



SAR TEST REPORT

Test Report No. 14121389S-A-R1

Customer	Canon Inc.
Description of EUT	Wireless LAN/Bluetooth Combo Module
Model Number of EUT	ES204
FCC ID	AZD241
Test Regulation	FCC 47CFR Part 2 (2.1093)
Test Result	Complied (Refer to SECTION 3)
Issue Date	August 23, 2022
Remarks	This SAR tested report is evaluation for 4 th host platform of ES204. The past host platforms SAR results refer to section 3.1 in this report.

Representative Test Engineer

Hiroshi Naka
Engineer

Approved By

Toyokazu Imamura
Leader



CERTIFICATE 1266.03

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
- ☒ There is no testing item of "Non-accreditation".

Report Cover Page -Form-ULID-003532 (DCS:13-EM-F0429) Issue# 21.0 (SAR Revision-v20.4sar20220721)

UL Japan, Inc. Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN / Telephone: +81 463 50 6400

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested.
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Shonan EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided from the applicant for this report is identified in Section 1.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No.: 14121389S-A

This report is a revised version of 14121389S-A. 14121389S-A is replaced with this report.

Revision	Test Report No.	Date	Page Revised Contents																														
- (Original)	14121389S-A	March 22, 2022	-																														
-R1	14121389S-A-R1	August 23, 2022	<p>(p5, 2.1) Updated of “Rating” of host platform as “DC 7.2 V (Battery), DC 8.0 V (AC adaptor), DC 9.0 V (USB).”</p> <p>(p5, 2.2) Corrected the mistake in table. (U-NII-2A (5.3 GHz band))</p> <p>(p5, 2.2) The antenna gain when built into the host platform was added for reference. “*.” (Reference purpose only)</p> <p>Antenna gain with the host platform: DS126861 enclosure: -2.9 dBi (@2480 MHz), -1.5 dBi (@5350 MHz).”</p> <p>(p8, 3.6) Added comment for Step 4 Zoom Scan (3dB check of Δx, Δy).</p> <p>“For 5 GHz band, SEMCAD Plot shows 4 mm, but the 3 dB point was tested at a distance greater than 4 mm in horizontally (which is step size of Δx, Δy).”</p> <p>“For 2.4 GHz band, SEMCAD Plot shows 5 mm, but the 3 dB point was tested at a distance greater than 5 mm in horizontally (which is step size of Δx, Δy).”</p> <p>(p10, 4.2) Replaced the antenna separation distance of bottom to aprox. 90mm from approx..98 mm.</p> <p>(p10, 4.2) Corrected the mistake in table of exemption limit. (separation distance, setup name)</p> <table><tr><td>> 50 mm⁽¹⁾ (55 mm)⁽²⁾</td><td>> 50 mm⁽¹⁾ (98 mm)⁽²⁾</td><td>> 50 mm⁽¹⁾</td></tr><tr><td>Rear⁽³⁾</td><td>Right, Bottom⁽⁴⁾</td><td>Rear, Right, Bottom⁽³⁾</td></tr><tr><td>SAR1_g⁽¹⁾</td><td>SAR1_g⁽¹⁾</td><td>SAR1_g⁽¹⁾</td></tr><tr><td>Exempt > 100mW</td><td>Exempt > 100mW</td><td>Exempt > 100mW⁽¹⁾</td></tr><tr><td>Exempt > 100mW</td><td>Exempt > 100mW</td><td>Exempt > 100mW⁽¹⁾</td></tr><tr><td>Exempt > 100mW</td><td>Exempt > 100mW</td><td>Exempt > 100mW⁽¹⁾</td></tr><tr><td>Exempt > 100mW</td><td>Exempt > 100mW</td><td>Exempt > 100mW⁽¹⁾</td></tr><tr><td>Exempt > 100mW</td><td>Exempt > 100mW</td><td>Exempt > 100mW⁽¹⁾</td></tr><tr><td>Exempt > 100mW</td><td>Exempt > 100mW</td><td>Exempt > 100mW⁽¹⁾</td></tr><tr><td>Exempt > 100mW</td><td>Exempt > 100mW</td><td>Exempt > 100mW⁽¹⁾</td></tr></table> <p>(new)</p> <p>(p10) Corrected ERP calculation formula and calculated results in table. (was: “-2.54”->new: “-2.15”)</p> <p>(p10) Add asterisk comment of “Module-based antenna gains with maximum values were used conservatively.”</p> <p>(p11) Corrected the mistake of CH. (5700 MHz, 140CH (11a, 11n20-SiSO, 11ac20-SiSO))</p> <p>(p14, 6.2) Corrected the mistake of tested frequency of 2.4 GHz band. (2412 MHz, setup of top-front, top, rear)</p> <p>(p14, 6.2) Corrected the mistake of CH.(116CH, 5580 MHz)</p> <p>(p19) Corrected the mistake of setup name. (Front-front->Top-front)</p>	> 50 mm ⁽¹⁾ (55 mm) ⁽²⁾	> 50 mm ⁽¹⁾ (98 mm) ⁽²⁾	> 50 mm ⁽¹⁾	Rear ⁽³⁾	Right, Bottom ⁽⁴⁾	Rear, Right, Bottom ⁽³⁾	SAR1 _g ⁽¹⁾	SAR1 _g ⁽¹⁾	SAR1 _g ⁽¹⁾	Exempt > 100mW	Exempt > 100mW	Exempt > 100mW ⁽¹⁾	Exempt > 100mW	Exempt > 100mW	Exempt > 100mW ⁽¹⁾	Exempt > 100mW	Exempt > 100mW	Exempt > 100mW ⁽¹⁾	Exempt > 100mW	Exempt > 100mW	Exempt > 100mW ⁽¹⁾	Exempt > 100mW	Exempt > 100mW	Exempt > 100mW ⁽¹⁾	Exempt > 100mW	Exempt > 100mW	Exempt > 100mW ⁽¹⁾	Exempt > 100mW	Exempt > 100mW	Exempt > 100mW ⁽¹⁾
> 50 mm ⁽¹⁾ (55 mm) ⁽²⁾	> 50 mm ⁽¹⁾ (98 mm) ⁽²⁾	> 50 mm ⁽¹⁾																															
Rear ⁽³⁾	Right, Bottom ⁽⁴⁾	Rear, Right, Bottom ⁽³⁾																															
SAR1 _g ⁽¹⁾	SAR1 _g ⁽¹⁾	SAR1 _g ⁽¹⁾																															
Exempt > 100mW	Exempt > 100mW	Exempt > 100mW ⁽¹⁾																															
Exempt > 100mW	Exempt > 100mW	Exempt > 100mW ⁽¹⁾																															
Exempt > 100mW	Exempt > 100mW	Exempt > 100mW ⁽¹⁾																															
Exempt > 100mW	Exempt > 100mW	Exempt > 100mW ⁽¹⁾																															
Exempt > 100mW	Exempt > 100mW	Exempt > 100mW ⁽¹⁾																															
Exempt > 100mW	Exempt > 100mW	Exempt > 100mW ⁽¹⁾																															
Exempt > 100mW	Exempt > 100mW	Exempt > 100mW ⁽¹⁾																															

Reference : Abbreviations (Including words undescribed in this report) (radio_r0v09s02_211221)

A2LA	The American Association for Laboratory Accreditation	IF	Intermediate Frequency
AC	Alternating Current	ILAC	International Laboratory Accreditation Conference
AFH	Adaptive Frequency Hopping	ISED	Innovation, Science and Economic Development Canada
AM	Amplitude Modulation	ISO	International Organization for Standardization
Amp, AMP	Amplifier	JAB	Japan Accreditation Board
ANSI	American National Standards Institute	LAN	Local Area Network
Ant, ANT	Antenna	LIMS	Laboratory Information Management System
AP	Access Point	MCS	Modulation and Coding Scheme
ASK	Amplitude Shift Keying	MIMO	Multiple Input Multiple Output (Radio)
Atten., ATT	Attenuator	MRA	Mutual Recognition Arrangement
AV	Average	MU-MIMO	Multi-User Multiple Input Multiple Output (Radio)
BPSK	Binary Phase-Shift Keying	N/A	Not Applicable, Not Applied
BR	Bluetooth Basic Rate	NII	National Information Infrastructure (Radio)
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	OBW	Occupied Band Width
CCK	Complementary Code Keying	OFDM	Orthogonal Frequency Division Multiplexing
CDD	Cyclic Delay Diversity	P/M	Power meter
Ch., CH	Channel	PCB	Printed Circuit Board
CISPR	Comite International Special des Perturbations Radioelectriques	PER	Packet Error Rate
CW	Continuous Wave	PHY	Physical Layer
DBPSK	Differential BPSK	PK	Peak
DC	Direct Current	PN	Pseudo random Noise
D-factor	Distance factor	PRBS	Pseudo-Random Bit Sequence
DFS	Dynamic Frequency Selection	PSD	Power Spectral Density
DQPSK	Differential QPSK	QAM	Quadrature Amplitude Modulation
DSSS	Direct Sequence Spread Spectrum	QP	Quasi-Peak
DUT	Device Under Test	QPSK	Quadrature Phase Shift Keying
EDR	Enhanced Data Rate	RBW	Resolution Band Width
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	RDS	Radio Data System
EMC	ElectroMagnetic Compatibility	RE	Radio Equipment
EMI	ElectroMagnetic Interference	RF	Radio Frequency
EN	European Norm	RMS	Root Mean Square
ERP, e.r.p.	Effective Radiated Power	RSS	Radio Standards Specifications
ETSI	European Telecommunications Standards Institute	Rx	Receiving
EU	European Union	SA, S/A	Spectrum Analyzer
EUT	Equipment Under Test	SAR	Specific Absorption Rate
Fac.	Factor	SISO	Single Input Single Output (Radio)
FCC	Federal Communications Commission	SG	Signal Generator
FHSS	Frequency Hopping Spread Spectrum	SPLSR	SAR to Peak Location Separation Ratio
FM	Frequency Modulation	SVSWR	Site-Voltage Standing Wave Ratio
Freq.	Frequency	T/R	Test Receiver
FSK	Frequency Shift Keying	Tx	Transmitting
GFSK	Gaussian Frequency-Shift Keying	U-NII	Unlicensed National Information Infrastructure (Radio)
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN
ICES	Interference-Causing Equipment Standard	Wi-Fi, WiFi	Wireless LAN, trademarked by Wi-Fi Alliance
IEC	International Electrotechnical Commission		
IEEE	Institute of Electrical and Electronics Engineers		

CONTENTS	PAGE
ANNOUNCEMENT	2
REVISION HISTORY	2
Reference : Abbreviations (Including words undescribed in this report)	3
CONTENTS	4
SECTION 1: Customer information	5
SECTION 2: Equipment under test (EUT)	5
2.1 Identification of EUT and host platform	5
2.2 Product Description	5
SECTION 3: Maximum SAR value, test specification and procedures	6
3.1 Summary of Maximum SAR Value	6
3.2 Test specification	7
3.3 Exposure limit	7
3.4 Addition, deviation and exclusion to the test procedure	7
3.5 Test location	7
3.6 SAR measurement procedure	8
SECTION 4: Operation of EUT during testing	9
4.1 Operation modes for SAR testing	9
4.2 RF exposure conditions	10
SECTION 5: Confirmation before testing	11
5.1 SAR reference power measurement	11
SECTION 6: SAR Measurement results	13
6.1 Tissue simulating liquid measurement	13
6.2 SAR results	14
6.3 Simultaneous transmission evaluation	15
6.4 SAR Measurement Variability (Repeated measurement requirement)	15
6.5 Device holder perturbation verification	15
<u>Contents of appendixes</u>	
APPENDIX 1: Photographs of test setup	16
Appendix 1-1 Photograph of host platform, EUT and antenna position	16
Appendix 1-2 EUT and support equipment	17
Appendix 1-3 Photograph of test setup	18
APPENDIX 2: SAR Measurement data	20
Appendix 2-1 Worst Reported SAR Plot	20
APPENDIX 3: Test instruments	23
Appendix 3-1 Equipment used	23
Appendix 3-2 Configuration and peripherals	24
Appendix 3-3 Test system specification	25
Appendix 3-4 Simulated tissues composition and parameter confirmation	27
Appendix 3-5 Daily check results	27
Appendix 3-6 Daily check measurement data	28
Appendix 3-7 Uncertainty assessment (SAR measurement/Daily check)	30
Appendix 3-8 Calibration certificate: E-Field Probe (EX3DV4)	31
Appendix 3-9 Calibration certificate: Dipole (D2450V2)	41
Appendix 3-10 Calibration certificate: Dipole (D5GHzV2)	49

SECTION 1: Customer information

Company Name	Canon Inc.
Address	30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo 146-8501 Japan
Telephone Number	+81-3-5482-7283
Contact Person	Tomohiro Suzuki

The information provided from the customer is as follows;

- Customer name, Company name, Type of Equipment, Model No., FCC ID on the cover and other relevant pages
- SECTION 1: Customer information
- SECTION 2: Equipment under test (EUT)
- SECTION 4: Operation of EUT during testing
- Appendix 1: The part of Antenna location information, Description of EUT and Support Equipment
- * The laboratory is exempted from liability of any test results affected from the above information in SECTION 2, SECTION 4 and Appendix 1.

SECTION 2: Equipment under test (EUT)

2.1 Identification of EUT and host platform

	EUT	Host platform
Type	Wireless LAN/Bluetooth Combo Module	Digital Camera
Model Number	ES204	DS126861
Serial Number	AT220107-B24	001019000134
Rating	DC 3.3 V supplied from the host platform.	DC 7.2 V (Battery), DC 8.0 V (AC adaptor), DC 9.0 V (USB)
Condition of sample	Engineering prototype (*1)	Engineering prototype (*1)
Receipt Date of sample	January 7, 2022 (for power measurement) (*. No modification by the Lab.) March 2, 2022 (for SAR test) (*. No modification by the Lab.)	
Test Date (SAR)	March 2 and 3, 2022	

*1. Not for sale: The sample is equivalent to mass-produced items.

2.2 Product Description

General

Feature of EUT	Model: ES204 (referred to as the EUT in this report) is a Wireless LAN/Bluetooth Combo Module which installs into the specified host platforms.
SAR Category Identified	Portable device (*. Since EUT may contact to a human body during Wi-Fi / Bluetooth operation, the partial-body SAR (1g) shall be observed.)
SAR Accessory	None (*. for the host platform)

Radio specification

Equipment type	Transceiver
Frequency of operation	*. The operation frequency in each operation band refer to remarks in below.
Channel spacing	Bluetooth 1 MHz (BR, EDR), 2 MHz (BT LE) (*.This platform only supports BT LE limited by the firmware.) WLAN 5 MHz (2.4GHz band), 20 MHz (5GHz band)
Bandwidth	Bluetooth 79 MHz WLAN 20 MHz (11b, 11g, 11a, 11n20, 11ac20), 40 MHz (11n40, 11ac40), 80 MHz (11ac80)
Type of modulation	Bluetooth GFSK/FHSS (BR, BT LE), $\pi/4$ -DQPSK / FHSS, 8DPSK / FHSS (EDR) (*.This platform only supports BT LE limited by the firmware.) WLAN DSSS: DBPSK, DQPSK, CCK (11b); OFDM: BPSK, QPSK, 16QAM, 64QAM, 256QAM (*.256QAM is only for ac80) (11g, 11a, 11 n20, 11ac20, 11n40, 11ac40, 11ac80)
Typical and maximum transmit power	*. The specification of typical and maximum tune-up tolerance limit power (which may occur) refer to remarks in below table. *. The measured output power (conducted) as SAR reference power refers to section 5 in this report.
Quantity of antenna	1 piece Antenna type Printed PCB Antenna connector type Antenna side: Soldered / Module side: MHF4
Antenna gain (peak)	2.98 dBi (2.4 GHz band), 4.94 dBi (5 GHz band) (*.module alone base, including cable loss) *. (Reference purpose only) Antenna gain with the host platform: DS126861 enclosure: -2.9 dBi (@2480 MHz), -1.5 dBi (@5350 MHz).

*. Typical power and tune-up limit power (as "maximum power")

Tx Mode	Data rate, MCS Index	Output power (Typical and maximum) [dBm] (*. The measured output power (conducted) refers to section 5 in this report.)														
		2.4 GHz band			U-NII-1 (5.2 GHz band)			U-NII-2A (5.3 GHz band)			U-NII-2C (5.6 GHz band)			U-NII-3 (5.8 GHz band)		
		F [MHz]	Typical	Max.	F [MHz]	Typical	Max.	F [MHz]	Typical	Max.	F [MHz]	Typical	Max.	F [MHz]	Typical	Max.
BR	1Mbps	2402-2480	N/A (*2)		N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
EDR	(2-3)Mbps	2402-2480	N/A (*2)		N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
BT LE	PHY1, PHY2	2402-2480	3.0	6.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11b	(1~11)Mbps	2412-2462	8.0	10.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11g	(6-54)Mbps	2412-2462	8.0	10.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11a	(6-54)Mbps	N/A	N/A	N/A	5180-5240	8.0	10.0	5260-5320	8.0	10.0	5500-5580, 5660-5700	8.0	10.0	5745-5825	8.0	10.0
11n20	MCS0~7	2412-2462	7.0	9.0	5180-5240	7.0	9.0	5260-5320	7.0	9.0	5500-5580, 5660-5700	7.0	9.0	5745-5825	7.0	9.0
11ac20	MCS0~8	N/A	N/A	N/A	5180-5240	7.0	9.0	5260-5320	7.0	9.0	5500-5580, 5660-5700	7.0	9.0	5745-5825	7.0	9.0
11n40	MCS0~7	2422-2452	7.0	9.0	5190, 5230	7.0	9.0	5270, 5310	7.0	9.0	5510, 5550, 5670	7.0	9.0	5755, 5795	7.0	9.0
11ac40	MCS0~9	N/A	N/A	N/A	5190, 5230	7.0	9.0	5270, 5310	7.0	9.0	5510, 5550, 5670	7.0	9.0	5755, 5795	7.0	9.0
11ac80	MCS0~9	N/A	N/A	N/A	5210	7.0	9.0	5290	7.0	9.0	5530	7.0	9.0	5775	7.0	9.0

*. (mode) 11b: IEEE 802.11b, 11g: IEEE 802.11g, 11a: IEEE 802.11a, 11n20: IEEE 802.11n(20HT)-SISO, 11n40: IEEE 802.11n(40HT)-SISO, 11ac20: IEEE 802.11ac(20VHT)-SISO, 11ac40: IEEE 802.11ac(40VHT)-SISO, 11ac80: IEEE 802.11ac(80VHT)-SISO.

*. F: Frequency; incl.: including; Max.: maximum; N/A: Not applicable.

*. The EUT do not use the special transmitting technique such as "beam-forming" and "time-space code diversity."

*. Maximum tune-up tolerance limit is conducted burst average power and is defined by a customer as Duty cycle 100% (continuous transmitting).

*. Wi-Fi and Bluetooth use same antenna. Therefore, simultaneously transmitted SAR was not considered for the WLAN 2.4 GHz band and Bluetooth. Simultaneously transmitted SAR was only considered for the WLAN 5 GHz band and Bluetooth.

*2. This host device only supports BT LE limited by the firmware.

SECTION 3: Maximum SAR value, test specification and procedures

3.1 Summary of Maximum SAR Value

Band	Max. power [dBm]	Summary of Highest Reported SAR [W/kg]	
		Partial-body (Separation 0 mm, Flat phantom)	Head (Separation 0 mm, SAM phantom)
		SAR (1g)	SAR (1g)
DTS, WLAN 2.4 GHz	10.0	0.14	N/A
U-NII-1, WLAN 5.2 GHz	10.0	0.26	N/A
U-NII-2A, WLAN 5.3 GHz	10.0	0.35	N/A
U-NII-2C, WLAN 5.6 GHz	10.0	0.68 (0.677)	N/A
U-NII-3, WLAN 5.8 GHz	10.0	0.68 (0.676)	N/A
DTS, Bluetooth	6.0	< 0.10	N/A
Simultaneous SAR (5 GHz WLAN + BT LE)		0.72 (*1)	N/A
Criteria	Partial body (body): 1.6 W/kg (SAR (1g)) for general population/uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093).		
Test Procedure	SAR measurement: KDB 447498 D04, KDB 248227 D01, KDB 865664 D01, IEC Std. 1528, UL Japan's SAR Work Procedures No.13-EM-W0429 and 13-EM-W0430.		
Category	FCC 47CFR §2.1093 (Portable device)		
SAR type	Partial-Body (including "Front-of-face")		

*1. WLAN and Bluetooth use same antenna. Therefore, simultaneously transmitted SAR was not considered for the WLAN 2.4 GHz band and Bluetooth. Simultaneously transmitted SAR was only considered for the WLAN 5 GHz band and Bluetooth.

*. "yellow marker" in the table; the highest Reported SAR (1g) and SAR (10g) of each band (2.4 GHz, 5 GHz) are shaded with yellow marker.

Test outline: Where the EUT is built into this new platform, it was verified whether multi-platform conditions can be suited in according with clause 4.2.4 in KDB 447498 D04 (v01).

Consideration of the test results:	The highest reported SAR of this host platform was kept; ≤ 0.8 W/kg (SAR(1g)) Since highest reported SAR (1g) on this EUT platforms obtained in accordance with KDB 447498 D04 (v01) was kept under 0.8 W/kg, this EUT was approved to operate "Specific set of Host Platforms."
------------------------------------	--

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for partial body) specified in FCC 47 CFR part 2 (2.1093) and had been tested in accordance with the measurement methods and procedures specified in FCC KDB publications and IEEE 1528-2013.

3.1.1 History of maximum SAR value in different platforms - Informative (Reference purpose only)

- *. The following information indicates a highest SAR number of the different host platforms in the past test. The SAR test results are not described in this report.
- *. In the past, this module had installed into the following host platforms and tested with measured highest reported SAR (1g) with < 0.8 W/kg. (per KDB 447498 D01 (v06); multi-platform operation requirement).

		Highest Reported SAR [W/kg]		
Host platform # :		1	2	3
Host platform type :		Digital Camera	Digital Camera	Digital Cinema Camera
Host platform model number :		DS126836	DS126855	ID0156
Reference SAR test report :		13024973S-A (*2)	13651875S-A (*2)	13863703S-A (*2)
SAR test procedure :		KDB 248227 D01(v02r02), KDB 447498 D01(v06), KDB 865664 D01 (v01r04)	KDB 248227 D01(v02r02), KDB 447498 D01(v06), KDB 865664 D01 (v01r04)	KDB 248227 D01(v02r02), KDB 447498 D01(v06), KDB 865664 D01 (v01r04)
Band	Max. Power [dBm]	Body-worn (Separation 0 mm)	Body-worn (Separation 0 mm)	Body-worn (Separation 0 mm)
		SAR (1g)	SAR (1g)	SAR (1g)
WLAN 2.4 GHz	10.0	0.25	0.17	0.17
WLAN 5.2 GHz	10.0	0.42	0.11	0.43
WLAN 5.3 GHz	10.0	0.33	0.15	0.25
WLAN 5.6 GHz	10.0	0.32	0.22	N/A (*3)
WLAN 5.8 GHz	10.0	0.25	0.12	N/A (*3)
Bluetooth	6.0	0.08	0.06	0.06 (*3)
Simultaneous SAR (SUM SAR)		0.50 (*4)	0.28 (*4)	0.49 (*3, *4)
Criteria	Partial body (head & body): 1.6 W/kg (SAR (1g)) for general population/uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093).			

*2. SAR evaluation and report publishing was done by Shonan EMC Lab. UL Japan.

*3. This host platform (model: ID0156) is only supported WLAN 5.2 GHz/5.3 GHz band and BT LE(PHY1) which are limited by firmware.

*4. WLAN and Bluetooth use same antenna. Therefore, simultaneously transmitted SAR was not considered for the WLAN 2.4 GHz band and Bluetooth. Simultaneously transmitted SAR was only considered for the WLAN 5 GHz band and Bluetooth.

3.2 Test specification

The tests documented in this report were performed in accordance with the following standard: FCC 47 CFR Parts 2 (2.1093), IEEE Std.1528-2013, and the following FCC Published RF exposure KDB procedures:

FCC 47 CFR part 2 (2.1093)	Radiofrequency radiation exposure evaluation: portable devices
ANSI/IEEE C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 KHz to 300 GHz
IEEE Std. 1528-2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
KDB 248227 D01	SAR Guidance for IEEE 802.11 (Wi-Fi) transmitters v02r02
KDB 447498 D04	Interim General RF Exposure Guidance v01
KDB 447498 D03	OET Bulletin 65, Supplement C Cross-Reference v01
KDB 865664 D01	SAR measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF exposure compliance reporting and documentation considerations v01r02

In addition to the above, the following information was used:

TCB workshop, October 2016	RF Exposure Procedure, DUT Holder Perturbations When the highest reported SAR of an antenna is > 1.2 W/kg, holder perturbation verification is required for each antenna, using the highest SAR configuration among all applicable frequency bands.
TCB workshop, April 2019	RF Exposure Procedure, 802.11ax SAR Testing
TCB workshop, October 2019	RF Exposure Procedure, Tissue Simulating Liquids (TSL) -Effective February 19, 2019, FCC has permitted the use of single head tissue simulating liquid specified in IEC 62209 for all SAR tests. -Mix and Match of traditional FCC SAR TSLs and IEC 62209 TSL in a single application is not permitted. -TSL can be changed in a Permissive Change. If SAR increases and original SAR > 1.2 W/kg, additional SAR tests will be required. -If FCC parameters are used, 5 % tolerance. If IEC parameters, 10 %.

3.3 Exposure limit

Environments of exposure limit	Whole-Body (averaged over the entire body)	Partial-Body (averaged over any 1g of tissue)	Hands, Wrists, Feet and Ankles (averaged over any 10g of tissue)
(A) Limits for Occupational /Controlled Exposure (W/kg)	0.4	8.0	20.0
(B) Limits for General population /Uncontrolled Exposure (W/kg)	0.08	1.6	4.0

*. Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

*. General Population/Uncontrolled Environments: are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

The limit applied to this device which tested in this report is;

General population / uncontrolled exposure, Partial-Body (averaged over any 1g of tissue) limit: 1.6 W/kg
--

3.4 Addition, deviation and exclusion to the test procedure

No addition, exclusion nor deviation has been made from the test procedure.

3.5 Test Location

UL Japan, Inc., Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone number: +81 463 50 6400 / Facsimile number: +81 463 50 6401

*. A2LA Certificate Number: 1266.03 (FCC Test Firm Registration Number: 626366, ISED Lab Company Number: 2973D / CAB identifier: JP0001)

Place	Width × Depth × Height (m)	Size of reference ground plane (m) / horizontal conducting plane
No.7 Shielded room	2.76 × 3.76 × 2.4	2.76 × 3.76

3.6 SAR measurement procedure

3.6.1 Normal SAR measurement procedure

Step 1: Confirmation before SAR testing

Before SAR test, the RF wiring for the sample had been switched to the antenna conducted power measurement line from the antenna line and the average power was measured. The SAR test reference power measurement and the SAR test were proceeded with the lowest data rate (which has the higher time-based average power typically) on each operation mode. Therefore, the average output power was measured on the lower, middle (or near middle), upper and specified channels with the lowest data rate of each operation mode. The power of other data rate was also measured to confirm the time-base average power and when it's required. The power measurement result is shown in Section 5.

*. The EUT transmission power was verified that it was not more than 2 dB lower than the maximum tune-up tolerance limit when it was set the rated power. (KDB447498 D04 (v01))

Step 2: Power reference measurement

Measurement of the E-field at a fixed location above the central position of flat phantom (or/and furthermore an interpolated peak SAR location of area scan in step 2) was used as a reference value for assessing the power drop.

Step 3: Area Scan (Area scan parameters: KDB 865664 D01 (v01r04).)

The SAR distribution at the exposed side of head or body position was measured at a distance of each device from the inner surface of the shell. The area covered the entire dimension of the antenna of EUT and suitable horizontal grid spacing of EUT. Based on these data, the area of the maximum absorption was determined by splines interpolation.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 4: Zoom Scan and post-processing (Zoom scan parameters: KDB 865664 D01 (v01r04).)

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure.

A volume of 30 mm (X) × 30 mm (Y) × 30 mm (Z) (or more) was assessed by measuring 7×7×7 points (or more), ≤ 3 GHz.

A volume of 28 mm (X) × 28 mm (Y) × 24mm (Z) (or more) was assessed by measuring 8×8×7 points (or more) (by “Ratio step” method (*1)), > 3 GHz.

When the SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are proceeded for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR. If the zoom scan measured as defined above complies with both of the following criteria, or if the peak spatial-average SAR is below 0.1 W/kg, no additional measurements are needed.

*. The smallest horizontal distance from the local SAR peaks to all points 3 dB below the SAR peak shall be larger than the horizontal grid steps in both x and y directions and recorded.

For 5 GHz band, SEMCAD Plot shows 4 mm, but the 3 dB point was tested at a distance greater than 4 mm in horizontally (which is step size of Δx , Δy).

For 2.4 GHz band, SEMCAD Plot shows 5 mm, but the 3 dB point was tested at a distance greater than 5 mm in horizontally (which is step size of Δx , Δy).

*. The ratio of the SAR at the second measured point to the SAR at the closest measured point at the x-y location of the measured maximum SAR value shall be at least 30 % and recorded.

		$f \leq 3$ GHz	$3 \text{ GHz} < f \leq 6$ GHz
1	Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}	≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
2	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
3	Maximum zoom scan spatial resolution, normal to phantom surface	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
4	graded grid	$\Delta z_{Zoom}(n>1)$: between subsequent points	≤ 1.5 · $\Delta z_{Zoom}(n-1)$ mm
5	Minimum zoom scan volume	x, y, z	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

*. The asterisk table-footnote is per KDB Pub. 865664 D01 v01r04.

NOTE For uniformity purposes the integer frequency increments of rows 1 to 3 and 5 apply, rather than the corresponding variable and fixed parameters given in IEC 62209-1:2016 and IEC 62209-2:2010/AMD1:2019.

Step 5: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 2. It was checked that the power drift is within ±5% in the evaluation procedure of SAR testing. The verification of power drift during the SAR test is that DASY system calculates the power drift by measuring the e-field at the same location at beginning and the end of the scan measurement for each test position. The result is shown in SAR plot data of APPENDIX 2.

*. DASY system calculation Power drift value[dB] = $20 \log(E_a)/(E_b)$ (where, Before SAR testing: $E_b[V/m]$ / After SAR testing: $E_a[V/m]$)

Limit of power drift[W] = ±5%; Power drift limit (X) [dB] = $10 \log(P_{drift}) = 10 \log(1.05/1) = 10 \log(1.05) - 10 \log(1) = 0.21 \text{ dB}$

from E-field relations with power; $S = E \times H = E^2/\eta = P/(4 \times \pi \times r^2)$ (η : Space impedance) → $P = (E^2 \times 4 \times \pi \times r^2)/\eta$

Therefore, The correlation of power and the E-field

Power drift limit (X) dB = $10 \log(P_{drift}) = 10 \log(E_{drift})^2 = 20 \log(E_{drift})$

From the above mentioned, **the calculated power drift of DASY system must be the less than (±) 0.21 dB.**

Step 6: Z-Scan

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

*. The all SAR tests were conservatively performed with test separation distance 0 mm. The phantom bottom thickness is approx. 2mm. Typical distance from probe tip to dipole centers is 1mm. The distance between the SAR probe tip to the surface of test device which is touched the bottom surface of the phantom is approx. 3 mm for 2.4GHz band and 2.4 mm for 5GHz band.

*1. “Ratio step” method parameters used; the first measurement point: “1.4mm” from the phantom surface, the initial z grid separation: “1.4mm”, subsequent graded grid ratio: “1.4”. These parameters comply with the requirement of KDB 865664 D01 and recommended by Schmid & Partner Engineering AG (DASY5 manual).

SECTION 4: Operation of EUT during testing

4.1 Operating modes for SAR testing

The EUT has Bluetooth (BR, EDR, Low energy) and IEEE 802.11b/11g/11a/11n20-SISO/11n40-SISO/11ac20-SISO/11ac40-SISO/11ac80-SISO continuous transmitting modes. The frequency and the modulation used in the SAR testing are shown as a following.

Operation mode	BR	EDR	BT LE	11b	11g	11n20	11n40	11a	11n20	11ac20	11n40	11ac40	11ac80	11a	11n20	11ac20	11n40	11ac40	11ac80
band	Bluetooth			2.4GHz band				U-NII-1						U-NII-2A					
Tx band [MHz]	2402~2480			2412~2462				2422~2452		5180~5240			5190, 5230	5210	5260~5320			5270, 5310	5290
Bandwidth [MHz]	1	1	1	20	20	20	40	20	20	20	40	40	80	20	20	20	40	40	80
Max.power [dBm]	6	3	6	10	10	9	9	10	9	9	9	9	9	10	9	9	9	9	9
Modulation	FHSS	FHSS	FHSS	DSSS	OFDM	OFDM	OFDM	OFDM	OFDM	OFDM	OFDM	OFDM	OFDM	OFDM	OFDM	OFDM	OFDM	OFDM	OFDM
D/R [Mbps]	1	2~3	1	2	1	6	MCS0	MCS0	6	MCS0	MCS0	MCS0	MCS0	6	MCS0	MCS0	MCS0	MCS0	MCS0
Frequency tested [MHz]	Not supported.			2402 (*1)	n/a (*1)	2412, 2437, 2462	2412 (*2)	n/a (*2)	n/a (*2)	5180, 5220, 5240 (*3)	n/a (*4)	n/a (*4)	n/a (*4)	n/a (*4)	5260, 5300, 5320	n/a (*4)	n/a (*4)	n/a (*4)	n/a (*4)

Operation mode	11a	11n20	11ac20	11n40	11ac40	11ac80	11a	11n20	11ac20	11n40	11ac40	11ac80
band	U-NII-2C						U-NII-3					
Tx band [MHz]	5500~5580, 5660~5700			5510, 5550, 5670		5530	5745~5825			5755, 5795		5775
Bandwidth [MHz]	20	20	20	40	40	80	20	20	20	40	40	80
Max.power [dBm]	10	9	9	9	9	9	10	9	9	9	9	9
Modulation	OFDM	OFDM	OFDM	OFDM	OFDM	OFDM	OFDM	OFDM	OFDM	OFDM	OFDM	OFDM
D/R [Mbps]	6	MCS0	MCS0	MCS0	MCS0	MCS0	6	MCS0	MCS0	MCS0	MCS0	MCS0
Frequency tested [MHz]	5500, 5580, 5700	n/a (*4)	n/a (*4)	n/a (*4)	n/a (*4)	n/a (*4)	5745, 5785, 5825	n/a (*4)	n/a (*4)	n/a (*4)	n/a (*4)	n/a (*4)

Controlled software	Test name	Software name	Version	Date	Storage location / Remarks
Power measurement	RF Test Command for 11ac1x1	WLAN/BTC/BLE module	Version 1.0	2022/01/07	*. Memory of test jig, operated by Tera-Term
	SAR	RF TEST	Version 1.0	2022/03/02	Memory of digital camera (firmware)

*. Max.power: Maximum power (tune-up limit power), D/R: Data rate, n/a: SAR test was not applied.

*. (mode) 11b: IEEE 802.11b, 11g: IEEE 802.11g, 11a: IEEE 802.11a, 11n20: IEEE 802.11n(20HT)-SISO, 11n40: IEEE 802.11n(40HT)-SISO, 11ac20: IEEE 802.11ac(20VHT)-SISO, 11ac40: IEEE 802.11ac(40VHT)-SISO, 11ac80: IEEE 802.11ac(80VHT)-SISO.

*1. SAR test was applied to a maximum output power channel of BT-LE (PHY1) mode in representatively.

*2. (KDB 248227 D01) Since reported SAR 1g of DSSS mode which had highest output power was enough small (< 1.2 W/kg), SAR test of OFDM mode (lower power than 11b) was reduced.

*3. SAR test of U-NII-1 band was also applied for the reference purpose, even though the reported SAR(1g) of U-NII-2A band was enough lower than 1.2 W/kg.

*4. Since the maximum output power was lower than 11a mode, the SAR test was reduced.

*5. WLAN and Bluetooth use same antenna. Therefore, simultaneously transmitted SAR was not considered for the WLAN 2.4 GHz band and Bluetooth. Simultaneously transmitted SAR was only considered for the WLAN 5 GHz band and Bluetooth.

*. OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

(KDB 248227 D01, SAR Guidance for Wi-Fi Transmitters) The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures.

When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected.

*. SAR test reduction considerations

(KDB 447498 D04(v01), General RF Exposure Guidance) Testing of other required channels within the operating mode of a frequency band is not required when the reported 1g or 10g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg for 1g, or 2.0 W/kg for 10g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg for 1g, or 1.5 W/kg for 10g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg for 1g, or 1.0 W/kg for 10g respectively, when the transmission band is ≥ 200 MHz

The SAR has been measured with highest transmission duty factor supported by the test mode tool for WLAN and/or Bluetooth. When the transmission duty factor could not be 100%, the reported SAR will be scaled to 100% transmission duty factor to determine compliance. When SAR is not measured at the maximum power level allowed for production unit, the measured SAR will be scaled to the maximum tune-up tolerance limit to determine compliance.

(KDB 248227 D01, SAR Guidance for Wi-Fi Transmitters) When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤ 1.2 W/kg or all required channels are tested.

For 2.4GHz band, the highest measured maximum output power channel of DSSS was selected for SAR measurement. When the reported SAR is ≤ 0.8 W/kg, no further SAR test is required in this exposure configuration. Otherwise, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

For 5GHz band, the initial test configuration was selected accordance to the transmission mode with the highest maximum output power. When the reported SAR is > 0.8 W/kg, SAR is required for the subsequent highest measured output power channel until the reported SAR result is ≤ 1.2 W/kg or all required channels are measured. For other transmission modes, SAR is not required when the highest reported SAR for initial test configuration is adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

4.2 RF exposure conditions

Antenna separation distances in each test setup plan are shown as follows.

		Mode:	Wi-Fi		Bluetooth	
Setup plan	Explanation of SAR test setup plan (* Refer to Appendix 1 for test setup photographs which had been tested.)	D [mm]	SAR Tested /Reduced (*1)	D [mm]	SAR Tested /Reduced (*1)	
Front-upper	An upper portion of front surface of camera is touched to the Flat phantom.	1.72	Tested	1.72	Tested	
Front-left-upper	A left upper portion of front surface of camera is touched to the Flat phantom.	≈ 7	Tested	≈ 7	Reduced	
Top-front-edge	A front edge of convex surface (view finder) of a camera is touched to the Flat phantom.	≈ 8	Tested	≈ 8	Reduced	
Top-front	A front portion of convex surface (view finder) of a camera is touched to the Flat phantom.	≈ 8	Tested	≈ 8	Reduced	
Top	A top of convex surface (view finder) of a camera is touched to the Flat phantom.	≈ 8	Tested	≈ 8	Reduced	
Front	A front surface of camera (lens mounting area) is touched to the Flat phantom.	< 27	Reduced	< 27	Reduced	
Left	A left surface of camera is touched to the Flat phantom.	≈ 40	Reduced	≈ 40	Reduced	
Rear (LCD)	A rear surface of camera is touched to the Flat phantom.	≈ 55	Reduced	≈ 55	Reduced	
Right	A right surface of camera is touched to the Flat phantom.	≈ 77	Reduced	≈ 77	Reduced	
Bottom	A bottom surface of camera is touched to the Flat phantom.	≈ 90	Reduced	≈ 90	Reduced	

* D: Antenna separation distance. It is the distance from the antenna inside platform the outer surface of platform which user may touch.

* Size of host platform: Refer to Appendix 1-1.

*1. [SAR test exemption consideration by KDB 447498 D04 (v01)]

Judge of SAR test exemption ("Test" or "Exempt") / SAR based Threshold power												
Antenna separation distance												
Tx mode	Higher frequency [MHz]	Conducted		Antenna		≤ 5mm (1.72 mm)	≈ 7 mm	≈ 8 mm	≈ 8 mm	< 27 mm	40 mm	> 50 mm
		Max. ave. power		Gain	ERP	Front-upper	Front-left-upper	Top-front-edge, Top-front	Top	Front	Left	Rear, Right, Bottom
		[dBm]	[mW]	[dBi]	[dBm]	SARlg	SARlg	SARlg	SARlg	SARlg	SARlg	SARlg
WLAN	BT LE	2480	6	4	2.98	6.83	5	Test, 3 mW	Test, 5 mW	Test, 7 mW	Test, 7 mW	Exempt, 67 mW
	2.4 GHz	2462	10	10	2.98	10.83	12	Test, 3 mW	Test, 5 mW	Test, 7 mW	Test, 7 mW	Exempt, 68 mW
	5.2 GHz	5240	10	10	4.94	12.79	19	Test, 1 mW	Test, 3 mW	Test, 4 mW	Test, 4 mW	Exempt, 49 mW
	5.3 GHz	5320	10	10	4.94	12.79	19	Test, 1 mW	Test, 3 mW	Test, 4 mW	Test, 4 mW	Exempt, 49 mW
	5.6 GHz	5700	10	10	4.94	12.79	19	Test, 1 mW	Test, 3 mW	Test, 4 mW	Test, 4 mW	Exempt, 47 mW
	5.8 GHz	5825	10	10	4.94	12.79	19	Test, 1 mW	Test, 3 mW	Test, 4 mW	Test, 4 mW	Exempt, 47 mW

* Module-based antenna gains with maximum values were used conservatively.

* Antenna separation distance is rounded to the nearest integer numbers (in mm) before calculation.

* (Calculating formula) ERP (dBm) = (max. conducted output power, dBm) + (antenna gain, dBi) - 2.15

<Conclusion for consideration for SAR test reduction>

- The all SAR tests were conservatively performed with test separation distance 0 mm.
- For WLAN operation; "Front-upper" and "Top (Top-front-edge, Top-front, Top)" setup are applied the SAR test because near antenna section (higher than calculated threshold power). The SAR test of other SAR test setup are reduced, because there have enough antenna separation distance and the SAR test exclusion judge was "test can be reduced".
- For Bluetooth operation, the SAR test was applied with the worst SAR condition of WLAN mode to evaluate "simultaneous transmission".

SAR-based thresholds (P_{th} (mW)) shown below table of "Example Power Thresholds [mW]" are derived based on frequency, power, and separation distance of the RF source. The formula defines the thresholds in general for either available maximum time-averaged power or maximum time-averaged effective radiated power (ERP), whichever is greater. The SAR-based exemption is calculated by Formula (B.2) in below, applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power or effective radiated power (ERP), whichever is greater, of less than or equal to the threshold P_{th} (mW).

When 10-g extremity SAR applies, SAR test exemption may be considered by applying a factor of 2.5 to the SAR-based exemption thresholds.

* This method shall only be used at separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive).

Table: Example Power Thresholds [mW] (SARlg, KDB 447498 D01 (v07))																																	
Frequency [MHz]	Distance [mm]																																
	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	35	40	45	50			
2402	3	4	5	7	9	10	12	15	17	20	22	25	28	32	35	39	42	46	50	55	59	64	68	73	78	84	112	144	180	220			
2412	3	4	5	7	8	10	12	15	17	20	22	25	28	32	35	39	42	46	50	55	59	64	68	73	78	83	112	144	180	220			
2450	3	4	5	7	8	10	12	15	17	19	22	25	28	31	35	38	42	46	50	54	58	63	68	73	78	83	111	143	179	219			
2462	3	4	5	7	8	10	12	14	17	19	22	25	28	31	35	38	42	46	50	54	58	63	68	73	78	83	111	143	179	219			
2480	3	4	5	7	8	10	12	14	17	19	22	25	28	31	35	38	42	46	50	54	58	63	67	72	77	82	111	143	179	218			
3600	2	3	4	5	6	8	10	11	13	16	18	20	23	26	29	32	35	38	42	45	49	53	57	62	66	71	96	125	158	195			
5180	2	2	3	4	5	6	8	9	11	13	15	17	19	21	24	26	29	32	35	38	42	45	49	53	57	61	84	110	141	175			
5240	1	2	3	4	5	6	8	9	11	13	14	17	19	21	24	26	29	32	35	38	42	45	49	53	57	61	83	110	140	174			
5260	1	2	3	4	5	6	8	9	11	13	14	16	19	21	24	26	29	32	35	38	42	45	49	52	56	61	83	110	140	174			
5320	1	2	3	4	5	6	8	9	11	12	14	16	19	21	23	26	29	32	35	38	41	45	48	52	56	60	83	109	139	173			
5500	1	2	3	4	5	6	7	9	10	12	14	16	18	21	23	26	28	31	34	37	41	44	48	51	55	59	82	108	138	172			
5700	1	2	3	4	5	6	7	9	10	12	14	16	18	20	23	25	28	31	34	37	40	43	47	51	55	59	81	107	136	170			
5745	1	2	3	4	5	6	7	9	10	12	14	16	18	20	22	25	28	31	34	37	40	43	47	51	54	58	80	106	136	169			
5800	1	2	3	4	5	6	7	9	10	12	14	16	18	20	22	25	28	30	33	36	40	43	47	50	54	58	80	106	136	169			
5825	1	2	3	4	5	6	7	9	10	12	14	16	18	20	22	25	28	30	33	36	40	43	47	50	54	58	80	106	135	169			

TABLE B.1—THRESHOLDS FOR SINGLE RF SOURCES
SUBJECT TO ROUTINE ENVIRONMENTAL EVALUATION

RF Source Frequency		Minimum Distance		Threshold ERP
f_L / MHz	f_H / MHz	$\lambda_L / 2\pi$	$\lambda_H / 2\pi$	W
0.3	~ 1.34	159 m	~ 35.6 m	1.920 R ²
1.34	~ 30	35.6 m	~ 1.6 m	3.450 R ² /f ²
30	~ 300	1.6 m	~ 159 mm	3.83 R ²
300	~ 1,500	159 mm	~ 31.8 mm	0.0128 R ² /f
1,500	~ 100,000	31.8 mm	~ 0.5 mm	19.2R ²

Subscripts L and H are low and high, λ is wavelength.
From L1.1307(b)(3)(C), modified by adding Minimum Distance columns.

Subscripts L and H are low and high; λ is wavelength.
From §1.1307(b)(3)(i)(C), modified by adding Minimum Distance columns.
R is in meter, f is in MHz
Threshold ERP [W] = $19.2 \times R^2$ (~formula (A.1))
(* where "R" is: > 0.4 m)

Calculating formula:

$$P_{th} \text{ (mW)} = ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases} \quad (B.1)$$

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases} \quad (B.2)$$

$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right)$

and f is in GHz, d is the separation distance (cm), and ERP_{20cm} is per Formula (B.1).

SECTION 5: Confirmation before testing

5.1 SAR reference power measurement (antenna terminal conducted average power of EUT)

*: Antenna gain (peak): 2.98 dBi (2.4GHz band), 4.94 dBi (5GHz band)

Mode	Frequency		Data rate	Power Setting (software)	Duty cycle	Duty factor	Duty scaled factor	Measurement Result				Power correction				Power tuning applied?	Remarks
								Time average power		Burst power		Power		Δ from max.	Tune-up factor		
	[MHz]	CH	[Mbps]	[-]	[%]	[dB]	[-]	[dBm]	[mW]	[dBm]	[mW]	Typical [dBm]	Max. [dBm]				
BT-LE (PHY1)	2402	0	1	5	64.1	1.93	1.56	3.24	2.11	5.17	3.29	3.0	6.0	-0.83	1.21	tuned-up	-
	2440	19	1	5	64.1	1.93	1.56	3.20	2.09	5.13	3.26	3.0	6.0	-0.87	1.22	tuned-up	-
	2480	39	1	5	64.1	1.93	1.56	3.23	2.10	5.16	3.28	3.0	6.0	-0.84	1.21	tuned-up	-
BT-LE (PHY2)	2402	0	1	5	34.5	4.62	2.90	0.49	1.12	5.11	3.24	3.0	6.0	-0.89	1.23	tuned-up	-
	2440	19	1	5	34.5	4.62	2.90	0.45	1.11	5.07	3.21	3.0	6.0	-0.93	1.24	tuned-up	-
	2480	39	1	5	34.5	4.62	2.90	0.48	1.12	5.10	3.24	3.0	6.0	-0.90	1.23	tuned-up	-
11b	2412	1	1	8	100	0.00	1.00	8.36	6.85	8.36	6.85	8.0	10.0	-1.64	1.46	n/a (default)	*.Initial CH-WLAN 2.4GHz
	2437	6	1	8	100	0.00	1.00	8.19	6.59	8.19	6.59	8.0	10.0	-1.81	1.52	n/a (default)	-
	2462	11	1	8	100	0.00	1.00	8.08	6.43	8.08	6.43	8.0	10.0	-1.92	1.56	n/a (default)	-
11g	2412	1	6	8	100	0.00	1.00	8.26	6.70	8.26	6.70	8.0	10.0	-1.74	1.49	n/a (default)	-
	2437	6	6	8	100	0.00	1.00	8.12	6.49	8.12	6.49	8.0	10.0	-1.88	1.54	n/a (default)	-
	2462	11	6	8	100	0.00	1.00	8.01	6.32	8.01	6.32	8.0	10.0	-1.99	1.58	n/a (default)	-
11n20 -SISO	2412	1	MCS0	7	100	0.00	1.00	7.46	5.57	7.46	5.57	7.0	9.0	-1.54	1.43	n/a (default)	-
	2437	6	MCS0	7	100	0.00	1.00	7.30	5.37	7.30	5.37	7.0	9.0	-1.70	1.48	n/a (default)	-
	2462	11	MCS0	7	100	0.00	1.00	7.19	5.24	7.19	5.24	7.0	9.0	-1.81	1.52	n/a (default)	-
11n40 -SISO	2422	3	MCS0	7	100	0.00	1.00	7.40	5.50	7.40	5.50	7.0	9.0	-1.60	1.45	n/a (default)	-
	2437	6	MCS0	7	100	0.00	1.00	7.31	5.38	7.31	5.38	7.0	9.0	-1.69	1.48	n/a (default)	-
	2452	9	MCS0	7	100	0.00	1.00	7.23	5.28	7.23	5.28	7.0	9.0	-1.77	1.50	n/a (default)	-
11a	5180	36	6	9	100	0.00	1.00	8.94	7.83	8.94	7.83	8.0	10.0	-1.06	1.28	tuned-up	-
	5200	40	6	9	100	0.00	1.00	8.98	7.91	8.98	7.91	8.0	10.0	-1.02	1.26	tuned-up	-
	5220	44	6	9	100	0.00	1.00	8.98	7.91	8.98	7.91	8.0	10.0	-1.02	1.26	tuned-up	*.Initial CH-WLAN 5.2GHz
	5240	48	6	9	100	0.00	1.00	8.88	7.73	8.88	7.73	8.0	10.0	-1.12	1.29	tuned-up	-
	5260	52	6	9	100	0.00	1.00	8.80	7.59	8.80	7.59	8.0	10.0	-1.20	1.32	tuned-up	*.Initial CH-WLAN 5.3GHz
	5280	56	6	9	100	0.00	1.00	8.71	7.43	8.71	7.43	8.0	10.0	-1.29	1.35	tuned-up	-
	5300	60	6	9	100	0.00	1.00	8.75	7.50	8.75	7.50	8.0	10.0	-1.25	1.33	tuned-up	-
	5320	64	6	9	100	0.00	1.00	8.65	7.33	8.65	7.33	8.0	10.0	-1.35	1.36	tuned-up	-
	5500	100	6	10	100	0.00	1.00	8.62	7.28	8.62	7.28	8.0	10.0	-1.38	1.37	tuned-up	-
	5580	116	6	10	100	0.00	1.00	8.64	7.31	8.64	7.31	8.0	10.0	-1.36	1.37	tuned-up	-
	5700	140	6	10	100	0.00	1.00	8.74	7.48	8.74	7.48	8.0	10.0	-1.26	1.34	tuned-up	*.Initial CH-WLAN 5.6GHz
	5745	149	6	9	100	0.00	1.00	8.61	7.26	8.61	7.26	8.0	10.0	-1.39	1.38	tuned-up	-
	5785	157	6	9	100	0.00	1.00	8.72	7.45	8.72	7.45	8.0	10.0	-1.28	1.34	tuned-up	-
	5825	165	6	9	100	0.00	1.00	8.77	7.53	8.77	7.53	8.0	10.0	-1.23	1.33	tuned-up	*.Initial CH-WLAN 5.8GHz
11n20 -SISO	5180	36	MCS0	8	100	0.00	1.00	8.12	6.49	8.12	6.49	7.0	9.0	-0.88	1.22	tuned-up	-
	5200	40	MCS0	8	100	0.00	1.00	8.17	6.56	8.17	6.56	7.0	9.0	-0.83	1.21	tuned-up	-
	5220	44	MCS0	8	100	0.00	1.00	8.17	6.56	8.17	6.56	7.0	9.0	-0.83	1.21	tuned-up	-
	5240	48	MCS0	8	100	0.00	1.00	8.07	6.41	8.07	6.41	7.0	9.0	-0.93	1.24	tuned-up	-
	5260	52	MCS0	8	100	0.00	1.00	7.99	6.30	7.99	6.30	7.0	9.0	-1.01	1.26	tuned-up	-
	5280	56	MCS0	8	100	0.00	1.00	7.90	6.17	7.90	6.17	7.0	9.0	-1.10	1.29	tuned-up	-
	5300	60	MCS0	8	100	0.00	1.00	7.94	6.22	7.94	6.22	7.0	9.0	-1.06	1.28	tuned-up	-
	5320	64	MCS0	8	100	0.00	1.00	7.85	6.10	7.85	6.10	7.0	9.0	-1.15	1.30	tuned-up	-
	5500	100	MCS0	9	100	0.00	1.00	7.81	6.04	7.81	6.04	7.0	9.0	-1.19	1.32	tuned-up	-
	5580	116	MCS0	9	100	0.00	1.00	7.83	6.07	7.83	6.07	7.0	9.0	-1.17	1.31	tuned-up	-
	5700	140	MCS0	9	100	0.00	1.00	7.94	6.22	7.94	6.22	7.0	9.0	-1.06	1.28	tuned-up	-
	5745	149	MCS0	8	100	0.00	1.00	7.80	6.03	7.80	6.03	7.0	9.0	-1.20	1.32	tuned-up	-
	5785	157	MCS0	8	100	0.00	1.00	7.91	6.18	7.91	6.18	7.0	9.0	-1.09	1.29	tuned-up	-
	5825	165	MCS0	8	100	0.00	1.00	7.97	6.27	7.97	6.27	7.0	9.0	-1.03	1.27	tuned-up	-
11ac20 -SISO	5180	36	MCS0	8	100	0.00	1.00	8.13	6.50	8.13	6.50	7.0	9.0	-0.87	1.22	tuned-up	-
	5200	40	MCS0	8	100	0.00	1.00	8.15	6.53	8.15	6.53	7.0	9.0	-0.85	1.22	tuned-up	-
	5220	44	MCS0	8	100	0.00	1.00	8.15	6.53	8.15	6.53	7.0	9.0	-0.85	1.22	tuned-up	-
	5240	48	MCS0	8	100	0.00	1.00	8.06	6.40	8.06	6.40	7.0	9.0	-0.94	1.24	tuned-up	-
	5260	52	MCS0	8	100	0.00	1.00	7.98	6.28	7.98	6.28	7.0	9.0	-1.02	1.26	tuned-up	-
	5280	56	MCS0	8	100	0.00	1.00	7.89	6.15	7.89	6.15	7.0	9.0	-1.11	1.29	tuned-up	-
	5300	60	MCS0	8	100	0.00	1.00	7.95	6.24	7.95	6.24	7.0	9.0	-1.05	1.27	tuned-up	-
	5320	64	MCS0	8	100	0.00	1.00	7.87	6.12	7.87	6.12	7.0	9.0	-1.13	1.30	tuned-up	-
	5500	100	MCS0	9	100	0.00	1.00	7.81	6.04	7.81	6.04	7.0	9.0	-1.19	1.32	tuned-up	-
	5580	116	MCS0	9	100	0.00	1.00	7.82	6.05	7.82	6.05	7.0	9.0	-1.18	1.31	tuned-up	-
	5700	140	MCS0	9	100	0.00	1.00	7.94	6.22	7.94	6.22	7.0	9.0	-1.06	1.28	tuned-up	-
	5745	149	MCS0	8	100	0.00	1.00	7.81	6.04	7.81	6.04	7.0	9.0	-1.19	1.32	tuned-up	-
	5785	157	MCS0	8	100	0.00	1.00	7.92	6.19	7.92	6.19	7.0	9.0	-1.08	1.28	tuned-up	-
	5825	165	MCS0	8	100	0.00	1.00	7.97	6.27	7.97	6.27	7.0	9.0	-1.03	1.27	tuned-up	-

(cont'd)

(cont'd)

cont.

Mode	Frequency		Data rate	Power Setting (software)	Duty cycle	Duty factor	Duty scaled factor	Measurement Result				Power correction				Power tuning applied?	Remarks
								Time average power		Burst power		Power		Δ from max.	Tune-up factor		
	[MHz]	CH	[Mbps]	[dBm]	[dB]	[dB]	[dBm]	[mW]	[dBm]	[mW]	Typical	Max.	[dB]				
1n40-SISO	5190	38	MCS0	8	100	0.00	1.00	8.07	6.41	8.07	6.41	7.0	9.0	-0.93	1.24	tuned-up	
	5230	46	MCS0	8	100	0.00	1.00	8.12	6.49	8.12	6.49	7.0	9.0	-0.88	1.22	tuned-up	
	5270	54	MCS0	8	100	0.00	1.00	7.95	6.24	7.95	6.24	7.0	9.0	-1.05	1.27	tuned-up	
	5310	62	MCS0	8	100	0.00	1.00	7.90	6.17	7.90	6.17	7.0	9.0	-1.10	1.29	tuned-up	
	5510	102	MCS0	9	100	0.00	1.00	7.82	6.05	7.82	6.05	7.0	9.0	-1.18	1.31	tuned-up	
	5550	110	MCS0	9	100	0.00	1.00	7.81	6.04	7.81	6.04	7.0	9.0	-1.19	1.32	tuned-up	
	5670	134	MCS0	9	100	0.00	1.00	7.83	6.07	7.83	6.07	7.0	9.0	-1.17	1.31	tuned-up	
	5755	151	MCS0	8	100	0.00	1.00	7.85	6.10	7.85	6.10	7.0	9.0	-1.15	1.30	tuned-up	
5795	159	MCS0	8	100	0.00	1.00	7.95	6.24	7.95	6.24	7.0	9.0	-1.05	1.27	tuned-up		
11ac40-SISO	5190	38	MCS0	8	100	0.00	1.00	8.09	6.44	8.09	6.44	7.0	9.0	-0.91	1.23	tuned-up	
	5230	46	MCS0	8	100	0.00	1.00	8.11	6.47	8.11	6.47	7.0	9.0	-0.89	1.23	tuned-up	
	5270	54	MCS0	8	100	0.00	1.00	7.94	6.22	7.94	6.22	7.0	9.0	-1.06	1.28	tuned-up	
	5310	62	MCS0	8	100	0.00	1.00	7.91	6.18	7.91	6.18	7.0	9.0	-1.09	1.29	tuned-up	
	5510	102	MCS0	9	100	0.00	1.00	7.82	6.05	7.82	6.05	7.0	9.0	-1.18	1.31	tuned-up	
	5550	110	MCS0	9	100	0.00	1.00	7.82	6.05	7.82	6.05	7.0	9.0	-1.18	1.31	tuned-up	
	5670	134	MCS0	9	100	0.00	1.00	7.83	6.07	7.83	6.07	7.0	9.0	-1.17	1.31	tuned-up	
	5755	151	MCS0	8	100	0.00	1.00	7.85	6.10	7.85	6.10	7.0	9.0	-1.15	1.30	tuned-up	
5795	159	MCS0	8	100	0.00	1.00	7.95	6.24	7.95	6.24	7.0	9.0	-1.05	1.27	tuned-up		
11ac80-SISO	5210	42	MCS0	7	100	0.00	1.00	7.47	5.58	7.47	5.58	7.0	9.0	-1.53	1.42	n/a (default)	
	5290	58	MCS0	7	100	0.00	1.00	7.33	5.41	7.33	5.41	7.0	9.0	-1.67	1.47	n/a (default)	
	5530	106	MCS0	7	100	0.00	1.00	7.32	5.40	7.32	5.40	7.0	9.0	-1.68	1.47	n/a (default)	
	5775	155	MCS0	7	100	0.00	1.00	7.39	5.48	7.39	5.48	7.0	9.0	-1.61	1.45	n/a (default)	

* : SAR test was applied.

* The SAR test powers by setting power were not more than 2dB lower than maximum tune-up power (KDB 447498 D04 (v01) requirement).


* CH: Channel; Max: Maximum; n/a: not applied.

* Calculating formula: Time average power (dBm) = (P/M Reading, dBm) + (Cable loss, dB) + (Attenuator, dB)
Burst power (dBm) = (P/M Reading, dBm) + (Cable loss, dB) + (Attenuator, dB) + (duty factor, dB)
Duty cycle: (duty cycle, %) = (Tx on time) / (1 cycle time) × 100, Duty factor (dBm) = 10 × log (100 / (duty cycle, %))
Duty cycle scaled factor: Duty cycle correction factor for obtained SAR value, Duty scaled factor [-] = 100(%) / (duty cycle, %)
Δ from max. (Deviation from maximum power, dB) = (Burst power measured (average, dBm)) - (Max. tune-up limit power (average, dBm))
Tune-up factor: Power tune-up factor for obtained SAR value, Tune-up factor [-] = 1 / (10 ^ ("Deviation from max., dB" / 10))

* Date measured: January 7, 2022 / Measured by: H. Naka/ Place: Preparation room of No. 7 shield room. (21 deg.C / 40 %RH)

* Uncertainty of antenna port conducted test; (±) 1.3 dB (Average power), (±) 2.7 % (duty cycle).

* Chart of the worst duty cycle for each operation mode in right and in follows.

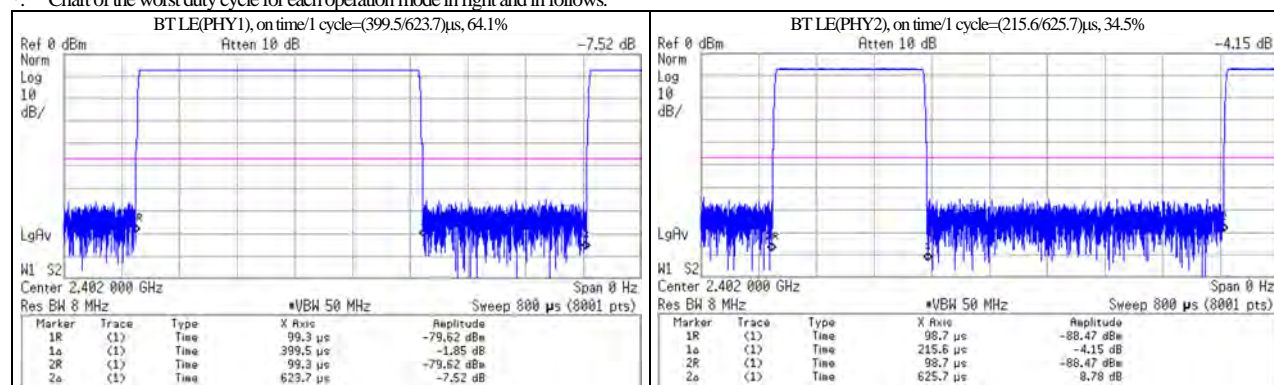

SECTION 6: SAR Measurement results

6.1 Tissue simulating liquid measurement

6.1.1 Target of tissue simulating liquid

Nominal dielectric values of the tissue simulating liquids in the phantom are listed in the following table. (Appendix A, KDB 865664 v01r04)

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
1800~2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

6.1.2 Liquid measurement (Liquid verification)

Frequency [MHz]	Liquid type	Liquid parameters ^(*a)													ASAR Coefficients ^(*b)			Date measured	
		Liquid Temp. [deg.C.]	Liquid depth of phantom [mm]	Target value	Permittivity (ε _r) [-]					Conductivity [S/m]					ASAR		Correction required? (°C)		
					Value	Δε _r [%]	Interpo- lated	Limit [%]	Δend, >48hrs [%] (*1)	Target value	Value	Δσ [%]	Interpo- lated	Limit [%]	Δend, >48hrs [%] (*1)	(1g) [%]			(10g) [%]
2402	Head	22.5	150	39.29	40.04	1.9	☑	10	begin	1.757	1.794	2.1	☑	10	begin	0.6	0.3	not required.	March 2, 2022 (Used until March 3)
2412				39.27	40.03	1.9	☑	10	begin	1.766	1.802	2.0	☑	10	begin	0.6	0.2	not required.	
2437				39.22	40.00	2.0	☑	10	begin	1.788	1.823	2.0	☑	10	begin	0.5	0.2	not required.	
2462				39.18	39.98	2.1	☑	10	begin	1.813	1.842	1.6	☑	10	begin	0.3	0.1	not required.	
5180				36.01	35.64	-1.0	☐	10	begin	4.635	4.435	-4.3	☐	10	begin	0.3	0.5	not required.	
5220				35.96	35.58	-1.1	☐	10	begin	4.676	4.475	-4.3	☐	10	begin	0.3	0.5	not required.	
5240				35.94	35.51	-1.2	☐	10	begin	4.696	4.500	-4.2	☐	10	begin	0.4	0.5	not required.	
5260				35.92	35.46	-1.3	☐	10	begin	4.717	4.523	-4.1	☐	10	begin	0.4	0.5	not required.	
5300				35.87	35.42	-1.3	☐	10	begin	4.758	4.566	-4.0	☐	10	begin	0.4	0.5	not required.	
5320				35.85	35.37	-1.3	☐	10	begin	4.778	4.582	-4.1	☐	10	begin	0.4	0.6	not required.	
5500				35.64	35.10	-1.5	☐	10	< 48hrs	4.963	4.770	-3.9	☐	10	< 48hrs	0.5	0.6	not required.	
5580				35.55	34.97	-1.6	☐	10	< 48hrs	5.045	4.871	-3.4	☐	10	< 48hrs	0.5	0.6	not required.	
5700				35.41	34.79	-1.8	☐	10	< 48hrs	5.168	4.999	-3.3	☐	10	< 48hrs	0.5	0.6	not required.	
5745				35.36	34.69	-1.9	☑	10	< 48hrs	5.214	5.043	-3.3	☑	10	< 48hrs	0.5	0.6	not required.	
5785				35.32	34.62	-2.0	☑	10	< 48hrs	5.255	5.095	-3.0	☑	10	< 48hrs	0.5	0.6	not required.	
5825				35.27	34.58	-2.0	☑	10	< 48hrs	5.296	5.150	-2.8	☑	10	< 48hrs	0.5	0.6	not required.	

*1. "begin": SAR test has ended within 24 hours from the liquid parameter measurement, "< 48 hrs.". Since SAR test has ended within 48 hours (2 days) from the liquid parameter measurement and a change in the liquid temperature was within 1 degree, liquid parameters measured on first day were used on next day continuously, "value (%)": Since the SAR test series took longer than 48 hours, the liquid parameters were measured on every 48 hours period and on the date which was end of test series. Since the difference of liquid parameters between the beginning and next measurement was smaller than 5%, the liquid parameters measured in beginning were used until end of each test series.
Calculating formula: $\Delta\text{end}(>48 \text{ hrs.}) (\%) = \{(\text{dielectric properties, end of test series}) / (\text{dielectric properties, beginning of test series}) - 1\} \times 100$

*a. The target values of (2000, 2450, 3000, 5800) MHz are parameters defined in Appendix A of KDB 865664 D01. For other frequencies, the target nominal dielectric values shall be obtained by linear interpolation between the higher and lower tabulated figures. Above 5800MHz were obtained using linear extrapolation.

*b. The coefficients in below are parameters defined in IEEE Std.1528-2013.

Calculating formula: $\Delta\text{SAR}(1g) = C_{\epsilon r} \times \Delta\epsilon_r + C_{\sigma} \times \Delta\sigma$, $C_{\epsilon r} = 7.854E-4 \times f^3 + 9.402E-3 \times f^2 - 2.742E-2 \times f + 0.2026$ / $C_{\sigma} = 9.804E-3 \times f^3 - 8.661E-2 \times f^2 + 2.981E-2 \times f + 0.7829$

Calculating formula: $\Delta\text{SAR}(10g) = C_{\epsilon r} \times \Delta\epsilon_r + C_{\sigma} \times \Delta\sigma$, $C_{\epsilon r} = 3.456 \times 10^{-3} \times f^3 - 3.531 \times 10^{-2} \times f^2 + 7.675 \times 10^{-2} \times f + 0.1860$ / $C_{\sigma} = 4.479 \times 10^{-3} \times f^3 - 1.586 \times 10^{-2} \times f^2 - 0.1972 \times f + 0.7717$

Since the calculated ASAR values of the tested liquid had shown positive correction, the measured SAR was not converted by ASAR correction.

Calculating formula: $\Delta\text{SAR corrected SAR (W/kg)} = (\text{Measured SAR (W/kg)}) \times (100 - (\Delta\text{SAR}(\%))) / 100$

*. Calibration frequency of the SAR measurement probe (and used conversion factors for each frequency.)

The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Liquid	SAR test frequency	Probe calibration frequency	Validity	Conversion factor	Uncertainty
Head	(2412, 2437, 2462) MHz	2450 MHz	within ± 50 MHz of calibration frequency	7.35	± 12.0 %
Head	(5180, 5220, 5240, 5260, 5300, 5320) MHz	5250 MHz	within ± 110 MHz of calibration frequency	5.14	± 13.1 %
Head	(5500, 5580, 5700) MHz	5600 MHz	within ± 110 MHz of calibration frequency	4.56	± 13.1 %
Head	(5745, 5785, 5825) MHz	5800 MHz	within ± 110 MHz of calibration frequency	4.60	± 13.1 %

6.2 SAR results

Test setup					Mode and Frequency			Duty cycle		Power correction			SAR results [W/kg]			SAR type	SAR Limit [W/kg]	SAR plot # in Appx. 2	Setup photo# in Appx. 1-3	Remarks	
Ant. #	Test position	Gap [mm]	Source power	LCD position	Mode (D/R)	[MHz]	CH	Duty [%]	Duty scaled factor	Max. tune-up limit [dBm]	Measured conducted [dBm]	Power scaled factor	(Max. value of multi-peak)								
					Mark with "*" is the initial mode & frequency.								Measured	ΔSAR	Scaled (*b)						
														[%]							corrected
Step 1) 24 GHz Band (*1)																					
-	Front-upper	0	Battery	Op.180N	11b (1Mbps)*	2412*	1	100	1.00	10	8.36	1.46	0.094	+ sign	n/a (*a)	0.138	1g	1.6	1-1	P1	-
-	Front-upper	0	Battery	Op.180N	11b (1Mbps)*	2437	6	100	1.00	10	8.19	1.52	0.081	+ sign	n/a (*a)	0.123	1g	1.6	-	P1	-
-	Front-upper	0	Battery	Op.180N	11b (1Mbps)*	2462	11	100	1.00	10	8.08	1.56	0.072	+ sign	n/a (*a)	0.112	1g	1.6	-	P1	-
-	Front-upper	0	Battery	Op.180N	11g (6Mbps)	2412	1	100	1.00	10	8.26	1.49	0.091	+ sign	n/a (*a)	0.136	1g	1.6	-	P1	-
-	Front-upper	0	Battery	Op.180N	BT LE (1Mbps)	2402	1	64.1	1.56	6	5.17	1.21	0.025	+ sign	n/a (*a)	0.047	1g	1.6	-	P1	-
-	Front-left-upper	0	Battery	Op.180N	11b (1Mbps)*	2412*	1	100	1.00	10	8.36	1.46	0.061	+ sign	n/a (*a)	0.089	1g	1.6	-	P2	-
-	Top-front-edge	0	Battery	Op.180N	11b (1Mbps)*	2412*	1	100	1.00	10	8.36	1.46	0.065	+ sign	n/a (*a)	0.095	1g	1.6	-	P3	-
-	Top-front	0	Battery	Op.180N	11b (1Mbps)*	2412*	1	100	1.00	10	8.36	1.46	0.068	+ sign	n/a (*a)	0.099	1g	1.6	-	P4	-
-	Top	0	Battery	CLR	11b (1Mbps)*	2412*	1	100	1.00	10	8.36	1.46	0.031	+ sign	n/a (*a)	0.045	1g	1.6	-	P5	Wide area scan
-	Front	0	Battery	CLR	11b (1Mbps)*	2412*	1	100	1.00	10	8.36	1.46	N/A (*1)	+ sign	n/a (*a)	N/A	1g	1.6	-	P6	Wide area scan
-	Left	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1g	1.6	-	-	SAR test: Exempt
-	Rear	0	Battery	Op.180R	11b (1Mbps)*	2412*	1	100	1.00	10	8.36	1.46	N/A (*1)	+ sign	n/a (*a)	N/A	1g	1.6	-	P7	Wide area scan
-	Right	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1g	1.6	-	-	SAR test: Exempt
-	Bottom	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1g	1.6	-	-	SAR test: Exempt
Step 2) U-NII-2A (5.3 GHz) (and U-NII-1 (5.2 GHz)) Band																					
-	Front-upper	0	Battery	Op.180N	11a (6Mbps)*	5260*	52	100	1.00	10	8.80	1.32	0.216	+ sign	n/a (*a)	0.285	1g	1.6	-	P1	-
-	Front-upper	0	Battery	Op.180N	11a (6Mbps)*	5300	60	100	1.00	10	8.75	1.33	0.245	+ sign	n/a (*a)	0.326	1g	1.6	-	P1	-
-	Front-upper	0	Battery	Op.180N	11a (6Mbps)*	5320	64	100	1.00	10	8.65	1.36	0.259	+ sign	n/a (*a)	0.352	1g	1.6	2a-1	P1	-
-	Front-left-upper	0	Battery	Op.180N	11a (6Mbps)*	5260*	52	100	1.00	10	8.80	1.32	0.151	+ sign	n/a (*a)	0.199	1g	1.6	-	P2	-
-	Top-front-edge	0	Battery	Op.180N	11a (6Mbps)*	5260*	52	100	1.00	10	8.80	1.32	0.110	+ sign	n/a (*a)	0.145	1g	1.6	-	P3	-
-	Top-front	0	Battery	Op.180N	11a (6Mbps)*	5260*	52	100	1.00	10	8.80	1.32	0.059	+ sign	n/a (*a)	0.078	1g	1.6	-	P4	-
-	Top	0	Battery	CLR	11a (6Mbps)*	5260*	52	100	1.00	10	8.80	1.32	0.030	+ sign	n/a (*a)	0.040	1g	1.6	-	P5	Wide area scan
-	Front	0	Battery	CLR	11a (6Mbps)*	5260*	52	100	1.00	10	8.80	1.32	N/A (*1)	+ sign	n/a (*a)	N/A	1g	1.6	-	P6	Wide area scan
-	Left	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1g	1.6	-	-	SAR test: Exempt
-	Rear	0	Battery	Op.180R	11a (6Mbps)*	5260*	52	100	1.00	10	8.80	1.32	N/A (*1)	+ sign	n/a (*a)	N/A	1g	1.6	-	P7	Wide area scan
-	Right	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1g	1.6	-	-	SAR test: Exempt
-	Bottom	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1g	1.6	-	-	SAR test: Exempt
-	Front-upper	0	Battery	Op.180N	11a (6Mbps)*	5180	36	100	1.00	10	8.94	1.28	0.185	+ sign	n/a (*a)	0.237	1g	1.6	-	P1	-
-	Front-upper	0	Battery	Op.180N	11a (6Mbps)*	5220*	44	100	1.00	10	8.98	1.26	0.196	+ sign	n/a (*a)	0.247	1g	1.6	-	P1	-
-	Front-upper	0	Battery	Op.180N	11a (6Mbps)*	5240	48	100	1.00	10	8.88	1.29	0.201	+ sign	n/a (*a)	0.259	1g	1.6	2b-1	P1	-
Step 3) U-NII-2C (5.6 GHz) Band																					
-	Front-upper	0	Battery	Op.180N	11a (6Mbps)*	5500	100	100	1.00	10	8.62	1.37	0.467	+ sign	n/a (*a)	0.640	1g	1.6	-	P1	-
-	Front-upper	0	Battery	Op.180N	11a (6Mbps)*	5580	116	100	1.00	10	8.64	1.37	0.489	+ sign	n/a (*a)	0.670	1g	1.6	-	P1	-
-	Front-upper	0	Battery	Op.180N	11a (6Mbps)*	5700*	140	100	1.00	10	8.74	1.34	0.505	+ sign	n/a (*a)	0.677	1g	1.6	3-1	P1	-
-	Front-left-upper	0	Battery	Op.180N	11a (6Mbps)*	5700*	140	100	1.00	10	8.74	1.34	0.235	+ sign	n/a (*a)	0.315	1g	1.6	-	P2	-
-	Top-front-edge	0	Battery	Op.180N	11a (6Mbps)*	5700*	140	100	1.00	10	8.74	1.34	0.354	+ sign	n/a (*a)	0.474	1g	1.6	-	P3	-
-	Top-front	0	Battery	Op.180N	11a (6Mbps)*	5700*	140	100	1.00	10	8.74	1.34	0.197	+ sign	n/a (*a)	0.264	1g	1.6	-	P4	-
-	Top	0	Battery	CLR	11a (6Mbps)*	5700*	140	100	1.00	10	8.74	1.34	0.061	+ sign	n/a (*a)	0.082	1g	1.6	-	P5	Wide area scan
-	Front	0	Battery	CLR	11a (6Mbps)*	5700*	140	100	1.00	10	8.74	1.34	N/A (*1)	+ sign	n/a (*a)	N/A	1g	1.6	-	P6	Wide area scan
-	Left	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1g	1.6	-	-	SAR test: Exempt
-	Rear	0	Battery	Op.180R	11a (6Mbps)*	5700*	140	100	1.00	10	8.74	1.34	N/A (*1)	+ sign	n/a (*a)	N/A	1g	1.6	-	P7	Wide area scan
-	Right	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1g	1.6	-	-	SAR test: Exempt
-	Bottom	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1g	1.6	-	-	SAR test: Exempt
Step 4) U-NII-3 (5.8 GHz) Band																					
-	Front-upper	0	Battery	Op.180N	11a (6Mbps)*	5745	149	100	1.00	10	8.61	1.38	0.454	+ sign	n/a (*a)	0.627	1g	1.6	-	P1	-
-	Front-upper	0	Battery	Op.180N	11a (6Mbps)*	5785	157	100	1.00	10	8.72	1.34	0.478	+ sign	n/a (*a)	0.641	1g	1.6	-	P1	-
-	Front-upper	0	Battery	Op.180N	11a (6Mbps)*	5825*	165	100	1.00	10	8.77	1.33	0.508	+ sign	n/a (*a)	0.676	1g	1.6	4-1	P1	-
-	Front-left-upper	0	Battery	Op.180N	11a (6Mbps)*	5825*	165	100	1.00	10	8.77	1.33	0.327	+ sign	n/a (*a)	0.435	1g	1.6	-	P2	-
-	Top-front-edge	0	Battery	Op.180N	11a (6Mbps)*	5825*	165	100	1.00	10	8.77	1.33	0.371	+ sign	n/a (*a)	0.493	1g	1.6	-	P3	-
-	Top-front	0	Battery	Op.180N	11a (6Mbps)*	5825*	165	100	1.00	10	8.77	1.33	0.219	+ sign	n/a (*a)	0.291	1g	1.6	-	P4	-
-	Top	0	Battery	CLR	11a (6Mbps)*	5825*	165	100	1.00	10	8.77	1.33	0.070	+ sign	n/a (*a)	0.093	1g	1.6	-	P5	Wide area scan
-	Front	0	Battery	CLR	11a (6Mbps)*	5825*	165	100	1.00	10	8.77	1.33	N/A (*1)	+ sign	n/a (*a)	N/A	1g	1.6	-	P6	Wide area scan
-	Left	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1g	1.6	-	-	SAR test: Exempt
-	Rear	0	Battery	Op.180R	11a (6Mbps)*	5825*	165	100	1.00	10	8.77	1.33	N/A (*1)	+ sign	n/a (*a)	N/A	1g	1.6	-	P7	Wide area scan
-	Right	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1g	1.6	-	-	SAR test: Exempt
-	Bottom	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1g	1.6	-	-	SAR test: Exempt

Notes: * The higher scaled (reported) SAR in each operation band is marked (shaded yellow marker).
 * Appx. Appendix, Ant: antenna; (LCD position) Op.180N: Open 180 degree-normal, Op.180R: Open 180 degree-reverse, CLR: Close-reverse; Max.: maximum; n/a: not applied; Gap: It is the separation distance between the platform surface and the bottom outer surface of phantom.
 * During SAR test, the radiated power is always monitored by Spectrum Analyzer.

*a. Since the calculated ΔSAR values of the tested liquid had shown positive correction, the measured SAR was not converted by ΔSAR correction.

*b. Calculating formula: Scaled SAR (W/kg) = (Measured SAR (W/kg)) × (Duty scaled factor) × (Power scaled factor)
 where, Duty scaled factor [-] = 100% / (duty cycle, %), Power scaled factor [-] = 10^Δ ((Max. tune-up limit, dBm) - (Measured conducted, dBm)) / 10

*1. (KDB 248227 D01) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test of OFDM mode was reduced.

OFDM mode	Maximum tune-up tolerance limit				OFDM scaled factor [-] (b)/(a)×100	DSSS worst reported SAR value				Estimated SAR value: OFDM [W/kg]	Exclusion limit [W/kg]	Standalone SAR test of OFDM mode require?
	DSSS		OFDM			SAR type	Setup	Antenna	[W/kg]			
	[dBm]	[mW] (a)	[dBm]	[mW] (b)								
11g	10.0	10	10.0	10	1.00	1g	Front-upper	-	0.138	0.14	≤ 1.2	No
11n20	10.0	10	9.0	8	0.80	1g	Front-upper	-	0.138	0.11	≤ 1.2	No
11n40	10.0	10	9.0	8	0.80	1g	Front-upper	-	0.138	0.11	≤ 1.2	No

*2. (KDB 248227 D01) For 5GHz band, for other transmission modes, SAR is not required when the highest reported SAR for initial test configuration is adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Band	OFDM mode	Maximum tune-up tolerance limit				Power scaled factor [-] (b)/(a)×100	Initial mode's worst reported SAR(1g) value			Estimated SAR value: other mode [W/kg]	Exclusion limit [W/kg]	Standalone SAR test of other mode require?
		Initial mode (11a)		other mode			Setup	Antenna	[W/kg]			
		[dBm]	[mW] (a)	[dBm]	[mW] (b)							
5.2 GHz WLAN	11n20-SISO	10	10	9	8	0.80	Front-upper	(single)	0.259	0.21	≤ 1.2	No
5.2 GHz WLAN	11ac20-SISO	10	10	9	8	0.80	Front-upper	(single)	0.259	0.21	≤ 1.2	No
5.2 GHz WLAN	11n40-SISO	10	10	9	8	0.80	Front-upper	(single)	0.259	0.21	≤ 1.2	No
5.2 GHz WLAN	11ac40-SISO	10	10	9	8	0.80	Front-upper	(single)	0.259	0.21	≤ 1.2	No
5.2 GHz WLAN	11ac80-SISO	10	10	9	8	0.80	Front-upper	(single)	0.259	0.21	≤ 1.2	No
5.3 GHz WLAN	11n20-SISO	10	10	9	8	0.80	Front-upper	(single)	0.352	0.28	≤ 1.2	No
5.3 GHz WLAN	11ac20-SISO	10	10	9	8	0.80	Front-upper	(single)	0.352	0.28	≤ 1.2	No
5.3 GHz WLAN	11n40-SISO	10	10	9	8	0.80	Front-upper	(single)	0.352	0.28	≤ 1.2	No
5.3 GHz WLAN	11ac40-SISO	10	10	9	8	0.80	Front-upper	(single)	0.352	0.28	≤ 1.2	No
5.3 GHz WLAN	11ac80-SISO	10	10	9	8	0.80	Front-upper	(single)	0.352	0.28	≤ 1.2	No
5.6 GHz WLAN	11n20-SISO	10	10	9	8	0.80	Front-upper	(single)	0.677	0.54	≤ 1.2	No
5.6 GHz WLAN	11ac20-SISO	10	10	9	8	0.80	Front-upper	(single)	0.677	0.54	≤ 1.2	No
5.6 GHz WLAN	11n40-SISO	10	10	9	8	0.80	Front-upper	(single)	0.677	0.54	≤ 1.2	No
5.6 GHz WLAN	11ac40-SISO	10	10	9	8	0.80	Front-upper	(single)	0.677	0.54	≤ 1.2	No
5.6 GHz WLAN	11ac80-SISO	10	10	9	8	0.80	Front-upper	(single)	0.677	0.54	≤ 1.2	No
5.8 GHz WLAN	11n20-SISO	10	10	9	8	0.80	Front-upper	(single)	0.676	0.54	≤ 1.2	No
5.8 GHz WLAN	11ac20-SISO	10	10	9	8	0.80	Front-upper	(single)	0.676	0.54	≤ 1.2	No
5.8 GHz WLAN	11n40-SISO	10	10	9	8	0.80	Front-upper	(single)	0.676	0.54	≤ 1.2	No
5.8 GHz WLAN	11ac40-SISO	10	10	9	8	0.80	Front-upper	(single)	0.676	0.54	≤ 1.2	No
5.8 GHz WLAN	11ac80-SISO	10	10	9	8	0.80	Front-upper	(single)	0.676	0.54	≤ 1.2	No

6.3 Simultaneous transmission evaluation

*. Simultaneous transmission SAR measurement (Volume Scan) was not required because SUM SAR(1g) was < 1.6 W/kg.

Simultaneous transmission scenario					Σ SAR 1g (Limit: ≤ 1.6 W/kg)	SPLSR Check? (Yes/No)	Antenna separation distance- design base [mm]	SPLSR (≤ 0.04)	Volume Scan? (Yes/No)
Test position	WLAN		Highest Reported SAR (*1)						
	mode	band	WLAN	Bluetooth					
Front-upper	11b, 11g	2.4GHz	0.138 w/kg	0.047 w/kg	*. not supported	n/a	n/a	n/a	n/a
	11a	U-NII-1	0.259 w/kg	0.047 w/kg	0.306 w/kg	< 1.6 W/kg (Σ SAR 1g), No	0 (*. same antenna)	n/a	No
	11a	U-NII-2A	0.352 w/kg	0.047 w/kg	0.399 w/kg	< 1.6 W/kg (Σ SAR 1g), No	0 (*. same antenna)	n/a	No
	11a	U-NII-2C	0.677 w/kg	0.047 w/kg	0.724 w/kg	< 1.6 W/kg (Σ SAR 1g), No	0 (*. same antenna)	n/a	No
	11a	U-NII-3	0.676 w/kg	0.047 w/kg	0.723 w/kg	< 1.6 W/kg (Σ SAR 1g), No	0 (*. same antenna)	n/a	No

Note: *1. These values are measured higher reported SAR (1g) of each operation band. Refer to section 6.2.

*. This wireless module supports both WLAN and Bluetooth on a same antenna.

*. WLAN (5GHz) and Bluetooth can transmit simultaneously.

*. WLAN (2.4GHz) and Bluetooth cannot transmit simultaneously.

<SAR Summation Analysis>

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR of all simultaneous transmitting antennas in an operating mode and exposure condition is within the SAR limit (SAR(1g): 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR is greater than the SAR limit (SAR(1g): 1.6 W/kg), SAR test exclusion is determined by the SPLSR.

(Calculating formula) Per KDB447498 D04(v01), $SPLSR = (SAR1 + SAR2) \times 1.5 / (\text{minimum antenna separation distance, mm})$

where; the minimum antenna separation distance is determined by the closest physical separation of the antennas, according to geometric center of the antennas.

6.4 SAR Measurement Variability (Repeated measurement requirement)

In accordance with published RF Exposure KDB procedure 865664 D01 (v01r04) SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR(1g) is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Since all the measured SAR are less than 0.8 W/kg (SAR(1g)), the repeated measurement is not required.

6.5 Device holder perturbation verification

When the highest reported SAR of an antenna is > 1.2 W/kg, holder perturbation verification (by Urethane form alone) is required by using the highest SAR configuration among all applicable frequency bands.

Since all the reported (scaled) SAR are less than 1.2 W/kg (SAR(1g)), the "device holder perturbation verification" measurement is not performed.

APPENDIX 2: SAR Measurement data

Appendix 2-1: Worst Reported (Scaled) SAR Plot

Plot 1-1: 2.4 GHz band, Front-upper & touch / 11b (1Mbps) / 2412 MHz

EUT: WLAN/BT Combo Module (Digital Camera); Type: ES204 (DS126861); Serial: AT220107-B24 (001019000134)

Mode: 11b(1Mbps, DSSS) (UID: 0, Wi-Fi_2.4Hz (0), Frame Length in ms: 0; PAR: 0; PMF: 1); Frequency: 2412 MHz; Crest Factor: 1.0

Medium: HSL5GHz(v6.2203); Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.802$ S/m; $\epsilon_r = 40.03$; $\rho = 1000$ kg/m³

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration: -Electronics: DAE4 Sn626; Calibrated: 2021/12/08 / -Phantom: ELI v4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section

-DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474) / -Probe: EX3DV4 - SN3907; ConvF(7.35, 7.35, 7.35) @ 2412 MHz; Calibrated: 2021/04/21

-Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0, 161.0$

touch1/24h3,2412,frt-top,b(1m)/

Area:60x60,12 (6x6x1): Measurement grid: $dx=12$ mm, $dy=12$ mm; Maximum value of SAR (measured) = 0.173 W/kg


Area:60x60,12 (51x51x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm; Maximum value of SAR (interpolated) = 0.211 W/kg

Z;160,5 (1x1x33): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm; Maximum value of SAR (measured) = 0.164 W/kg

Zoom:30x30x30,5 (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm;

Reference Value = 9.675 V/m; Power Drift = -0.01 dB; Maximum value of SAR (measured) = 0.157 W/kg; Peak SAR (extrapolated) = 0.263 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.034 W/kg (*. Smallest distance from peaks to all points 3 dB below = 5 mm; Ratio of SAR at M2 to SAR at M1 = 41.5%)

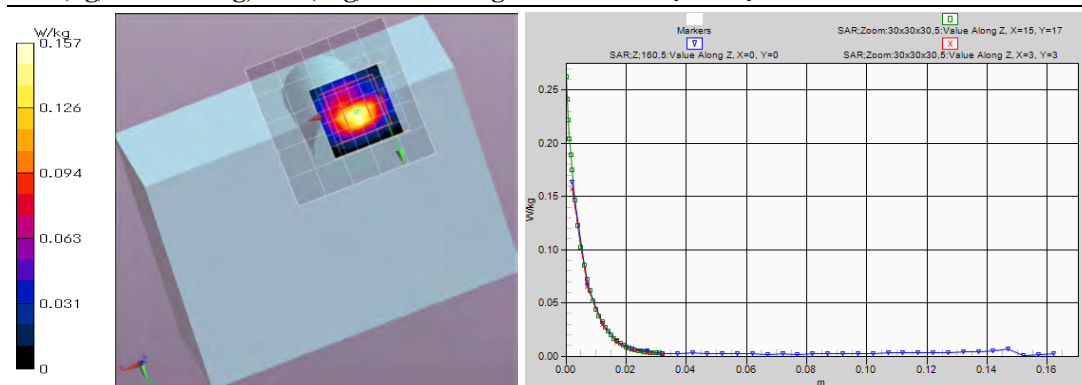

Remarks: *. Date tested: 2022/3/2; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
*. liquid depth: 150 mm; Position: distance of EUT to phantom: 0 mm (2 mm to liquid); ambient: (23~24) deg.C. / (50~70) %RH,
*. liquid temperature: 22.5(start)/22.5(end)/22.5(in check) deg.C.; *. White cubic: zoom scan area, Red cubic: big=SAR(10g) /small=SAR(1g)

Plot 2a-1: U-NII-2A (5.3 GHz) band, Front-upper & touch / 11a (6Mbps) / 5320 MHz

EUT: WLAN/BT Combo Module (Digital Camera); Type: ES204 (DS126861); Serial: AT220107-B24 (001019000134)

Mode: 11a (6Mbps, OFDM) (UID: 0, Wi-Fi_5GHz (0), Frame Length in ms: 0; PAR: 0; PMF: 1); Frequency: 5320 MHz; Crest Factor: 1.0

Medium: HSL5GHz(v6.2203); Medium parameters used: $f = 5320$ MHz; $\sigma = 4.582$ S/m; $\epsilon_r = 35.37$; $\rho = 1000$ kg/m³

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration: -Electronics: DAE4 Sn626; Calibrated: 2021/12/08 / -Phantom: ELI v4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section

-DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474) / -Probe: EX3DV4 - SN3907; ConvF(5.14, 5.14, 5.14) @ 5320 MHz; Calibrated: 2021/04/21

-Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0, 156.0$

touch2/5h3,533,5320,frt-top,a(6m)/

Area:60x60,10 (7x7x1): Measurement grid: $dx=10$ mm, $dy=10$ mm; Maximum value of SAR (measured) = 0.382 W/kg


Area:60x60,10 (61x61x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm; Maximum value of SAR (interpolated) = 0.578 W/kg

Z;155,5 (1x1x32): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm; Maximum value of SAR (measured) = 0.713 W/kg

Zoom:28x28x24,xy4-z1.4(ratio) (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm;

Reference Value = 12.88 V/m; Power Drift = -0.07 dB; Maximum value of SAR (measured) = 0.724 W/kg; Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.076 W/kg (*. Smallest distance from peaks to all points 3 dB below = 4 mm; Ratio of SAR at M2 to SAR at M1 = 60.5%)

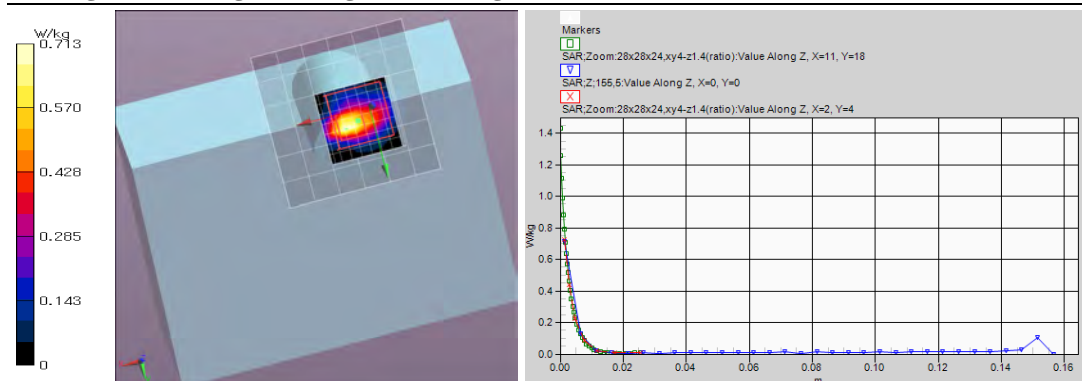

Remarks: *. Date tested: 2022/3/2; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
*. liquid depth: 150 mm; Position: distance of EUT to phantom: 0 mm (2 mm to liquid); ambient: (23~24) deg.C. / (50~70) %RH,
*. liquid temperature: 22.6(start)/22.6(end)/22.5(in check) deg.C.; *. White cubic: zoom scan area, Red cubic: big=SAR(10g) /small=SAR(1g)

APPENDIX 2: SAR Measurement data / Appendix 2-1: Worst Reported (Scaled) SAR Plot (cont'd)**Plot 2b-1: U-NII-1 (5.2 GHz) band, Front-upper & touch / 11a (6Mbps) / 5240 MHz****EUT: WLAN/BT Combo Module (Digital Camera); Type: ES204 (DS126861); Serial: AT220107-B24 (001019000134)****Mode: 11a (6Mbps, OFDM) (UID: 0, Wi-fi_5GHz (0), Frame Length in ms: 0, PAR: 0, PMF: 1); Frequency: 5240 MHz; Crest Factor: 1.0****Medium: HSL5GHz(v6.2203); Medium parameters used: $f = 5240$ MHz; $\sigma = 4.5$ S/m; $\epsilon_r = 35.51$; $\rho = 1000$ kg/m³**


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration: -Electronics: DAE4 Sn626; Calibrated: 2021/12/08 / -Phantom: ELI v4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section

-DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474) / -Probe: EX3DV4 - SN3907; ConvF(5.14, 5.14, 5.14) @ 5240 MHz; Calibrated: 2021/04/21

-Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0, 156.0$ **touch3/5h13.52.3.5240,frt-top,a(6m)/****Area:60x60,10 (7x7x1):** Measurement grid: $dx=10$ mm, $dy=10$ mm; Maximum value of SAR (measured) = 0.400 W/kg**Area:60x60,10 (61x61x1):** Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm; Maximum value of SAR (interpolated) = 0.454 W/kg**Z:155.5 (1x1x32):** Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm; Maximum value of SAR (measured) = 0.559 W/kg**Zoom:28x28x24,xy4-z1.4(ratio) (8x8x7)/Cube 0:** Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm;

Reference Value = 11.15 V/m; Power Drift = -0.10 dB; Maximum value of SAR (measured) = 0.573 W/kg; Peak SAR (extrapolated) = 1.07 W/kg

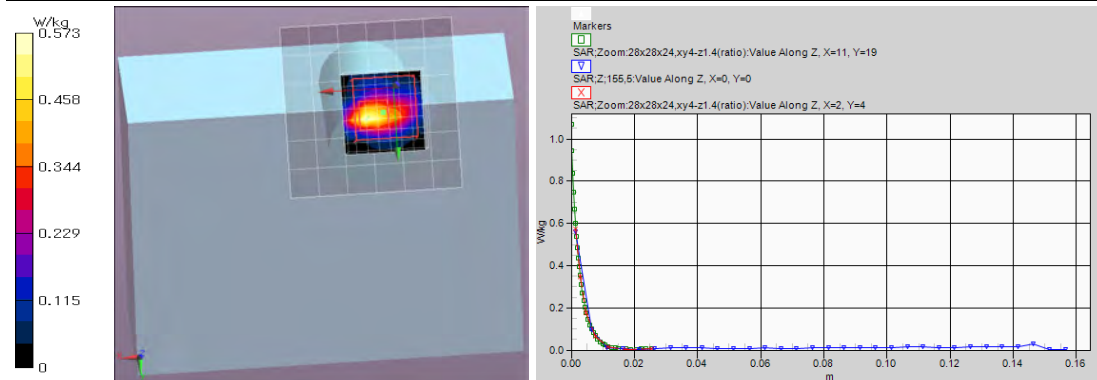SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.060 W/kg (*, Smallest distance from peaks to all points 3 dB below = 4.3 mm; Ratio of SAR at M2 to SAR at M1 = 60.4%)

Remarks: * Date tested: 2022/3/2; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
 *. liquid depth: 150 mm; Position: distance of EUT to phantom: 0 mm (2 mm to liquid); ambient: (23~24) deg.C. / (50~70) %RH,
 *. liquid temperature: 22.6(start)/22.6(end)/22.5(in check) deg.C.; *. White cubic: zoom scan area, Red cubic: big=SAR(10g)/small=SAR(1g)

Plot 3-1: U-NII-2C (5.6 GHz) band, Front-upper & touch / 11a (6Mbps) / 5700 MHz**EUT: WLAN/BT Combo Module (Digital Camera); Type: ES204 (DS126861); Serial: AT220107-B24 (001019000134)****Mode: 11a (6Mbps, OFDM) (UID: 0, Wi-fi_5GHz (0), Frame Length in ms: 0, PAR: 0, PMF: 1); Frequency: 5700 MHz; Crest Factor: 1.0****Medium: HSL5GHz(v6.2203); Medium parameters used: $f = 5700$ MHz; $\sigma = 4.999$ S/m; $\epsilon_r = 34.79$; $\rho = 1000$ kg/m³**


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration: -Electronics: DAE4 Sn626; Calibrated: 2021/12/08 / -Phantom: ELI v4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section

-DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474) / -Probe: EX3DV4 - SN3907; ConvF(4.56, 4.56, 4.56) @ 5700 MHz; Calibrated: 2021/04/21

-Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0, 156.0$ **touch2/5h4.56.1.5700,frt-top,a(6m)/****Area:60x60,10 (7x7x1):** Measurement grid: $dx=10$ mm, $dy=10$ mm; Maximum value of SAR (measured) = 0.670 W/kg**Area:60x60,10 (61x61x1):** Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm; Maximum value of SAR (interpolated) = 0.962 W/kg**Z:155.5 (1x1x32):** Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm; Maximum value of SAR (measured) = 1.54 W/kg**Zoom:28x28x24,xy4-z1.4(ratio) (8x8x7)/Cube 0:** Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm;

Reference Value = 18.28 V/m; Power Drift = -0.12 dB; Maximum value of SAR (measured) = 1.54 W/kg; Peak SAR (extrapolated) = 3.27 W/kg

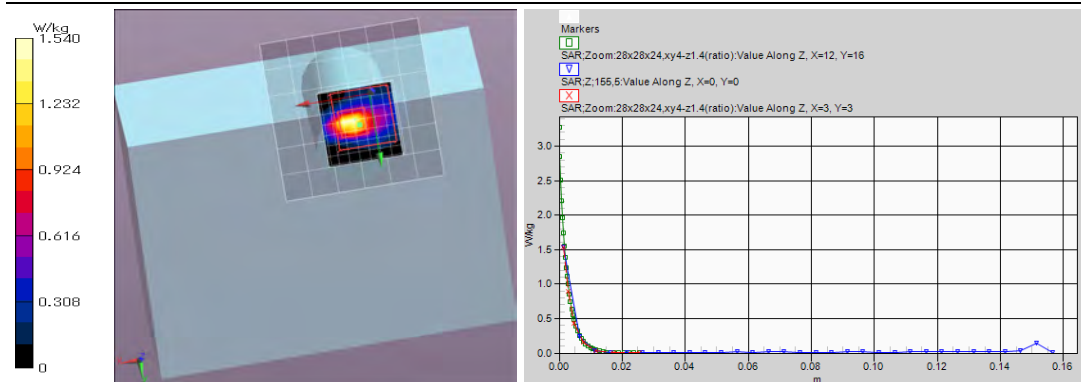SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.123 W/kg (*, Smallest distance from peaks to all points 3 dB below = 4 mm; Ratio of SAR at M2 to SAR at M1 = 58.2%)

Remarks: * Date tested: 2022/3/3; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
 *. liquid depth: 150 mm; Position: distance of EUT to phantom: 0 mm (2 mm to liquid); ambient: (23~24) deg.C. / (50~70) %RH,
 *. liquid temperature: 22.6(start)/22.6(end)/22.5(in check) deg.C.; *. White cubic: zoom scan area, Red cubic: big=SAR(10g)/small=SAR(1g)

APPENDIX 2: SAR Measurement data / Appendix 2-1: Worst Reported (Scaled) SAR Plot (cont'd)

Plot 4-1: U-NII-3 (5.8 GHz) band, Front-upper & touch / 11a (6Mbps) / 5825 MHz

EUT: WLAN/BT Combo Module (Digital Camera); Type: ES204 (DS126861); Serial: AT220107-B24 (001019000134)

Mode: 11a (6Mbps, OFDM) (UID: 0, Wi-fi_5GHz (0), Frame Length in ms: 0, PAR: 0, PMF: 1); Frequency: 5825 MHz; Crest Factor: 1.0

Medium: HSL5GHz(v6.2203); Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 5.15$ S/m; $\epsilon_r = 34.58$; $\rho = 1000$ kg/m³

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration: -Electronics: DAE4 Sn626; Calibrated: 2021/12/08 / -Phantom: ELI v4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section

-DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474) / -Probe: EX3DV4 - SN3907; ConvF(4.6, 4.6, 4.6) @ 5825 MHz; Calibrated: 2021/04/21

-Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0, 156.0$

touch3/5h8,58.1.5825,frt-top,a(6m)/

Area:60x60,10 (7x7x1): Measurement grid: $dx=10$ mm, $dy=10$ mm; Maximum value of SAR (measured) = 0.802 W/kg


Area:60x60,10 (61x61x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm; Maximum value of SAR (interpolated) = 0.976 W/kg

Z;155,5 (1x1x32): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm; Maximum value of SAR (measured) = 1.41 W/kg

Zoom:28x28x24,xy4-z1.4(ratio) (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm;

Reference Value = 17.51 V/m; Power Drift = -0.11 dB; Maximum value of SAR (measured) = 1.44 W/kg; Peak SAR (extrapolated) = 3.34 W/kg

SAR(1 g) = 0.508 W/kg; SAR(10 g) = 0.127 W/kg (*. Smallest distance from peaks to all points 3 dB below = 4 mm; Ratio of SAR at M2 to SAR at M1 = 59.1%)

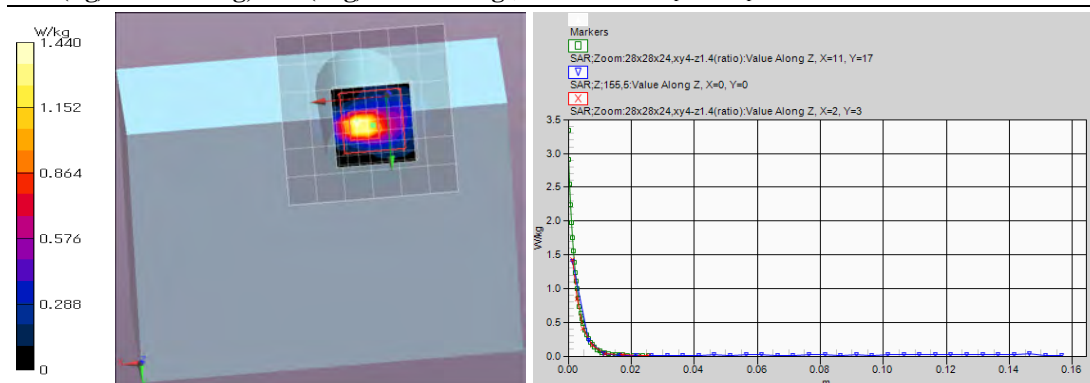

Remarks: *. Date tested: 2022/3/3; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
*. liquid depth: 150 mm; Position: distance of EUT to phantom: 0 mm (2 mm to liquid); ambient: (23~24) deg.C. / (50~70) %RH,
*. liquid temperature: 22.6(start)/22.5(end)/22.5(in check) deg.C.; *. White cubic: zoom scan area, Red cubic: big=SAR(10g)/small=SAR(1g)

APPENDIX 3: Test instruments

Appendix 3-1: Equipment used

Test Name	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Calibration	
							Last Date	Interval (Month)
AT	SAT10-SARP1	160520	Attenuator	Weinschel - API Technologies Corp	4M-10	-	2021/12/01	12
AT	SDPS-06	188161	Power Supply(DC)	GW Instek	PW16-5ADP	18026330	-	-
AT	SOS-26	191844	Humidity Indicator	CUSTOM, Inc	CTH-201	-	2021/08/02	12
AT	SPM-13	169910	Power Meter	Keysight Technologies Inc	8990B	MY51000448	2021/01/25	12
AT	SPSS-06	169911	Power sensor	Keysight Technologies Inc	N1923A	MY57270004	2021/01/25	12

* AT (antenna terminal conducted power measurement) was measured January 7, 2022. (Refer to Section 5 in this report.)

Test Name	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Calibration	
							Last Date	Interval (Month)
SAR	COTS-SSAR-02	144885	DASY52 software	Schmid&Partner Engineering AG	DASY5 PRO	Ver.52.10.3.1513	-	-
SAR	COTS-SSEP-02	144886	Dielectric assessment software	Schmid&Partner Engineering AG	DAK	Ver.DAK1.10.317.11	-	-
SAR	KAT10-P1	144882	Attenuator	Weinschel - API Technologies Corp	24-10-34	BY5927	2021/12/01	12
SAR	KCPL-07	146100	Directional Coupler	Pulsar Microwave Corp.	CCS30-B26	621	-	-
SAR	KDAE-01	144944	Data Acquisition Electronics	Schmid&Partner Engineering AG	DAE4	626	2021/12/08	12
SAR	KIU-08	145059	Power sensor	Rohde & Schwarz	NRV-Z4	100372	2021/09/18	12
SAR	KIU-09	145099	Power sensor	Rohde & Schwarz	NRV-Z4	100371	2021/09/18	12
SAR	KOS-14	144986	Thermo-Hygrometer data logger	SATO KEIRYOKI	SK-L200THIIIa/SK-LTHIIIa-2	015246/08169	2021/10/13	12
SAR	KPA-12	145359	RF Power Amplifier	Milmege	AS2560-50	1018582	-	-
SAR	KPFL-01	145560	Flat Phantom	Schmid&Partner Engineering AG	Oval flat phantom ELI 4.0	1059	2021/08/18	12
SAR	KPM-05	144988	Power meter	Keysight Technologies Inc	E4417A	GB41290718	2021/04/09	12
SAR	KPM-06	144989	Power Meter	Rohde & Schwarz	NRVD	101599	2021/09/18	12
SAR	KPSS-01	144990	Power sensor	Keysight Technologies Inc	E9327A	US40440544	2021/04/09	12
SAR	KRU-04	145086	Ruler(300mm)	SHINWA	13134	-	2022/02/16	12
SAR	KRU-05	145087	Ruler(100x50mm,L)	SHINWA	12101	-	2022/02/16	12
SAR	KSDA-01	145090	Dipole Antenna	Schmid&Partner Engineering AG	D2450V2	822	2021/12/09	12
SAR	KSDA-02	145091	Dipole Antenna	Schmid&Partner Engineering AG	D5GHzV2	1070	2021/04/20	12
SAR	KSDH-01	145596	Device holder	Schmid&Partner Engineering AG	Mounting device for transmitter	-	2021/09/14	12
SAR	KSG-08	145109	Signal Generator	Rohde & Schwarz	SMT06	100763	2021/09/19	12
SAR	SALC-01	146112	Primepure Ethanol	Kanto Chemical Co., Inc.	14032-79	-	-	-
SAR	SAT20-SARP1	160521	Attenuator	Weinschel - API Technologies Corp	4M-20	-	2021/12/01	12
SAR	SAT6-SAR1	145160	Attenuator	Huber+Suhner	6806.17.A	766429-1	2021/12/01	12
SAR	SCC-SAR2	145405	Coaxial Cable	Huber+Suhner	SF104A/11PC3542/11N451/4M	MY699/4A	2021/12/01	12
SAR	SEPP-02	145500	Dielectric probe	Schmid&Partner Engineering AG	DAK3.5	1129	2021/04/14	12
SAR	SOS-26	191844	Humidity Indicator	CUSTOM, Inc	CTH-201	-	2021/08/02	12
SAR	SOS-SAR2	201967	Digital thermomoter	HANNA	Checktemp-4	A01440226111	2021/10/13	12
SAR	SOS-SAR3	201968	Digital thermomoter	HANNA	Checktemp-4	A01310946111	2021/10/13	12
SAR	SPB-02	146235	Dosimetric E-Field Probe	Schmid&Partner Engineering AG	EX3DV4	3907	2021/04/21	12
SAR	SRU-06	150560	Measuring Tool, Ruler	SHINWA	14001	-	2022/02/16	12
SAR	SSA-04	146176	Spectrum Analyzer	ADVANTEST	R3272	101100994	-	-
SAR	SSAR-02	146177	SAR measurement system	Schmid&Partner Engineering AG	DASY5	1324	-	-
SAR	SSLHV6-01	207714	Head Tissue Simulating Liquid	Schmid&Partner Engineering AG	HBBL600-10000V6	SL AAH U16 BC	-	-
SAR	SSNA-01	146258	Network Analyzer	Keysight Technologies Inc	8753ES	US39171777	2021/11/09	12
SAR	SSRBT-02	145621	SAR robot	Schmid&Partner Engineering AG	TX60 Lspeag	F12/5L2QA1/A/01	2021/09/14	12
SAR	SWTR-03	146185	DI water	MonotaRo	34557433	-	-	-

* Local ID: SALC-01, the parameters of primepure Ethanol (as reference liquid) used for the simulated tissue parameter confirmation was defined the NPL Report MAT23 (<http://www.npl.co.uk/content/conpublication/4295>)

The expiration date of calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chain of calibrations.


All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

* Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

[Test Item] SAR: Specific Absorption Rate, AT: Antenna terminal conducted power

Appendix 3-2: Configuration and peripherals

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot, which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetry probes EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

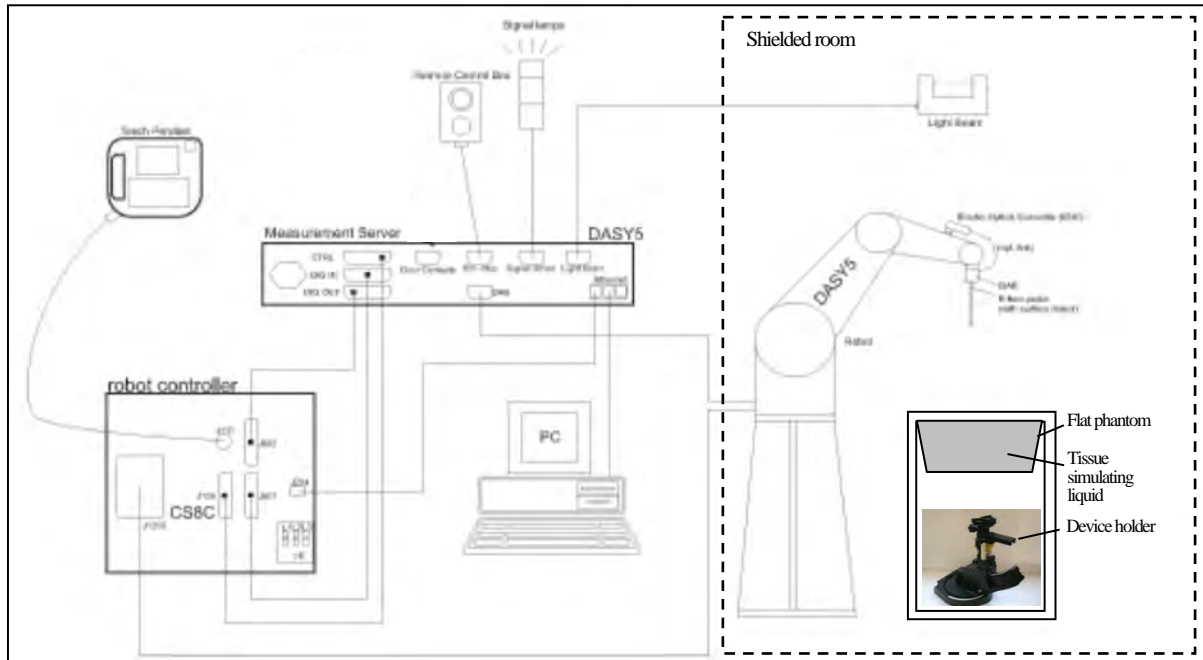

The DASY5 system for performing compliance tests consist of the following items:

1	A standard high precision 6-axis robot (Stäubli TX/RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
2	An isotropic field probe optimized and calibrated for the targeted measurement.
3	A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4	The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
5	The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
6	The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
7	A computer running Win7 professional operating system and the DASY5 software.
8	R Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
9	The phantom.
10	The device holder for EUT. (low-loss dielectric palette) (*. when it was used.)
11	Tissue simulating liquid mixed according to the given recipes.
12	Validation dipole kits allowing to validate the proper functioning of the system.

Appendix 3-3: Test system specification

TX60 Lsepag robot/CS8Csepag-TX60 robot controller

- Number of Axes : 6
- Repeatability : ± 0.02 mm
- Manufacture : Stäubli Unimation Corp.

DASY5 Measurement server

- Features : The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz intel ULV Celeron, 128MB chip-disk and 128MB RAM. The necessary circuits for communication with the DAE4 electronics box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.
- Calibration : No calibration required.
- Manufacture : Schmid & Partner Engineering AG

Data Acquisition Electronic (DAE)

- Features : Signal amplifier, multiplexer, A/D converter and control logic.
Serial optical link for communication with DASY5 embedded system (fully remote controlled).
2 step probe touch detector for mechanical surface detection and emergency robot stop (not in - R version)
- Measurement Range : $1 \mu\text{V}$ to $> 200 \text{ mV}$ (16bit resolution and 2 range settings: 4 mV, 400 mV)
- Input Offset voltage : $< 1 \mu\text{V}$ (with auto zero)
- Input Resistance : 200 M Ω
- Battery Power : > 10 hrs. of operation (with two 9 V battery)
- Manufacture : Schmid & Partner Engineering AG

Electro-Optical Converter (EOC61)

- Manufacture : Schmid & Partner Engineering AG

Light Beam Switch (LB5/80)

- Manufacture : Schmid & Partner Engineering AG

SAR measurement software

- Item : Dosimetric Assessment System DASY5
- Software version : Refer to Appendix 3-1 (Equipment used)
- Manufacture : Schmid & Partner Engineering AG

E-Field Probe


- Model : EX3DV4 (serial number: 3907)
- Construction : Symmetrical design with triangular core.
Built-in shielding against static charges.
PEEK enclosure material (resistant to organic solvents, e.g., DGBE).
- Frequency : 10MHz to 6GHz, Linearity: ± 0.2 dB (30MHz to 6GHz)
- Conversion Factors (CF) : Head: (2.45, 5.25, 5.6, 5.8) GHz
Body: (2.45, 5.25, 5.6, 5.75) GHz
- Directivity : ± 0.3 dB in HSL (rotation around probe axis)
 ± 0.5 dB in tissue material (rotation normal to probe axis)
- Dynamic Range : $10 \mu\text{W/g}$ to $> 100 \text{ mW/g}$; Linearity: ± 0.2 dB (noise: typically $< 1 \mu\text{W/g}$)
- Dimension : Overall length: 330 mm (Tip: 20 mm)
Tip diameter: 2.5 mm (Body: 12 mm)
Typical distance from probe tip to dipole centers: 1mm
- Application : High precision dosimetric measurement in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6GHz with precision of better 30%.
- Manufacture : Schmid & Partner Engineering AG

Phantom

- Model Number : **ELI 4.0 oval flat phantom**
- Shell Material : Fiberglass
- Shell Thickness : Bottom plate: 2 ± 0.2 mm
- Dimensions : Bottom elliptical: 600×400 mm, Depth: 190 mm (Volume: Approx. 30 liters)
- Manufacture : Schmid & Partner Engineering AG

Device Holder

- ☒ Urethane foam
- ☒ Device holder: In combination with the ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Transmitter devices can be easily and accurately positioned. The low-loss dielectric urethane foam was used for the mounting section of device holder.
- Material : Polyoxymethylene (POM)
- Manufacture : Schmid & Partner Engineering AG
- ☐ Laptop holder: A simple but effective and easy-to-use extension for the Mounting Device; facilitates testing of larger devices (e.g., laptops, cameras, etc.) according to IEC 62209-2.
- Material : Polyoxymethylene (POM), PET-G, Foam
- Manufacture : Schmid & Partner Engineering AG

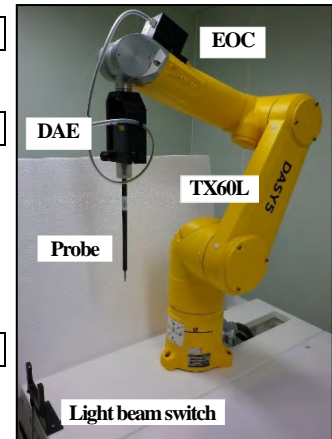

Data storage and evaluation (postprocessing)

The DASY5 software stores the measured voltage acquired by the Data Acquisition Electronics (DAE) as raw data together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and communication system parameters) in measurement files with the extension “.da5x”. The postprocessing software evaluates the data every time the data is visualized or exported.

The fields and SAR are calculated from the measured voltage (probe voltage acquired by the DAE) and the following parameters:

Probe parameters:	- Sensitivity	$norm_i, ai0, ai1, ai2$
	- Conversion Factor	$convFi$
	- Diode Compression Point	dcp_i
	- Probe Modulation Response Factors	ai, bi, ci, d
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Relative Permittivity	ρ

This parameters are stored in the DASY5 V52 measurement file.

These parameters must be correctly set in the DASY5 V52 software setup. They are available as configuration file and can be imported into the measurement file. The values displayed in the multimeter window are assessed using the parameters of the actual system setup. In the scan visualization and export modes, the parameters stored in the measurement file are used.

The measured voltage is not proportional to the exciting. It must be first linearized.

Approximated Probe Response Linearization using Crest Factor;

This linearization method is enabled when a custom defined communication system is measured. The compensation applied is a function of the measured voltage, the detector diode compression point and the crest factor of the measured signal.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i	= linearized voltage of channel i in μV	(i = x,y,z)
U_i	= measured voltage of channel i in μV	(i = x,y,z)
cf	= crest factor of exciting field	(DASY parameter)
dcp_i	= diode compression point of channel i in μV	(Probe parameter, i = x,y,z)

The resulting linearized voltage is only approximated because the probe is not calibrated to this specific signal.

Field and SAR Calculation

The primary field data for each channel are calculated using the linearized voltage:

$$E - \text{fieldprobes} : E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with V_i	= linearized voltage of channel i in μV	(i = x,y,z)
$Norm_i$	= sensor sensitivity of channel i in $\mu V/(V/m)^2$ for E-field Probes	(i = x,y,z)
$ConvF$	= sensitivity enhancement in solution	
E_i	= electric field strength of channel i in V/m	(i = x,y,z)

The RMS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

with SAR	= local specific absorption rate in mW/g
E_{tot}	= total field strength in V/m
σ	= conductivity in [mho/m] or [Siemens/m]
ρ	= equivalent tissue density in g/cm ³

Appendix 3-4: Simulated tissue composition and parameter confirmation

Liquid type	Head	Control No.	SSLHV6-01	Model No. / Product No.	HBBL600-10000V6 / SLAAH U16 BC
Ingredient: Mixture [%]	Water: >77, Ethanediol: <5.2, Sodium petroleum sulfonate: <2.9, Hexylene Glycol: <2.9, alkoxylated alcohol (>C ₁₆): <2.0				
Tolerance specification	± 10%				
Temperature gradients [% / deg.C]	permittivity: -0.19 / conductivity: -0.57 (at 2.6 GHz), permittivity: +0.31 / conductivity: -1.43 (at 5.5 GHz) (*1)				
Manufacture	Schmid & Partner Engineering AG		Note: *1. speag_920-SLAxyy-E.1.12.15CL (Maintenance of tissue simulating liquid)		

*. The dielectric parameters were checked prior to assessment using the DAK3.5 dielectric probe kit.

Date measured	Frequency [MHz]	Liquid type	Ambient/ [deg.C] [%RH]		Liquid temp. [deg.C]	Liquid depth of phantom [mm]	Liquid parameters (*a)										ASAR (*b)	
							Permittivity (ε _r) [-]					Conductivity [S/m]						
							Target	Measured			Δend, >48hrs	Target	Measured			Δend, >48hrs	1g [%]	10g [%]
								Meas.	Δε _r [%]	Limit			Meas.	Δσ [%]	Limit			
March 2, 2022 (Used until March 3)	2450	Head	23	40~50	22.5	150	39.2	39.99	2.0	10%	-	1.80	1.833	1.8	10%	-	0.4	0.2
	5250	Head					35.93	35.51	-1.2	10%	-	4.706	4.510	-4.2	10%	-	0.4	0.5
	5600	Head					35.53	34.93	-1.7	10%	< 48 hrs.	5.065	4.890	-3.5	10%	< 48 hrs.	0.5	0.6
	5800	Head					35.3	34.58	-2.0	10%	< 48 hrs.	5.27	5.113	-3.0	10%	< 48 hrs.	0.5	0.6

*. Calculating formula: Δend(>48 hrs.) (%) = {(dielectric properties, end of test series) / (dielectric properties, beginning of test series) - 1} × 100

*a. The target values of (2000, 2450, 3000 and 5800) MHz are parameters defined in Appendix A of KDB 865664 D01. For other frequencies, the target nominal dielectric values shall be obtained by linear interpolation between the higher and lower tabulated figures.

Standard										Interpolated & Extrapolated									
f (MHz)	Head Tissue		Body Tissue		f (MHz)	Head Tissue		Body Tissue		f (MHz)	Head Tissue		Body Tissue		f (MHz)	Head Tissue		Body Tissue	
	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]		ϵ_r	σ [S/m]		
(1800~)2000	40.0	1.40	53.3	1.52	3000	38.5	2.40	52.0	2.73	5250	35.93	4.706	48.95	5.358	5750	35.36	5.219	48.27	5.942
2450	39.2	1.80	52.7	1.95	5800	35.3	5.27	48.2	6.00	5600	35.53	5.065	48.47	5.766					

*b. The coefficients are parameters defined in IEEE Std. 1528-2013.

$$\Delta SAR(1g) = C_{\epsilon r} \times \Delta \epsilon_r + C_{\sigma} \times \Delta \sigma, C_{\epsilon r} = 7.854E-4 \times f^3 + 9.402E-3 \times f^2 - 2.742E-2 \times f + 0.2026 / C_{\sigma} = 9.804E-3 \times f^3 - 8.661E-2 \times f^2 + 2.981E-2 \times f + 0.7829$$

$$\Delta SAR(10g) = C_{\epsilon r} \times \Delta \epsilon_r + C_{\sigma} \times \Delta \sigma, C_{\epsilon r} = 3.456 \times 10^{-3} \times f^3 - 3.531 \times 10^{-2} \times f^2 + 7.675 \times 10^{-2} \times f + 0.1860 / C_{\sigma} = 4.479 \times 10^{-3} \times f^3 - 1.586 \times 10^{-2} \times f^2 - 0.1972 \times f + 0.7717$$

Appendix 3-5: Daily check results

*. Prior to the SAR assessment of EUT, the Daily check was performed to test whether the SAR system was operating within its target of ±10%. The Daily check results are in the table below.

Date		Frequency [MHz]	ASAR		Daily check results (*. Meas.: Measured, Cal.: Calibration value, STD: Standard value)																			
					SAR (1g) [W/kg] (*d)								SAR (10g) [W/kg] (*d)											
					Target				Deviation				Limit [%]	Pass ?	Target				Deviation				Limit [%]	Pass ?
					Meas. (*c)	ASAR-correct	1W scaled		Cal. (*e)	STD [*f]	Cal. [*f]	STD [%]			Meas. (*c)	ASAR-correct	1W scaled		Cal. (*e)	STD [*f]	Cal. [%]	STD [%]		
March 2, 2022	2450	Head	0.4	0.2	13.2	13.15	52.6	52	52.4	1.2	0.4	±10	Pass	6.13	6.12	24.48	24.4	24	0.3	2.0	±10	Pass		
March 2, 2022	5250	Head	0.4	0.5	7.72	7.69	76.9	78.8	n/a	-2.4	-	±10	Pass	2.22	2.21	22.1	22.6	n/a	-2.2	-	±10	Pass		
March 3, 2022	5600	Head	0.5	0.6	8.26	8.22	82.2	82.4	n/a	-0.2	-	±10	Pass	2.34	2.33	23.3	23.4	n/a	-0.4	-	±10	Pass		
March 3, 2022	5800	Head	0.5	0.6	8.06	8.02	80.2	80.1	78	0.1	2.8	±10	Pass	2.29	2.28	22.8	22.5	21.9	1.3	4.1	±10	Pass		

*. Calculating formula:

$$\Delta SAR \text{ corrected SAR (1g,10g) (W/kg)} = (\text{Measured SAR (1g,10g) (W/kg)} \times (100 - (\Delta SAR(\%)) / 100$$


*c. The "Meas. (Measured)" SAR value is obtained at 250 mW for 2450MHz, 100 mW for (5250, 5600, 5800) MHz

*d. The measured SAR value of Daily check was compensated for tissue dielectric deviations (ΔSAR) and scaled to 1W of output power in order to compare with the manufacture's calibration target value which was normalized.


*e. The target value is a parameter defined in the calibration data sheet of D2450V2 (sn:822) and D5GHZV2 (sn:1070) dipole calibrated by Schmid & Partner Engineering AG (Certification No. D2450V2-822_Dec21 and D5GHZV2-1070_Apr21, the data sheet was filed in this report).

*f. The target value (normalized to 1W) is defined in IEEE Std.1528.

Test setup for the system performance check->

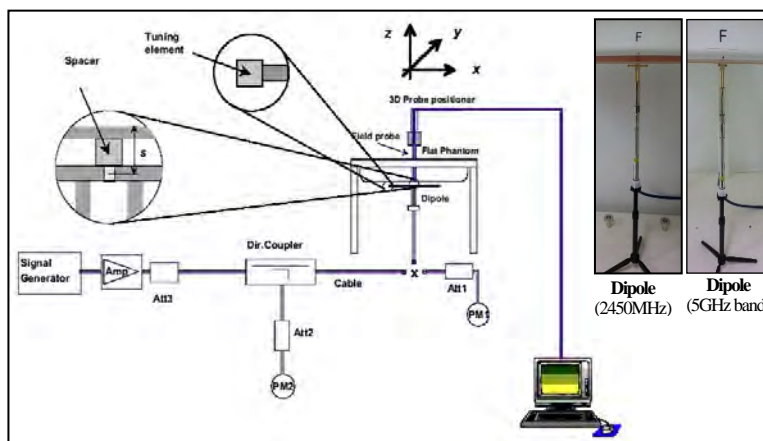

Appendix 3-6: Daily check measurement data



EUT: Dipole(2.4GHz)-822; Type: D2450V2; Serial: 822; Power: 250 mW

Communication System: CW (0) (*UID: 0, Frame Length in ms: 0; Communication System PAR: 0; PMF: 1) ; **Frequency: 2450 MHz; Crest Factor: 1.0**

Medium: HSL5GHz(v6.2203); Medium parameters used: $f = 2450$ MHz; $\sigma = 1.833$ S/m; $\epsilon_r = 39.99$; $\rho = 1000$ kg/m³

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration: -Electronics: DAE4 Sn626; Calibrated: 2021/12/08 / -Phantom: ELI v4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section

-DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474) / -Probe: EX3DV4 - SN3907; ConvF(7.35, 7.35, 7.35) @ 2450 MHz; Calibrated: 2021/04/21

-Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0, 161.0$

Area:60x60,15 (5x5x1): Measurement grid: $dx=15$ mm, $dy=15$ mm; Maximum value of SAR (measured) = 19.7 W/kg


Area:60x60,15 (41x41x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm; Maximum value of SAR (interpolated) = 19.7 W/kg

Z;160,5 (1x1x33): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm; Maximum value of SAR (measured) = 20.2 W/kg

Zoom:30x30x30,5 (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm;

Reference Value = 105.4 V/m; Power Drift = 0.07 dB; Maximum value of SAR (measured) = 20.0 W/kg; Peak SAR (extrapolated) = 26.9 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.13 W/kg (*, Smallest distance from peaks to all points 3 dB below = 9 mm; Ratio of SAR at M2 to SAR at M1 = 49.4%)

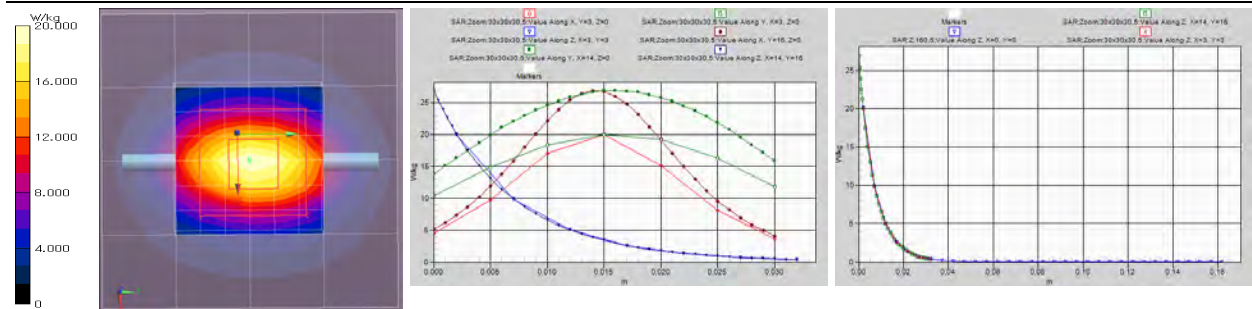

Remarks: * Date tested: 2022/3/2; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
* liquid depth: 150 mm; Position: distance of dipole to phantom: 8mm (10mm to liquid); ambient: (24) deg.C. / (45~55) %RH,
* liquid temperature: 22.3(start)/22.3(end)/22.5(in check) deg.C.; * White cubic: zoom scan area, Red cubic: big=SAR(10g)/small=SAR(1g)

EUT: Dipole(5GHz); Type: D5GHzV2; Serial: 1070; Power: 100mW

Communication System: CW (0) (*UID: 0, Frame Length in ms: 0; Communication System PAR: 0; PMF: 1) ; **Frequency: 5250 MHz; Crest Factor: 1.0**

Medium: HSL5GHz(v6.2203); Medium parameters used: $f = 5250$ MHz; $\sigma = 4.51$ S/m; $\epsilon_r = 35.51$; $\rho = 1000$ kg/m³

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration: -Electronics: DAE4 Sn626; Calibrated: 2021/12/08 / -Phantom: ELI v4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section

-DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474) / -Probe: EX3DV4 - SN3907; ConvF(5.14, 5.14, 5.14) @ 5250 MHz; Calibrated: 2021/04/21

-Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0, 156.0$

Area:60x60,10 (7x7x1): Measurement grid: $dx=10$ mm, $dy=10$ mm; Maximum value of SAR (measured) = 18.1 W/kg


Area:60x60,10 (61x61x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm; Maximum value of SAR (interpolated) = 18.7 W/kg

Z;155,5 (1x1x32): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm; Maximum value of SAR (measured) = 18.0 W/kg

Zoom:28x28x24,4,1.4(ratio) (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm;


Reference Value = 69.62 V/m; Power Drift = 0.10 dB; Maximum value of SAR (measured) = 18.2 W/kg; Peak SAR (extrapolated) = 30.2 W/kg

SAR(1 g) = 7.72 W/kg; SAR(10 g) = 2.22 W/kg (*, Smallest distance from peaks to all points 3 dB below = 7.2 mm; Ratio of SAR at M2 to SAR at M1 = 66.1%)

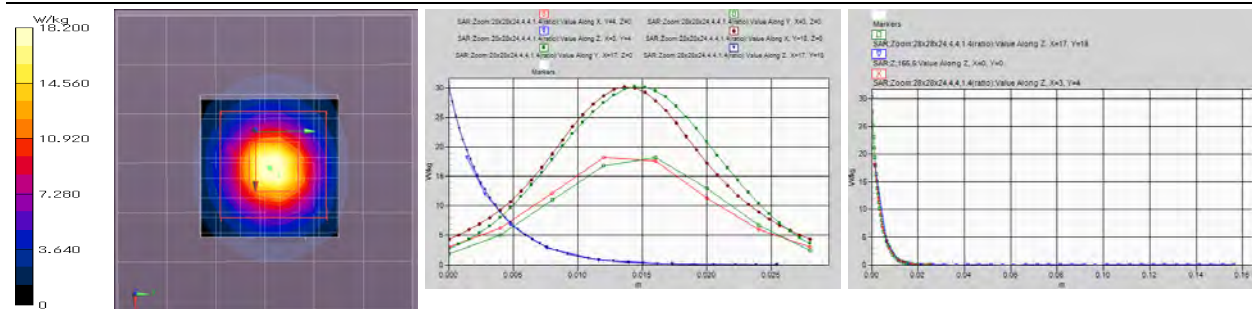

Remarks: * Date tested: 2022/3/2; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
* liquid depth: 150 mm; Position: distance of dipole to phantom: 8mm (10mm to liquid); ambient: (24) deg.C. / (45~55) %RH,
* liquid temperature: 22.3(start)/22.3(end)/22.5(in check) deg.C.; * White cubic: zoom scan area, Red cubic: big=SAR(10g)/small=SAR(1g)

Appendix 3-6: Daily check measurement data (cont'd)



EUT: Dipole(5GHz); Type: D5GHzV2; Serial: 1070; Power: 100mW

Communication System: CW (0) (*UID: 0, Frame Length in ms: 0; Communication System PAR: 0; PMF: 1) ; Frequency: 5600 MHz; Crest Factor: 1.0

Medium: HSL5GHz(v6.2203); Medium parameters used: $f = 5600$ MHz; $\sigma = 4.89$ S/m; $\epsilon_r = 34.93$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration: -Electronics: DAE4 Sn626; Calibrated: 2021/12/08 / -Phantom: ELI v4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section -DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474) / -Probe: EX3DV4 - SN3907; ConvF(4.56, 4.56, 4.56) @ 5600 MHz; Calibrated: 2021/04/21

-Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0, 156.0$

Area:60x60,10 (7x7x1): Measurement grid: $dx=10$ mm, $dy=10$ mm; Maximum value of SAR (measured) = 20.6 W/kg


Area:60x60,10 (61x61x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm; Maximum value of SAR (interpolated) = 21.4 W/kg

Z;155,5 (1x1x32): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm; Maximum value of SAR (measured) = 19.8 W/kg

Zoom:28x28x24,4,1,1,4(ratio) (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm;

Reference Value = 71.36 V/m; Power Drift = 0.03 dB; Maximum value of SAR (measured) = 19.9 W/kg; Peak SAR (extrapolated) = 35.1 W/kg

SAR(1 g) = 8.26 W/kg; SAR(10 g) = 2.34 W/kg (*: Smallest distance from peaks to all points 3 dB below = 7.2 mm; Ratio of SAR at M2 to SAR at M1 = 63.4%)

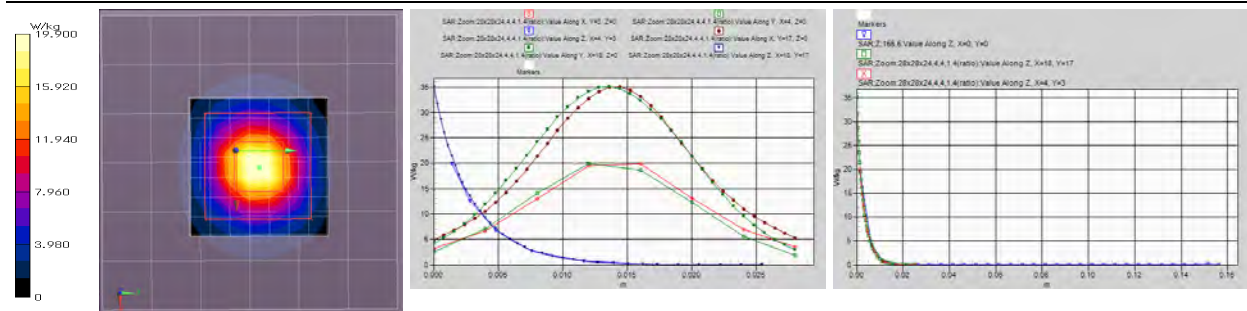

Remarks: * Date tested: 2022/3/3; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
* liquid depth: 150 mm; Position: distance of dipole to phantom: 8mm (10mm to liquid); ambient: (24) deg.C. / (45~60) %RH,
* liquid temperature: 22.3(start)/22.3(end)/22.5(in check) deg.C.; *: White cubic: zoom scan area, Red cubic: big=SAR(10g) /small=SAR(1g)

EUT: Dipole(5GHz); Type: D5GHzV2; Serial: 1070; Power: 100mW

Communication System: CW (0) (*UID: 0, Frame Length in ms: 0; Communication System PAR: 0; PMF: 1) ; Frequency: 5800 MHz; Crest Factor: 1.0

Medium: HSL5GHz(v6.2203); Medium parameters used: $f = 5800$ MHz; $\sigma = 5.113$ S/m; $\epsilon_r = 34.58$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration: -Electronics: DAE4 Sn626; Calibrated: 2021/12/08 / -Phantom: ELI v4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section -DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474) / -Probe: EX3DV4 - SN3907; ConvF(4.6, 4.6, 4.6) @ 5800 MHz; Calibrated: 2021/04/21

-Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0, 156.0$

Area:60x60,10 (7x7x1): Measurement grid: $dx=10$ mm, $dy=10$ mm; Maximum value of SAR (measured) = 20.3 W/kg


Area:60x60,10 (61x61x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm; Maximum value of SAR (interpolated) = 20.9 W/kg

Z;155,5 (1x1x32): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm; Maximum value of SAR (measured) = 19.6 W/kg

Zoom:28x28x24,4,1,1,4(ratio) (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm;

Reference Value = 69.24 V/m; Power Drift = 0.03 dB; Maximum value of SAR (measured) = 19.7 W/kg; Peak SAR (extrapolated) = 36.0 W/kg

SAR(1 g) = 8.06 W/kg; SAR(10 g) = 2.29 W/kg (*: Smallest distance from peaks to all points 3 dB below = 7.2 mm; Ratio of SAR at M2 to SAR at M1 = 62%)

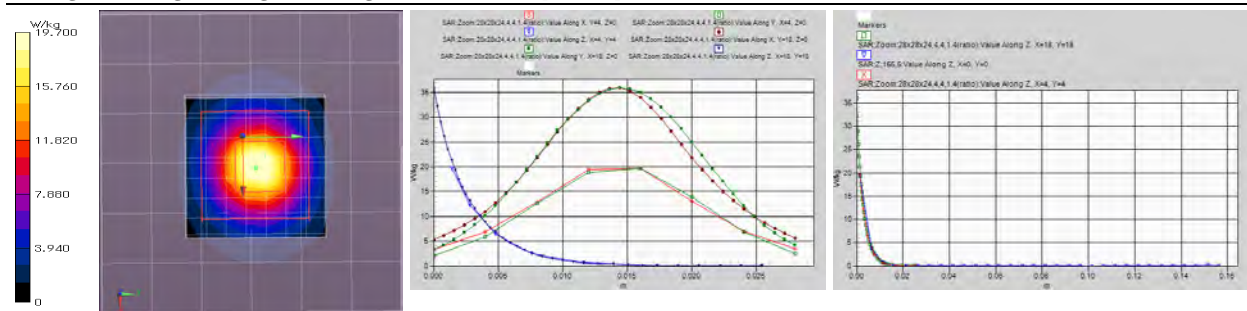

Remarks: * Date tested: 2022/3/3; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
* liquid depth: 150 mm; Position: distance of dipole to phantom: 8mm (10mm to liquid); ambient: (24) deg.C. / (45~60) %RH,
* liquid temperature: 22.3(start)/22.3(end)/22.5(in check) deg.C.; *: White cubic: zoom scan area, Red cubic: big=SAR(10g) /small=SAR(1g)

Appendix 3-7: Uncertainty Assessment (SAR measurement/Daily check)

* Although this standard determines only the limit value of uncertainty, there is no applicable rule of uncertainty in this. Therefore, the following results are derived depending on whether or not laboratory uncertainty is applied.

Uncertainty of SAR measurement (2.4GHz~6GHz) (*, v6h, ε&σ: 10%, DAK3.5, Tx: ≈100% duty cycle) (v09r02)						1g SAR	10g SAR		
Combined measurement uncertainty of the measurement system (k=1)						± 13.2 %	± 13.1 %		
Expanded uncertainty (k=2)						± 26.4 %	± 26.2 %		
	Error Description (2.4-6GHz)	Uncertainty Value	Probability distribution	Divisor	ci (1g)	ci (10g)	ui (1g)	ui (10g)	Vi, veff
A	Measurement System (DASY5)						(std. uncertainty)	(std. uncertainty)	
1	Probe Calibration Error	±7.0 %	Normal	1	1	1	±7.0 %	±7.0 %	∞
2	Axial isotropy Error	±4.7 %	Rectangular	√3	0.71	0.71	±1.9 %	±1.9 %	∞
3	Hemispherical isotropy Error	±9.6 %	Rectangular	√3	0.71	0.71	±3.9 %	±3.9 %	∞
4	Linearity Error	±4.7 %	Rectangular	√3	1	1	±2.7 %	±2.7 %	∞
5	Probe modulation response (v09)	±5.5 %	Rectangular	√3	1	1	±3.2 %	±3.2 %	∞
6	Sensitivity Error (detection limit)	±1.0 %	Rectangular	√3	1	1	±0.6 %	±0.6 %	∞
7	Boundary effects Error	±4.3 %	Rectangular	√3	1	1	±2.5 %	±2.5 %	∞
8	Readout Electronics Error(DAE)	±0.3 %	Rectangular	√3	1	1	±0.3 %	±0.3 %	∞
9	Response Time Error	±0.8 %	Normal	1	1	1	±0.5 %	±0.5 %	∞
10	Integration Time Error (≈100% duty cycle)	±0 %	Rectangular	√3	1	1	0 %	0 %	∞
11	RF ambient conditions-noise (v09)	±1.0 %	Rectangular	√3	1	1	±0.6 %	±0.6 %	∞
12	RF ambient conditions-reflections	±3.0 %	Rectangular	√3	1	1	±1.7 %	±1.7 %	∞
13	Probe positioner mechanical tolerance	±3.3 %	Rectangular	√3	1	1	±1.9 %	±1.9 %	∞
14	Probe Positioning with respect to phantom shell	±6.7 %	Rectangular	√3	1	1	±3.9 %	±3.9 %	∞
15	Max. SAR evaluation (Post-processing)	±4.0 %	Rectangular	√3	1	1	±2.3 %	±2.3 %	∞
B	Test Sample Related								
16	Device Holder or Positioner Tolerance (v09)	±3.2 %	Normal	1	1	1	±3.2 %	±3.2 %	5
17	Test Sample Positioning Error (v09)	±2.1 %	Normal	1	1	1	±2.1 %	±2.1 %	10
18	Power scaling	±0 %	Rectangular	√3	1	1	±0 %	±0 %	∞
19	Drift of output power (measured, <0.2dB)	±5.0 %	Rectangular	√3	1	1	±2.9 %	±2.9 %	∞
C	Phantom and Setup								
20	Phantom uncertainty (shape, thickness tolerances)	±7.5 %	Rectangular	√3	1	1	±4.3 %	±4.3 %	∞
21	Algorithm for correcting SAR (e',σ: 10%)	±1.9 %	Normal	1	1	0.84	±1.9 %	±1.6 %	∞
22	Measurement Liquid Conductivity Error (DAK3.5)	±3.0 %	Normal	1	0.78	0.71	±2.3 %	±2.1 %	7
23	Measurement Liquid Permittivity Error (DAK3.5)	±3.1 %	Normal	1	0.23	0.26	±0.7 %	±0.8 %	7
24	Liquid Conductivity-temp.uncertainty (≤2deg.C.v6h)	±3.0 %	Rectangular	√3	0.78	0.71	±1.4 %	±1.2 %	∞
25	Liquid Permittivity-temp.uncertainty (≤2deg.C.v6h)	±1.0 %	Rectangular	√3	0.23	0.26	±0.1 %	±0.2 %	∞
Combined Standard Uncertainty (v09r02)							± 13.2 %	± 13.1 %	945
Expanded Uncertainty (k=2) (v09r02)							± 26.4 %	± 26.2 %	

* This measurement uncertainty budget is suggested by IEEE Std.1528(2013) and determined by Schmid & Partner Engineering AG (DASY5 Uncertainty Budget). Per KDB 865664 D01 (v01r04) SAR Measurement 100 MHz to 6 GHz, Section 2.8.1., when the highest measured SAR(1g) within a frequency band is < 1.5W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std.1528 (2013) is not required in SAR reports submitted for equipment approval.

Uncertainty of daily check (2.4-6GHz) (*v6h,ε&σ tolerance: 10%, DAK3.5, CW) (v09r02)						1g SAR	10g SAR		
Combined measurement uncertainty of the measurement system (k=1)						± 10.8 %	± 10.7 %		
Expanded uncertainty (k=2)						± 21.6 %	± 21.4 %		
	Error Description (2.4-6GHz)	Uncertainty Value	Probability distribution	Divisor	ci (1g)	ci (10g)	ui (1g)	ui (10g)	Vi, veff
A	Measurement System (DASY5)						(std. uncertainty)	(std. uncertainty)	
1	Probe Calibration Error	±7.0 %	Normal	1	1	1	±7.0 %	±7.0 %	∞
2	Axial isotropy error	±4.7 %	Rectangular	√3	0.71	0.71	±1.9 %	±1.9 %	∞
3	Hemispherical isotropy error	±9.6 %	Rectangular	√3	0	0	0 %	0 %	∞
4	Probe linearity	±4.7 %	Rectangular	√3	1	1	±2.7 %	±2.7 %	∞
5	Probe modulation response (CW)	±0.0 %	Rectangular	√3	1	1	0 %	0 %	∞
6	System detection limit	±1.0 %	Rectangular	√3	1	1	±0.6 %	±0.6 %	∞
7	Boundary effects	±4.3 %	Rectangular	√3	1	1	±2.5 %	±2.5 %	∞
8	System readout electronics (DAE)	±0.3 %	Normal	1	1	1	±0.3 %	±0.3 %	∞
9	Response Time Error (<5ms/100ms wait)	±0.0 %	Rectangular	√3	1	1	0 %	0 %	∞
10	Integration Time Error (CW)	±0.0 %	Rectangular	√3	1	1	0 %	0 %	∞
11	RF ambient conditions-noise	±3.0 %	Rectangular	√3	1	1	±1.7 %	±1.7 %	∞
12	RF ambient conditions-reflections	±3.0 %	Rectangular	√3	1	1	±1.7 %	±1.7 %	∞
13	Probe positioner mechanical tolerance	±3.3 %	Rectangular	√3	1	1	±1.9 %	±1.9 %	∞
14	Probe positioning with respect to phantom shell	±6.7 %	Rectangular	√3	1	1	±3.9 %	±3.9 %	∞
15	Max. SAR evaluation (Post-processing)	±4.0 %	Rectangular	√3	1	1	±2.3 %	±2.3 %	∞
B	Test Sample Related								
16	Deviation of the experimental source	±1.9 %	Normal	1	1	1	±1.9 %	±1.9 %	∞
17	Dipole to liquid distance (10mm±0.2mm,<2deg.)	±2.0 %	Rectangular	√3	1	1	±1.2 %	±1.2 %	∞
18	Drift of output power (measured, <0.1dB)	±2.3 %	Rectangular	√3	1	1	±1.3 %	±1.3 %	∞
C	Phantom and Setup								
19	Phantom uncertainty	±2.0 %	Rectangular	√3	1	1	±1.2 %	±1.2 %	∞
20	Algorithm for correcting SAR (e',σ: 10%)	±1.9 %	Normal	1	1	0.84	±1.9 %	±1.6 %	∞
21	Liquid conductivity (meas.) (DAK3.5)	±3.0 %	Normal	1	0.78	0.71	±2.3 %	±2.1 %	∞
22	Liquid permittivity (meas.) (DAK3.5)	±3.1 %	Normal	1	0.23	0.26	±0.7 %	±0.8 %	∞
23	Liquid Conductivity-temp.uncertainty (<2deg.C.v6h)	±3.0 %	Rectangular	√3	0.78	0.71	±1.4 %	±1.2 %	∞
24	Liquid Permittivity-temp.uncertainty (<2deg.C.v6h)	±1.0 %	Rectangular	√3	0.23	0.26	±0.1 %	±0.2 %	∞
Combined Standard Uncertainty (v09r02)							±10.8 %	±10.7 %	
Expanded Uncertainty (k=2) (v09r02)							±21.6 %	±21.4 %	

* This measurement uncertainty budget is suggested by IEEE Std. 1528(2013) and determined by Schmid & Partner Engineering AG (DASY5 Uncertainty Budget).

* Table of uncertainties are listed for ISO/IEC 17025.

Appendix 3-8: Calibration certificate: E-Field Probe (EX3DV4)

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client **UL Japan (RCC)**

Certificate No: EX3-3907_Apr21

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3907**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v6, QA CAL-23.v5, QA CAL-25.v7**
Calibration procedure for dosimetric E-field probes

Calibration date: **April 21, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: CC2552 (20x)	09-Apr-21 (No. 217-03343)	Apr-22
DAE4	SN: 660	23-Dec-20 (No. DAE4-660_Dec20)	Dec-21
Reference Probe ES3DV2	SN: 3013	30-Dec-20 (No. ES3-3013_Dec20)	Dec-21
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-20)	In house check: Jun-22
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

	Name	Function	Signature
Calibrated by:	Jeffrey Katzman	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			
Issued: April 24, 2021			

Certificate No: EX3-3907_Apr21

Page 1 of 10

Appendix 3-8: Calibration certificate: E-Field Probe (EX3DV4) (cont'd)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(*f*)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR:** PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}:** A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle:** The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Appendix 3-8: Calibration certificate: E-Field Probe (EX3DV4) (cont'd)

EX3DV4 – SN:3907

April 21, 2021

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3907

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.45	0.58	0.54	± 10.1 %
DCP (mV) ^B	102.7	97.5	99.0	

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Max dev.	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	134.6	± 3.5 %	± 4.7 %
		Y	0.0	0.0	1.0		129.4		
		Z	0.0	0.0	1.0		129.5		

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Appendix 3-8: Calibration certificate: E-Field Probe (EX3DV4) (cont'd)

EX3DV4- SN:3907

April 21, 2021

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3907

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-143.3
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3-4 mm for an *Area Scan* job.

Appendix 3-8: Calibration certificate: E-Field Probe (EX3DV4) (cont'd)

EX3DV4- SN:3907

April 21, 2021

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3907

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth (mm) ^C	Unc (k=2)
2450	39.2	1.80	7.35	7.35	7.35	0.41	0.90	± 12.0 %
5250	35.9	4.71	5.14	5.14	5.14	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.56	4.56	4.56	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.60	4.60	4.60	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Appendix 3-8: Calibration certificate: E-Field Probe (EX3DV4) (cont'd)

EX3DV4- SN:3907

April 21, 2021

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3907

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
2450	52.7	1.95	7.44	7.44	7.44	0.36	0.95	± 12.0 %
5250	48.9	5.36	4.49	4.49	4.49	0.50	1.90	± 13.1 %
5600	48.5	5.77	3.96	3.96	3.96	0.50	1.90	± 13.1 %
5750	48.3	5.94	4.07	4.07	4.07	0.50	1.90	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Appendix 3-8: Calibration certificate: E-Field Probe (EX3DV4) (cont'd)

EX3DV4— SN:3907

April 21, 2021

Frequency Response of E-Field
(TEM-Cell:ifi110 EXX, Waveguide: R22)

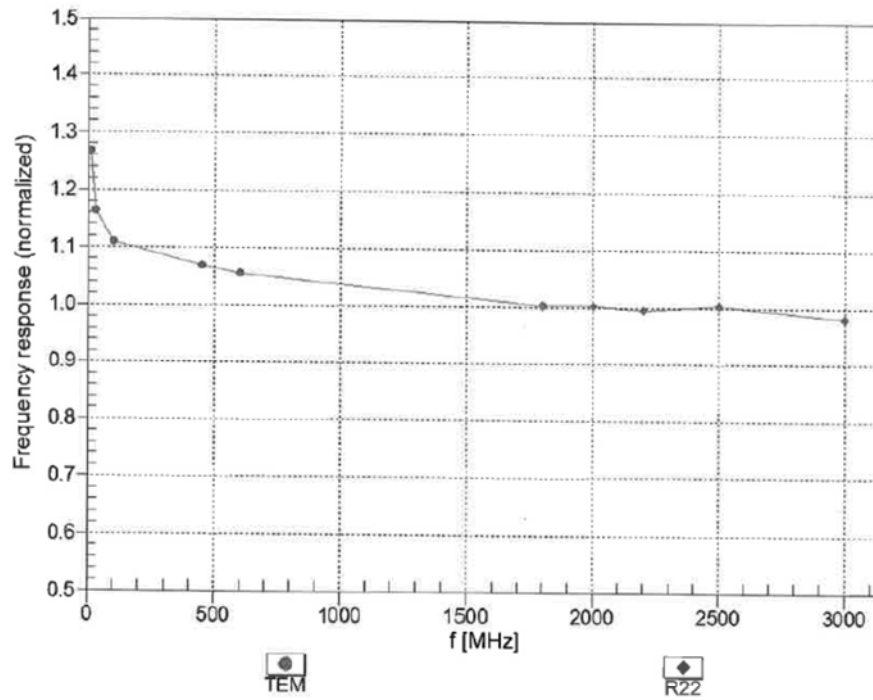



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Appendix 3-8: Calibration certificate: E-Field Probe (EX3DV4) (cont'd)

EX3DV4- SN:3907

April 21, 2021

Receiving Pattern (ϕ), $\theta = 0^\circ$

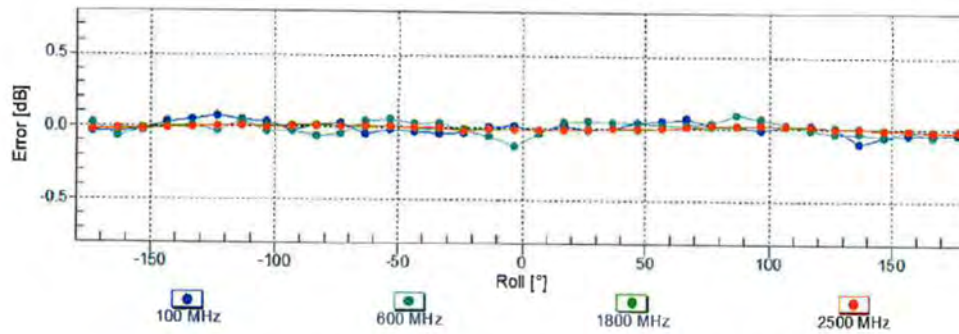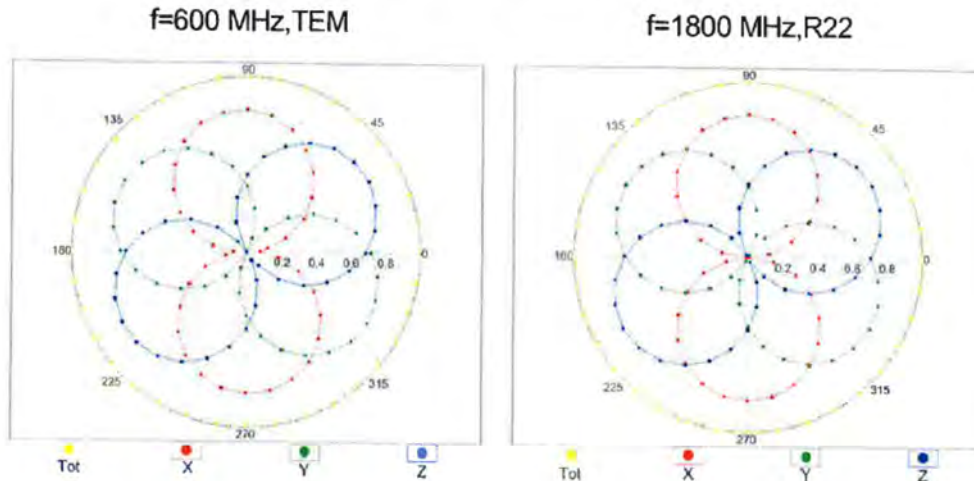



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Appendix 3-8: Calibration certificate: E-Field Probe (EX3DV4) (cont'd)

EX3DV4- SN:3907

April 21, 2021

Dynamic Range f(SAR_{head})
(TEM cell , f_{eval}= 1900 MHz)

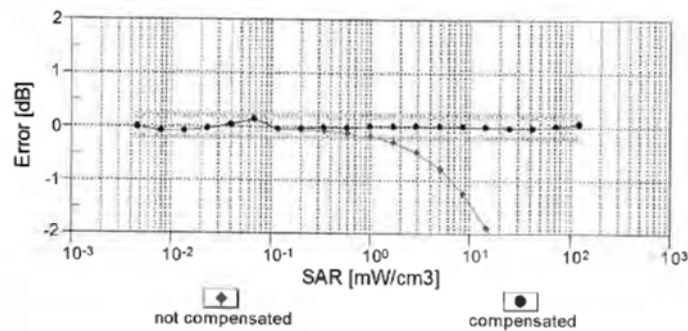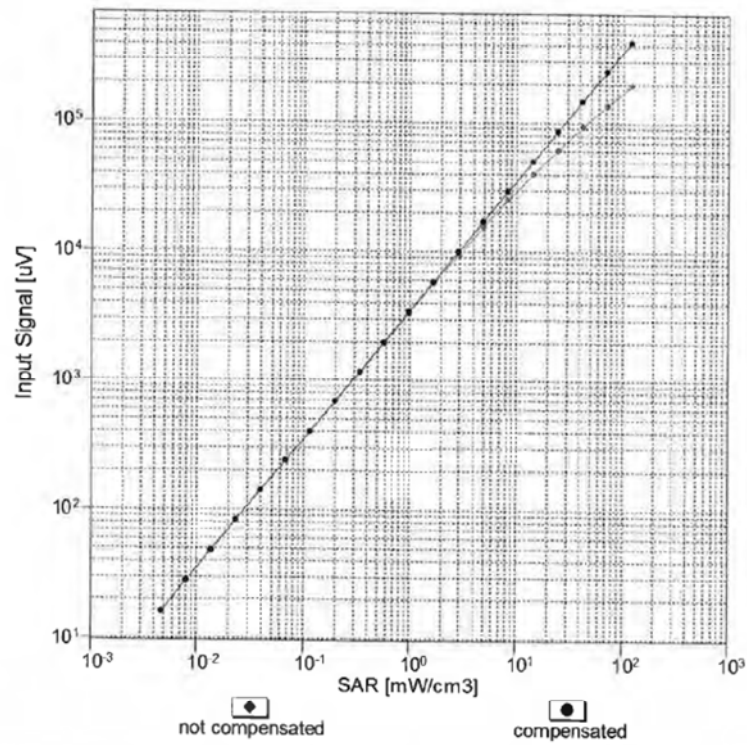


Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

Appendix 3-8: Calibration certificate: E-Field Probe (EX3DV4) (cont'd)

EX3DV4- SN:3907

April 21, 2021

Conversion Factor Assessment

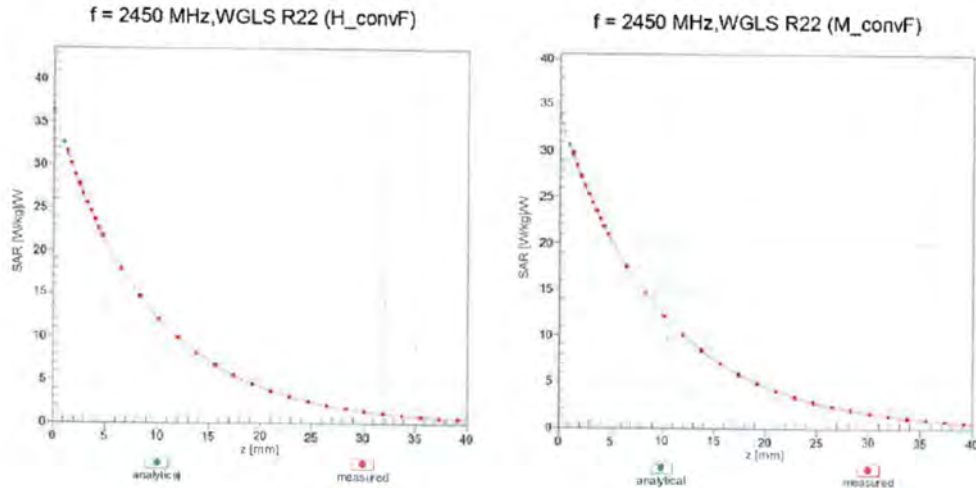

Deviation from Isotropy in Liquid

Error (ϕ , θ), f = 900 MHz

