



# EMC TEST REPORT

**Report No.:** SET2022-08782

**Product Name:** Thermal Imaging Binoculars

**FCC ID:** 2A7ZZ-2G-00

**Model No. :** AURORA A3, AURORA A3R

**Applicant:** Visir Inc.

**Address:** 39899 Balentine Drive Suite 200 Newark, CA 94560

**Received Date:** 2022.06.27

**Dates of Testing:** 2022.06.27—2022.07.11

**Issued by:** CCIC Southern Testing Co., Ltd.

**Lab Location:** Electronic Testing Building, No. 43 Shahe Road, Xili Street,  
Nanshan District, Shenzhen, Guangdong, China.

**Tel:** 86 755 26627338    **Fax:** 86 755 26627238

This test report consists of **19** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



## Test Report

**Product Name**..... Thermal Imaging Binoculars

**Model No.** ..... AURORA A3, AURORA A3R

**Trade name**..... RIX

**Applicant**..... Visir Inc.

**Applicant Address**..... 39899 Balentine Drive Suite 200 Newark, CA 94560

**Manufacturer** ..... Visir Inc.

**Manufacturer Address** ..... 39899 Balentine Drive Suite 200 Newark, CA 94560

**Test Standards**..... 47 CFR Part 15 Subpart B

**Test Result**..... PASS

**Tested by** ..... Ruihong Xie

Ruihong Xie Test Engineer

2022.07.11

**Reviewed by** ..... Chris You

Chris You Senior Engineer

2022.07.11

**Approved by** ..... Shuangwen Zhang

Shuangwen Zhang, Manager

2020.07.11

**TABLE OF CONTENTS**

<b>1.</b>	<b>GENERAL INFORMATION .....</b>	<b>4</b>
<b>1.1</b>	<b>EUT Description .....</b>	<b>4</b>
<b>1.2</b>	<b>Test Standards and Results .....</b>	<b>5</b>
<b>1.3</b>	<b>Facilities and Accreditations .....</b>	<b>6</b>
1.3.1	Facilities .....	6
1.3.2	Test Environment Conditions .....	6
1.3.3	Measurement Uncertainty .....	6
<b>2.</b>	<b>TEST CONDITIONS SETTING .....</b>	<b>7</b>
<b>2.1</b>	<b>Test Mode .....</b>	<b>7</b>
<b>2.2</b>	<b>Test Setup and Equipments List.....</b>	<b>7</b>
2.2.1	Conducted Emission .....	7
2.2.2	Radiated Emission.....	8
<b>3.</b>	<b>47 CFR PART 15B REQUIREMENTS .....</b>	<b>11</b>
<b>3.1</b>	<b>Conducted Emission .....</b>	<b>11</b>
3.1.1	Requirement .....	11
3.1.2	Test Description .....	11
3.1.3	Test Result.....	11
<b>3.2</b>	<b>Radiated Emission .....</b>	<b>14</b>
3.2.1	Requirement .....	14
3.2.2	Test Description .....	14
3.2.3	Test Result.....	15

Change History		
Issue	Date	Reason for change
1.0	2022.07.11	First edition



## 1. GENERAL INFORMATION

### 1.1 EUT Description

EUT Name ..... : Thermal Imaging Binoculars  
Trade Name.....: RIX  
Brand Name.....: RIX  
Hardware Version..... : V1.0  
Software Version ..... : V1.0  
Power supply.....: Battery  
Model No.: JQ033-07L  
Capacitance: 3820mAh  
Rated Voltage: 3.6V  
Charge Limit: 4.2V  
Manufacturer : Jin Qu Electronics(ZheJiang)Co.Ltd  
Ancillary Equipment.....: AC Adapter  
Brand Name: Simsukian  
Model No.: SK01T8-0500200Z  
I/p: 100-240V~50/60Hz ,400mA,Max  
O/p: 5V= 2000mA,10W  
Manufacturer : Shenzhen Simsukian Electronics Technology Co.,Ltd

*Note 1:*The EUT is a Thermal Imaging Binoculars

*Note 2:*For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

*Note 3:* All the patterns have been tested and only the worst results are recorded in the report.

*Note 4:* Please refer to ANNEX I for the photographs of the EUT. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacture

*Note 5:*Model No.: AURORA A3R have the same technical construction including circuit diagram,PCB Layoutcomponents and component layoutall electrical construction and mechanical construction,with AURORA A3.The difference lies only in the laser module of the different models.

## 1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B 2018	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS

NOTE:

(1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2014.



## 1.3 Facilities and Accreditations

### 1.3.1 Facilities

#### **FCC-Registration No.: CN1283**

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until April 19th, 2023.

#### **ISED Registration: 11185A-1**

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until April 20th, 2023.

#### **A2LA Code: 5721.01**

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

### 1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature ( °C):	15 °C - 35 °C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

### 1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 3.2 dB (k=2)
Uncertainty of Radiated Emission: (30MHz~1GHz)	Uc = 5.8 dB (k=2)
Uncertainty of Radiated Emission: (1~6GHz)	Uc = 5.1 dB (k=2)
Uncertainty of Radiated Emission: (6~18GHz)	Uc = 5.5 dB (k=2)

## 2. TEST CONDITIONS SETTING

### 2.1 Test Mode

The EUT have the following typical setups during the test:

Setup1: EUT + Charger;


Setup2: EUT +DATA Transfer + PC;

Setup3: EUT +WIFI

### 2.2 Test Setup and Equipments List

#### 2.2.1 Conducted Emission

##### A.Test Setup:

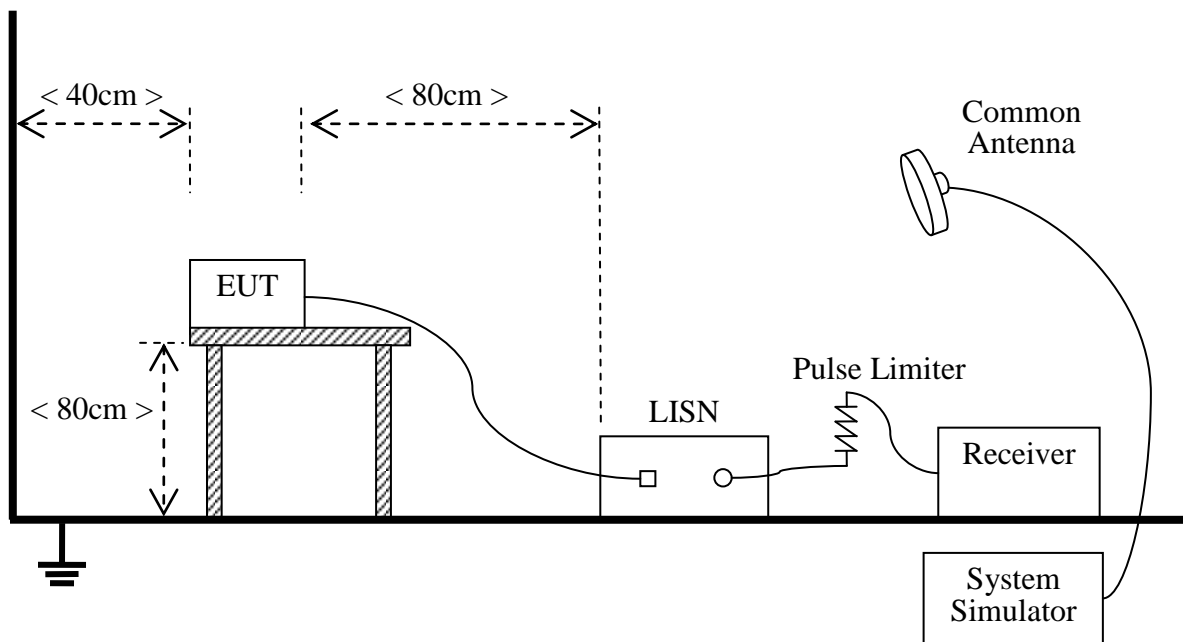

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides  $50\Omega/50\mu\text{H}$  of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.


### B.Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	KEYSIGHT	N9038A	A141202036	2021.09.20	2022.08.04
LISN	ROHDE&SCHWARZ	ENV216	A140701847	2021.08.02	2022.08.02
Cable	MATCHING PAD	W7	/	2021.08.02	2022.08.02

### 2.2.2 Radiated Emission


#### A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

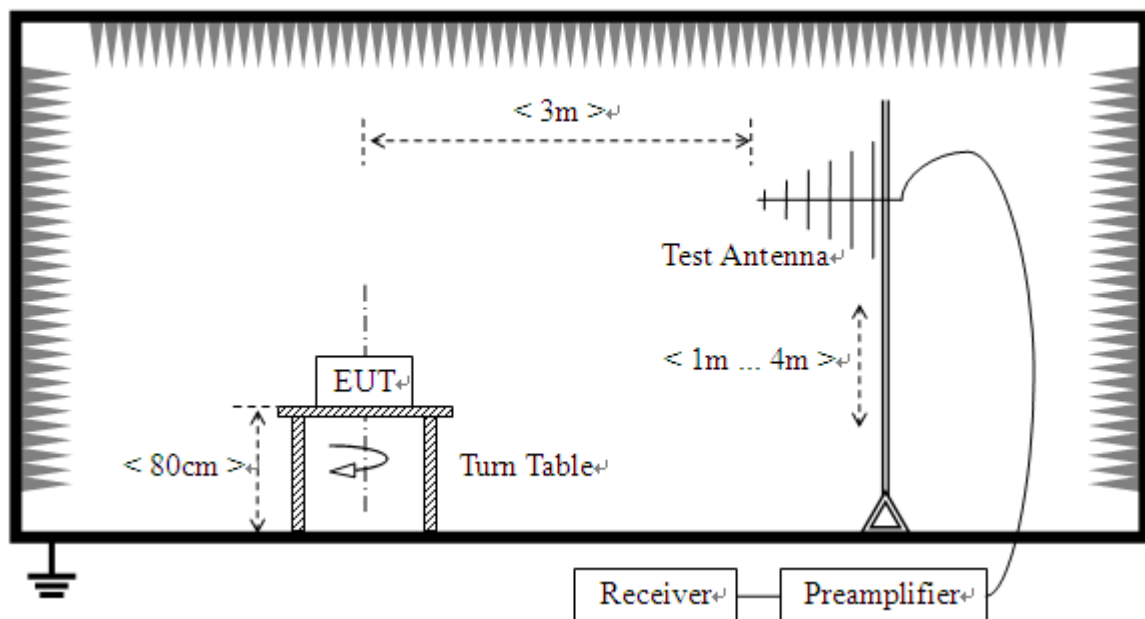



## 2) For radiated emissions above 1GHz

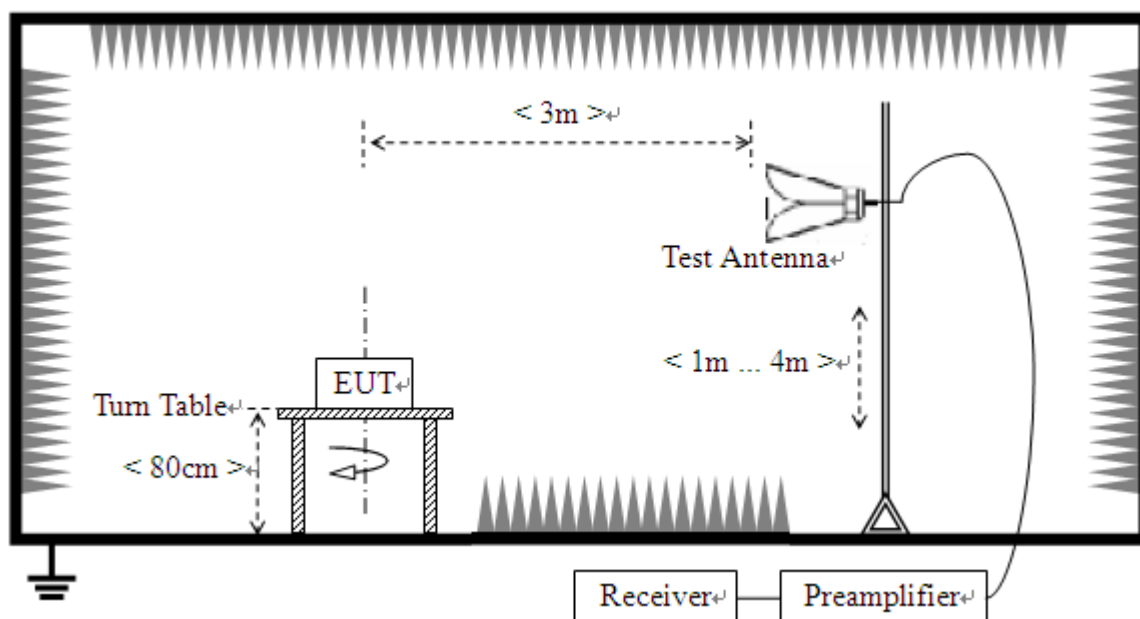

### B. Test Procedure

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

### C. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	A0902601	2022.05.23	2023.04.17
Broadband Ant.	2786	ETC	A150402239	2021.09.16	2024.03.03
3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2019.03.26	2023.03.25
EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2021.08.12	2022.08.06



Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
System Simulator	ROHDE&SCHWARZ	CMW500	A150802214	2021.08.02	2022.07.22
5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2021.08.02	2022.07.22
EMI Horn Ant.	ROHDE&SCHWARZ	HF906	A0304225	2019.03.25	2023.03.24

### 3. 47 CFR PART 15B REQUIREMENTS

#### 3.1 Conducted Emission

##### 3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

**Note:**

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

##### 3.1.2 Test Description

See section 2.2.1 of this report.

##### 3.1.3 Test Result


The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

**Note:**

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a Nominal 120V AC,50/60Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

## Test voltage and frequency (120V AC,60Hz)


### A.Mains terminal disturbance voltage, L phase

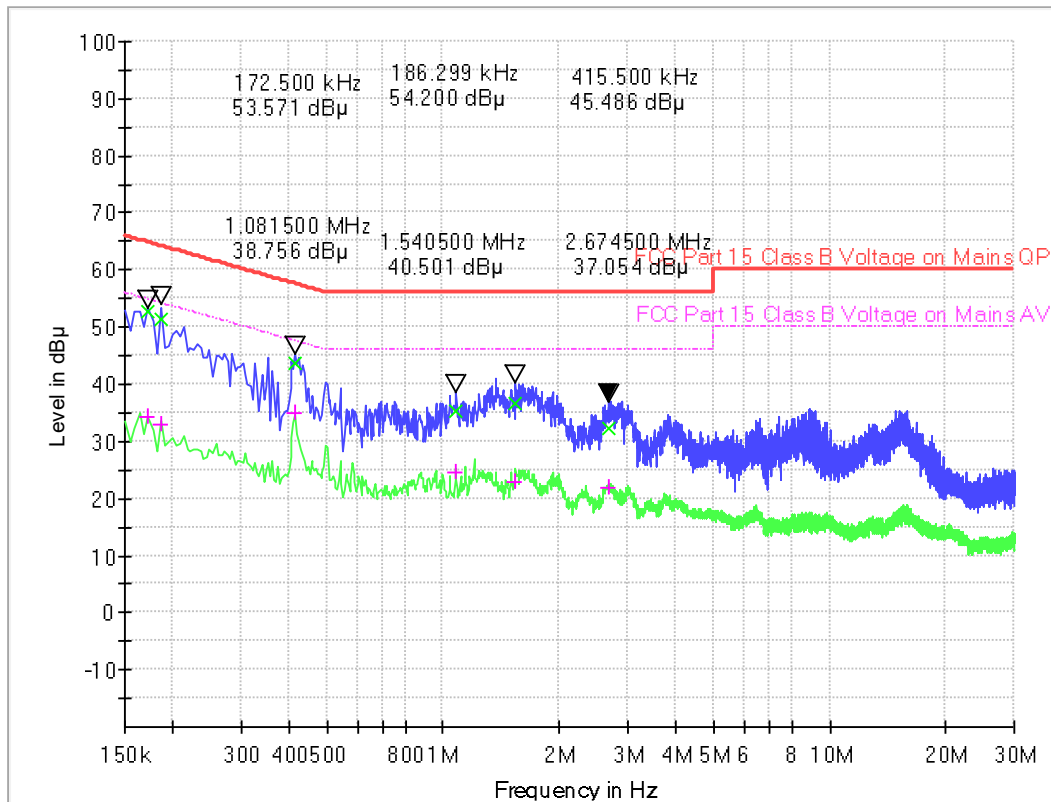

(Plot A: L Phase)

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μ V)
0.172500	52.83	34.28	0.1	19.5	12.01	64.8	20.56	54.8
0.186000	51.27	32.81	0.1	19.5	12.94	64.2	21.40	54.2
0.415500	43.60	34.90	0.2	19.5	13.94	57.5	12.64	47.5
1.081500	35.25	24.53	0.2	19.6	20.75	56.0	21.47	46.0
1.540500	36.76	22.74	0.2	19.6	19.24	56.0	23.26	46.0
2.674500	32.42	21.79	0.3	19.6	23.58	56.0	24.21	46.0

## B.Mains terminal disturbance voltage, N phase

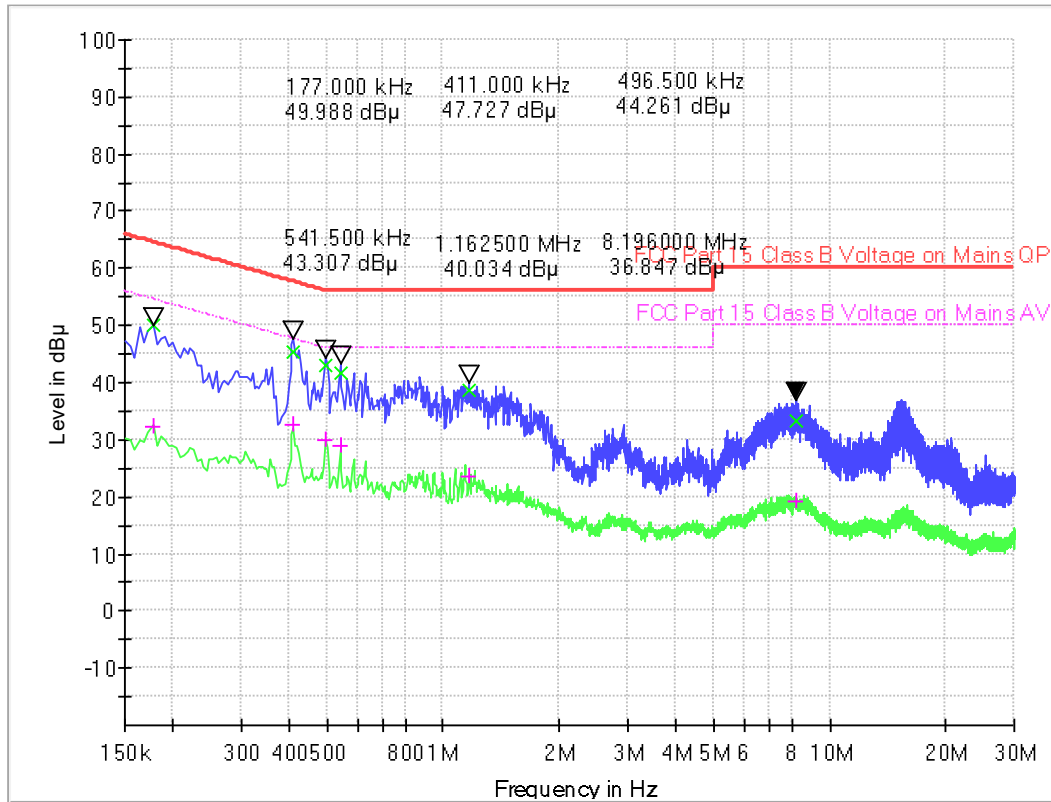

(Plot B: N Phase)

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μ V)
0.177000	50.01	32.22	0.1	19.5	14.62	64.6	22.41	54.6
0.411000	45.52	32.77	0.1	19.5	12.11	57.6	14.86	47.6
0.496500	43.11	30.03	0.2	19.5	12.95	56.1	16.03	46.1
0.541500	41.81	28.95	0.2	19.5	14.19	56.0	17.05	46.0
1.162500	38.50	23.54	0.3	19.6	17.50	56.0	22.46	46.0
8.196000	33.27	19.31	0.2	19.9	26.73	60.0	30.69	50.0

## 3.2 Radiated Emission

### 3.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	( $\mu\text{V/m}$ )	( $\text{dBuV/m}$ )
30.0 - 88.0	100	3m	100	$20\log 100$
88.0 - 216.0	150	3m	150	$20\log 150$
216.0 - 960.0	200	3m	200	$20\log 200$
Above 960.0	500	3m	500	$20\log 500$

- For frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- For below 1G :QP detector RBW 120kHz ,VBW 300kHz.
- For Above 1G: PK detector RBW 1MHz,VBW 3MHz for PK value ;AV detector RBW 1MHz, VBW 10Hz for AV value.

#### Note:

- The tighter limit shall apply at the boundary between two frequency range.
- Limitation expressed in  $\text{dBuV/m}$  is calculated by  $20\log \text{Emission Level}(\mu\text{V/m})$ .
- If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of  $L_{d1} = L_{d2} * (d_2/d_1)^2$ .

Example:

F.S Limit at 30m distance is  $30\mu\text{V/m}$ , then F.S Limitation at 3m distance is adjusted as

$$L_{d1} = L_1 = 30\mu\text{V/m} * (10)^2 = 100 * 30\mu\text{V/m}.$$

### 3.2.2 Test Description

See section 2.3.2 of this report.




### 3.2.3 Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

## A.Radiation disturbances, antenna polarization:Vertical

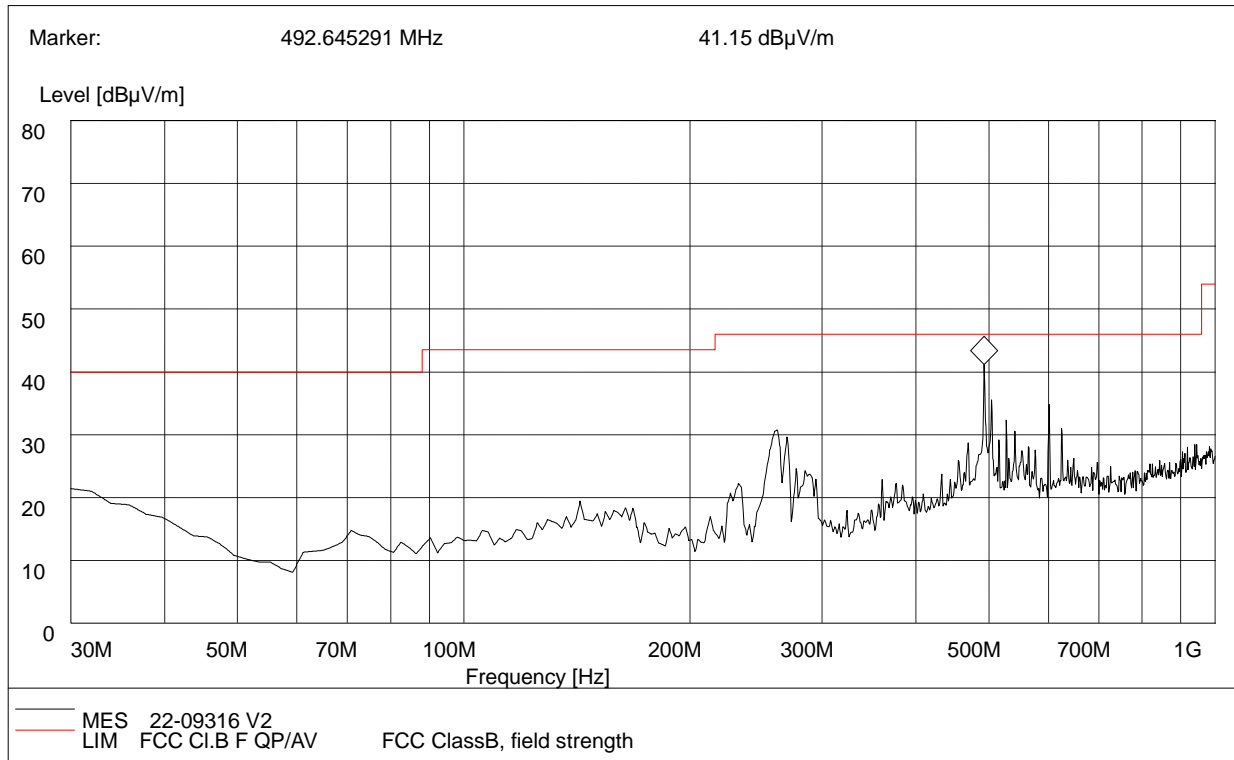


(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.00	21.01	120.000	107	40	18.99	Vertical	0.4	25.9	Pass
71.29	13.27	120.000	112	40	26.73	Vertical	0.4	26.0	Pass
142.34	19.34	120.000	124	43.5	24.16	Vertical	0.5	26.2	Pass
164.13	18.20	120.000	119	43.5	25.30	Vertical	0.5	26.5	Pass
492.65	41.05	120.000	137	46	4.95	Vertical	0.7	27.8	Pass
601.43	33.02	120.000	116	46	12.98	Vertical	0.8	27.6	Pass



## B.Radiation disturbances, antenna polarization: Horizontal

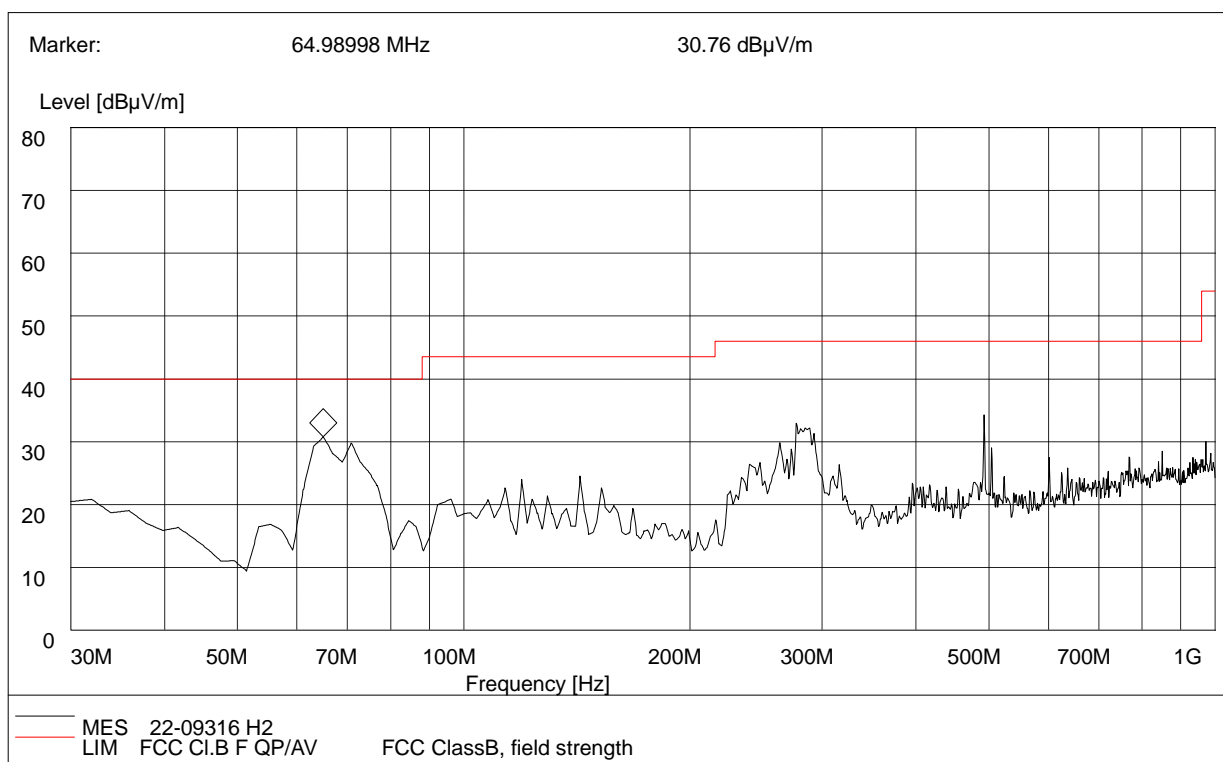


(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
64.08	30.20	120.000	129	40	9.80	Horizontal	0.4	26.1	Pass
70.49	28.43	120.000	131	40	11.57	Horizontal	0.4	26.0	Pass
119.34	23.57	120.000	144	43.5	19.93	Horizontal	0.5	26.4	Pass
142.29	24.09	120.000	135	43.5	19.41	Horizontal	0.6	26.7	Pass
276.16	32.14	120.000	141	46	13.86	Horizontal	0.8	28.0	Pass
492.53	34.43	120.000	179	46	11.57	Horizontal	0.9	28.4	Pass

**Test Result: PASS**


## A.Radiation disturbances, antenna polarization: Horizontal

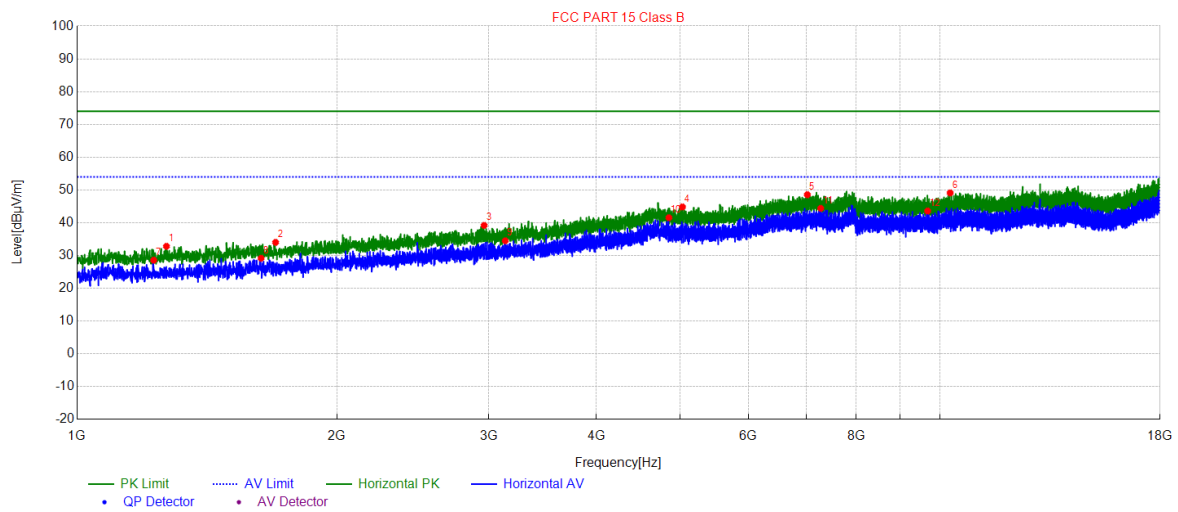

(Plot M: Test Antenna Horizontal 1G – 18G)

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	1269.46	32.82	-14.83	74.00	41.18	PK	124	174	Horizontal
2	1698.73	34.03	-13.26	74.00	39.97	PK	139	293	Horizontal
3	2963.59	39.19	-8.69	74.00	34.81	PK	147	147	Horizontal
4	5030.90	44.83	-1.42	74.00	29.17	PK	106	165	Horizontal
5	7021.70	48.56	3.36	74.00	25.44	PK	157	43	Horizontal
6	10279.0	49.10	5.66	74.00	24.90	PK	155	278	Horizontal
7	1226.96	28.58	-14.93	54.00	25.42	AV	149	165	Horizontal
8	1634.13	29.18	-13.48	54.00	24.82	AV	177	304	Horizontal
9	3135.30	34.50	-8.17	54.00	19.50	AV	136	178	Horizontal
10	4852.39	41.54	-1.17	54.00	12.46	AV	125	164	Horizontal
11	7275.86	44.40	3.41	54.00	9.60	AV	134	247	Horizontal
12	9679.78	43.59	5.26	54.00	10.41	AV	119	139	Horizontal

## B.Radiation disturbances, antenna polarization: Vertical

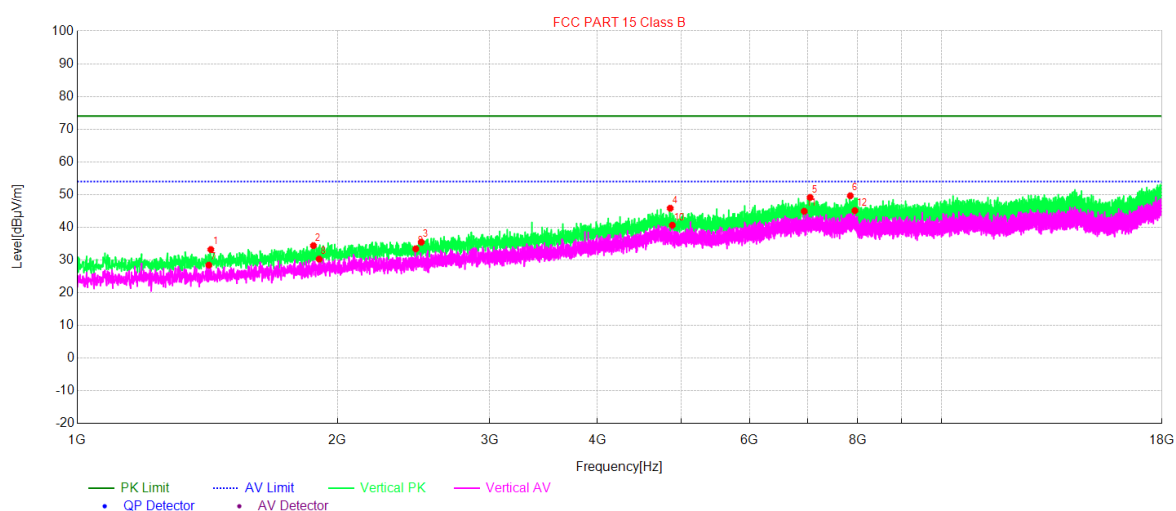

(Plot N: Test Antenna Vertical 1G – 18G)

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	1427.57	33.23	-14.27	74.00	40.77	PK	139	224	Vertical
2	1876.39	34.41	-12.40	74.00	39.59	PK	124	136	Vertical
3	2501.17	35.46	-10.24	74.00	38.54	PK	136	173	Vertical
4	4854.94	45.83	-1.18	74.00	28.17	PK	147	154	Vertical
5	7048.05	49.14	3.38	74.00	24.86	PK	139	334	Vertical
6	7845.39	49.65	4.02	74.00	24.35	PK	100	267	Vertical
7	1419.92	28.46	-14.29	54.00	25.54	AV	115	253	Vertical
8	1905.29	30.31	-12.27	54.00	23.69	AV	125	187	Vertical
9	2464.62	33.44	-10.39	54.00	20.56	AV	103	170	Vertical
10	4882.14	40.65	-1.36	54.00	13.35	AV	121	262	Vertical
11	6939.24	44.91	3.24	54.00	9.09	AV	136	257	Vertical
12	7941.44	45.11	4.08	54.00	8.89	AV	117	163	Vertical

-----End of Report-----