

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEM151000665501

28 sets samples, 8 pcs of full sprayed parts

Email: ee.shenzhen@sgs.com Page: 1 of 19

FCC REPORT

Application No.: SZEM1510006655CR(SGS SZ No.:T51510250061EM)

Applicant: SpinMaster Toys Far East LTD. **Manufacturer:** Root Land Plastic Toy Factory

Supplier: Spin Master

Product Name: MEC ELT RC Racer CN GML 3pk M02

Phantom No.: 20072248

Style/Item No.: 91780, 91804, 91711, 91752, 1037143, 886350

 Trade Mark:
 MEC

 Family No.:
 91780

 Sales Planning
 6028127

 Date Code:
 50711ARL

P.O./ **Ref.No.**: 91780, 6028127, 1037143

Finished Goods No.: 1037143

Numbers of Samples

Submitted: 20 3613
Request Age Grading: 8+

Country of Origin: 8+

Country of Destination: US/CANADA/EU/AU FCC ID: US/CANADA/EU/AU PQN91780TX27145

Standards: 47 CFR Part 15, Subpart C (2014)

Date of Receipt: 2015-10-30

Date of Test: 2015-11-6 to 2015-11-16

Date of Issue:2015-11-17Test Result:PASS *

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: SZEM151000665501

Page: 2 of 19

2 Version

Revision Record							
Version Chapter Date Modifier Remark							
00		2015-11-17		Original			

Authorized for issue by:		
Tested By	Gebin Sun	2015-11-16
	(Gebin Sun) /Project Engineer	Date
Prepared By	Joyce Shi	2015-11-17
	(Joyce Shi) /Clerk	Date
Checked By	Eric Fu	2015-11-17
	(Eric Fu) /Reviewer	Date



Report No.: SZEM151000665501

Page: 3 of 19

3 Test Summary

Test Item Test Requirement		Test method	Result
Radiated Emission	47 CFR Part 15, Subpart C Section 15.227	ANSI C63.10 (2009)	PASS
Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.215	ANSI C63.10 (2009)	PASS



Report No.: SZEM151000665501

Page: 4 of 19

4 Contents

	Fo	age
C	OVER PAGE	1
V	ERSION	2
TI	EST SUMMARY	3
C	ONTENTS	4
G	ENERAL INFORMATION	5
5.1	CLIENT INFORMATION	5
5.2	GENERAL DESCRIPTION OF EUT	
5.3	TEST ENVIRONMENT AND MODE	
5.4	DESCRIPTION OF SUPPORT UNITS	
5.5	TEST LOCATION	6
5.6	TEST FACILITY	
5.7	ABNORMALITIES FROM STANDARD CONDITIONS	7
5.8	OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
5.9	EQUIPMENT LIST	8
TI	EST RESULT & MEASUREMENT DATA	12
6.1	ANTENNA REQUIRMENT	12
6.2	RADIATED EMISSIONS.	
6.3	OCCUPIED BANDWIDTH	17
PI	HOTOGRAPHS - EUT TEST SETUP	19
7.1	RADIATED EMISSION	19
PI	HOTOGRAPHS - EUT CONSTRUCTION DETAILS	19
	V T C G 5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 T 6.1 6.2 6.3 P 7.1	COVER PAGE VERSION TEST SUMMARY CONTENTS GENERAL INFORMATION 5.1 CLIENT INFORMATION 5.2 GENERAL DESCRIPTION OF EUT 5.3 TEST ENVIRONMENT AND MODE 5.4 DESCRIPTION OF SUPPORT UNITS 5.5 TEST LOCATION 5.6 TEST FACILITY 5.7 ABNORMALITIES FROM STANDARD CONDITIONS 5.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER 5.9 EQUIPMENT LIST TEST RESULT & MEASUREMENT DATA 6.1 ANTENNA REQUIRMENT 6.2 RADIATED EMISSIONS 6.3 OCCUPIED BANDWIDTH PHOTOGRAPHS - EUT TEST SETUP



Report No.: SZEM151000665501

Page: 5 of 19

5 General Information

5.1 Client Information

Applicant:	SpinMaster Toys Far East LTD.
Address of Applicant:	1113. 11 th Floor, Chinachen Golden Plaza, 77 Mody Road, Tsim Sha Tsui East Kowloon, Hong Kong
Manufacturer:	Root Land Plastic Toy Factory

5.2 General Description of EUT

Product Name:	MEC ELT RC Racer CN GML 3pk M02
Phantom No.:	20072248
Trade Mark:	MEC
RF Function (Frequency):	27.145MHz
Power Supply:	9V DC (1x9V"6F22" Size Battery) for TX
	4.5V DC (3x1.5V"AA" Size Battery) for RX

Remark:

Only the Phantom No.: 20072248 was tested in this report.



Report No.: SZEM151000665501

Page: 6 of 19

5.3 Test Environment and Mode

Operating Environment:	Operating Environment:				
Temperature:	24.0 °C				
Humidity:	52 % RH				
Atmospheric Pressure:	1020 mbar				
Test mode:					
Transmitting mode: Keep the EUT in transmitting mode.					

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM151000665501

Page: 7 of 19

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

The 3m Semi-anechoic chambers and the 10m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-2, 4620C-3.

None.

5.7 Abnormalities from Standard Conditions

None.

5.8 Other Information Requested by the Customer

None.



Report No.: SZEM151000665501

Page: 8 of 19

5.9 Equipment List

	RF connected test							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)		
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09		
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24	2016-10-24		
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-17	2016-10-17		
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-13	2016-05-13		
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-13	2016-05-13		
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-13	2016-05-13		
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-04-25	2016-04-25		
8	POWER METER	R & S	NRVS	SEL0144	2015-10-09	2016-10-09		
9	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-04-25	2016-04-25		



Report No.: SZEM151000665501

Page: 9 of 19

	RE in Chamber		ı ayı	. 901	
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2016-05-13
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2016-09-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	Coaxial cable	SGS	N/A	SEL0027	2016-05-13
5	Coaxial cable	SGS	N/A	SEL0189	2016-05-13
6	Coaxial cable	SGS	N/A	SEL0121	2016-05-13
7	Coaxial cable	SGS	N/A	SEL0178	2016-05-13
8	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2017-11-15
9	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2018-10-17
10	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2016-05-13
11	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2016-10-17
12	Barometer	ChangChun	DYM3	SEL0088	2016-05-13
13	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2016-10-09
14	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2016-10-24
15	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2016-05-13
16	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2016-05-13



Report No.: SZEM151000665501

Page: 10 of 19

	RE in Chamber				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEL0303	2016-08-01
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2016-05-13
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	Coaxial cable	SGS	N/A	SEL0288	2016-05-13
5	Coaxial cable	SGS	N/A	SEL0275	2016-05-13
6	Coaxial cable	SGS	N/A	SEL0274	2016-05-13
7	BiConiLog Antenna (30M-1GHz)	Schwarzbeck	VULB9160	SEL0308	2018-10-17
8	BiConiLog Antenna (30M-1GHz)	Schwarzbeck	VULB9160	SEL0309	2018-10-17
9	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEL0311	2018-06-14
10	Pre-amplifier	Sonoma Instrument Co	310N	SEL0298	2016-05-13
11	Low Noise Amplifier	Black Diamond Series	BDLNA-011 8-352810	SEL0319	2016-10-09
12	Loop Antenna	ETS-LINDGREN	6502	SEL0802	2016-08-14



Report No.: SZEM151000665501

Page: 11 of 19

	Fage. 110119						
	Conducted Emiss	ion					
Item	Test Equipment	Manufacturer	Model No.	Inventory	Cal. date	Cal.Due date	
	• •			No.	(yyyy-mm-dd)	(yyyy-mm-dd)	
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-05-13	2016-05-13	
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2015-10-09	2016-10-09	
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-13	2016-05-13	
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T8-02	SEL0162	2015-08-30	2016-08-30	
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T4-02	SEL0163	2015-08-30	2016-08-30	
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T2-02	SEL0164	2015-08-30	2016-08-30	
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-13	2016-05-13	
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-13	2016-05-13	
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09	
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24	2016-10-24	
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-13	2016-05-13	





Report No.: SZEM151000665501

Page: 12 of 19

6 Test Result & Measurement Data

6.1 Antenna Requirment

Standard Requirement: 47 CFR Part 15C Section 15.203

15.203 Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:





Report No.: SZEM151000665501

Page: 13 of 19

6.2 Radiated Emissions

Test Requirement:	47 CFR Part 15C Section 15.227							
Test Method:	ANSI C63.10: 2009							
Test Site:	3m (Semi-Anechoic C	haml	oer)					
ERP Limit:	Carrier Power will not exceed 80dBuV/m at 3m (Average).							
Receiver Setup:	Frequency		Detector	RBW	VBW		Remark	
	0.009MHz-0.090MI	Ηz	Peak	10kHz	30kHz		Peak	
	0.009MHz-0.090MI	Ηz	Average	10kHz	30kHz		Average	
	0.090MHz-0.110MI	Ηz	Quasi-peak	10kHz	30kHz	G	Quasi-peak	
	0.110MHz-0.490MHz		Peak	10kHz	30kHz		Peak	
	0.110MHz-0.490Mi	Ηz	Average	10kHz	30kHz		Average	
	0.490MHz -30MH	Z	Quasi-peak	10kHz	30kHz	O	uasi-peak	
	30MHz-1GHz		Quasi-peak	100 kHz	300kHz	G	uasi-peak	
	Above 1GHz		Peak	1MHz	3MHz		Peak	
	Above rariz		Peak	1MHz	10Hz		Average	
Limit:	Frequency	Frequency Field strength (microvolt/meter)		Limit (dBuV/m)	Remark		Measureme distance (r	
	0.009MHz-0.490MHz	24	400/F(kHz)	-	-		300	
	0.490MHz705MHz	24	000/F(kHz)	-	-		30	
	1.705MHz-30MHz		30	-	-		30	
	30MHz-88MHz		100	40.0	Quasi-peak 3		3	
	88MHz-216MHz		150	43.5	'		3	
	216MHz-960MHz		200	46.0	' ' '		3	
	960MHz-1GHz		500	54.0	Quasi-pea	ak	3	
	Above 1GHz		500	54.0	Average)	3	
	Note: 15.35(b), emissions is 2 applicable to the emission level r	0dB e equ	above the ma ipment under t	aximum pe est. This pe	rmitted ave	erag	ge emission	limit
Test Procedure:	a. The EUT was place at a 3 meter se determine the pos	mi-ar	nechoic cambe	er. The tabl				
	b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.							
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.							
	d. For each suspected the antenna was to of below 30MHz,	uned	to heights from	n 1 meter to	4 meters (f	for t	he test frequ	iency



Report No.: SZEM151000665501


Page: 14 of 19

table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified

- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be retested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.

Test Setup:

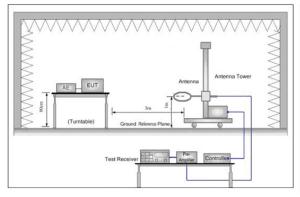

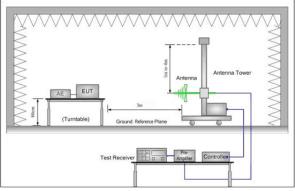


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

Test Mode:	Transmitting mode.			
Instruments Used:	Refer to section 5.10 for details.			
Test Result:	Pass			

27.145MHz Mode

Test Procedure: For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10: 2009. The center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

Test Result:

Intentional emission

Test Frequency	dBμV/m)	Limits	Margin (dB)		
(MHz)	Vertical	Horizontal	(dBµV/m)	Vertical	Horizontal
27.145	68.49	60.46	100.0	-31.51	-39.54

Test Frequency	Average	age (dBμV/m) Limits Margin			in (dB)
(MHz)	Vertical	Horizontal	(dBµV/m)	Vertical	Horizontal
27.145	62.91	52.84	80.0	-17.09	-27.16




Report No.: SZEM151000665501

Page: 15 of 19

Out of Band Emissions

Vertical

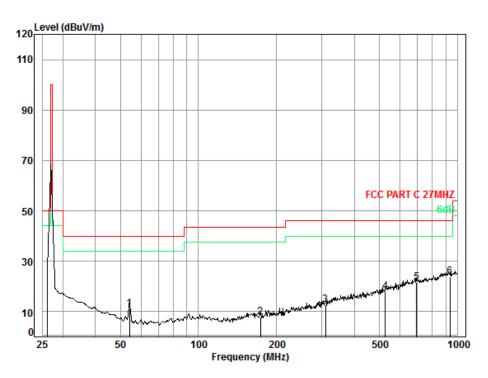

Condition: FCC PART C 27MHZ 3m 3142C Vertical

Job No. : 6655CR Test Mode: TX Mode


	Freq			Preamp Factor		Level		Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	54.25	0.80	8.14	27.28	29.46	11.12	40.00	-28.88
2	173.39	1.36	9.64	26.80	23.70	7.90	43.50	-35.60
3	309.42	1.93	14.06	26.46	23.08	12.61	46.00	-33.39
4	526.31	2.63	18.43	27.65	24.53	17.94	46.00	-28.06
5	694.06	2.89	21.61	27.42	24.44	21.52	46.00	-24.48
6	935.76	3.64	23.31	26.61	23.48	23.82	46.00	-22.18



Report No.: SZEM151000665501

Page: 16 of 19

Horizontal

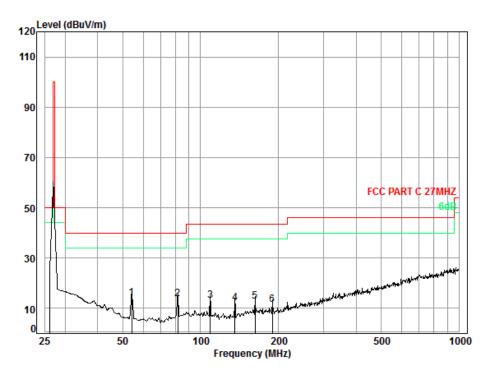

Condition: FCC PART C 27MHZ 3m 3142C Horizontal

Job No. : 6655CR Test Mode: TX Mode

	Freq			Preamp Factor			Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	54.25	0.80	8.14	27.28	32.41	14.07	40.00	-25.93
2	81.70	1.10	7.98	27.23	31.92	13.77	40.00	-26.23
3	108.93	1.23	8.74	27.14	30.11	12.94	43.50	-30.56
4	135.92	1.29	8.20	26.98	29.43	11.94	43.50	-31.56
5	162.25	1.34	9.65	26.85	28.63	12.77	43.50	-30.73
6	189.44	1.39	10.09	26.74	26.55	11.29	43.50	-32.21

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level =Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) The disturbance below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



Report No.: SZEM151000665501

Page: 17 of 19

6.3 Occupied Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.215 (C)
Test Method:	ANSI C63.10: 2009
Limit:	Operation within the band 26.960 – 27.280 MHz
Requirement :	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equip compliance with the 20dB attenuation specification may base on measurement at the intentional radiator's antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be deomonstrated by measuring the radiated emissions.
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane
Test Mode:	Transmitting mode.
Instruments Used:	Refer to section 5.10 for details.
Test Result:	Pass


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM151000665501

Page: 18 of 19

Test Result:

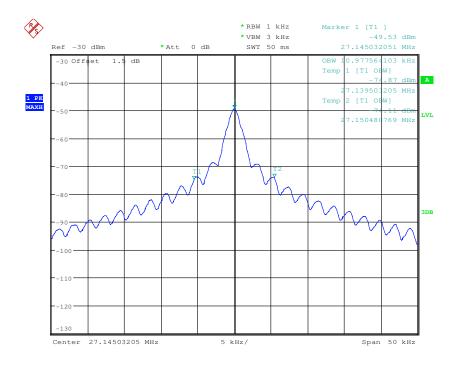



Report No.: SZEM151000665501

Page: 19 of 19

7 Photographs - EUT Test Setup

7.1 Radiated Emission





8 Photographs - EUT Construction Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1510006655CR.