



HUNAN GIANTSUN POWER ELECTRONICS CO., LTD
Building 16 and 17, Taiwan Industrial Park, Chenzhou
Nonferrous Metals Industrial
Park, Hunan Province

TEL: 0735-2668666

FAX: 0735-2668000

Total 5 Page

Specification For Approval

An old (invalid) letter of admission	
GSP part number	
Version	
Date	

REV: _____

Case No.: _____

GSP Parts No.: 10801-0046

Model: Transmitting coil module

Components Spec.: Transmitting coil module

Manufacturer: Ju Yuan

Supplier: Ju Yuan

No. of Approved: _____

Date of Approved: _____

Issuing department (Cultural and administrative center)	Admission department					
	Supervisor approval	Audit				Fiction
		Environmental ☐	Safety ☐	Electronic ☐	Organization ☐	
	Condition					
	Receipton ☐					
	Receipton ☐					
1. If there is any change, it must be contacted in advance and approved before the change; 2. The relevant units need to file and save, and see the inspection report before receiving the conditions; 3. If there are no special instructions, all internal and supplier acknowledgement numbers must be withdrawn when accepting the previous version.						

NO.: GSP-3GC-163-001 A/2




Change The Detail

part 1 of 5

[illegible]

Model Number:	Transmitting coil module	Customer P / N:	10801-0046
		Supplier P / N:	18.00541

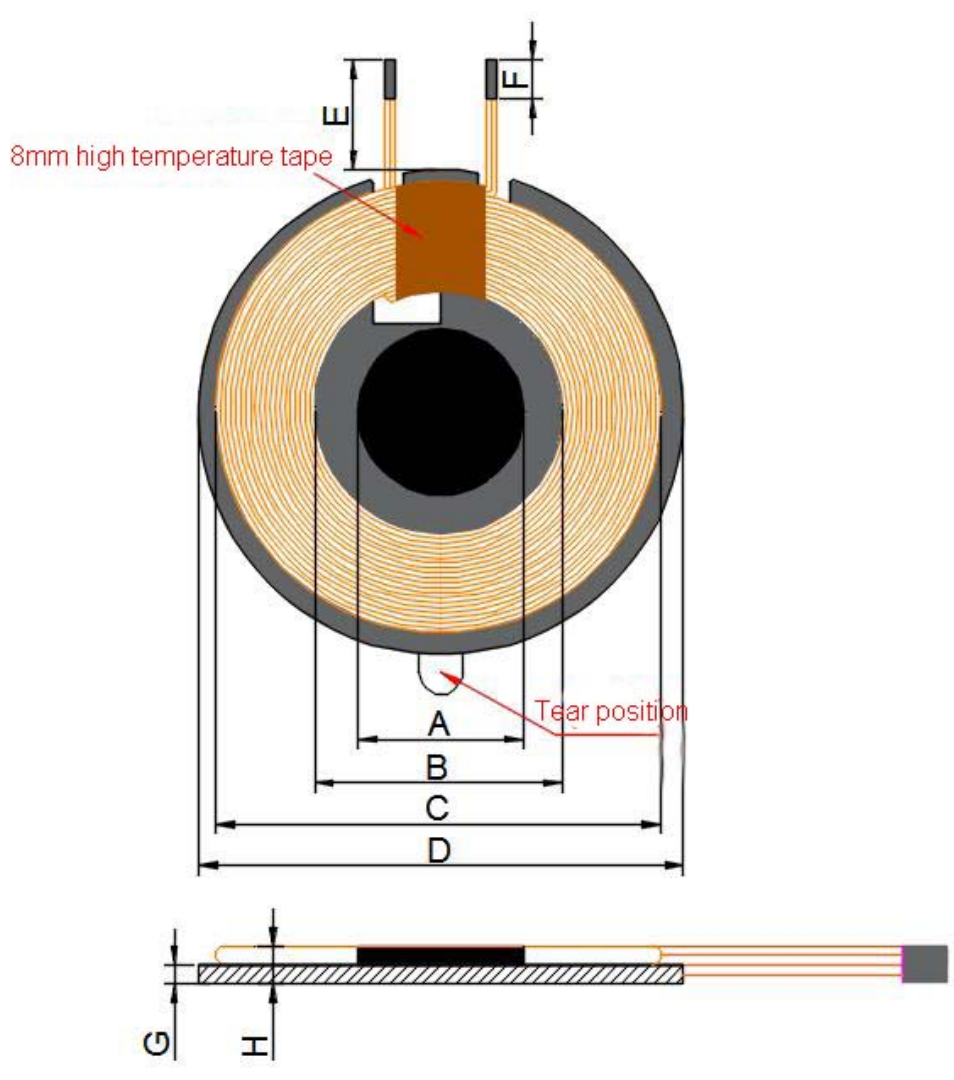—. Appearance Size: (Unit/mm) 		A	15±0.5
		B	22±0.5
		C	40.5±1
		D	44±1
		E	10±2
		F	3.5±1.5
		G	0.8±0.2
		H	2.2MAX Coating position
		I	
		J	
		K	
		L	
		M	
		N	
		O	
		P	
		Q	
		R	
		S	
		T	
		U	
		V	
		W	
		X	
		Y	
		Z	

二. Schematic Diagram :




三. Winding Parameters :

Winding	Start	Finish	Turns	Line Diameter	Winding Way	Winding Direction	Layer&Circle
	S	F	11TS	0.08*80P	Single layer close wound	anticlockwise	1 层/11TS



四. Electrical Characteristics :

Item	Terminal	Test Conditions	Test Instrument	Parameter	Unit	Numerical Value
inductance	S-F	100KHz/1.00V/100Ω	1062 bridge	Inductance @100KHz/1V	μH	8.2μH±10%
resistance	S-F	100KHz/1.00V/100Ω	1062 bridge	RS@100KHz/1V	mΩ	80MAX
Q value	S-F	100KHz/1.00V/100Ω	1062 bridge	@100KHz/1V		70MIN

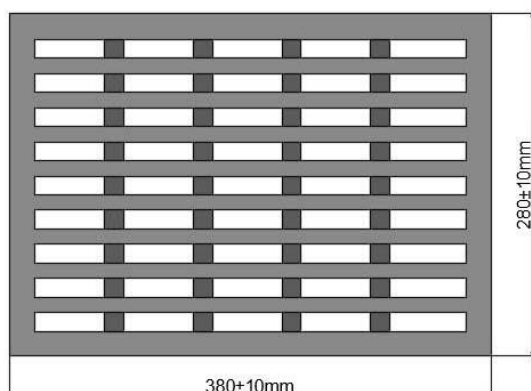

Pearl cotton size is

Each pearl cotton 45 boxes, each box containing 6pcs,
a total of 270pcs products

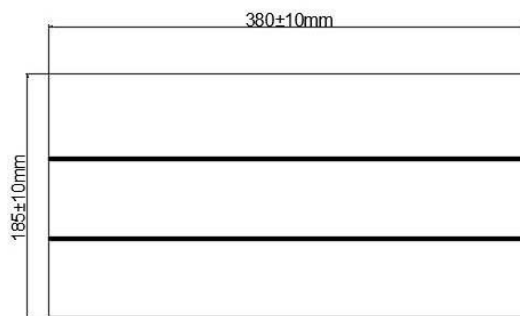

Each box is packed with 3 layers of pearl cotton,
separated directly by cardboard



- 1、 Each layer of pearl cotton can hold 270pcs of products;
- 2、 Each box can hold 3 layers of pearl cotton, can hold 810 products

Product	Single layer quantity	Layer/Box	Total/Box	Weigh
	270pcs	3 layer	810pcs	



Material List

Customer P / N		10801-0046		Supplier P / N		18.00541	
No.	Material Name	Material Specification		Material Code		Manufacturer	
1	enamelled wire	0.08*80P		01.00003			
2	Lead-free tin strip	high-temperature		05.00058			
3	Glue	Whites glues		05.00001			
4	High-temperature tape	8mm		05.00023			
5	Round double slot hard disk with holes	G44*5*0.8mm		02.00003			
6	Double-side tape	43*5*0.08mm		05.00020			
7	Round hard disk	15*0.8mm		02.00254			
8	Paperboard	378*270mm		04.00020			
9	Packing box	390*280*47mm		04.00029			
10	Carton	400*300*190mm		04.00008			
11							
12							
13							
14							