



RF TEST REPORT

Applicant Quectel Wireless Solutions Co., Ltd

FCC ID XMR201910BG95M3

Product LTE Cat M1 & Cat NB2 & EGPRS Module

Brand Quectel

Model BG95-M3, BG95-M3 MINIPCIE

Report No. R2108A0735-R3

Issue Date September 10, 2021

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in FCC CFR47 Part 2 (2020)/ FCC CFR47 Part 27C (2020). The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1	Tes	t Laboratory	4
	1.1	Notes of the Test Report	4
	1.2	Test facility	4
	1.3	Testing Location	4
2	Ger	neral Description of Equipment under Test	5
3	App	plied Standards	7
4	Tes	t Configuration	8
5	Tes	t Case Results	10
	5.1	RF Power Output	10
	5.2	Effective Isotropic Radiated Power	15
	5.3	Occupied Bandwidth	22
	5.4	Band Edge Compliance	32
	5.5	Peak-to-Average Power Ratio (PAPR)	61
	5.6	Frequency Stability	64
	5.7	Spurious Emissions at Antenna Terminals	68
	5.8	Radiates Spurious Emission	97
6	Mai	in Test Instruments	114
ΑI	NNEX	A: The EUT Appearance	117
ΑI	NNEX	B: Test Setup Photos	118
ΔΙ	NEX	C: Product Change Description	119



TA

Report No.: R2108A0735-R3

Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
_		27.50(d)(4)	
2	Effective Isotropic Radiated power	/27.50(b)(10) /27.50(c)(10) /27.50(h)(2)	PASS
3	Occupied Bandwidth	2.1049	PASS
		27.53(h)	
4	Band Edge Compliance	/27.53(g) /27.53(f) /27.53(c)	PASS
5	Peak-to-Average Power Ratio	27.50(d)/KDB971168 D01(5.7)	PASS
6	Frequency Stability	2.1055 / 27.54	PASS
7	Spurious Emissions at Antenna Terminals	2.1051 /27.53(h) /27.53(g) /27.53(f) /27.53(c)	PASS
8	Radiates Spurious Emission	2.1053 /27.53(h) /27.53(g) /27.53(f) /27.53(c)	PASS

Date of Testing: (Original) August 20, 2019 ~ September 5, 2019 and June 5, 2020 (Variant) August 23, 2021~ August 26, 2021

Date of Sample Received: (Variant) August 13, 2021

Note: PASS: The EUT complies with the essential requirements in the standard.

FAIL: The EUT does not comply with the essential requirements in the standard.

All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.

BG95-M3, BG95-M3 MINIPCIE (Report No.: R2108A0735-R3) is a variant model of BG95-M3, BG95-M3 MINIPCIE (Report No.: R2006A0361-R3V1). There is only changed the Power Amplifier of product. Power of new variant is varied due to measurement uncertainty, and sample tolerance of the acceptance range for variant in this report. Test values partial duplicated from Original for variant. There is only tested Band Edge Compliance and Occupied Bandwidth. The detailed product change description please refers to the Difference Declaration Letter.





1 **Test Laboratory**

Notes of the Test Report 1.1

This report shall not be reproduced in full or partial, without the written approval of TA technology (shanghai) co., Ltd. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.

Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

City: Shanghai

Post code: 201201

P. R. China Country:

Contact: Xu Kai

Telephone: +86-021-50791141/2/3

Fax: +86-021-50791141/2/3-8000

Website: http://www.ta-shanghai.com

E-mail: xukai@ta-shanghai.com



General Description of Equipment under Test

Client Information

Applicant	Quectel Wireless Solutions Co., Ltd			
Applicant address	Building 5, Shanghai Business Park Phase III (Area B), No.1016			
Applicant address	Tianlin Road, Minhang District, Shanghai, China 200233			
Manufacturer	Quectel Wireless Solutions Co., Ltd			
Manufacturar address	Building 5, Shanghai Business Park Phase III (Area B), No.1016			
Manufacturer address	Tianlin Road, Minhang District, Shanghai, China 200233			

General information

EUT Description							
Model	BG95-M3,	BG95-M3, BG95-M3 MINIPCIE					
	Original	Original 864475040001736 for BG95-M3					
IMEI -	Original	864475040484106 for BG95			3 MINIPCIE		
NVICI	 Variant	864475040989633 for BG95-M3					
		3 MINIPCIE					
Hardware Version	R2.1						
Software Version	BG95M3LA	AR02A03					
Power Supply	External po	ower supply					
Antenna Type	External Ar	ntenna					
	LTE Band	4: 1.9dBi					
	LTE Band						
Antenna Gain	LTE Band						
	LTE Band 66: 2.0dBi						
	LTE Band						
Test Mode(s)		4/12/13/66/85	5				
Test Modulation	(LTE)QPSI	K 16QAM					
LTE Category	M1			Г			
Maximum E.I.R.P	LTE Band	4:		22.73dBm			
Maximum Emitin	LTE Band	66:		22.20dBm			
	LTE Band 12:			22.31dBm			
Maximum E.R.P.	LTE Band	13:		22.88dBm			
	LTE Band	85		23.25dBm			
Rated Power Supply Voltage:	3.8V						
Extreme Voltage	Minimum:	3.3V Maxir	num: 4	.3V			
Extreme Temperature	Lowest: -40°C Highest: +85°C						
	М	ode	T	x (MHz)	Rx (MHz)		
Frequency Range(s)	LTE E	Band 4	171	0 ~ 1755	2110 ~ 2155		
	LTE B	and 12	69	99 ~ 716	729 ~ 746		



LTE Band 13	777 ~ 787	746 ~ 756
LTE Band 66	1710 ~ 1780	2110 ~ 2180
LTE Band 85	698 ~ 716	728 ~ 746

Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.

2. The series model number is: BG95-M3 MINIPCIE. The difference of these models are have different marketing requirement.





3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 27C (2020)

ANSI C63.26 (2015)

Reference standard:

FCC CFR47 Part 2 (2020)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4 Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in LTE is set based on the maximum RF Output Power.

The following testing in different Bandwidth is set to detailin the following table:

Test modes are chosen to be reported as the worst case configuration below for LTE Band 4/12/13/66/85:

Test items	Modes		Baı	ndwid	lth (M	Hz)		Mod	ulation		RB		C	Test hann	
1001 1101110		1.4	3	5	10	15	20	QPSK	16QAM	1	50%	100%	L	M	Н
	LTE 4	0	0	0	0	0	0	0	0	0	0	0	0	0	0
RF power	LTE 12	0	0	0	0	-	-	0	0	0	0	0	0	0	0
output	LTE 13	-	-	0	0	-	-	0	0	0	0	0	0	0	0
Gaipai	LTE 66	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	LTE 85	-	-	0	0	-	-	0	0	0	0	0	0	0	0
	LTE 4	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Effective	LTE 12	0	0	0	0	-	-	0	0	0	0	0	0	0	0
Isotropic Radiated	LTE 13	-	-	0	0	-	-	0	0	0	0	0	0	0	0
power	LTE 66	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	LTE 85	-	-	0	0	-	-	0	0	0	0	0	0	0	0
	LTE 4	0	0	0	0	0	0	0	0	-	-	0	-	0	-
Occupied	LTE 12	0	0	0	0	-	-	0	0	-	-	0	-	0	-
Occupied Bandwidth	LTE 13	-	-	0	0	-	-	0	0	-	-	0	-	0	-
Dandwidth	LTE 66	0	0	0	0	0	0	0	0	ı	-	0	1	0	-
	LTE 85	-	ı	0	0	-	ı	0	0	ı	-	0	ı	0	-
	LTE 4	0	0	0	0	0	0	0	0	0	-	0	0	-	0
Band Edge	LTE 12	0	0	0	0	-	-	0	0	0	-	0	0	-	0
Compliance	LTE 13	-	-	0	0	-	-	0	0	0	-	0	0	-	0
Compliance	LTE 66	0	0	0	0	0	0	0	0	0	-	0	0	-	0
	LTE 85	-	-	0	0	-	-	0	0	0	-	0	0	-	0
Peak-to-Aver	LTE 4	0	0	0	0	0	0	0	0	-	-	0	-	0	-
age Power	LTE 12	0	0	0	0	-	-	0	0	-	-	0	-	0	-
Ratio	LTE 13	-	-	0	0	-	-	0	0	-	-	0	-	0	-



RF Test Report Report No.: R2108A0735-R3 **LTE 66** LTE 85 LTE 4 О LTE 12 O Frequency LTE 13 О О Ο -Stability LTE 66 Ο LTE 85 LTE 4 **Spurious** LTE 12 Emissions at LTE 13 Antenna O O LTE 66 **Terminals** LTE 85 LTE 4 LTE 12 Radiates **Spurious** LTE 13 ---**Emission** LTE 66 О ---LTE 85 1. The mark "O" means that this configuration is chosen for testing. Note 2. The mark "-" means that this configuration is not testing.





5 **Test Case Results**

5.1 **RF Power Output**


Ambient condition

Temperature	Relative humidity	Pressure		
23°C ~25°C	45%~50%	101.5kPa		

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

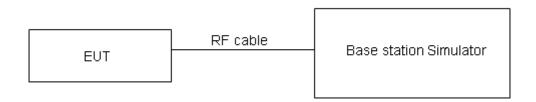

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 2, U=0.4 dB.



Test Results

175 5 14	Channel/		RB#	Conducted I	Power (dBm)
LTE Band 4	Frequency(MHz)	Index	RBstart	QPSK	16QAM
	40057/4740.7	0	1#0	20.83	19.76
	19957/1710.7	0	6#0	18.78	19.04
4 48411-	00475/4700.5	0	1#0	20.57	19.62
1.4MHz	20175/1732.5	0	6#0	18.52	18.54
	00000/4754-0	0	1#5	19.92	19.75
	20393/1754.3	0	6#0	18.63	18.48
	19965/1711.5	0	1#0	20.41	20.02
	19905/1711.5	0	6#0	18.71	18.78
3MHz	20175/1732.5	0	1#0	20.32	19.37
SIVITZ	20175/1732.5	0	6#0	18.71	18.94
	20385/1753.5	1	1#5	20.15	19.15
	20365/1755.5	0	6#0	18.81	19.01
	19975/1712.5	3	1#0	20.39	20.51
	19975/1712.5	0	6#0	19.81	19.91
5MHz	20175/1732.5	0	1#0	20.28	20.39
SIVIFIZ		0	6#0	19.73	19.67
	20375/1752.5	0	1#5	20.11	20.17
		0	6#0	19.72	19.69
	20000/1715	3	1#0	20.38	20.49
		0	4#0	20.27	20.14
10MHz	20175/1732.5	0	1#0	20.16	20.24
TOWN 12		0	4#0	20.12	19.98
	20350/1750	4	1#5	19.94	20.07
	20330/1730	7	4#2	20.04	19.91
	20025/1717.5	3	1#0	20.33	20.48
	20025/1717.5	0	6#0	20.27	20.42
15MHz	20175/1732.5	0	1#0	20.16	20.31
13101112	20173/1732.3	0	6#0	20.12	20.24
	20325/1747.5	8	1#5	19.97	20.11
	20020/1141.J	11	6#0	20.04	20.11
	20050/1720	3	1#0	20.32	20.46
	20000/1720	0	6#0	20.19	20.36
20MHz	20175/1732.5	0	1#0	20.24	20.38
ZOIVII IZ	20113/1132.3	0	6#0	20.09	20.21
	20300/1745	12	1#5	20.11	20.14
	20300/1745	15	6#0	20.11	20.16

Report No.: R2108A0735-R3



RF Test Report	Channel/		RB#		Power (dBm)
LTE Band 12	Frequency(MHz)	Index	RBstart	QPSK	16QAM
	00047/0007	0	1#0	20.02	19.76
	23017/699.7	0	6#0	18.64	18.62
1.4MHz	2200E/707 E	0	1#0	19.85	19.73
1.4Ⅳ□Z	23095/707.5	0	6#0	18.51	18.42
	23173/715.3	0	1#5	20.46	19.32
	23173/713.3	0	6#0	18.56	19.03
	23025/700.5	0	1#0	20.25	19.76
	23023/700.3	0	6#0	18.69	18.61
3MHz	23095/707.5	0	1#0	20.22	20.01
SIVII 12		0	6#0	18.47	18.58
	23165/714.5	1	1#5	20.21	19.81
		0	6#0	18.55	18.63
	23035/701.5	3	1#0	20.19	20.39
		0	6#0	19.67	19.82
5MHz	22005/707.5	0	1#0	20.01	20.21
SIVIFIZ	23095/707.5	0	6#0	19.60	19.73
	23155/713.5	0	1#5	19.96	20.19
	23100/113.0	0	6#0	19.61	19.77
	23060/704	3	1#0	20.21	20.41
	23000/704	0	4#0	20.23	20.07
10MHz	23095/707.5	0	1#0	20.16	20.30
TUIVIEZ	23093/101.3	0	4#0	20.07	19.95
	23130/711	4	1#5	19.91	20.13
	23130/111	7	4#2	20.15	19.90

LTE Band 13	Channel/	Index	RB#	Conducted I	Power (dBm)
LIE Ballu 13	Frequency(MHz)	index	RBstart	QPSK	16QAM
	23205/779.5	3	1#0	20.18	20.53
	23203/119.5	0	6#0	19.95	20.03
5MHz	23230/782	0	1#0	20.31	19.91
SIVITZ		0	6#0	19.81	20.02
		0	1#5	20.02	20.43
		0	6#0	19.82	19.84
10MHz	23230/782	0	1#0	20.11	20.53
10MHz		0	4#0	19.84	19.57



1.TE D 100	Channel/	1.1.	RB#	Conducted	Power (dBm)
LTE Band 66	Frequency(MHz)	Index	RBstart	QPSK	16QAM
	404070/4740 7	0	1#0	20.18	19.66
	131979/1710.7	0	6#0	18.38	18.49
4 4841	400000/4745	0	1#0	19.80	19.47
1.4MHz	132322/1745	0	6#0	18.34	18.08
	420665/4770 2	0	1#5	19.61	19.78
	132665/1779.3	0	6#0	18.50	18.33
	131987/1711.5	0	1#0	19.97	19.57
	131907/1711.5	0	6#0	18.32	18.25
3MHz	132322/1745	0	1#0	19.80	19.55
SIVITZ	132322/1743	0	6#0	18.20	18.12
	132657/1778.5	1	1#5	19.84	19.69
	132037/1770.3	0	6#0	18.52	18.35
	131997/1712.5	3	1#0	19.89	20.20
	131997/1712.5	0	6#0	19.35	19.36
5MHz	132322/1745	0	1#0	19.73	20.04
SIVITZ		0	6#0	19.18	19.29
	132647/1777.5	0	1#5	19.84	20.11
		0	6#0	19.55	19.57
	132022/1715	3	1#0	19.95	20.15
		0	4#0	19.88	19.79
10MHz	132022/1745	0	1#0	19.76	19.99
TOWIE		0	4#0	19.83	19.58
	400000/4775	4	1#5	19.70	20.02
	132622/1775	7	4#2	19.87	19.81
	132047/1717.5	3	1#0	19.92	20.18
	132047/1717.5	0	6#0	19.84	19.87
15MHz	132322/1745	0	1#0	19.73	20.02
TOWITZ	132322/1743	0	6#0	19.79	19.83
	132597/1772.5	8	1#5	19.85	20.09
	132381/1112.3	11	6#0	19.94	19.95
	132072/1720	3	1#0	19.90	20.19
	132012/1120	0	6#0	19.81	19.94
20MHz	132322/1745	0	1#0	19.86	20.08
ZUIVIFIZ	132322/1743	0	6#0	19.82	19.91
	132572/1770	12	1#5	19.49	19.65
	132312/1110	15	6#0	19.52	19.67



LTE Band 85	Channel/	Index	RB#	Conducted I	Power (dBm)
LIE Ballu 65	Frequency(MHz)	index	RBstart	QPSK	16QAM
	134027/700.5	3	1#0	20.70	20.63
	134027/700.5	0	6#0	20.46	20.54
ENAL I-	124002/707	0	1#0	21.18	20.71
5MHz	134092/707	0	6#0	20.74	20.70
	134157/713.5	0	1#5	21.16	20.64
		0	6#0	20.71	20.63
	134052/703	3	1#0	20.91	20.37
		0	4#0	20.55	20.74
10MHz	134092/707	0	1#0	21.15	20.59
TUIVIEZ	134092/101	0	4#0	21.08	21.29
	12/122/711	4	1#5	21.28	20.62
	134132/711	7	4#2	21.27	21.40



5.2 Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

- 1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI C63.26 (2015).
- a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- b) Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- c) Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading.LOSS = Generator Output Power (dBm) Analyzer reading (dBm)
- e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation:ERP (dBm) = LVL (dBm) + LOSS (dB)
- f) The maximum ERP is the maximum value determined in the preceding step.
- g) When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:


EIRP (dBm) = Output Power (dBm) - Losses (dB) + Antenna Gain (dBi) where:dBd refers to gain relative to an ideal dipole.

EIRP (dBm) = ERP (dBm) + 2.15 (dB.)

The RB allocation refers to section 5.1, using the maximum output power configuration.



Test setup

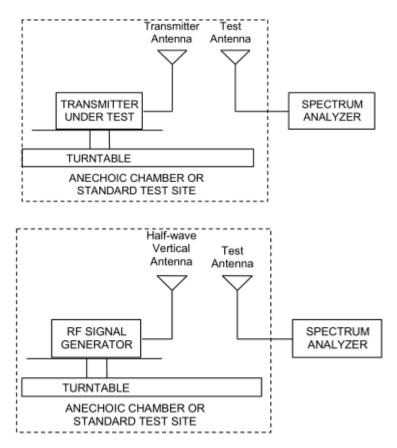

Note: Area side:2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

Limits

Rule Part 27.50(b) (10) specifies that "Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP"

Rule Part 27.50(c) (10) specifies that "Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP"

Rule Part 27.50(d) (4) specifies that "Fixed, mobile and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP"

Part 27.50(b)(10)Limit	≤ 3 W (34.77 dBm)
Part 27.50(c)(10)Limit	≤ 3 W (34.77 dBm)
Part 27.50(d)(4)Limit	≤ 1 W (30 dBm)

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 2, U = 1.19 dB



Test Results

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

			LTE Ban	nd 4			
	Channel/		RB#	EIRP	(dBm)	Limit	
Mode	Frequency(MHz)	Index	RBstart	QPSK	16QAM	(dBm)	Conclusion
	40057/4740.7	0	1#0	22.73	21.66	30	Pass
	19957/1710.7	0	6#0	20.68	20.94	30	Pass
4 4111-	00475/4700.5	0	1#0	22.47	21.52	30	Pass
1.4MHz	20175/1732.5	0	6#0	20.42	20.44	30	Pass
	20202/4754.2	0	1#5	21.82	21.65	30	Pass
	20393/1754.3	0	6#0	20.53	20.38	30	Pass
	19965/1711.5	0	1#0	22.31	21.92	30	Pass
	19905/1711.5	0	6#0	20.61	20.68	30	Pass
3MHz	20175/1732.5	0	1#0	22.22	21.27	30	Pass
SIVITIZ	20175/1752.5	0	6#0	20.61	20.84	30	Pass
	20205/4752.5	1	1#5	22.05	21.05	30	Pass
	20385/1753.5	0	6#0	20.71	20.91	30	Pass
	10075/1710 5	3	1#0	22.29	22.41	30	Pass
	19975/1712.5	0	6#0	21.71	21.81	30	Pass
5MHz	20175/1732.5	0	1#0	22.18	22.29	30	Pass
SIVITZ		0	6#0	21.63	21.57	30	Pass
	20375/1752.5	0	1#5	22.01	22.07	30	Pass
		0	6#0	21.62	21.59	30	Pass
	20000/1715	3	1#0	22.28	22.39	30	Pass
	20000/1713	0	4#0	22.17	22.04	30	Pass
10MHz	20175/1732.5	0	1#0	22.06	22.14	30	Pass
TOWNIZ	20173/1732.3	0	4#0	22.02	21.88	30	Pass
	20350/1750	4	1#5	21.84	21.97	30	Pass
	20330/1730	7	4#2	21.94	21.81	30	Pass
	20025/1717.5	3	1#0	22.23	22.38	30	Pass
	20023/1717.3	0	6#0	22.17	22.32	30	Pass
15MHz	20175/1732.5	0	1#0	22.06	22.21	30	Pass
TOIVINZ	20175/1752.5	0	6#0	22.02	22.14	30	Pass
	20325/1747.5	8	1#5	21.87	22.01	30	Pass
	20323/1747.3	11	6#0	21.94	22.01	30	Pass
	20050/1720	3	1#0	22.22	22.36	30	Pass
	20030/1720	0	6#0	22.09	22.26	30	Pass
20MHz	20175/1732.5	0	1#0	22.14	22.28	30	Pass
ZUIVINZ	20173/1732.3	0	6#0	21.99	22.11	30	Pass
	20300/1745	12	1#5	22.01	22.04	30	Pass
	20300/1743	15	6#0	22.01	22.06	30	Pass

			LTE Ban	d 12			
34 . 1.	Channel/		RB# ERP(dBm)		Limit	0	
Mode	Frequency(MHz)	Index	RBstart	QPSK	16QAM	(dBm)	Conclusion
	20407/824.7	0	1#0	21.87	21.61	34.77	Pass
	20407/824.7	0	6#0	20.49	20.47	34.77	Pass
1.4MHz	20525/836.5	0	1#0	21.70	21.58	34.77	Pass
1.4IVI⊓Z	20525/836.5	0	6#0	20.36	20.27	34.77	Pass
	20042/040.2	0	1#5	22.31	21.17	34.77	Pass
	20643/848.3	0	6#0	20.41	20.88	34.77	Pass
	20415/825.5	0	1#0	22.10	21.61	34.77	Pass
	20415/625.5	0	6#0	20.54	20.46	34.77	Pass
3MHz	20525/926 F	0	1#0	22.07	21.86	34.77	Pass
3IVIHZ	20525/836.5	0	6#0	20.32	20.43	34.77	Pass
	20635/847.5	1	1#5	22.06	21.66	34.77	Pass
		0	6#0	20.40	20.48	34.77	Pass
	20425/826.5	3	1#0	22.04	22.24	34.77	Pass
		0	6#0	21.52	21.67	34.77	Pass
ENAL I-	20525/926 F	0	1#0	21.86	22.06	34.77	Pass
5MHz	20525/836.5	0	6#0	21.45	21.58	34.77	Pass
	20625/046.5	0	1#5	21.81	22.04	34.77	Pass
	20625/846.5	0	6#0	21.46	21.62	34.77	Pass
	20450/020	3	1#0	22.06	22.26	34.77	Pass
	20450/829	0	4#0	22.08	21.92	34.77	Pass
10MHz	20525/926 5	0	1#0	22.01	22.15	34.77	Pass
TUIVITZ	20525/836.5	0	4#0	21.92	21.80	34.77	Pass
	20600/844	4	1#5	21.76	21.98	34.77	Pass
	20600/844	7	4#2	22.00	21.75	34.77	Pass

	LTE Band 13									
Mada	Channel/	Index	RB#	ERP(dBm)	Limit	Conclusion			
Mode	Frequency(MHz)	illuex	RBstart	QPSK	16QAM	(dBm)	Conclusion			
	23205/779.5	3	1#0	22.53	22.88	34.77	Pass			
	23205/119.5	0	6#0	22.30	22.38	34.77	Pass			
5MHz	23230/782	0	1#0	22.66	22.26	34.77	Pass			
SIVITZ		0	6#0	22.16	22.37	34.77	Pass			
	22255/704.5	0	1#5	22.37	22.78	34.77	Pass			
	23255/784.5	0	6#0	22.17	22.19	34.77	Pass			
10MHz	23230/782	0	1#0	22.46	22.88	34.77	Pass			
		0	4#0	22.19	21.92	34.77	Pass			





			LTE Ban	d 66			
	Channel/		RB#	EIRP((dBm)	Limit	
Mode	Frequency(MHz)	Index	RBstart	QPSK	16QAM	(dBm)	Conclusion
	424070/4740 7	0	1#0	22.18	21.66	30	Pass
	131979/1710.7	0	6#0	20.38	20.49	30	Pass
4 41411-	42222/4745	0	1#0	21.80	21.47	30	Pass
1.4MHz	132322/1745	0	6#0	20.34	20.08	30	Pass
	132665/1779.3	0	1#5	21.61	21.78	30	Pass
	132003/1779.3	0	6#0	20.50	20.33	30	Pass
	131987/1711.5	0	1#0	21.97	21.57	30	Pass
	131907/1711.5	0	6#0	20.32	20.25	30	Pass
3MHz	132322/1745	0	1#0	21.80	21.55	30	Pass
SIVITIZ	132322/1745	0	6#0	20.20	20.12	30	Pass
	132657/1778.5	1	1#5	21.84	21.69	30	Pass
	132037/1770.5	0	6#0	20.52	20.35	30	Pass
	121007/1712 5	3	1#0	21.89	22.20	30	Pass
	131997/1712.5	0	6#0	21.35	21.36	30	Pass
5MHz	132322/1745	0	1#0	21.73	22.04	30	Pass
SIVITZ		0	6#0	21.18	21.29	30	Pass
	132647/1777.5	0	1#5	21.84	22.11	30	Pass
		0	6#0	21.55	21.57	30	Pass
	132022/1715	3	1#0	21.95	22.15	30	Pass
		0	4#0	21.88	21.79	30	Pass
10MHz	132022/1745	0	1#0	21.76	21.99	30	Pass
TOWN 12	132022/1743	0	4#0	21.83	21.58	30	Pass
	132622/1775	4	1#5	21.70	22.02	30	Pass
	132022/1773	7	4#2	21.87	21.81	30	Pass
	132047/1717.5	3	1#0	21.92	22.18	30	Pass
	132047/1717.3	0	6#0	21.84	21.87	30	Pass
15MHz	132322/1745	0	1#0	21.73	22.02	30	Pass
13111112	132322/1743	0	6#0	21.79	21.83	30	Pass
	132597/1772.5	8	1#5	21.85	22.09	30	Pass
	132337/1772.3	11	6#0	21.94	21.95	30	Pass
	132072/1720	3	1#0	21.90	22.19	30	Pass
	132072/1720	0	6#0	21.81	21.94	30	Pass
20MHz	132322/1745	0	1#0	21.86	22.08	30	Pass
ZUIVII IZ	102022/1140	0	6#0	21.82	21.91	30	Pass
	132572/1770	12	1#5	21.49	21.65	30	Pass
	102312/1110	15	6#0	21.52	21.67	30	Pass





			LTE Ban	d 85			
Mode	Channel/	Indov	RB#	ERP(dBm)	Limit	Canalusian
Mode	Frequency(MHz)	Index	RBstart	QPSK	16QAM	(dBm)	Conclusion
	134027/700.5	3	1#0	22.55	22.48	34.77	Pass
	134027/700.5	0	6#0	22.31	22.39	34.77	Pass
5MHz	134092/707	0	1#0	23.03	22.56	34.77	Pass
SIVITZ	134092/707	0	6#0	22.59	22.55	34.77	Pass
	134157/713.5	0	1#5	23.01	22.49	34.77	Pass
		0	6#0	22.56	22.48	34.77	Pass
	134052/703	3	1#0	22.76	22.22	34.77	Pass
	134052/703	0	4#0	22.40	22.59	34.77	Pass
10MHz	424002/707	0	1#0	23.00	22.44	34.77	Pass
TUIVIMZ	134092/707	0	4#0	22.93	23.14	34.77	Pass
	12/122/711	4	1#5	23.13	22.47	34.77	Pass
	134132/711	7	4#2	23.12	23.25	34.77	Pass



5.3 Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure			
23°C ~25°C	45%~50%	101.5kPa			


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 51kHz, VBW is set to 160kHz for LTE Band 4/12/13/66/85.

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

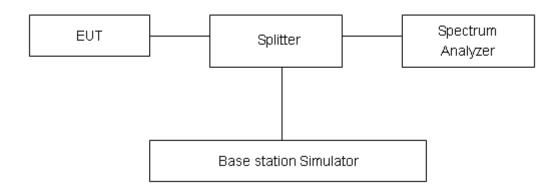

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 2, U=624Hz.

Test Result

			Channal/			Bandwic	lth(MHz)
Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)	RB	Index	99%	00 dD =
			r requericy(ivii iz)			Power	-26dBc
	1.4MHz	QPSK	20175/1732.5	6#0	0	1.110	1.319
	1.4IVI⊓Z	16QAM	20175/1732.5	6#0	0	0.936	1.164
	3MHz	QPSK	20175/1732.5	6#0	0	1.115	1.361
	SIVITZ	16QAM	20175/1732.5	6#0	0	0.949	1.163
	5MHz	QPSK	20175/1732.5	6#0	0	1.118	1.338
Band4	SIVITZ	16QAM	20175/1732.5	6#0	0	0.963	1.223
Danu4	10MHz	QPSK	20175/1732.5	6#0	0	1.125	1.330
	TUIVITZ	16QAM	20175/1732.5	6#0	0	0.973	1.251
	1 <i>5</i> MU>	QPSK	20175/1732.5	6#0	0	1.130	1.352
	15MHz	16QAM	20175/1732.5	6#0	0	0.974	1.222
	2014117	QPSK	20175/1732.5	6#0	0	1.131	1.347
	20MHz	16QAM	20175/1732.5	6#0	0	0.974	1.241

			Channel/			Bandwic	lth(MHz)
Mode	Bandwidth	Modulation	Frequency(MHz)	RB	Index	99%	-26dBc
			i requericy(ivii iz)			Power	
	1.4MHz	QPSK	23095/707.5	6#0	0	1.110	1.349
	1.4₩ΠΖ	16QAM	23095/707.5	6#0	0	0.943	1.180
	3MHz	QPSK	23095/707.5	6#0	0	1.107	1.360
Band12		16QAM	23095/707.5	6#0	0	0.955	1.268
Danuiz	5MHz	QPSK	23095/707.5	6#0	0	1.116	1.359
	SIVITZ	16QAM	23095/707.5	6#0	0	0.959	1.171
	40141-	QPSK	23095/707.5	6#0	0	1.126	1.375
	10MHz	16QAM	23095/707.5	6#0	0	0.960	1.262

			Channal/	RB		Bandwidth(MHz)		
Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)		Index	99%	-26dBc	
						Power		
	5MHz	QPSK	23230/782	6#0	0	1.113	1.340	
Pand12	SIVITZ	16QAM	23230/782	6#0	0	0.950	1.156	
Band13	10MHz	QPSK	23230/782	6#0	0	1.121	1.339	
		16QAM	23230/782	6#0	0	0.973	1.222	



			Channel/			Bandwic	lth(MHz)
Mode	Bandwidth	Modulation		RB	Index	99%	-26dBc
			Frequency(MHz)			Power	
	1.4MHz	QPSK	132322/1745	6#0	0	1.101	1.328
	1. 4 IVITIZ	16QAM	132322/1745	6#0	0	0.941	1.149
	3MHz	QPSK	132322/1745	6#0	0	1.116	1.364
	SIVITZ	16QAM	132322/1745	6#0	0	0.954	1.161
	5MHz	QPSK	132322/1745	6#0	0	1.111	1.316
Band66		16QAM	132322/1745	6#0	0	0.955	1.180
Dariuoo	10MHz	QPSK	132322/1745	6#0	0	1.119	1.337
	TOWINZ	16QAM	132322/1745	6#0	0	0.936	1.252
	15MHz	QPSK	132322/1745	6#0	0	1.125	1.353
	ISIVITZ	16QAM	132322/1745	6#0	0	0.962	1.210
	00MI.I-	QPSK	132322/1745	6#0	0	1.134	1.376
	20MHz	16QAM	132322/1745	6#0	0	0.968	1.172

Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)	RB	Index	Bandwidth(MHz)	
						99%	-26dBc
						Power	
Band85	5MHz	QPSK	134092/707	6#0	0	1.121	1.324
		16QAM	134092/707	6#0	0	0.955	1.310
	10MHz	QPSK	134092/707	6#0	0	1.112	1.317
		16QAM	134092/707	6#0	0	0.957	1.279



LTE Band 4 QPSK 1.4MHz CH-Middle



LTE Band 4 QPSK 3MHz CH-Middle




LTE Band 4 QPSK 5MHz CH-Middle



LTE Band 4 QPSK 10MHz CH-Middle



LTE Band 4 QPSK 15MHz CH-Middle

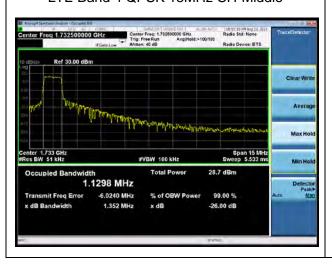

LTE Band 4 QPSK 20MHz CH-Middle



LTE Band 4 16QAM 1.4MHz CH-Middle



LTE Band 4 16QAM 3MHz CH-Middle



LTE Band 4 16QAM 5MHz CH-Middle



LTE Band 4 16QAM 10MHz CH-Middle



LTE Band 4 16QAM 15MHz CH-Middle




LTE Band 4 16QAM 20MHz CH-Middle






LTE Band 12 QPSK 1.4MHz CH-Middle

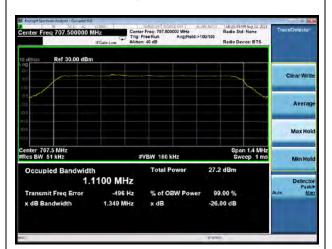

LTE Band 12 QPSK 3MHz CH-Middle



LTE Band 12 QPSK 5MHz CH-Middle

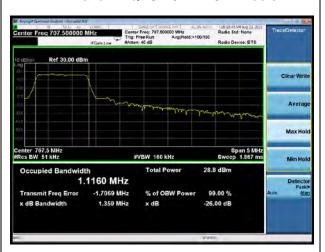

LTE Band 12 QPSK 10MHz CH-Middle



LTE Band 12 16QAM 1.4MHz CH-Middle



LTE Band 12 16QAM 3MHz CH-Middle






LTE Band 12 16QAM 5MHz CH-Middle



LTE Band 12 16QAM 10MHz CH-Middle



LTE Band 13 QPSK 5MHz CH-Middle

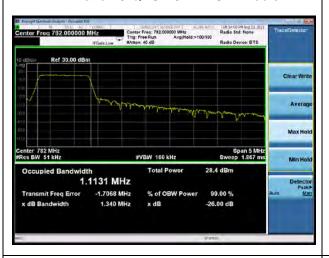

LTE Band 13 QPSK 10MHz CH-Middle



LTE Band 13 16QAM 5MHz CH-Middle



LTE Band 13 16QAM 10MHz CH-Middle






LTE Band 66 QPSK 1.4MHz CH-Middle



LTE Band 66 QPSK 3MHz CH-Middle




LTE Band 66 QPSK 5MHz CH-Middle

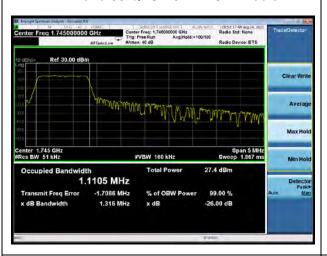

LTE Band 66 QPSK 10MHz CH-Middle



LTE Band 66 QPSK 15MHz CH-Middle

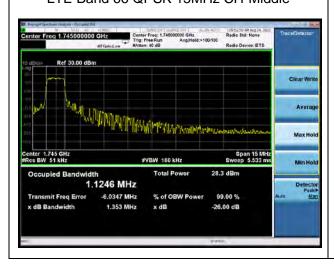

LTE Band 66 QPSK 20MHz CH-Middle



LTE Band 66 16QAM 1.4MHz CH-Middle



LTE Band 66 16QAM 3MHz CH-Middle




LTE Band 66 16QAM 5MHz CH-Middle



LTE Band 66 16QAM 10MHz CH-Middle



LTE Band 66 16QAM 15MHz CH-Middle

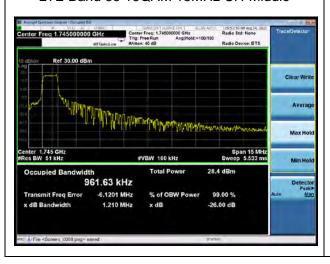

LTE Band 66 16QAM 20MHz CH-Middle





LTE Band 85 QPSK 5MHz CH-Middle



LTE Band 85 QPSK 10MHz CH-Middle



LTE Band 85 16QAM 5MHz CH-Middle



LTE Band 85 16QAM 10MHz CH-Middle



5.4 Band Edge Compliance

Ambient condition

Temperature	Relative humidity	Pressure		
23°C ~25°C	45%~50%	101.5kPa		

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured.

The testing follows KDB 971168 D01 v03r01 Section 6.0

The EUT was connected to spectrum analyzer and system simulator via a power divider.

The band edges of low and high channels for the highest RF powers were measured.

RBW is set to 51kHz, VBW is set to 160kHz for LTE Band 4/12/13/66/85.


on spectrum analyzer.

Set spectrum analyzer with RMS detector.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Checked that all the results comply with the emission limit line.

Test Setup

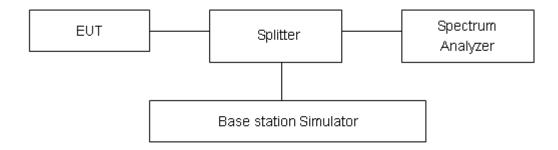

Limits

Rule Part 27.53(i) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2305 and 2320 MHz.

Rule Part 27.53(h) specifies that "for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}$ (P) dB"

Rule Part 27.53(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any



emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least 43 + 10 log (P) dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

Rule Part 27.53(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

Rule Part 27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than 76 + 10 log (P) dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 1.96, U=0.684dB.



Test Result

All the test traces in the plots shows the test results clearly.







LTE Band 4 QPSK 1.4MHz CH-High, 1 RB




LTE Band 4 QPSK 1.4MHz CH-Low, 100%RB

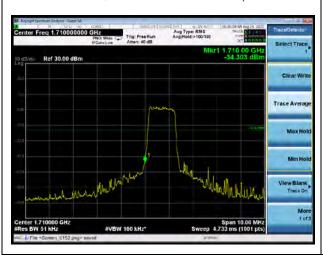


LTE Band 4 QPSK 1.4MHz CH-High, 100%RB

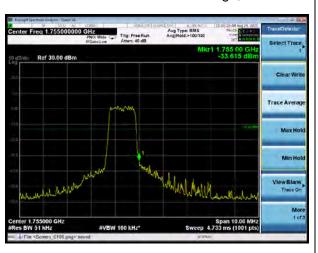

LTE Band 4 QPSK 3MHz CH-Low, 1 RB

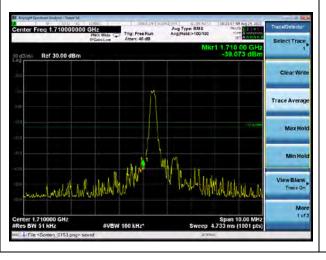


LTE Band 4 QPSK 3MHz CH-High, 1 RB

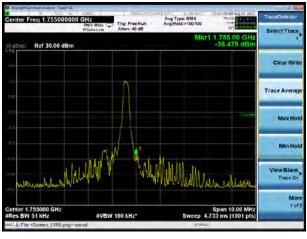


LTE Band 4 QPSK 3MHz CH-Low, 100%RB




LTE Band 4 QPSK 3MHz CH-High, 100%RB

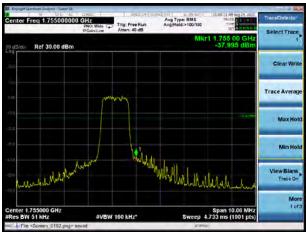


LTE Band 4 QPSK 5MHz CH-Low, 1 RB

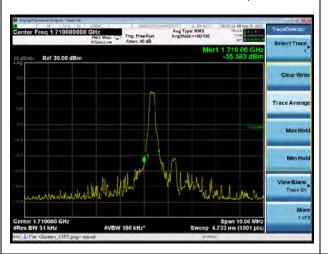


LTE Band 4 QPSK 5MHz CH-High, 1 RB

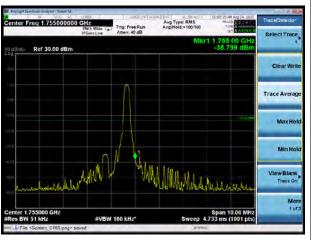


LTE Band 4 QPSK 5MHz CH-Low, 100%RB

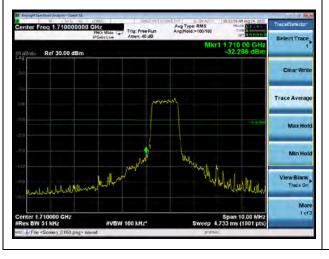


LTE Band 4 QPSK 5MHz CH-High, 100%RB

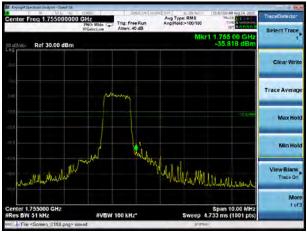


LTE Band 4 QPSK 10MHz CH-Low, 1 RB

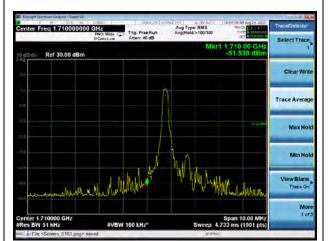


LTE Band 4 QPSK 10MHz CH-High, 1 RB

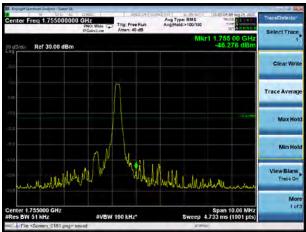


LTE Band 4 QPSK 10MHz CH-Low, 100%RB

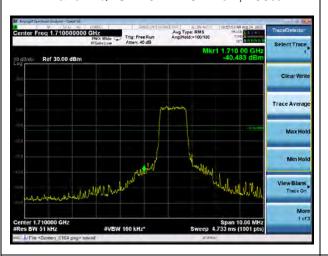

LTE Band 4 QPSK 10MHz CH-High, 100%RB

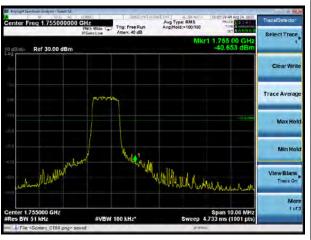


LTE Band 4 QPSK 15MHz CH-Low, 1 RB

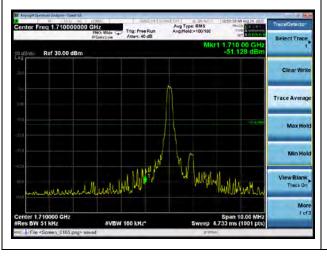


LTE Band 4 QPSK 15MHz CH-High, 1 RB




LTE Band 4 QPSK 15MHz CH-Low, 100%RB

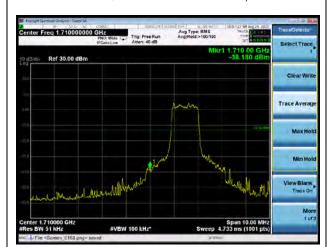


LTE Band 4 QPSK 15MHz CH-High, 100%RB

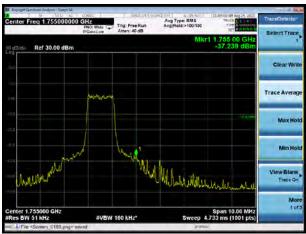


LTE Band 4 QPSK 20MHz CH-Low, 1 RB

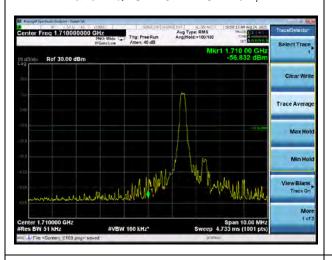


LTE Band 4 QPSK 20MHz CH-High, 1 RB

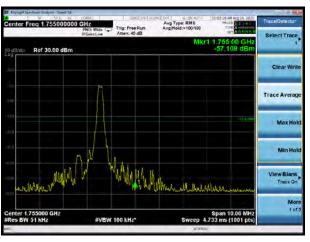


LTE Band 4 QPSK 20MHz CH-Low, 100%RB

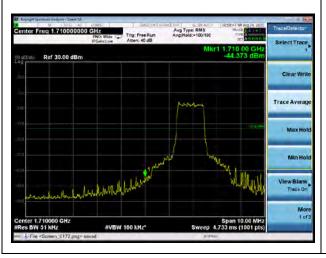


LTE Band 4 QPSK 20MHz CH-High, 100%RB

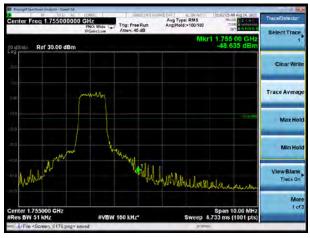


LTE Band 4 16QAM 1.4MHz CH-Low, 1 RB

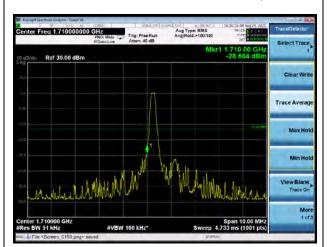


LTE Band 4 16QAM 1.4MHz CH-High, 1 RB

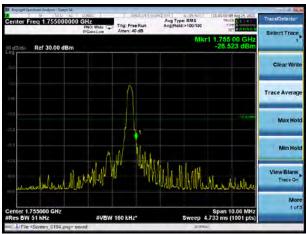


LTE Band 4 16QAM 1.4MHz CH-Low, 100%RB

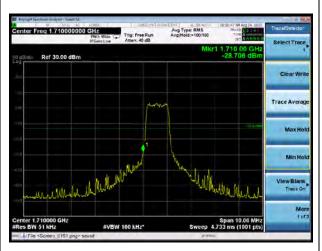


LTE Band 4 16QAM 1.4MHz CH-High, 100%RB

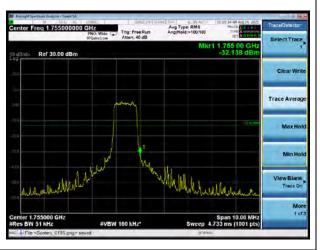


LTE Band 4 16QAM 3MHz CH-Low, 1 RB

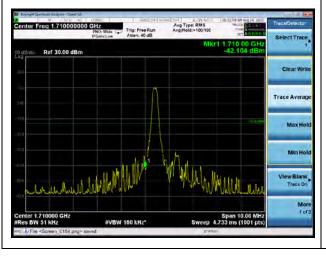


LTE Band 4 16QAM 3MHz CH-High, 1 RB

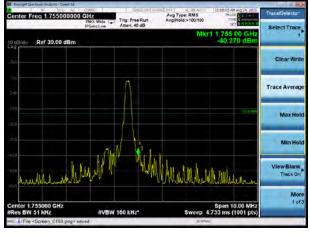


LTE Band 4 16QAM 3MHz CH-Low, 100%RB

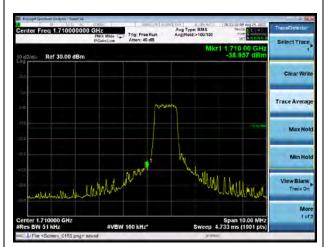


LTE Band 4 16QAM 3MHz CH-High, 100%RB

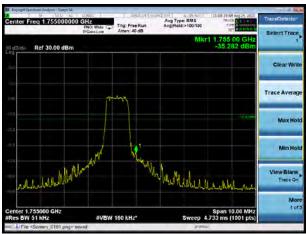


LTE Band 4 16QAM 5MHz CH-Low, 1 RB

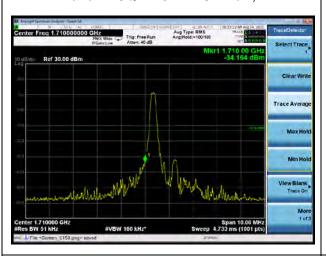


LTE Band 4 16QAM 5MHz CH-High, 1 RB

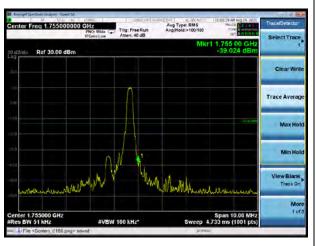


LTE Band 4 16QAM 5MHz CH-Low, 100%RB

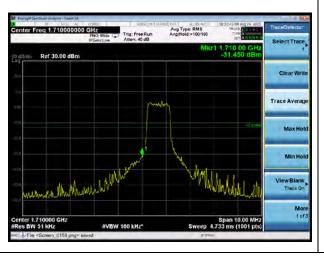

LTE Band 4 16QAM 5MHz CH-High, 100%RB

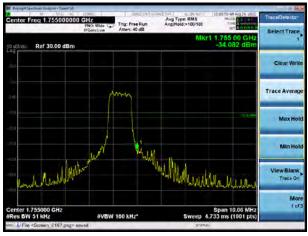


LTE Band 4 16QAM 10MHz CH-Low, 1 RB

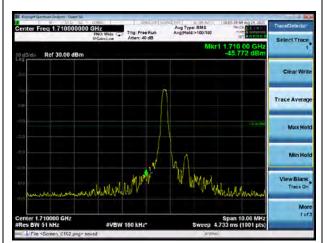

LTE Band 4 16QAM 10MHz CH-High, 1 RB




LTE Band 4 16QAM 10MHz CH-Low, 100%RB

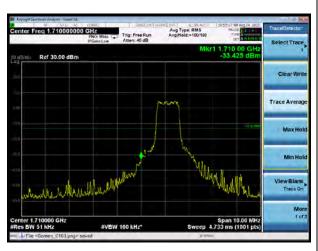

LTE Band 4 16QAM 10MHz CH-High, 100%RB




LTE Band 4 16QAM 15MHz CH-Low, 1 RB

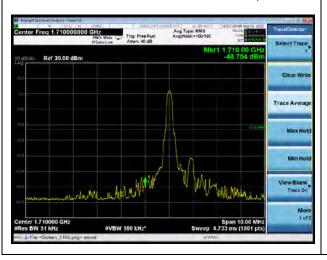


LTE Band 4 16QAM 15MHz CH-High, 1 RB




LTE Band 4 16QAM 15MHz CH-Low, 100%RB

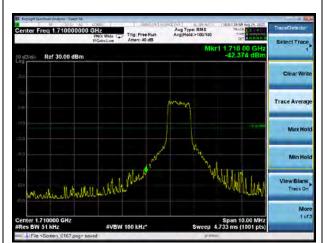


LTE Band 4 16QAM 15MHz CH-High, 100%RB

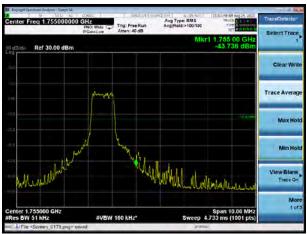


LTE Band 4 16QAM 20MHz CH-Low, 1 RB

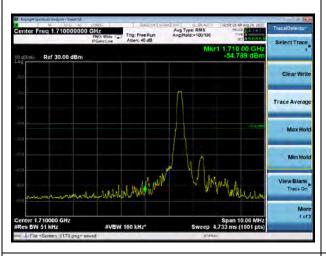


LTE Band 4 16QAM 20MHz CH-High, 1 RB

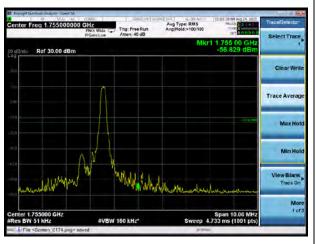

LTE Band 4 16QAM 20MHz CH-Low, 100%RB

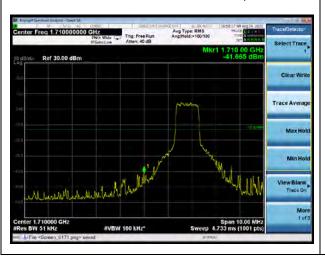


LTE Band 4 16QAM 20MHz CH-High, 100%RB

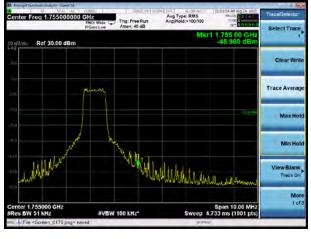

LTE Band 12 QPSK 1.4MHz CH-Low, 1 RB



LTE Band 12 QPSK 1.4MHz CH-High, 1 RB

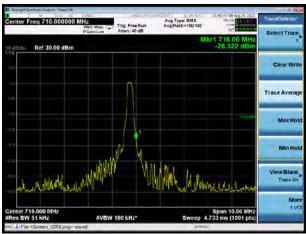


LTE Band 12 QPSK 1.4MHz CH-Low, 100%RB




LTE Band 12 QPSK 1.4MHz CH-High, 100%RB




LTE Band 12 QPSK 3MHz CH-Low, 1 RB

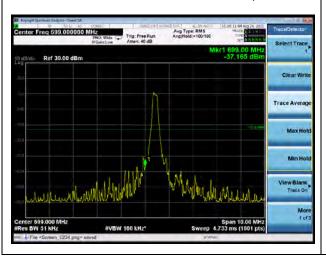

LTE Band 12 QPSK 3MHz CH-High, 1 RB

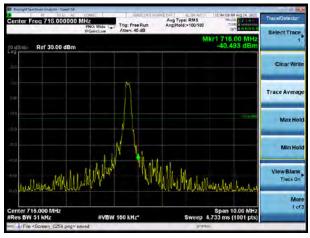


LTE Band 12 QPSK 3MHz CH-Low, 100%RB

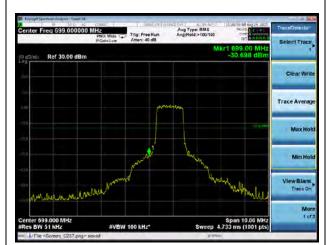


LTE Band 12 QPSK 3MHz CH-High, 100%RB




LTE Band 12 QPSK 5MHz CH-Low, 1 RB

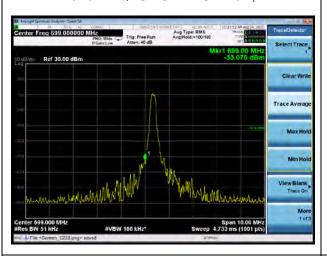

LTE Band 12 QPSK 5MHz CH-High, 1 RB

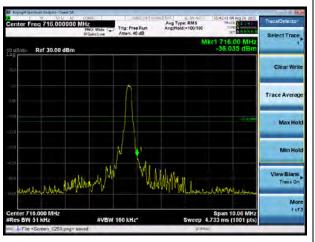


LTE Band 12 QPSK 5MHz CH-Low, 100%RB

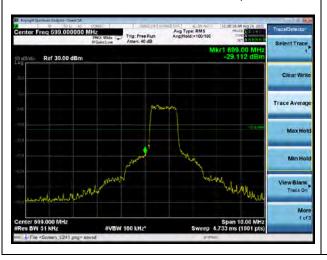


LTE Band 12 QPSK 5MHz CH-High, 100%RB




LTE Band 12 QPSK 10MHz CH-Low, 1 RB

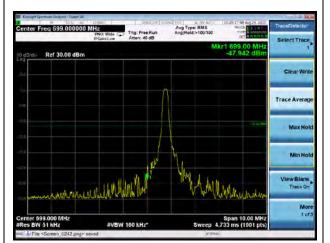


LTE Band 12 QPSK 10MHz CH-High, 1 RB

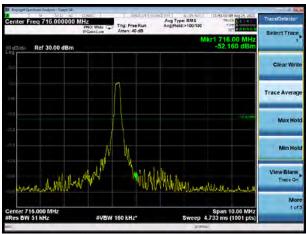

LTE Band 12 QPSK 10MHz CH-Low, 100%RB

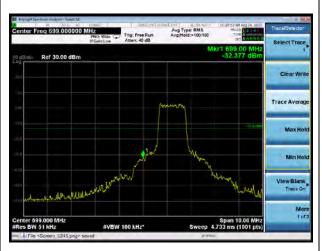


LTE Band 12 QPSK 10MHz CH-High, 100%RB

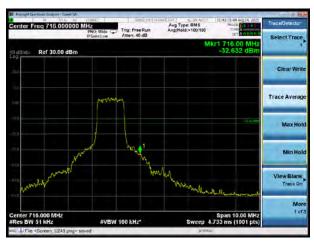


LTE Band 12 16QAM 1.4MHz CH-Low, 1 RB




LTE Band 12 16QAM 1.4MHz CH-High, 1 RB

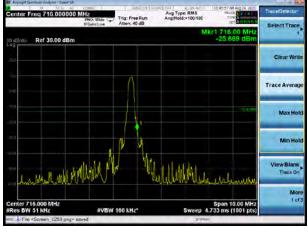


LTE Band 12 16QAM 1.4MHz CH-Low, 100%RB

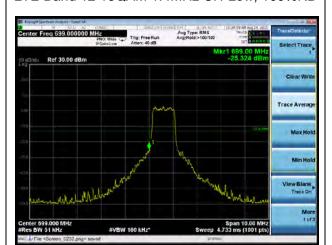

LTE Band 12 16QAM 1.4MHz CH-High, 100%RB

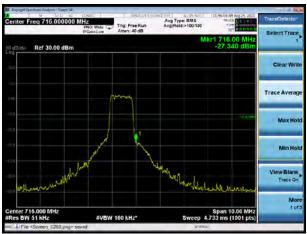


LTE Band 12 16QAM 3MHz CH-Low, 1 RB

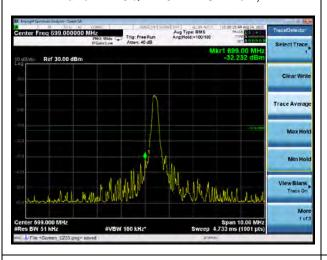


LTE Band 12 16QAM 3MHz CH-High, 1 RB



LTE Band 12 16QAM 3MHz CH-Low, 100%RB

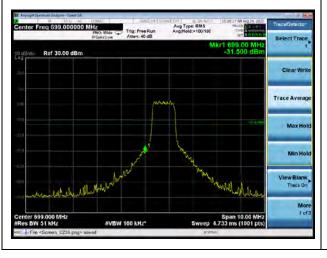


LTE Band 12 16QAM 3MHz CH-High, 100%RB

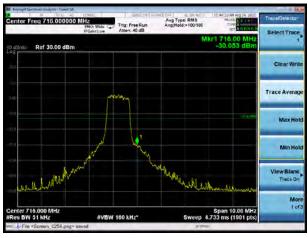

LTE Band 12 16QAM 5MHz CH-Low, 1 RB




LTE Band 12 16QAM 5MHz CH-High, 1 RB

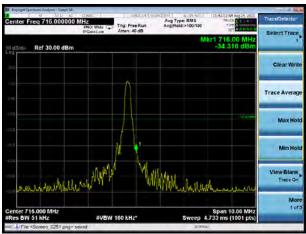


LTE Band 12 16QAM 5MHz CH-Low, 100%RB



LTE Band 12 16QAM 5MHz CH-High, 100%RB

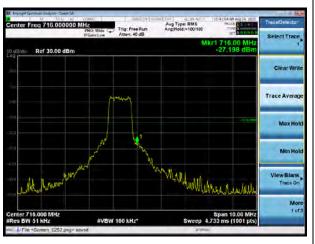



LTE Band 12 16QAM 10MHz CH-Low, 1 RB

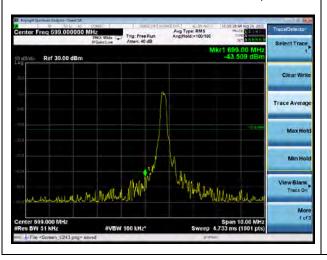


LTE Band 12 16QAM 10MHz CH-High, 1 RB




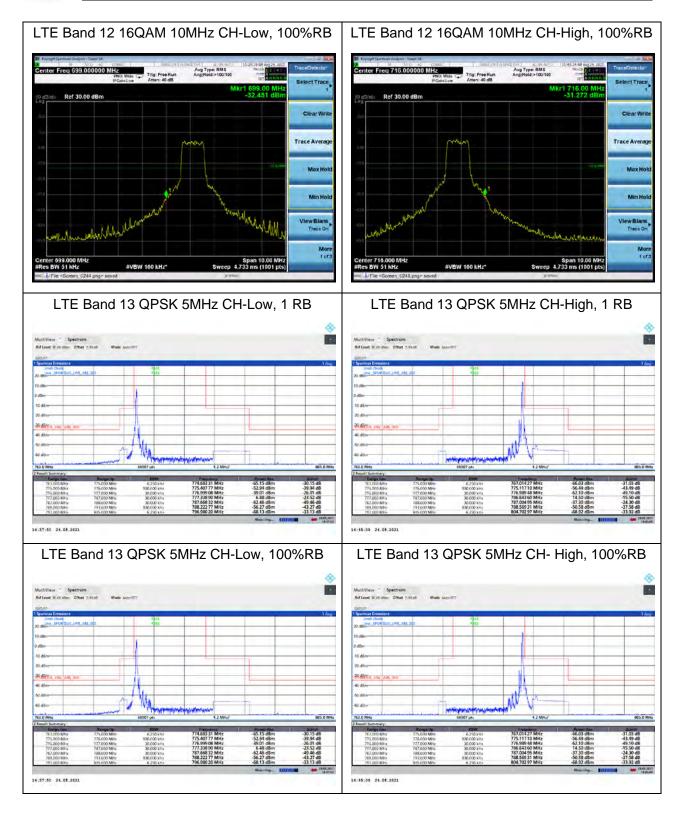

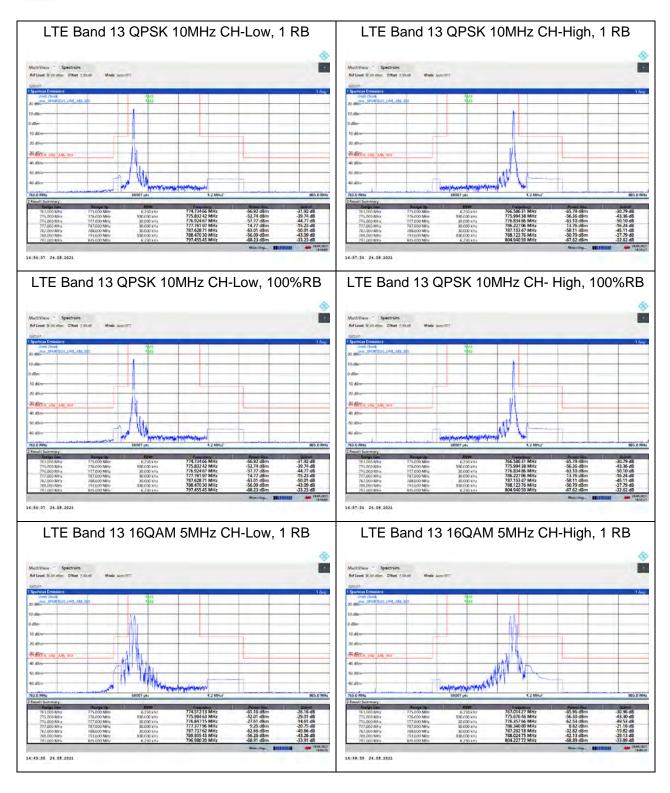


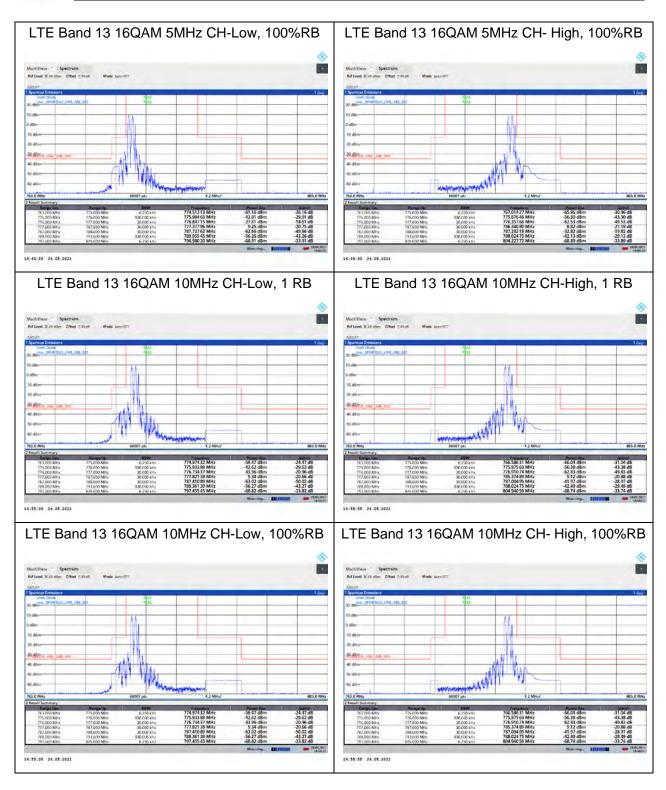




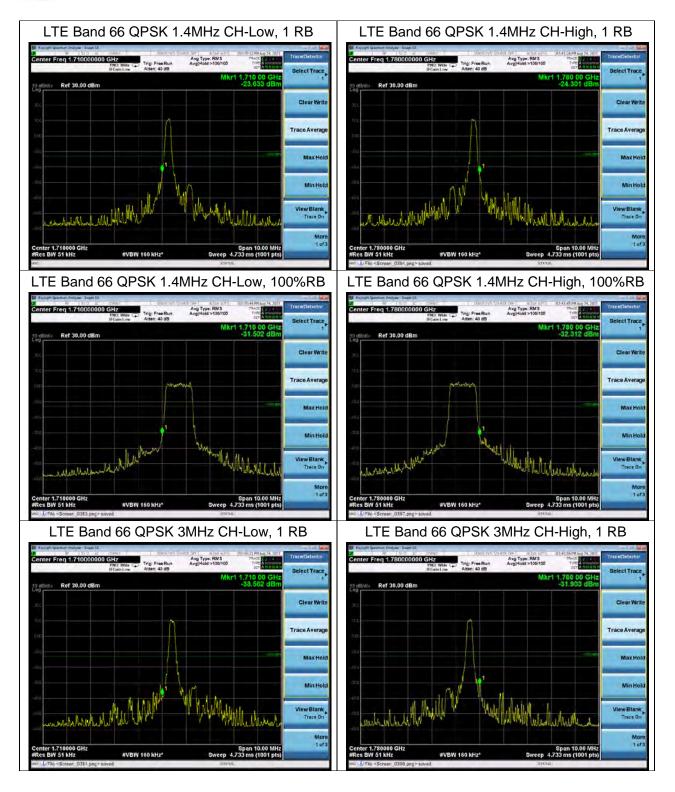




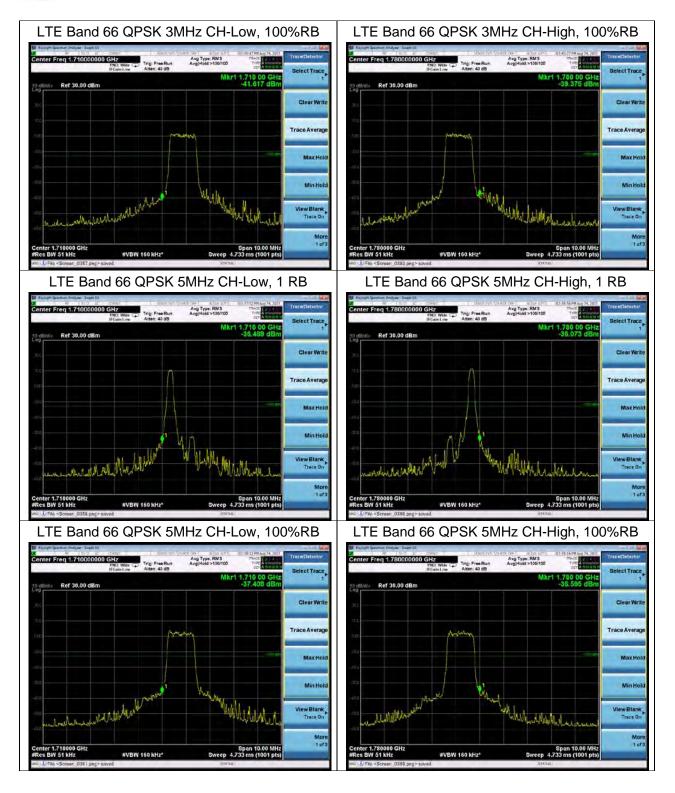


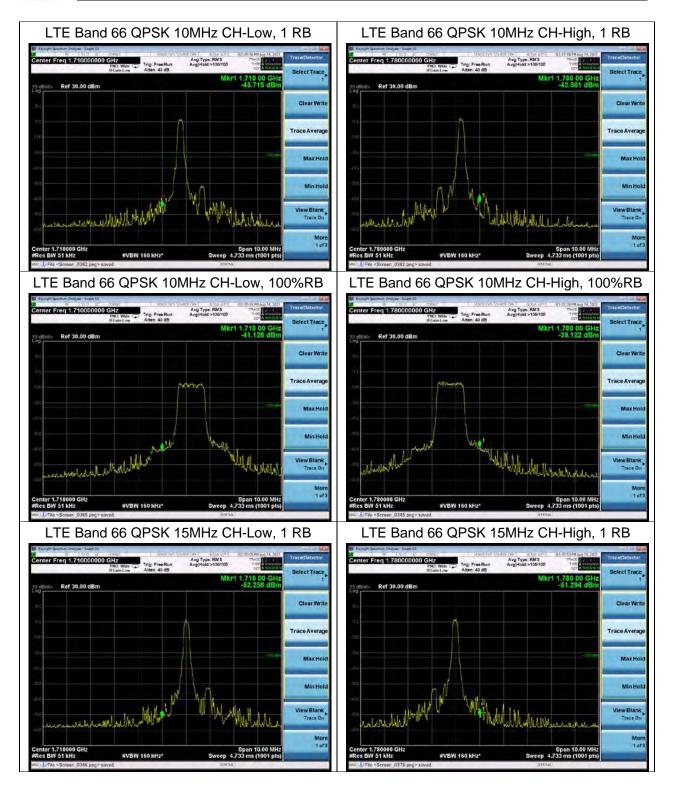




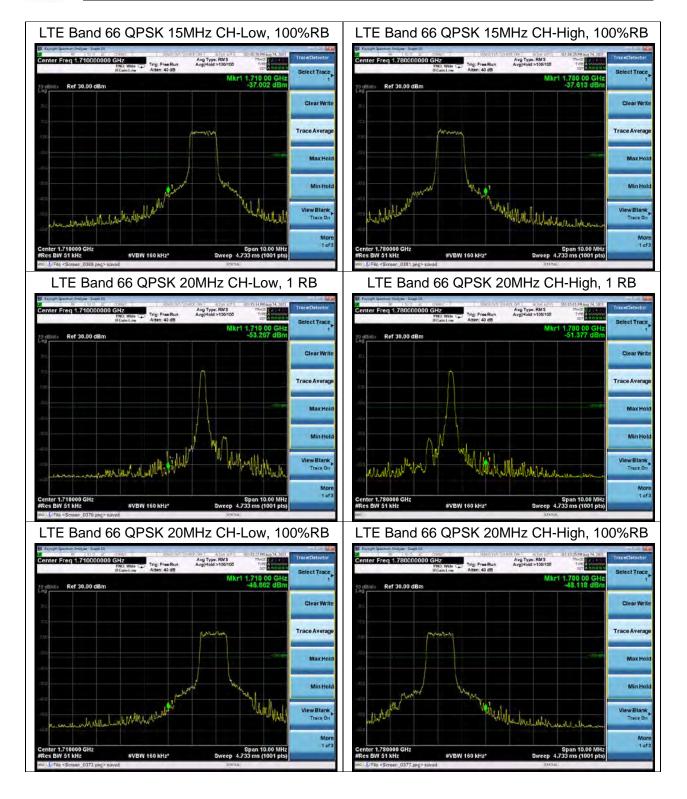




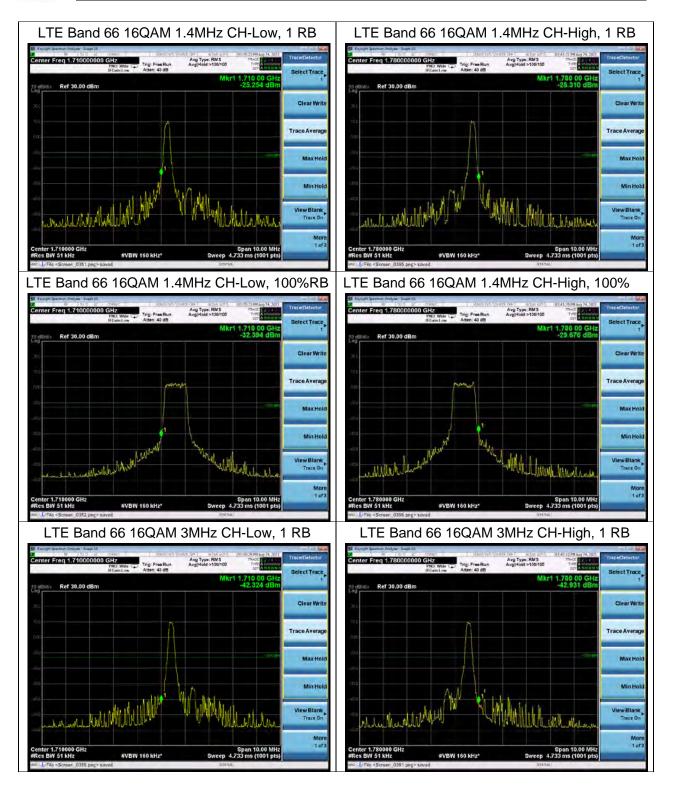




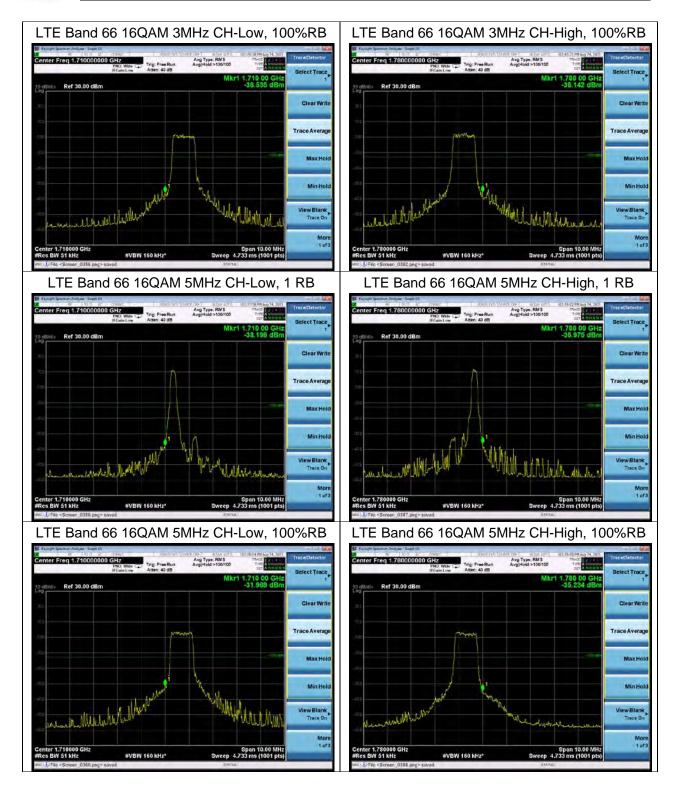



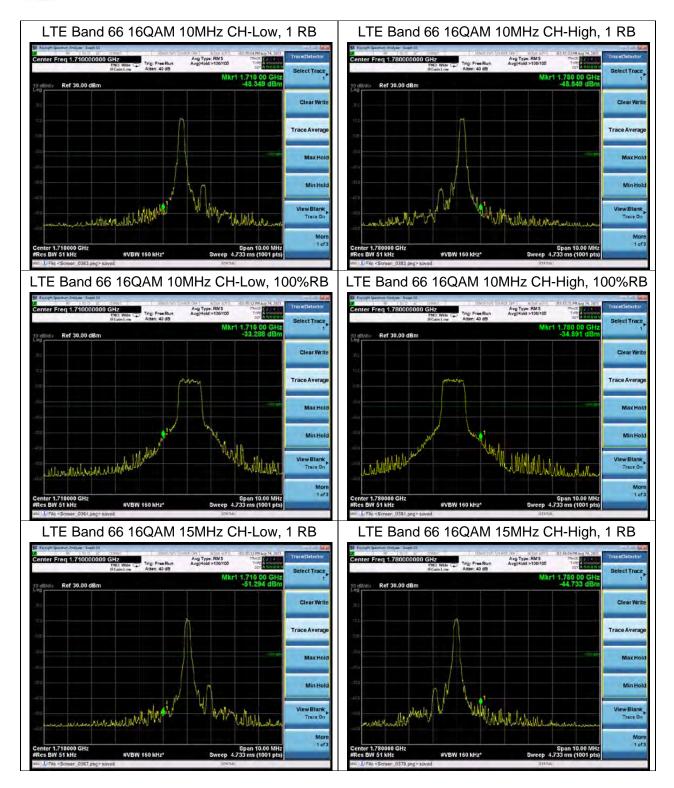




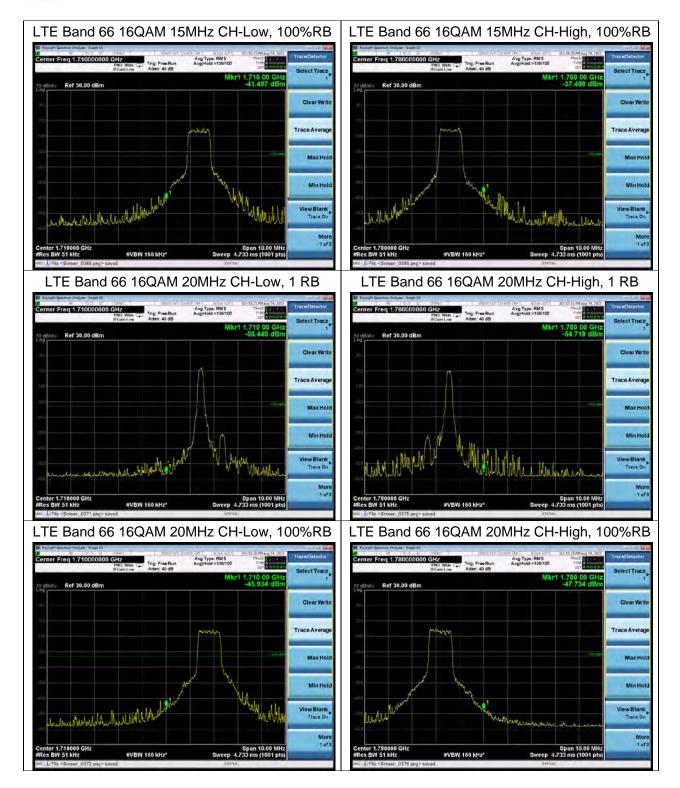


LTE Band 85 QPSK 5MHz CH-Low, 1 RB



LTE Band 85 QPSK 5MHz CH-High, 1 RB

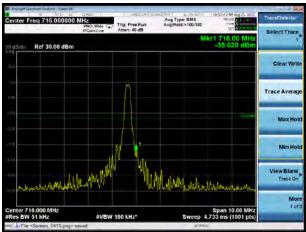


LTE Band 85 QPSK 5MHz CH-Low, 100%RB

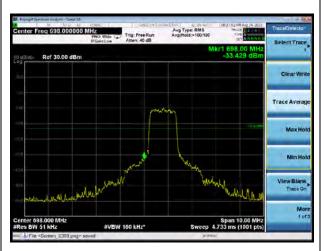


LTE Band 85 QPSK 5MHz CH-High, 100%RB



LTE Band 85 QPSK 10MHz CH-Low, 1 RB

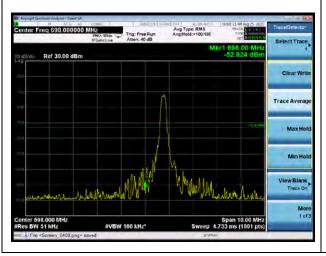


LTE Band 85 QPSK 10MHz CH-High, 1 RB

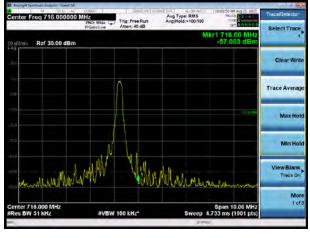


LTE Band 85 QPSK 10MHz CH-Low, 100%RB




LTE Band 85 QPSK 10MHz CH-High, 100%RB

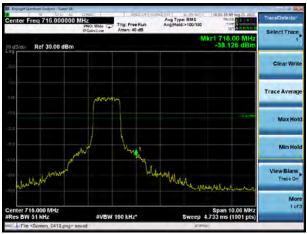


LTE Band 85 16QAM 5MHz CH-Low, 1 RB

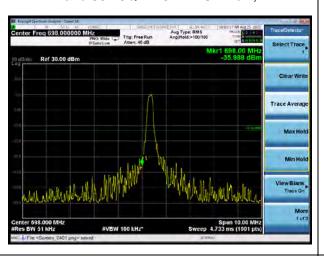


LTE Band 85 16QAM 5MHz CH-High, 1 RB

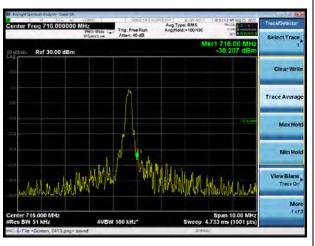

LTE Band 85 16QAM 5MHz CH-Low, 100%RB

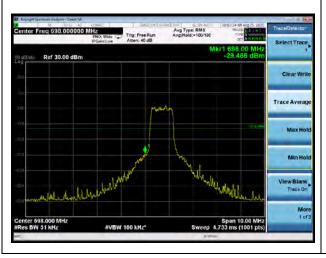


LTE Band 85 16QAM 5MHz CH-High, 100%RB

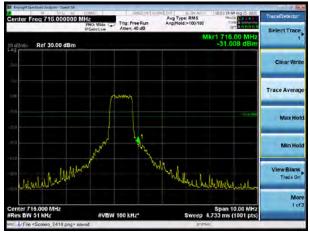





LTE Band 85 16QAM 10MHz CH-Low, 1 RB

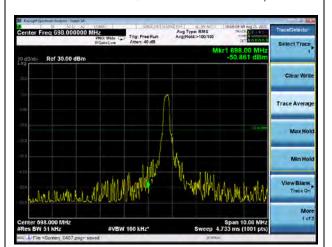


LTE Band 85 16QAM 10MHz CH-High, 1 RB

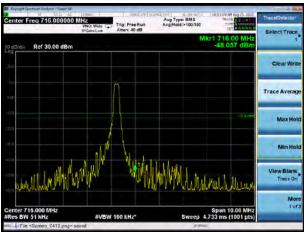

LTE Band 85 16QAM 10MHz CH-Low, 100%RB

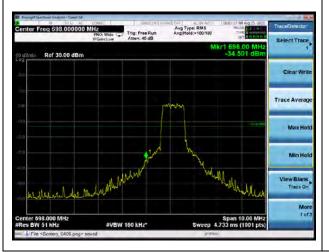

LTE Band 85 16QAM 10MHz CH-High, 100%RB

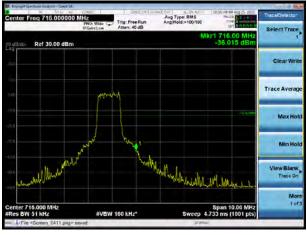



Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure	
23°C ~25°C	45%~50%	101.5kPa	

Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

PAPR (dB) = PPk (dBm) - PAvg (dBm).

Test Setup

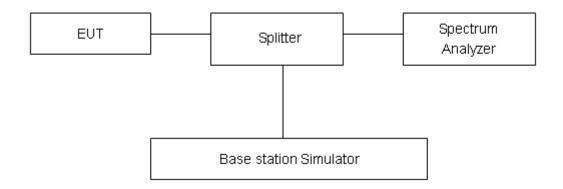

Limits

Rule Part 27.50(d)(5) Equipment employed must be authorized in accordance with the provisions of 24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for thenormal distribution is with the coverage factor k = 2, U = 0.4 dB.



Test Results

Mode	Mode Bandwidth	Modulation	Channel/ Frequency(MHz)	Peak-to-Average Power Ratio (PAPR)			
			Trequency(ivii iz)	Peak(dBm)	Avg(dBm)	PAPR(dB)	
	1.4MHz	QPSK	20175/1732.5	23.22	13.32	9.90	
	1.4IVITZ	16QAM	20175/1732.5	23.47	12.67	10.80	
	3MHz	QPSK	20175/1732.5	22.80	12.53	10.27	
	SIVITZ	16QAM	20175/1732.5	23.43	13.07	10.36	
	ENAL I—	QPSK	20175/1732.5	23.48	14.13	9.35	
LTE	5MHz	16QAM	20175/1732.5	24.03	13.91	10.12	
Band4	10MHz	QPSK	20175/1732.5	23.46	13.97	9.49	
	TUIVITZ	16QAM	20175/1732.5	24.56	15.80	8.76	
	1 E M I I -	QPSK	20175/1732.5	24.22	14.44	9.78	
	15MHz	16QAM	20175/1732.5	24.68	14.70	9.98	
	20141-	QPSK	20175/1732.5	24.24	15.38	8.86	
	20MHz	16QAM	20175/1732.5	24.66	14.76	9.90	

Mode Bandwidth	Modulation	Channel/	Peak-to-Average Power Ratio (PAPR)			
			Frequency(MHz)	Peak(dBm)	Avg(dBm)	PAPR(dB)
	1.4MHz	QPSK	23095/707.5	25.21	15.65	9.56
	1. 4 V ⊓∠	16QAM	23095/707.5	25.62	15.96	9.66
	01411	QPSK	23095/707.5	24.77	13.41	11.36
LTE	3MHz	16QAM	23095/707.5	25.52	13.97	11.55
Band12	ENALI-	QPSK	23095/707.5	25.71	17.64	8.07
	5MHz	16QAM	23095/707.5	26.02	17.84	8.18
	101/11/2	QPSK	23095/707.5	25.56	16.28	9.28
	10MHz	16QAM	23095/707.5	26.07	17.73	8.34

Mode Bandwidth	Modulation	Channel/	Peak-to-/	Average Pow (PAPR)	er Ratio	
			Frequency(MHz)	Peak(dBm)	Avg(dBm)	PAPR(dB)
	TE 5MHz	QPSK	23230/782	24.95	15.84	9.11
LTE		16QAM	23230/782	25.48	16.28	9.20
Band13	Band13 10MHz	QPSK	23230/782	24.68	15.70	8.98
		16QAM	23230/782	25.47	15.90	9.57





Peak-to-Average Power Ratio Channel/ Mode Bandwidth (PAPR) Modulation Frequency(MHz) Peak(dBm) Avg(dBm) PAPR(dB) 23.17 **QPSK** 132322/1745 13.49 9.68 1.4MHz 16QAM 132322/1745 12.90 10.79 23.69 **QPSK** 22.91 132322/1745 12.01 10.90 3MHz 16QAM 132322/1745 23.79 12.34 11.45 **QPSK** 132322/1745 23.79 14.45 9.34 5MHz LTE 16QAM 132322/1745 24.31 14.55 9.76 9.71 Ban66 **QPSK** 132322/1745 23.68 13.97 10MHz 16QAM 132322/1745 24.74 15.53 9.21 **QPSK** 132322/1745 24.31 15.20 9.11 15MHz 16QAM 132322/1745 24.76 15.00 9.76 QPSK 24.29 132322/1745 15.57 8.72 20MHz 16QAM 9.77 132322/1745 24.69 14.92

Mode Bandwidth	Bandwidth	Modulation	Channel/	Peak-to-A	Average Pow (PAPR)	er Ratio
			Frequency(MHz)	Peak(dBm)	Avg(dBm)	PAPR(dB)
	LTE 5MHz	QPSK	134092/707	24.06	14.07	9.99
LTE		16QAM	134092/707	24.68	14.89	9.79
Band85	Band85 10MHz	QPSK	134092/707	24.02	14.72	9.30
		16QAM	134092/707	25.11	15.61	9.50

Report No.: R2108A0735-R3

Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -40°C to +85°C in 10°C step size.

- (1)With all power removed, the temperature was decreased to -10°C and permitted to stabilize for three hours.
- (2) Measure the carrier frequency with the test equipment in a "call mode". These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.
- (3) Repeat the above measurements at 10°C increments from -40°C to +85°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.


Frequency Stability (Voltage Variation)

The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.3 V and 4.3V, with a nominal voltage of 3.8V.

Test setup

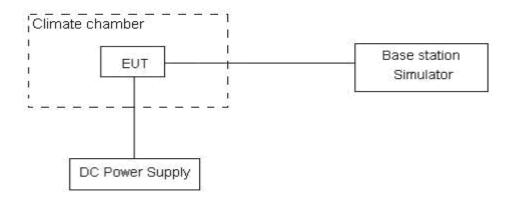

Limits

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor k = 3, U=0.01ppm.



Test Result

		LT	E Band 4			
Condition BANDWIDTH 20MHz		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	ronago	3.90	13.54	0.00208	0.00720	PASS
Extreme (85°C)		14.71	15.79	0.00782	0.00840	PASS
Extreme (80°C)		16.56	3.95	0.00881	0.00210	PASS
Extreme (70°C)		4.47	12.80	0.00238	0.00681	PASS
Extreme (60°C)		16.41	6.69	0.00873	0.00356	PASS
Extreme (50°C)		7.32	7.93	0.00389	0.00422	PASS
Extreme (40°C)		12.49	16.52	0.00664	0.00878	PASS
Extreme (30°C)	Normal	7.28	10.17	0.00387	0.00541	PASS
Extreme (20°C)		11.06	15.25	0.00588	0.00811	PASS
Extreme (10°C)		9.23	2.16	0.00491	0.00115	PASS
Extreme (0°C)		8.59	8.78	0.00457	0.00467	PASS
Extreme (-10°C)		8.39	1.68	0.00446	0.00089	PASS
Extreme (-20°C)		12.58	1.30	0.00669	0.00069	PASS
Extreme (-30°C)		16.51	10.71	0.00878	0.00570	PASS
Extreme (-40°C)		3.82	17.50	0.00203	0.00931	PASS
25 ℃	LV	11.81	11.04	0.00628	0.00587	PASS
25 (HV	11.62	17.54	0.00618	0.00933	PASS

	LTE Band 12						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability	Frequency Stability	Verdict	
BANDWIDTH	10MHz	(112)	(1.12)	(ppm)	(ppm)	Verdict	
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK		
Normal (25℃)		12.53	3.48	0.00666	0.00185	PASS	
Extreme (85°C)		15.97	14.78	0.00850	0.00786	PASS	
Extreme (80°C)		11.46	14.56	0.00610	0.00775	PASS	
Extreme (70°C)		8.85	12.25	0.00471	0.00651	PASS	
Extreme (60°C)		3.72	4.83	0.00198	0.00257	PASS	
Extreme (50°C)	Normal	10.61	11.45	0.00564	0.00609	PASS	
Extreme (40°C)	INOITHAL	12.43	17.60	0.00661	0.00936	PASS	
Extreme (30°C)		17.92	13.78	0.00953	0.00733	PASS	
Extreme (20°C)		9.49	17.11	0.00505	0.00910	PASS	
Extreme (10°C)		16.01	14.10	0.00851	0.00750	PASS	
Extreme (0°C)		5.81	17.62	0.00309	0.00937	PASS	
Extreme (-10°C)		11.24	5.08	0.00598	0.00270	PASS	

Extreme (-20°C)		5.65	14.52	0.00300	0.00772	PASS
Extreme (-30°C)		13.44	1.57	0.00715	0.00083	PASS
Extreme (-40°C)		7.68	12.06	0.00409	0.00641	PASS
25 ℃	LV	7.56	11.96	0.00402	0.00636	PASS
25 (HV	13.32	10.72	0.00708	0.00570	PASS

	LTE Band 13							
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability	Frequency Stability	Verdict		
BANDWIDTH	10MHz	(/	(/	(ppm)	(ppm)	7010101		
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK			
Normal (25°C)		9.59	10.61	0.00510	0.00564	PASS		
Extreme (85°C)		15.19	9.19	0.00808	0.00489	PASS		
Extreme (80°C)		14.51	15.91	0.00772	0.00846	PASS		
Extreme (70°C)		2.05	15.82	0.00109	0.00842	PASS		
Extreme (60°C)		7.80	1.21	0.00415	0.00064	PASS		
Extreme (50°C)		15.19	1.88	0.00808	0.00100	PASS		
Extreme (40°C)		9.17	5.92	0.00488	0.00315	PASS		
Extreme (30°C)	Normal	16.67	2.13	0.00887	0.00113	PASS		
Extreme (20°C)		5.98	9.38	0.00318	0.00499	PASS		
Extreme (10°C)		9.85	4.71	0.00524	0.00251	PASS		
Extreme (0°C)		16.17	6.49	0.00860	0.00345	PASS		
Extreme (-10°C)		13.07	11.84	0.00695	0.00630	PASS		
Extreme (-20°C)		8.10	4.05	0.00431	0.00215	PASS		
Extreme (-30°C)		7.22	5.82	0.00384	0.00310	PASS		
Extreme (-40°C)		2.55	9.06	0.00136	0.00482	PASS		
2 5°C	LV	9.26	15.99	0.00492	0.00851	PASS		
25℃	HV	16.68	4.48	0.00887	0.00238	PASS		

	LTE Band 66								
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability	Frequency Stability	Verdict			
BANDWIDTH	20MHz	(112)	(112)	(ppm)	(ppm)	verdict			
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK				
Normal (25℃)		8.81	15.15	0.00468	0.00806	PASS			
Extreme (85°C)		11.40	10.69	0.00606	0.00568	PASS			
Extreme (80°C)	Normal	6.99	12.72	0.00372	0.00677	PASS			
Extreme (70°C)	Normal	13.80	2.04	0.00734	0.00108	PASS			
Extreme (60°C)		17.20	12.07	0.00915	0.00642	PASS			
Extreme (50°C)		2.48	7.22	0.00132	0.00384	PASS			



Report No.: R2108A0735-R3 Extreme (40°C) 11.24 13.31 0.00598 0.00708 **PASS** Extreme (30°C) 2.20 11.13 0.00117 0.00592 **PASS** Extreme (20°C) 16.10 2.50 0.00857 0.00133 **PASS** 0.00621 Extreme (10°C) 11.67 14.50 0.00771 **PASS** 5.12 7.92 **PASS** Extreme (0°C) 0.00273 0.00421 7.88 **PASS** Extreme (-10°C) 15.75 0.00419 0.00838 7.56 Extreme (-20°C) 6.76 0.00359 0.00402 **PASS** Extreme (-30°C) 10.89 17.33 0.00579 0.00922 PASS Extreme (-40°C) PASS 7.35 1.39 0.00391 0.00074 LV 8.35 14.29 0.00444 0.00760 **PASS** 25℃ HV8.54 8.14 0.00455 0.00433 **PASS**

		LTI	E Band 85			
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability	Frequency Stability	Verdict
BANDWIDTH	10MHz	(112)	(112)	(ppm)	(ppm)	Verdict
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)		6.96	13.47	0.00370	0.00716	PASS
Extreme (85°C)		3.82	6.71	0.00203	0.00357	PASS
Extreme (80°C)		1.72	16.56	0.00091	0.00881	PASS
Extreme (70°C)		5.37	14.33	0.00285	0.00762	PASS
Extreme (60°C)		8.12	8.69	0.00432	0.00462	PASS
Extreme (50°C)		13.03	6.05	0.00693	0.00322	PASS
Extreme (40°C)		17.13	6.46	0.00911	0.00344	PASS
Extreme (30°C)	Normal	9.52	16.08	0.00506	0.00855	PASS
Extreme (20°C)		5.36	6.23	0.00285	0.00331	PASS
Extreme (10°C)		9.51	11.62	0.00506	0.00618	PASS
Extreme (0°C)		13.57	9.79	0.00722	0.00520	PASS
Extreme (-10°C)		13.20	11.04	0.00702	0.00587	PASS
Extreme (-20°C)		3.14	5.92	0.00167	0.00315	PASS
Extreme (-30°C)		10.57	8.73	0.00562	0.00464	PASS
Extreme (-40°C)		14.43	13.99	0.00768	0.00744	PASS
25 ℃	LV	6.80	9.82	0.00362	0.00522	PASS
25 (HV	10.54	13.13	0.00561	0.00699	PASS



Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.


RBW is set to 100kHz, VBW is set to 300kHz for 30MHz~1GHz

RBW is set to 1MHz, VBW is set to 3MHz for above 1GHz, Sweep is set to ATUO.

Of those disturbances below (limit – 20 dB), the mark is not required for the EUT.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

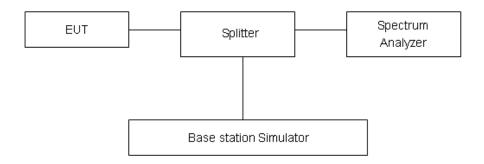

Limits

Rule Part 27.53(h) specifies that "for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least 43 + 10 log10 (P) dB.."

Rule Part 27.53 (g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least 43 + 10 log (P) dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

Rule Part 27.53(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically



radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

Rule Part 27.53(a)(4)(i) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2305 and 2320 MHz.

Part 27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than 76 + 10 log (P) dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

Part 27.53(a)/(h)/(g) Limit		-13 dBm
Part 27.53(f) Limit	Limit out of the band 1559-1610 MHz	-13 dBm
	Limit in the band 1559-1610 MHz	-40 dBm

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor k = 1.96.

Frequency	Uncertainty	
30MHz-1GHz	0.684 dB	
1GHz-27GHz	1.407 dB	






Test Result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.

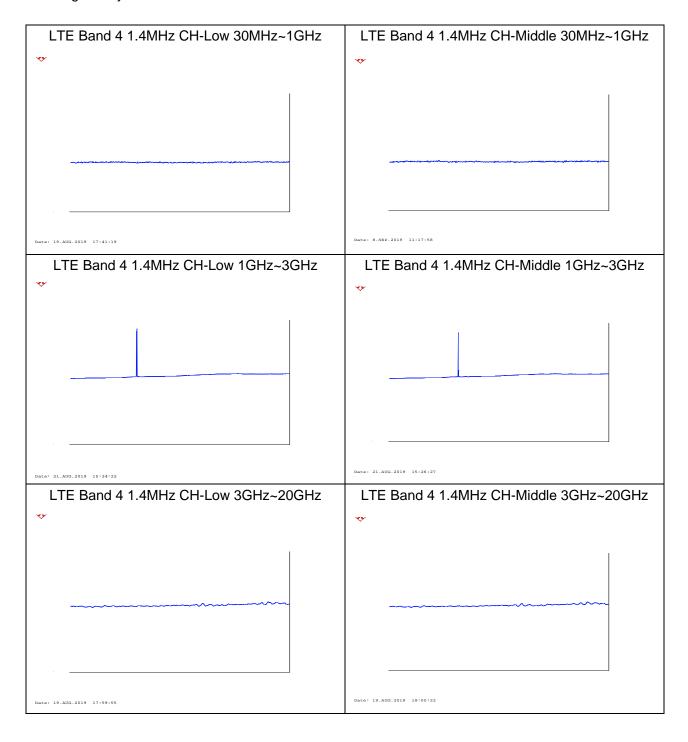







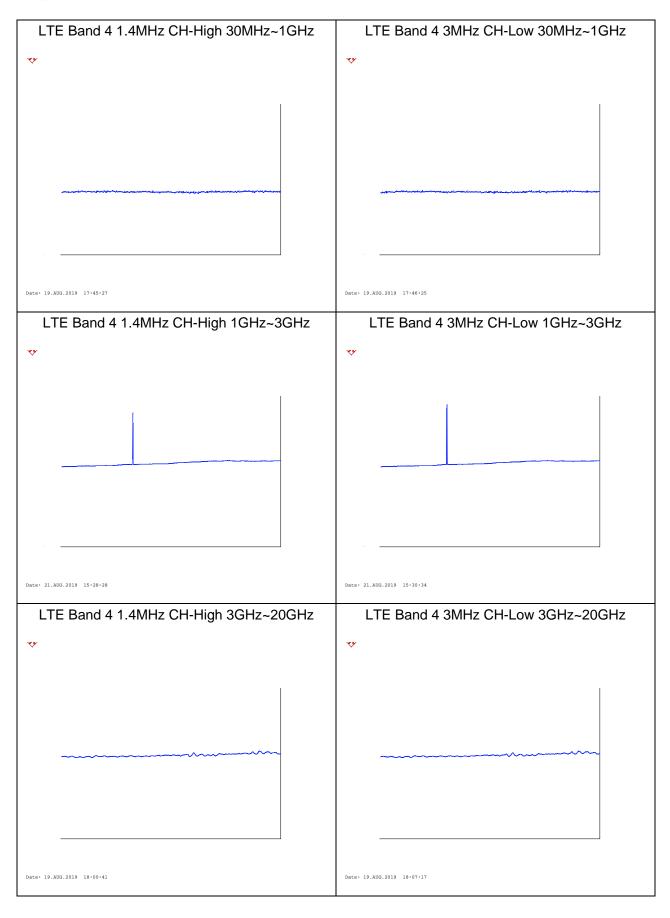

Date: 19.AUG.2019 18:08:00


Date: 19.AUG.2019 18:09:18

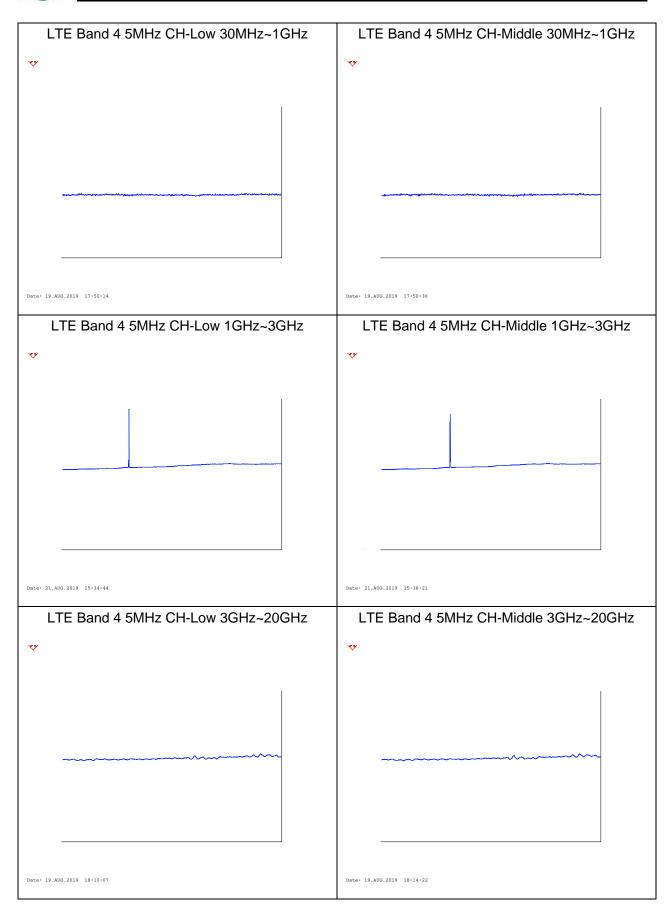

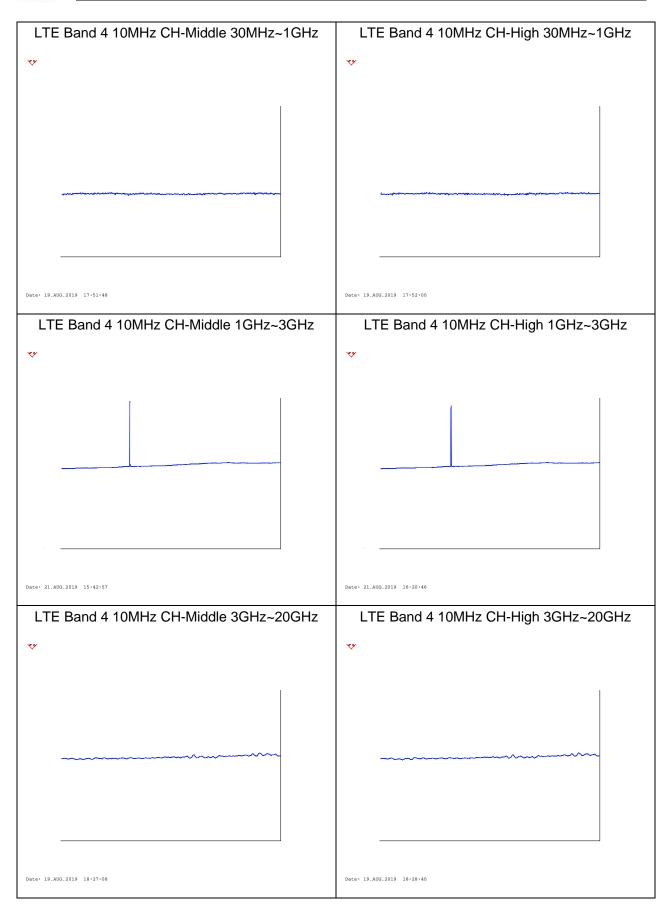





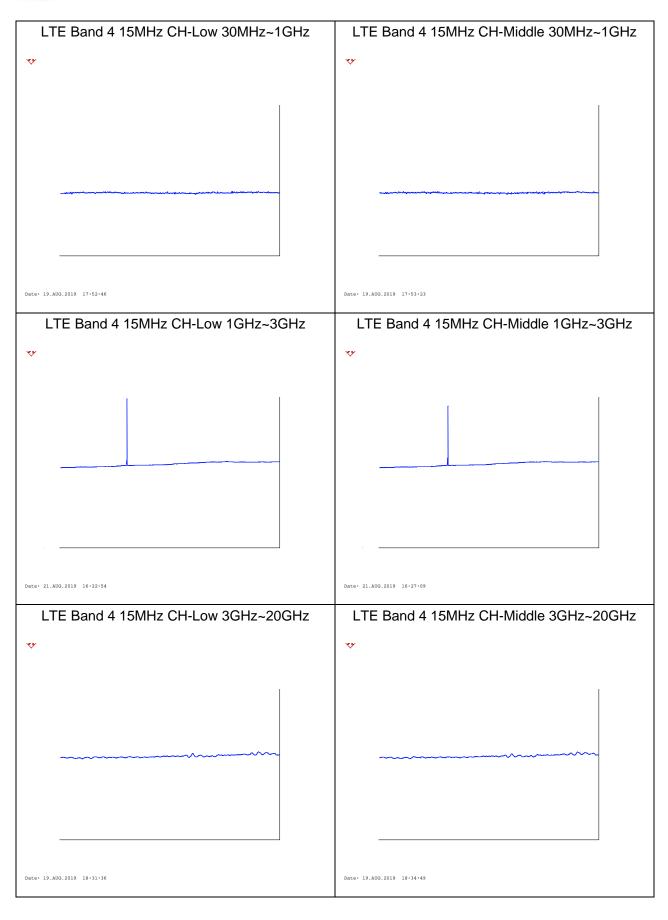

Date: 19.AUG.2019 17:54:47

LTE Band 4 20MHz CH-Middle 1GHz~3GHz

LTE Band 4 20MHz CH-High 1GHz~3GHz

Date: 21.AUG.2019 16:34:38

Date: 19.AUG.2019 17:55:16


LTE Band 4 20MHz CH-Middle 3GHz~20GHz

LTE Band 4 20MHz CH-High 3GHz~20GHz

Date: 19.AUG.2019 18:37:53


Date: 19.AUG.2019 18:38:14




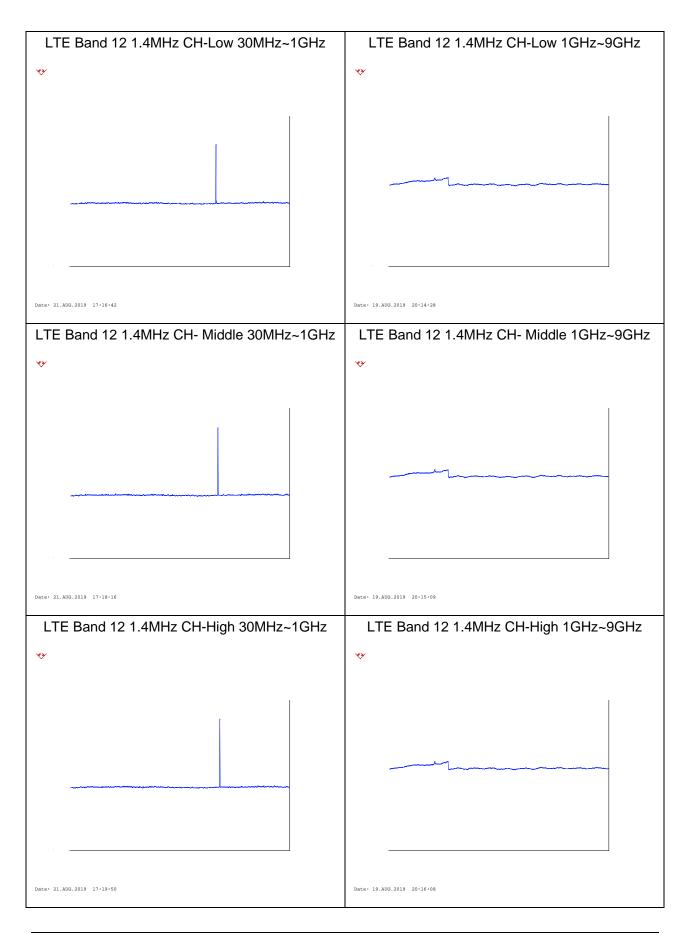






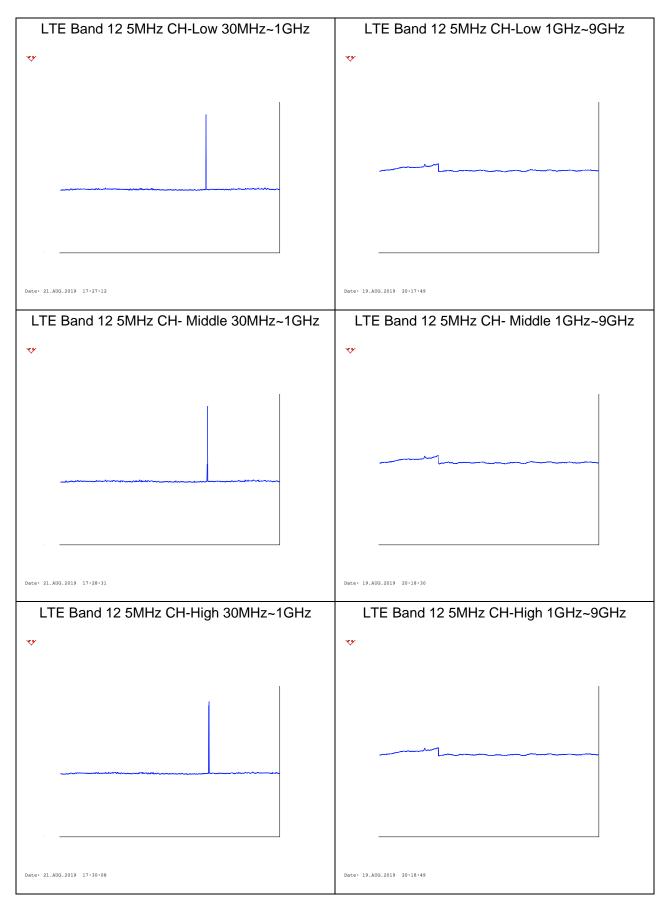


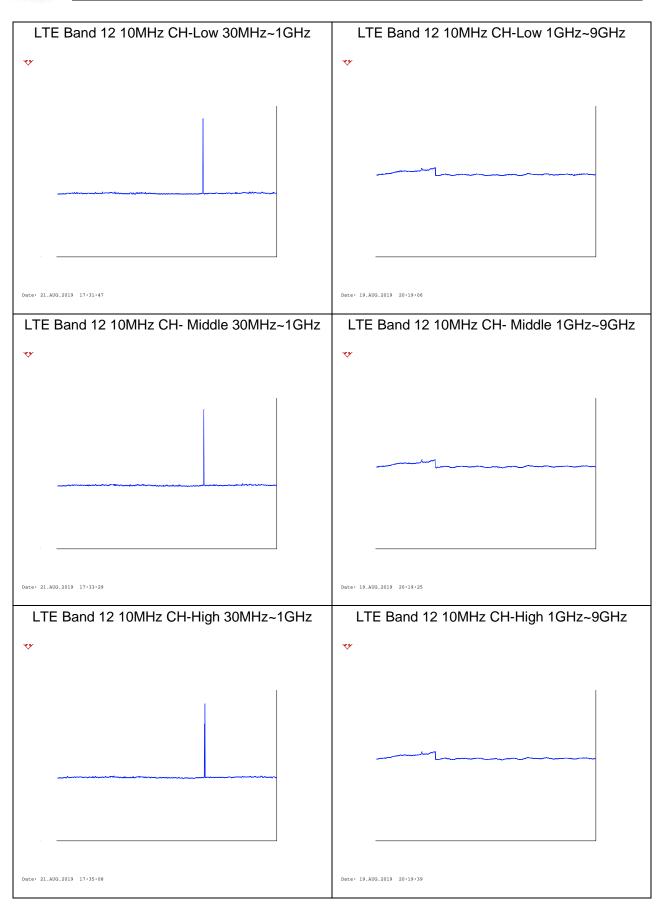








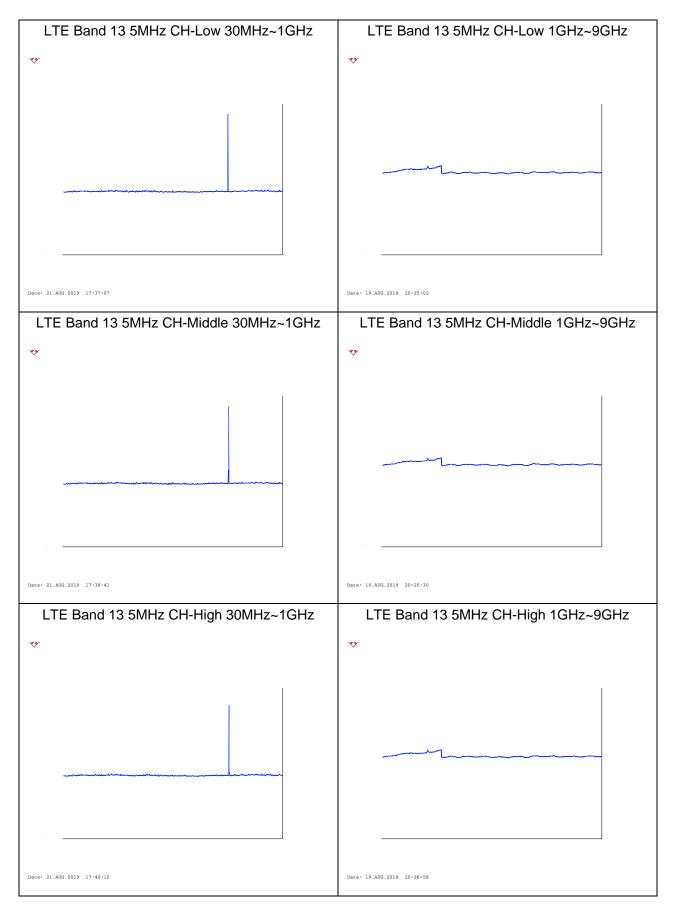


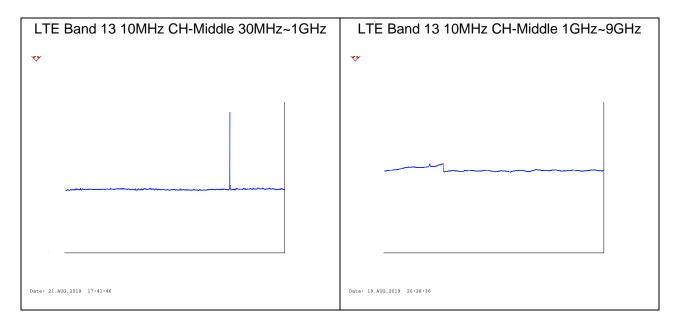


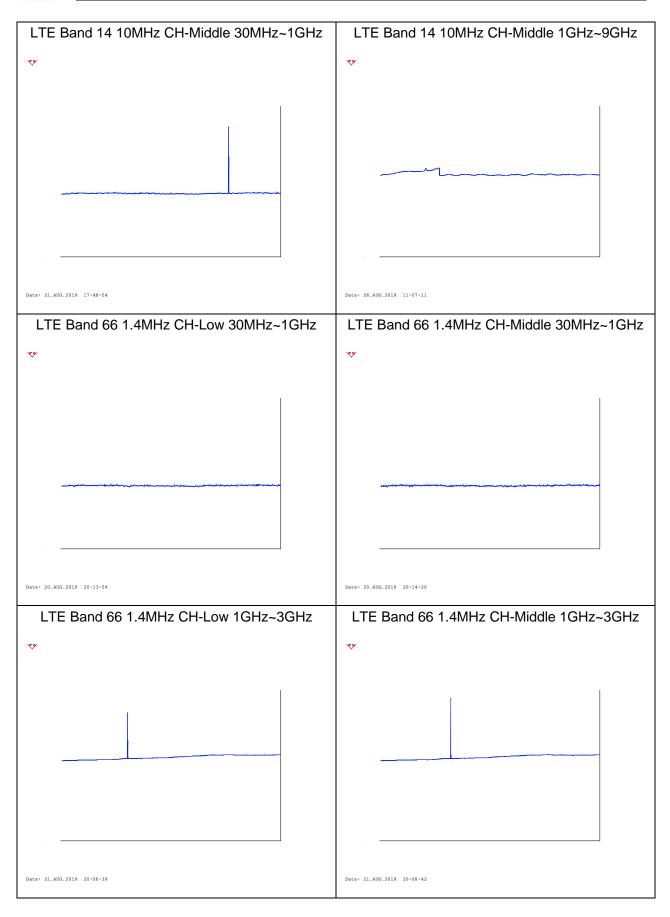


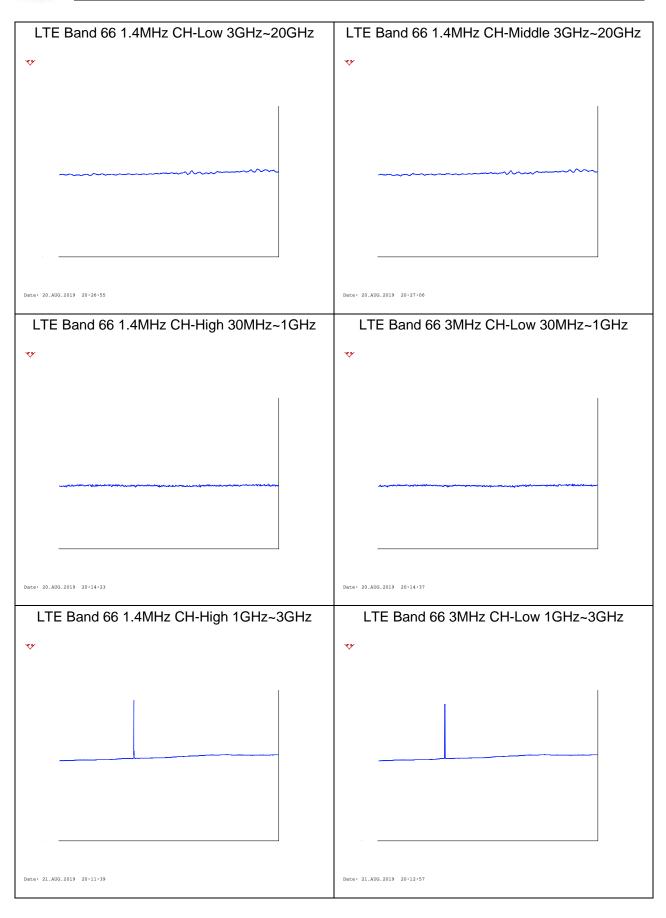


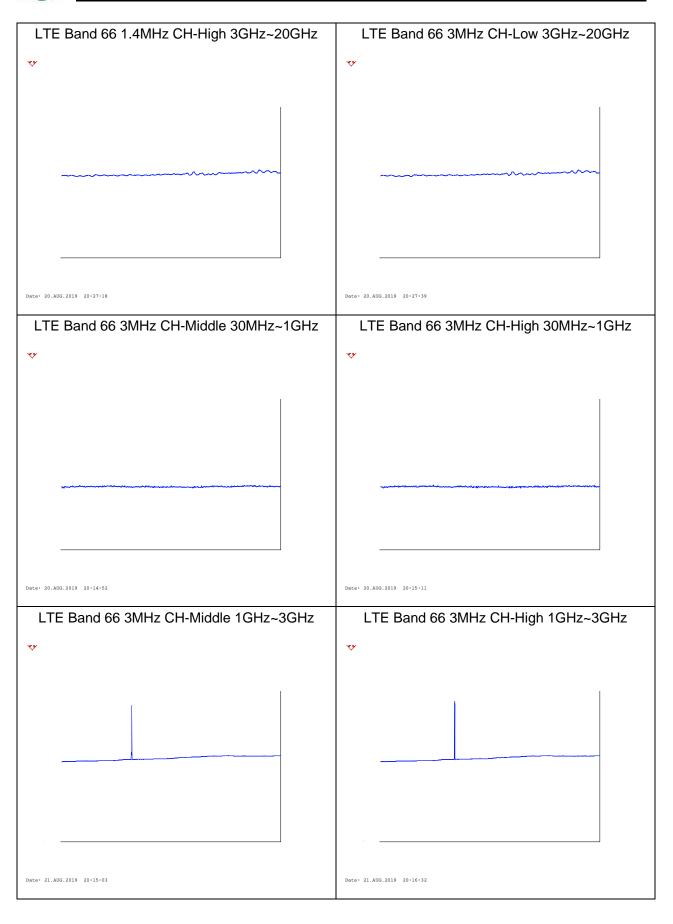


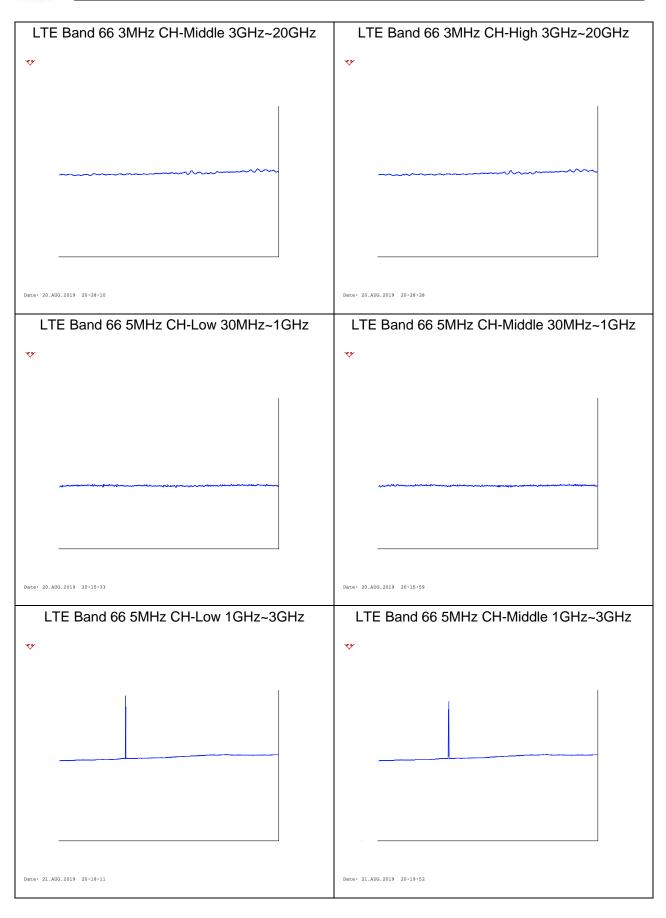


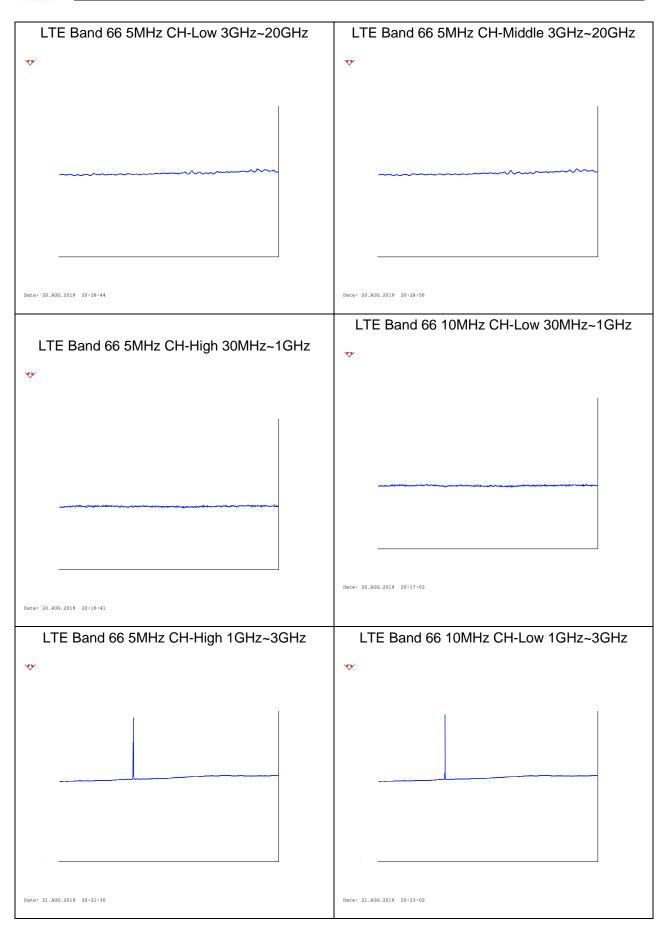


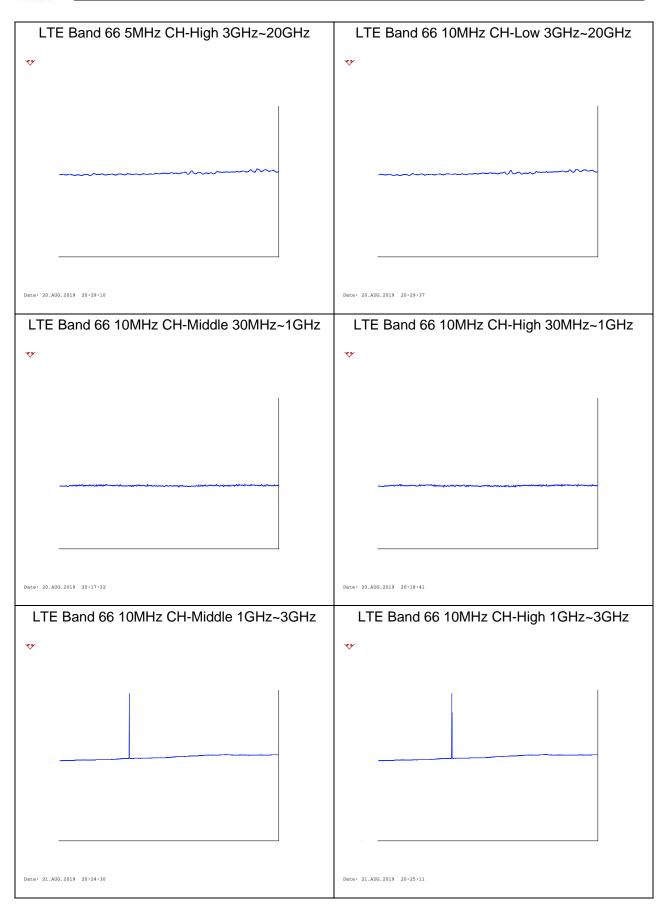


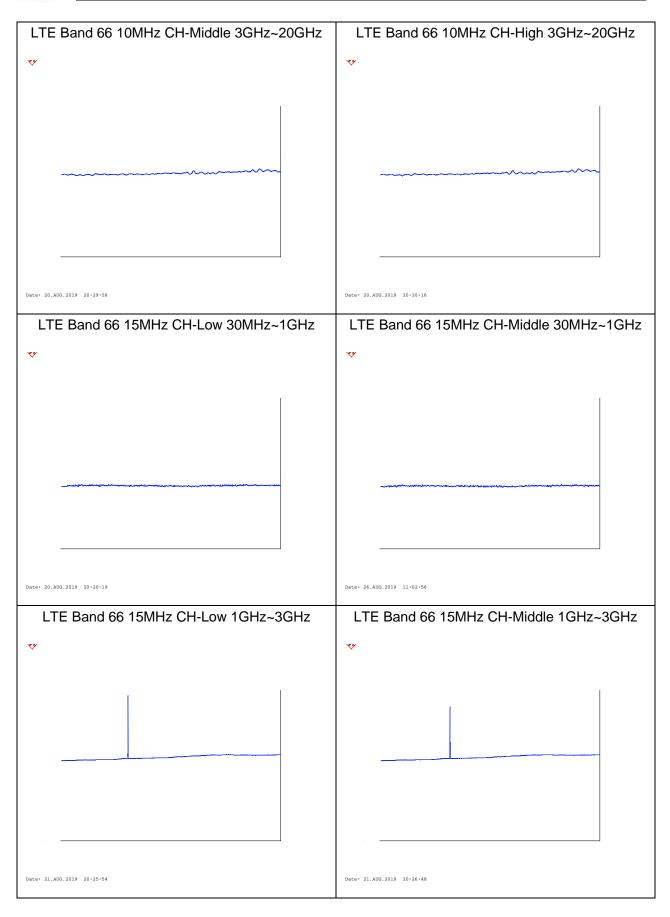

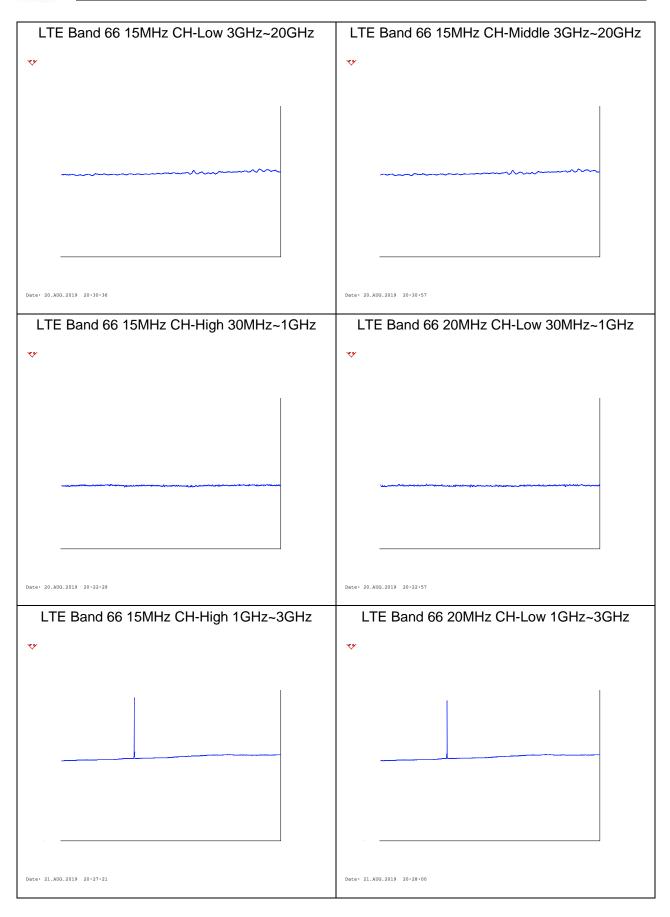


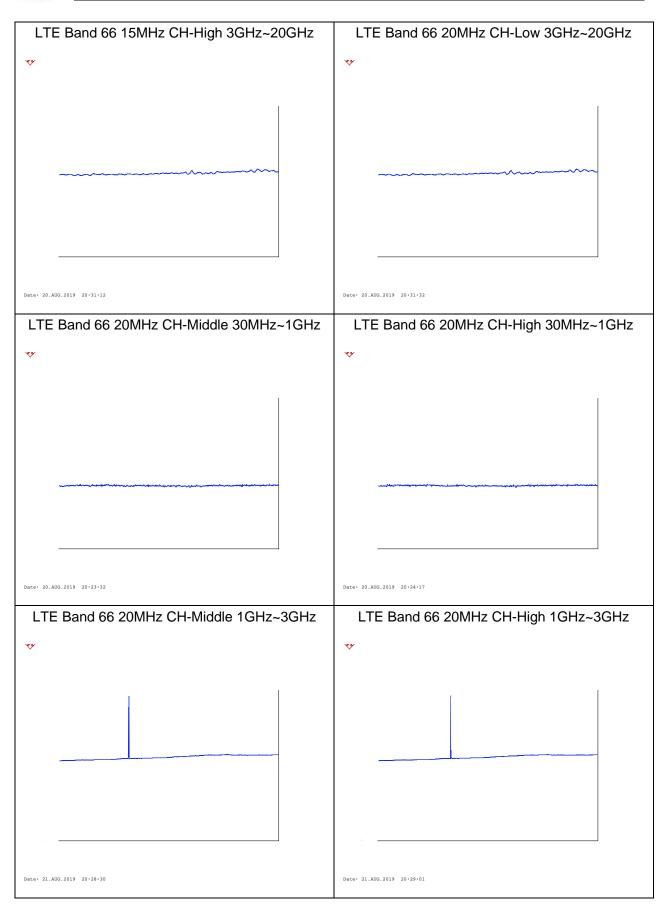

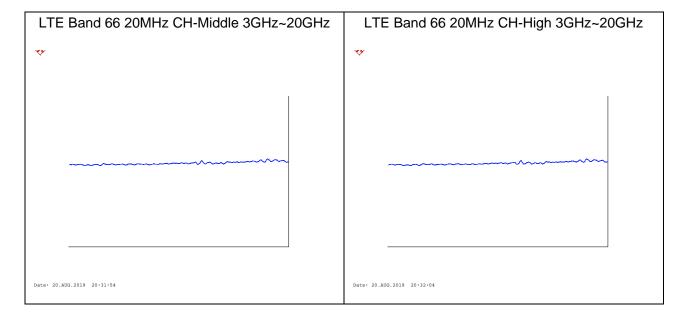

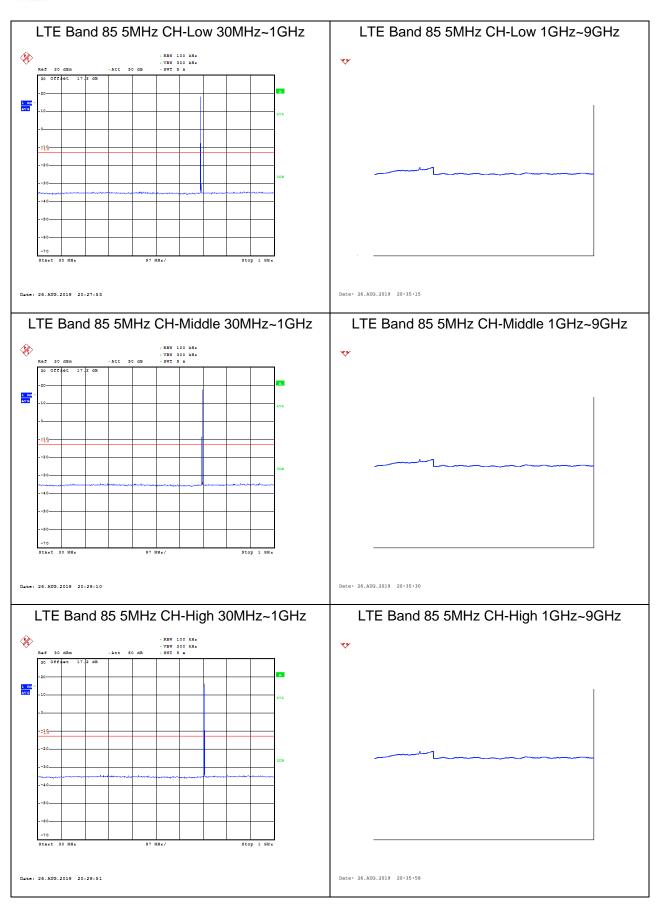

st Report Report No.: R2108A0735-R3

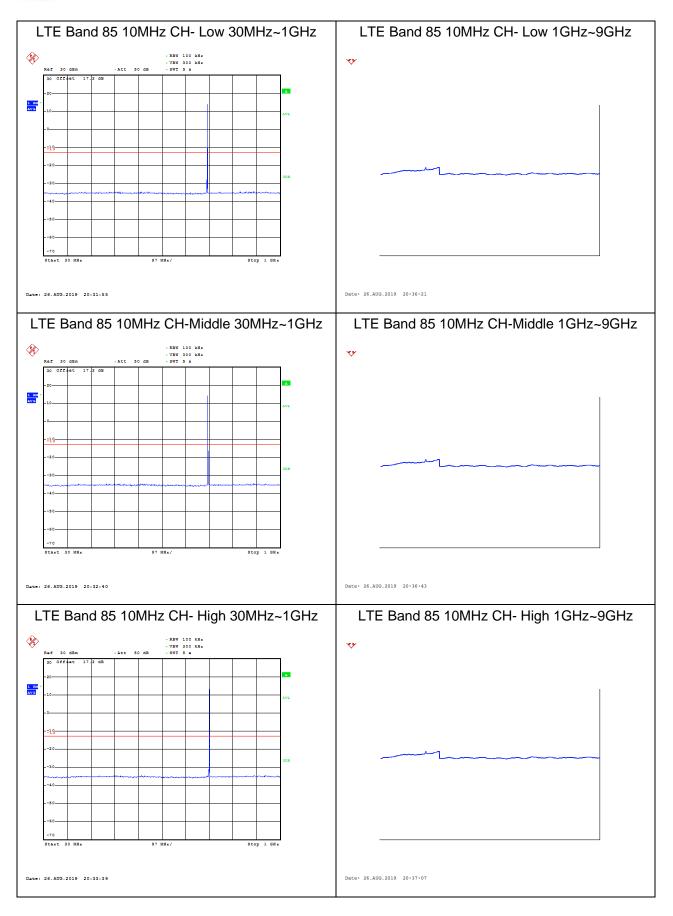



5.8 Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

- 1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI C63.26 (2015).
- 2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
- 3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz150kHz, RBW=10kHz, VBW=30kHz 150kHz-30MHz, RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz And the maximum value of the receiver should be recorded as (Pr).
- 5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (PcI) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- 7. The measurement results are obtained as described below:

Power(EIRP)=PMea- PAg - Pcl + Ga

The measurement results are amend as described below:

Power(EIRP)=PMea- PcI + Ga


8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP

Report No.: R2108A0735-R3 = EIRP-2.15dBi.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

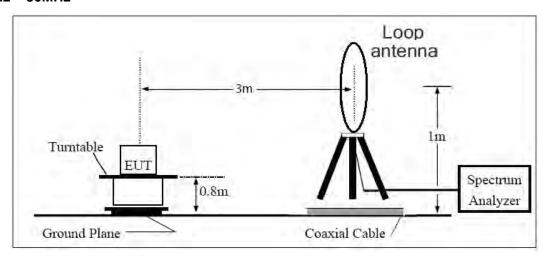

30MHz ~ 1GHz

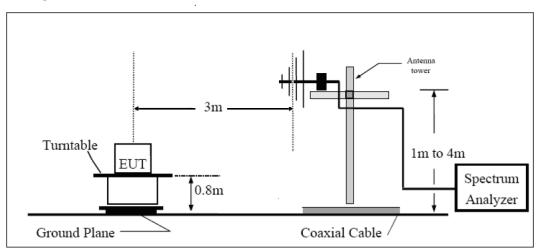

Above 1GHz

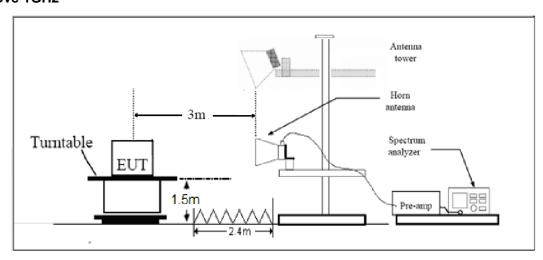

Note: Area side:2.4mX3.6m

Rule Part 27.53(h) specifies that "for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least 43 + 10 log10 (P) dB."

Rule Part 27.53 (g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least 43 + 10 log (P) dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

Rule Part 27.53(f)For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

Part 27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than 76 + 10 log (P) dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

Part 27.53(a)/(h)/(g)	Limit	-13 dBm
Part 27.53(f) Limit	Limit out of the band 1559-1610 MHz	-13 dBm
	Limit in the band 1559-1610 MHz	-40 dBm

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = \pm 1.96$, $U = \pm 3.55$ dB.

Test Result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

BG95-M3:

LTE Band 4 QPSK 1.4MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3464.3	-51.29	2.6	10.75	Horizontal	-43.14	-13.00	30.14	45
3	5197.5	-56.01	2.4	11.05	Horizontal	-47.36	-13.00	34.36	0
4	6930.0	-53.79	4.5	11.15	Horizontal	-47.14	-13.00	34.14	135
5	8662.5	-48.57	5.1	11.35	Horizontal	-42.32	-13.00	29.32	225
6	10395.0	-49.90	5.3	11.95	Horizontal	-43.25	-13.00	30.25	135
7	12127.5	-49.38	5.5	13.55	Horizontal	-41.33	-13.00	28.33	90
8	13860.0	-52.81	6.3	13.75	Horizontal	-45.36	-13.00	32.36	45
9	15592.5	-46.15	6.7	13.85	Horizontal	-39.00	-13.00	26.00	90
10	17325.0	-46.40	6.8	14.25	Horizontal	-38.95	-13.00	25.95	180

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

LTE Band 4 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3460.5	-50.97	2.6	10.75	Horizontal	-42.82	-13.00	29.82	180
3	5191.5	-58.55	2.4	11.05	Horizontal	-49.90	-13.00	36.90	45
4	6930.0	-56.85	4.5	11.15	Horizontal	-50.20	-13.00	37.20	90
5	8662.5	-51.65	5.1	11.35	Horizontal	-45.40	-13.00	32.40	135
6	10395.0	-49.15	5.3	11.95	Horizontal	-42.50	-13.00	29.50	315
7	12127.5	-50.25	5.5	13.55	Horizontal	-42.20	-13.00	29.20	225
8	13860.0	-49.45	6.3	13.75	Horizontal	-42.00	-13.00	29.00	180
9	15592.5	-47.55	6.7	13.85	Horizontal	-40.40	-13.00	27.40	45
10	17325.0	-45.95	6.8	14.25	Horizontal	-38.50	-13.00	25.50	90

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

^{2.} The worst emission was found in the antenna is Horizontal position.

^{2.} The worst emission was found in the antenna is Horizontal position.



LTE Band 4 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3447.0	-51.16	2.6	10.75	Horizontal	-43.01	-13.00	30.01	45
3	5170.5	-57.55	2.4	11.05	Horizontal	-48.90	-13.00	35.90	90
4	6930.0	-56.75	4.5	11.15	Horizontal	-50.10	-13.00	37.10	180
5	8662.5	-51.55	5.1	11.35	Horizontal	-45.30	-13.00	32.30	0
6	10395.0	-48.80	5.3	11.95	Horizontal	-42.15	-13.00	29.15	0
7	12127.5	-50.15	5.5	13.55	Horizontal	-42.10	-13.00	29.10	135
8	13860.0	-48.37	6.3	13.75	Horizontal	-40.92	-13.00	27.92	45
9	15592.5	-45.05	6.7	13.85	Horizontal	-37.90	-13.00	24.90	90
10	17325.0	-45.35	6.8	14.25	Horizontal	-37.90	-13.00	24.90	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

LTE Band 12 QPSK 1.4MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1415.00	-41.05	2.00	10.75	Horizontal	-34.45	-13.00	21.45	45
3	2122.50	-54.99	2.51	11.05	Horizontal	-48.60	-13.00	35.60	90
4	2830.00	-56.68	4.20	11.15	Horizontal	-51.88	-13.00	38.88	45
5	3537.50	-55.37	5.20	11.15	Horizontal	-51.57	-13.00	38.57	90
6	4245.00	-54.55	5.50	11.95	Horizontal	-50.25	-13.00	37.25	180
7	4952.50	-54.34	5.70	13.55	Horizontal	-48.64	-13.00	35.64	0
8	5660.00	-54.91	6.30	13.75	Horizontal	-49.61	-13.00	36.61	45
9	6367.50	-55.30	6.80	13.85	Horizontal	-50.40	-13.00	37.40	90
10	7075.00	-55.50	6.90	14.25	Horizontal	-50.30	-13.00	37.30	0

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

^{2.} The worst emission was found in the antenna is Horizontal position.



LTE Band 12 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1415.00	-40.15	2.00	10.75	Horizontal	-33.55	-13.00	20.55	90
3	2122.50	-54.55	2.51	11.05	Horizontal	-48.16	-13.00	35.16	135
4	2830.00	-56.58	4.20	11.15	Horizontal	-51.78	-13.00	38.78	90
5	3537.50	-54.92	5.20	11.15	Horizontal	-51.12	-13.00	38.12	135
6	4245.00	-54.07	5.50	11.95	Horizontal	-49.77	-13.00	36.77	45
7	4952.50	-54.30	5.70	13.55	Horizontal	-48.60	-13.00	35.60	225
8	5660.00	-54.20	6.30	13.75	Horizontal	-48.90	-13.00	35.90	135
9	6367.50	-55.00	6.80	13.85	Horizontal	-50.10	-13.00	37.10	90
10	7075.00	-54.40	6.90	14.25	Horizontal	-49.20	-13.00	36.20	180

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 12 QPSK 10MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1415.00	-39.54	2.00	10.75	Horizontal	-32.94	-13.00	19.94	315
3	2122.50	-54.77	2.51	11.05	Horizontal	-48.38	-13.00	35.38	45
4	2830.00	-56.13	4.20	11.15	Horizontal	-51.33	-13.00	38.33	135
5	3537.50	-56.53	5.20	11.15	Horizontal	-52.73	-13.00	39.73	315
6	4245.00	-53.50	5.50	11.95	Horizontal	-49.20	-13.00	36.20	225
7	4952.50	-55.20	5.70	13.55	Horizontal	-49.50	-13.00	36.50	90
8	5660.00	-53.50	6.30	13.75	Horizontal	-48.20	-13.00	35.20	45
9	6367.50	-55.00	6.80	13.85	Horizontal	-50.10	-13.00	37.10	315
10	7075.00	-55.50	6.90	14.25	Horizontal	-50.30	-13.00	37.30	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.



LTE Band 13 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1564.0	-61.17	2.00	10.75	Horizontal	-52.42	-40.00	12.42	45
Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
3	2346.0	-46.10	2.51	11.05	Horizontal	-39.71	-13.00	26.71	90
4	3128.0	-56.89	4.20	11.15	Horizontal	-52.09	-13.00	39.09	0
5	3910.0	-53.98	5.20	11.15	Horizontal	-50.18	-13.00	37.18	90
6	4692.0	-54.67	5.50	11.95	Horizontal	-50.37	-13.00	37.37	45
7	5474.0	-55.32	5.70	13.55	Horizontal	-49.62	-13.00	36.62	225
8	6256.0	-55.42	6.30	13.75	Horizontal	-50.12	-13.00	37.12	91
9	7038.0	-54.10	6.80	13.85	Horizontal	-49.20	-13.00	36.20	135
10	7820.0	-52.29	6.90	14.25	Horizontal	-47.09	-13.00	34.09	180

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

LTE Band 13 QPSK 10MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1555.3	-58.69	2.00	10.75	Horizontal	-52.09	-13.00	39.09	135
3	2346.0	-47.02	2.51	11.05	Horizontal	-40.63	-13.00	27.63	135
4	3128.0	-56.79	4.20	11.15	Horizontal	-51.99	-13.00	38.99	45
5	3910.0	-53.90	5.20	11.15	Horizontal	-50.10	-13.00	37.10	90
6	4692.0	-54.90	5.50	11.95	Horizontal	-50.60	-13.00	37.60	0
7	5474.0	-55.20	5.70	13.55	Horizontal	-49.50	-13.00	36.50	0
8	6256.0	-52.55	6.30	13.75	Horizontal	-47.25	-13.00	34.25	45
9	7038.0	-54.20	6.80	13.85	Horizontal	-49.30	-13.00	36.30	90
10	7820.0	-53.10	6.90	14.25	Horizontal	-47.90	-13.00	34.90	315

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

^{2.} The worst emission was found in the antenna is Horizontal position.



LTE Band 66 QPSK 1.4MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3472.1	-53.47	2.6	10.75	Horizontal	-45.32	-13.00	32.32	45
3	5208.4	-56.39	2.4	11.05	Horizontal	-47.74	-13.00	34.74	135
4	6980	-57.68	4.5	11.15	Horizontal	-51.03	-13.00	38.03	270
5	8725	-51.78	5.1	11.35	Horizontal	-45.53	-13.00	32.53	90
6	10470	-49.88	5.3	11.95	Horizontal	-43.23	-13.00	30.23	45
7	12215	-49.27	5.5	13.55	Horizontal	-41.22	-13.00	28.22	0
8	13960	-48.59	6.3	13.75	Horizontal	-41.14	-13.00	28.14	45
9	15705	-49.18	6.7	13.85	Horizontal	-42.03	-13.00	29.03	225
10	17450	-47.85	6.8	14.25	Horizontal	-40.40	-13.00	27.40	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

LTE Band 66 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3472.1	-53.11	2.6	10.75	Horizontal	-44.96	-13.00	31.96	0
3	5208.4	-55.65	2.4	11.05	Horizontal	-47.00	-13.00	34.00	315
4	6980	-58.15	4.5	11.15	Horizontal	-51.50	-13.00	38.50	135
5	8725	-51.75	5.1	11.35	Horizontal	-45.50	-13.00	32.50	90
6	10470	-49.75	5.3	11.95	Horizontal	-43.10	-13.00	30.10	315
7	12215	-49.15	5.5	13.55	Horizontal	-41.10	-13.00	28.10	135
8	13960	-48.95	6.3	13.75	Horizontal	-41.50	-13.00	28.50	270
9	15705	-50.05	6.7	13.85	Horizontal	-42.90	-13.00	29.90	0
10	17450	-47.81	6.8	14.25	Horizontal	-40.36	-13.00	27.36	90

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

^{2.} The worst emission was found in the antenna is Horizontal position.

LTE Band 66 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3472.1	-51.67	2.6	10.75	Horizontal	-43.52	-13.00	30.52	90
3	5208.4	-55.85	2.4	11.05	Horizontal	-47.20	-13.00	34.20	45
4	6980	-58.45	4.5	11.15	Horizontal	-51.80	-13.00	38.80	315
5	8725	-51.85	5.1	11.35	Horizontal	-45.60	-13.00	32.60	135
6	10470	-50.45	5.3	11.95	Horizontal	-43.80	-13.00	30.80	0
7	12215	-49.05	5.5	13.55	Horizontal	-41.00	-13.00	28.00	315
8	13960	-48.75	6.3	13.75	Horizontal	-41.30	-13.00	28.30	270
9	15705	-49.15	6.7	13.85	Horizontal	-42.00	-13.00	29.00	225
10	17450	-47.55	6.8	14.25	Horizontal	-40.10	-13.00	27.10	0

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

LTE Band 85 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1414.0	-35.42	2.00	10.75	Horizontal	-28.82	-13.00	15.82	45
3	2121.0	-49.85	2.51	11.05	Horizontal	-43.46	-13.00	30.46	90
4	2828.0	-58.31	4.20	11.15	Horizontal	-53.51	-13.00	40.51	135
5	3535.0	-51.97	5.20	11.15	Horizontal	-48.17	-13.00	35.17	90
6	4242.0	-58.97	5.50	11.95	Horizontal	-54.67	-13.00	41.67	135
7	4949.0	-58.81	5.70	13.55	Horizontal	-53.11	-13.00	40.11	180
8	5656.0	-60.13	6.30	13.75	Horizontal	-54.83	-13.00	41.83	0
9	6363.0	-58.51	6.80	13.85	Horizontal	-53.61	-13.00	40.61	45
10	7070.0	-55.17	6.90	14.25	Horizontal	-49.97	-13.00	36.97	135

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

^{2.} The worst emission was found in the antenna is Horizontal position.



LTE Band 85 QPSK 10MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1414.0	-40.57	2.00	10.75	Horizontal	-33.97	-13.00	20.97	90
3	2121.0	-49.85	2.51	11.05	Horizontal	-43.46	-13.00	30.46	315
4	2828.0	-55.42	4.20	11.15	Horizontal	-50.62	-13.00	37.62	225
5	3535.0	-52.39	5.20	11.15	Horizontal	-48.59	-13.00	35.59	90
6	4242.0	-59.75	5.50	11.95	Horizontal	-55.45	-13.00	42.45	135
7	4949.0	-61.25	5.70	13.55	Horizontal	-55.55	-13.00	42.55	45
8	5656.0	-60.21	6.30	13.75	Horizontal	-54.91	-13.00	41.91	315
9	6363.0	-57.80	6.80	13.85	Horizontal	-52.90	-13.00	39.90	225
10	7070.0	-54.80	6.90	14.25	Horizontal	-49.60	-13.00	36.60	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

^{2.} The worst emission was found in the antenna is Horizontal position.

F Test Report Report No.: R2108A0735-R3

BG95-M3 MINIPCIE:

LTE Band 4 QPSK 1.4MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3464.3	-47.65	2.6	10.75	Horizontal	-39.50	-13.00	26.50	135
3	5197.5	-63.17	2.4	11.05	Horizontal	-54.52	-13.00	41.52	315
4	6930.0	-56.73	4.5	11.15	Horizontal	-50.08	-13.00	37.08	180
5	8662.5	-54.26	5.1	11.35	Horizontal	-48.01	-13.00	35.01	90
6	10395.0	-50.54	5.3	11.95	Horizontal	-43.89	-13.00	30.89	135
7	12127.5	-52.43	5.5	13.55	Horizontal	-44.38	-13.00	31.38	180
8	13860.0	-50.01	6.3	13.75	Horizontal	-42.56	-13.00	29.56	225
9	15592.5	-53.06	6.7	13.85	Horizontal	-45.91	-13.00	32.91	90
10	17325.0	-49.58	6.8	14.25	Horizontal	-42.13	-13.00	29.13	315

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

LTE Band 4 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3460.5	-47.90	2.6	10.75	Horizontal	-39.75	-13.00	26.75	180
3	5191.5	-62.27	2.4	11.05	Horizontal	-53.62	-13.00	40.62	45
4	6930.0	-57.90	4.5	11.15	Horizontal	-51.25	-13.00	38.25	45
5	8662.5	-53.58	5.1	11.35	Horizontal	-47.33	-13.00	34.33	270
6	10395.0	-51.87	5.3	11.95	Horizontal	-45.22	-13.00	32.22	225
7	12127.5	-52.73	5.5	13.55	Horizontal	-44.68	-13.00	31.68	315
8	13860.0	-51.19	6.3	13.75	Horizontal	-43.74	-13.00	30.74	180
9	15592.5	-52.90	6.7	13.85	Horizontal	-45.75	-13.00	32.75	90
10	17325.0	-48.76	6.8	14.25	Horizontal	-41.31	-13.00	28.31	315

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

^{2.} The worst emission was found in the antenna is Horizontal position.

^{2.} The worst emission was found in the antenna is Horizontal position.



LTE Band 4 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3447.8	-47.94	2.6	10.75	Horizontal	-39.79	-13.00	26.79	45
3	5170.9	-62.14	2.4	11.05	Horizontal	-53.49	-13.00	40.49	90
4	6930.0	-57.05	4.5	11.15	Horizontal	-50.40	-13.00	37.40	225
5	8662.5	-53.90	5.1	11.35	Horizontal	-47.65	-13.00	34.65	315
6	10395.0	-52.05	5.3	11.95	Horizontal	-45.40	-13.00	32.40	180
7	12127.5	-52.17	5.5	13.55	Horizontal	-44.12	-13.00	31.12	135
8	13860.0	-50.19	6.3	13.75	Horizontal	-42.74	-13.00	29.74	90
9	15592.5	-53.45	6.7	13.85	Horizontal	-46.30	-13.00	33.30	225
10	17325.0	-48.33	6.8	14.25	Horizontal	-40.88	-13.00	27.88	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

LTE Band 12 QPSK 1.4MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1415.0	-42.92	2.00	10.75	Horizontal	-36.32	-13.00	23.32	225
3	2122.5	-53.24	2.51	11.05	Horizontal	-46.85	-13.00	33.85	135
4	2830.0	-58.82	4.20	11.15	Horizontal	-54.02	-13.00	41.02	315
5	3537.5	-52.90	5.20	11.15	Horizontal	-49.10	-13.00	36.10	90
6	4245.0	-60.59	5.50	11.95	Horizontal	-56.29	-13.00	43.29	135
7	4952.5	-60.92	5.70	13.55	Horizontal	-55.22	-13.00	42.22	225
8	5660.0	-60.84	6.30	13.75	Horizontal	-55.54	-13.00	42.54	45
9	6367.5	-59.00	6.80	13.85	Horizontal	-54.10	-13.00	41.10	90
10	7075.0	-56.00	6.90	14.25	Horizontal	-50.80	-13.00	37.80	315

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

^{2.} The worst emission was found in the antenna is Horizontal position.



LTE Band 12 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1415.0	-43.36	2.00	10.75	Horizontal	-36.76	-13.00	23.76	225
3	2122.5	-52.81	2.51	11.05	Horizontal	-46.42	-13.00	33.42	45
4	2830.0	-57.82	4.20	11.15	Horizontal	-53.02	-13.00	40.02	135
5	3526.5	-54.43	5.20	11.15	Horizontal	-50.63	-13.00	37.63	180
6	4408.1	-61.06	5.50	11.95	Horizontal	-56.76	-13.00	43.76	0
7	5289.8	-62.77	5.70	13.55	Horizontal	-57.07	-13.00	44.07	315
8	6171.4	-60.88	6.30	13.75	Horizontal	-55.58	-13.00	42.58	270
9	7053.0	-55.30	6.80	13.85	Horizontal	-50.40	-13.00	37.40	225
10	7934.6	-56.93	6.90	14.25	Horizontal	-51.73	-13.00	38.73	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

LTE Band 12 QPSK 10MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1415.0	-44.11	2.00	10.75	Horizontal	-37.51	-13.00	24.51	315
3	2122.5	-52.82	2.51	11.05	Horizontal	-46.43	-13.00	33.43	270
4	2830.0	-58.12	4.20	11.15	Horizontal	-53.32	-13.00	40.32	225
5	3516.4	-53.97	5.20	11.15	Horizontal	-50.17	-13.00	37.17	0
6	4395.0	-60.38	5.50	11.95	Horizontal	-56.08	-13.00	43.08	45
7	5274.0	-61.68	5.70	13.55	Horizontal	-55.98	-13.00	42.98	90
8	6153.0	-60.18	6.30	13.75	Horizontal	-54.88	-13.00	41.88	315
9	7032.0	-56.08	6.80	13.85	Horizontal	-51.18	-13.00	38.18	180
10	7911.0	-56.25	6.90	14.25	Horizontal	-51.05	-13.00	38.05	270

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

^{2.} The worst emission was found in the antenna is Horizontal position.



LTE Band 13 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1564.0	-56.28	2.00	10.75	Horizontal	-49.68	-40.00	9.68	135
3	2346.0	-44.27	2.51	11.05	Horizontal	-37.88	-13.00	24.88	270
4	3120.0	-55.67	4.20	11.15	Horizontal	-50.87	-13.00	37.87	45
5	3901.0	-59.65	5.20	11.15	Horizontal	-55.85	-13.00	42.85	135
6	4692.0	-60.07	5.50	11.95	Horizontal	-55.77	-13.00	42.77	225
7	5474.0	-61.21	5.70	13.55	Horizontal	-55.51	-13.00	42.51	0
8	6256.0	-59.44	6.30	13.75	Horizontal	-54.14	-13.00	41.14	90
9	7038.0	-54.83	6.80	13.85	Horizontal	-49.93	-13.00	36.93	180
10	7820.0	-55.86	6.90	14.25	Horizontal	-50.66	-13.00	37.66	270

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

LTE Band 13 QPSK 10MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1555.3	-55.66	2.00	10.75	Horizontal	-49.06	-13.00	36.06	180
3	2346.0	-44.53	2.51	11.05	Horizontal	-38.14	-13.00	25.14	225
4	3111.0	-56.21	4.20	11.15	Horizontal	-51.41	-13.00	38.41	270
5	3888.8	-59.69	5.20	11.15	Horizontal	-55.89	-13.00	42.89	90
6	4666.5	-60.40	5.50	11.95	Horizontal	-56.10	-13.00	43.10	315
7	5444.3	-61.93	5.70	13.55	Horizontal	-56.23	-13.00	43.23	180
8	6222.0	-59.44	6.30	13.75	Horizontal	-54.14	-13.00	41.14	0
9	6999.8	-55.88	6.80	13.85	Horizontal	-50.98	-13.00	37.98	225
10	7777.5	-55.18	6.90	14.25	Horizontal	-49.98	-13.00	36.98	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

^{2.} The worst emission was found in the antenna is Horizontal position.

^{2.} The worst emission was found in the antenna is Horizontal position.



F Test Report Report No.: R2108A0735-R3

LTE Band 66 QPSK 1.4MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3489.0	-49.31	2.6	10.75	Horizontal	-41.16	-13.00	28.16	45
3	5235.0	-60.94	2.4	11.05	Horizontal	-52.29	-13.00	39.29	315
4	6980.0	-57.63	4.5	11.15	Horizontal	-50.98	-13.00	37.98	270
5	8725.0	-54.81	5.1	11.35	Horizontal	-48.56	-13.00	35.56	135
6	10470.0	-52.10	5.3	11.95	Horizontal	-45.45	-13.00	32.45	225
7	12215.0	-51.72	5.5	13.55	Horizontal	-43.67	-13.00	30.67	90
8	13960.0	-49.23	6.3	13.75	Horizontal	-41.78	-13.00	28.78	180
9	15705.0	-53.88	6.7	13.85	Horizontal	-46.73	-13.00	33.73	0
10	17450.0	-48.64	6.8	14.25	Horizontal	-41.19	-13.00	28.19	135

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

LTE Band 66 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3486.0	-48.70	2.6	10.75	Horizontal	-40.55	-13.00	27.55	90
3	5229.0	-62.48	2.4	11.05	Horizontal	-53.83	-13.00	40.83	135
4	6972.0	-58.31	4.5	11.15	Horizontal	-51.66	-13.00	38.66	270
5	8715.0	-53.52	5.1	11.35	Horizontal	-47.27	-13.00	34.27	45
6	10458.0	-51.52	5.3	11.95	Horizontal	-44.87	-13.00	31.87	0
7	12201.0	-52.69	5.5	13.55	Horizontal	-44.64	-13.00	31.64	180
8	13944.0	-50.21	6.3	13.75	Horizontal	-42.76	-13.00	29.76	90
9	15687.0	-53.44	6.7	13.85	Horizontal	-46.29	-13.00	33.29	315
10	17430.0	-49.52	6.8	14.25	Horizontal	-42.07	-13.00	29.07	225

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

^{2.} The worst emission was found in the antenna is Horizontal position.



LTE Band 66 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3472.5	-47.44	2.6	10.75	Horizontal	-39.29	-13.00	26.29	180
3	5209.0	-62.65	2.4	11.05	Horizontal	-54.00	-13.00	41.00	45
4	6945.8	-58.17	4.5	11.15	Horizontal	-51.52	-13.00	38.52	315
5	8682.0	-52.68	5.1	11.35	Horizontal	-46.43	-13.00	33.43	90
6	10418.6	-51.81	5.3	11.95	Horizontal	-45.16	-13.00	32.16	225
7	12455.0	-53.39	5.5	13.55	Horizontal	-45.34	-13.00	32.34	180
8	13891.5	-48.37	6.3	13.75	Horizontal	-40.92	-13.00	27.92	270
9	15627.0	-53.15	6.7	13.85	Horizontal	-46.00	-13.00	33.00	0
10	17364.4	-49.27	6.8	14.25	Horizontal	-41.82	-13.00	28.82	135

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

LTE Band 85 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1414.0	-52.62	2.00	10.75	Horizontal	-46.02	-13.00	33.02	270
3	2121.0	-50.05	2.51	11.05	Horizontal	-43.66	-13.00	30.66	225
4	2828.0	-55.91	4.20	11.15	Horizontal	-51.11	-13.00	38.11	0
5	3535.0	-56.35	5.20	11.15	Horizontal	-52.55	-13.00	39.55	315
6	4242.0	-59.27	5.50	11.95	Horizontal	-54.97	-13.00	41.97	225
7	4949.0	-57.69	5.70	13.55	Horizontal	-51.99	-13.00	38.99	90
8	5656.0	-58.73	6.30	13.75	Horizontal	-53.43	-13.00	40.43	315
9	6363.0	-58.30	6.80	13.85	Horizontal	-53.40	-13.00	40.40	45
10	7070.0	-55.15	6.90	14.25	Horizontal	-49.95	-13.00	36.95	180

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

^{2.} The worst emission was found in the antenna is Horizontal position.



LTE Band 85 QPSK 10MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1405.3	-52.68	2.00	10.75	Horizontal	-46.08	-13.00	33.08	180
3	2108.0	-49.33	2.51	11.05	Horizontal	-42.94	-13.00	29.94	315
4	2810.8	-55.47	4.20	11.15	Horizontal	-50.67	-13.00	37.67	45
5	3535.0	-56.12	5.20	11.15	Horizontal	-52.32	-13.00	39.32	225
6	4242.0	-59.31	5.50	11.95	Horizontal	-55.01	-13.00	42.01	315
7	4949.0	-59.93	5.70	13.55	Horizontal	-54.23	-13.00	41.23	90
8	5656.0	-58.78	6.30	13.75	Horizontal	-53.48	-13.00	40.48	315
9	6363.0	-55.97	6.80	13.85	Horizontal	-51.07	-13.00	38.07	45
10	7070.0	-54.14	6.90	14.25	Horizontal	-48.94	-13.00	35.94	270

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

^{2.} The worst emission was found in the antenna is Horizontal position.





6 Main Test Instruments

Date of Testing: August 20, 2019 ~ September 5, 2019:

Name	Manufacturer	Туре	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2019-05-19	2020-05-18
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2019-05-19	2020-05-18
Signal Analyzer	R&S	FSV30	100815	2018-12-16	2019-12-15
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2020-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2021-06-19
Signal generator	R&S	SMB 100A	102594	2019-05-19	2020-05-18
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preampflier	R&S	SCU18	102327	2019-05-19	2020-05-18
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2019-05-19	2020-05-18
RF Cable	Agilent	SMA 15cm	0001	2019-06-14	2019-12-13
Software	R&S	EMC32	9.26.0	/	/



Date of Testing: June 5, 2020:

Name	Manufacturer	Туре	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2020-05-18	2021-05-17
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2020-05-18	2021-05-17
Signal Analyzer	R&S	FSV30	100815	2019-12-15	2020-12-14
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2020-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2021-06-19
Signal generator	R&S	SMB 100A	102594	2020-05-18	2021-05-17
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preampflier	R&S	SCU18	102327	2020-05-18	2021-05-17
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2020-05-18	2021-05-17
RF Cable	Agilent	SMA 15cm	0001	2020-06-12	2020-12-11
Software	R&S	EMC32	9.26.0	/	/



Date of Testing: August 23, 2021~ August 26, 2021

Name	Manufacturer	Туре	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2021-05-15	2022-05-14
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2021-05-15	2022-05-14
Signal Analyzer	R&S	FSV3030	101411	2020-12-13	2021-12-12
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2020-04-02	2023-04-01
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	391	2019-12-16	2022-12-15
Horn Antenna	R&S	HF907	102723	2020-08-11	2023-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2023-06-19
Signal generator	R&S	SMB 100A	102594	2021-05-15	2022-05-14
Climatic Chamber	ESPEC	SU-242	93000506	2020-12-13	2021-12-12
Preampflier	R&S	SCU18	102327	2021-05-15	2022-05-14
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2021-06-09	2021-12-08
RF Cable	Agilent	SMA 15cm	0001	2021-06-09	2021-12-08
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT *****



ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.



ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.



ANNEX C: Product Change Description

The Product Change Description are submitted separately.