


CINCH Systems

RF-UT-EiA630-HT-433

FCC 15.231:2019

433 MHz Periodic Radio

Report # CINC0042.1

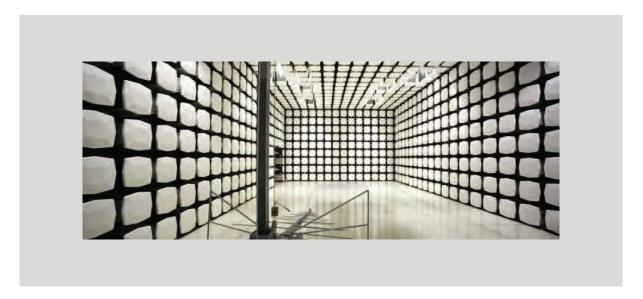





CERTIFICATE OF TEST



Last Date of Test: April 5, 2019 CINCH Systems Model: RF-UT-EiA630-HT-433

Radio Equipment Testing

Standards

Specification	Method					
FCC 15.231:2019	ANSI C63.10:2013					

Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	No	N/A	Not required for a battery powered EUT.
6.5, 6.6	Field Strength of Fundamental	Yes	Pass	
6.5, 6.6	Spurious Radiated Emissions	Yes	Pass	
6.9.2	Occupied Bandwidth	Yes	Pass	
7.5	Duty Cycle	Yes	Pass	

Deviations From Test Standards

None

Approved By:

Matt Nuernberg, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.

Report No. CINC0042.1 2/23

REVISION HISTORY



Revision Number	Description	Date (yyyy-mm-dd)	Page Number
00	None		

Report No. CINC0042.1 3/23

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB) and as a CAB for the acceptance of test data.

European Union

European Commission - Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC - Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit: https://www.nwemc.com/emc-testing-accreditations

Report No. CINC0042.1 4/23


FACILITIES







California Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	Oregon Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600						
NVLAP										
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0							
	Innovation, Science and Economic Development Canada									
2834B-1, 2834B-3	2834E-1, 2834E-3	2834D-1	2834D-1 2834G-1							
		BSMI								
SL2-IN-E-1154R	SL2-IN-E-1152R	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R						
		VCCI								
A-0029	A-0109	A-0108	A-0201	A-0110						
Red	cognized Phase I CAB for IS	ED, ACMA, BSMI, IDA, KCC/	RRA, MIC, MOC, NCC, OF	-CA						
US0158	US0175	US0017	US0191	US0157						

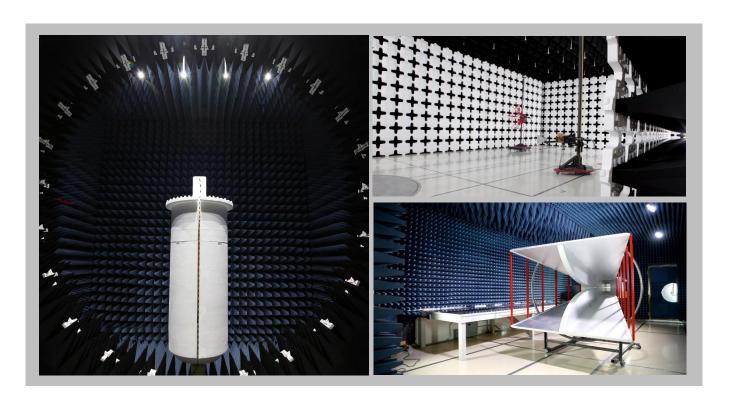

Report No. CINC0042.1 5/23

MEASUREMENT UNCERTAINTY



Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.


Test	+ MU	- MU
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

Report No. CINC0042.1 6/23


Test Setup Block Diagrams




Antenna Port Conducted Measurements

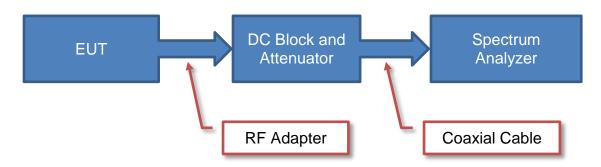

Near Field Test Fixture Measurements

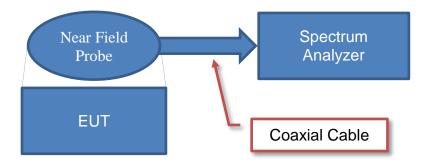

Spurious Radiated Emissions

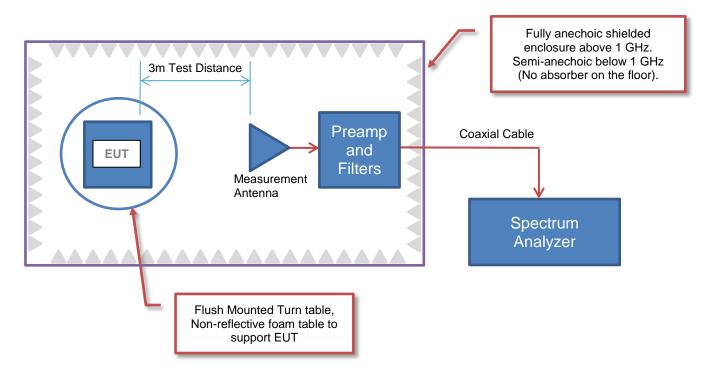

Report No. CINC0042.1 7/23

PRODUCT DESCRIPTION



Client and Equipment Under Test (EUT) Information

Company Name:	CINCH Systems
Address:	12075 43rd Street NE Suite 300
City, State, Zip:	St. Michael, MN 55376
Test Requested By:	Jibril Aga
Model:	RF-UT-EiA630-HT-433
First Date of Test:	April 4, 2019
Last Date of Test:	April 5, 2019
Receipt Date of Samples:	April 4, 2019
Equipment Design Stage:	Production
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:

Low power periodic radio with one antenna operating at 433.42 MHz used in a fire system sensor for communication with a fire alarm control panel.

Testing Objective:

To demonstrate compliance of the Low Power radio to FCC 15.231 specifications.

Report No. CINC0042.1 8/23

CONFIGURATIONS



Configuration CINC0042- 2

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Heat Detector	CINCH Systems	RFHT-A	331721

Report No. CINC0042.1 9/23

MODIFICATIONS



Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
		Spurious	Tested as	No EMI suppression	EUT remained at
1	2019-04-04	Radiated	delivered to	devices were added or	Element following the
		Emissions	Test Station.	modified during this test.	test.
2 2019-04-04		Field	Tested as	No EMI suppression	EUT remained at
	2019-04-04	Strength of	delivered to	devices were added or	Element following the
		Fundamental	Test Station.	modified during this test.	test.
	2019-04-04	Occupied	Tested as	No EMI suppression	EUT remained at
3		Bandwidth	delivered to	devices were added or	Element following the
		Dariuwiuiri	Test Station.	modified during this test.	test.
			Tested as No EMI suppression		Sahadulad taating
4	2019-04-05	Duty Cycle	delivered to	devices were added or	Scheduled testing
			Test Station.	modified during this test.	was completed.

Report No. CINC0042.1 10/23

FIELD STRENGTH OF FUNDAMENTAL



PSA-ESCI 2019.02.26

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Tx at 433.42 MHz modulated

POWER SETTINGS INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

CINC0042 - 2

FREQUENCY RANGE INVESTIGATED

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
 Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	27-Apr-2018	12 mo
Cable	ESM Cable Corp.	Bilog Cables	MNH	2-Nov-2018	12 mo
Antenna - Biconilog	Teseq	CBL 6141B	AYD	25-Jan-2018	24 mo

MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

Report No. CINC0042.1 11/23

TEST DESCRIPTION

The antennas to be used with the EUT were tested. The EUT was configured for continuous un-modulated CW operation at its single transmit frequency. The field strength of the transmit frequency was maximized by rotating the EUT, adjusting the measurement antenna height and polarization, and manipulating the EUT in 3 orthogonal planes (per ANSI C63.10:2013).

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" = N1L1 +N2L2 +....

Where N1 is the number of type 1 pulses, L1 is length of type 1 pulses, N2 is the number of type 2 pulses, L2 is the length of type 2 pulses, etc.

Therefore, Duty Cycle = (N1L1 +N2L2 +...)/100mS or T, whichever is less. (Where T is the period of the pulse train.)

The measured values for the EUT's pulse train are as follows:

Period = 100 mSec Pulsewidth of Type 1 Pulse = .2027 mSec Pulsewidth of Type 2 Pulse = .1013 mSec Number of Type 1 Pulses = 19 Number of Type 2 Pulses = 42

Duty Cycle = $20 \log [((19)(.2027) + (42)(.1013))/100] = -21.8 dB$

The duty cycle correction factor of –21.8 dB was added to the peak readings to mathematically derive the average levels. Peak measurements were made with a resolution bandwidth of 100kHz and a video bandwidth of 300kHz.

Report No. CINC0042.1 12/23

FIELD STRENGTH OF FUNDAMENTAL



											EmiR5 2018.09.26		PSA-ESCI 2019.02.2	8	
	Wo	rk Order:	CINC	C0042		Date:	4-Ap	r-2019			Emilio 2010.09.20	7 11-	T 3A-E301 2019.02.2	ĺ	
		Project:		one	Ten	nperature:		4 °C	/	0	//	11			
		Job Site:		N05		Humidity:		% RH							
S	erial	Number:	331	1721	Barome	etric Pres.:	1030) mbar		Tested by:	Chris Patte	erson		-	
				4630-HT-43	3									 	
		iguration:												_	
		ustomer:	CINCH Sy	stems										_	
			Jibril Aga											_	
		JT Power:		42 MHz mo	all = 4 = al									_	
Op	erati	ng Mode:	1 X at 433.	42 MHZ 1110	dulated										
	De	eviations:	None											_	
		mmantai	Measurem	nents taken	while devic	e was in a	modulated	mode. Avg	g. were calc	culated base	ed on DCCI	F.		_	
	C	omments:													
Test S	peci	fications						Test Meth	od					_	
FCC 1	5.23°	1:2019						ANSI C63.	10:2013					_	
D.	ın #	4	Toot Di	stance (m)	3	Antonica	Height(s)		1 to 4(m)		Results	D.	ass	_	
ΚU	III #	4	Test Di	Stance (III)	3	Antenna	neight(s)		1 10 4(111)		Results	F	a55	_	
1	00 +														
											_				
	80														
_	60														
dBuV/m	00														
⋛															
8															
	40														
	40														
	20														
	0														
	1	0					100						1000		
							MHz				■ PK	◆ AV	QP		
						Duty Cycle		Polarity/							
						Correction	External	Transducer		Distance			Compared to		
Fred		Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Factor (dB)	Attenuation (dB)	Туре	Detector	Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Spec. (dB)		
(MH	۷)	(ubuv)	(db)	(ineters)	(uegrees)	(ub)	(ub)			(ub)	(ubuv/III)	(ubav/III)	(ub)	Comments	
433.4		76.0	23.1	2.0	181.1		0.0	Horz	PK	0.0	99.1	100.8	-1.7	EUT Horz	
433.4		75.9	23.1	1.2	297.9		0.0	Vert	PK	0.0	99.0	100.8	-1.8	EUT On Sic	
433.4		75.0	23.1	2.3	144.0	24.0	0.0	Horz	PK AV	0.0	98.1	100.8	-2.7	EUT Vert	
433.4 433.4		76.0 75.9	23.1 23.1	2.0 1.2	181.1 297.9	-21.8 -21.8	0.0 0.0	Horz Vert	AV AV	0.0 0.0	77.3 77.2	80.8 80.8	-3.5 -3.6	EUT Horz EUT On Sig	
433.4		75.9 75.0	23.1	2.3	144.0	-21.8 -21.8	0.0	Horz	AV	0.0	76.3	80.8	-3.6 -4.5	EUT Vert	
433.4		70.6	23.1	1.0	261.9		0.0	Vert	PK	0.0	93.7	100.8	-7.1	EUT Vert	
433.4		69.7	23.1	1.0	343.9		0.0	Horz	PK	0.0	92.8	100.8	-8.0	EUT On Sid	
433.4	.00	69.0	23.1	1.0	96.9		0.0	Vert	PK	0.0	92.1	100.8	-8.7	EUT Horz	

Report No. CINC0042.1 13/23

Vert

Vert

Horz

Vert

PK

 AV

 AV

ΑV

0.0

0.0

0.0

0.0

92.1

71.9

71.0

70.3

100.8

80.8

80.8

80.8

-8.7

-8.9

-9.8 -10.5

EUT Horz

EUT Vert EUT On Side

0.0

0.0

0.0

0.0

343.9 96.9

261.9

343.9

96.9

-21.8

-21.8

-21.8

433.400 433.400 433.400 433.400 433.400

69.0

70.6

69.7

69.0

23.1

23.1

23.1

23.1

1.0

1.0

1.0

1.0

SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2019.02.26

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Tx at 433.42 MHz modulated

POWER SETTINGS INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

CINC0042 - 2

FREQUENCY RANGE INVESTIGATED

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

	Description	Manufacturer	Model	ID	Last Cal.	Interval
An	nalyzer - Spectrum Analyzer	Keysight	N9010A	AFN	27-Apr-2018	12 mo
	Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVT	8-Feb-2019	12 mo
	Cable	ESM Cable Corp.	Double Ridge Guide Horn Cables	MNI	24-Sep-2018	12 mo
	Antenna - Double Ridge	ETS Lindgren	3115	AJA	27-Jun-2018	24 mo
	Attenuator	Fairview Microwave	SA18E-10	TYA	24-Sep-2018	12 mo
	Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	AVO	2-Nov-2018	12 mo
	Cable	ESM Cable Corp.	Bilog Cables	MNH	2-Nov-2018	12 mo
	Antenna - Biconilog	Teseq	CBL 6141B	AYD	25-Jan-2018	24 mo

MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequency in each operational band and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

Report No. CINC0042.1 14/23

QP = Quasi-Peak Detector PK = Peak Detector AV = RMS Detector

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" = N1L1 +N2L2 +....

Where N1 is the number of type 1 pulses, L1 is length of type 1 pulses, N2 is the number of type 2 pulses, L2 is the length of type 2 pulses, etc.

Therefore, Duty Cycle = (N1L1 +N2L2 +...)/100mS or T, whichever is less. Where T is the period of the pulse train.

The measured values for the EUT's pulse train are as follows:

Period = 100 mSec Pulsewidth of Type 1 Pulse = .2027 mSec Pulsewidth of Type 2 Pulse = .1013 mSec Number of Type 1 Pulses = 19 Number of Type 2 Pulses = 42

Duty Cycle = $20 \log [((19)(.2027) + (42)(.1013))/100] = -21.8 dB$

The duty cycle correction factor of -21.8 dB was added to the peak readings to mathematically derive the average levels. Peak measurements were made with a resolution bandwidth of 100kHz and a video bandwidth of 300kHz for measurements at or below 1GHz. Above 1GHz, a resolution bandwidth of 1MHz and a video bandwidth of 3MHz was used.

Report No. CINC0042.1

SPURIOUS RADIATED EMISSIONS



										EmiR5 2018.09.26		PSA-ESCI 2019.02.26	3
Wo	rk Order:	CINC	0042		Date:	4-Apr	-2019			/	7 11_		1
	Project:		ne	T	emperature:		°C			11	M		
	Job Site:		N05		Humidity:		% RH						
Serial	Number:	331			metric Pres.:	1028	mbar		Tested by:	Chris Patte	erson		_
Confi			630-HT-43	3									_
	guration:	CINCH Sy:	ctome										_
Δ1	ttendees:	Jihril Aga	sterris										_
	T Power:												_
			42 MHz mod	dulated									_
Operatii	ng Mode:												
De	eviations:	None											_
													=
Ca		None											
Co	mments:												
T1 0	(i 4i						Took Made		1				=
FCC 15.231							Test Meth ANSI C63.						_
FCC 15.231	1:2019						ANSI Cos.	10:2013					
													_
Run #	10	Test Dis	stance (m)	3	Antenna	a Height(s)		1 to 4(m)		Results	P	ass	- -
_													
80									, <u>"</u>	m —			
00													
									ш ш	" " " " —			
70 +													
								-					
60						_							
00									•				
									ى سى	╜╜╙╙			
_ 50 +					 	+							
<u> </u>						ט ע		8	•				
w//ngp									*				
₩ 40									•				
30 +									•				
20													
20													
10 +													
0													
10				10	00			1000				10000	
						MHz							
										■ PK	◆ AV	• QP	
					Duty Cycle	_	Polarity/						
Freq	Amplitude	Factor	Antenna Height	Azimuth	Correction Factor	External Attenuation	Transducer Type	Detector	Distance Adjustment	Adjusted	Spec. Limit	Compared to Spec.	
(MHz)	(dBuV)	(dB)	(meters)	(degrees		(dB)	75-	2 3 3 3 3 3	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
	48.1	11.1	1.0	121.9		10.0	Uo	PK	0.0	69.2	90.0	-11.6	Comments EUT Horz
866.800 866.800	48.1 48.1	11.1 11.1	1.0 1.0	121.9		10.0	Horz Horz	AV	0.0 0.0	69.2 47.4	80.8 60.8	-11.6	EUT Horz
866.800	46.1	11.1	1.0	66.0		10.0	Horz	PK	0.0	67.2	80.8	-13.6	EUT Vert
866.800	46.1	11.1	1.3	153.9		10.0	Vert	PK	0.0	67.2	80.8	-13.6	EUT On Side
1733.597 866.800	71.9 46.1	-5.6 11.1	1.0 1.0	286.0 66.0	-21.8	0.0 10.0	Horz Horz	PK AV	0.0 0.0	66.3 45.4	80.8 60.8	-14.5 -15.4	EUT Horz EUT Vert
866.800	46.1	11.1	1.3	153.9		10.0	Vert	AV	0.0	45.4	60.8	-15.4	EUT On Side
1733.605	70.3	-5.6	1.0	87.0		0.0	Vert	PK	0.0	64.7	80.8	-16.1	EUT On Side
1733.597	71.9	-5.6	1.0	286.0		0.0	Horz	A۷	0.0	44.5 57.7	60.8	-16.3	EUT Horz
1300.227 1733.605	64.5 70.3	-6.8 -5.6	1.0 1.0	196.0 87.0	-21.8	0.0 0.0	Horz Vert	PK AV	0.0 0.0	57.7 42.9	74.0 60.8	-16.3 -17.9	EUT Horz EUT On Side
1300.227	64.5	-6.8	1.0	196.0		0.0	Horz	AV	0.0	35.9	54.0	-18.1	EUT Horz
866.800	40.5	11.1	1.0	249.0		10.0	Horz	PK	0.0	61.6	80.8	-19.2	EUT On Side

Report No. CINC0042.1 16/23

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
866.800	40.3	11.1	2.0	41.0		10.0	Vert	PK	0.0	61.4	80.8	-19.4	EUT Horz
866.805	40.3	11.1	2.0	347.9		10.0	Vert	PK	0.0	61.4	80.8	-19.4	EUT Vert
1300.202	61.2	-6.8	1.0	36.0		0.0	Vert	PK	0.0	54.4	74.0	-19.6	EUT On Side
866.800	40.5	11.1	1.0	249.0	-21.8	10.0	Horz	AV	0.0	39.8	60.8	-21.0	EUT On Side
866.800	40.3	11.1	2.0	41.0	-21.8	10.0	Vert	AV	0.0	39.6	60.8	-21.2	EUT Horz
866.805	40.3	11.1	2.0	347.9	-21.8	10.0	Vert	AV	0.0	39.6	60.8	-21.2	EUT Vert
1300.202	61.2	-6.8	1.0	36.0	-21.8	0.0	Vert	AV	0.0	32.6	54.0	-21.4	EUT On Side

Report No. CINC0042.1 17/23

OCCUPIED BANDWIDTH



XMit 2019 02 26

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Amplifier - Pre-Amplifier	Miteq	AM-1064-9079 and SA18E-10	AOO	23-Feb-19	23-Feb-20
Cable	Element	Biconilog Cable	MNX	23-Feb-19	23-Feb-20
Antenna - Biconilog	ETS Lindgren	3142D	AXO	15-Dec-17	15-Dec-19
Analyzer - Spectrum Analyzer	Keysight	N9010A (EXA)	AFQ	13-Dec-18	13-Dec-19

TEST DESCRIPTION

The measurement was made in a radiated configuration of the fundamental with the carrier fully maximized for its highest radiated power. The EUT was transmitting at its maximum data rate.

The 20 dB occupied bandwidth is required to be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz.

Report No. CINC0042.1 18/23

OCCUPIED BANDWIDTH



							AIWII 2015.02.20
EUT:	RF-UT-EiA630-HT-433				Work Order:	CINC0042	
Serial Number:	331721				Date:	5-Apr-19	
Customer:	CINCH Systems				Temperature:	23.3 °C	
Attendees:	Jibril Aga				Humidity:	28.9% RH	
Project:					Barometric Pres.:		,
Tested by:	Andrew Rogstad		Power:	Battery	Job Site:	MN09	
TEST SPECIFICATI	ONS			Test Method			
FCC 15.231:2019				ANSI C63.10:2013			
COMMENTS							
None							
DEVIATIONS FROM	I TEST STANDARD						
None							
Configuration #	2	Signature	to Roo	gstool			
					Value (kHz)	Limit (kHz)	Result
433.42 MHz				•	32.14	1083.55	Pass

Report No. CINC0042.1 19/23


OCCUPIED BANDWIDTH



433.42 MHz

Value (kHz) Limit (kHz) Result

32.14 1083.55 Pass

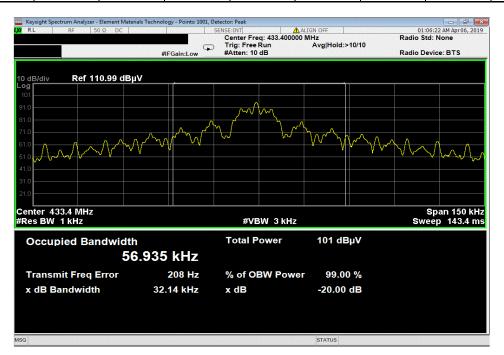

Report No. CINC0042.1 20/23

DUTY CYCLE



XMit 2017.12.13

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Antenna - Biconilog	Teseq	CBL 6141B	AYD	25-Jan-2018	25-Jan-2020
Cable	ESM Cable Corp.	Bilog Cables	MNH	2-Nov-2018	2-Nov-2019
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	27-Apr-2018	27-Apr-2019

TEST DESCRIPTION

The measurement was made in a radiated configuration of the fundamental with the carrier fully maximized for its highest radiated power. For software controlled or pre-programmed devices, the manufacturer shall declare the duty cycle class or classes for the equipment under test. For manually operated or event dependant devices, with or without software controlled functions, the manufacturer shall declare whether the device once triggered, follows a pre-programmed cycle, or whether the transmission is constant until the trigger is released or manually reset. The manufacturer shall also give a description of the application for the device and include a typical usage pattern. The typical usage pattern as declared by the manufacturer shall be used to determine the duty cycle and hence the duty class.

Where an acknowledgement is required, the additional transmitter on-time shall be included and declared by the manufacturer.

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" = N1L1 +N2L2 +....

Where N1 is the number of type 1 pulses, L1 is length of type 1 pulses, N2 is the number of type 2 pulses, L2 is the length of type 2 pulses, etc.

Therefore, Duty Cycle = (N1L1 +N2L2 +...)/100mS or T, whichever is less. (Where T is the period of the pulse train.)

The measured values for the EUT's pulse train are as follows:

Period = 100 mSec Pulsewidth of Type 1 Pulse = .2027 mSec Pulsewidth of Type 2 Pulse = .1013 mSec Number of Type 1 Pulses = 19 Number of Type 2 Pulses = 42

Duty Cycle = $20 \log [((19)(.2027) + (42)(.1013))/100] = -21.8 dB$

The duty cycle correction factor of –21.8 dB was added to the peak readings to mathematically derive the average levels. Peak measurements were made with a resolution bandwidth of 100kHz and a video bandwidth of 300kHz.

Report No. CINC0042.1

DUTY CYCLE




EUT: RF-UT-EIA630-HT-433
Serial Number: 331721
Customer: CINCH Systems
Attendees: Jibril Aga
Project: None
Tested by: Chris Patterson
TEST SPECIFICATIONS Work Order: CINC0042
Date: 4-Apr-19
Temperature: 22.6 °C
Humidity: 21.1% RH
Barometric Press.: 1029 mbar Power: Battery
Test Method Job Site: MN05 ANSI C63.10:2013 FCC 15.231:2019 COMMENTS Tx at 433.42 MHz DEVIATIONS FROM TEST STANDARD Configuration # 2 Signature Number of Type 1 Pulses Number of Type 2 Pulses Type 1 Pulse Type 2 Pulse length (ms) length (ms) DCCF Result 0.2027 0.1013 100 ms 5 s -21.8 N/A N/A N/A

Report No. CINC0042.1 22/23


DUTY CYCLE



100 ms Type 2 Pulse Type 1 Pulse Number of Number of Type 1 Pulses Type 2 Pulses DCCF length (ms) length (ms) Result 0.2027 0.1013 -21 8 N/A 20 40

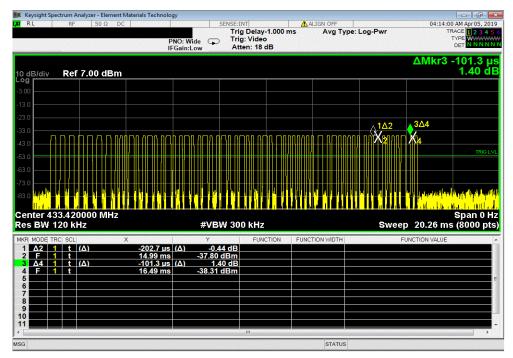

		5 s			
Number of	Type 1 Pulse	Number of	Type 2 Pulse		
 Type 1 Pulses	length (ms)	Type 2 Pulses	length (ms)	DCCF	Result
N/A	N/A	N/A	N/A	NI/A	N/A

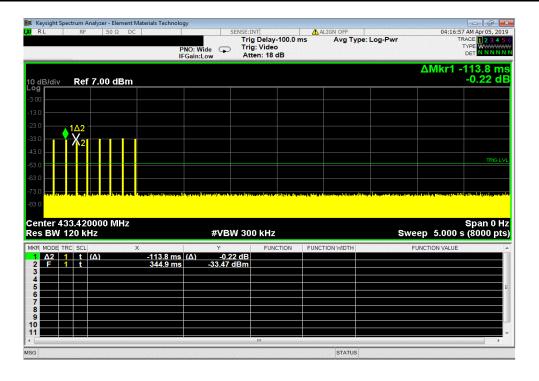

Report No. CINC0042.1 23/23