



3、成品图（Product drawing）：

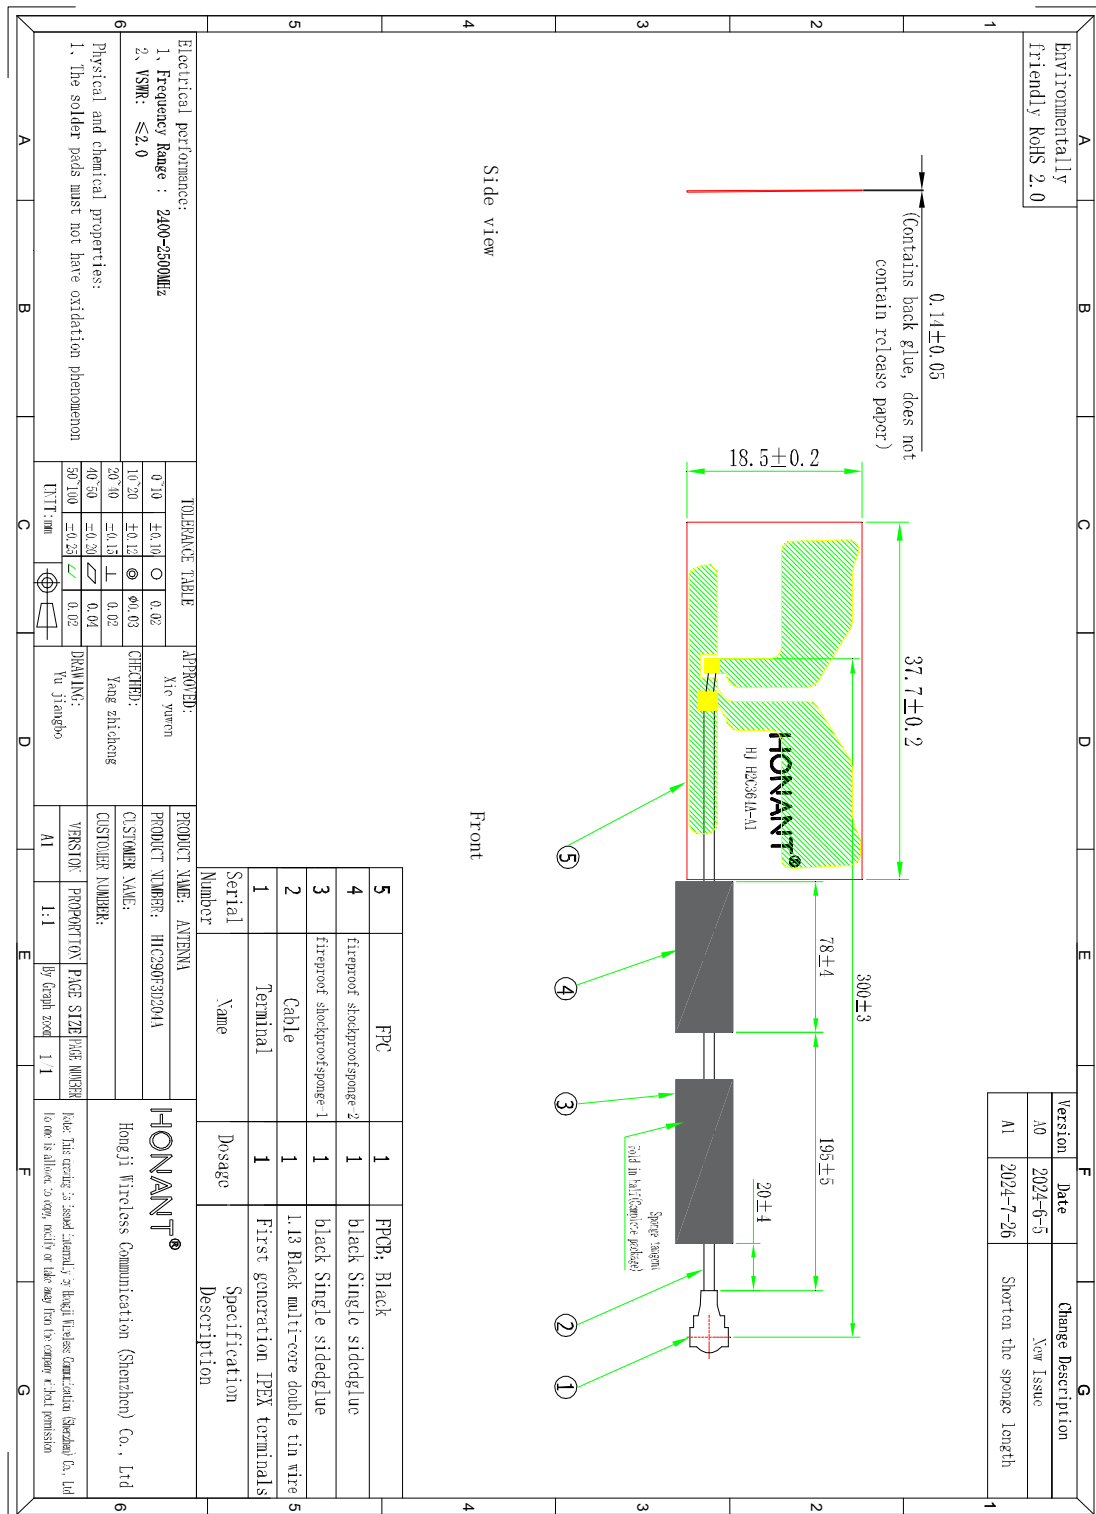


4、包装规范（Packaging specifications）：

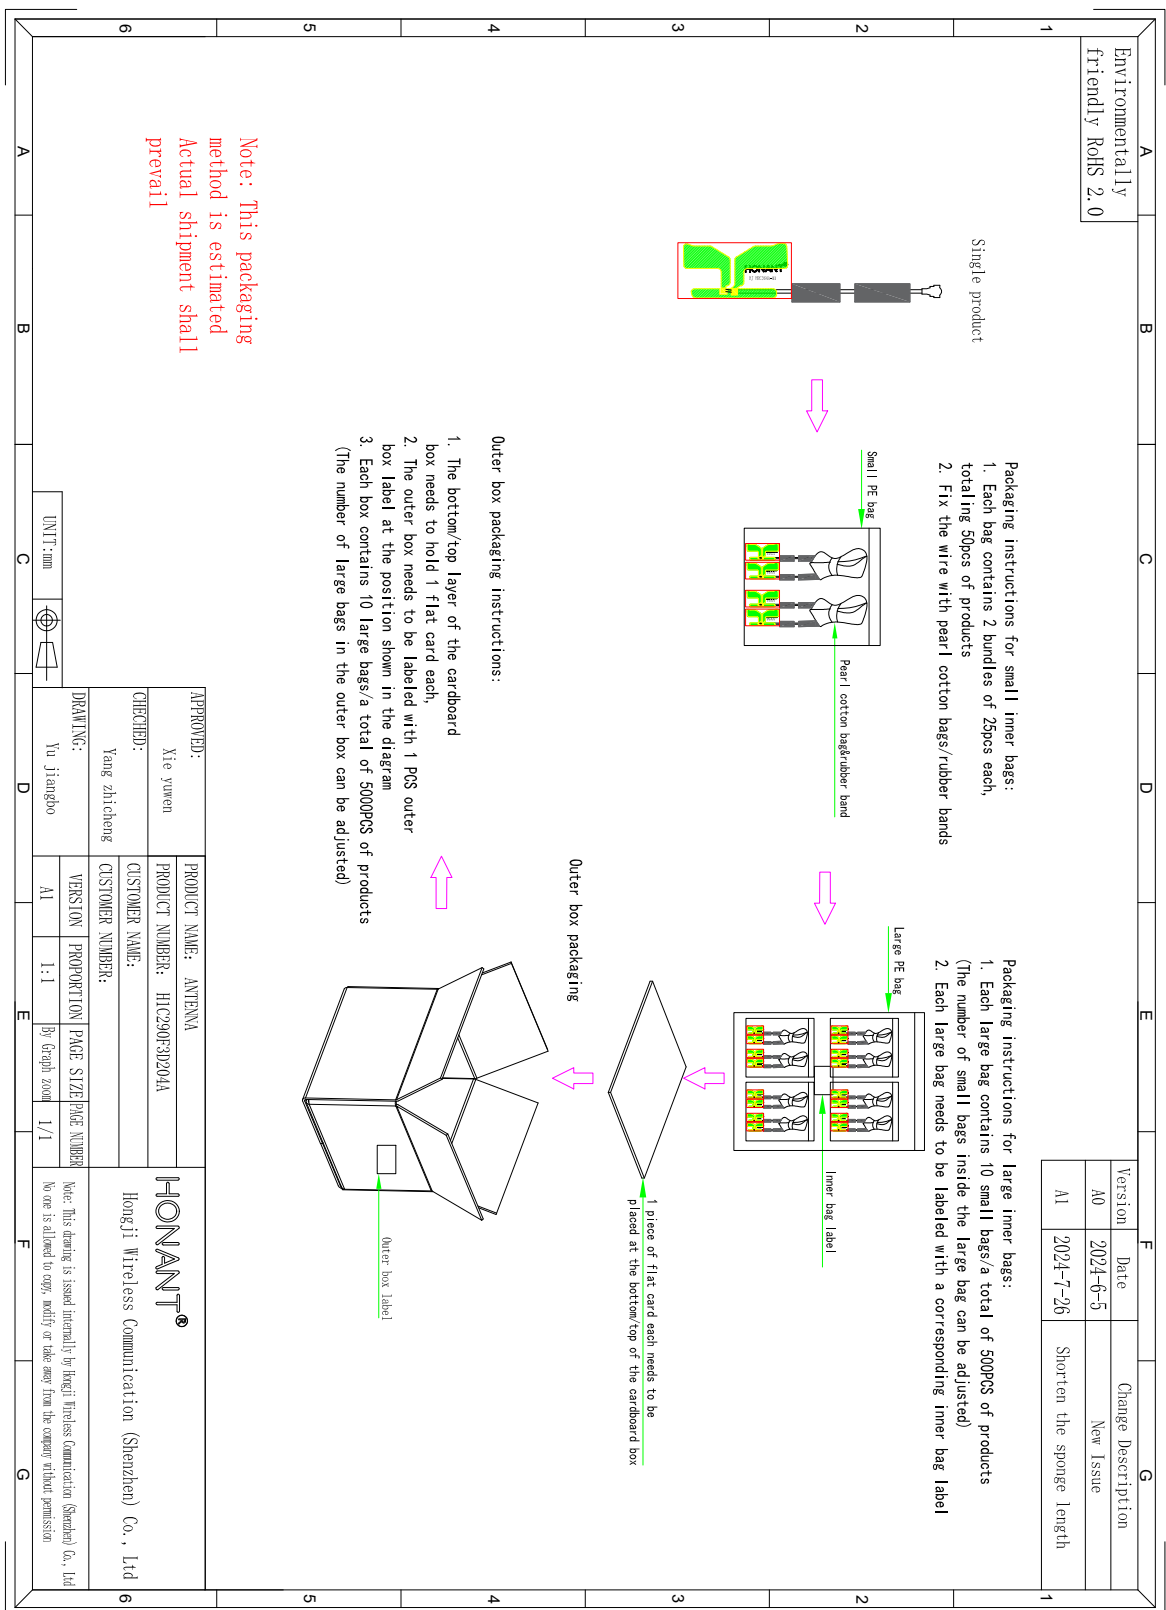


5、测试报告 (Test report)：

5.1: S11

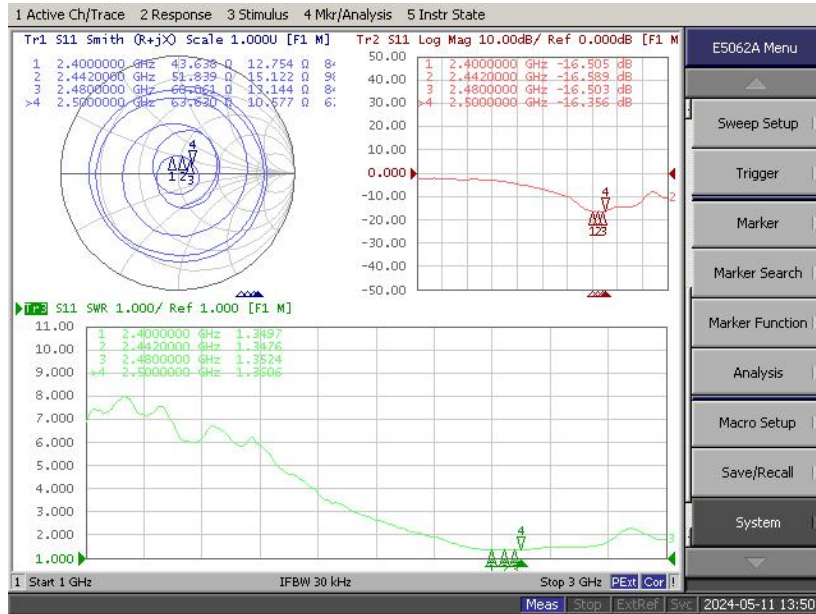

5.2: 2D、3DRadiation Pattern


MAX: 4.8dBi
MIN: -28.93dBi

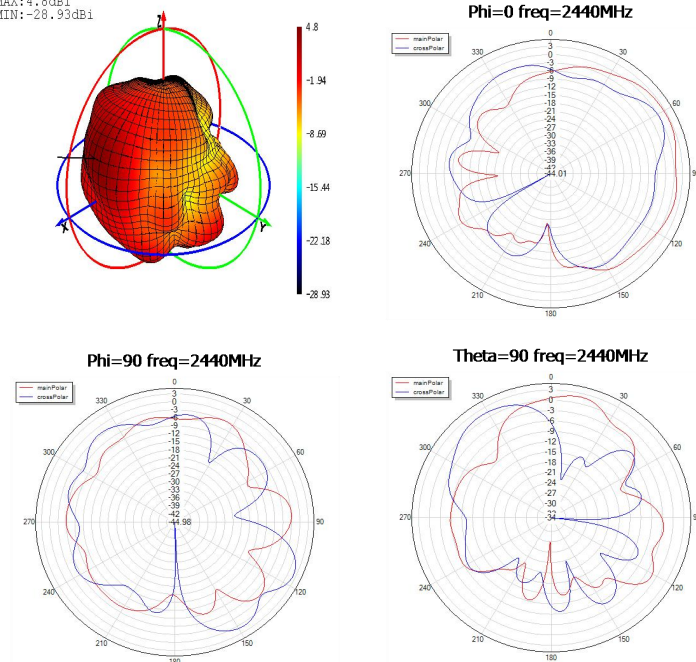

5.3: Antenna gain and efficiency

Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
2400	4.80	-3.07	49.36
2410	4.78	-3.26	47.24
2420	4.69	-3.41	45.62
2430	4.78	-3.43	45.38
2440	4.80	-3.57	44.00
2450	4.80	-3.55	44.13
2460	4.64	-3.57	43.99
2470	4.59	-3.45	45.20
2480	4.29	-3.34	46.37
2490	4.13	-3.12	48.78
2500	3.89	-2.96	50.63

5.4: Matching circuit

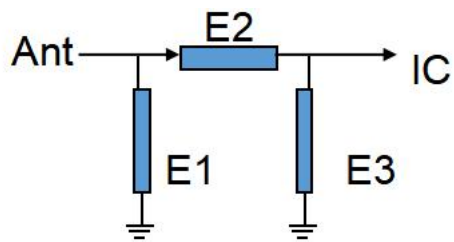

Element	Value
E1	N/C
E2	0Ω
E3	N/C