

Figure 126. DCU—Function—Trigger Switch--Baseline Save Confirmation

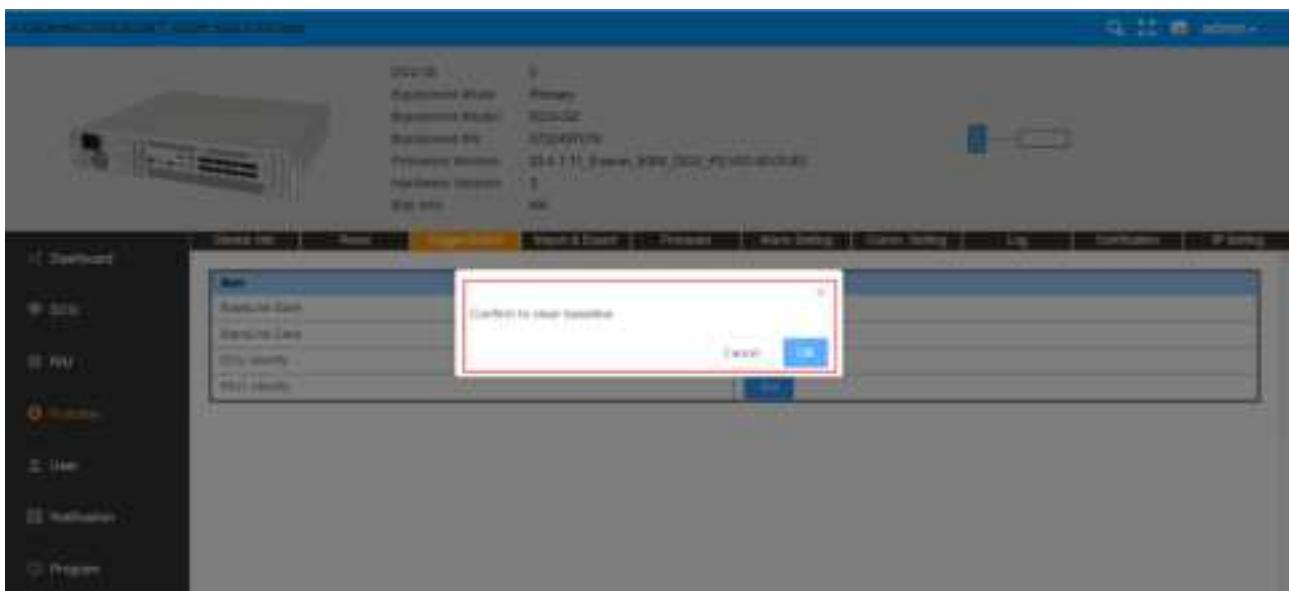


Figure 127. DCU—Function—Trigger Switch--Baseline Clear Confirmation

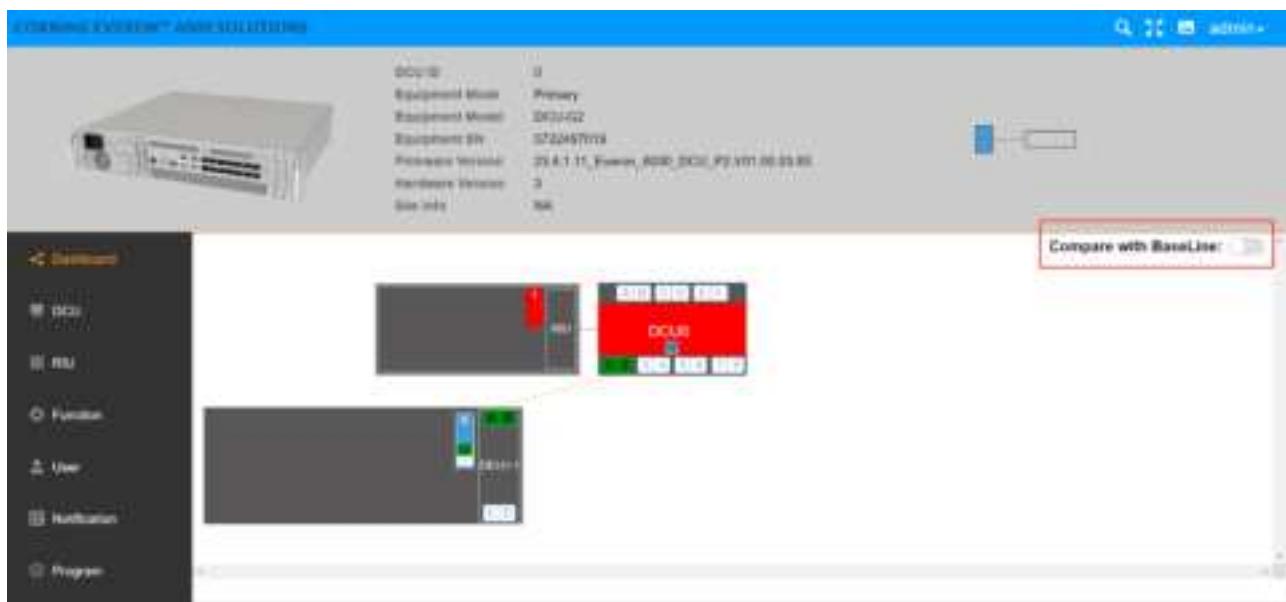


Figure 128. DCU--Dashboard-- Compare with Baseline

5.2.3.4 Import & Export

The user can import and export DCU configuration by clicking Function Import & Export, as shown in the following figure.

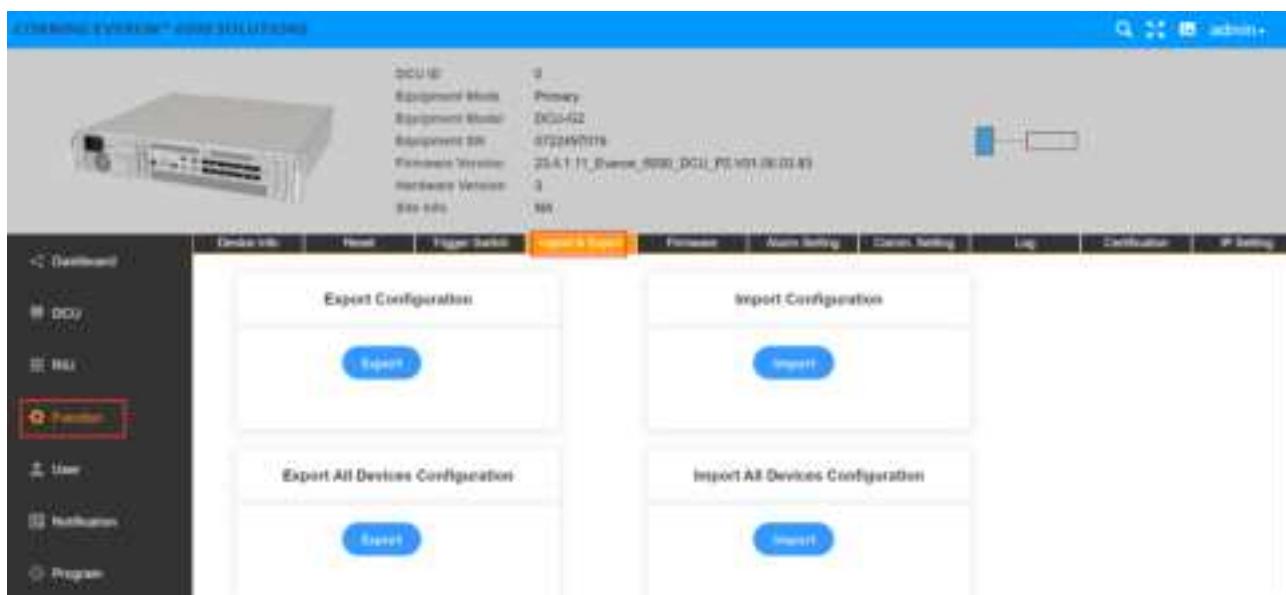


Figure 129 DCU Function Import & Export

5.2.3.5 Firmware

Click Function FirmWare and the firmWare info can be viewed and upgraded.

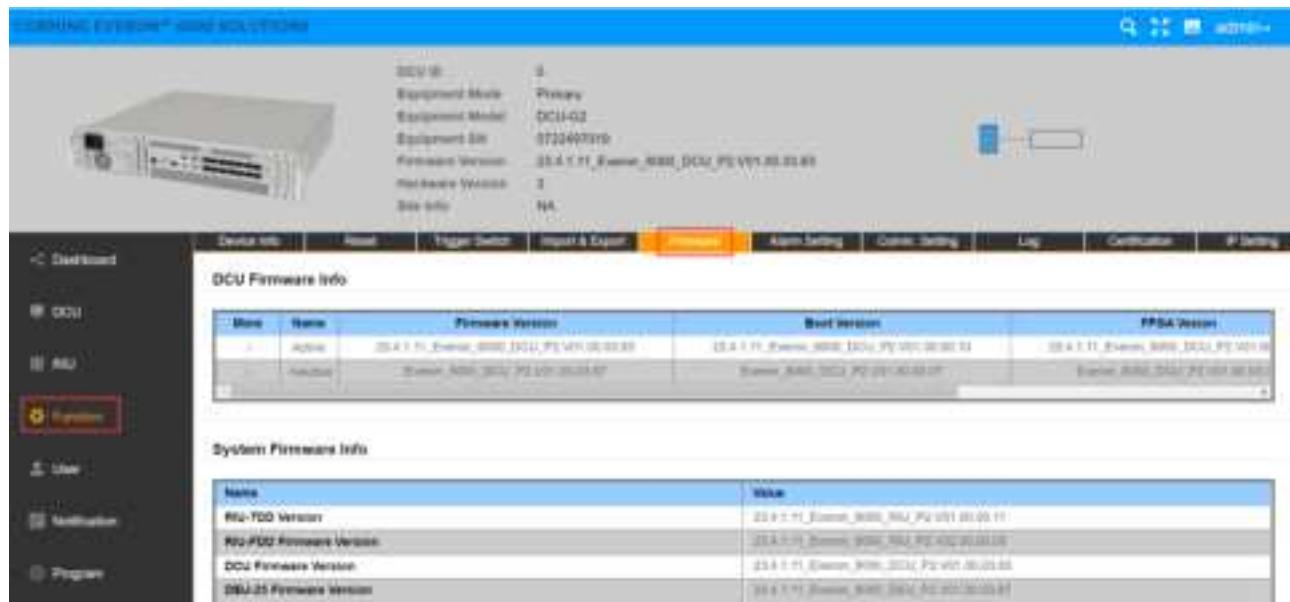


Figure 130.DCU Function Firmware

Two upgrade modes are supported by 5G digital DAS products of D430 series of the system software of all NE: centralized upgrade and decentralized upgrade. The settings of the two modes can be configured in Control Switch.

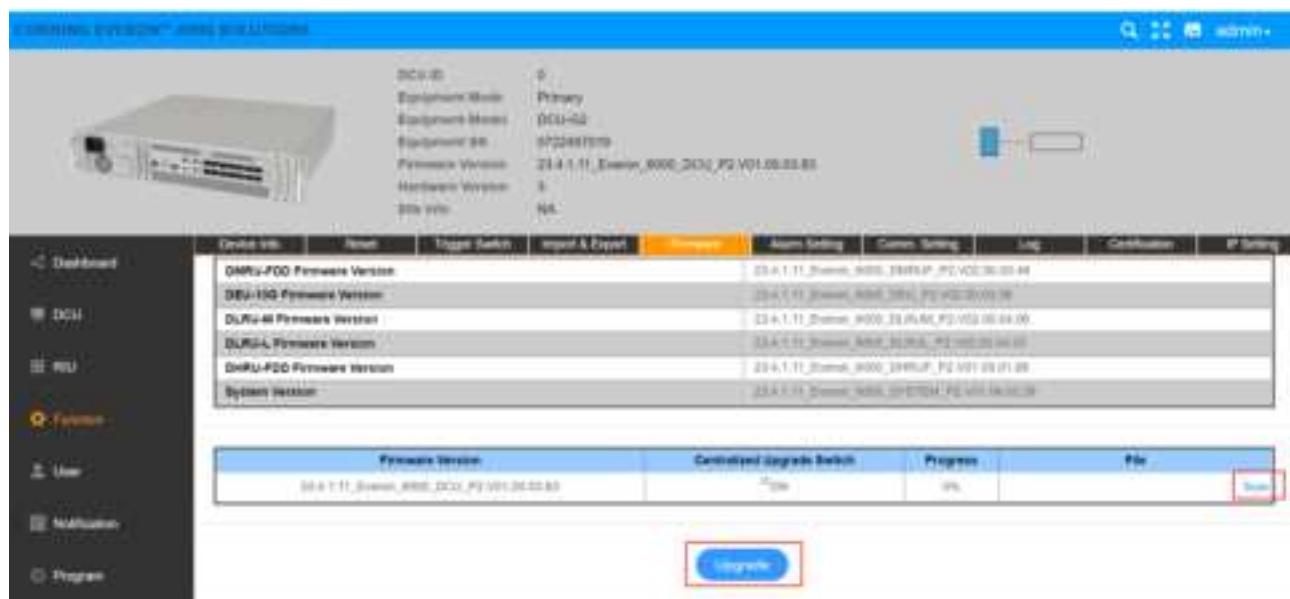


Figure 131. Firmware Upgrade Configuration

1. Decentralized upgrade: the Control Switch is OFF and only the software of the current DCU unit can be upgraded in this mode. The steps to upgrade the software are the followings:

Step 1: Click SCAN to import the software version to be upgraded.

Step 2: Click Upgrade. When the progress of downloading the software to the device is 100% and FINISH is prompted, the software is successfully downloaded.

Step 3: After the device is reset, the software will be upgraded automatically.

2. Centralize upgrade: the Control Switch is ON. The system software of seven NE (RIU, DCU, DEU, dLRU-2.5, dLRU-3.5, dMRU-2.5, dMRU-3.5) in the 5G digital DAS products will be stored after they are imported into the internal storage by the users. All the slave NE (slave DCU, DEU, dLRU) connected to this seven NE will automatically take the system software to be upgraded independently.

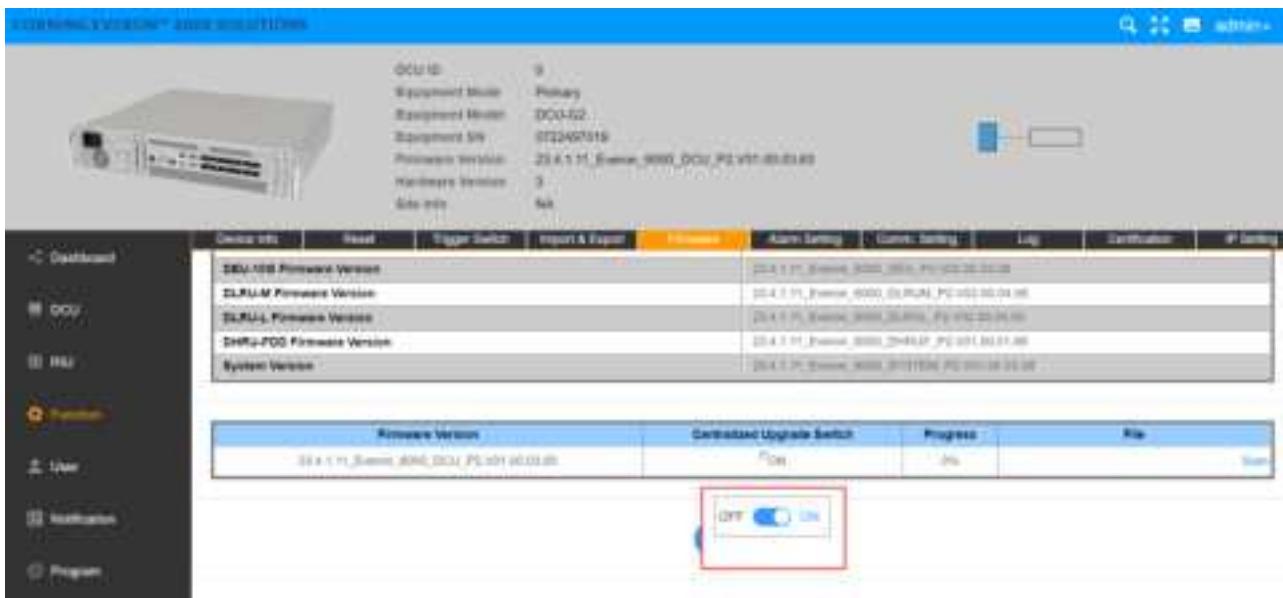


Figure 132. System Upgrade ON/OFF

5.2.3.6 Alarm Setting

Through Function Alarm Setting, setting the alarm duration can be achieved. When it is set to 1~253, it shows alarm duration, with the unit of 10s. Setting to 254 indicates an immediate level alarm; Set to 0 and the alarm will not occur until 3 minutes later.

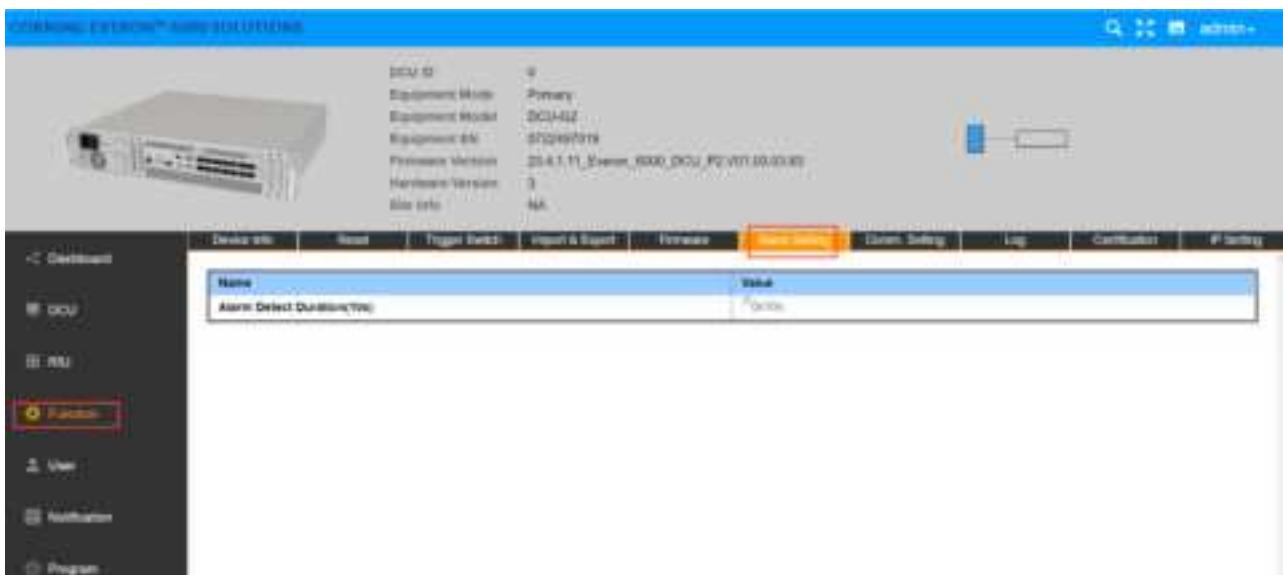


Figure 133. DCU Function Alarm Setting Alarm Detect Duration

5.2.3.7 Comm Setting

Click Function--Comm. Setting to set the network management communication types.

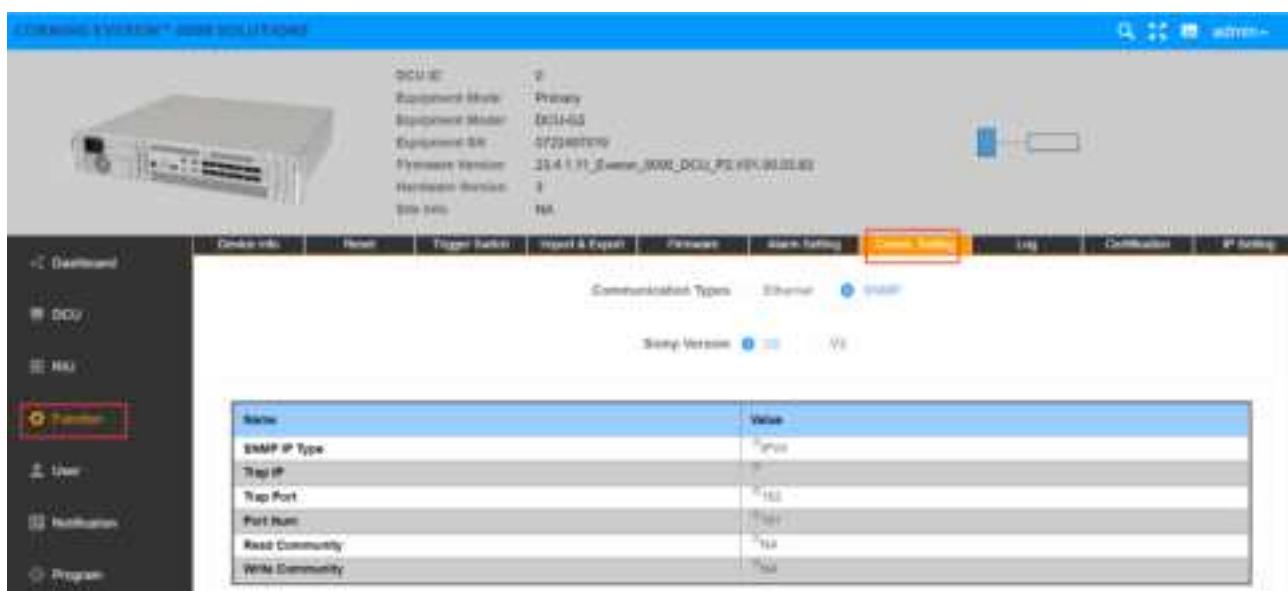


Figure 134. DCU Function Comm. Setting

5.2.3.8 Log

Click Function--Log to export the log of DCU for problem analysis.



Figure 135.DCU—Function-- Log

5.2.3.9 Certification

Click Certification to view issuer name, subject name, start time and end time of DCU.



Figure 136.DCU—Function—Certification

5.2.3.10 IP Setting

Click Function--IP Setting to set DCU IP for OMC communication.



Figure 137.DCU Function-- IP Setting

5.2.4 DCU -> User Info

5.2.4.1 Password

Click User->Password to reset the DCU password which should include capital and lower-case letters and 12 digits in length.



Figure 138. DCU User Password

The rules for setting passwords are as follows:

1. Default account and password at the first access: account/password= admin/admin
2. Need to change the password after the first access
3. Password restriction:
 - The minimum user password length is 12 characters.
 - At least three combinations of numbers, uppercase, lowercase and special symbols

It has been shown in the Web GUI if we enter into the password setup/modify page as follow



The minimum user password length is 12 characters.





At least three combinations of numbers, uppercase, lowercase and special symbols



Modify

5.2.4.2 User Info

Click User->User Info to add a user and set the role and password.

The screenshot shows the DCU User Info page. At the top, there is a summary section with various equipment details. Below this, a table lists users. The table has columns for User Name, Role, Status, and Operation. One row is present in the table, showing 'admin' as the User Name and 'admin' as the Role. The 'Operation' column contains a blue 'Reset' button. A large blue 'Add User' button is located at the bottom right of the table area. On the left side of the screen, there is a sidebar with navigation links: Dashboard, DCU, RRU, Function, User (which is highlighted), and Notifications.

User Name	Role	Status	Operation
admin	admin		<button>Reset</button>

Figure 139.DCU User User Info

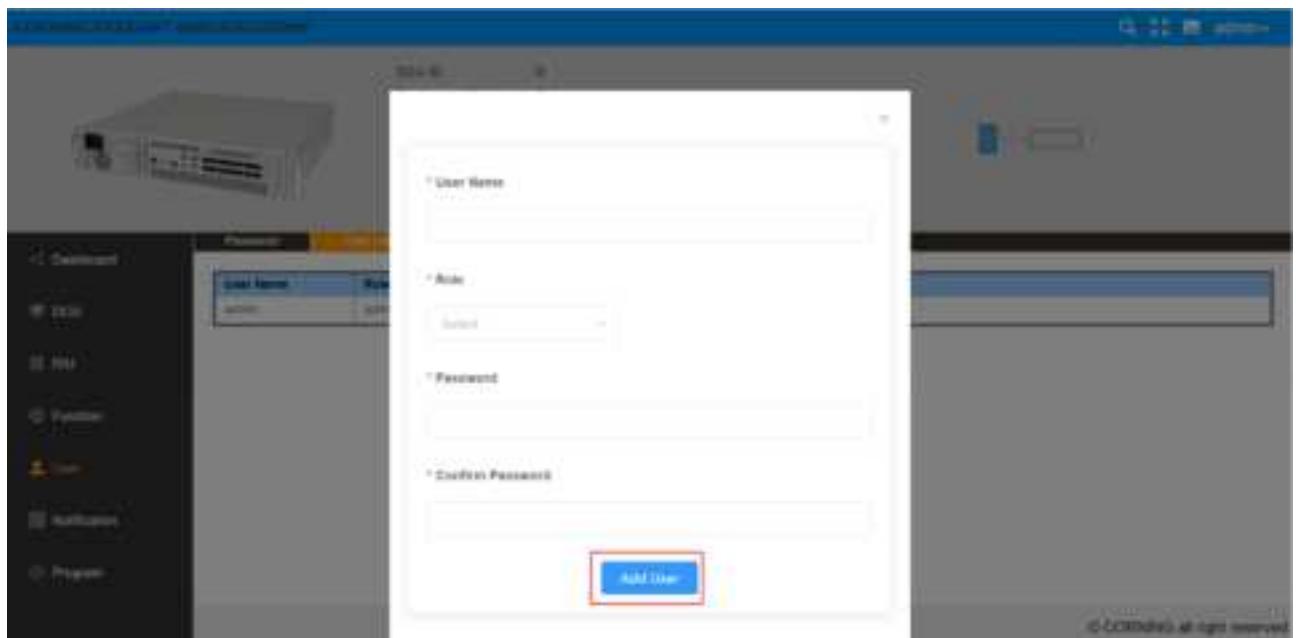


Figure 140.DCU User User Info Add User

5.2.4.3 Login Info

Click User->Login Info to set the max value of password input attempts. This function indicates that when a user logs in, the system will be locked if the times of password input exceeds the maximum.

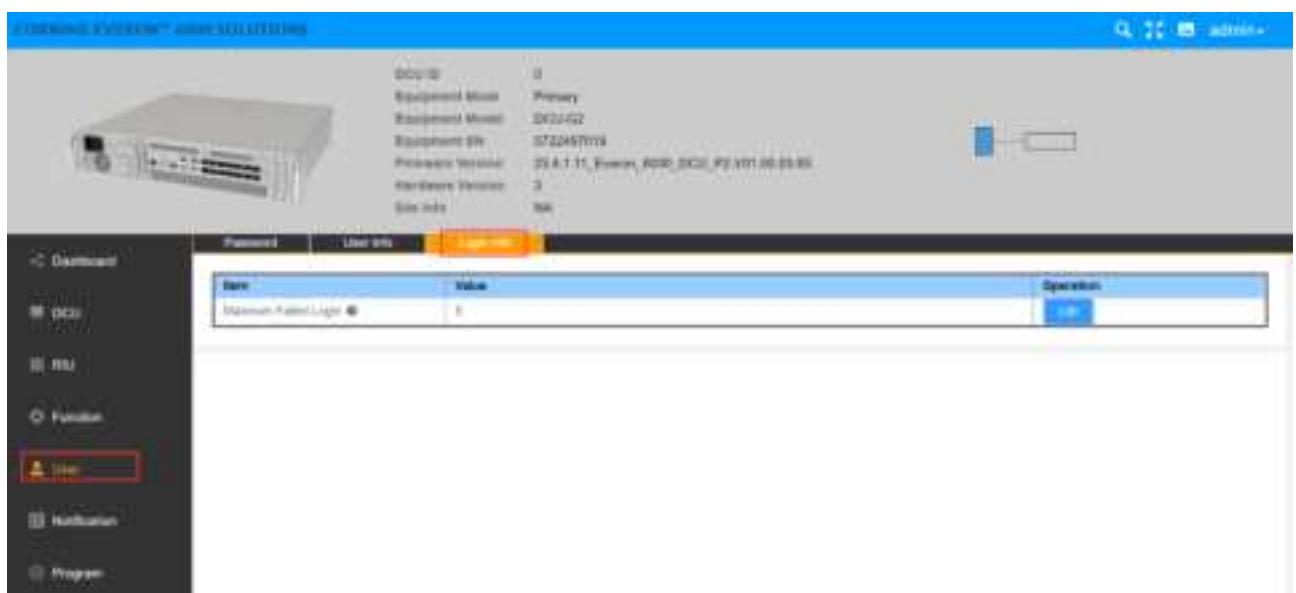


Figure 141. DCU User Login Info

5.2.4.4 Notification

The screenshot shows the DCU Management interface with the 'Notification' tab selected. On the left, there is a navigation sidebar with icons for Dashboard, DEM, RU, Function, User, Notification, and Program. The 'Program' icon is highlighted with a red border. The main content area displays the DCU's hardware information and a table titled 'Non-Supported Firmware'. The table has columns for 'Type', 'Active Firmware Version', and 'Non-Supported Firmware'. A note at the bottom states: 'Note: The active firmware can not upgrade/downgrade to the non-supported firmware version.'

Type	Active Firmware Version	Non-Supported Firmware
DCU	Firmware_0000_0000_P0_V01_0000.bf	firmware_0000_0000_P0_V01_0001.bf firmware_0000_0000_P0_V01_0002.bf firmware_0000_0000_P0_V01_0003.bf firmware_0000_0000_P0_V01_0004.bf firmware_0000_0000_P0_V01_0005.bf firmware_0000_0000_P0_V01_0006.bf

Figure 142. Notification

5.2.4.5 Program

The DCU ID is automatically obtained and cannot be set. The default value is 0. It is updated only when the internal DCU network is connected.

Click Program - Site Management to clear the site ID of the DCU.

The screenshot shows the DCU Management interface with the 'Program Site Management' dialog open. The 'Site Management' button in the navigation bar is highlighted with a red border. The main content area displays the DCU's hardware information. A dialog box titled 'Clear Site ID' contains a single button labeled 'Clear'.

Figure 143. DCU Program Site Management

5.3 DEU Config

SN	DEU Parameters	Ranges	Default Values
1	Temperature THR	0~125 °C	80 °C
2	Power Temperature THR	0~125 °C	80 °C
3	Optical Module Temperature THR	0~125 °C	80 °C
4	RU Temperature THR	0~125 °C	80 °C
5	Equipment mode	25G/10G	
6	Alarm Detect Duration	0-255S	0-10S
7	Switch	ON/OFF	ON
8	Technology	3G/4G/5G	3G
9	UL Center Freq. (MHz)	(2496-2690), (3450-3700), (3700-3980), (817-849), (663-698), (2305-2315), (698-798), (1850-1915), (1695-1780)	
10	DL Center Freq. (MHz)	(2496-2690), (3450-3700), (3700-3980), (862-894), (617-652), (2350-2360), (728-768), (1930-2020), (2110-2200)	
11	BW	N/A/5MHz/10MHz/15MHz/20MHz/30MHz/40MHz/50MHz/60MHz/70MHz/80MHz/90MHz/100MHz/150MHz/200MHz	
12	Operator	ATT/VZW/TMB/OTHER	
13	Power Sharing =OFF	UL ATTN	-9~20 dB
		DL ATTN	0~20 dB
	Power Sharing =ON	DL ATTN	calculated by Power sharing
14	UL Delay		0~4000000 us
15	DL Delay		0~4000000 us

5.3.1 DEU -> Dashboard

Click the Dashboard navigation button to enter the dashboard page, where you can query the full topology of all the dependent NE connected to the DEU unit. And the info query and configuration management page of other NE can be switched to after clicking NE ID in the topology.

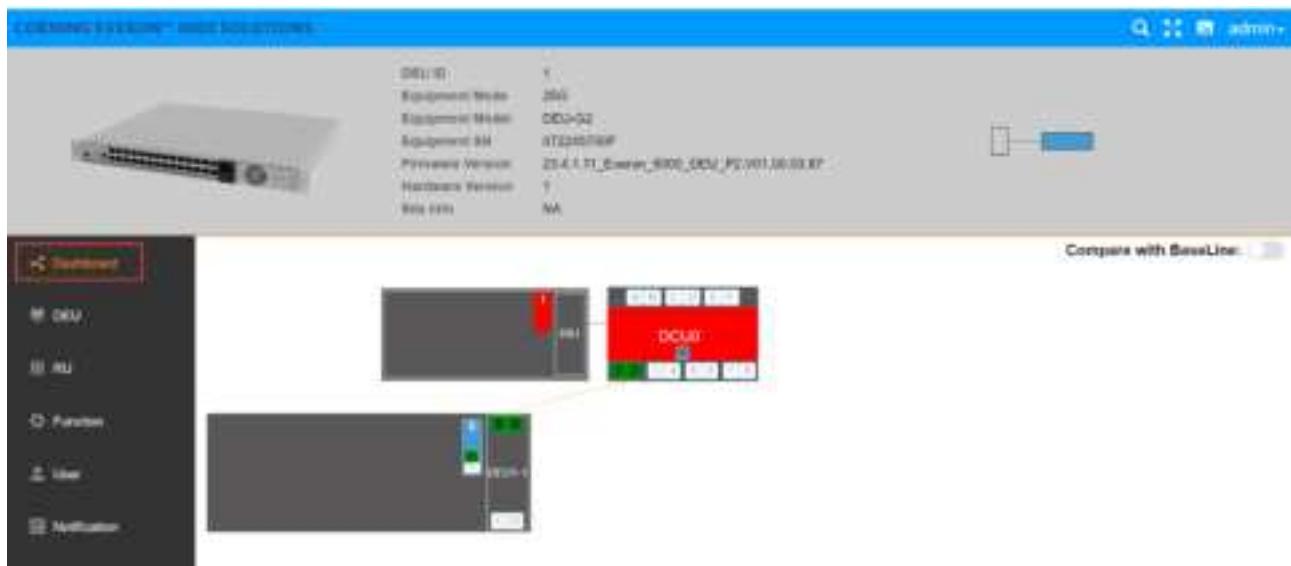


Figure 144. DEU25G Dashboard

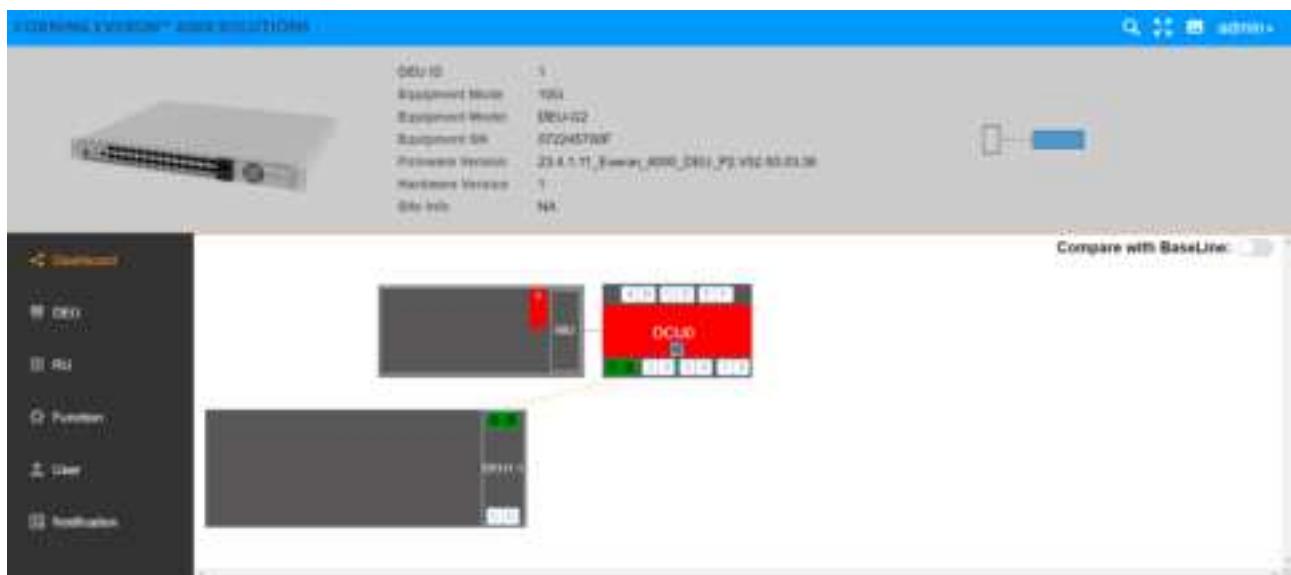


Figure 145. DEU10G Dashboard

5.3.1.1 Alarm Info



Figure 146. DEU25G Alarm Info



Figure 147. DEU 10 G Alarm Info

Alarms can be set and viewed in this function which are defined as follows:

- 1) Equipment Alarm: Take effect if any alarm is valid.
- 2) Fan Alarm 1~4: Take effect if any fan (4 in total) in the module is abnormal.
- 3) Temperature Alarm: Take effect if the device temperature is higher than the device over temperature THR (80°C by default).
- 4) Power Temperature Alarm 1~2: Take effect if the temperature of any PSE is higher than the device over temperature THR (80°C by default).
- 5) DC Voltage Alarm: The alarm will occur if the input power<37V

- 6) Digital Unlocked Alarm: Take effect if the device is unlocked.
- 7) Firmware Mismatch Alarm: The module version does not match the system version.
- 8) Temperature THR: Alarm will be generated if the device temperature exceeds this value.
- 9) Power Temperature THR: Alarm will be generated if the power module temperature exceeds this value.
- 10) RU Temperature THR: Alarm will be generated if RU temperature exceeds it.
- 11) Optical Module Temperature THR: Generate alarm if the optical module temperature exceeds this value.

➤ **To set alarm info parameters**

1. Click DCU—Alarm Info to enter the configuration page.
2. For alarms, click the edit button  and Disable and Enable button can be seen. Select Enable and the green icon will be displayed .
3. For Temperature THR, Power Temperature THR, Optical Module Temperature THR, System Delay THR, click  to enter the values within the range according to the form above.
4. Click Finish  to complete the configuration.

5.3.1.2 OP Info

5.3.1.2.1 CPRI Info

The range of optical module transmitting power (Tx PWR) is -3dBm~5dBm; The range of Rx PWR shall be greater than -10dBm. The maximum operating temperature must be lower than 80 ° C and the optical module must be correctly matched. Otherwise, an exception may occur. Alarms can be queried on this interface.



Figure 148.DEU 25 G OP Info CPRI Info

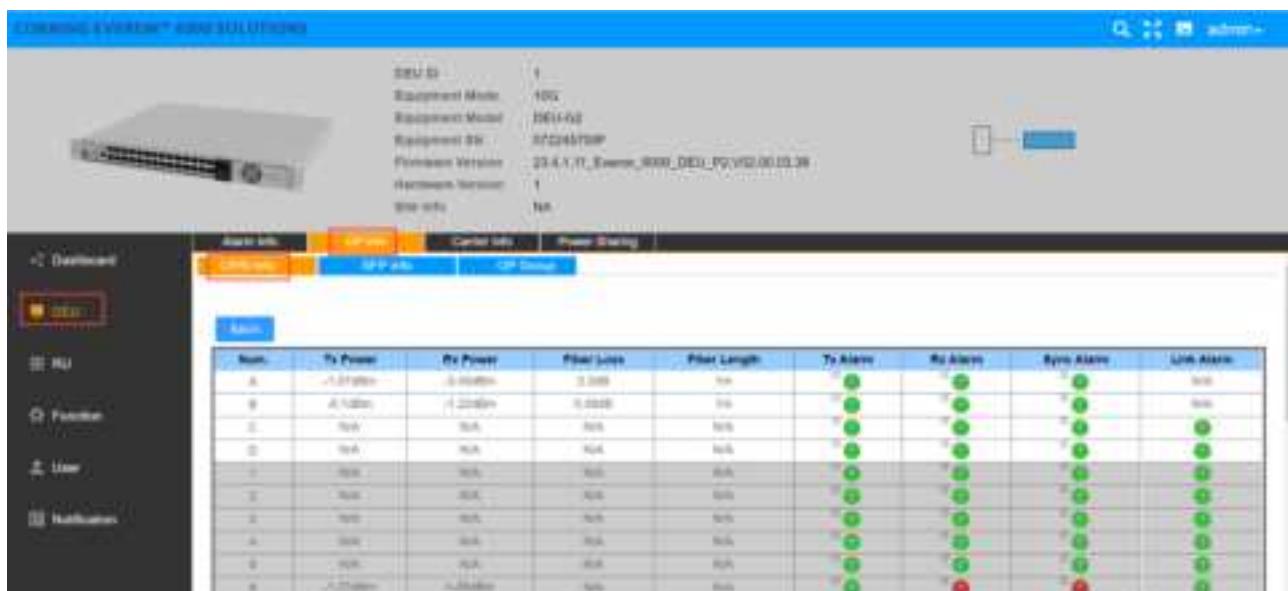


Figure 149.DEU 10 G OP Info CPRI Info

5.3.1.2.2 SFP Info



Figure 150. DEU 25 G OP Info SFP Info

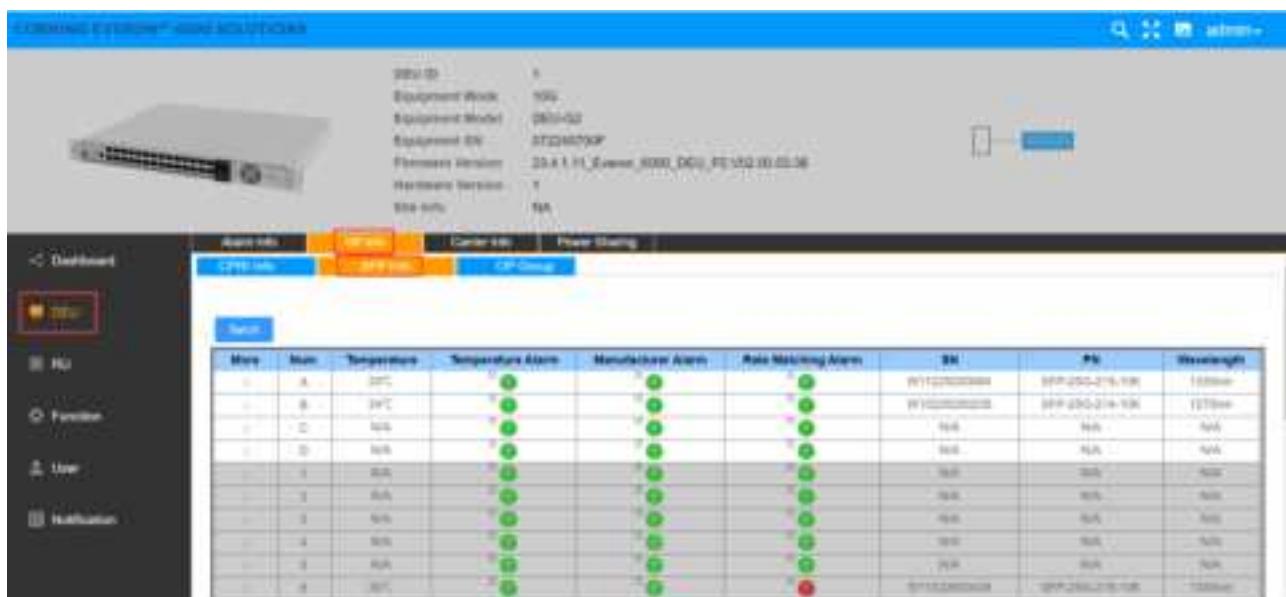


Figure 151. DEU 10 G OP Info SFP Info

Click ">" under the SFP Info More to view the optical module info.

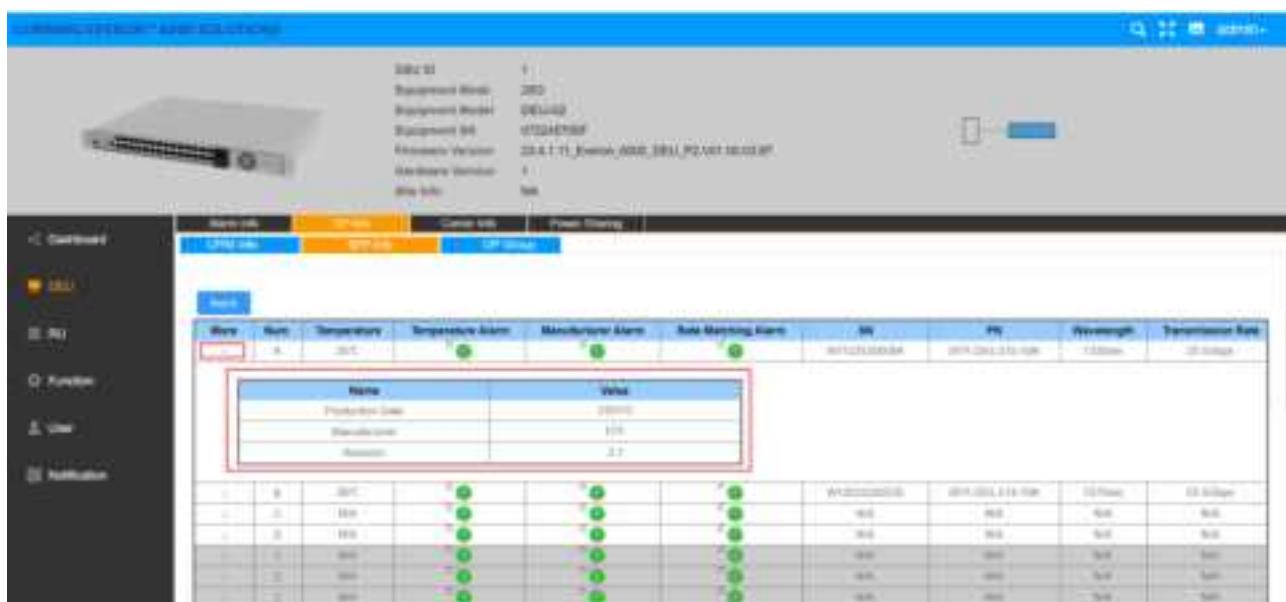


Figure 152.DEU 25 G OP Info SFP Info More

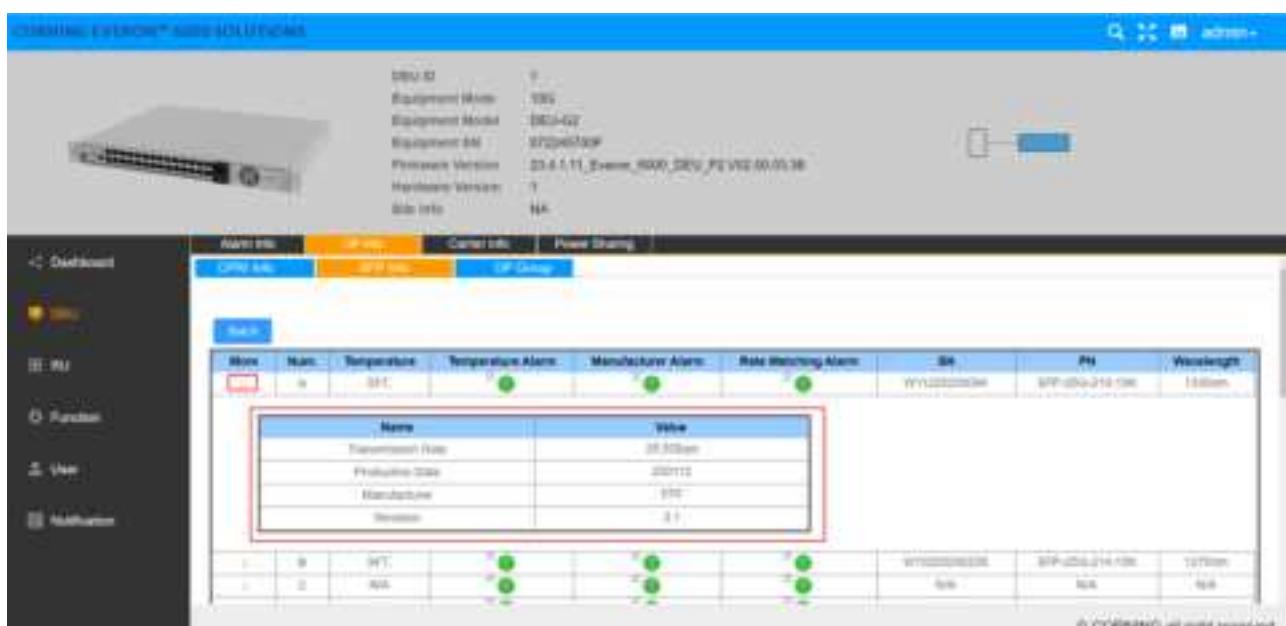


Figure 153. DEU 10 G OP Info SFP Info More

5.3.1.2.3 OP Group

- a. For the port configuration of 10G DEU, we design the new GUI for the various SFP port config. It supports 3 configuration mode on each 6 SFP ports (Group). *Click DEU OP Info OP Group to configure SFP port as shown in Figure 154.*



Figure 154. DEU 10G OP Info OP Group

Click button in Group Mode. In the drop-down box, there are three models to choose from. Then click Save to complete the configuration. Default configuration is model 1

Model 1: Two SFP ports are mapped to one RU, and it is recommended to align the DEU and RU SFPs in the same order, otherwise an SFP alarm will occur.

Model 2: 1 SFP port is mapped to 1 RU.

Model 3: 3 SFP ports are mapped to 1 RU. It is recommended to align the DEU and RU SFP in the same order, otherwise an SFP alarm will occur.



Figure 155. DEU 10 G Group Mode

Click  button in RU Mismatch Alarm. Select Enable/ Disable, then click Finish to complete the configuration.

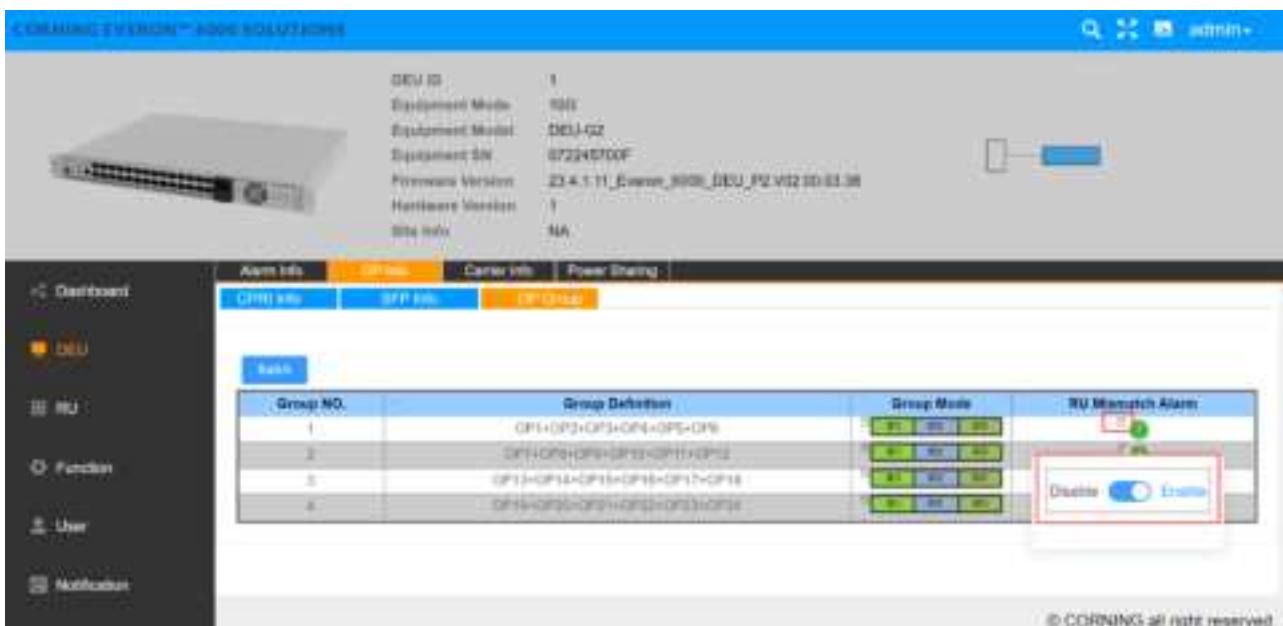


Figure 156.DEU 10 G RU Mismatch Alarm

b. For the port configuration of 25G DEU, there are two models to choose from. The configuration steps are the same as that of 10G DEU OP group configuration.



Figure 157.DEU 25G OP Info OP Group

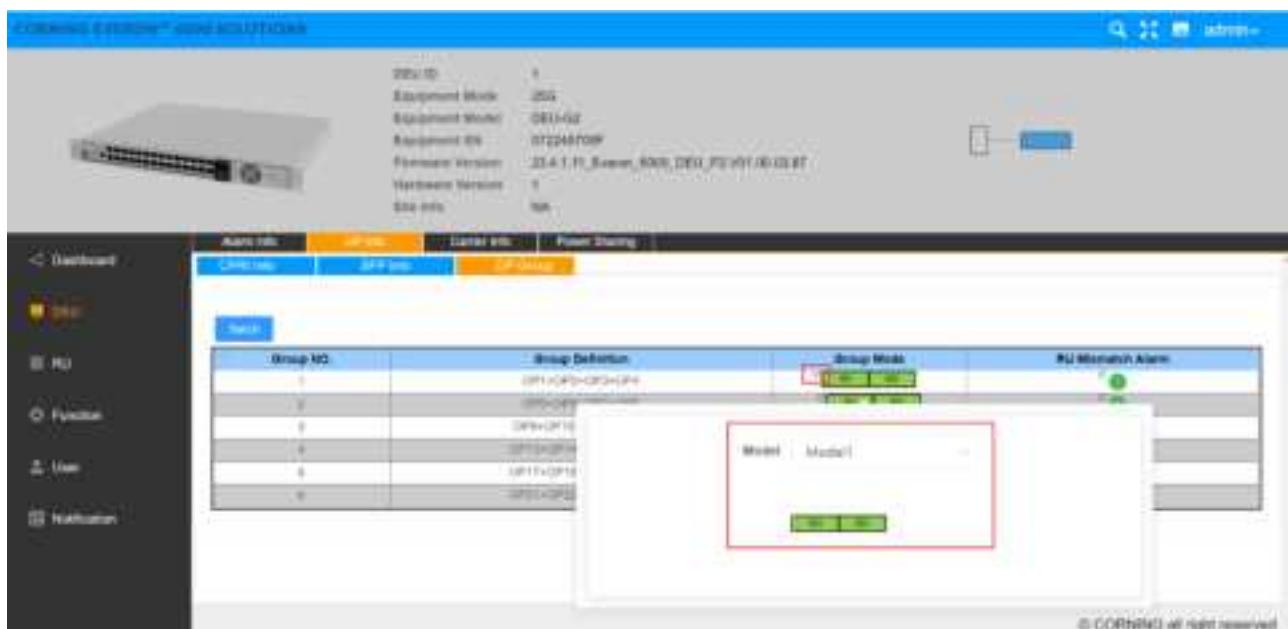


Figure 158.DEU 25G OP Group Group Mode

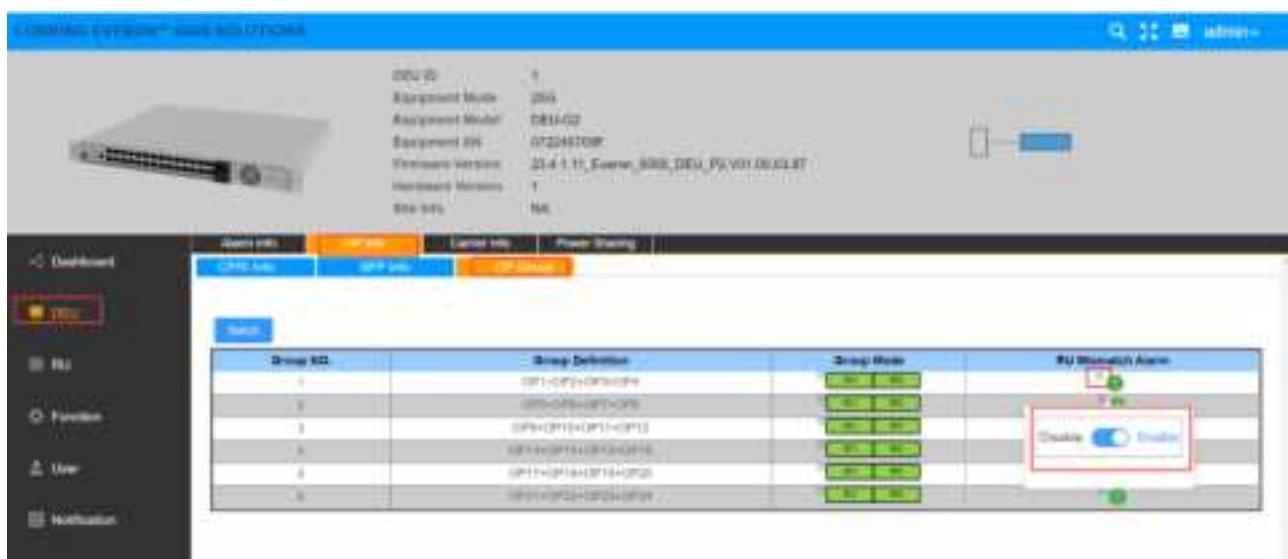


Figure 159.DEU 25G OP Group RU Mismatch Alarm

5.3.1.3 Carrier Info

- To configure carrier info

1. Click DEU Carrier Info Add to set UL Center Freq. and DL Center Freq. to enter the following page.
2. Click the icon in each field and select one from the drop-down options, enter values within the range and select ON/OFF and Enable/Disable button.
3. Click Finish to set.

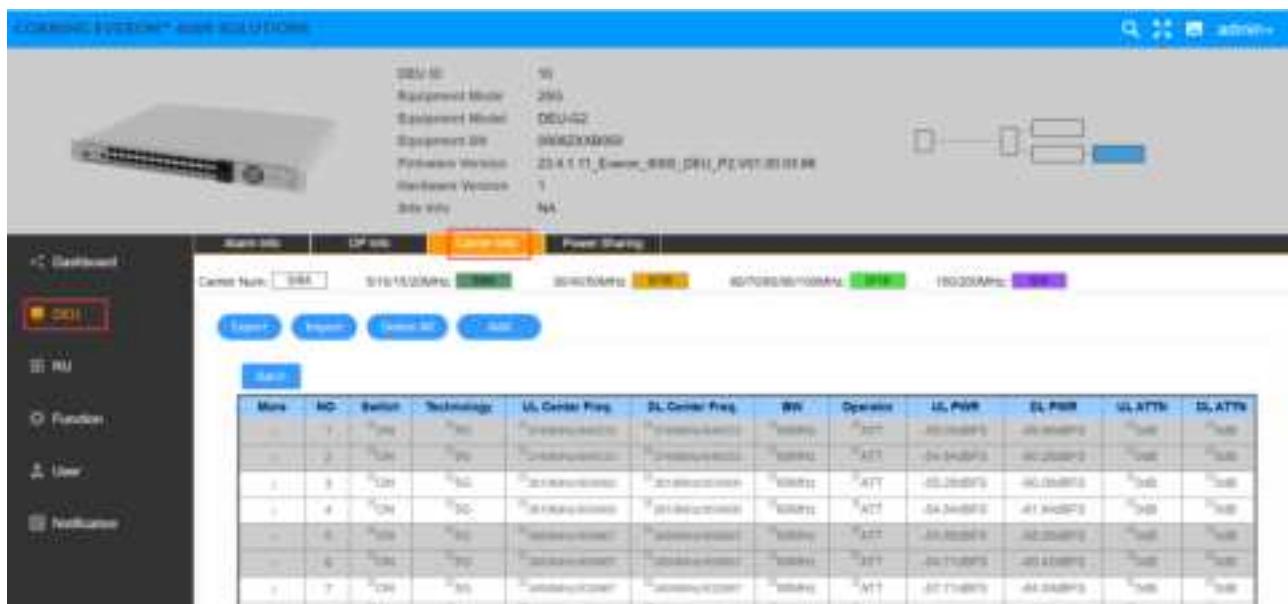


Figure 160. DEU 25G Carrier Info

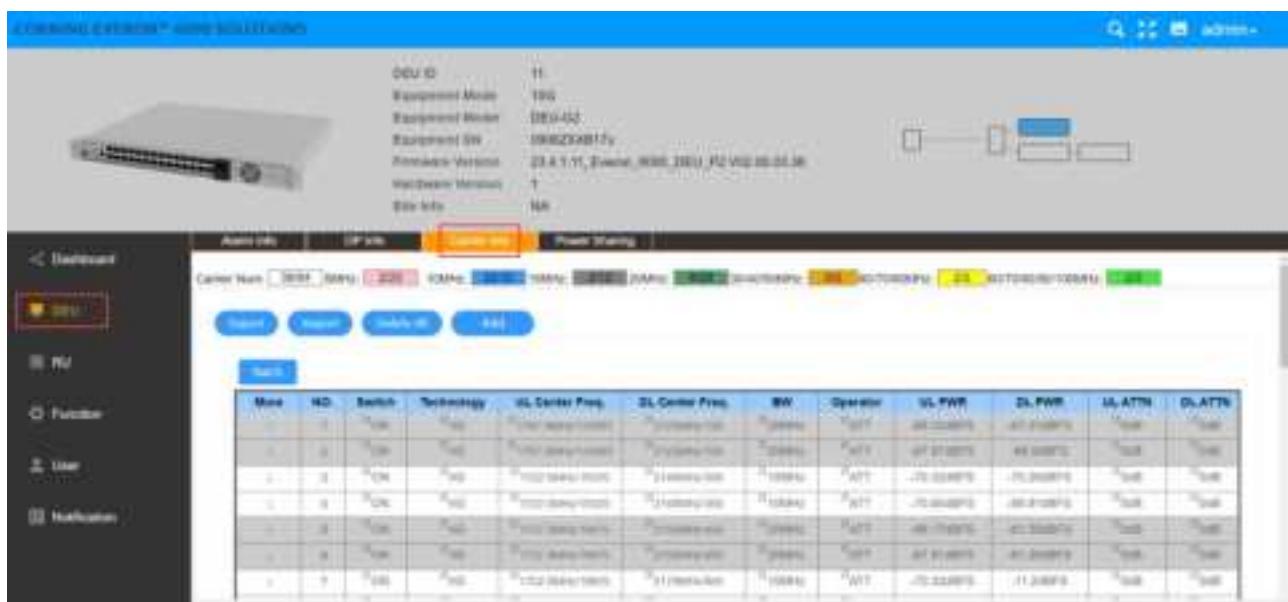


Figure 161. DEU 10G Carrier Info

➤ **To add carrier**

1. Click Add button  and the following setting page appear.
2. Click the arrow  and select one from the listed options.
3. Enter the values of the field marked *.
4. Click Save  to finish the settings.



Figure 162.DEU 25G Carrier Info Add



Figure 163. DEU 10 G Carrier Info Add

5.3.1.4 Power Sharing

SN	DEU Sharing Power Parameters	Ranges	Default Values
1	Power Sharing Lock	ON/OFF (Lock the DL ATT config on the carrier info)	OFF
2	Band	2500T/3500F/3500G	3500G
3	Assigned	10% ~ 100%	66%
4	Unassigned	0% ~ 90%	34%
5	Number of Carrier for each band/sub-band	0 ~ 4	N/A
7	Assign Percent	0%-100%	33%
8	Assign Type	Density/Even	Density

➤ To configure power sharing

1. Click the Set button then the DL ATTN can be configured. 

2. Select Powering Sharing Lock  and operation success will pop up.  operation success
3. Enter the value of Assign Percent 
4. Click the arrow in Assign type 

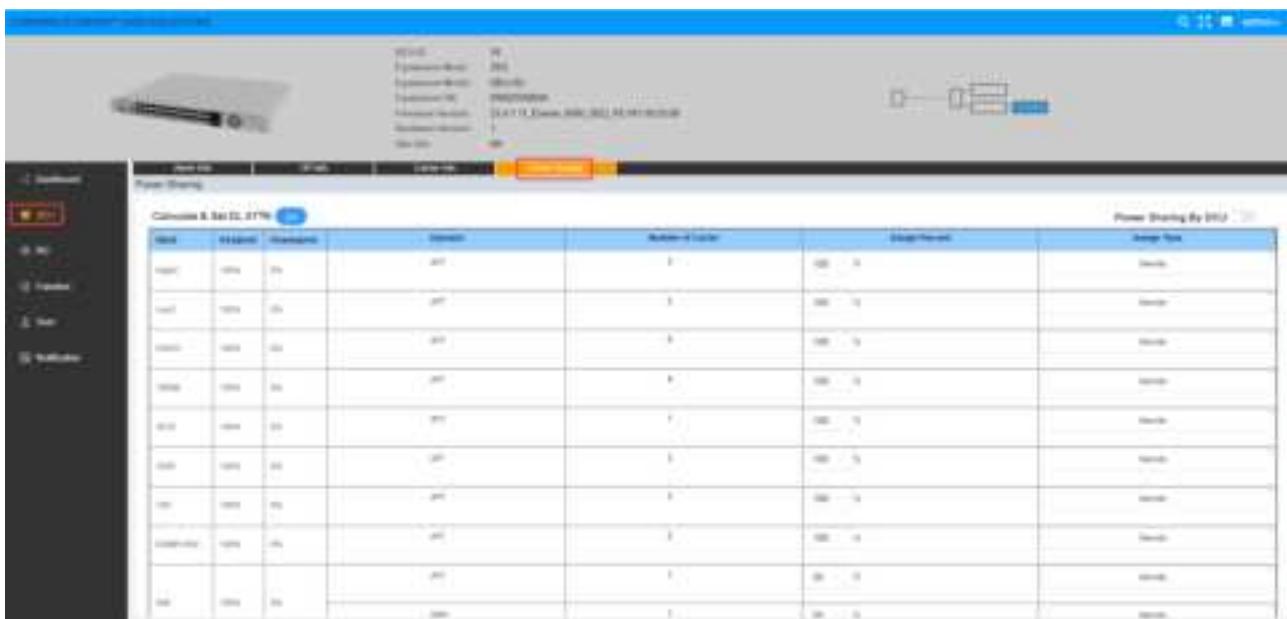


Figure 164. DEU25G Power Sharing

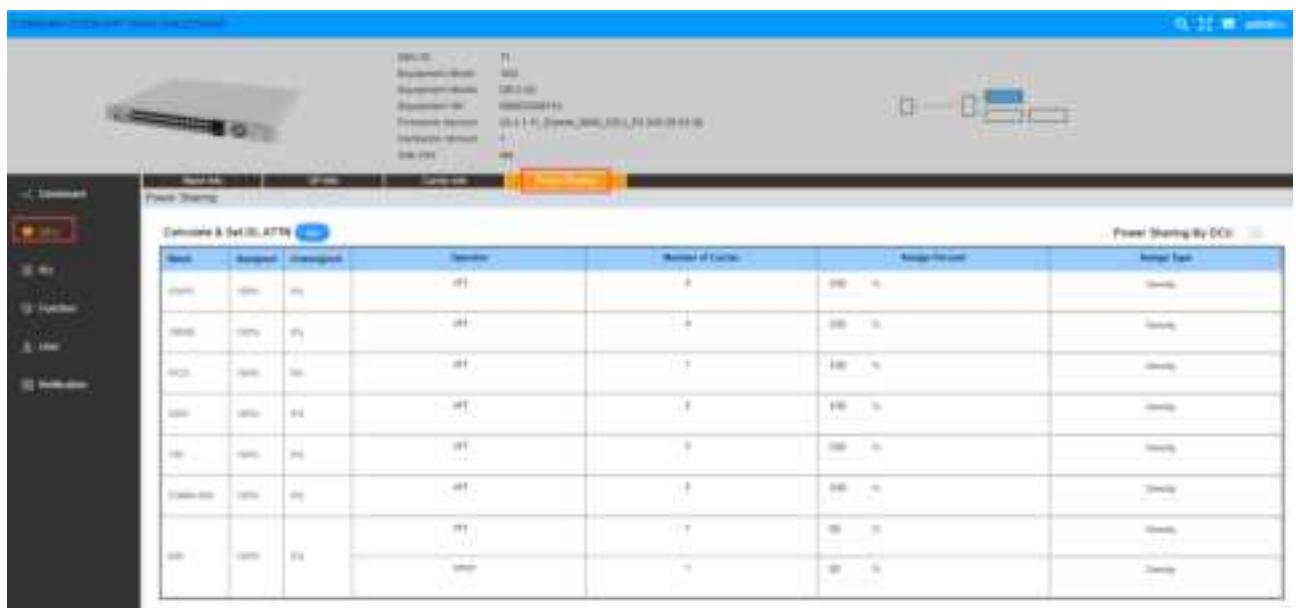


Figure 165.DEU 10 G Power Sharing

5.3.2 DEU -> Function

5.3.2.1 Device Info

Click Function Device Info to view the time, latitude, longitude, and other information of 10G/25G device. The site info is defined by the user.

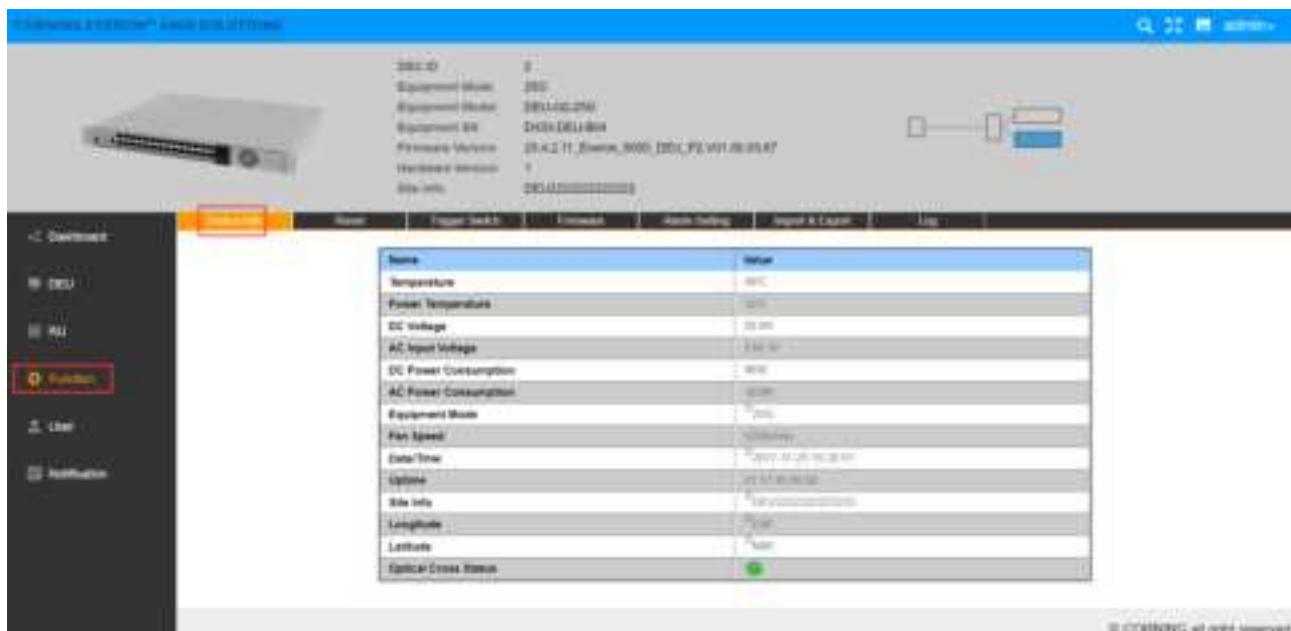


Figure 166.DEU25G Function Device Info



Figure 167. DEU 10 G Function Device Info

5.3.2.2 Reset

Click Function Reset to clear the historical alarm, reset the software and hardware of the DEU, and reset the software and hardware of the RU connected to the DEU.