


E1

S-CW-R0-09

W-LAN 050517

Roadbee

Matching

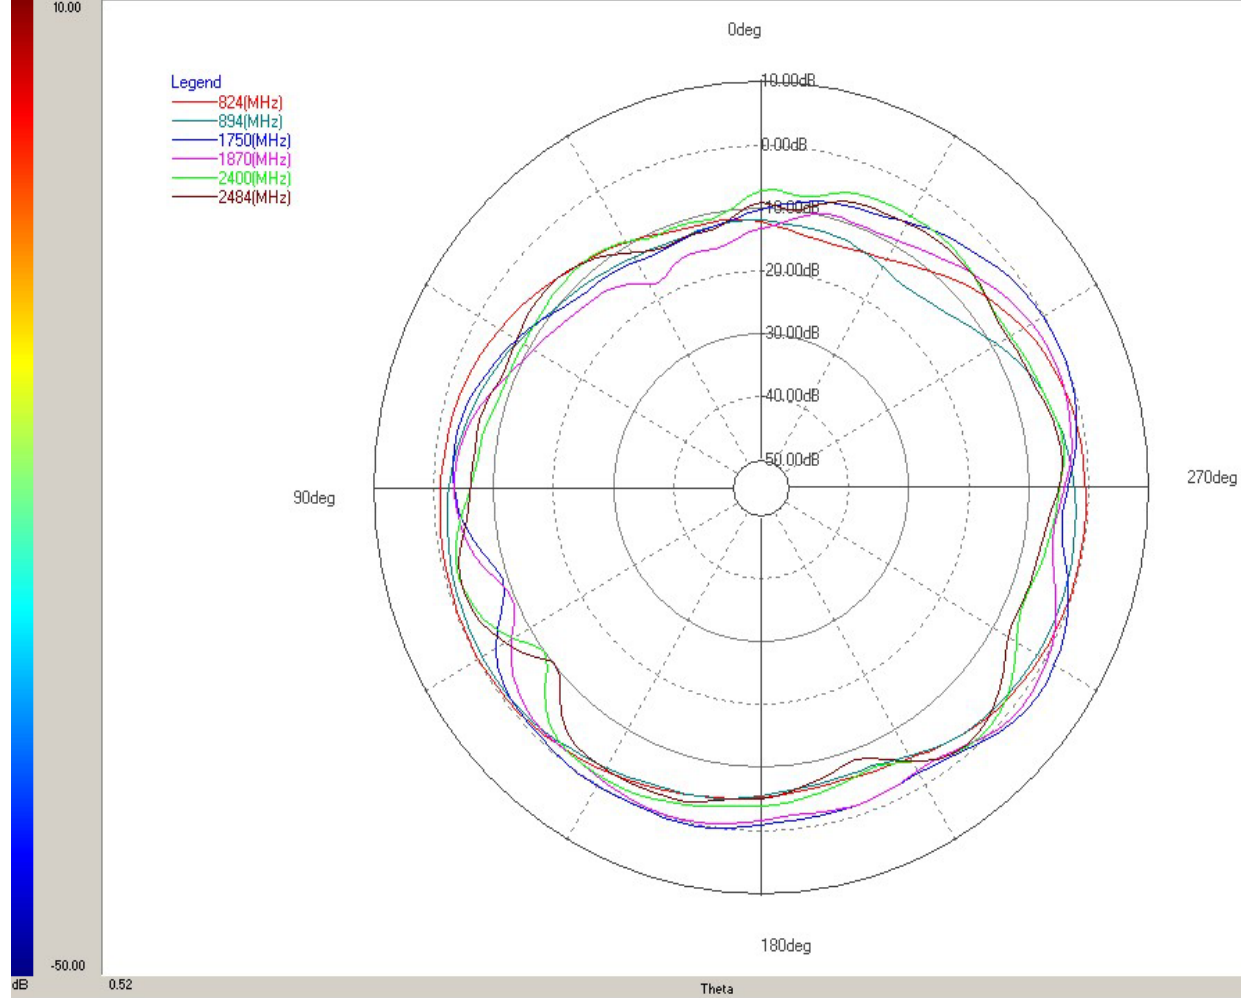

Layer	Max value	Position	Min value	Position	BeamWidth	Average	Standard deviation	Marker 1 pos	Marker 1 value	Marker 2 pos
824(MHz)	-0.16 dB	117.14 deg	-14.21 dB	-14.29 deg	87.36 deg	-4.00 dB	4.76	----	----	----
894(MHz)	-0.90 dB	122.86 deg	-14.63 dB	-37.14 deg	75.63 deg	-5.41 dB	6.2	----	----	----
1750(MHz)	2.23 dB	-125.71 deg	-13.65 dB	25.71 deg	32.81 deg	-3.19 dB	3.9	----	----	----
1870(MHz)	1.07 dB	-128.57 deg	-17.74 dB	28.57 deg	31.23 deg	-4.54 dB	5.29	----	----	----
2400(MHz)	-0.74 dB	-137.14 deg	-11.18 dB	11.43 deg	24.76 deg	-5.36 dB	6.22	----	----	----
2484(MHz)	-1.30 dB	-140.00 deg	-13.19 dB	22.86 deg	22.76 deg	-6.08 dB	6.96	----	----	----