

Test Report

FCC ID: 2AFW2B021

Date of issue: Sep. 02, 2015

Sample Description:	Bluetooth Keyboard
Model(s):	B021/ B202 /B204 /B205 /B206
Applicant:	Shenzhen DZH Industrial Co., Ltd.
Address:	3th Floor, YiTuo Mike Industrial A building, Bu Yong Industrial D zone, ShaJing, Shenzhen
Date of Test:	Aug, 20. 2015 to Sep. 01, 2015

Shenzhen Microtest Co., Ltd.
<http://www.mtitest.com>



This test report is limited to the above client company and the product mode only. It may not be duplicated without prior written consent of Shenzhen Microtest Co., Ltd.

TABALE OF CONTENTS

1. General description.....	5
1.1 Feature of equipment under test (EUT).....	5
1.2 operation channel list.....	5
2. Test Configuration of EUT	6
2.1 Test Frequency Channel	6
2.2 EUT operation mode.....	6
2.4 Test conditions.....	6
2.5 Testing site	6
2.6 Ancillary equipment list.....	6
2.6 Measurement uncertainty	6
3. List of test equipment	7
4. Test Result	8
4.1 Antenna requirement.....	8
4.2 AC power line conducted emission	9
4.3 Peak output power.....	12
4.3 20dB emission bandwidth.....	14
4.4 Carrier frequency separation.....	16
4.5 Number of hopping channel	18
4.6 Time of occupancy (dwell time).....	19
4.6 Band edge spurious emission, conducted spurious emission	20
4.7 Radiated emission	23

This test report is limited to the above client company and the product mode only. It may not be duplicated without prior written consent of Shenzhen Microtest Co., Ltd.

TEST RESULT CERTIFICATION	
Applicant's name:	Shenzhen DZH Industrial Co., Ltd.
Address:	3th Floor, YiTuo Mike Industrial A building, Bu Yong Industrial D zone, ShaJing, Shenzhen
Manufacture's Name:	Shenzhen DZH Industrial Co., Ltd.
Address:	3th Floor, YiTuo Mike Industrial A building, Bu Yong Industrial D zone, ShaJing, Shenzhen
Product description	
Product name:	Bluetooth Keyboard
Trademark:	千业
Model name:	B021
Serial Model:	B202/B204/205/B026
Standards:	FCC Part 15.247
Test Procedure:	ANSI C63.4-2009; FCC public notice DA 00-705

This device described above has been tested by Shenzhen Microtest Co.,Ltd. and the test results show that the equipment under test (EUT) is in compliance with the R&TTE requirements. And it is applicable only to the tested sample identified in the report.


Tested By :



David Chen

Sep, 02. 2015


Reviewed By :



Leon Chen

Sep, 02. 2015

Approved By :



Ares Liu

Sep, 02. 2015

SUMMARY OF TEST RESULT

Item	FCC Part No.	Description of Test	Result
1	15.203	Antenna requirement	Pass
2	15.207	AC power line conducted emission	Pass
3	15.247(b)(1)	Peak output power	Pass
4	15.247(a)(1)	20dB emission bandwidth	Pass
5	15.247(a)(1)	Carrier frequency separation	Pass
6	15.247(a)1	Number of hopping channel	Pass
7	15.247(a)(1)	Time of occupancy (dwell time)	Pass
8	15.247(d)	Band edge spurious emission, conducted spurious emission	Pass
9	15.247(d), 15.209	Radiated emission	Pass

1. General description

1.1 Feature of equipment under test (EUT)

Product name:	Bluetooth Keyboard
Model name:	B021
Serial Model:	B202/B204/B205/B206
Tx/Rx frequency range:	Tx/Rx: 2402MHz~2480MHz
Bluetooth version:	3.0
Modulation Type:	GFSK
Power Source:	Li-on battery DC Voltage 3.7V
Antenna Designation:	PCB antenna (Antenna Gain: 0dBi)
Hardware Version:	V1.0
Software Version:	V1.0
Remark:	All the models above are identical in interior structure, electrical circuits and components; just model names are different for marking requirement.

1.2 operation channel list

Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz
1	2403MHz	21	2423MHz	41	2443MHz
---	---	---	---	---	---
---	---	---	---	---	---
18	2420MHz	38	2440MHz	77	2479MHz
19	2421MHz	39	2441MHz	78	2480MHz

2. Test Configuration of EUT

2.1 Test Frequency Channel

Low	2402MHz
Middle	2441MHz
High	2480MHz

2.2 EUT operation mode

During testing, RF test program provided by the the manufacture to control the Tx/Rx operation followed the test requirement.

2.4 Test conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 22°C~27°C
- Humidity: 52%~58%
- Atmospheric pressure: 98kPa~101kPa

2.5 Testing site

Test Site	Shenzhen Toby Technology Co., Ltd.
Test Site Location	1 A/F., Bldg.6, Yusheng Industrial Zone The National Road No.107 Xixiang Section 467
FCC Registration No.:	811562
CNAS Registration No.:	CNAS L5813

2.6 Ancillary equipment list

Equipment	Model	S/N	Manufacturer
Notebook	G40	YB10482397	LENOVE

2.6 Measurement uncertainty

Measurement Uncertainty for a Level of Confidence of 95 %, $U=2 \times U_c(y)$

RF frequency	1×10^{-7}
RF power, conducted	± 1 dB
Conducted emission of receivers	± 1 dB
Radiated emission of transmitter	± 6 dB
Radiated emission of receiver	± 6 dB
Temperature	± 1 degree
Humidity	± 5 %

3. List of test equipment

For AC power line conducted emission:

Equipment	Manufacturer	Model	Serial No.	Calibration Due
LISN	R&S	ENV216	101313	2015.12.06
LISN	SCHWARZBECK	NNLK 8129	8129245	2015.12.25
Pulse Limiter	SCHWARZBECK	VTSD 9561F	9716	2015.12.25
Test Cable	N/A	N/A	C01	2015.12.06
EMI Test Receiver	R&S	ESCI	101160	2015.12.06

For Radiated emission:

Equipment	Manufacturer	Model	Serial No.	Calibration Due
Log-Bicon Antenna	MESS-ELEKTRO NIK	VULB 9160	3058	2015.12.11
Horn Antenna	Schwarzbeck	BBHA 9120D	631	2015.12.05
Horn Antenna	Schwarzbeck	BBHA 9170	373	2015.12.05
Test Cable	United Microwave	57793	1m	2015.12.05
Test Cable	United Microwave	A30A30-5006	10M	2015.12.05
Microwave Pre amplifier	Agilent	8449B	3008A01714	2015.12.05
Pre-Amplifier	Anritsu	MH648A	M09961	2015.12.05
EMI Test Receiver	R&S	ESCI-7	101318	2015.12.05

For RF conducted emission:

Equipment	Manufacturer	Model	Serial No.	Calibration Due
Receiver	R&S	ESCI	101368	2016.06.01
Spectrum analyzer	Agilent	E4470B	MY41441082	2016.06.01

Note: the calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

4. Test Result


4.1 Antenna requirement

4.1.1 Requirement defined in FCC 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.1.2 EUT antenna description

The Bluetooth antenna of EUT is an internal permanently attached antenna which the maximum gain is 0dBi. So the antenna meets the requirement of this part.

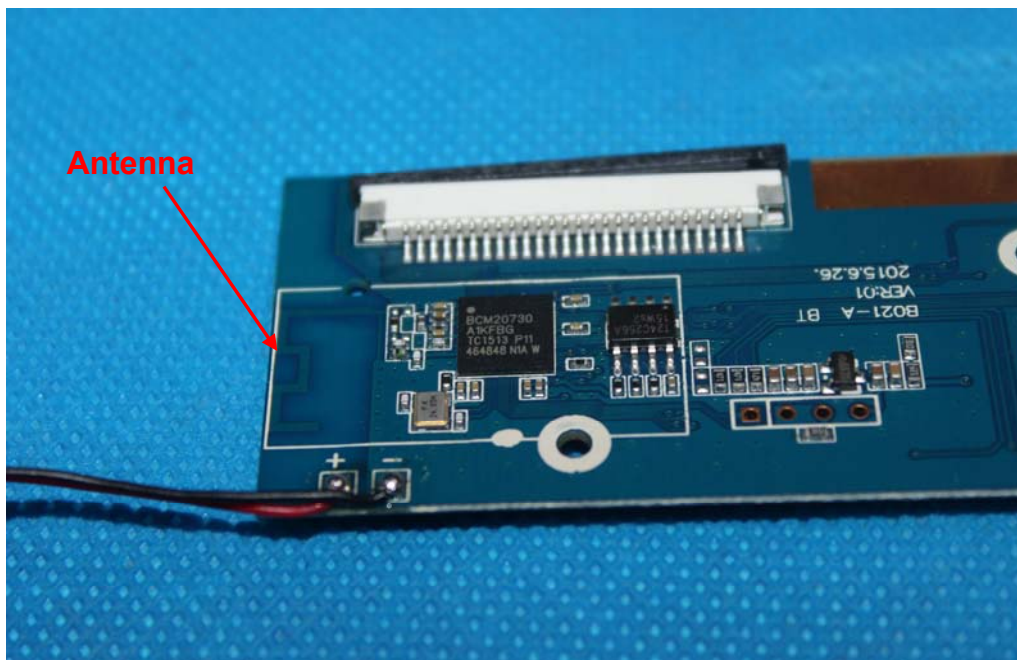

4.2 AC power line conducted emission

4.2.1 Limits

Frequency (MHz)	Quasi-peak Limit dB μ V	Average Limit dB μ V
0.15 - 0.5	66 - 56 *	56 - 46 *
0.5 - 5	56	46
5 - 30	60	50


* Decreases linearly with the logarithm of the frequency in the range.

4.2.2 Test method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line


4.2.3 Test result

Temperature:	24℃	Relative Humidity:	55%
Pressure:	101kPa	Phase:	L
Test voltage:	AC 120V/60Hz	Test mode:	Charging+ transmitting(measured at notebook charger AC port)

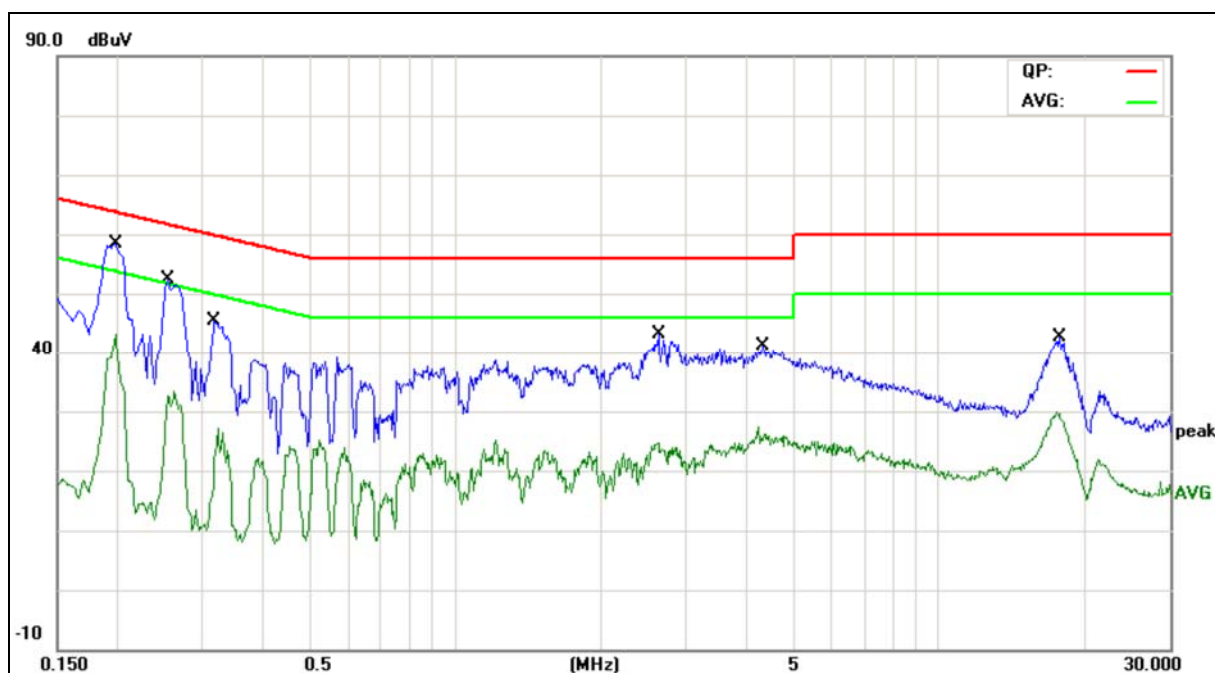

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1980	44.38	10.02	54.40	63.69	-9.29	QP	
2		0.1980	28.99	10.02	39.01	53.69	-14.68	AVG	
3		0.2540	37.14	10.02	47.16	61.62	-14.46	QP	
4		0.2540	19.11	10.02	29.13	51.62	-22.49	AVG	
5		0.3180	30.09	10.02	40.11	59.76	-19.65	QP	
6		0.3180	11.94	10.02	21.96	49.76	-27.80	AVG	
7		2.6260	27.40	10.04	37.44	56.00	-18.56	QP	
8		2.6260	13.50	10.04	23.54	46.00	-22.46	AVG	
9		4.3340	26.73	9.98	36.71	56.00	-19.29	QP	
10		4.3340	13.69	9.98	23.67	46.00	-22.33	AVG	
11		17.6900	26.16	10.21	36.37	60.00	-23.63	QP	
12		17.6900	18.40	10.21	28.61	50.00	-21.39	AVG	

Temperature:	24°C	Relative Humidity:	55%
Pressure:	101kPa	Phase:	N
Test voltage:	AC 120V/60Hz	Test mode:	Charging+ transmitting(measured at notebook charger AC port)

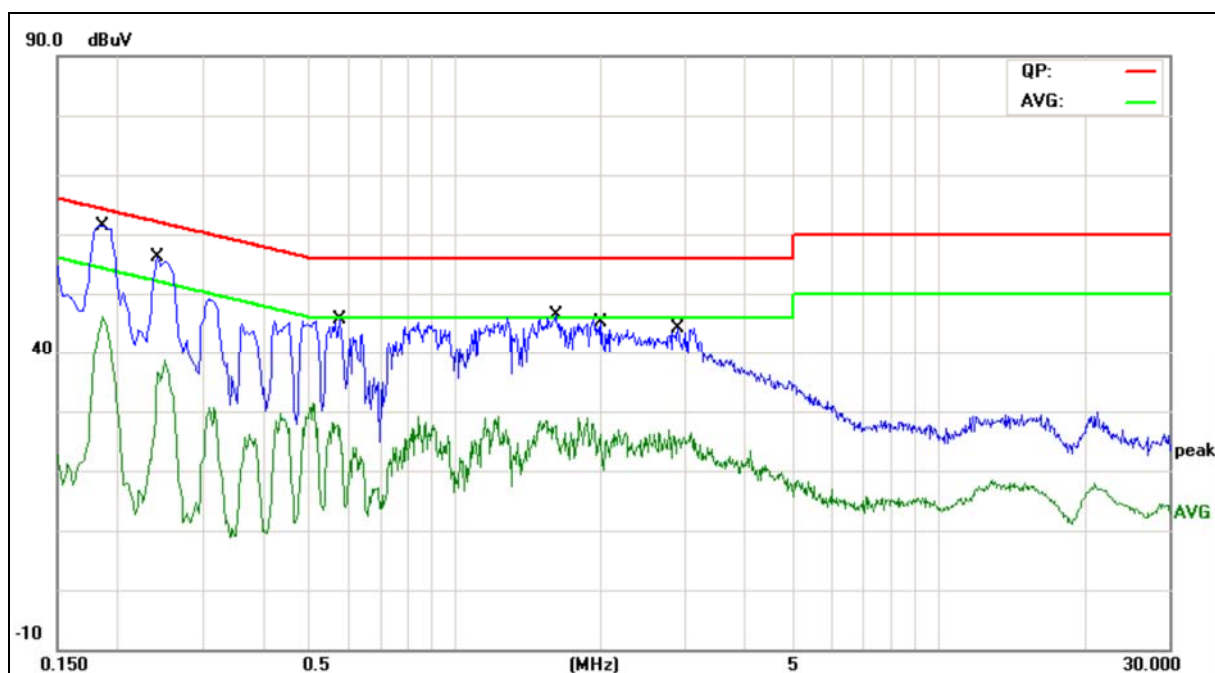

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1860	47.84	9.99	57.83	64.21	-6.38	QP	
2		0.1860	33.73	9.99	43.72	54.21	-10.49	AVG	
3		0.2420	42.06	10.02	52.08	62.02	-9.94	QP	
4		0.2420	24.52	10.02	34.54	52.02	-17.48	AVG	
5		0.5780	34.13	10.06	44.19	56.00	-11.81	QP	
6		0.5780	19.10	10.06	29.16	46.00	-16.84	AVG	
7		1.6180	33.27	10.06	43.33	56.00	-12.67	QP	
8		1.6180	17.38	10.06	27.44	46.00	-18.56	AVG	
9		2.0100	30.17	10.06	40.23	56.00	-15.77	QP	
10		2.0100	14.19	10.06	24.25	46.00	-21.75	AVG	
11		2.8980	28.40	10.03	38.43	56.00	-17.57	QP	
12		2.8980	15.04	10.03	25.07	46.00	-20.93	AVG	

4.3 Peak output power

4.2.1 Limits

Conducted peak output power limit is 125mW (21dBm)

4.2.2 Test Method

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold


Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.

4.2.3 Test Result

Frequency (MHz)	Peak output power (dBm)	Limit (dBm)
2402	2.54	21
2441	2.22	21
2480	1.78	21


Test plots as below

2402MHz

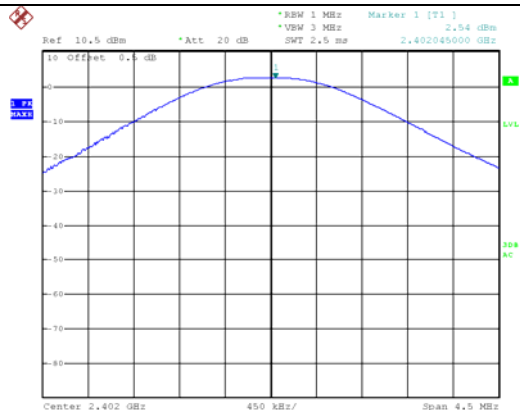


Date: 29.AUG.2015 14:57:58

2441MHz

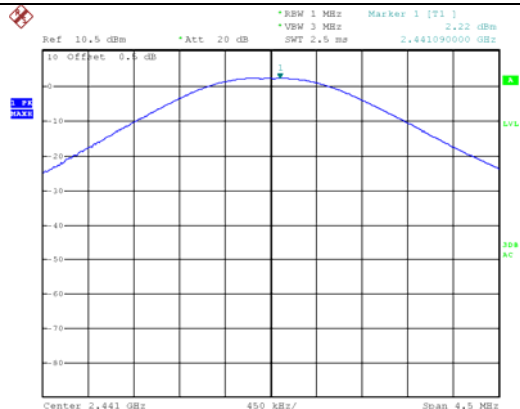

Date: 29.AUG.2015 14:57:42

2480MHz

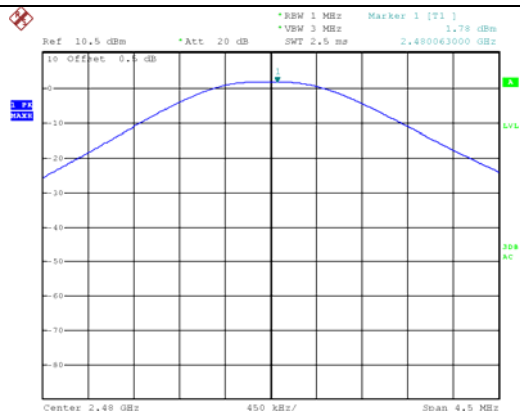

Date: 29.AUG.2015 14:57:26

4.3 20dB emission bandwidth

4.3.1 Test method

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak


Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the markerdelta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

4.3.2 Test result


Frequency (MHz)	20dB emission bandwidth (MHz)
2402	0.816
2441	0.816
2480	0.812

2402MHz

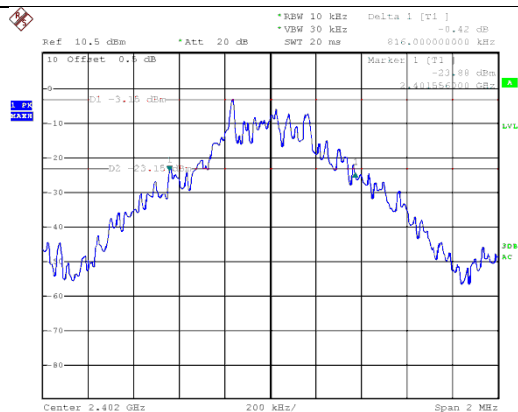


Date: 29.AUG.2015 14:55:36

2441MHz

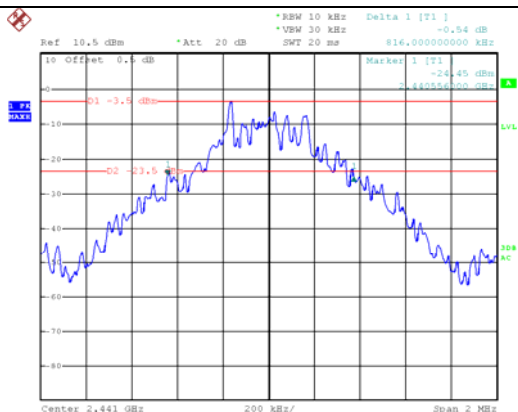

Date: 29.AUG.2015 14:54:52

2480MHz

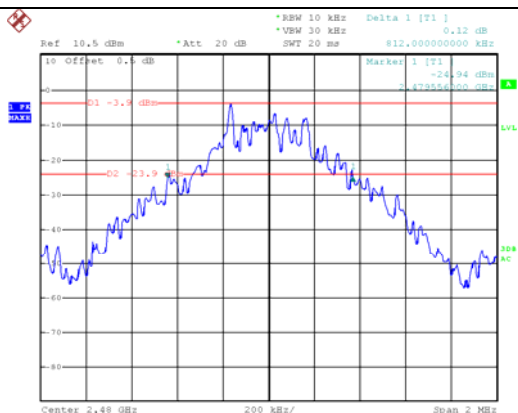

Date: 29.AUG.2015 14:56:30

4.4 Carrier frequency separation

4.4.1 Limits

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

4.4.2 Test method

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak


Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

4.4.3 Test result


Frequency (MHz)	Separation (MHz)	Limit (MHz)
2402	1	0.544
2441	1	0.544
2480	1	0.544

2402MHz

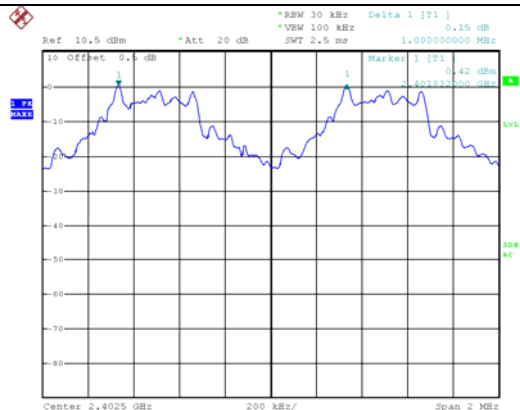


Date: 29.AUG.2015 15:00:07

2441MHz

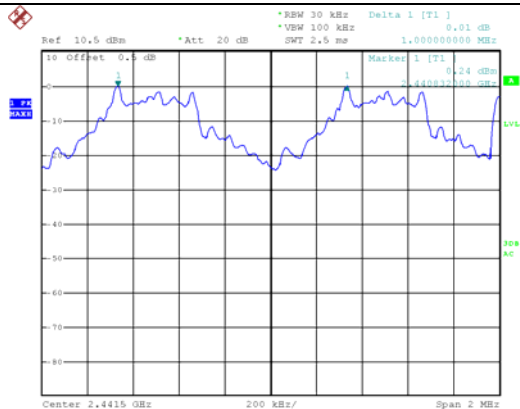

Date: 29.AUG.2015 15:01:23

2480MHz

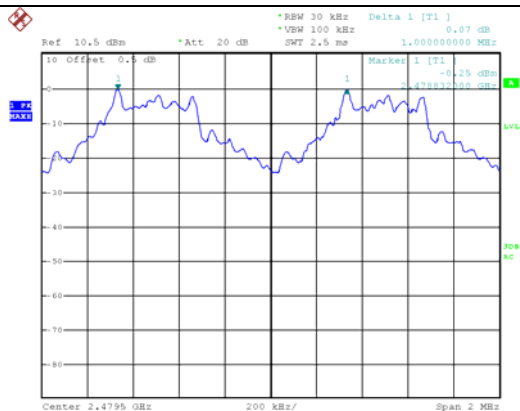

Date: 29.AUG.2015 15:02:01

4.5 Number of hopping channel

4.5.1 Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

4.5.2 Test method

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW


Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. It

4.5.3 Test Result

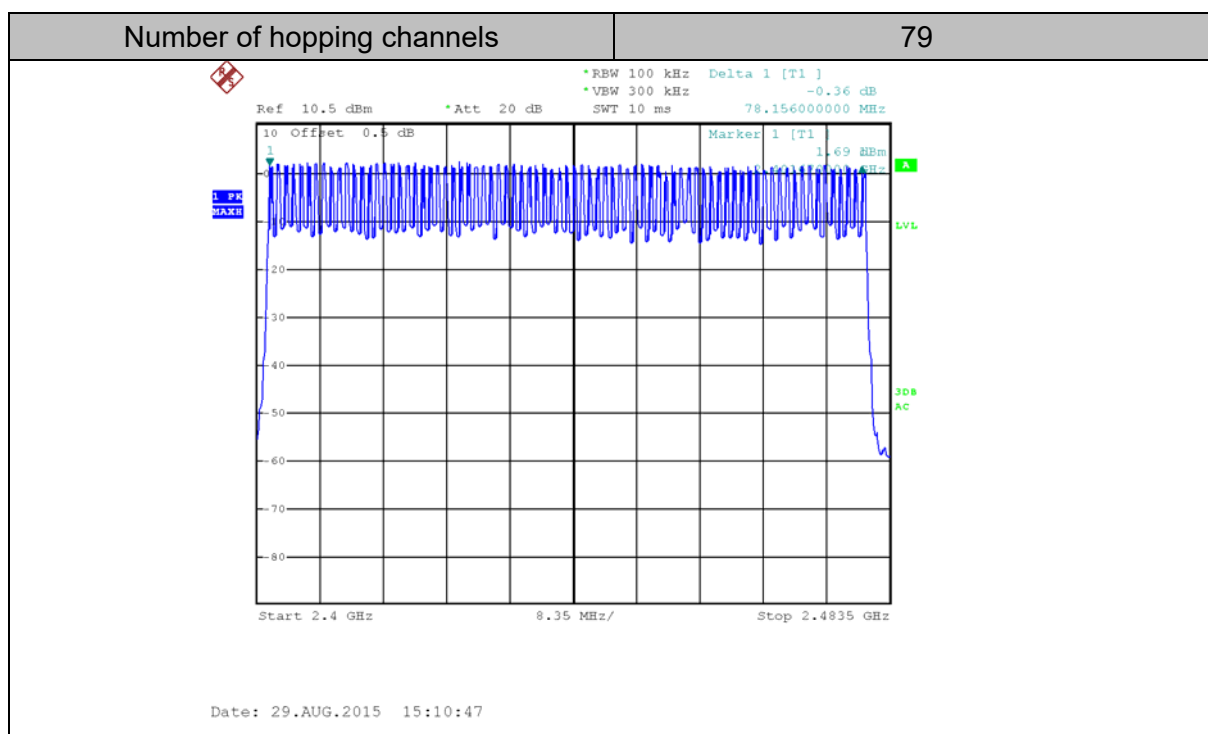

4.6 Time of occupancy (dwell time)

4.6.1 Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.6.3 Test method

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW = 1 MHz

VBW $\geq$ RBW


Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

Use the marker-delta function to determine the dwell time.

4.6.4 Test Result

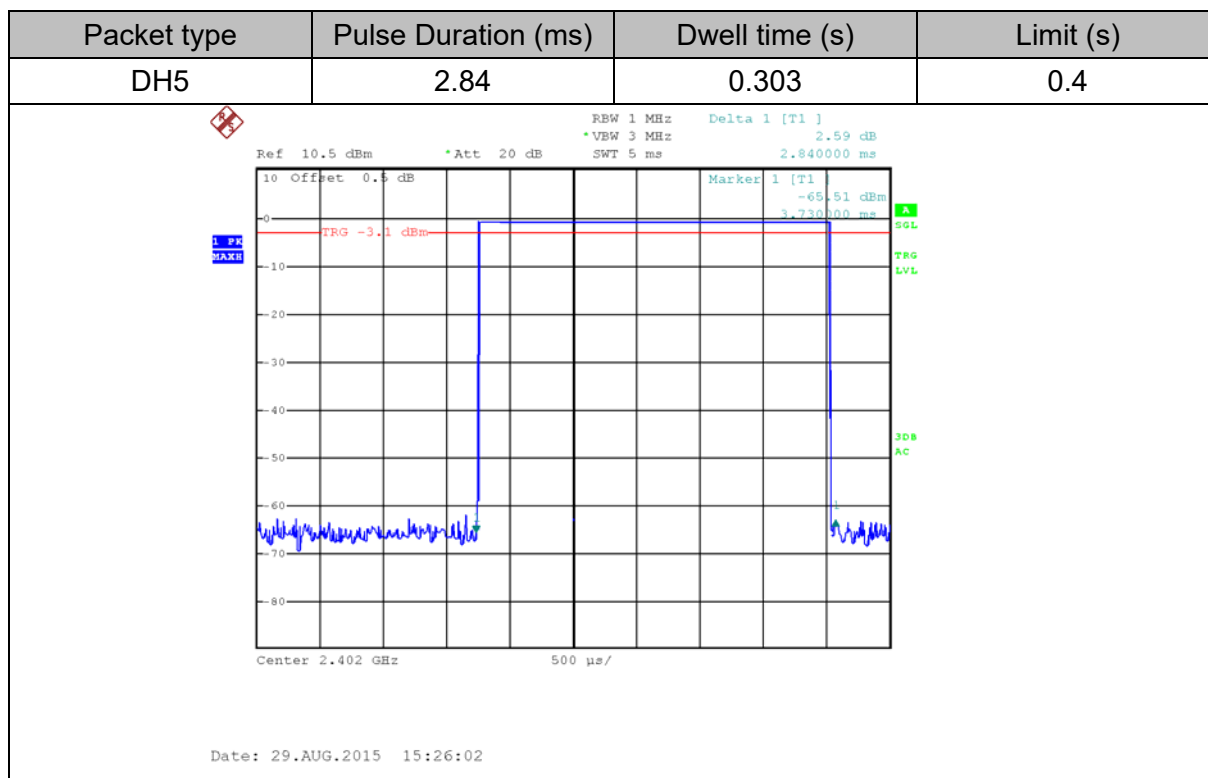

Note: for the worst mode of DH5 packet type, in normal hopping mode, hopping rate is 1600hops/s with 6 slots in 79 hopping channel

4.6 Band edge spurious emission, conducted spurious emission

4.6.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


4.6.2 Test method

Use the following spectrum analyzer settings:


Set RBW=100 kHz. VBW $\geq$ 3RBW. Detector =peak, Sweep time = auto couple, Trace mode = max hold.

4.6.3 Test Result

RF Conducted emission

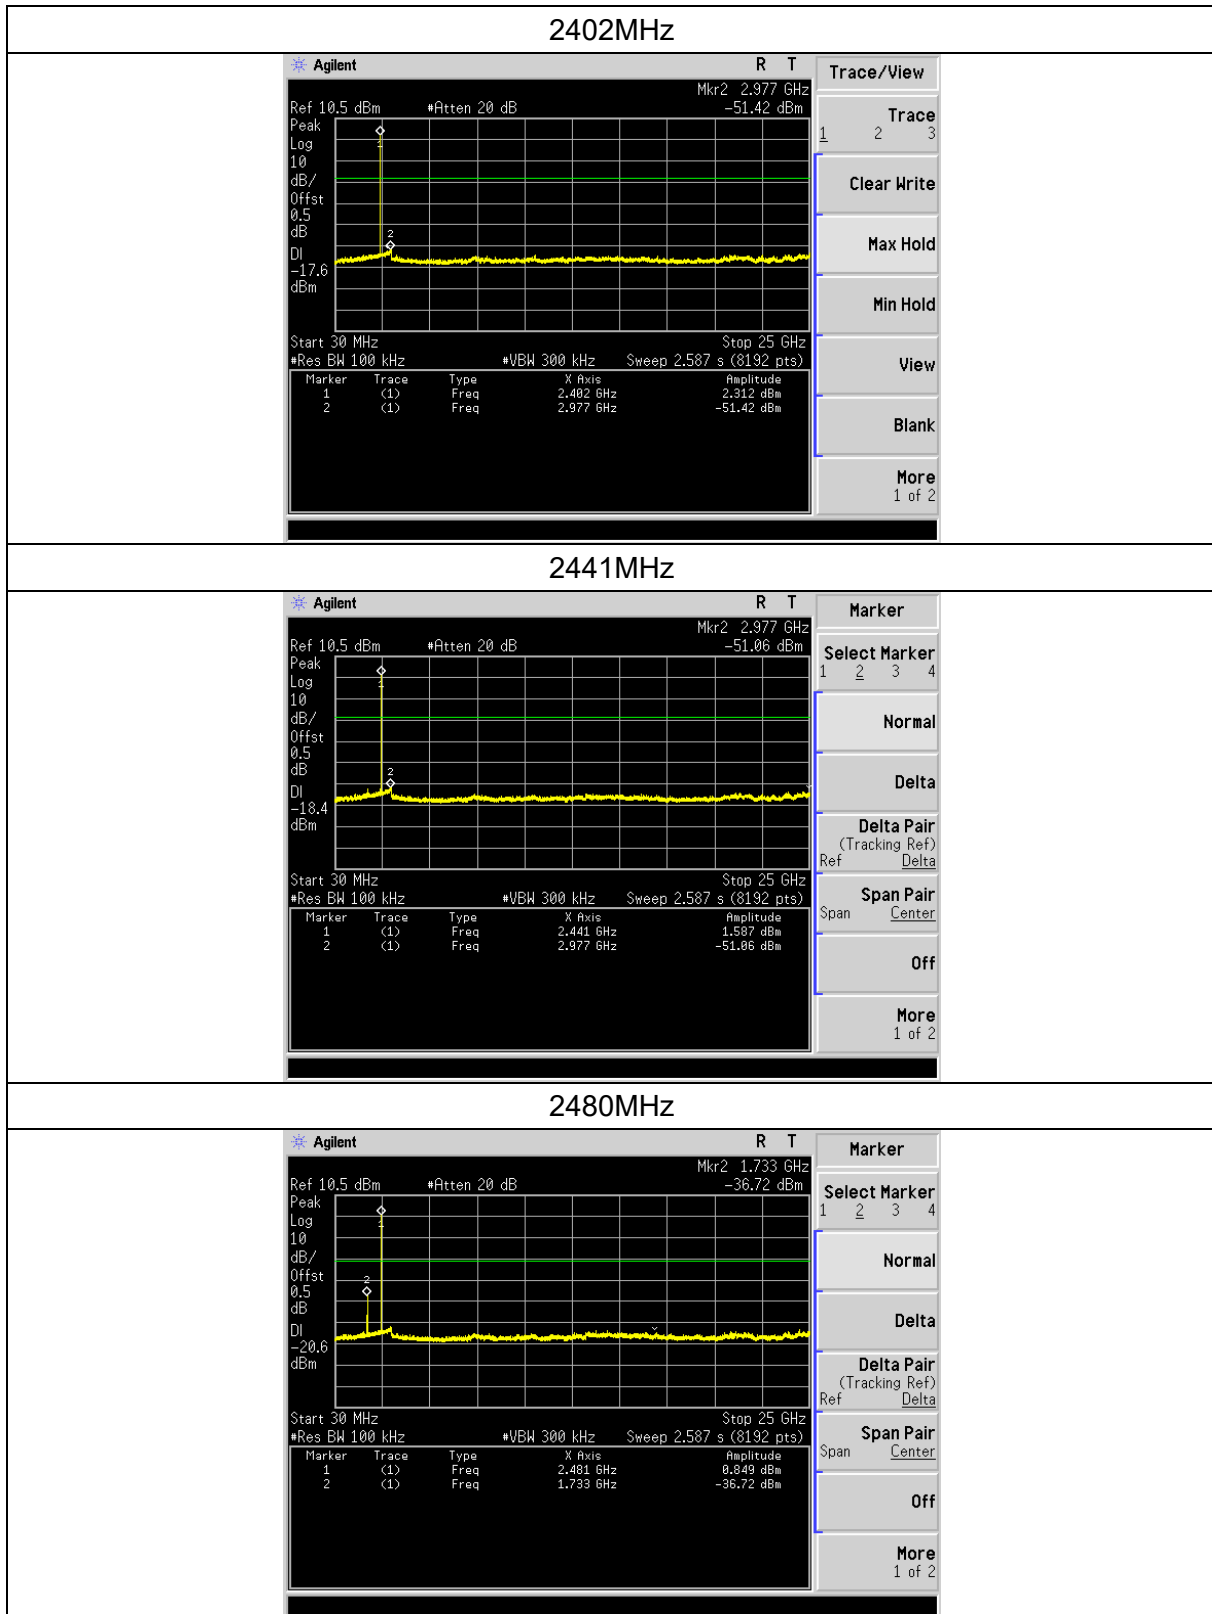

Band edge

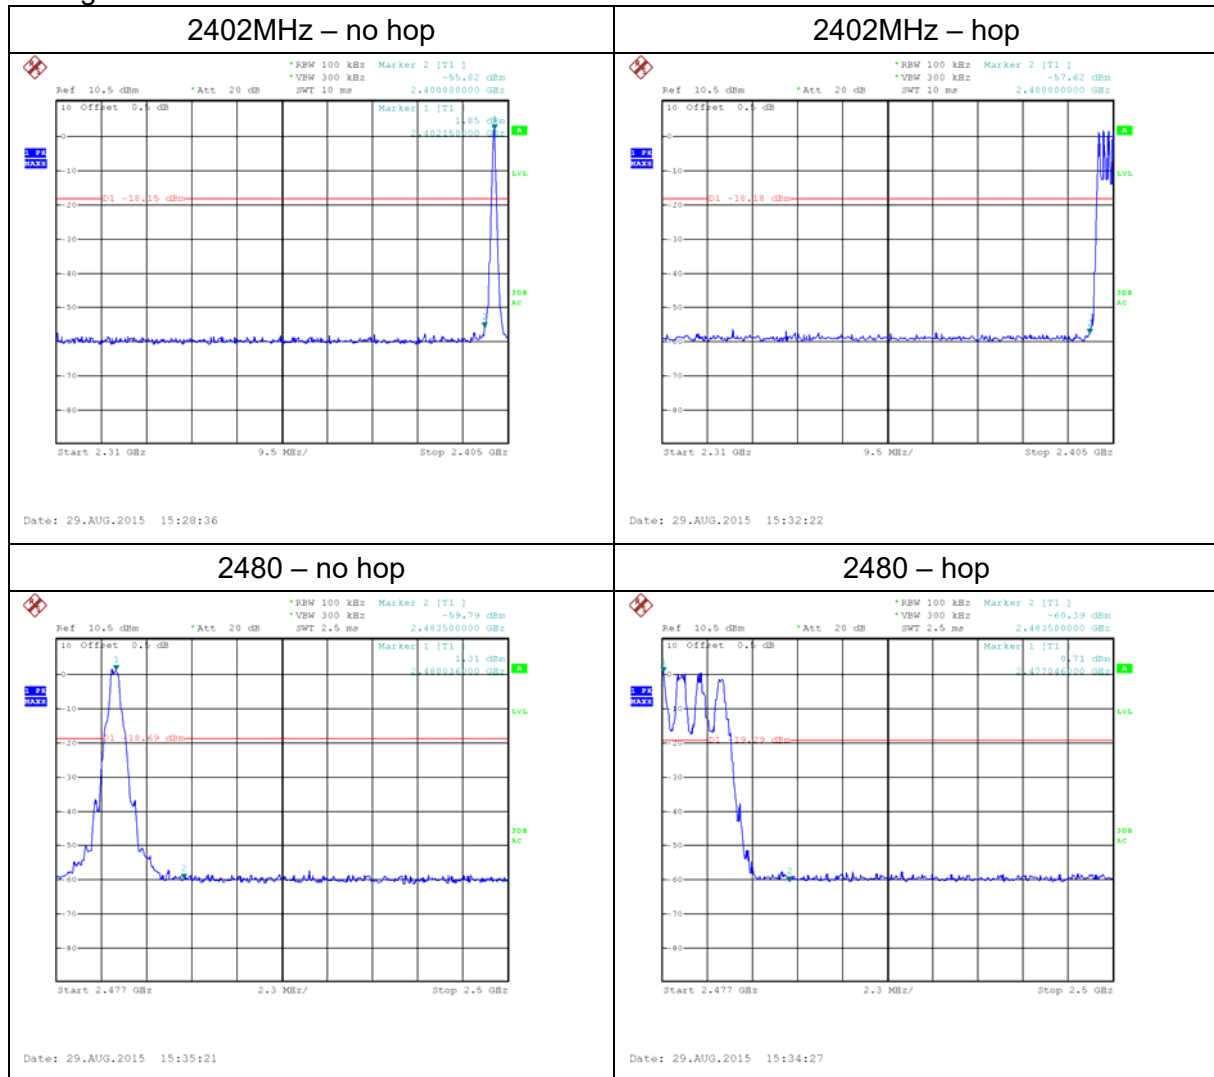

4.7 Radiated emission

4.7.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Frequency (MHz)	Field strength $\mu\text{V/m}$	Field strength $\text{dB}\mu\text{V/m}$	Detector	Measurement distance
30-88	100	40	QP	3m
88-216	150	43.5	QP	
216-960	200	46	QP	
960-1000	500	46	QP	
Above 1000	500	54	AV	
Above 1000	5000	74	PK	

4.7.2 Test method

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
3. Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured, RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$, VBW $\geq$ RBW, Sweep = auto, Detector function = peak, Trace = max hold

4. Follow the guidelines in ANSI C63.4-2009 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

5. Set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the duty cycle per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{duty cycle}/100\text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

4.7.3 Test Result

2402MHz

Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dBμV/m	dBμV/m		
191.75	V	22.36	43.5	QP	Pass
205.67	H	21.81	43.5	QP	
2400	V	45.38	74	PK	
2400	H	45.27	74	PK	
4804	V	52.81	74	PK	
4804	H	50.47	74	PK	

2441MHz

Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dBμV/m	dBμV/m		
191.75	V	22.08	43.5	QP	Pass
205.67	H	21.54	43.5	QP	
4882	V	51.75	74	PK	
4882	H	50.19	74	PK	

2480MHz

Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dBμV/m	dBμV/m		
191.75	V	22.84	43.5	QP	Pass
205.67	H	21.39	43.5	QP	
2483.5	V	46.37	74	PK	
2483.5	H	46.22	74	PK	
4960	V	49.27	74	PK	
4960	H	46.9	74	PK	

Note:

QP Emission Level= Antenna Factor +Cable Loss + Reading

PK Emission Level= Antenna Factor +Cable Loss - Amp. Factor + Reading

AV Emission Level= PK Emission Level+20log (duty cycle) or set the RBW/VBW to be 1MHz/10Hz to read the level.

If the PK measured values lower than average mode limit, the EUT shall be deemed to meet average limits and then no additional average mode measurement performed.

----END OF REPORT----