

# TEST REPORT

ACCORDING TO: FCC 47CFR part 96

FOR:

**Airspan Networks Inc.**

**5G NR Base Station**

**Model: AirSpeed 2900, 5G, 3.55-3.7GHz (n48)**

**FCC ID: PIDAS2900**

This report is in conformity with ISO/IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.  
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

## Table of contents

1	Applicant information.....	3
2	Equipment under test attributes .....	3
3	Manufacturer information .....	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Ports and lines .....	5
6.3	Support and test equipment .....	5
6.4	Changes made in the EUT .....	5
6.5	Test configuration.....	6
6.6	Transmitter characteristics .....	7
7	Transmitter tests according to 47CFR part 96.....	8
7.1	Peak output power test.....	8
7.2	Peak-to-average power ratio (PAPR) test .....	37
7.3	Occupied bandwidth test .....	49
7.4	Emission mask test .....	64
7.5	Radiated spurious emission measurements.....	94
7.6	Spurious emissions at RF antenna connector test .....	106
7.7	Frequency stability test.....	162
8	APPENDIX A Test equipment and ancillaries used for tests.....	164
9	APPENDIX B Test equipment correction factors.....	166
10	APPENDIX C Measurement uncertainties .....	172
11	APPENDIX D Test laboratory description .....	173
12	APPENDIX E Specification references.....	173
13	APPENDIX F Abbreviations and acronyms.....	174

## 1 Applicant information

**Client name:** Airspan Networks Inc.  
**Address:** 777 Yamato, Road Suite 310 Boca Raton, FL 33431, USA  
**Telephone:** +1 561 893 8670  
**Fax:** +1 561 893 8671  
**E-mail:** [zlevi@airspan.com](mailto:zlevi@airspan.com)  
**Contact name:** Mr. Zion Levi

## 2 Equipment under test attributes

**Product name:** 5G NR Base Station  
**Product type:** Transceiver  
**Model(s):** AirSpeed 2900, 5G, 3.55-3.7GHz (n48)  
**Serial number:** ED0A5A0163BE  
**Hardware version:** 08  
**Software release:** SR19.00  
**Receipt date** 28-Oct-21

## 3 Manufacturer information

**Manufacturer name:** Airspan Networks Inc.  
**Address:** 777 Yamato, Road Suite 310 Boca Raton, FL 33431, USA  
**Telephone:** +1 561 893 8670  
**Fax:** +1 561 893 8671  
**E-Mail:** [zlevi@airspan.com](mailto:zlevi@airspan.com)  
**Contact name:** Mr. Zion Levi

## 4 Test details

**Project ID:** 44746  
**Location:** Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel  
**Test started:** 01-Nov-21  
**Test completed:** 21-Nov-21  
**Test specification(s):** FCC 47CFR part 96




## 5 Tests summary

Test	Status
<b>Transmitter characteristics</b>	
Section 96.41(b), Maximum EIRP and maximum power spectral density	Pass
Section 96.41(g), Peak-to- average power ratio	Pass
Section 2.1049, Occupied bandwidth	Pass
Section 96.41(e), Emission mask	Pass
Section 96.41(e)(2), Radiated spurious emissions	Pass
Section 96.41(e)(3), Conducted spurious emissions	Pass
Section 2.1055, Frequency stability	Pass

This test report supersedes the previously issued test report identified by Doc ID: AIRRAD\_FCC.44746

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
<b>Tested by:</b>	Mr. A. Morozov, test engineer, EMC & Radio	01-Nov-21 – 21-Nov-21	
<b>Reviewed by:</b>	Mrs. S. Peysahov Sheynin, test engineer, EMC & Radio	24-Nov-21	
<b>Approved by:</b>	Mr. S. Samokha, technical manager, EMC & Radio	24-Nov-21	

## 6 EUT description

Note: The following data in this clause is provided by the customer and represents his sole responsibility

### 6.1 General information

EUT is a Mobile Digital station, AirSpeed 2900 3550-3700MHz (N48), is part of a 5G broadband fixed cellular wireless access system. The system provides a radio link between an end-user (a subscriber) and a network to give high-speed data access. The AirSpeed 2900's transceiver/receiver (Up to 256 QAM modulation, data rate up to 190 Mbps) equipped with a 17dBi External antenna. Advanced Antenna Techniques 2x2 MIMO are supported. The maximum RF output power (not including antenna gain) is 33.00 dBm for 17dBi and it can be reduced by software.

The AirSpeed is installed outdoors. The Subscriber transmits and receives traffic to and from the base station respectively. The transceiver provides subscribers with "always-on" Internet, high speed data only, or data and voice (VoIP) services and is configured with a unique base station reference number, preventing the 5G UE from relocating to another subscriber premises without authorization.

**Note:** AirSpeed 2900 equipment defined as Category B CBSD (Citizens Broadband Radio Service Device) per FCC part 96 section 96.3(2).

Antennas 1/2 arrange one sector while antenna 1 is cross polarized to antenna 2 and antennas 3/4 arrange another sector while antenna 3 is cross polarized to antenna 4. The transmitter output signals are completely uncorrelated.

The sectors are either non overlapping by operation on different frequency channels or by different sectors coverage without overlapping of antenna beams."

### 6.2 Ports and lines

Port type	Port description	Connected from	Connected to	Qty.	Cable type	Cable length, m
Power	DC power	EUT	AC/DC adapter	1	Unshielded	20
Signal	Ethernet	EUT	Laptop	1	Shielded	20
Signal*	Serial*	Not connected	Not connected	1	NA	NA
Signal	Optic Port	EUT	Laptop	1	Unshielded	20
Signal	GPS	EUT	NA	1	NA	NA

\*for maintenance only


### 6.3 Support and test equipment

Description	Manufacturer	Model number	Serial number
Laptop	Dell	E7450	8TYRP32
USB to RS-232 convertor	ATEN	UC2324	NA
AC/DC adapter	MW	PSP-600-48	NA
SFP adapter	Finisar	FTLF1318P3BTL	NSE0AQC
GPS antenna	Tallysman	32-3010-0	01252012

### 6.4 Changes made in the EUT

No changes were implemented in the EUT during testing.

## 6.5 Test configuration

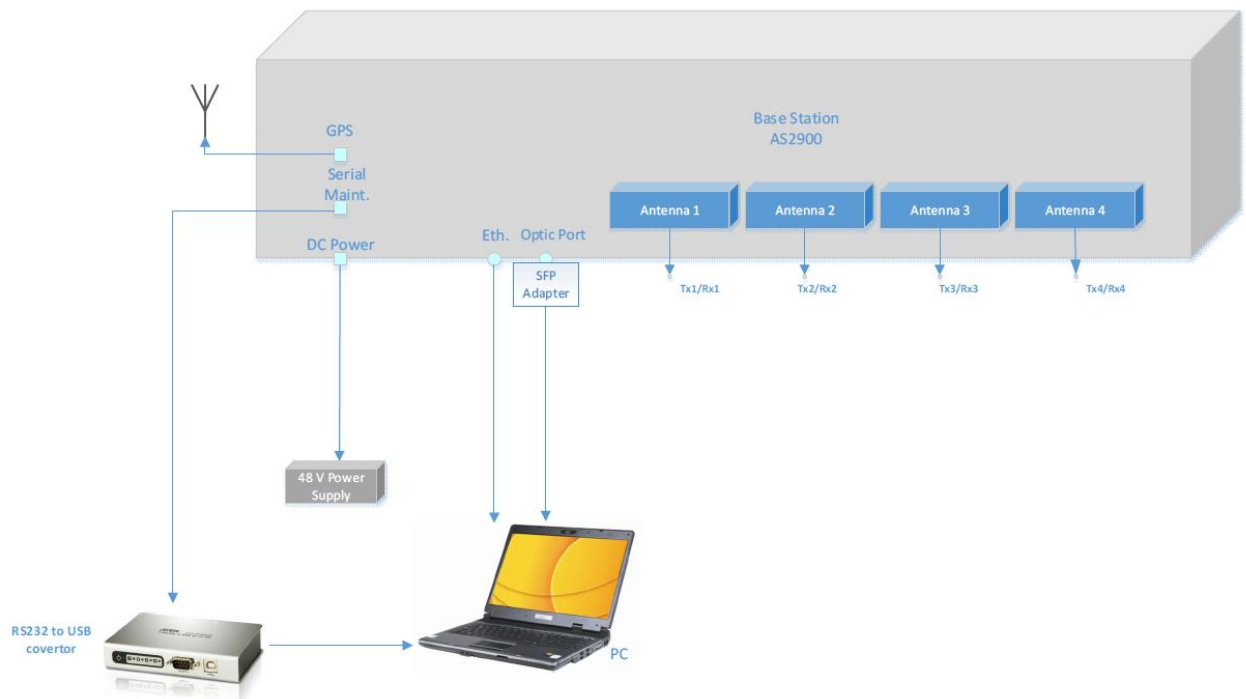

## 6.6 Transmitter characteristics

<b>Type of equipment</b>					
<b>V</b>	Stand-alone (Equipment with or without its own control provisions)				
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)				
	Plug-in card (Equipment intended for a variety of host systems)				
<b>Intended use</b>		<b>Condition of use</b>			
<b>V</b>	fixed	Always at a distance more than 2 m from all people			
	mobile	Always at a distance more than 20 cm from all people			
	portable	May operate at a distance closer than 20 cm to human body			
<b>Assigned frequency range</b>		3550.0 – 3700.0 MHz			
<b>Operating frequency (full bands)</b>		3560.0 – 3690.0 MHz			
<b>RF channel spacing</b>		20 MHz, 40 MHz			
<b>Maximum rated output power</b>		At transmitter 50 $\Omega$ RF output connector (per port)		33.00 dBm	
<b>Is transmitter output power variable?</b>		No			
		<b>V</b>	Yes	continuous variable	
				stepped variable with step size	0.25 dB
				minimum RF power	-30 dBm
		maximum RF power at antenna connector			dBm
<b>Antenna connection</b>					
unique coupling	<b>V</b>	standard connector	Integral	<b>V</b> with temporary RF connector without temporary RF connector	
<b>Antenna/s technical characteristics</b>					
Type	Manufacturer		Model number	Gain	
External	ALPHA		AN1003-R2	17 dBi	
<b>Transmitter aggregate data rate/s, Mbps</b>					
Transmitter 26dBc power bandwidth		Type of modulation			
		QPSK	16QAM	64QAM	256QAM
20 MHz		23.4	45.4	95.0	143.0
40 MHz		46.8	90.8	190.0	285.0
<b>Type of multiplexing</b>		TDD			
<b>Modulating test signal (baseband)</b>		PRBS			
<b>Maximum transmitter duty cycle in normal use</b>		0.74			
<b>Transmitter power source</b>					
		<b>Nominal rated voltage</b>		<b>Battery type</b>	
<b>V</b>	DC	<b>Nominal rated voltage</b>	48 VDC		
	AC mains	<b>Nominal rated voltage</b>		<b>Frequency</b>	
<b>Common power source for transmitter and receiver</b>		<b>V</b>	yes		no



<b>Test specification:</b> Section 96.41(b), Maximum EIRP and maximum power spectral density			
<b>Test procedure:</b> Section 96.41(e)(3)			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Nov-21			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 54 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

## 7 Transmitter tests according to 47CFR part 96

### 7.1 Peak output power test

#### 7.1.1 General

This test was performed to measure the maximum EIRP and maximum spectral power density at the transmitter RF antenna connector. Specification test limits are given in Table 7.1.1, Table 7.1.2.

Table 7.1.1 Maximum EIRP limits

Assigned frequency range, MHz	EIRP
	dBm/10 MHz
3550 - 3700	47.0

Table 7.1.2 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, MHz	Peak spectral power density, dBm
3550 - 3700	1.0	37.0

#### 7.1.2 Test procedure


7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.1.2.3 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in average mode with resolution bandwidth set to 1.0 MHz, video bandwidth wider than resolution bandwidth, sweep time and sufficient number of sweeps was allowed for trace stabilization.

7.1.2.4 Spectrum analyzer was set in average mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.1.3, Table 7.1.4 and the associated plots.

Figure 7.1.1 Peak output power test setup

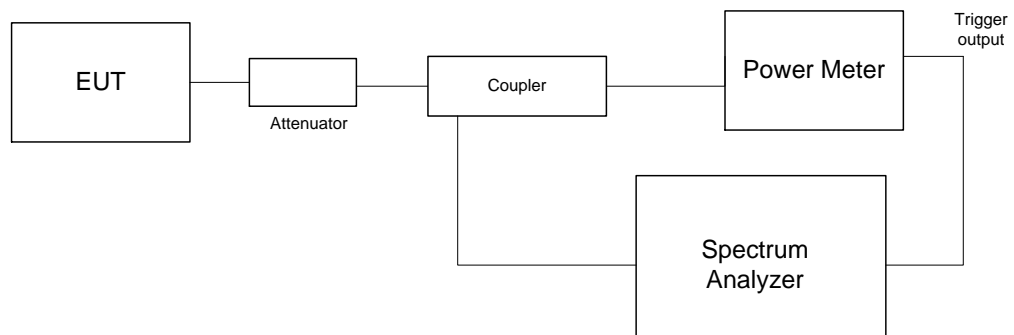





Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.1.3 Peak output power test results

ASSIGNED FREQUENCY RANGE:

3550.0 – 3700.0 MHz

DETECTOR USED:

Average (gated)

VIDEO BANDWIDTH:

≥ Resolution bandwidth

CHANNEL SPACING:

20 MHz

Frequency , MHz	RF Output power				Antenna gain, dBi	EIRP*, dBm/20 MHz	EIRP*, dBm/10 MHz	Limit, dBm/10 MHz	Margin, dB**	Verdict
	Chain RF#1, dBm	Chain RF#2, dBm	Chain RF#3, dBm	Chain RF#4, dBm						
Modulation QPSK										
3560.0	31.35	31.73	32.23	31.78	17.00	49.23	46.63	47.0	-0.37	Pass
3625.0	31.31	31.87	31.43	32.15	17.00	49.15	46.55	47.0	-0.45	Pass
3690.0	30.61	31.29	30.62	31.19	17.00	48.29	45.69	47.0	-1.31	Pass
Modulation 16QAM										
3560.0	31.25	31.48	32.19	31.75	17.00	49.19	46.59	47.0	-0.41	Pass
3625.0	31.62	31.55	31.71	31.63	17.00	48.71	46.11	47.0	-0.89	Pass
3690.0	30.75	31.19	31.10	31.09	17.00	48.19	45.59	47.0	-1.41	Pass
Modulation 64QAM										
3560.0	31.38	31.41	32.10	31.81	17.00	49.10	46.50	47.0	-0.50	Pass
3625.0	31.60	31.53	31.96	31.32	17.00	48.96	46.36	47.0	-0.64	Pass
3690.0	30.76	31.10	31.07	30.88	17.00	48.10	45.50	47.0	-1.50	Pass
Modulation 256QAM										
3560.0	31.25	31.96	32.13	31.82	17.00	49.13	46.53	47.0	-0.47	Pass
3625.0	31.32	31.41	31.90	31.12	17.00	48.90	46.30	47.0	-0.70	Pass
3690.0	30.70	30.96	30.71	30.65	17.00	47.96	45.36	47.0	-1.64	Pass

\* - EIRP = Max SA reading (Chains #1&2 and #3&4) - 10\*log[OBW(MHz) / 10 MHz]] + Antenna gain =  
Max SA reading – 2.6 dB + Antenna gain: The transmitter output signal are completely uncorrelated, antennas 1/2 is one sector and antennas 3/4 is another sector.

\*\* - Margin = EIRP, dBm – specification limit.



Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.1.4 Peak output power test results

ASSIGNED FREQUENCY RANGE:

3550.0 – 3700.0 MHz

DETECTOR USED:

Average (gated)

VIDEO BANDWIDTH:

≥ Resolution bandwidth

CHANNEL SPACING:

40 MHz

Frequency , MHz	RF Output power				Antenna gain, dBi	EIRP*, dBm/40 MHz	EIRP*, dBm/10 MHz	Limit, dBm/10 MHz	Margin, dB**	Verdict
	Chain RF#1, dBm	Chain RF#2, dBm	Chain RF#3, dBm	Chain RF#4, dBm						
Modulation QPSK										
3570.0	32.44	32.78	32.40	33.00	17.0	50.00	44.23	47.0	-2.77	Pass
3625.0	32.40	32.37	32.48	32.80	17.0	49.80	44.03	47.0	-2.97	Pass
3680.0	31.10	31.60	31.27	31.60	17.0	48.60	42.83	47.0	-4.17	Pass
Modulation 16QAM										
3570.0	32.14	32.39	32.60	32.97	17.0	49.97	44.20	47.0	-2.80	Pass
3625.0	32.02	32.36	32.45	32.91	17.0	49.91	44.14	47.0	-2.86	Pass
3680.0	30.89	31.28	31.06	31.76	17.0	48.76	42.99	47.0	-4.01	Pass
Modulation 64QAM										
3570.0	32.18	32.73	32.21	32.97	17.0	49.70	43.93	47.0	-3.07	Pass
3625.0	32.15	32.35	32.49	32.89	17.0	49.89	44.12	47.0	-2.88	Pass
3680.0	30.80	31.73	31.06	31.72	17.0	48.73	42.96	47.0	-4.04	Pass
Modulation 256QAM										
3570.0	32.19	32.76	31.94	33.00	17.0	50.00	43.93	47.0	-3.07	Pass
3625.0	32.23	32.35	32.70	32.89	17.0	49.89	44.12	47.0	-2.88	Pass
3680.0	30.79	31.58	30.99	31.99	17.0	48.99	42.96	47.0	-4.04	Pass

\*- EIRP = Max SA reading (Chains #1&2 and #3&4) -  $10 \cdot \log[\text{OBW}(\text{MHz}) / 10 \text{ MHz}]$  + Antenna gain =

Max SA reading – 5.77 dB + Antenna gain: The transmitter output signal are completely uncorrelated, antennas 1/2 is one sector and antennas 3/4 is another sector.

\*\* - Margin = EIRP, dBm – specification limit.



HERMON LABORATORIES

Report ID: AIRRAD\_FCC.44746\_Rev1

Date of Issue: 24-Nov-21

Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.1.5 Peak spectral power density test results

ASSIGNED FREQUENCY RANGE:

3550.0 – 3700.0 MHz

DETECTOR USED:

Average (gated)

VIDEO BANDWIDTH:

≥ Resolution bandwidth

NUMBER OF CHAINS:

4

Frequency, MHz	SA Reading, dBm/MHz				Antenna gain, dBi	Total PSD*, dBm/ MHz	Limit, dBm/MHz	Margin , dB	Verdi ct
	Chain RF#1,	Chain RF#2,	Chain RF#3,	Chain RF#4,					
Channel spacing 20 MHz									
Modulation QPSK									
3560.0	18.10	18.52	18.93	18.60	17.00	35.93	37.0	-1.07	Pass
3625.0	17.98	18.66	18.17	18.80	17.00	35.80	37.0	-1.20	Pass
3690.0	17.37	17.86	17.46	18.06	17.00	35.06	37.0	-1.94	Pass
Modulation 16QAM									
3560.0	18.08	18.34	18.98	18.59	17.00	35.98	37.0	-1.02	Pass
3625.0	18.43	18.37	18.51	18.41	17.00	35.51	37.0	-1.49	Pass
3690.0	17.53	18.01	17.92	18.14	17.00	35.14	37.0	-1.86	Pass
Modulation 64QAM									
3560.0	18.21	18.31	19.02	18.78	17.00	36.02	37.0	-0.98	Pass
3625.0	18.32	18.32	18.75	18.08	17.00	35.75	37.0	-1.25	Pass
3690.0	17.56	17.87	17.98	18.14	17.00	35.14	37.0	-1.86	Pass
Modulation 256QAM									
3560.0	18.08	18.85	18.90	18.67	17.00	35.90	37.0	-1.10	Pass
3625.0	18.06	18.20	18.74	17.95	17.00	35.74	37.0	-1.26	Pass
3690.0	17.40	17.71	17.60	17.99	17.00	34.99	37.0	-2.01	Pass

\* - Total PSD = Max SA reading (Chains #1&2 or chains #3&4) + Antenna Gain: The transmitter output signal are completely uncorrelated, antennas 1/2 is one sector and antennas 3/4 is another sector.

\*\* - Margin = Total PSD, dBm – specification limit.



HERMON LABORATORIES

Report ID: AIRRAD\_FCC.44746\_Rev1

Date of Issue: 24-Nov-21

Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.1.6 Peak spectral power density test results

ASSIGNED FREQUENCY RANGE:

3550.0 – 3700.0 MHz

DETECTOR USED:

Average (gated)

VIDEO BANDWIDTH:

≥ Resolution bandwidth

NUMBER OF CHAINS:

4

Frequency, MHz	SA Reading, dBm/MHz				Antenna gain, dBi	Total PSD*, dBm/ MHz	Limit, dBm/MHz	Margin , dB	Verdi ct
	Chain RF#1,	Chain RF#2,	Chain RF#3,	Chain RF#4,					
Channel spacing 40 MHz									
Modulation QPSK									
3570.0	16.33	16.60	16.69	15.93	17.0	33.69	37.0	-3.31	Pass
3625.0	16.16	16.37	16.45	16.51	17.0	33.51	37.0	-3.49	Pass
3680.0	14.30	15.09	14.76	15.07	17.0	32.09	37.0	-4.91	Pass
Modulation 16QAM									
3570.0	16.27	16.40	16.50	17.08	17.0	34.08	37.0	-2.92	Pass
3625.0	16.00	16.51	16.56	16.74	17.0	33.74	37.0	-3.26	Pass
3680.0	14.09	14.84	14.70	15.34	17.0	32.34	37.0	-4.66	Pass
Modulation 64QAM									
3570.0	16.30	16.84	16.12	17.15	17.0	34.15	37.0	-2.85	Pass
3625.0	16.14	16.47	16.58	16.75	17.0	33.75	37.0	-3.25	Pass
3680.0	14.10	15.38	14.69	15.33	17.0	32.38	37.0	-4.62	Pass
Modulation 256QAM									
3570.0	16.34	16.88	15.85	17.13	17.0	34.13	37.0	-2.87	Pass
3625.0	16.20	16.37	16.72	16.71	17.0	33.72	37.0	-3.28	Pass
3680.0	14.18	15.24	14.65	15.60	17.0	32.60	37.0	-4.40	Pass

\* - Total PSD = Max SA reading (Chains #1&2 or chains #3&4) + Antenna Gain: The transmitter output signal are completely uncorrelated, antennas 1/2 is one sector and antennas 3/4 is another sector.

\*\* - Margin = Total PSD, dBm – specification limit.

#### Reference numbers of test equipment used

HL 3301	HL 4355	HL 4366	HL 5643	HL 5409	HL 5636	HL 5637	HL 5642
---------	---------	---------	---------	---------	---------	---------	---------

Full description is given in Appendix A.



HERMON LABORATORIES

Report ID: AIRRAD\_FCC.44746\_Rev1

Date of Issue: 24-Nov-21

<b>Test specification:</b>		<b>Section 96.41(b), Maximum EIRP and maximum power spectral density</b>	
<b>Test procedure:</b>		Section 96.41(e)(3)	
<b>Test mode:</b>		<b>Verdict:</b> PASS	
<b>Date(s):</b>			
14-Nov-21			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 54 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

### Plot 7.1.1 Peak spectral power density at low frequency

CHANNEL SPACING:



ANTENNA CHAIN:

Modulation: QPSK


20 MHz

1


Modulation: 16QAM

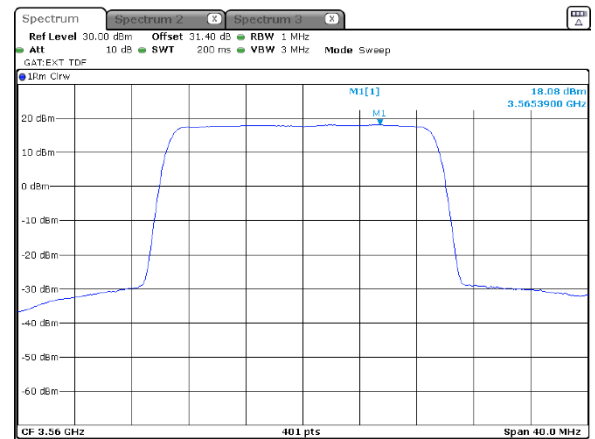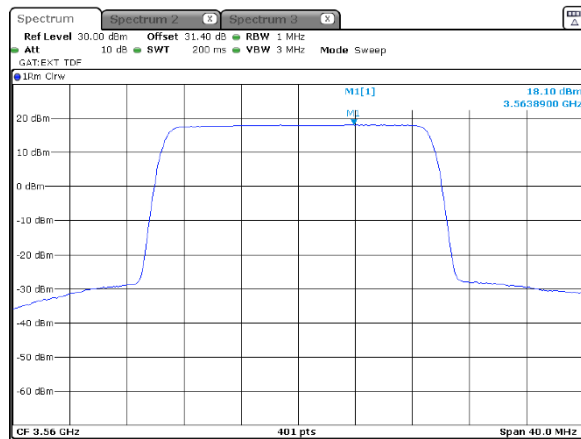

Modulation: 64QAM

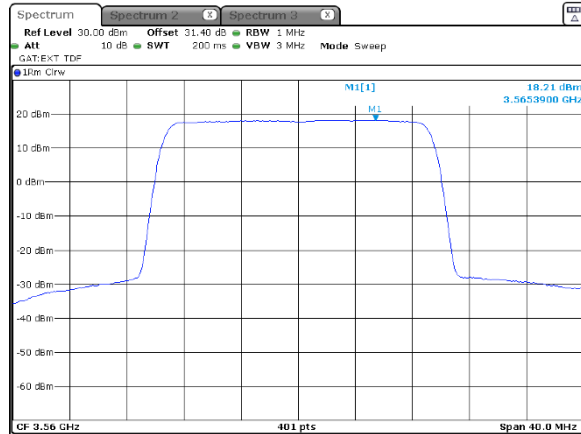

Modulation: 256QAM

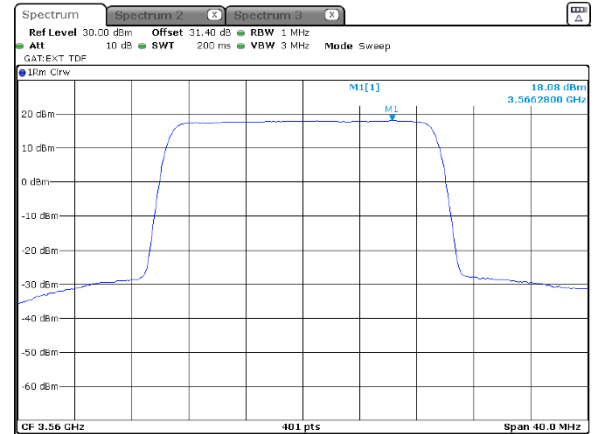




HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.2 Peak spectral power density at low frequency


CHANNEL SPACING:  
ANTENNA CHAIN:  
Modulation: QPSK

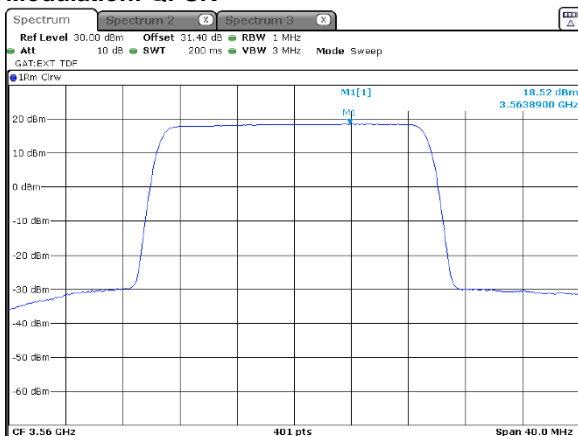


20 MHz  
2  
Modulation: 16QAM

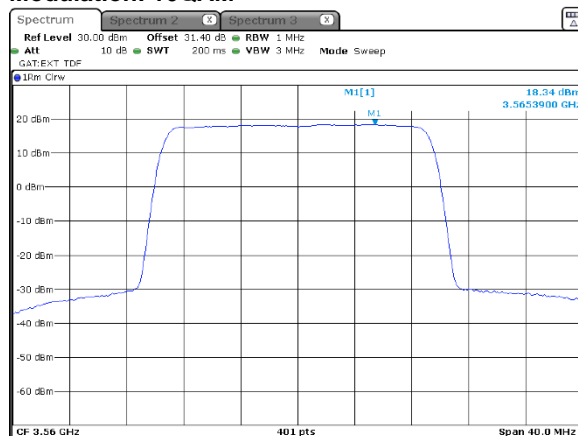

Modulation: 64QAM

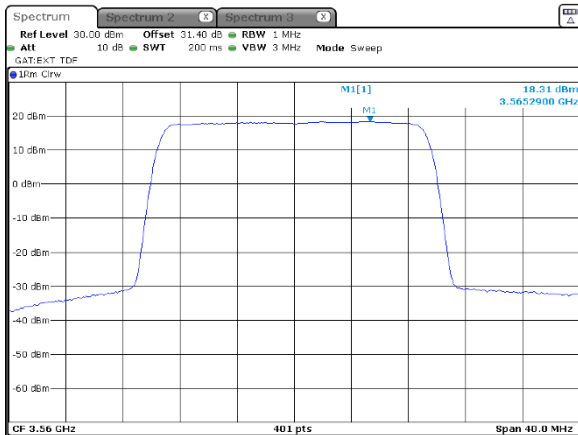

Modulation: 256QAM

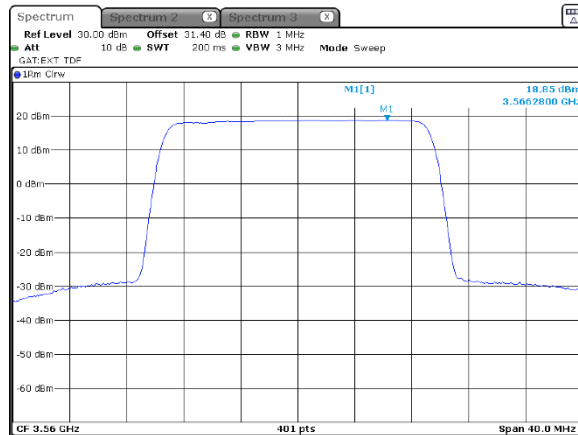




HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.3 Peak spectral power density at low frequency


CHANNEL SPACING:  
ANTENNA CHAIN:  
Modulation: QPSK

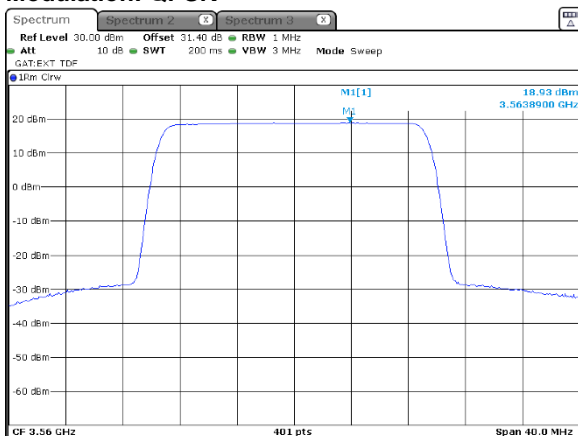


20 MHz  
3  
Modulation: 16QAM

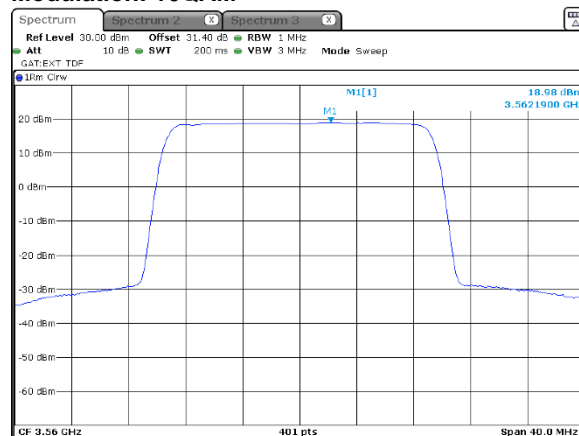

Modulation: 64QAM

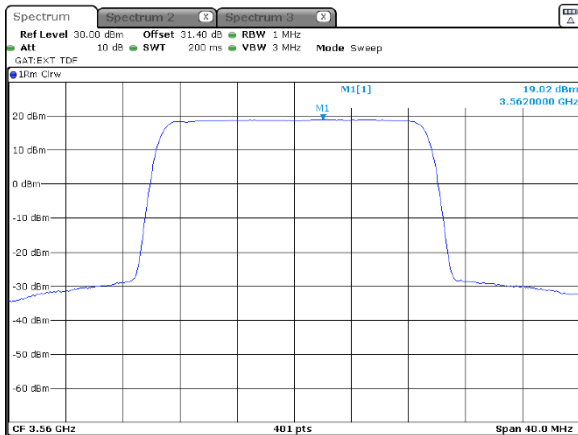

Modulation: 256QAM

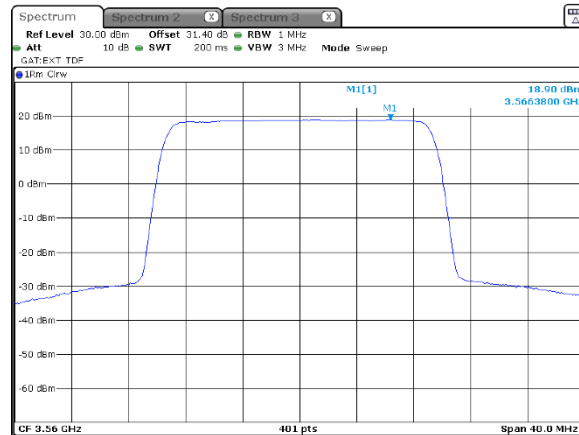




HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.4 Peak spectral power density at low frequency


CHANNEL SPACING:  
ANTENNA CHAIN:  
Modulation: QPSK

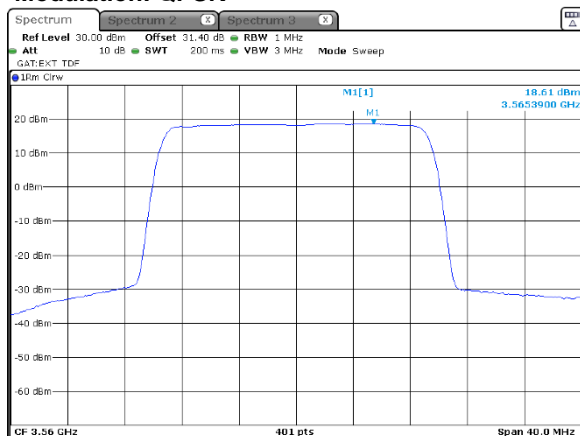


20 MHz  
4  
Modulation: 16QAM

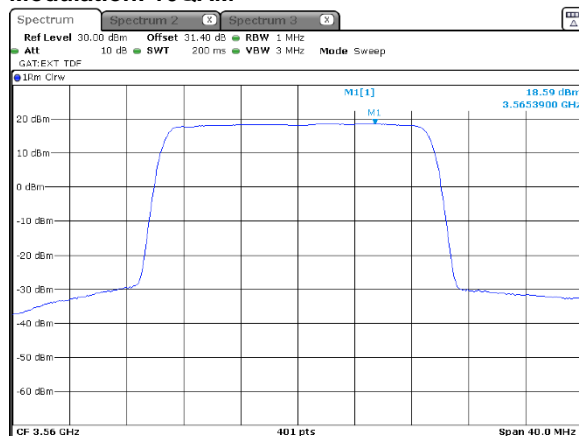

Modulation: 64QAM

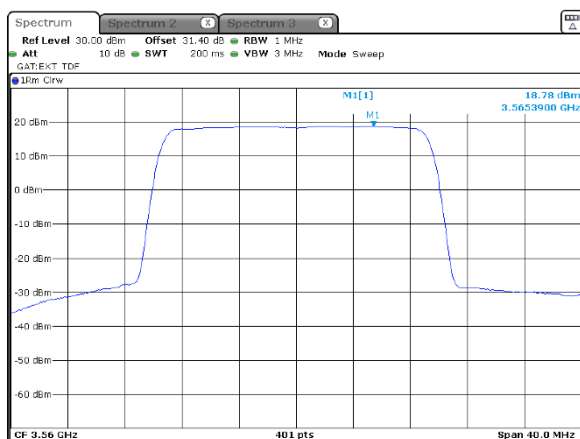

Modulation: 256QAM

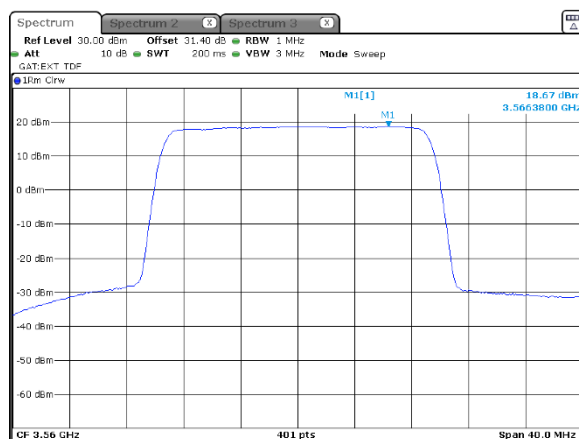





HERMON LABORATORIES

Report ID: AIRRAD\_FCC.44746\_Rev1

Date of Issue: 24-Nov-21


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.5 Peak spectral power density at mid frequency


CHANNEL SPACING:

ANTENNA CHAIN:

Modulation: QPSK

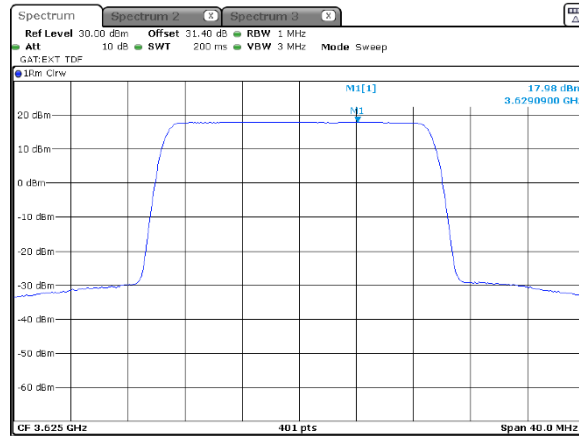


Modulation: 64QAM

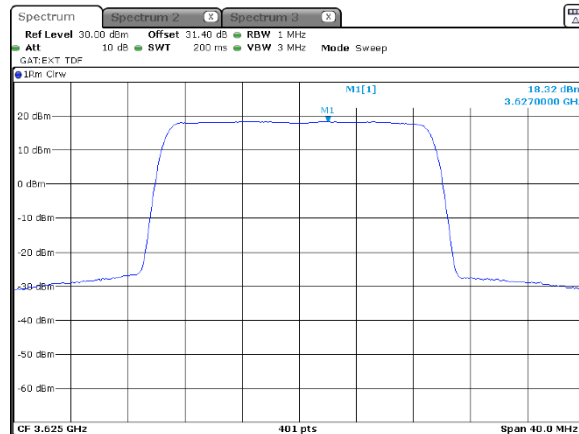


20 MHz

1

Modulation: 16QAM

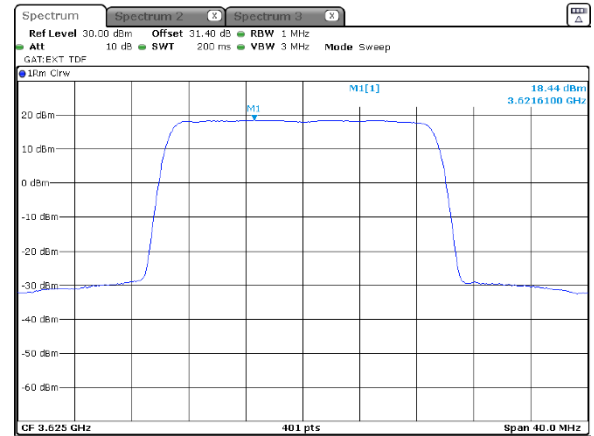

Modulation: 256QAM

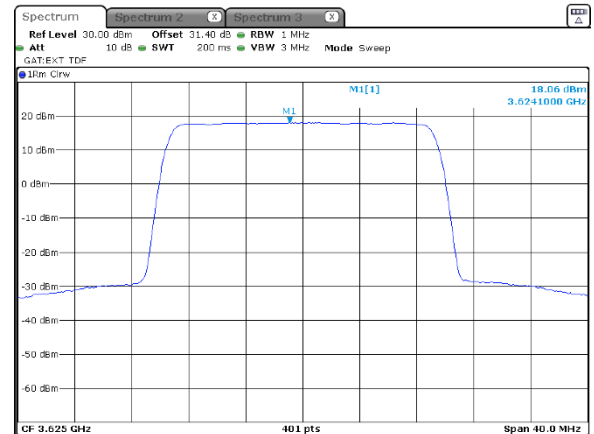



HERMON LABORATORIES

Report ID: AIRRAD\_FCC.44746\_Rev1

Date of Issue: 24-Nov-21


<b>Test specification:</b> Section 96.41(b), Maximum EIRP and maximum power spectral density			
<b>Test procedure:</b> Section 96.41(e)(3)			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Nov-21			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 54 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Plot 7.1.6 Peak spectral power density at mid frequency


CHANNEL SPACING:

ANTENNA CHAIN:

Modulation: QPSK

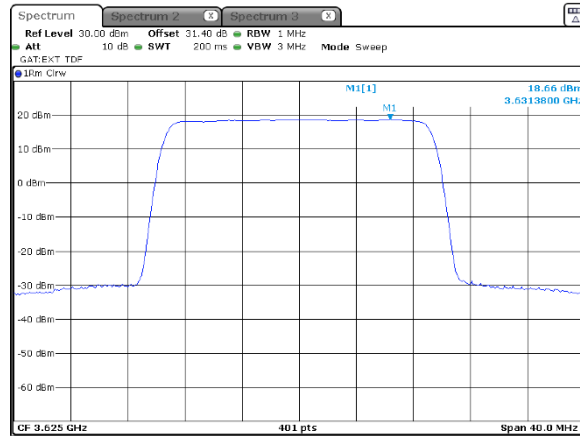


Modulation: 64QAM

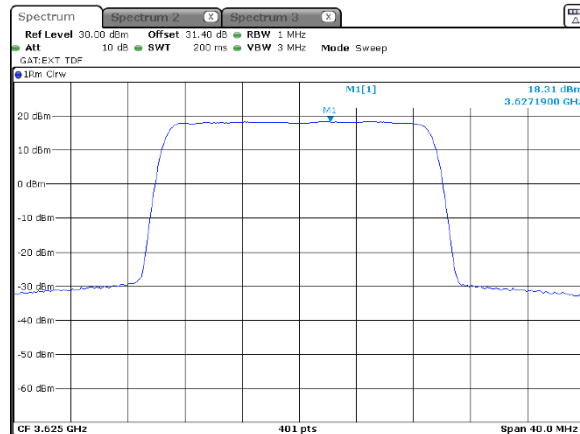


20 MHz

2

Modulation: 16QAM

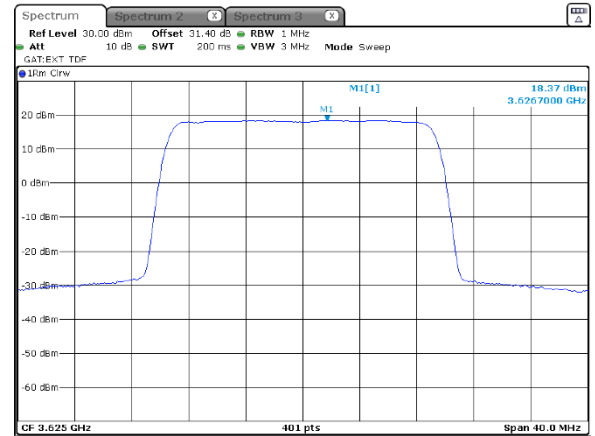

Modulation: 256QAM

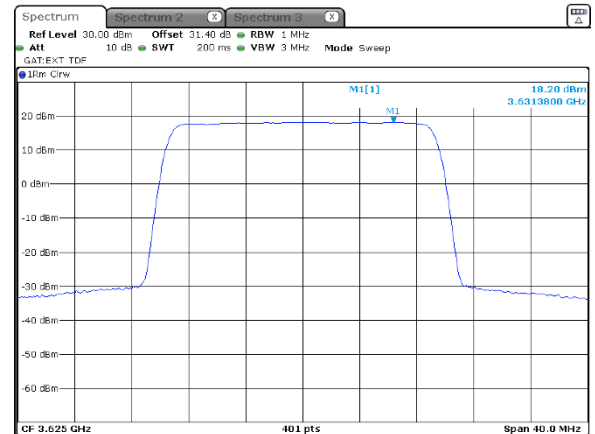




HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.7 Peak spectral power density at mid frequency


CHANNEL SPACING:  
ANTENNA CHAIN:  
Modulation: QPSK

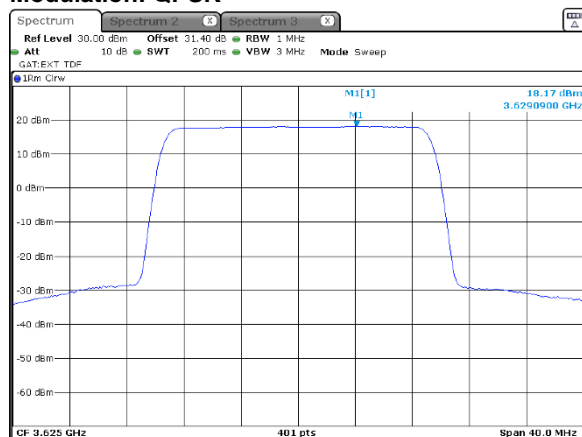


Modulation: 64QAM

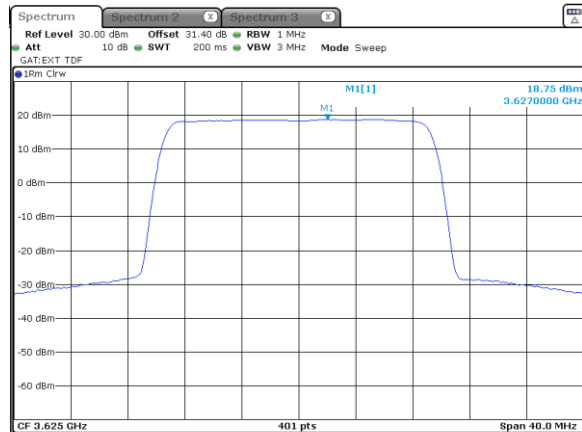

20 MHz  
3  
Modulation: 16QAM

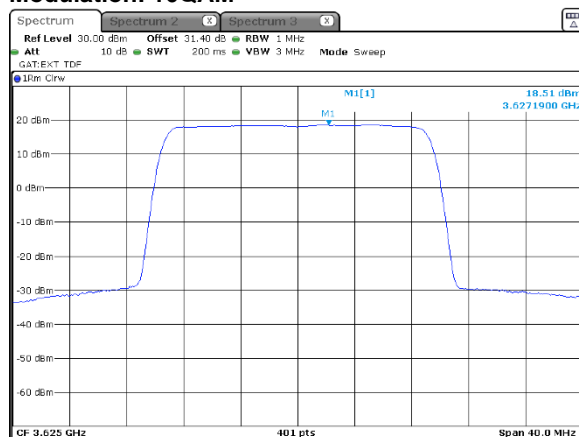

Modulation: 256QAM

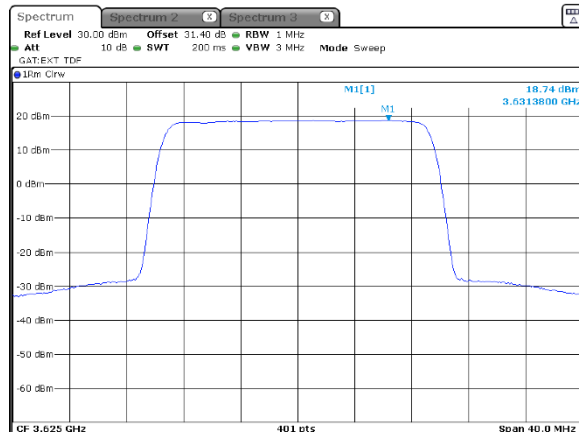



HERMON LABORATORIES

Report ID: AIRRAD\_FCC.44746\_Rev1

Date of Issue: 24-Nov-21


<b>Test specification:</b> Section 96.41(b), Maximum EIRP and maximum power spectral density			
<b>Test procedure:</b> Section 96.41(e)(3)			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Nov-21			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 54 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Plot 7.1.8 Peak spectral power density at mid frequency


CHANNEL SPACING:

ANTENNA CHAIN:

Modulation: QPSK

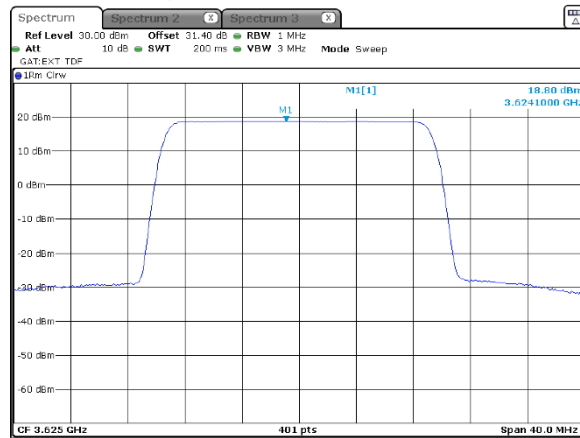


Modulation: 64QAM

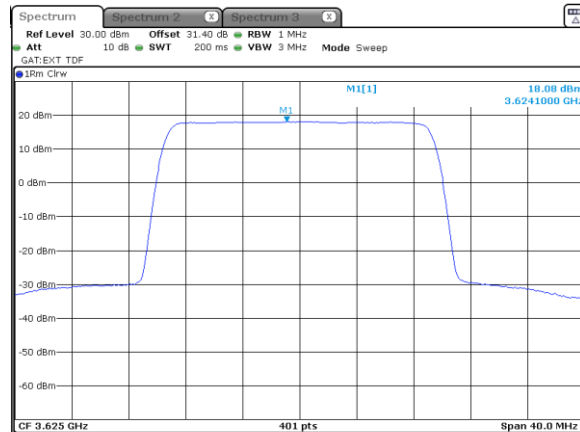


20 MHz

4

Modulation: 16QAM

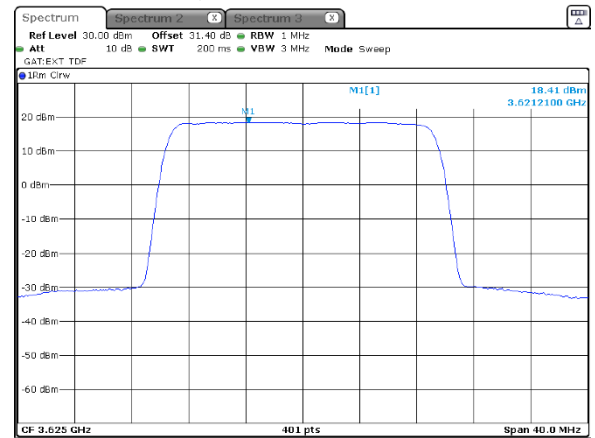

Modulation: 256QAM

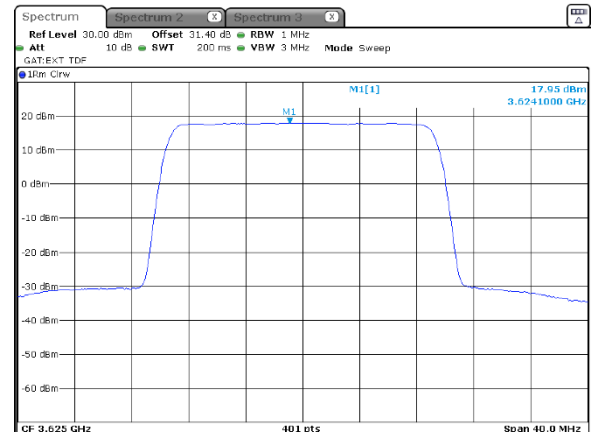



HERMON LABORATORIES

Report ID: AIRRAD\_FCC.44746\_Rev1

Date of Issue: 24-Nov-21


<b>Test specification:</b> Section 96.41(b), Maximum EIRP and maximum power spectral density			
<b>Test procedure:</b> Section 96.41(e)(3)			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Nov-21			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 54 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Plot 7.1.9 Peak spectral power density at high frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

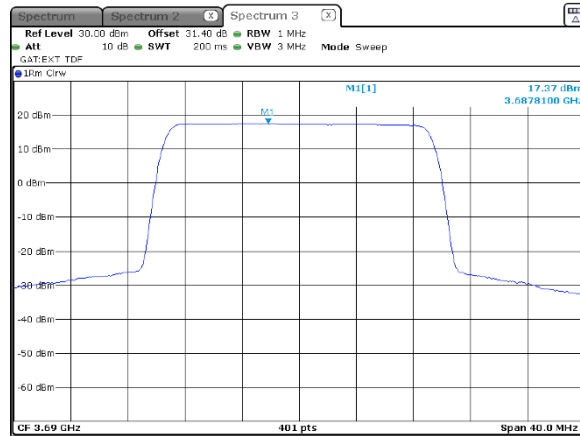


20 MHz

1


Modulation: 16QAM

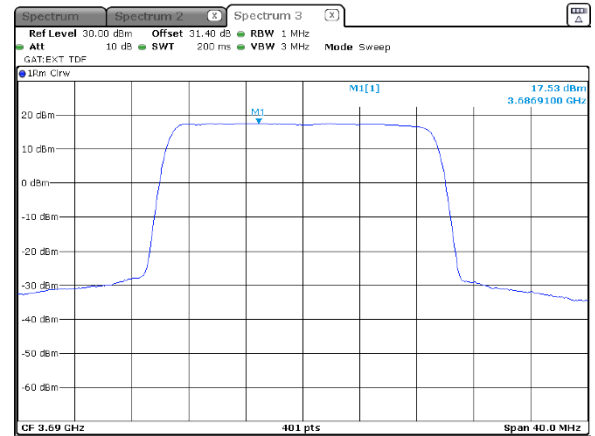

Modulation: 64QAM

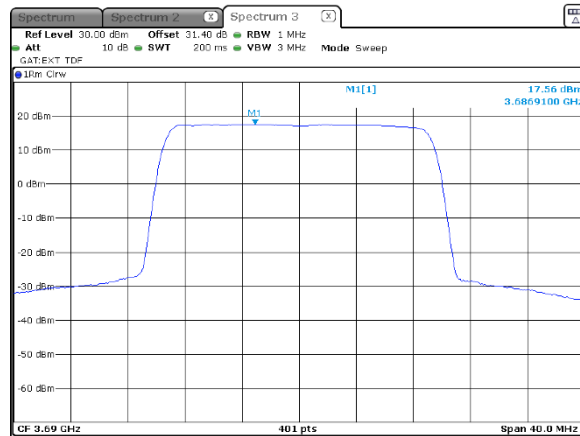

Modulation: 256QAM

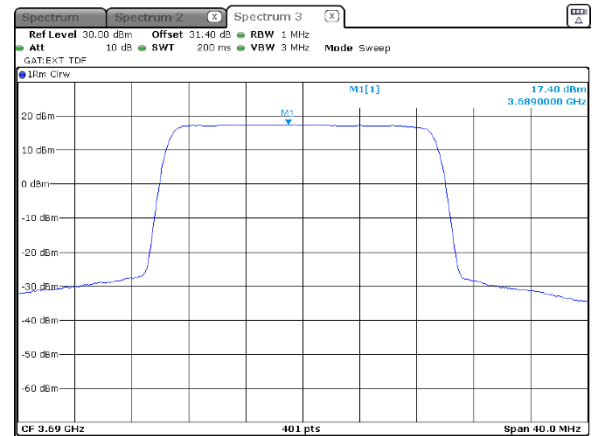




HERMON LABORATORIES


<b>Test specification:</b> Section 96.41(b), Maximum EIRP and maximum power spectral density			
<b>Test procedure:</b> Section 96.41(e)(3)			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Nov-21			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 54 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Plot 7.1.10 Peak spectral power density at high frequency


CHANNEL SPACING:  
ANTENNA CHAIN:  
Modulation: QPSK

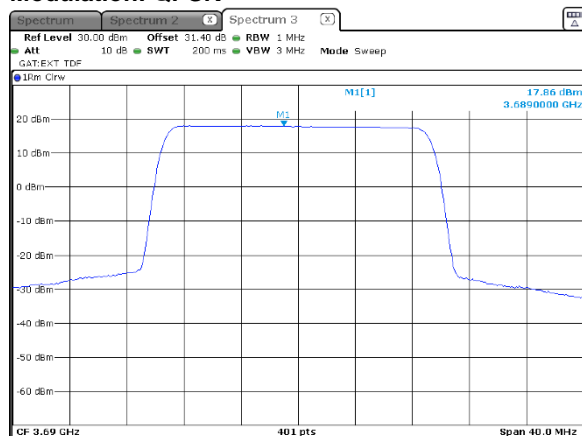


20 MHz  
2  
Modulation: 16QAM

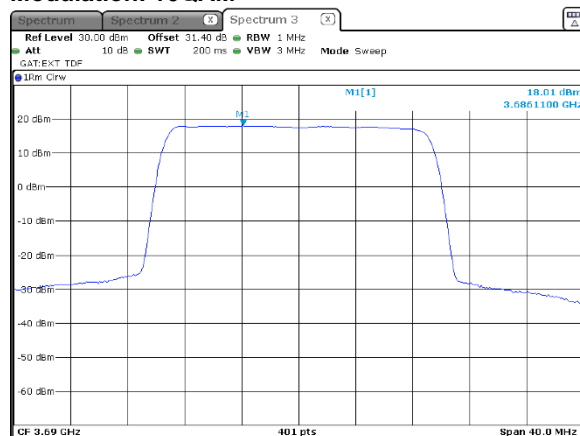

Modulation: 64QAM

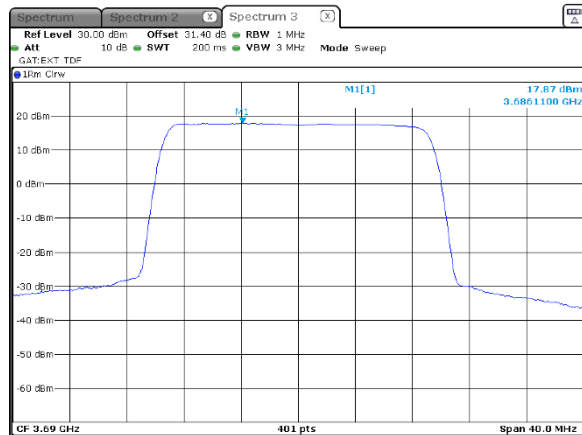

Modulation: 256QAM

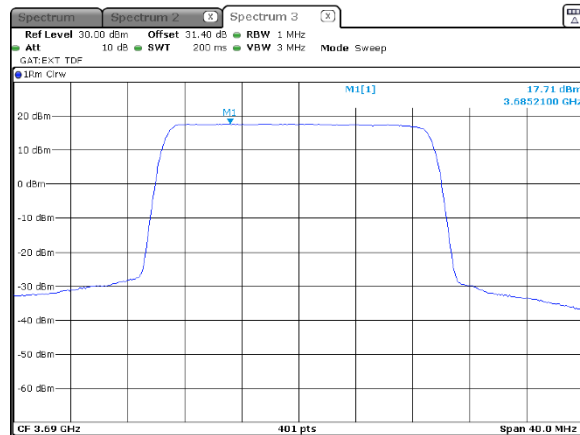



HERMON LABORATORIES

Report ID: AIRRAD\_FCC.44746\_Rev1

Date of Issue: 24-Nov-21


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.11 Peak spectral power density at high frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

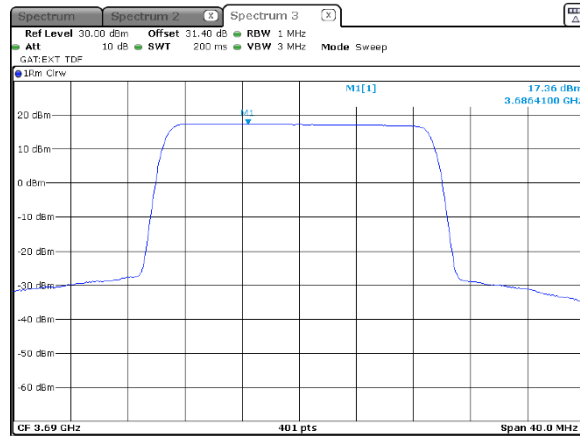


20 MHz

3


Modulation: 16QAM

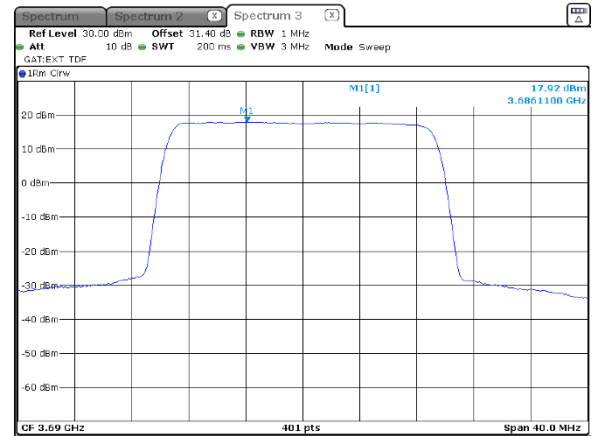

Modulation: 64QAM

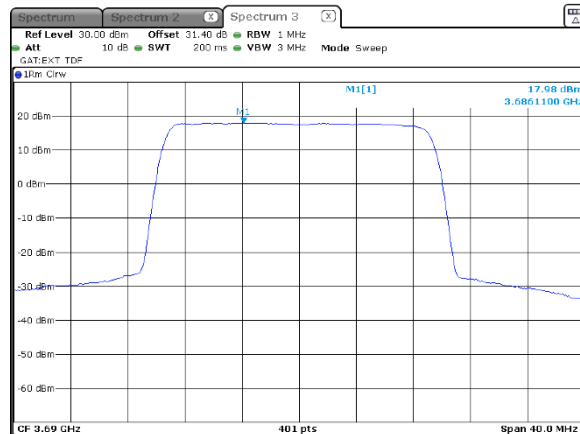

Modulation: 256QAM

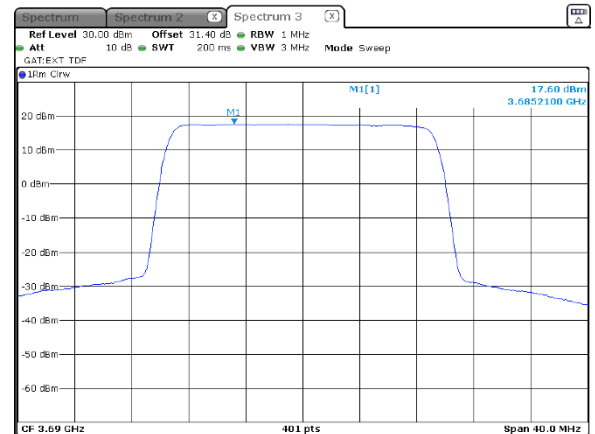




HERMON LABORATORIES


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.12 Peak spectral power density at high frequency


CHANNEL SPACING:  
ANTENNA CHAIN:  
Modulation: QPSK

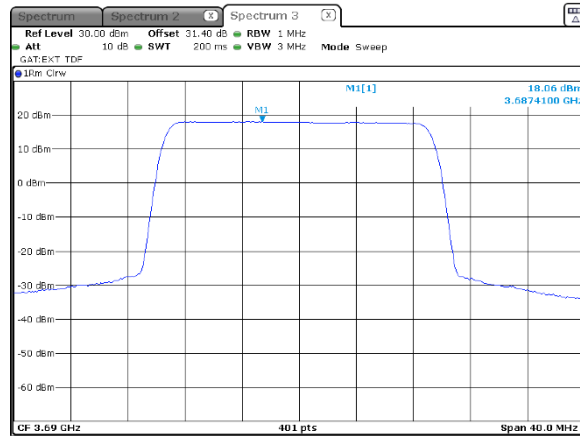


20 MHz  
4  
Modulation: 16QAM

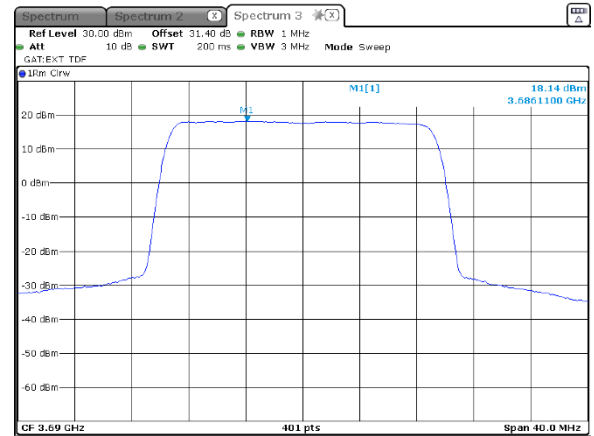

Modulation: 64QAM

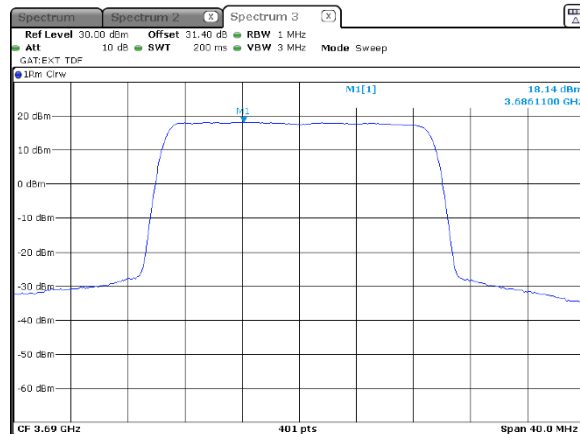

Modulation: 256QAM

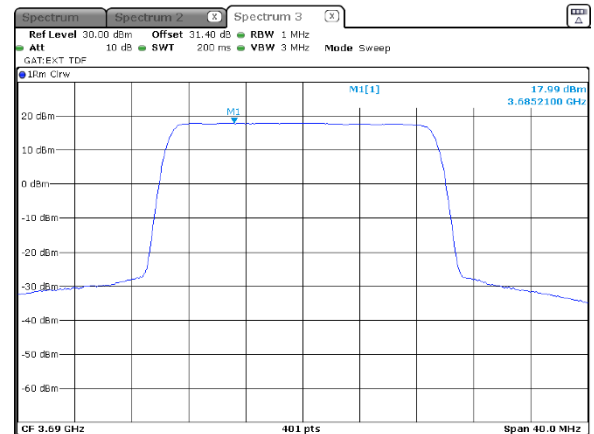






HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.13 Peak spectral power density at low frequency


CHANNEL SPACING:  
ANTENNA CHAIN:  
Modulation: QPSK

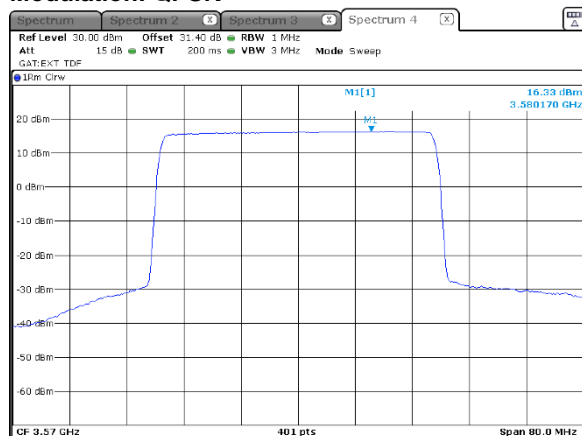


40 MHz  
1  
Modulation: 16QAM

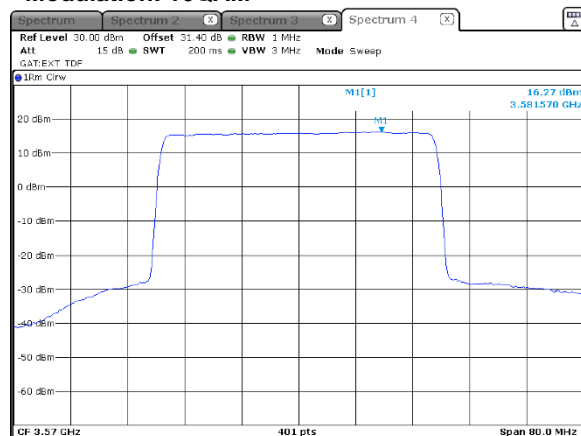

Modulation: 64QAM

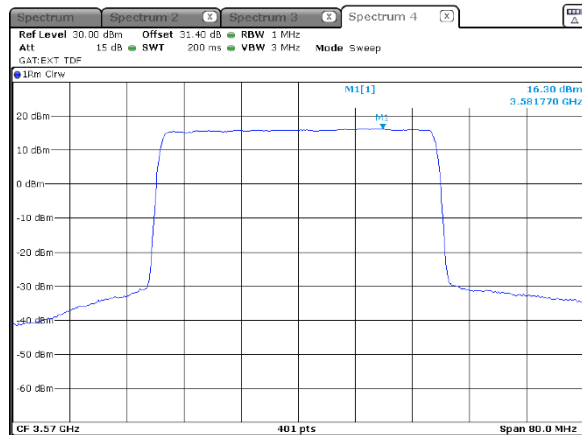

Modulation: 256QAM

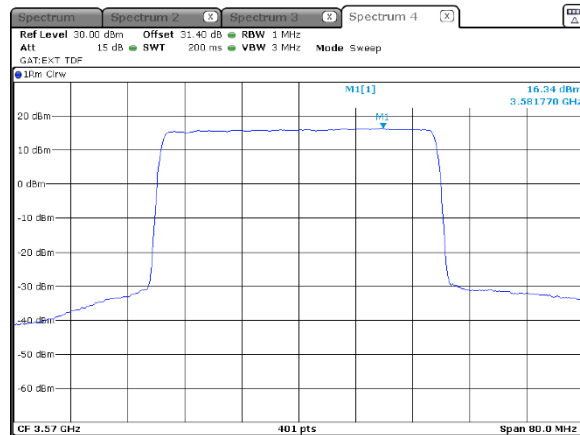



HERMON LABORATORIES

Report ID: AIRRAD\_FCC.44746\_Rev1

Date of Issue: 24-Nov-21


<b>Test specification:</b> Section 96.41(b), Maximum EIRP and maximum power spectral density			
<b>Test procedure:</b> Section 96.41(e)(3)			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Nov-21			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 54 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Plot 7.1.14 Peak spectral power density at low frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

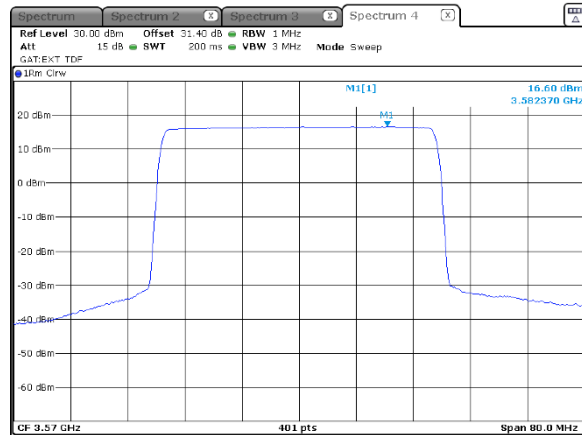


40 MHz

2


Modulation: 16QAM

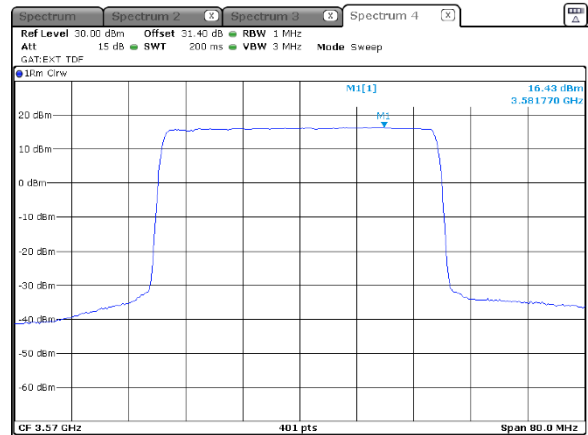

Modulation: 64QAM

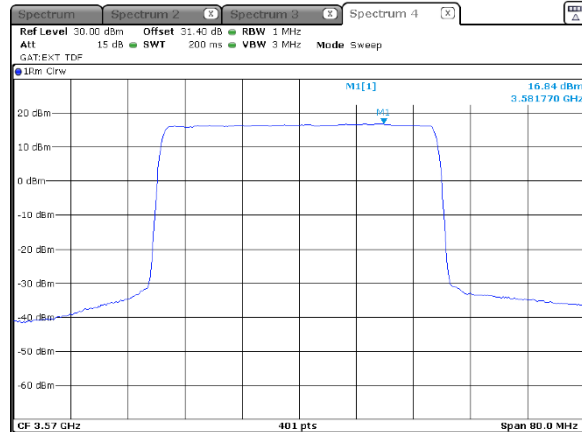

Modulation: 256QAM

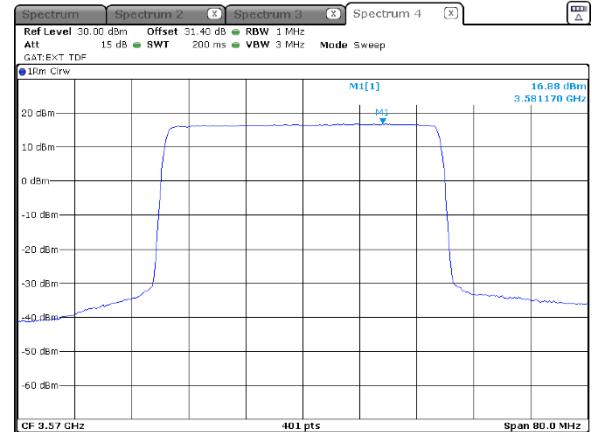



HERMON LABORATORIES

Report ID: AIRRAD\_FCC.44746\_Rev1

Date of Issue: 24-Nov-21


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.15 Peak spectral power density at low frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

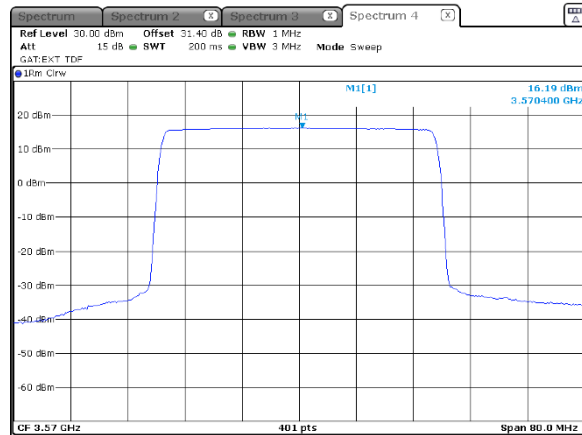


40 MHz

3


Modulation: 16QAM

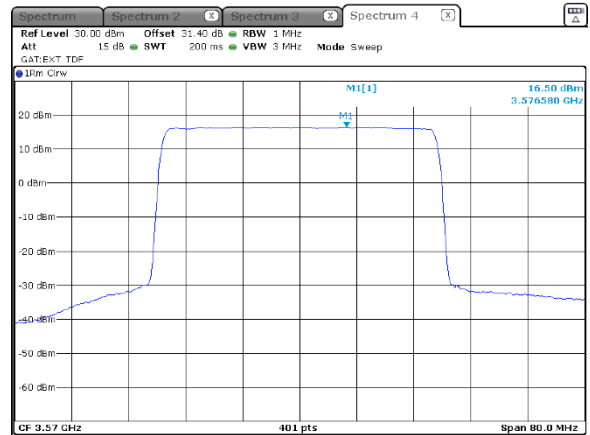

Modulation: 64QAM

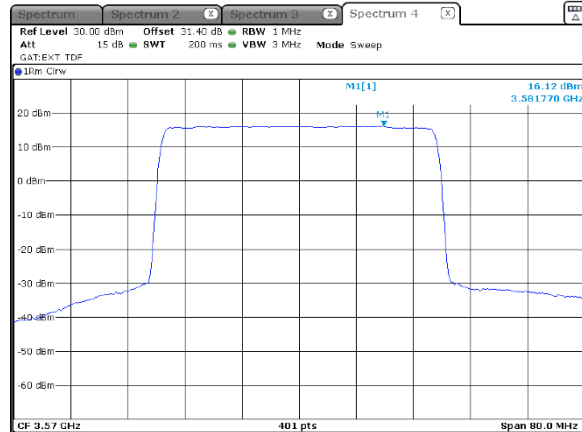

Modulation: 256QAM

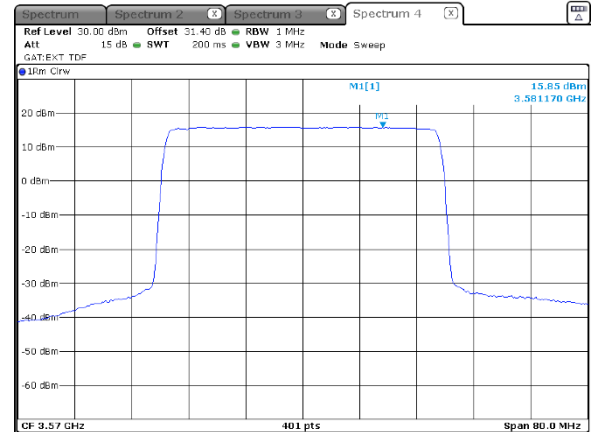



HERMON LABORATORIES

Report ID: AIRRAD\_FCC.44746\_Rev1

Date of Issue: 24-Nov-21


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.16 Peak spectral power density at low frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

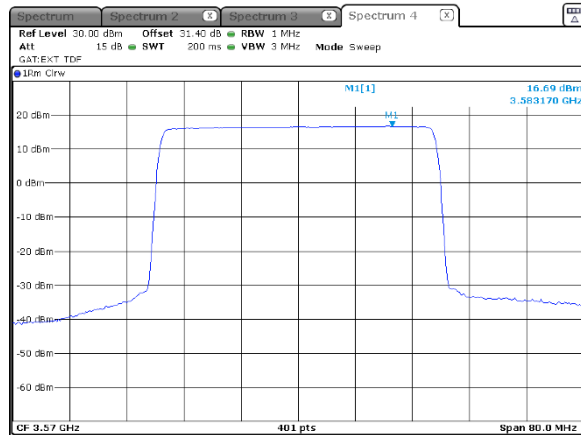


40 MHz

4


Modulation: 16QAM

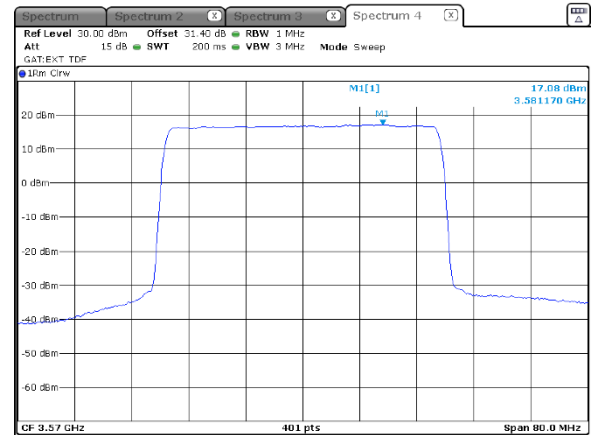

Modulation: 64QAM

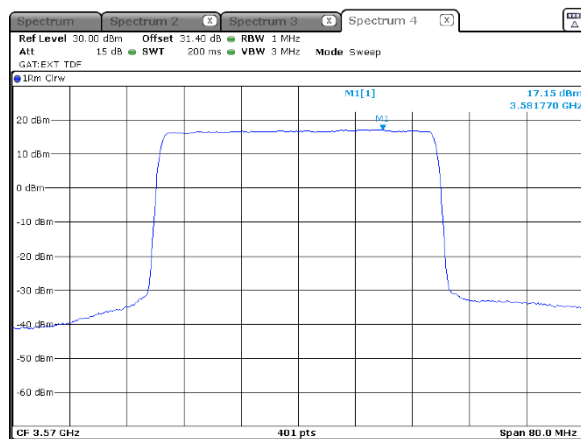

Modulation: 256QAM

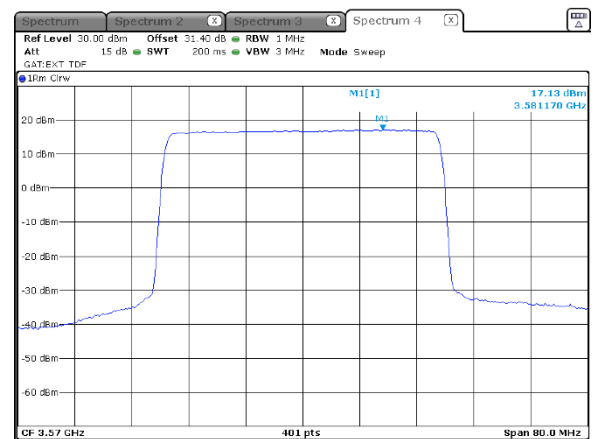



HERMON LABORATORIES

Report ID: AIRRAD\_FCC.44746\_Rev1

Date of Issue: 24-Nov-21


<b>Test specification:</b> Section 96.41(b), Maximum EIRP and maximum power spectral density			
<b>Test procedure:</b> Section 96.41(e)(3)			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 14-Nov-21			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 54 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Plot 7.1.17 Peak spectral power density at mid frequency


CHANNEL SPACING:

ANTENNA CHAIN:

Modulation: QPSK

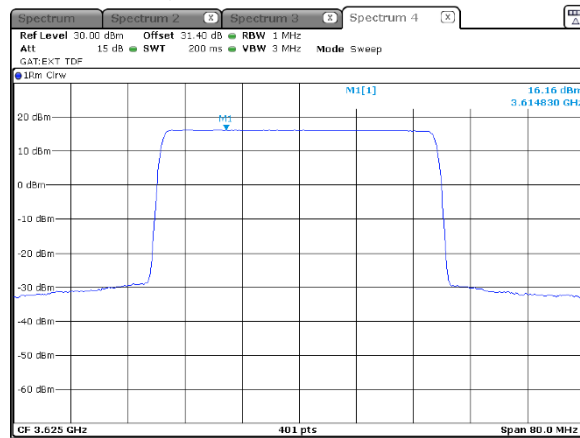


Modulation: 64QAM

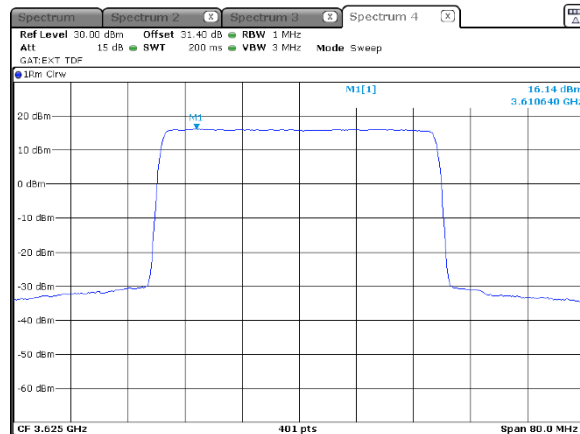


40 MHz

1

Modulation: 16QAM

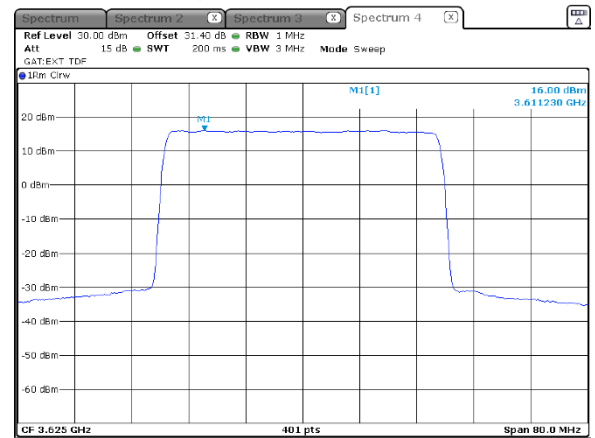

Modulation: 256QAM

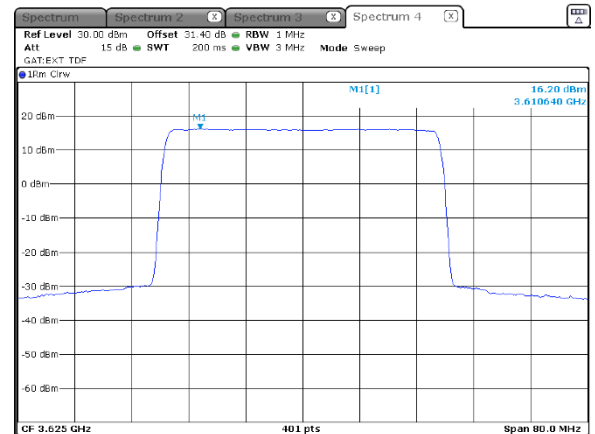




HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.18 Peak spectral power density at mid frequency


CHANNEL SPACING:  
ANTENNA CHAIN:  
Modulation: QPSK

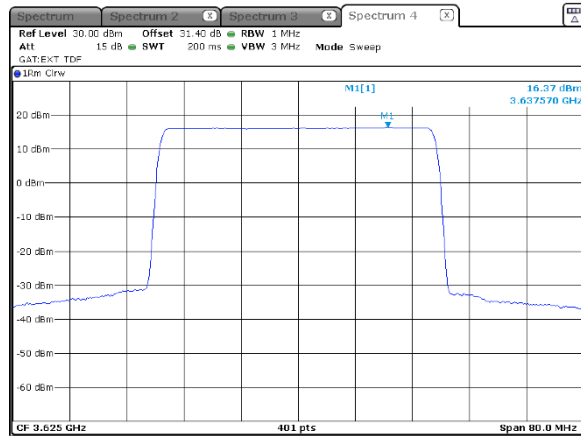


Modulation: 64QAM

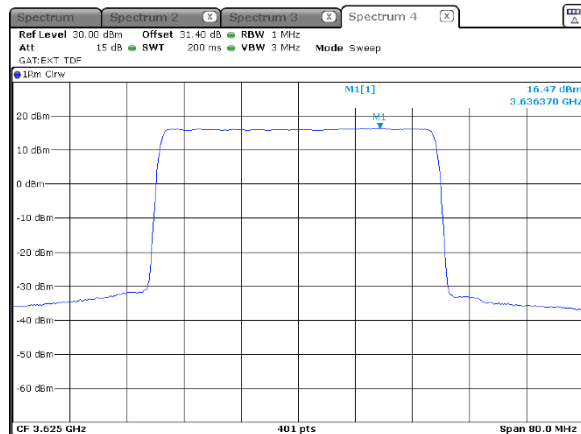

40 MHz  
2  
Modulation: 16QAM

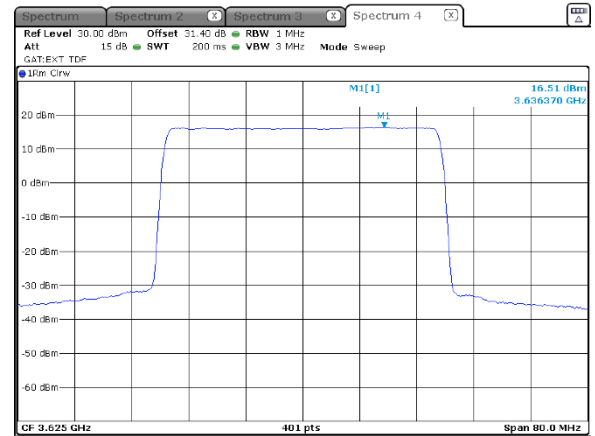

Modulation: 256QAM

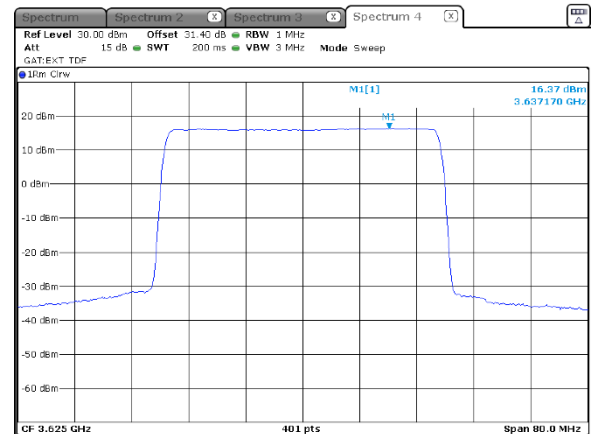




HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.19 Peak spectral power density at mid frequency


CHANNEL SPACING:  
ANTENNA CHAIN:  
Modulation: QPSK

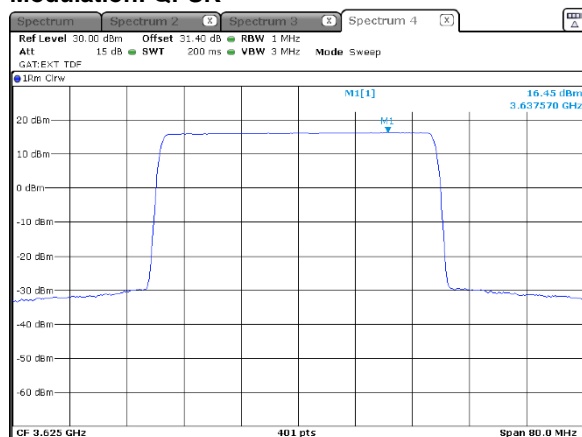


Modulation: 64QAM

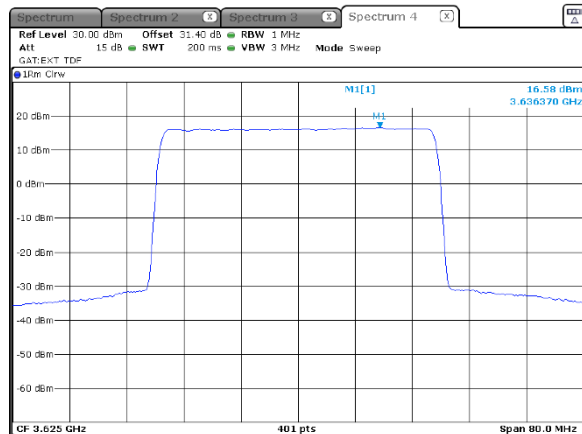

40 MHz  
3  
Modulation: 16QAM

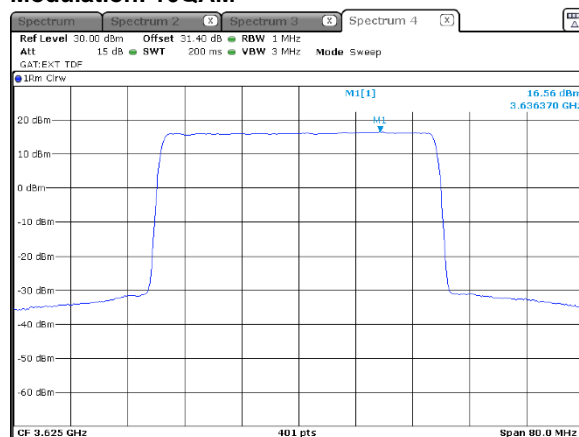

Modulation: 256QAM

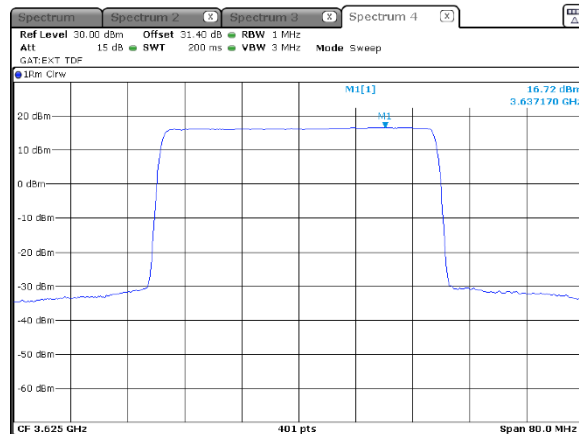



HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.20 Peak spectral power density at mid frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

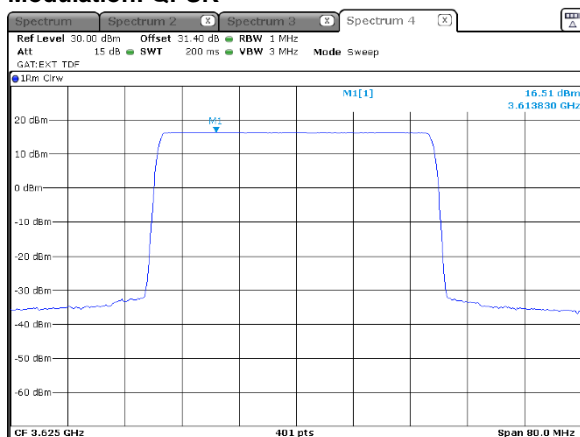


40 MHz

4


Modulation: 16QAM

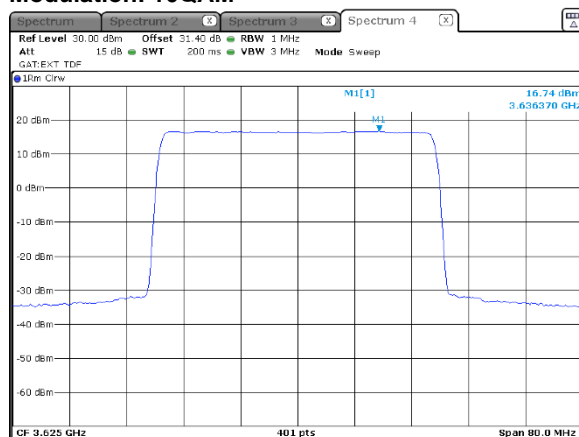

Modulation: 64QAM

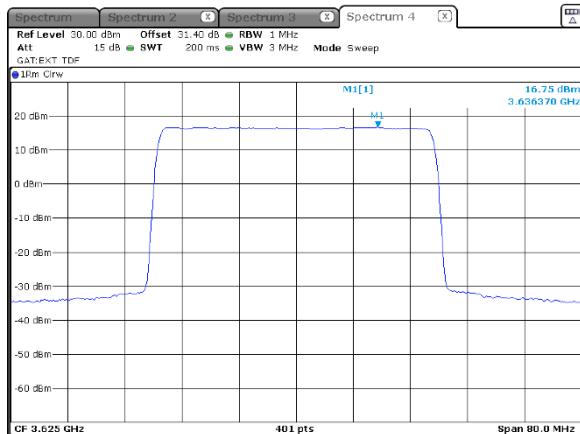

Modulation: 256QAM

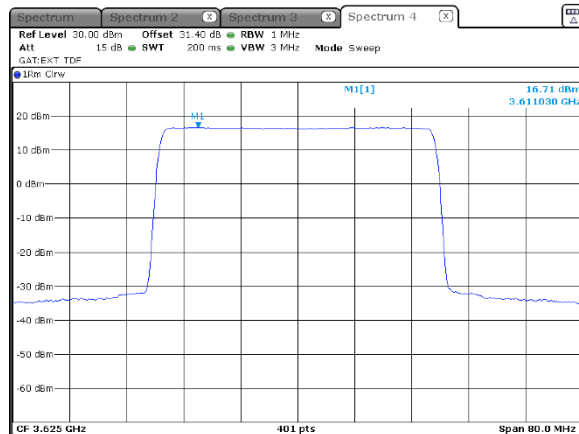





HERMON LABORATORIES

Report ID: AIRRAD\_FCC.44746\_Rev1

Date of Issue: 24-Nov-21


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.21 Peak spectral power density at high frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

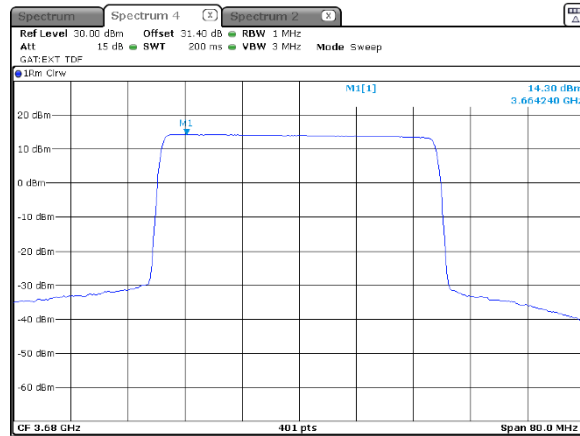


40 MHz

1


Modulation: 16QAM

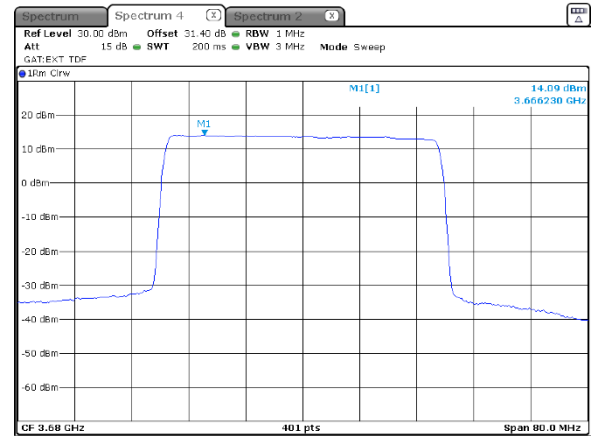

Modulation: 64QAM

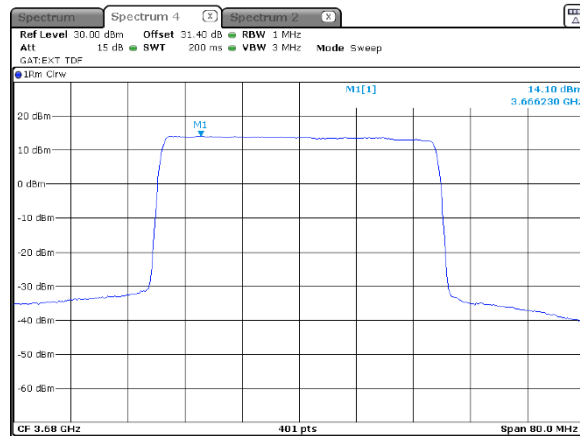

Modulation: 256QAM

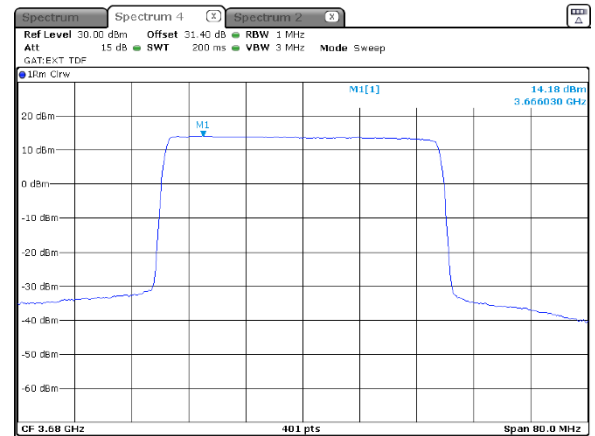



HERMON LABORATORIES

Report ID: AIRRAD\_FCC.44746\_Rev1

Date of Issue: 24-Nov-21


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.22 Peak spectral power density at high frequency

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

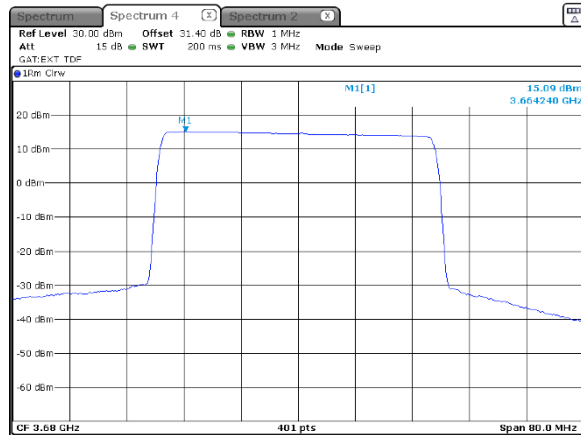


40 MHz

2


Modulation: 16QAM

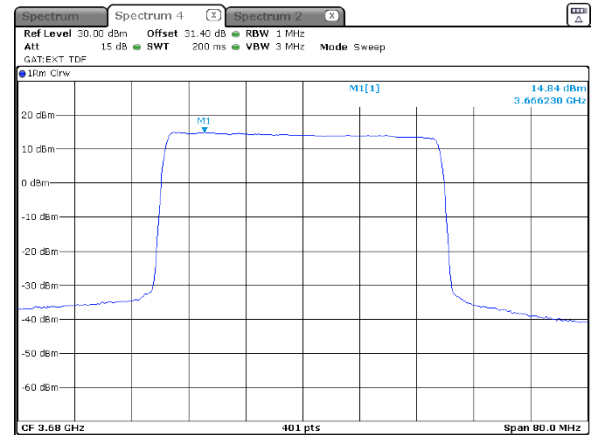

Modulation: 64QAM

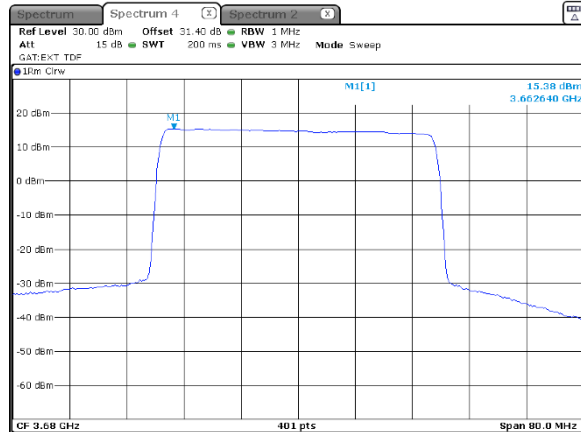

Modulation: 256QAM

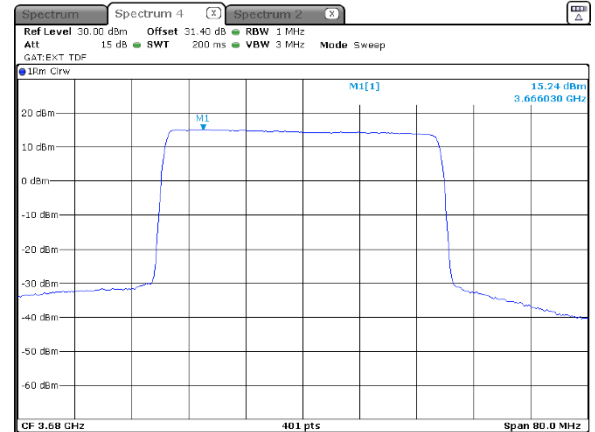




HERMON LABORATORIES


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.23 Peak spectral power density at high frequency


CHANNEL SPACING:  
ANTENNA CHAIN:  
Modulation: QPSK

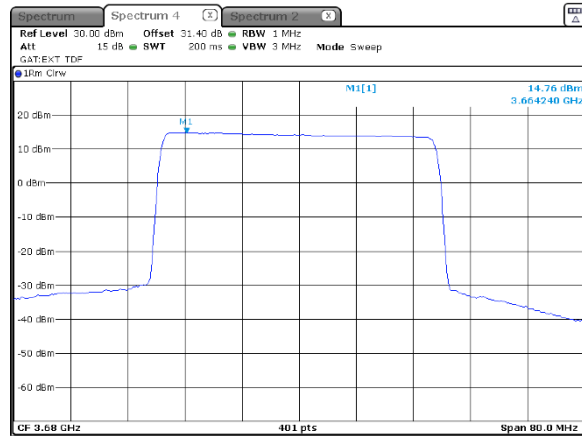


Modulation: 64QAM

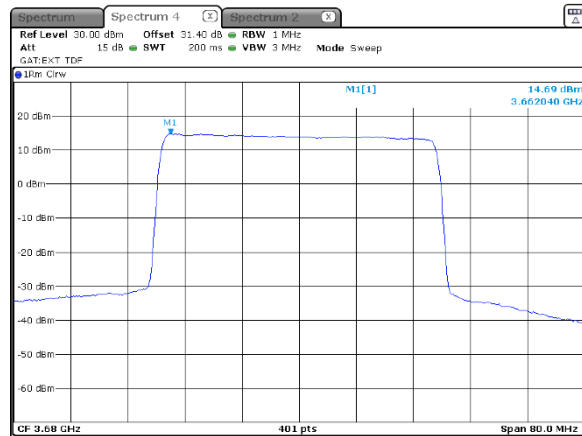

40 MHz  
3  
Modulation: 16QAM

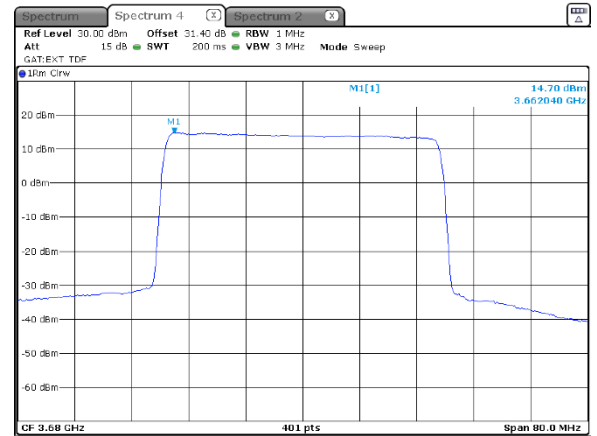

Modulation: 256QAM

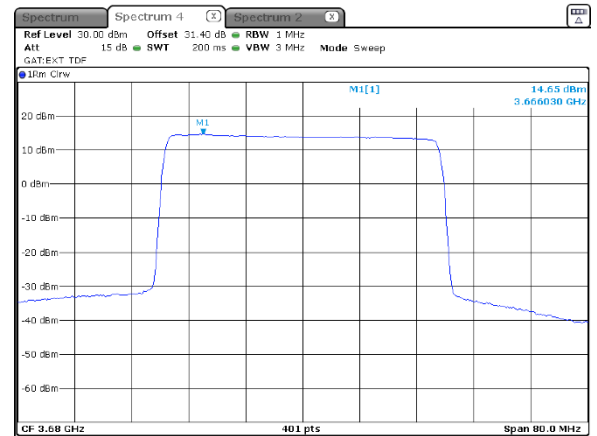




HERMON LABORATORIES


Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.24 Peak spectral power density at high frequency


CHANNEL SPACING:  
ANTENNA CHAIN:  
Modulation: QPSK

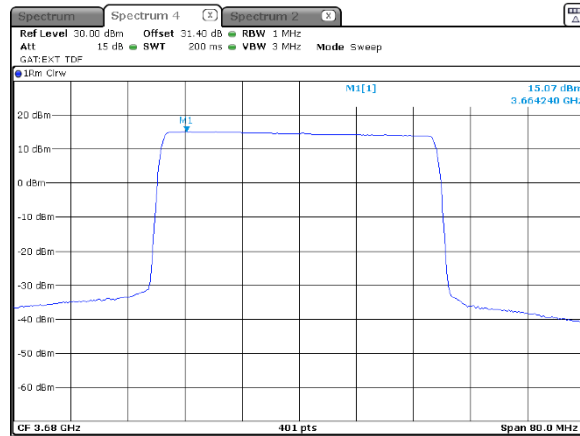


Modulation: 64QAM

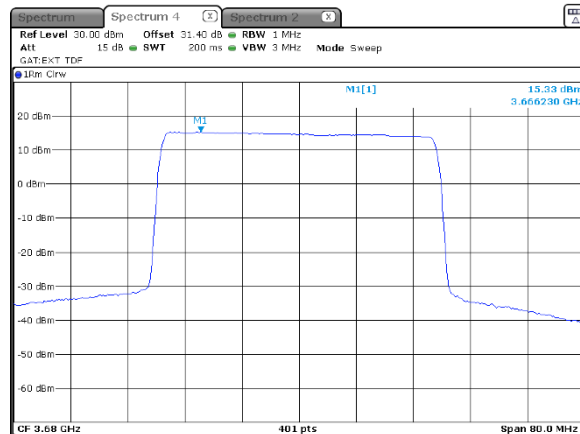

40 MHz  
4  
Modulation: 16QAM

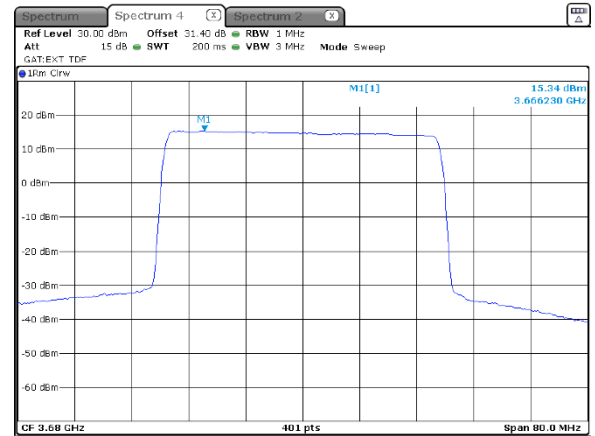

Modulation: 256QAM

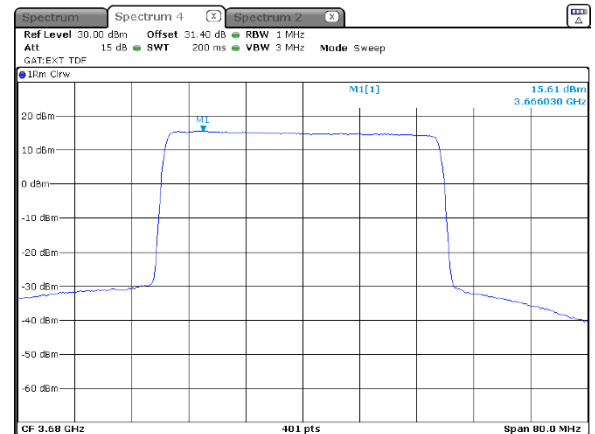



<b>Test specification:</b> Section 96.41(g), Peak-to- average power ratio			
<b>Test procedure:</b> Section 96.41(g)			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 07-Nov-21			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 54 %	<b>Air Pressure:</b> 1011 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

## 7.2 Peak-to-average power ratio (PAPR) test

### 7.2.1 General

This test was performed to measure the peak to average power ratio at RF antenna connector. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Peak-to-average power ratio limits

Assigned frequency range, MHz	Peak to average power ratio limit	
	Probability, %	dB
3550.0 – 3700.0	0.1	13.0


### 7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The EUT was adjusted to produce maximum available to the end user RF output power.

7.2.2.3 The peak to average power ratio was measured with power meter as provided in Table 7.2.2 and the associated plots.

Figure 7.2.1 Peak-to-average power ratio test setup

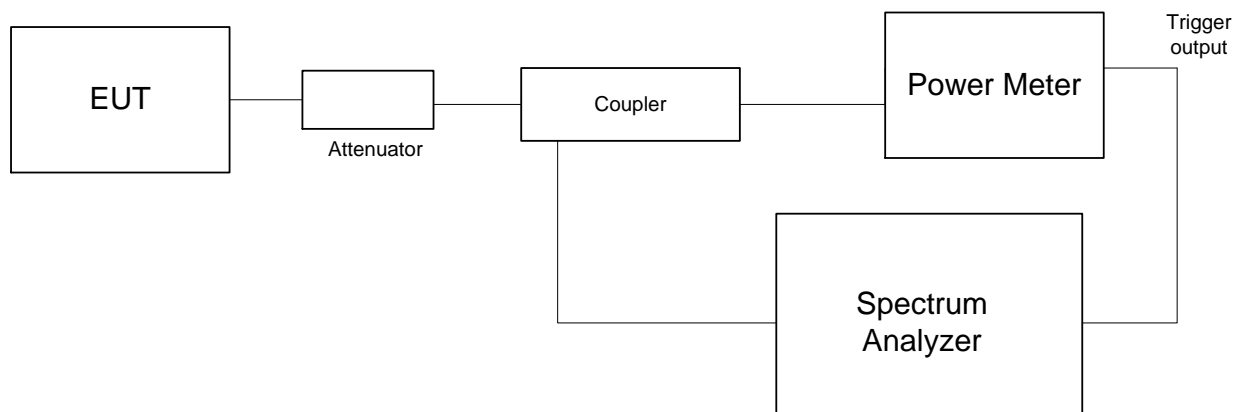



Test specification:		Section 96.41(g), Peak-to- average power ratio	
Test procedure:		Section 96.41(g)	
Test mode:		Verdict: PASS	
Date(s):			
07-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1011 hPa	Power: 48 VDC
Remarks:			

Table 7.2.2 Peak-to-average power ratio test results

OPERATING FREQUENCY RANGE:

3550 – 3700 MHz

DETECTOR USED:

Peak/Average

MODULATING SIGNAL:

PRBS

TRANSMITTER OUTPUT POWER SETTINGS:

Maximum

Carrier frequency, MHz	Peak to average ratio, dB	Limit, dBm	Margin, dB	Verdict
<b>Channel spacing 20 MHz</b>				
<b>Modulation QPSK</b>				
3560.0	8.32	13.0	-4.68	Pass
3625.0	8.20	13.0	-4.80	Pass
3690.0	8.70	13.0	-4.30	Pass
<b>Modulation 16QAM</b>				
3560.0	8.29	13.0	-4.71	Pass
3625.0	8.14	13.0	-4.86	Pass
3690.0	8.41	13.0	-4.59	Pass
<b>Modulation 64QAM</b>				
3560.0	8.29	13.0	-4.71	Pass
3625.0	8.12	13.0	-4.88	Pass
3690.0	8.35	13.0	-4.65	Pass
<b>Modulation 256QAM</b>				
3560.0	8.38	13.0	-4.62	Pass
3625.0	8.14	13.0	-4.86	Pass
3690.0	8.58	13.0	-4.42	Pass



Test specification:		Section 96.41(g), Peak-to- average power ratio	
Test procedure:		Section 96.41(g)	
Test mode:		Verdict: PASS	
Date(s):			
07-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1011 hPa	Power: 48 VDC
Remarks:			

Table 7.2.3 Peak-to-average power ratio test results

OPERATING FREQUENCY RANGE:

3550 – 3700 MHz

DETECTOR USED:

Peak/Average

TRANSMITTER OUTPUT POWER SETTINGS:

Maximum

Carrier frequency, MHz	Peak to average ratio, dB	Limit, dBm	Margin, dB	Verdict
<b>Channel spacing 40 MHz</b>				
<b>Modulation QPSK</b>				
3570.0	9.44	13.0	-3.56	Pass
3625.0	9.62	13.0	-3.38	Pass
3680.0	9.60	13.0	-3.40	Pass
<b>Modulation 16QAM</b>				
3570.0	9.41	13.0	-3.59	Pass
3625.0	9.45	13.0	-3.55	Pass
3680.0	9.39	13.0	-3.61	Pass
<b>Modulation 64QAM</b>				
3570.0	9.45	13.0	-3.55	Pass
3625.0	9.43	13.0	-3.57	Pass
3680.0	9.39	13.0	-3.61	Pass
<b>Modulation 256QAM</b>				
3570.0	9.43	13.0	-3.57	Pass
3625.0	9.38	13.0	-3.62	Pass
3680.0	9.39	13.0	-3.61	Pass

## Reference numbers of test equipment used

HL 3301	HL 4355	HL 5409					
---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification:		Section 96.41(g), Peak-to- average power ratio	
Test procedure:		Section 96.41(g)	
Test mode:		Verdict: PASS	
Date(s):			
07-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1011 hPa	Power: 48 VDC
Remarks:			

Plot 7.2.1 Peak-to-average power ratio test results at low frequency

CHANNEL SPACING:

ANTENNA PORT:


Modulation: QPSK

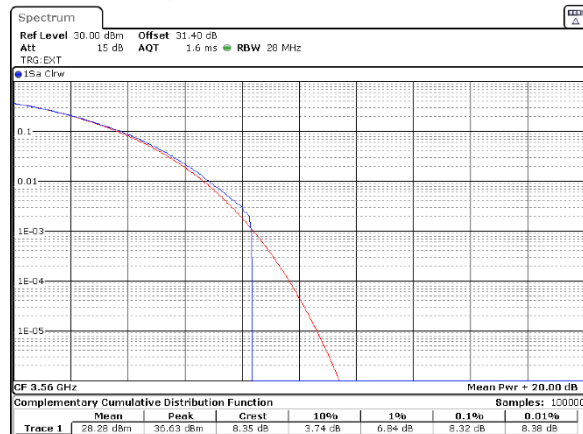


20 MHz

4

Modulation: 16QAM

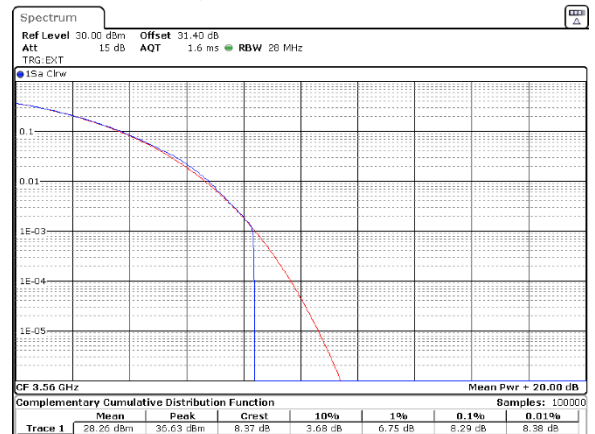

Modulation: 64QAM

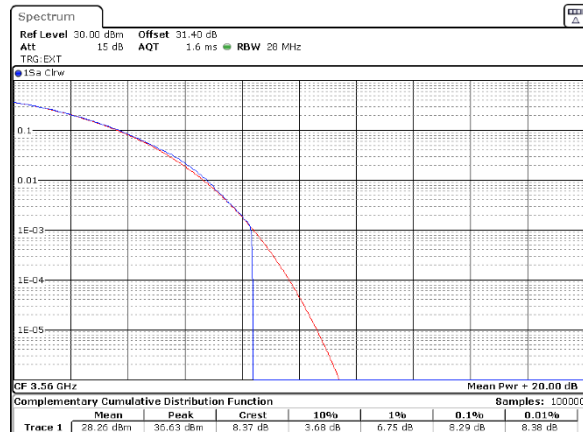

Modulation: 256QAM







<b>Test specification:</b> Section 96.41(g), Peak-to- average power ratio			
<b>Test procedure:</b> Section 96.41(g)			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 07-Nov-21			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 54 %	<b>Air Pressure:</b> 1011 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

### Plot 7.2.2 Peak-to-average power ratio test results at mid frequency


CHANNEL SPACING:  
ANTENNA PORT:  
**Modulation: QPSK**

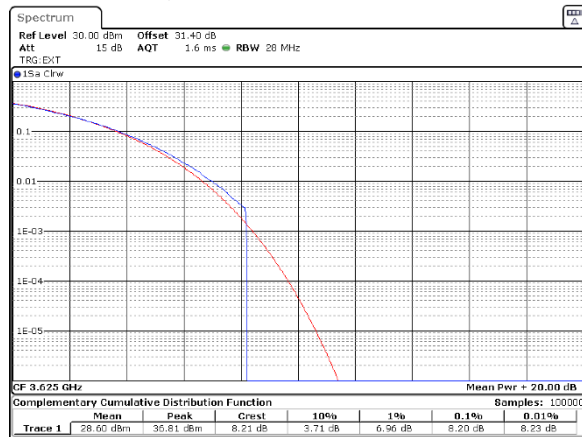

20 MHz  
4  
**Modulation: 16QAM**

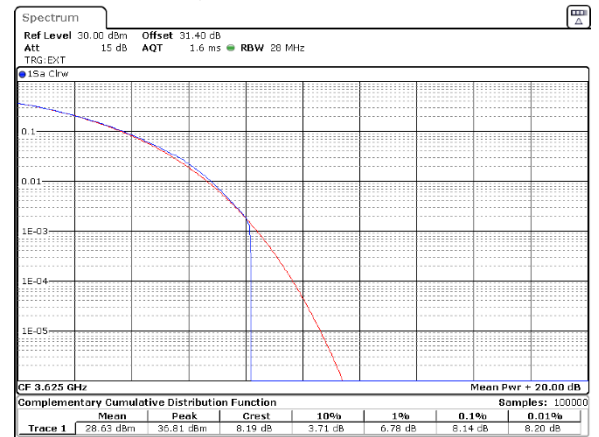

**Modulation: 64QAM**

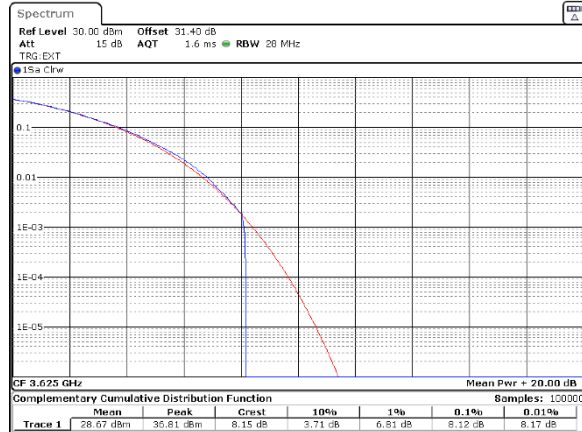

**Modulation: 256QAM**

