

# **ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT**

# INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

Product Name:	Mobile Tablet		
Brand Name:	DT Research Inc.		
Model No.:	DT395BV, Atlas 91i		
Model Difference:	Different Exterior Color: DT395BV-Black, Atlas 91i-Red		
FCC ID:	YE3800E		
Report No.:	E2/2015/70009		
Issue Date:	Jul. 13, 2015		
FCC Rule Part:	§15.247, Cat: DSS		
Prepared for:	DT Research Inc. 6F, NO.1, Ning-Po E. Street, Taipei 100, Tai- wan SGS Taiwan Ltd.		
Duananad have	Electronics & Communication Laboratory		
Prepared by:	No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333		
TAF Dac-MRA Teting Laboratory	<i>Note:</i> This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of		

the document.

0513

6.1.1

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised that information contaited extend of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unage of this document is unavitied and reference are particed to the fulle extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



# **VERIFICATION OF COMPLIANCE**

Applicant:	DT Research Inc. 6F, NO.1, Ning-Po E. Street, Taipei 100, Taiwan		
Product Name:	Mobile Tablet		
Brand Name:	DT Research Inc.		
Model No.:	DT395BV, Atlas 91i		
Model Difference:	Different Exterior Color: DT395BV-Black, Atlas 91i-Red		
FCC ID:	YE3800E		
<b>Report Number:</b>	E2/2015/70009		
Date of test:	Jun. 23, 2015 ~ Jul. 13, 2015		
Date of EUT Received:	Jun. 23, 2015		
We hereby certify that:			

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits. The test results of this report relate only to the tested sample identified in this report.

Test By:	Jerry Lu	Date:	Jul. 13, 2015
Prepared By:	Jerry Lu/Engineer Allon Tsai	Date:	Jul. 13, 2015
Approved By:	Allen Tsai / Engineer Jim Chang	Date:	Jul. 13, 2015

Jim Chang / Asst. Manager

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of all weights and the results and state the four result of the state of th Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



# **Revision History**

Report Number	Revision	Description	Issue Date	
E2/2015/70009	Rev.00	Initial creation of document	Jul. 13, 2015	



# **Table of Contents**

1.	GEN	ERAL INFORMATION	7
	1.1.	Product description	7
	1.2.	Product Feature of Equipment Under Test	
	1.3.	Test Methodology of Applied Standards	9
	1.4.	Test Facility	9
	1.5.	Special Accessories	9
	1.6.	Equipment Modifications	9
2.	SYST	FEM TEST CONFIGURATION	
	2.1.	EUT Configuration	
	2.2.	EUT Exercise	
	2.3.	Test Procedure	
	2.4.	Measurement Results Explanation Example	
	2.5.	Configuration of Tested System	
3.	SUM	IMARY OF TEST RESULTS	
4.	DES	CRIPTION OF TEST MODES	
	2.6.	Operated in 2400 ~ 2483.5MHz Band	
	2.7.	The Worst Test Modes and Channel Details	
5.	MEA	ASUREMENT UNCERTAINTY	
6.	CON	DUCTED EMISSION TEST	
	6.1.	Standard Applicable	
	6.2.	Measurement Equipment Used	
	6.3.	EUT Setup	
	6.4.	Test SET-UP (Block Diagram of Configuration)	
	6.5.	Measurement Procedure	
	6.6.	Measurement Result	
7.	PEA	K OUTPUT POWER MEASUREMENT	
	7.1.	Standard Applicable	
	7.2.	Measurement Equipment Used	
	7.3.	Test Set-up:	
	7.4.	Measurement Procedure:	
	7.5.	Measurement Result	
8.	20dB	BANDWIDTH MEASUREMENT	
	8.1.	Standard Applicable	
	8.2.	Measurement Equipment Used	



## FCC ID: YE3800E

	8.3.	Test Set-up	22
	8.4.	Measurement Procedure	22
	8.5.	Measurement Result	23
9.	CON	DUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	29
	9.1.	Standard Applicable	29
	9.2.	Measurement Equipment Used	29
	9.3.	Test SET-UP	29
	9.4.	Measurement Procedure	30
	9.5.	Measurement Result	30
10.	RADI	ATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	36
	10.1.	Standard Applicable	36
	10.2.	Measurement Equipment Used	37
	10.3.	Test SET-UP	38
	10.4.	Measurement Procedure	39
	10.5.	Field Strength Calculation	40
	10.6.	Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz	40
	10.7.	Measurement Result	40
11.	FREQ	UENCY SEPARATION	57
	11.1.	Standard Applicable	57
	11.2.	Measurement Equipment Used	57
	11.3.	Test Set-up	57
	11.4.	Measurement Procedure	57
	11.5.	Measurement Result	58
12.	NUM	BER OF HOPPING FREQUENCY	59
	12.1.	Standard Applicable	59
	12.2.	Measurement Equipment Used	59
	12.3.	Test Set-up	59
	12.4.	Measurement Procedure	59
	12.5.	Measurement Result	59
13.	TIME	C OF OCCUPANCY (DWELL TIME)	61
	13.1.	Standard Applicable	61
	13.2.	Measurement Equipment Used	61
	13.3.	Test Set-up	61
	13.4.	Measurement Procedure	62
	13.5.	Tabular Result of the Measurement	63



## FCC ID: YE3800E

	13.6.	Measurement Result	
14.	ANTI	ENNA REQUIREMENT	
	14.1	Standard Applicable:	
	14.2	Antenna Connected Construction:	
PH	отос	GRAPHS OF SET UP	
PH	отос	GRAPHS OF EUT	



#### **GENERAL INFORMATION** 1.

## 1.1. Product description

#### General:

Product Name:	Mobile Ta	blet		
Brand Name:	DT Resear	DT Research Inc.		
Model No.:	DT395BV	DT395BV, Atlas 91i		
Model Difference:	Different I	Exterior Color: DT395BV-Black, Atlas 91i-Red		
Product SW/HW version:	WIN embe	edded 8.1 industry pro. / MB version 2.1		
Radio SW/HW version:	N/A			
Test SW Version:	DRTU version 1.7.4-1041			
RF power setting in TEST SW:	N/A			
	7.4Vdc from Rechargeable Li-ion Battery or 19V from AC/DC Adapter			
Power Supply:	Battery:	Model No.:ACC-006-18, Supplier: Formosa Electronic Industries INC		
	Adapter :	Model No.:A11-065N1A, Supplier: Chicony		

#### Bluetooth\_BR+EDR:

Bluetooth Version:	V4.0 dual mode	
Channel number:	79 channels	
Modulation type:	Frequency Hopping Spread Spectrum	
Transmit Power:	6.20dBm	
Frequency Range:	2.402GHz – 2.480GHz	
Dwell Time:	<= 0.4s	
Antenna Designation:	PIFA Antenna, Gain: 5.0dBi	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised that information contaited extend of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unage of this document is unavitied and reference are particed to the fulle extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## 1.2. Product Feature of Equipment Under Test

The equipment under Test (Hereafter Called: EUT) is mobile phone supporting, CDMA, LTE, Wi-Fi 802.11abgn & ac, Bluetooth features, and below is details of information.

Product Feature			
Product Name:	Mobile Tablet		
Brand Name: DT Research Inc.			
Model No.:	DT395BV, Atlas 91i		
Model Difference:	Different Exterior Color: DT395BV-Black, Atlas 91i-Red		
FCC ID:	YE3800E		
CDMA2000 / EVDO	BC0/BC1		
LTE	B4/B13		
Wi-Fi Specification	802.11a/b/g/n & ac		
Bluetooth Version	V4.0 dual mode		

Note: The above EUT information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



## 1.3. Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

FCC Public Notice DA 00-705 Measurement Guidelines

ANSI C63.10:2009

Note:

- 1. All test items have been performed and record as per the above standards.
- The composite system is compliance with FCC Subpart B is authorized under the certification 2. procedure.
- 3. The EUT was placed 0.8m height for frequency above 1GHz in accordance with ANSI C63. 10:2009

## 1.4. Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333. (TAF code 0513)

FCC Registration Numbers are: 628985

Canada Registration Number: 4620A-5.

#### **1.5.** Special Accessories

There is no special accessory used while test was conducted.

#### **1.6. Equipment Modifications**

There was no modification incorporated into the EUT.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

たか方方式の「URTERSATED」の現代であれて見りの現代になって見ず、「つけURTERSATED SUC」を発行するという。 かういかなん。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



# 2. SYSTEM TEST CONFIGURATION

## 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.2. EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

#### 2.3. Test Procedure

## 2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to \$15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

#### **2.3.2 Radiated Emissions**

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 0.8 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

#### 2.4. Measurement Results Explanation Example

#### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

#### Note:

The spectrum analyzer offset is derived from RF cable loss 0.6dB.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## 2.5. Configuration of Tested System

Fig. 2-1 Conducted (Antenna Port)



#### Fig. 2-2 Radiated Emission & AC Power Line Conducted Emission Configuration



#### **Table 2-1 Equipment Used in Tested System**

Item	Equipment	Mfr/Brand	Model/Model No.	Series No.	Data Cable	Power Cord
1.	BT Test Soft- ware	N/A	N/A	N/A	N/A	N/A
2.	DC Power supply	Agilent	E3640A	MY53140006	N/A	Unshielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



# 3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b)(1)	Peak Output Power	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.247(d)	Conducted Band Edge and Spurious Emission Complia	
§15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.247(a)(1)	Frequency Separation Complia	
§15.247(a)(1)(iii)	Number of hopping frequency	Compliant
§15.247(a)(1)(iii)	Time of Occupancy	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any be prosecuted to the fulle at vent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



# 4. DESCRIPTION OF TEST MODES

#### 2.6. Operated in 2400 ~ 2483.5MHz Band

79 channels are provided for Bluetooth

CH	FREQUENCY	СН	FREQUENCY	СН	FREQUENCY	СН	FREQUENCY
0	2402 MHz	20	2422 MHz	40	2442 MHz	70	2462 MHz
1	2403 MHz	21	2423 MHz	41	2443 MHz	71	2463 MHz
2	2404 MHz	22	2424 MHz	42	2444 MHz	72	2464 MHz
3	2405 MHz	23	2425 MHz	43	2445 MHz	73	2465 MHz
4	2406 MHz	24	2426 MHz	44	2446 MHz	74	2466 MHz
5	2407 MHz	25	2427 MHz	45	2447 MHz	75	2467 MHz
6	2408 MHz	26	2428 MHz	46	2448 MHz	76	2468 MHz
7	2409 MHz	27	2429 MHz	47	2449 MHz	77	2469 MHz
8	2410 MHz	28	2430 MHz	48	2450 MHz	78	2470 MHz
9	2411 MHz	29	2431 MHz	49	2451 MHz	79	2471 MHz
10	2412 MHz	30	2432 MHz	50	2452 MHz	70	2472 MHz
11	2413 MHz	31	2433 MHz	51	2453 MHz	71	2473 MHz
12	2414 MHz	32	2434 MHz	52	2454 MHz	72	2474 MHz
13	2415 MHz	33	2435 MHz	53	2455 MHz	73	2475 MHz
14	2416 MHz	34	2436 MHz	54	2456 MHz	74	2476 MHz
15	2417 MHz	35	2437 MHz	55	2457 MHz	75	2477 MHz
16	2418 MHz	36	2438 MHz	56	2458 MHz	76	2478 MHz
17	2419 MHz	37	2439 MHz	57	2459 MHz	77	2479 MHz
18	2420 MHz	38	2440 MHz	58	2460 MHz	78	2480 MHz
19	2421 MHz	39	2441 MHz	59	2461 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any be prosecuted to the fulle at vent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



# 2.7. The Worst Test Modes and Channel Details

- The EUT has been tested under operating condition. 1
- 2 Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- Investigation has been done on all the possible configurations for searching the worst case. 3

## **RADIATED EMISSION TEST:**

<b>RADIATED EMISSION TEST (BELOW 1 GHz)</b>									
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE	ANTENNA PORT				
Bluetooth	0 to 78	0,39,78	GFSK	DH5	MAIN				
	RADIATED	<b>EMISSION TE</b>	ST (ABOVE 1 GH	[ <b>z</b> )					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE	ANTENNA PORT				
Bluetooth	0 to 78	0,39,78	GFSK	DH5	MAIN				

#### Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth BR+EDR Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

## **ANTENNA PORT CONDUCTED MEASUREMENT:**

		CONDUCTED	TEST					
Peak Output Power, 20dB Band Width								
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE	ANTENNA PORT			
	0 to 78	0,39,78	GFSK	DH5	MAIN			
Bluetooth	0 to 78	0,39,78	/4-DQPSK	2DH5	MAIN			
	0 to 78	0,39,78	8-DQPK	3DH5	MAIN			
		Band Edg	ge					
Bluetooth	0 to 78	0,78	GFSK	DH5	MAIN			
		<b>Frequency Sepa</b>	aration					
Bluetooth	0 to 78	0,1,2	GFSK	DH5	MAIN			
	Nu	mber of hopping	frequency					
Bluetooth	0 to 78	0 to 78	GFSK	DH5	MAIN			
	Tim	e of Occupancy	(Dwell time)					
Bluetooth	0 to 78	0,39,78	GFSK	DH1/DH3/DH5	MAIN			
Bluetooth	0 to 78	39	/4-DQPSK	DH1/DH3/DH5	MAIN			
Bluetooth	0 to 78	39	8-DPSK	DH1/DH3/DH5	MAIN			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of all weights and the results and state the four result of the state of th Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



#### **MEASUREMENT UNCERTAINTY** 5.

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 0.84 dB
20dB Bandwidth	+/- 51.33 Hz
100 kHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Frequency Separation	+/- 51.33 Hz
Number of hopping frequency	+/- 51.33 Hz
Time of Occupancy	+/- 51.33 Hz
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

**Radiated Spurious Emission:** 

	30MHz - 180MHz: +/- 3.37dB
Maagumement un containtu	180MHz -417MHz: +/- 3.19dB
Measurement uncertainty (Polarization : <b>Vertical</b> )	0.417GHz-1GHz: +/- 3.19dB
(i olulization : vertical)	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : <b>Horizontal</b> )	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the

95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised that information contaited extend of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unage of this document is unavitied and reference are particed to the fulle extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### **CONDUCTED EMISSION TEST** 6.

# 6.1. Standard Applicable

According to §15.207, frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

Frequency range	Limits dB(uV)					
MHz	Quasi-peak	Average				
0.15 to 0.50	66 to 56	56 to 46				
0.50 to 5	56	46				
5 to 30	60	50				
Note						
1. The lower limit shall apply at the transition frequencies						
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.						

## 6.2. Measurement Equipment Used

Conducted Emission Test Site									
EQUIPMENT	MFR MODEL		SERIAL	LAST	CAL DUE.				
ТҮРЕ		NUMBER	NUMBER	CAL.					
EMI Test Receiver	R&S	ESCI 7	100950	12/12/2014	12/11/2015				
Coaxial Cables	N/A	N30N30-1042-150cm	N/A	01/06/2015	01/07/2016				
LISN	Schwarzbeck	NSLK 8127	8127-648	06/09/2015	06/08/2016				
LISN	Rolf-Heine	NNB-2/16Z	99012	03/04/2015	03/03/2016				
Test Software	Farad	EZ-EMC	Ver. SGS-03A2	N.C.R.	N.C.R.				

## 6.3. EUT Setup


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2009.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of all weights and the results and state the four result of the state of th Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.



## 6.4. Test SET-UP (Block Diagram of Configuration)

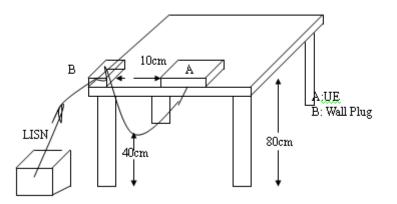

#### 6.5. Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

#### 6.6. Measurement Result

Note: Refer to next page for measurement data and plots. Note2: The \* reveals the worst-case results that closet to the limit


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of all weights and the results and state the four result of the state of th Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



# AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Operation mode			Test Date:	Jul. 03, 2015
Temperature:	26	Humidity:	52 %	Test By:	Ashton
Model No.:	o.: Adapter: A11-065N1A			Phase:	L1

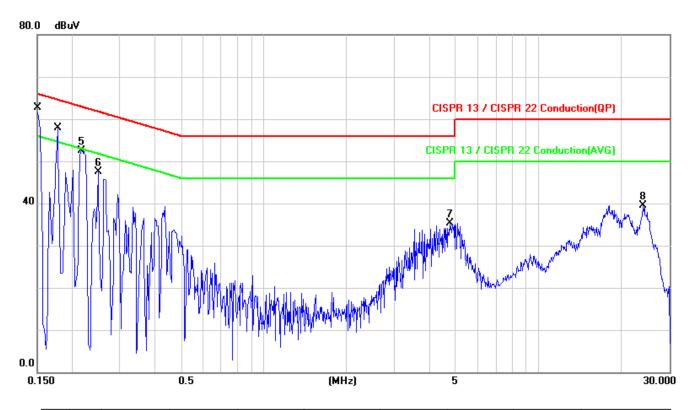


No.	Mk.	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Comment
		(MHz)	dBuV	(dB)	(dBuV)	(dBuV)	(dB)		
1	*	0.1500	60.81	0.08	60.89	66.00	-5.11	QP	
2		0.1500	47.01	0.08	47.09	56.00	-8.91	AVG	
3		0.1780	56.70	0.08	56.78	64.58	-7.80	QP	
4		0.1780	42.40	0.08	42.48	54.58	-12.10	AVG	
5		0.2180	52.34	0.08	52.42	62.89	-10.47	peak	
6		0.2500	47.40	0.09	47.49	61.76	-14.27	peak	
7		4.7540	34.69	0.62	35.31	56.00	-20.69	peak	
8		24.1380	38.82	0.74	39.56	60.00	-20.44	peak	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Operation Mode:	Operation mode			Test Date:	Jul. 03, 2015
Temperature:	26	Humidity:	52 %	Test By:	Ashton
Model No.:	Iodel No.: Adapter: A11-065N1A			Phase:	N

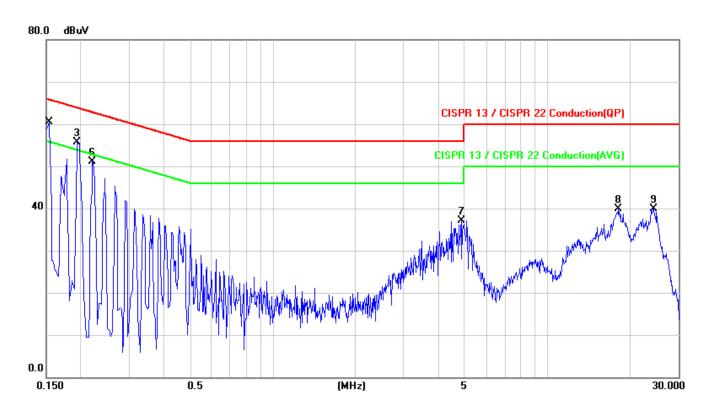

No.	Mk.	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Comment
		(MHz)	dBuV	(dB)	(dBuV)	(dBuV)	(dB)		
1		0.1540	55.40	0.14	55.54	65.78	-10.24	QP	
2		0.1540	36.40	0.14	36.54	55.78	-19.24	AVG	
3	*	0.1940	55.52	0.13	55.65	63.86	-8.21	peak	
4		0.1940	53.90	0.13	54.03	63.86	-9.83	QP	
5		0.1940	35.50	0.13	35.63	53.86	-18.23	AVG	
6		0.2220	50.98	0.14	51.12	62.74	-11.62	peak	
- 7		4.8660	36.39	0.67	37.06	56.00	-18.94	peak	
8		18.1500	39.21	0.61	39.82	60.00	-20.18	peak	
9		24.3820	39.14	0.78	39.92	60.00	-20.08	peak	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

# 7. PEAK OUTPUT POWER MEASUREMENT


# 7.1. Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: The Limit: 0.125 Watts. The power limit for 1Mbps is 1watt, and 2Mbps, 3Mbps and AFH mode are 0.125 watts.

## 7.2. Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL SERIAL		LAST	CAL DUE.		
ТҮРЕ		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	E4446A	MY51100003	01/29/2015	01/28/2016		
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015		
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/19/2014	12/18/2015		
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015		

## 7.3. Test Set-up:



## 7.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >=20dB bandwidth)
- 4. Record the max. reading.
- 5. Repeat above procedures until all default test channel is completed.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### 7.5. Measurement Result

	GFSK (1 Mbps)					
Channel	Frequency Output Power (MHz) (dBm)		Output Power (mW)	Limit (mW)		
0	2402	5.41	3.47536	1000		
39	2441	5.90	3.89045	1000		
78	2480	6.20	4.16869	1000		
		π/4-DQPSK	(2 Mbps)			
Channel	Frequency	<b>Output Power</b>	<b>Output Power</b>	Limit		
Channel	(MHz)	(dBm)	( <b>mW</b> )	(mW)		
0	2402	3.66	2.32274	125		
39	2441	4.18	2.61818	125		
78	2480	4.53	2.83792	125		
		<b>8-DPSK</b> (	3 Mbps)			
Channel	Frequency	<b>Output Power</b>	<b>Output Power</b>	Limit		
Channel	(MHz)	(dBm)	( <b>mW</b> )	(mW)		
0	2402	2.78	1.89671	125		
39	2441	3.31	2.14289	125		
78	2480	3.70	2.34423	125		

NOTE: cable loss as 0.6dB that offsets in the spectrum

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised that information contaited extend of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unage of this document is unavitied and reference are particed to the fulle extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### 8. **20dB BANDWIDTH MEASUREMENT**


## 8.1. Standard Applicable

For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

#### **Measurement Equipment Used** 8.2.

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL SERIAL		LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	E4446A	MY51100003	01/29/2015	01/28/2016		
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015		
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/19/2014	12/18/2015		
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015		

#### 8.3. Test Set-up



#### 8.4. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set the spectrum analyzer as RBW=10 kHz (1 % of 20 dB Bandwidth.), VBW = 30 kHz, Span= 3MHz, Sweep=auto, Detector = Peak, and Max hold for 20dB Bandwidth test.
- 5. Mark the peak frequency and –20dB (upper and lower) frequency
- 6. Repeat above procedures until all test default channel is completed

#### NOTE:

1. cable loss as 0.6dB that offsets in the spectrum

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offies Sofiel was stated the count of any and to an open for the state of the sta tronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/terms-e-document.htm">www.sgs.com/terms-e-document.htm</a>. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



#### 8.5. Measurement Result

	GFSK						
Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	2/3 Bandwidth (MHz)				
0	2402	0.92	-				
39	2441	0.92	-				
78	2480	0.92	-				
		/4-DQPSK					
Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	2/3 Bandwidth (MHz)				
0	2402	1.46	0.97				
39	2441	1.46	0.97				
78	2480	1.46	0.97				
		8-DPSK					
Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	2/3 Bandwidth (MHz)				
0	2402	1.41	0.94				
39	2441	1.41	0.94				
78	2480	1.41	0.94				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any be prosecuted to the fulle at vent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



# 20dB Band Width Test Data CH-Low (GFSK mode)



# 20dB Band Width Test Data CH-Mid (GFSK mode)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Onless other was stated are results and the art report for the form of the state are results and the state are results are results and the state are results tronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms-e-document.htm">www.sgs.com/terms-e-document.htm</a>. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# 20dB Band Width Test Data CH-High (GFSK mode)



# 20dB Band Width Test Data CH-Low ( /4-DQPSK mode)

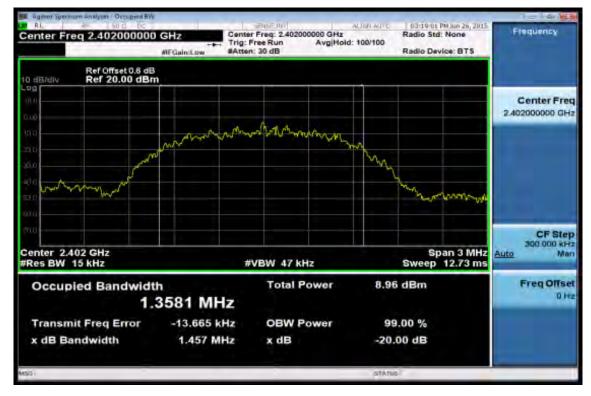


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Chiefs So therwise stated the results shown in this test report refer only to the sample(s) tested and social after feature for so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# 20dB Band Width Test Data CH-Mid ( /4-DQPSK mode)

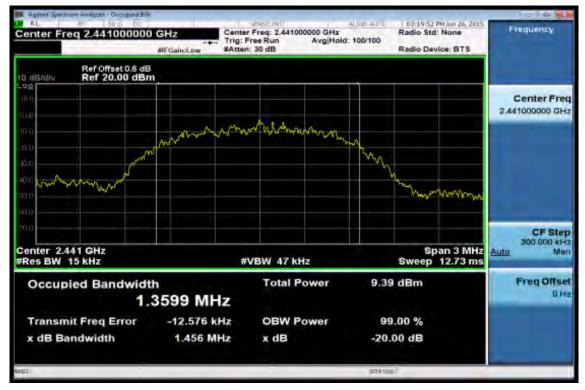

# 20dB Band Width Test Data CH-High ( /4-DQPSK mode)

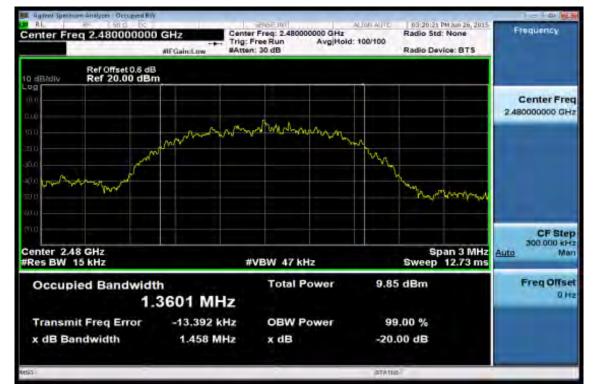


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Chiefs So therwise stated the results shown in this test report refer only to the sample(s) tested and social after feature for so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# 20dB Band Width Test Data CH-Low (8-DPSK mode)

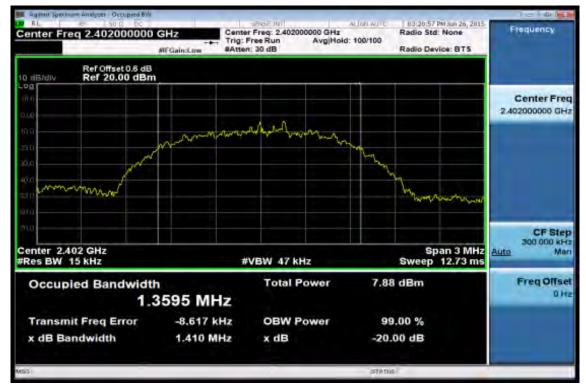

## 20dB Band Width Test Data CH-Mid (8-DPSK mode)




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless other was stated are results and the art report for the form of the state are results and the state are results are results and the state are results tronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms-e-document.htm">www.sgs.com/terms-e-document.htm</a>. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# 20dB Width Test Data CH-High (8-DPSK mode)

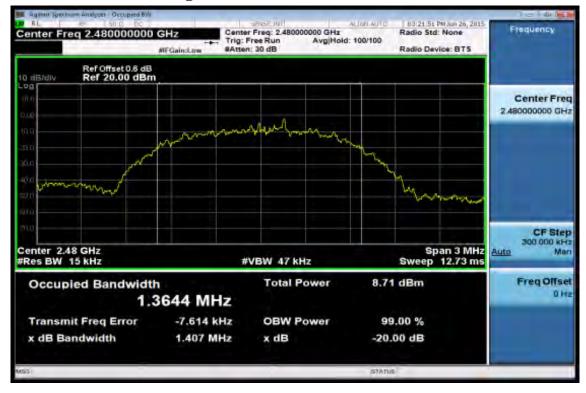

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



# 9. CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT


# 9.1. Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

## 9.2. Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	E4446A	MY51100003	01/29/2015	01/28/2016		
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015		
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/19/2014	12/18/2015		
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015		

## 9.3. Test SET-UP



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



# 9.4. Measurement Procedure

## Conducted Band Edge:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Sweep = auto
- 6. Mark Peak, 2.3999GHz and 2.4836GHz and record the max. level.
- 7. Repeat above procedures until all frequency measured were complete.

## **Conducted Spurious Emission:**

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Set RBW = 100 kHz & VBW = 300 kHz, Detector =Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

# $\mathbf{FS} = \mathbf{RA} + \mathbf{AF} + \mathbf{CL} - \mathbf{AG}$

	Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
ſ		RA = Reading Amplitude	AG = Amplifier Gain
		AF = Antenna Factor	

## 9.5. Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

# NOTE:

- 1. Cable loss as 0.6dB that offsets in the spectrum
- 2. The occurrence of the spike on the conducted emission is the signal of the fundamental emission.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


除非方方机则,此我告惑本性對測点之樣的員質「同時比樣的性情留別人。本報告未整本公司者面計引,不可能分複彩。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document document documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# Band Edges Test Data CH-Low (Hopping mode)

Agitent Spectrum Analyzes   Swept SA			_		0.000		10 4 3
Center Freq 2.3650000	DO GHZ	Trig: Free Run		Type: Log-Pwr	02:50:30 PMJun TRACE	34.9	Frequency
Ref Offset 0.5 dB	IFGain:Low	#Atten: 30 dB		Mkr	1 2.415 27 5.59 c	GHz	Auto Tune
190 190 0 00 100					MUNIT		Center Freq 2.36500000 GHz
20 0 20 0 40 0							Start Freq 2.310000000 GHz
έα ο σε ο <u>Αλικλέφη Ακτηλητική Αλιλήν</u> 17α ο	wanaanaanaanaa	NAAAHAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAA	ARAAAAAA	www.shanww	Ø <sup>2</sup>		Stop Freq 2,42000000 GHz
Start 2.31000 GHz #Res BW 100 kHz MRR MODE TRC SCL 2	¢	300 kHz	PUNCTION	Sweep 1.	Stop 2.42000 000 ms (1001	l pts)	CF Step 11.000000 MHz Auto Man
2 N 1 1	2 415 27 GHz 2 399 90 GHz 2 390 00 GHz	5.59 dBm -59.25 dBm -57.88 dBm					Freq Offset 0 Hz
9 10 11				STATUS	_	÷	

**Band Edges Test Data CH-High** 

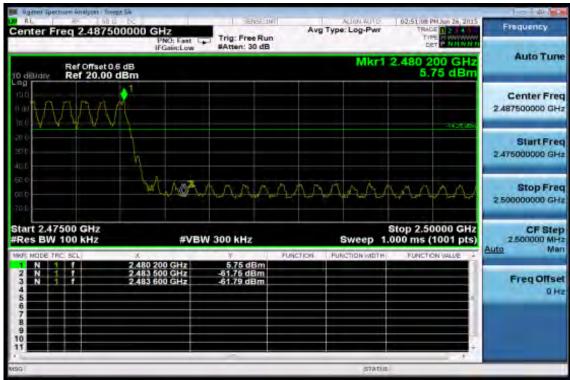


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



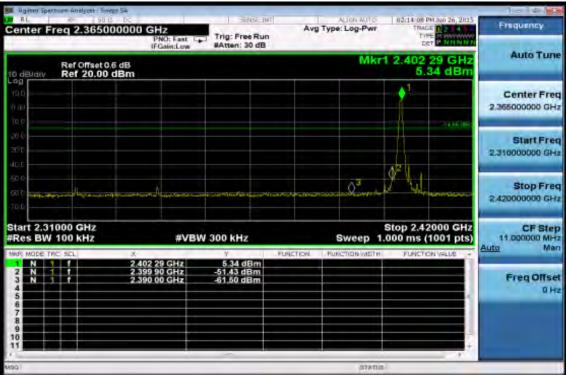

# Band Edges Test Data CH-Low (Non-Hopping mode)

**Band Edges Test Data CH-High** 

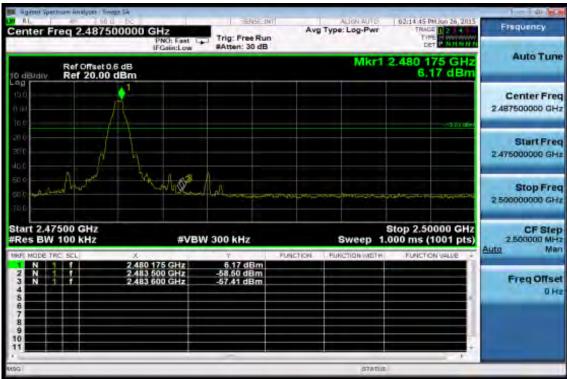


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


GS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號




# **Conducted Spurious Emission Measurement Result** Ch Low 30MHz - 3GHz

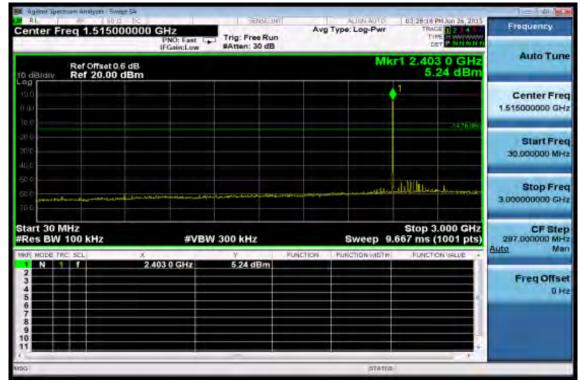

# Ch Low <u>3GHz – 26.5GHz</u>

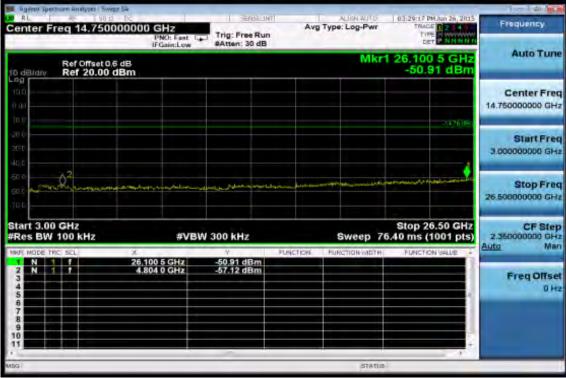


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> and condition and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# Ch Mid 30MHz – 3GHz


M Agient Spe	etrum Analyzes   Sine		-	-			0 4 2
Center F	req 1.51500		Trig: Free Run #Atten: 30 dB	Avs	Type: Log-Pwr	03:30:01 PMJun 26, 2035 TRACE 2 2 4 1 TIPE DET P NHWNT	Frequency
10 dB/dtv	Ref Offset 0. Ref 20.00	5 dB			Mk	r1 2.441 6 GHz 5.66 dBm	Auto Tune
19,0 19,0 10,0 10,0						↓1 	Center Freq 1.515000000 GHz
20 0 30 0							Start Freq 30.000000 MHz
50.0 60.0 70.0		an ta fan as an Inder Dalama an Inder			يالل سوخة ما يسمعهم الأل		Stop Freq 3.00000000 GHz
Start 30 F #Res BW	100 kHz	#VB	W 300 kHz	FUNCTION	Sweep 9.	Stop 3.000 GHz 667 ms (1001 pts)	CF Step 297.000000 MHz <u>Auto</u> Man
1 N 2 3 4 5 6 7 8 9		2.441 6 GHz	5.66 dBm				Freq Offset 0 Hz
10 11 11			~		autera	-	_

# Ch Mid 3GHz – 26.5GHz

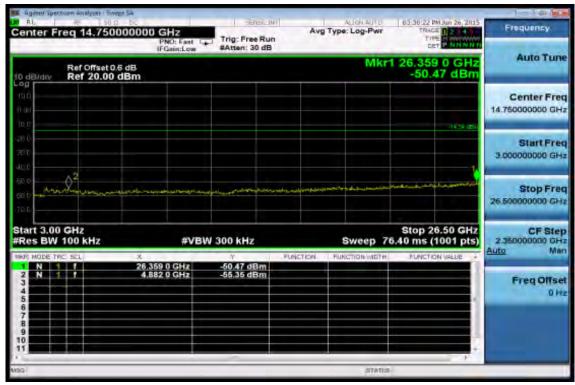




# Ch High 30MHz - 3GHz

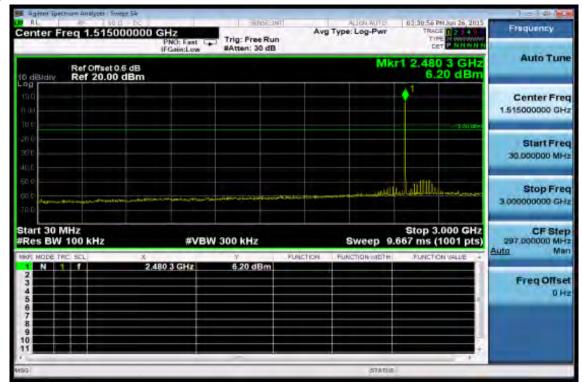

# Ch High 3GHz – 26.5GHz

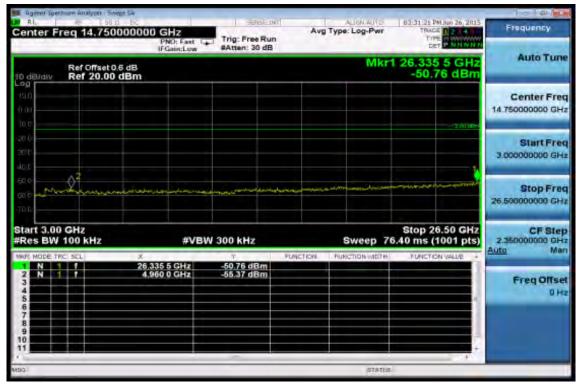

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Chiefy Source stated the results shown in this test report refer only to the sample(s) tested and such sample(s) tested and the test sample(s) tested and such sample(s) tested and the test sample(s) tested and sample(s) tested and the test sample(s) tested and tested and sample(s) tested and tested and sample(s) tested and sample(s) tested and the test sample(s) tested and test pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# **10. RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT 10.1. Standard Applicable**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to \$15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level  $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> <u>e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the peraance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### **10.2.** Measurement Equipment Used


	966 Chamber										
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.						
TYPE		NUMBER	NUMBER	CAL.							
EMI Test Receiver	R&S	ESU 40	100363	04/09/2015	04/08/2016						
Loop Antenna	ETS-Lindgren	6502	00143303	12/09/2014	12/08/2015						
Broadband Antenna	TESEQ	CBL 6112D	35240	12/05/2014	12/04/2015						
Horn Antenna	ETS-Lindgren	3117	00143272	12/08/2014	12/07/2015						
Horn Antenna	ETS-Lindgren	3160-09	00117911	11/13/2014	11/12/2015						
Horn Antenna	ETS-Lindgren	3160-10	00117783	11/13/2014	11/12/2015						
Pre Amplifier	EMC Instruments	EMC330	980096	12/19/2014	12/18/2015						
Pre Amplifier	EMC Instruments	EMC0011830	980199	12/19/2014	12/18/2015						
Pre Amplifier	R&S	SCU-18	10204	12/19/2014	12/18/2015						
Pre Amplifier	R&S	SCU-26	100780	12/19/2014	12/18/2015						
Coaxial Cable	Huber+Suhner	RG 214/U	966Rx 9K-30M	12/19/2014	12/18/2015						
Coaxial Cable	Huber+Suhner	RG 214/U SUCOFLEX 104	966Rx 30M-3G	12/19/2014	12/18/2015						
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Rx 1G-18G	12/19/2014	12/18/2015						
Coaxial Cable	Huber+Suhner	mini 141-12 SUCOFLEX 104	966Rx 18G-40G	12/19/2014	12/18/2015						
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Tx 30M-18G	12/19/2014	12/18/2015						
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	966Tx 18G-40G	12/19/2014	12/18/2015						
Attenuator	WOKEN	218FS-10	RF27	12/19/2014	12/18/2015						
Site NSA	SGS	966 Chamber C	SAC-C	03/04/2015	03/03/2016						
Site VSWR	SGS	966 Chamber C	SAC-C	03/04/2015	03/03/2016						
DC Power Supply	HOLA	DP-3003	D7070035	05/04/2015	05/03/2016						
Controller	MF	MF-7802	N/A	N.C.R.	N.C.R.						
Antenna Master	MF	N/A	N/A	N.C.R.	N.C.R.						
Turn Table	MF	N/A	N/A	N.C.R.	N.C.R.						
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.						

NOTE: N.C.R refers to Not Calibrated Required.




### 10.3. Test SET-UP




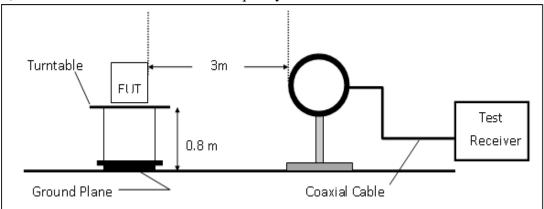

### (B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

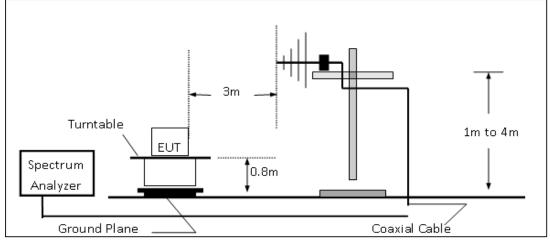

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

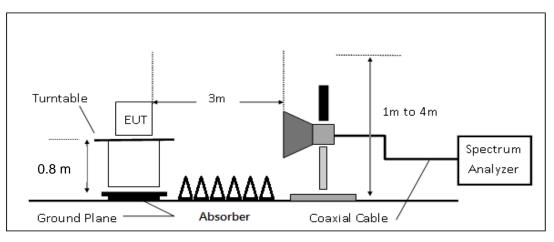

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### **10.4. Measurement Procedure**

### **Radiated Emission**

- 1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 0.8m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Use the follow spectrum analyzer setting:
  - (1) Span = wide enough to fully capture the emission being measured
  - (2) RBW = 1 MHz for  $f \ge 1$  GHz, 100 kHz for f < 1 GHz, VBW  $\ge$  RBW, Sweep = auto, Detector function = peak, Trace = max hold
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c)

Duty Cycle = On time/100 milliseconds

On time = N1\*L1=N2\*L2+...+N(n-1)\*LN(n-1)+N(n)\*L(n)

Where N1 is number of type 1 pulses, L1 is length of type 1 pulses, etc.

Average Emission Level = Peak Emission Level +  $20*\log (duty Cycle)$ 

- 6. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 7. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 8. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 9. Repeat above procedures until all frequency of the interest measured were complete.



#### **10.5. Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

 $\mathbf{FS} = \mathbf{RA} + \mathbf{AF} + \mathbf{CL} - \mathbf{AG}$ 

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

The limit of the emission level is expressed in dBuV/m, which converts 20\*log(uV/m)

Actual  $FS(dB\mu V/m) = SPA$ . Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$ 

### Note :

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

### 10.6. Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

#### **10.7. Measurement Result**

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



#### **Radiated Band Edge Measurement Result: (Hopping Mode)**

Operation Band Fundamental Frequency Operation Mode EUT Pol.		:BR+Hopping :2402 MHz :Band Edge LOW :E2 Plan		Test Date Temp./Humi. Engineer Measurement Ant	tenna Pol	:2015-07-08 :22.7 deg_C / 57 RH :Vito :VERTICAL	
201101.							
Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Lev	el	FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Peak	44.13	6.62	50.75	74.00	-23.25
2390.00	E	Average	33.16	6.62	39.78	54.00	-14.22

Operation Ba Fundamental Operation Mo EUT Pol.	Frequency	:BR+Hopping Test Date :2402 MHz Temp./Humi. :Band Edge LOW Engineer :E2 Plan Measurement Antenna Pol.		Temp./Humi. Engineer		:2015-07-08 :22.7 deg_C / 57 RH :Vito :HORIZONTAL	
Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Lev	el	FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Peak	45.05	6.62	51.67	74.00	-22.33
2390.00	Е	Average	33.18	6.62	39.80	54.00	-14.20



### FCC ID: YE3800E

Report No.: E2/2015/70009 Issue Date: Jul. 13, 2015 Page: 42 of 79

Operation Band Fundamental Frequency Operation Mode EUT Pol.		:2480 MHz :Band Edge HIGH		Test Date Temp./Humi. Engineer Measurement An	tenna Pol.	:2015-07-08 :22.7 deg_C / 57 RH :Vito :VERTICAL	
Freq.	Detector Mode	Note	Spectrum Reading Lev		Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Е	Peak	48.00	6.96	54.96	74.00	-19.04
2483.50	Е	Average	34.50	6.96	41.46	54.00	-12.54

Operation Ba Fundamental Operation Mo EUT Pol.	Frequency	:BR+Hoppin :2480 MHz :Band Edge :E2 Plan	HIGH	Test Date Temp./Humi. Engineer Measurement Antenna l		:2015-07-08 :22.7 deg_C / :Vito :HORIZONTA	
Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Lev	vel	FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Peak	48.39	6.96	55.35	74.00	-18.65
2483.50	E	Average	35.09	6.96	42.05	54.00	-11.95



#### 10.6.2 Radiated Emission - Band Edge (Non-Hopping Mode):

Operation Band		:BR		Test Date		:2015-07-08	
Fundamental Frequency		:2402 MHz		Temp./Humi.		:22.7 deg_C / 57 RH	
Operation Mode		:Band Edge	LOW	Engineer		:Vito	
EUT Pol.		:E2 Plan		Measurement An	tenna Pol.	:VERTICAL	
Freq. MHz	Detector Mode PK/QP/AV	Note F/H/E/S	Spectrum Reading Lev dBµV	Factor el dB	Actual FS dBµV∕m	Limit @3m dBµV/m	Margin dB
2390.00	Е	Peak	44.25	6.62	50.87	74.00	-23.13
2390.00	Е	Average	33.10	6.62	39.72	54.00	-14.28

Operation Ba Fundamental Operation Mo EUT Pol.	Frequency	:BR :2402 MHz :Band Edge :E2 Plan	LOW	Test Date Temp./Humi. Engineer Measurement Antenna Pol.		:2015-07-08 :22.7 deg_C / :Vito :HORIZONTA	
Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Lev	el	FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Peak	45.01	6.62	51.62	74.00	-22.38
2390.00	E	Average	33.13	6.62	39.75	54.00	-14.25



Report No.: E2/2015/70009 Issue Date: Jul. 13, 2015 Page: 44 of 79

Operation Ba Fundamental Operation Mo EUT Pol.	amental Frequency:2480 MHzTemp./Humi.ation Mode:Band Edge HIGHEngineer		:2015-07-08 :22.7 deg_C / 57 RH :Vito :VERTICAL				
Freq.	Detector Mode	Note	Spectrum Reading Lev	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV∕m	dB
2483.50	Е	Peak	48.93	6.96	55.89	74.00	-18.11
2483.50	E	Average	43.11	6.96	50.07	54.00	-3.93

Operation Ba Fundamental Operation Mo EUT Pol.	Frequency	:BR :2480 MHz :Band Edge :E2 Plan	HIGH	Test Date Temp./Humi. HIGH Engineer Measurement Antenna		:2015-07-08 :22.7 deg_C / :Vito :HORIZONTA	
Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Lev	vel	FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Peak	49.07	6.96	56.03	74.00	-17.97
2483.50	E	Average	43.82	6.96	50.78	54.00	-3.22



#### **Radiated Spurious Emission Measurement Result:**


#### For Frequency form 30MHz to 1000MHz

**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.

:BR :2402 MHz :TX LOW :E2 Plan

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2015-07-08 :22.7 deg\_C / 57 RH :Vito :VERTICAL

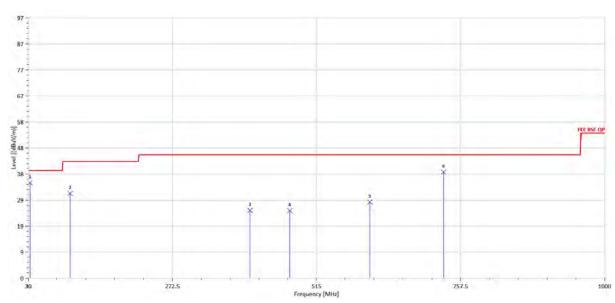

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
32.91	S	Peak	50.21	-14.69	35.51	40.00	-4.49
100.81	S	Peak	55.25	-23.69	31.56	43.50	-11.94
403.45	S	Peak	41.07	-15.75	25.32	46.00	-20.68
470.38	S	Peak	39.37	-14.16	25.21	46.00	-20.79
605.21	S	Peak	41.02	-12.64	28.38	46.00	-17.62
729.37	S	Peak	50.15	-10.66	39.49	46.00	-6.51




Report No.: E2/2015/70009 Issue Date: Jul. 13, 2015 Page: 46 of 79



Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
37.76	S	Peak	39.11	-17.57	21.54	40.00	-18.46
100.81	S	Peak	48.60	-23.69	24.91	43.50	-18.59
142.52	S	Peak	49.23	-21.92	27.32	43.50	-16.18
268.62	S	Peak	46.26	-19.63	26.63	46.00	-19.37
403.45	S	Peak	45.18	-15.75	29.43	46.00	-16.57
730.34	S	Peak	40.43	-10.64	29.79	46.00	-16.21




Report No.: E2/2015/70009 Issue Date: Jul. 13, 2015 Page: 47 of 79

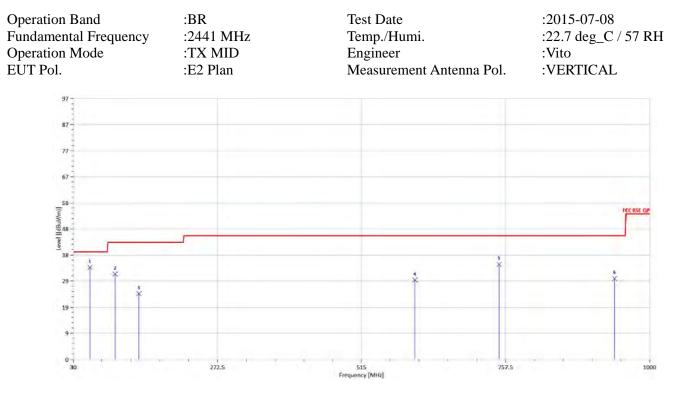

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
58.13	S	Peak	62.03	-27.92	34.11	40.00	-5.89
100.81	S	Peak	55.37	-23.69	31.68	43.50	-11.82
140.58	S	Peak	46.10	-21.70	24.40	43.50	-19.10
605.21	S	Peak	42.13	-12.64	29.49	46.00	-16.51
746.83	S	Peak	45.17	-9.95	35.22	46.00	-10.78
940.83	S	Peak	37.63	-7.63	30.00	46.00	-16.00




Report No.: E2/2015/70009 Issue Date: Jul. 13, 2015 Page: 48 of 79

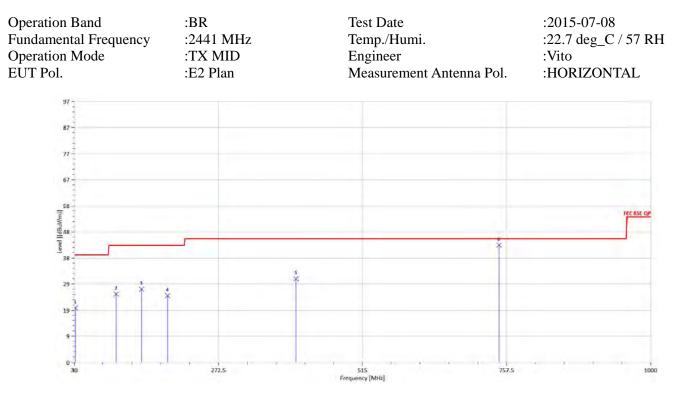

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
31.94	S	Peak	34.40	-14.17	20.24	40.00	-19.76
100.81	S	Peak	49.07	-23.69	25.38	43.50	-18.12
143.49	S	Peak	49.23	-22.04	27.19	43.50	-16.31
187.14	S	Peak	49.03	-24.24	24.78	43.50	-18.72
403.45	S	Peak	46.78	-15.75	31.03	46.00	-14.97
744.89	S	Peak	53.63	-10.02	43.60	46.00	-2.40




Report No.: E2/2015/70009 Issue Date: Jul. 13, 2015 Page: 49 of 79

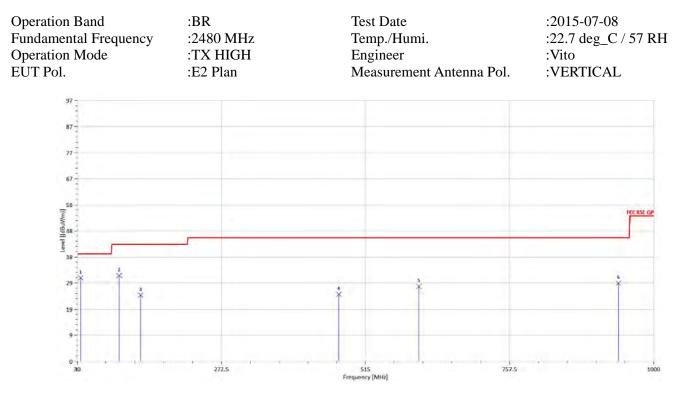

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
35.82	S	Peak	47.33	-16.34	30.98	40.00	-9.02
100.81	S	Peak	55.58	-23.69	31.89	43.50	-11.61
136.70	S	Peak	46.16	-21.55	24.61	43.50	-18.89
470.38	S	Peak	39.09	-14.16	24.93	46.00	-21.07
605.21	S	Peak	40.45	-12.64	27.81	46.00	-18.19
940.83	S	Peak	36.69	-7.63	29.06	46.00	-16.94



Report No.: E2/2015/70009 Issue Date: Jul. 13, 2015 Page: 50 of 79

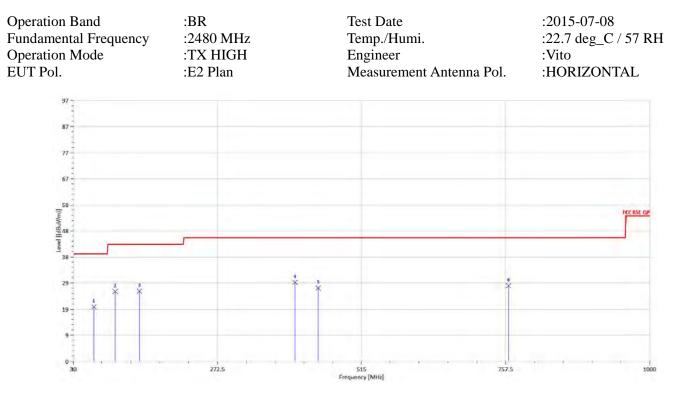

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
64.92	S	Peak	48.43	-28.16	20.27	40.00	-19.73
100.81	S	Peak	49.67	-23.69	25.99	43.50	-17.51
141.55	S	Peak	47.91	-21.81	26.10	43.50	-17.40
403.45	S	Peak	45.12	-15.75	29.37	46.00	-16.63
442.25	S	Peak	42.53	-15.28	27.25	46.00	-18.75
762.35	S	Peak	38.11	-10.00	28.11	46.00	-17.89



#### **Radiated Spurious Emission Measurement Result:**

### For Frequency above 1 GHz


Operation Band Fundamental Frequency Operation Mode EUT Pol.	:BR :2402 MHz :TX LOW :E2 Plan	Test Date Temp./Humi. Engineer Measurement Antenna Po	:2015-07-08 :22.7 deg_C / 57 RH :Vito 1. :VERTICAL
97			
87			
<i>n</i>			FCC RSE PM
67			
58 [(u)/oftp]] ] Pana 38			FCCRSE AV
198-1 38-1		*	
29		*	
19			
9			
0	2750	4500 Frequency [MHz]	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV∕m	dBµV/m	dB
4804.00	Н	Peak	32.34	10.98	43.32	74.00	-30.68
4804.00	Н	Average	22.24	10.98	33.22	54.00	-20.78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised that information contaited extend of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unage of this document is unavitied and reference are particed to the fulle extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號




Report No.: E2/2015/70009 Issue Date: Jul. 13, 2015 Page: 52 of 79

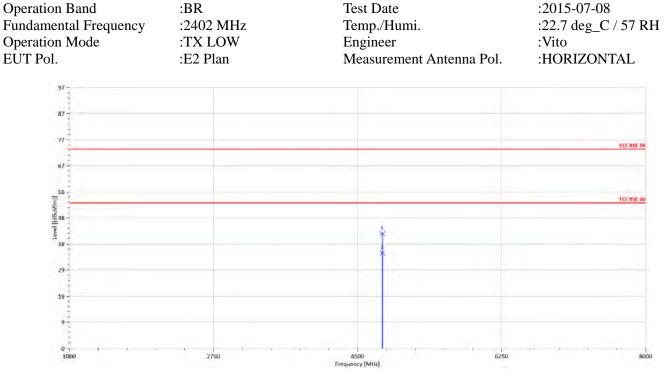

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
4804.00	Н	Peak	31.70	10.98	42.68	74.00	-31.32
4804.00	Н	Average	24.39	10.98	35.37	54.00	-18.63




Report No.: E2/2015/70009 Issue Date: Jul. 13, 2015 Page: 53 of 79

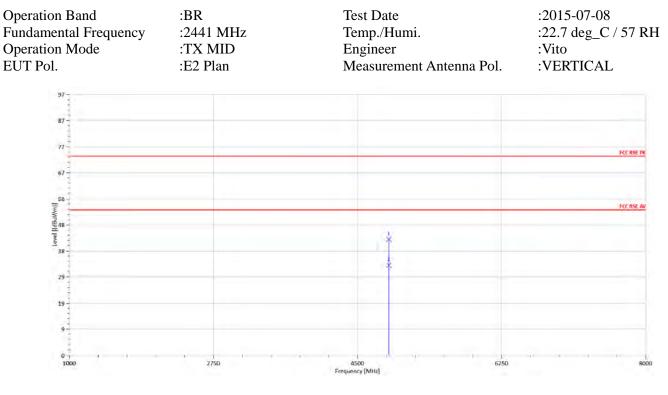

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
4882.00	Н	Peak	32.25	10.91	43.16	74.00	-30.84
4882.00	Н	Average	22.50	10.91	33.41	54.00	-20.59




Report No.: E2/2015/70009 Issue Date: Jul. 13, 2015 Page: 54 of 79

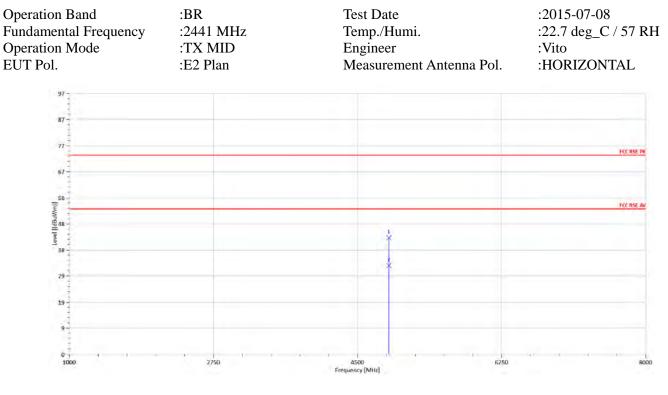

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
4882.00	Н	Peak	32.42	10.91	43.34	74.00	-30.66
4882.00	Н	Average	22.05	10.91	32.96	54.00	-21.04




Report No.: E2/2015/70009 Issue Date: Jul. 13, 2015 Page: 55 of 79

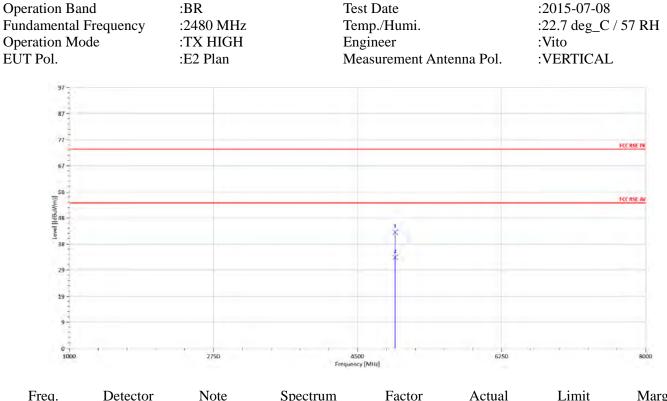

	Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin	
		Mode		Reading Level		FS	@3m		
_	MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB	
	4960.00	Н	Peak	32.20	10.99	43.19	74.00	-30.81	
	4960.00	Н	Average	22.80	10.99	33.79	54.00	-20.21	



Report No.: E2/2015/70009 Issue Date: Jul. 13, 2015 Page: 56 of 79

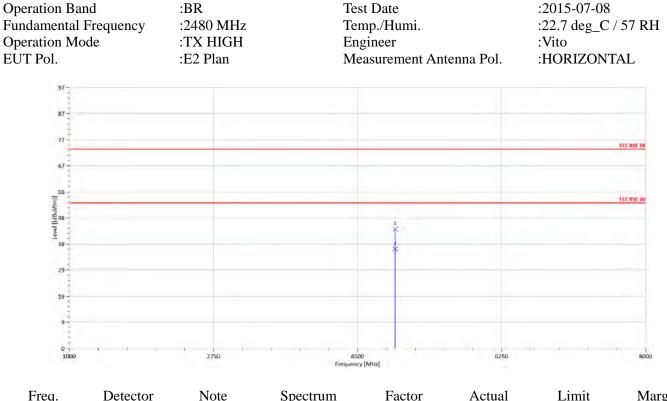

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin	
	Mode		Reading Level		FS	@3m		
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV∕m	dB	
4960.00	Н	Peak	33.28	10.99	44.27	74.00	-29.73	
4960.00	Н	Average	25.90	10.99	36.89	54.00	-17.11	

# **11. FREQUENCY SEPARATION**


### 11.1. Standard Applicable

Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 2/3\*20dB bandwidth of the hopping channel, whichever is greater.

### **11.2. Measurement Equipment Used**

	Conducted Emission Test Site											
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.							
ТҮРЕ		NUMBER	NUMBER	CAL.								
Spectrum Analyzer	Agilent	E4446A	MY51100003	01/29/2015	01/28/2016							
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015							
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/19/2014	12/18/2015							
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015							

### 11.3. Test Set-up



### **11.4.** Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = middle of hopping channel.
- 5. Set the spectrum analyzer as RBW, VBW=100 kHz, Adjust Span to 5MHz, Sweep = auto.
- 6. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### **11.5. Measurement Result**

Channel separation (MHz)	Limit	Result
1	>=25 kHz or 2/3 times 20dB bandwidth	PASS

# **Frequency Separation Test Data**



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



# **12. NUMBER OF HOPPING FREQUENCY**


# 12.1. Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

### 12.2. Measurement Equipment Used

Conducted Emission Test Site						
EQUIPMENT	MFR	MFR MODEL SERIAL		LAST	CAL DUE.	
ТҮРЕ		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	Agilent	E4446A	MY51100003	01/29/2015	01/28/2016	
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015	
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/19/2014	12/18/2015	
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015	

### 12.3. Test Set-up



### **12.4. Measurement Procedure**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 5. Set the spectrum analyzer as RBW=430 kHz, VBW=1.5MHz., Detector = Peak
- 6. Max hold, view and count how many channel in the band.

## 12.5. Measurement Result

### Tabular Data of Total Channel Number

	Channel Number	Limit
2.4 GHz – 2.441GHz	40	
2.441 GHz – 2.4835GHz	39	>15
2.4GHz ~2.4835GHz	(40+39) = 79	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



# **Channel Number**

03:03:51 PMJun 26, 2015 SENSE INT Frequency Avg Type: Log-Pwr 2.420500000 GHz Center Freq Trig: Free Run #Atten: 30 dB PNO: Fast IFGain:Low DET Auto Tune Mkr1 2.40 00 GHz Ref Offset 0.6 dB Ref 20.00 dBm 5.18 dBm 0 dBirda Center Freq 2,420500000 GHz Start Freq 2.40000000 GHz Stop Freq 2.441000000 GHz CF Step 4.100000 MHz Man Auto Freq Offset OH Stop 2.44100 GHz Sweep 1.000 ms (1001 pts) Start 2.40000 GHz #Res BW 430 kHz #VBW 1.5 MHz

2.4 GHz – 2.441GHz

### 2.441 GHz – 2.4835GHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u>.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 GS Taiwan Ltd.



#### 13. TIME OF OCCUPANCY (DWELL TIME)


### 13.1. Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

### 13.2. Measurement Equipment Used

Conducted Emission Test Site						
EQUIPMENT MFR MOD		MODEL	SERIAL	LAST	CAL DUE.	
ТҮРЕ		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	Agilent	E4446A	MY51100003	01/29/2015	01/28/2016	
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015	
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/19/2014	12/18/2015	
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015	

### 13.3. Test Set-up





### **13.4. Measurement Procedure**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz, Detector = Peak, Adjust Sweep = 2~8ms.
- 6. Repeat above procedures until all frequency of the interest measured were complete.

Formula Deduced: time occupancy of one time slot X Hopping rate / total slot in one channel / total channel that hops X period of working channels.

Where, standard hopping rate is 1600 hops/s, slot in one channel for DH1, DH3, and DH5 is 2, 4, and 6, respectively.

DH1 consists of single time slot of the uplink, and one slot of the downlink Total Slot: 2

DH3 consists of three time slot of the uplink, and one slot of the downlink. Total Slot: 4

DH5 consists of five time slot of the uplink, and one slot of the downlink. Total Slot: 6

In AFH mode, hopping rate is 800 hop/s with 6 slots in 20 hopping channels with channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 \* 20) (S), Hop Over Occupancy Time comes to (800 / 6 / 20)\*(0.4 \* 20) =53.33

Note: the result of the complete test default channel at 1Mbps is recorded on the test report, 2Mbps, and 3Mbps only records the measurement result at middle channel that reveals no much deviation.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



### 13.5. Tabular Result of the Measurement

	GFSK	(1Mbps)		
Channel	PACKET TYPE	Measurement Result	Limit	
		(ms)	(ms)	
	DH1	128	400ms	
0	DH3	512	400ms	
	DH5	928	400ms	
	DH1	128	400ms	
39	DH3	512	400ms	
	DH5	928	400ms	
	DH1	128	400ms	
78	DH3	512	400ms	
	DH5	928	400ms	
	/4 DQP	SK (2Mbps)		
Channel	PACKET TYPE	Measurement Result	Limit	
Chaimer	FACKETTTE	(ms)	(ms)	
	DH1	128	400ms	
39	DH3	512	400ms	
	DH5	928	400ms	
	8-DPSK	X (3Mbps)		
Ok ann al		Measurement Result	Limit	
Channel	PACKET TYPE	(ms)	(ms)	
	DH1	128	400ms	
39	DH3	512	400ms	
	DH5	928	400ms	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any be prosecuted to the fulle at vent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



#### A period time = 0.4 (s) \* 79 = 31.6 (s)

#### GFSK (1Mbps):

CH Low	DH1 time slot $=$	0.4	(ms) * (1600/2/79) * 31.6 =	128	(ms)
	DH3 time slot $=$	1.6	(ms) * (1600/4/79) * 31.6 =	512	(ms)
	DH5 time slot =	2.9	(ms) * (1600/6/79) * 31.6 =	928	(ms)

- CH Mid DH1 time slot =0.4 (ms) \* (1600/2/79) \* 31.6 = 128 (ms) DH3 time slot =(ms) \* (1600/4/79) \* 31.6 =1.6 (ms) 512 DH5 time slot =(ms) \* (1600/6/79) \* 31.6 =2.9 (ms) 928
- CH High DH1 time slot =(ms) \* (1600/2/79) \* 31.6 =0.4 (ms) 128 DH3 time slot =(ms) \* (1600/4/79) \* 31.6 =(ms) 1.6 512 (ms) \* (1600/6/79) \* 31.6 =DH5 time slot =2.9 928 (ms)

#### /4 -DQPSK (2Mbps):

CH Mid	2DH1 time slot =	0.4	(ms) * (1600/2/79) * 31.6 =	128	(ms)
	2DH3 time slot =	1.6	(ms) * (1600/4/79) * 31.6 =	512	(ms)
	2DH5 time slot =	2.9	(ms) * (1600/6/79) * 31.6 =	928	(ms)
8-DPSK (3Mbps):					
CH Mid	3DH1 time slot =	0.4	(ms) * (1600/2/79) * 31.6 =	128	(ms)
	3DH3 time slot =	1.6	(ms) * (1600/4/79) * 31.6 =	512	(ms)
	3DH5 time slot =	2.9	(ms) * (1600/6/79) * 31.6 =	928	(ms)



**AFH Mode:** 

GFSK (1Mbps) for AFH Mode					
Hopping Channel Number	PACKET TYPE	Measurement Result (ms)	Limit (ms)		
20	DH5	154.67	400ms		
	/4 DQPSK (2Mbps) for Mode				
Hopping Channel Number	PACKET TYPE	Measurement Result (ms)	Limit (ms)		
20	DH5	154.67	400ms		
8-DPSK (3Mbps) for AFH Mode					
Hopping Channel Number	PACKET TYPE	Measurement Result (ms)	Limit (ms)		
20	DH5	154.67	400ms		

#### GFSK (1Mbps):

DH5 time slot = 2.9(ms) \* (800/6/20)\* 8 = 154.67 (ms)

#### /4 -DQPSK (2Mbps):

2DH5 time slot = 2.9 (ms) \* (800/6/20) \* 8 = 154.67 (ms)

#### 8-DPSK (3Mbps):

3DH5 time slot = 2.9 (ms) \* (800/6/20)154.67 (ms) \* 8 =

### 13.6. Measurement Result

Note: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised that information contaited extend of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unage of this document is unavitied and reference are particed to the fulle extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



# **CH-Low** DH1



#### DH3

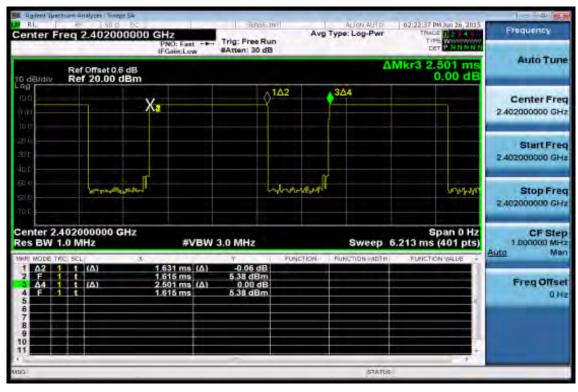




DH5




# CH-Mid

DH1

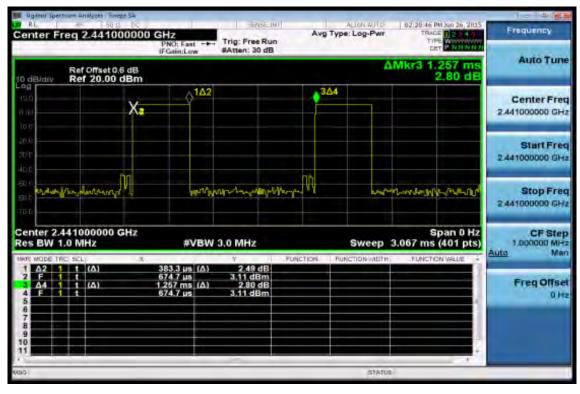



### DH3

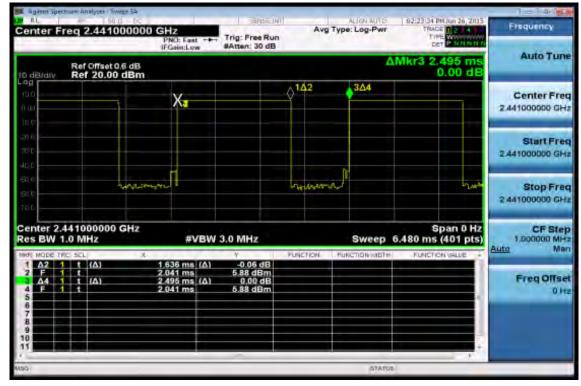

### DH5




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




# **CH-High**

# DH1

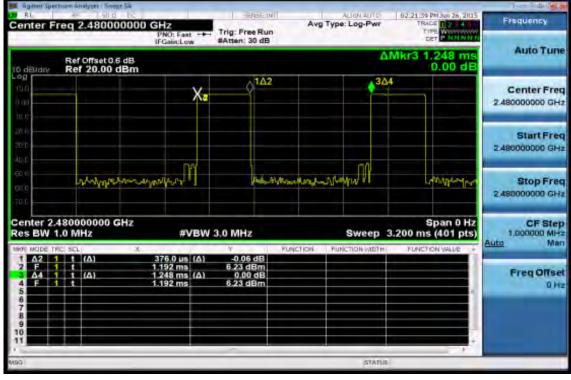

#### DH3

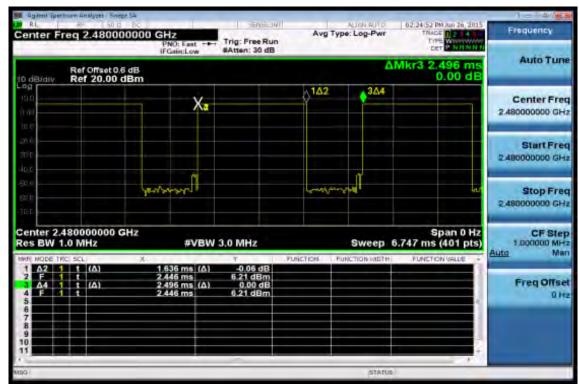



DH5




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



# CH-Mid 2DH1

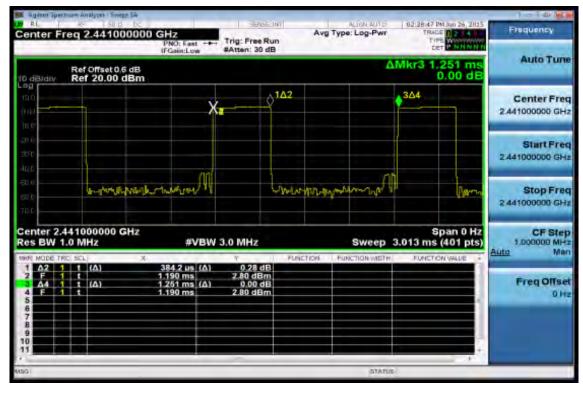


### 2DH3





2DH5

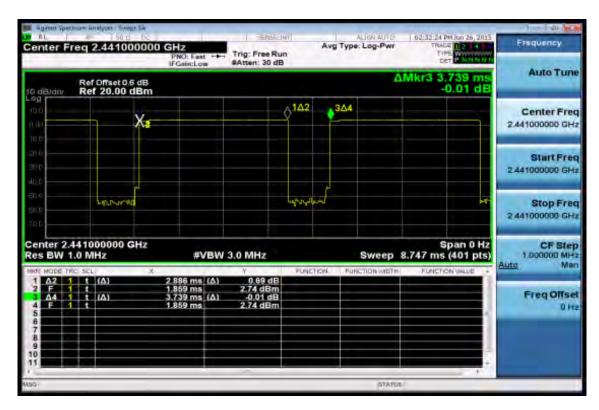


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


GS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



# CH-Mid **3DH1**

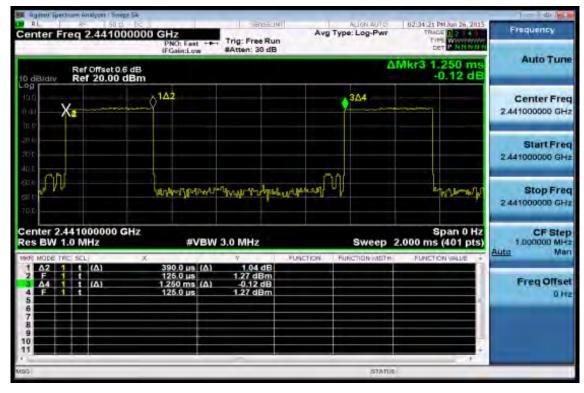


### 3DH3

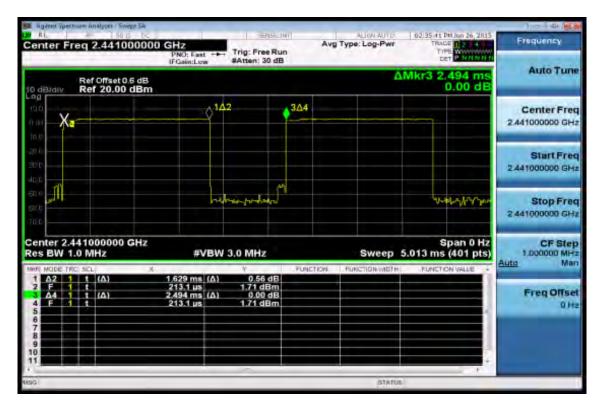



3DH5

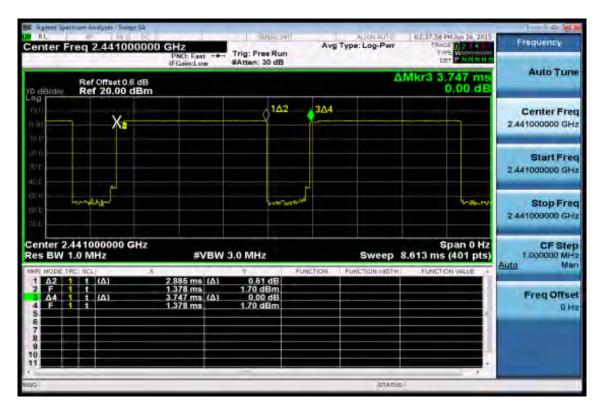

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號

# **14. ANTENNA REQUIREMENT**

### 14.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

In case of point-to-point operation, the power shall be reduced by the one dB for every 3 dB that the directional gain of antenna exceeds 6dBi.

### 14.2 Antenna Connected Construction:

An embedded-in antenna design is used.

The antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum output power limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。