

APPLICANT: AUDIO TECHNICA CORPORATION
FCC ID: JFZT5000D

TABLE OF CONTENTS LIST

TEST REPORT CONTAINING:

PAGE	1.....	GENERAL INFORMATION
PAGE	2.....	DESCRIPTIONS
PAGE	3.....	RF POWER
PAGE	4.....	MODULATION CHARACTERISTICS
PAGE	4.....	AUDIO FREQUENCY RESPONSE GRAPH
PAGE	5.....	MODULATION LIMITING PLOT - 300 Hz
PAGE	6.....	MODULATION LIMITING PLOT - 1000 Hz
PAGE	7.....	MODULATION LIMITING PLOT - 15000 Hz
PAGE	8.....	OCCUPIED BANDWIDTH
PAGE	9.....	OCCUPIED BANDWIDTH PLOT
PAGE	10.....	OCCUPIED BANDWIDTH PLOT - CW
PAGE	11.....	RADIATED EMISSIONS TEST DATA
PAGE	12.....	METHOD OF MEASURING RADIATED EMISSIONS
PAGE	13.....	FREQUENCY STABILITY TEST DATA
PAGE	14-17.....	EQUIPMENT LIST

EXHIBITS CONTAINING:

EXHIBIT	1.....	FCC ID LABEL SAMPLE
EXHIBIT	2.....	ID LABEL LOCATION
EXHIBIT	3.....	BLOCK DIAGRAM
EXHIBIT	4.....	SCHEMATICS
EXHIBIT	5.....	TUNING PROCEDURE
EXHIBIT	6.....	CIRCUIT DESCRIPTION
EXHIBIT	7.....	USER'S MANUAL
EXHIBIT	8.....	TEST SET UP PHOTOGRAPH
EXHIBIT	9.....	EXTERNAL PHOTOGRAPH
EXHIBIT	10.....	INTERNAL COMPONENT SIDE PHOTOGRAPH
EXHIBIT	11.....	INTERNAL COPPER SIDE PHOTOGRAPH
EXHIBIT	12.....	CONFIDENTIALITY REQUEST LETTER

APPLICANT: AUDIO TECHNICA CORPORATION
FCC ID: JFZT5000D

REPORT #: T:\A\AudioTechnica_JFZ\660UT22\660UT22TestReport.doc
TABLE OF CONTENTS LIST

GENERAL INFORMATION REQUIRED
FOR TYPE ACCEPTANCE

- 2.1033(c)(1) AUDIO TECHNICA CORPORATION will manufacture the JFZT5000D in
2.1033(c)(2) quantity, for use under FCC RULES PART 74.801, LOW POWER AUXILIARY STATIONS.

AUDIO TECHNICA CORPORATION
2206 NARUSE, MACHIDA
TOKYO, 194 JAPAN

2.1033 TECHNICAL DESCRIPTION

- (c)(3) Instruction book. The instruction manual is included as Exhibit 7A-7C.

- (c)(4) Type of Emission: 80K0F3E

Bn = 2M + 2DK

M = 20000

D = 20 kHz

K = 1

Bn = 2(20k) + 2(20k)(1) = 80k

ALLOWED AUTHORIZED BANDWIDTH = 200kHz.
74.861(e)(5)

- (c)(5) Frequency Range: Part 74: 655-680 MHz
TEST FREQ = 668.00 MHz.

- (c)(6) Power Range and Controls: UNIT has no controls.

- (c)(7) Maximum Output Power Rating:

HIGH POWER = .004W ERP

LOW POWER = .001W ERP

- (c)(8) DC Voltages and Current into Final Amplifier:

FINAL AMPLIFIER ONLY

3.0V BATTERY

Vce = 3.0 Volts

Ice = HIGH - .170 AMPS

LOW - .140 AMPS

- (c)(9) Tune-up procedure. The tune-up procedure is given in Exhibit 5.

- (c)(10) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT # 6. The block diagram is included as EXHIBIT #3.

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT5000D

REPORT #: T:\A\AudioTechnica_JFZ\660UT22\660UT22TestReport.doc

- 2.1033(c)(11) Photo or Drawing of Label and sketch of location:
See EXHIBIT # 1 & EXHIBIT #2.
- 2.1033(c)(12) Photos of Equipment:
See EXHIBIT #'S 9-11.
- (c)(13) Description of all circuitry and devices provided
for determining and stabilizing frequency.
- Description of any circuits or devices employed
for suppression of spurious radiation, for limiting
modulation, and for limiting power.
- This circuitry is described in Exhibit 6.
- Limiting Modulation:
The transmitter audio circuitry is contained
in IC101, IC102 and IC103.
- Limiting Power:
There is no provision for limiting power.
- (13) Digital modulation. This unit does not use
digital modulation.
- 2.1033(c)(14) The data required by 2.1046 through 2.1057 is sub-
mitted below.

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT5000D

REPORT #: T:\A\AudioTechnica_JFZ\660UT22\660UT22TestReport.doc

Page 2 of 17


2.1046 RF power output.

RF power measured is:

OUTPUT POWER: High Power = .004 W ERP

Low Power = .001 W ERP

2.1046 RF power output.

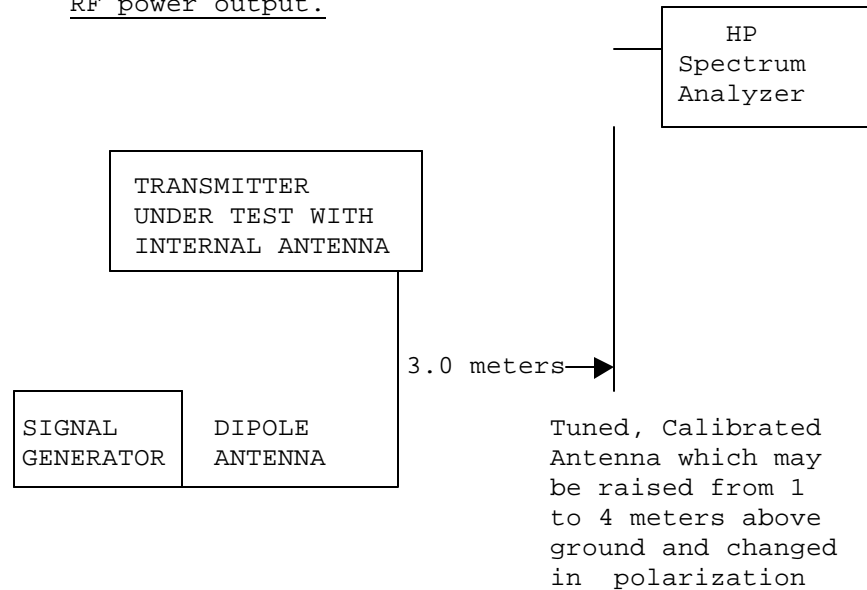

Equipment placed 1 meter above ground
on a rotatable platform.

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT5000D

REPORT #: T:\A\AudioTechnica_JFZ\660UT22\660UT22TestReport.doc

Page 3 of 17

2.1047(a)(b) Modulation characteristics:


AUDIO FREQUENCY RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown on the next page.

AUDIO LOW PASS FILTER

The audio low pass filter is not required in this unit.

AUDIO FREQUENCY RESPONSE GRAPH

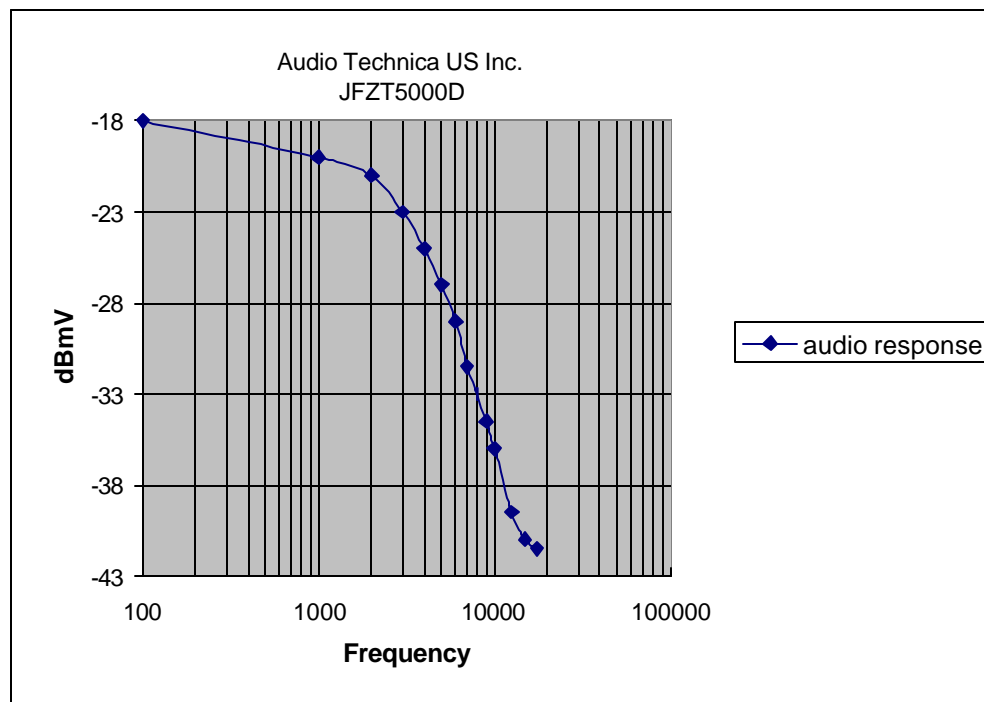


APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT5000D

REPORT #: T:\A\AudioTechnica_JFZ\660UT22\660UT22TestReport.doc

AUDIO INPUT VERSUS MODULATION GRAPH : 300 Hz

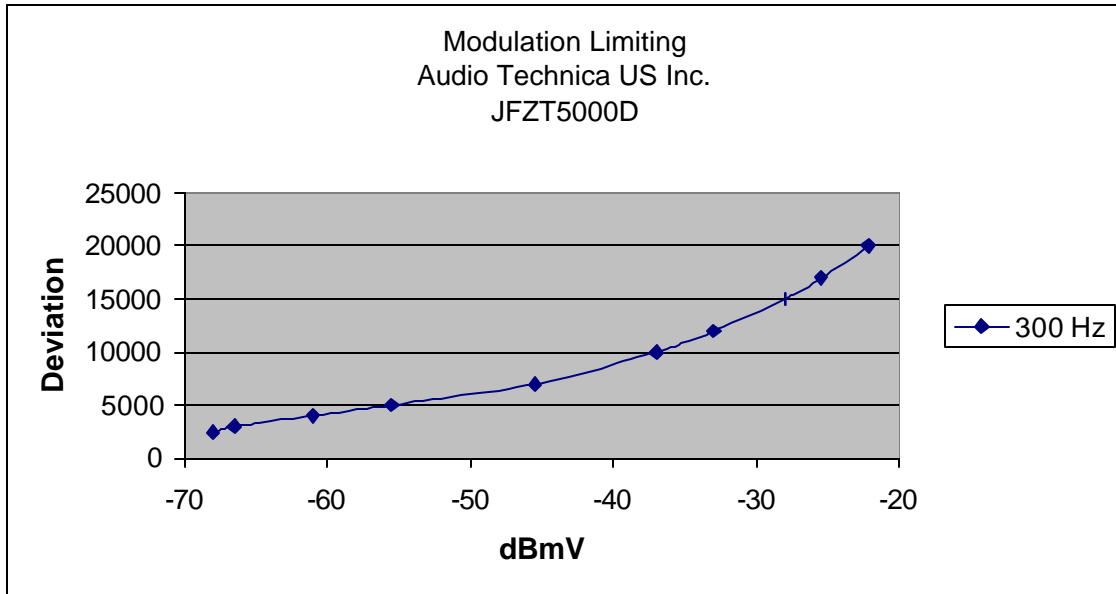


APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT5000D

REPORT #: T:\A\AudioTechnica_JFZ\660UT22\660UT22TestReport.doc

Page 5 of 17

AUDIO INPUT VERSUS MODULATION GRAPH : 1000 Hz

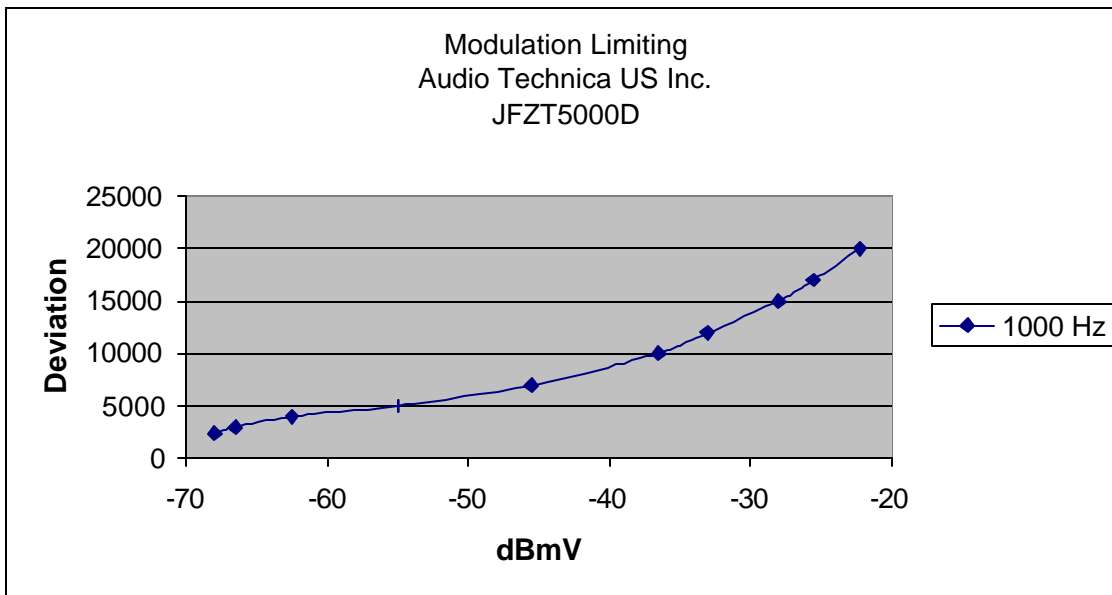


APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT5000D

REPORT #: T:\A\AudioTechnica_JFZ\660UT22\660UT22TestReport.doc

AUDIO INPUT VERSUS MODULATION GRAPH : 15000 Hz

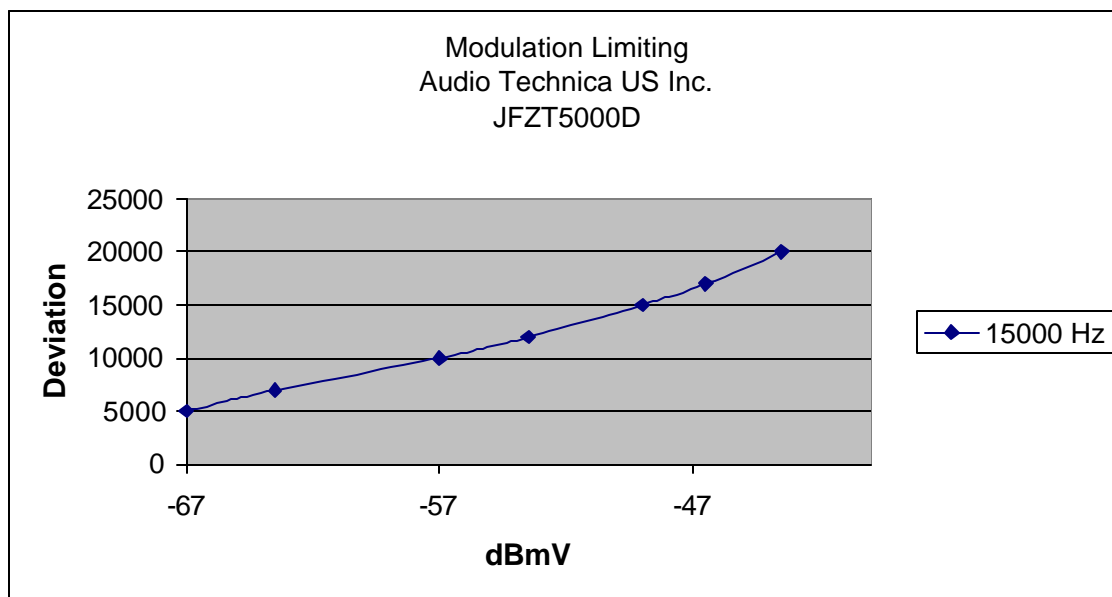

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT5000D

REPORT #: T:\A\AudioTechnica_JFZ\660UT22\660UT22TestReport.doc

2.1049(c)


Occupied Bandwidth:

Data in the plots show that all sidebands between 50 & 100% for the authorized bandwidth are attenuated by at least 25dB. From 100 to 250% of the authorized bandwidth they are attenuated by at least 35dB and beyond 250% $43 \log(P_o)$ dB. The plot shows the transmitter modulated with 15000 Hz (the highest modulation frequency), adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the unmodulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth plots follow.

Wireless Microphone transmitter:

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

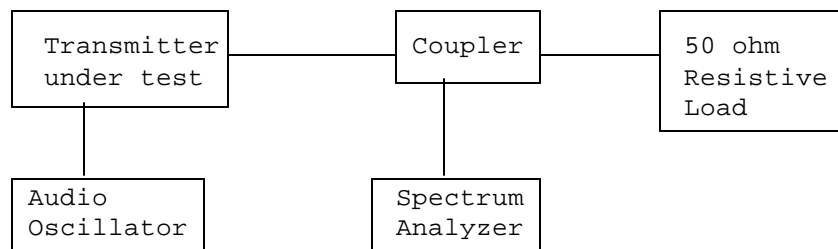

REQUIREMENT: PART 74: 200kHz EMISSION BANDWIDTH.


APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT5000D

REPORT #: T:\A\AudioTechnica_JFZ\660UT22\660UT22TestReport.doc

Page 8 of 17

OCCUPIED BANDWIDTH PLOT

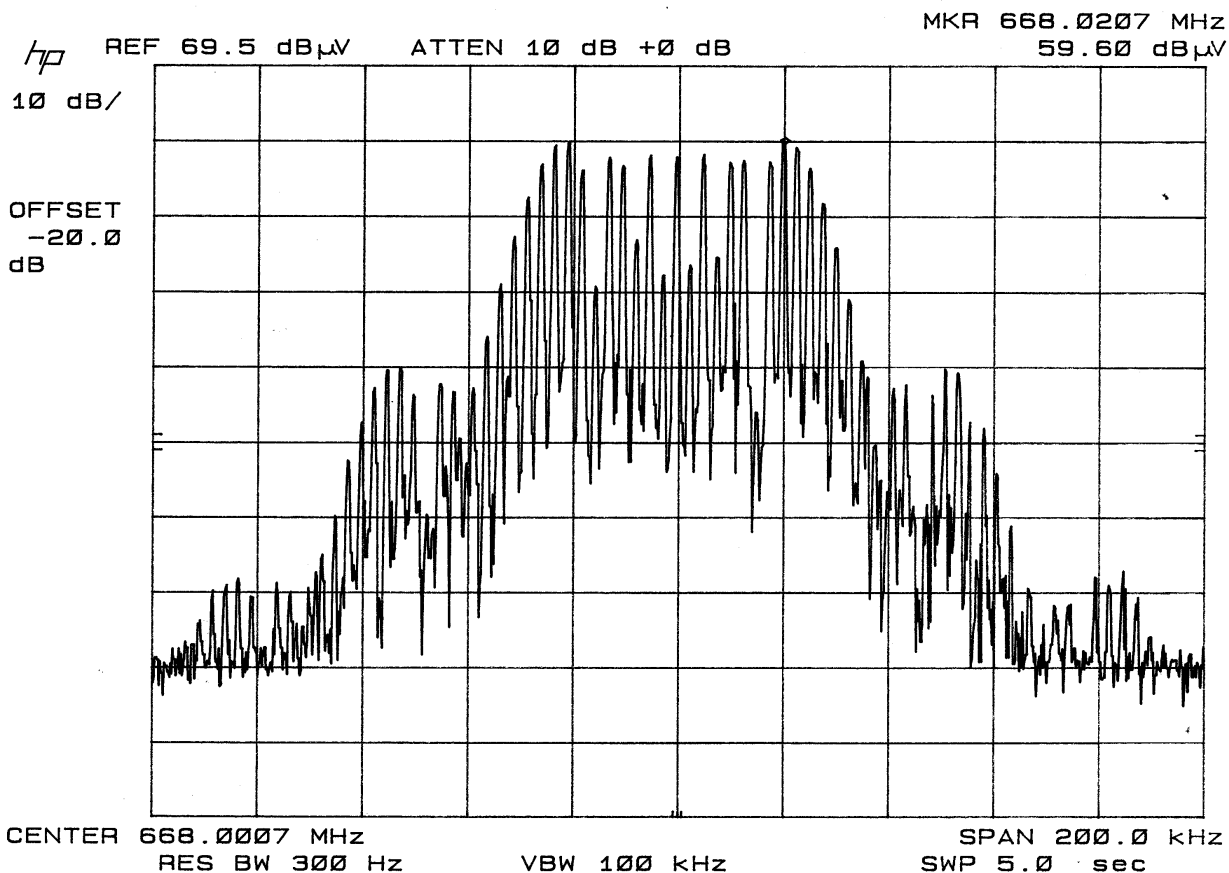


APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT5000D

REPORT #: T:\A\AudioTechnica_JFZ\660UT22\660UT22TestReport.doc

OCCUPIED BANDWIDTH PLOT - CW

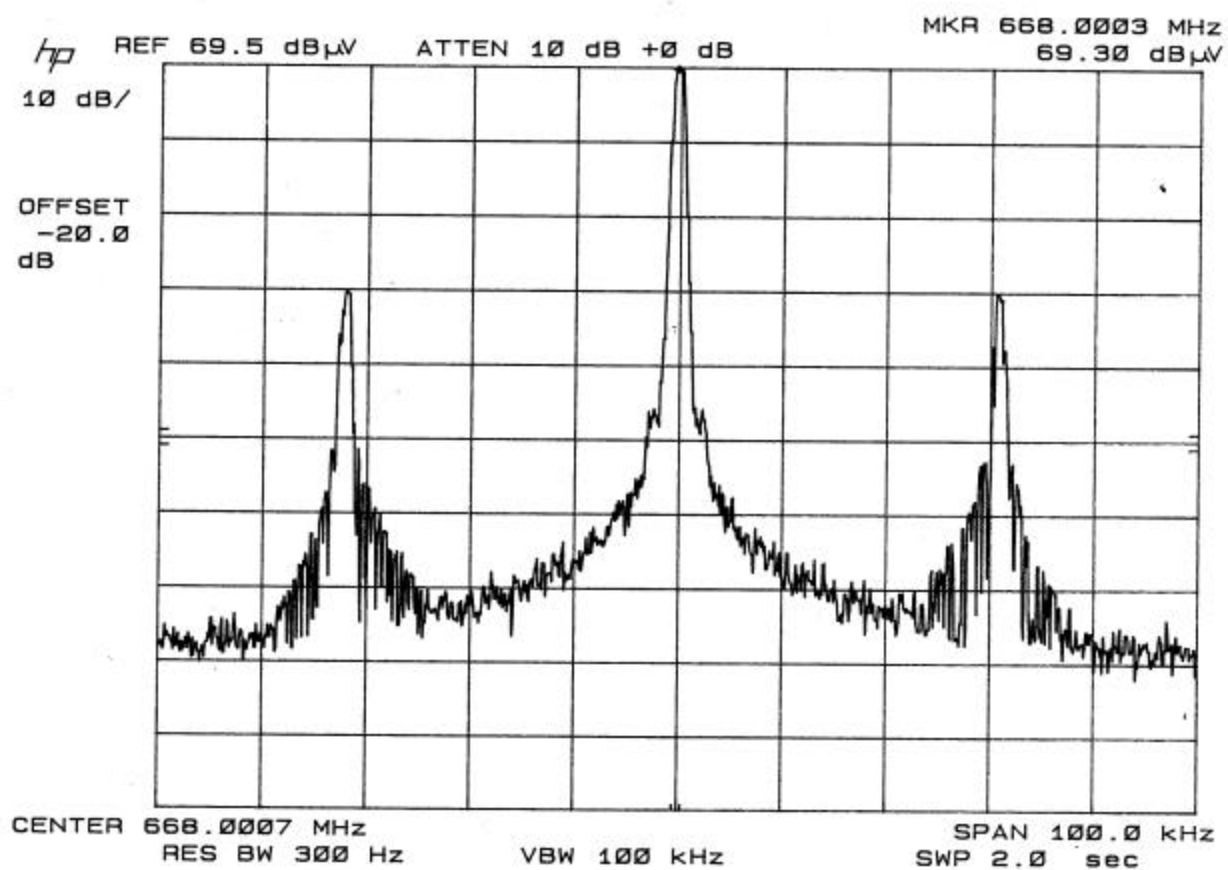

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT5000D

REPORT #: T:\A\AudioTechnica_JFZ\660UT22\660UT22TestReport.doc

2.1051 Spurious emissions at antenna terminals(conducted):
Not Applicable no antenna connector.

2.1053(a)(b) Field strength of spurious emissions:

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Emissions must be 43 +10log(Po) dB below the
mean power output of the transmitter.

HIGH - 43 + 10 log(.004) = 19.02 dB

LOW - 43 + 10 log(.001) = 13.00 dB

TEST DATA:

Emission Frequency MHz	ATTN dBc
HIGH POWER	
668.00	0.00
1,336.00	46.40
2,004.00	51.70
2,672.00	48.70
3,340.00	50.20
4,008.00	45.70
4,676.00	47.30
5,344.00	55.50
6,012.00	48.20
LOW POWER	
668.10	0.00
1,336.00	39.50
2,004.00	44.20
2,672.00	48.90
3,340.00	45.40
4,008.00	43.60
4,676.00	45.70
5,344.00	51.60
6,012.00	43.80


METHOD OF MEASUREMENT: The procedure used was TIA/EIA STANDARD 603.
The spectrum was scanned from 30 to at least the tenth harmonic of the
fundamental using a HP model 8566B spectrum analyzer and an appro-
priate antenna. Measurements were made at the open field test site of
TIMCO ENGINEERING INC. located at 849 NW SR 45 Newberry, Florida
32669.

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT5000D

REPORT #: T:\A\AudioTechnica_JFZ\660UT22\660UT22TestReport.doc

Method of Measuring Radiated Spurious Emissions

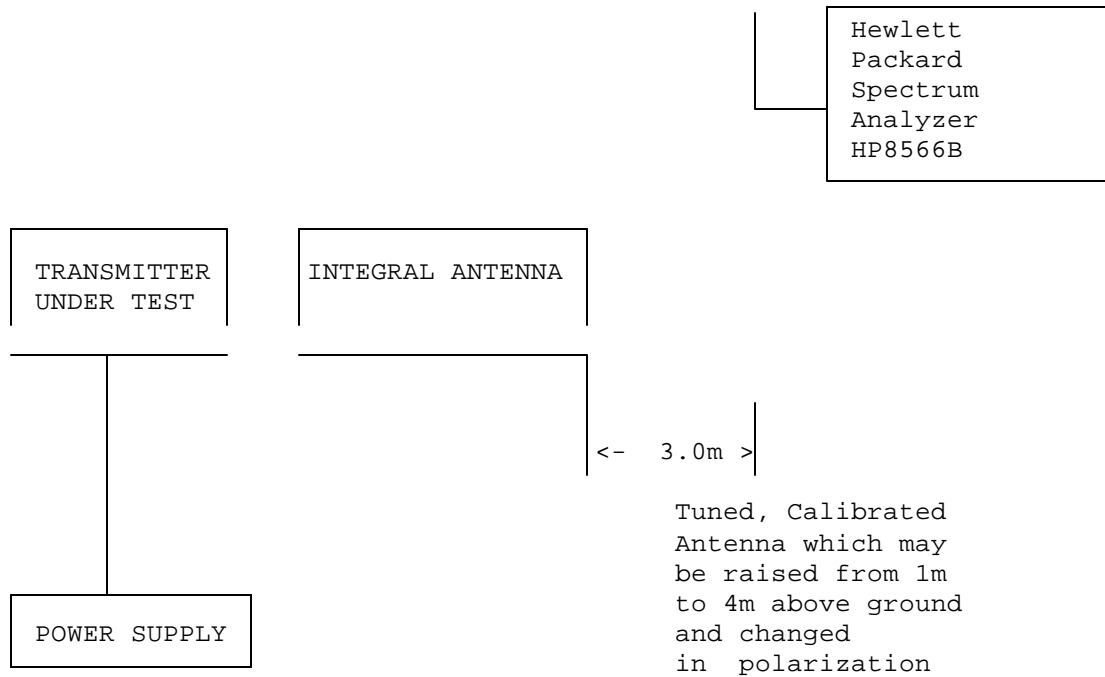

Equipment placed 80cm above ground on a rotatable platform.

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT5000D

REPORT #: T:\A\AudioTechnica_JFZ\660UT22\660UT22TestReport.doc

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT5000D

REPORT #: T:\A\AudioTechnica_JFZ\660UT22\660UT22TestReport.doc

Page 13 of 17

2.1055 Frequency stability:
S74.861(e)(4)

Temperature and voltage tests were performed to verify that the frequency remains within the .0050%, (50 ppm) (74.861 e.4) specification limit.

The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15-second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15-second intervals. The worst-case number was recorded for temperature plotting. This procedure was repeated in 10-degree increments up to + 50 degrees C.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 668.003 197

TEMPERATURE °C	FREQUENCY MHz	PPM
-30	668.018 432	22.81
-20	668.018 704	23.21
-10	668.017 363	21.21
0	668.014 842	17.43
10	668.011 685	12.71
20	668.006 282	4.62
30	668.000 084	- 4.66
40	667.994 072	-13.66
50	667.988 923	-21.37

25c END BATT. Volt(2.5)= 2.55VDC 668.003 335 + 0.21

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was -21.37 to +22.81 ppm. The maximum frequency variation over the voltage range was +0.40 ppm.

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT5000D

REPORT #: T:\A\AudioTechnica_JFZ\660UT22\660UT22TestReport.doc

Equipment List

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
X	3-Meter OATS	TEI	N/A	N/A	Listed 12/22/99	12/22/02
	3/10-Meter OATS	TEI	N/A	N/A	Listed 3/26/01	3/26/04
X	Receiver, Beige Tower					
X	Spectrum Analyzer (Tan)	HP	8566B Opt 462	3138A07786 3144A20661	CAL 8/31/01	8/31/02
X	RF Preselector (Tan)	HP	85685A	3221A01400	CAL 8/31/01	8/31/02
X	Quasi-Peak Adapter (Tan)	HP	85650A	3303A01690	CAL 8/31/01	8/31/02
	Receiver, Blue Tower					
	Spectrum Analyzer (Blue)	HP	8568B	2928A04729 2848A18049	CHAR 10/22/01	10/22/02
	RF Preselector (Blue)	HP	85685A	2926A00983	CHAR 10/22/01	10/22/02
	Quasi-Peak Adapter (Blue)	HP	85650A	2811A01279	CHAR 10/22/01	10/22/02
	Biconnical Antenna	Electro-Metrics	BIA-25	1171	CAL 4/26/01	4/26/03
X	Biconnical Antenna	Eaton	94455-1	1096	CAL 10/1/01	10/1/02
	Biconnical Antenna	Eaton	94455-1	1057	CHAR 3/15/00	3/15/01
	BiconiLog Antenna	EMCO	3143	9409-1043		
X	Log-Periodic Antenna	Electro-Metrics	LPA-25	1122	CAL 10/2/01	10/2/02
	Log-Periodic Antenna	Electro-Metrics	EM-6950	632	CHAR 10/15/01	10/15/02
	Log-Periodic Antenna	Electro-Metrics	LPA-30	409	CHAR 10/16/01	10/16/02
	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	152	CAL 3/21/01	3/21/02
	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 11/24/00	11/24/01

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT5000D

REPORT #: T:\A\AudioTechnica_JFZ\660UT22\660UT22TestReport.doc

	Double-Ridged Horn Antenna	Electro-Metrics	RGA-180	2319	CAL 12/19/01	12/19/02
	Horn Antenna	Electro-Metrics	EM-6961	6246	CAL 3/21/01	3/21/02
	Horn Antenna	ATM	19-443-6R	None	No Cal Required	
	Passive Loop Antenna	EMC Test Systems	EMCO 6512	9706-1211	CHAR 7/10/01	7/10/02
	Line Impedance Stabilization . . .	Electro-Metrics	ANS-25/2	2604	CAL 10/9/01	10/9/02
	Line Impedance Stabilization . . .	Electro-Metrics	EM-7820	2682	CAL 3/16/01	3/16/02
	Termaline Wattmeter	Bird Electronic Corporation	611	16405	CAL 5/25/99	(5/25/00)
	Termaline Wattmeter	Bird Electronic Corporation	6104	1926	CAL 12/12/01	12/12/02
	Oscilloscope	Tektronix	2230	300572	CHAR 2/1/01	2/1/02
X	Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 1/22/02	1/22/03
X	AC Voltmeter	HP	400FL	2213A14499	CAL 10/9/01	10/9/02
	AC Voltmeter	HP	400FL	2213A14261	CHAR 10/15/01	10/15/02
	AC Voltmeter	HP	400FL	2213A14728	CHAR 10/15/01	10/15/02
X	Digital Multimeter	Fluke	77	35053830	CHAR 1/8/02	1/8/03
	Digital Multimeter	Fluke	77	43850817	CHAR 1/8/02	1/8/03
	Digital Multimeter	HP	E2377A	2927J05849	CHAR 1/8/02	1/8/03
	Multimeter	Fluke	FLUKE-77-3	79510405	CAL 9/26/01	9/26/02
	Peak Power Meter	HP	8900C	2131A00545	CHAR 1/26/01	1/26/02
	Digital Thermometer	Fluke	2166A	42032	CAL 1/16/02	1/16/03
	Thermometer	Traulsen	SK-128		CHAR 1/22/02	1/22/03

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT5000D

REPORT #: T:\A\AudioTechnica_JFZ\660UT22\660UT22TestReport.doc

X	Temp/Humidity gauge	EXTech	44577F	E000901	CHAR 1/22/02	1/22/03
	Frequency Counter	HP	5352B	2632A00165	CAL 11/28/01	11/28/02
	Power Sensor	Agilent Technologies	84811A	2551A02705	CAL 1/26/01	1/26/02
	Injection Probe	Fischer Custom Communications	F-120-9A	270	CAL 6/1/01	6/1/02
	Service Monitor	IFR	FM/AM 500A	5182	CAL 11/22/00	11/22/01
	Comm. Serv. Monitor	IFR	FM/AM 1200S	6593	CAL 11/12/99	11/12/00
	Signal Generator	HP	8640B	2308A21464	CAL 11/15/01	11/15/02
	Modulation Analyzer	HP	8901A	3435A06868	CAL 9/5/01	9/5/02
	Power Line Coupling/ Decoupling Network	Fischer Custom Communications	FCC-801- M2-16A	01048	CAL 8/29/01	8/29/02
	Power Line Coupling/ Decoupling Network	Fischer Custom Communications	FCC-801- M3-16A	01060	CAL 8/29/01	8/29/02
	VHF/UHF Current Probe	Fischer Custom Communications	F-52	130	CAL 8/30/01	8/30/02
	Passive Impedance Adapter	Fischer Custom Communications	FCC-801- 150-50-CDN	01117 & 01118	CAL 8/29/01	8/29/02
	Radiating Field Coil	Fischer Custom Communications	F-1000-4- 8/9/10-L-1M	9859	CAL 10/15/98	10/15/99
	Near Field Probe	HP	HP11940A	2650A02748	CHAR 2/1/01	2/1/02
	BandReject Filter	Lorch Microwave	5BR4-2400/ 60-N	Z1	CHAR 3/2/01	3/2/02
	BandReject Filter	Lorch Microwave	6BR6-2442/ 300-N	Z1	CHAR 3/2/01	3/2/02
	BandReject Filter	Lorch Microwave	5BR4-10525/ 900-S	Z1	CHAR 3/2/01	3/2/02
	High Pas Filter	Microlab	HA-10N		CHAR 10/4/01	10/4/02
	Audio Oscillator	HP	653A	832-00260	CHAR 3/1/01	3/1/02

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT5000D

REPORT #: T:\A\AudioTechnica_JFZ\660UT22\660UT22TestReport.doc

	Frequency Counter	HP	5382A	1620A03535	CHAR 3/2/01	3/2/02
	Frequency Counter	HP	5385A	3242A07460	CHAR 12/11/01	12/11/02
	Preamplifier	HP	8449B-H02	3008A00372	CHAR 3/4/01	3/4/02
	Amplifier	HP	11975A	2738A01969	CHAR 3/1/01	3/1/02
	Egg Timer	Unk			CHAR 2/28/01	2/28/02
	Measuring Tape, 20M	Kraftixx	0631-20		CHAR 2/28/01	2/28/02
	Measuring Tape, 7.5M	Kraftixx	7.5M PROFI		CHAR 2/28/01	2/28/02
	EMC Immunity Test System	Keytek	CEMASTER	9810210		
	AC Power Source	California Instruments	1251RP	L05865		
	AC Power Source	California Instruments	PACS-1	X71484		
	Isotropic Field Probe	Amplifier Research	FP5000	22839		
	Isotropic Field Probe	Amplifier Research	FP5000	300103		
	Capacitor Clamp	Keytek	CM-CCL	9811359	No Cal Required	
	Amplifier	Amplifier Research	10W1000B	23117	No Cal Required	
	Field Monitor	Amplifier Research	FM5004	22288	No Cal Required	
	ELF Meter	F. W. Bell	4060	Not serialized		
	Coaxial Cable #51	Insulated Wire Inc.	NPS 2251-2880	Timco #51	CHAR 1/23/02	1/23/03
	Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 1/24/02	1/24/03
	Coaxial Cable #65	General Cable Co.	E9917 RG233/U	Timco #65	CHAR 1/23/02	1/23/03
	Coaxial Cable #106	Unknown	Unknown	Timco #106	CHAR 1/23/02	1/23/03

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT5000D

REPORT #: T:\A\AudioTechnica_JFZ\660UT22\660UT22TestReport.doc