



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 1 of 227

TEST REPORT

Application No.: KSCR2311002105AT
FCC ID: WAP829I10
IC: 7922A-829I10
Applicant: Cypress Semiconductor
Address of Applicant: 198 Champion Ct, San Jose, California 95134, United States
Manufacturer: Cypress Semiconductor
Address of Manufacturer: 198 Champion Ct, San Jose, California 95134, United States
Factory: FITTEC ELECTRONICS (Suzhou) CO., LTD.
Address of Factory: No. 29, Donfu Road, Loufeng East District, Suzhou Industrial Park, Suzhou, Jiangsu Province, P.R.China
Equipment Under Test (EUT):
EUT Name: AIROC Bluetooth LE Module
Model No.: CYW20829B0-P4TAI100, CYW20829B0S-P4TAI100,
CYW20829B0-P4EPI100, CYW20829B0S-P4EPI100 ♣
♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Trade Mark: INFINEON
Standard(s) : 47 CFR Part 15, Subpart C 15.247
RSS-247 Issue 2, February 2017
RSS-Gen Issue 5 Amendment 2 (February 2021)
Date of Receipt: 2023-11-21
Date of Test: 2023-12-01 to 2023-12-12
Date of Issue: 2023-12-12

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 2 of 227

Revision Record			
Version	Description	Date	Remark
00	Original	2023-12-12	/

Authorized for issue by:				
Tested By				
		Eric_Liu/Project Engineer		
Approved By				
		Terry Hou /Reviewer		



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 3 of 227

2 Test Summary

Radio Spectrum Technical Requirement				
Item	FCC Requirement	IC Requirement	Method	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	RSS-Gen Clause 6.8	N/A	Customer Declaration

N/A: Not applicable

Radio Spectrum Matter Part				
Item	FCC Requirement	IC Requirement	Method	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.207	RSS-Gen Clause 8.8	ANSI C63.10 (2013) Section 6.2	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247a(2)	RSS-247 Clause 5.2(a)	ANSI C63.10 (2013) Section 11.8.1	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247(b)(3)	RSS-247 Clause 5.4(d)	ANSI C63.10 (2013) Section 11.9.1	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247(e)	RSS-247 Clause 5.2(b)	ANSI C63.10 (2013) Section 11.10.2	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Clause 5.5	ANSI C63.10 (2013) Section 11.13.3.2	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Clause 5.5	ANSI C63.10 (2013) Section 11.11	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.10.5	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.4,6.5,6.6	Pass
99% Bandwidth	-	RSS-Gen Section 6.7	ANSI C63.10 Section 6.9.3	Pass

Only the model CYW20829B0-P4TAI100, CYW20829B0-P4EPI100 was tested.

The series of models mentioned in the report, CYW20829B0-P4TAI100 and CYW20829B0S-P4TAI100, support PCB antennas. CYW20829B0-P4EPI100 and CYW20829B0S-P4EPI100 support Dipole antennas. Their other electrical performance is the same. The module's part number has -S, means the device supports encrypted secure mode to improve the security with the same hardware.

3 Contents

	Page
1 COVER PAGE.....	1
2 Test Summary	3
3 Contents	4
4 General Information	5
4.1 Details of E.U.T.	5
4.2 Description of Support Units	5
4.3 Measurement Uncertainty	6
4.4 Test Location.....	7
4.5 Test Facility	7
4.6 Deviation from Standards	7
4.7 Abnormalities from Standard Conditions	7
5 Equipment List.....	8
6 Radio Spectrum Technical Requirement	10
6.1 Antenna Requirement	10
7 Radio Spectrum Matter Test Results	11
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	11
7.2 Conducted Peak Output Power.....	15
7.3 Minimum 6dB Bandwidth	17
7.4 Power Spectrum Density	19
7.5 Conducted Band Edges Measurement.....	21
7.6 Conducted Spurious Emissions	23
7.7 Radiated Emissions which fall in the restricted bands.....	25
7.8 Radiated Spurious Emissions Below 1GHz	66
7.9 Radiated Spurious Emissions Above 1GHz.....	70
7.10 99% Bandwidth	120
8 Test Setup Photo	121
9 EUT Constructional Details (EUT Photos)	121
10 Appendix	122



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 5 of 227

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 3.3V
Operation Frequency:	2402MHz to 2480MHz
Modulation Type:	GFSK
Number of Channels:	40
Channel Spacing:	2MHz
Antenna Type:	Dipole Antenna; PCB Antenna
Antenna Gain:	Dipole Antenna: 2.0dBi (Provided by the manufacturer) PCB Antenna: -0.5dBi (Provided by the manufacturer)

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
AC Adapter	HONOTO	ADS-12FG-12N 12012EPG	/
Notebook	LENOVO	K27	EB24537645

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 6 of 227

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-18GHz)
		5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%
Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.		

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 7 of 227

4.4 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

• FCC

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

• ISED

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

• VCCI

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 8 of 227

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
Conducted Emission at Mains Terminals (150kHz-30MHz)						
1	EMI Test Receive	R&S	ESCI	KS301101	02/03/2023	02/02/2024
2	LISN	R&S	ENV216	KS301197	01/17/2023	01/16/2024
3	LISN	Schwarzbeck	NNLK 8129	KS301091	01/17/2023	01/16/2024
4	Pulse Limiter	R&S	ESH3-Z2	KUS1902E001	01/17/2023	01/16/2024
5	CE test Cable	Thermax	/	CZ301102	01/17/2023	01/16/2024
6	Test Software	Farad	EZ-EMC	/	N.C.R	N.C.R
RF Conducted Test						
1	Spectrum Analyzer	Keysight	N9020A	KUS1911E004-2	08/24/2023	08/23/2024
2	Spectrum Analyzer	Keysight	N9020A	KUS2001M001-2	08/24/2023	08/23/2024
3	Spectrum Analyzer	Keysight	N9030B	KSEM021-1	02/03/2023	02/02/2024
4	Signal Generator	R&S	SMBV100B	KSEM032	03/16/2023	03/15/2024
5	Signal Generator	R&S	SMW200A	KSEM020-1	08/24/2023	08/23/2024
6	Signal Generator	Agilent	N5182A	KUS2001M001-1	08/24/2023	08/23/2024
7	Radio Communication Test Station	Anritsu	MT8000A	KSEM001-1	08/24/2023	08/23/2024
8	Radio Communication Analyzer	Anritsu	MT8821C	KSEM002-1	03/16/2023	03/15/2024
9	Universal Radio Communication Tester	R&S	CMW500	KUS1911E004-1	08/24/2023	08/23/2024
10	Switcher	CCSRF	FY562	KUS2001M001-3	08/24/2023	08/23/2024
11	AC Power Source	EXTECH	6605	KS301178	N.C.R	N.C.R
12	DC Power Supply	Aglient	E3632A	KS301180	N.C.R	N.C.R
13	Conducted Test Cable	Thermax	RF01-RF04	CZ301111-CZ301120	02/03/2023	02/02/2024
14	Temp. / Humidity Chamber	TERCHY	MHK-120AK	KS301190	08/24/2023	08/23/2024
15	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-5	03/22/2023	03/21/2024
16	Software	BST	TST-PASS	/	N/A	N/A
RF Radiated Test						
1	Spectrum Analyzer	R&S	FSV40	KUS1806E003	08/24/2023	08/23/2024
2	Universal Radio Communication Tester	R&S	CMW500	KSEM009-1	03/16/2023	03/15/2024
3	Signal Generator	Agilent	E8257C	KS301066	08/24/2023	08/23/2024
4	Loop Antenna	COM-POWER	AL-130R	KUS1806E001	03/18/2023	03/17/2025
5	Bilog Antenna	TESEQ	CBL 6112D	KUS1806E005	06/29/2023	06/28/2025
6	Bilog Antenna	SCHWARZBECK	VULB9160	CZ301016	04/13/2021	04/12/2024
7	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	KS301079	08/24/2023	08/23/2024
8	Horn-antenna(1-18GHz)	ETS-LINDGREN	3117	KS301186	02/21/2023	02/20/2024
9	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	CZ301058	02/26/2023	02/25/2024
10	Amplifier(30MHz~18GHz)	PANSHAN TECHNOLOGY	LNA:1~18G	KSEM010-1	01/17/2023	01/16/2024
11	Amplifier(18~40GHz)	COM-POWER	PAM-840A	KUS1710E001	01/21/2023	01/20/2024
12	RE Test Cable	REBES MICROWAVE	/	CZ301097	08/24/2023	08/23/2024
13	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-4	03/22/2023	03/21/2024



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 9 of 227

14	Software	Faratronic	EZ EMC-v 3A1	/	N/A	N/A
----	----------	------------	-----------------	---	-----	-----



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 10 of 227

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna1 is Dipole Antenna; antenna2 is PCB Antenna and no consideration of replacement. The best case gain of the Dipole antenna is 2.0dBi. PCB antenna is -0.5dBi.

Antenna location: Refer to internal photo.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.1 °C


Humidity: 55.3 % RH

Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	00	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
	01	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
	02	TX mode(125K)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
	03	TX mode(500K)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
	04	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
	05	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
	06	TX mode(125K)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
	07	TX mode(500K)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	00	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.

7.1.3 Test Setup Diagram

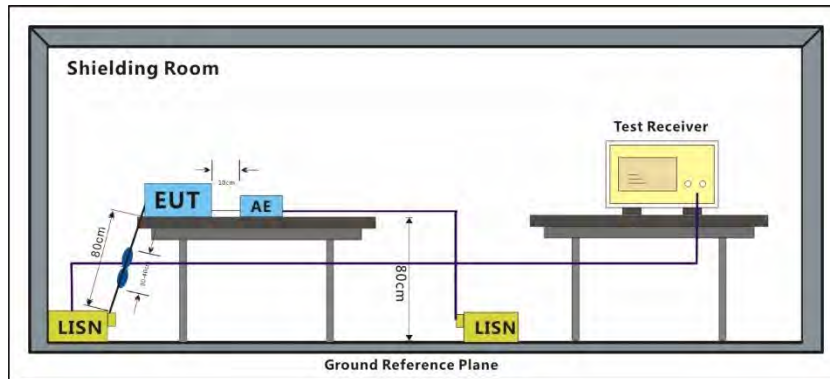

7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark1: Level=Read Level+ Cable Loss+ LISN Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 13 of 227

Test Mode: 00; Line: Live line

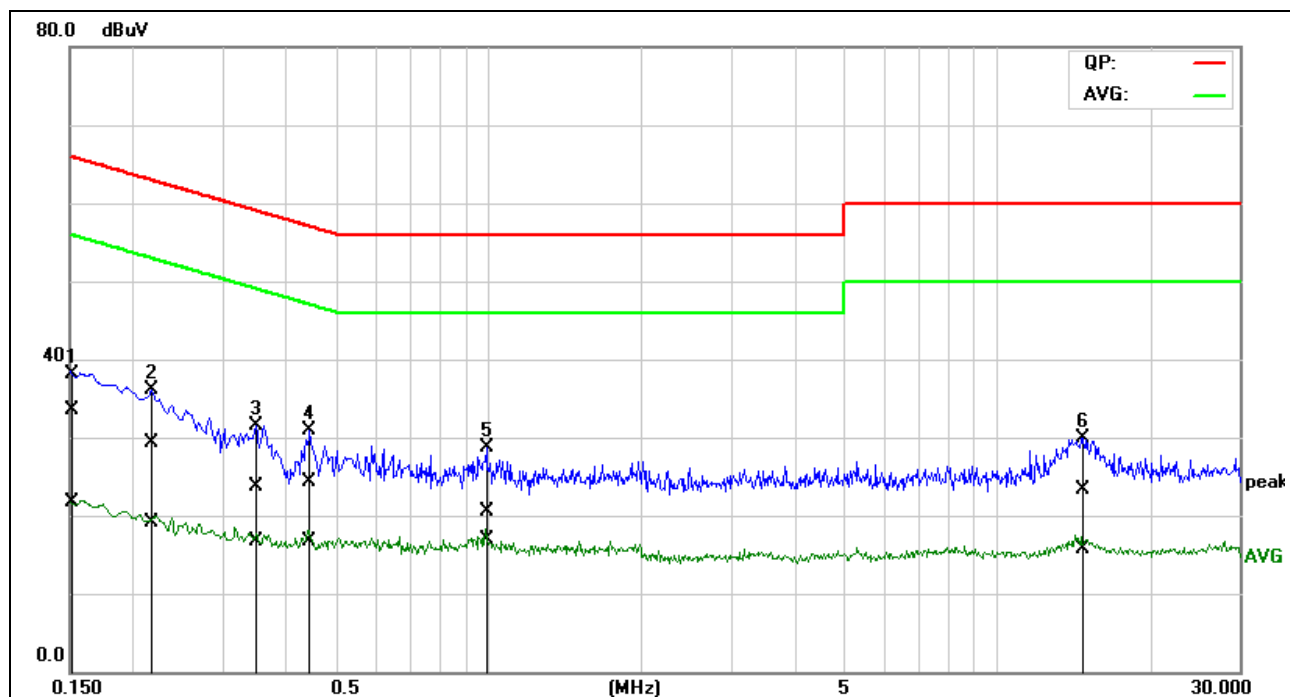

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1528	13.29	1.46	20.19	33.48	21.65	65.85	55.85	-32.37	-34.20	Pass
2	0.2171	9.22	-0.90	20.02	29.24	19.12	62.93	52.93	-33.69	-33.81	Pass
3	0.3520	3.68	-3.33	20.02	23.70	16.69	58.92	48.92	-35.22	-32.23	Pass
4	0.4471	4.28	-3.33	20.05	24.33	16.72	56.93	46.93	-32.60	-30.21	Pass
5*	0.9859	0.50	-3.08	19.91	20.41	16.83	56.00	46.00	-35.59	-29.17	Pass
6	14.7427	3.29	-4.23	19.95	23.24	15.72	60.00	50.00	-36.76	-34.28	Pass


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 14 of 227

Test Mode: 00; Line: Neutral Line

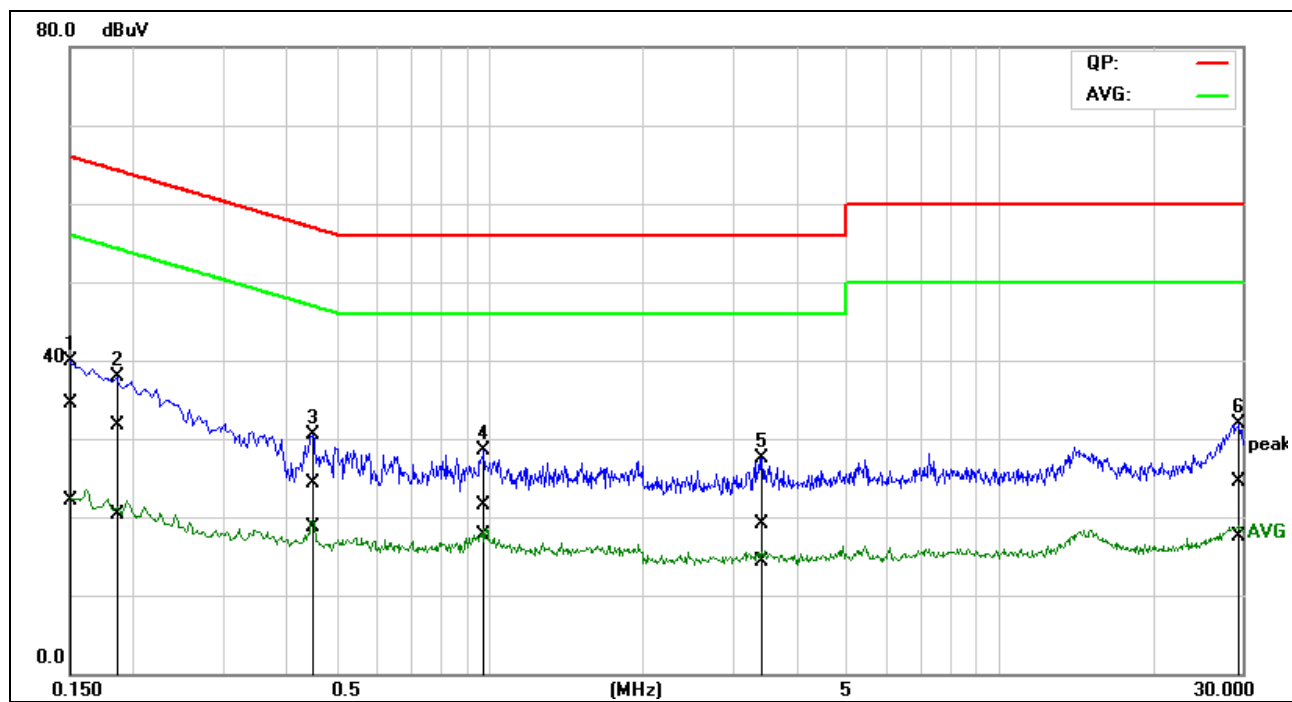

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1500	14.34	1.91	20.25	34.59	22.16	66.00	56.00	-31.41	-33.84	Pass
2	0.1855	11.55	0.22	20.17	31.72	20.39	64.24	54.24	-32.52	-33.85	Pass
3*	0.4498	4.14	-1.33	20.09	24.23	18.76	56.88	46.88	-32.65	-28.12	Pass
4	0.9821	1.55	-2.36	20.00	21.55	17.64	56.00	46.00	-34.45	-28.36	Pass
5	3.3728	-0.85	-5.66	19.98	19.13	14.32	56.00	46.00	-36.87	-31.68	Pass
6	29.4731	4.30	-2.74	20.26	24.56	17.52	60.00	50.00	-35.44	-32.48	Pass

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 15 of 227

7.2 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.1

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 25.2 °C

Humidity: 55.3 % RH

Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	01	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	02	TX mode(125K)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	03	TX mode(500K)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	04	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	05	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	06	TX mode(125K)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	07	TX mode(500K)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 16 of 227

7.2.3 Test Setup Diagram

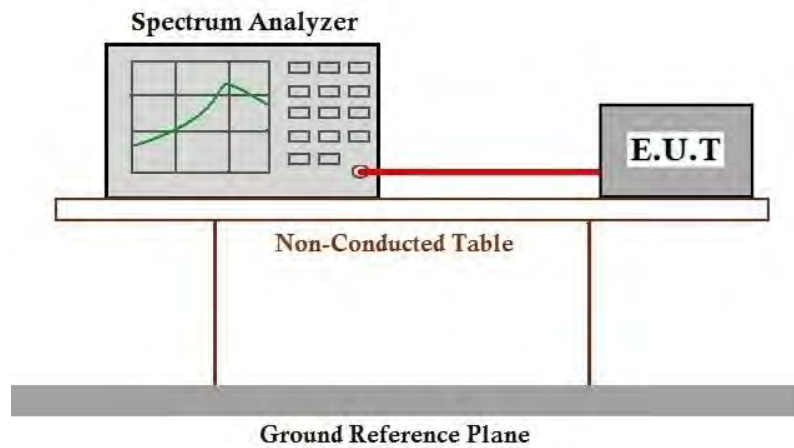

7.2.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.3 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)

Test Method: ANSI C63.10 (2013) Section 11.8.1

Limit:

≥500 kHz

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 25.1 °C


Humidity: 55.2 % RH

Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	01	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	02	TX mode(125K)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	03	TX mode(500K)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	04	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	05	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	06	TX mode(125K)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	07	TX mode(500K)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.

7.3.3 Test Setup Diagram

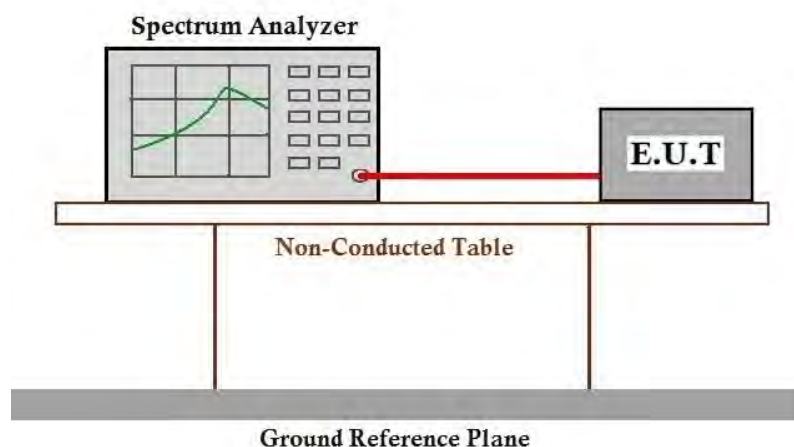



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 18 of 227

7.3.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.4 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 25.2 °C


Humidity: 55.4 % RH

Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	01	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	02	TX mode(125K)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	03	TX mode(500K)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	04	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	05	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	06	TX mode(125K)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	07	TX mode(500K)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.

7.4.3 Test Setup Diagram

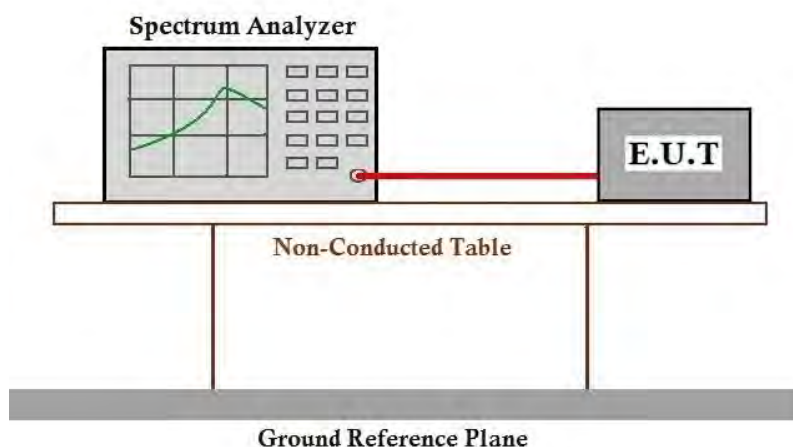



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 20 of 227

7.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 21 of 227

7.5 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25.1 °C


Humidity: 55.2 % RH

Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	01	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	02	TX mode(125K)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	03	TX mode(500K)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	04	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	05	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	06	TX mode(125K)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	07	TX mode(500K)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.

7.5.3 Test Setup Diagram

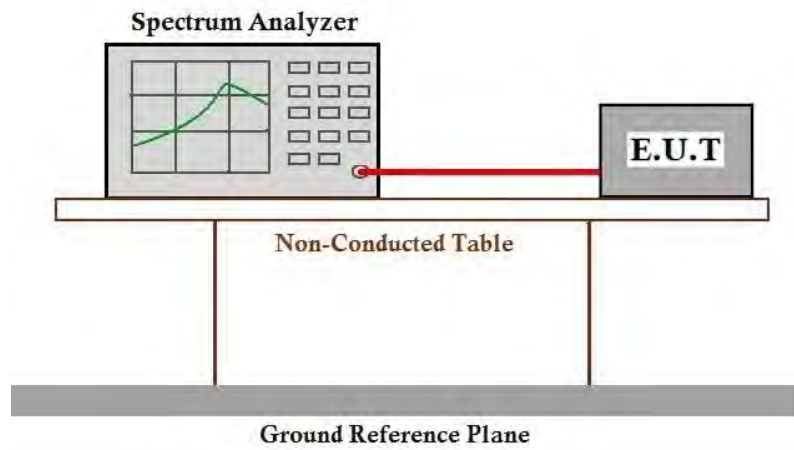

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 23 of 227

7.6 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.1 °C


Humidity: 55.3 % RH

Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	01	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	02	TX mode(125K)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	03	TX mode(500K)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	04	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	05	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	06	TX mode(125K)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	07	TX mode(500K)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.

7.6.3 Test Setup Diagram

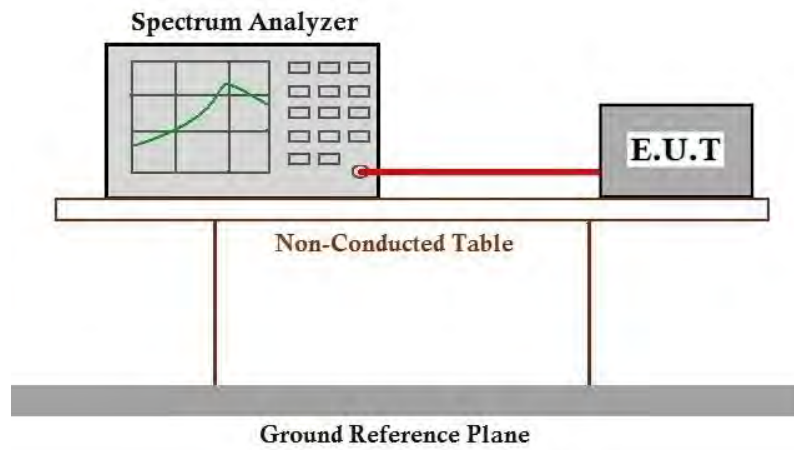

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 25 of 227

7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3M

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 20.6 °C


Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	01	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	02	TX mode(125K)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	03	TX mode(500K)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	04	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	05	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	06	TX mode(125K)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	07	TX mode(500K)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.

7.7.3 Test Setup Diagram

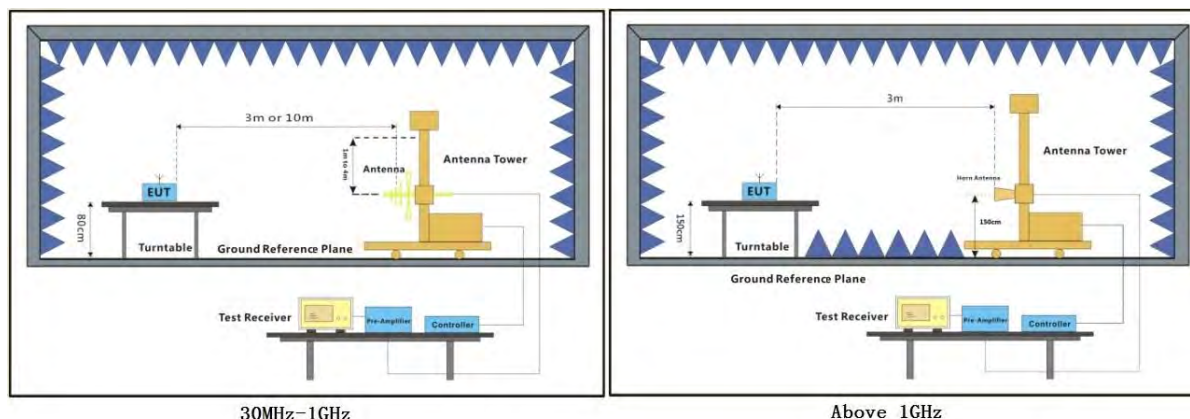

7.7.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 27 of 227

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

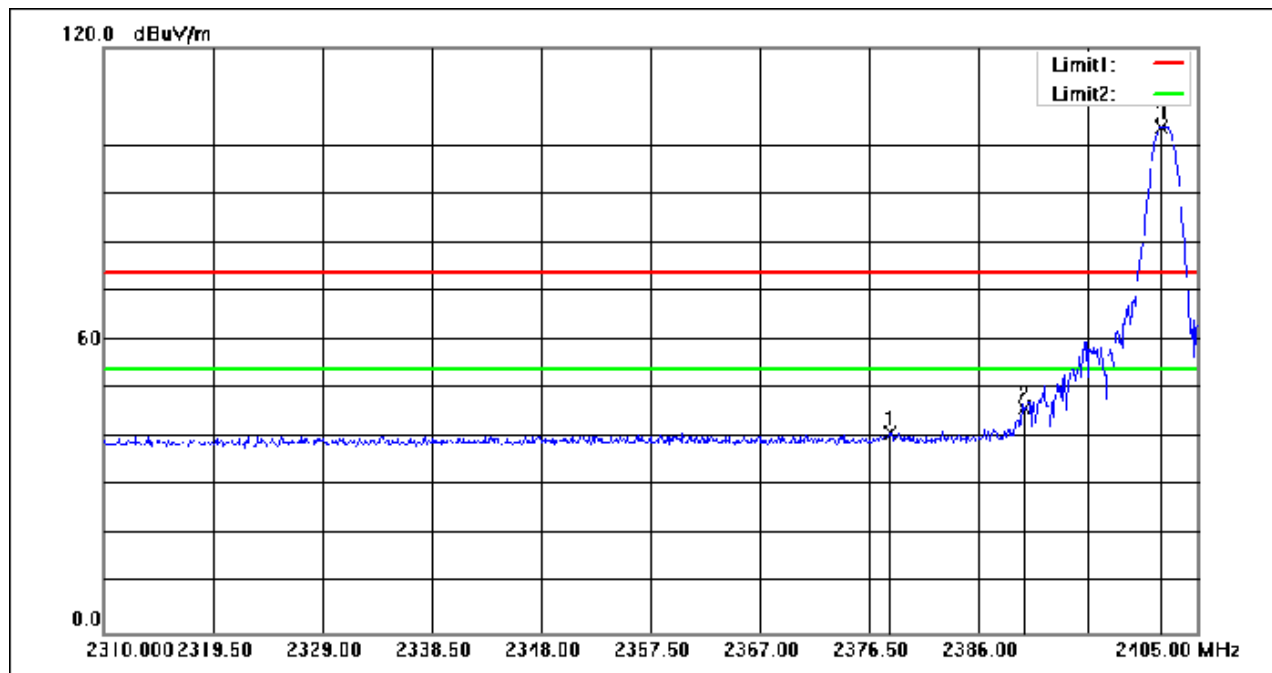

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2378.305	60.97	-19.95	41.02	74.00	-32.98	peak
2	2390.000	65.84	-19.92	45.92	74.00	-28.08	peak
3	2401.865	123.52	-19.89	103.63	74.00	29.63	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 28 of 227

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

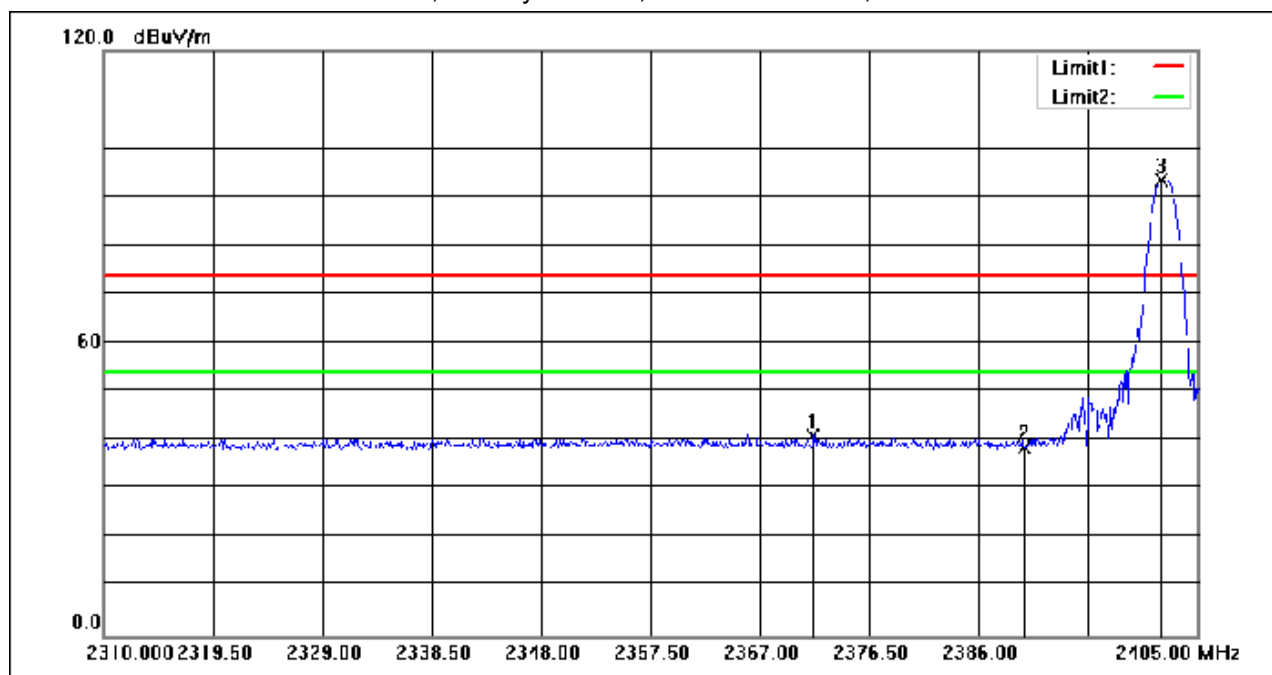

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2371.655	61.06	-19.96	41.10	74.00	-32.90	peak
2	2390.000	58.47	-19.92	38.55	74.00	-35.45	peak
3	2401.865	113.22	-19.89	93.33	74.00	19.33	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 29 of 227

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

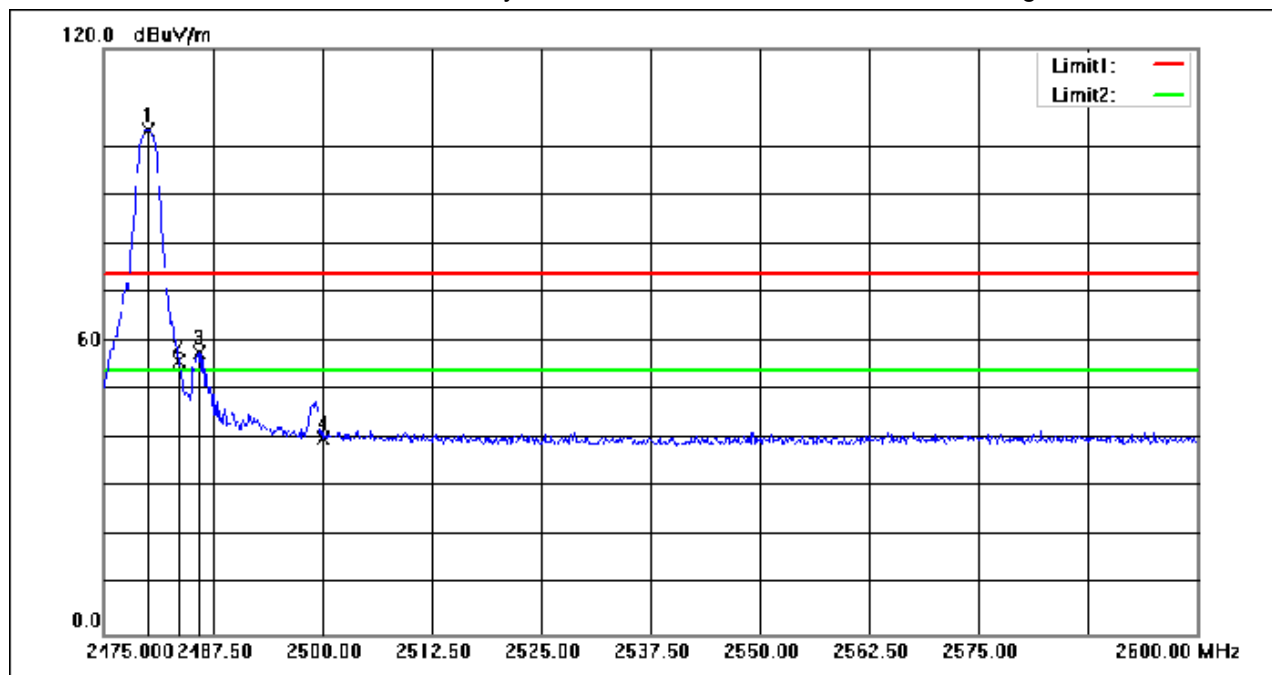

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	122.91	-19.59	103.32	74.00	29.32	peak
2	2483.500	75.65	-19.59	56.06	74.00	-17.94	peak
3	2485.875	77.26	-19.59	57.67	74.00	-16.33	peak
4	2500.000	59.62	-19.61	40.01	74.00	-33.99	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 30 of 227

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

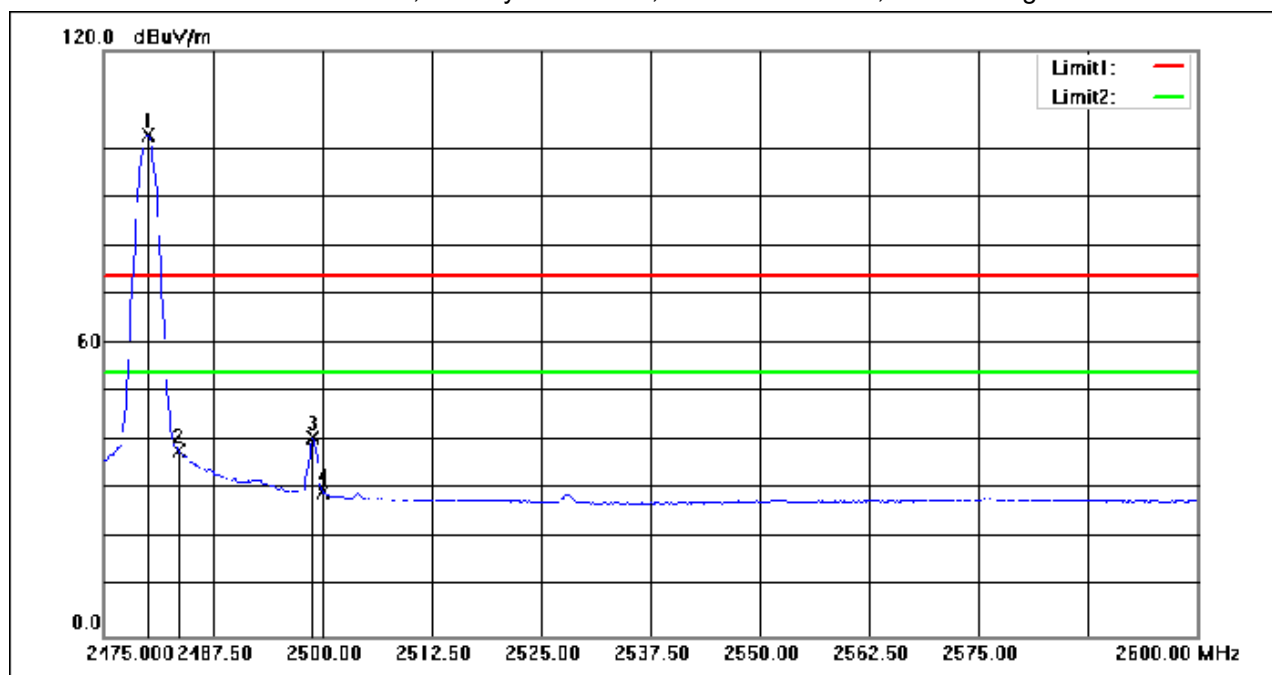

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	122.30	-19.59	102.71	54.00	48.71	AVG
2	2483.500	57.61	-19.59	38.02	54.00	-15.98	AVG
3	2498.875	60.17	-19.61	40.56	54.00	-13.44	AVG
4	2500.000	49.31	-19.61	29.70	54.00	-24.30	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 31 of 227

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

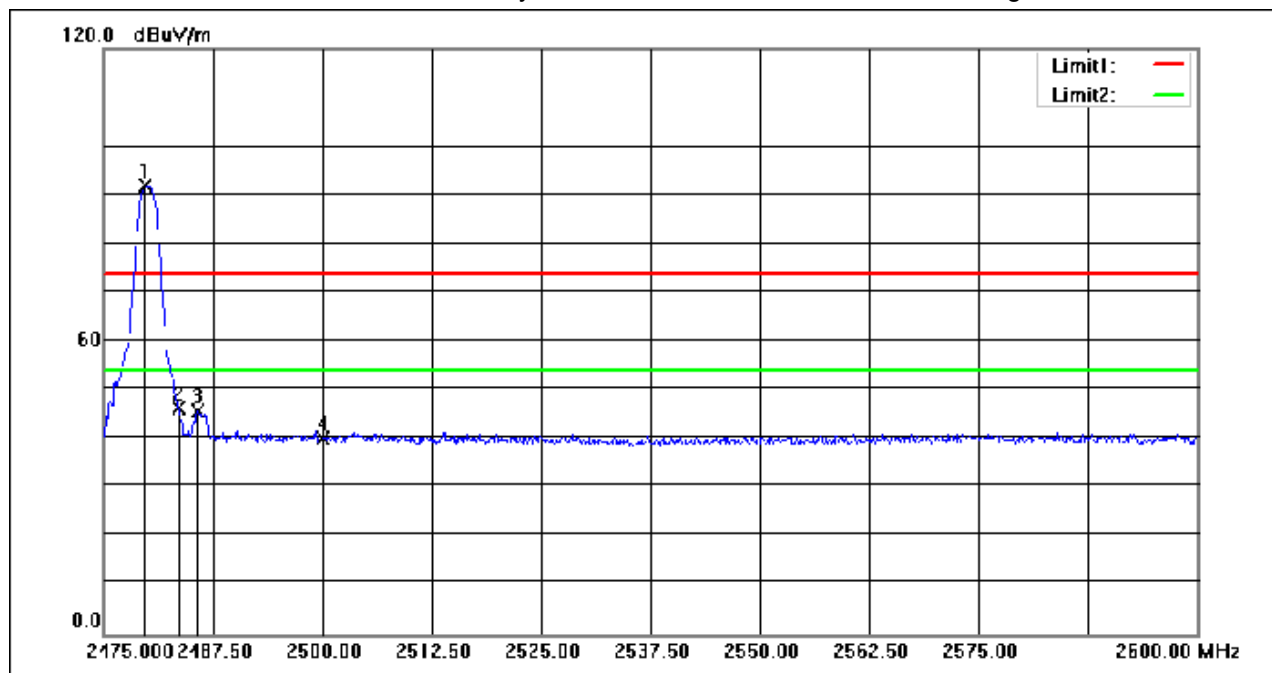

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.750	111.41	-19.59	91.82	74.00	17.82	peak
2	2483.500	66.00	-19.59	46.41	74.00	-27.59	peak
3	2485.750	65.36	-19.59	45.77	74.00	-28.23	peak
4	2500.000	59.77	-19.61	40.16	74.00	-33.84	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 32 of 227

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:Low

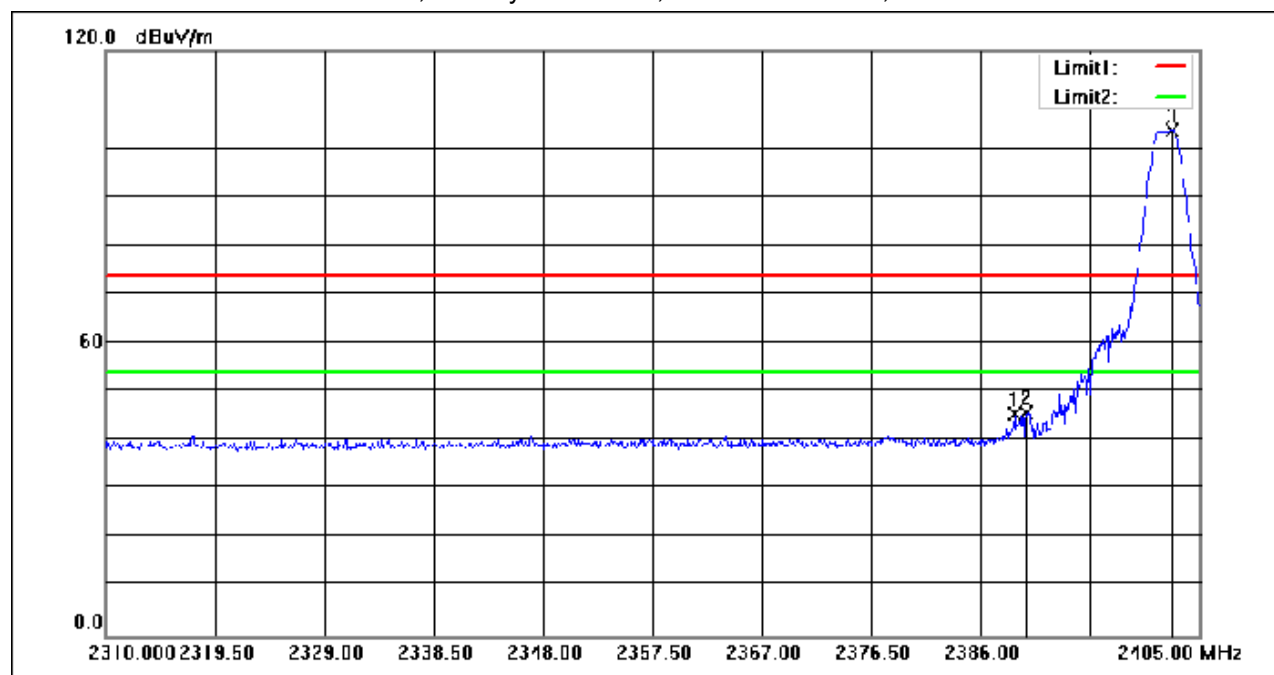

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.945	65.39	-19.92	45.47	74.00	-28.53	peak
2	2390.000	65.63	-19.92	45.71	74.00	-28.29	peak
3	2402.625	123.50	-19.88	103.62	74.00	29.62	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 33 of 227

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:Low

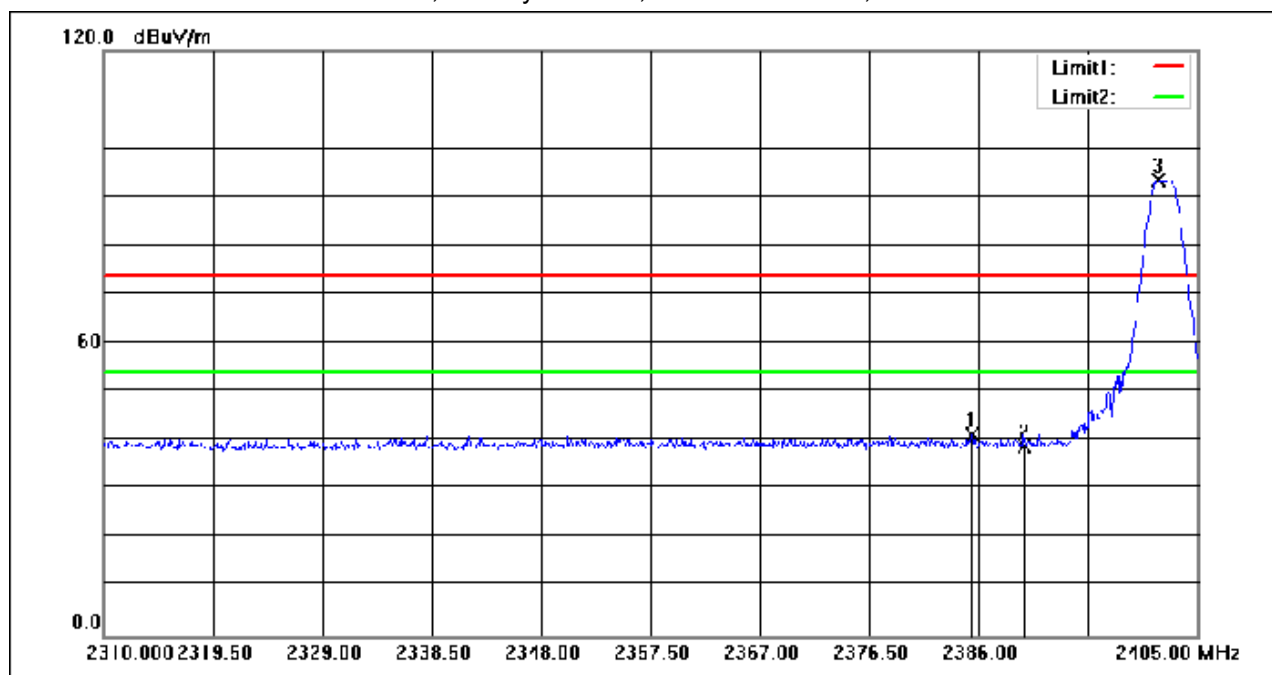

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.430	61.06	-19.94	41.12	74.00	-32.88	peak
2	2390.000	58.90	-19.92	38.98	74.00	-35.02	peak
3	2401.580	113.30	-19.89	93.41	74.00	19.41	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 34 of 227

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:High

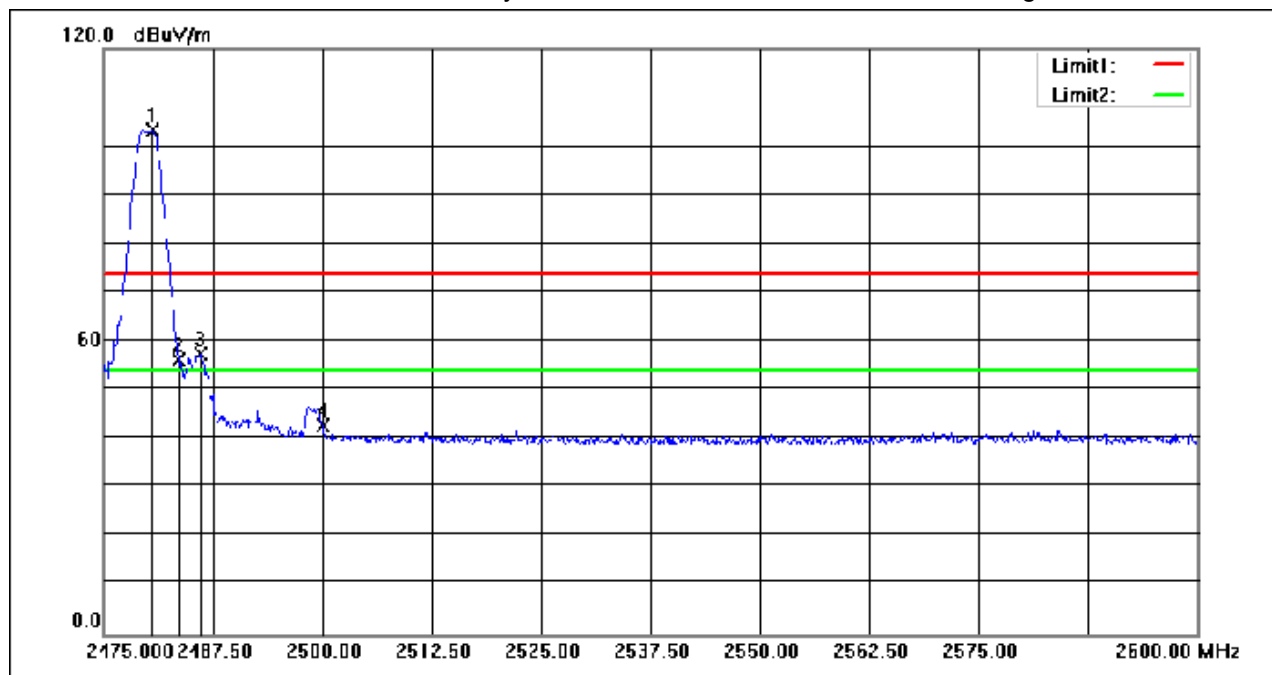

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.500	122.87	-19.59	103.28	74.00	29.28	peak
2	2483.500	75.78	-19.59	56.19	74.00	-17.81	peak
3	2486.125	76.93	-19.59	57.34	74.00	-16.66	peak
4	2500.000	62.42	-19.61	42.81	74.00	-31.19	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 35 of 227

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:High

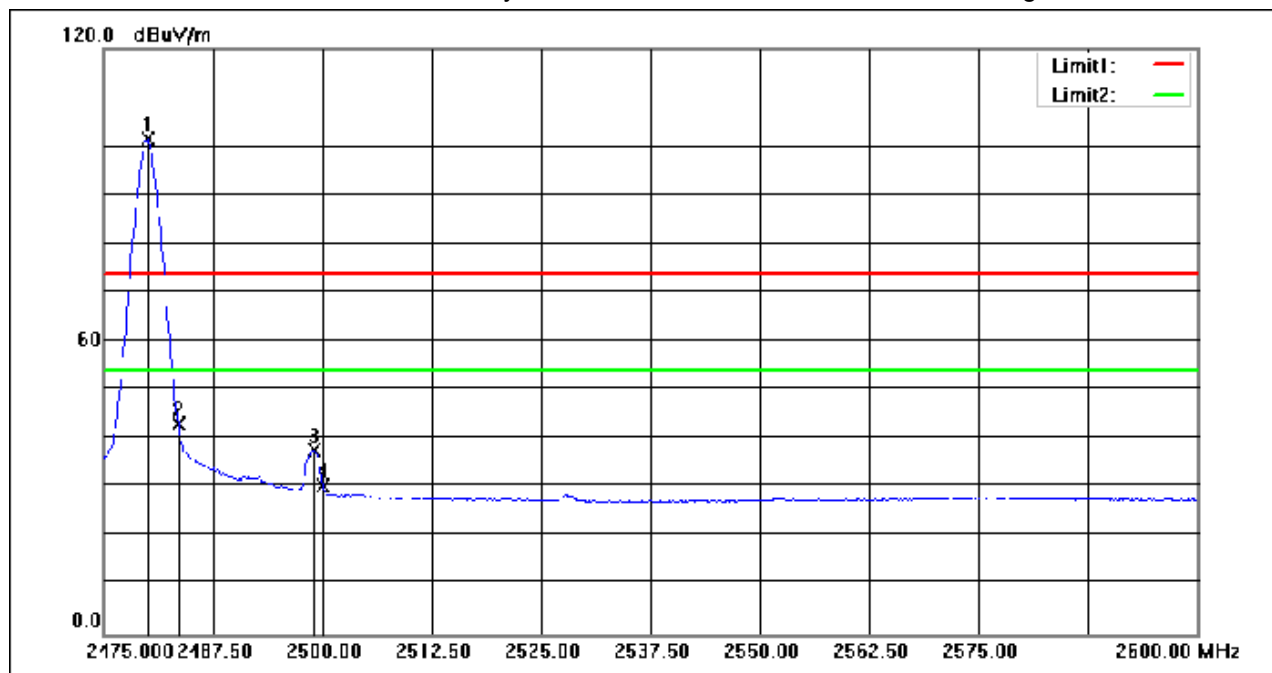

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	120.99	-19.59	101.40	54.00	47.40	AVG
2	2483.500	62.72	-19.59	43.13	54.00	-10.87	AVG
3	2499.000	57.33	-19.61	37.72	54.00	-16.28	AVG
4	2500.000	50.12	-19.61	30.51	54.00	-23.49	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 36 of 227

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:High

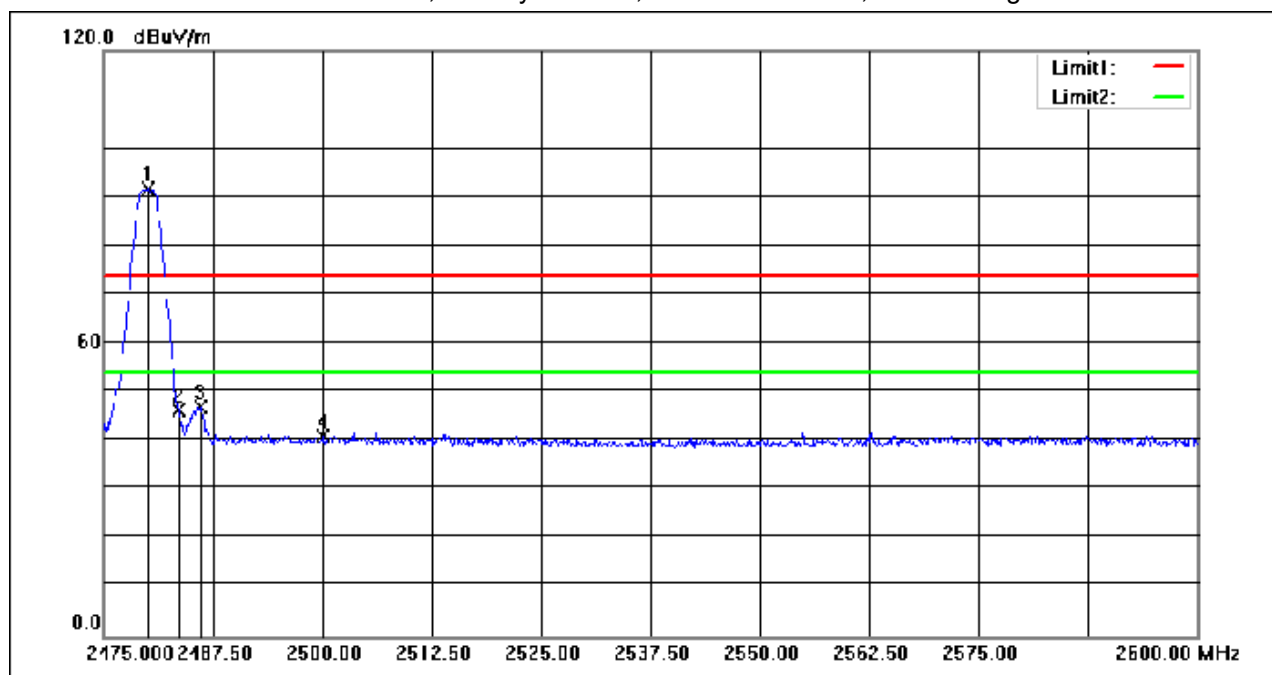

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	111.13	-19.59	91.54	74.00	17.54	peak
2	2483.500	65.88	-19.59	46.29	74.00	-27.71	peak
3	2486.000	66.60	-19.59	47.01	74.00	-26.99	peak
4	2500.000	60.61	-19.61	41.00	74.00	-33.00	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 37 of 227

Test Mode: 02; Polarity: Horizontal; Modulation:GFSK; Channel:Low

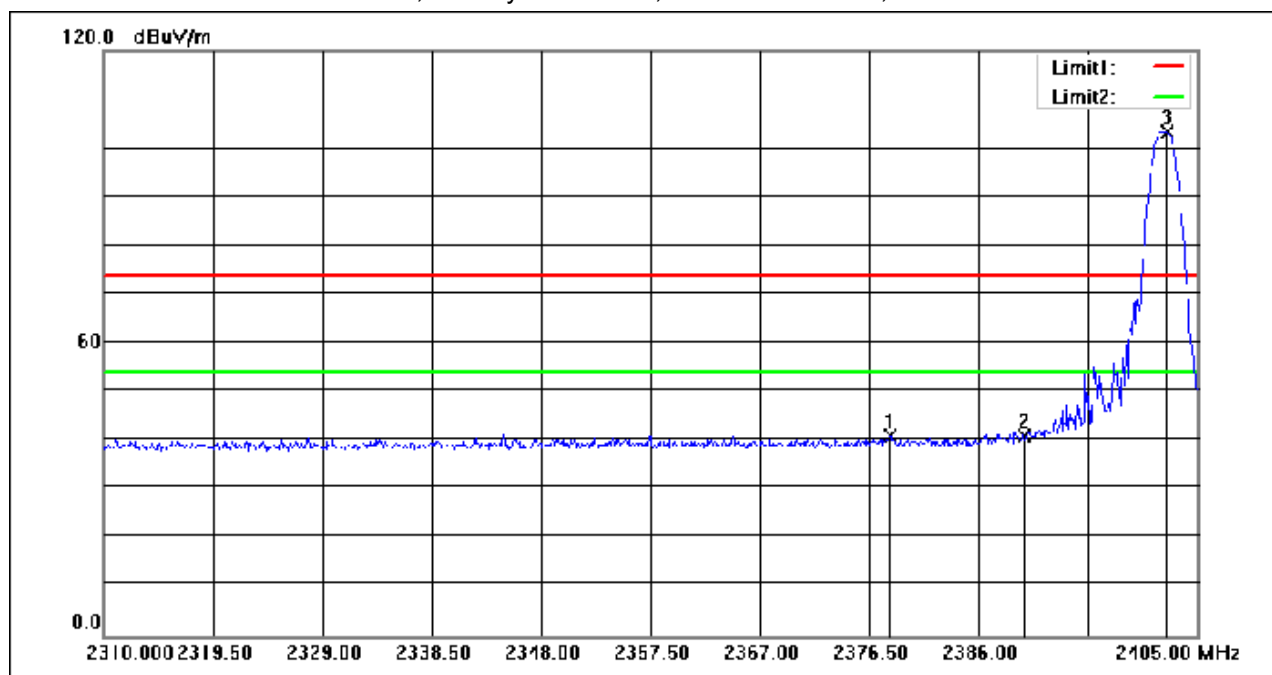

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2378.305	60.83	-19.95	40.88	74.00	-33.12	peak
2	2390.000	60.76	-19.92	40.84	74.00	-33.16	peak
3	2402.340	123.29	-19.89	103.40	74.00	29.40	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 38 of 227

Test Mode: 02; Polarity: Vertical; Modulation:GFSK; Channel:Low

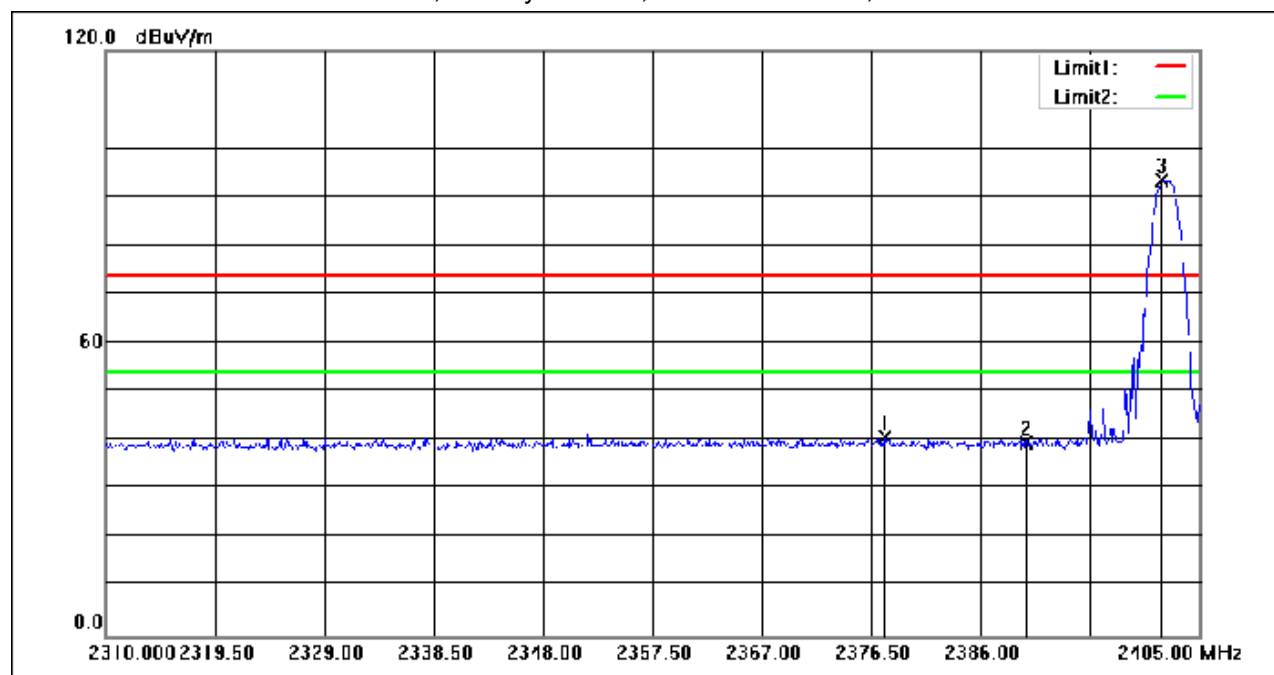

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2377.640	60.55	-19.96	40.59	74.00	-33.41	peak
2	2390.000	59.49	-19.92	39.57	74.00	-34.43	peak
3	2401.770	113.20	-19.89	93.31	74.00	19.31	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 39 of 227

Test Mode: 02; Polarity: Horizontal; Modulation:GFSK; Channel:High

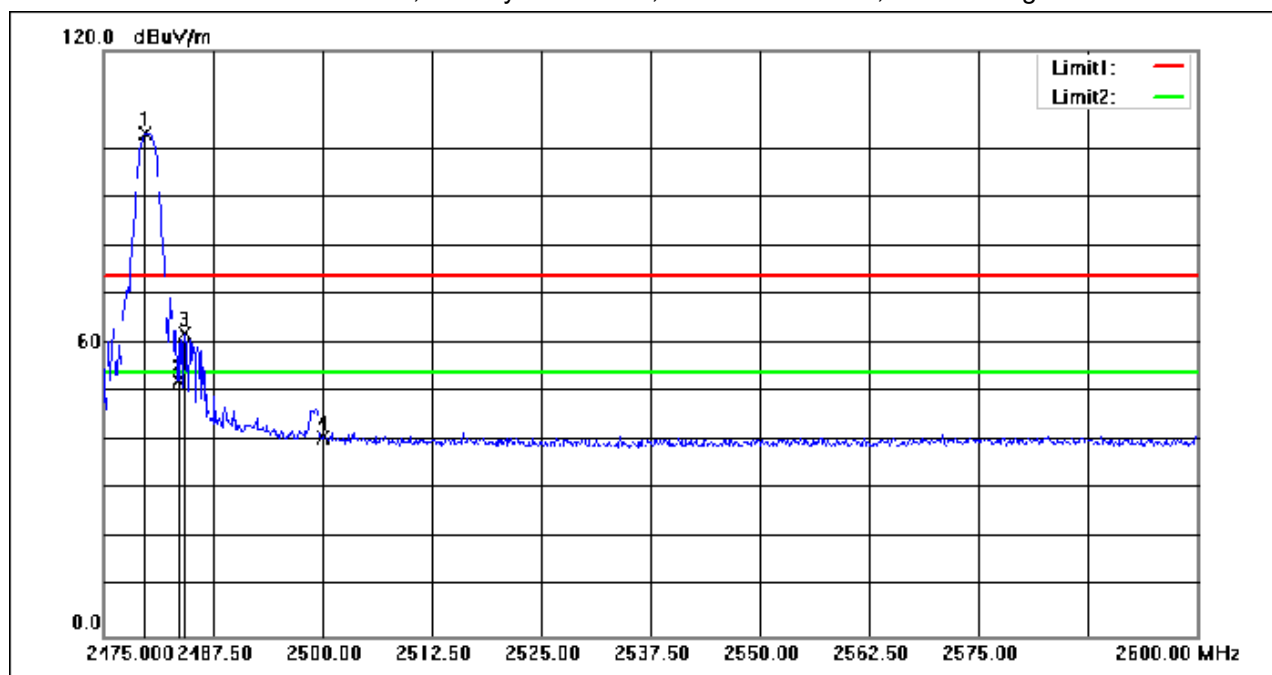

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.750	122.76	-19.59	103.17	74.00	29.17	peak
2	2483.500	72.09	-19.59	52.50	74.00	-21.50	peak
3	2484.250	81.57	-19.60	61.97	74.00	-12.03	peak
4	2500.000	60.30	-19.61	40.69	74.00	-33.31	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 40 of 227

Test Mode: 02; Polarity: Horizontal; Modulation:GFSK; Channel:High

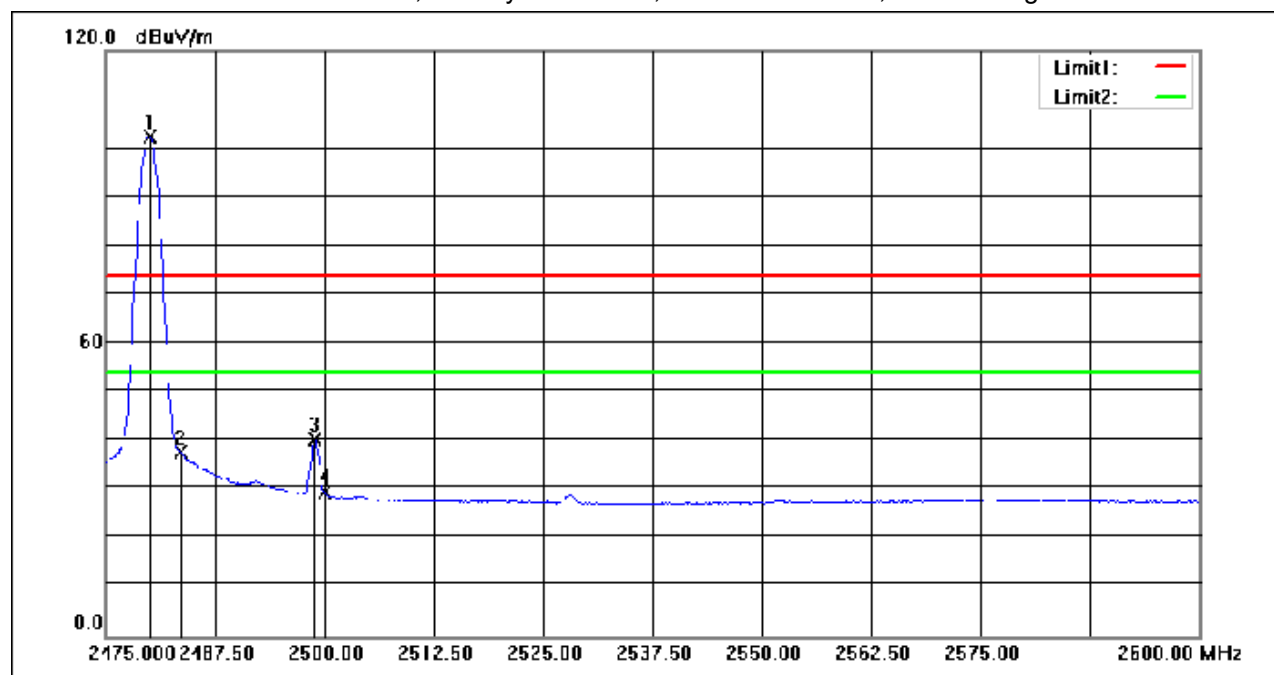

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	122.10	-19.59	102.51	54.00	48.51	AVG
2	2483.500	57.16	-19.59	37.57	54.00	-16.43	AVG
3	2498.875	59.94	-19.61	40.33	54.00	-13.67	AVG
4	2500.000	49.02	-19.61	29.41	54.00	-24.59	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 41 of 227

Test Mode: 02; Polarity: Vertical; Modulation:GFSK; Channel:High

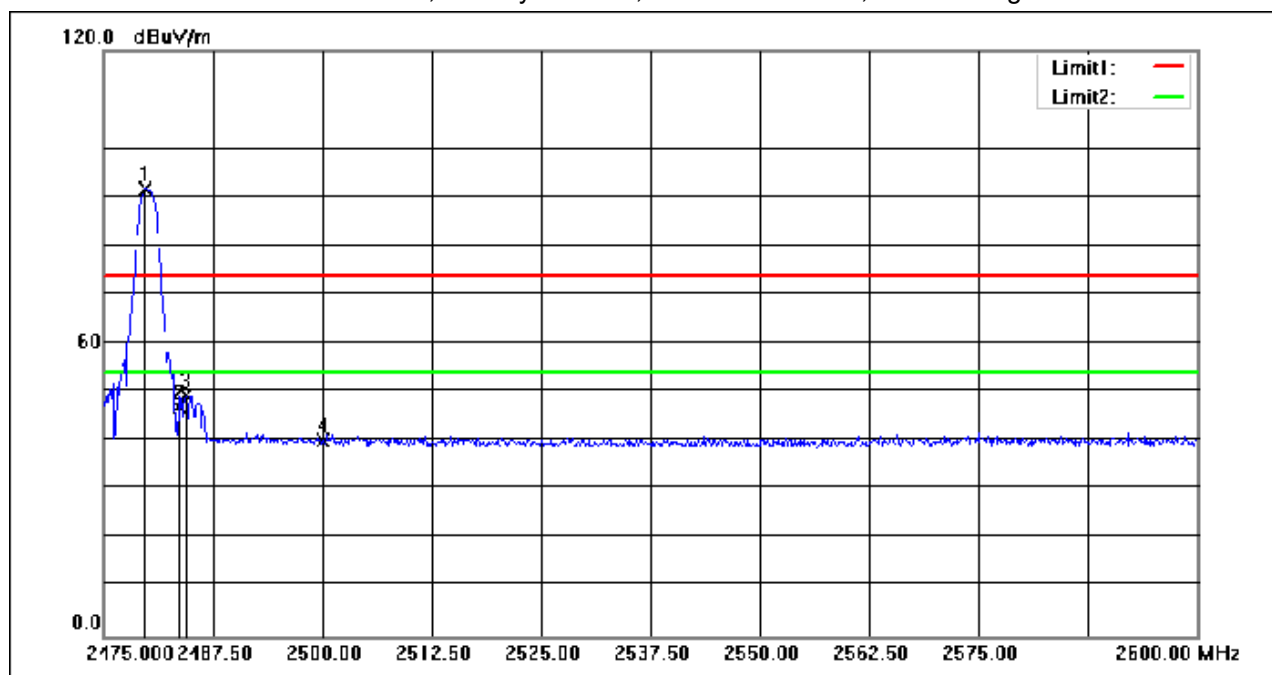

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.750	111.11	-19.59	91.52	74.00	17.52	peak
2	2483.500	66.61	-19.59	47.02	74.00	-26.98	peak
3	2484.375	68.84	-19.60	49.24	74.00	-24.76	peak
4	2500.000	59.68	-19.61	40.07	74.00	-33.93	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 42 of 227

Test Mode: 03; Polarity: Horizontal; Modulation:GFSK; Channel:Low

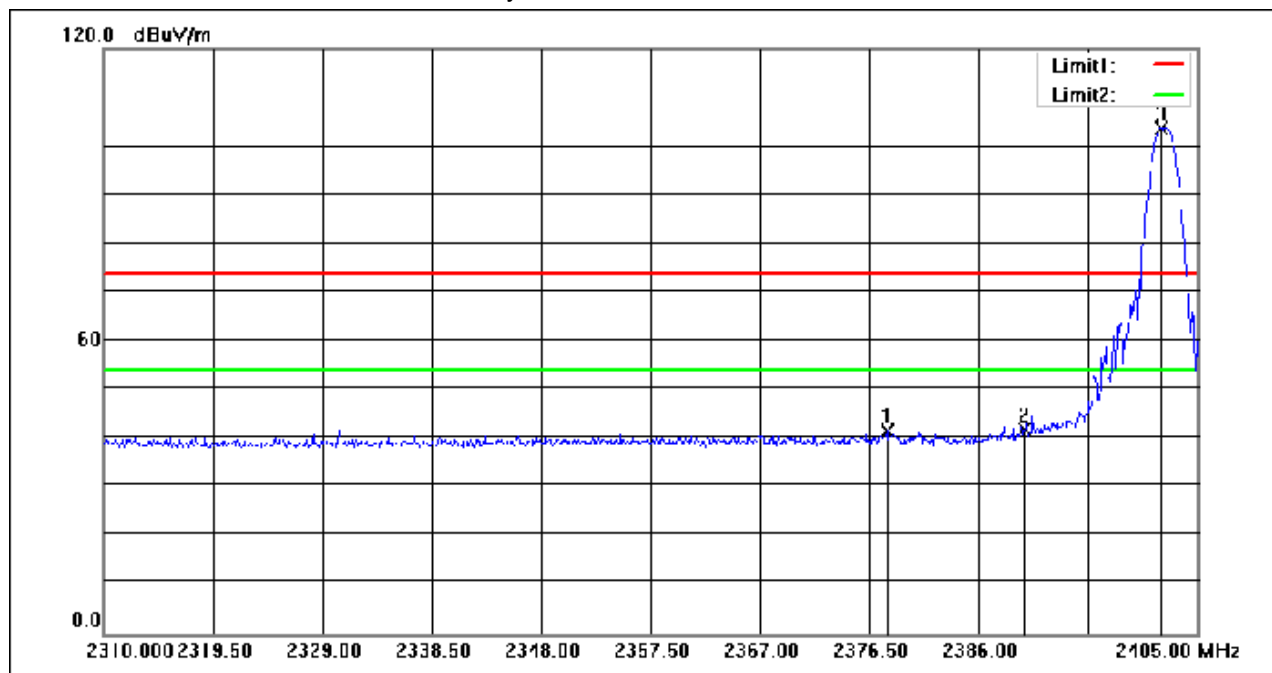

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2378.020	61.51	-19.96	41.55	74.00	-32.45	peak
2	2390.000	61.78	-19.92	41.86	74.00	-32.14	peak
3	2401.865	123.46	-19.89	103.57	74.00	29.57	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 43 of 227

Test Mode: 03; Polarity: Vertical; Modulation:GFSK; Channel:Low

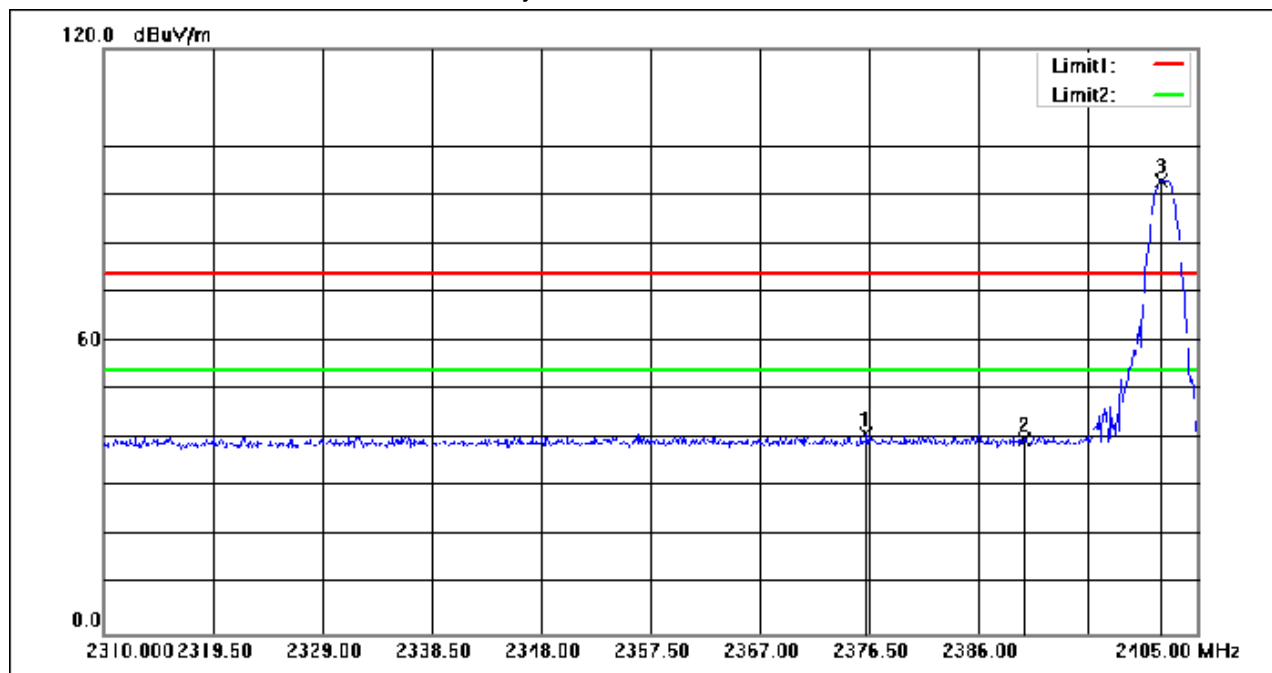

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2376.215	60.78	-19.96	40.82	74.00	-33.18	peak
2	2390.000	59.63	-19.92	39.71	74.00	-34.29	peak
3	2401.865	112.80	-19.89	92.91	74.00	18.91	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 44 of 227

Test Mode: 03; Polarity: Horizontal; Modulation:GFSK; Channel:High

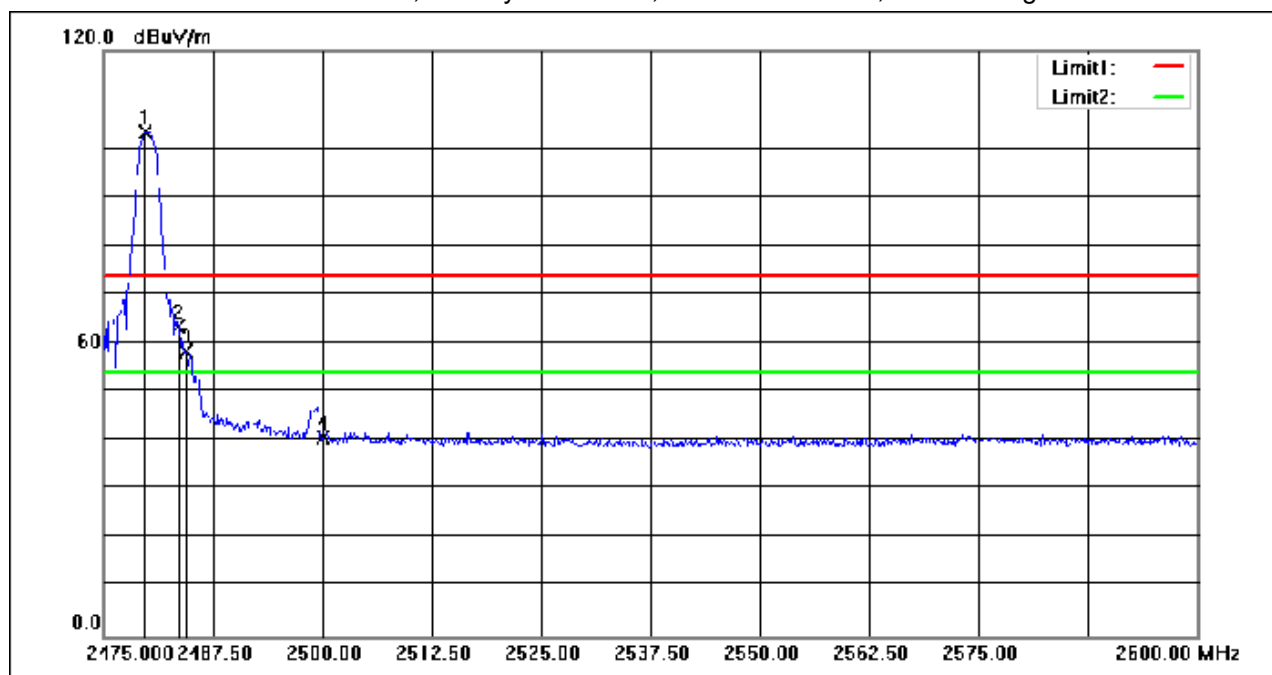

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.750	122.88	-19.59	103.29	74.00	29.29	peak
2	2483.500	83.12	-19.59	63.53	74.00	-10.47	peak
3	2484.375	77.85	-19.60	58.25	74.00	-15.75	peak
4	2500.000	60.39	-19.61	40.78	74.00	-33.22	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 45 of 227

Test Mode: 03; Polarity: Horizontal; Modulation:GFSK; Channel:High

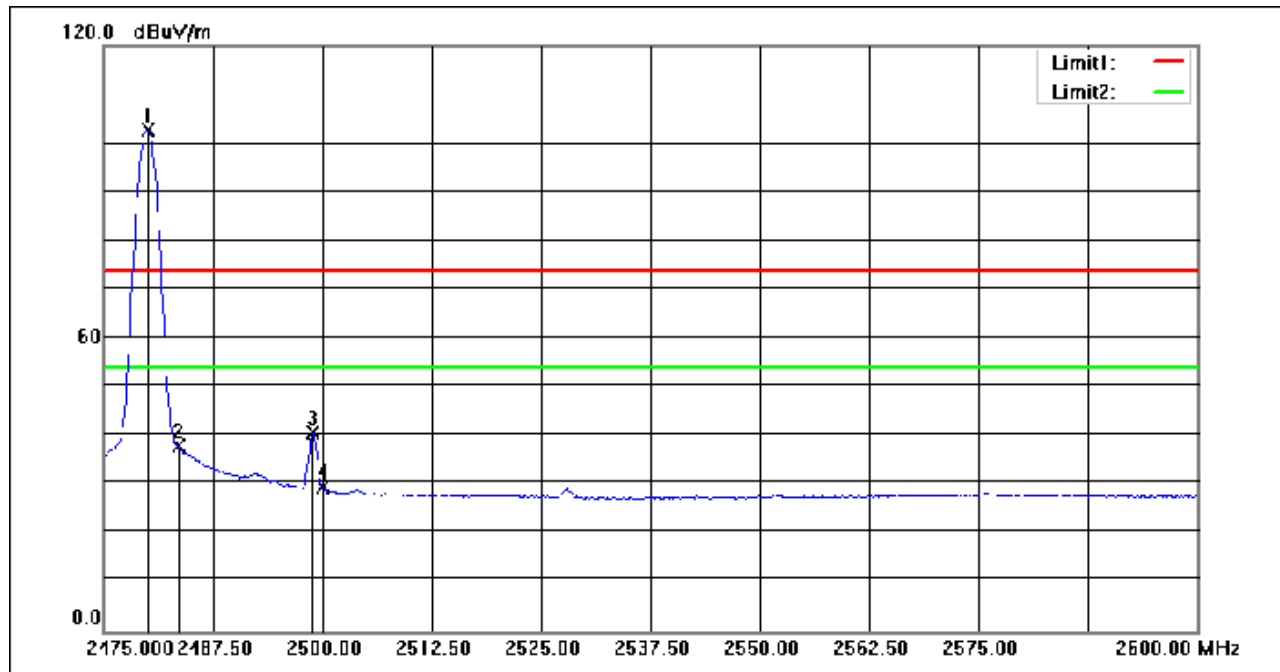

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	122.23	-19.59	102.64	54.00	48.64	AVG
2	2483.500	57.50	-19.59	37.91	54.00	-16.09	AVG
3	2498.875	60.25	-19.61	40.64	54.00	-13.36	AVG
4	2500.000	49.07	-19.61	29.46	54.00	-24.54	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 46 of 227

Test Mode: 03; Polarity: Vertical; Modulation:GFSK; Channel:High

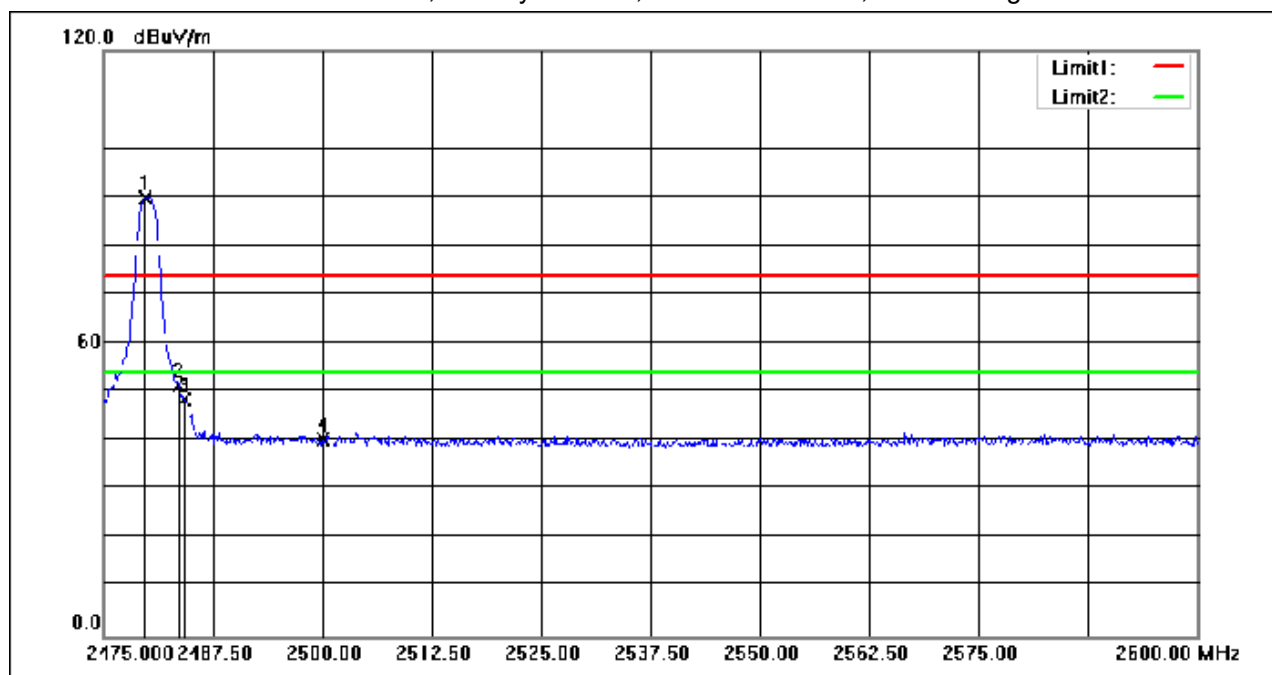

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.750	109.52	-19.59	89.93	74.00	15.93	peak
2	2483.500	71.07	-19.59	51.48	74.00	-22.52	peak
3	2484.250	67.96	-19.60	48.36	74.00	-25.64	peak
4	2500.000	60.09	-19.61	40.48	74.00	-33.52	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 47 of 227

Test Mode: 04; Polarity: Horizontal; Modulation:GFSK; Channel:Low

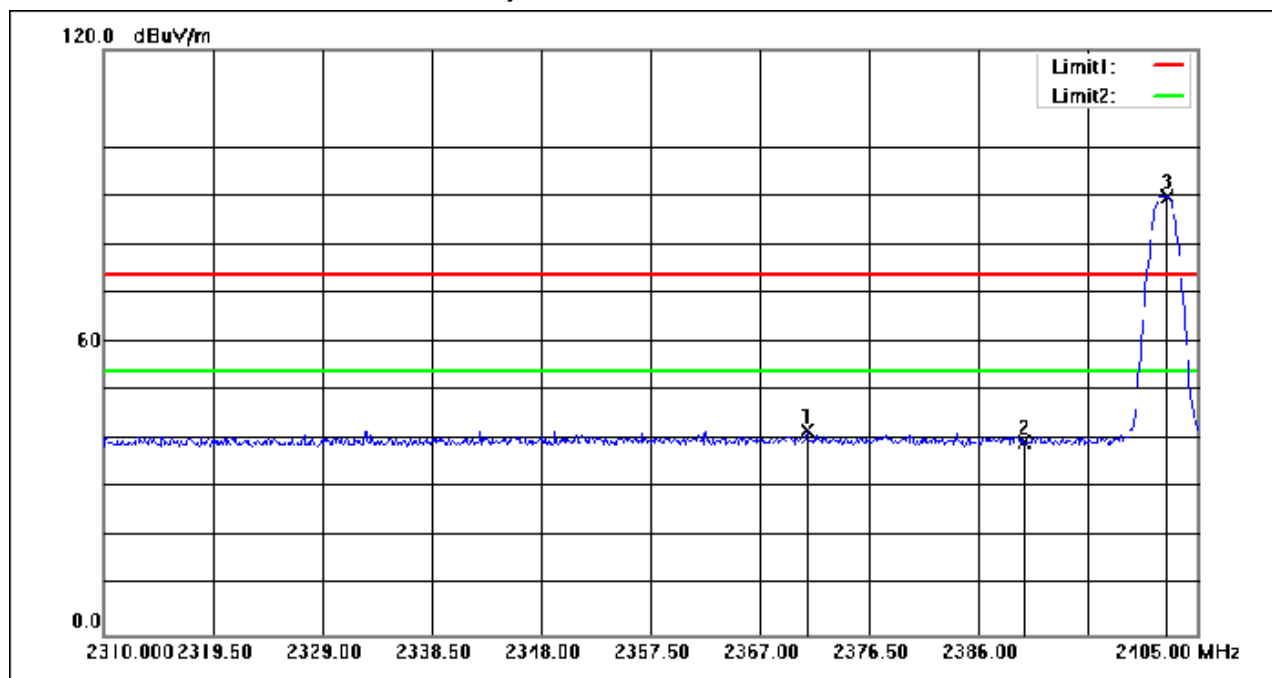

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2371.085	61.66	-19.96	41.70	74.00	-32.30	peak
2	2390.000	59.24	-19.92	39.32	74.00	-34.68	peak
3	2402.340	109.78	-19.89	89.89	74.00	15.89	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 48 of 227

Test Mode: 04; Polarity: Vertical; Modulation:GFSK; Channel:Low

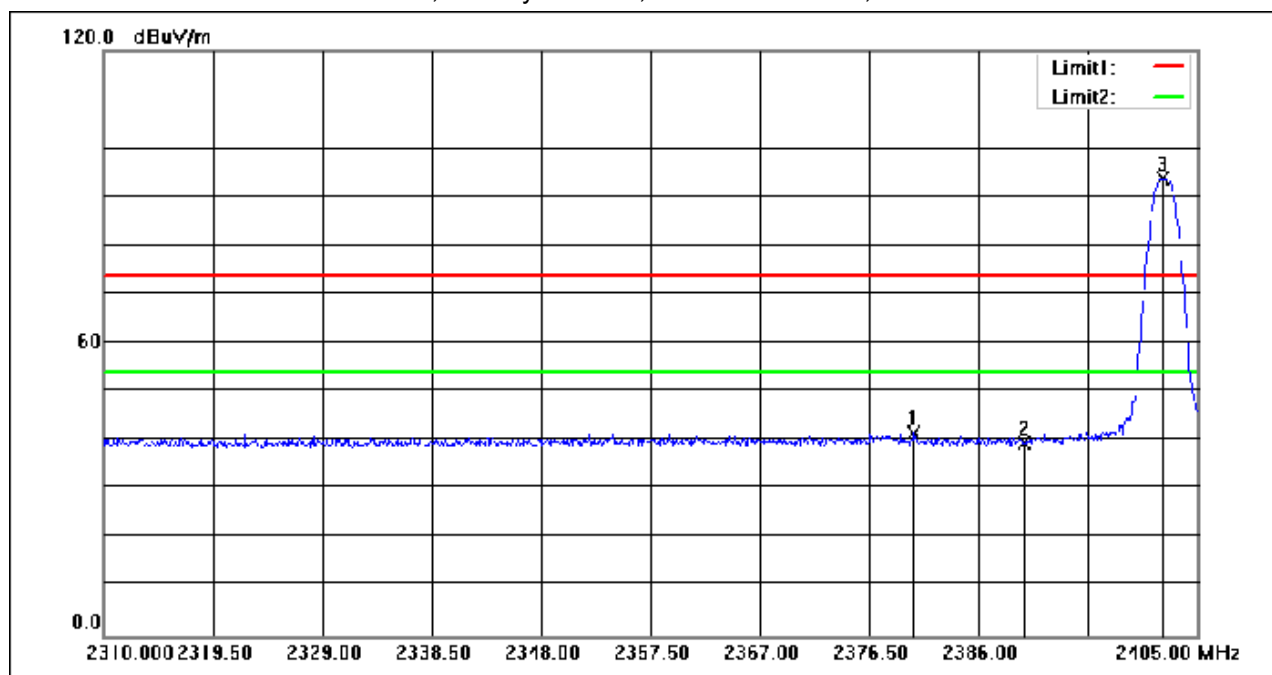

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2380.395	61.60	-19.94	41.66	74.00	-32.34	peak
2	2390.000	59.38	-19.92	39.46	74.00	-34.54	peak
3	2402.055	113.76	-19.89	93.87	74.00	19.87	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 49 of 227

Test Mode: 04; Polarity: Horizontal; Modulation:GFSK; Channel:High

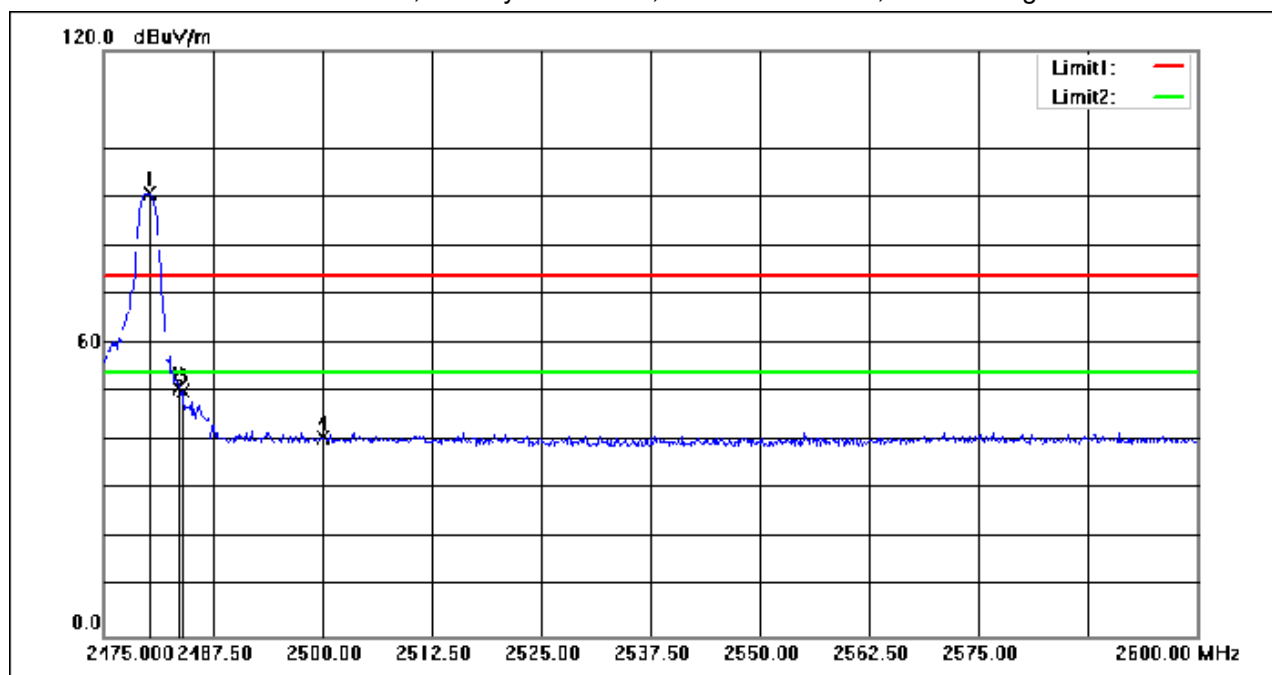

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.250	110.36	-19.59	90.77	74.00	16.77	peak
2	2483.500	70.51	-19.59	50.92	74.00	-23.08	peak
3	2484.000	69.89	-19.59	50.30	74.00	-23.70	peak
4	2500.000	60.17	-19.61	40.56	74.00	-33.44	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 50 of 227

Test Mode: 04; Polarity: Vertical; Modulation:GFSK; Channel:High

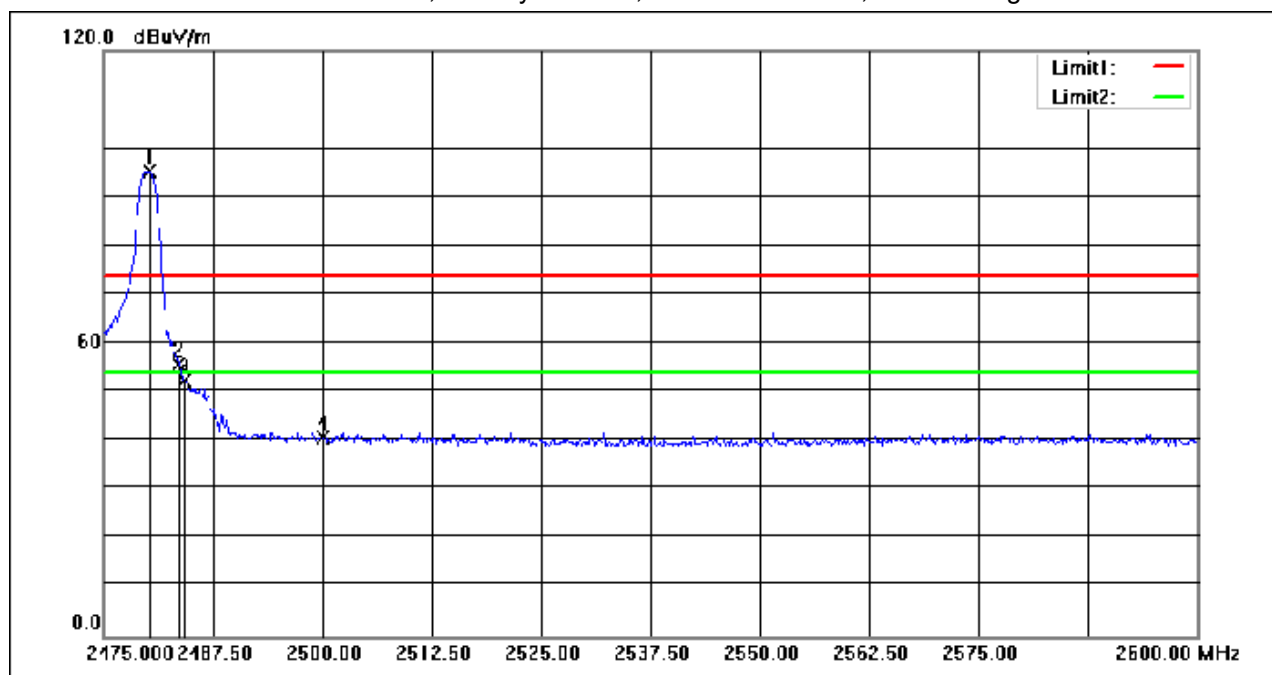

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.250	114.88	-19.59	95.29	74.00	21.29	peak
2	2483.500	75.24	-19.59	55.65	74.00	-18.35	peak
3	2484.250	72.01	-19.60	52.41	74.00	-21.59	peak
4	2500.000	60.32	-19.61	40.71	74.00	-33.29	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 51 of 227

Test Mode: 04; Polarity: Vertical; Modulation:GFSK; Channel:High

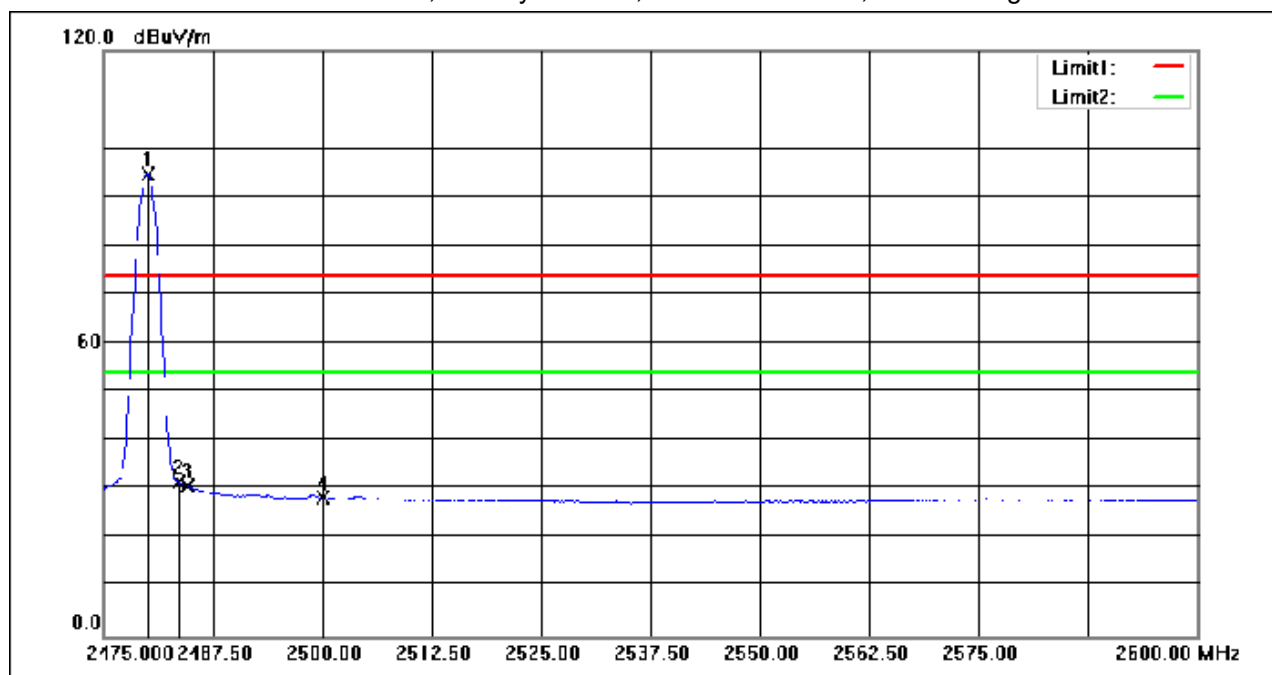

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	114.33	-19.59	94.74	54.00	40.74	AVG
2	2483.500	51.21	-19.59	31.62	54.00	-22.38	AVG
3	2484.625	50.27	-19.59	30.68	54.00	-23.32	AVG
4	2500.000	47.88	-19.61	28.27	54.00	-25.73	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 52 of 227

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:Low

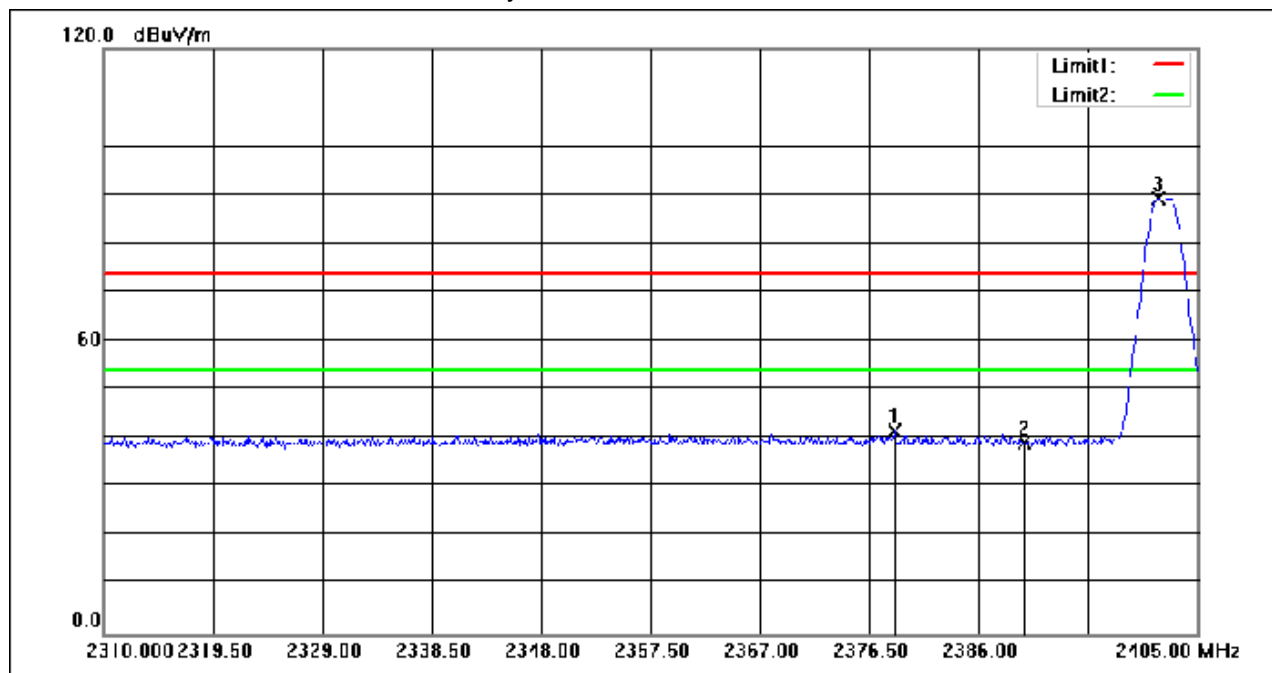

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2378.685	61.57	-19.95	41.62	74.00	-32.38	peak
2	2390.000	59.08	-19.92	39.16	74.00	-34.84	peak
3	2401.580	109.20	-19.89	89.31	74.00	15.31	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 53 of 227

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:Low

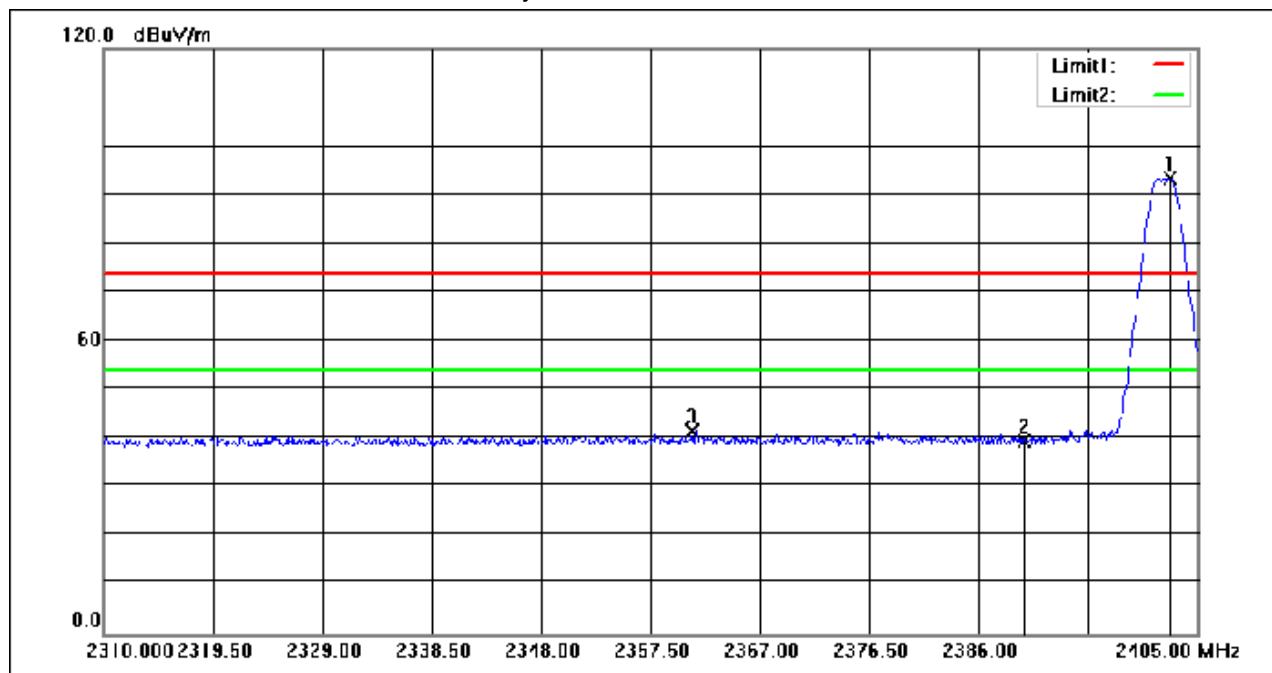

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2402.625	113.19	-19.88	93.31	74.00	19.31	peak
2	2390.000	59.34	-19.92	39.42	74.00	-34.58	peak
3	2361.110	61.65	-19.99	41.66	74.00	-32.34	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 54 of 227

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:High

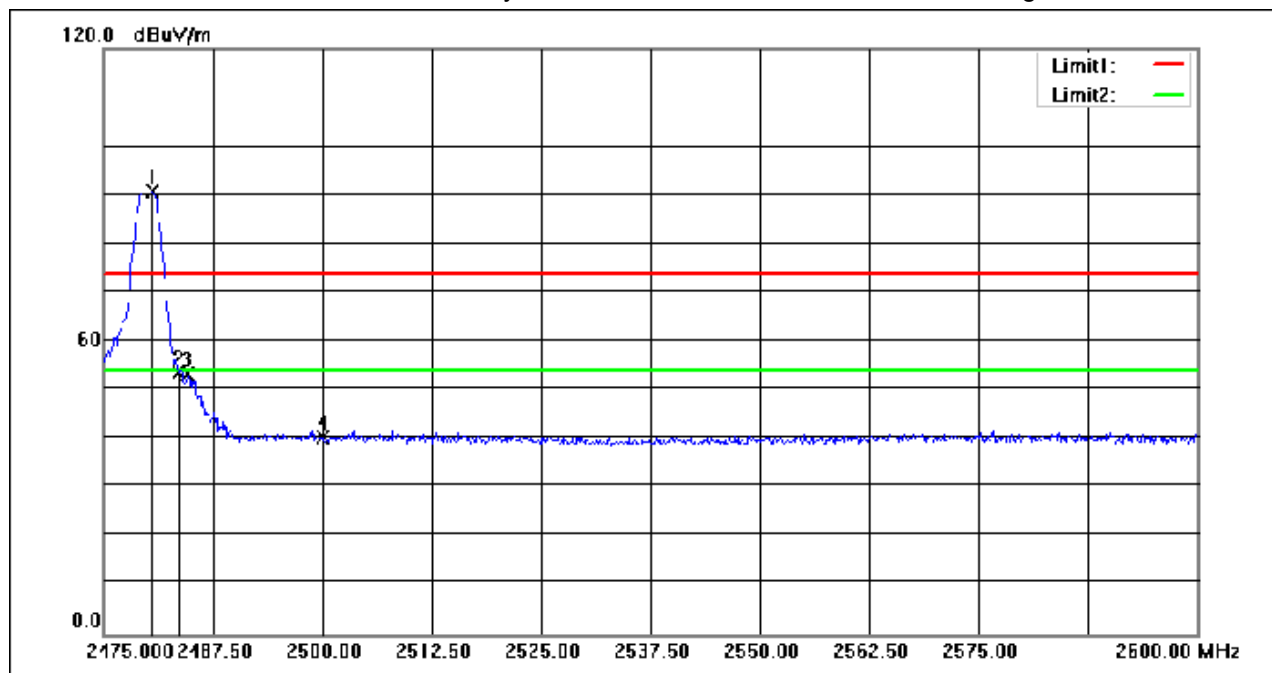

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.500	110.22	-19.59	90.63	74.00	16.63	peak
2	2483.500	73.01	-19.59	53.42	74.00	-20.58	peak
3	2484.500	72.84	-19.60	53.24	74.00	-20.76	peak
4	2500.000	60.10	-19.61	40.49	74.00	-33.51	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 55 of 227

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:High

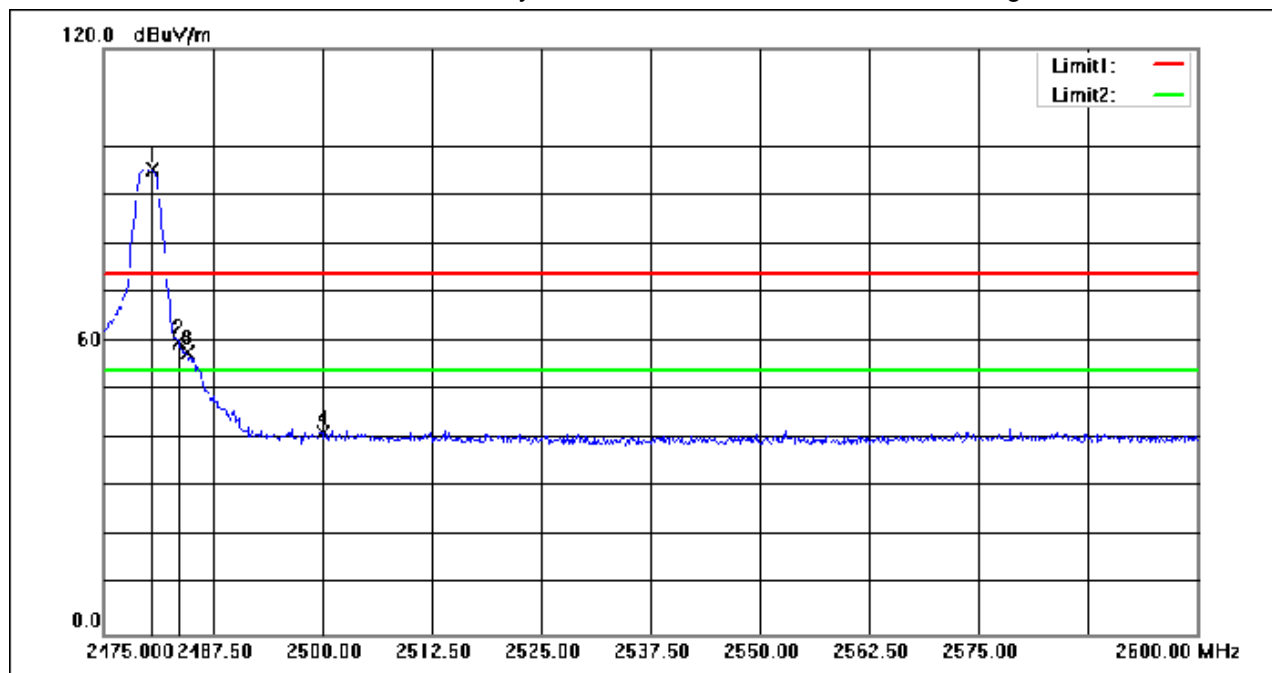

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.500	114.81	-19.59	95.22	74.00	21.22	peak
2	2483.500	79.52	-19.59	59.93	74.00	-14.07	peak
3	2484.625	77.25	-19.59	57.66	74.00	-16.34	peak
4	2500.000	60.85	-19.61	41.24	74.00	-32.76	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 56 of 227

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:High

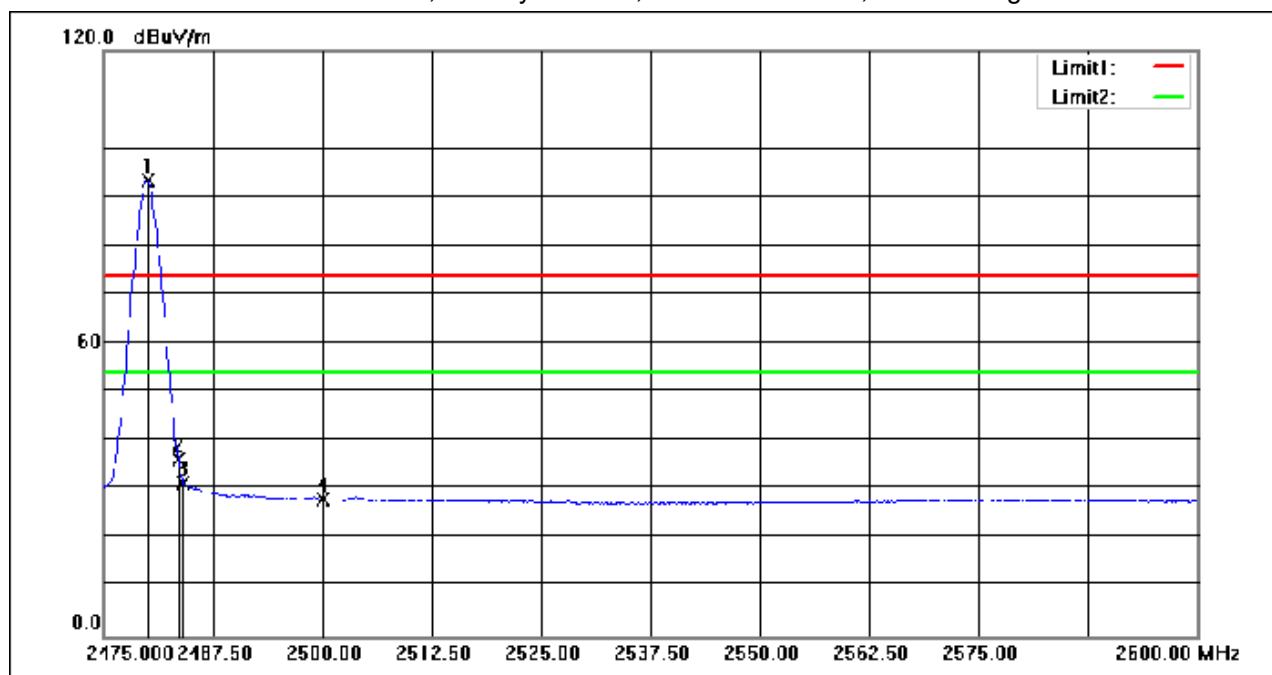

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	113.01	-19.59	93.42	54.00	39.42	AVG
2	2483.500	55.84	-19.59	36.25	54.00	-17.75	AVG
3	2484.125	51.00	-19.60	31.40	54.00	-22.60	AVG
4	2500.000	47.66	-19.61	28.05	54.00	-25.95	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 57 of 227

Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:Low

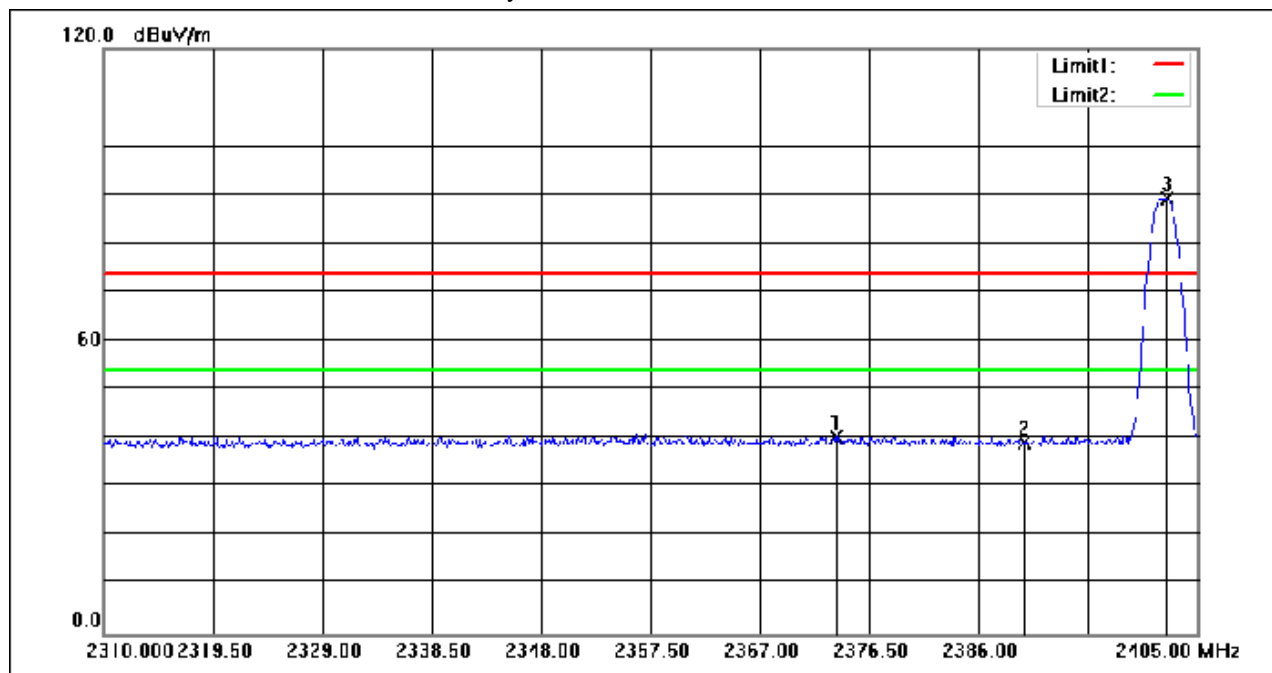

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2373.650	60.46	-19.96	40.50	74.00	-33.50	peak
2	2390.000	59.12	-19.92	39.20	74.00	-34.80	peak
3	2402.340	109.14	-19.89	89.25	74.00	15.25	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 58 of 227

Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:Low

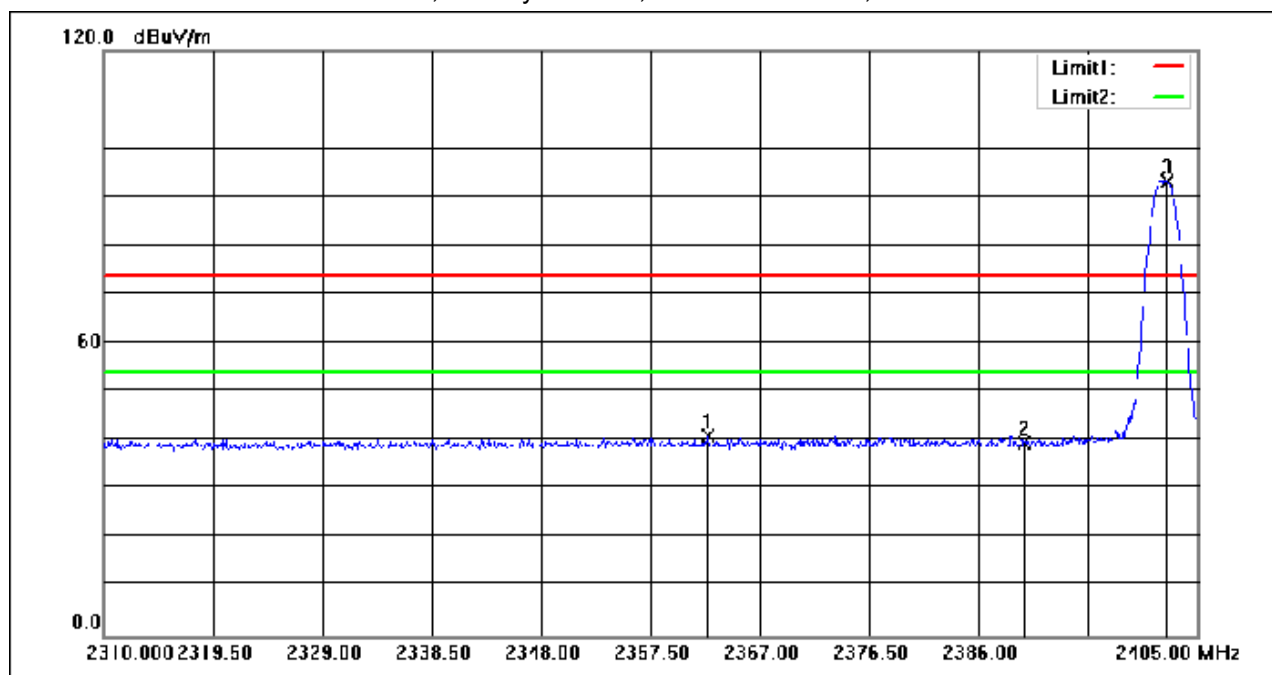

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2362.440	60.96	-19.98	40.98	74.00	-33.02	peak
2	2390.000	59.44	-19.92	39.52	74.00	-34.48	peak
3	2402.340	112.98	-19.89	93.09	74.00	19.09	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 59 of 227

Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:High

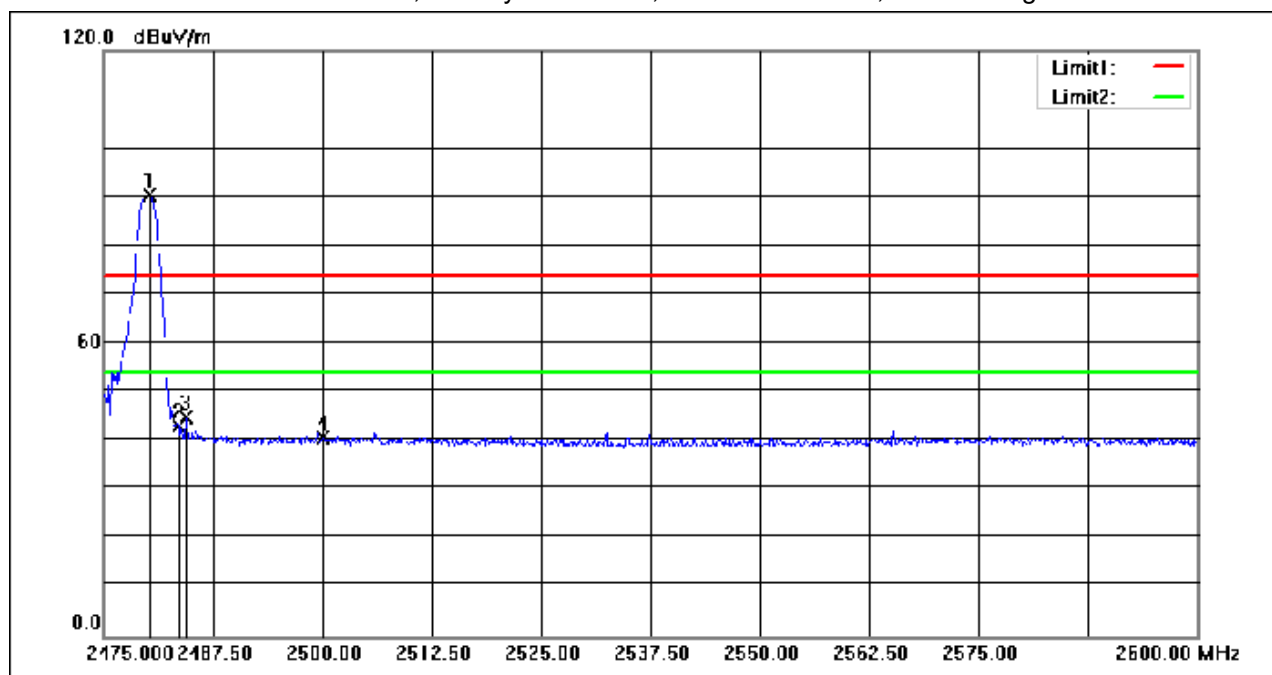

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.250	109.95	-19.59	90.36	74.00	16.36	peak
2	2483.500	62.69	-19.59	43.10	74.00	-30.90	peak
3	2484.375	64.32	-19.60	44.72	74.00	-29.28	peak
4	2500.000	60.25	-19.61	40.64	74.00	-33.36	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 60 of 227

Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:High

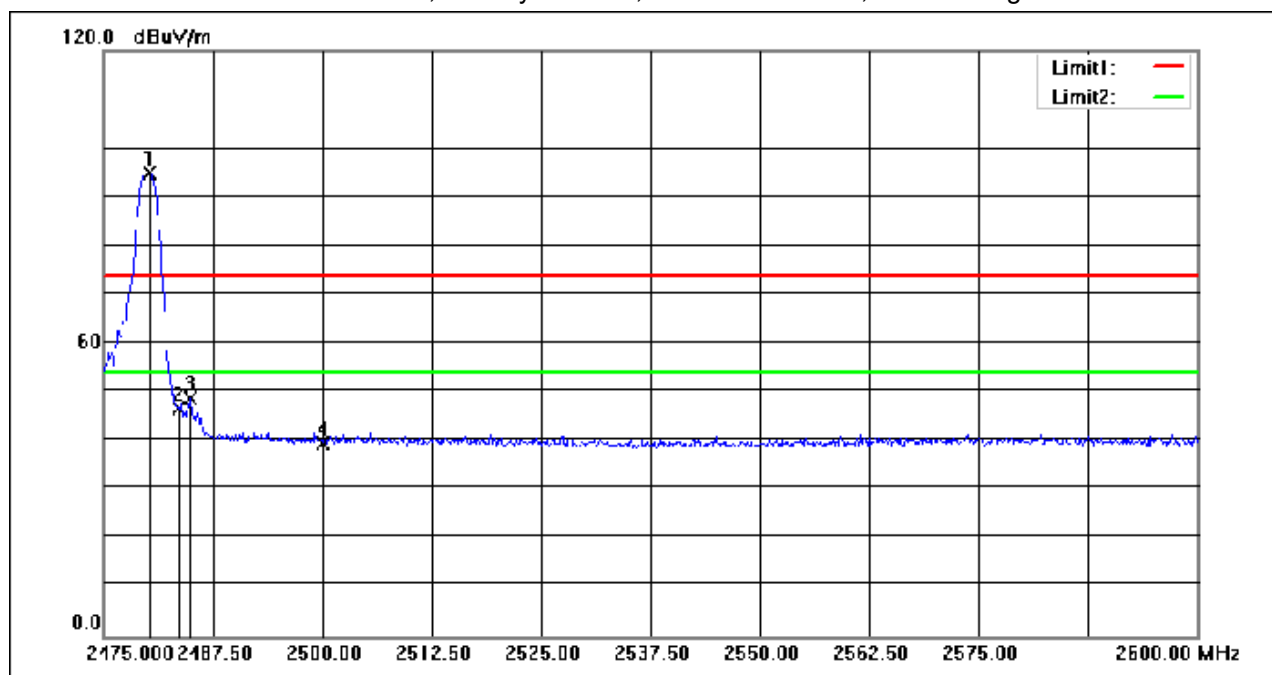

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.250	114.64	-19.59	95.05	74.00	21.05	peak
2	2483.500	66.25	-19.59	46.66	74.00	-27.34	peak
3	2484.875	68.27	-19.59	48.68	74.00	-25.32	peak
4	2500.000	59.21	-19.61	39.60	74.00	-34.40	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 61 of 227

Test Mode: 07; Polarity: Horizontal; Modulation:GFSK; Channel:Low

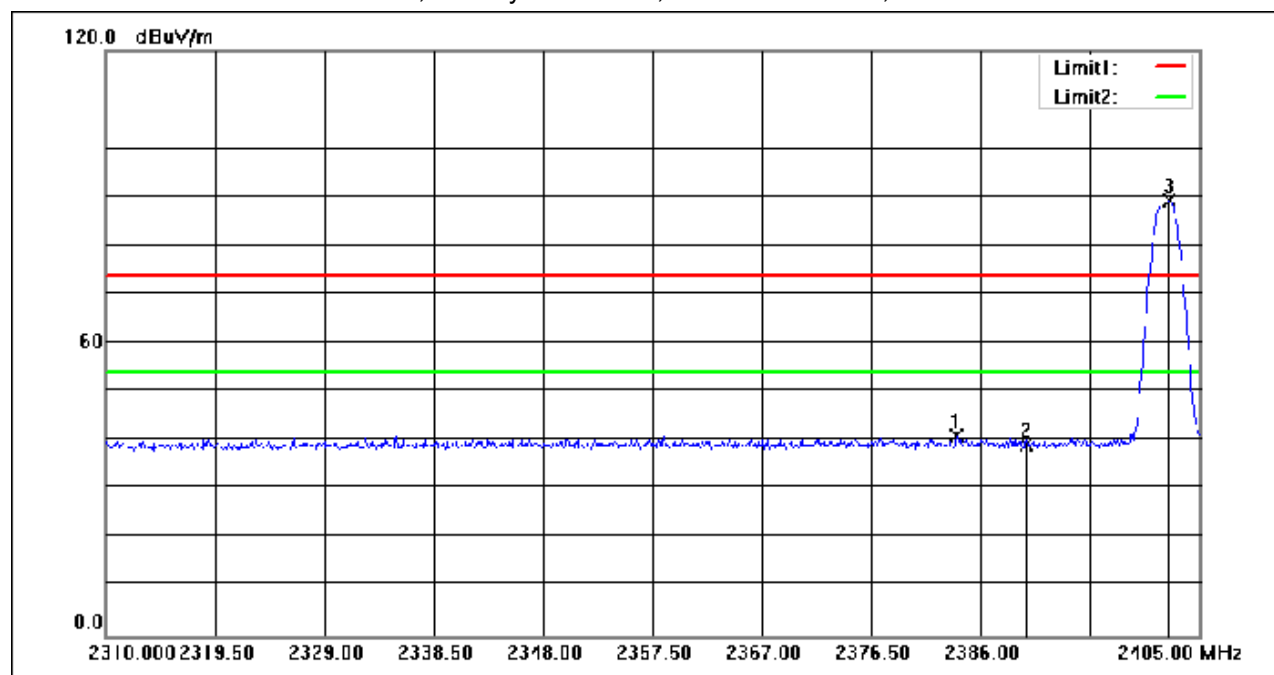

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.910	60.88	-19.94	40.94	74.00	-33.06	peak
2	2390.000	58.95	-19.92	39.03	74.00	-34.97	peak
3	2402.340	109.03	-19.89	89.14	74.00	15.14	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 62 of 227

Test Mode: 07; Polarity: Vertical; Modulation:GFSK; Channel:Low

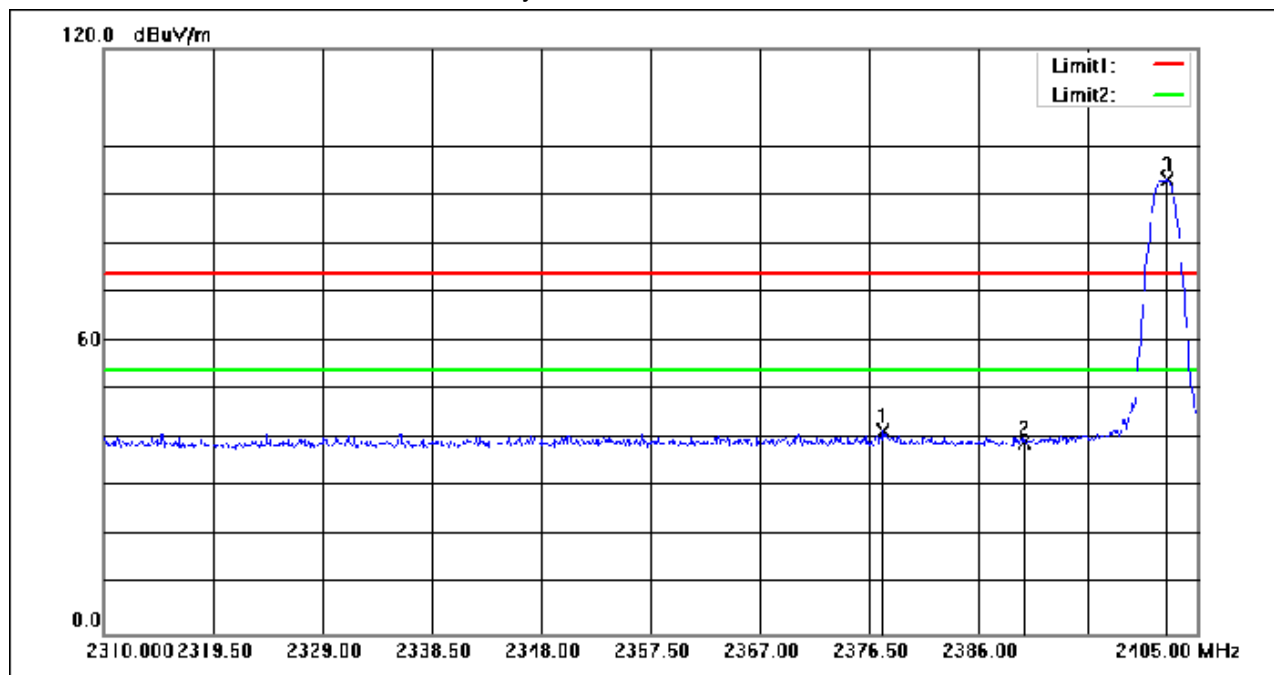

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2377.735	61.49	-19.96	41.53	74.00	-32.47	peak
2	2390.000	59.00	-19.92	39.08	74.00	-34.92	peak
3	2402.340	112.92	-19.89	93.03	74.00	19.03	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 63 of 227

Test Mode: 07; Polarity: Horizontal; Modulation:GFSK; Channel:High

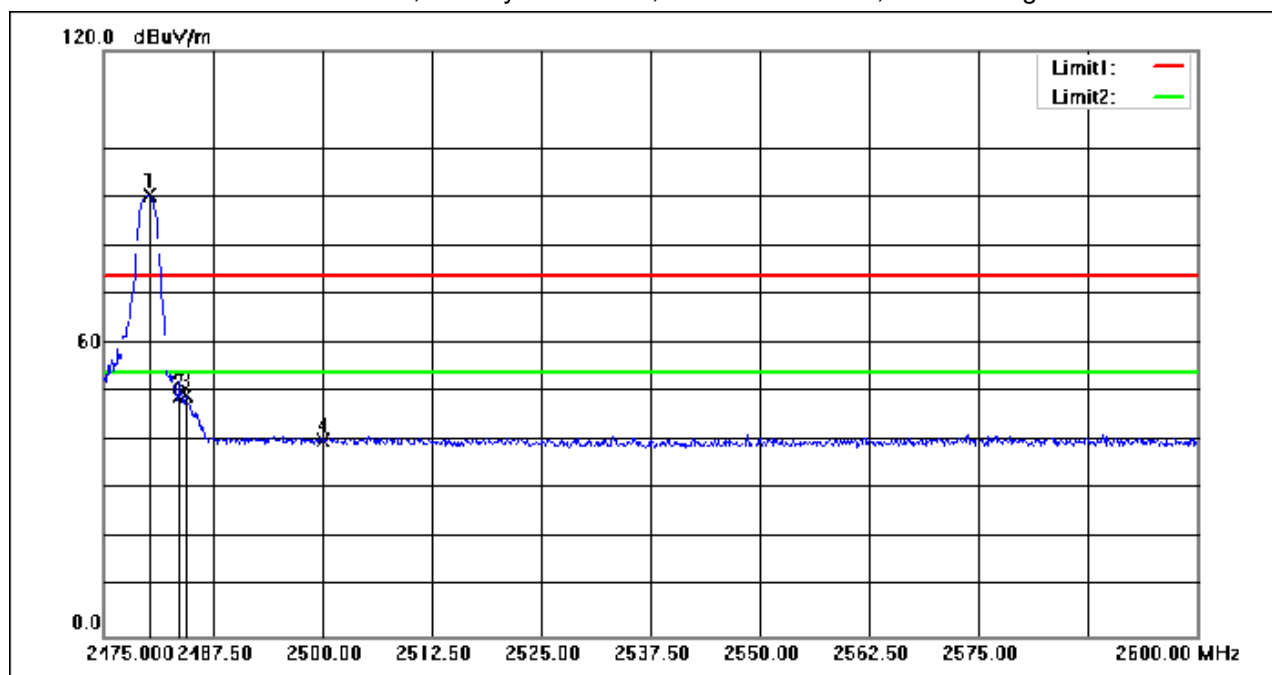

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.250	109.91	-19.59	90.32	74.00	16.32	peak
2	2483.500	68.67	-19.59	49.08	74.00	-24.92	peak
3	2484.375	68.89	-19.60	49.29	74.00	-24.71	peak
4	2500.000	59.73	-19.61	40.12	74.00	-33.88	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 64 of 227

Test Mode: 07; Polarity: Vertical; Modulation:GFSK; Channel:High

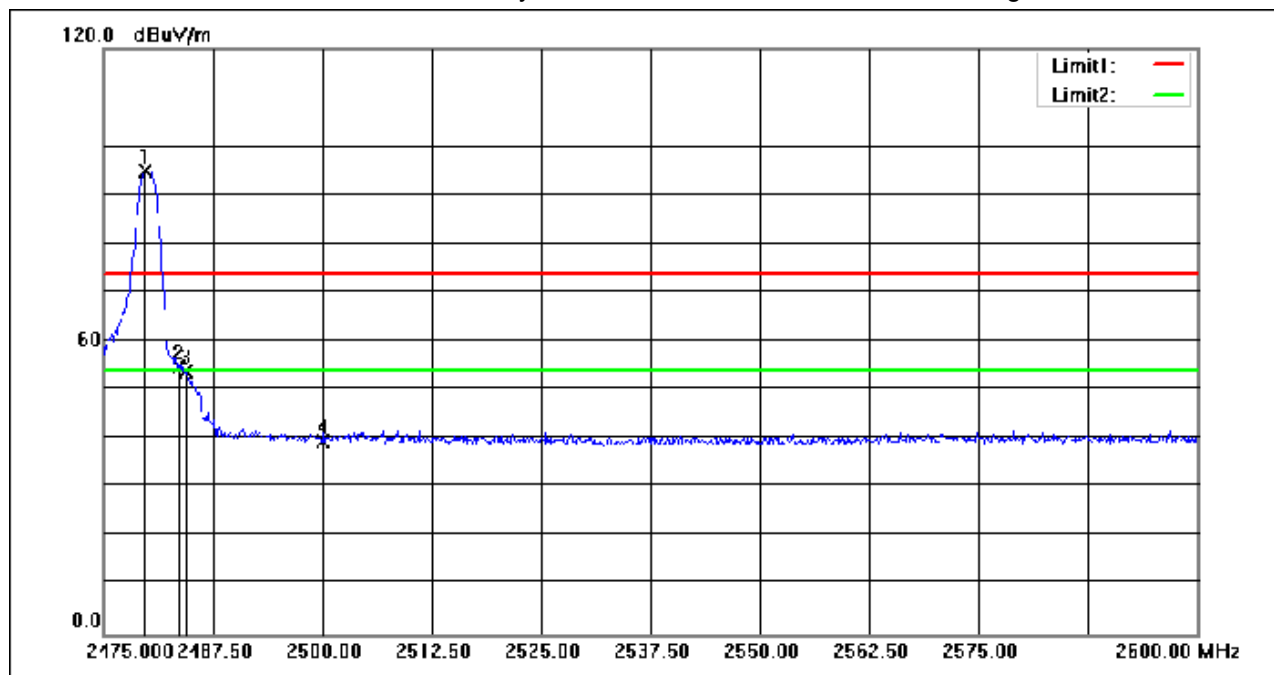

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.750	114.62	-19.59	95.03	74.00	21.03	peak
2	2483.500	74.30	-19.59	54.71	74.00	-19.29	peak
3	2484.375	73.34	-19.60	53.74	74.00	-20.26	peak
4	2500.000	59.00	-19.61	39.39	74.00	-34.61	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 65 of 227

Test Mode: 07; Polarity: Vertical; Modulation:GFSK; Channel:High

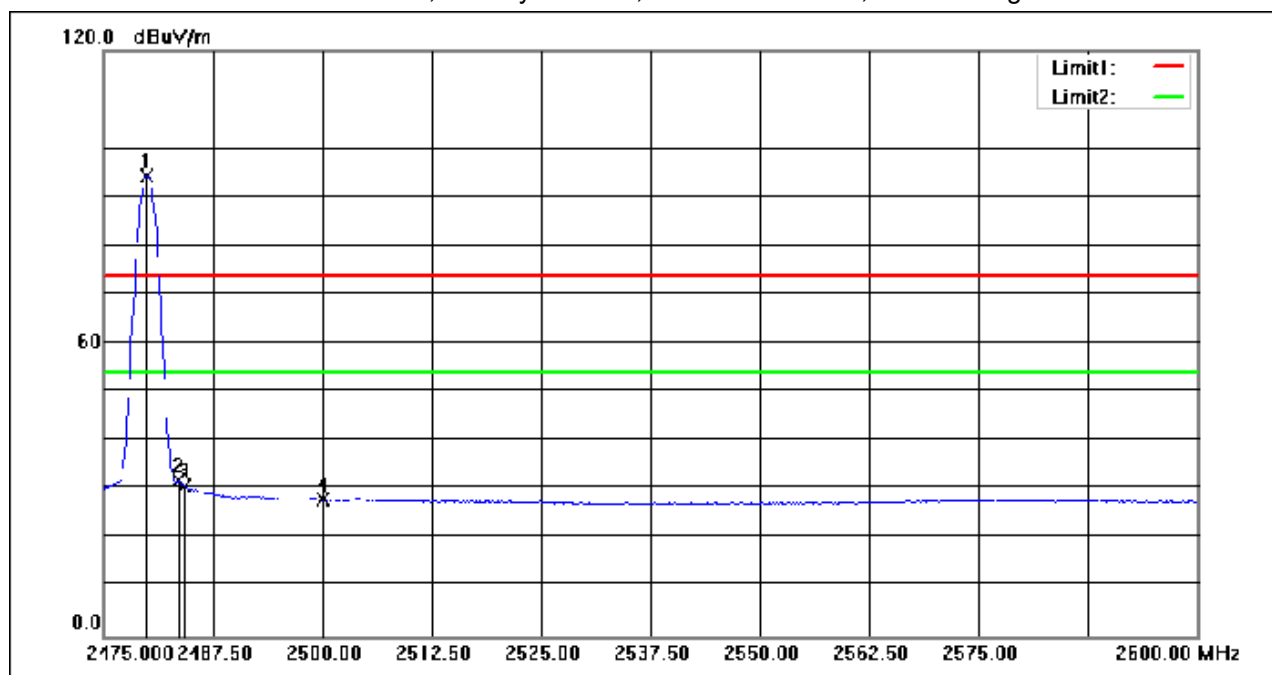

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.875	114.08	-19.59	94.49	54.00	40.49	AVG
2	2483.500	51.44	-19.59	31.85	54.00	-22.15	AVG
3	2484.250	50.38	-19.60	30.78	54.00	-23.22	AVG
4	2500.000	47.59	-19.61	27.98	54.00	-26.02	AVG

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 66 of 227

7.8 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Measurement Distance: 3M

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 20.6 °C


Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	00	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
	01	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
	02	TX mode(125K)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
	03	TX mode(500K)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
	04	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
	05	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
	06	TX mode(125K)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
	07	TX mode(500K)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	00	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.

7.8.3 Test Setup Diagram

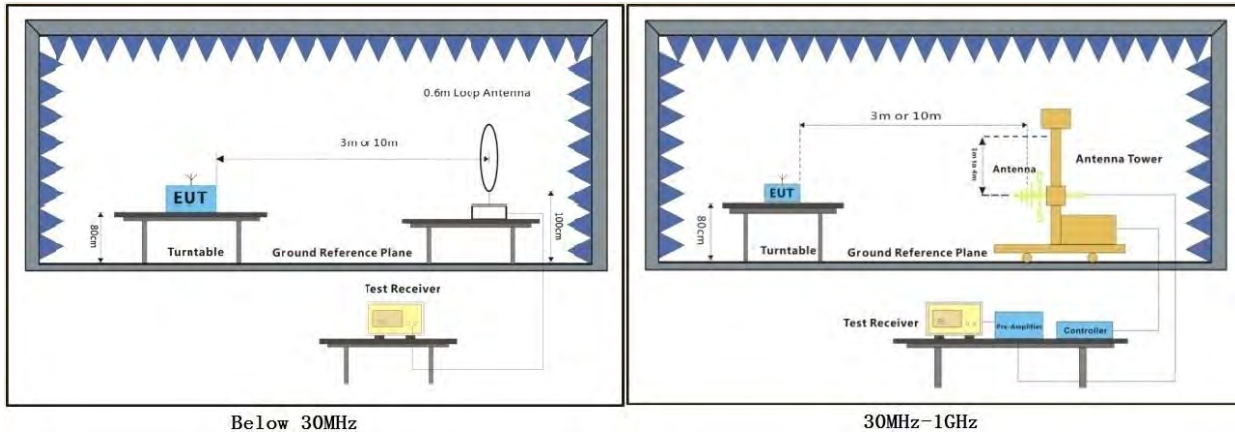

7.8.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:

- Level= Read Level+ Cable Loss+ Antenna Factor- Preamplifier Factor
- Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- We evaluated all modes and antennas and only showed the worst data in the report.


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 68 of 227

Test Mode: 00; Polarity: Horizontal

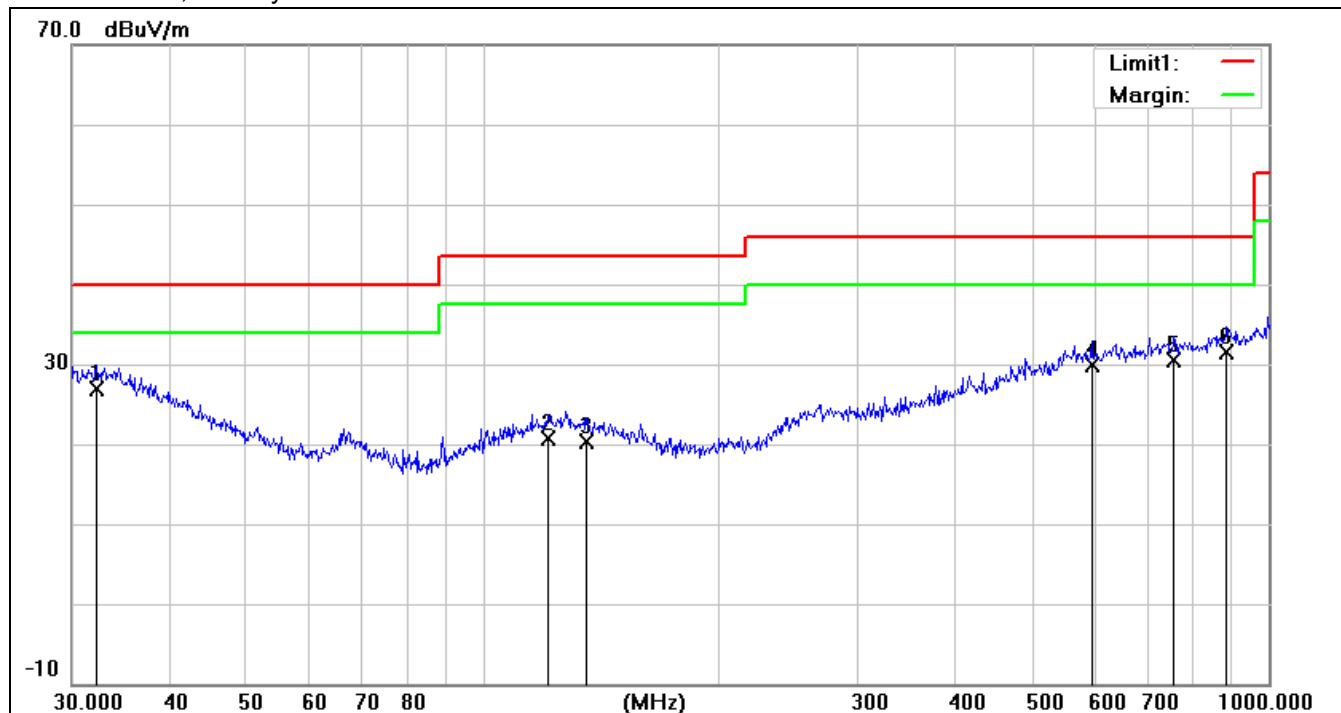

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	32.2925	1.64	25.18	26.82	40.00	-13.18	200	148	QP
2	121.1231	1.31	19.44	20.75	43.50	-22.75	100	171	QP
3	135.5062	1.31	19.07	20.38	43.50	-23.12	100	211	QP
4	595.1329	2.79	27.07	29.86	46.00	-16.14	100	362	QP
5	758.0408	2.18	28.24	30.42	46.00	-15.58	200	362	QP
6	884.5029	2.20	29.40	31.60	46.00	-14.40	200	153	QP


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 69 of 227

Test Mode: 00; Polarity: Vertical

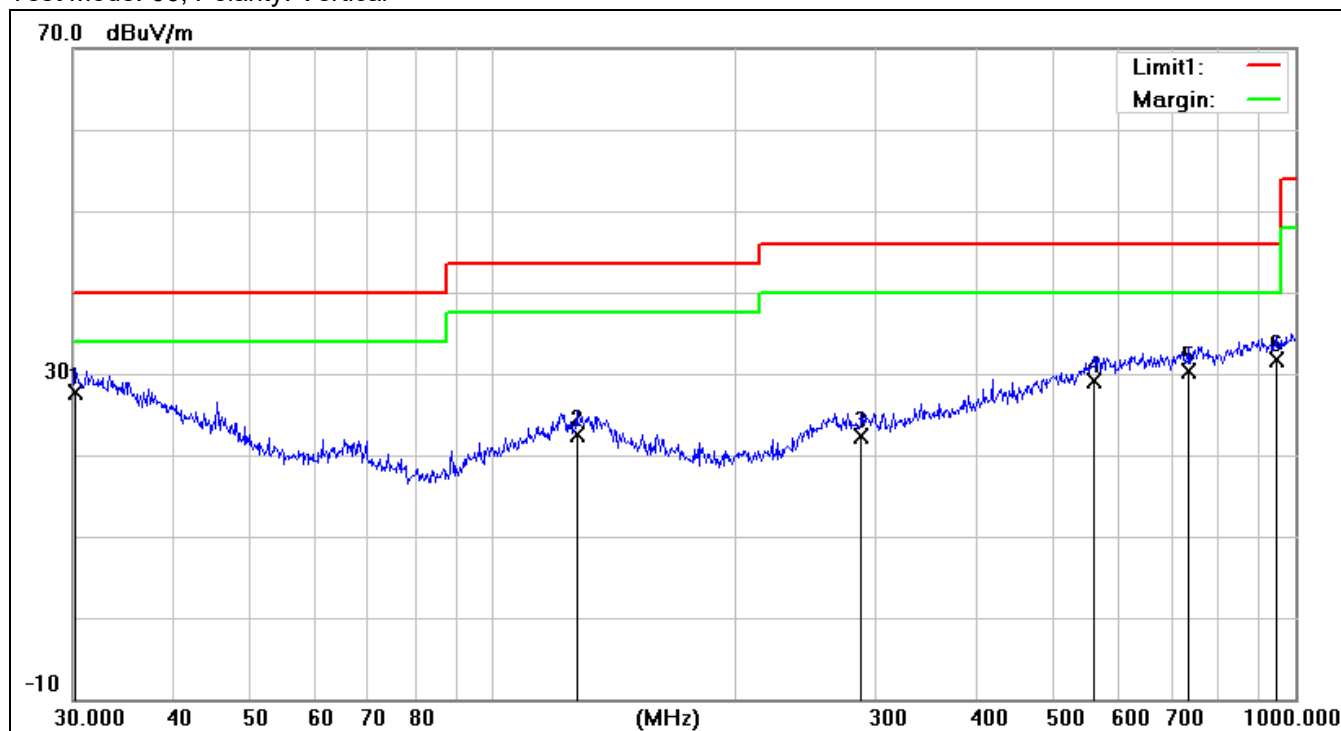

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	30.2111	2.48	25.30	27.78	40.00	-12.22	100	281	QP
2	127.2176	2.99	19.49	22.48	43.50	-21.02	100	278	QP
3	287.9904	1.97	20.40	22.37	46.00	-23.63	100	77	QP
4	560.6928	1.69	27.40	29.09	46.00	-16.91	100	241	QP
5	737.0714	2.31	28.08	30.39	46.00	-15.61	200	52	QP
6	945.4399	2.42	29.36	31.78	46.00	-14.22	100	45	QP

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 70 of 227

7.9 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.6

Measurement Distance: 3M

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 20.5 °C


Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	01	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	02	TX mode(125K)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	03	TX mode(500K)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	04	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	05	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	06	TX mode(125K)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	07	TX mode(500K)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.

7.9.3 Test Setup Diagram

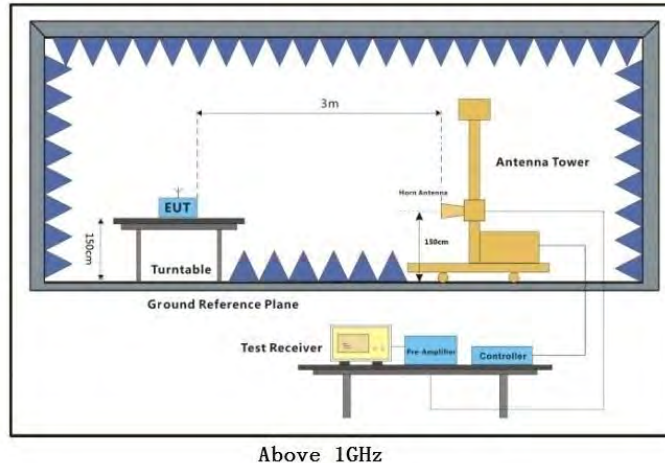

7.9.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamplifier Factor}$
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 72 of 227

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

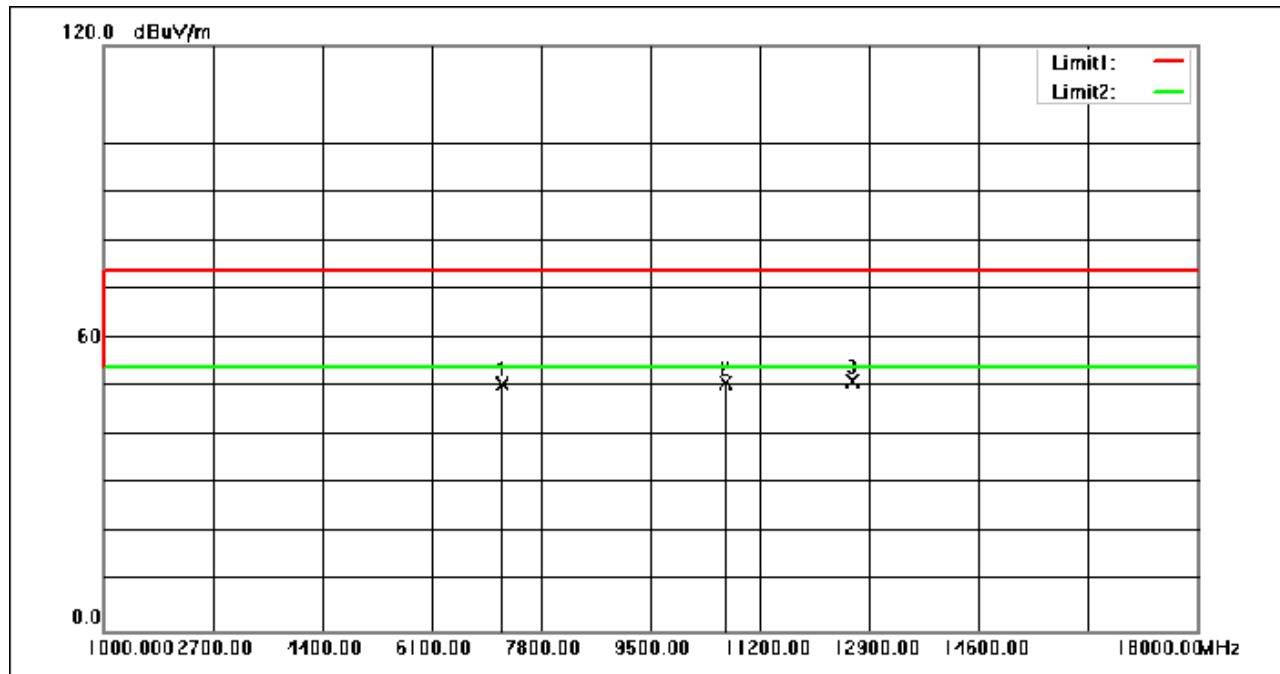

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7205.000	56.11	-5.52	50.59	74.00	-23.41	peak
2	10656.000	51.34	-0.43	50.91	74.00	-23.09	peak
3	12628.000	51.11	0.14	51.25	74.00	-22.75	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 73 of 227

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

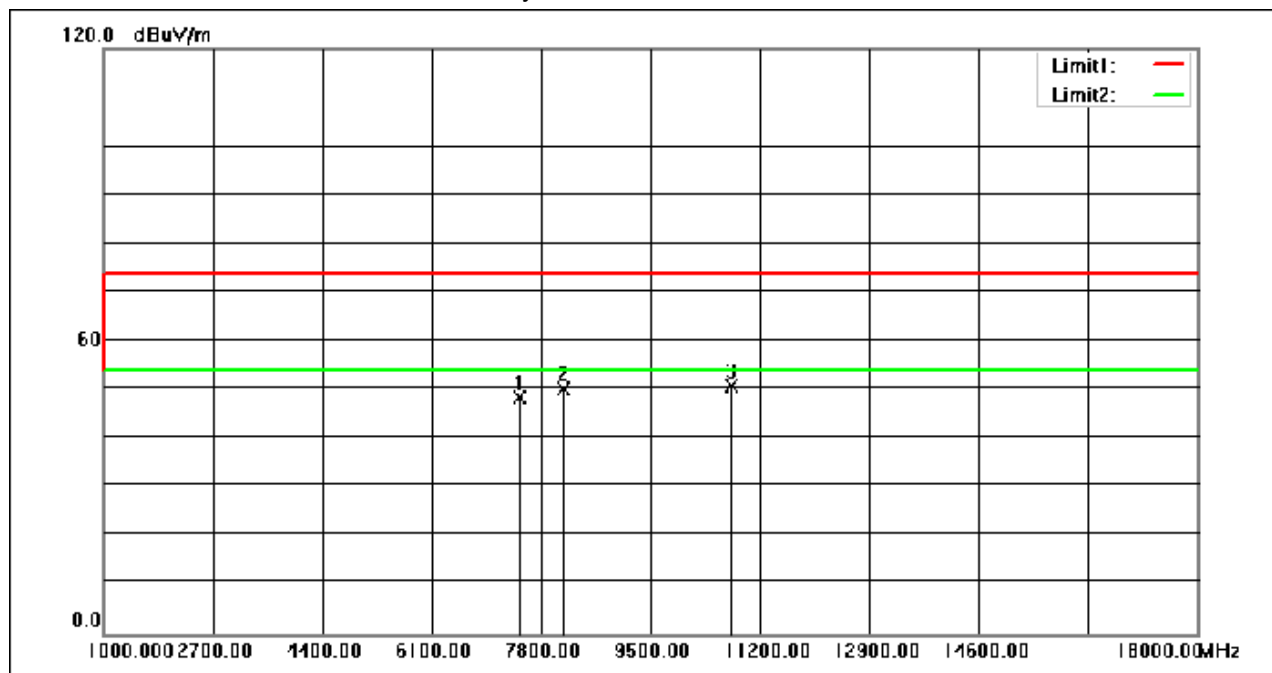

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7477.000	53.39	-5.03	48.36	74.00	-25.64	peak
2	8140.000	54.32	-4.09	50.23	74.00	-23.77	peak
3	10758.000	51.25	-0.50	50.75	74.00	-23.25	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 74 of 227

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:middle

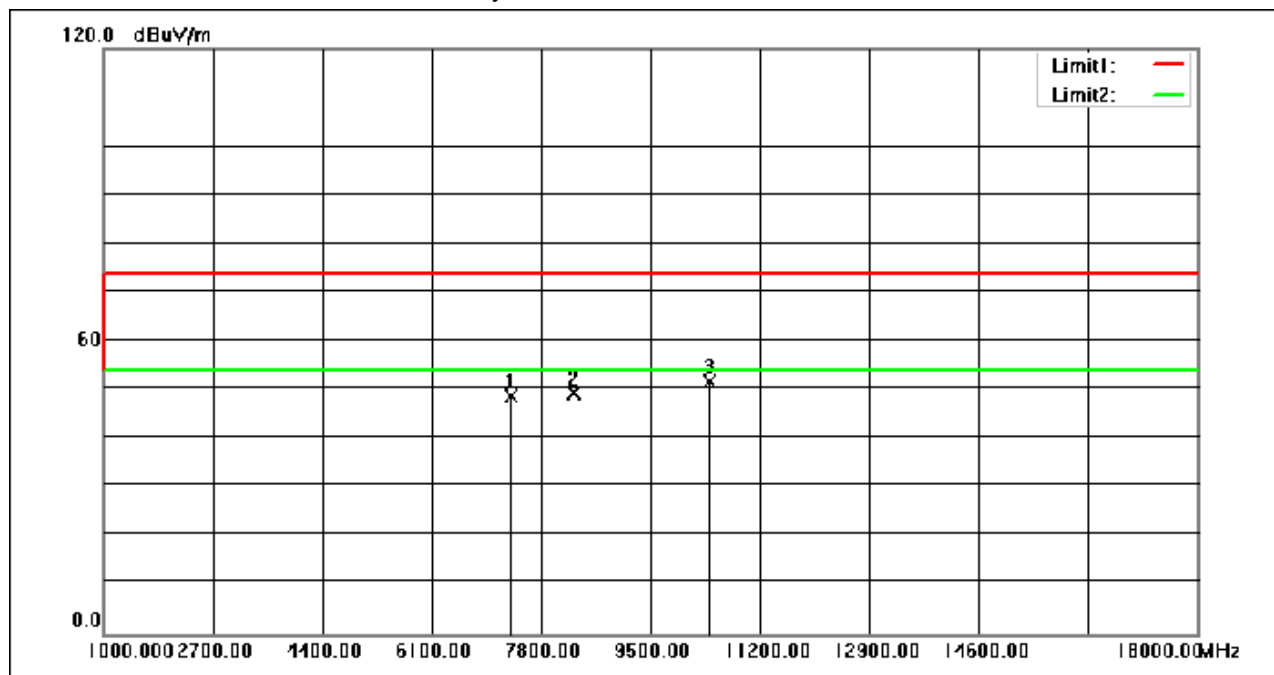

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7324.000	53.97	-5.19	48.78	74.00	-25.22	peak
2	8310.000	53.41	-4.10	49.31	74.00	-24.69	peak
3	10418.000	52.15	-0.52	51.63	74.00	-22.37	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 75 of 227

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:middle

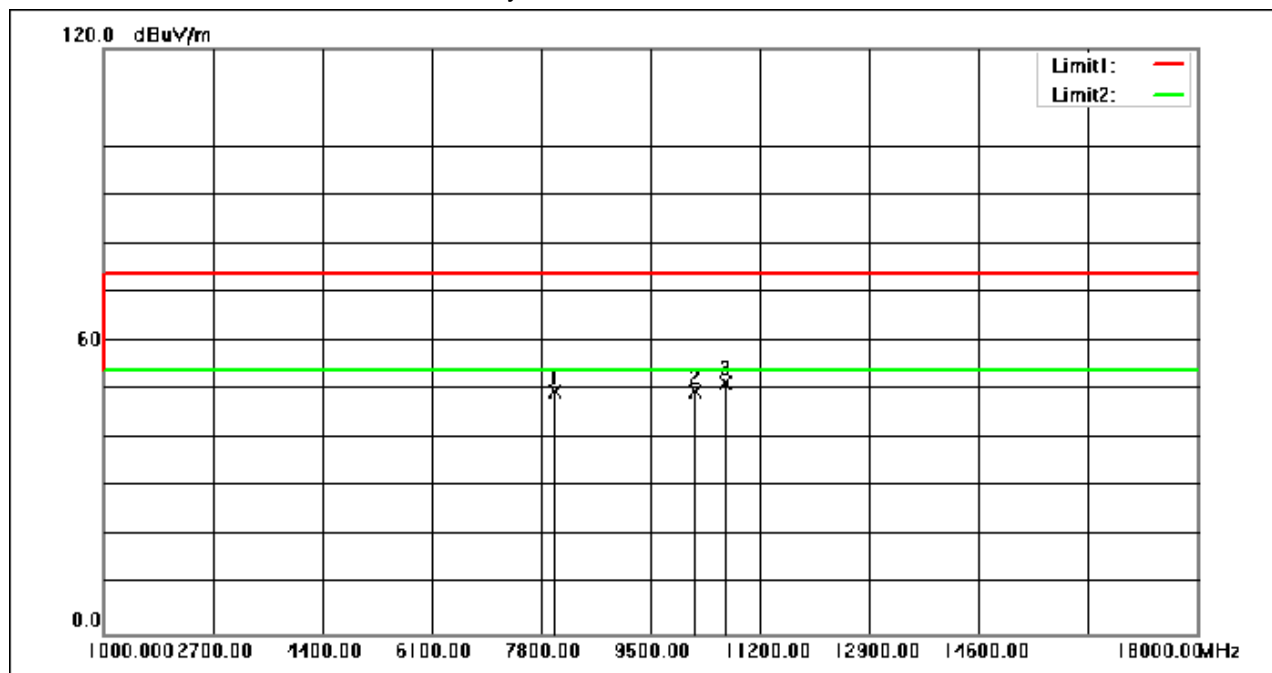

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8004.000	53.48	-3.97	49.51	74.00	-24.49	peak
2	10197.000	50.69	-1.05	49.64	74.00	-24.36	peak
3	10673.000	51.82	-0.44	51.38	74.00	-22.62	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 76 of 227

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

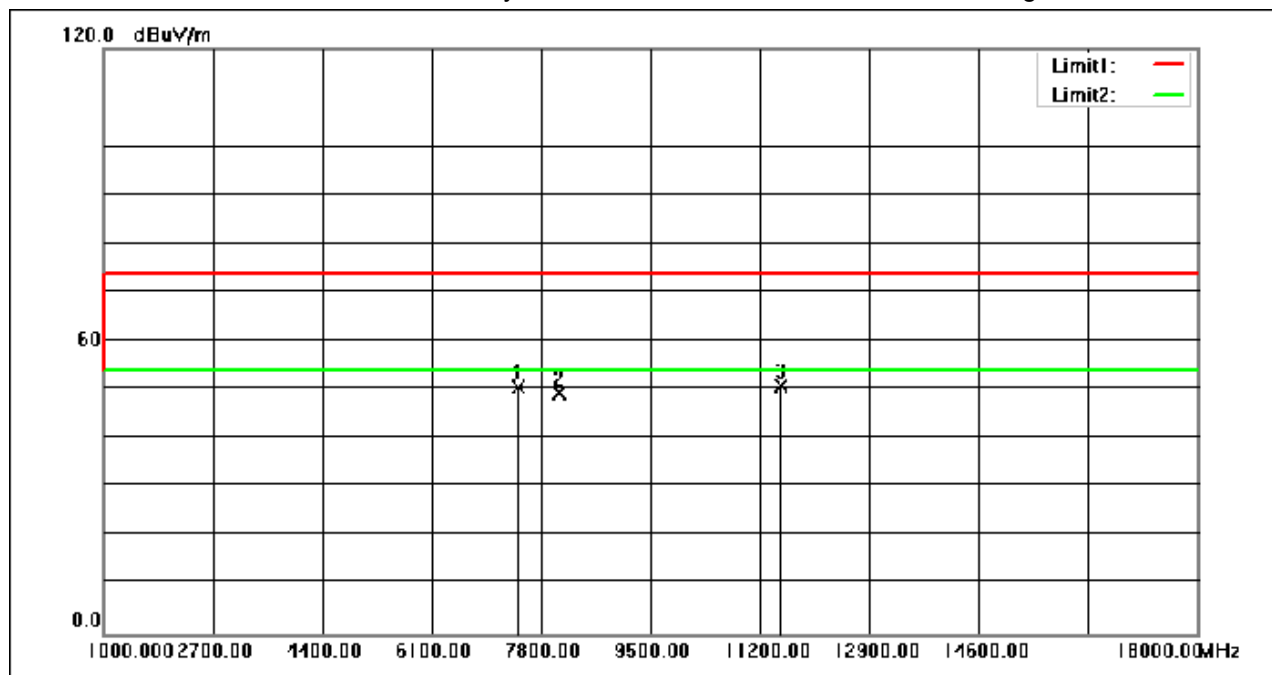

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7443.000	55.69	-5.00	50.69	74.00	-23.31	peak
2	8072.000	53.43	-4.02	49.41	74.00	-24.59	peak
3	11523.000	50.93	-0.01	50.92	74.00	-23.08	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 77 of 227

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

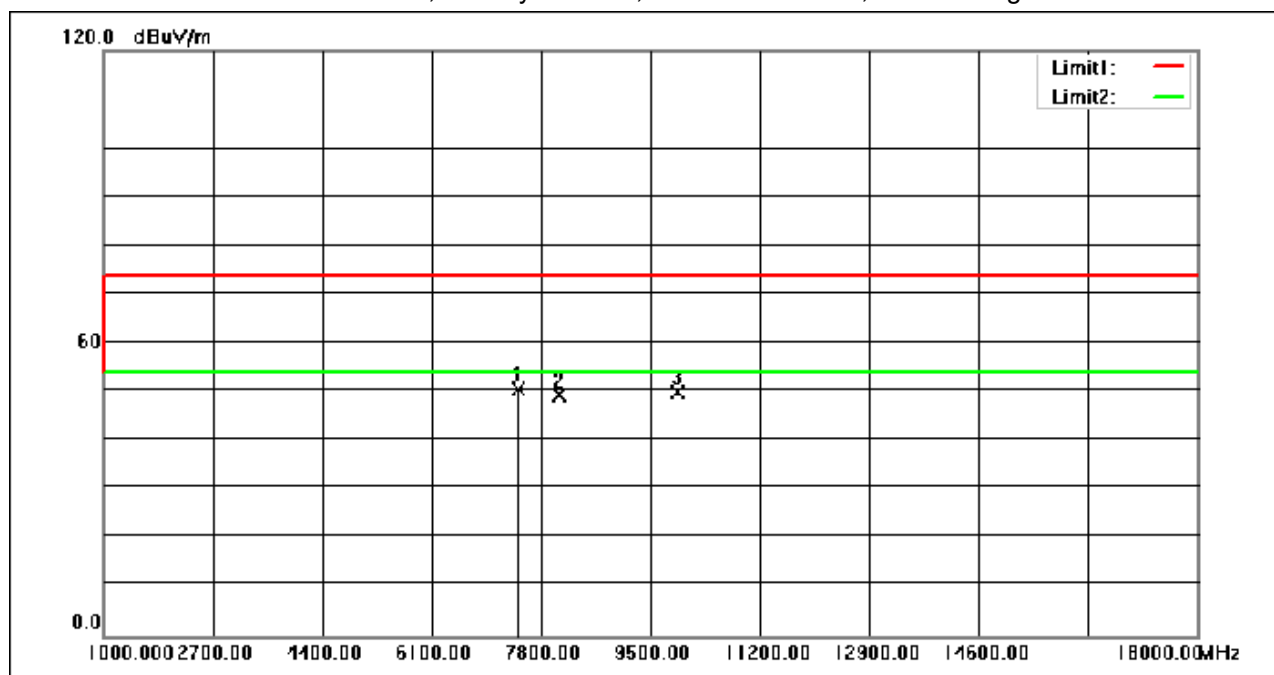

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7443.000	55.69	-5.00	50.69	74.00	-23.31	peak
2	8072.000	53.43	-4.02	49.41	74.00	-24.59	peak
3	9908.000	51.61	-1.72	49.89	74.00	-24.11	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 78 of 227

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:Low

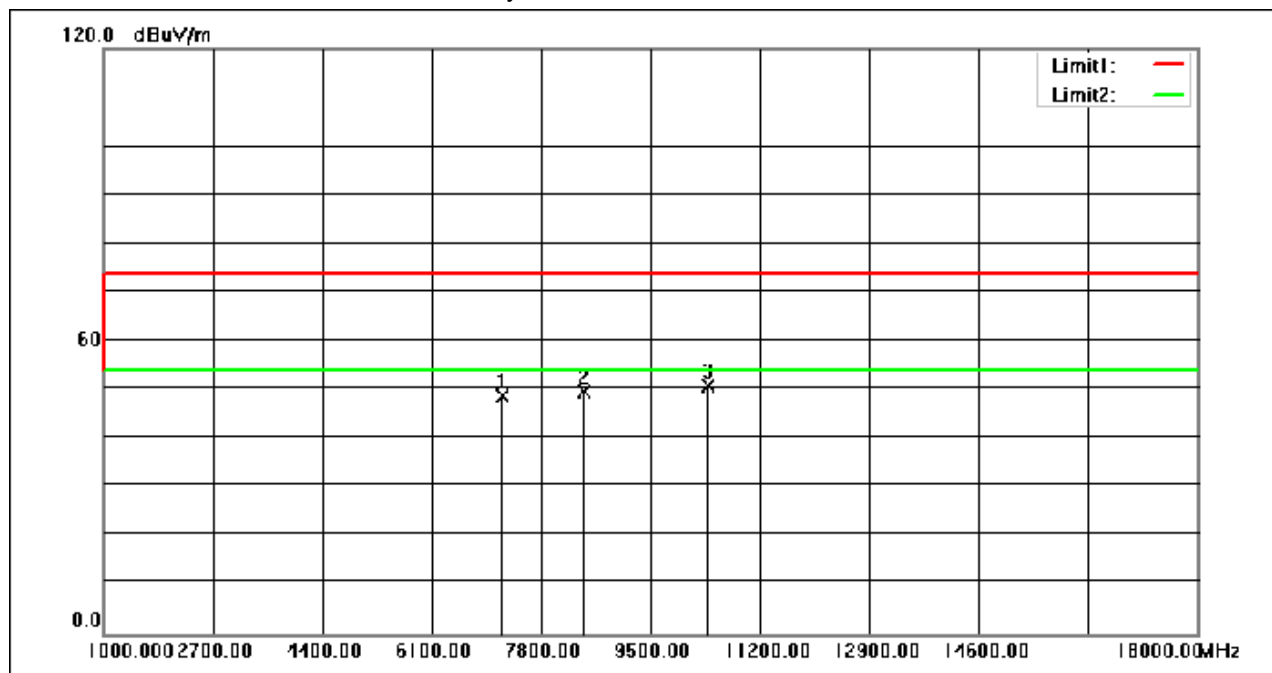

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7205.000	54.25	-5.52	48.73	74.00	-25.27	peak
2	8463.000	53.89	-4.12	49.77	74.00	-24.23	peak
3	10401.000	51.31	-0.56	50.75	74.00	-23.25	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 79 of 227

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:Low

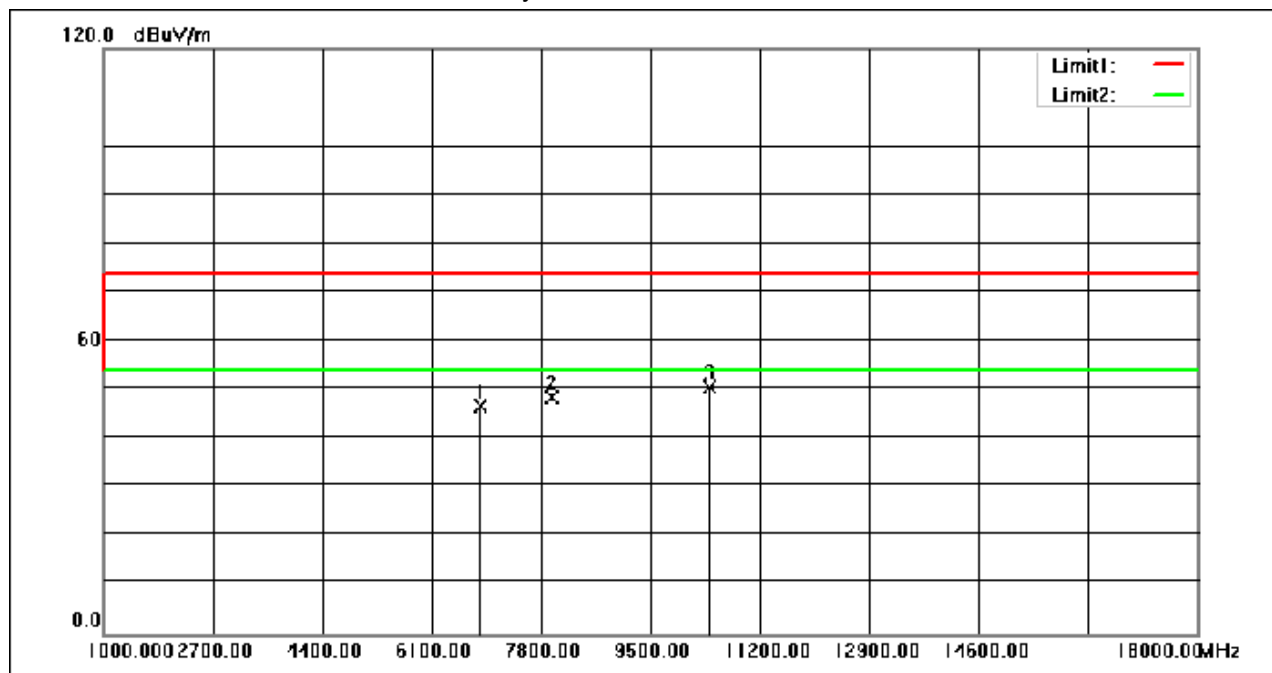

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6848.000	53.54	-6.99	46.55	74.00	-27.45	peak
2	7970.000	52.44	-4.02	48.42	74.00	-25.58	peak
3	10418.000	51.01	-0.52	50.49	74.00	-23.51	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 80 of 227

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:middle

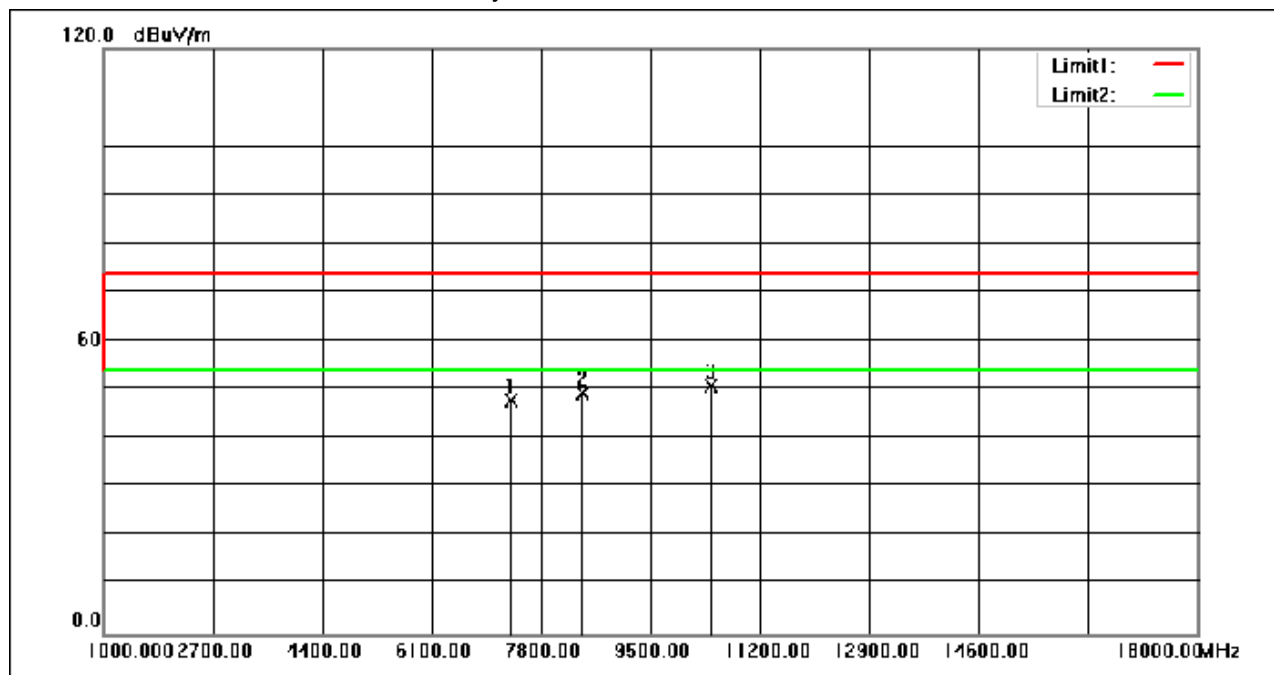

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7324.000	53.13	-5.19	47.94	74.00	-26.06	peak
2	8446.000	53.54	-4.12	49.42	74.00	-24.58	peak
3	10435.000	51.42	-0.48	50.94	74.00	-23.06	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 81 of 227

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:middle

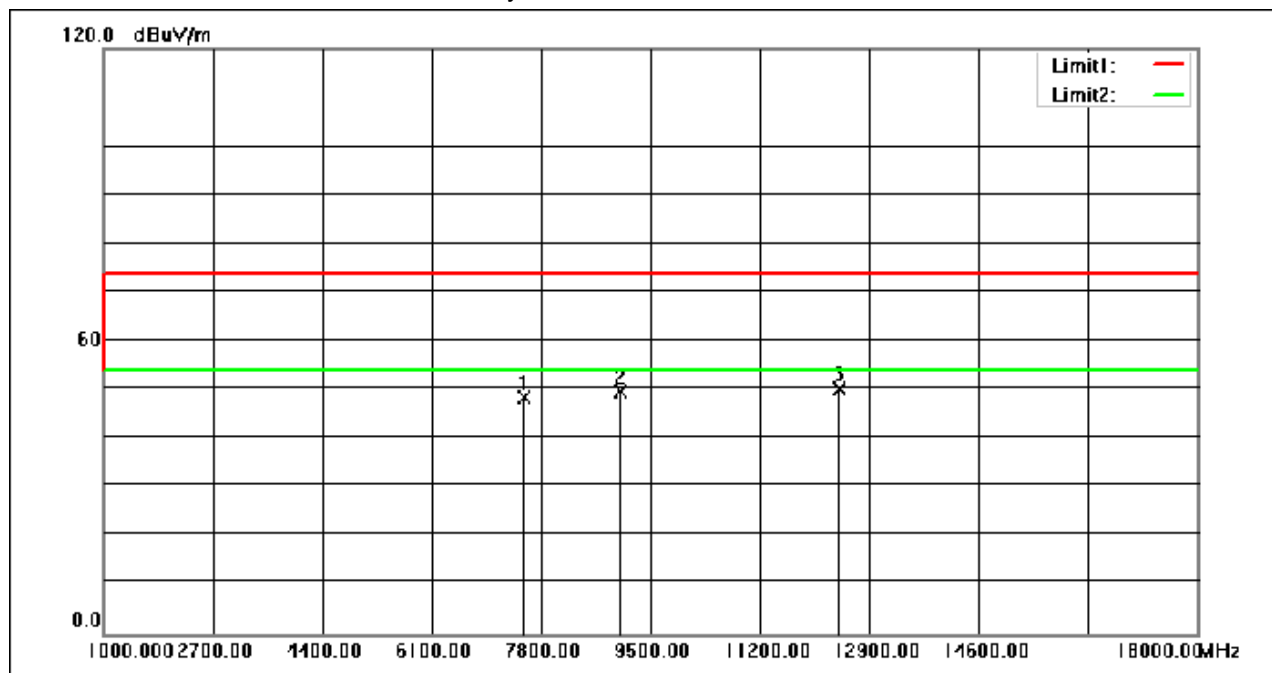

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7528.000	53.44	-4.99	48.45	74.00	-25.55	peak
2	9024.000	52.53	-3.02	49.51	74.00	-24.49	peak
3	12441.000	50.25	0.05	50.30	74.00	-23.70	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 82 of 227

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:High

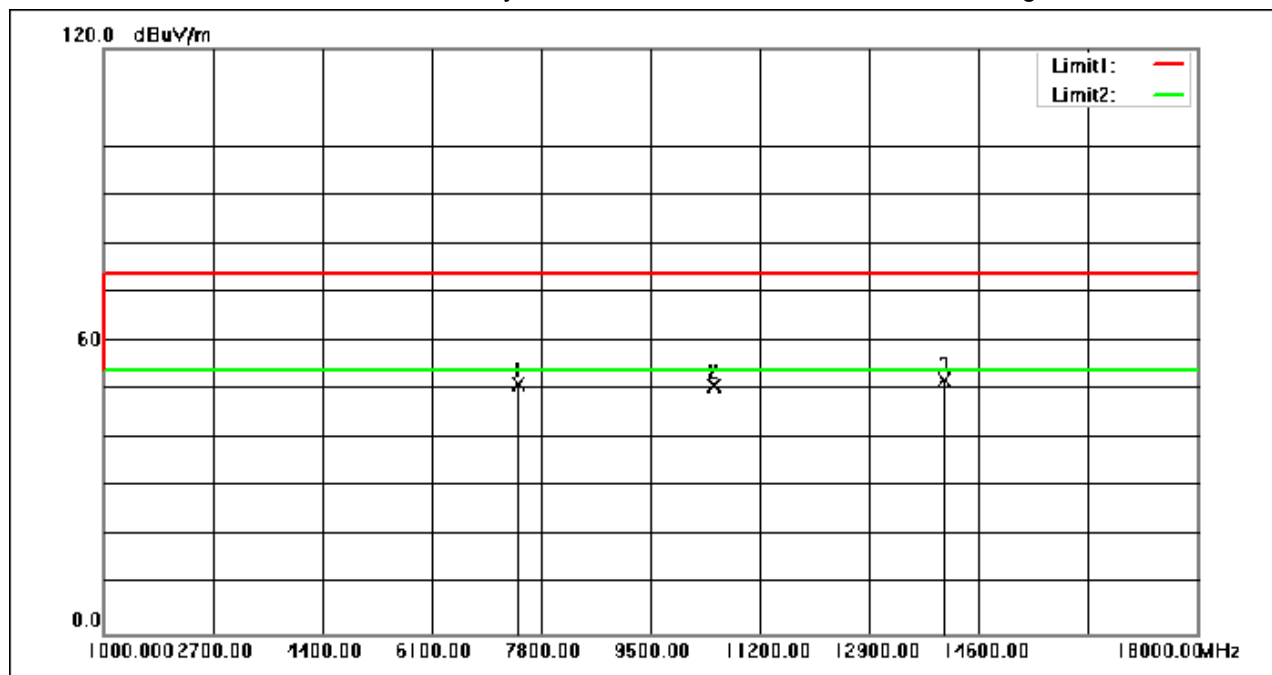

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7443.000	56.12	-5.00	51.12	74.00	-22.88	peak
2	10486.000	51.23	-0.35	50.88	74.00	-23.12	peak
3	14073.000	49.13	3.00	52.13	74.00	-21.87	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 83 of 227

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:High

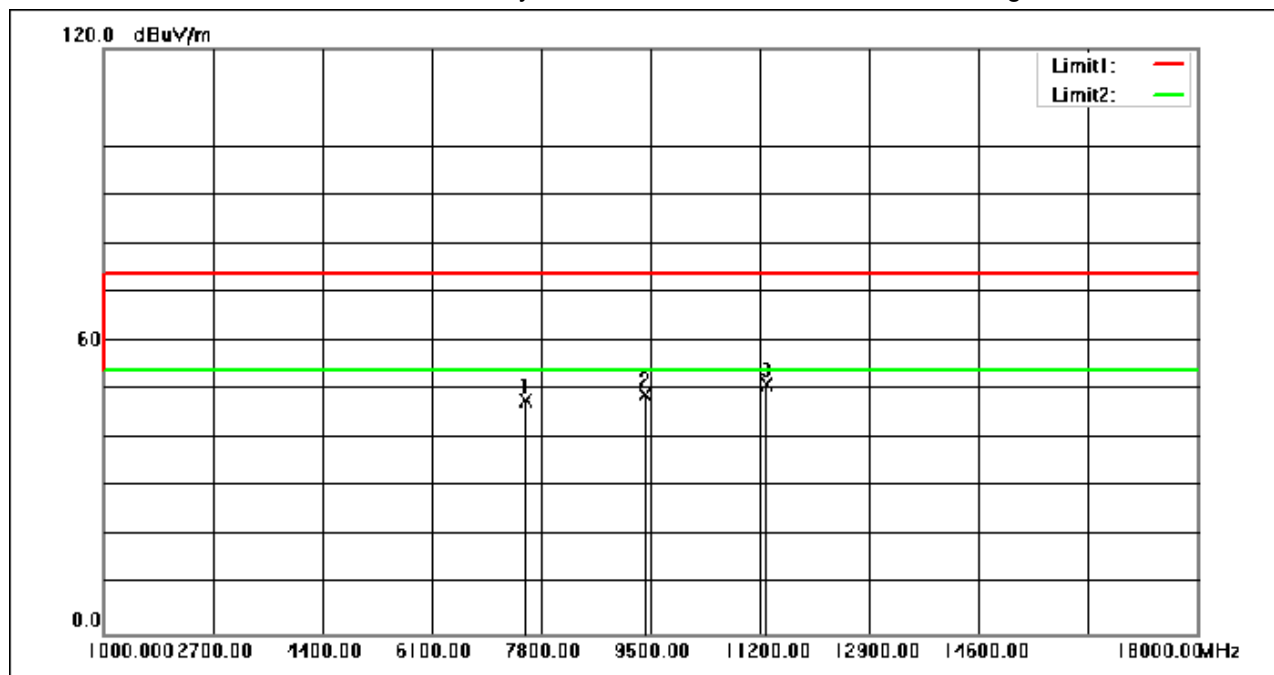

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7562.000	52.89	-4.91	47.98	74.00	-26.02	peak
2	9415.000	51.70	-2.55	49.15	74.00	-24.85	peak
3	11302.000	51.50	-0.39	51.11	74.00	-22.89	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 84 of 227

Test Mode: 02; Polarity: Horizontal; Modulation:GFSK; Channel:Low

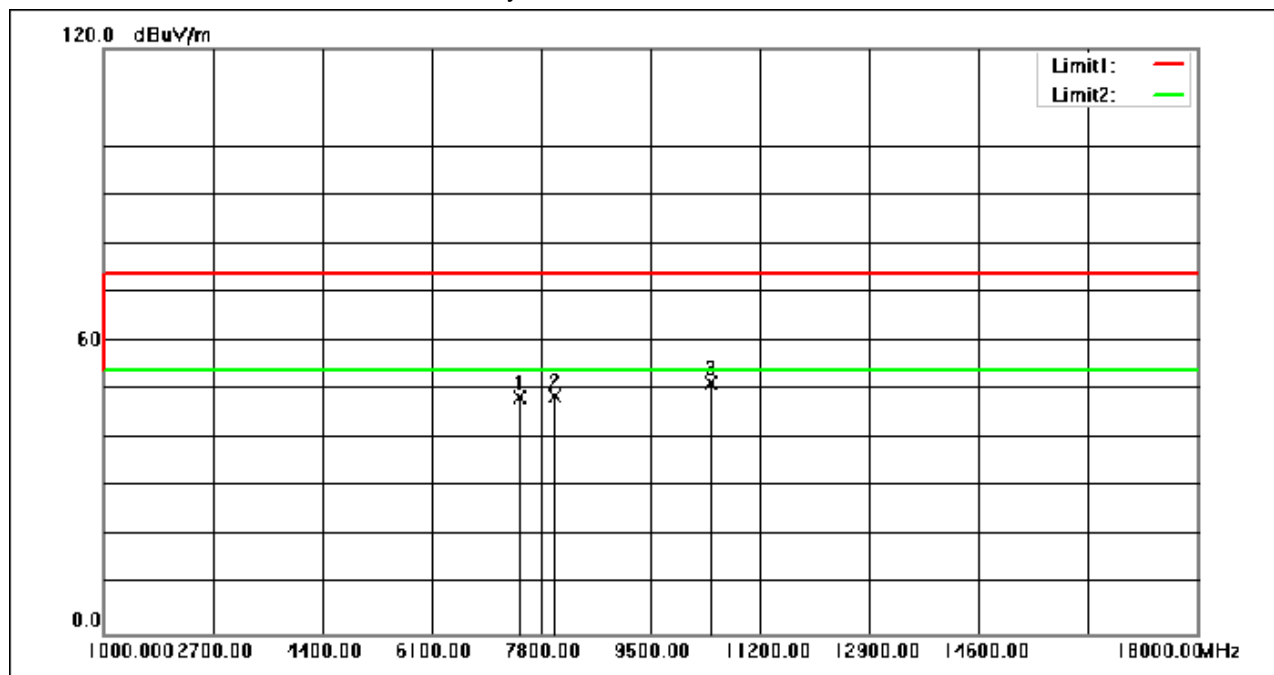

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7477.000	53.44	-5.03	48.41	74.00	-25.59	peak
2	8021.000	52.81	-3.98	48.83	74.00	-25.17	peak
3	10435.000	52.00	-0.48	51.52	74.00	-22.48	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 85 of 227

Test Mode: 02; Polarity: Vertical; Modulation:GFSK; Channel:Low

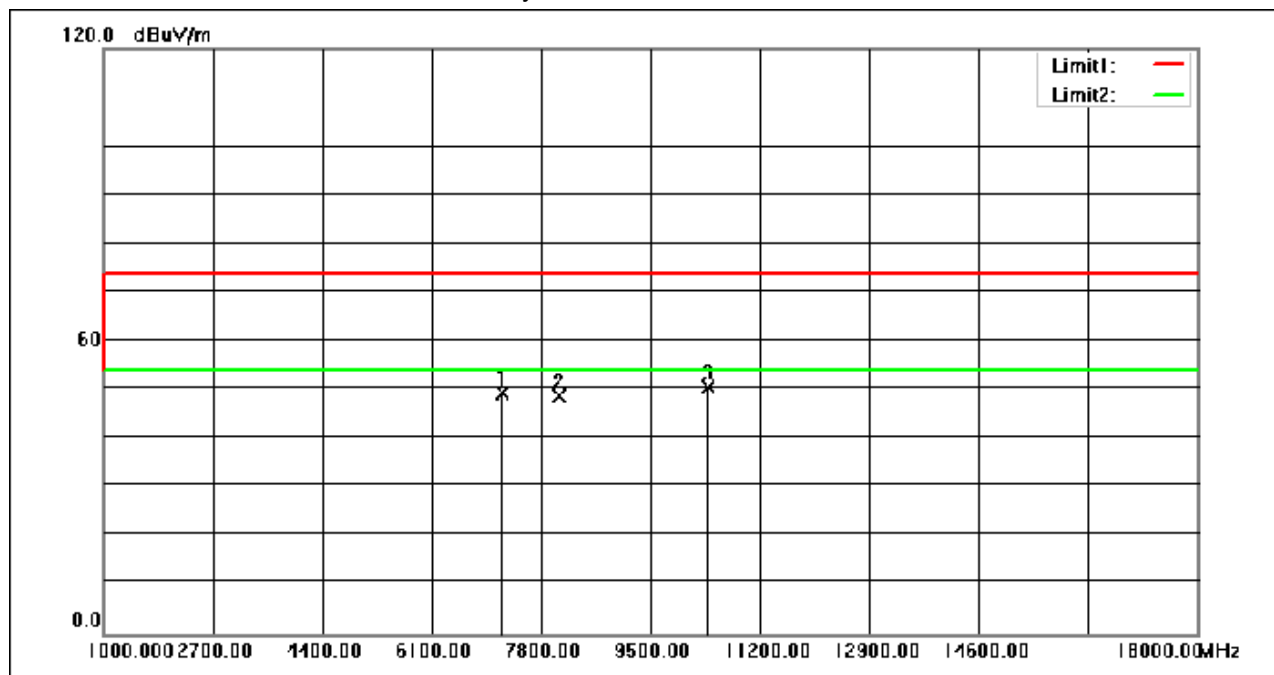

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7205.000	55.00	-5.52	49.48	74.00	-24.52	peak
2	8072.000	52.83	-4.02	48.81	74.00	-25.19	peak
3	10401.000	51.06	-0.56	50.50	74.00	-23.50	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 86 of 227

Test Mode: 02; Polarity: Horizontal; Modulation:GFSK; Channel:middle

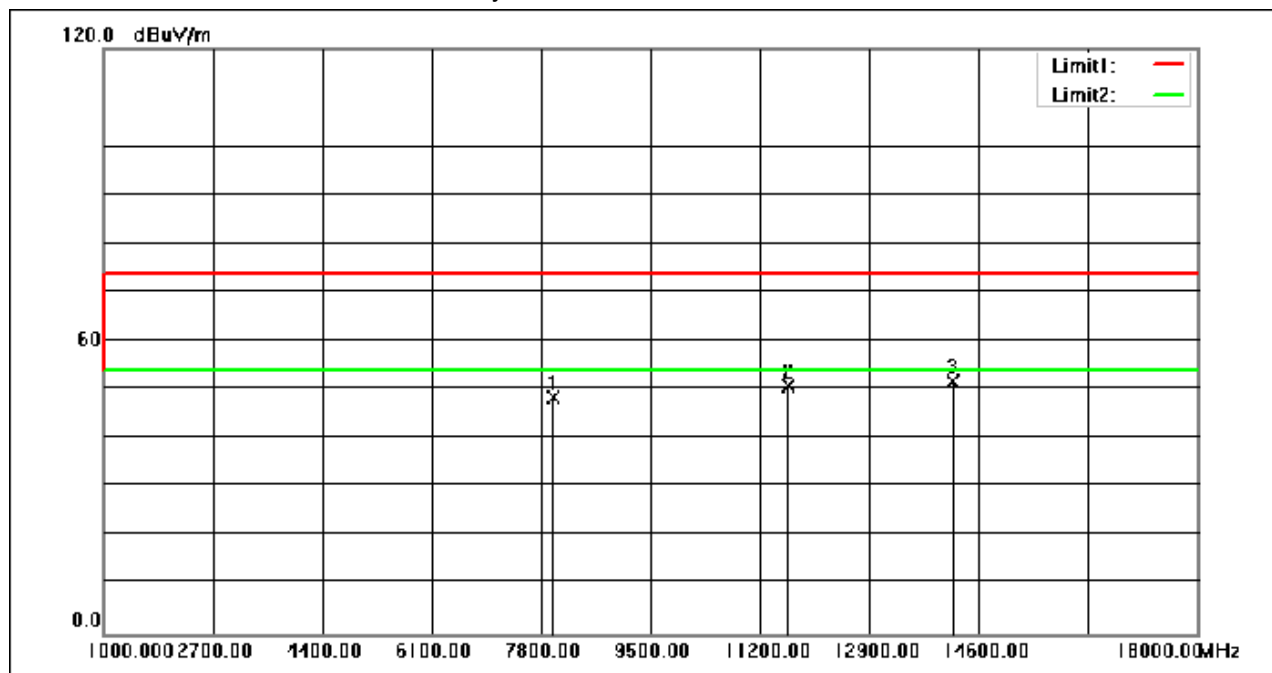

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7987.000	52.47	-3.98	48.49	74.00	-25.51	peak
2	11642.000	50.80	-0.10	50.70	74.00	-23.30	peak
3	14192.000	48.78	3.11	51.89	74.00	-22.11	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 87 of 227

Test Mode: 02; Polarity: Vertical; Modulation:GFSK; Channel:middle

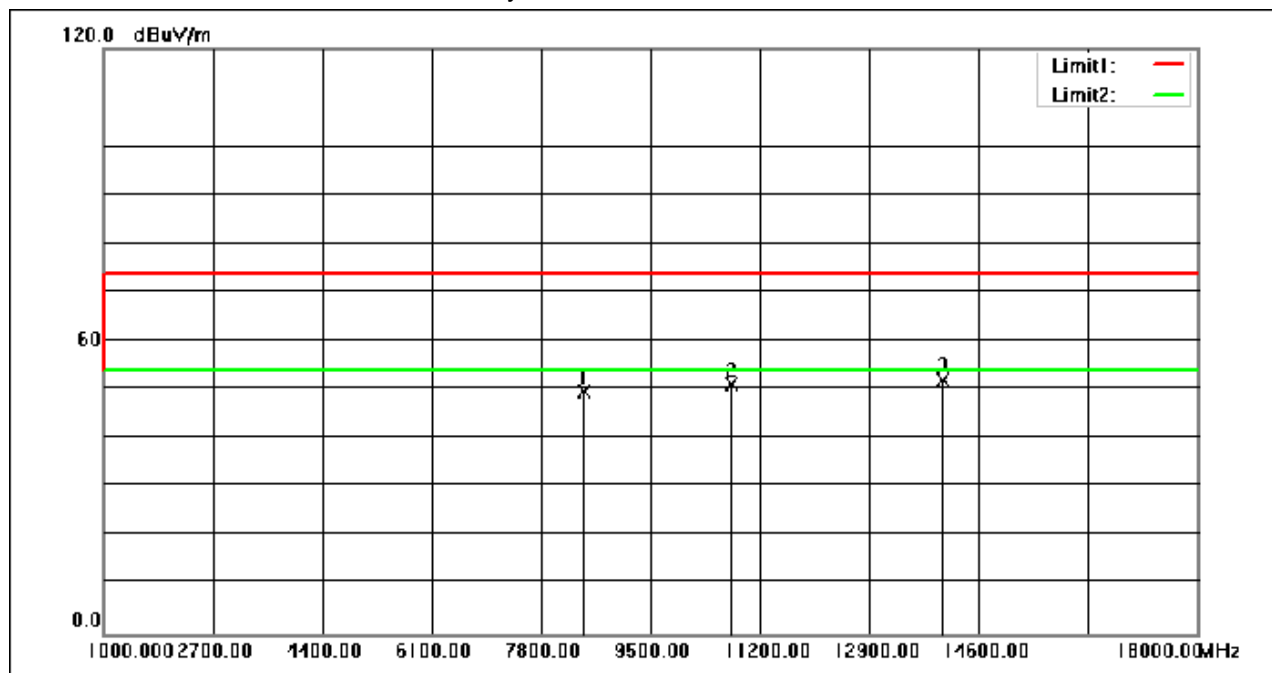

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8463.000	53.66	-4.12	49.54	74.00	-24.46	peak
2	10758.000	51.70	-0.50	51.20	74.00	-22.80	peak
3	14039.000	49.06	2.97	52.03	74.00	-21.97	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 88 of 227

Test Mode: 02; Polarity: Horizontal; Modulation:GFSK; Channel:High

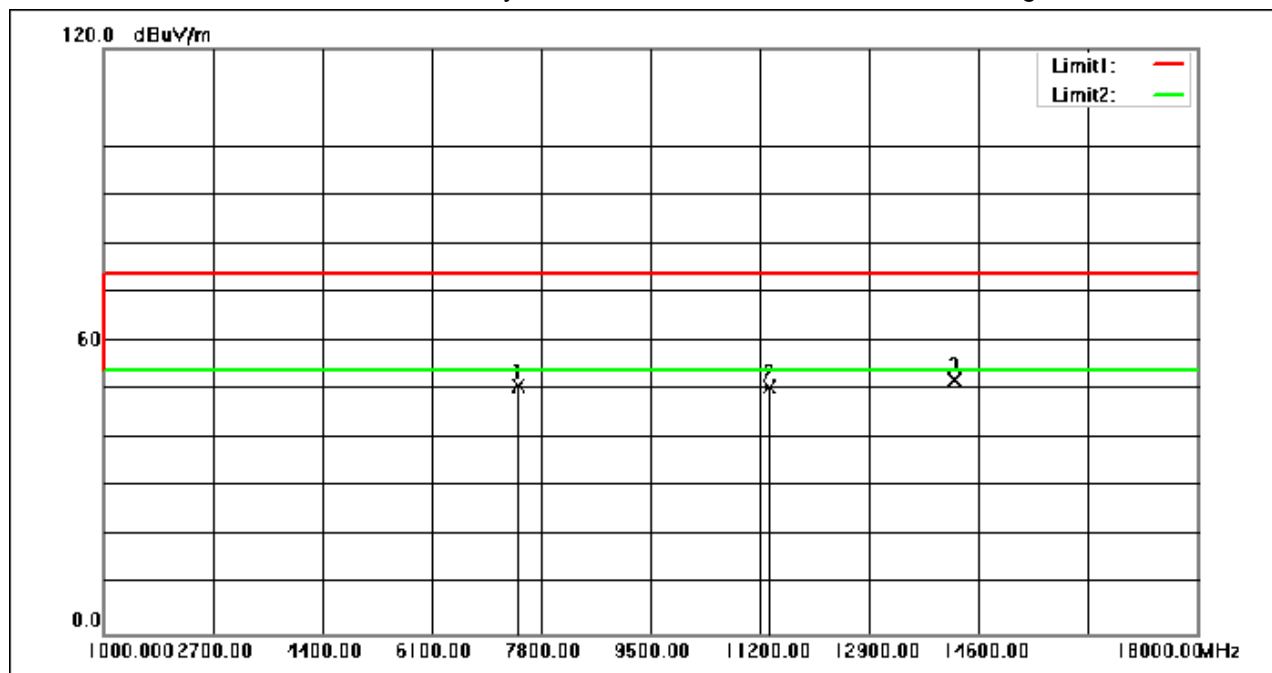

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7443.000	55.85	-5.00	50.85	74.00	-23.15	peak
2	11336.000	50.76	-0.32	50.44	74.00	-23.56	peak
3	14226.000	48.92	3.14	52.06	74.00	-21.94	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 89 of 227

Test Mode: 02; Polarity: Vertical; Modulation:GFSK; Channel:High

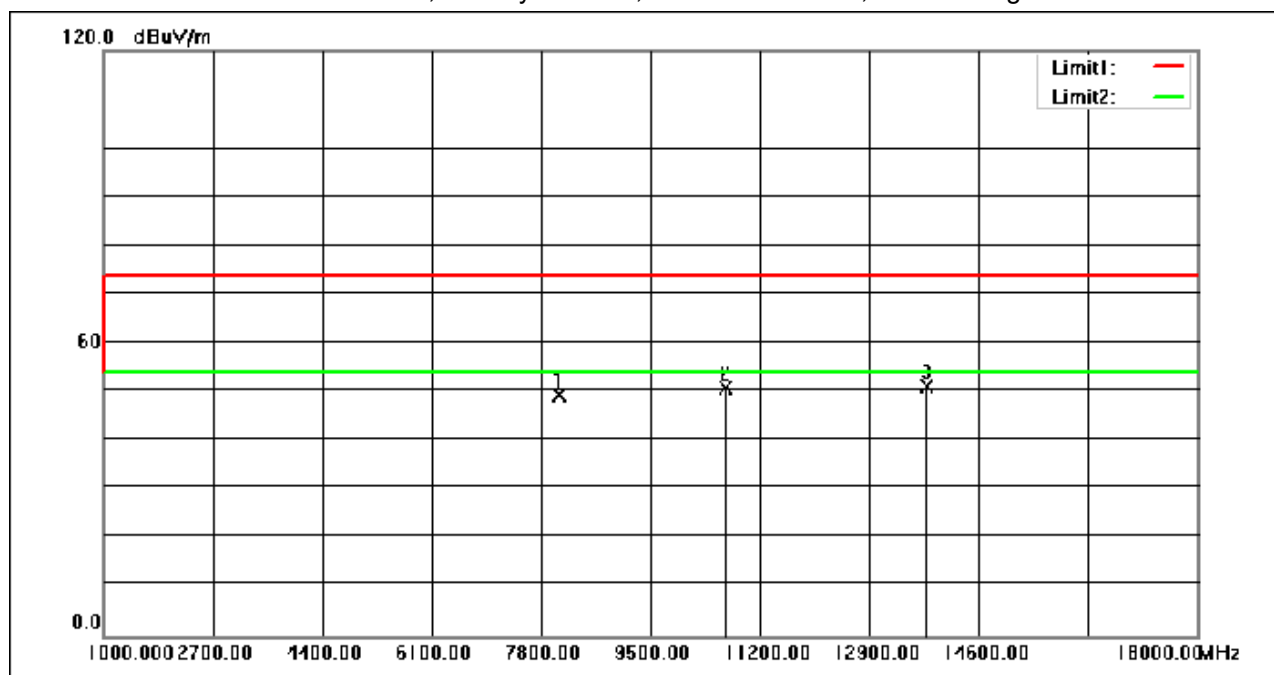

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8072.000	53.32	-4.02	49.30	74.00	-24.70	peak
2	10656.000	51.38	-0.43	50.95	74.00	-23.05	peak
3	13801.000	48.98	2.14	51.12	74.00	-22.88	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 90 of 227

Test Mode: 03; Polarity: Horizontal; Modulation:GFSK; Channel:Low

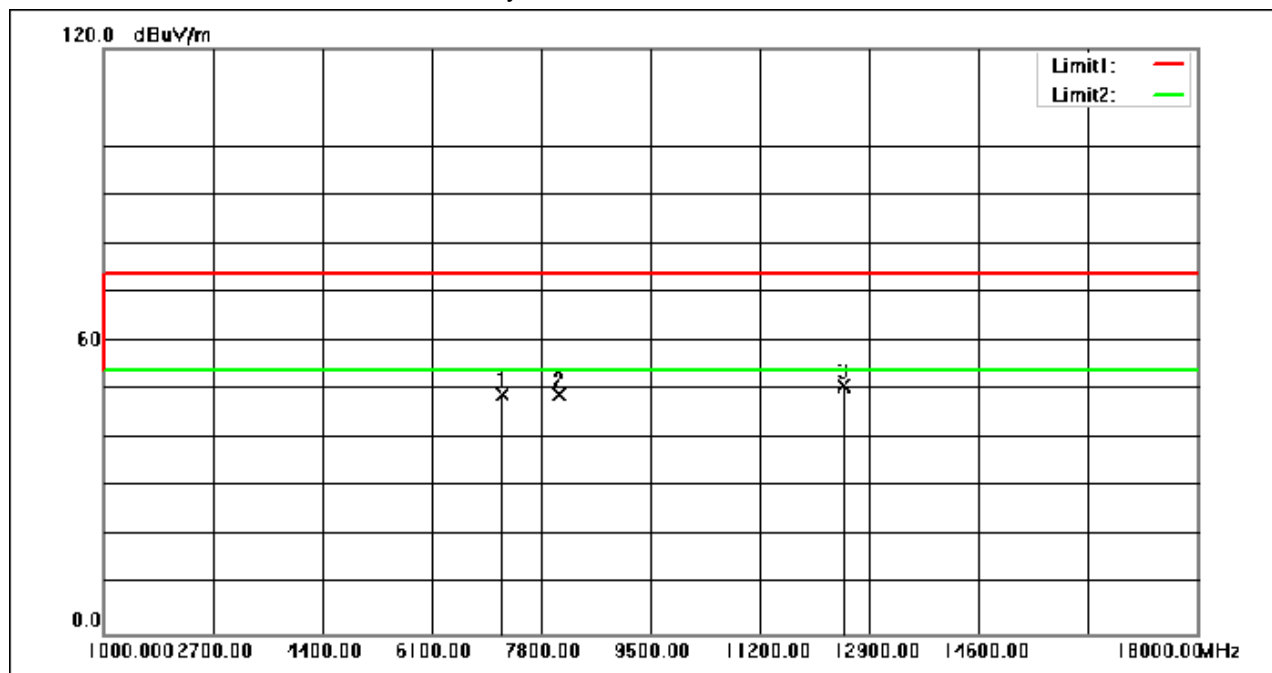

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7205.000	54.46	-5.52	48.94	74.00	-25.06	peak
2	8072.000	53.20	-4.02	49.18	74.00	-24.82	peak
3	12492.000	50.85	0.09	50.94	74.00	-23.06	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 91 of 227

Test Mode: 03; Polarity: Vertical; Modulation:GFSK; Channel:Low

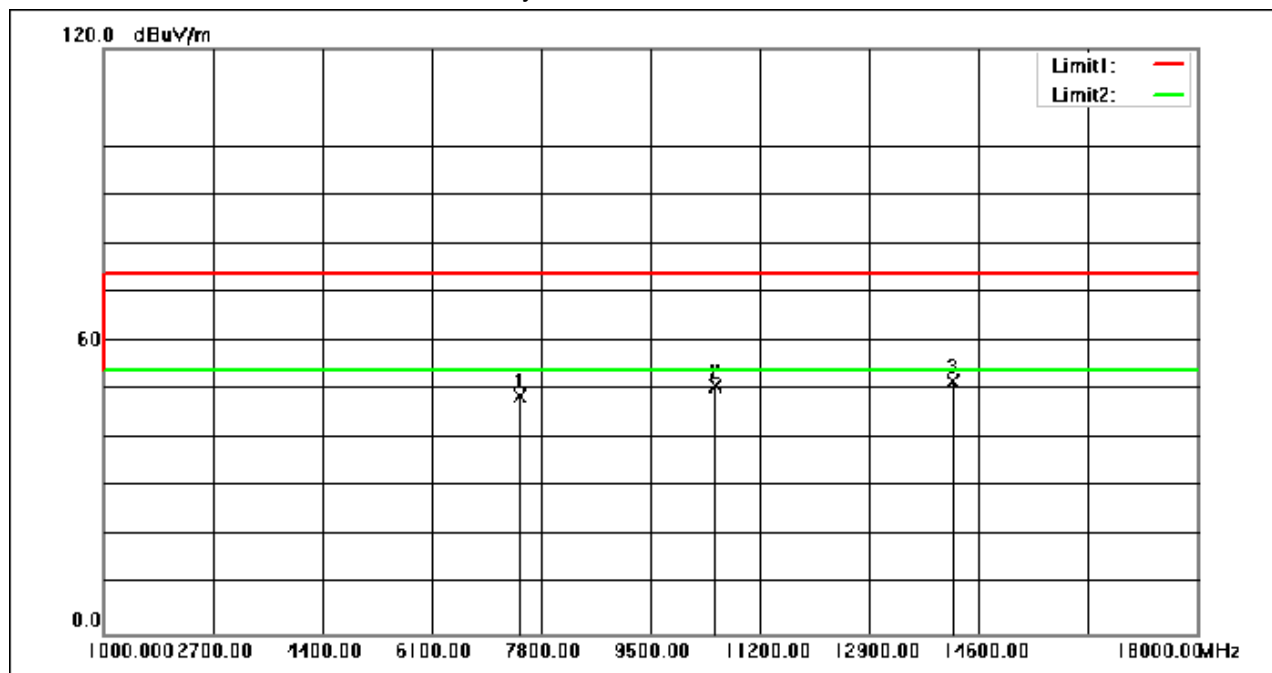

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7477.000	53.73	-5.03	48.70	74.00	-25.30	peak
2	10503.000	51.29	-0.33	50.96	74.00	-23.04	peak
3	14192.000	48.67	3.11	51.78	74.00	-22.22	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 92 of 227

Test Mode: 03; Polarity: Horizontal; Modulation:GFSK; Channel:middle

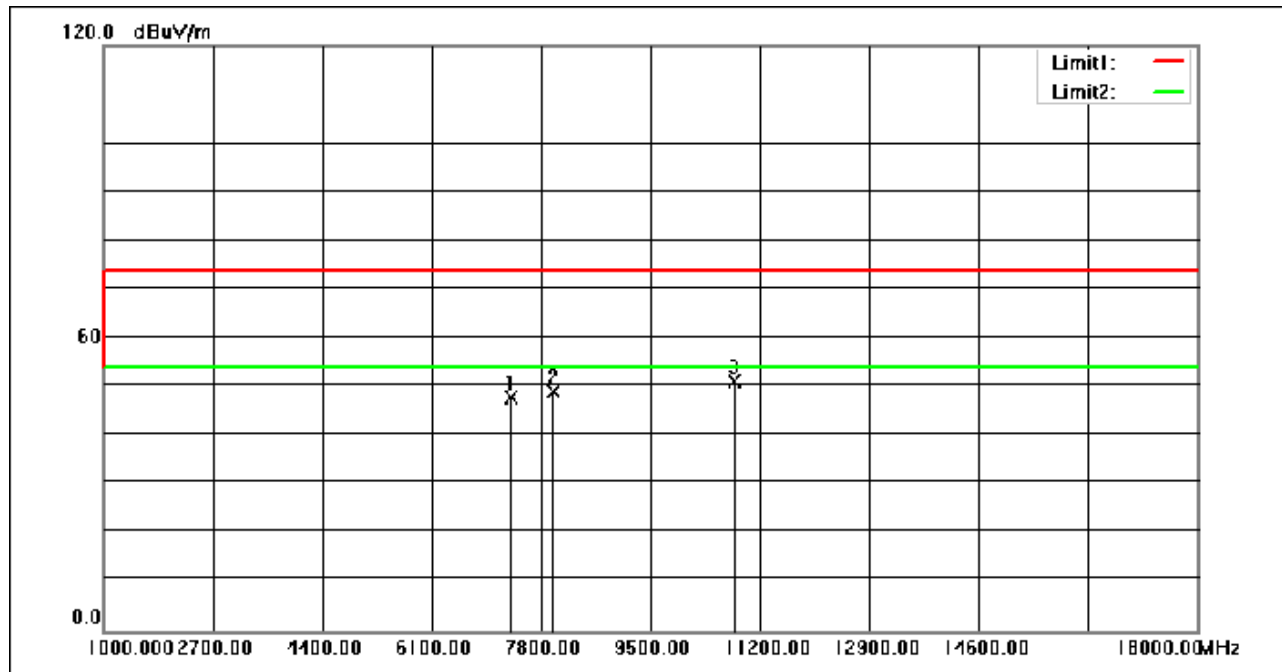

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7324.000	53.10	-5.19	47.91	74.00	-26.09	peak
2	7987.000	53.07	-3.98	49.09	74.00	-24.91	peak
3	10809.000	51.78	-0.54	51.24	74.00	-22.76	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 93 of 227

Test Mode: 03; Polarity: Vertical; Modulation:GFSK; Channel:middle

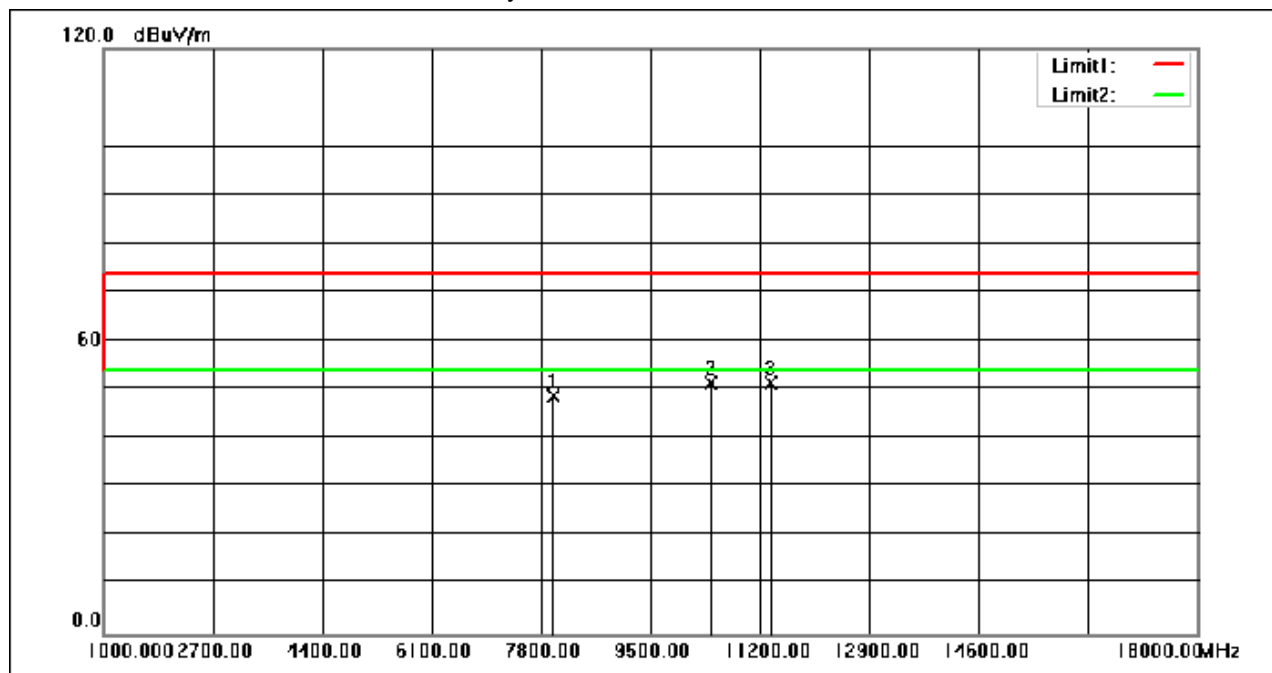

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7987.000	52.62	-3.98	48.64	74.00	-25.36	peak
2	10435.000	52.03	-0.48	51.55	74.00	-22.45	peak
3	11370.000	51.61	-0.25	51.36	74.00	-22.64	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 94 of 227

Test Mode: 03; Polarity: Horizontal; Modulation:GFSK; Channel:High

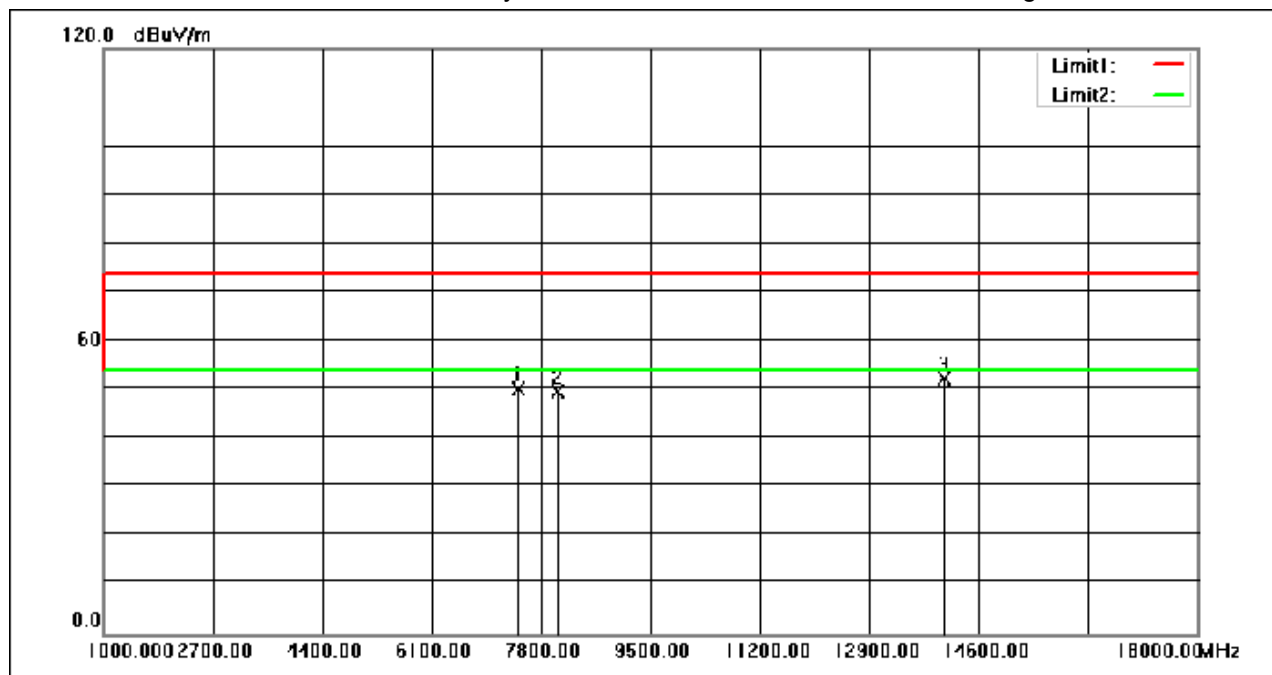

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7443.000	55.22	-5.00	50.22	74.00	-23.78	peak
2	8055.000	53.53	-4.01	49.52	74.00	-24.48	peak
3	14056.000	49.32	2.98	52.30	74.00	-21.70	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 95 of 227

Test Mode: 03; Polarity: Vertical; Modulation:GFSK; Channel:High

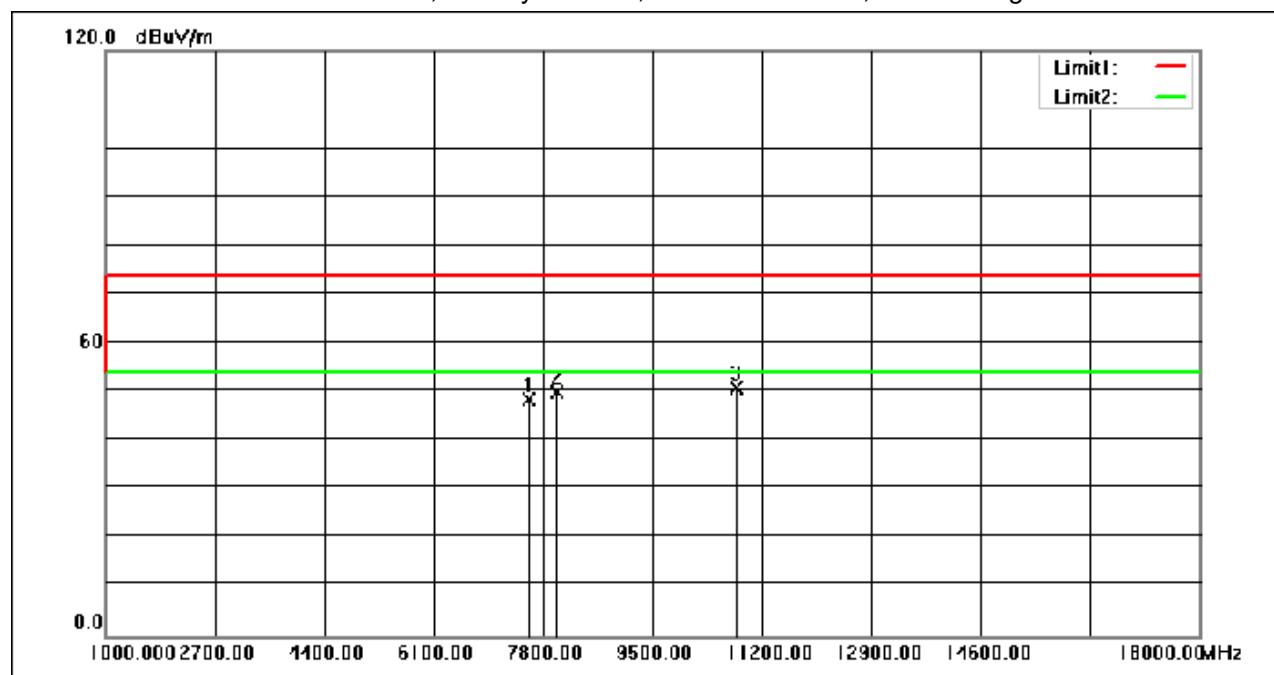

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7579.000	53.26	-4.88	48.38	74.00	-25.62	peak
2	8004.000	53.84	-3.97	49.87	74.00	-24.13	peak
3	10809.000	51.41	-0.54	50.87	74.00	-23.13	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 96 of 227

Test Mode: 04; Polarity: Horizontal; Modulation:GFSK; Channel:Low

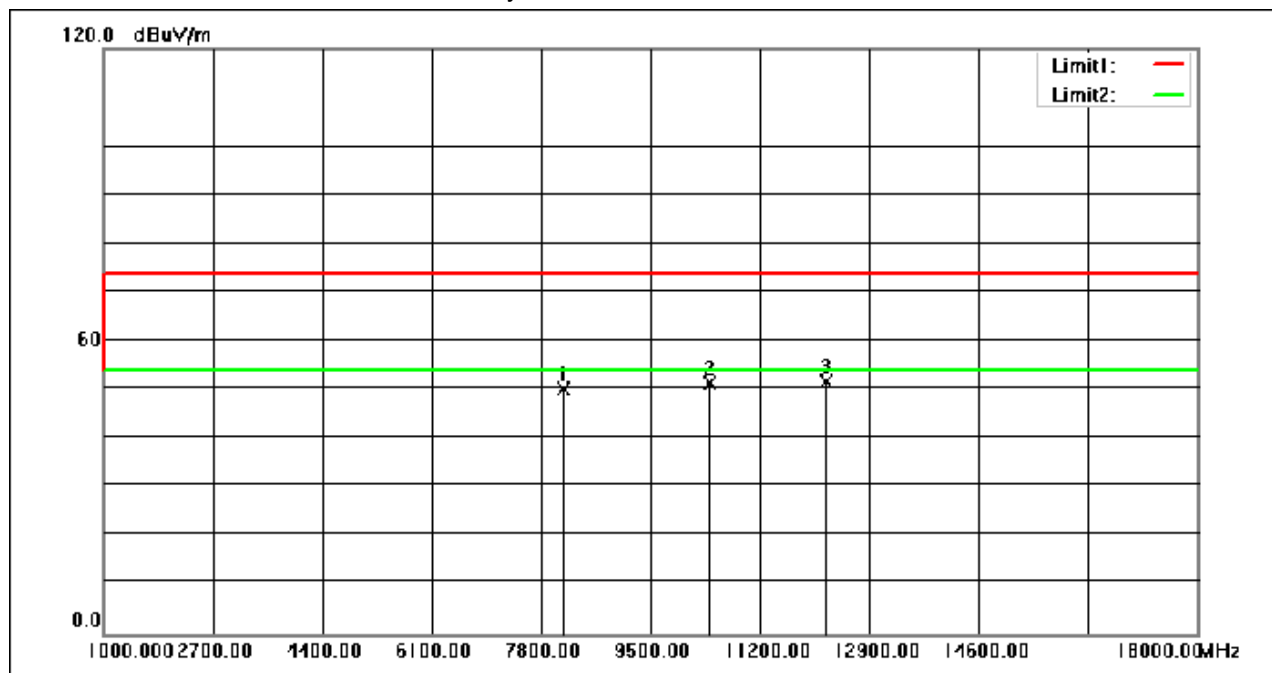

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8140.000	54.27	-4.09	50.18	74.00	-23.82	peak
2	10418.000	51.89	-0.52	51.37	74.00	-22.63	peak
3	12220.000	51.93	-0.15	51.78	74.00	-22.22	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 97 of 227

Test Mode: 04; Polarity: Vertical; Modulation:GFSK; Channel:Low

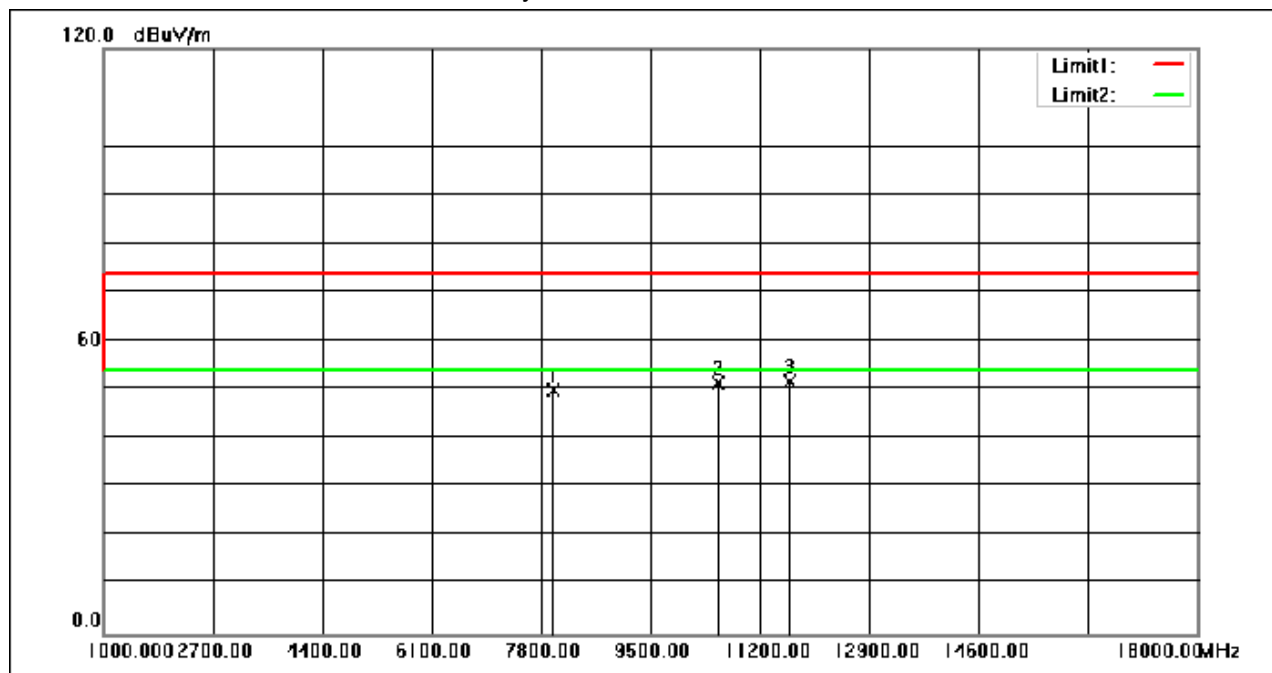

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7987.000	54.00	-3.98	50.02	74.00	-23.98	peak
2	10554.000	51.91	-0.36	51.55	74.00	-22.45	peak
3	11659.000	51.94	-0.11	51.83	74.00	-22.17	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 98 of 227

Test Mode: 04; Polarity: Horizontal; Modulation:GFSK; Channel:middle

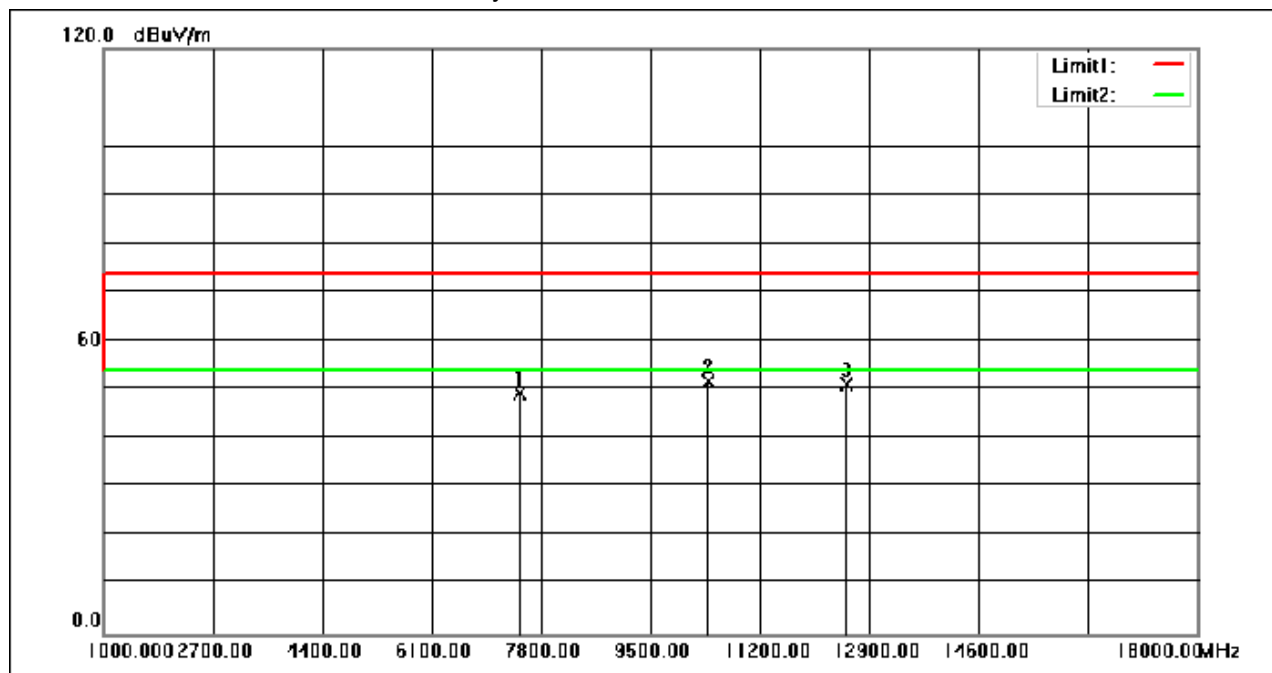

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7477.000	54.48	-5.03	49.45	74.00	-24.55	peak
2	10401.000	52.43	-0.56	51.87	74.00	-22.13	peak
3	12543.000	50.98	0.11	51.09	74.00	-22.91	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 99 of 227

Test Mode: 04; Polarity: Vertical; Modulation:GFSK; Channel:middle

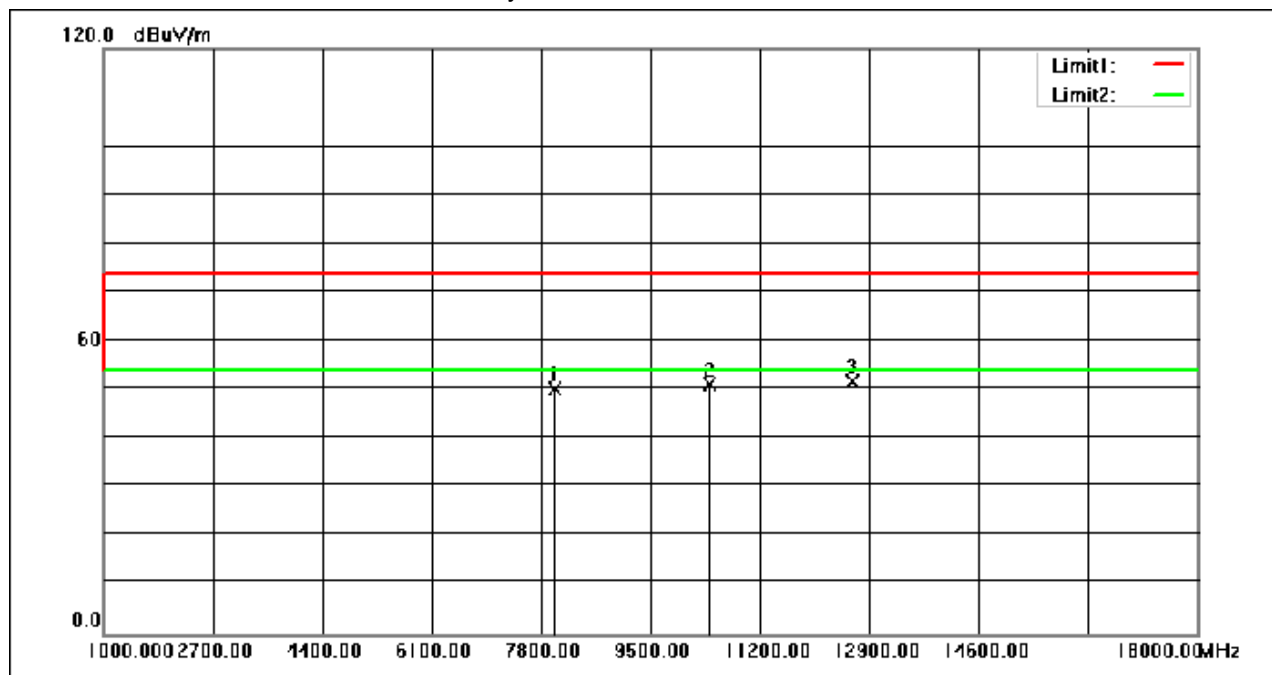

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8004.000	54.22	-3.97	50.25	74.00	-23.75	peak
2	10418.000	51.68	-0.52	51.16	74.00	-22.84	peak
3	12628.000	51.72	0.14	51.86	74.00	-22.14	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 100 of 227

Test Mode: 04; Polarity: Horizontal; Modulation:GFSK; Channel:High

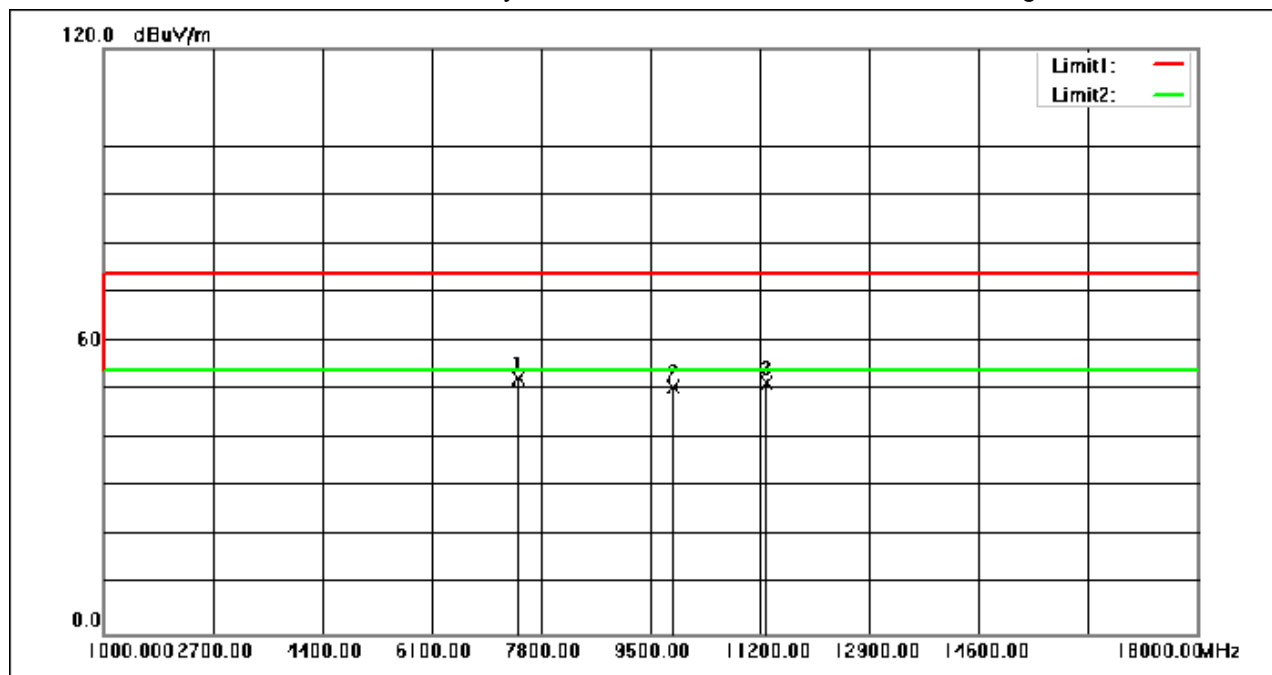

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7443.000	57.44	-5.00	52.44	74.00	-21.56	peak
2	9840.000	52.28	-1.86	50.42	74.00	-23.58	peak
3	11302.000	51.74	-0.39	51.35	74.00	-22.65	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 101 of 227

Test Mode: 04; Polarity: Vertical; Modulation:GFSK; Channel:High

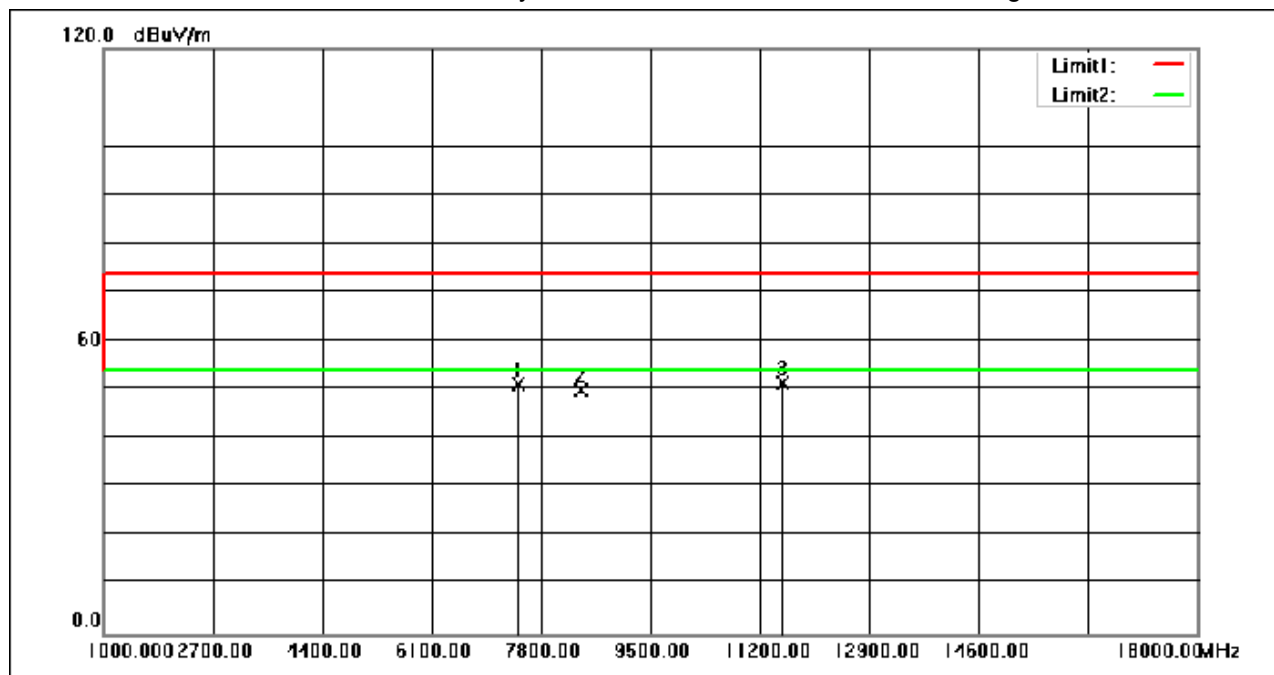

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7443.000	56.21	-5.00	51.21	74.00	-22.79	peak
2	8412.000	54.17	-4.12	50.05	74.00	-23.95	peak
3	11557.000	51.48	-0.04	51.44	74.00	-22.56	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 102 of 227

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:Low

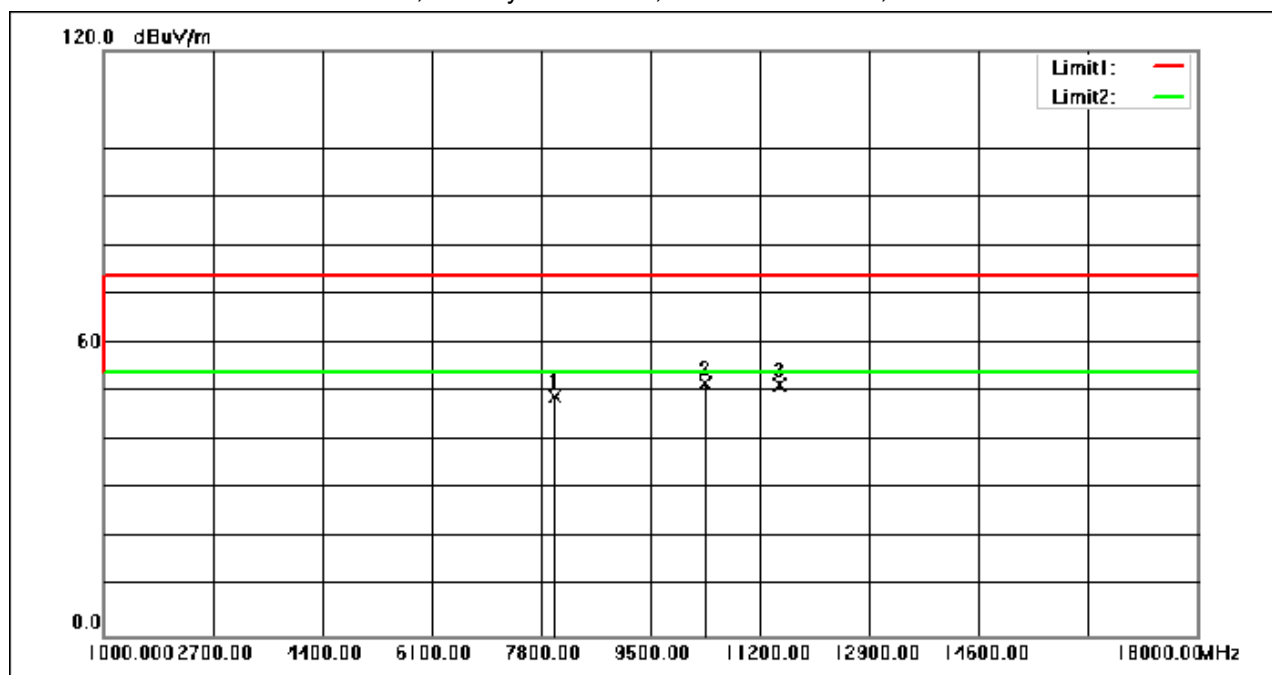

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8021.000	53.11	-3.98	49.13	74.00	-24.87	peak
2	10350.000	52.30	-0.68	51.62	74.00	-22.38	peak
3	11506.000	51.54	0.01	51.55	74.00	-22.45	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 103 of 227

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:Low

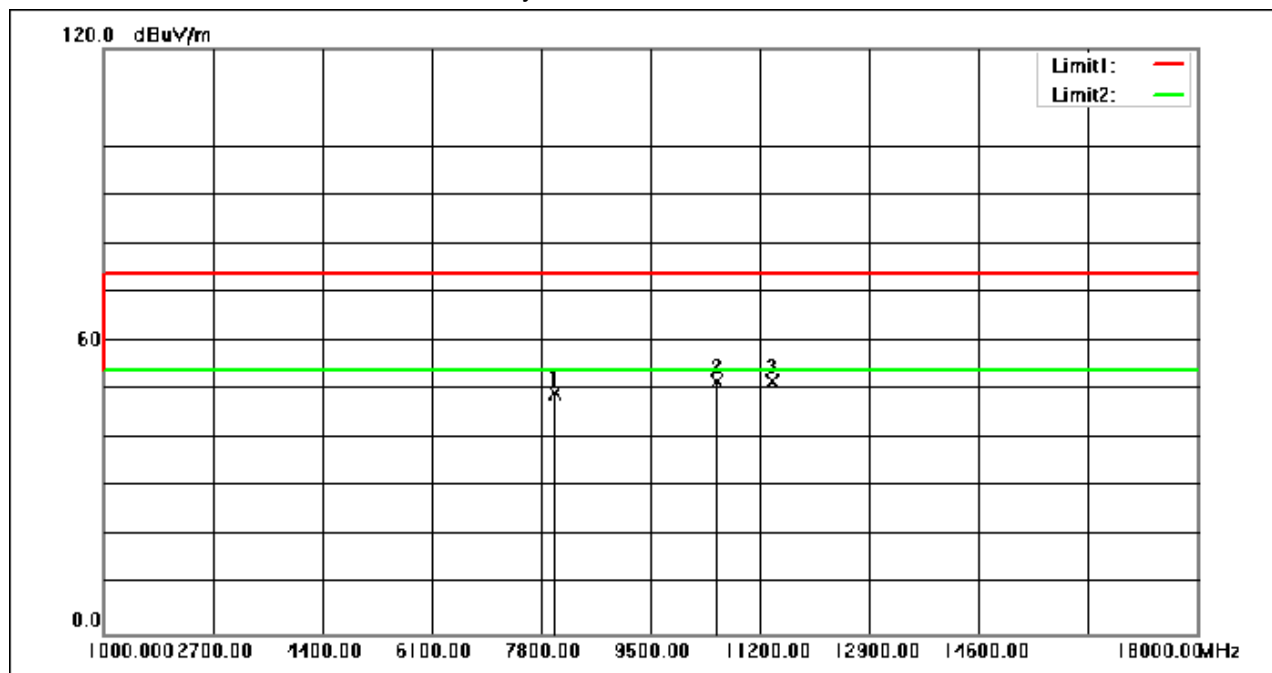

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8021.000	53.28	-3.98	49.30	74.00	-24.70	peak
2	10520.000	52.11	-0.34	51.77	74.00	-22.23	peak
3	11387.000	51.87	-0.22	51.65	74.00	-22.35	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 104 of 227

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:middle

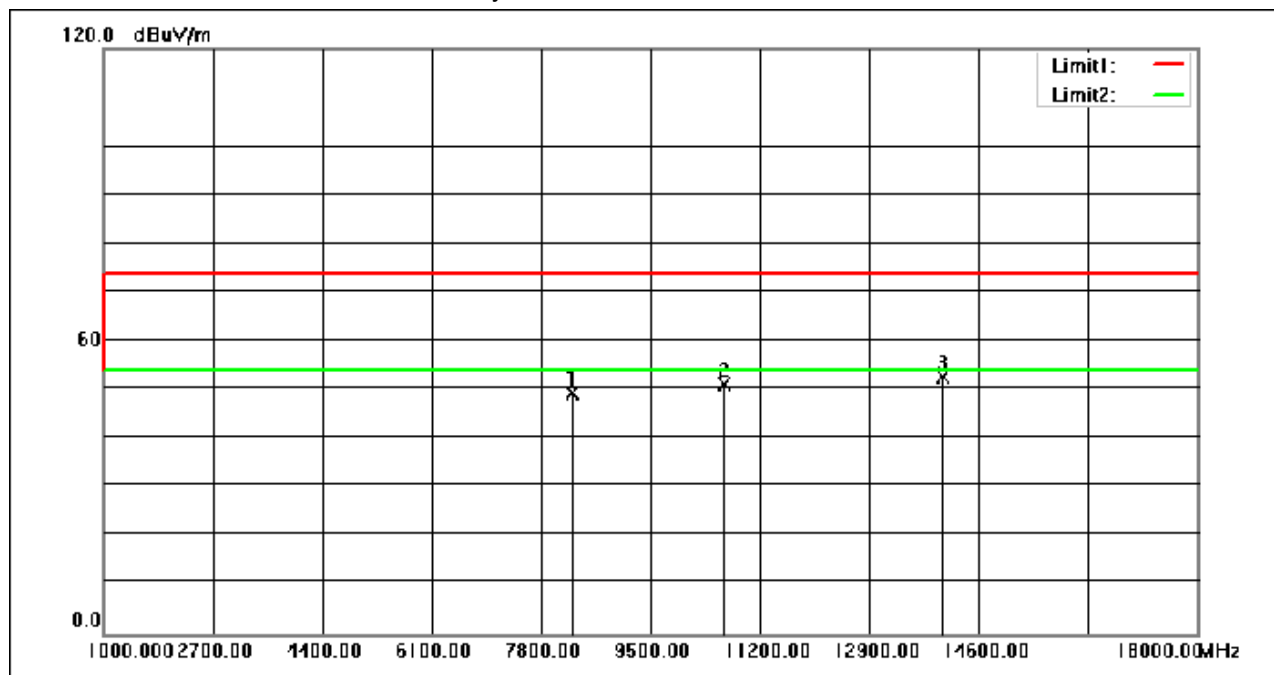

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8276.000	53.40	-4.10	49.30	74.00	-24.70	peak
2	10639.000	51.56	-0.42	51.14	74.00	-22.86	peak
3	14039.000	49.58	2.97	52.55	74.00	-21.45	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 105 of 227

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:middle

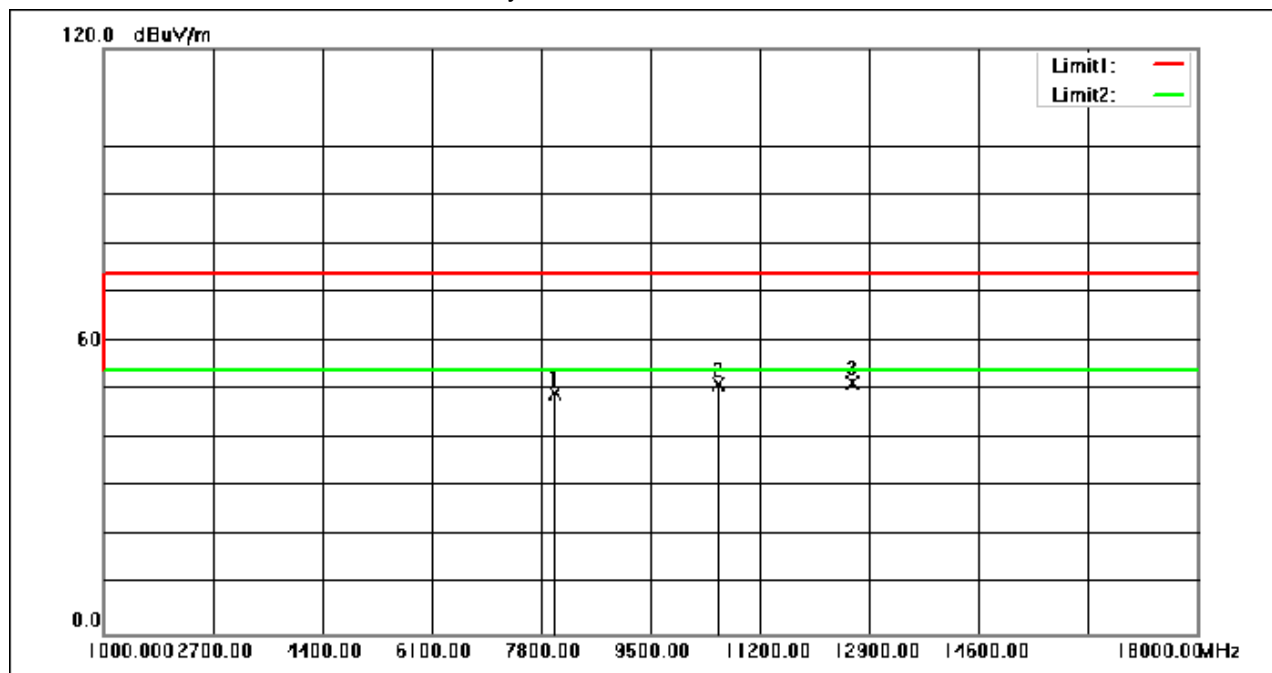

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8021.000	53.39	-3.98	49.41	74.00	-24.59	peak
2	10554.000	51.53	-0.36	51.17	74.00	-22.83	peak
3	12645.000	51.20	0.15	51.35	74.00	-22.65	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 106 of 227

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:High

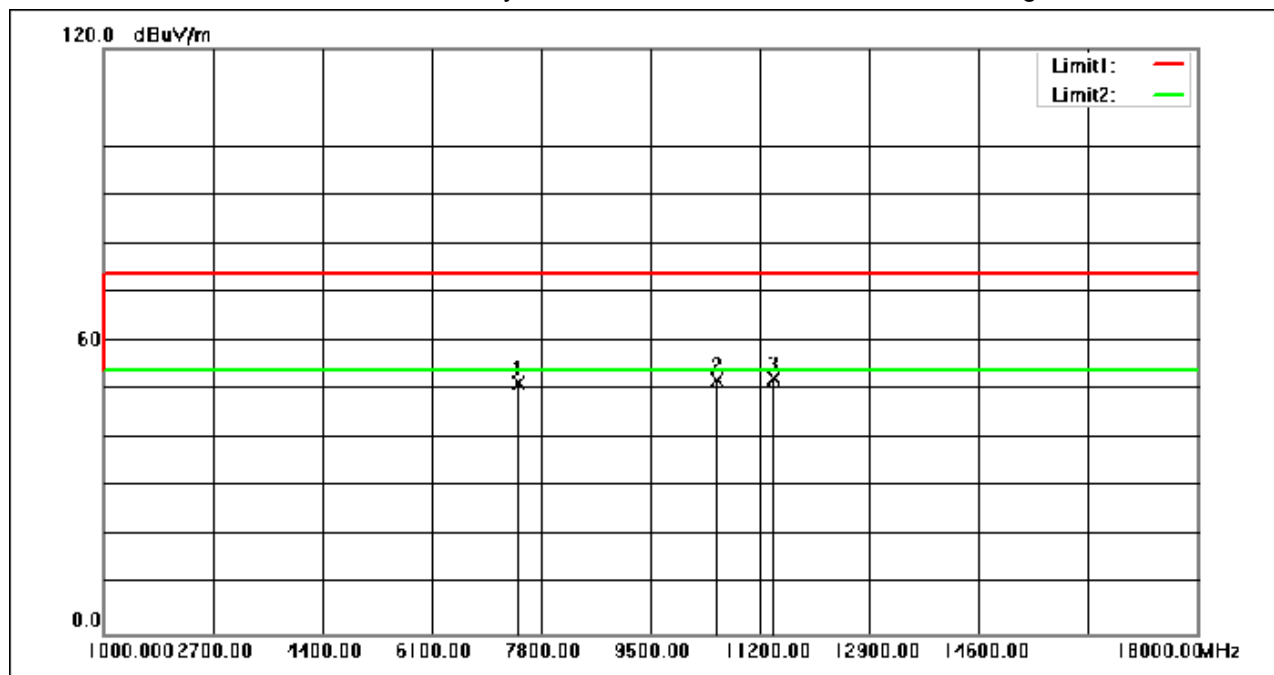

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7443.000	56.36	-5.00	51.36	74.00	-22.64	peak
2	10537.000	52.49	-0.35	52.14	74.00	-21.86	peak
3	11404.000	52.67	-0.19	52.48	74.00	-21.52	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 107 of 227

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:High

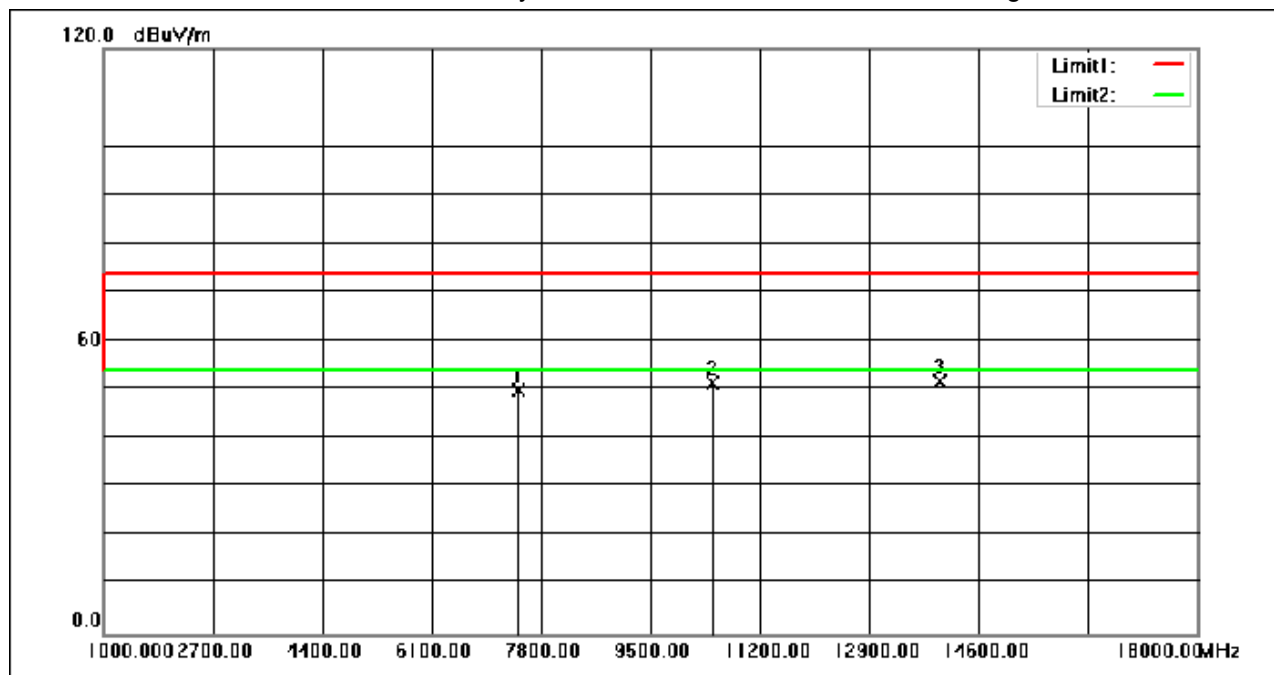

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7443.000	54.91	-5.00	49.91	74.00	-24.09	peak
2	10469.000	51.86	-0.39	51.47	74.00	-22.53	peak
3	13988.000	48.88	2.88	51.76	74.00	-22.24	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 108 of 227

Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:Low

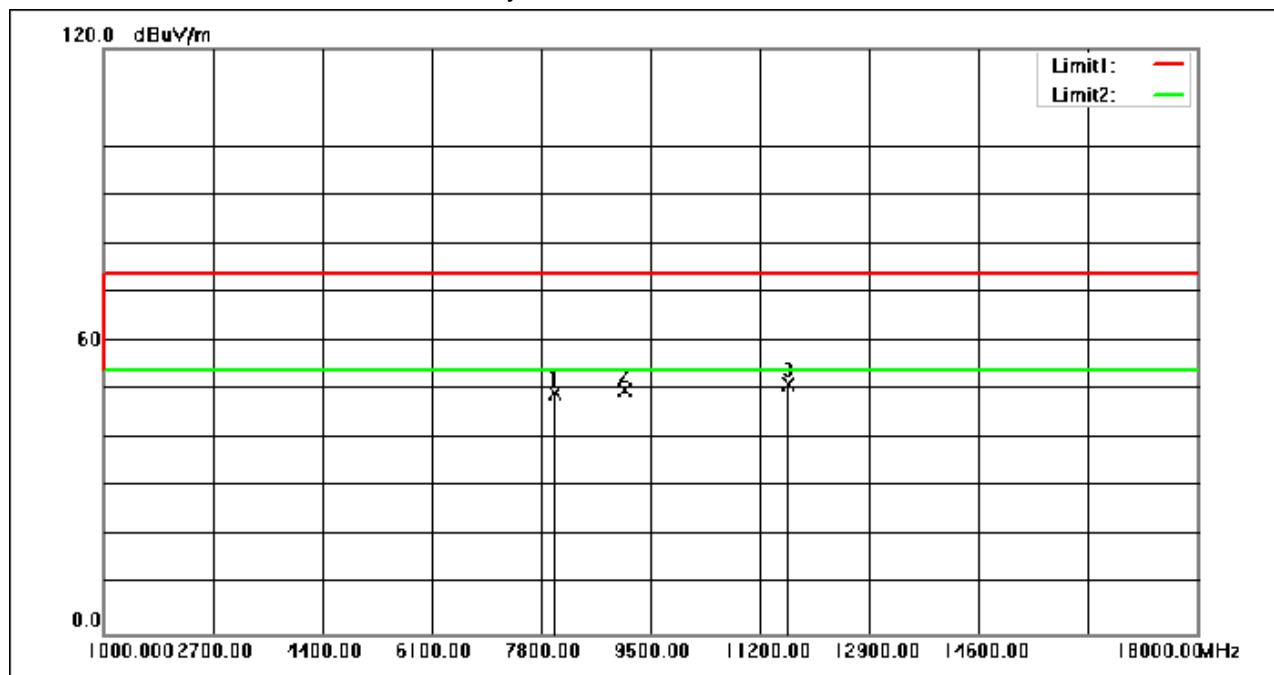

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8021.000	53.46	-3.98	49.48	74.00	-24.52	peak
2	9092.000	52.76	-2.94	49.82	74.00	-24.18	peak
3	11642.000	51.12	-0.10	51.02	74.00	-22.98	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 109 of 227

Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:Low

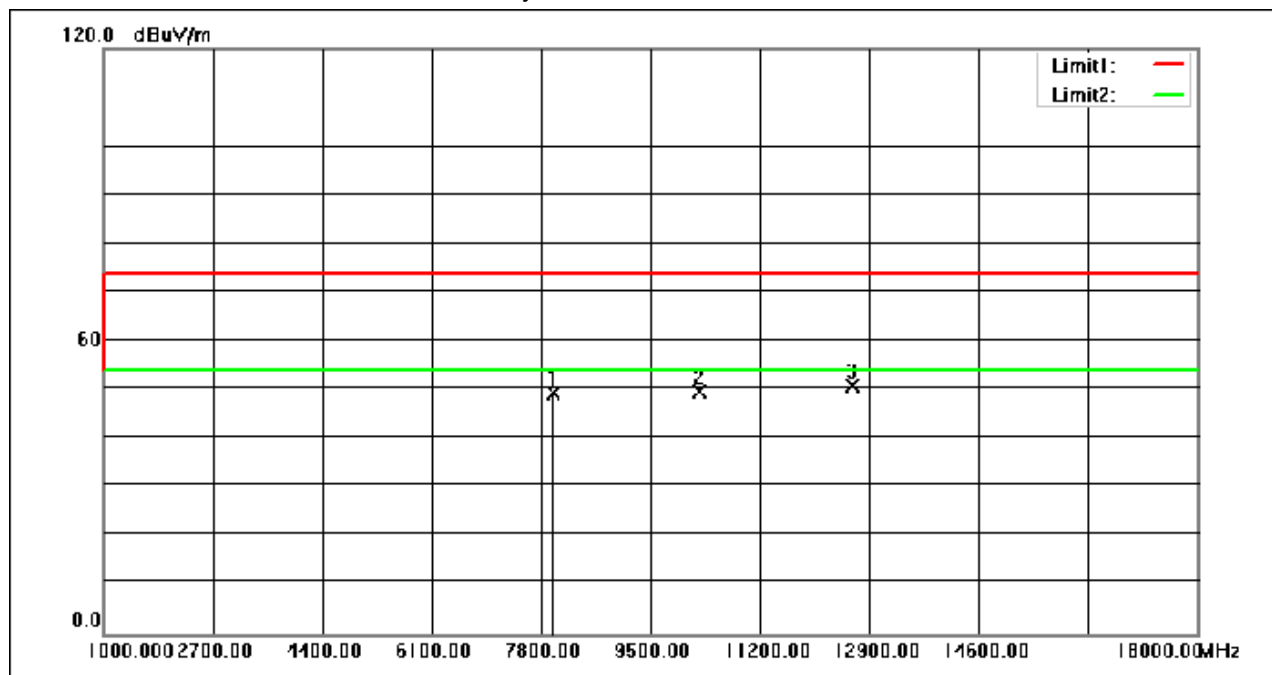

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7987.000	53.39	-3.98	49.41	74.00	-24.59	peak
2	10265.000	50.49	-0.88	49.61	74.00	-24.39	peak
3	12645.000	50.66	0.15	50.81	74.00	-23.19	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 110 of 227

Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:middle

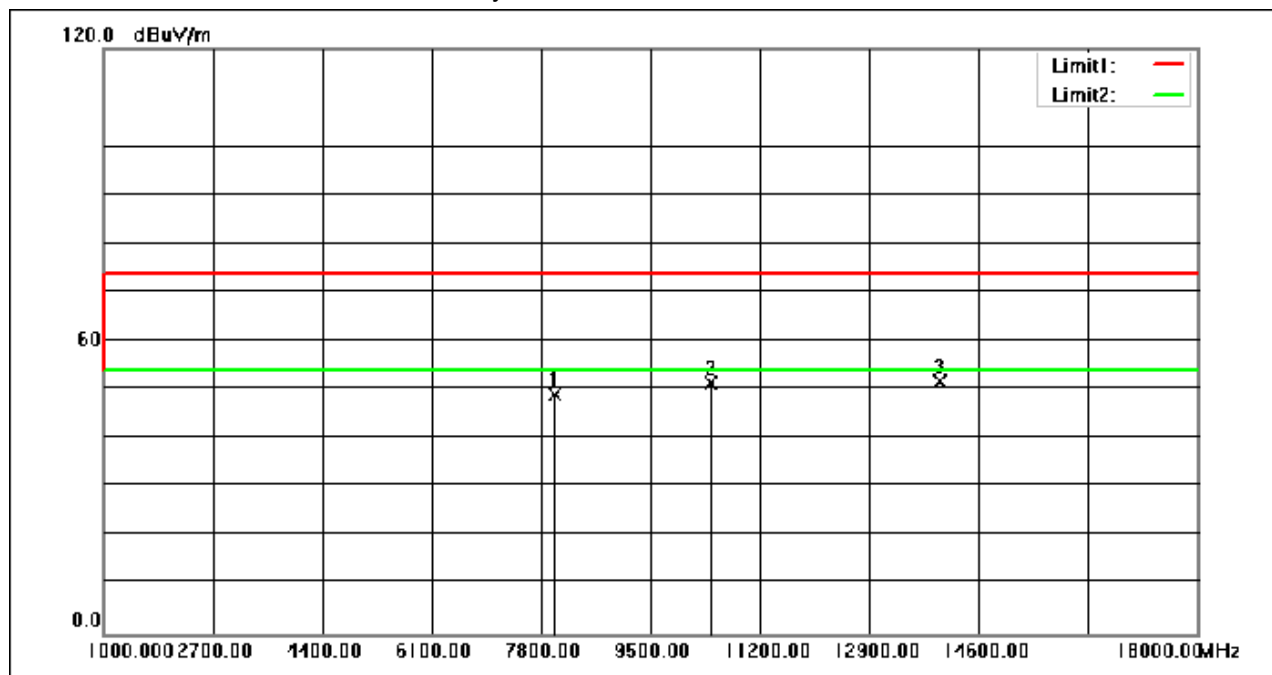

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8021.000	53.03	-3.98	49.05	74.00	-24.95	peak
2	10435.000	51.85	-0.48	51.37	74.00	-22.63	peak
3	13988.000	48.95	2.88	51.83	74.00	-22.17	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 111 of 227

Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:middle

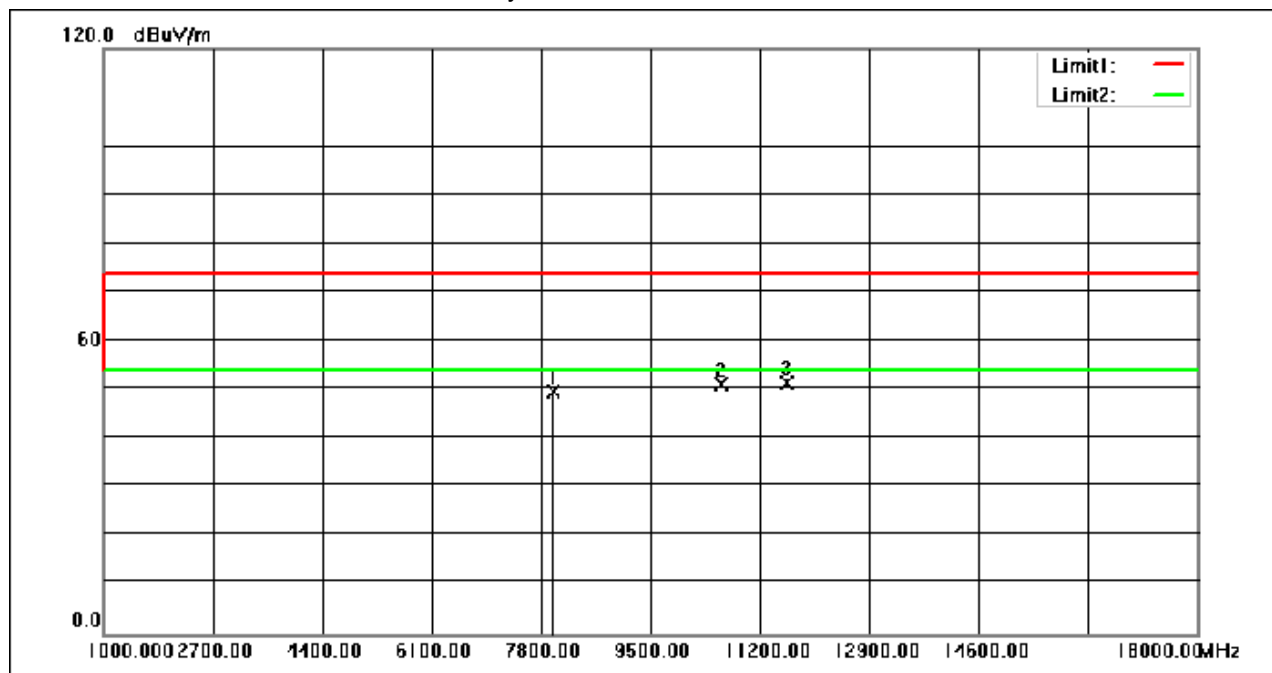

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7987.000	53.53	-3.98	49.55	74.00	-24.45	peak
2	10588.000	51.60	-0.38	51.22	74.00	-22.78	peak
3	11608.000	51.41	-0.07	51.34	74.00	-22.66	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 112 of 227

Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:High

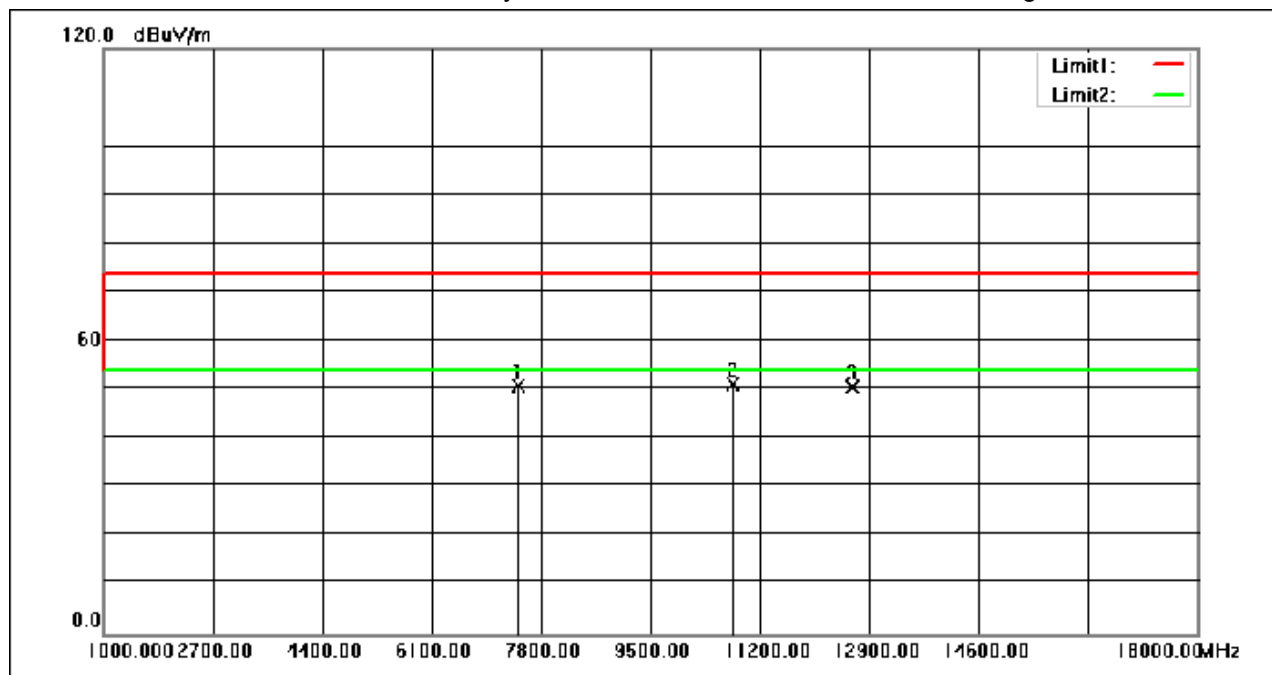

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7443.000	55.78	-5.00	50.78	74.00	-23.22	peak
2	10775.000	51.60	-0.51	51.09	74.00	-22.91	peak
3	12628.000	50.54	0.14	50.68	74.00	-23.32	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 113 of 227

Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:High

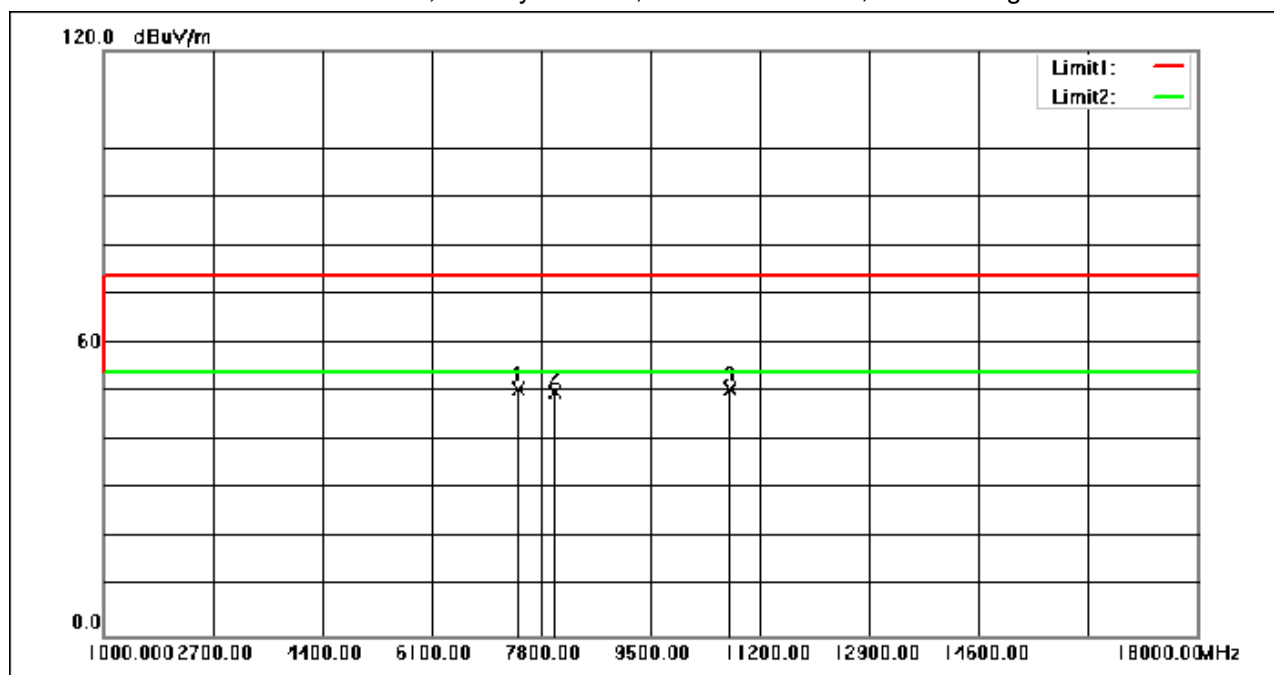

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7443.000	55.53	-5.00	50.53	74.00	-23.47	peak
2	8021.000	53.83	-3.98	49.85	74.00	-24.15	peak
3	10741.000	51.12	-0.49	50.63	74.00	-23.37	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 114 of 227

Test Mode: 07; Polarity: Horizontal; Modulation:GFSK; Channel:Low

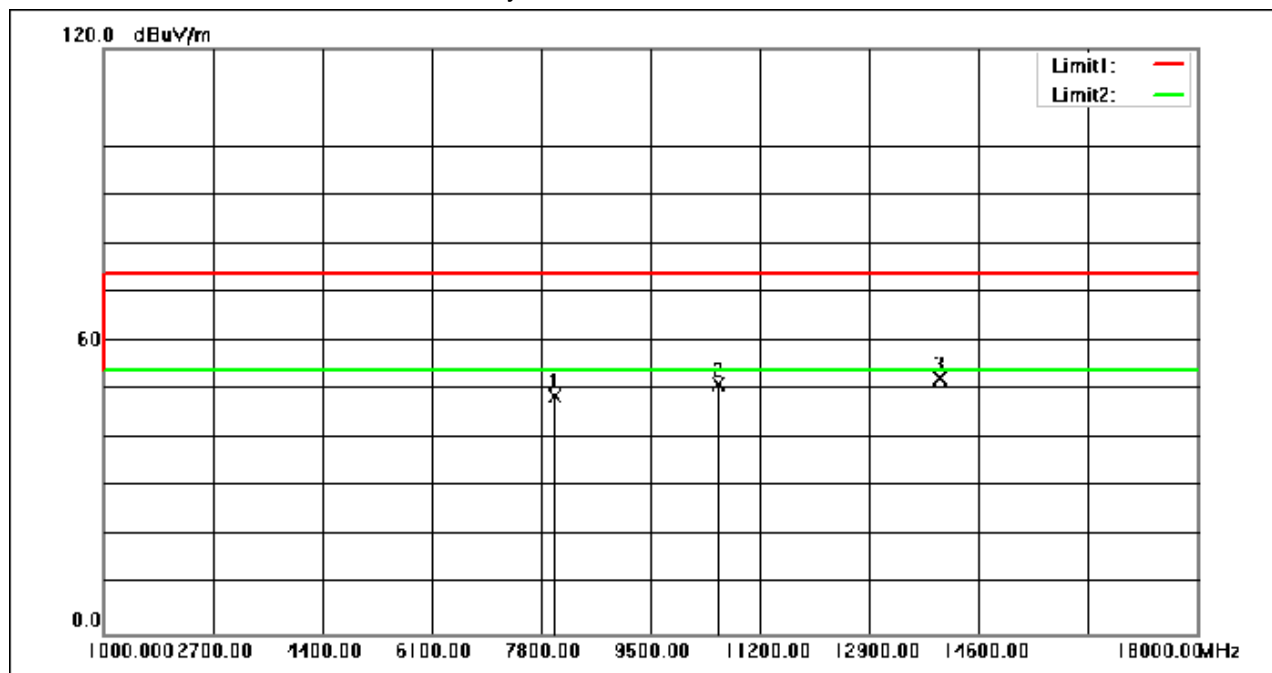

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8004.000	52.64	-3.97	48.67	74.00	-25.33	peak
2	10554.000	51.53	-0.36	51.17	74.00	-22.83	peak
3	13988.000	49.49	2.88	52.37	74.00	-21.63	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 115 of 227

Test Mode: 07; Polarity: Vertical; Modulation:GFSK; Channel:Low

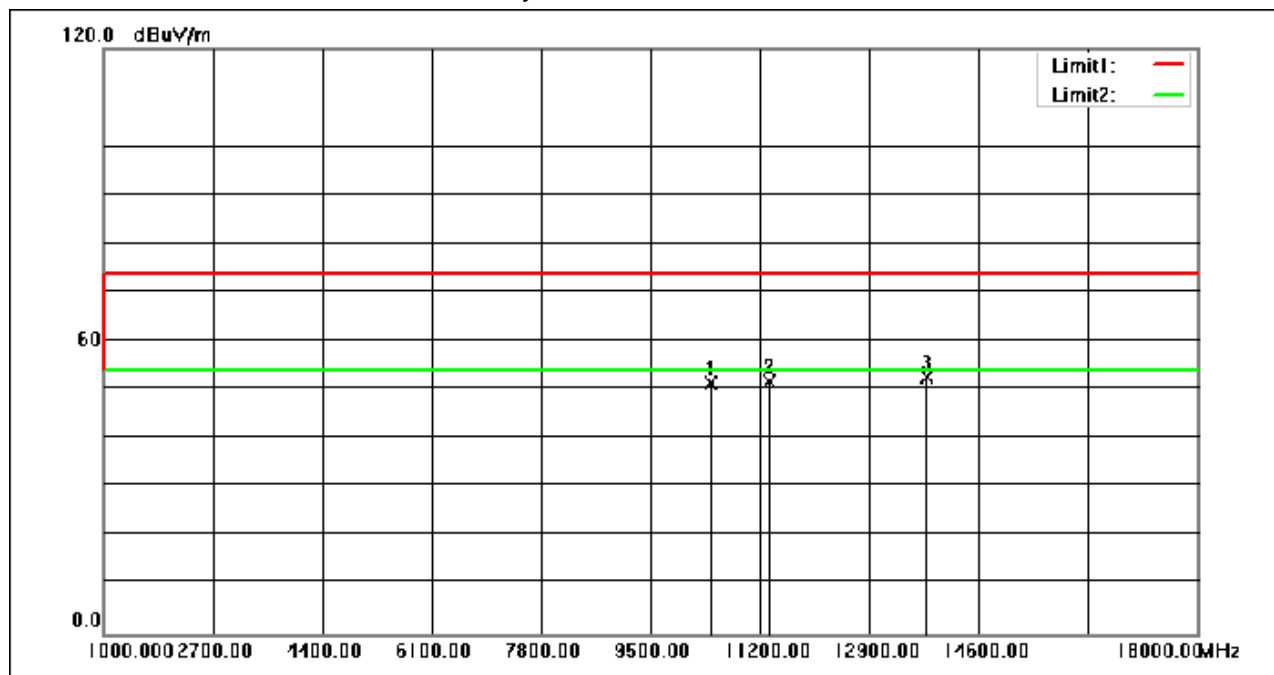

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10435.000	51.82	-0.48	51.34	74.00	-22.66	peak
2	11353.000	51.94	-0.28	51.66	74.00	-22.34	peak
3	13801.000	50.37	2.14	52.51	74.00	-21.49	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 116 of 227

Test Mode: 07; Polarity: Horizontal; Modulation:GFSK; Channel:middle

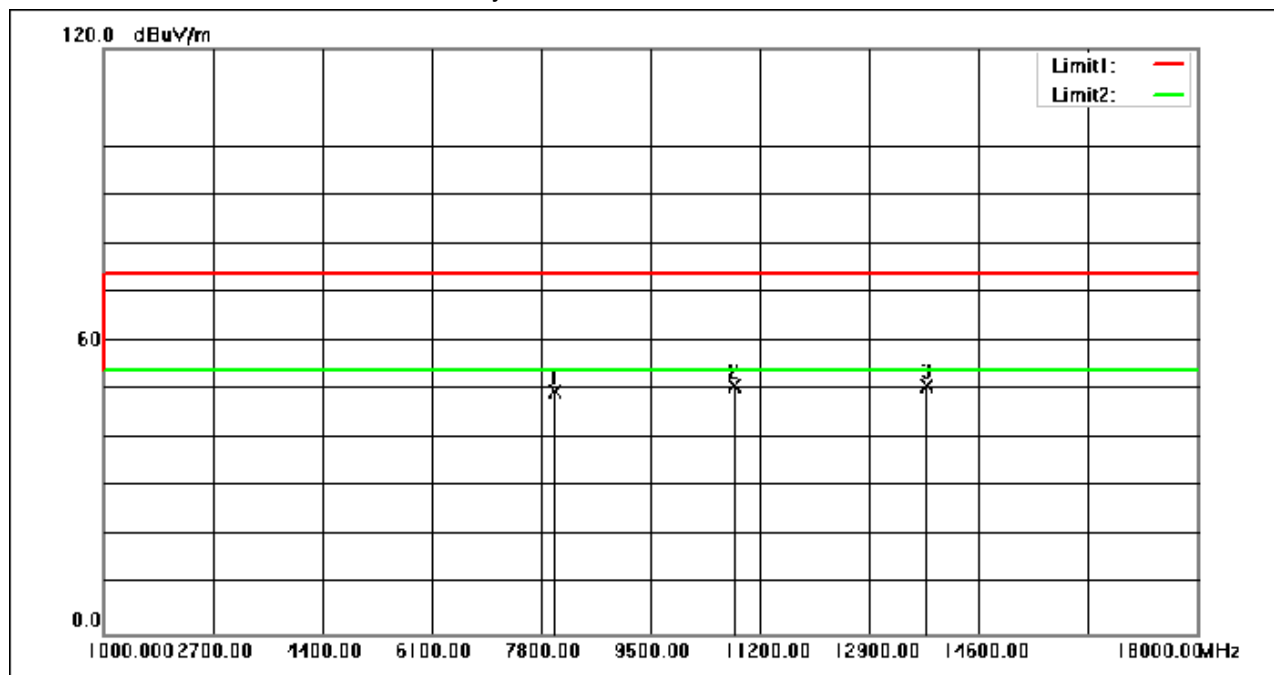

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8004.000	53.55	-3.97	49.58	74.00	-24.42	peak
2	10792.000	51.41	-0.52	50.89	74.00	-23.11	peak
3	13784.000	48.88	2.07	50.95	74.00	-23.05	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 117 of 227

Test Mode: 07; Polarity: Vertical; Modulation:GFSK; Channel:middle

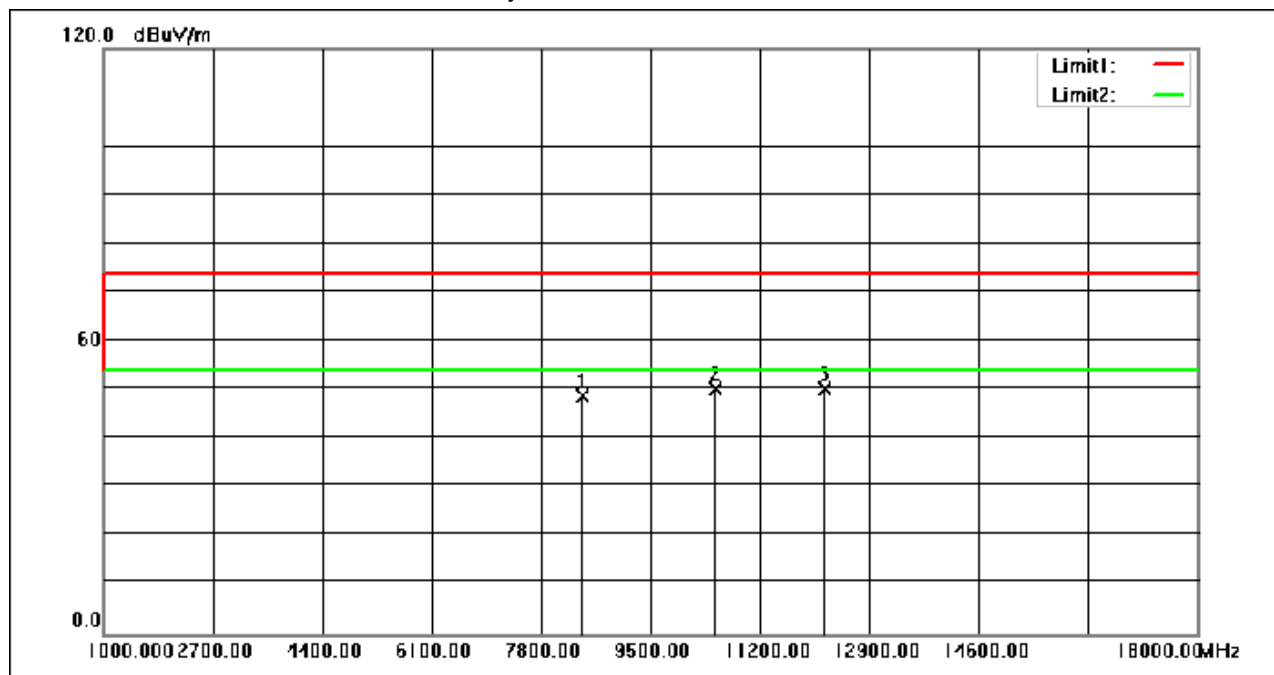

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8446.000	52.79	-4.12	48.67	74.00	-25.33	peak
2	10503.000	50.60	-0.33	50.27	74.00	-23.73	peak
3	12203.000	50.46	-0.16	50.30	74.00	-23.70	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 118 of 227

Test Mode: 07; Polarity: Horizontal; Modulation:GFSK; Channel:High

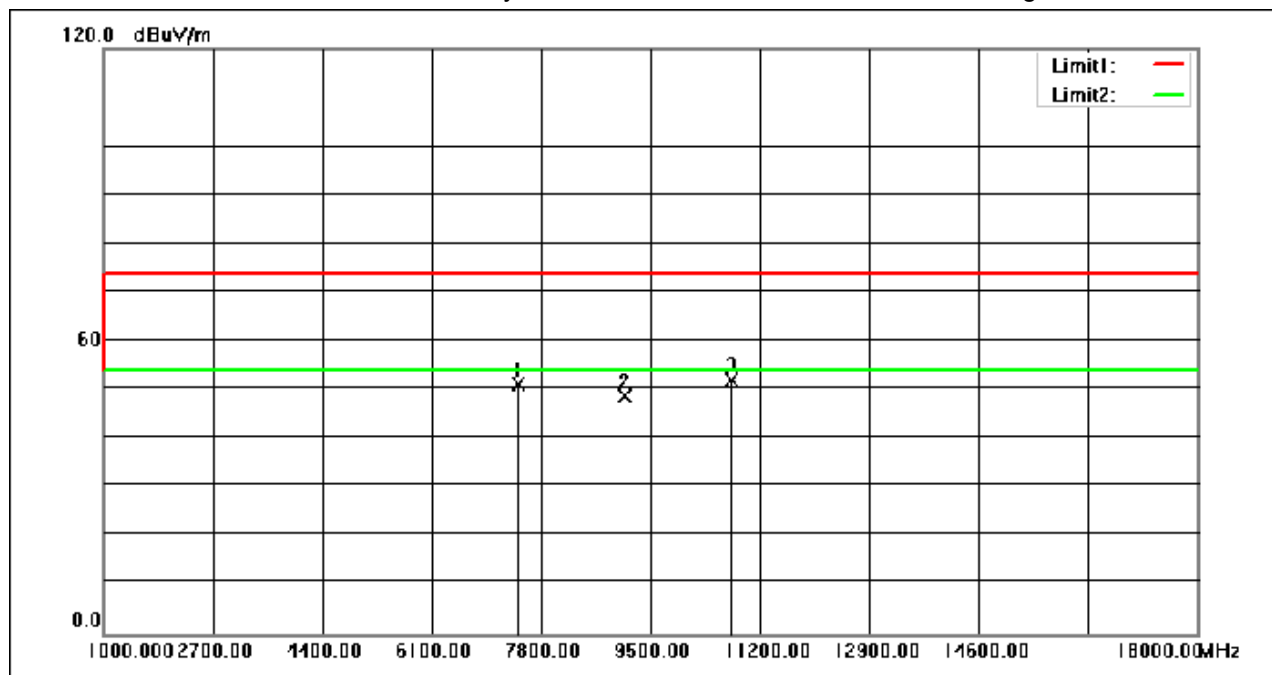

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7443.000	56.14	-5.00	51.14	74.00	-22.86	peak
2	9109.000	51.80	-2.92	48.88	74.00	-25.12	peak
3	10758.000	52.54	-0.50	52.04	74.00	-21.96	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 119 of 227

Test Mode: 07; Polarity: Vertical; Modulation:GFSK; Channel:High

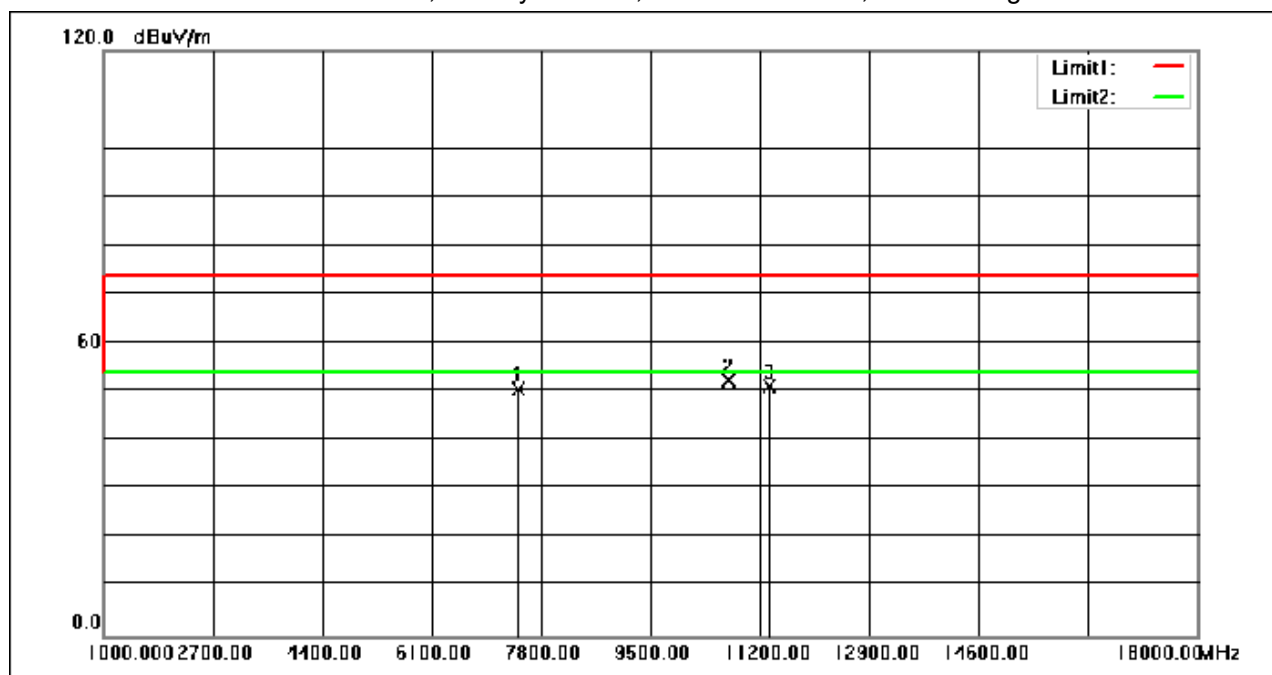

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7443.000	55.60	-5.00	50.60	74.00	-23.40	peak
2	10707.000	52.76	-0.46	52.30	74.00	-21.70	peak
3	11353.000	51.40	-0.28	51.12	74.00	-22.88	peak

7.10 99% Bandwidth

Test Requirement RSS-Gen Section 6.7
Test Method: ANSI C63.10 (2013) Section 6.9.3


7.10.1 E.U.T. Operation

Operating Environment:
Temperature: 25.1 °C Humidity: 55.2 % RH Atmospheric Pressure: 1010 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	01	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	02	TX mode(125K)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	03	TX mode(500K)_Keep the EUT in continuously transmitting mode with GFSK modulation for Dipole Antenna.
Final test	04	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	05	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	06	TX mode(125K)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.
Final test	07	TX mode(500K)_Keep the EUT in continuously transmitting mode with GFSK modulation for PCB Antenna.

7.10.3 Test Setup Diagram

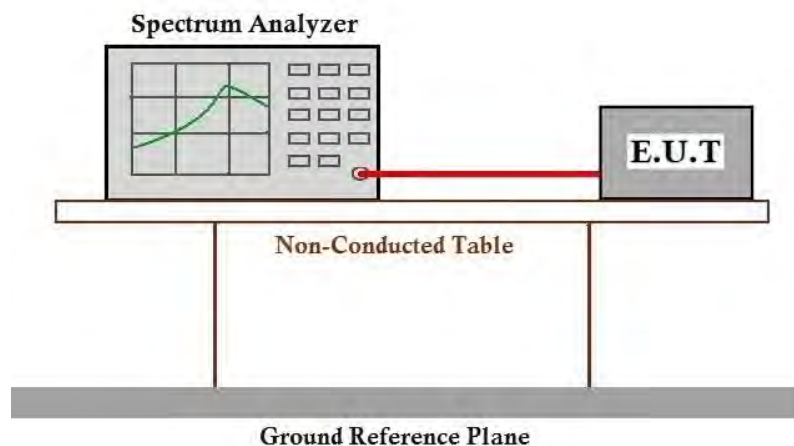

7.10.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 121 of 227

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for KSCR2311002105AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix - Photographs of EUT Constructional Details for KSCR2311002105AT

10 Appendix

PCB Antenna


1. Duty Cycle

1.1 Ant1

1.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
S8	SISO	2402	17.067	17.500	97.53	0.11	0.00
		2440	17.067	17.500	97.53	0.11	0.00
		2480	17.067	17.500	97.53	0.11	0.00
S2	SISO	2402	4.563	4.999	91.28	0.40	0.04
		2440	4.565	5.001	91.28	0.40	0.03
		2480	4.563	4.999	91.28	0.40	0.00
1M	SISO	2402	2.141	2.500	85.64	0.67	0.03
		2440	2.141	2.500	85.64	0.67	0.03
		2480	2.140	2.499	85.63	0.67	0.03
2M	SISO	2402	1.085	1.875	57.87	2.38	0.02
		2440	1.085	1.875	57.87	2.38	0.03
		2480	1.085	1.875	57.87	2.38	0.03

1.1.2 Test Graph

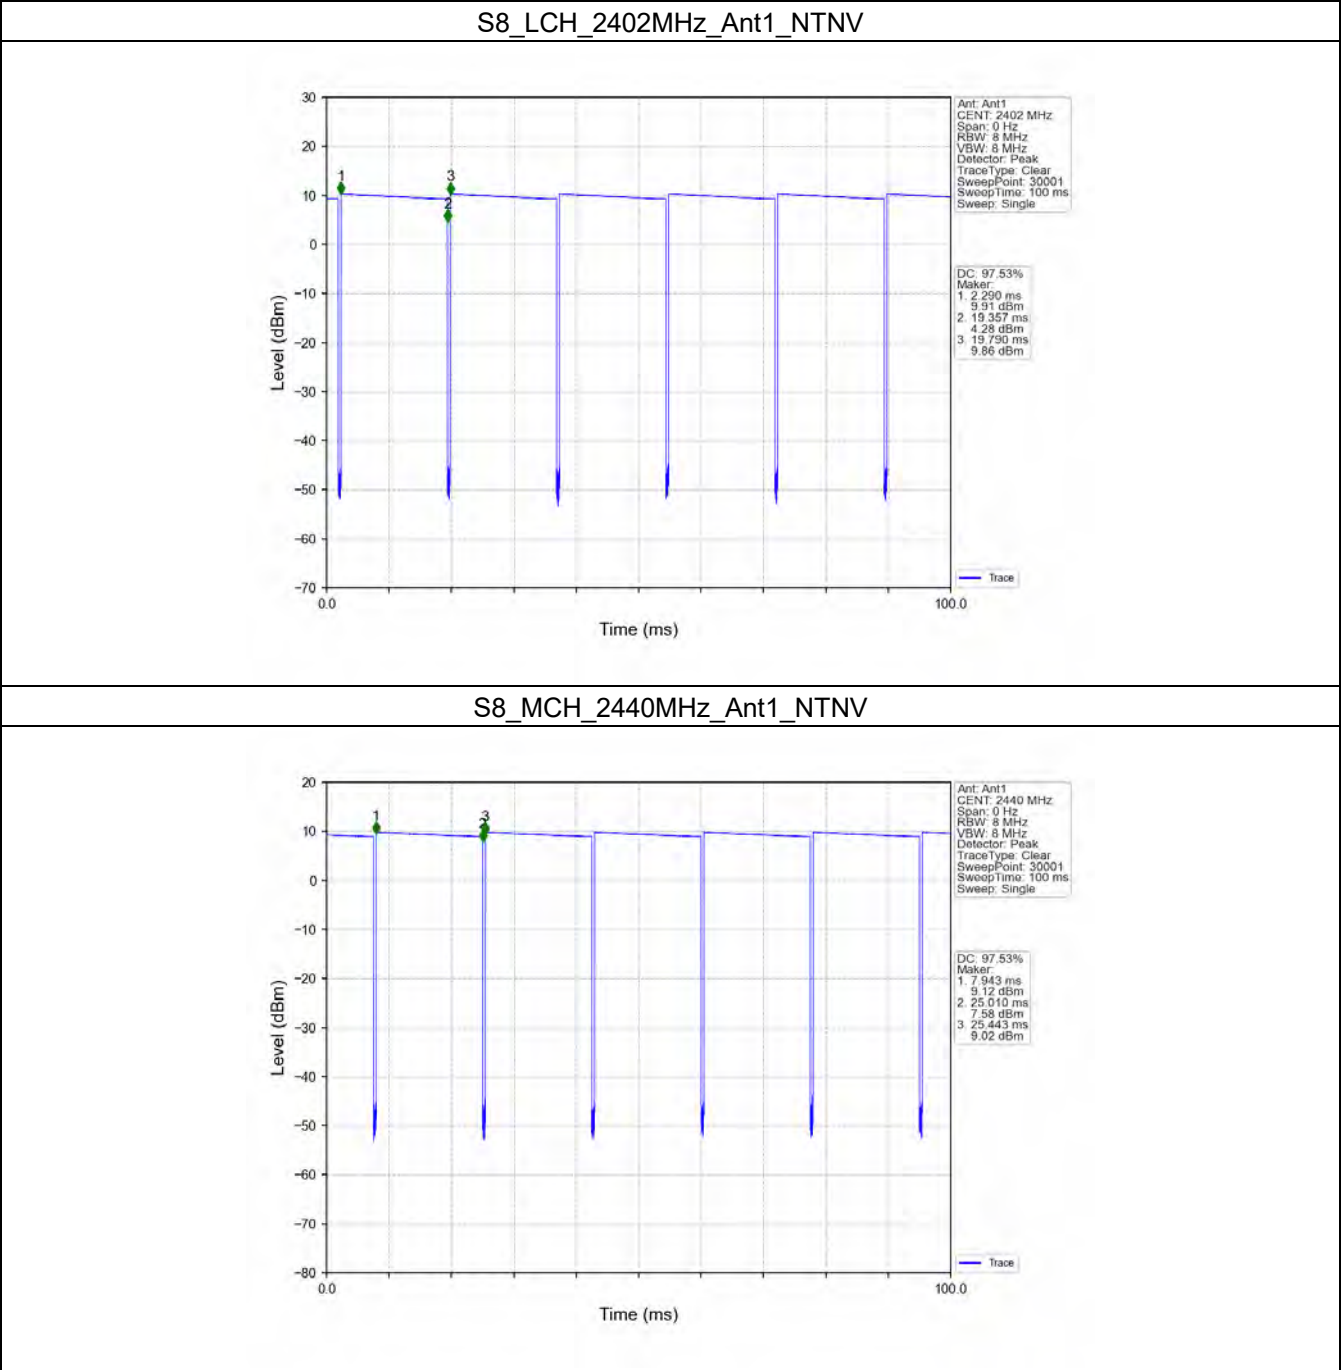


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 124 of 227

S8_HCH_2480MHz_Ant1_NTNV

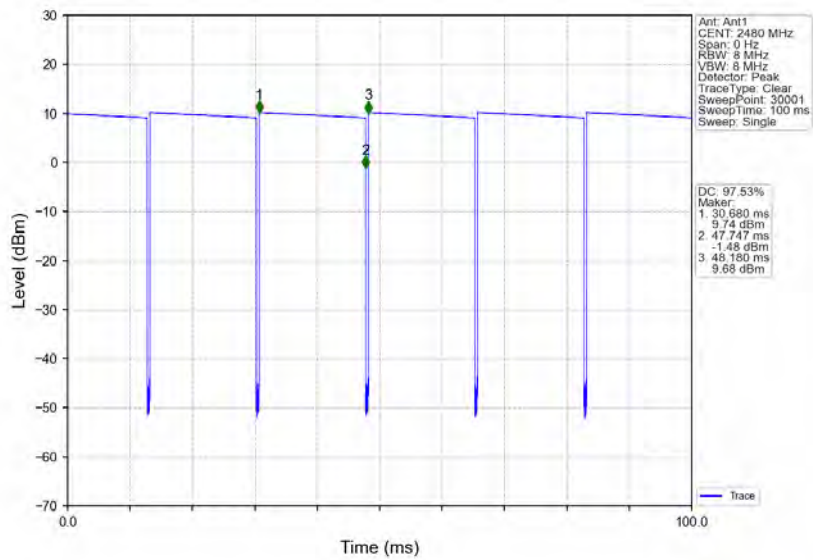

S2_LCH_2402MHz_Ant1_NTNV

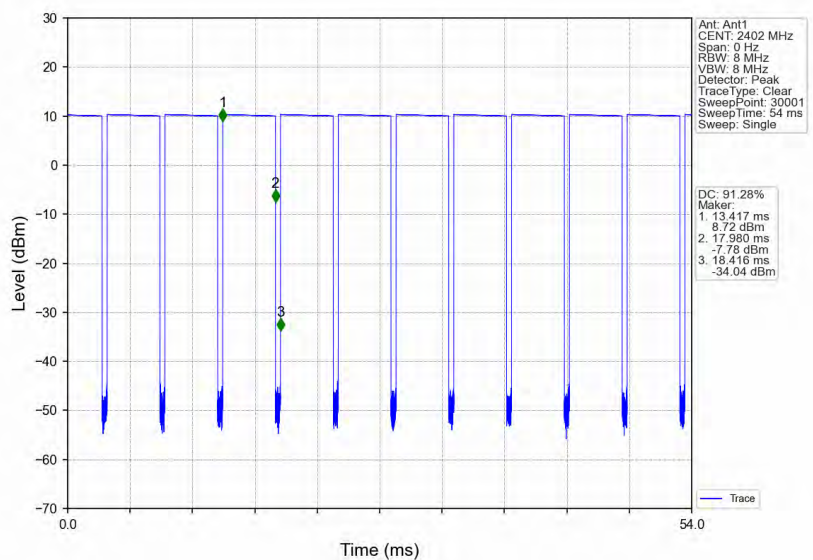


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 125 of 227

S2_MCH_2440MHz_Ant1_NTNV

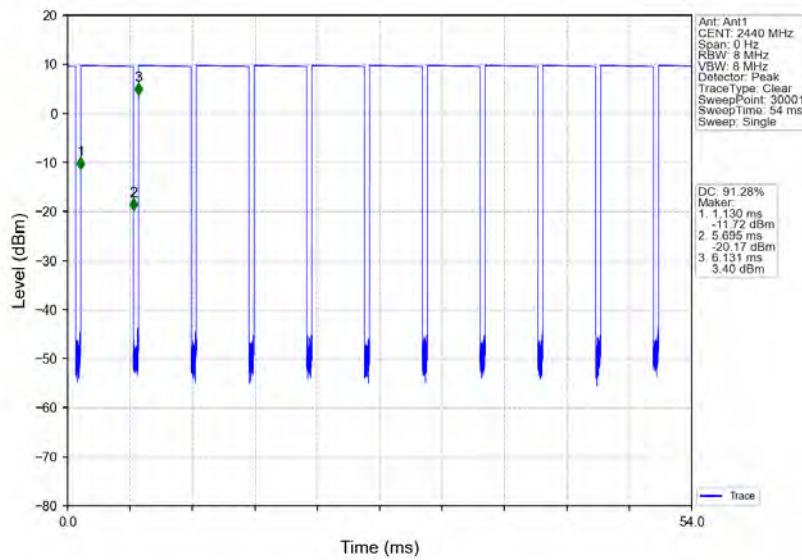

S2_HCH_2480MHz_Ant1_NTNV

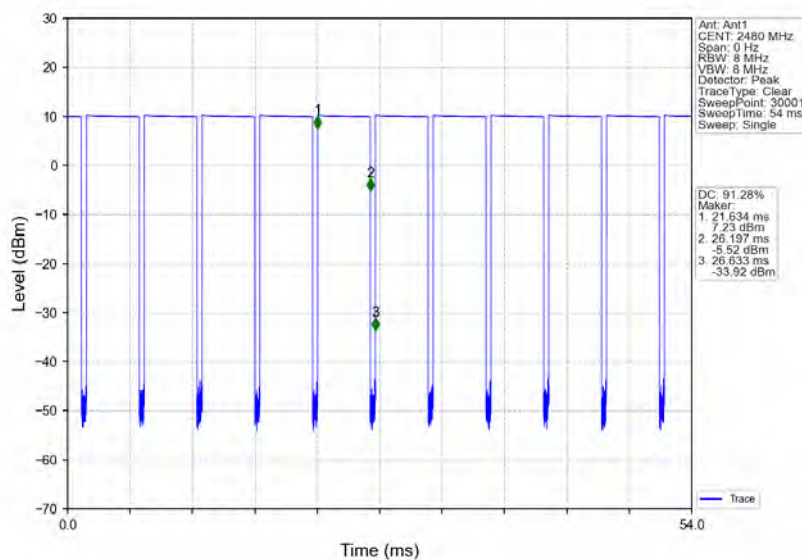


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 126 of 227

1M_LCH_2402MHz_Ant1_NTNV

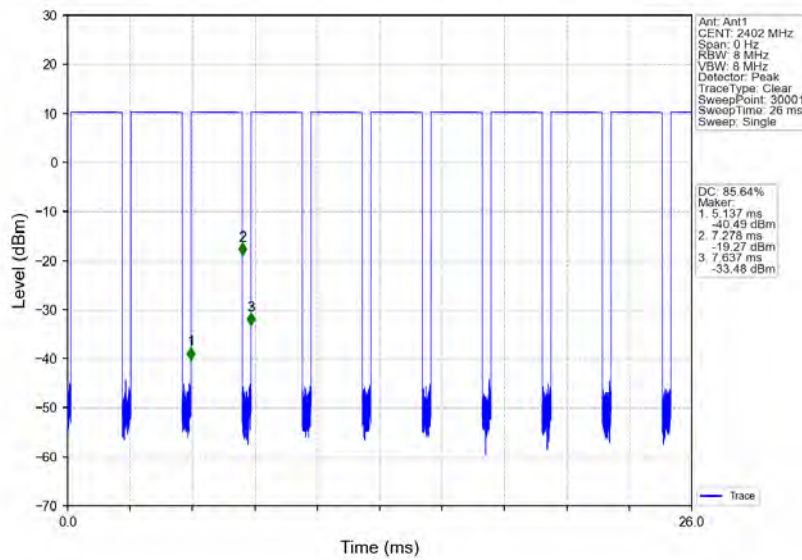

1M_MCH_2440MHz_Ant1_NTNV

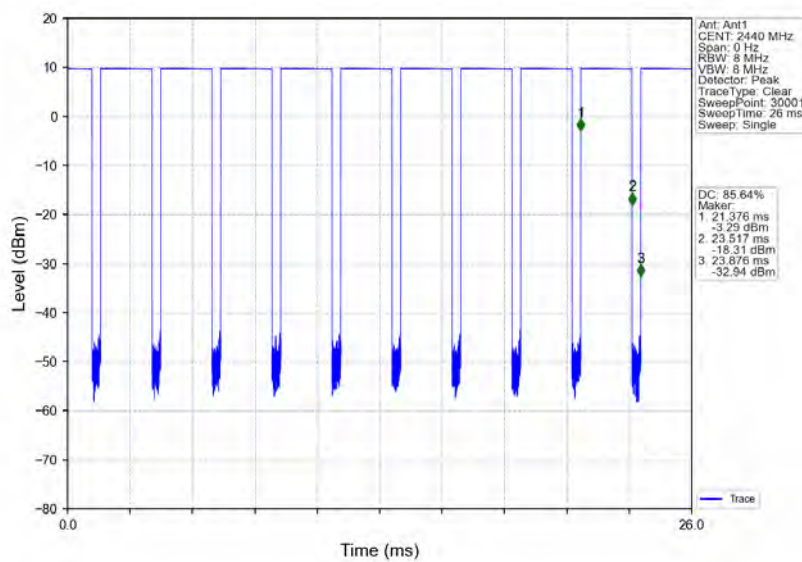


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 127 of 227

1M_HCH_2480MHz_Ant1_NTNV

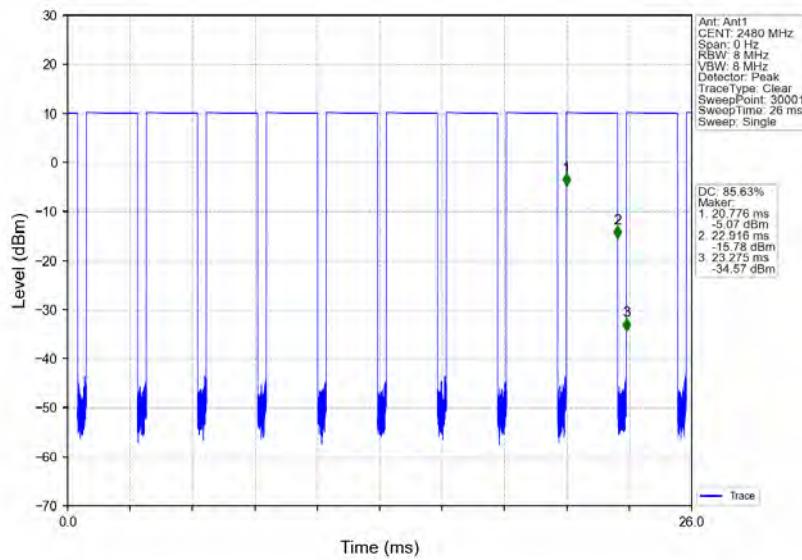

2M_LCH_2402MHz_Ant1_NTNV

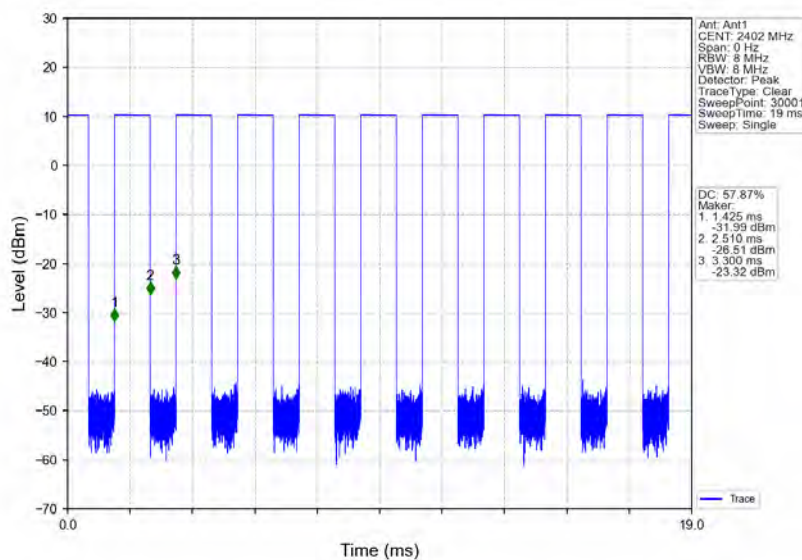


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 128 of 227

2M_MCH_2440MHz_Ant1_NTNV

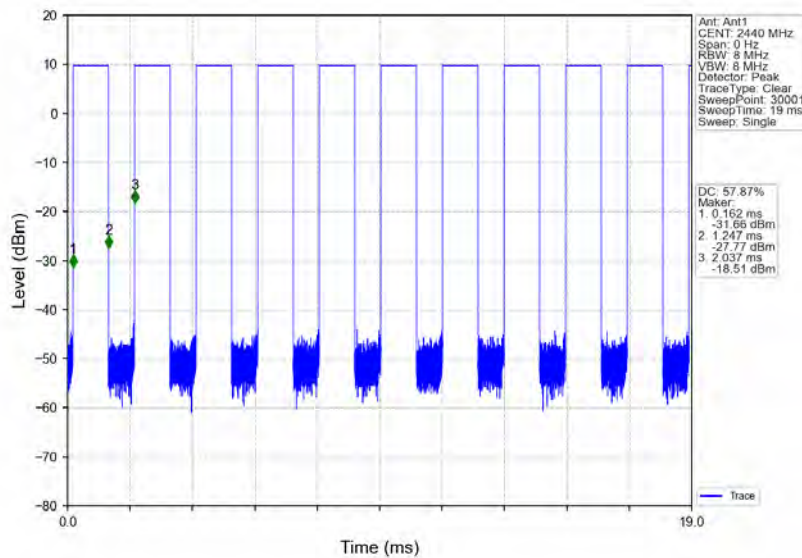

2M_HCH_2480MHz_Ant1_NTNV

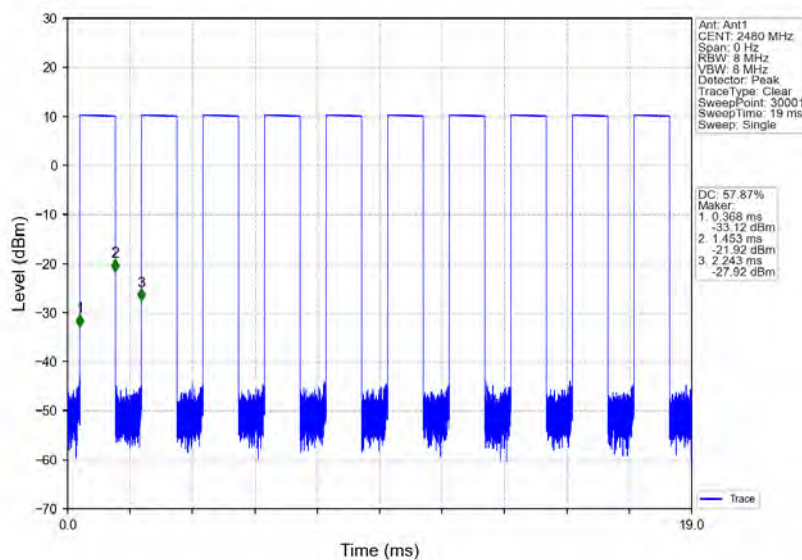

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 129 of 227

2. Bandwidth

2.1 OBW

2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
S8	SISO	2402	1	1.084	/	Pass
		2440	1	1.084	/	Pass
		2480	1	1.083	/	Pass
S2	SISO	2402	1	1.034	/	Pass
		2440	1	1.038	/	Pass
		2480	1	1.037	/	Pass
1M	SISO	2402	1	1.052	/	Pass
		2440	1	1.043	/	Pass
		2480	1	1.052	/	Pass
2M	SISO	2402	1	2.097	/	Pass
		2440	1	2.096	/	Pass
		2480	1	2.087	/	Pass


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 130 of 227

2.1.2 Test Graph

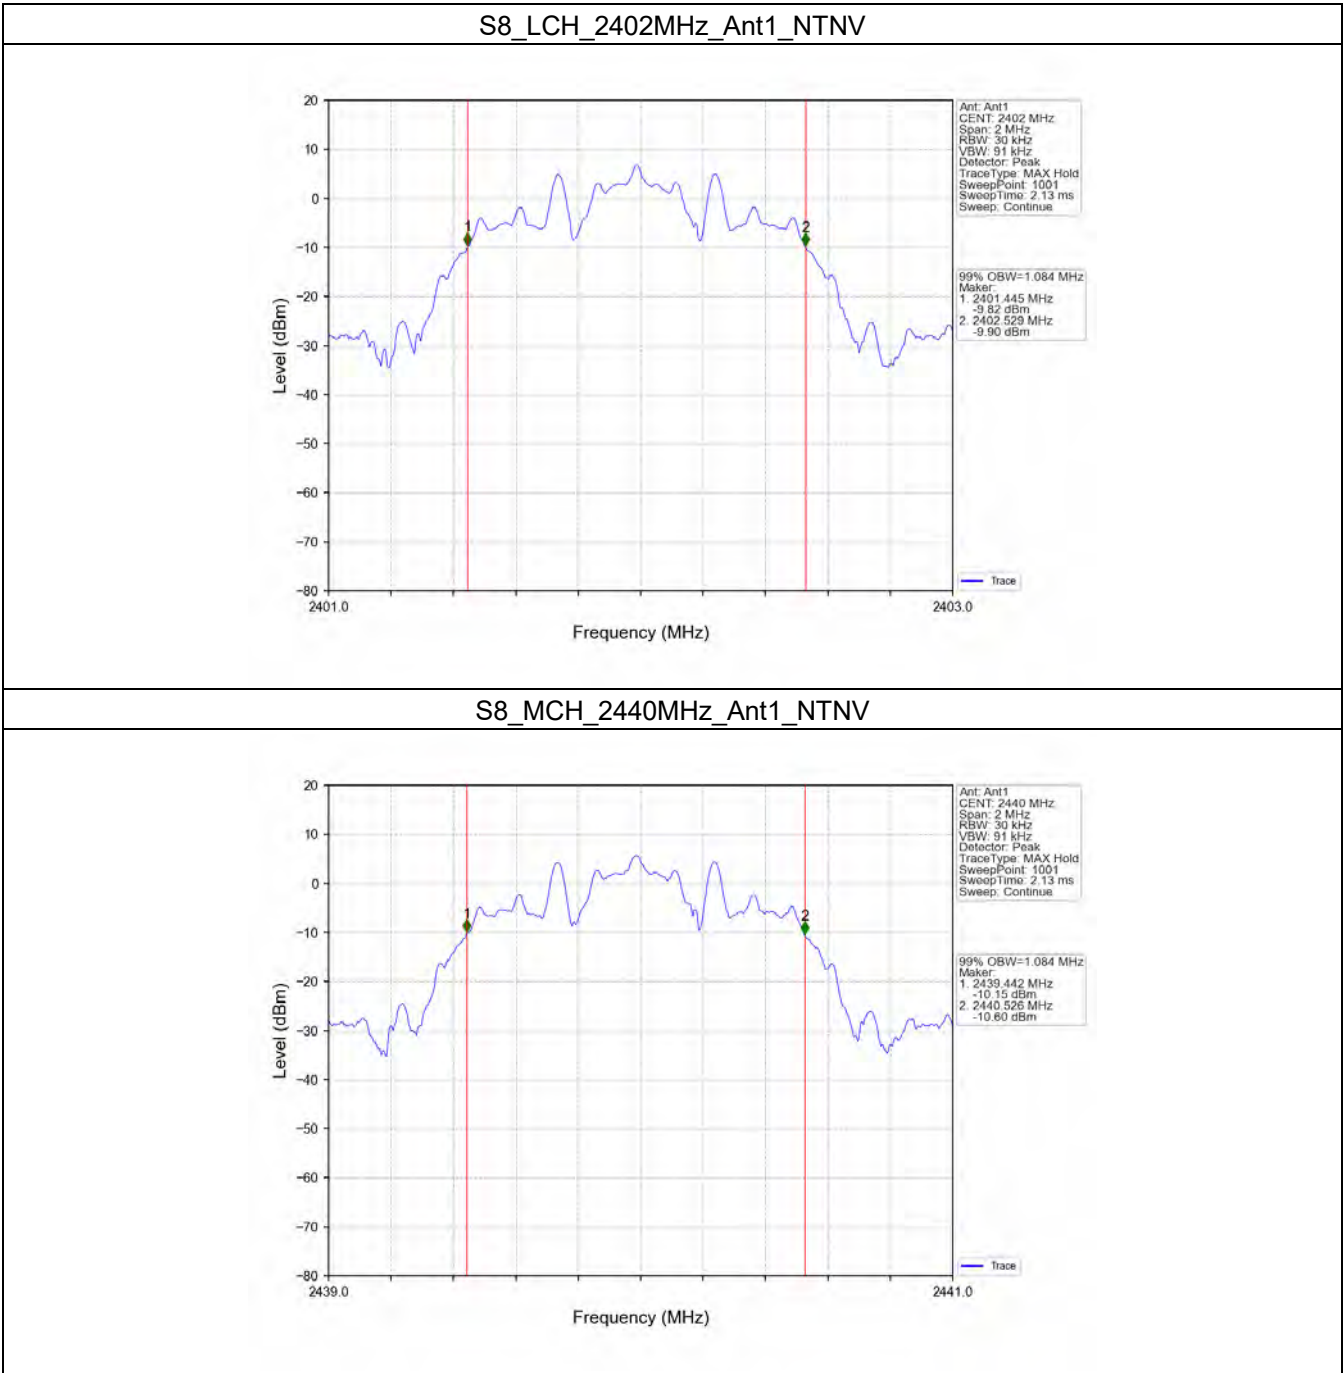


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 131 of 227

S8_HCH_2480MHz_Ant1_NTNV

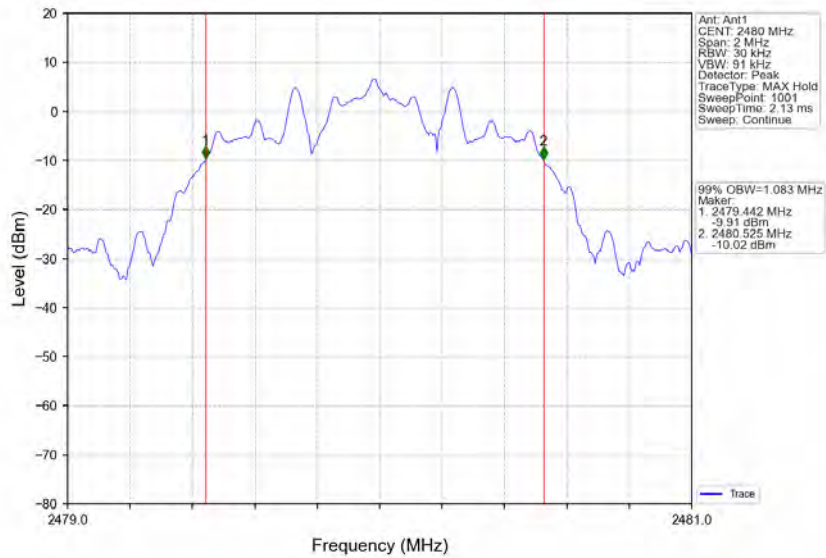

S2_LCH_2402MHz_Ant1_NTNV

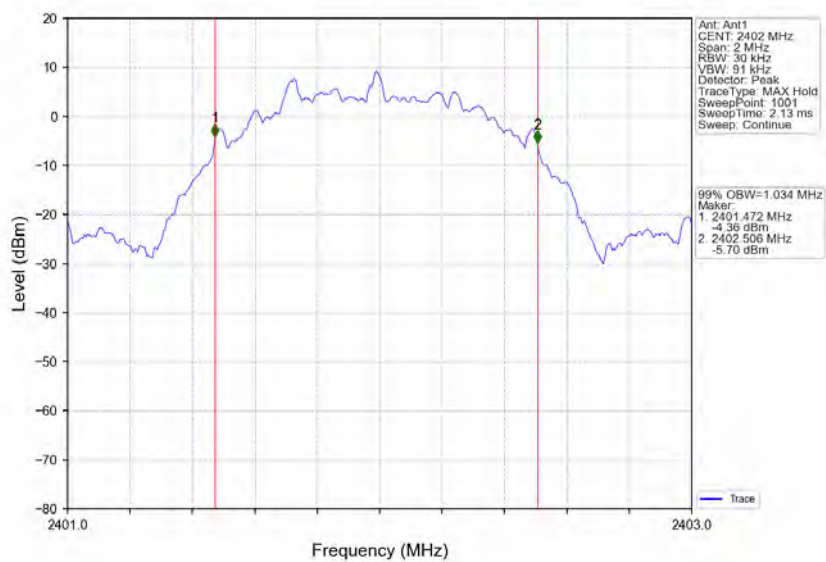


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 132 of 227

S2_MCH_2440MHz_Ant1_NTNV

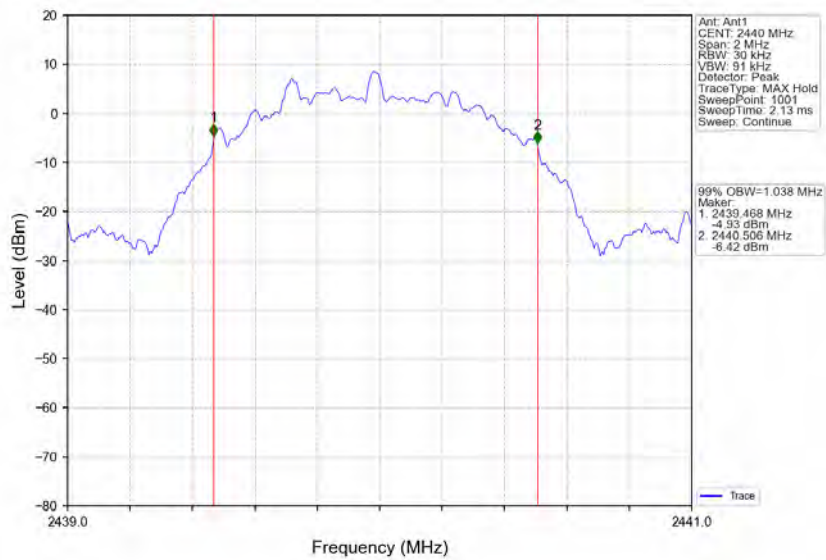

S2_HCH_2480MHz_Ant1_NTNV

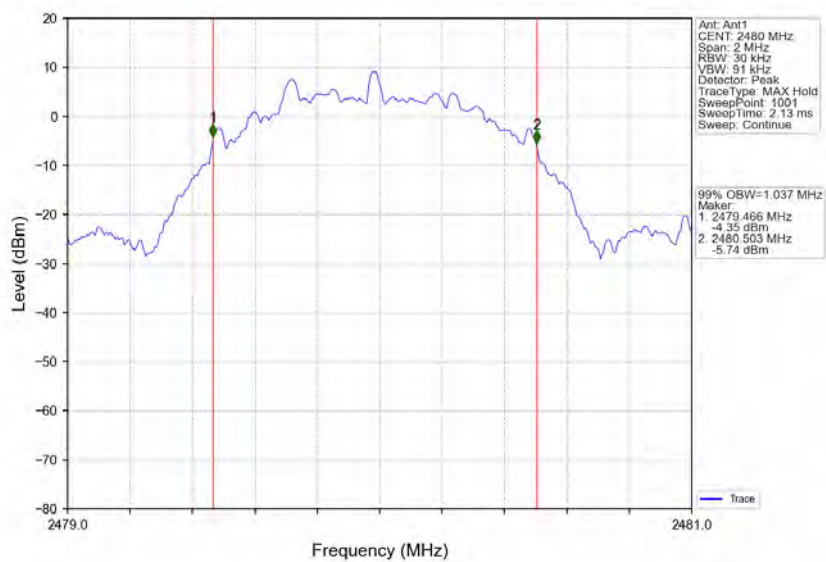


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 133 of 227


1M_LCH_2402MHz_Ant1_NTNV

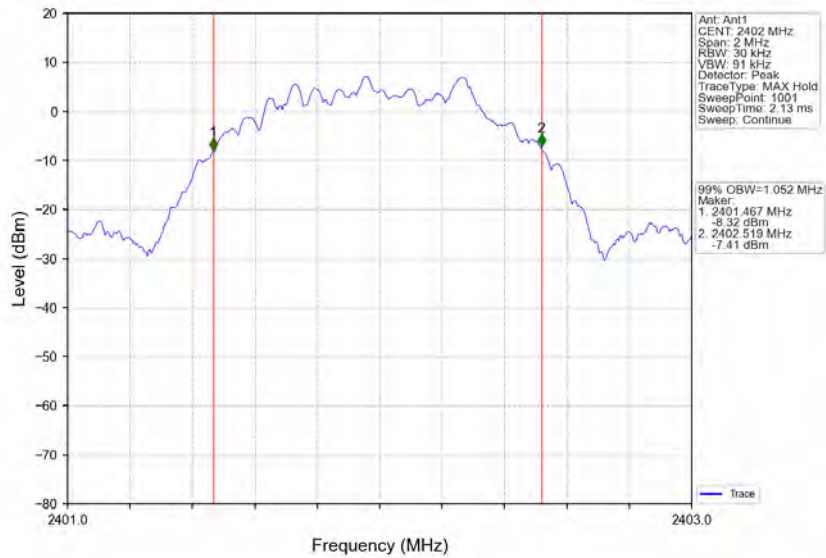


1M_MCH_2440MHz_Ant1_NTNV

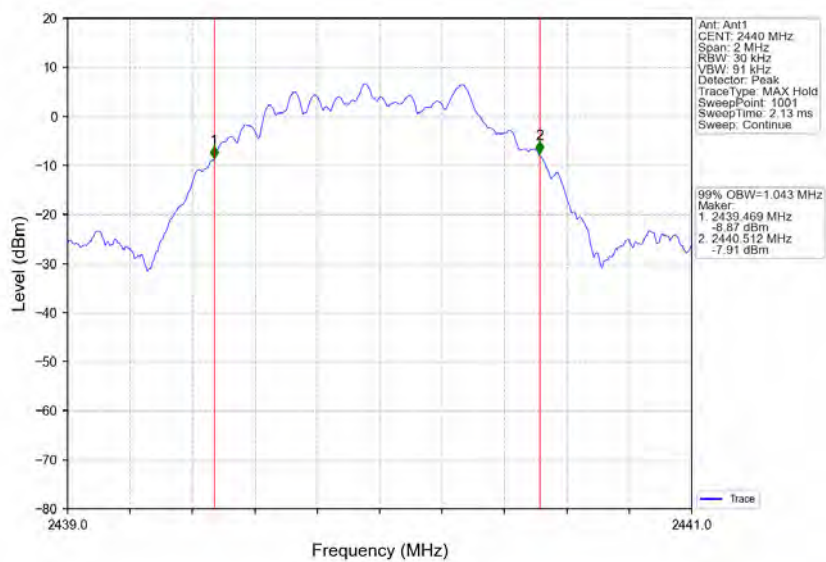

1M_HCH_2480MHz_Ant1_NTNV

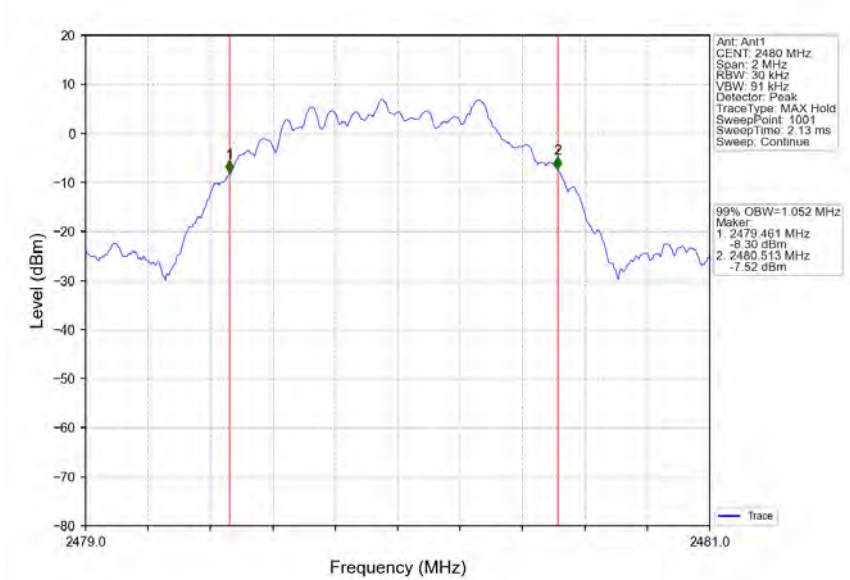

2M_LCH_2402MHz_Ant1_NTNV

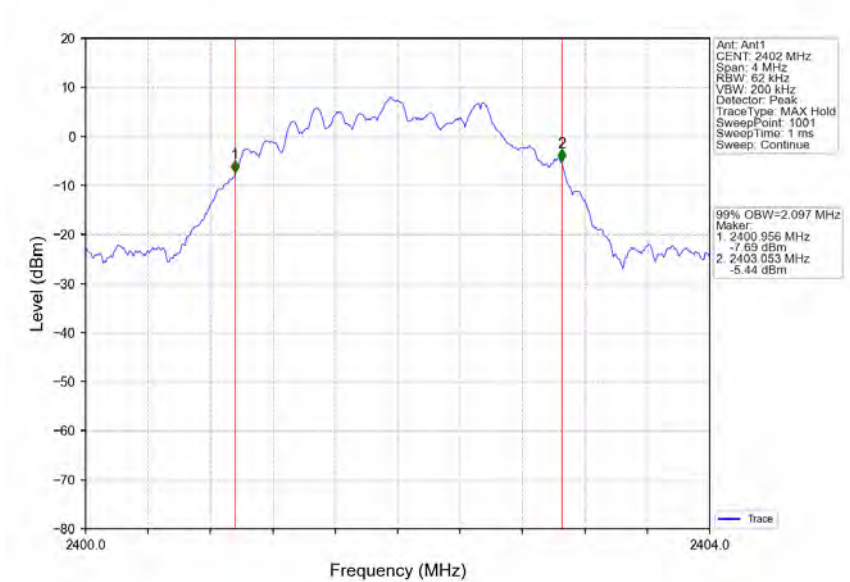


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 135 of 227

2M_MCH_2440MHz_Ant1_NTNV

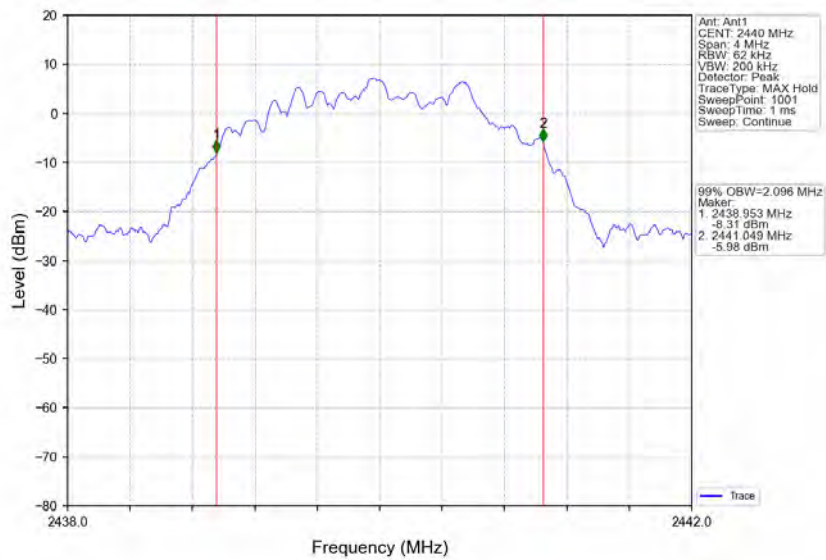

2M_HCH_2480MHz_Ant1_NTNV

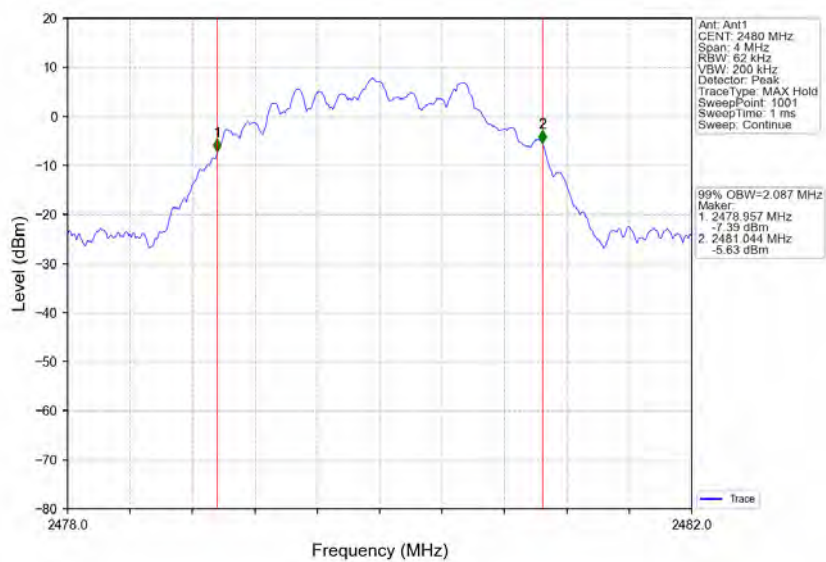

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 136 of 227


2.2 6dB BW

2.2.1 Test Result


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
S8	SISO	2402	1	0.650	≥ 0.5	Pass
		2440	1	0.633	≥ 0.5	Pass
		2480	1	0.636	≥ 0.5	Pass
S2	SISO	2402	1	0.717	≥ 0.5	Pass
		2440	1	0.706	≥ 0.5	Pass
		2480	1	0.711	≥ 0.5	Pass
1M	SISO	2402	1	0.704	≥ 0.5	Pass
		2440	1	0.703	≥ 0.5	Pass
		2480	1	0.706	≥ 0.5	Pass
2M	SISO	2402	1	1.298	≥ 0.5	Pass
		2440	1	1.299	≥ 0.5	Pass
		2480	1	1.294	≥ 0.5	Pass

2.2.2 Test Graph

S8_LCH_2402MHz_Ant1_NTNV

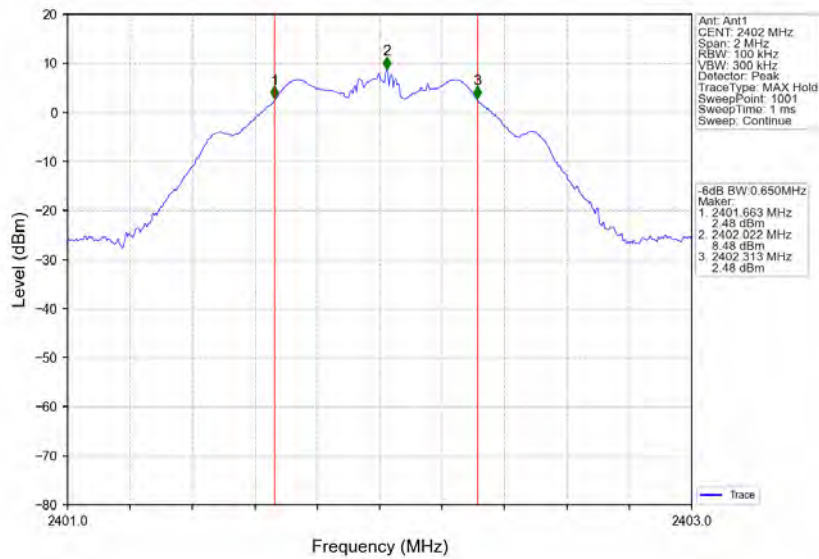

S8_MCH_2440MHz_Ant1_NTNV

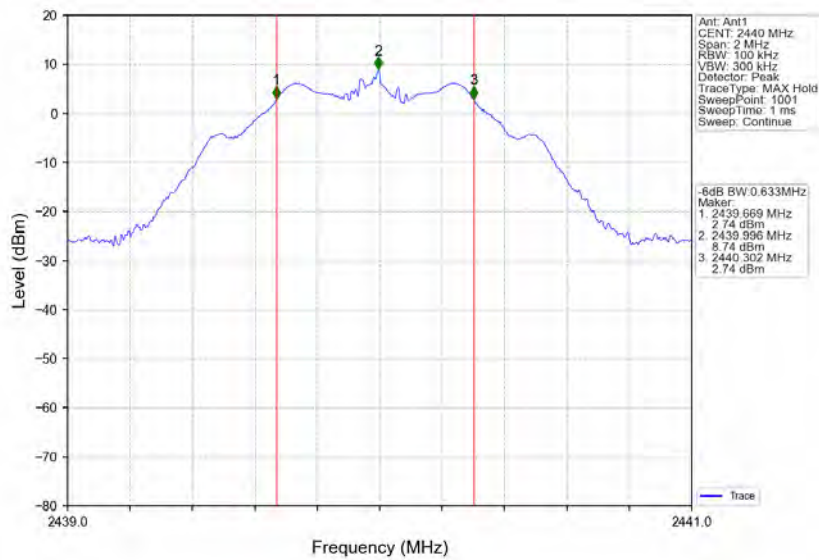


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 138 of 227


S8_HCH_2480MHz_Ant1_NTNV

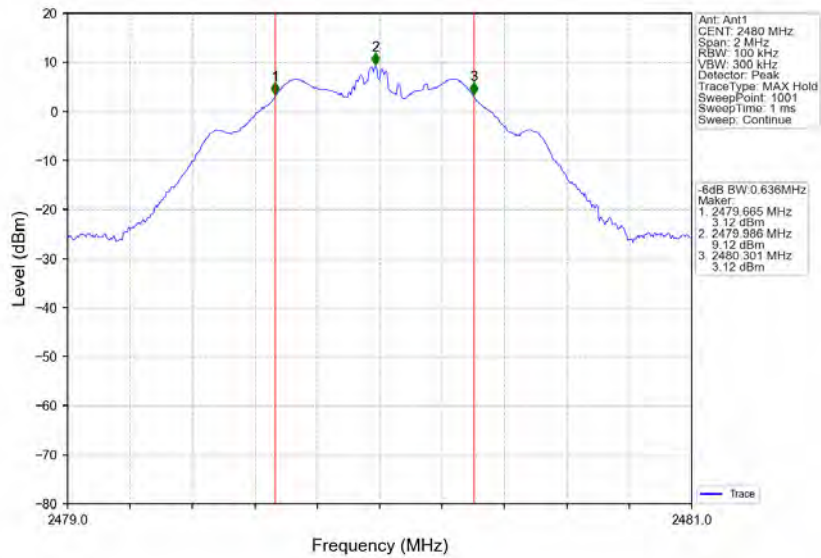


S2_LCH_2402MHz_Ant1_NTNV

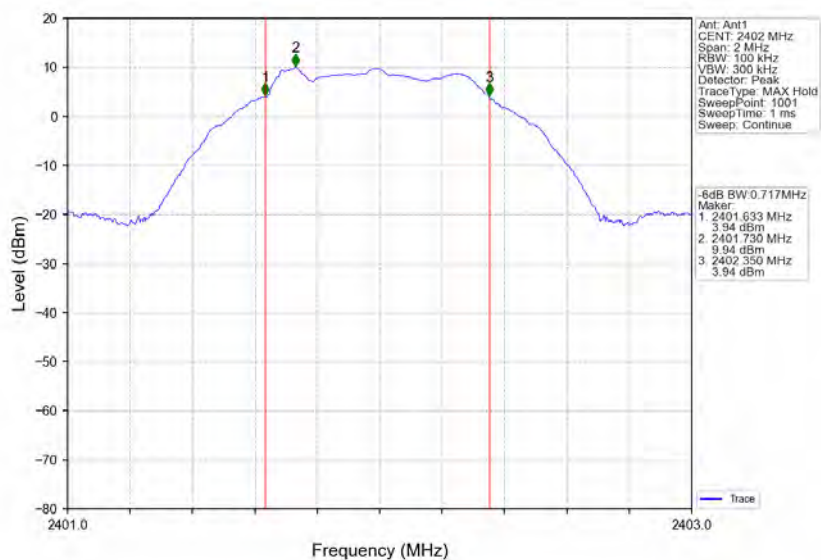

S2_MCH_2440MHz_Ant1_NTNV

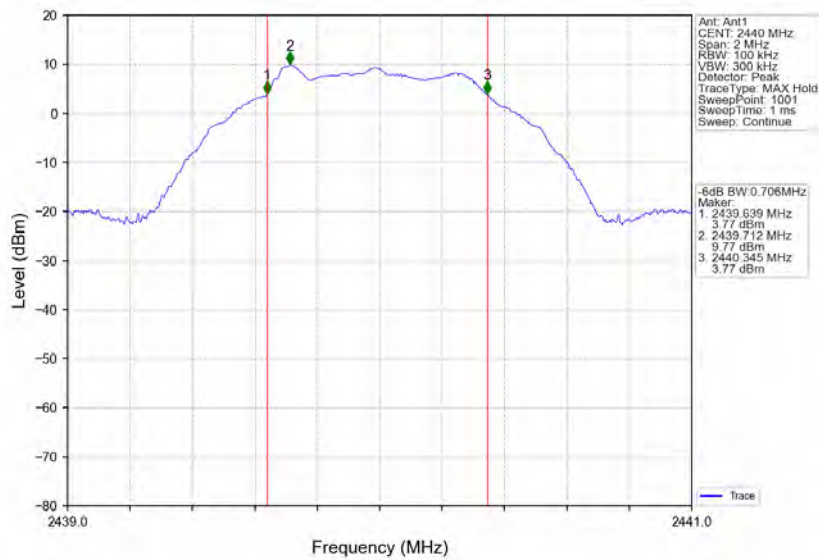

S2_HCH_2480MHz_Ant1_NTNV

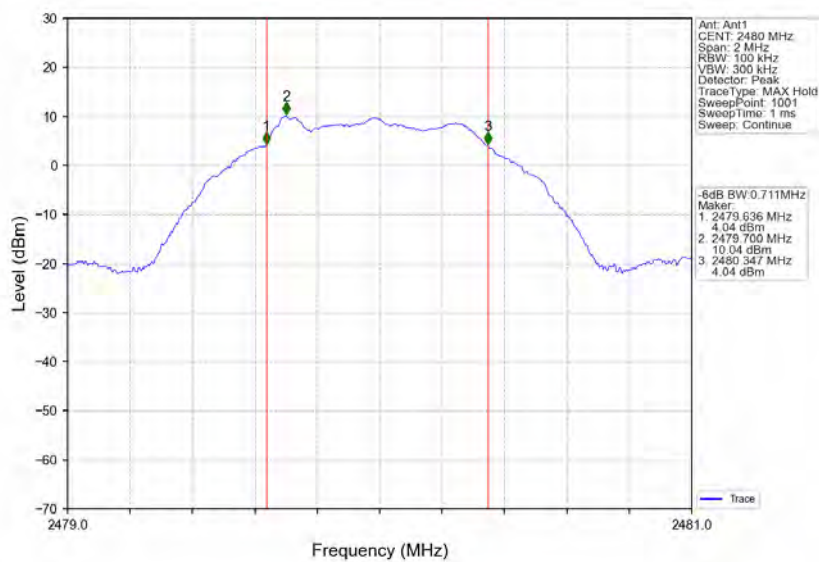


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 140 of 227

1M_LCH_2402MHz_Ant1_NTNV

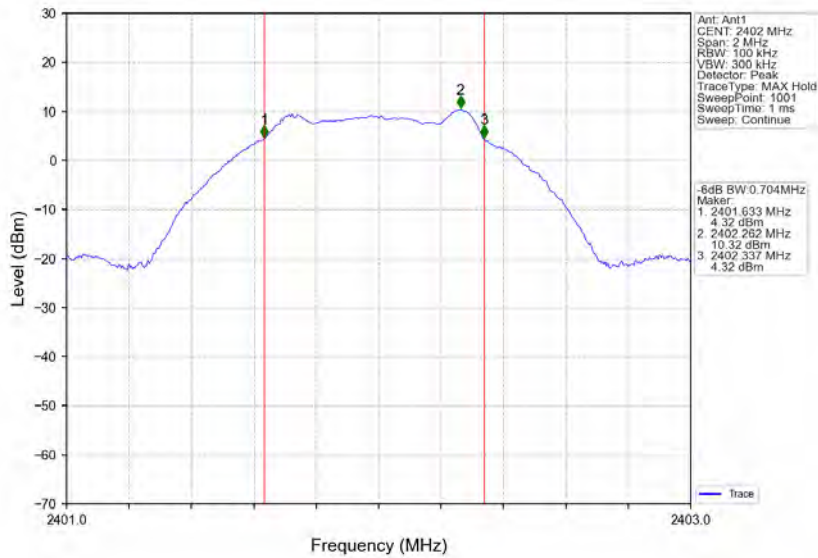

1M_MCH_2440MHz_Ant1_NTNV

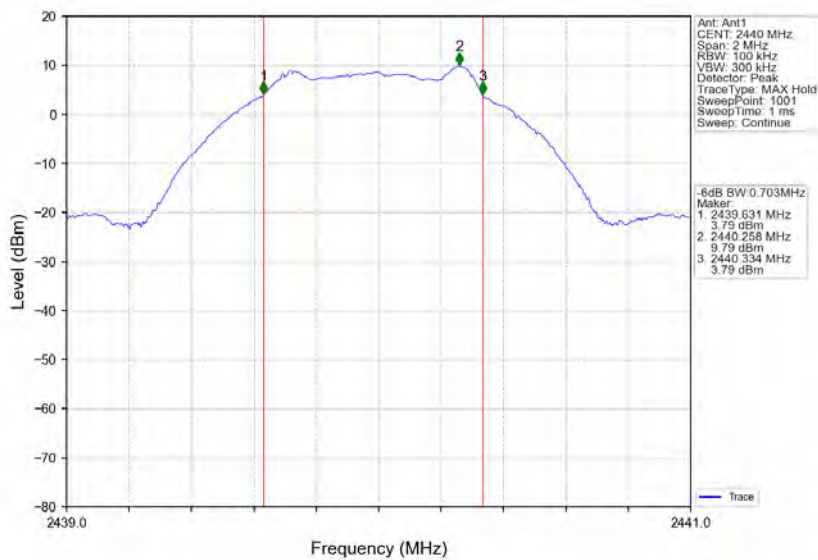


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 141 of 227

1M_HCH_2480MHz_Ant1_NTNV

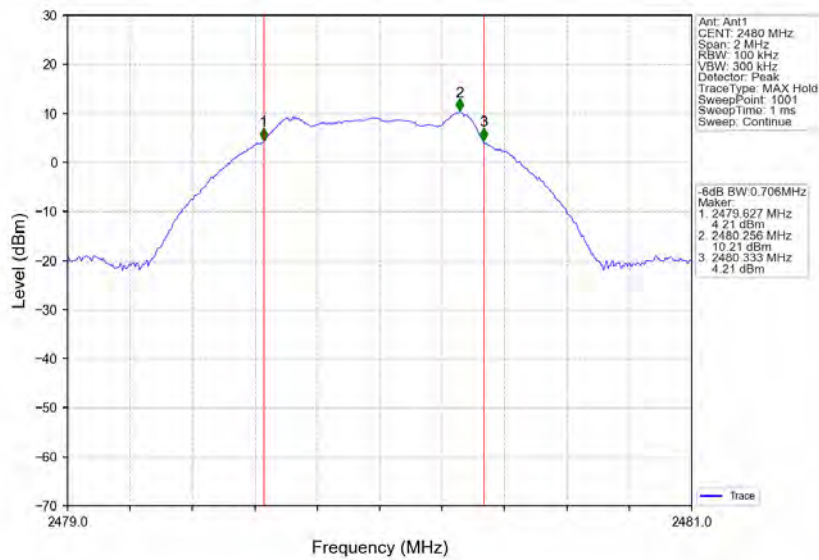

2M_LCH_2402MHz_Ant1_NTNV

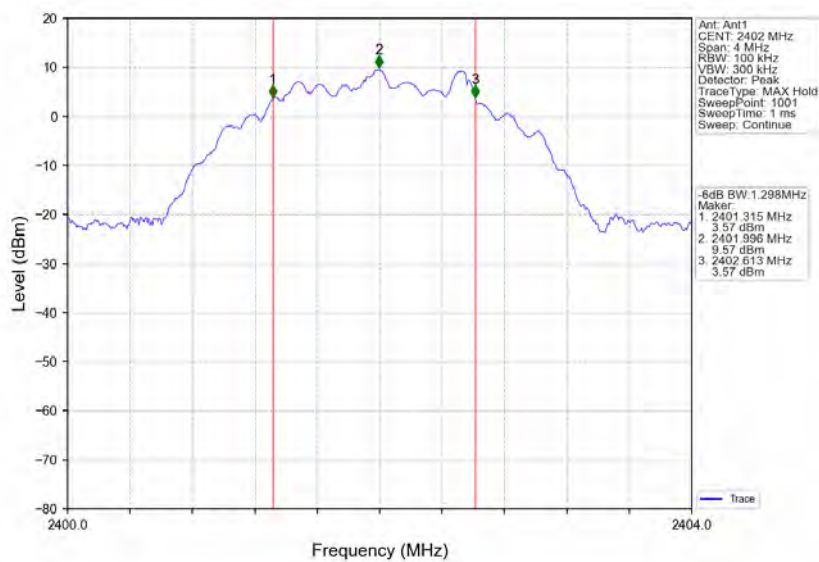


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 142 of 227

2M_MCH_2440MHz_Ant1_NTNV

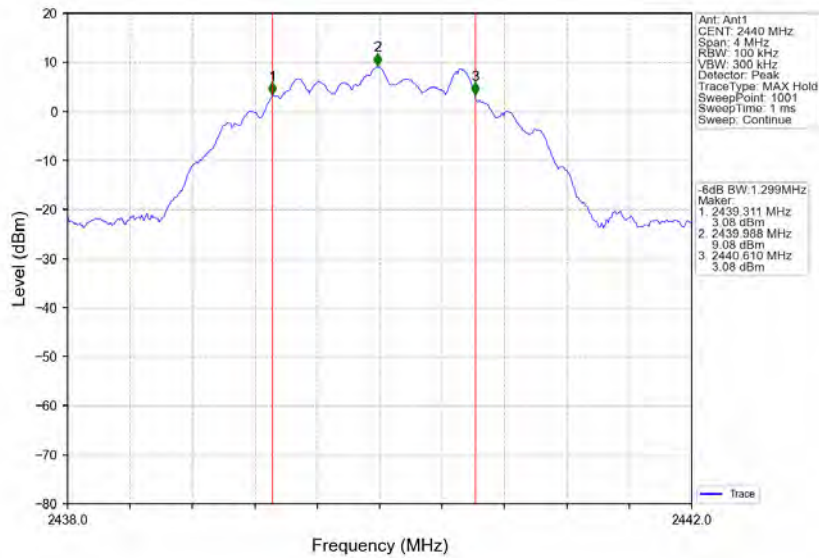

2M_HCH_2480MHz_Ant1_NTNV

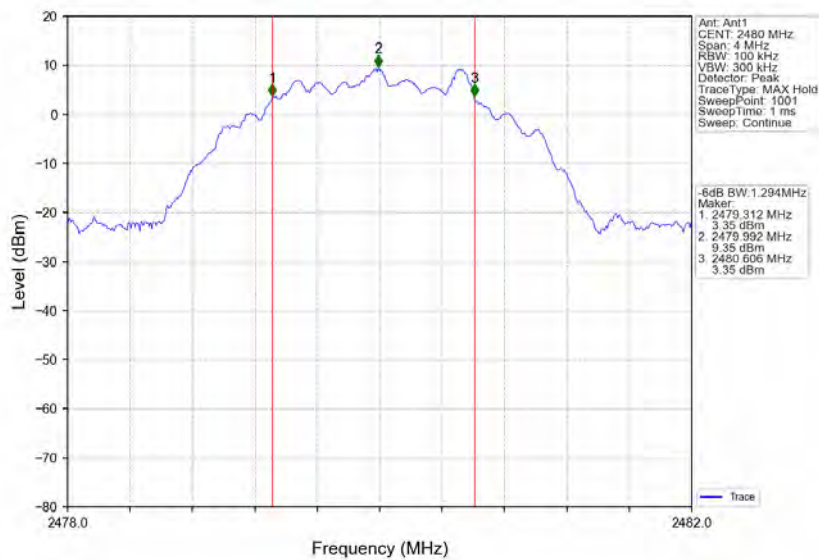

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 143 of 227


3. Maximum Conducted Output Power

3.1 Power

3.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
S8	SISO	2402	10.34	<=30	Pass
		2440	9.79	<=30	Pass
		2480	10.22	<=30	Pass
S2	SISO	2402	10.34	<=30	Pass
		2440	9.80	<=30	Pass
		2480	10.22	<=30	Pass
1M	SISO	2402	10.34	<=30	Pass
		2440	9.79	<=30	Pass
		2480	10.22	<=30	Pass
2M	SISO	2402	10.34	<=30	Pass
		2440	9.81	<=30	Pass
		2480	10.23	<=30	Pass
Note1: Antenna Gain: Ant1: -0.50dBi;					

3.1.2 Test Graph

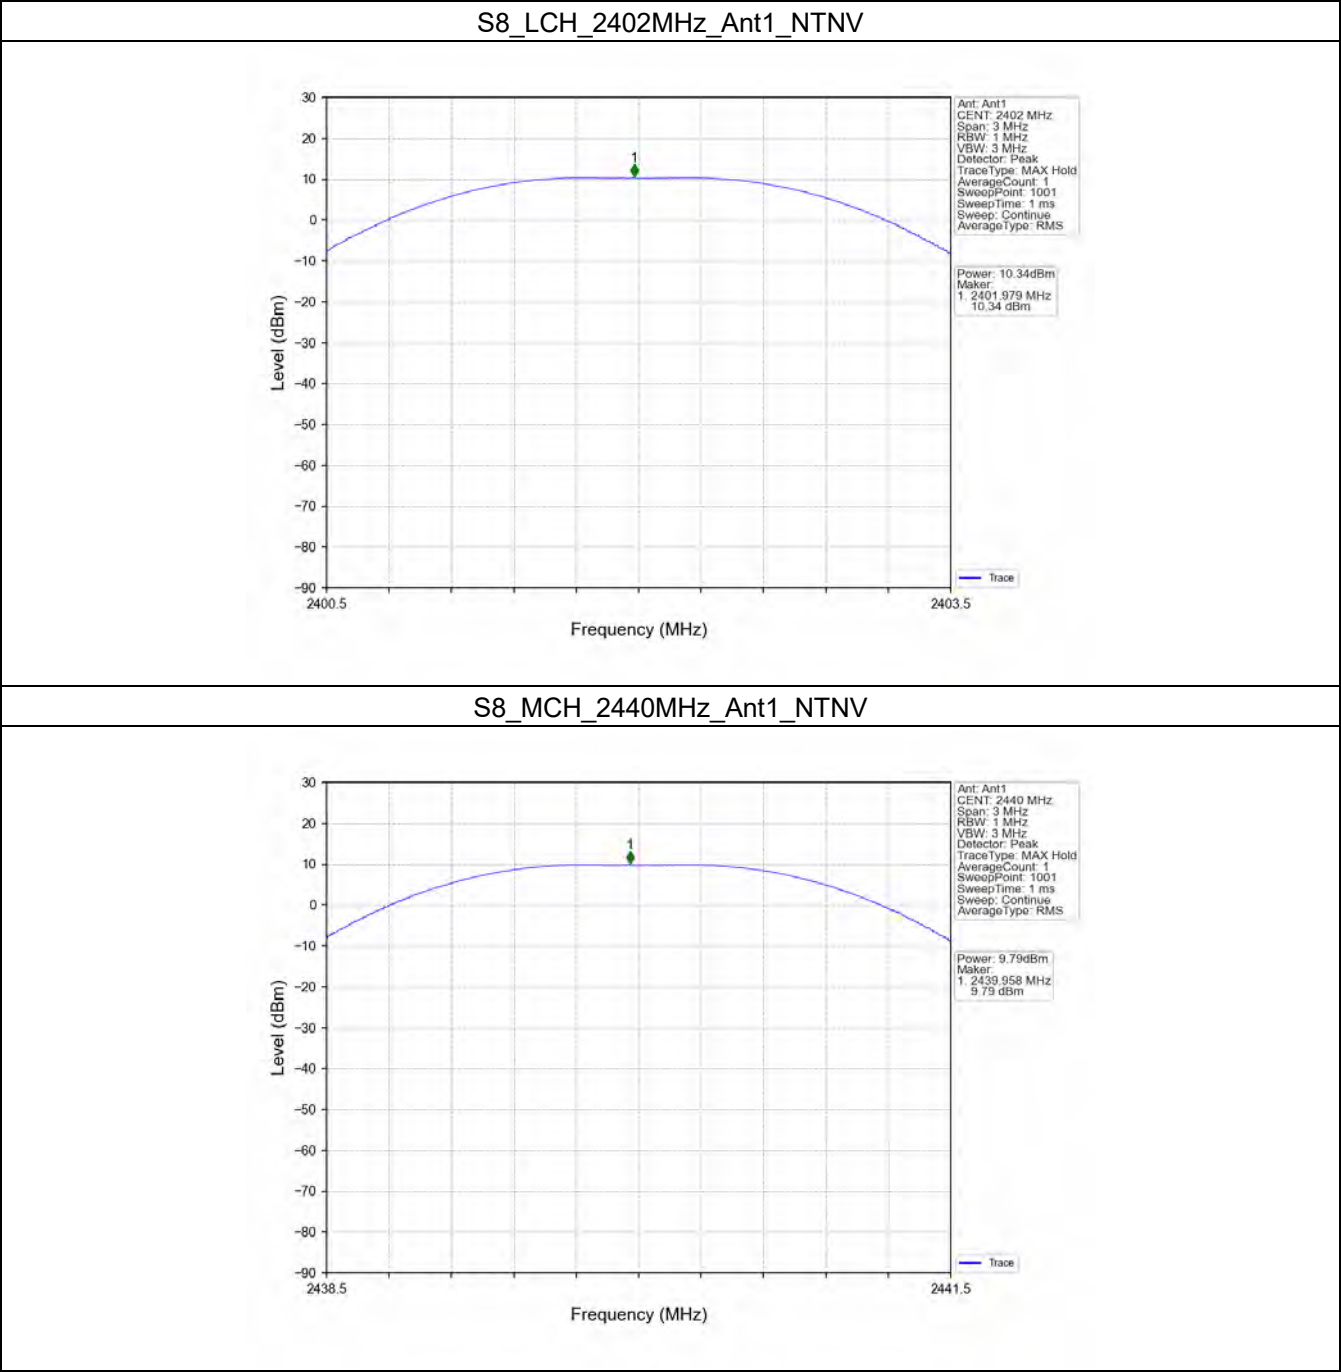


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 145 of 227

S8_HCH_2480MHz_Ant1_NTNV

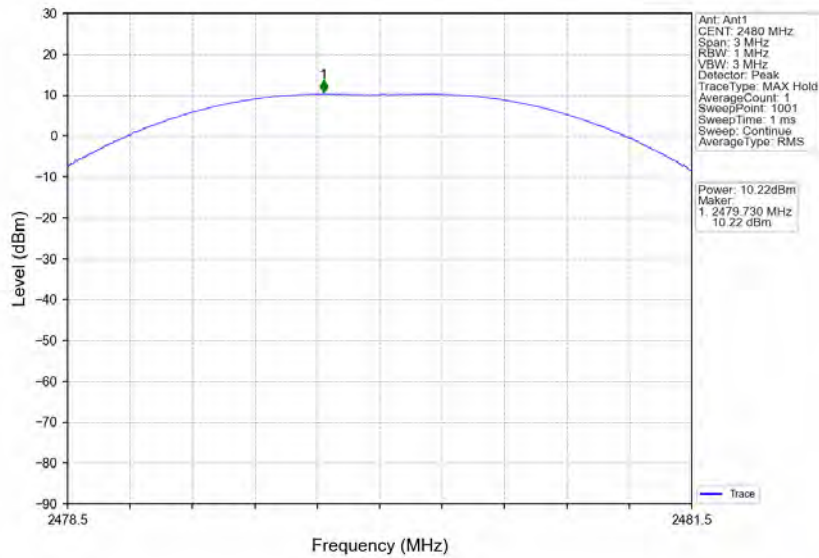

S2_LCH_2402MHz_Ant1_NTNV

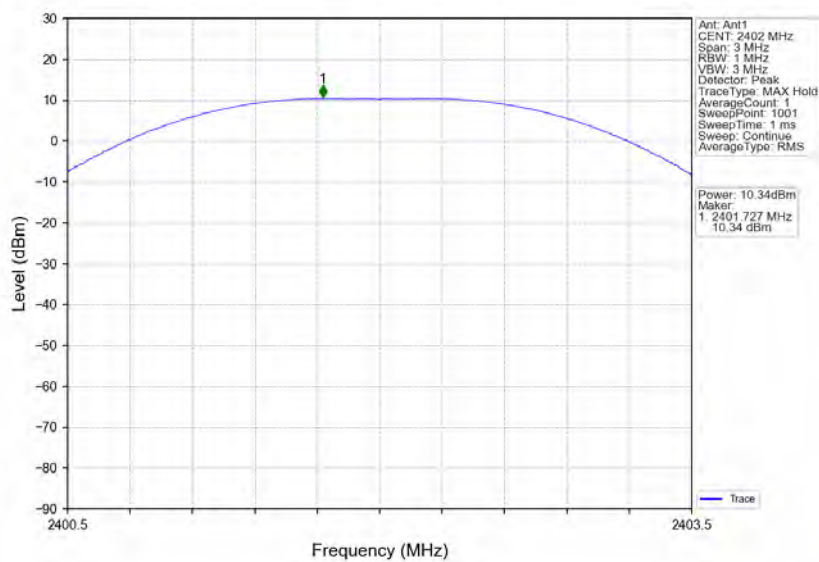


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 146 of 227

S2_MCH_2440MHz_Ant1_NTNV

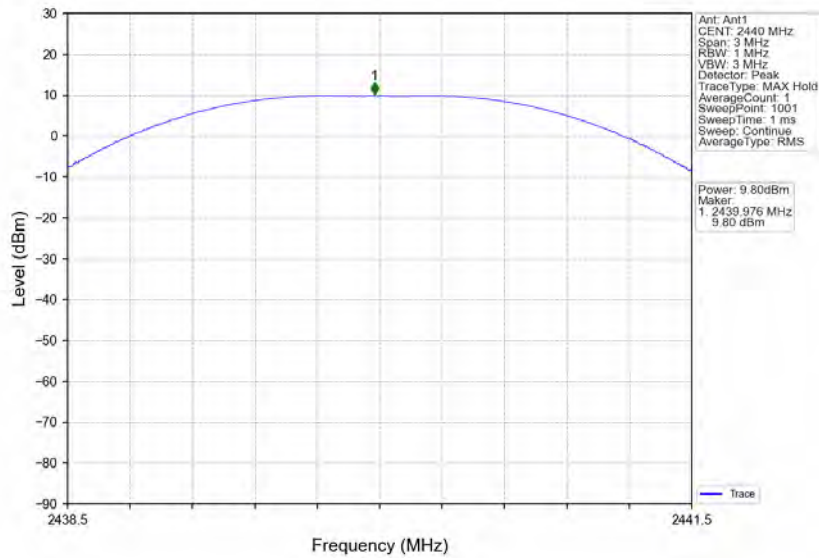

S2_HCH_2480MHz_Ant1_NTNV

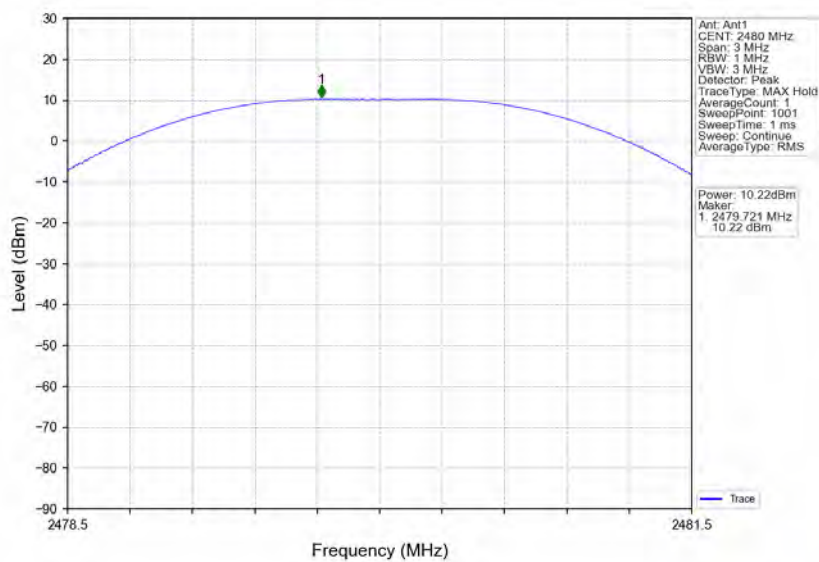


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 147 of 227

1M_LCH_2402MHz_Ant1_NTNV

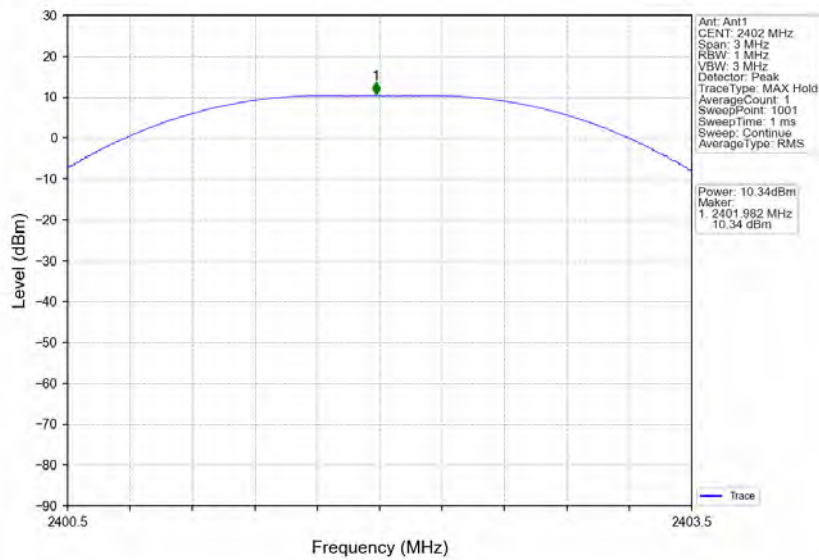

1M_MCH_2440MHz_Ant1_NTNV

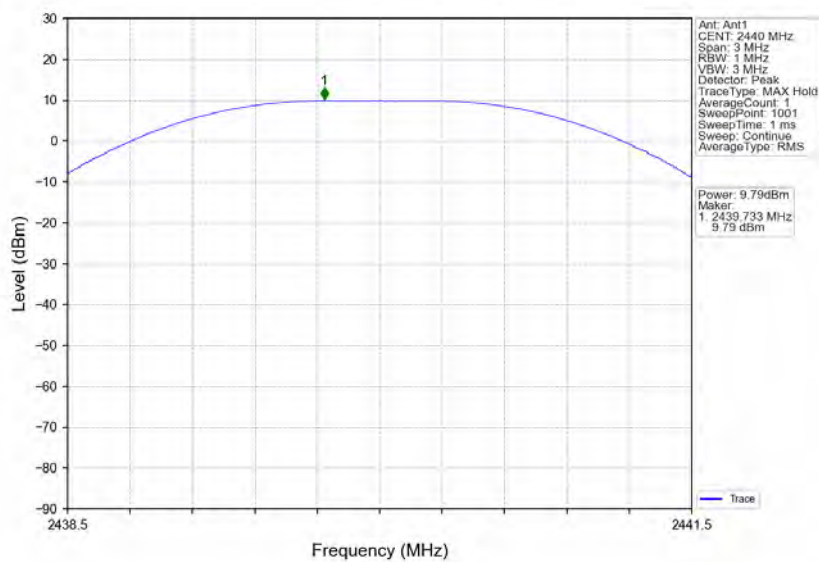


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 148 of 227

1M_HCH_2480MHz_Ant1_NTNV

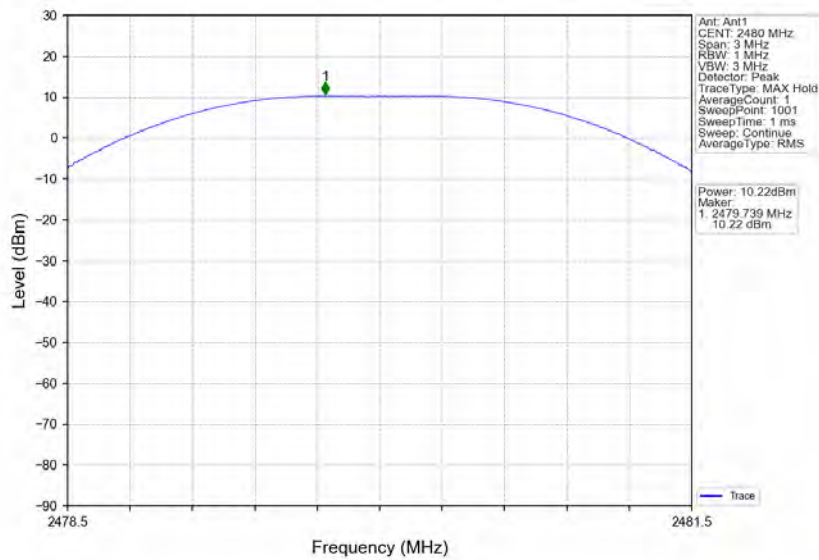

2M_LCH_2402MHz_Ant1_NTNV

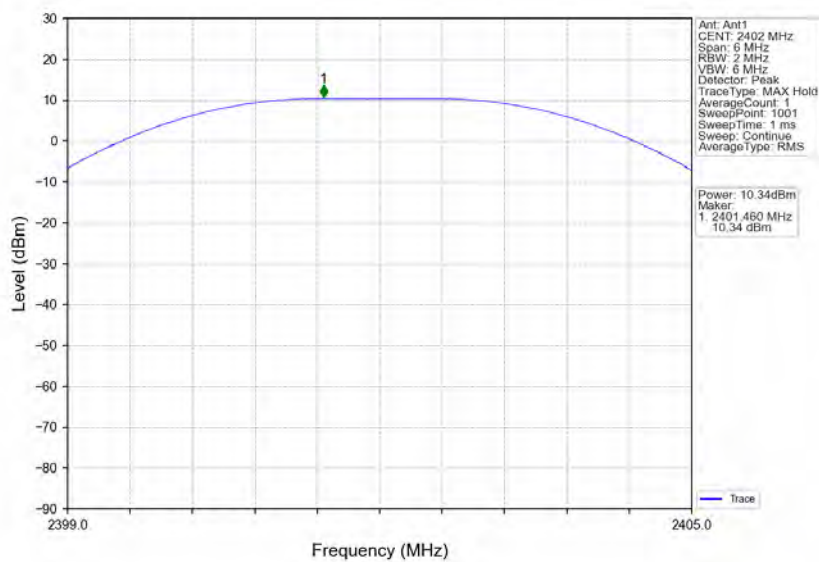


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 149 of 227

2M_MCH_2440MHz_Ant1_NTNV

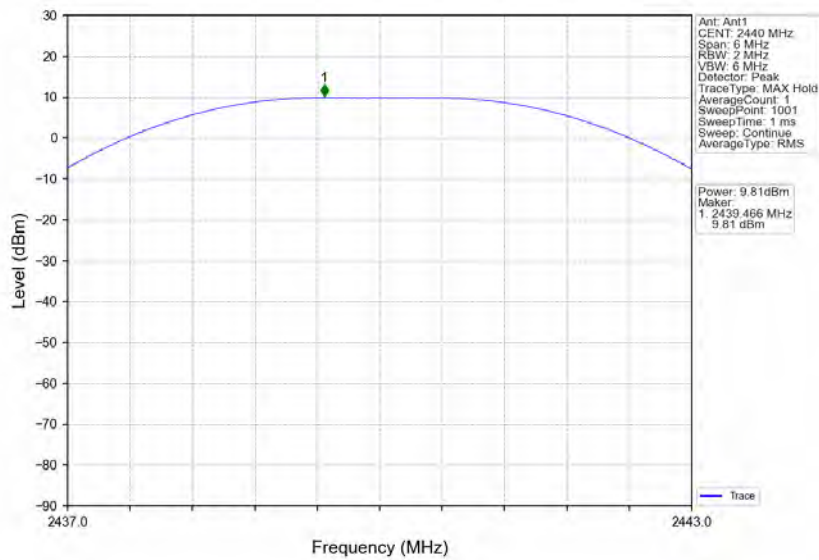

2M_HCH_2480MHz_Ant1_NTNV

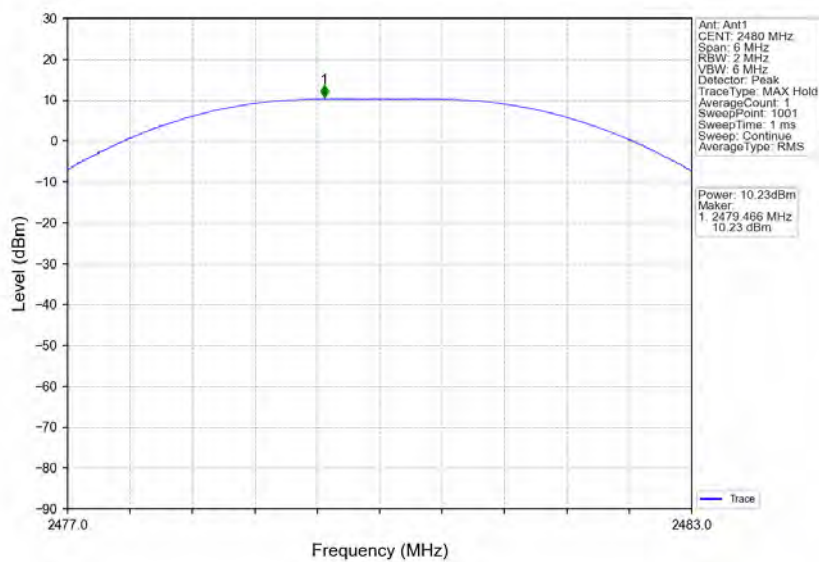

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 150 of 227

4. Maximum Power Spectral Density


4.1 PSD

4.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
S8	SISO	2402	4.26	<=8	Pass
		2440	3.68	<=8	Pass
		2480	4.08	<=8	Pass
S2	SISO	2402	3.83	<=8	Pass
		2440	3.45	<=8	Pass
		2480	3.58	<=8	Pass
1M	SISO	2402	-4.02	<=8	Pass
		2440	-4.48	<=8	Pass
		2480	-4.11	<=8	Pass
2M	SISO	2402	-7.98	<=8	Pass
		2440	-8.28	<=8	Pass
		2480	-8.05	<=8	Pass
Note1: Antenna Gain: Ant1: -0.50dBi;					

4.1.2 Test Graph

S8_LCH_2402MHz_Ant1_NTNV

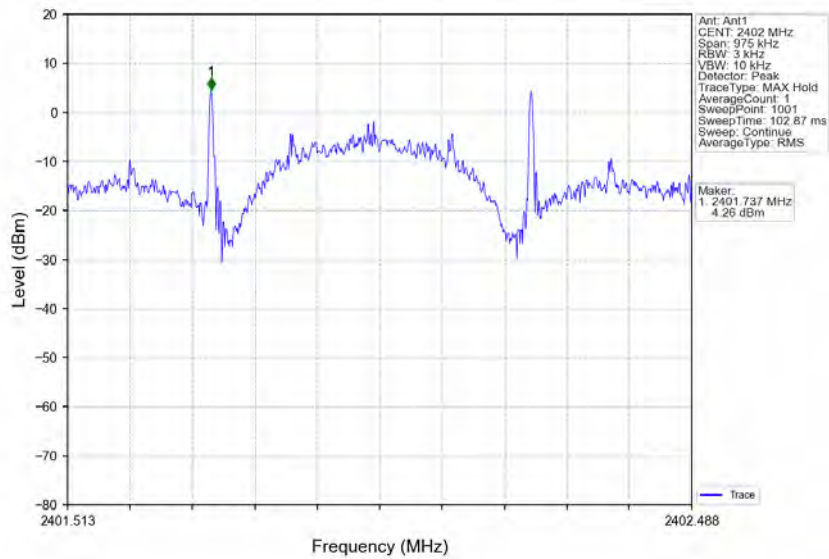

S8_MCH_2440MHz_Ant1_NTNV

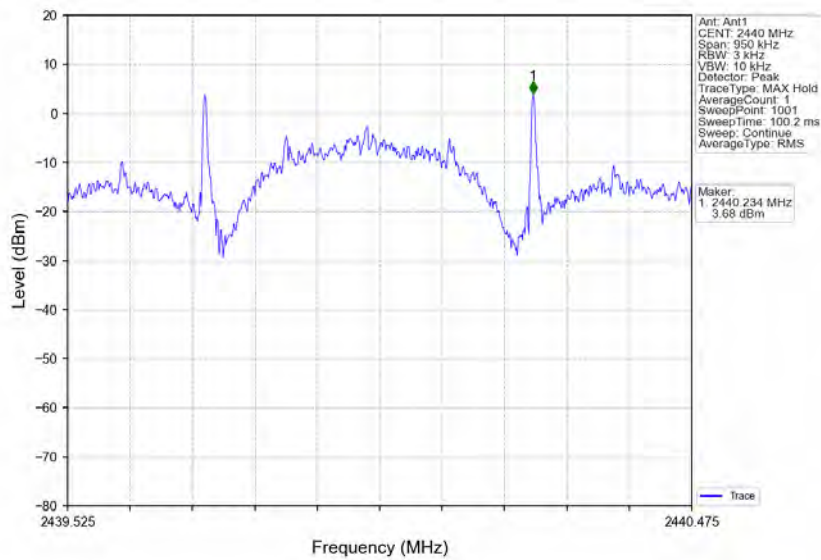


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 152 of 227

S8_HCH_2480MHz_Ant1_NTNV

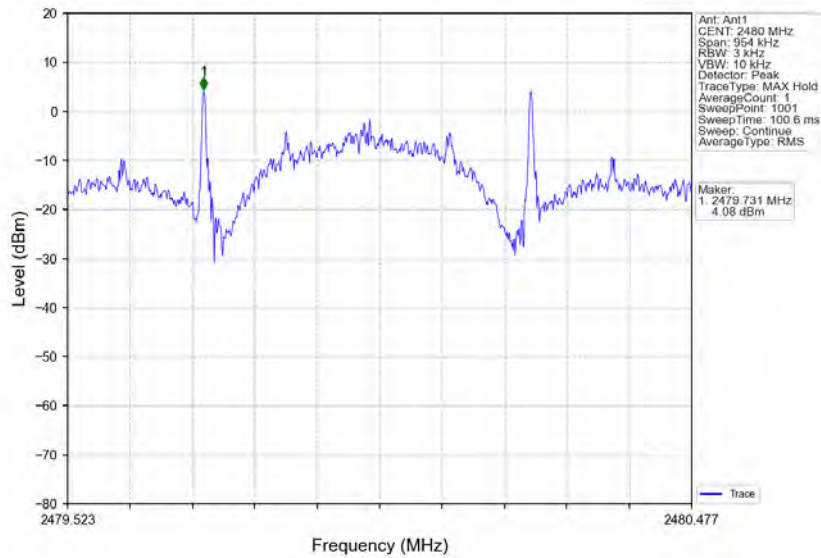

S2_LCH_2402MHz_Ant1_NTNV

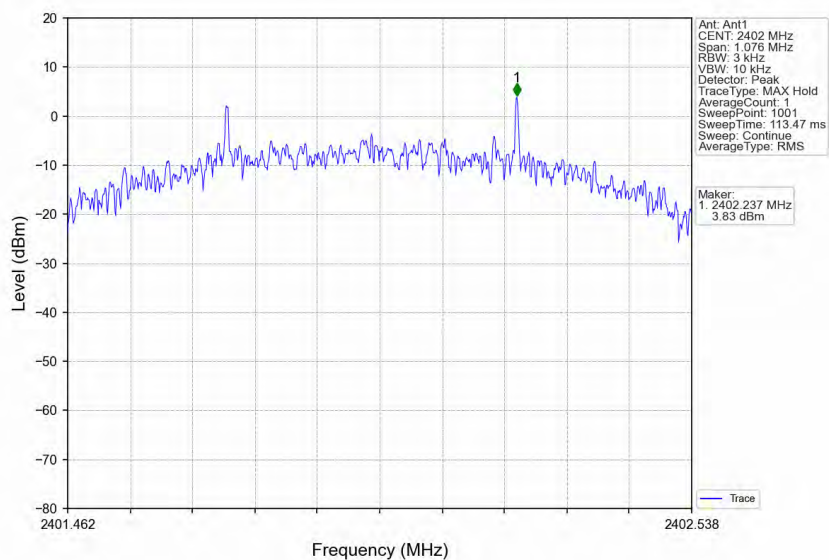


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 153 of 227

S2_MCH_2440MHz_Ant1_NTNV

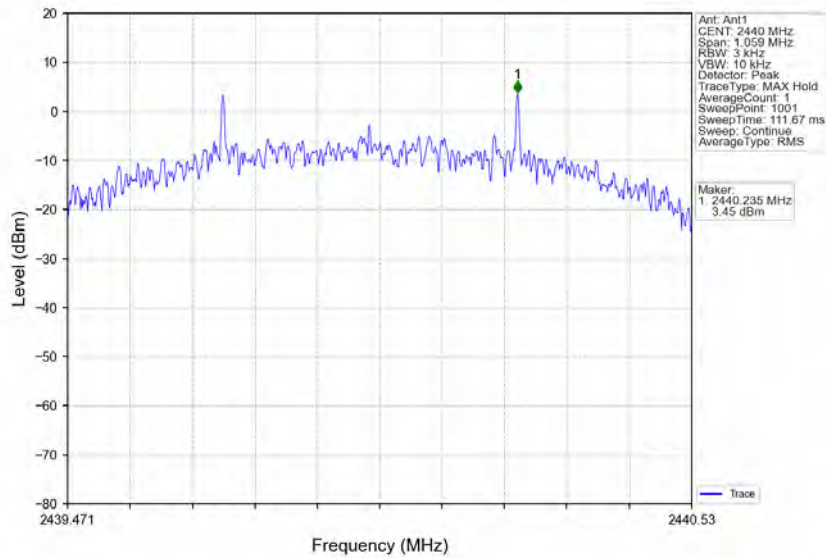

S2_HCH_2480MHz_Ant1_NTNV

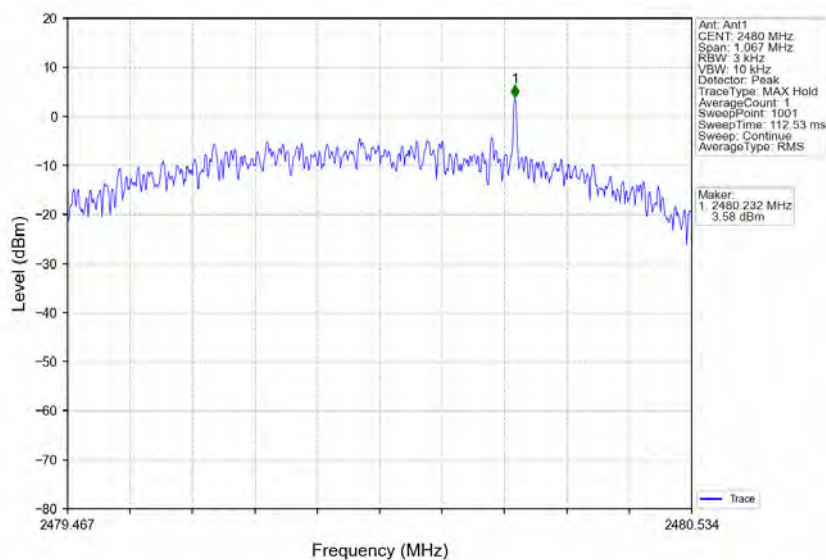


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 154 of 227

1M_LCH_2402MHz_Ant1_NTNV

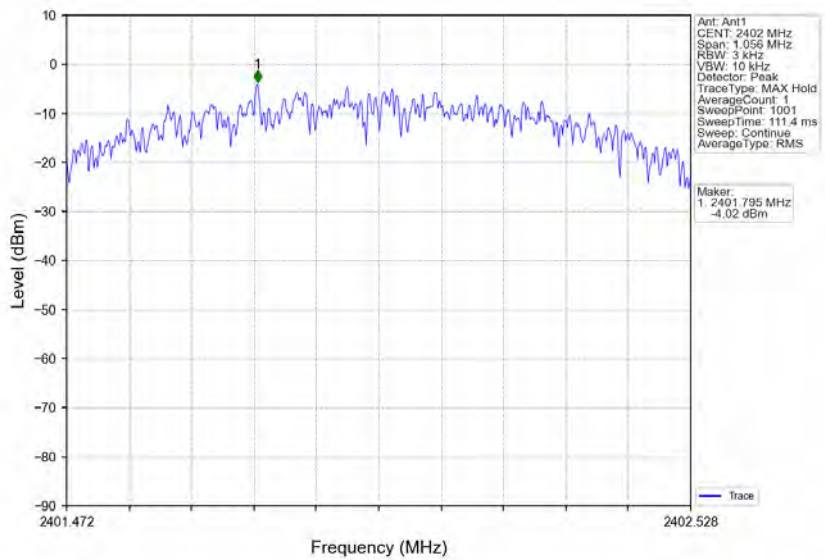

1M_MCH_2440MHz_Ant1_NTNV

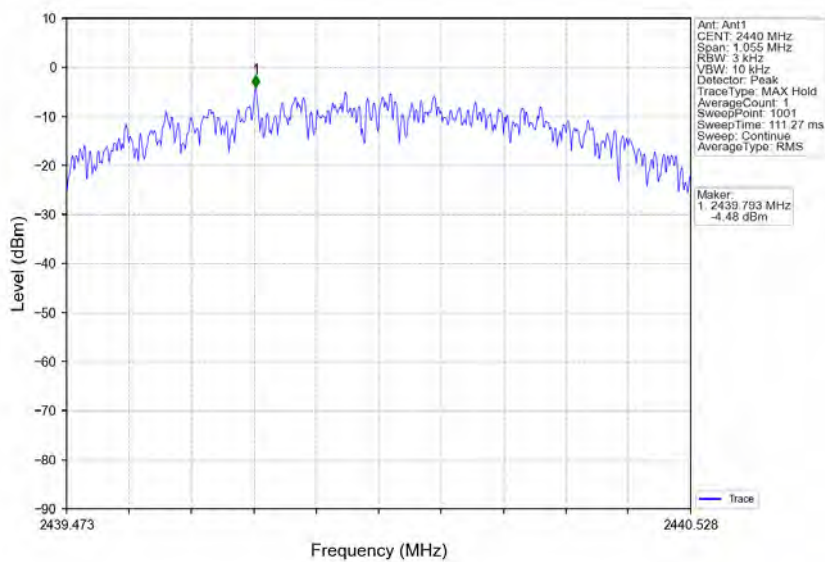


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 155 of 227

1M_HCH_2480MHz_Ant1_NTNV

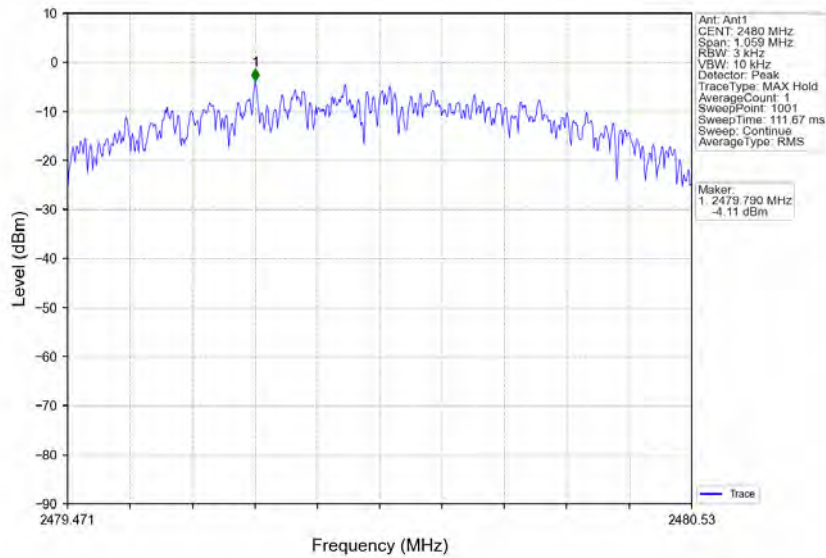

2M_LCH_2402MHz_Ant1_NTNV

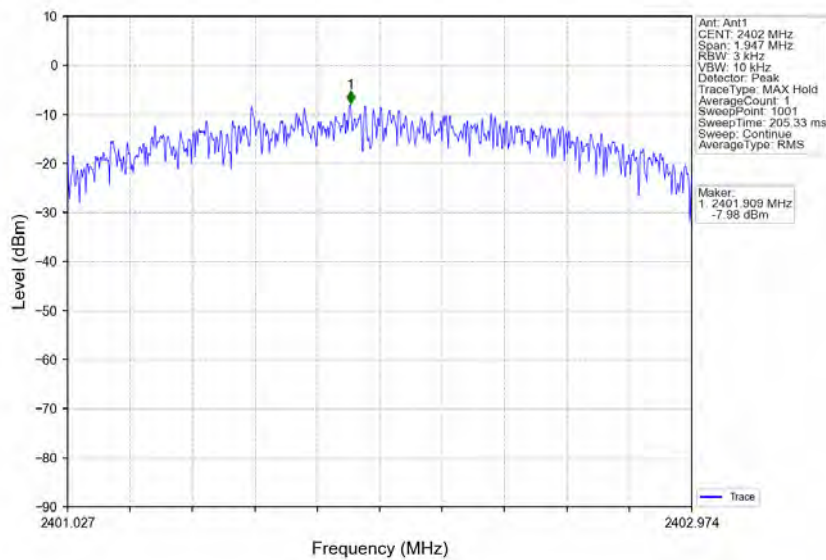


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 156 of 227

2M_MCH_2440MHz_Ant1_NTNV

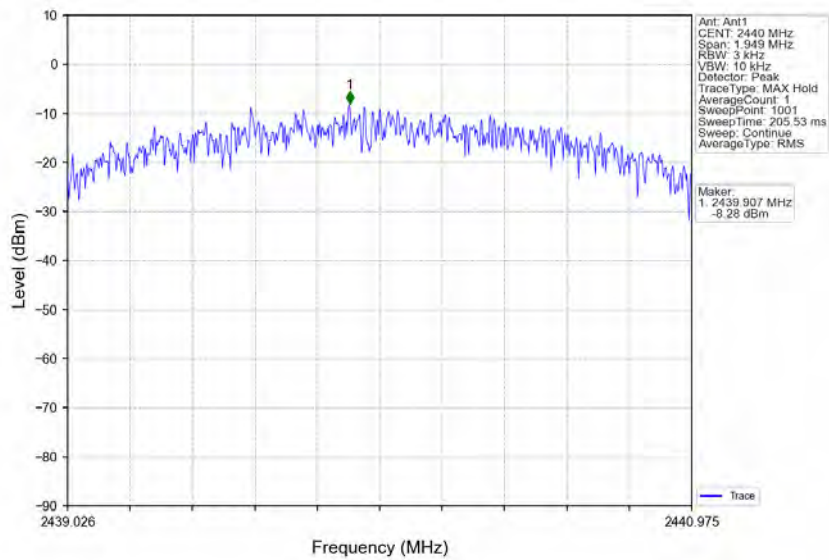

2M_HCH_2480MHz_Ant1_NTNV

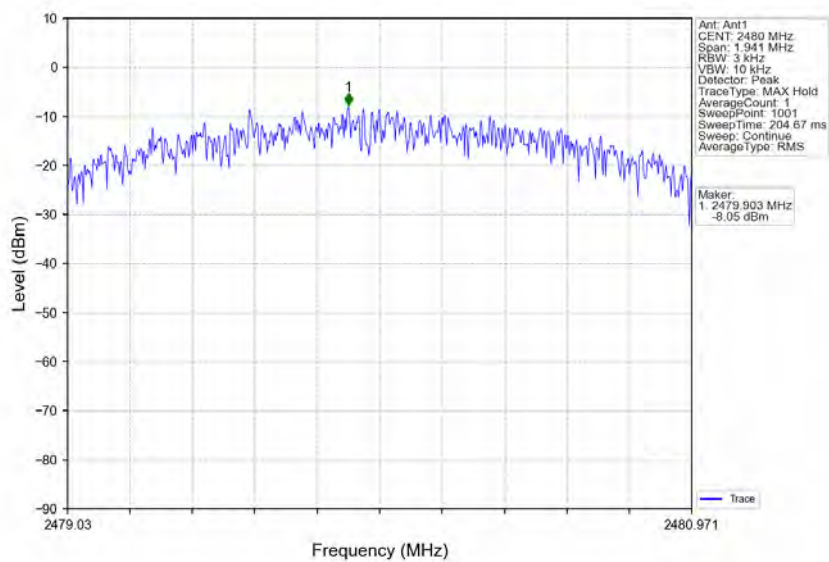

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 157 of 227

5. Unwanted Emissions In Non-restricted Frequency Bands


5.1 Ref

5.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
S8	SISO	2402	1	9.19
		2440	1	8.66
		2480	1	8.97
S2	SISO	2402	1	10.29
		2440	1	9.77
		2480	1	10.18
1M	SISO	2402	1	10.32
		2440	1	9.79
		2480	1	10.21
2M	SISO	2402	1	9.52
		2440	1	9.00
		2480	1	9.35

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

5.1.2 Test Graph

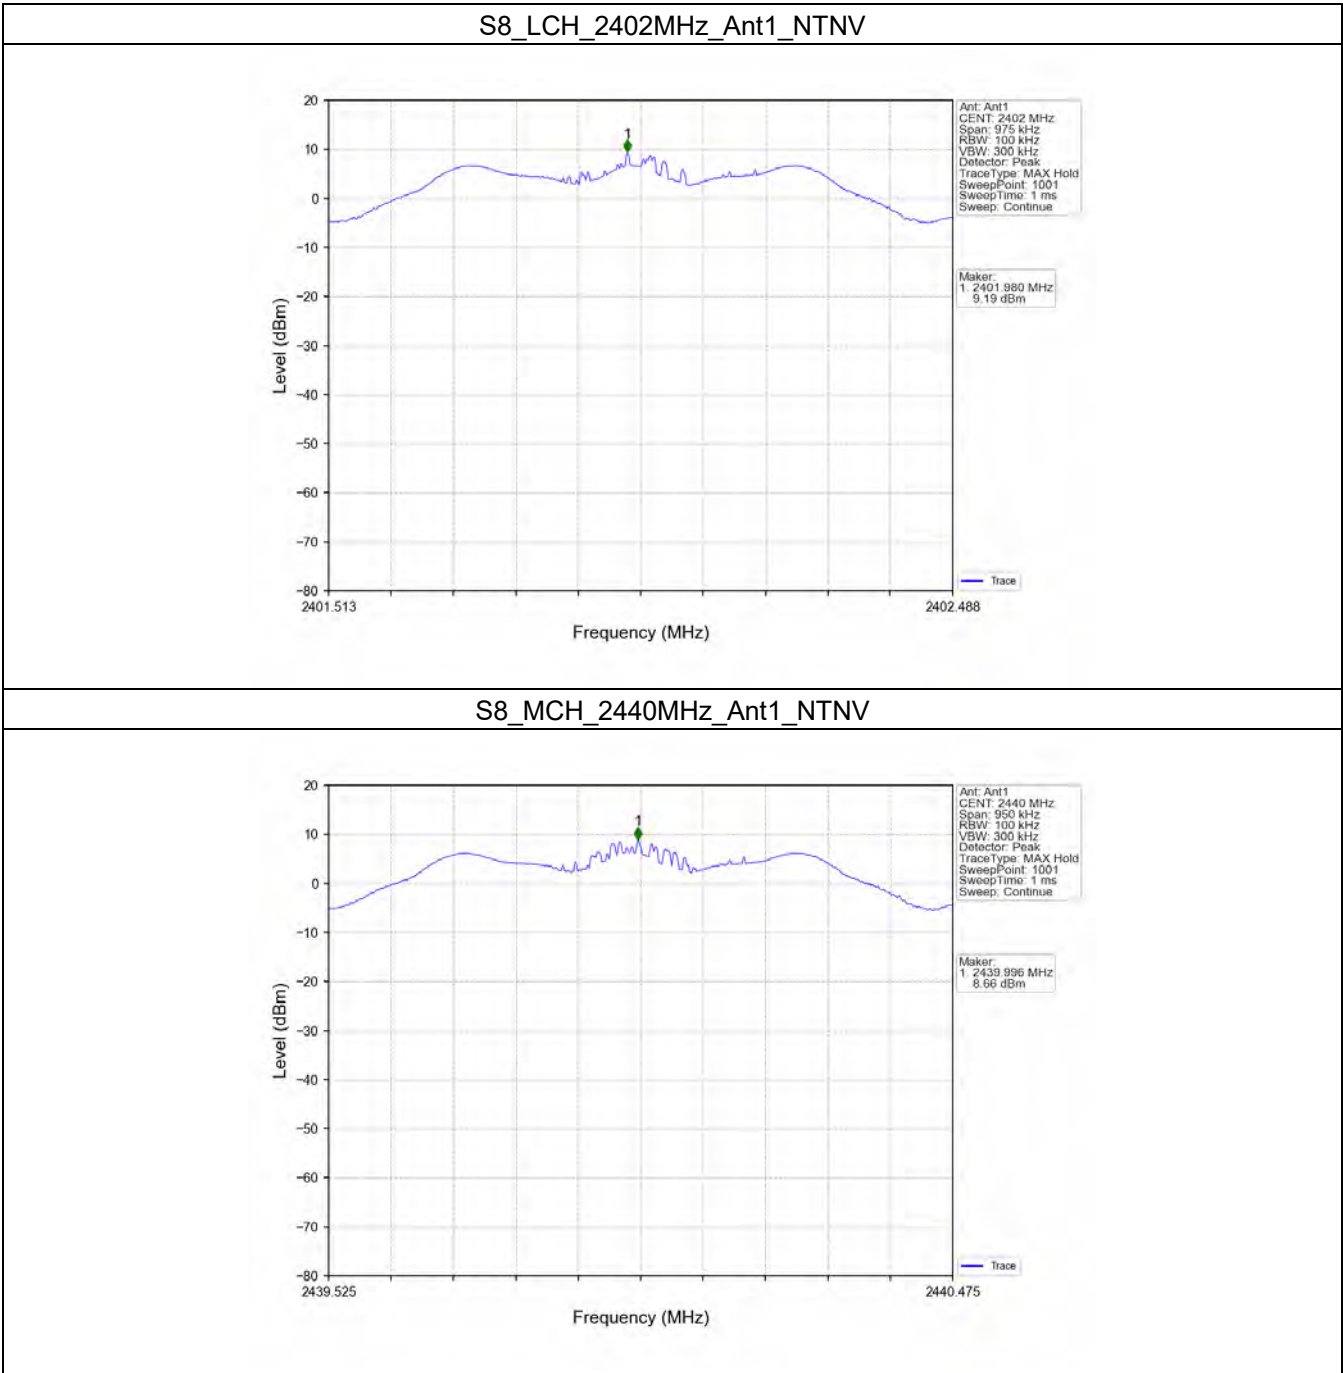


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 159 of 227

S8_HCH_2480MHz_Ant1_NTNV

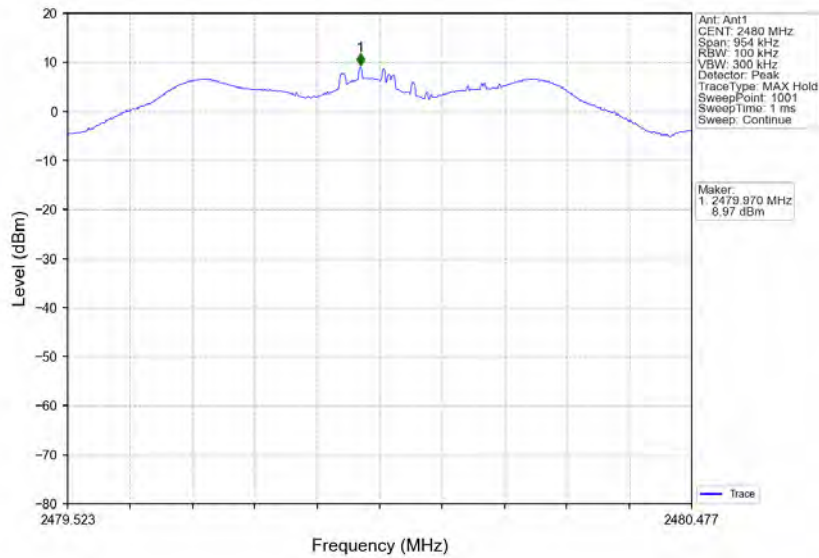

S2_LCH_2402MHz_Ant1_NTNV

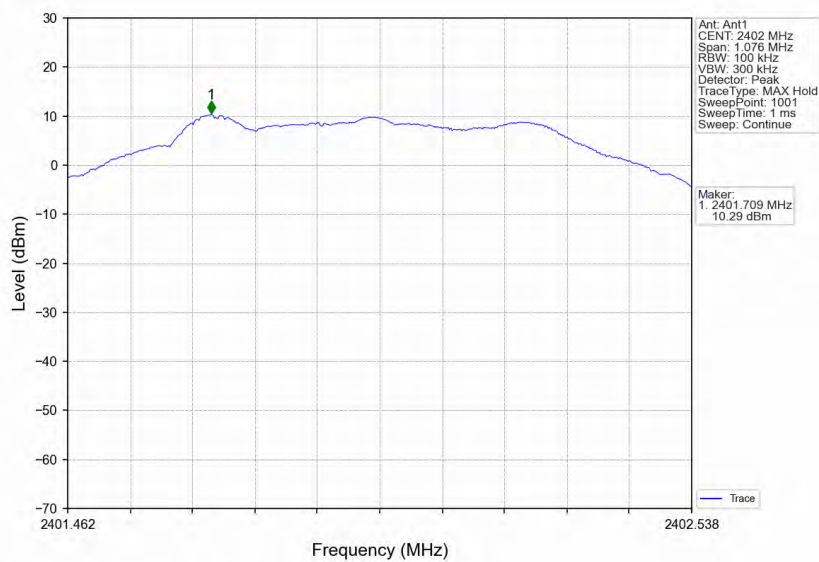


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 160 of 227

S2_MCH_2440MHz_Ant1_NTNV

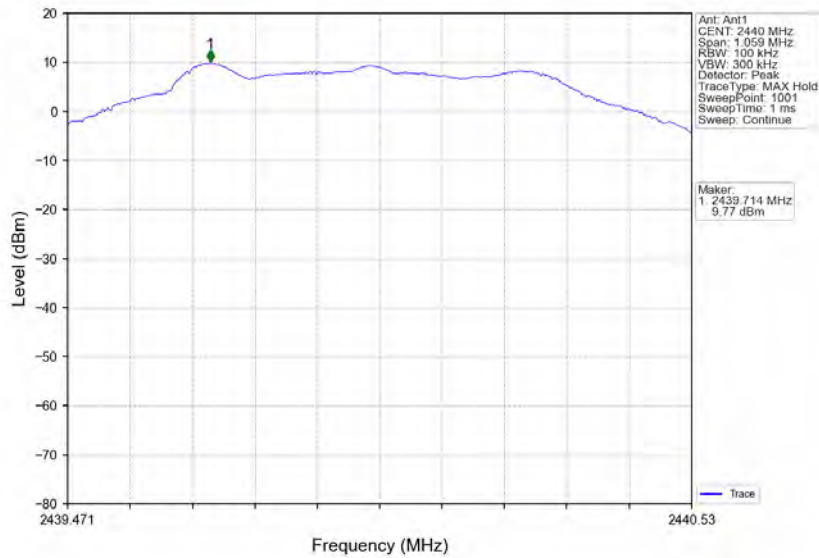

S2_HCH_2480MHz_Ant1_NTNV

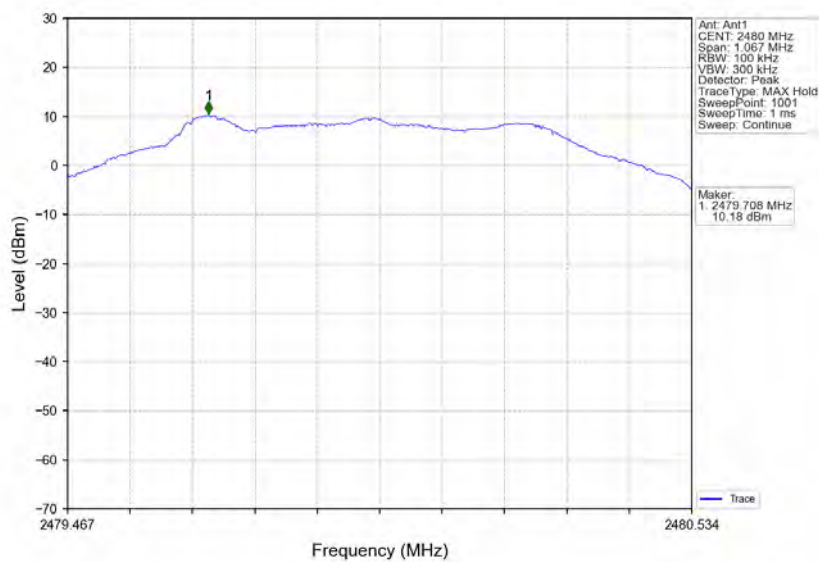


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 161 of 227

1M_LCH_2402MHz_Ant1_NTNV

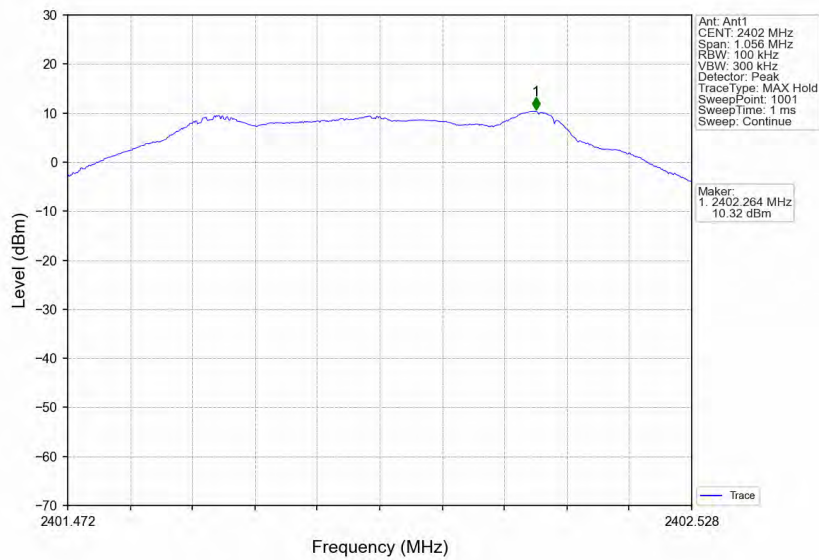

1M_MCH_2440MHz_Ant1_NTNV

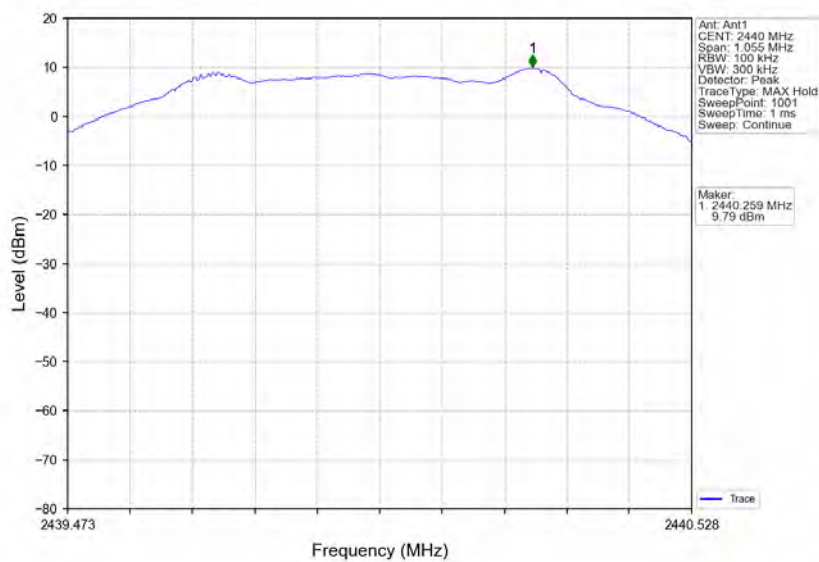


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 162 of 227

1M_HCH_2480MHz_Ant1_NTNV

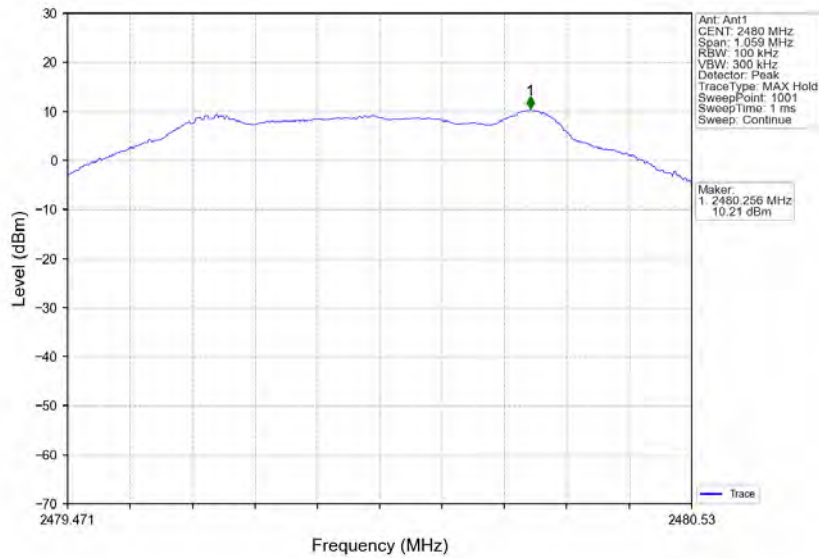

2M_LCH_2402MHz_Ant1_NTNV

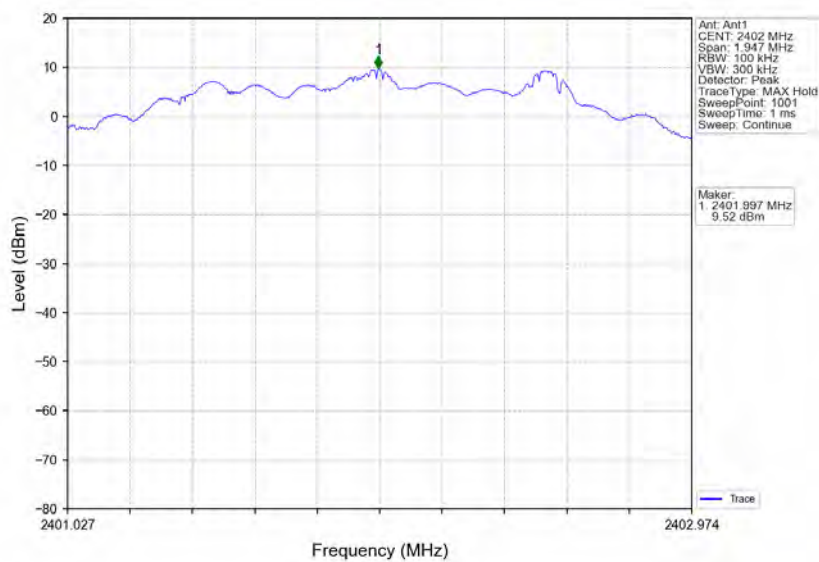


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 163 of 227

2M_MCH_2440MHz_Ant1_NTNV

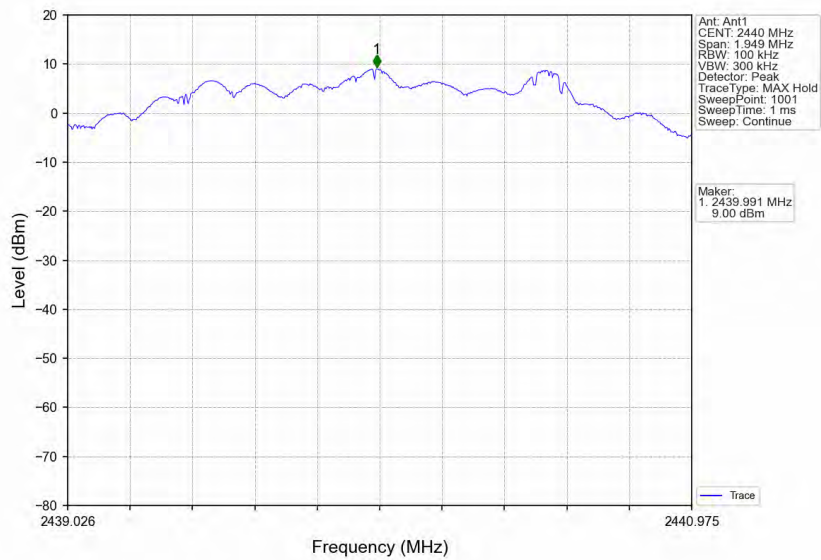

2M_HCH_2480MHz_Ant1_NTNV

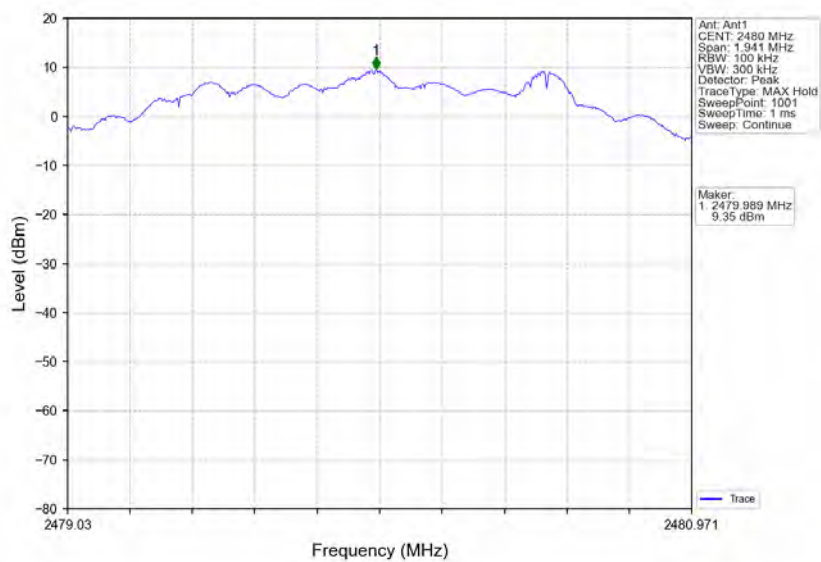

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 164 of 227

5.2 CSE


5.2.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
S8	SISO	2402	1	9.19	-10.81	Pass
		2440	1	9.19	-10.81	Pass
		2480	1	9.19	-10.81	Pass
S2	SISO	2402	1	10.29	-9.71	Pass
		2440	1	10.29	-9.71	Pass
		2480	1	10.29	-9.71	Pass
1M	SISO	2402	1	10.32	-9.68	Pass
		2440	1	10.32	-9.68	Pass
		2480	1	10.32	-9.68	Pass
2M	SISO	2402	1	9.52	-10.48	Pass
		2440	1	9.52	-10.48	Pass
		2480	1	9.52	-10.48	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

5.2.2 Test Graph

S8_LCH_2402MHz_Ant1_NTNV

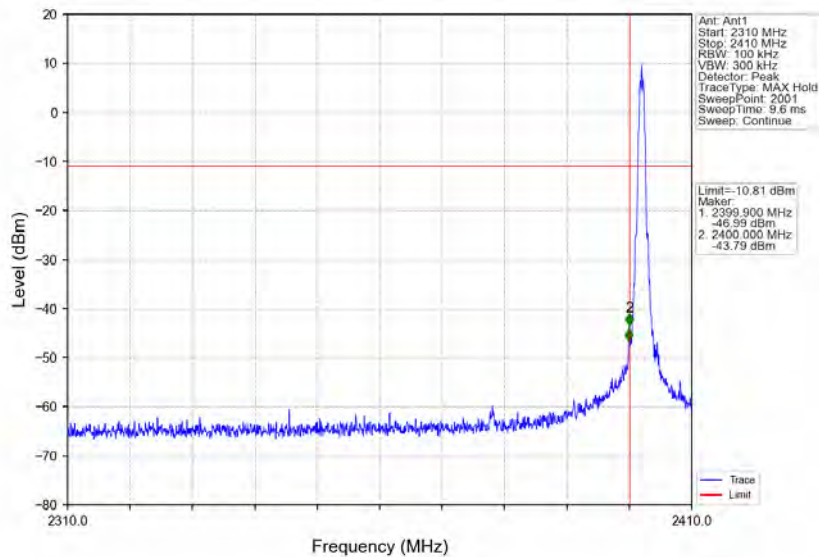

S8_LCH_2402MHz_Ant1_NTNV

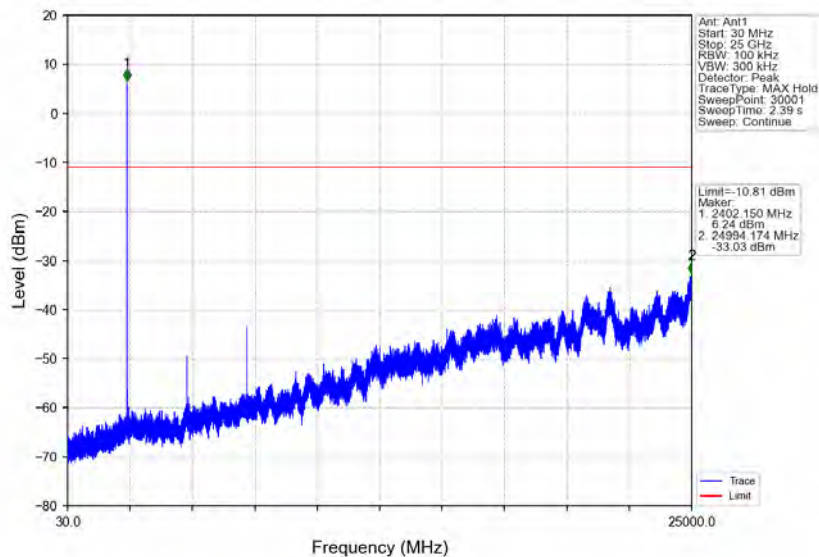


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 166 of 227

S8_MCH_2440MHz_Ant1_NTNV

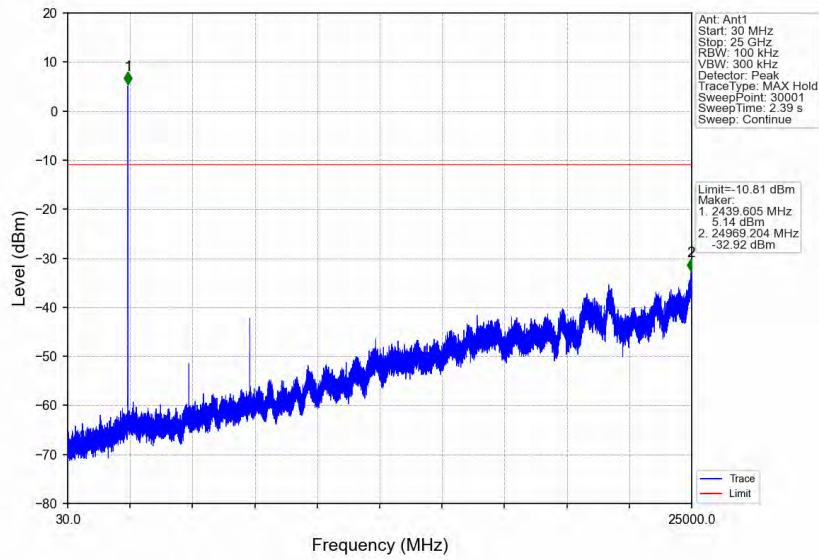

S8_HCH_2480MHz_Ant1_NTNV

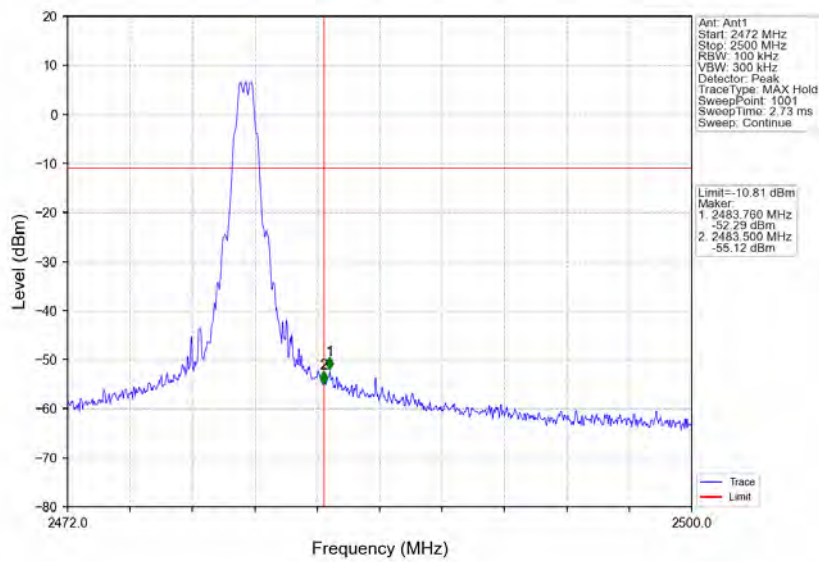


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 167 of 227

S8_HCH_2480MHz_Ant1_NTNV

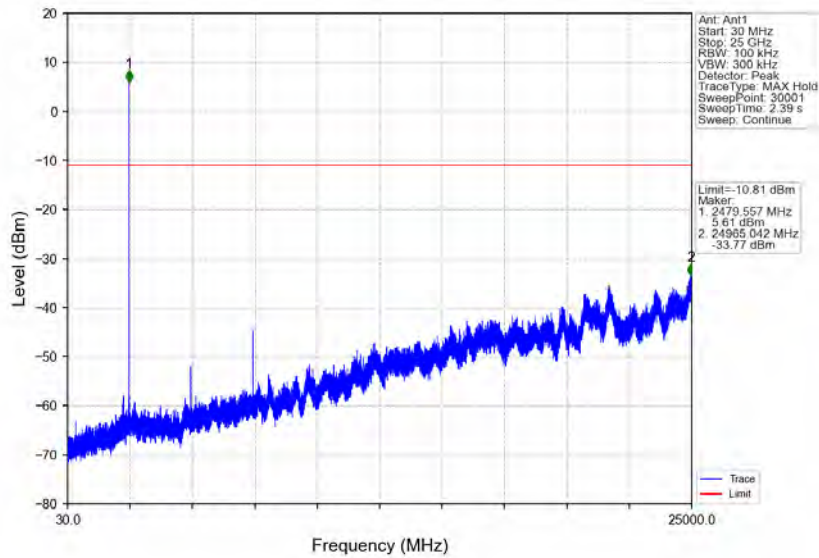

S2_LCH_2402MHz_Ant1_NTNV

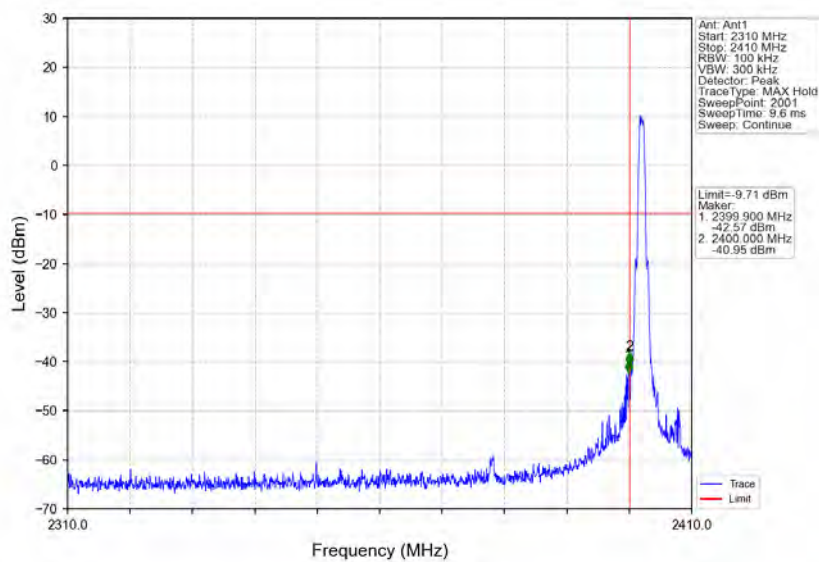


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 168 of 227

S2_LCH_2402MHz_Ant1_NTNV

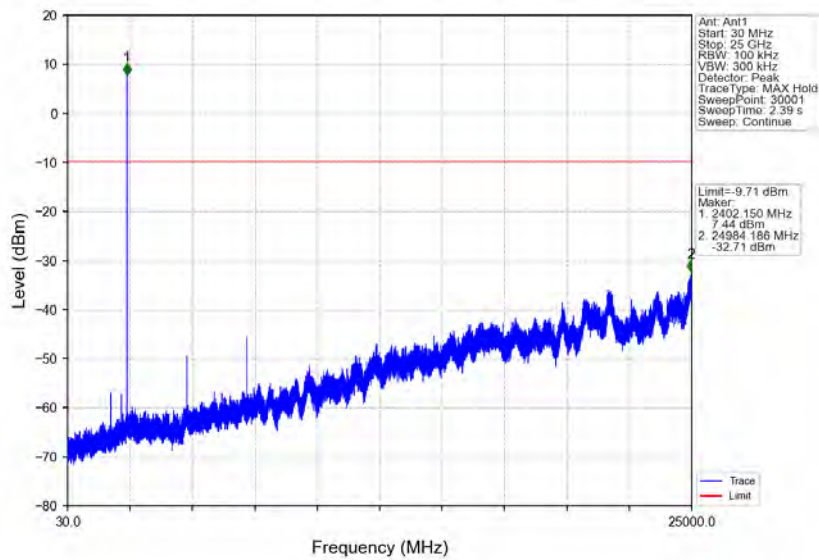

S2_MCH_2440MHz_Ant1_NTNV

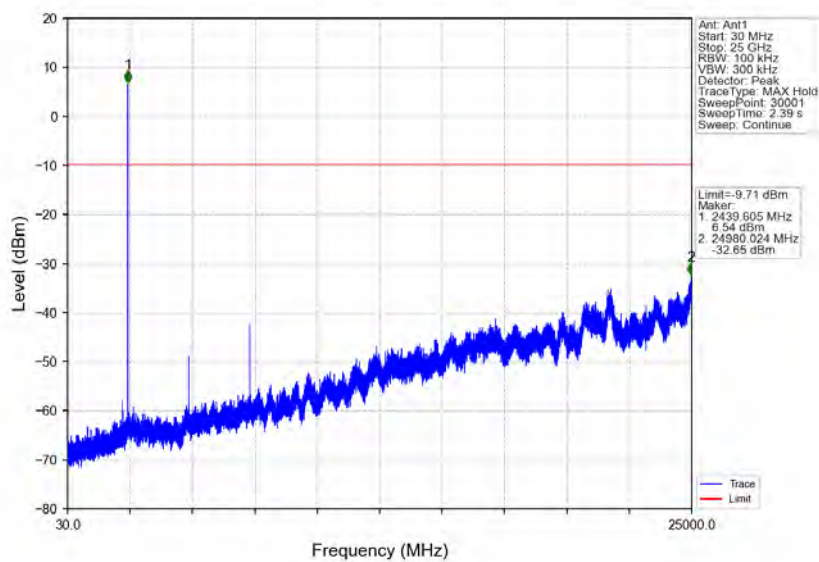


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 169 of 227

S2_HCH_2480MHz_Ant1_NTNV

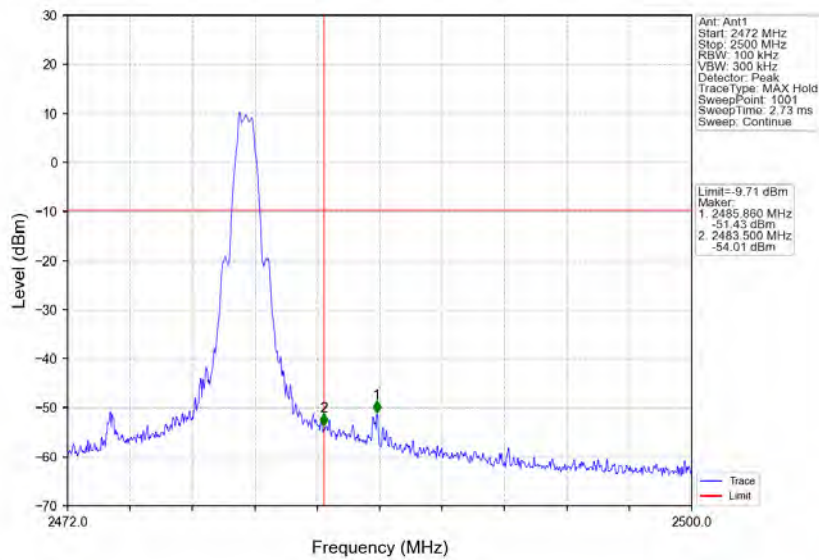

S2_HCH_2480MHz_Ant1_NTNV

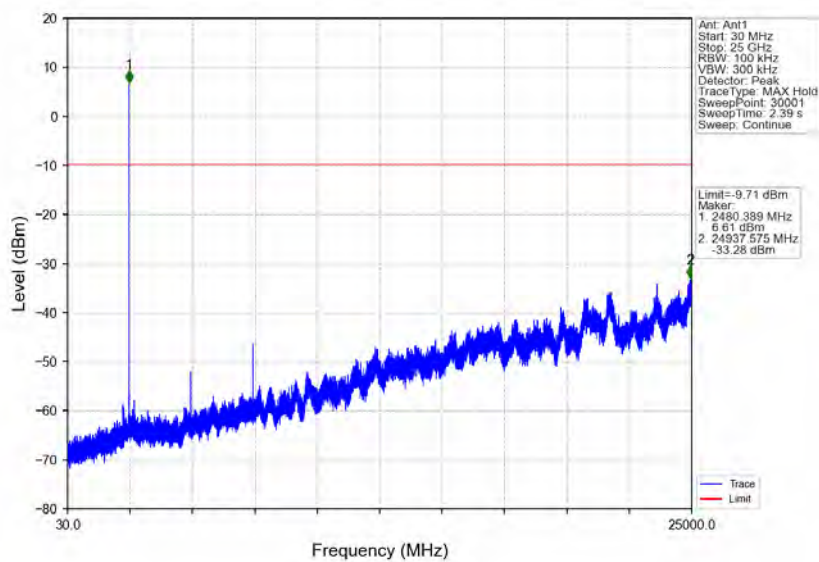


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 170 of 227

1M_LCH_2402MHz_Ant1_NTNV

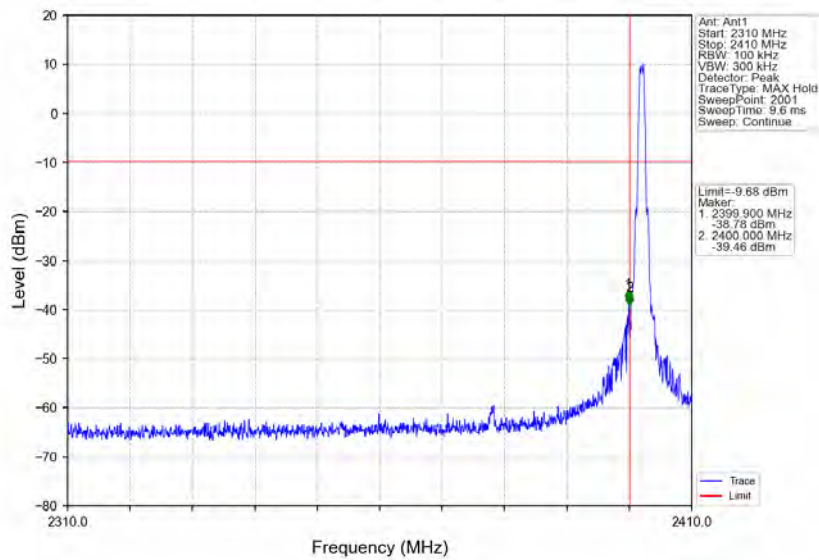

1M_LCH_2402MHz_Ant1_NTNV

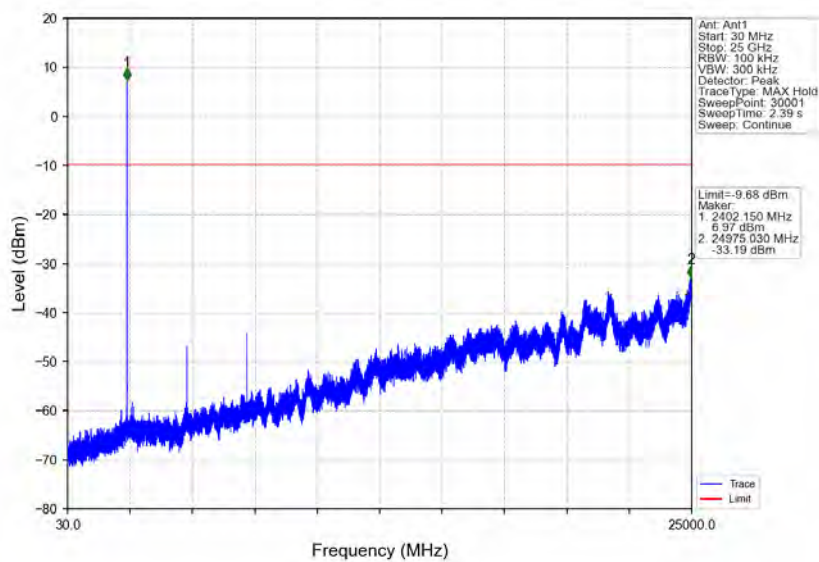


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 171 of 227

1M_MCH_2440MHz_Ant1_NTNV

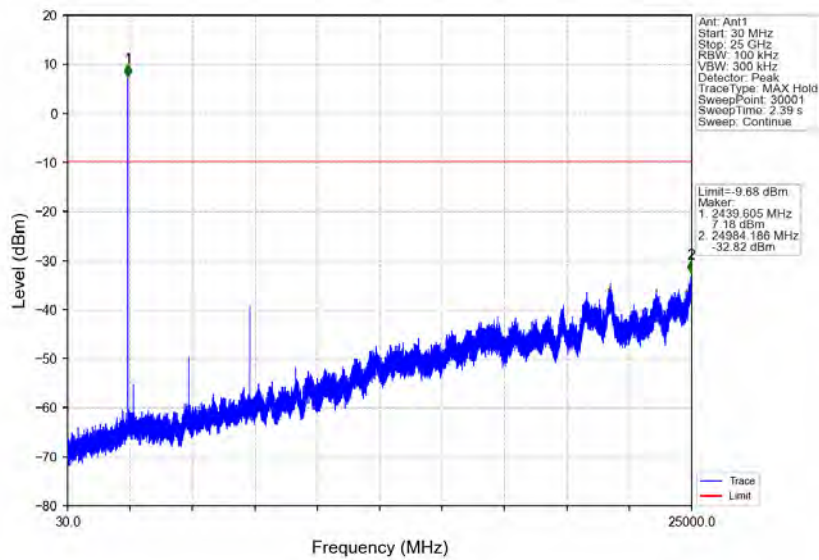

1M_HCH_2480MHz_Ant1_NTNV

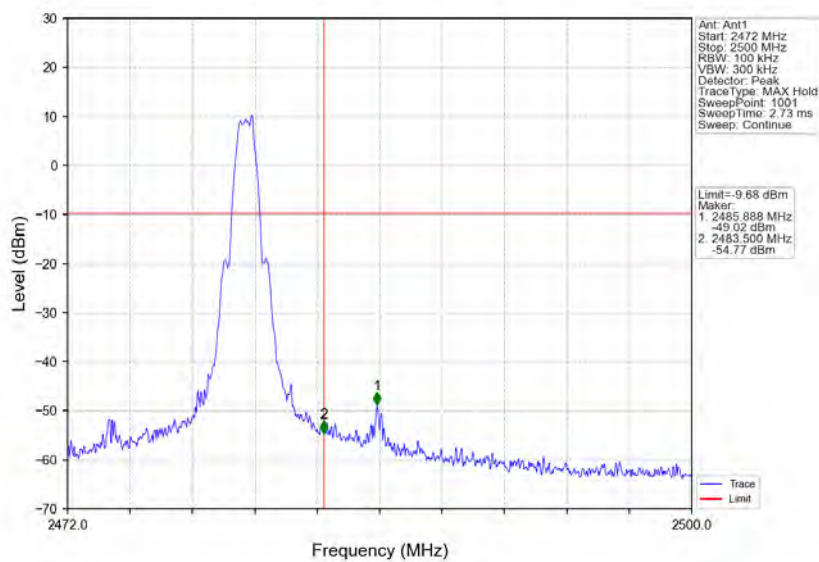


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 172 of 227

1M_HCH_2480MHz_Ant1_NTNV

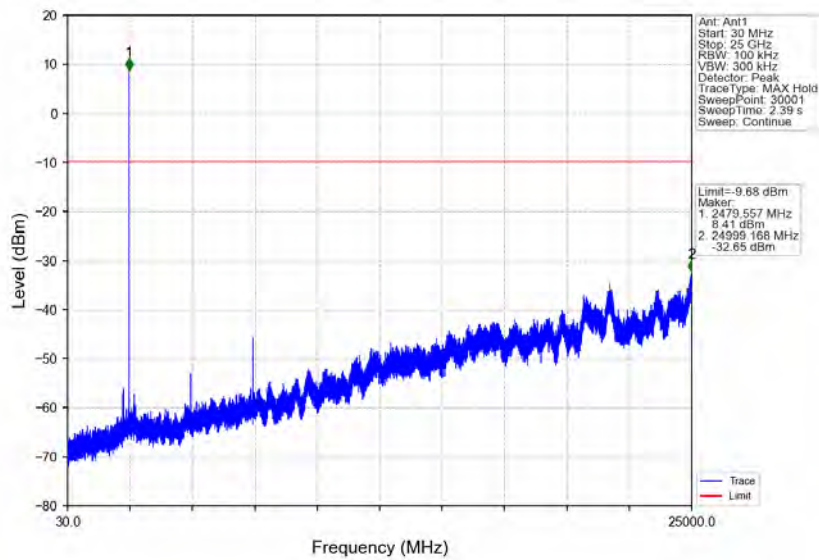

2M_LCH_2402MHz_Ant1_NTNV

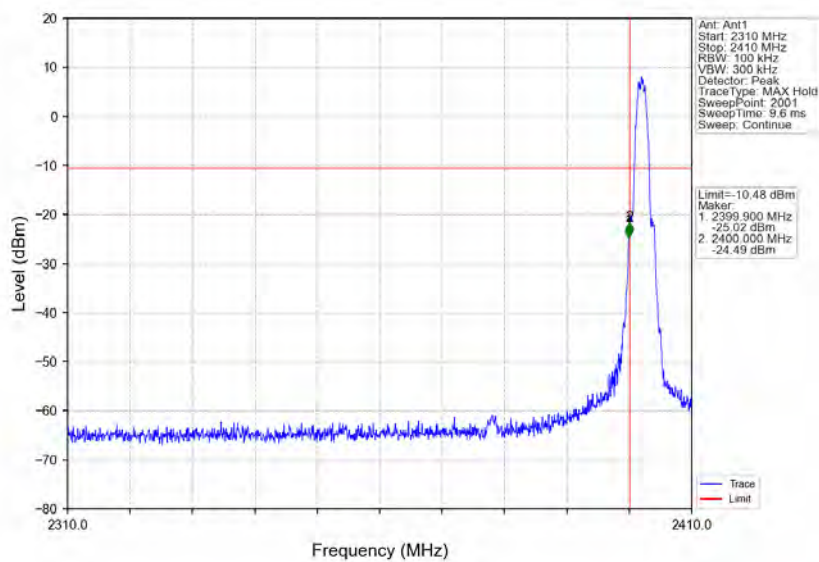


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 173 of 227

2M_LCH_2402MHz_Ant1_NTNV

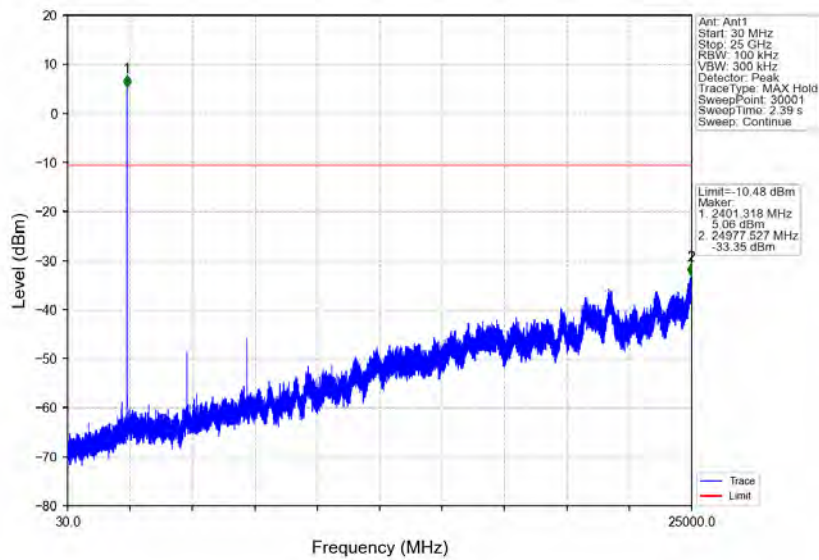

2M_MCH_2440MHz_Ant1_NTNV

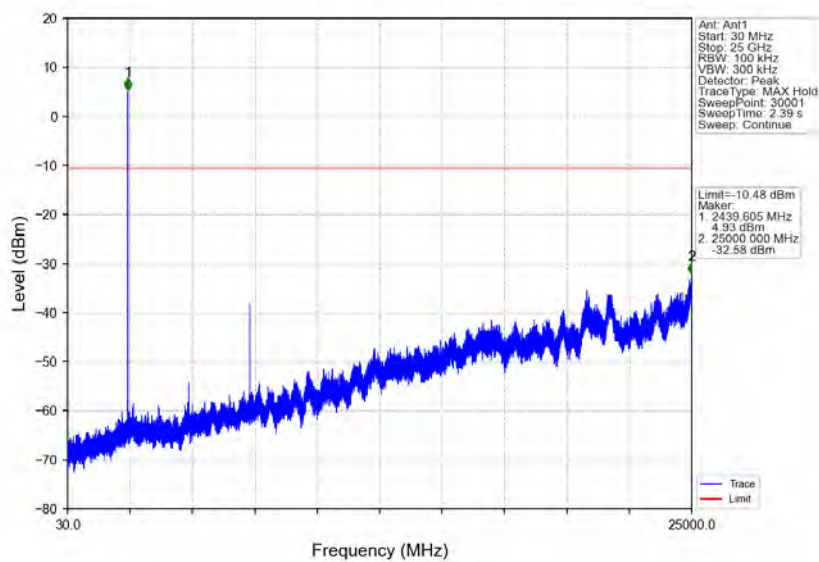


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 174 of 227

2M_HCH_2480MHz_Ant1_NTNV

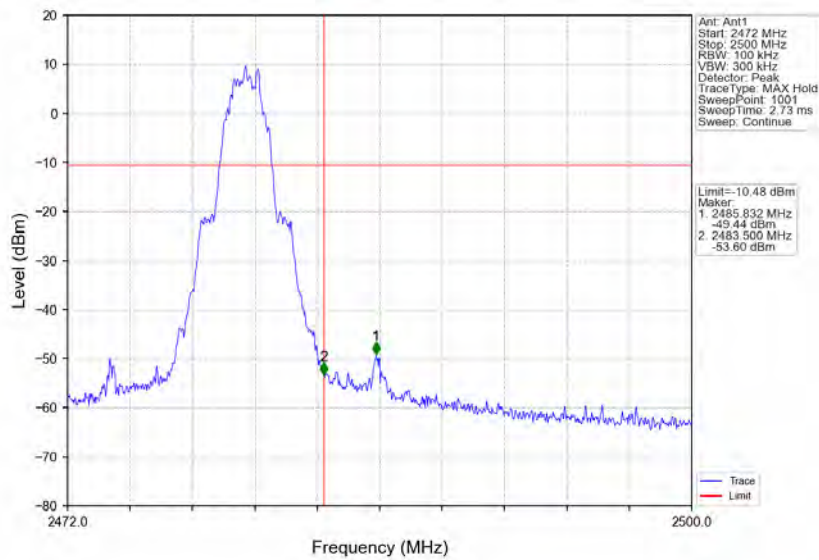

2M_HCH_2480MHz_Ant1_NTNV

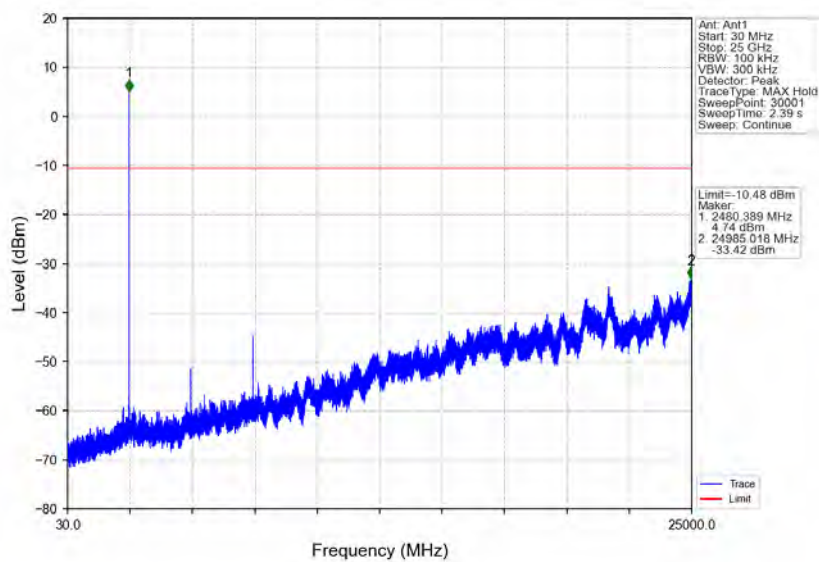

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 175 of 227

Dipole Antenna

1. Duty Cycle


1.1 Ant1

1.1.1 Test Result


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
S8	SISO	2402	17.070	17.500	97.54	0.11	0.00
		2440	17.066	17.500	97.52	0.11	0.02
		2480	17.067	17.500	97.53	0.11	0.00
S2	SISO	2402	4.563	4.999	91.28	0.40	0.00
		2440	4.563	4.998	91.30	0.40	0.00
		2480	4.563	4.999	91.28	0.40	0.00
1M	SISO	2402	2.140	2.499	85.63	0.67	0.03
		2440	2.140	2.499	85.63	0.67	0.03
		2480	2.142	2.501	85.65	0.67	0.03
2M	SISO	2402	1.084	1.875	57.81	2.38	0.03
		2440	1.085	1.875	57.87	2.38	0.03
		2480	1.085	1.875	57.87	2.38	0.03

1.1.2 Test Graph

S8_LCH_2402MHz_Ant1_NTNV

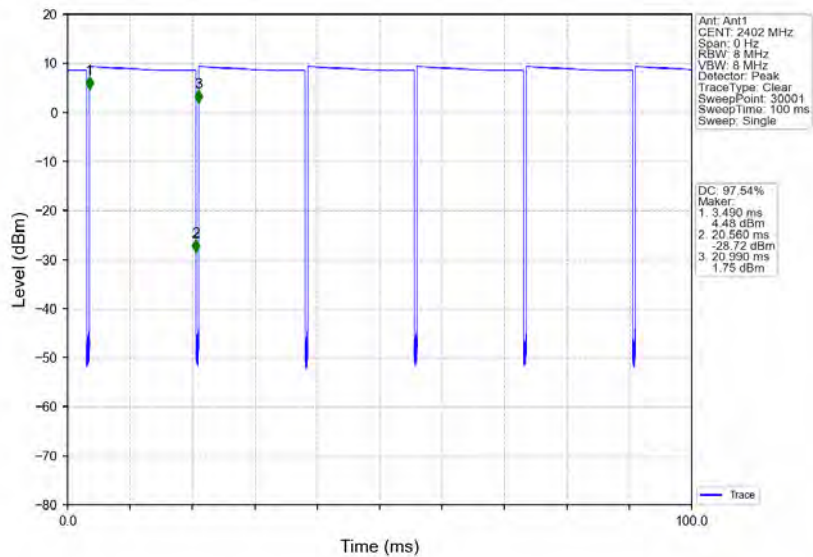

S8_MCH_2440MHz_Ant1_NTNV

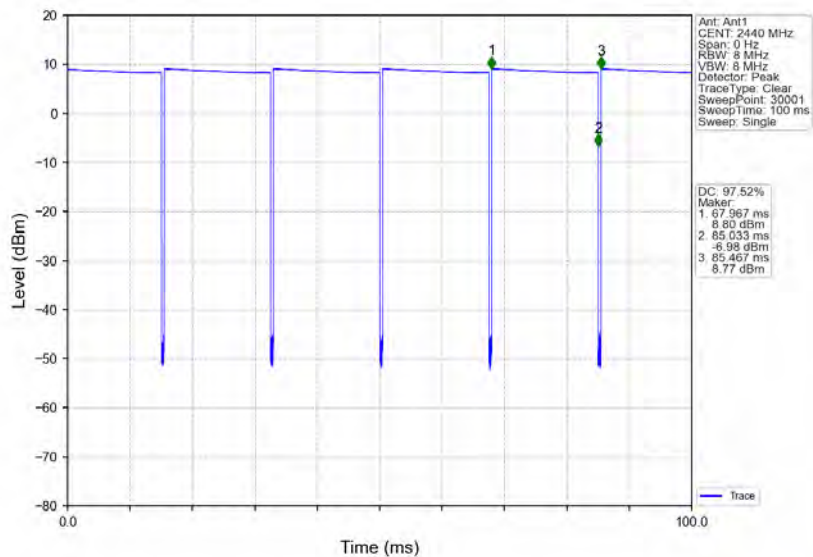


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 177 of 227

S8_HCH_2480MHz_Ant1_NTNV

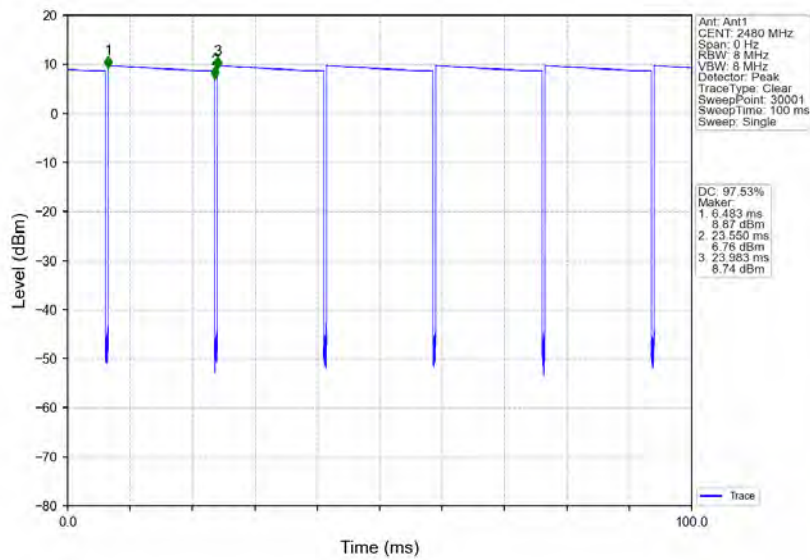

S2_LCH_2402MHz_Ant1_NTNV

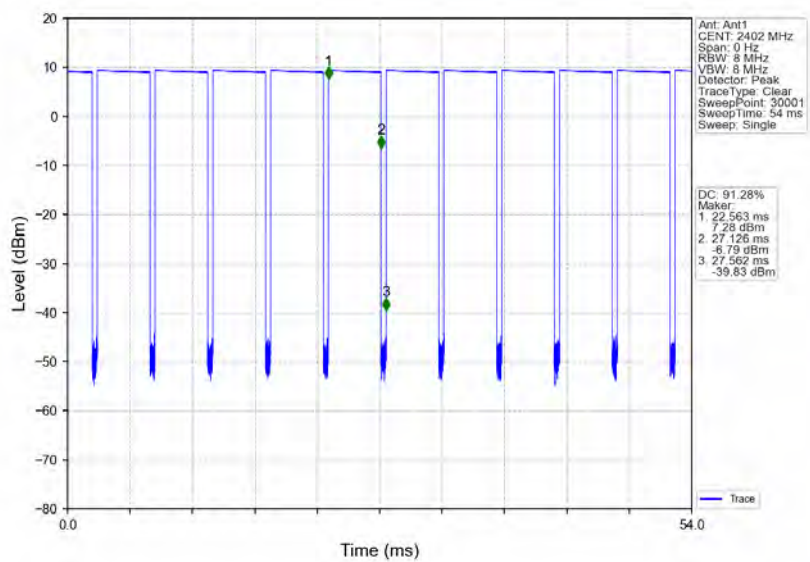


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 178 of 227

S2_MCH_2440MHz_Ant1_NTNV

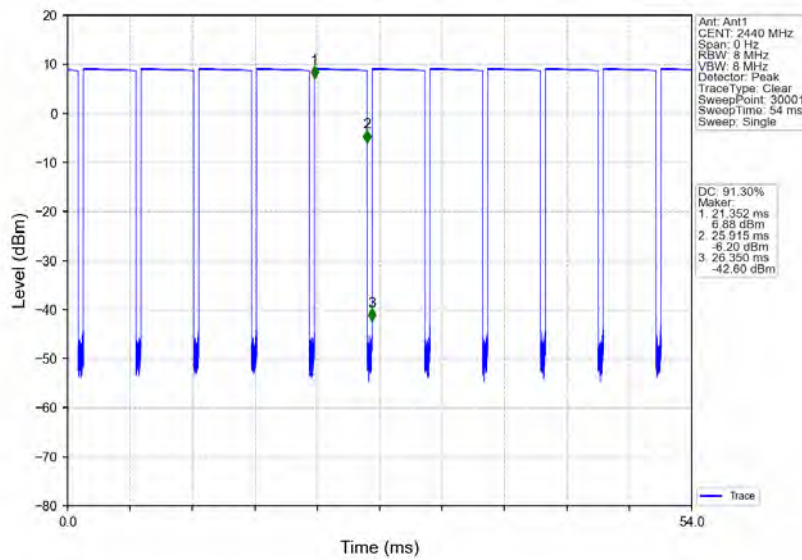

S2_HCH_2480MHz_Ant1_NTNV

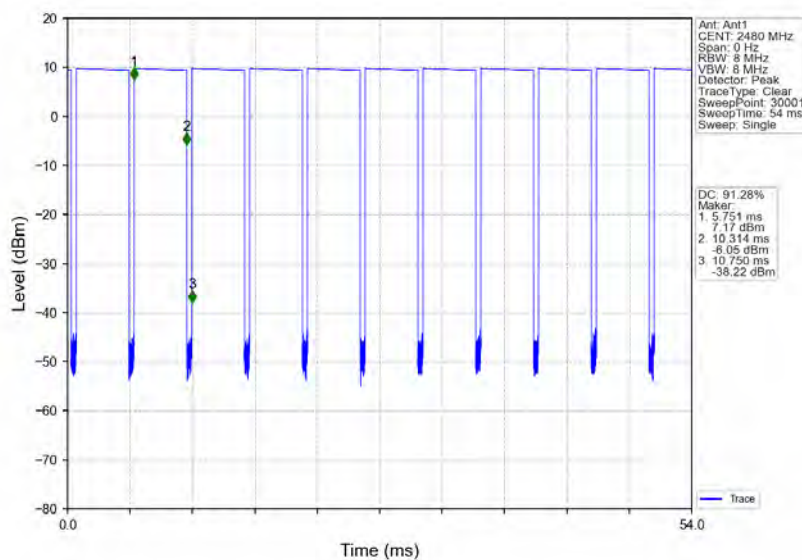


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 179 of 227


1M_LCH_2402MHz_Ant1_NTNV

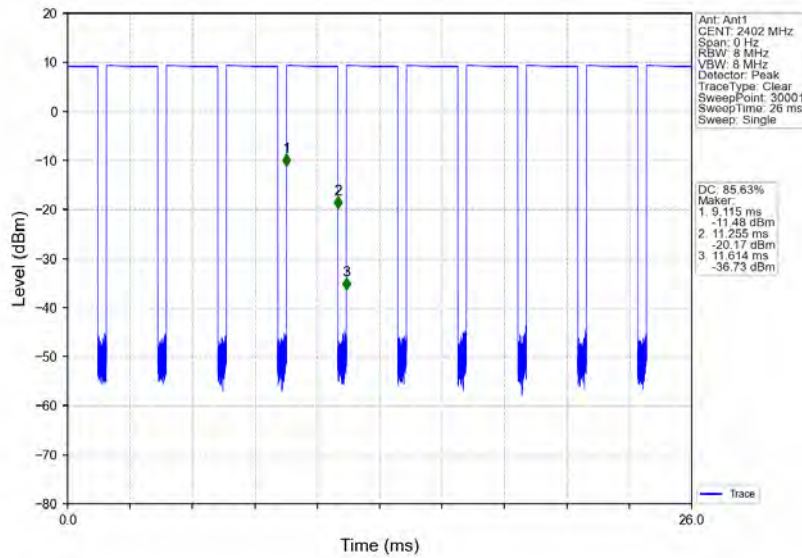


1M_MCH_2440MHz_Ant1_NTNV

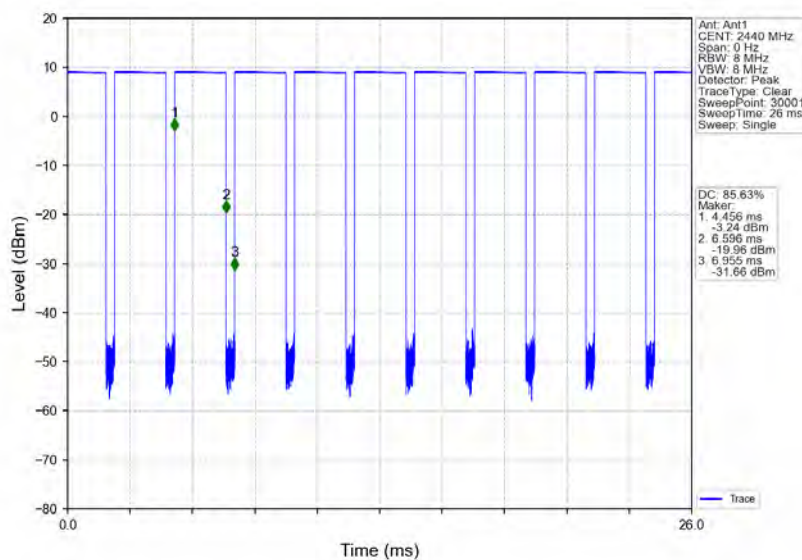


1M_HCH_2480MHz_Ant1_NTNV

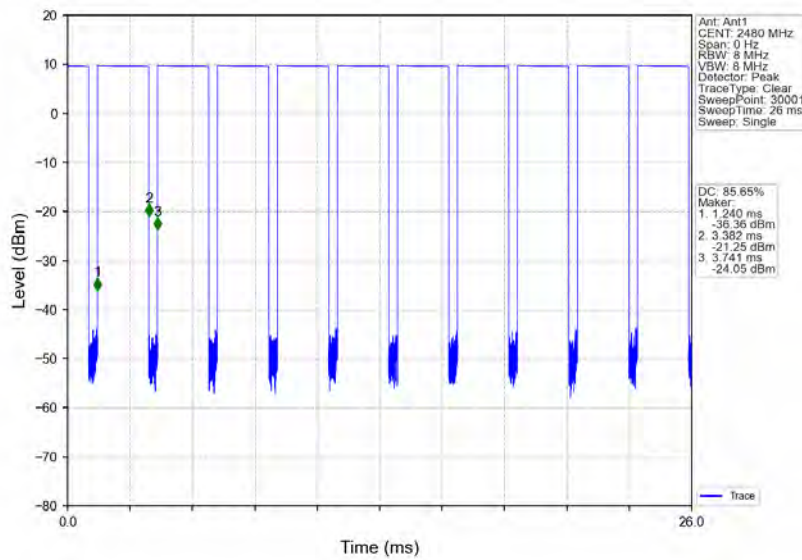


2M_LCH_2402MHz_Ant1_NTNV

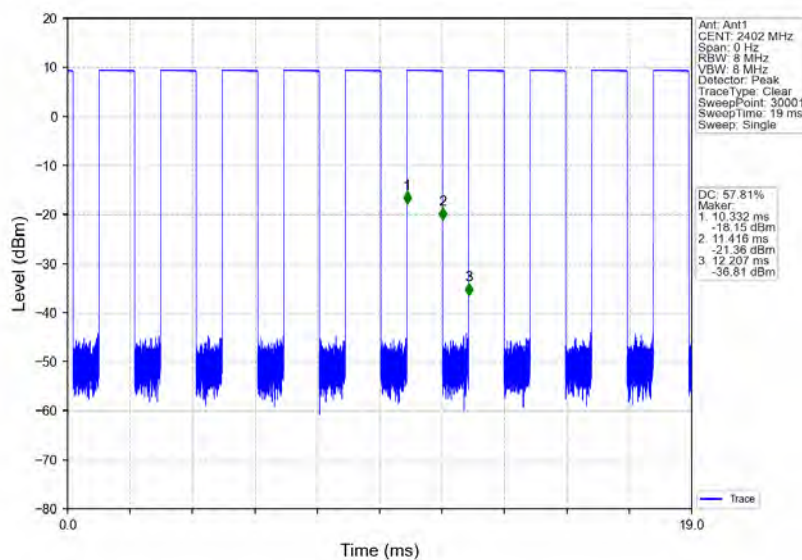

2M_MCH_2440MHz_Ant1_NTNV

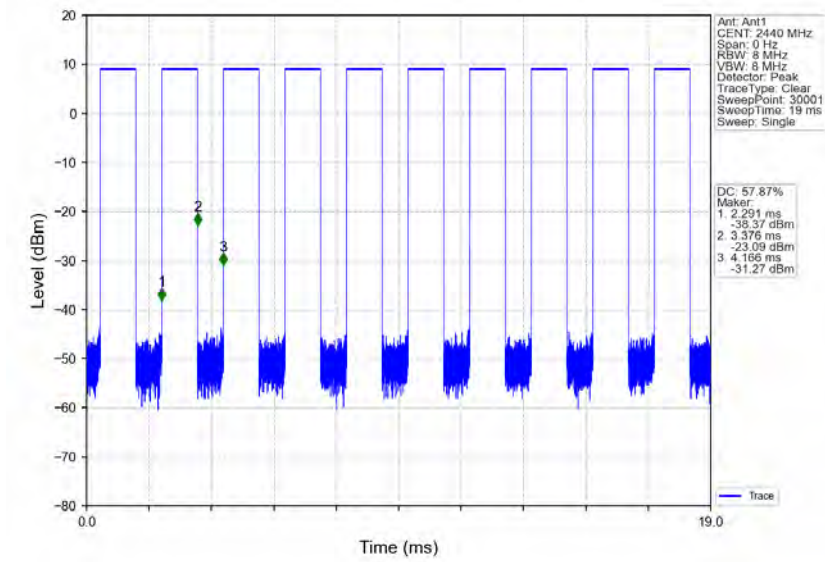

2M_HCH_2480MHz_Ant1_NTNV

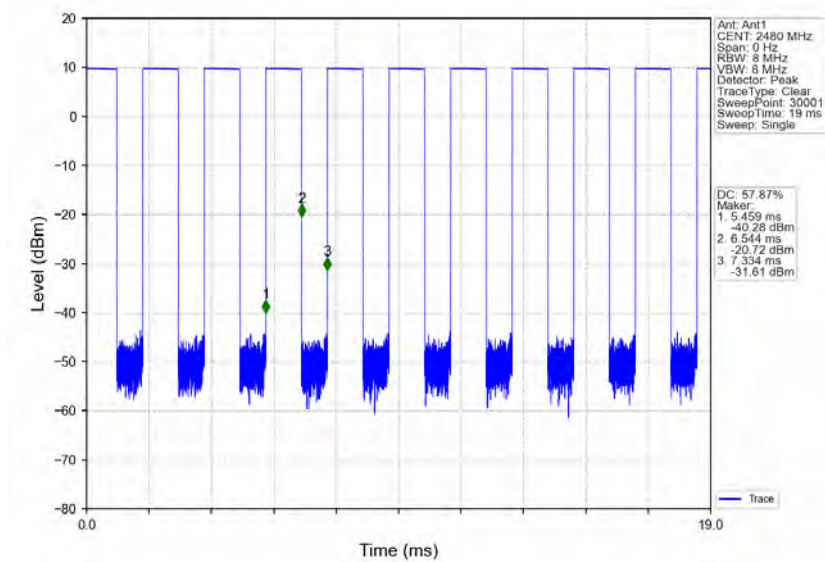

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 182 of 227

2. Bandwidth


2.1 OBW

2.1.1 Test Result


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
S8	SISO	2402	1	1.063	/	Pass
		2440	1	1.066	/	Pass
		2480	1	1.061	/	Pass
S2	SISO	2402	1	1.028	/	Pass
		2440	1	1.028	/	Pass
		2480	1	1.027	/	Pass
1M	SISO	2402	1	1.032	/	Pass
		2440	1	1.032	/	Pass
		2480	1	1.029	/	Pass
2M	SISO	2402	1	2.063	/	Pass
		2440	1	2.065	/	Pass
		2480	1	2.060	/	Pass

2.1.2 Test Graph

S8_LCH_2402MHz_Ant1_NTNV

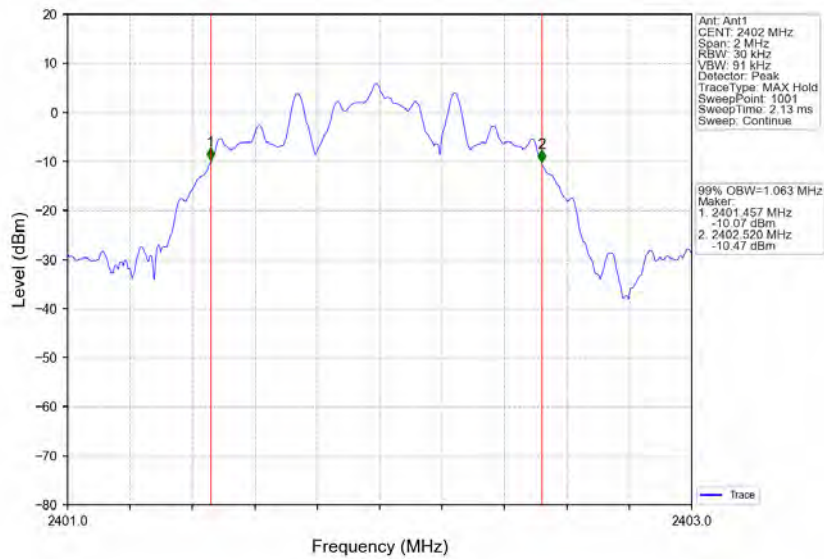

S8_MCH_2440MHz_Ant1_NTNV

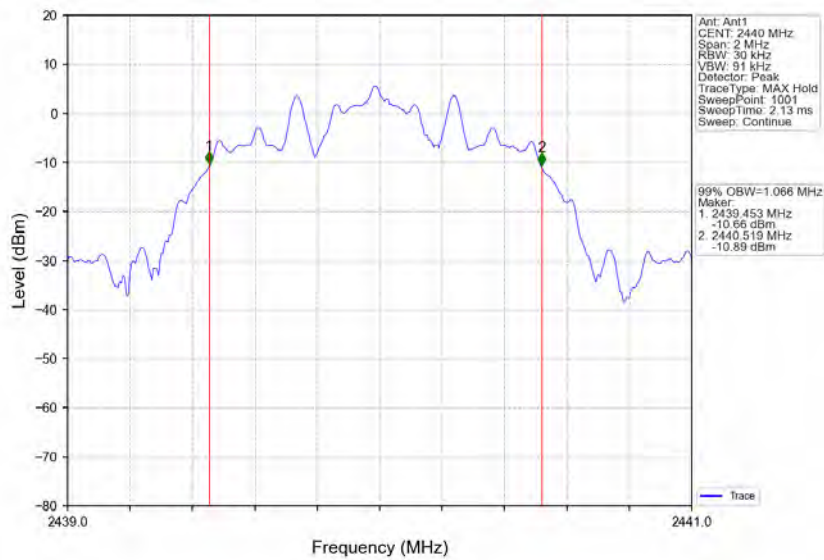


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 184 of 227

S8_HCH_2480MHz_Ant1_NTNV

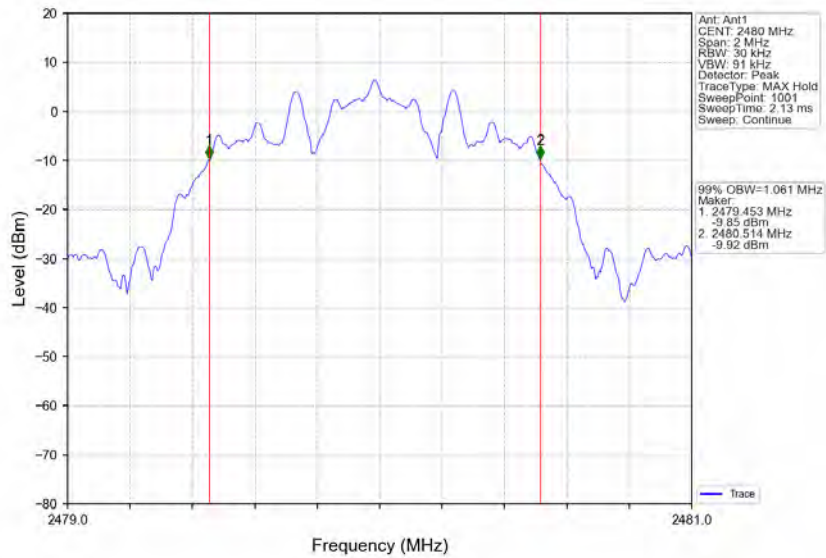

S2_LCH_2402MHz_Ant1_NTNV

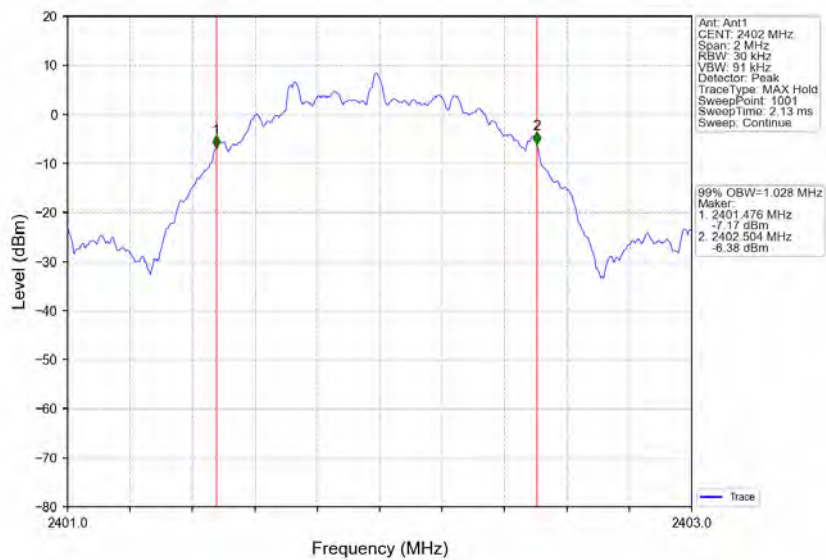


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 185 of 227

S2_MCH_2440MHz_Ant1_NTNV

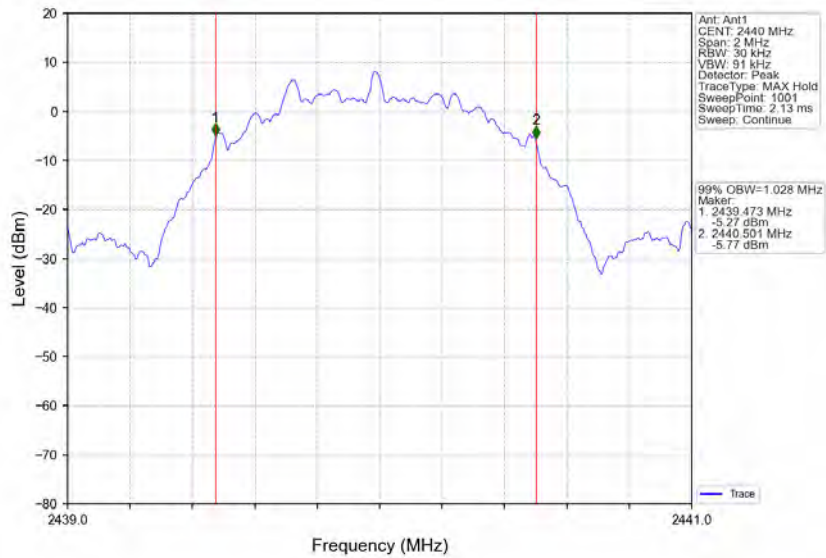

S2_HCH_2480MHz_Ant1_NTNV

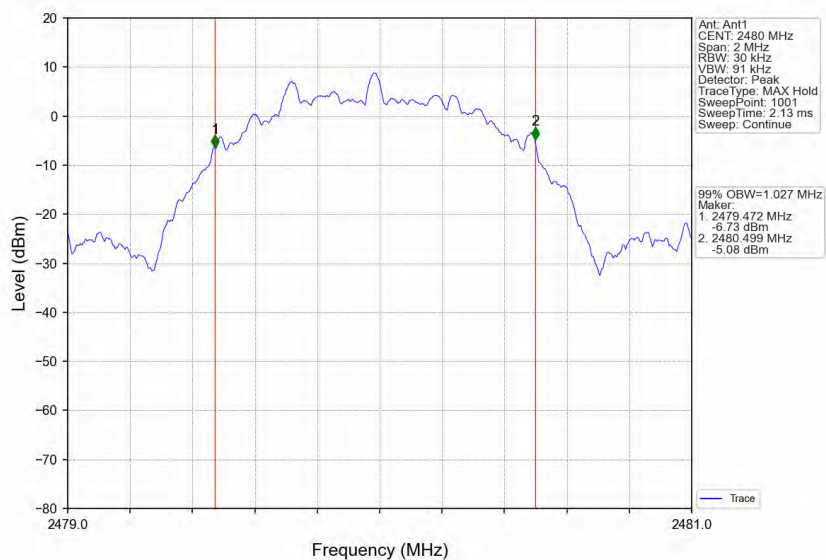


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 186 of 227

1M_LCH_2402MHz_Ant1_NTNV

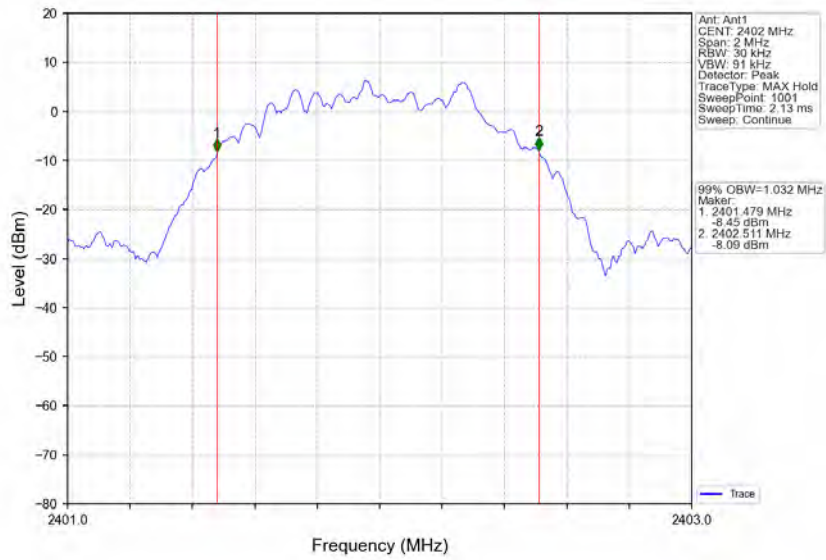

1M_MCH_2440MHz_Ant1_NTNV

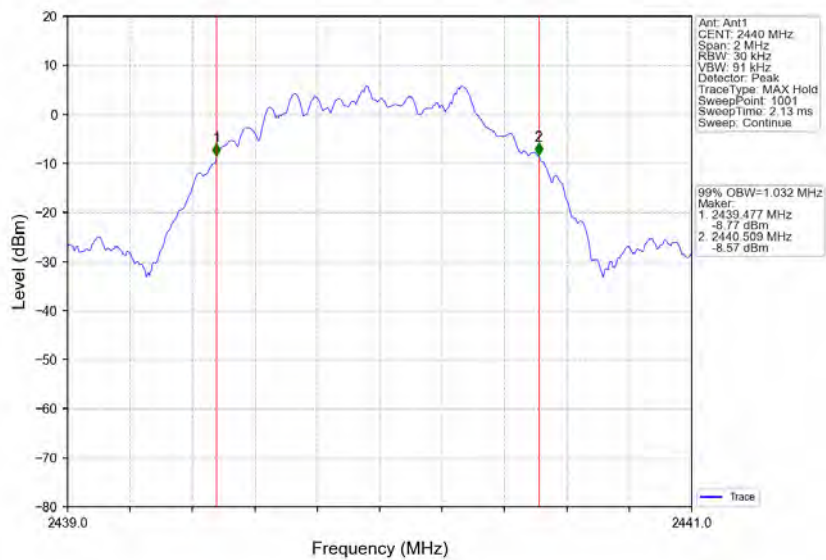


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 187 of 227

1M_HCH_2480MHz_Ant1_NTNV

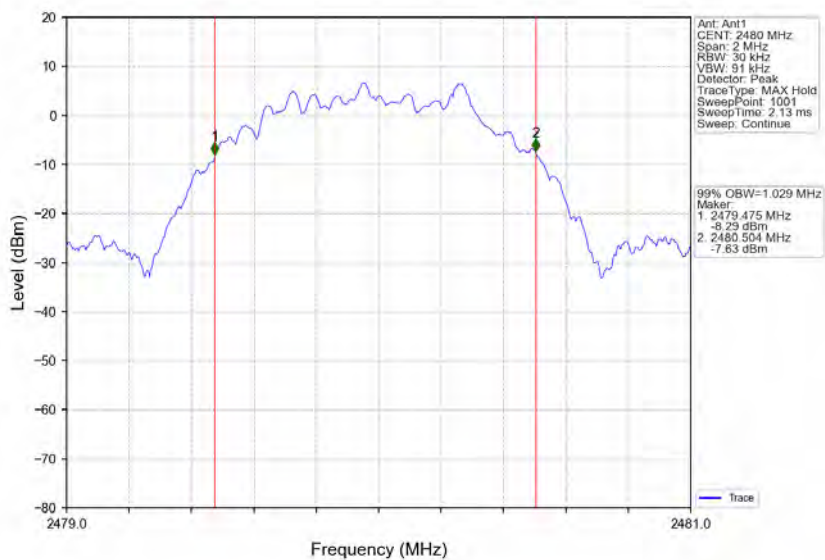

2M_LCH_2402MHz_Ant1_NTNV

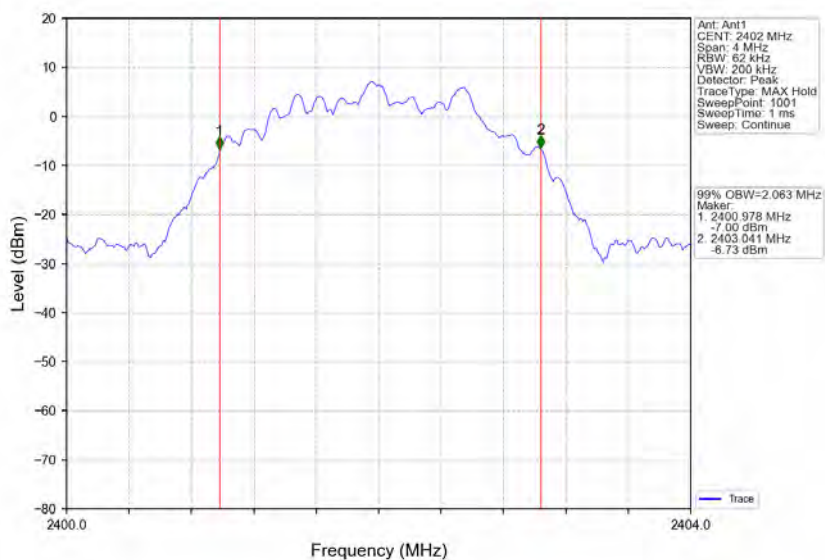


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 188 of 227

2M_MCH_2440MHz_Ant1_NTNV

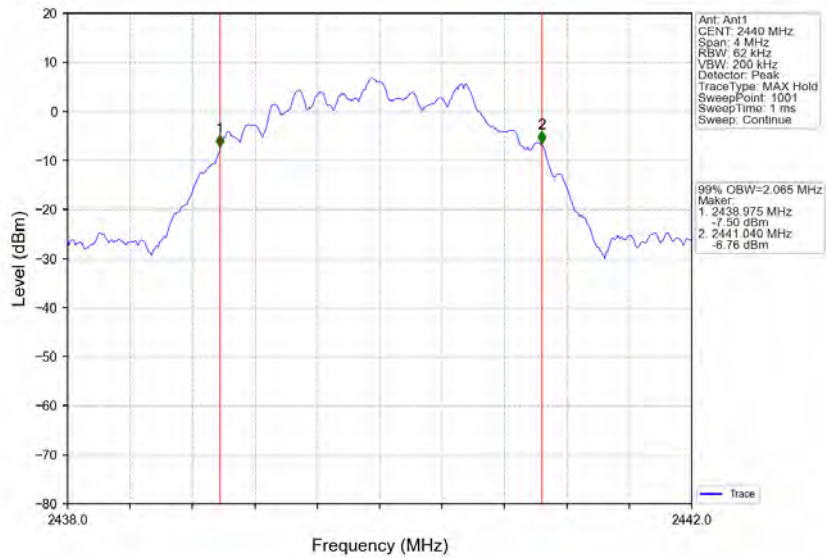

2M_HCH_2480MHz_Ant1_NTNV

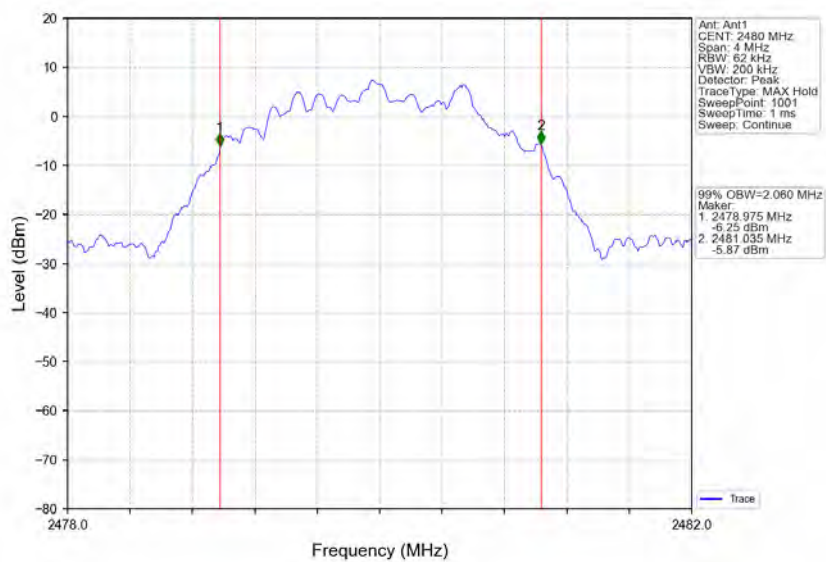

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 189 of 227


2.2 6dB BW

2.2.1 Test Result


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
S8	SISO	2402	1	0.633	≥ 0.5	Pass
		2440	1	0.633	≥ 0.5	Pass
		2480	1	0.656	≥ 0.5	Pass
S2	SISO	2402	1	0.705	≥ 0.5	Pass
		2440	1	0.707	≥ 0.5	Pass
		2480	1	0.711	≥ 0.5	Pass
1M	SISO	2402	1	0.706	≥ 0.5	Pass
		2440	1	0.705	≥ 0.5	Pass
		2480	1	0.704	≥ 0.5	Pass
2M	SISO	2402	1	1.237	≥ 0.5	Pass
		2440	1	1.288	≥ 0.5	Pass
		2480	1	1.289	≥ 0.5	Pass

2.2.2 Test Graph

S8_LCH_2402MHz_Ant1_NTNV

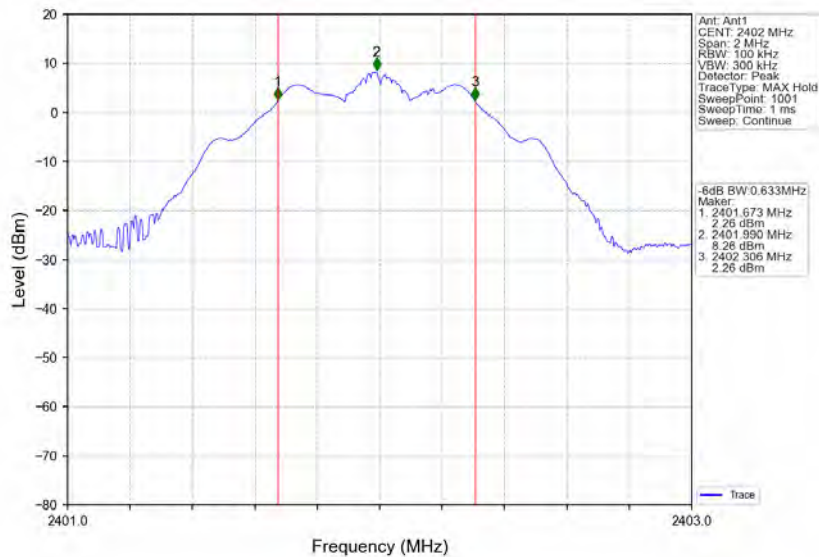

S8_MCH_2440MHz_Ant1_NTNV

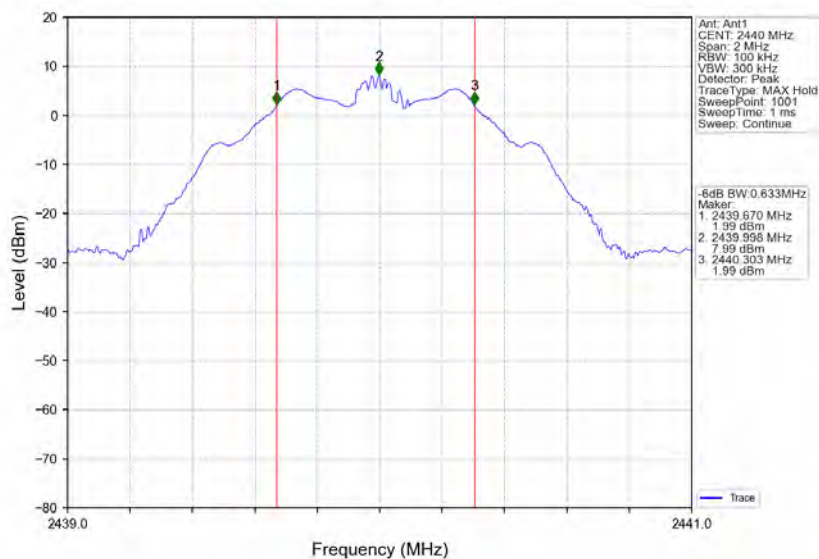


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 191 of 227


S8_HCH_2480MHz_Ant1_NTNV

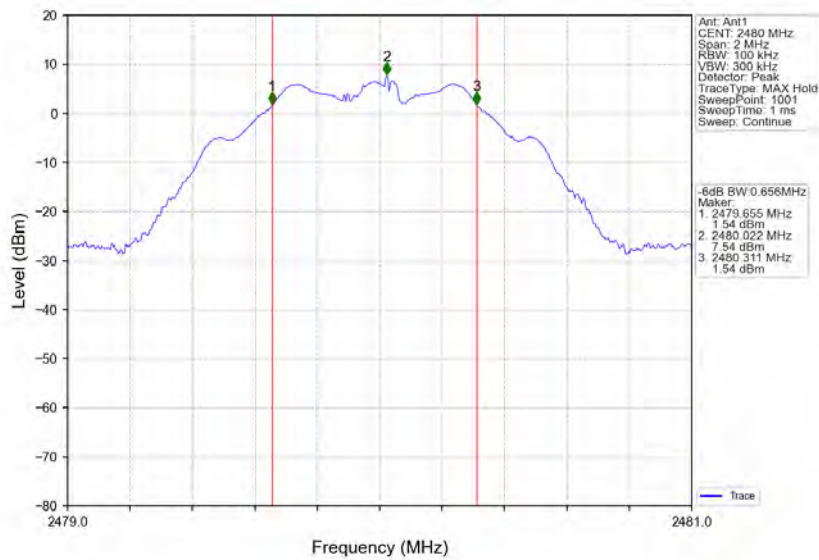


S2_LCH_2402MHz_Ant1_NTNV

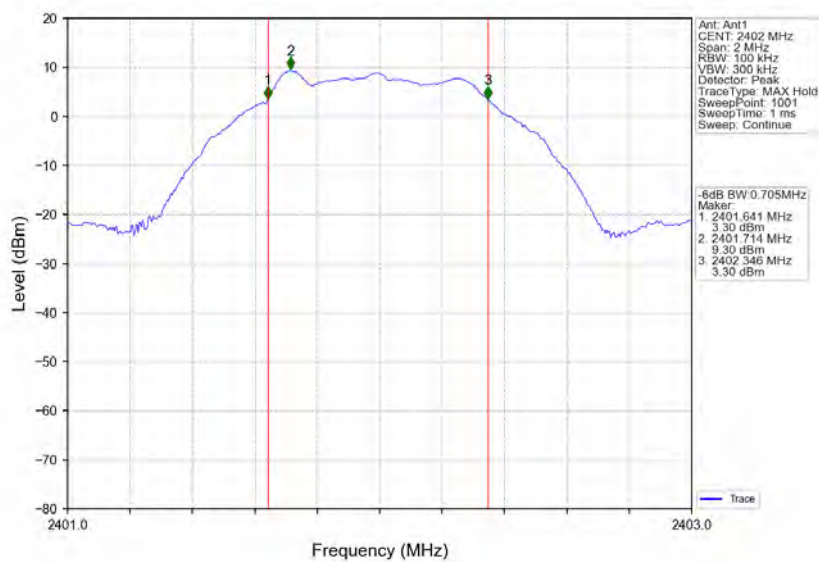

S2_MCH_2440MHz_Ant1_NTNV

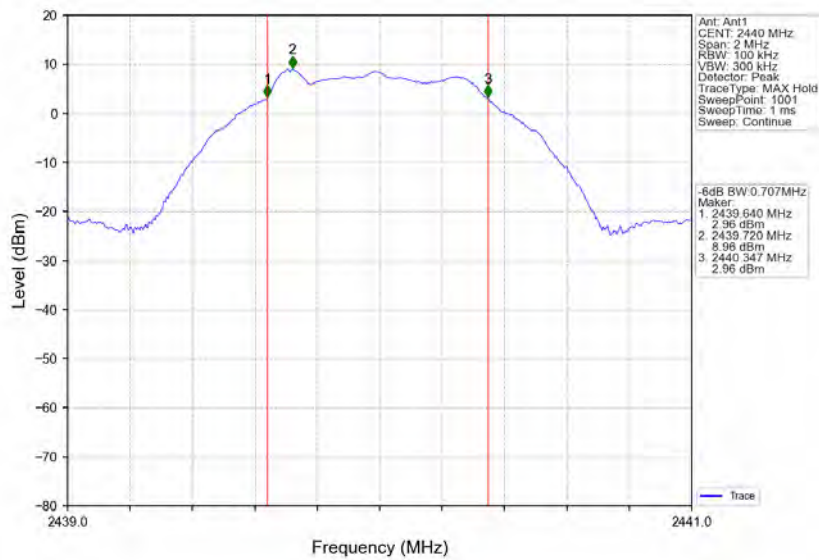

S2_HCH_2480MHz_Ant1_NTNV

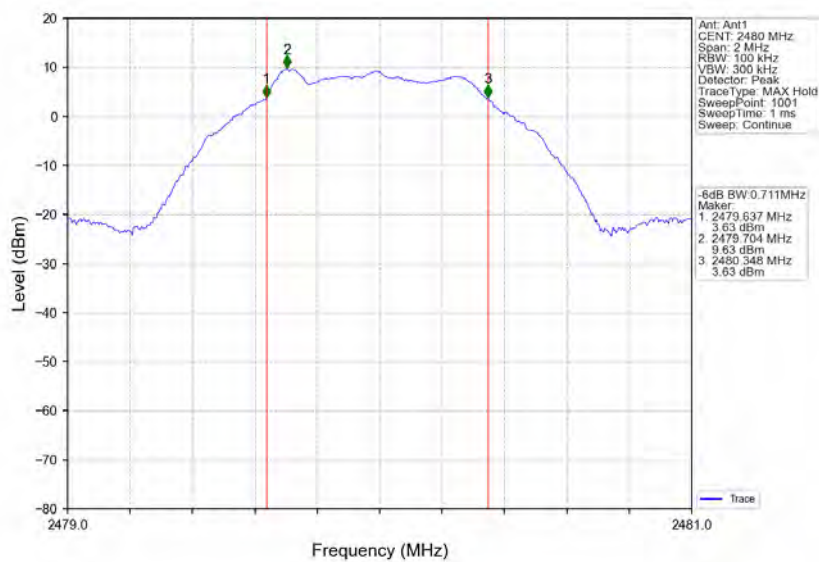


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 193 of 227

1M_LCH_2402MHz_Ant1_NTNV

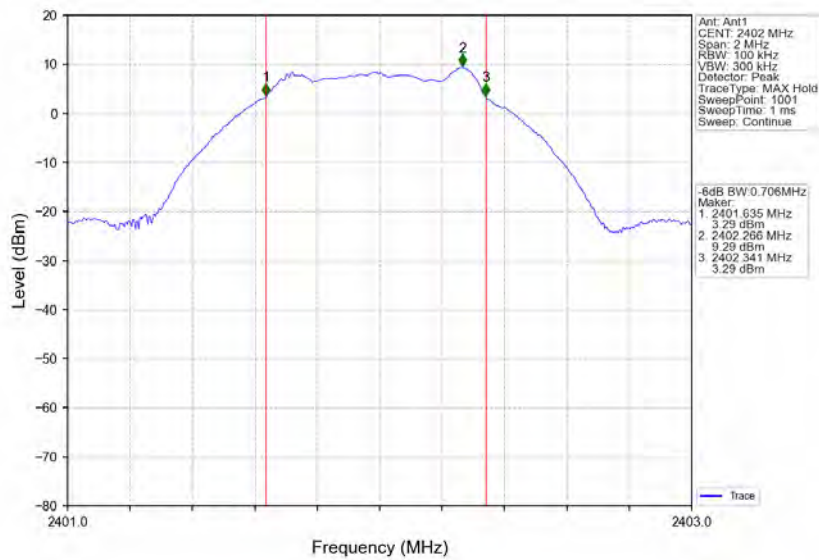

1M_MCH_2440MHz_Ant1_NTNV

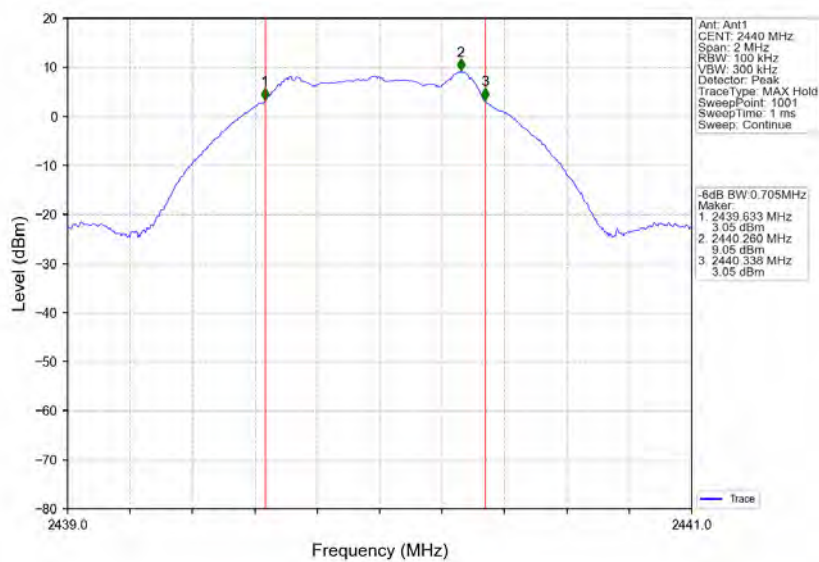


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 194 of 227

1M_HCH_2480MHz_Ant1_NTNV

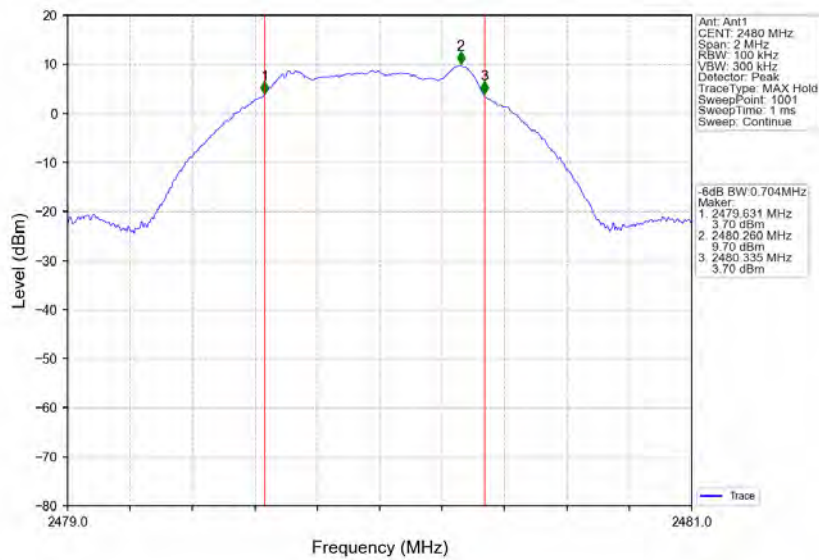

2M_LCH_2402MHz_Ant1_NTNV

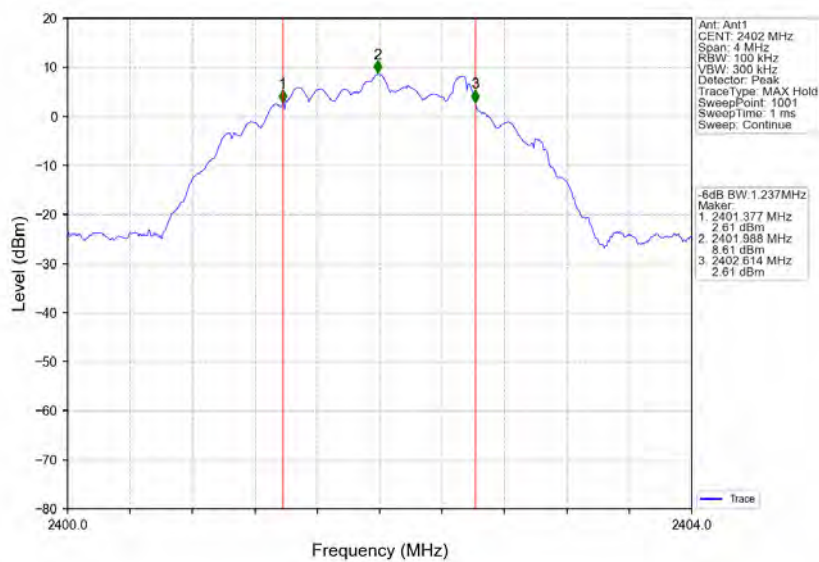


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 195 of 227

2M_MCH_2440MHz_Ant1_NTNV

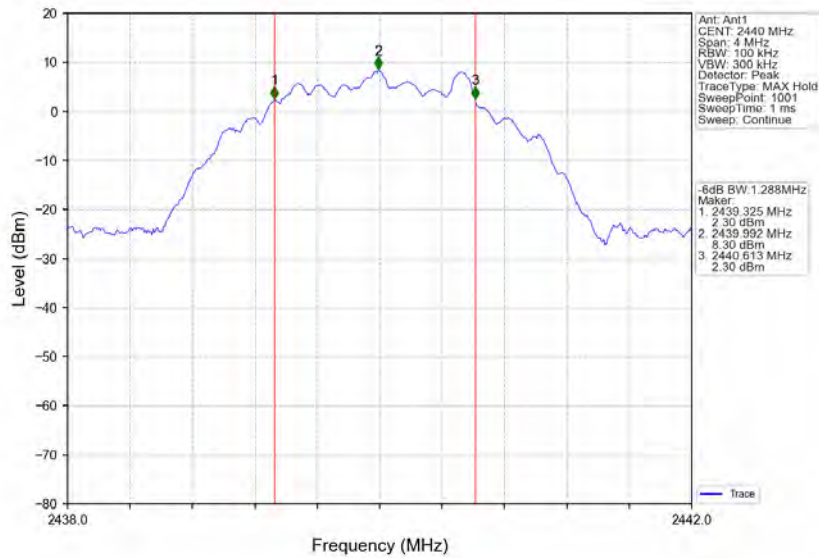

2M_HCH_2480MHz_Ant1_NTNV

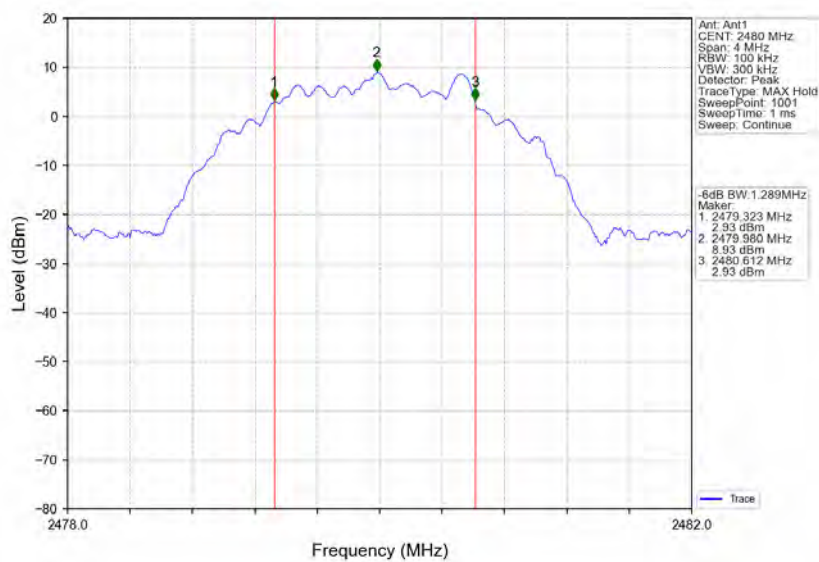



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 196 of 227


3. Maximum Conducted Output Power

3.1 Power

3.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
S8	SISO	2402	9.35	<=30	Pass
		2440	9.08	<=30	Pass
		2480	9.76	<=30	Pass
S2	SISO	2402	9.35	<=30	Pass
		2440	9.08	<=30	Pass
		2480	9.76	<=30	Pass
1M	SISO	2402	9.32	<=30	Pass
		2440	9.06	<=30	Pass
		2480	9.73	<=30	Pass
2M	SISO	2402	9.35	<=30	Pass
		2440	9.08	<=30	Pass
		2480	9.78	<=30	Pass
Note1: Antenna Gain: Ant1: 2.00dBi;					

3.1.2 Test Graph

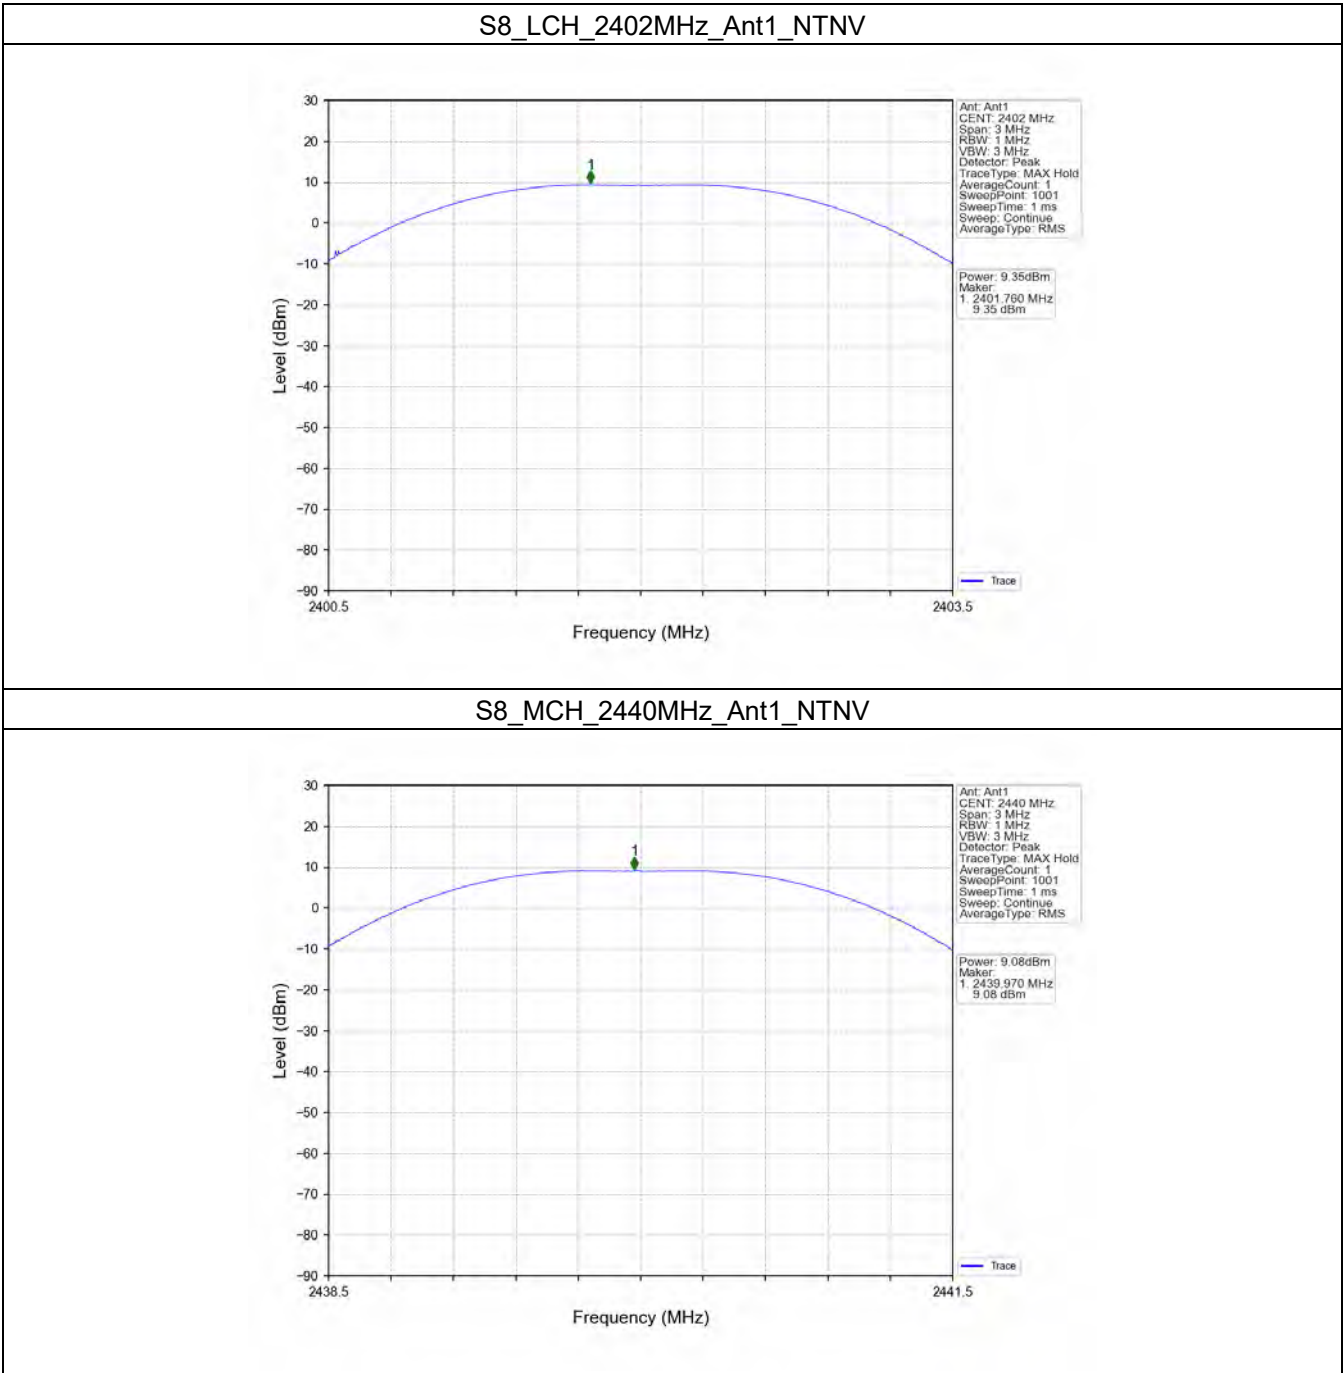


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 198 of 227


S8_HCH_2480MHz_Ant1_NTNV

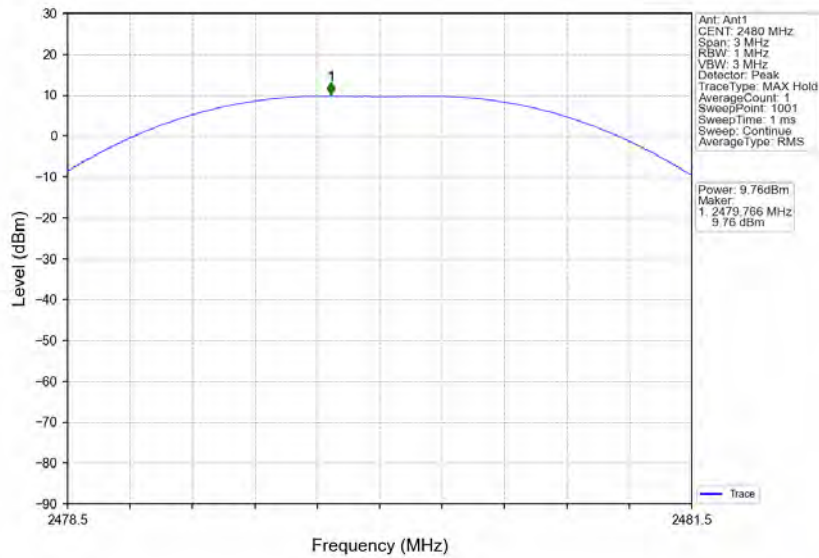


S2_LCH_2402MHz_Ant1_NTNV

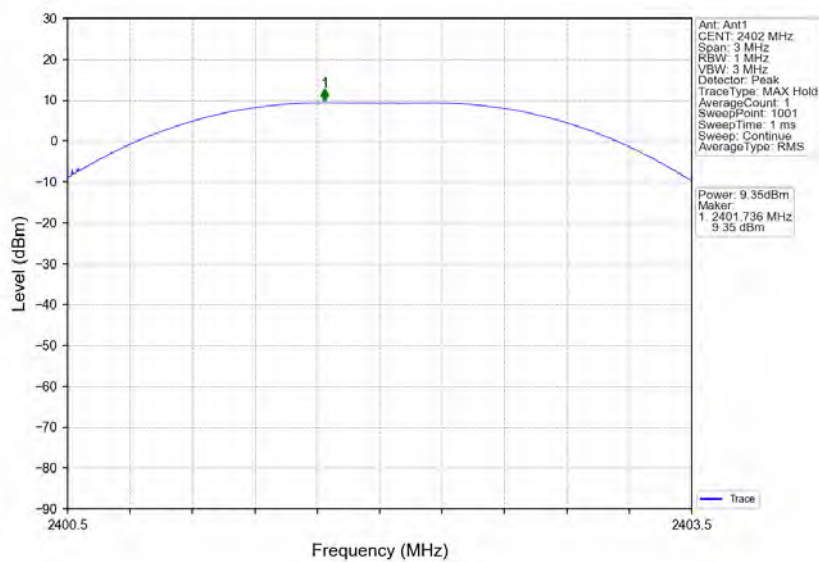

S2_MCH_2440MHz_Ant1_NTNV

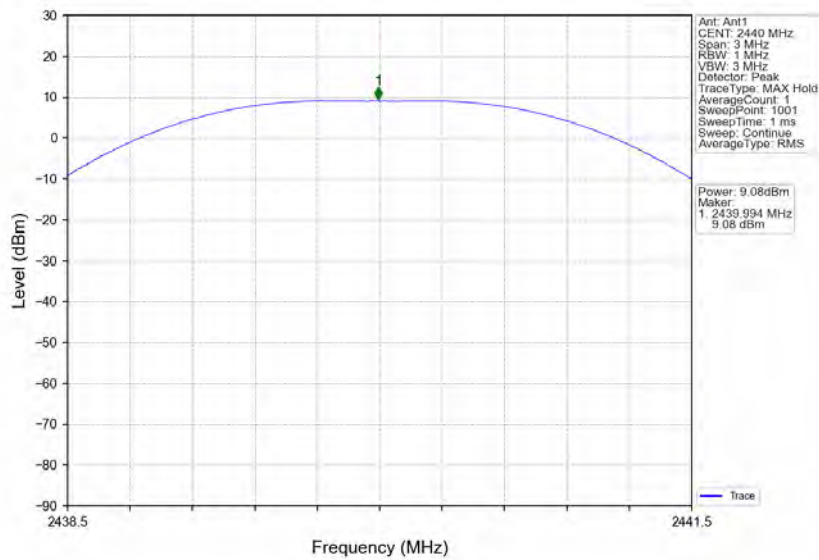

S2_HCH_2480MHz_Ant1_NTNV

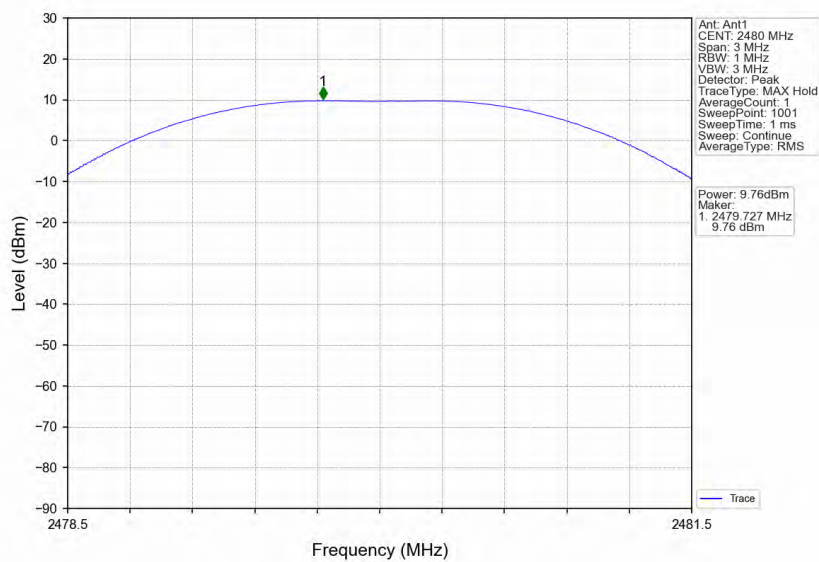


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 200 of 227

1M_LCH_2402MHz_Ant1_NTNV

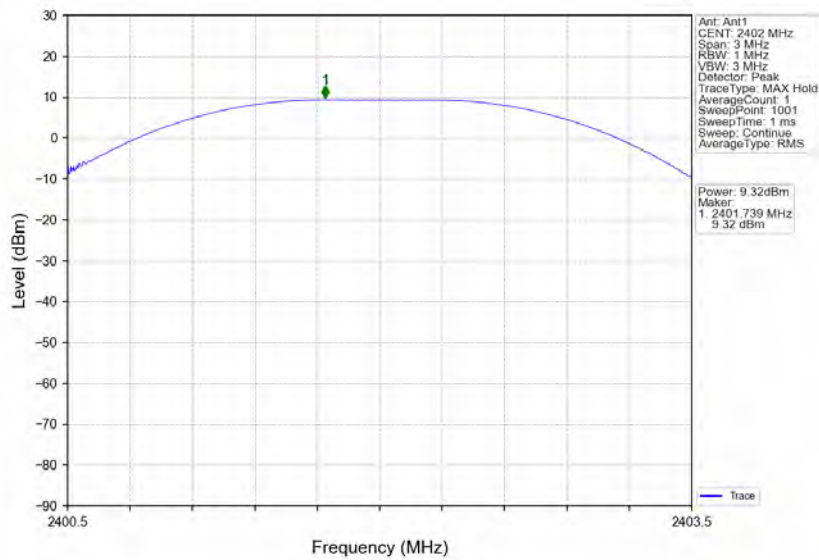

1M_MCH_2440MHz_Ant1_NTNV

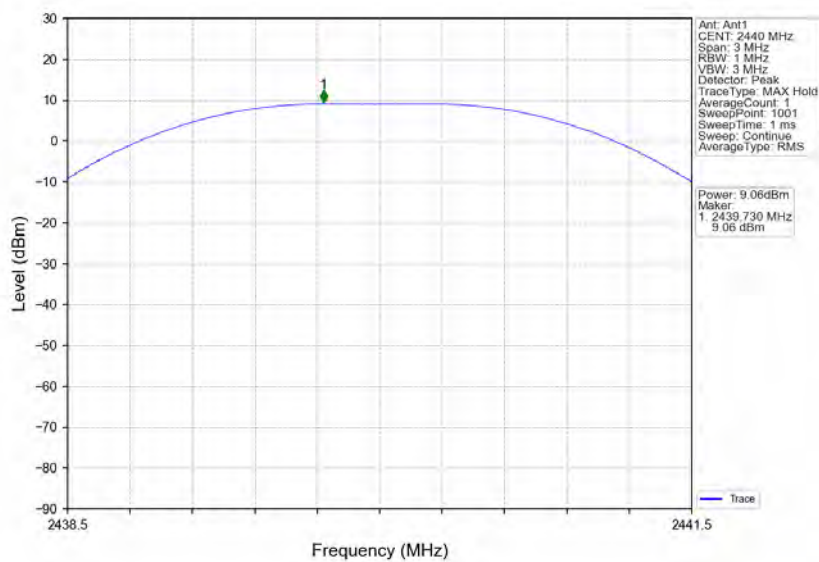


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 201 of 227

1M_HCH_2480MHz_Ant1_NTNV

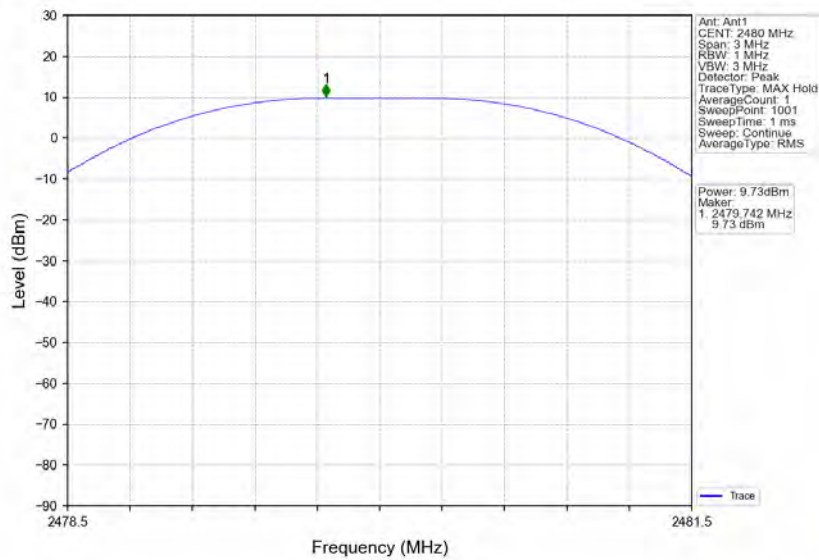

2M_LCH_2402MHz_Ant1_NTNV

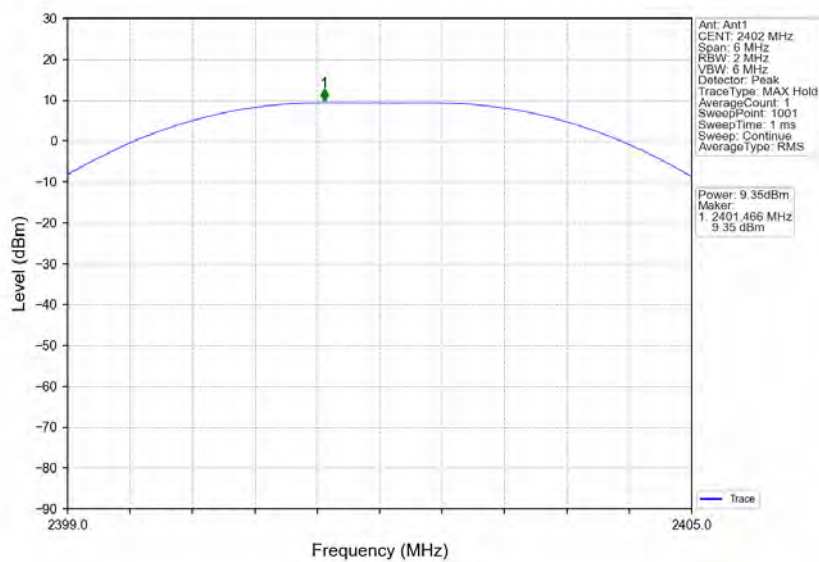


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 202 of 227

2M_MCH_2440MHz_Ant1_NTNV

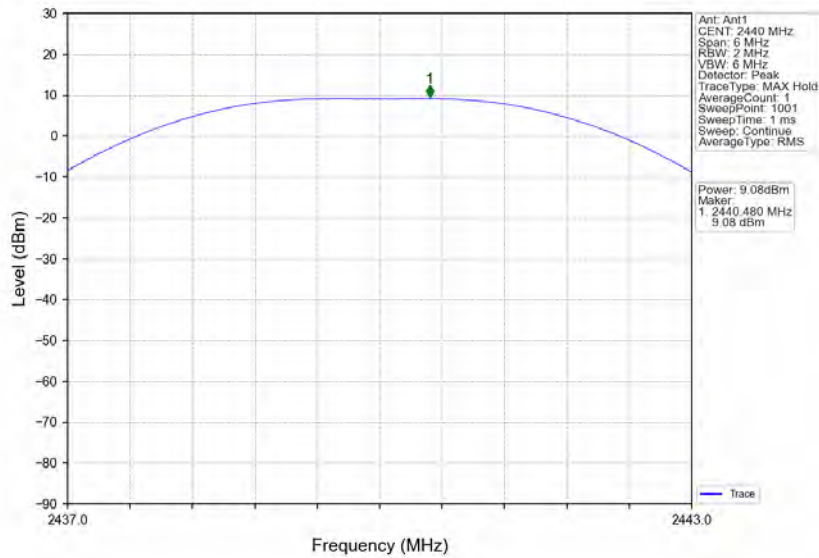

2M_HCH_2480MHz_Ant1_NTNV

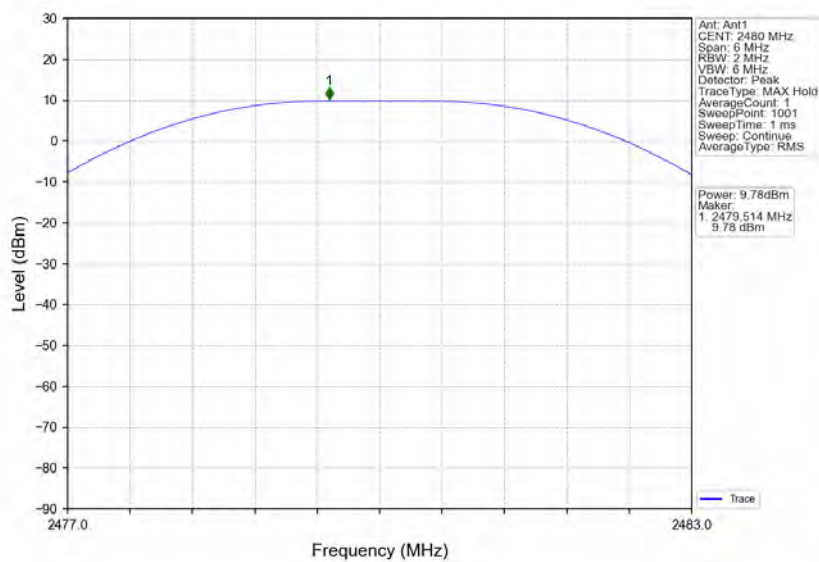

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 203 of 227

4. Maximum Power Spectral Density

4.1 PSD

4.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
S8	SISO	2402	3.17	<=8	Pass
		2440	2.90	<=8	Pass
		2480	3.50	<=8	Pass
S2	SISO	2402	2.76	<=8	Pass
		2440	2.48	<=8	Pass
		2480	3.27	<=8	Pass
1M	SISO	2402	-5.01	<=8	Pass
		2440	-5.32	<=8	Pass
		2480	-4.59	<=8	Pass
2M	SISO	2402	-8.82	<=8	Pass
		2440	-8.98	<=8	Pass
		2480	-8.43	<=8	Pass
Note1: Antenna Gain: Ant1: 2.00dBi;					

Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501


Page: 204 of 227

4.1.2 Test Graph

S8_LCH_2402MHz_Ant1_NTNV

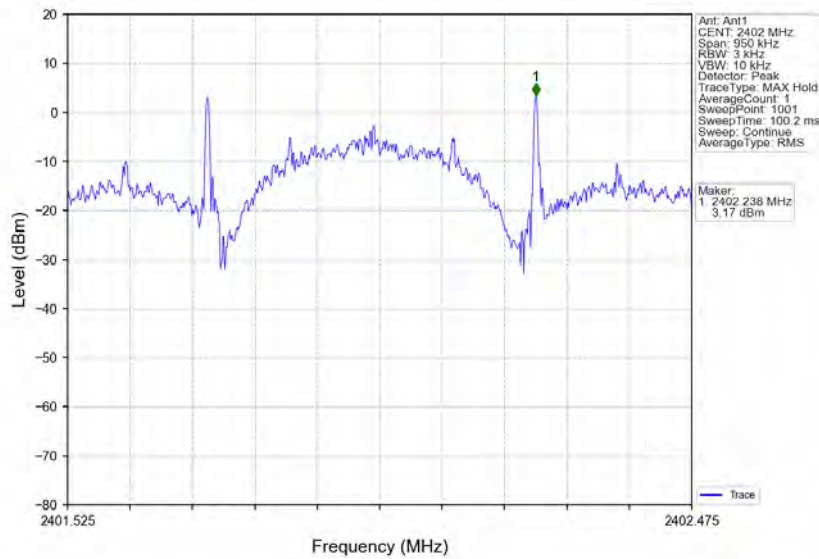

S8_MCH_2440MHz_Ant1_NTNV

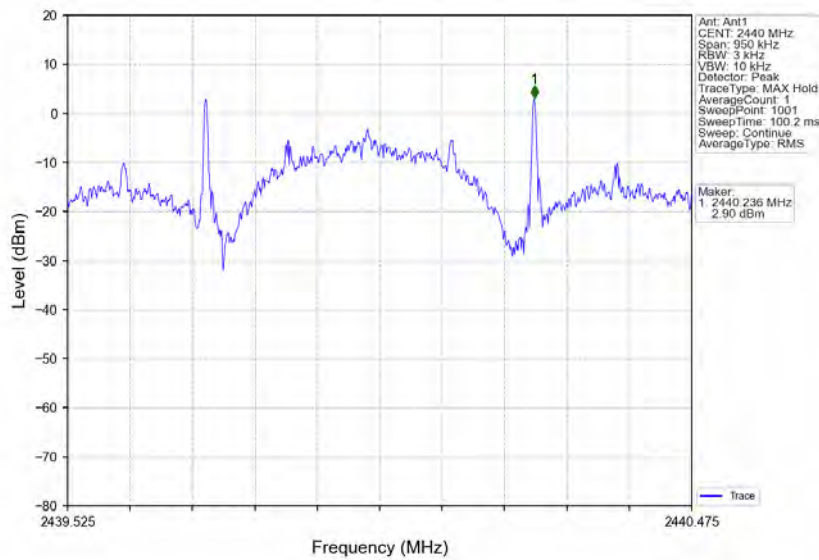


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 205 of 227

S8_HCH_2480MHz_Ant1_NTNV

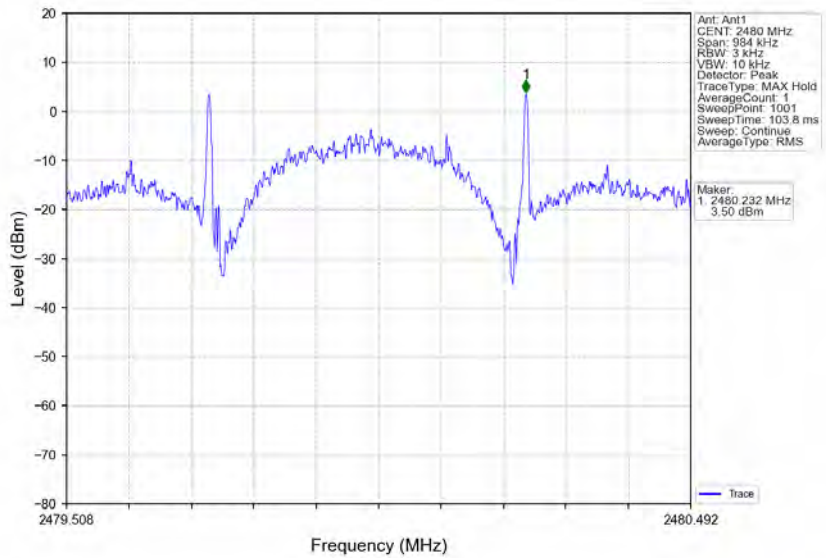

S2_LCH_2402MHz_Ant1_NTNV

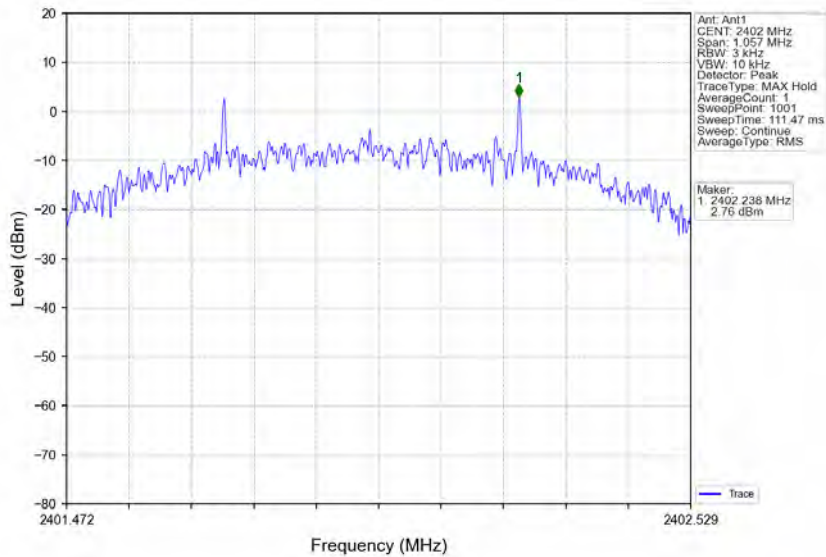


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 206 of 227

S2_MCH_2440MHz_Ant1_NTNV

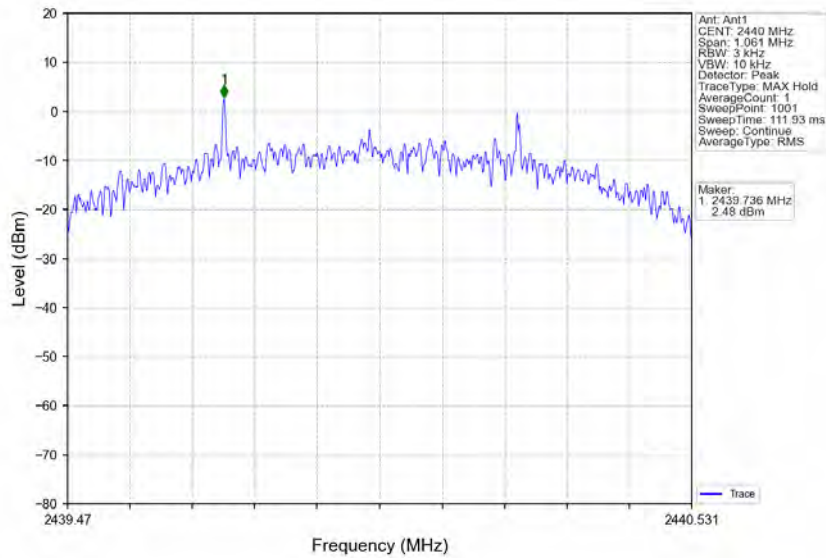

S2_HCH_2480MHz_Ant1_NTNV

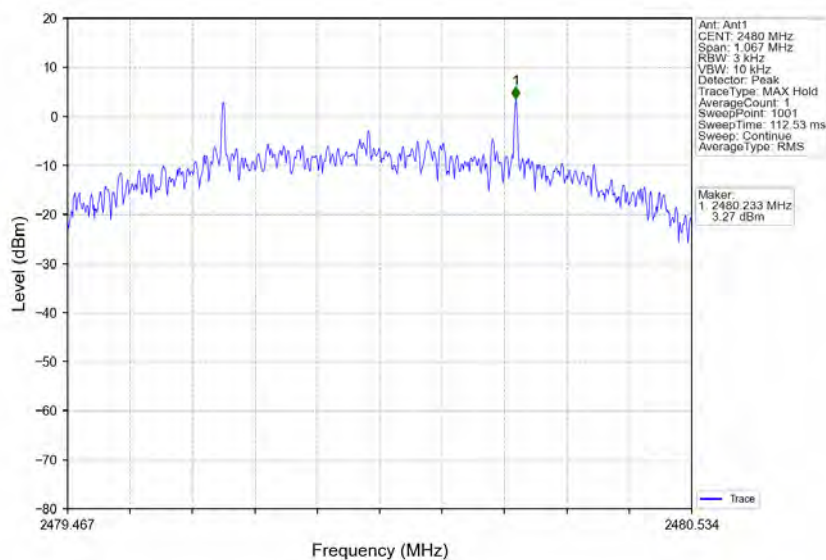


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 207 of 227

1M_LCH_2402MHz_Ant1_NTNV

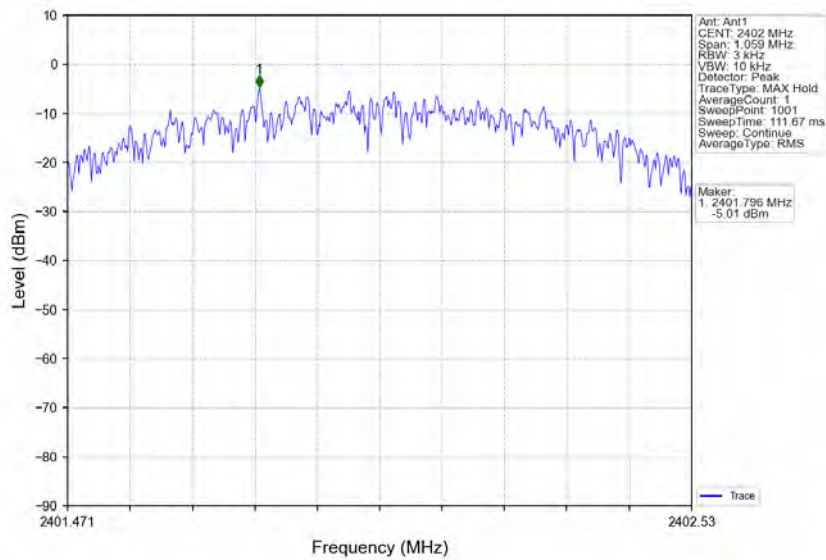

1M_MCH_2440MHz_Ant1_NTNV

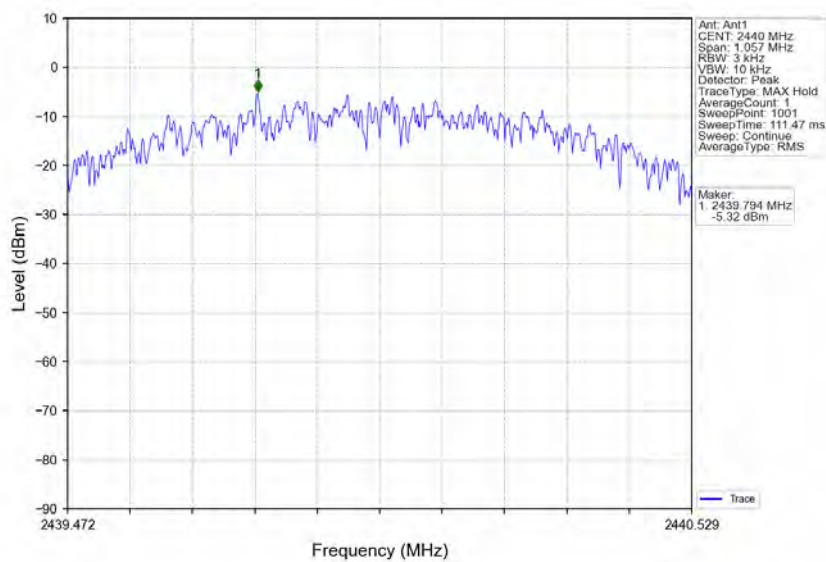


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 208 of 227

1M_HCH_2480MHz_Ant1_NTNV

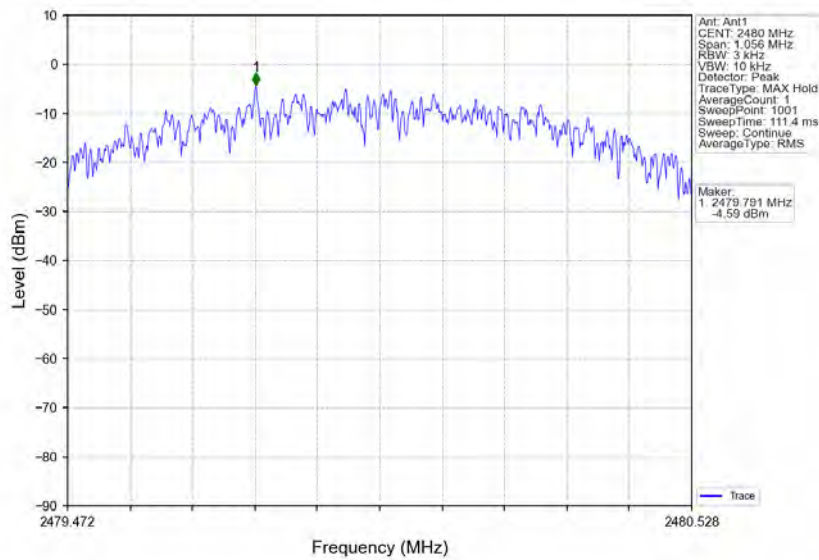

2M_LCH_2402MHz_Ant1_NTNV

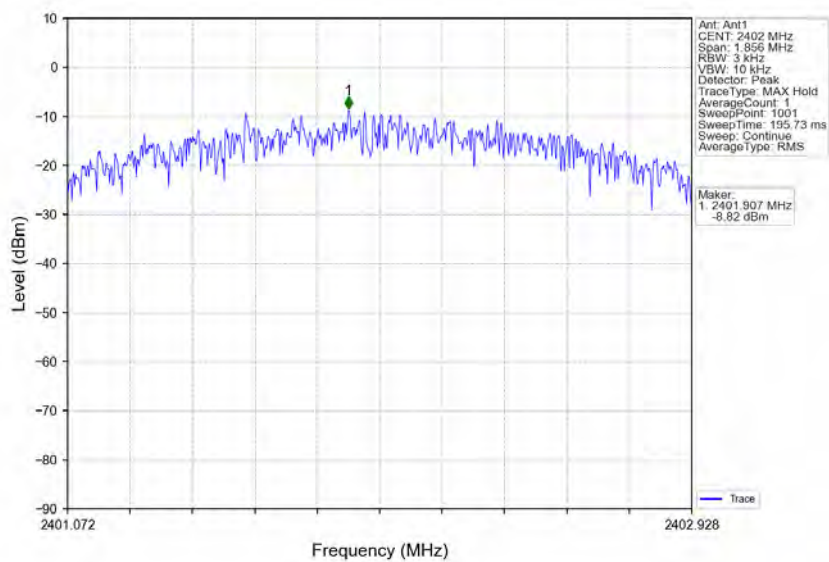


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 209 of 227

2M_MCH_2440MHz_Ant1_NTNV

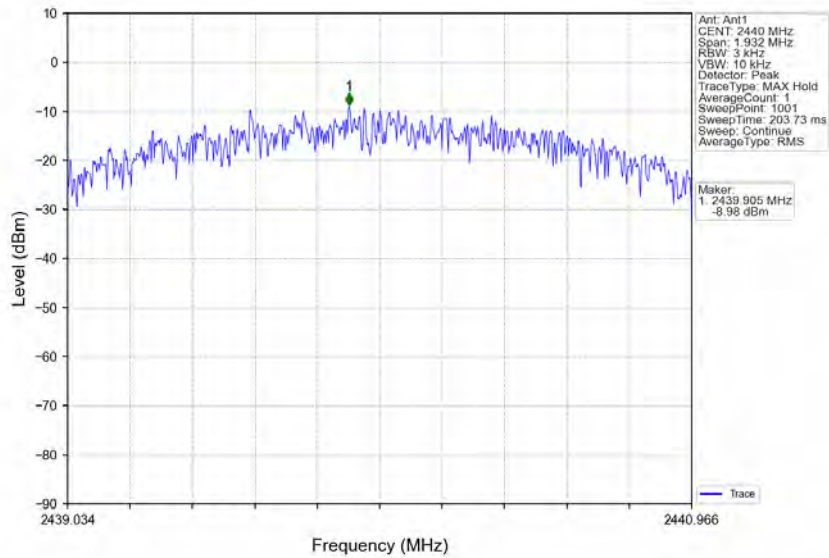

2M_HCH_2480MHz_Ant1_NTNV

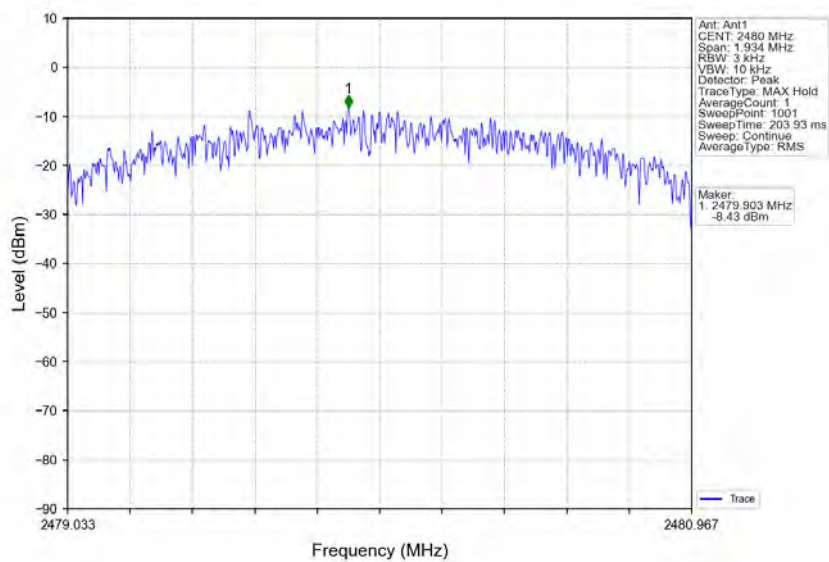

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 210 of 227

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Ref


5.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
S8	SISO	2402	1	8.28
		2440	1	7.34
		2480	1	8.62
S2	SISO	2402	1	9.28
		2440	1	9.03
		2480	1	9.68
1M	SISO	2402	1	9.29
		2440	1	9.05
		2480	1	9.70
2M	SISO	2402	1	8.57
		2440	1	8.26
		2480	1	8.90


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

5.1.2 Test Graph

S8_LCH_2402MHz_Ant1_NTNV

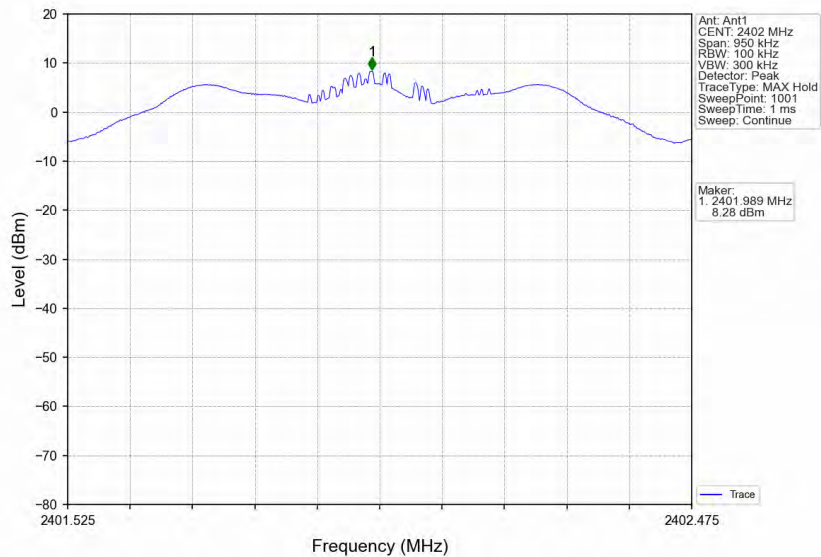

S8_MCH_2440MHz_Ant1_NTNV

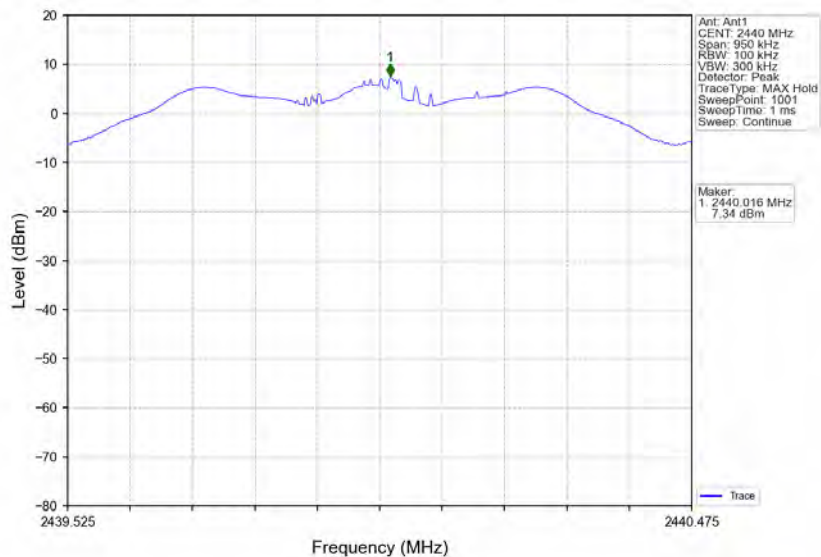


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 212 of 227

S8_HCH_2480MHz_Ant1_NTNV

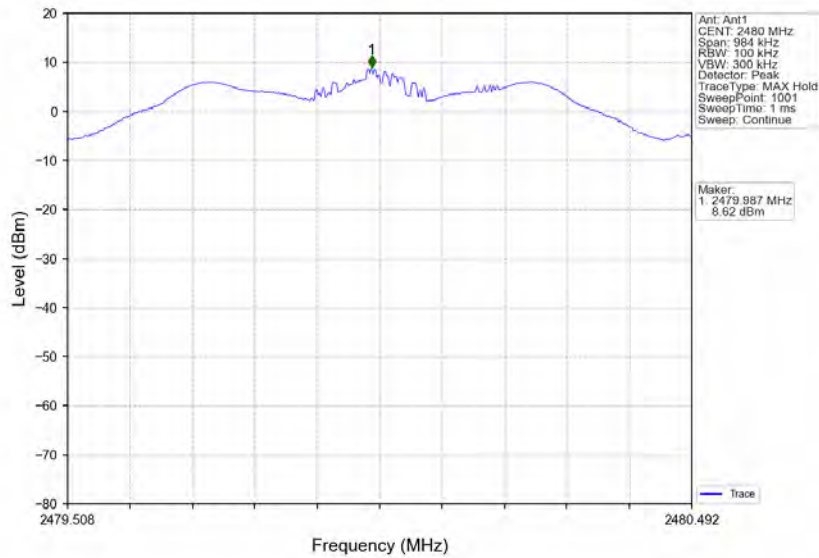

S2_LCH_2402MHz_Ant1_NTNV

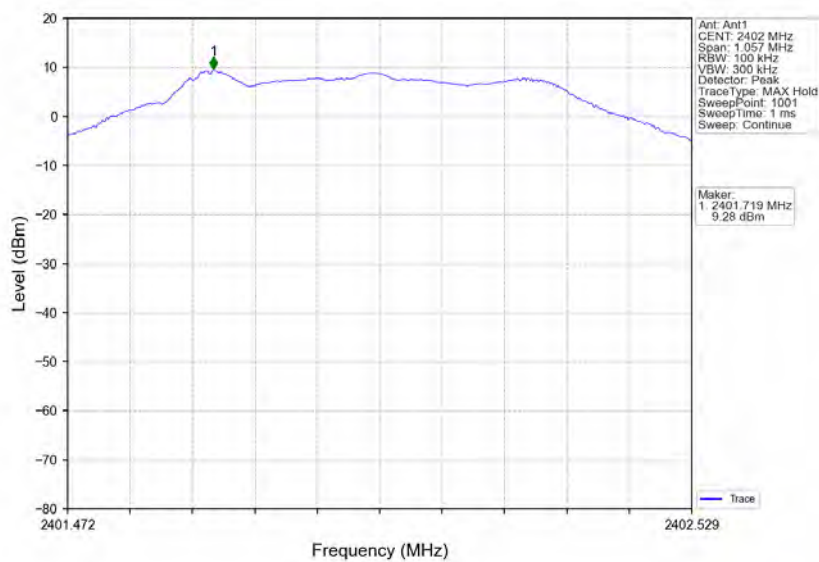


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 213 of 227

S2_MCH_2440MHz_Ant1_NTNV

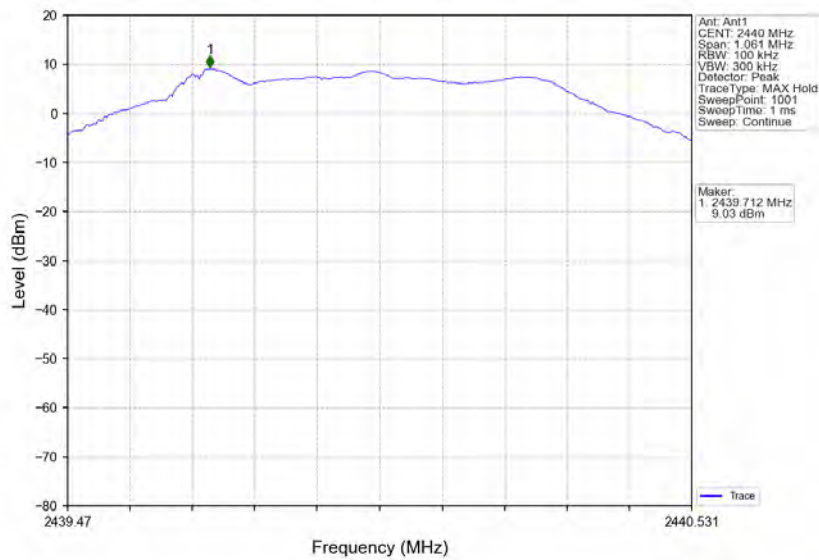

S2_HCH_2480MHz_Ant1_NTNV

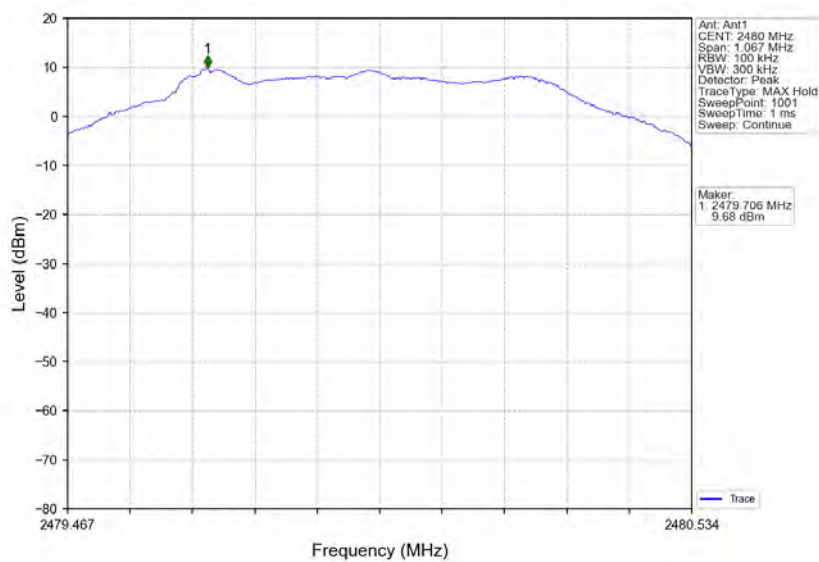


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 214 of 227

1M_LCH_2402MHz_Ant1_NTNV

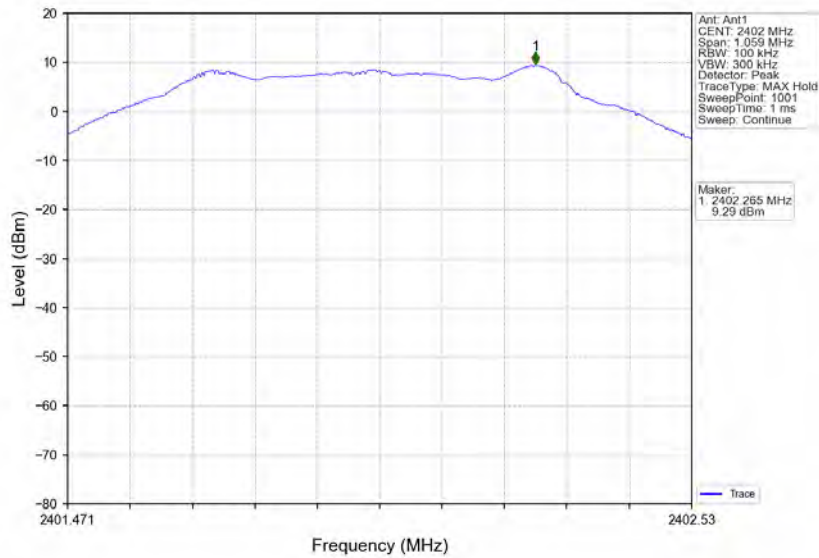

1M_MCH_2440MHz_Ant1_NTNV

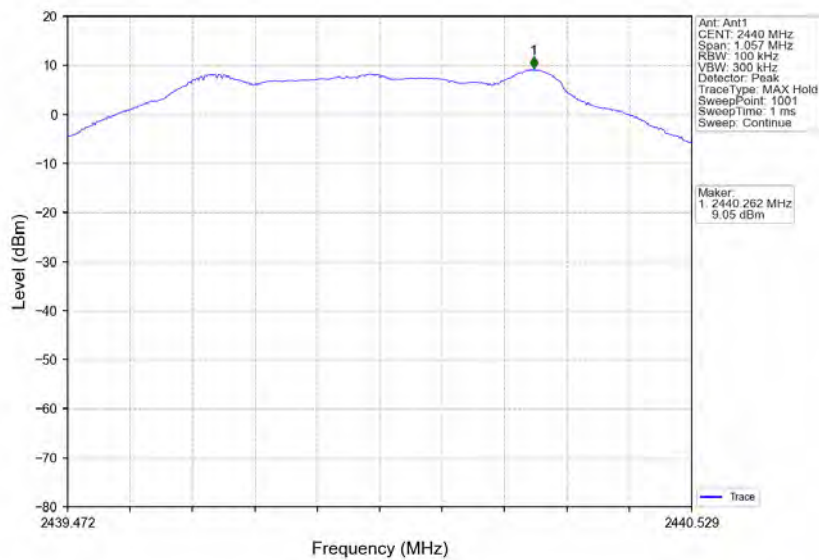


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 215 of 227

1M_HCH_2480MHz_Ant1_NTNV

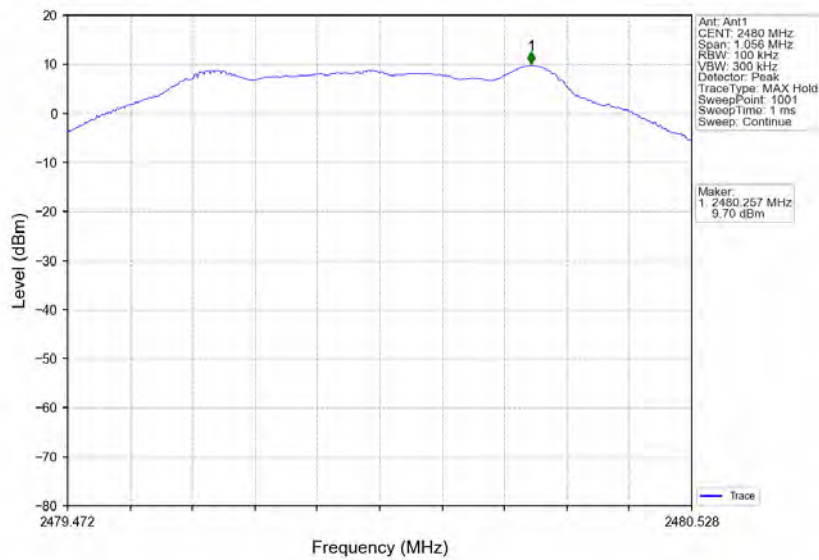

2M_LCH_2402MHz_Ant1_NTNV

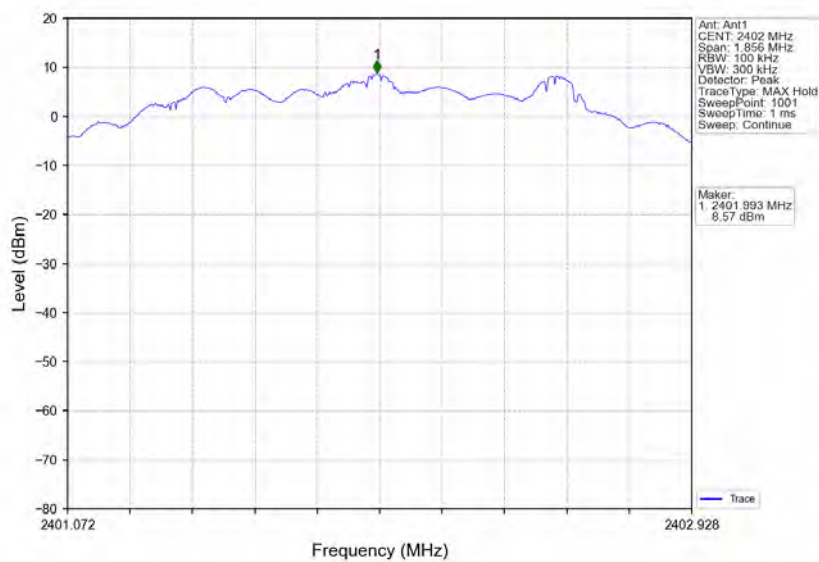


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 216 of 227

2M_MCH_2440MHz_Ant1_NTNV

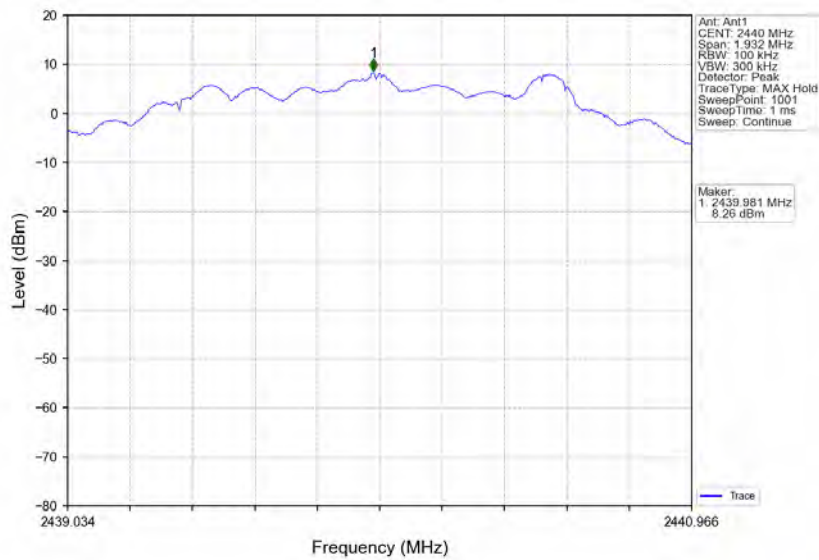

2M_HCH_2480MHz_Ant1_NTNV

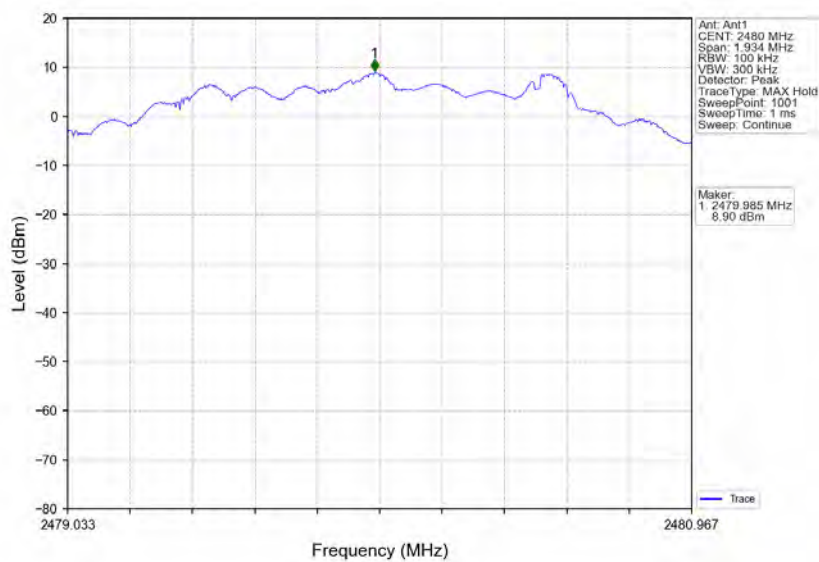

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR231100210501

Page: 217 of 227

5.2 CSE


5.2.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
S8	SISO	2402	1	8.62	-11.38	Pass
		2440	1	8.62	-11.38	Pass
		2480	1	8.62	-11.38	Pass
S2	SISO	2402	1	9.68	-10.32	Pass
		2440	1	9.68	-10.32	Pass
		2480	1	9.68	-10.32	Pass
1M	SISO	2402	1	9.70	-10.30	Pass
		2440	1	9.70	-10.30	Pass
		2480	1	9.70	-10.30	Pass
2M	SISO	2402	1	8.90	-11.10	Pass
		2440	1	8.90	-11.10	Pass
		2480	1	8.90	-11.10	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

5.2.2 Test Graph

S8_LCH_2402MHz_Ant1_NTNV

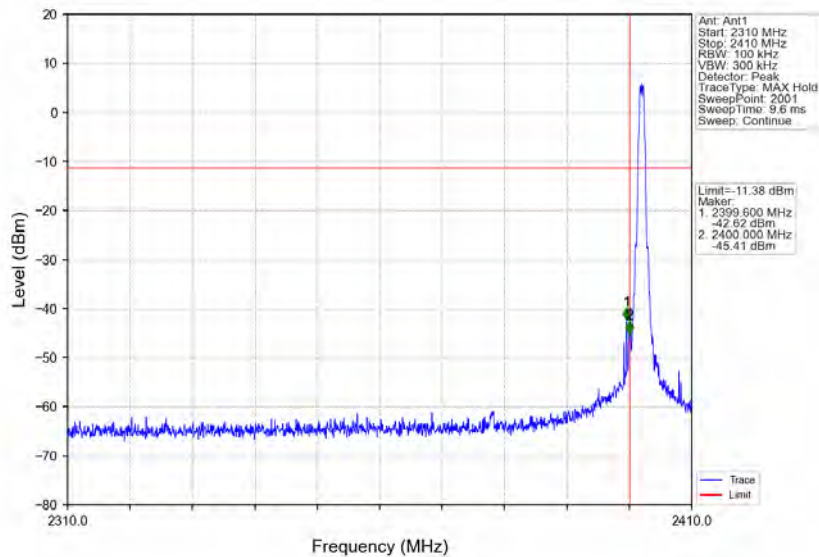

S8_LCH_2402MHz_Ant1_NTNV

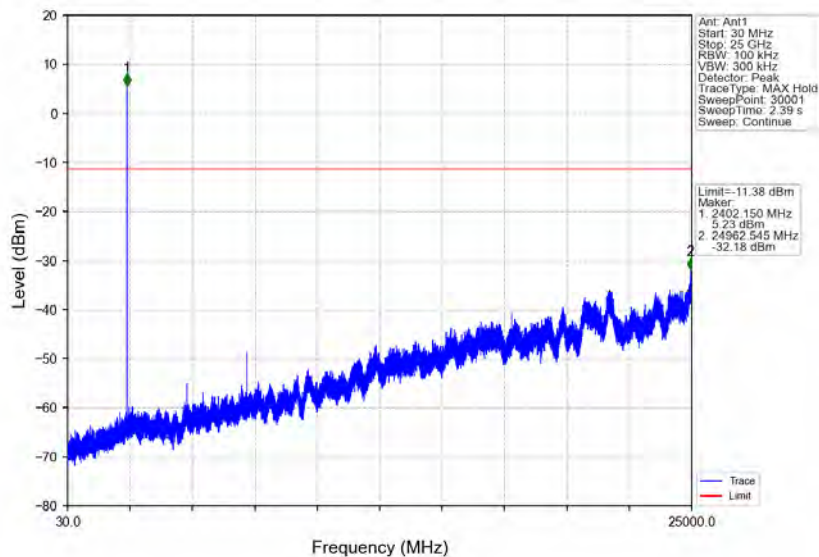


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 219 of 227

S8_MCH_2440MHz_Ant1_NTNV

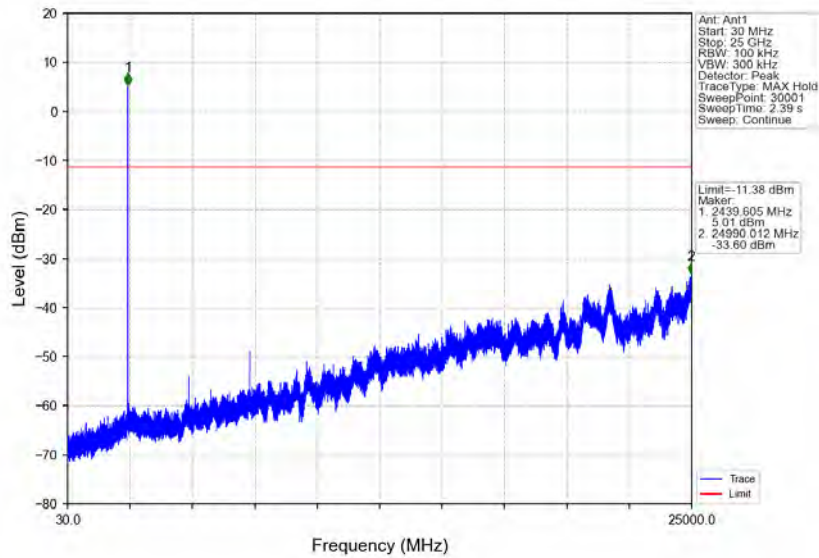

S8_HCH_2480MHz_Ant1_NTNV

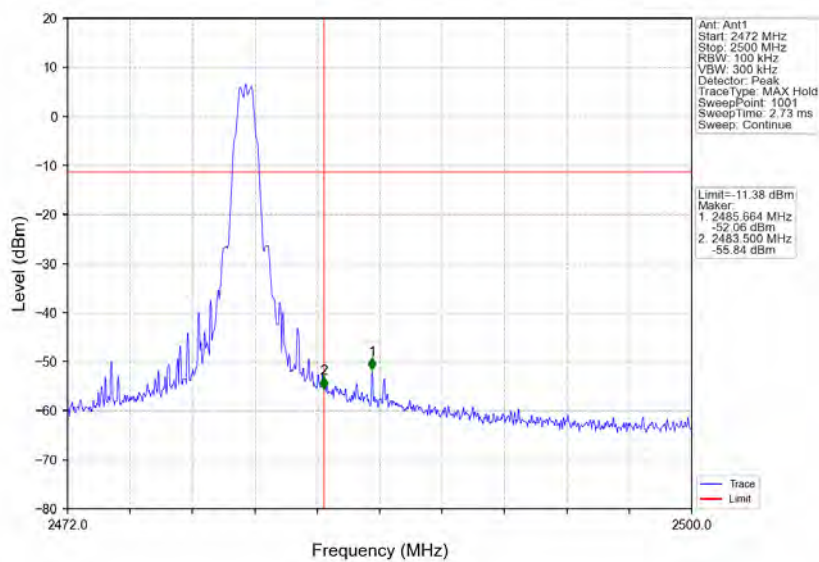


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 220 of 227

S8_HCH_2480MHz_Ant1_NTNV

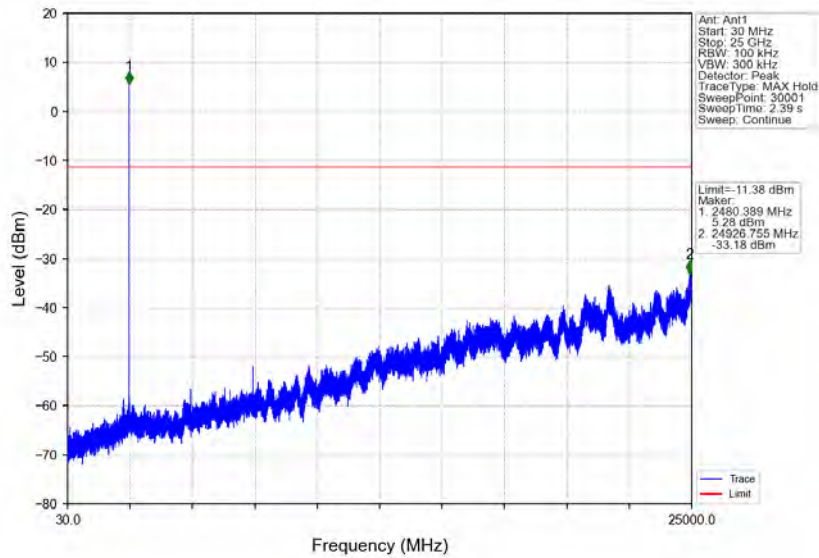

S2_LCH_2402MHz_Ant1_NTNV

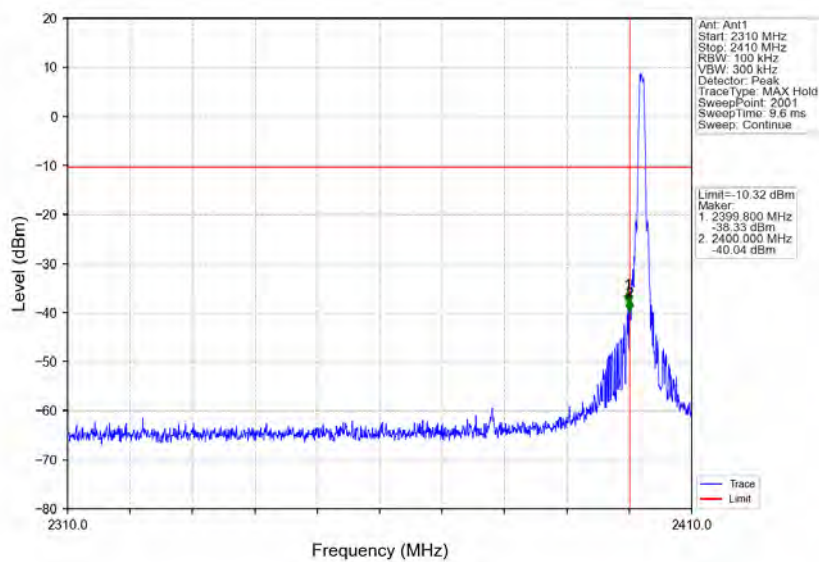


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 221 of 227

S2_LCH_2402MHz_Ant1_NTNV

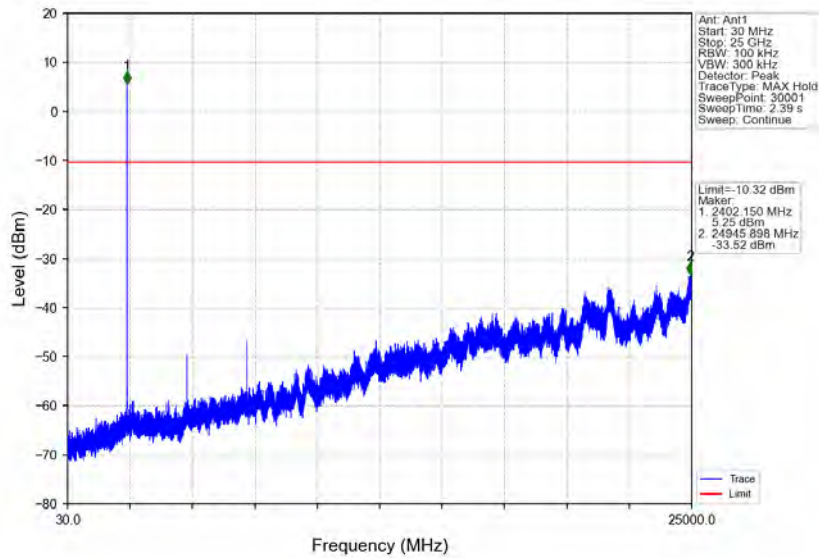

S2_MCH_2440MHz_Ant1_NTNV

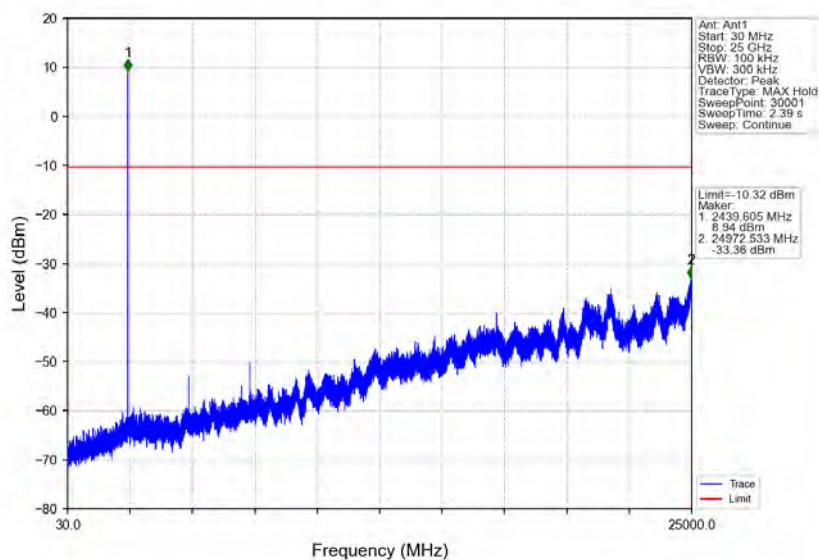


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 222 of 227

S2_HCH_2480MHz_Ant1_NTNV

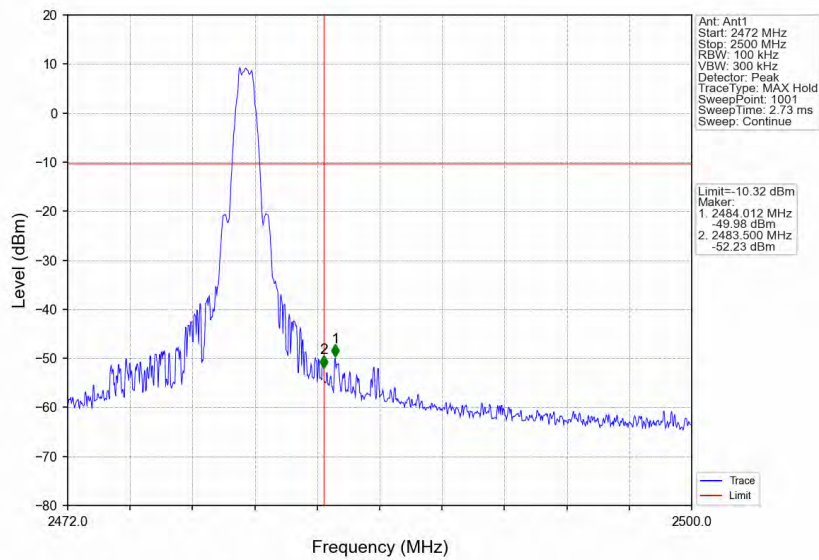

S2_HCH_2480MHz_Ant1_NTNV

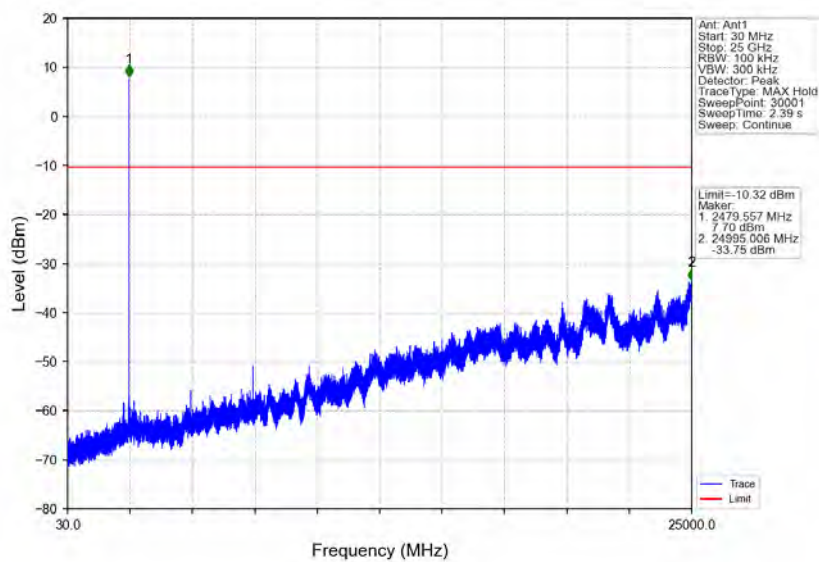


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 223 of 227

1M_LCH_2402MHz_Ant1_NTNV

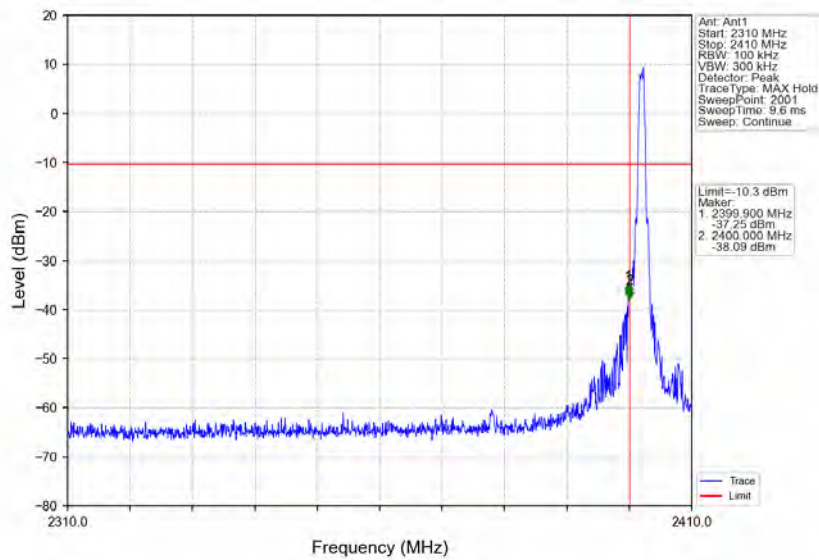

1M_LCH_2402MHz_Ant1_NTNV

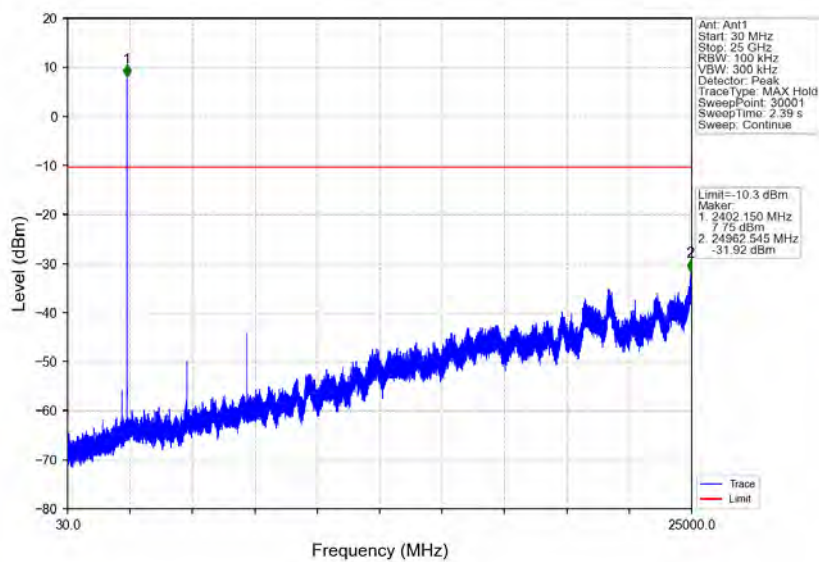


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 224 of 227

1M_MCH_2440MHz_Ant1_NTNV

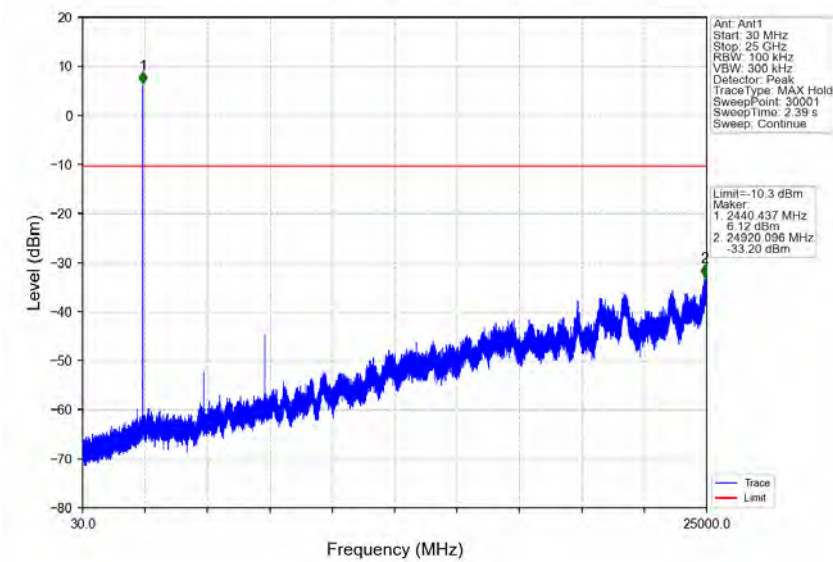

1M_HCH_2480MHz_Ant1_NTNV

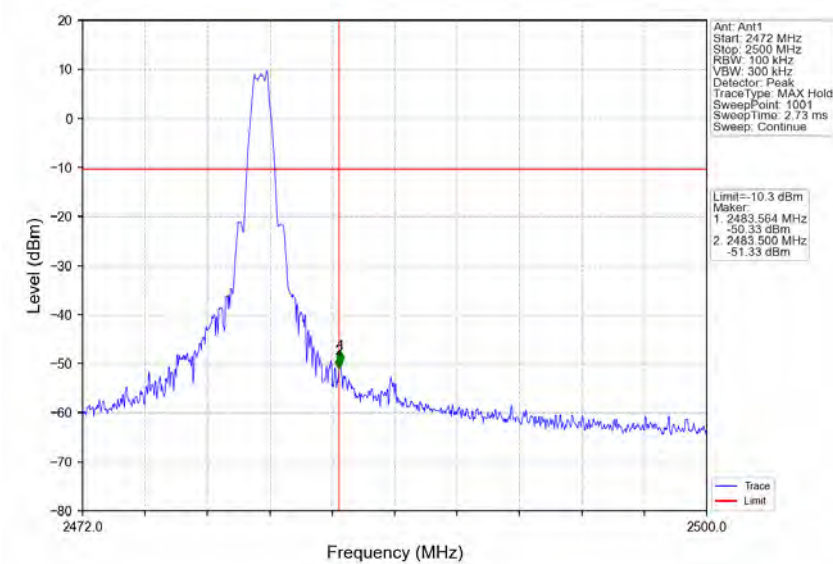


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 225 of 227

1M_HCH_2480MHz_Ant1_NTNV

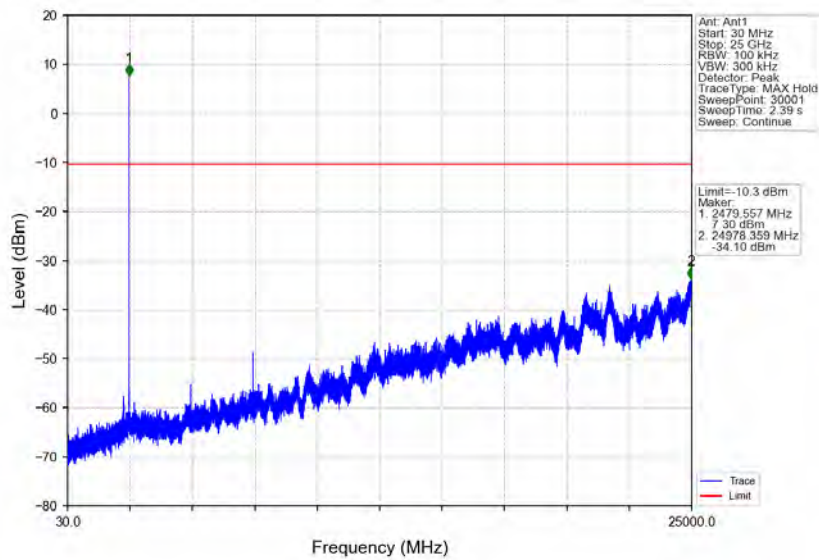

2M_LCH_2402MHz_Ant1_NTNV

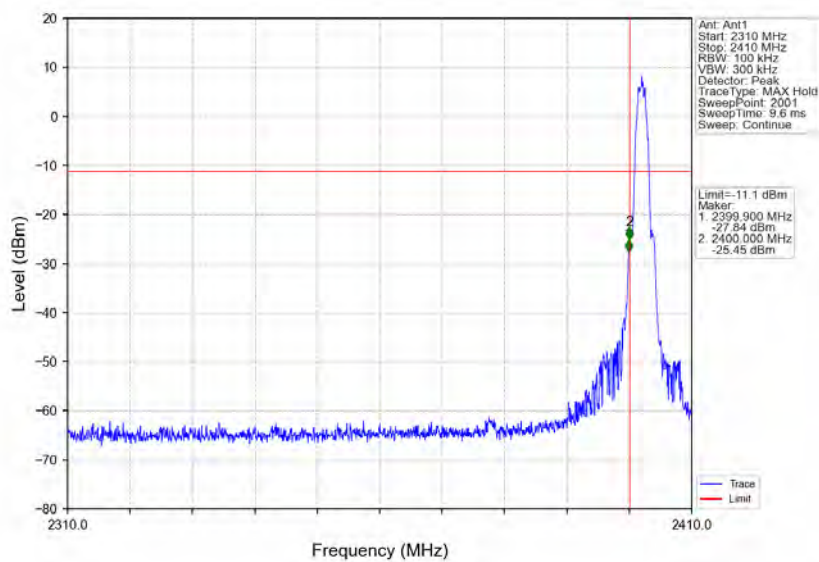


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 226 of 227

2M_LCH_2402MHz_Ant1_NTNV

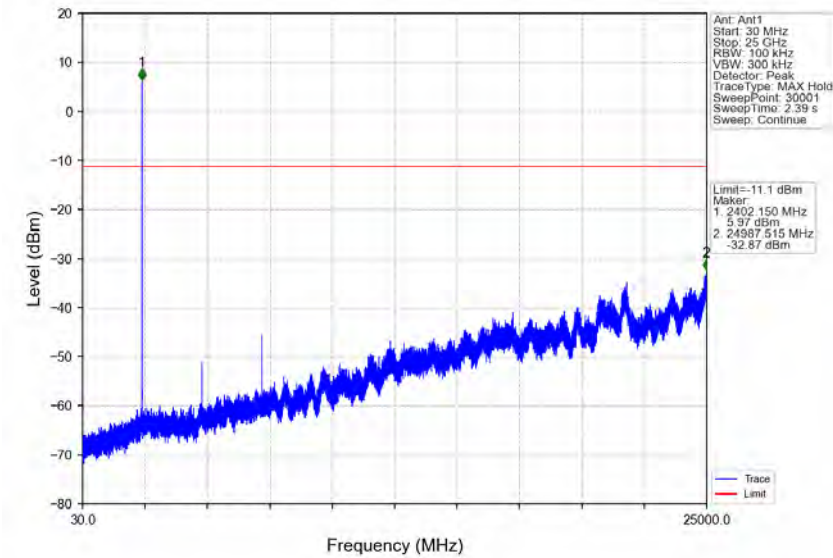

2M_MCH_2440MHz_Ant1_NTNV

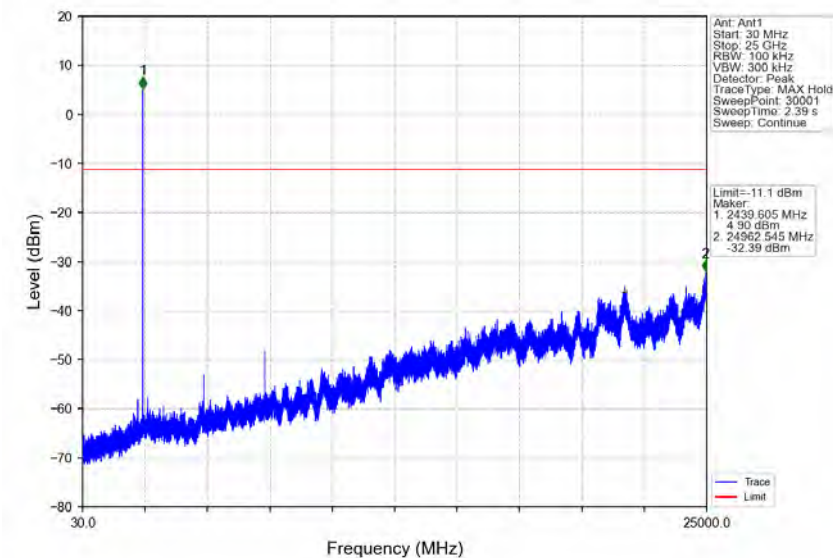


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR231100210501

Page: 227 of 227

2M_HCH_2480MHz_Ant1_NTNV

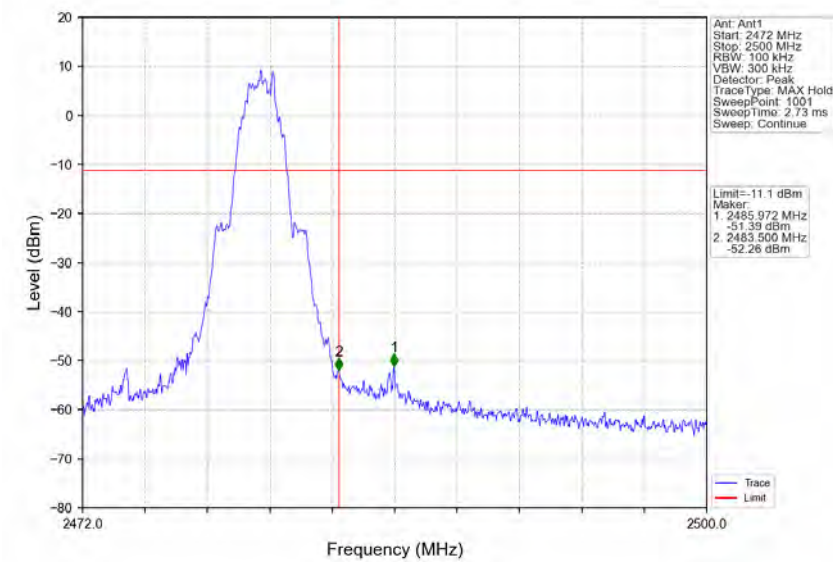

2M_HCH_2480MHz_Ant1_NTNV

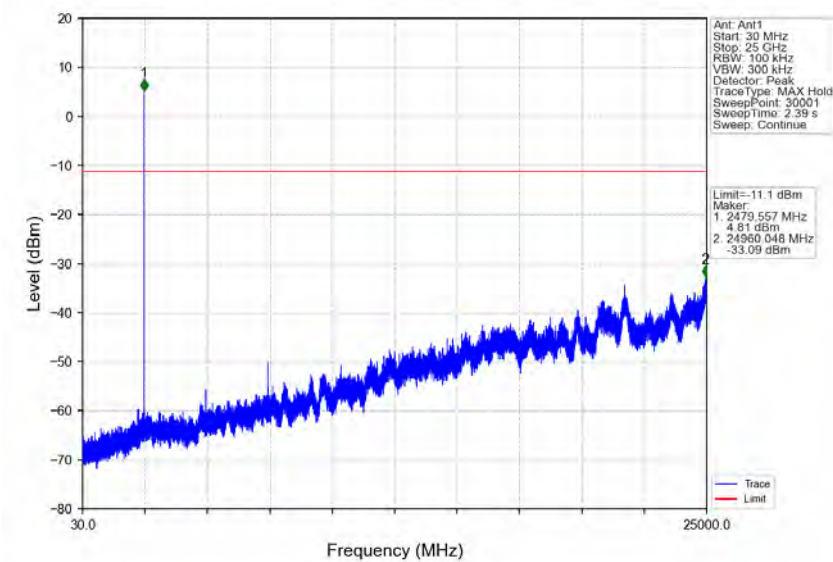

- End of the Report -