

FCC PART 15.247


TEST REPORT

For

GL Technologies (Hong Kong) Limited

FLAT/RM 203 2/F BUILDING 19W 19 SCIENCE PARK WEST AVENUE SHATIN NT,
Shatin, Hong Kong

FCC ID: 2AFIW-AP1300C4

Report Type: Original Report	Product Type: AC1300 Wireless Access Point
Report Number: RDG200416004-00A	
Report Date: 2020-06-15	
Jimmy Xiao 	
Reviewed By: RF Engineer	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S)	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	7
DUTY CYCLE	8
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
APPLICABLE STANDARD	12
RESULT	12
FCC §15.203 - ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP.....	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	15
CORRECTED FACTOR & MARGIN CALCULATION	16
TEST RESULTS SUMMARY	16
TEST DATA	16
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	23
APPLICABLE STANDARD	23
EUT SETUP.....	23
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	24
TEST PROCEDURE	24
CORRECTED AMPLITUDE & MARGIN CALCULATION	24
TEST RESULTS SUMMARY	24
TEST DATA	25
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST DATA	38

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST DATA	39
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST DATA	40
FCC §15.247(e) - POWER SPECTRAL DENSITY	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
TEST DATA	41

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	AC1300 Wireless Access Point
Tested Model	GL-AP1300LTEC4
Frequency Range	Wi-Fi: 2412~2472MHz/2422-2462MHz BLE: 2402-2480MHz
Maximum Conducted Output Power	Wi-Fi(Average Power): 19.9dBm(802.11b), 20.1dBm(802.11g), 20.1dBm(802.11n20), 20.6dBm(802.11n40) BLE(Peak power): 8.70dBm
Modulation Technique	Wi-Fi: DSSS,OFDM BLE:GFSK
Antenna Specification	Wi-Fi:3.92dBi BLE:-0.042dBi
Voltage Range	DC 12V from adapter or DC48V from POE
Date of Test	2020-05-07 to 2020-06-13
Sample serial number	RDG200416004-RF-S1 (Assigned by BACL, Shenzhen)
Received date	2020-04-16
Sample/EUT Status	Good condition
Adapter 1 information	Model: ICP30A-120-2000 Input: AC 100-240V, 50/60Hz, 0.8A Output: DC 12.0V, 2.0A
Adapter 2 information	Model:KA2401A-1202000DE Input: AC 100-240V, 50/60Hz, 0.65A Output: DC 12.0V, 2.0A

Objective

This report is prepared on behalf of *GL Technologies (Hong Kong) Limited* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.407 NII submissions with FCC ID: 2AFIW-AP1300C4.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.73dB
RF conducted test with spectrum		±1.6dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1 °C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The device supports beamforming and non-beamforming mode for 2.4G Wi-Fi. And these two modes share the same power declared by the applicant.

For 802.11b, 802.11g and 802.11n-HT20 mode, 13 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442	/	/

For 802.11b, 802.11g, 802.11n-HT20 mode, EUT was tested with Channel 1, 7 and 13

For 802.11n-HT40 mode, 9 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	6	2447
2	2427	7	2452
3	2432	8	2457
4	2437	9	2462
5	2442	/	/

EUT was tested with Channel 1, 5 and 9.

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“QRCT” software was used to test for Wi-Fi Mode. “SecureCRT” software was used to test for BLE Mode.

The device was tested with the worst case was performed as below:

Mode	Data rate	Power level		
		Low channel	Middle channel	High channel
802.11b	1 Mbps	19	19	19
802.11g	6 Mbps	19	19	18
802.11n-HT20	MCS0	19	19	18
802.11n-HT40	MCS0	19	19	18
BLE	/	117	117	117

For Wi-Fi mode, the worse-case data rates are determined to be as follows for each mode based upon investigations by measuring the output power and PSD across all data rated bandwidths, and modulations.

The device supports SISO and MIMO in all modes, per pretest, the MIMO mode was the worst mode for all the modes. So the test data of the MIMO mode were reported.

Duty cycle

Please refer to the Appendix 2.4GWifi and Appendix BLE.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
GOSPELL	POE	G0720-480-050	G0720-480-050
Dell	PC	Latitude E5430	11429208685
Sagemcom	Wireless Router	1704N	3c81d839027c

External I/O Cable


Cable Description	Length (m)	From/Port	To
Un-shielded Un-detachable DC Cable	1.0	EUT	Adapter
Un-shielded detachable AC Cable	1.0	LISN	POE
Un-shielded detachable RJ45 Cable	1.0	EUT	POE
Un-shielded detachable RJ45 Cable	10	EUT	PC
Un-shielded detachable RJ45 Cable	10	EUT	Router
Un-shielded detachable RJ45 Cable	10	POE	Router

Block Diagram of Test Setup

For conducted emissions
For Adapter:

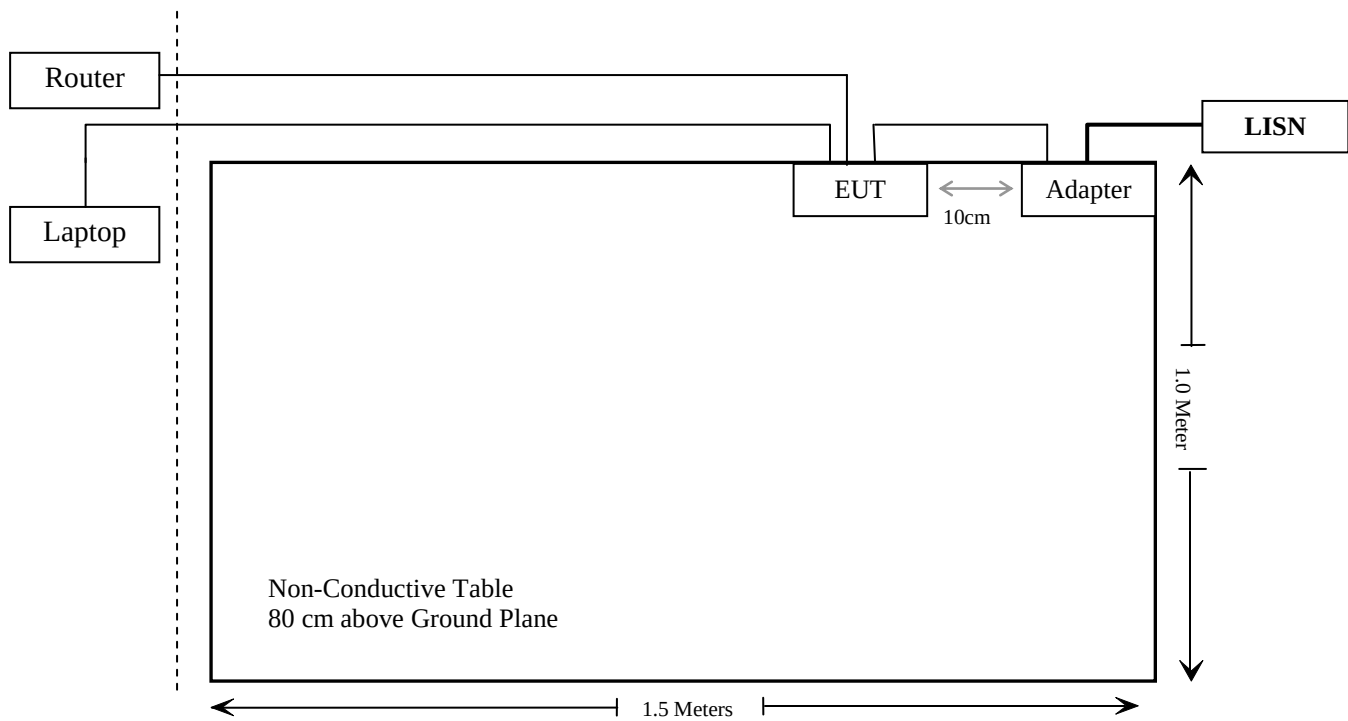

For POE:

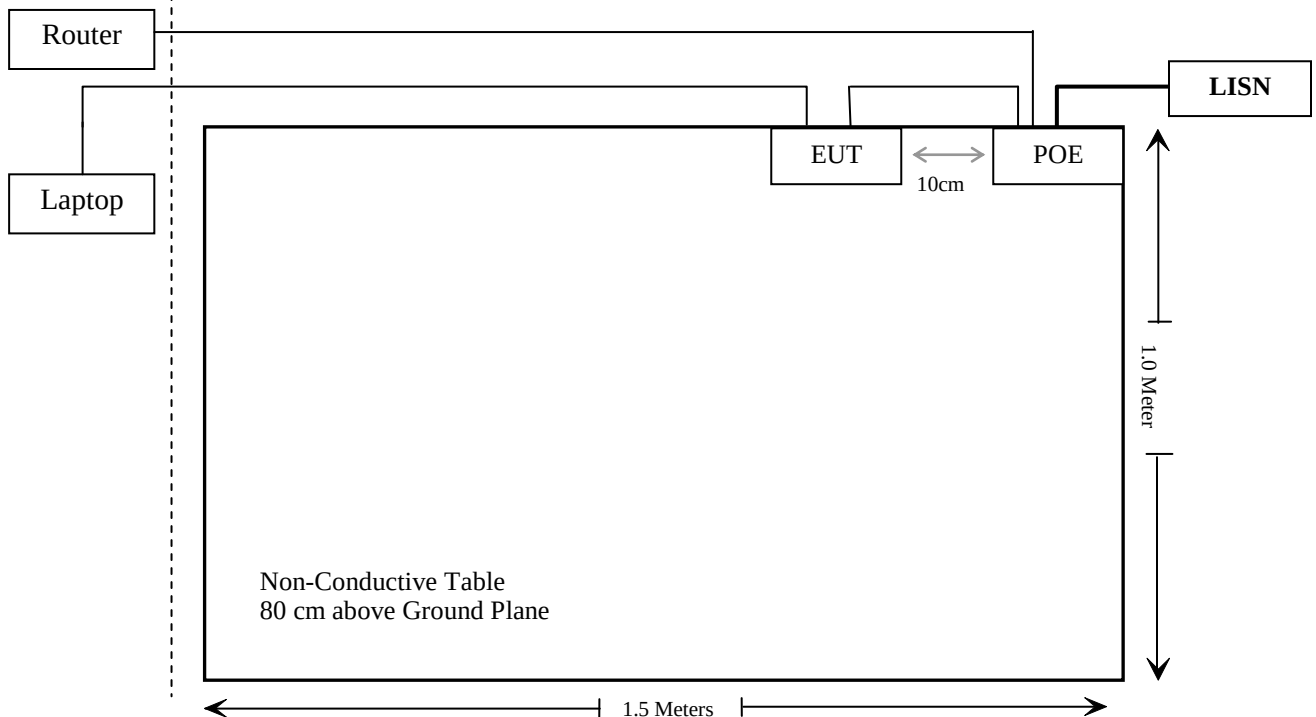

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1091	Maximum Permissible Exposure(MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2019/7/9	2020/7/8
Rohde & Schwarz	LISN	ENV216	101613	2020/1/22	2021/1/21
Rohde & Schwarz	Transient Limitor	ESH3Z2	DE25985	2019/11/29	2020/11/28
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2019/11/29	2020/11/28
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102455	2019/7/9	2020/7/8
Sonoma instrument	Pre-amplifier	310 N	186238	2020/4/20	2021/4/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017/12/22	2020/12/21
Unknown	Cable 2	RF Cable 2	F-03-EM197	2019/11/29	2020/11/28
Unknown	Cable	Chamber Cable 1	F-03-EM236	2019/11/29	2020/11/28
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2019/7/22	2020/7/21
COM-POWER	Pre-amplifier	PA-122	181919	2019/11/29	2020/11/28
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2019/11/29	2020/11/28
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017/12/22	2020/12/21
Insulted Wire Inc.	RF Cable	SPS-2503-3150	02222010	2019/11/29	2020/11/28
Unknown	RF Cable	W1101-EQ1 OUT	F-19-EM005	2019/11/29	2020/11/28
SNSD	Band Reject filter	BSF2402-2480MN-0898-001	2.4G filter	2020/4/20	2021/4/20
Ducommun Technologies	Horn antenna	ARH-4223-02	1007726-02 1304	2017/12/6	2020/12/5
RF Conducted Test					
Tonscend Corporation	RF control Unit	JS0806-2	19D8060154	2019/7/10	2020/7/9
Rohde & Schwarz	Signal and Spectrum Analyzer	FSV40	101473	2019/7/22	2020/7/21
Unknown	RF Cable	Unknown	2301 276	2019/11/29	2020/11/28

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Mode	Frequency (MHz)	Antenna Gain		Max Tune Up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
2.4G Wi-Fi	2412-2472	6.93	4.93	21.0	125.89	20	0.124	1.0
BLE	2402-2480	-0.042	0.99	9.0	7.94	20	0.002	1.0
5G Wi-Fi	5150-5250	8.56	7.18	20.0	100.0	20	0.143	1.0
5G Wi-Fi	5725-5850	7.53	5.66	20.0	100.0	20	0.113	1.0
WCDMA Band 2	1850-1910	2.71	1.87	25.0	316.23	20	0.118	1.0
WCDMA Band 4	1710-1755	1.25	1.33	25.0	316.23	20	0.084	1.0
WCDMA Band 5	824-849	0.19	1.04	25.0	316.23	20	0.065	0.55
LTE Band 2	1850-1910	2.71	1.87	25.0	316.23	20	0.118	1.0
LTE Band 4	1710-1755	1.25	1.33	25.0	316.23	20	0.084	1.0
LTE Band 5	824-849	0.19	1.04	25.0	316.23	20	0.065	0.55
LTE Band 12	699-716	-1.55	0.70	25.0	316.23	20	0.044	0.466
LTE Band 13	777-787	-0.50	0.89	25.0	316.23	20	0.056	0.518
LTE Band 14	788-798	-0.50	0.89	25.0	316.23	20	0.056	0.525
LTE Band 66	1710-1780	1.25	1.33	25.0	316.23	20	0.084	1.0
LTE Band 71	663-698	-2.15	0.61	25.0	316.23	20	0.038	0.442

- Note: 1. the tune up conducted power was declared by the applicant
 2. the BLE, Wi-Fi function can transmit at the same time with the LTE.
 3. For the Wi-Fi, as it can support the beam-forming function, so the antenna gain should add the 10lg2.
 4. Please refer to the MPE report of the FCC ID: XMR201808EC25AF for the LTE output power.

So the worst simultaneous transmitting consideration:

$$\text{The ratio} = \text{MPE}_{2.4\text{GWi-Fi}}/\text{limit} + \text{MPE}_{5\text{GWi-Fi}}/\text{limit} + \text{MPE}_{\text{Band 5}}/\text{limit} = 0.124/1.0 + 0.143/1.0 + 0.065/0.55 = 0.385 < 1.0$$

so simultaneous exposure is not required.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a PCB antenna for BLE and two internal antennas for Wi-Fi which were permanently attached. The antenna gain of BLE is -0.042dBi and 3.92dBi for Wi-Fi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207

EUT Setup

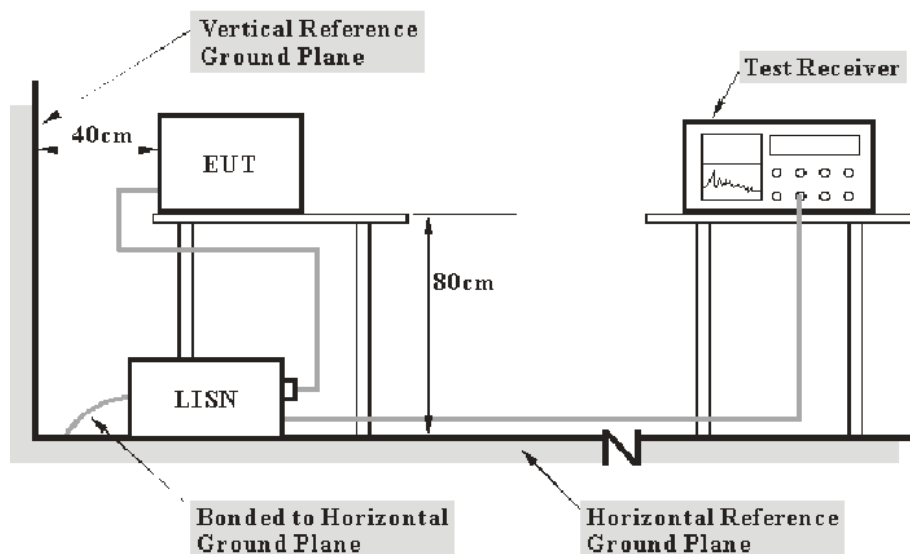

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the EUT complied with the FCC Part 15.207,

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	65 %
ATM Pressure:	101.0 kPa


The testing was performed by Haiguo Li from 2020-05-07 to 2020-05-15.

EUT operation mode: Transmitting (Wi-Fi High channel in 802.11n40 mode was the worst case)

For Adapter 1

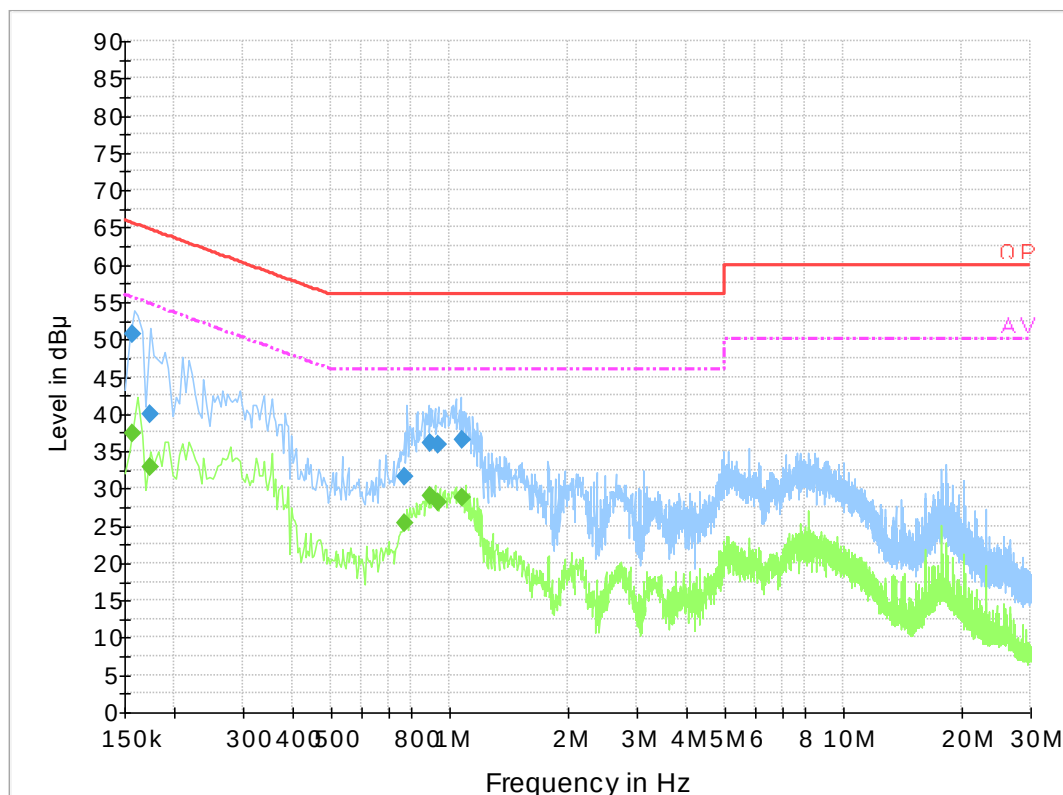
AC 120V/60 Hz, Line

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.157500	50.7	19.8	65.6	14.9	QP
0.173500	39.9	19.9	64.8	24.9	QP
0.770270	31.5	19.8	56.0	24.5	QP
0.892710	36.0	19.8	56.0	20.0	QP
0.939930	35.8	19.8	56.0	20.2	QP
1.086050	36.5	19.9	56.0	19.5	QP
0.157500	37.3	19.8	55.6	18.3	Ave.
0.173500	32.8	19.9	54.8	22.0	Ave.
0.770270	25.3	19.8	46.0	20.7	Ave.
0.892710	29.0	19.8	46.0	17.0	Ave.
0.939930	28.2	19.8	46.0	17.8	Ave.
1.086050	28.9	19.9	46.0	17.1	Ave.

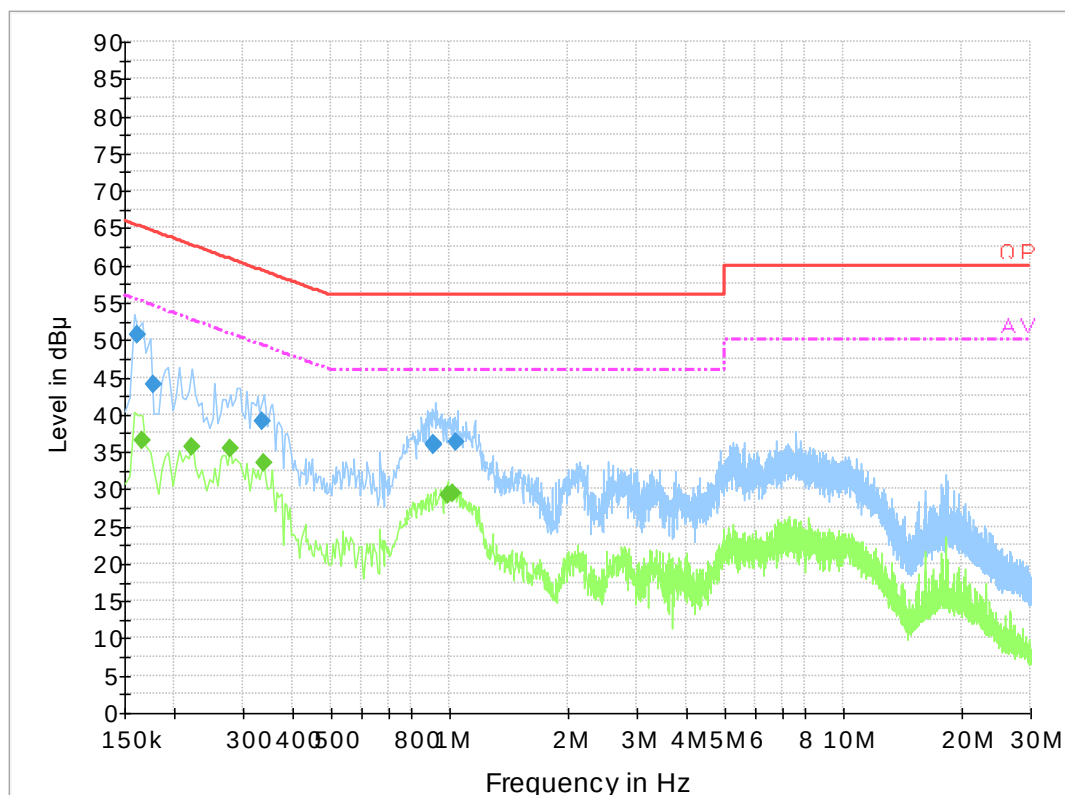
AC 120V/60 Hz, Neutral

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.161500	50.7	19.8	65.4	14.7	QP
0.177500	43.9	19.8	64.6	20.7	QP
0.336930	39.1	19.8	59.3	20.2	QP
0.912170	36.0	19.7	56.0	20.0	QP
0.912410	36.0	19.7	56.0	20.0	QP
1.042250	36.3	19.8	56.0	19.7	QP
0.166000	36.5	19.8	55.2	18.7	Ave.
0.222000	35.7	19.8	52.7	17.0	Ave.
0.278000	35.4	19.7	50.9	15.5	Ave.
0.338000	33.5	19.8	49.3	15.8	Ave.
0.990000	29.3	19.8	46.0	16.7	Ave.
1.018000	29.4	19.8	46.0	16.6	Ave.

For Adapter 2

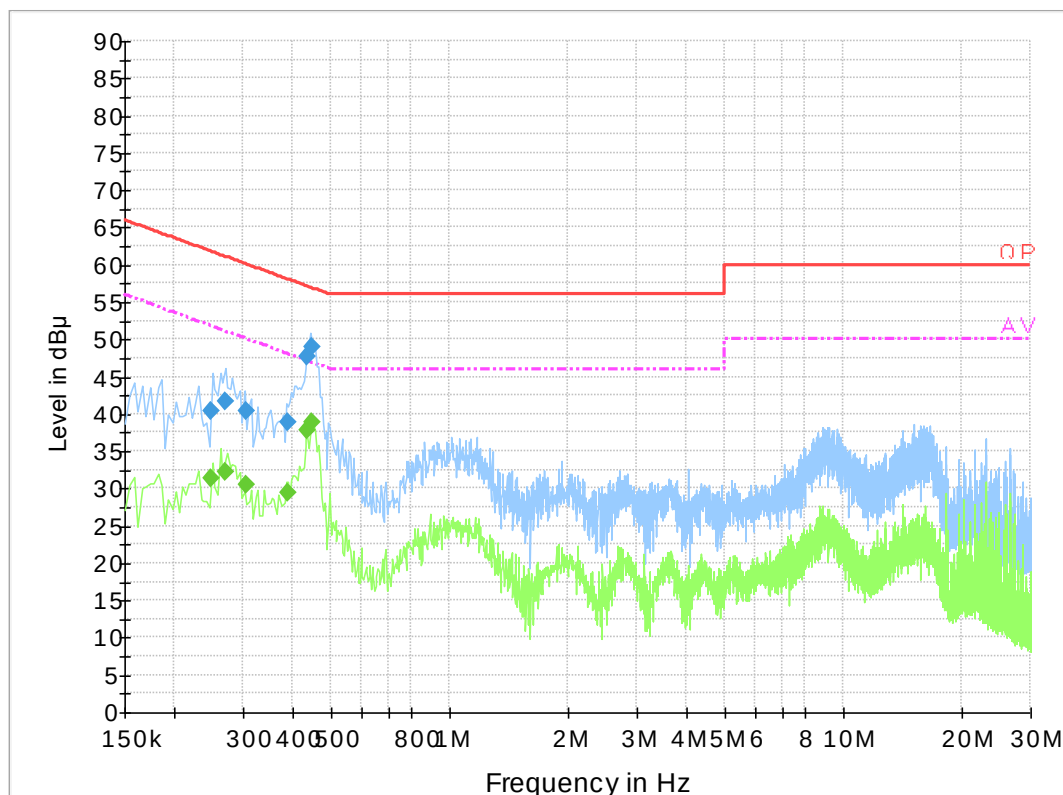AC 120V/60 Hz, Line


Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.249500	40.4	19.8	61.8	21.4	QP
0.269500	41.7	19.8	61.1	19.4	QP
0.305470	40.5	19.7	60.1	19.6	QP
0.388210	38.8	19.9	58.1	19.3	QP
0.436450	47.7	19.8	57.1	9.4	QP
0.447310	49.1	19.8	56.9	7.9	QP
0.249500	31.4	19.8	51.8	20.3	Ave.
0.269500	32.3	19.8	51.1	18.9	Ave.
0.305470	30.5	19.7	50.1	19.6	Ave.
0.388210	29.4	19.9	48.1	18.7	Ave.
0.436450	37.9	19.8	47.1	9.3	Ave.
0.447310	38.9	19.8	46.9	8.1	Ave.

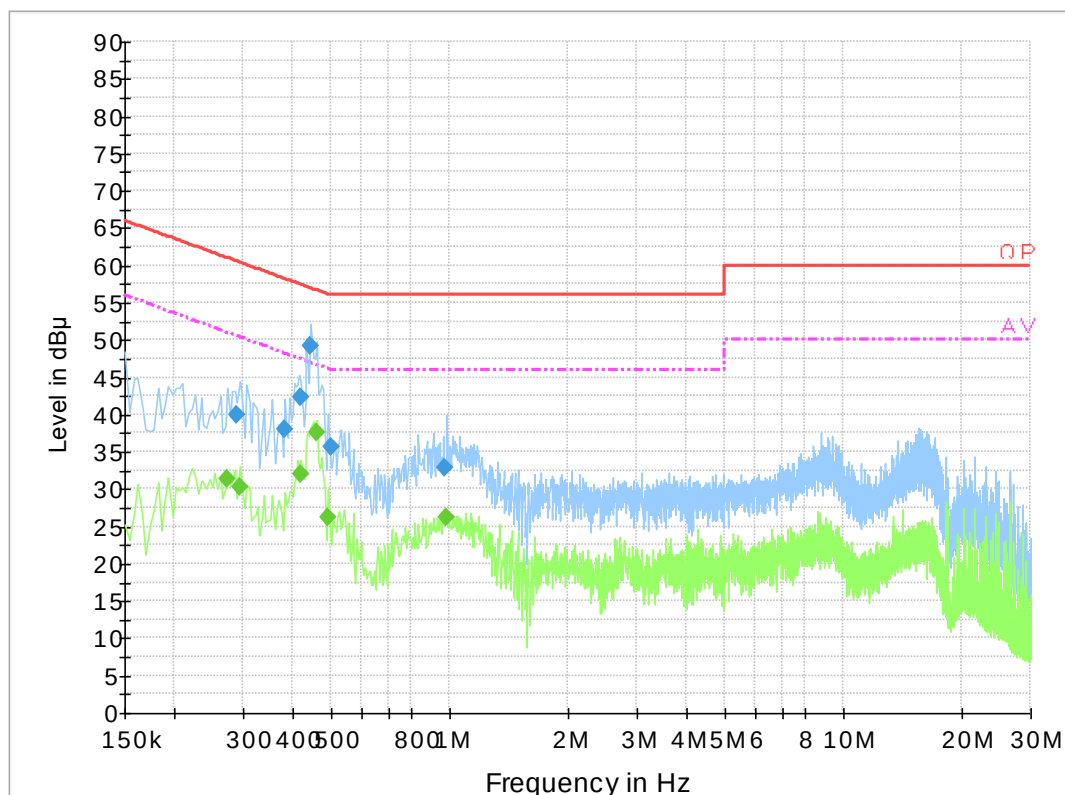AC 120V/60 Hz, Neutral


Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.289500	39.9	19.7	60.5	20.6	QP
0.384270	38.0	19.8	58.2	20.2	QP
0.419730	42.3	19.8	57.5	15.2	QP
0.443310	49.2	19.8	57.0	7.8	QP
0.501410	35.7	19.8	56.0	20.3	QP
0.971210	32.8	19.8	56.0	23.2	QP
0.274000	31.4	19.7	51.0	19.6	Ave.
0.294000	30.3	19.7	50.4	20.1	Ave.
0.422000	32.0	19.8	47.4	15.4	Ave.
0.462000	37.5	19.8	46.7	9.1	Ave.
0.494000	26.2	19.8	46.1	19.9	Ave.
0.986000	26.2	19.8	46.0	19.8	Ave.

For POE:

AC 120V/60 Hz, Line

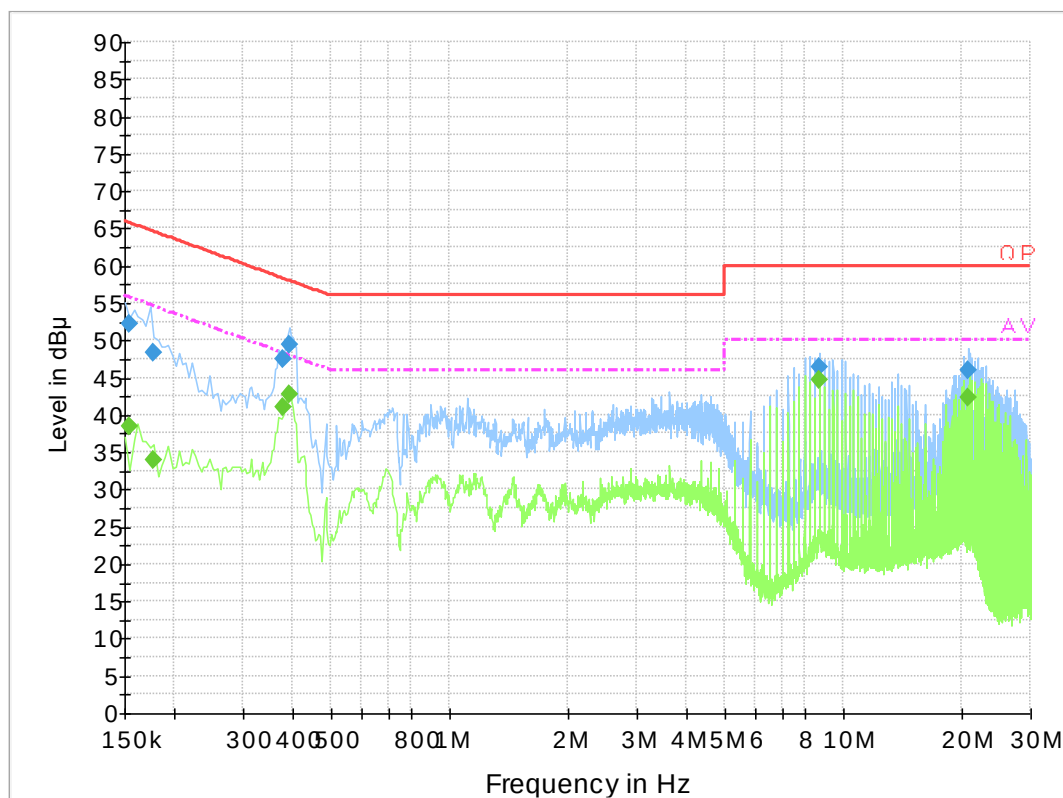

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.154500	52.3	19.8	65.8	13.5	QP
0.177500	48.4	19.9	64.6	16.2	QP
0.380210	47.4	19.9	58.3	10.9	QP
0.392090	49.3	19.9	58.0	8.7	QP
8.711290	46.4	20.0	60.0	13.6	QP
20.809850	46.0	20.5	60.0	14.0	QP
0.154500	38.5	19.8	55.8	17.2	Ave.
0.177500	34.0	19.9	54.6	20.6	Ave.
0.380210	41.0	19.9	48.3	7.3	Ave.
0.392090	42.7	19.9	48.0	5.3	Ave.
8.711290	44.8	20.0	50.0	5.2	Ave.
20.809850	42.4	20.5	50.0	7.6	Ave.

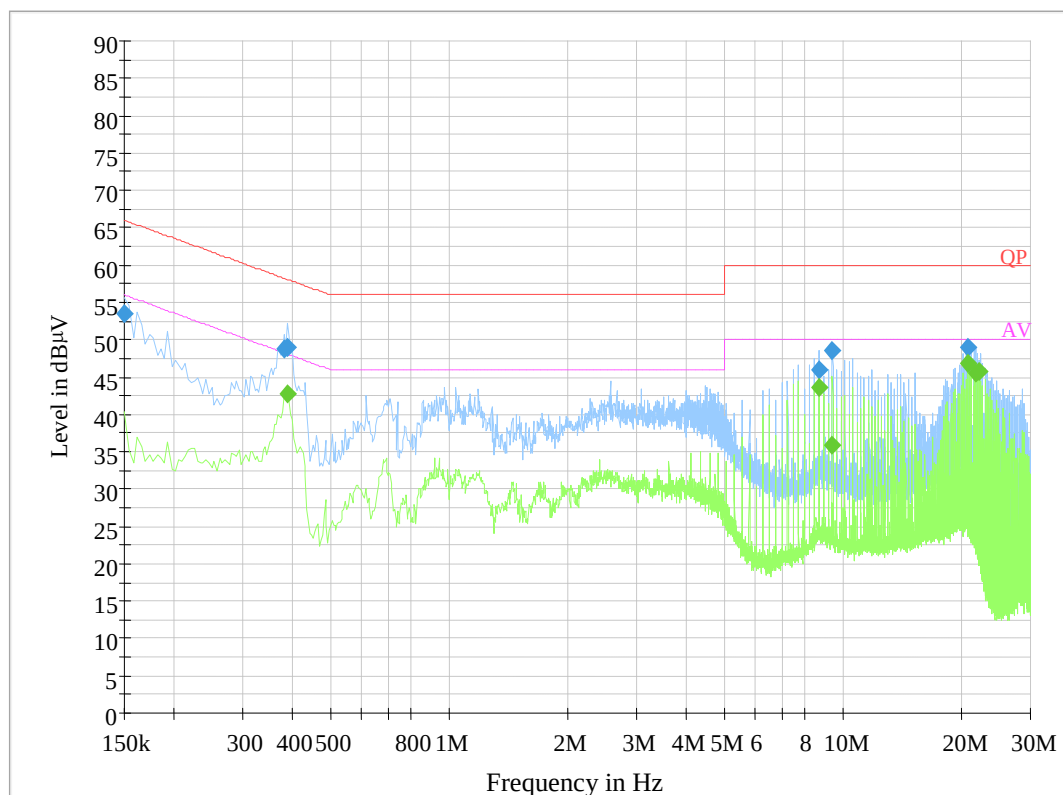AC 120V/60 Hz, Neutral

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.161500	50.7	19.8	65.4	14.7	QP
0.177500	43.9	19.8	64.6	20.7	QP
0.336930	39.1	19.8	59.3	20.2	QP
0.912170	36.0	19.7	56.0	20.0	QP
0.912410	36.0	19.7	56.0	20.0	QP
1.042250	36.3	19.8	56.0	19.7	QP
0.166000	36.5	19.8	55.2	18.7	Ave.
0.222000	35.7	19.8	52.7	17.0	Ave.
0.278000	35.4	19.7	50.9	15.5	Ave.
0.338000	33.5	19.8	49.3	15.8	Ave.
0.990000	29.3	19.8	46.0	16.7	Ave.
1.018000	29.4	19.8	46.0	16.6	Ave.

Note:


- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

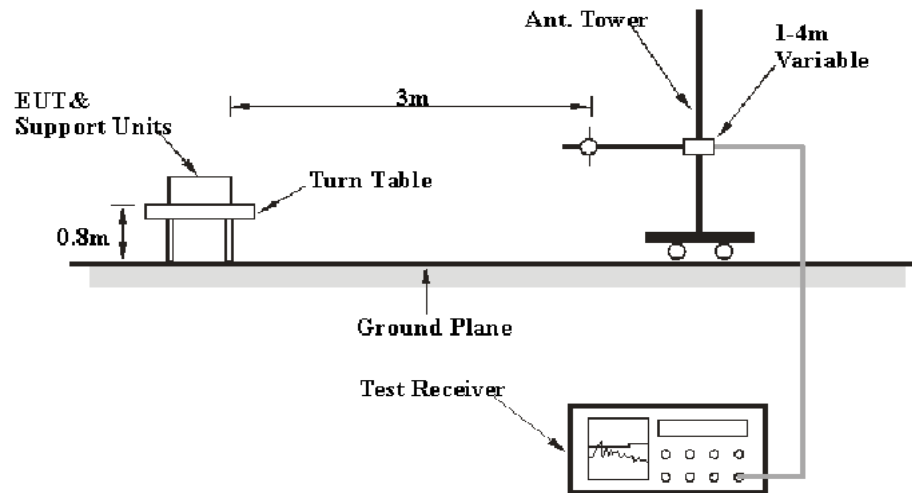

Above 1GHz:

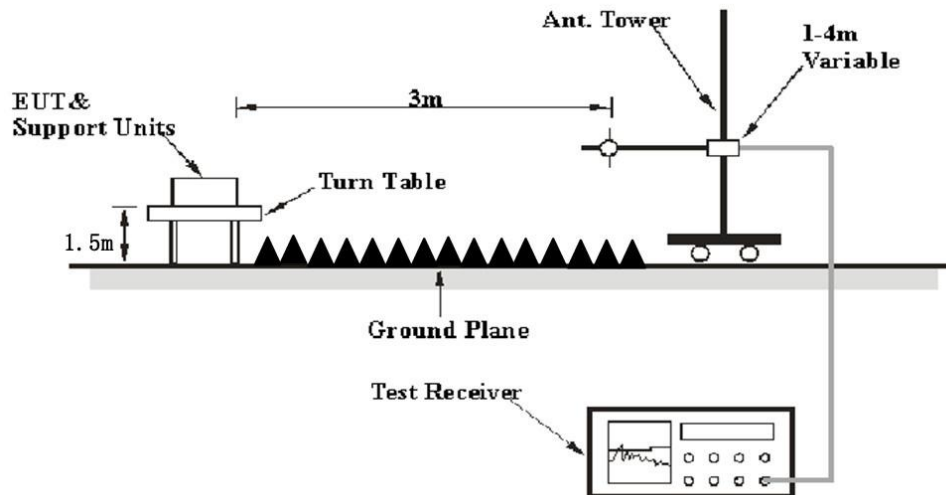

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary


According to the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	60 %
ATM Pressure:	101.0 kPa

The testing was performed by Zero Yan from 2020-05-07 to 2020-05-17 for below 1G and Leo Huang on 2020-05-13 for above 1G.


EUT operation mode: Transmitting

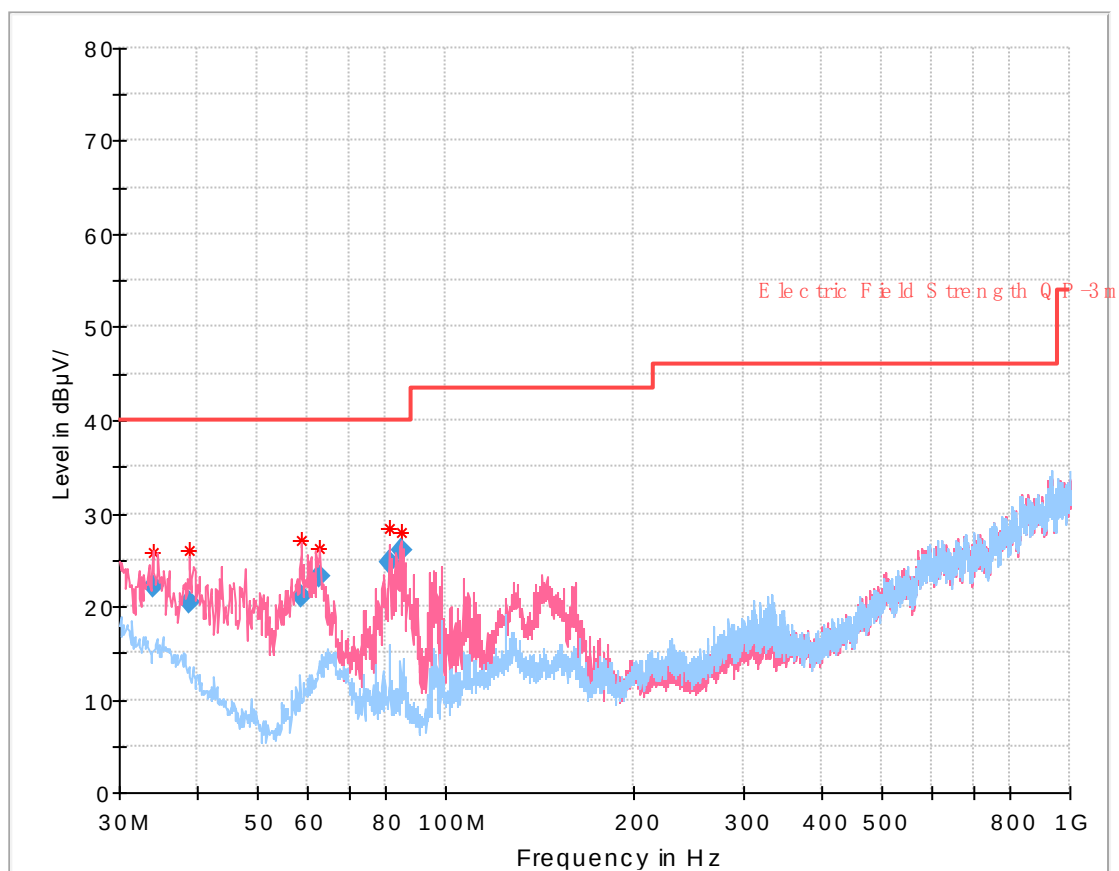For Adapter 1 :**30 MHz~1 GHz (Wi-Fi High channel in 802.11n40 mode was the worst case):**

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
34.076875	22.05	144.0	V	258.0	-10.0	40.00	17.95
38.808125	20.37	111.0	V	116.0	-13.0	40.00	19.63
58.746625	21.10	142.0	V	80.0	-20.1	40.00	18.90
62.790000	23.32	122.0	V	208.0	-20.3	40.00	16.68
81.209125	24.67	128.0	V	101.0	-19.9	40.00	15.33
84.652250	25.99	109.0	V	102.0	-19.5	40.00	14.01

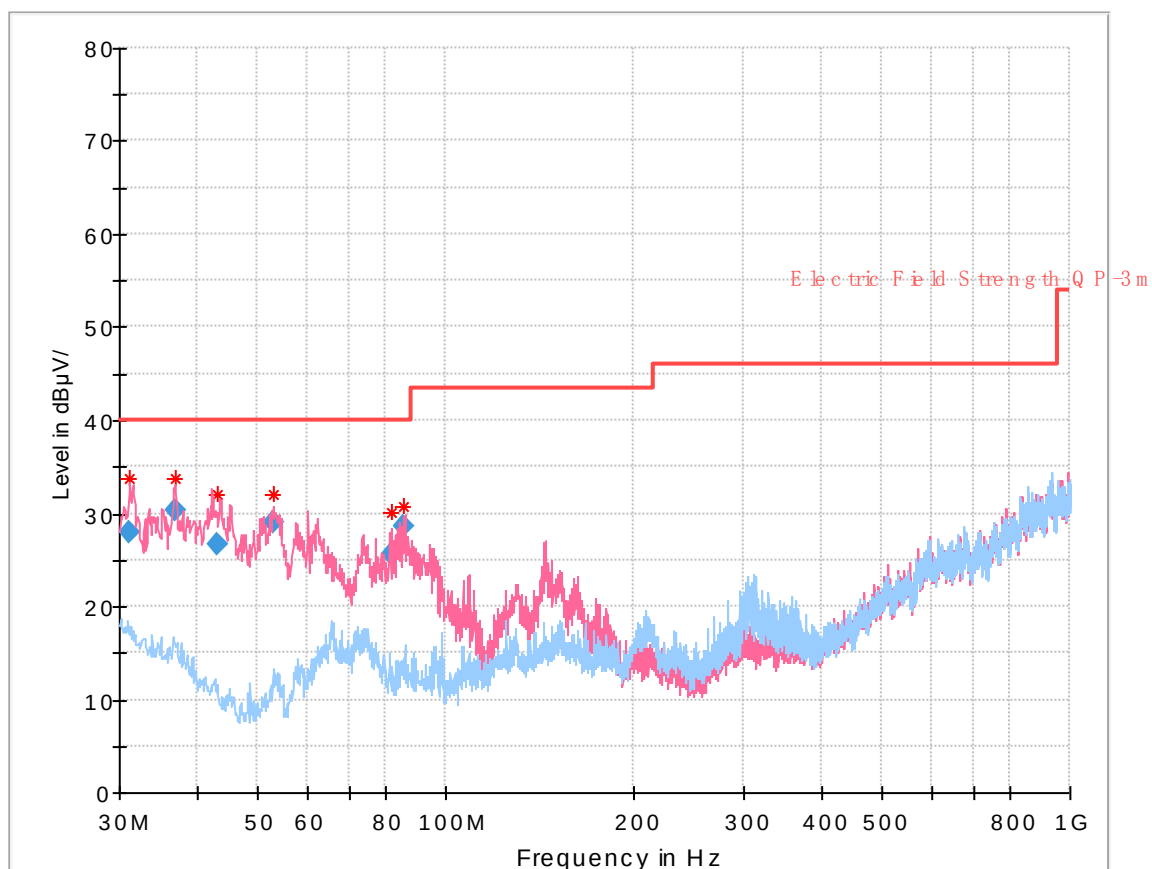For Adapter 2 :**30 MHz~1 GHz (Wi-Fi High channel in 802.11n40 mode was the worst case):**

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
31.231250	27.95	111.0	V	177.0	-8.4	40.00	12.05
36.933250	30.38	110.0	V	200.0	-11.8	40.00	9.62
43.092125	26.72	109.0	V	102.0	-16.0	40.00	13.28
52.985625	29.00	119.0	V	44.0	-19.8	40.00	11.00
82.042500	25.49	109.0	V	95.0	-19.8	40.00	14.51
85.520500	28.54	119.0	V	91.0	-19.5	40.00	11.46

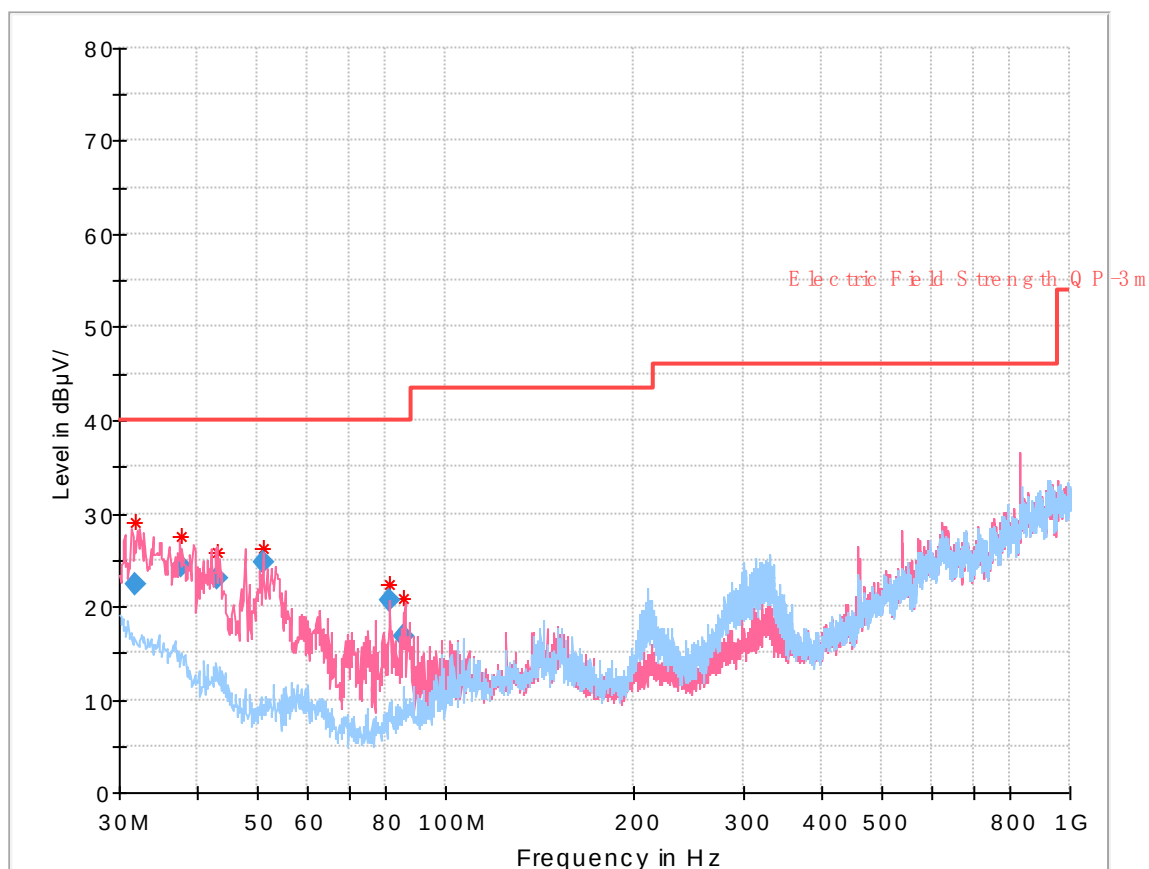For POE:**30 MHz~1 GHz (Wi-Fi High channel in 802.11n40 mode was the worst case):**

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
31.715750	22.39	110.0	V	41.0	-8.7	40.00	17.61
37.806500	24.37	101.0	V	151.0	-12.4	40.00	15.63
43.007125	23.03	103.0	V	53.0	-15.9	40.00	16.97
51.058000	24.72	112.0	V	205.0	-19.7	40.00	15.28
81.206875	20.73	103.0	V	337.0	-19.9	40.00	19.27
85.531500	16.83	112.0	V	313.0	-19.5	40.00	23.17

Adapter 1 power is the worst case for above 1GHz:

1 GHz-25 GHz (Wi-Fi):

802.11b Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2412 MHz)									
2389.46	27.59	PK	147	1.6	H	31.87	59.46	74	14.54
2389.46	13.46	Ave.	147	1.6	H	31.87	45.33	54	8.67
2483.70	27.43	PK	226	2.0	H	32.13	59.56	74	14.44
2483.70	13.32	Ave.	226	2.0	H	32.13	45.45	54	8.55
4824.00	46.21	PK	45	2.0	H	6.28	52.49	74	21.51
4824.00	34.89	Ave.	45	2.0	H	6.28	41.17	54	12.83
Middle Channel (2442MHz)									
4884.00	47.60	PK	218	2.4	H	6.76	54.36	74	19.64
4884.00	40.85	Ave.	218	2.4	H	6.76	47.61	54	6.39
High Channel (2472 MHz)									
2389.24	28.16	PK	199	1.5	H	31.87	60.03	74	13.97
2389.24	13.25	Ave.	199	1.5	H	31.87	45.12	54	8.88
2489.42	28.61	PK	159	2.1	H	32.13	60.74	74	13.26
2489.42	13.64	Ave.	159	2.1	H	32.13	45.77	54	8.23
4944.00	45.18	PK	91	2.2	H	6.76	51.94	74	22.06
4944.00	34.91	Ave.	91	2.2	H	6.76	41.67	54	12.33

802.11g Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2412 MHz)									
2389.94	31.5	PK	83	2.4	H	31.87	63.37	74	10.63
2389.94	14.08	Ave.	83	2.4	H	31.87	45.95	54	8.05
2488.98	28.20	PK	276	2.3	H	32.13	60.33	74	13.67
2488.98	13.57	Ave.	276	2.3	H	32.13	45.70	54	8.30
4824.00	45.97	PK	199	1.1	H	6.28	52.25	74	21.75
4824.00	30.54	Ave.	199	1.1	H	6.28	36.82	54	17.18
Middle Channel (2442MHz)									
4884.00	44.89	PK	190	1.8	H	6.76	51.65	74	22.35
4884.00	29.97	Ave.	190	1.8	H	6.76	36.73	54	17.27
High Channel (2472 MHz)									
2389.48	27.40	PK	235	1.5	H	31.87	59.27	74	14.73
2389.48	13.50	Ave.	235	1.5	H	31.87	45.37	54	8.63
2483.63	40.44	PK	26	2.4	H	32.13	72.57	74	1.43
2483.63	19.38	Ave.	26	2.4	H	32.13	51.51	54	2.49
4944.00	43.88	PK	215	2.0	H	6.76	50.64	74	23.36
4944.00	28.78	Ave.	215	2.0	H	6.76	35.54	54	18.46

802.11n-HT20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2412 MHz)									
2389.83	32.40	PK	28	2.0	H	31.87	64.27	74	9.73
2389.83	16.89	Ave.	28	2.0	H	31.87	48.76	54	5.24
2484.96	28.04	PK	160	1.9	H	32.13	60.17	74	13.83
2484.96	13.57	Ave.	160	1.9	H	32.13	45.70	54	8.30
4824.00	43.31	PK	128	1.6	H	6.28	49.59	74	24.41
4824.00	27.95	Ave.	128	1.6	H	6.28	34.23	54	19.77
Middle Channel (2442MHz)									
4884.00	44.75	PK	333	1.0	H	6.76	51.51	74	22.49
4884.00	28.52	Ave.	333	1.0	H	6.76	35.28	54	18.72
High Channel (2472 MHz)									
2381.37	27.50	PK	156	1.7	H	31.87	59.37	74	14.63
2381.37	13.49	Ave.	156	1.7	H	31.87	45.36	54	8.64
2483.56	38.95	PK	342	1.1	H	32.13	71.08	74	2.92
2483.56	19.71	Ave.	342	1.1	H	32.13	51.84	54	2.16
4944.00	44.85	PK	359	1.2	H	6.76	51.61	74	22.39
4944.00	29.06	Ave.	359	1.2	H	6.76	35.82	54	18.18

802.11n-HT40 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2422 MHz)									
2389.36	35.58	PK	41	2.1	H	31.87	67.45	74	6.55
2389.36	17.71	Ave.	41	2.1	H	31.87	49.58	54	4.42
2483.94	28.43	PK	143	1.4	H	32.13	60.56	74	13.44
2483.94	13.62	Ave.	143	1.4	H	32.13	45.75	54	8.25
4844.00	43.51	PK	38	2.0	H	6.28	49.79	74	24.21
4844.00	28.88	Ave.	38	2.0	H	6.28	35.16	54	18.84
Middle Channel (2442MHz)									
4884.00	43.58	PK	201	1.6	H	6.76	50.34	74	23.66
4884.00	28.69	Ave.	201	1.6	H	6.76	35.45	54	18.55
High Channel (2462 MHz)									
2388.97	28.76	PK	238	2.5	H	31.87	60.63	74	13.37
2388.97	13.54	Ave.	238	2.5	H	31.87	45.41	54	8.59
2483.94	36.06	PK	88	2.5	H	32.13	68.19	74	5.81
2483.94	18.54	Ave.	88	2.5	H	32.13	50.67	54	3.33
4924.00	43.62	PK	304	2.2	H	6.76	50.38	74	23.62
4924.00	28.79	Ave.	304	2.2	H	6.76	35.55	54	18.45

Co-location Transmitting (802.11b mode 2442MHz + 802.11a mode 5755MHz+LTE Band 5 mode 836.5MHz)

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Test Distance (m)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)					
935.62	34.83	QP	310	1.5	H	4.8	39.63	46	6.37	3
935.62	33.27	QP	185	1.8	V	4.8	38.07	46	7.93	3
1673.00	55.69	PK	218	1.7	H	-2.06	53.63	74	20.37	3
1673.00	43.82	Ave.	218	1.7	H	-2.06	41.76	54	12.24	3
4884.00	46.53	PK	154	1.6	V	6.76	53.29	74	20.71	3
4884.00	35.16	Ave.	154	1.6	V	6.76	41.92	54	12.08	3
11510.00	41.62	PK	359	2.0	V	17.47	59.09	83.5	24.41	1
11510.00	27.54	Ave.	359	2.0	V	17.47	45.01	63.5	18.49	1

BLE:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2389.73	28.42	PK	14	1.2	H	31.87	60.29	74	13.71
2389.73	13.57	Ave.	14	1.2	H	31.87	45.44	54	8.56
2483.70	27.86	PK	268	1.1	H	32.13	59.99	74	14.01
2483.70	13.49	Ave.	268	1.1	H	32.13	45.62	54	8.38
4804.00	45.08	PK	238	2.2	H	6.28	51.36	74	22.64
4804.00	35.70	Ave.	238	2.2	H	6.28	41.98	54	12.02
Middle Channel (2440MHz)									
4880.00	46.51	PK	325	2.0	H	6.76	53.27	74	20.73
4880.00	35.65	Ave.	325	2.0	H	6.76	42.41	54	11.59
High Channel (2480 MHz)									
2389.46	27.62	PK	136	1.1	H	31.87	59.49	74	14.51
2389.46	13.46	Ave.	136	1.1	H	31.87	45.33	54	8.67
2486.45	27.49	PK	208	1.2	H	32.13	59.62	74	14.38
2486.45	13.59	Ave.	208	1.2	H	32.13	45.72	54	8.28
4960.00	45.45	PK	119	2.0	H	6.80	52.25	74	21.75
4960.00	34.21	Ave.	119	2.0	H	6.80	41.01	54	12.99

Note:


Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading


Margin = Limit - Corrected. Amplitude

The other spurious emission which is 20dB to the limit was not recorded.

And for the harmonic test, it is performed with the 2400-2483.5MHz band filter.

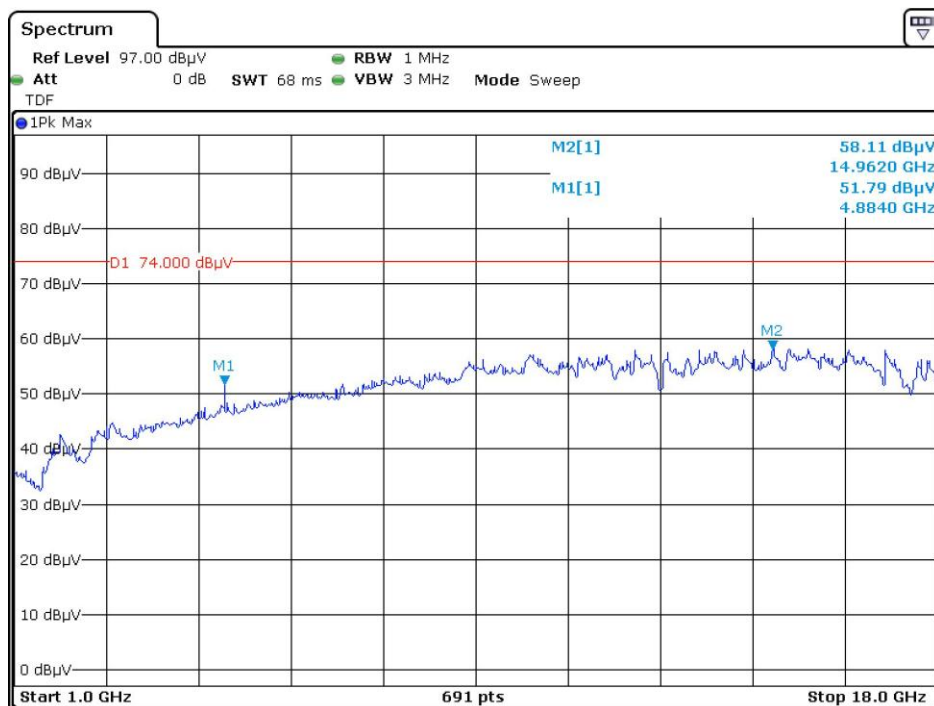
**Pre-scan with 802.11b Mode, Middle channel
Horizontal**

Date: 13.MAY.2020 16:18:18

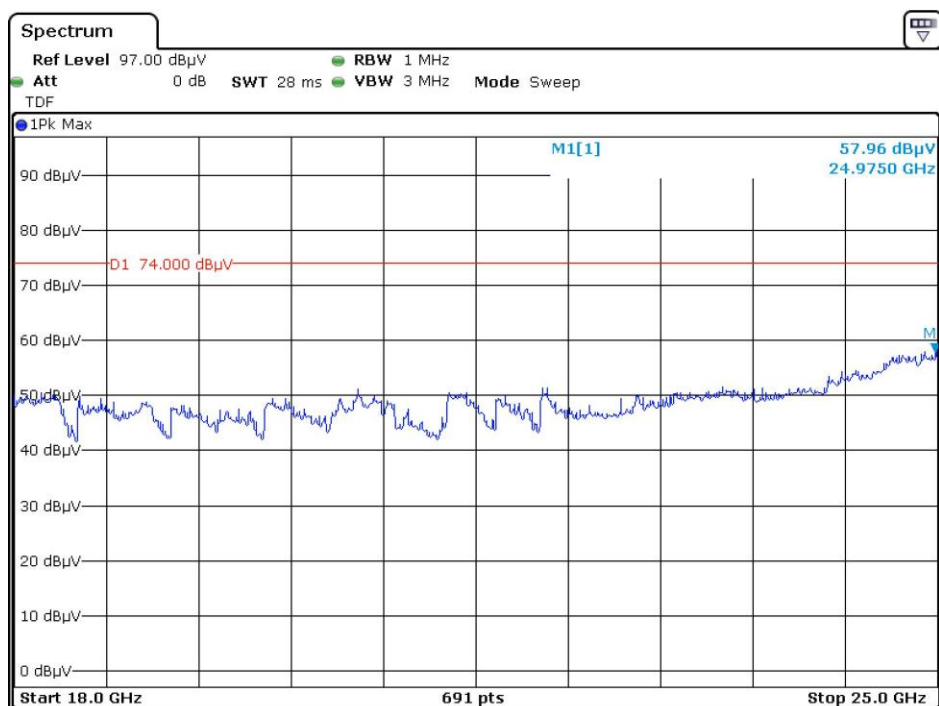


Date: 13.MAY.2020 17:03:43

Vertical


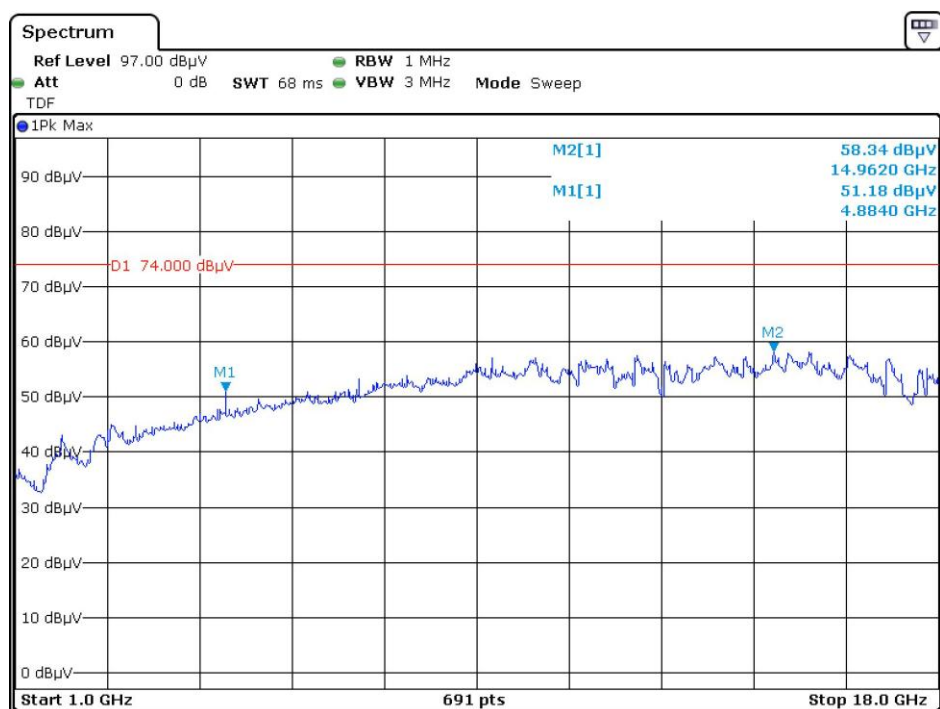


Date: 13.MAY.2020 16:24:06

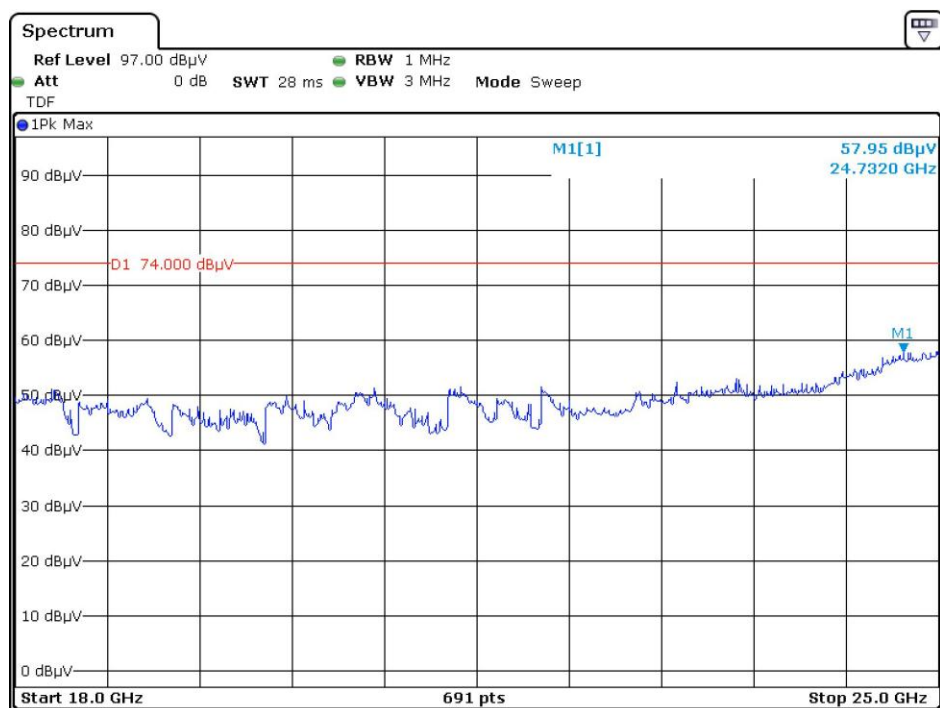


Date: 13.MAY.2020 16:57:44


Pre-scan for Average Horizontal

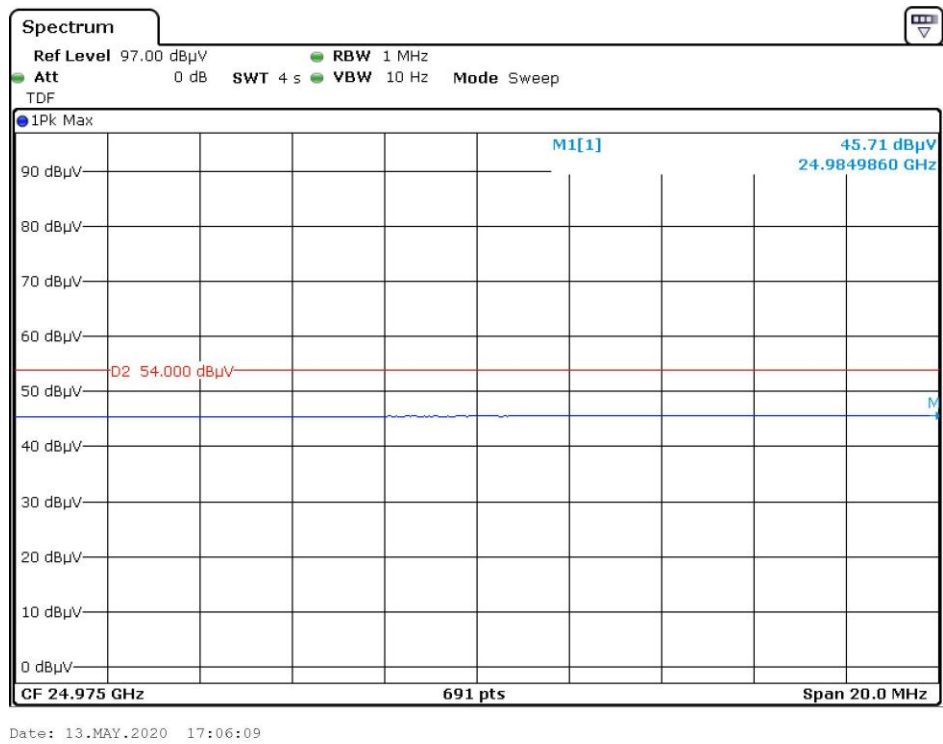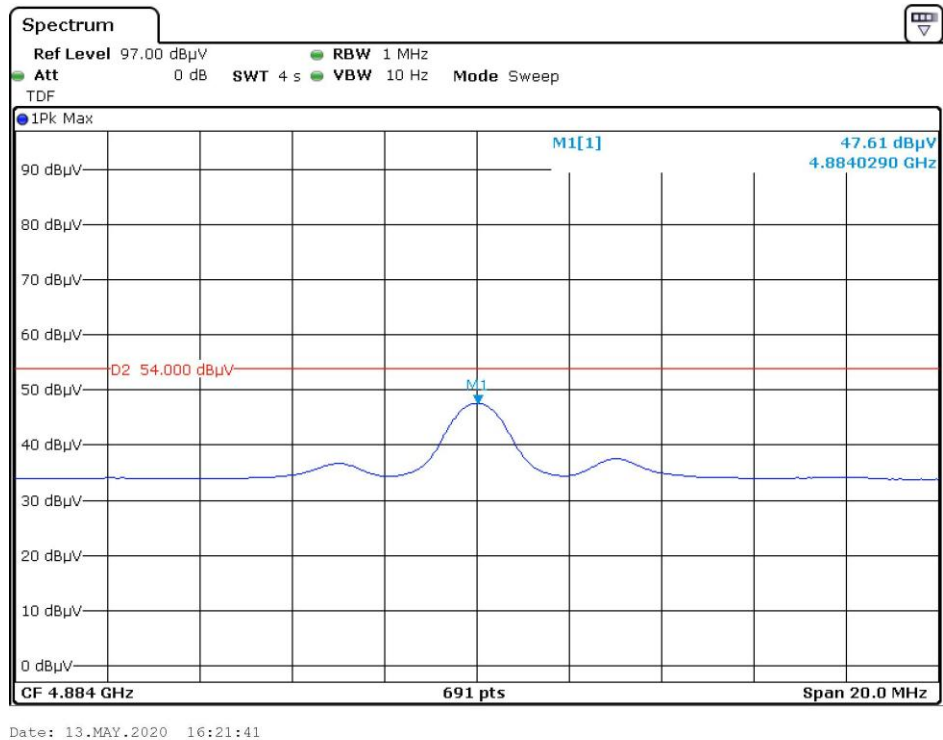

Vertical

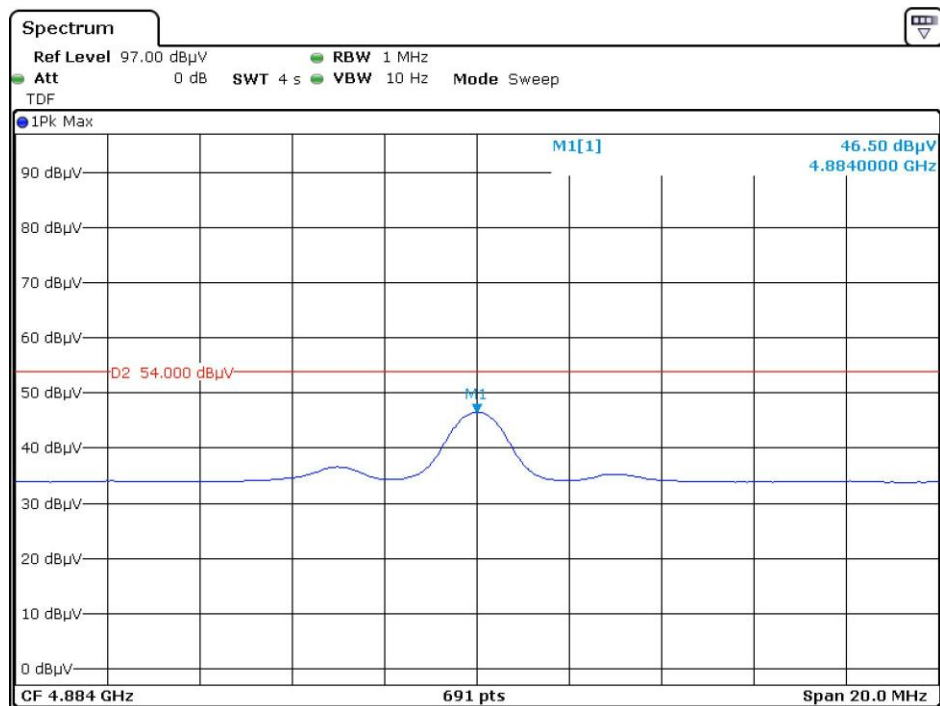

Date: 13.MAY.2020 16:27:48

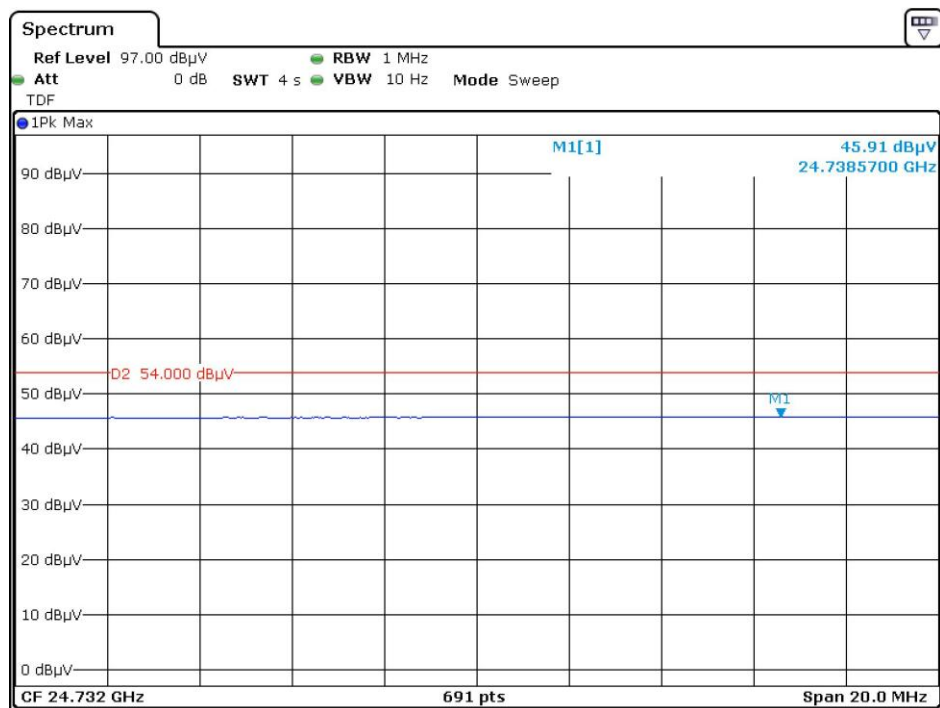

Date: 13.MAY.2020 17:00:15


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Cary Guan from 2020-05-18 to 2020-06-13.

Test Result: Pass.

Please refer to the Appendix 2.4G Wi-Fi & Appendix BLE.


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Cary Guan on 2020-05-18 and 2020-05-19.

Test Result: Pass.

Please refer to the Appendix 2.4G Wi-Fi & Appendix BLE.


FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Cary Guan on 2020-05-18 and 2020-05-19.

EUT operation mode: Transmitting

Test Result: Compliance

Please refer to the Appendix 2.4G Wi-Fi & Appendix BLE.


FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Cary Guan on 2020-05-18 and 2020-05-19.

EUT operation mode: Transmitting

Test Result: Compliance

Please refer to the Appendix 2.4G Wi-Fi & Appendix BLE.

******* END OF REPORT *******


Appendix A - 2.4 GHz Wi-Fi

AppendixA: DTS Bandwidth**Test Result**


TestMode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
11bMIMO	Ant1	2412	8.120	0.5	PASS
	Ant2	2412	7.160	0.5	PASS
	Ant1	2442	7.160	0.5	PASS
	Ant2	2442	7.640	0.5	PASS
	Ant1	2472	8.120	0.5	PASS
	Ant2	2472	7.160	0.5	PASS
11gMIMO	Ant1	2412	16.400	0.5	PASS
	Ant2	2412	16.400	0.5	PASS
	Ant1	2442	16.400	0.5	PASS
	Ant2	2442	16.400	0.5	PASS
	Ant1	2472	16.440	0.5	PASS
	Ant2	2472	16.440	0.5	PASS
11N20MIMO	Ant1	2412	16.400	0.5	PASS
	Ant2	2412	16.400	0.5	PASS
	Ant1	2442	16.400	0.5	PASS
	Ant2	2442	16.400	0.5	PASS
	Ant1	2472	16.440	0.5	PASS
	Ant2	2472	16.440	0.5	PASS
11N40MIMO	Ant1	2422	35.280	0.5	PASS
	Ant2	2422	35.280	0.5	PASS
	Ant1	2442	35.280	0.5	PASS
	Ant2	2442	35.440	0.5	PASS
	Ant1	2462	35.280	0.5	PASS
	Ant2	2462	35.280	0.5	PASS

Test Graphs


11bMIMO_Ant1_2412

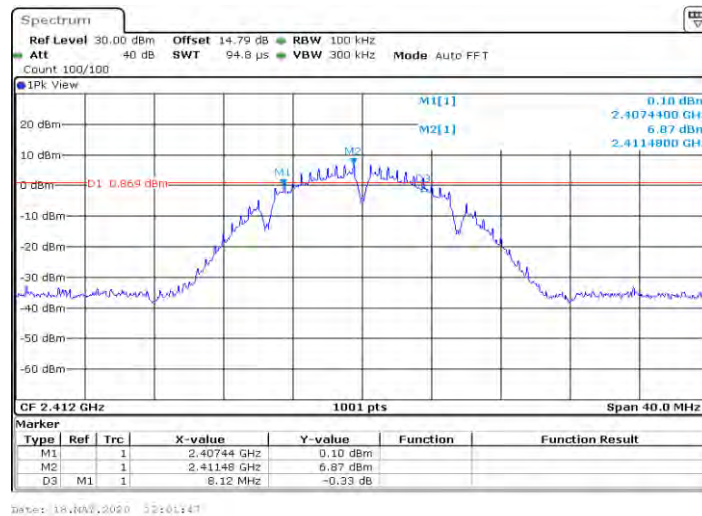


11bMIMO_Ant2_2412

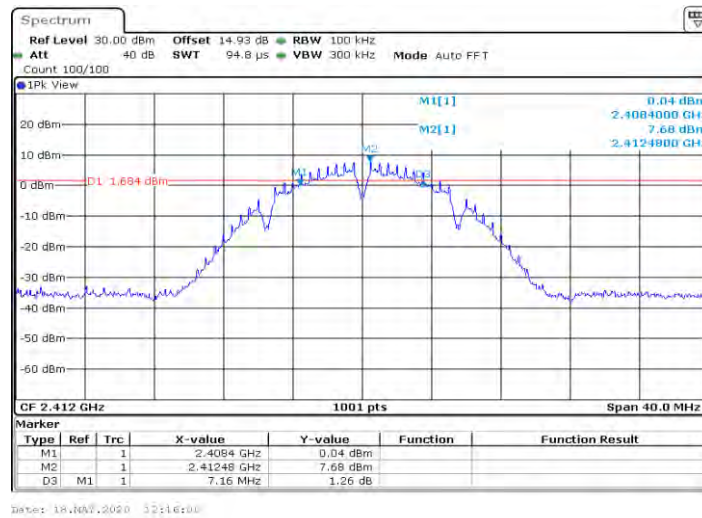


11bMIMO_Ant1_2442

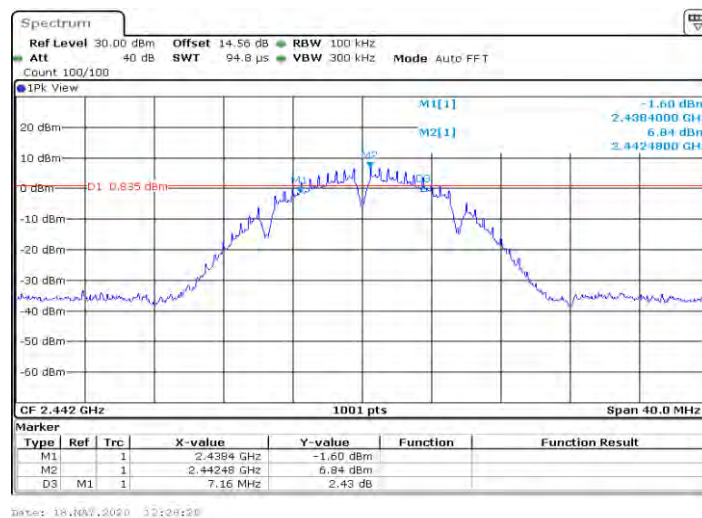


11bMIMO_Ant2_2442

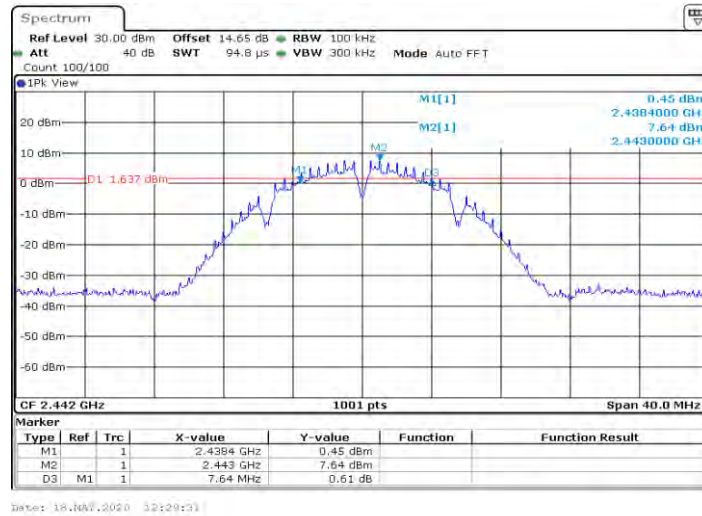


11bMIMO_Ant1_2472

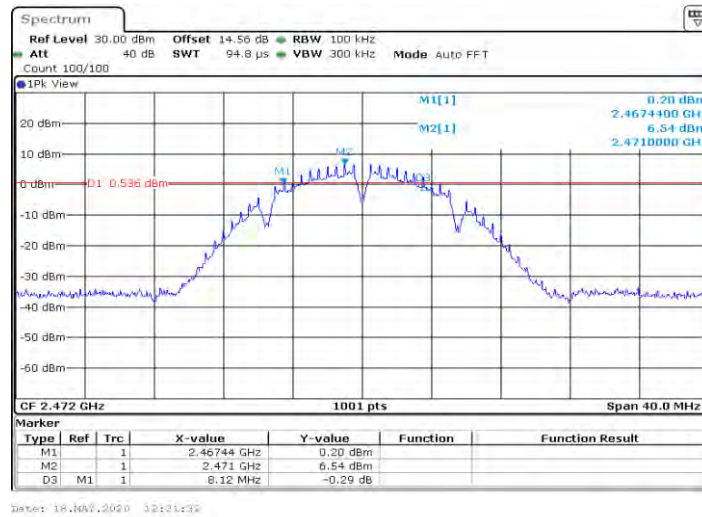


11bMIMO_Ant2_2472

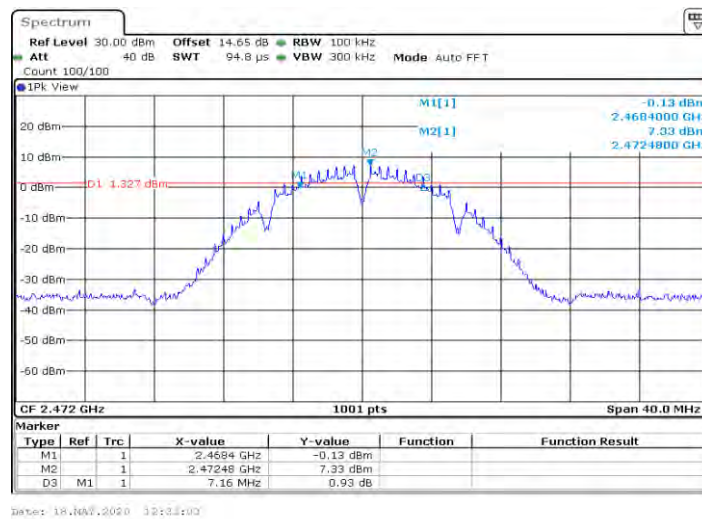


11gMIMO_Ant1_2412

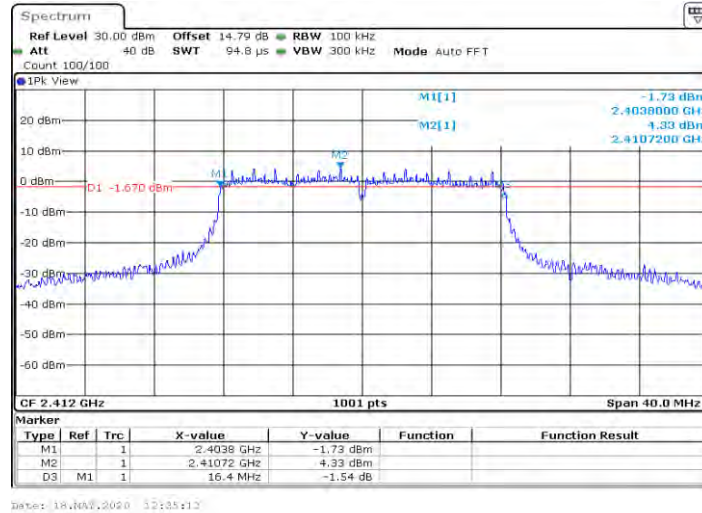


11gMIMO_Ant2_2412

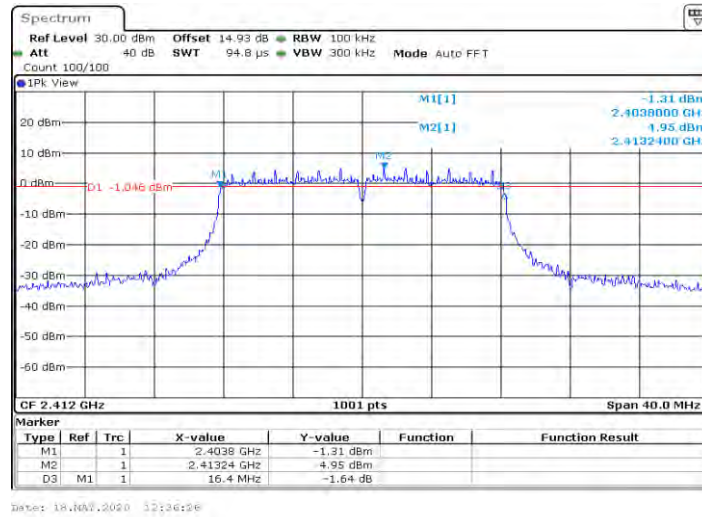


11gMIMO_Ant1_2442

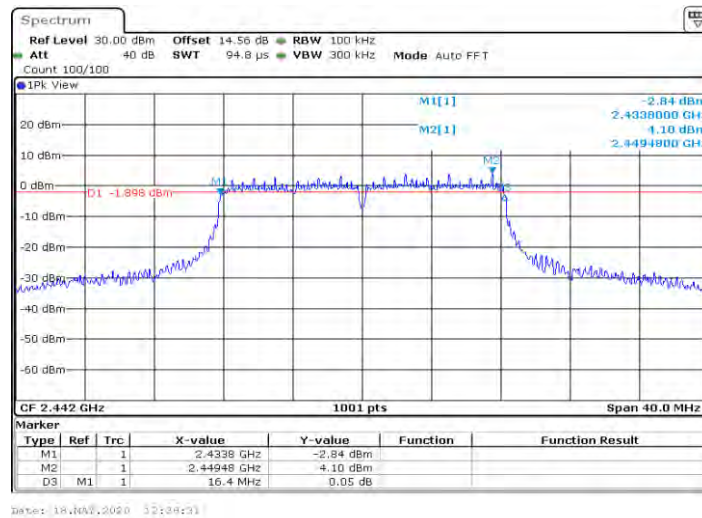


11gMIMO_Ant2_2442

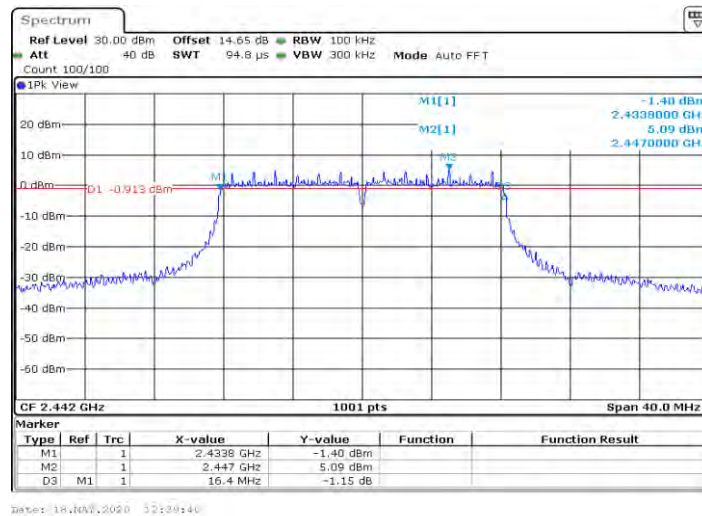


11gMIMO_Ant1_2472

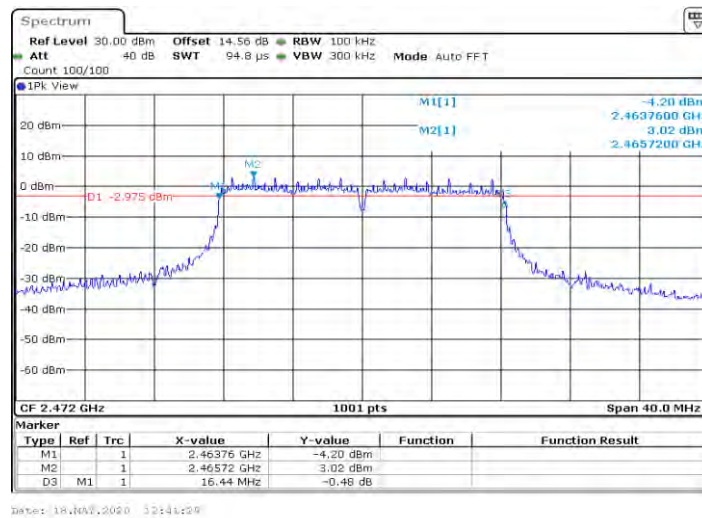


11gMIMO_Ant2_2472

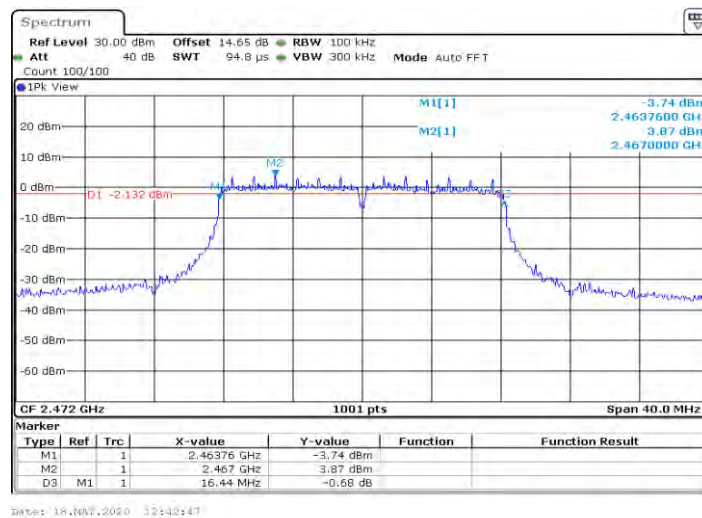


11N20MIMO_Ant1_2412

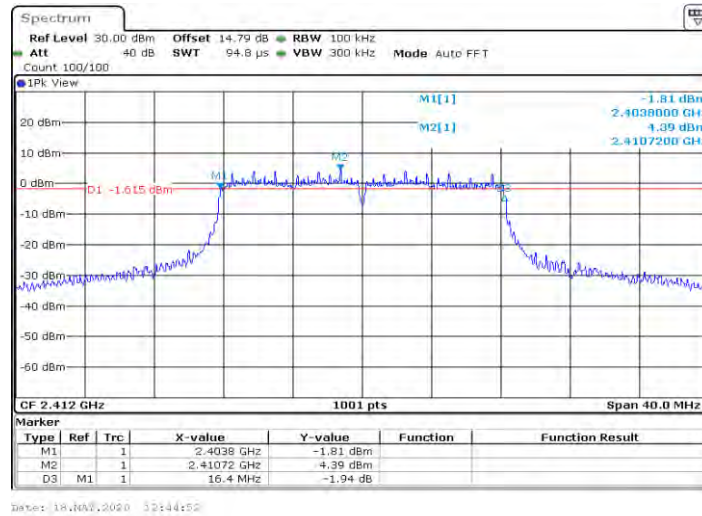


11N20MIMO_Ant2_2412

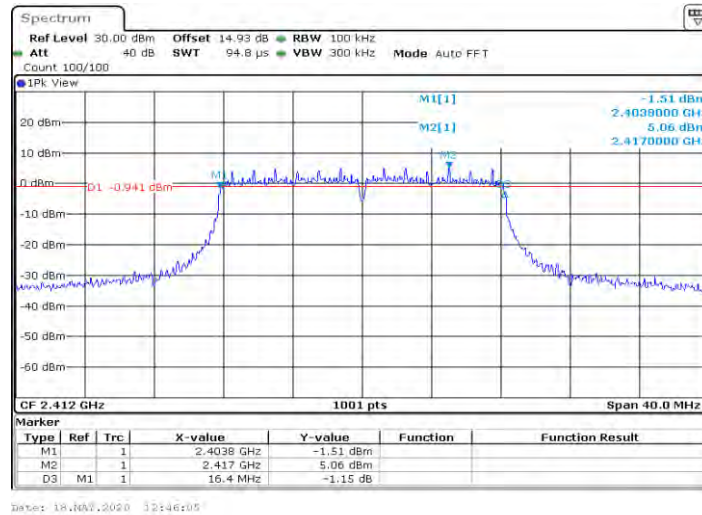


11N20MIMO_Ant1_2442

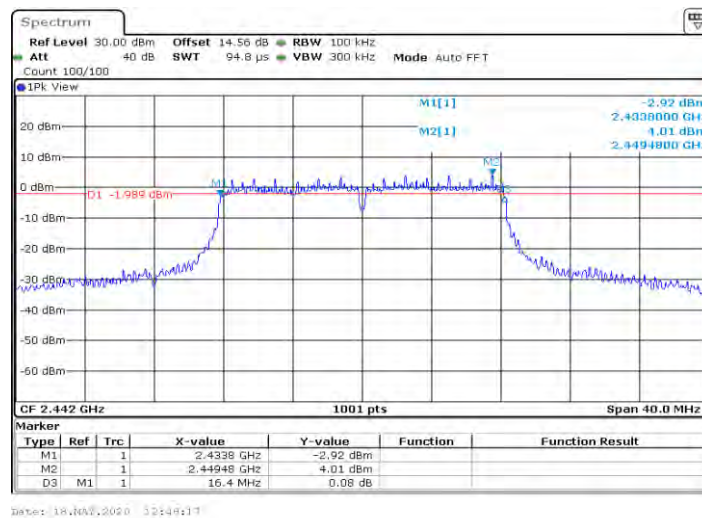


11N20MIMO_Ant2_2442

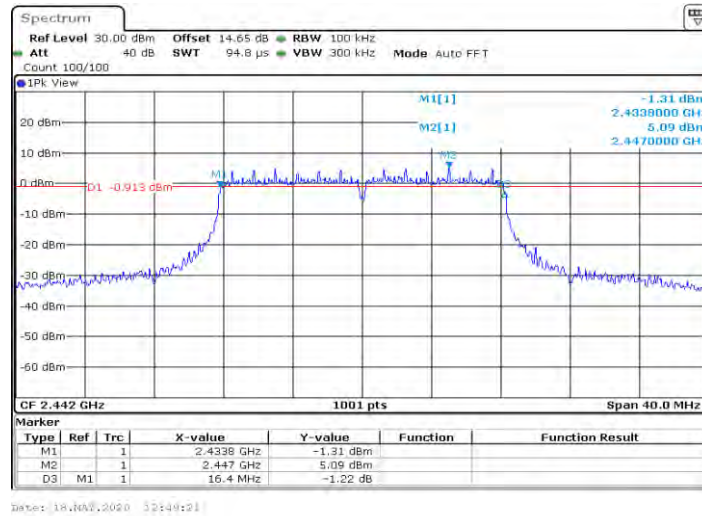


11N20MIMO_Ant1_2472

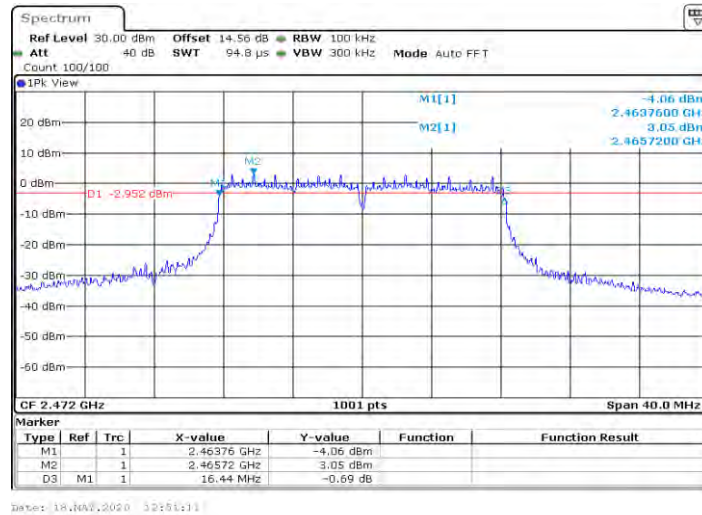


11N20MIMO_Ant2_2472

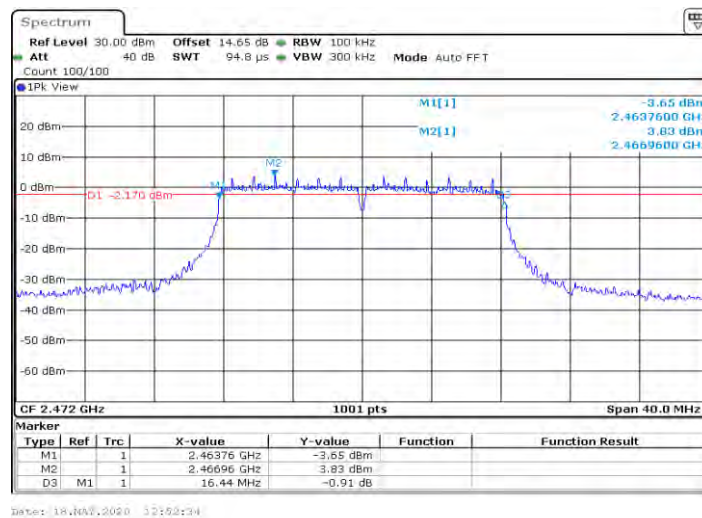


11N40MIMO_Ant1_2422

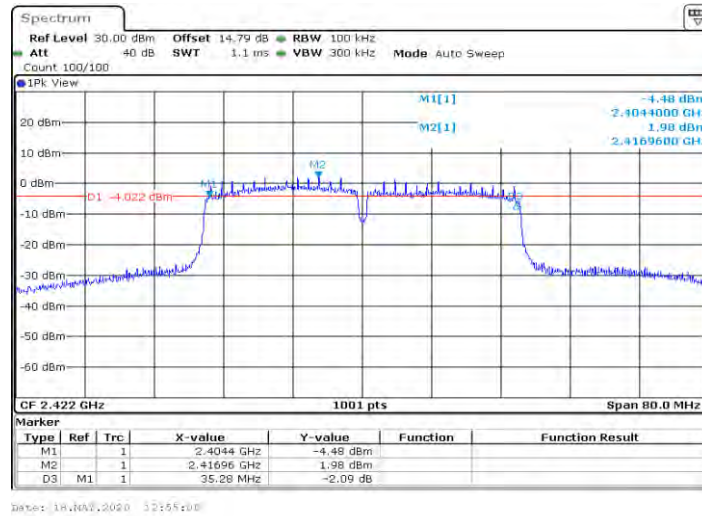


11N40MIMO_Ant2_2422

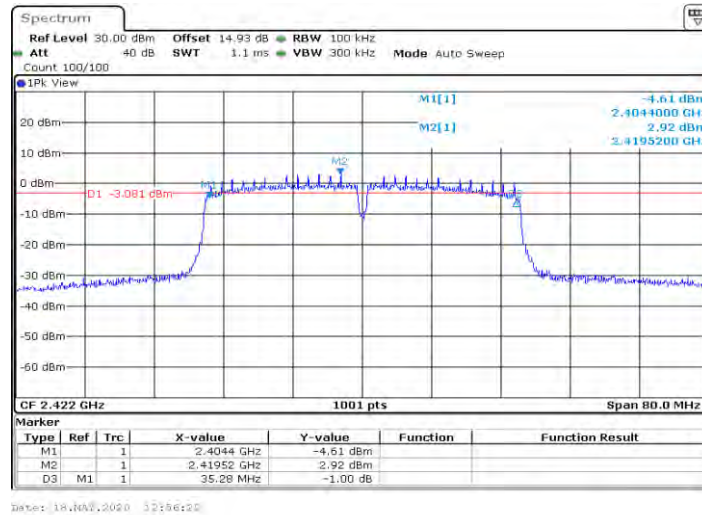


11N40MIMO_Ant1_2442

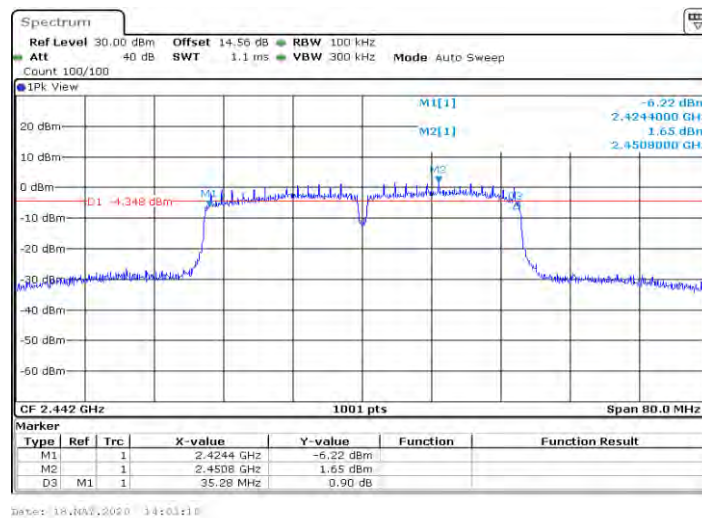


11N40MIMO_Ant2_2442

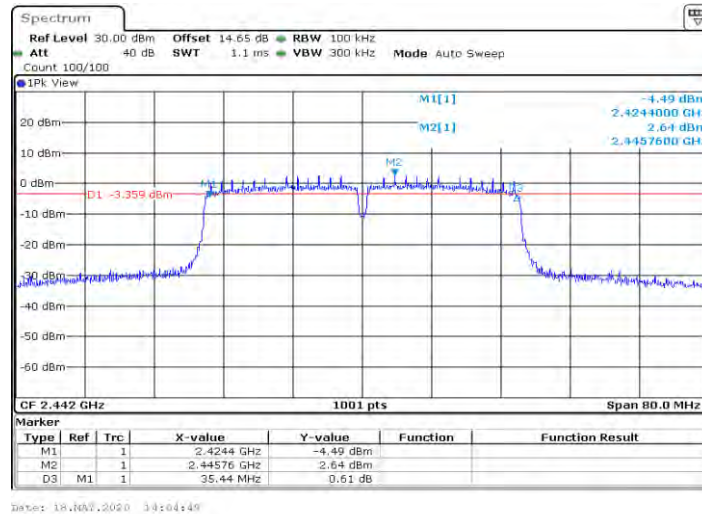

11N40MIMO_Ant1_2462

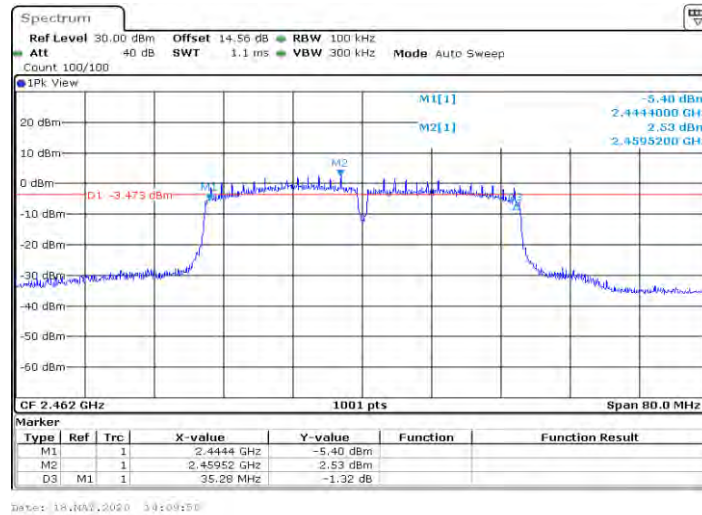

11N40MIMO_Ant2_2462

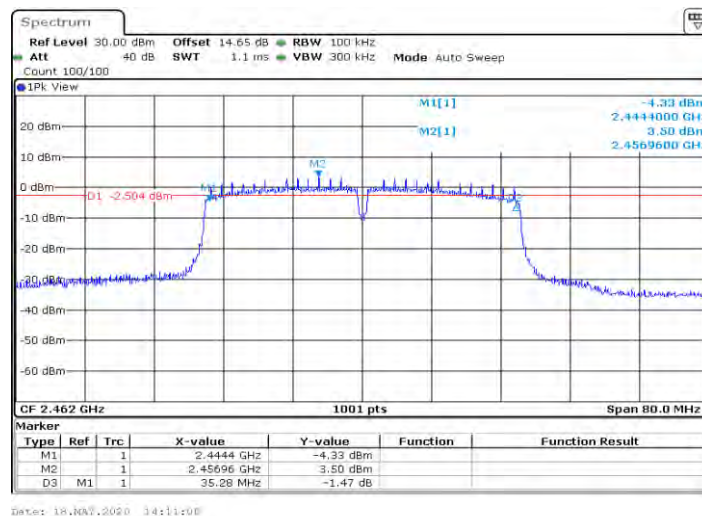

AppendixC: Maximum conducted Average output power

TestMode	Antenna	Channel	Result [dBm]	Limit_Non BF [dBm]	Limit_BF [dBm]	Verdict
11bMIMO	Ant1	2412	15.03	<=30	<=29.07	PASS
	Ant2	2412	17.47			PASS
	total	2412	19.4			PASS
	Ant1	2442	15.08			PASS
	Ant2	2442	18.13			PASS
	total	2442	19.9			PASS
	Ant1	2472	15.16			PASS
	Ant2	2472	17.44			PASS
	total	2472	19.5			PASS
11gMIMO	Ant1	2412	15.31			PASS
	Ant2	2412	18.14			PASS
	total	2412	20.0			PASS
	Ant1	2442	15.30			PASS
	Ant2	2442	18.39			PASS
	total	2442	20.1			PASS
	Ant1	2472	14.54			PASS
	Ant2	2472	17.19			PASS
	total	2472	19.1			PASS
11N20MIMO	Ant1	2412	15.33			PASS
	Ant2	2412	18.12			PASS
	total	2412	20.0			PASS
	Ant1	2442	15.33			PASS
	Ant2	2442	18.41			PASS
	total	2442	20.1			PASS
	Ant1	2472	14.48			PASS
	Ant2	2472	17.23			PASS
	total	2472	19.1			PASS
11N40MIMO	Ant1	2422	15.56			PASS
	Ant2	2422	18.37			PASS
	total	2422	20.2			PASS
	Ant1	2442	15.58			PASS
	Ant2	2442	18.74			PASS
	total	2442	20.5			PASS
	Ant1	2462	15.73			PASS
	Ant2	2462	18.91			PASS
	total	2462	20.6			PASS

1. Directional gain = array gain+Ant gain= $10 \cdot \lg(N_{ant}/N_{ss}) + 3.92\text{dBi} = 6.93\text{dBi} > 6\text{dBi}$,

So $Limit_{BF} = 30 - (6.93 - 6) = 29.07\text{dBm}$

2. Non-Beam Forming mode shares the same power with the Beam Forming mode.

AppendixD: Maximum power spectral density

Test Result


TestMode	Antenna	Channel	Result [dBm/3kHz]	Limit_Non BF [dBm/3kHz]	Limit_BF [dBm/3kHz]	Verdict
11bMIMO	Ant1	2412	-18.65	<=8	<=7.07	PASS
	Ant2	2412	-17.78			PASS
	total	2412	-15.18			PASS
	Ant1	2442	-18.85			PASS
	Ant2	2442	-17.58			PASS
	total	2442	-15.16			PASS
	Ant1	2472	-18.82			PASS
	Ant2	2472	-18.49			PASS
	total	2472	-15.64			PASS
11gMIMO	Ant1	2412	-19.44			PASS
	Ant2	2412	-19.38			PASS
	total	2412	-16.40			PASS
	Ant1	2442	-20.37			PASS
	Ant2	2442	-19.39			PASS
	total	2442	-16.84			PASS
	Ant1	2472	-20.94			PASS
	Ant2	2472	-20.51			PASS
	total	2472	-17.71			PASS
11N20MIMO	Ant1	2412	-19.49			PASS
	Ant2	2412	-19.39			PASS
	total	2412	-16.43			PASS
	Ant1	2442	-20.44			PASS
	Ant2	2442	-19.4			PASS
	total	2442	-16.88			PASS
	Ant1	2472	-20.96			PASS
	Ant2	2472	-20.49			PASS
	total	2472	-17.71			PASS
11N40MIMO	Ant1	2422	-22.38			PASS
	Ant2	2422	-21.97			PASS
	total	2422	-19.16			PASS
	Ant1	2442	-23.17			PASS
	Ant2	2442	-22.43			PASS
	total	2442	-19.77			PASS
	Ant1	2462	-22.00			PASS
	Ant2	2462	-21.53			PASS
	total	2462	-18.75			PASS

1. Directional gain = array gain+Ant gain= $10*\log(Nant/Nss)+3.92dBi=6.93dBi>6dBi$,
So $Limit_{BF}=8-(6.93-6)dBm/MHz=7.07dBm/MHz$


*2. Non-Beam Forming mode shares the same power with the Beam Forming mode.

Test Graphs


11bMIMO_Ant1_2412

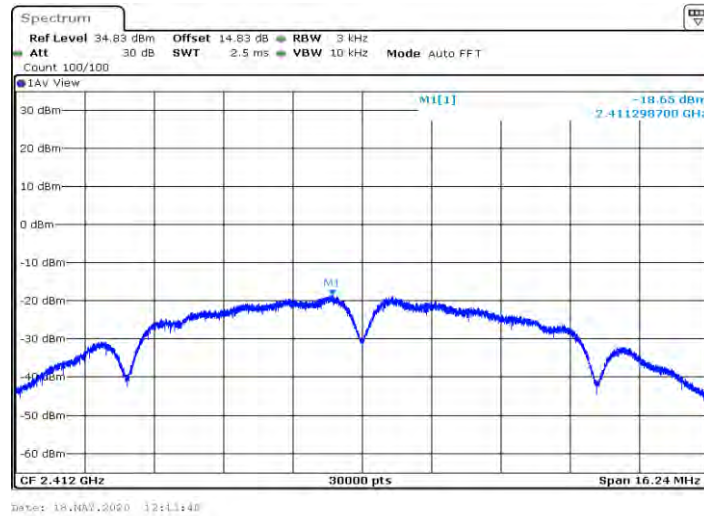


11bMIMO_Ant2_2412

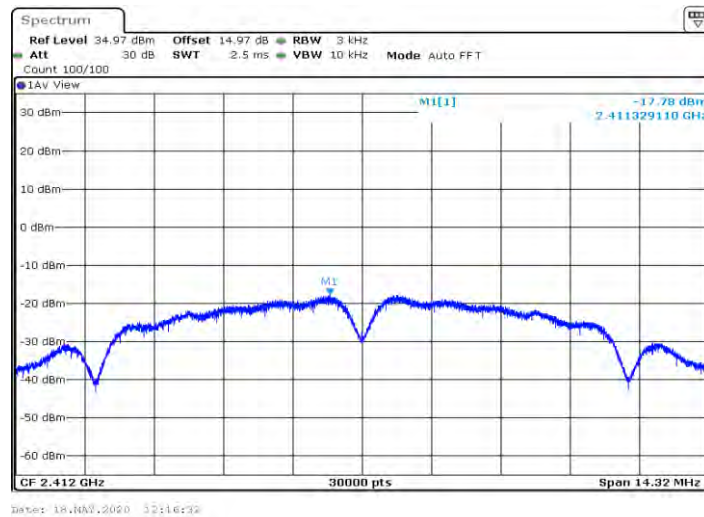


11bMIMO_Ant1_2442

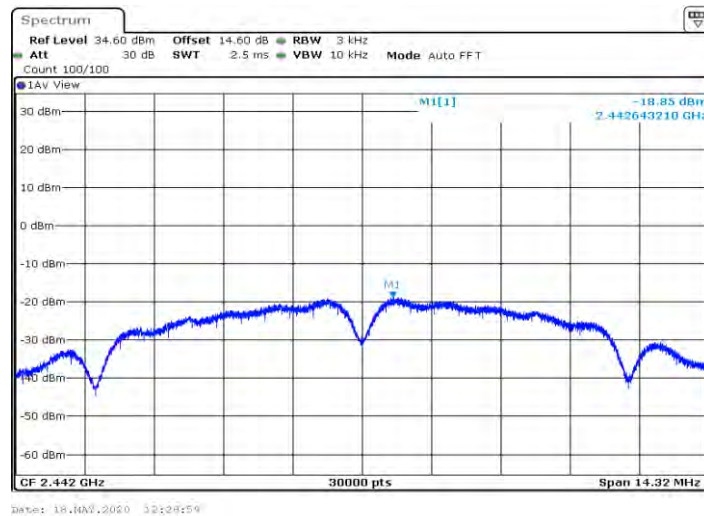


11bMIMO_Ant2_2442

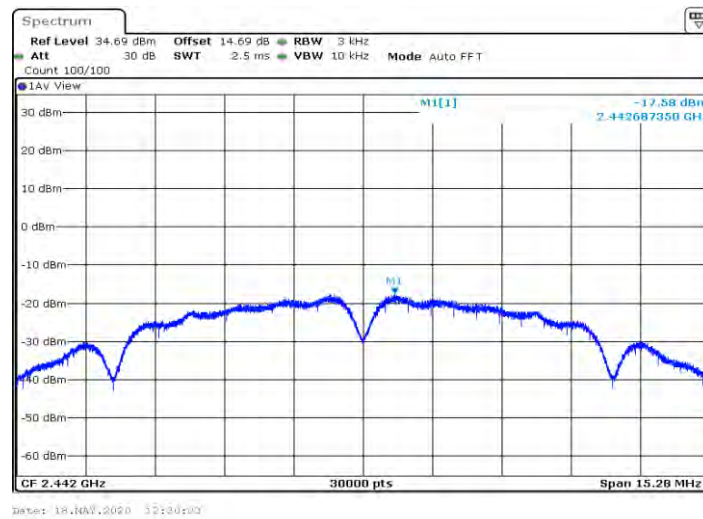


11bMIMO_Ant1_2472

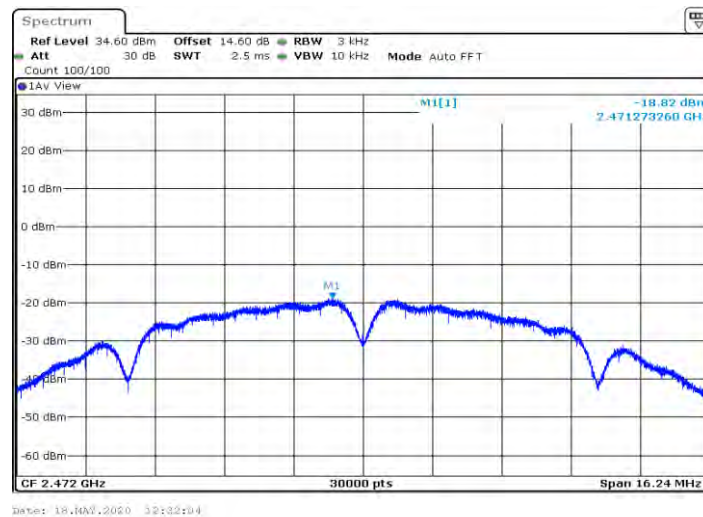


11bMIMO_Ant2_2472

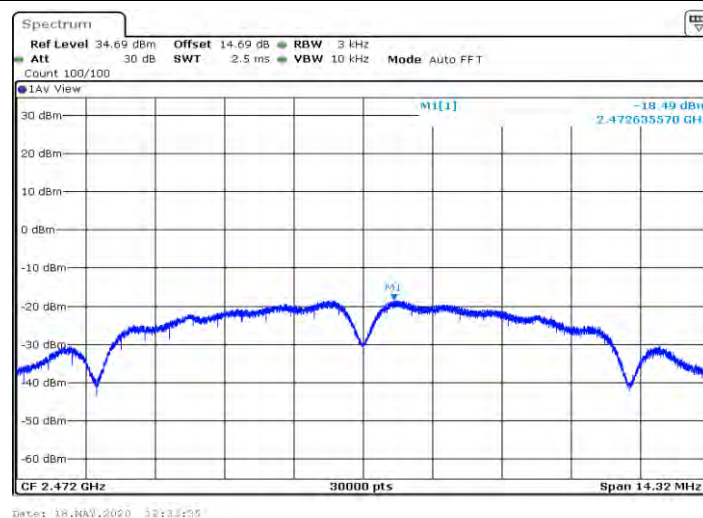


11gMIMO_Ant1_2412

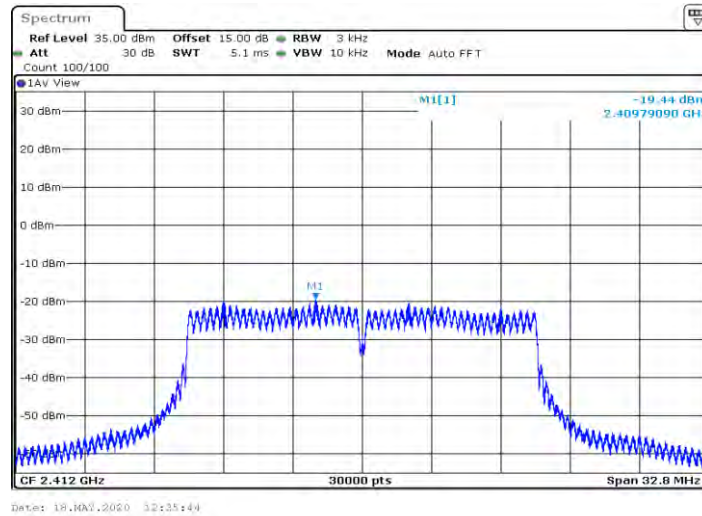


11gMIMO_Ant2_2412

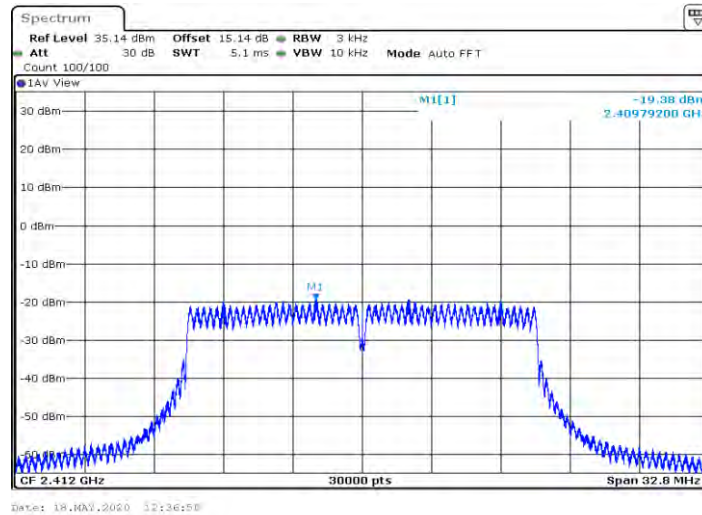


11gMIMO_Ant1_2442

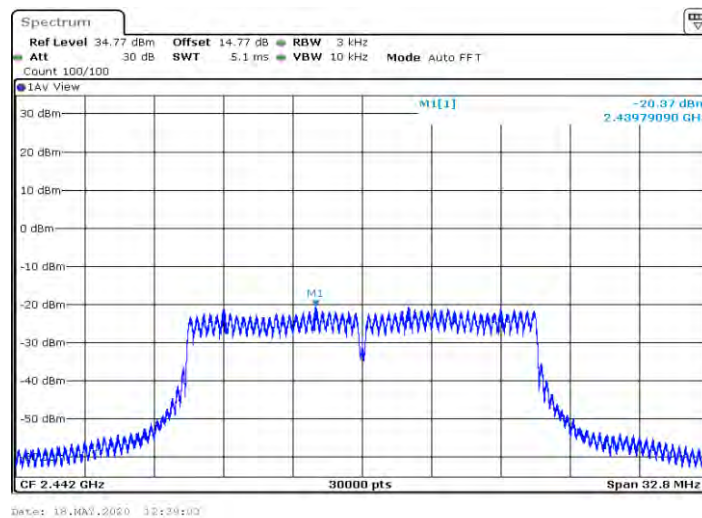


11gMIMO_Ant2_2442

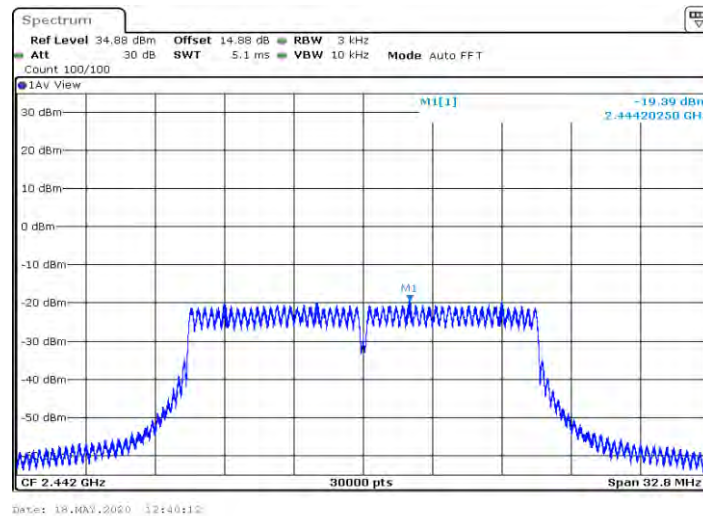


11gMIMO_Ant1_2472

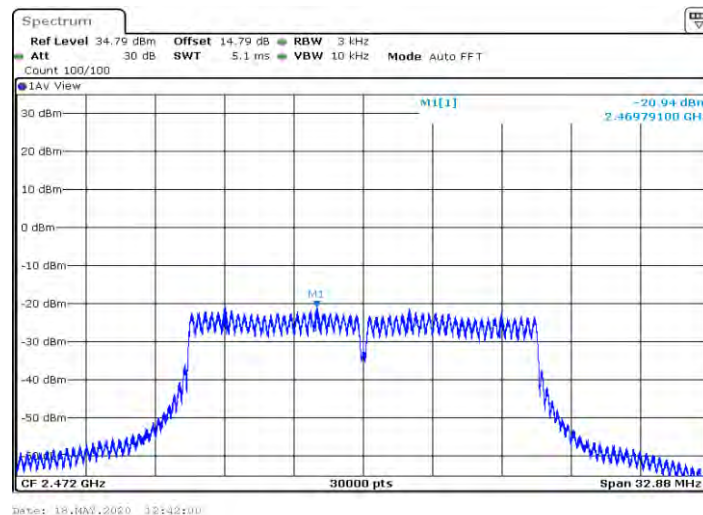


11gMIMO_Ant2_2472

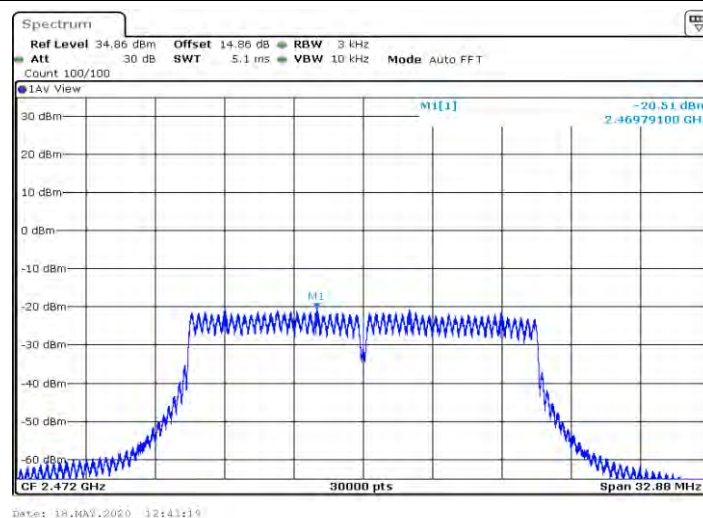


11N20MIMO_Ant1_2412

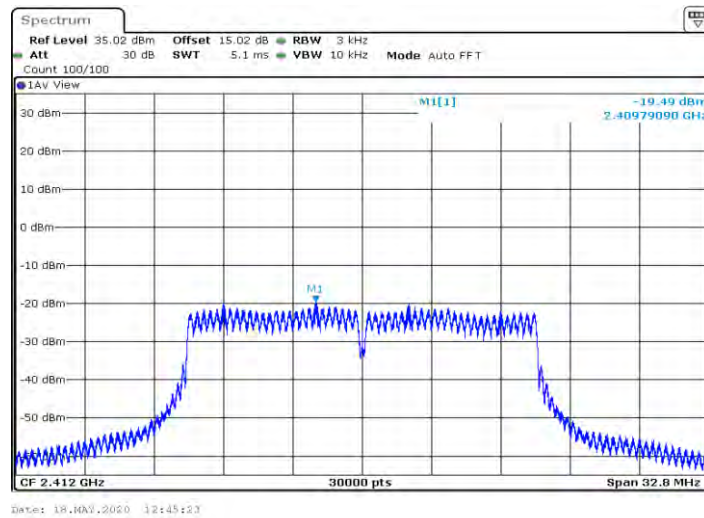


11N20MIMO_Ant2_2412

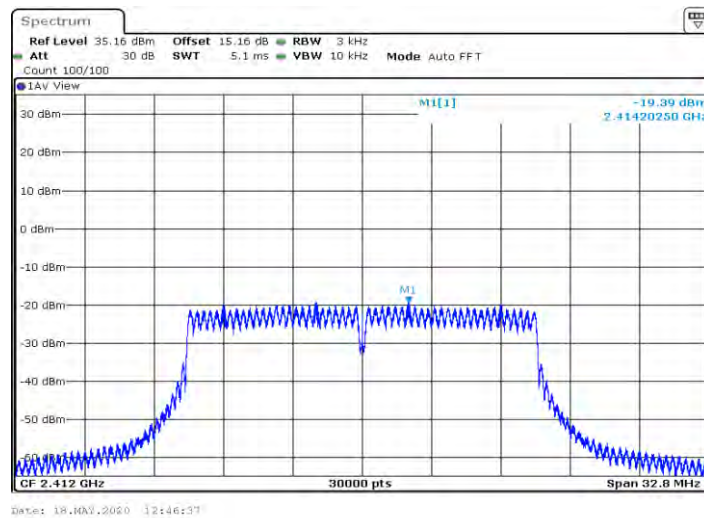


11N20MIMO_Ant1_2442

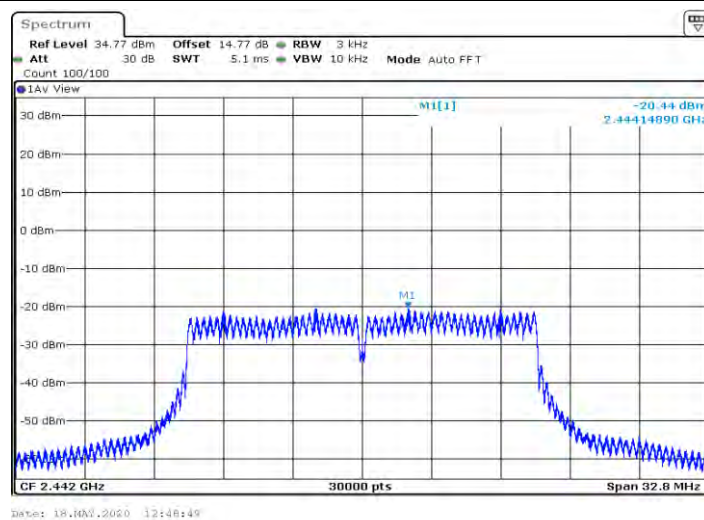


11N20MIMO_Ant2_2442

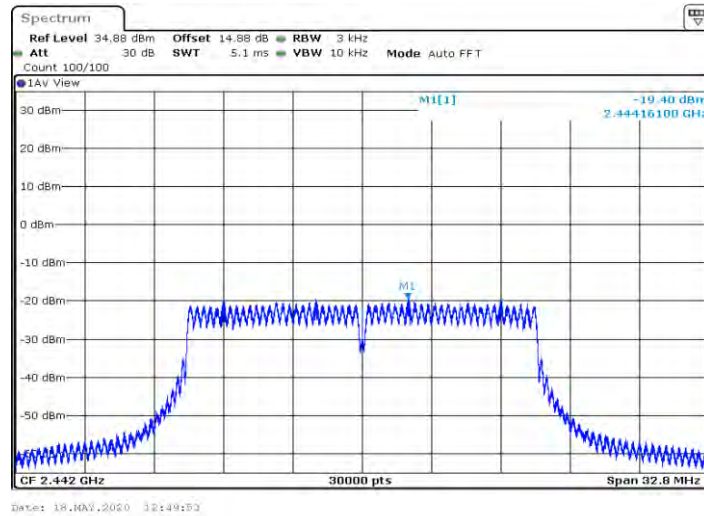


11N20MIMO_Ant1_2472

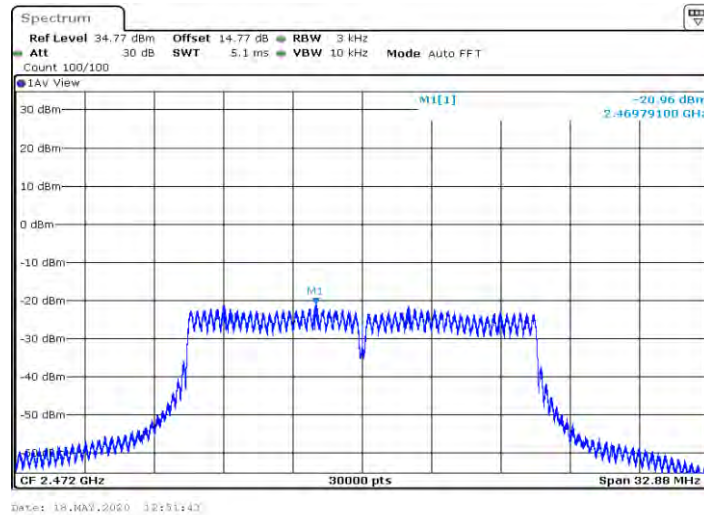


11N20MIMO_Ant2_2472

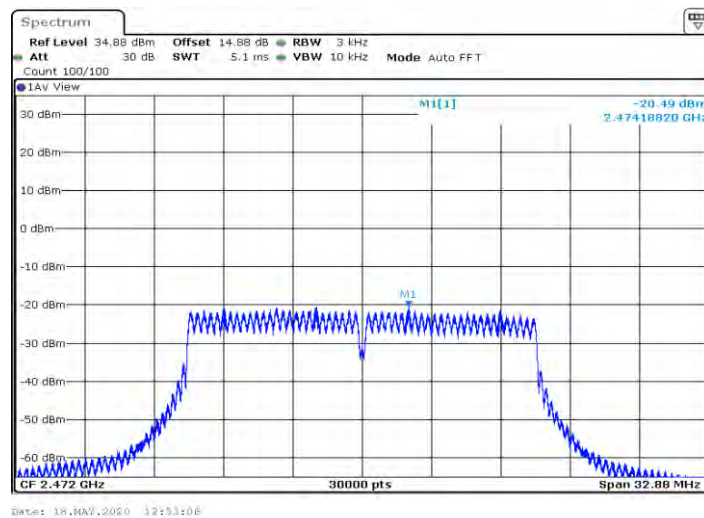


11N40MIMO_Ant1_2422

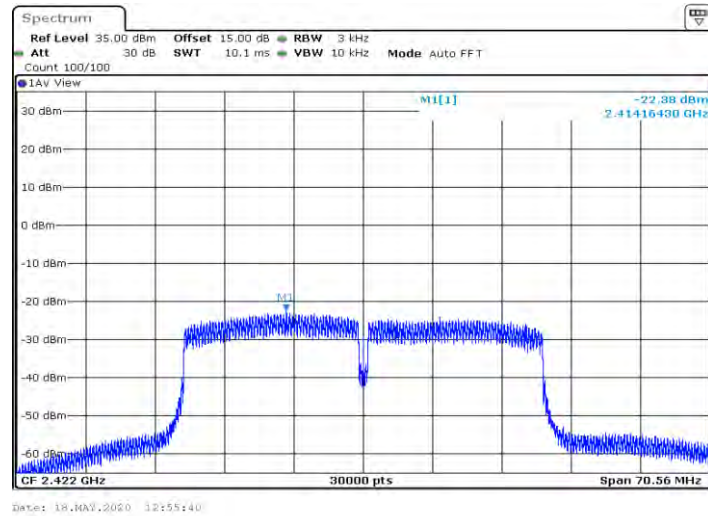


11N40MIMO_Ant2_2422

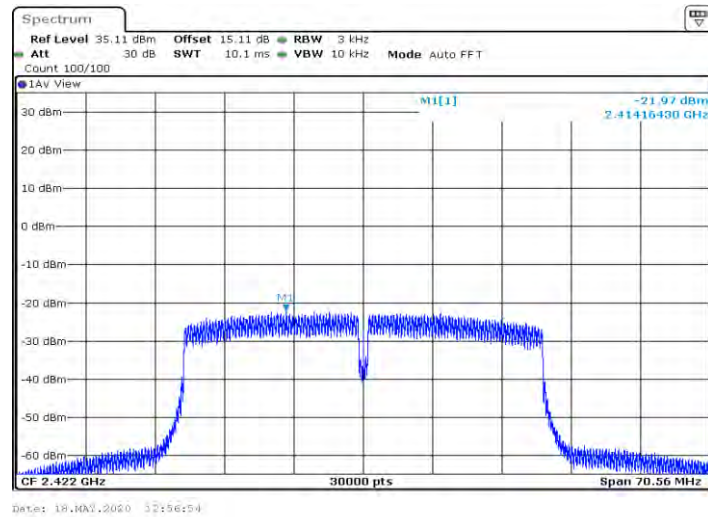


11N40MIMO_Ant1_2442

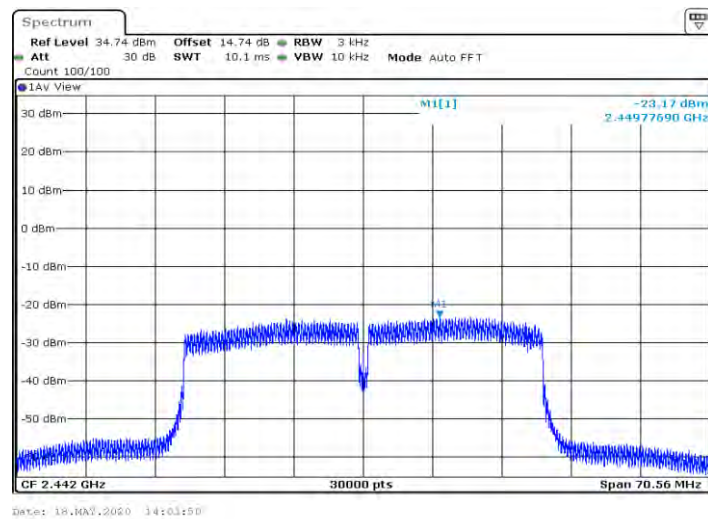


11N40MIMO_Ant2_2442

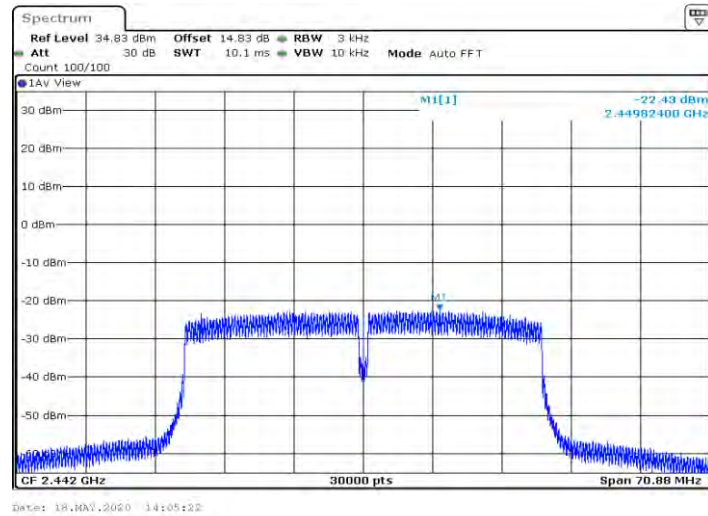

11N40MIMO_Ant1_2462

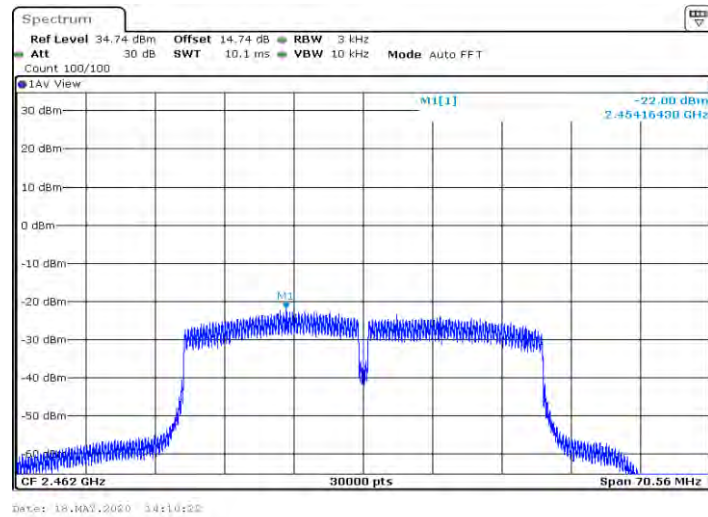


11N40MIMO_Ant2_2462

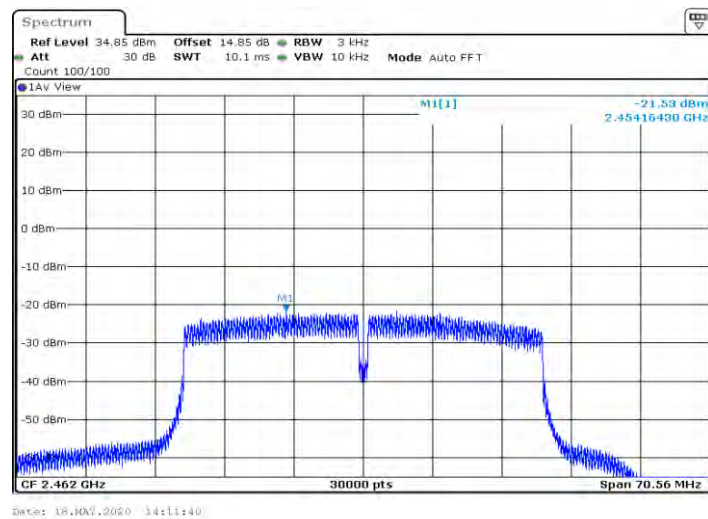


AppendixE:Band edge measurements

Test Graphs


11bMIMO_Ant1_Low_2412

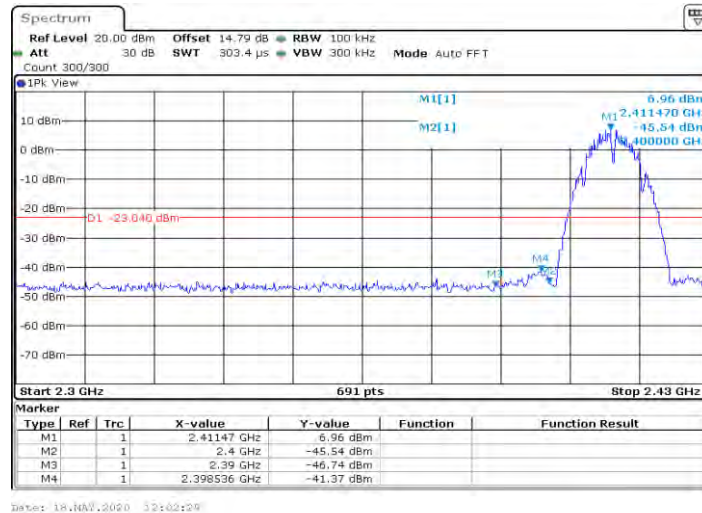


11bMIMO_Ant2_Low_2412

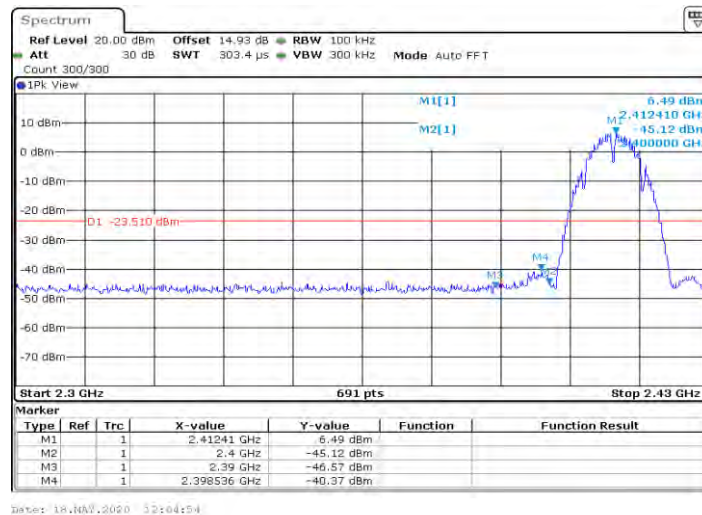


11bMIMO_Ant1_High_2472

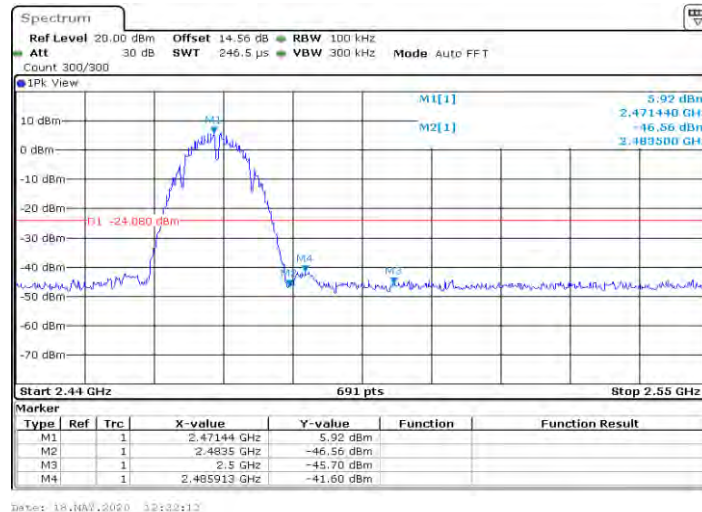


11bMIMO_Ant2_High_2472

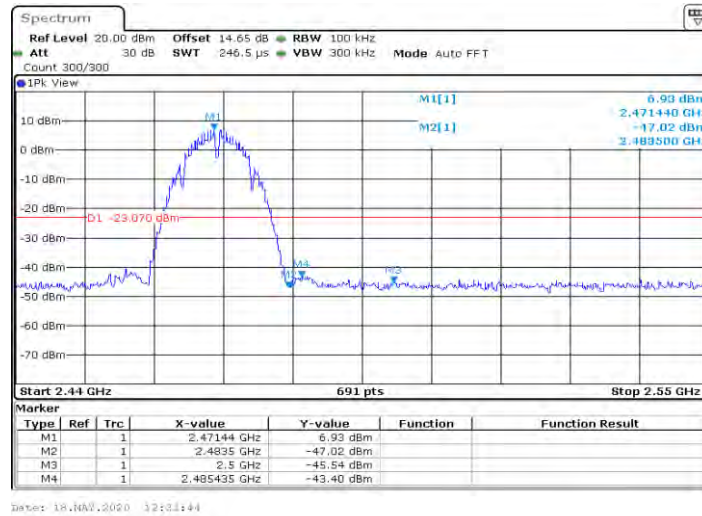


11gMIMO_Ant1_Low_2412

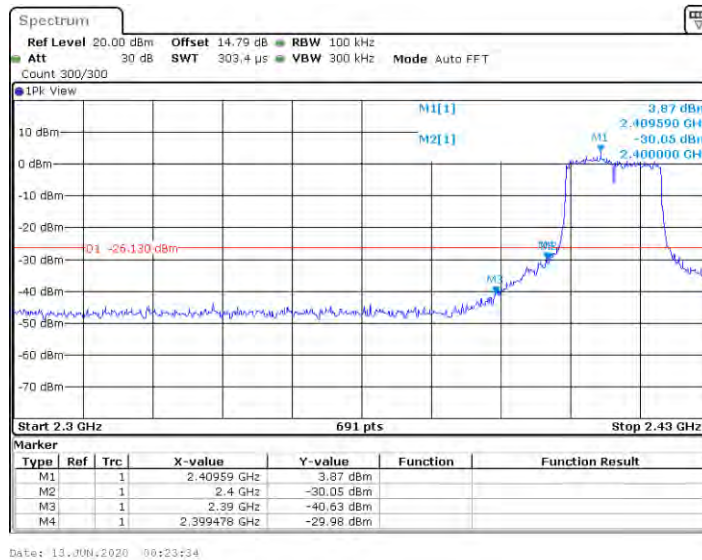


11gMIMO_Ant2_Low_2412

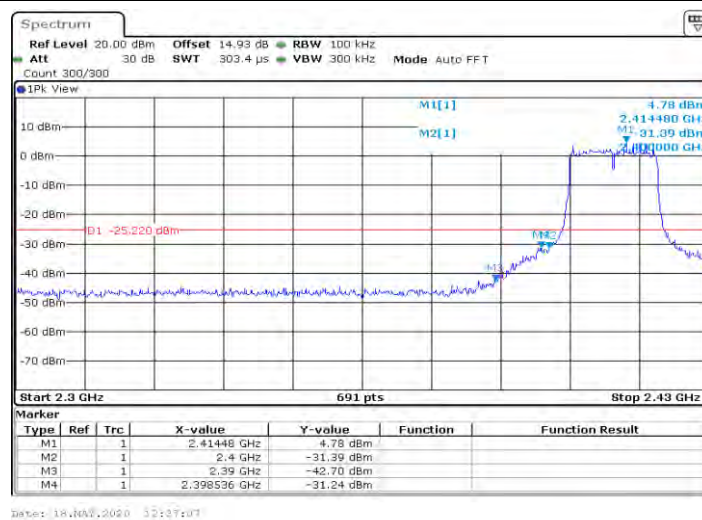


11gMIMO_Ant1_High_2472

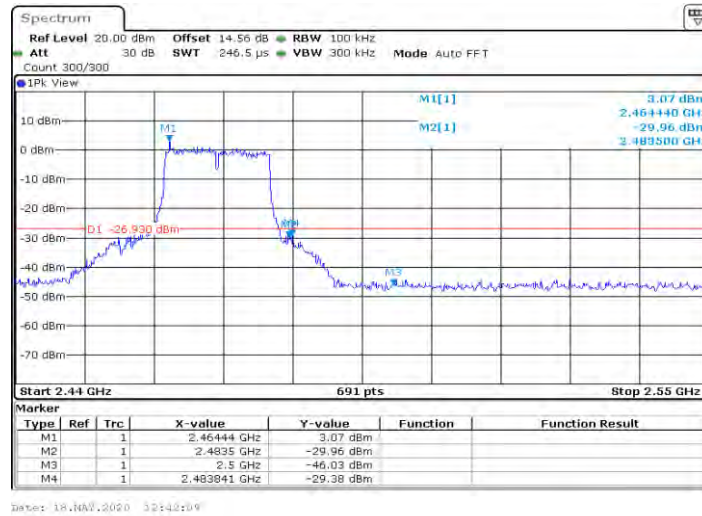


11gMIMO_Ant2_High_2472

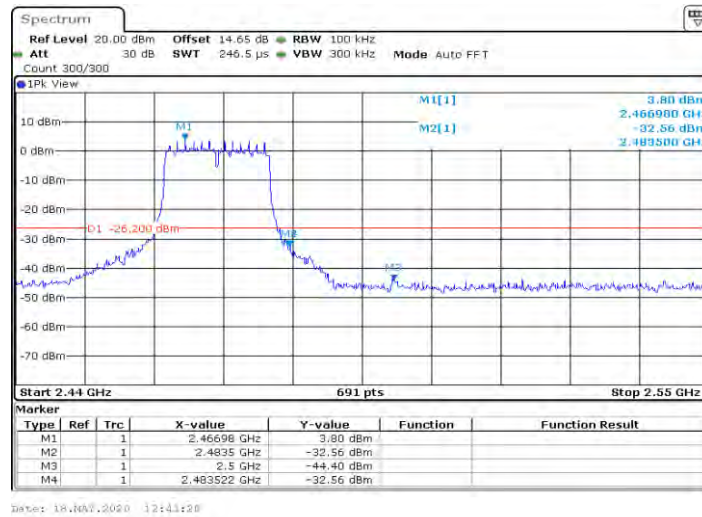


11N20MIMO_Ant1_Low_2412

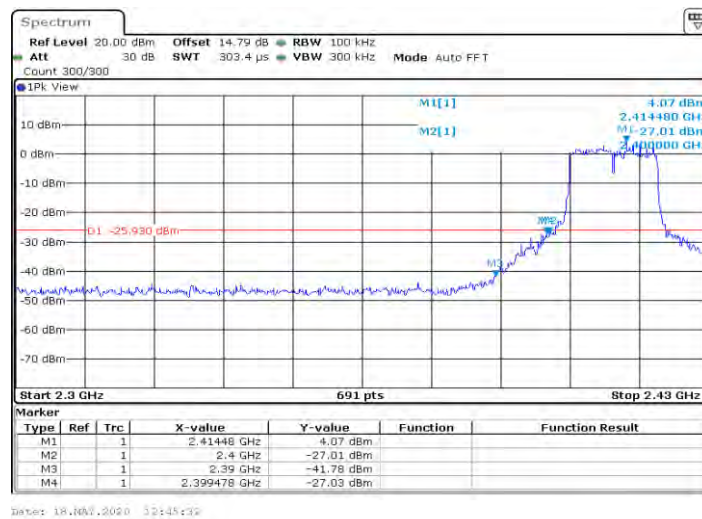


11N20MIMO_Ant2_Low_2412

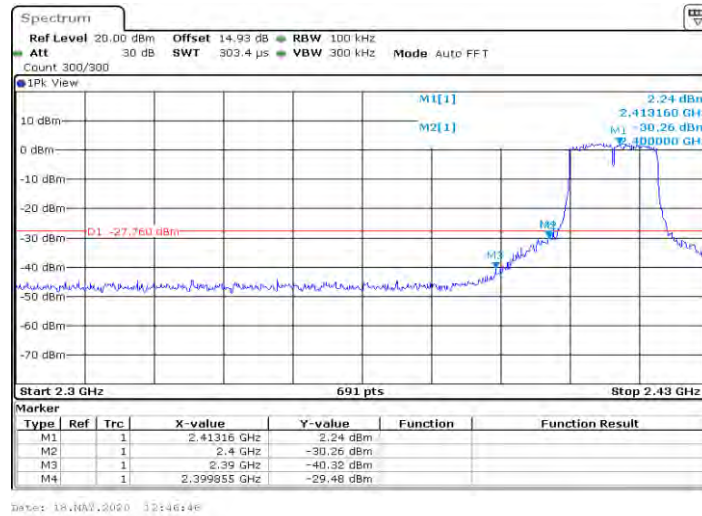


11N20MIMO_Ant1_High_2472

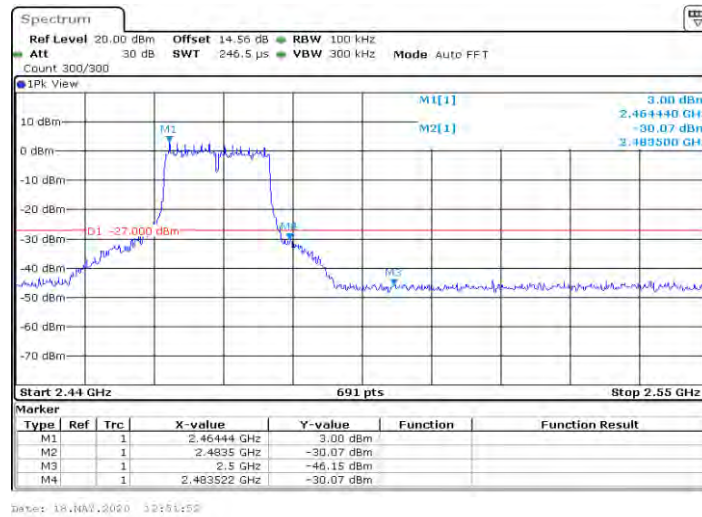


11N20MIMO_Ant2_High_2472

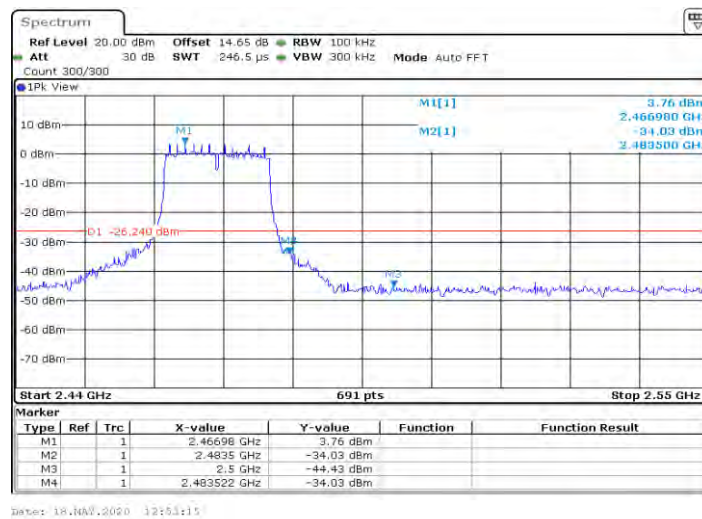


11N40MIMO_Ant1_Low_2422

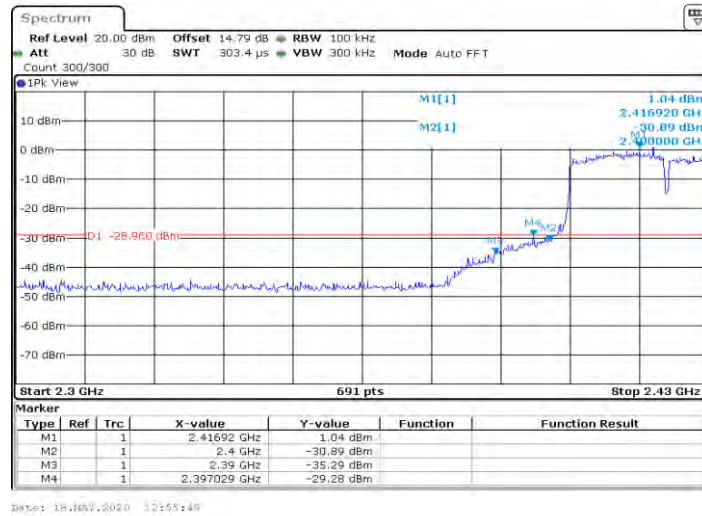


11N40MIMO_Ant2_Low_2422

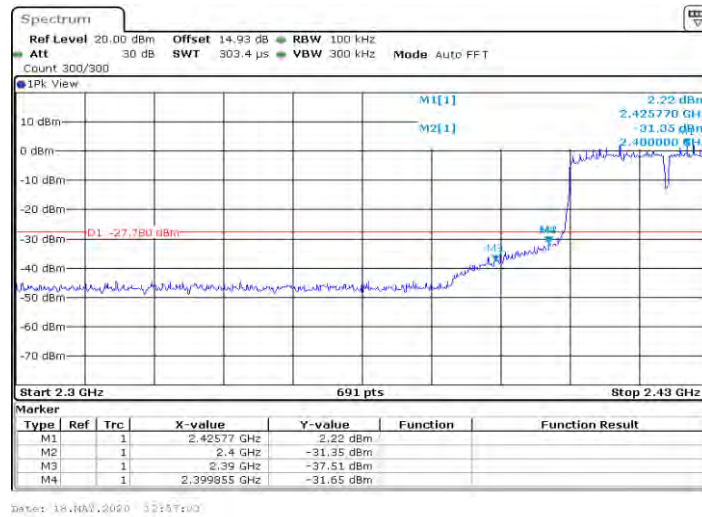

11N40MIMO_Ant1_High_2462

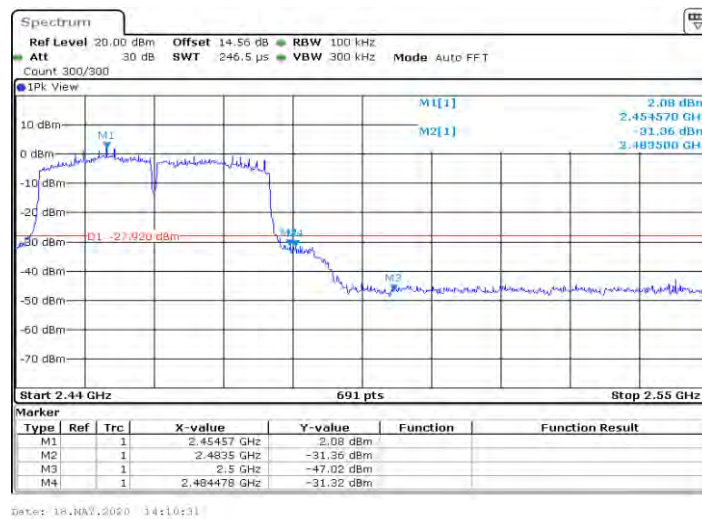

11N40MIMO_Ant2_High_2462

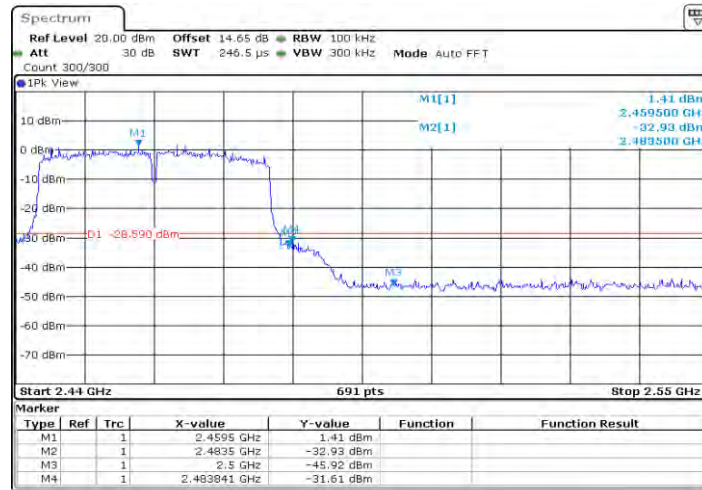

Date: 18.Nov.2020 14:11:50


AppendixG: DutyCycle

Test Result


TestMode	Antenna	Channel	TransmissionDuration [ms]	Transmission Period [ms]	Duty Cycle [%]
11bMIMO	Ant1	2412	12.15	12.30	98.78
	Ant2	2412	12.18	12.30	99.02
	Ant1	2442	12.18	12.30	98.98
	Ant2	2442	12.18	12.30	99.02
	Ant1	2472	12.18	12.30	99.02
	Ant2	2472	12.18	12.30	99.02
11gMIMO	Ant1	2412	2.00	2.11	94.79
	Ant2	2412	2.01	2.12	94.81
	Ant1	2442	2.01	2.12	94.81
	Ant2	2442	2.01	2.11	95.26
	Ant1	2472	2.01	2.12	94.81
	Ant2	2472	2.01	2.11	95.26
11N20MIMO	Ant1	2412	4.94	5.04	98.02
	Ant2	2412	4.95	5.05	98.02
	Ant1	2442	4.95	5.05	98.02
	Ant2	2442	4.94	5.05	97.82
	Ant1	2472	4.95	5.05	98.02
	Ant2	2472	4.95	5.05	98.02
11N40MIMO	Ant1	2422	2.39	2.49	95.98
	Ant2	2422	2.39	2.50	95.60
	Ant1	2442	2.39	2.49	95.98
	Ant2	2442	2.39	2.50	95.60
	Ant1	2462	2.39	2.49	95.98
	Ant2	2462	2.39	2.50	95.60

Test Graphs


11bMIMO_Ant1_2412

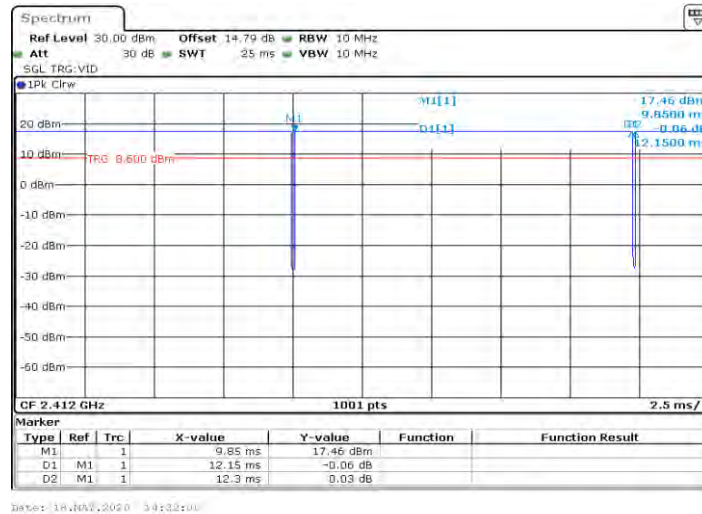


11bMIMO_Ant2_2412

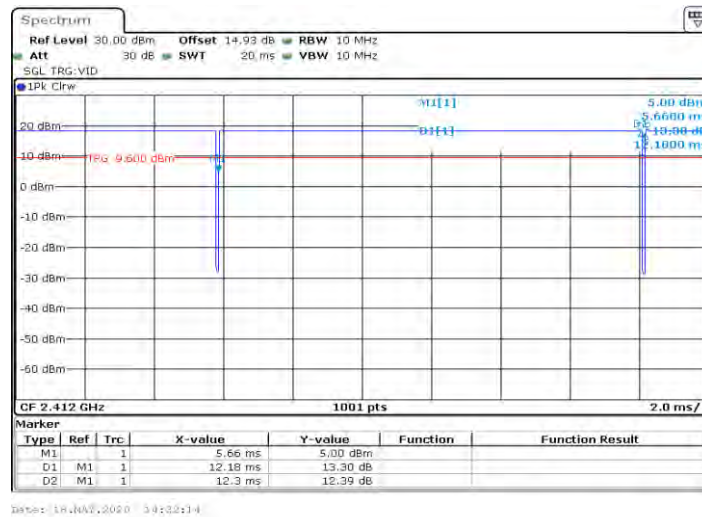


11bMIMO_Ant1_2442

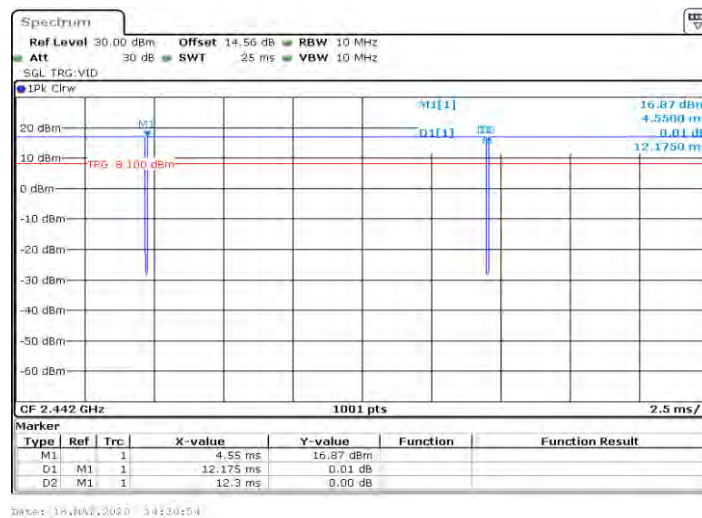


11bMIMO_Ant2_2442

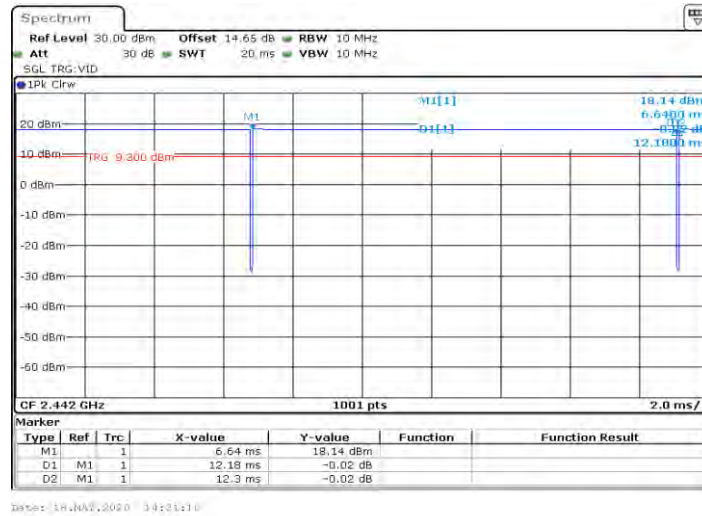


11bMIMO_Ant1_2472

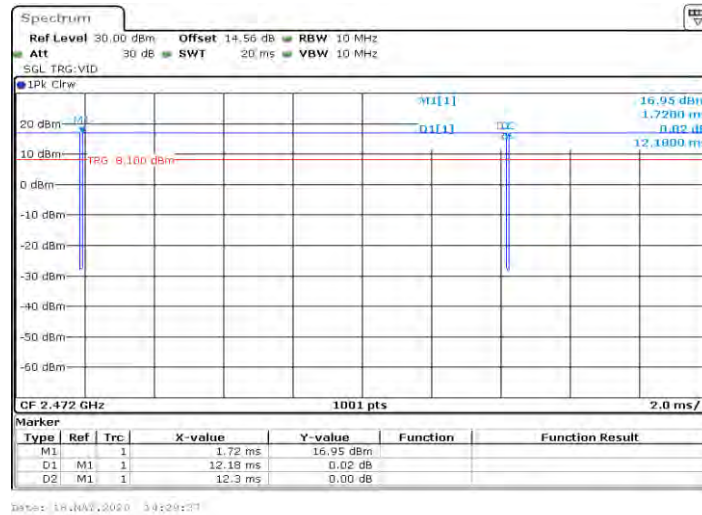


11bMIMO_Ant2_2472

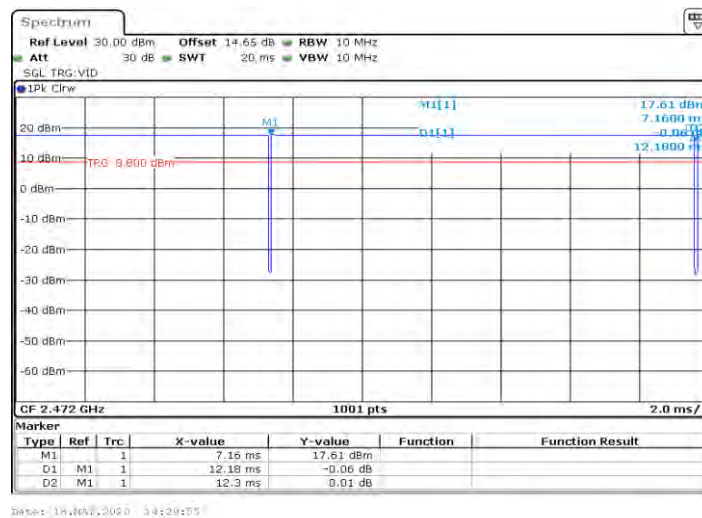


11gMIMO_Ant1_2412

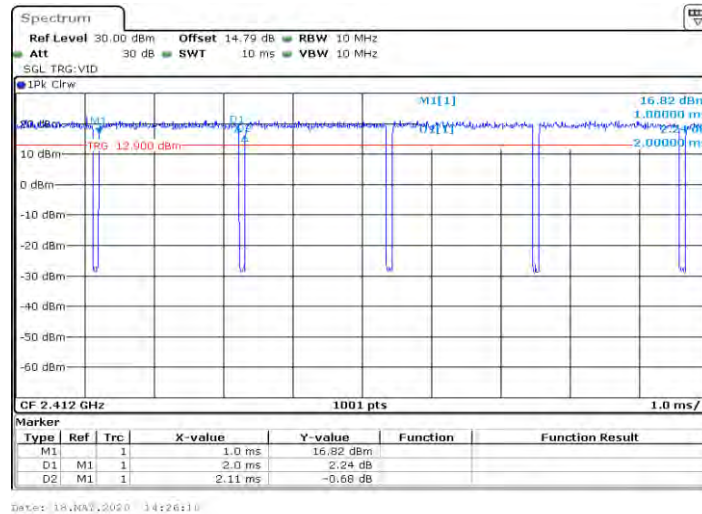


11gMIMO_Ant2_2412

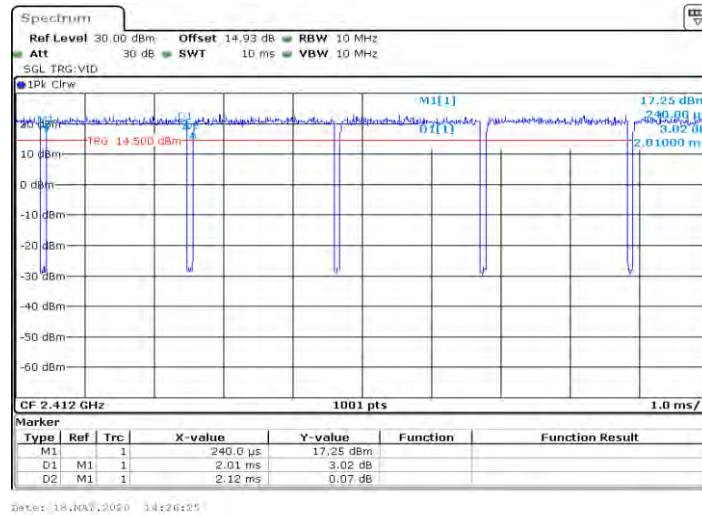


11gMIMO_Ant1_2442

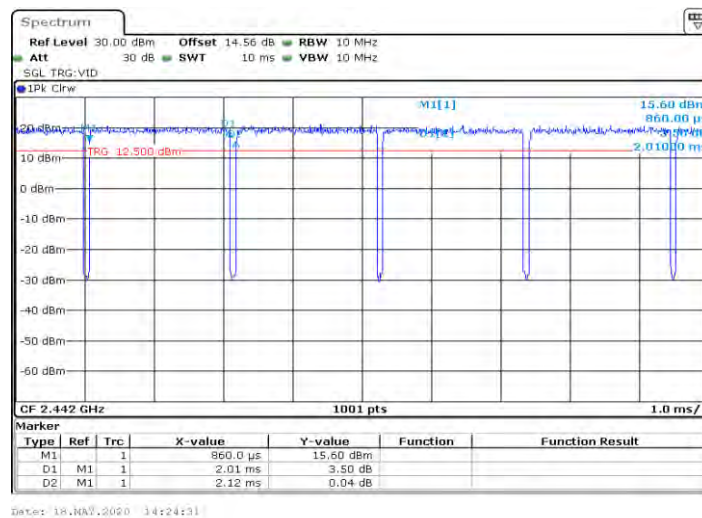


11gMIMO_Ant2_2442

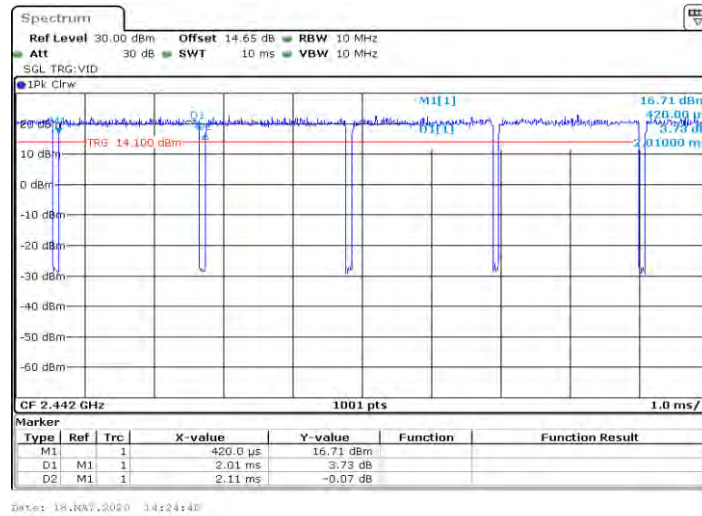


11gMIMO_Ant1_2472

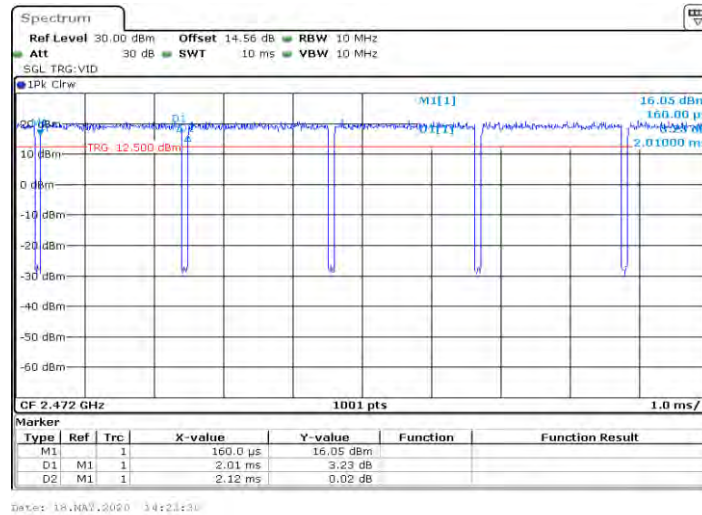


11gMIMO_Ant2_2472

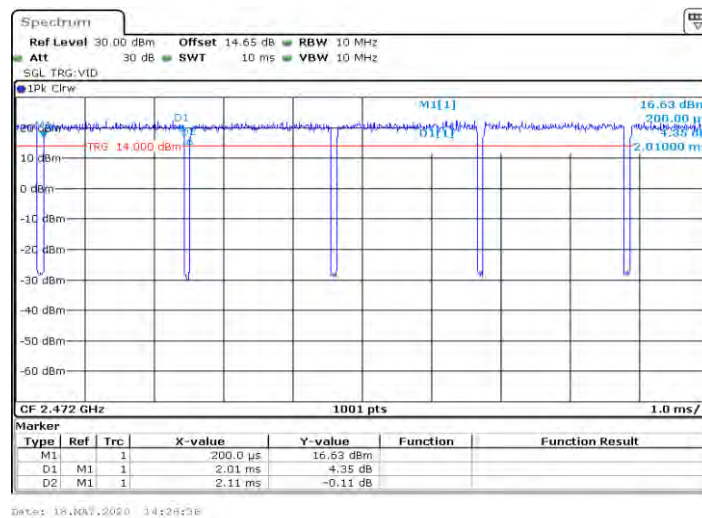


11N20MIMO_Ant1_2412

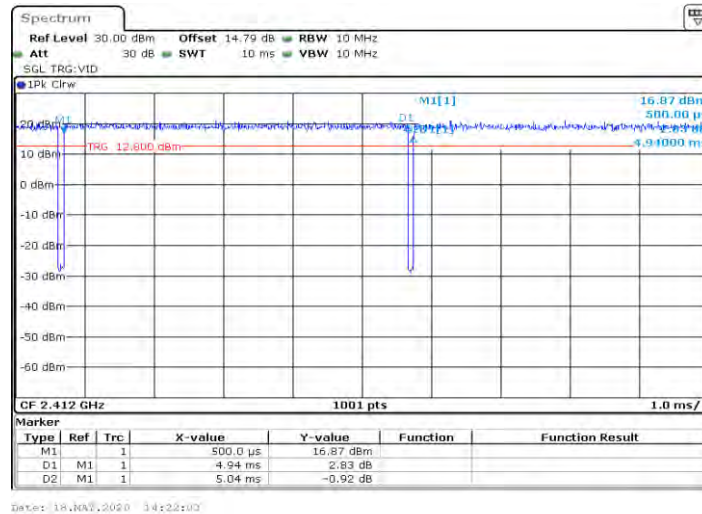


11N20MIMO_Ant2_2412

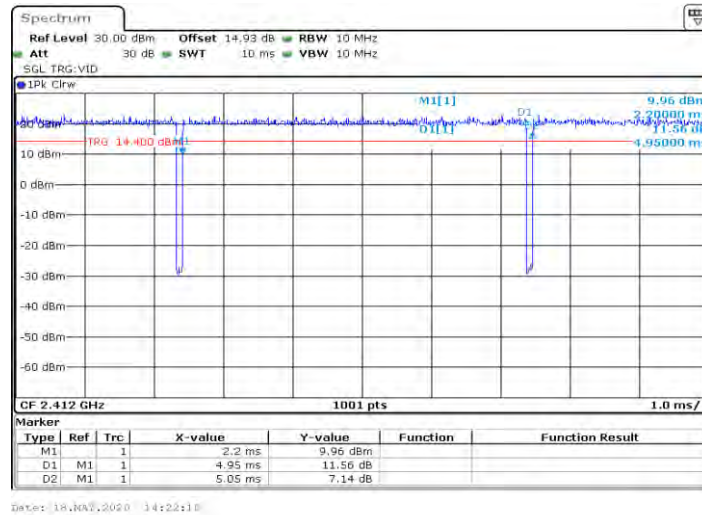


11N20MIMO_Ant1_2442

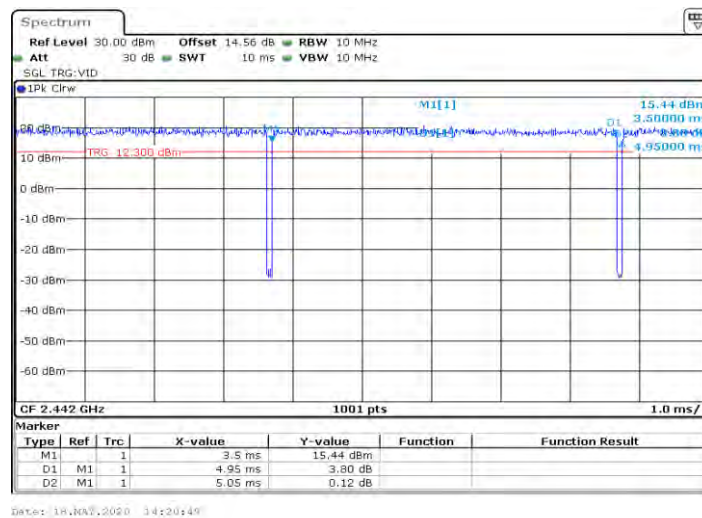


11N20MIMO_Ant2_2442

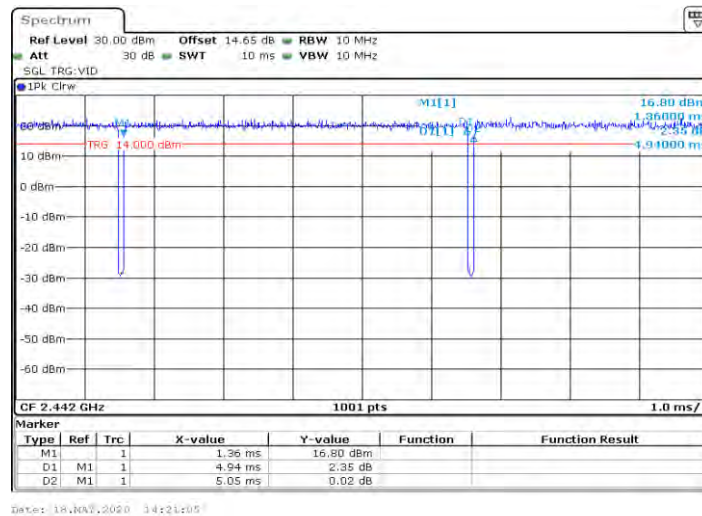


11N20MIMO_Ant1_2472

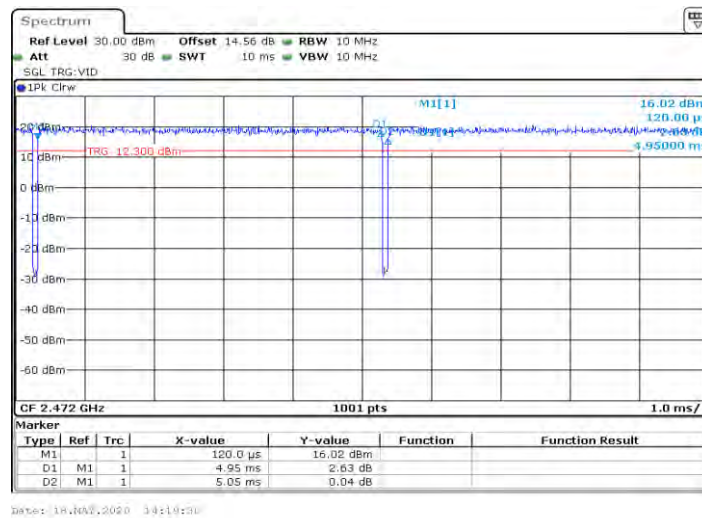


11N20MIMO_Ant2_2472

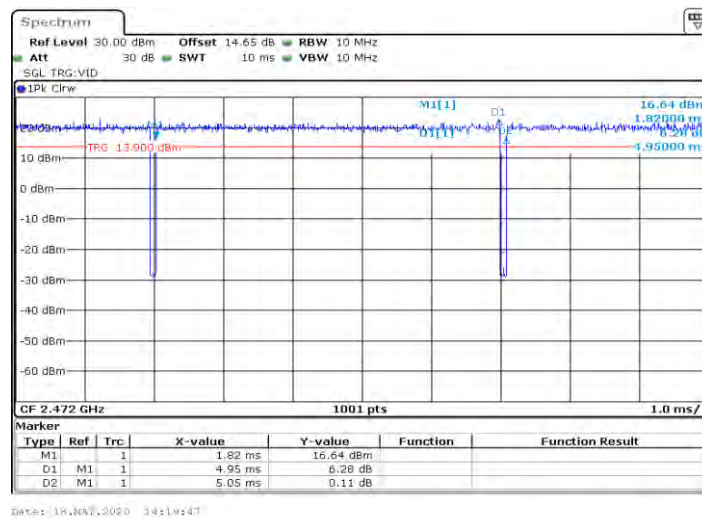


11N40MIMO_Ant1_2422

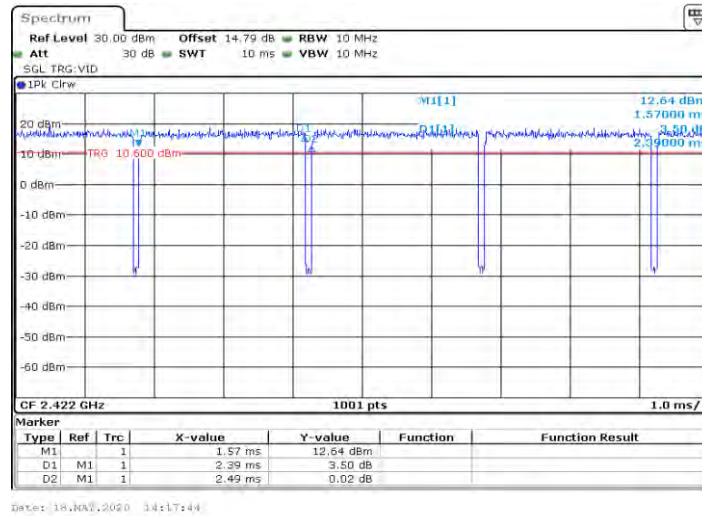


11N40MIMO_Ant2_2422

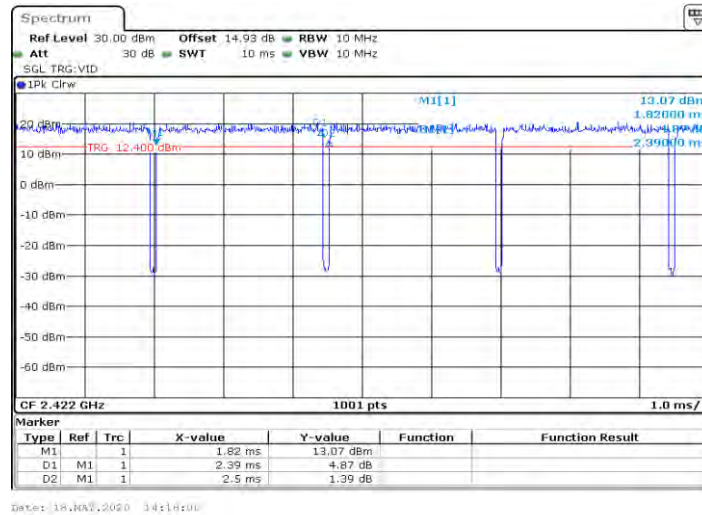


11N40MIMO_Ant1_2442

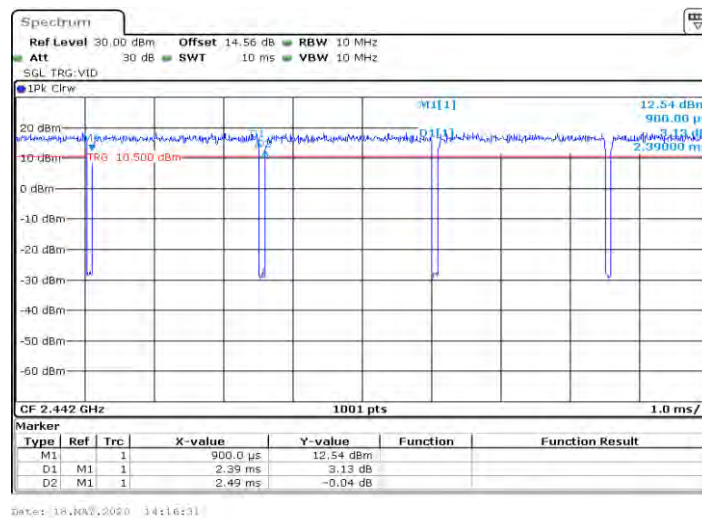


11N40MIMO_Ant2_2442

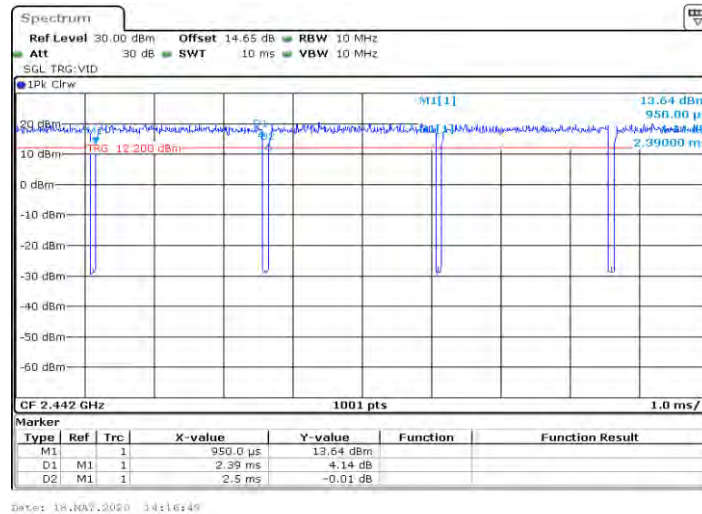

11N40MIMO_Ant1_2462

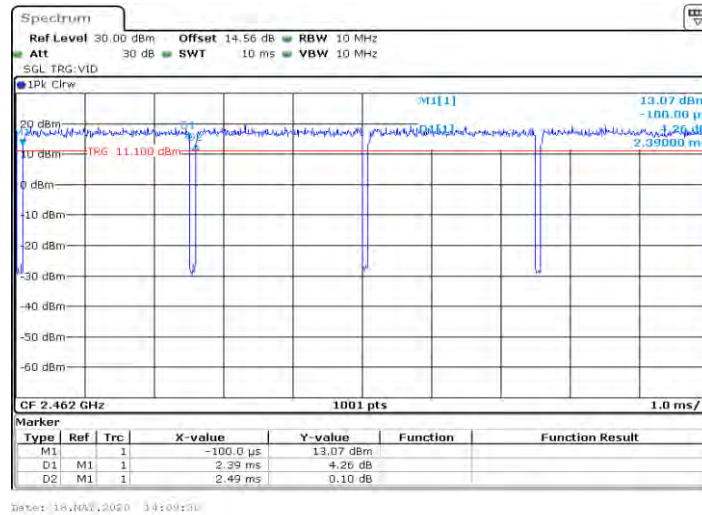

11N40MIMO_Ant2_2462

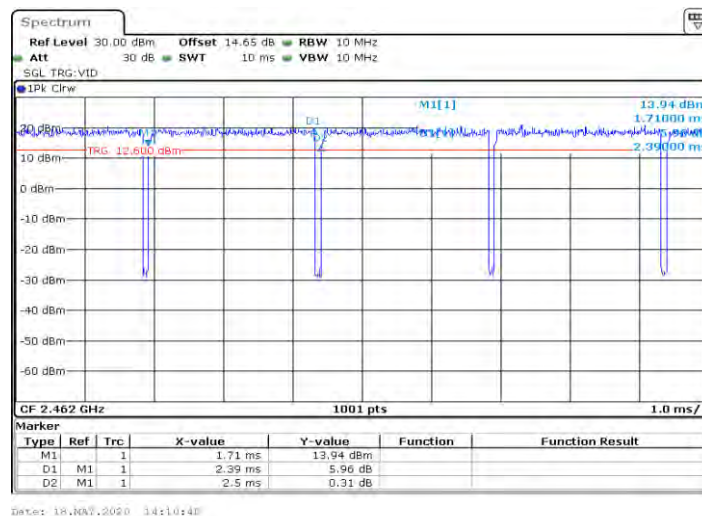

Appendix A - BLE


AppendixA: DTS Bandwidth

Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
BLE	Ant1	2402	0.764	0.5	PASS
		2440	0.768	0.5	PASS
		2480	0.764	0.5	PASS


Test Graphs

BLE_Ant1_2402

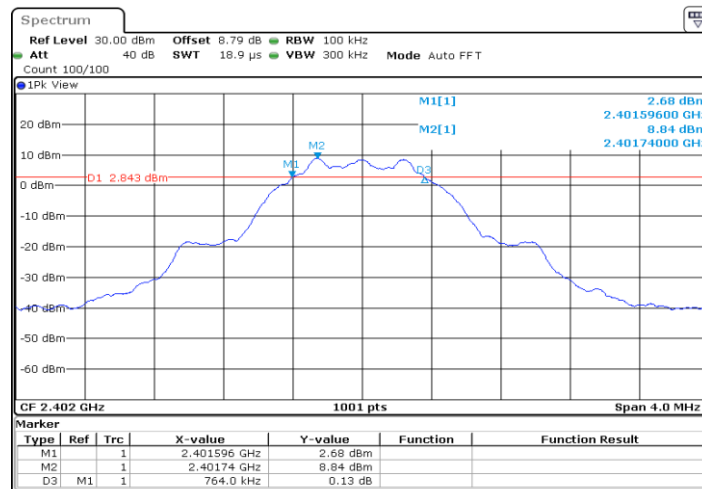


Date: 19.MAY.2020 10:19:55

BLE_Ant1_2440

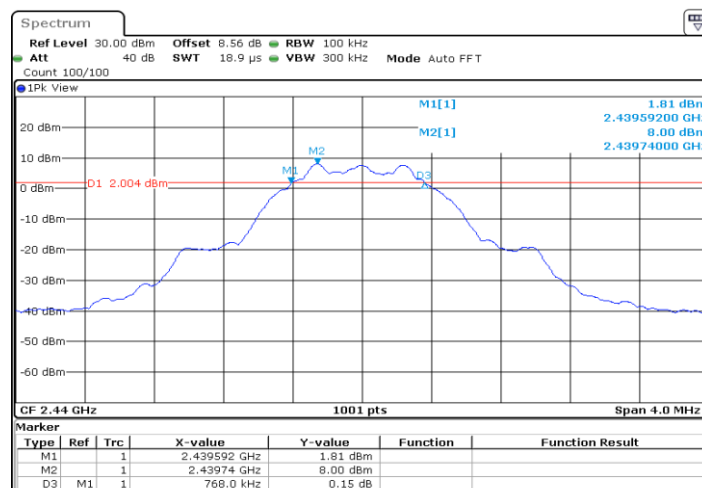

Date: 19.MAY.2020 10:18:02

BLE_Ant1_2480

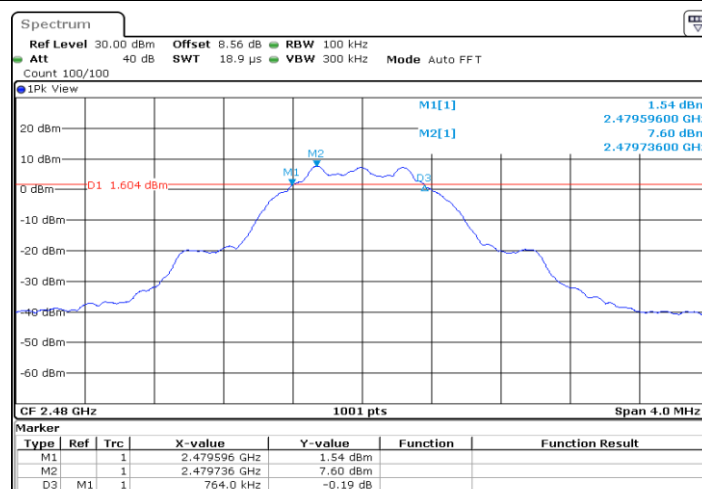

Date: 19.MAY.2020 10:15:12

Appendix B: Maximum conducted Peak output power**Test Result**

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant1	2402	8.70	<=30	PASS
		2440	8.40	<=30	PASS
		2480	8.05	<=30	PASS


Appendix C: Maximum power spectral density

Test Result


TestMode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE	Ant1	2402	-7.43	<=8	PASS
		2440	-8.16	<=8	PASS
		2480	-8.65	<=8	PASS

Test Graphs


BLE_Ant1_2402

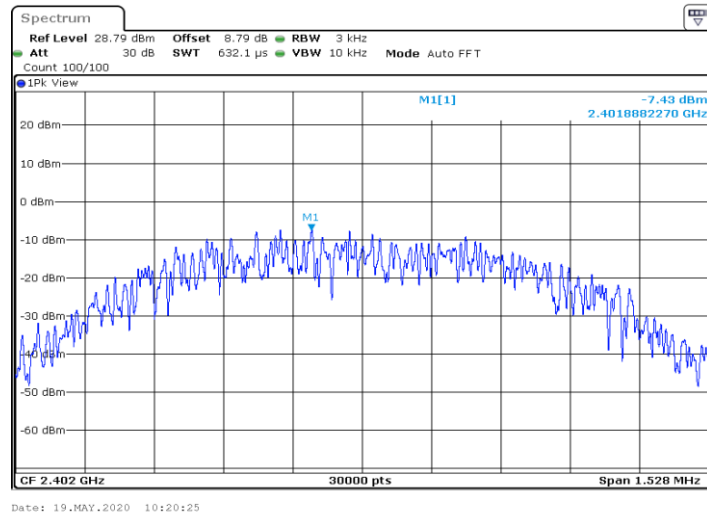

BLE_Ant1_2440

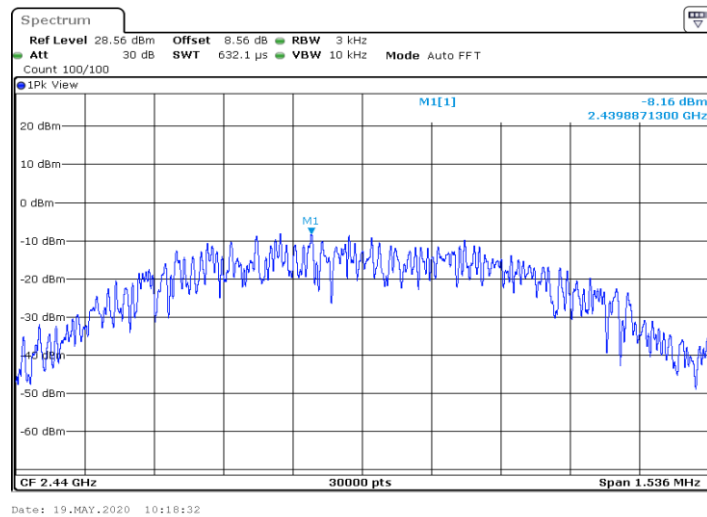


BLE_Ant1_2480

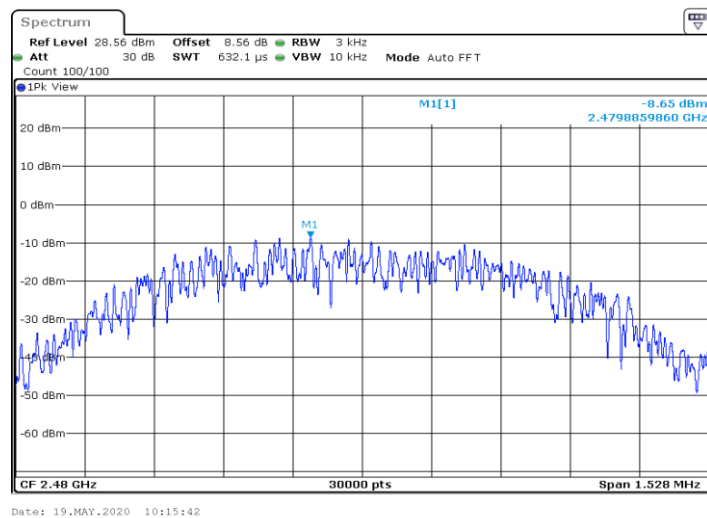


Appendix D: Band edge measurements

Test Graphs

BLE_Ant1_Low_2402

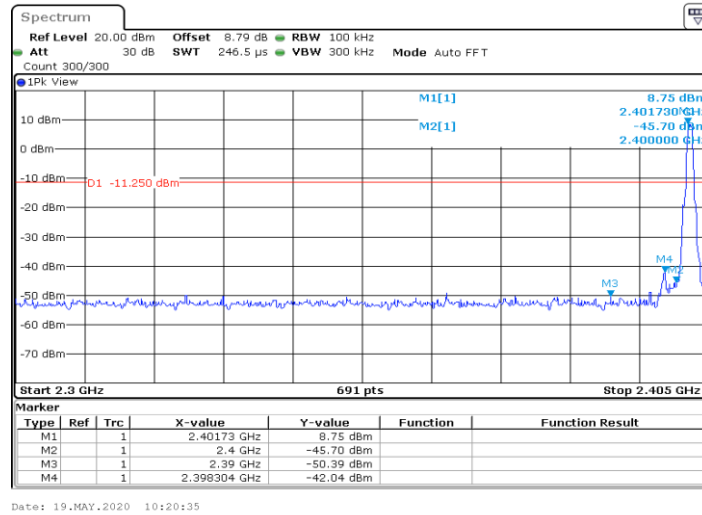

BLE_Ant1_High_2480

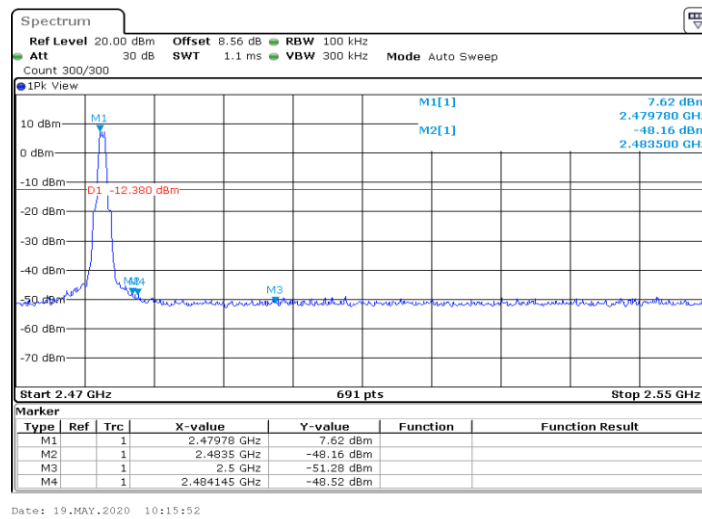

Appendix E: DutyCycle

Test Result

TestMode	Antenna	Channel	TransmissionDuration [ms]	Transmission Period [ms]	Duty Cycle [%]
BLE	Ant1	2440	0.25	0.63	40.00

Test Graphs

