



## FCC AND ISED CERTIFICATION TEST REPORT

<b>Applicant</b>	:	Guangdong A-OK Technology Grand Development Co., Ltd.
<b>Address of Applicant</b>	:	Hexing Road South Side, Sanhe Economic Development Zone, Huiyang, 516213 Huizhou, Guangdong, PEOPLE' S REPUBLIC OF CHINA
<b>Manufacturer</b>	:	Guangdong A-OK Technology Grand Development Co., Ltd.
<b>Address of Manufacturer</b>	:	Hexing Road South Side, Sanhe Economic Development Zone, Huiyang, 516213 Huizhou, Guangdong, PEOPLE' S REPUBLIC OF CHINA
<b>Equipment under Test</b>	:	Remote control
<b>Model No.</b>	:	AC127-01, AC127-02, AC127-03, AC127-06, AC127-16
<b>FCC ID</b>	:	2AVVD-AC127
<b>IC</b>	:	26127-AC127
<b>Test Standard(s)</b>	:	FCC Rules and Regulations Part 15 Subpart C, RSS-210 Issue 11 June 2024, ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)
<b>Report No.</b>	:	DDT-RE24052708-1E01
<b>Issue Date</b>	:	2024/07/04
<b>Issue By</b>	:	Guangdong Dongdian Testing Service Co., Ltd.
<b>Address of Laboratory</b>	:	Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

# REPORT

## Table of Contents

	Test report declares.....	4
1.	Summary of Test Results.....	6
2.	General Test Information .....	7
2.1.	Description of EUT .....	7
2.2.	Accessories of EUT.....	7
2.3.	Assistant equipment used for test.....	7
2.4.	Block diagram of EUT configuration for test .....	7
2.5.	Test environment conditions .....	7
2.6.	Deviations of test standard.....	8
2.7.	Test laboratory .....	8
2.8.	Measurement uncertainty.....	9
3.	Equipment Used During Conductive Test.....	10
4.	On Time and Duty Cycle .....	11
4.1.	Block diagram of test setup.....	11
4.2.	Limits .....	11
4.3.	Test Procedure.....	11
4.4.	Test Result .....	11
4.5.	Original test data .....	12
5.	20dB Bandwidth and 99% Bandwidth.....	15
5.1.	Block diagram of test setup.....	15
5.2.	Limits .....	15
5.3.	Test Procedure.....	15
5.4.	Test Result .....	15
5.5.	Original test data .....	16
6.	Stop transmitting time test.....	17
6.1.	Block diagram of test setup.....	17
6.2.	Limits .....	17
6.3.	Test Procedure.....	17
6.4.	Test Result .....	17
6.5.	Original test data .....	18
7.	Radiated Emission .....	19
7.1.	Test equipment.....	19
7.2.	Block diagram of test setup.....	19
7.3.	Limit .....	21
7.4.	Test Procedure.....	23
7.5.	Test result.....	24
8.	Power Line Conducted Emission .....	31

8.1.	Test equipment.....	31
8.2.	Block diagram of test setup.....	31
8.3.	Power line conducted emission limits .....	31
8.4.	Test procedure .....	31
8.5.	Test result.....	32
9.	Antenna Requirements .....	33
9.1.	Limit .....	33
9.2.	Result .....	33
10.	Test Setup Photograph .....	34
11.	Photos of the EUT .....	36

## Test Report Declare

<b>Applicant</b>	:	Guangdong A-OK Technology Grand Development Co., Ltd.
<b>Address of Applicant</b>	:	Hexing Road South Side, Sanhe Economic Development Zone, Huiyang, 516213 Huizhou, Guangdong, PEOPLE' S REPUBLIC OF CHINA
<b>Equipment under Test</b>	:	Remote control
<b>Model No.</b>	:	AC127-01, AC127-02, AC127-03, AC127-06, AC127-16
<b>Manufacturer</b>	:	Guangdong A-OK Technology Grand Development Co., Ltd.
<b>Address of Manufacturer</b>	:	Hexing Road South Side, Sanhe Economic Development Zone, Huiyang, 516213 Huizhou, Guangdong, PEOPLE' S REPUBLIC OF CHINA

**Test Standard Used:**

FCC Rules and Regulations Part 15 Subpart C,

RSS-210 Issue 11 June 2024.

**Test Procedure Used:**

ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)

**We Declare:**

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

**After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&ISED standards.**

<b>Report No.:</b>	DDT-RE24052708-1E01		
<b>Date of Receipt:</b>	2024/06/01	<b>Date of Test:</b>	2024/06/01 ~ 2024/07/04

**Prepared By:****Approved By:**

---

**Johnson Huang/Engineer**

---

**Damon Hu/EMC Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	2024/07/04	

## 1. Summary of Test Results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Verdict
20dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.231 ANSI C63.10:2013 RSS-210 Issue 11 RSS-Gen Issue 5	PASS
Stop Transmitting Time Test	FCC Part 15C: 15.231(a) RSS-210 Issue 11	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.231(b) ANSI C63.10:2013 RSS-210 Issue 11 RSS-Gen Issue 5	PASS
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10:2013 RSS-210 Issue 11 RSS-Gen Issue 5	N/A
Antenna requirement	FCC Part 15: 15.203 RSS-210 Issue 11 RSS-Gen Issue 5	PASS
Note 1: N/A is an abbreviation for Not Applicable.		

## 2. General Test Information

### 2.1. Description of EUT

EUT Name	:	Remote control
Model Number	:	AC127-01, AC127-02, AC127-03, AC127-06, AC127-16
Difference of model number	:	Above all the models are electrical identical including the same hardware design, only the model number is different, therefore the test performed on the model AC127-01
EUT Function Description	:	Please reference user manual of this device
Power Supply	:	DC 3.7V by Li-ion Polymer Battery
Operation Frequency	:	433.92 MHz
Modulation	:	ASK
Antenna Gain	:	PCB antenna, maximum PK gain: 0.32 dBi

Note: EUT is the ab. of equipment under test.

### 2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Description	Remark
N/A	N/A	N/A	N/A	N/A

### 2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
N/A	N/A	N/A	N/A	N/A

### 2.4. Block diagram of EUT configuration for test

EUT

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, channel, information		
Mode	Channel	Frequency (MHz)
TX mode	/	433.92

### 2.5. Test environment conditions

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

## 2.6. Deviations of test standard

No deviation.

## 2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No.17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China 523808

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: [ddt@dgddt.com](mailto:ddt@dgddt.com).

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118



**2.8. Measurement uncertainty**


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ( $10 \text{ MHz} \leq f < 3.6 \text{ GHz}$ );
	1.38 dB ( $3.6 \text{ GHz} \leq f < 8 \text{ GHz}$ )
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ( $10 \text{ MHz} \leq f < 3.6 \text{ GHz}$ );
	1.38 dB ( $3.6 \text{ GHz} \leq f < 8 \text{ GHz}$ )
Frequencies Stability	$6.7 \times 10^{-8}$ (Antenna couple method)
	$5.5 \times 10^{-8}$ (Conducted method)
Conducted spurious emissions	0.86 dB ( $10 \text{ MHz} \leq f < 3.6 \text{ GHz}$ );
	1.40 dB ( $3.6 \text{ GHz} \leq f < 8 \text{ GHz}$ )
	1.66 dB ( $8 \text{ GHz} \leq f < 26.5 \text{ GHz}$ )
Uncertainty for radio frequency (RBW < 20 kHz)	$3 \times 10^{-8}$
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

### 3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☑RF Connected Test (RF Measurement System 4#)				
Signal & Spectrum Analyzer	R&S	FSV3044	101173	2025/03/31
Wideband Radio Communication Tester	R&S	CMW500	168801	2025/03/31
MXG Vector Signal Generator	Agilent	N5182A	MY48180737	2025/03/31
PSG Vector Signal Generator	Agilent	E8267D	US49060192	2024/09/05
RF Control Unit	Tonsend	JS0806-2	21I8060485	2025/03/31
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2025/04/22
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A

## 4. On Time and Duty Cycle

### 4.1. Block diagram of test setup

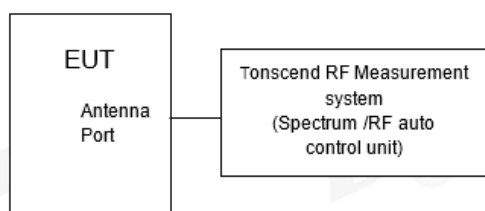

### 4.2. Limits

None: for reporting purposes only.

### 4.3. Test Procedure

Set the Centre frequency of the spectrum analyzer to the transmitting frequency;

Set the span=0 MHz, RBW=10 MHz, VBW=10 MHz, Sweep time=200 ms;


Trace mode = Single hold.


### 4.4. Test Result


Test Channel[MHz]	Duty Cycle[%]	20log(Δ) Factor[dB]
433.92	29.42	-10.63

Note 1: The transmitter duty cycle was measured using a spectrum analyser in the time domain and calculated by below Equation:  
 $(3.606-3.317)*52+(608.97*21/1000)+5.096=3760\mu s=32.89ms$   
 $\delta(dB) = 20\log(\Delta) = 20\log(32.8/111.780) = -10.63dB$   
 $\delta$  is the duty cycle correction factor (dB)  
 $\Delta$  is the duty cycle (dimensionless)  
 Note 2: In cases where the pulse train exceeds 0.1 s, the measured field strength shall be determined during a 0.1 s interval

4.5. Original test data

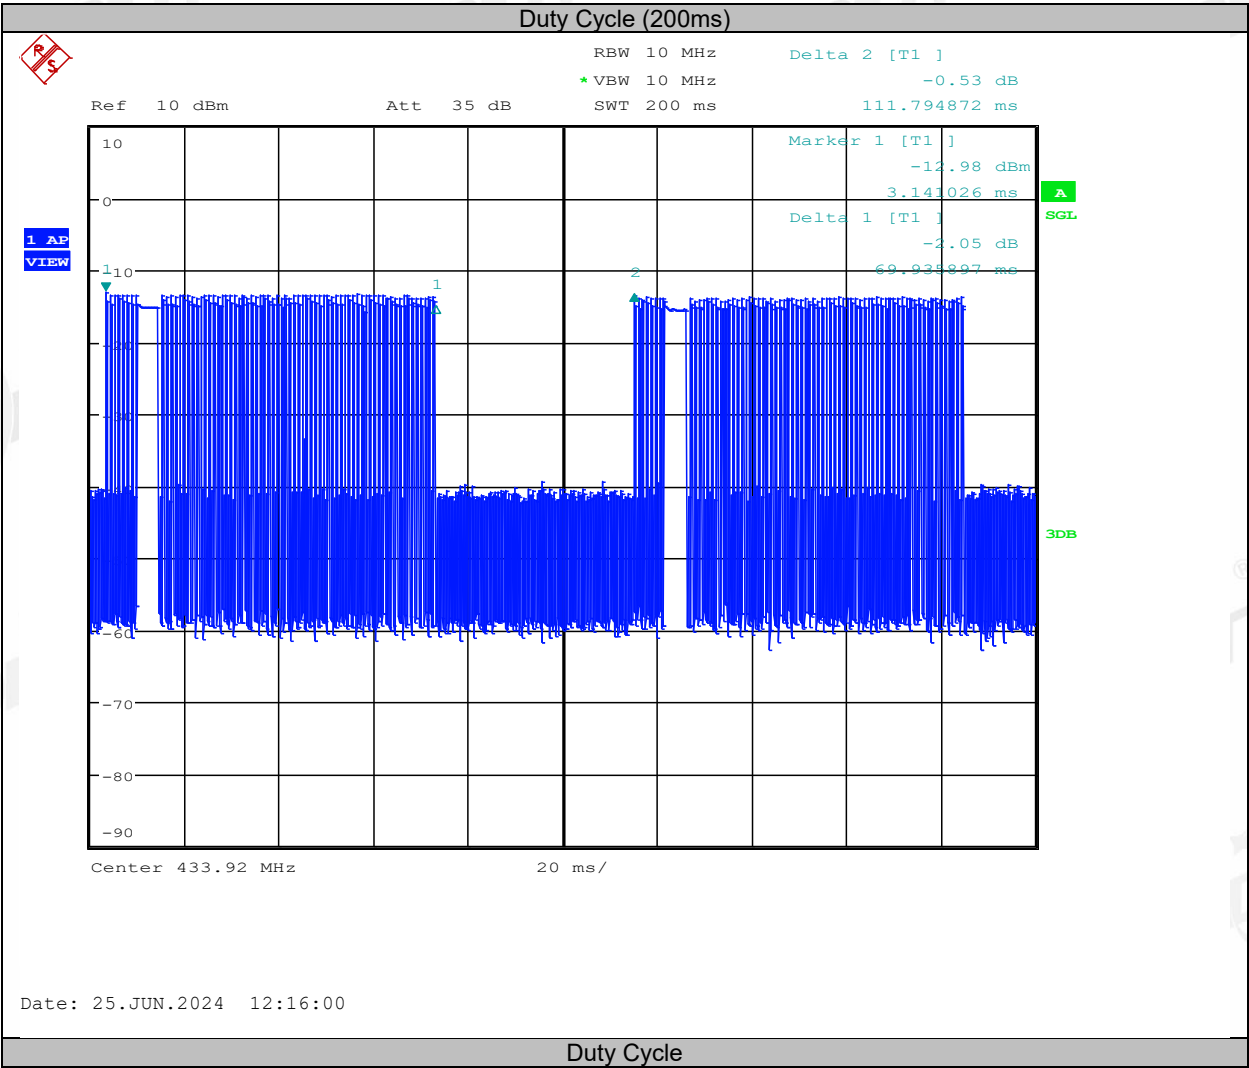


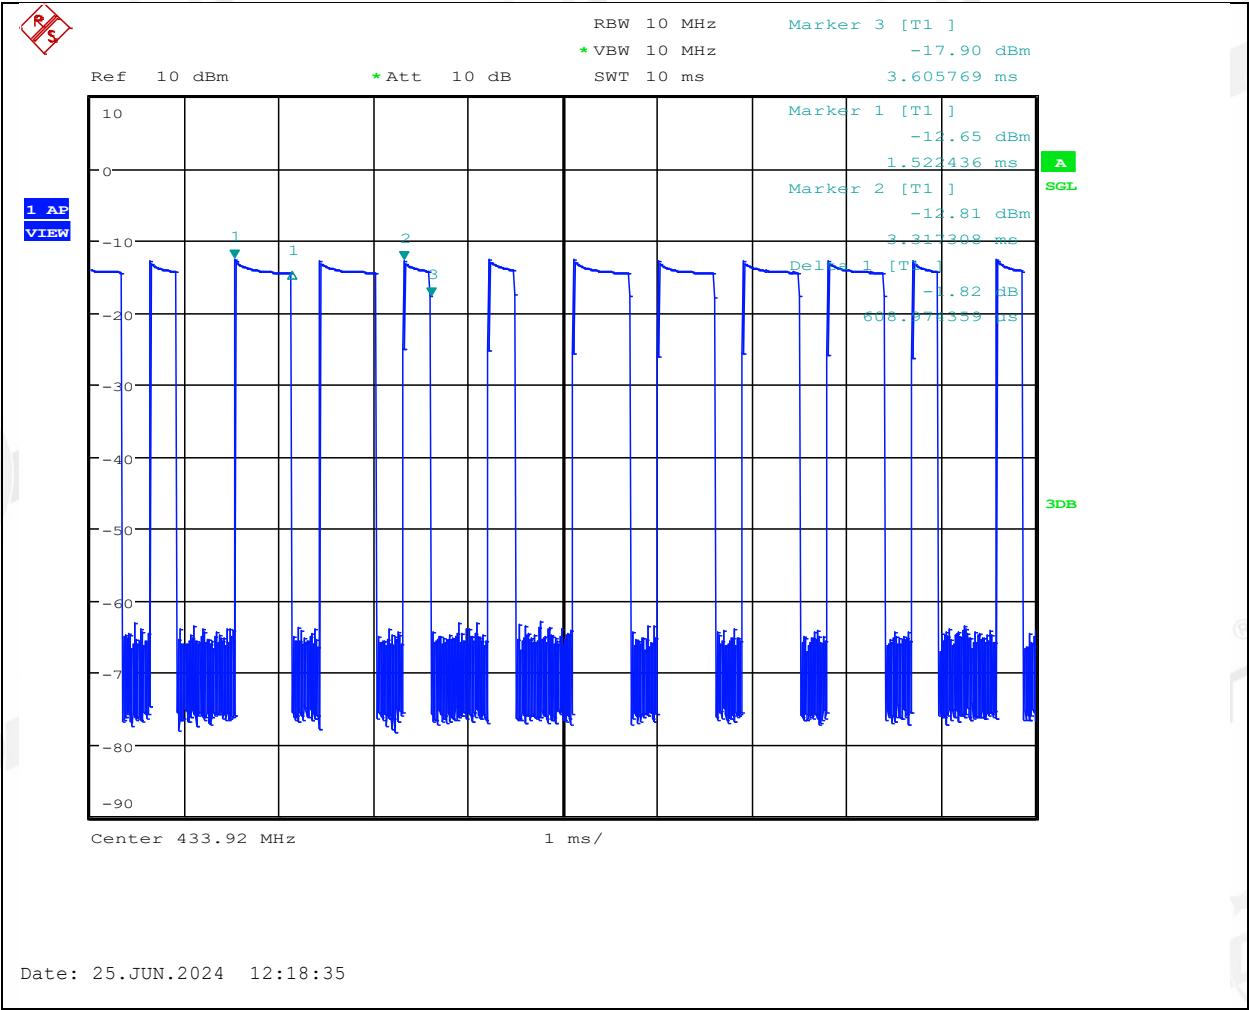

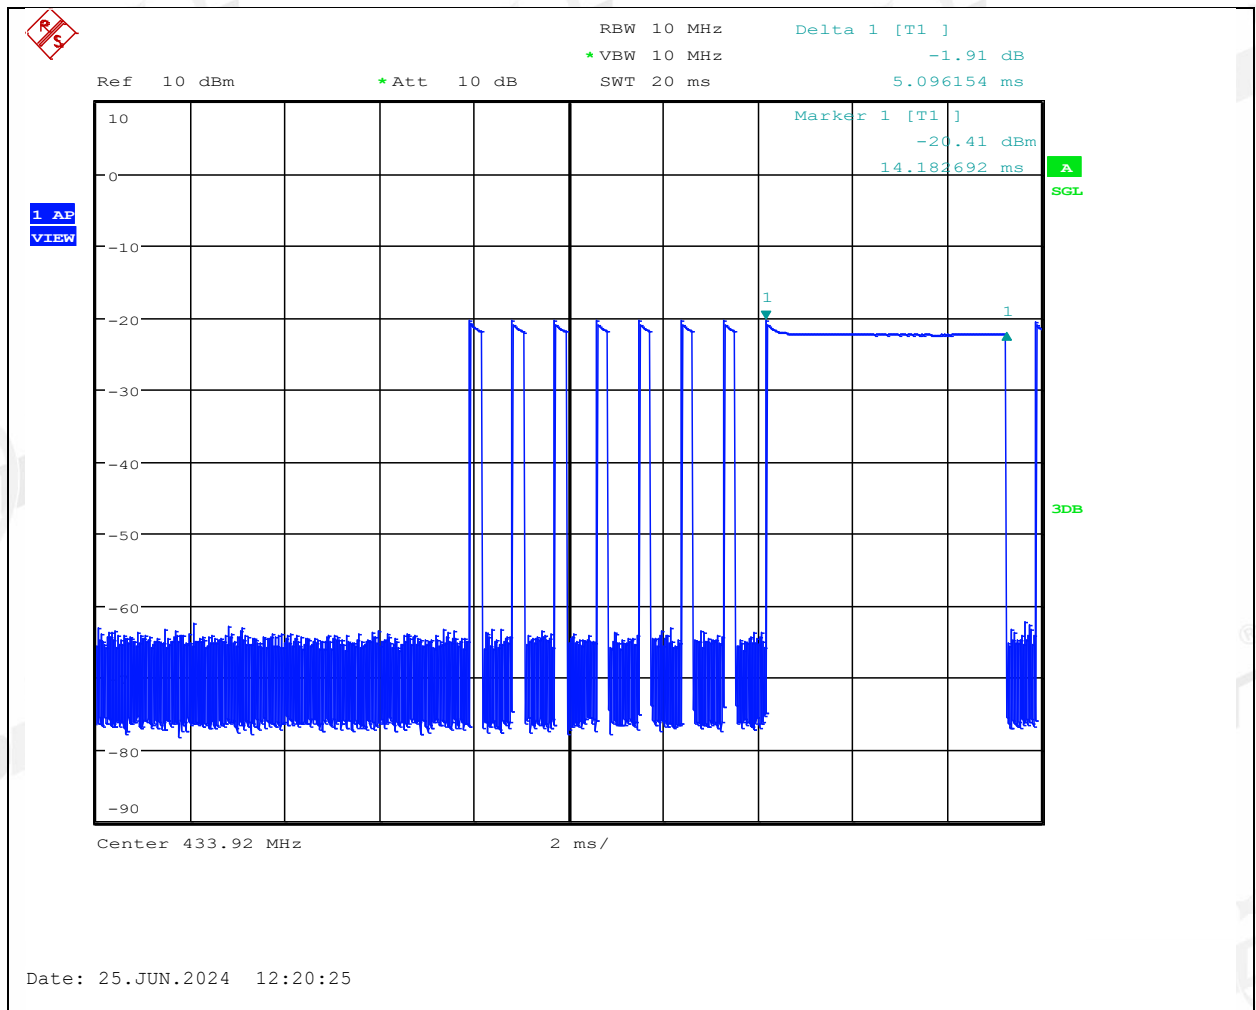

## 5. 20dB Bandwidth and 99% Bandwidth

### 5.1. Block diagram of test setup

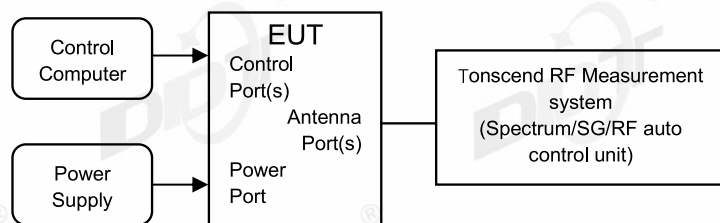

### 5.2. Limits

The bandwidth of the emission shall be no wider than 0.25% of the center frequency of devices operation above 70MHz and below 900MHz.


### 5.3. Test Procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1kHz RBW and 3kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### 5.4. Test Result

Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)	Limit (kHz)	Verdict
433.92	9.19	41.86	1084.8	PASS


5.5. Original test data

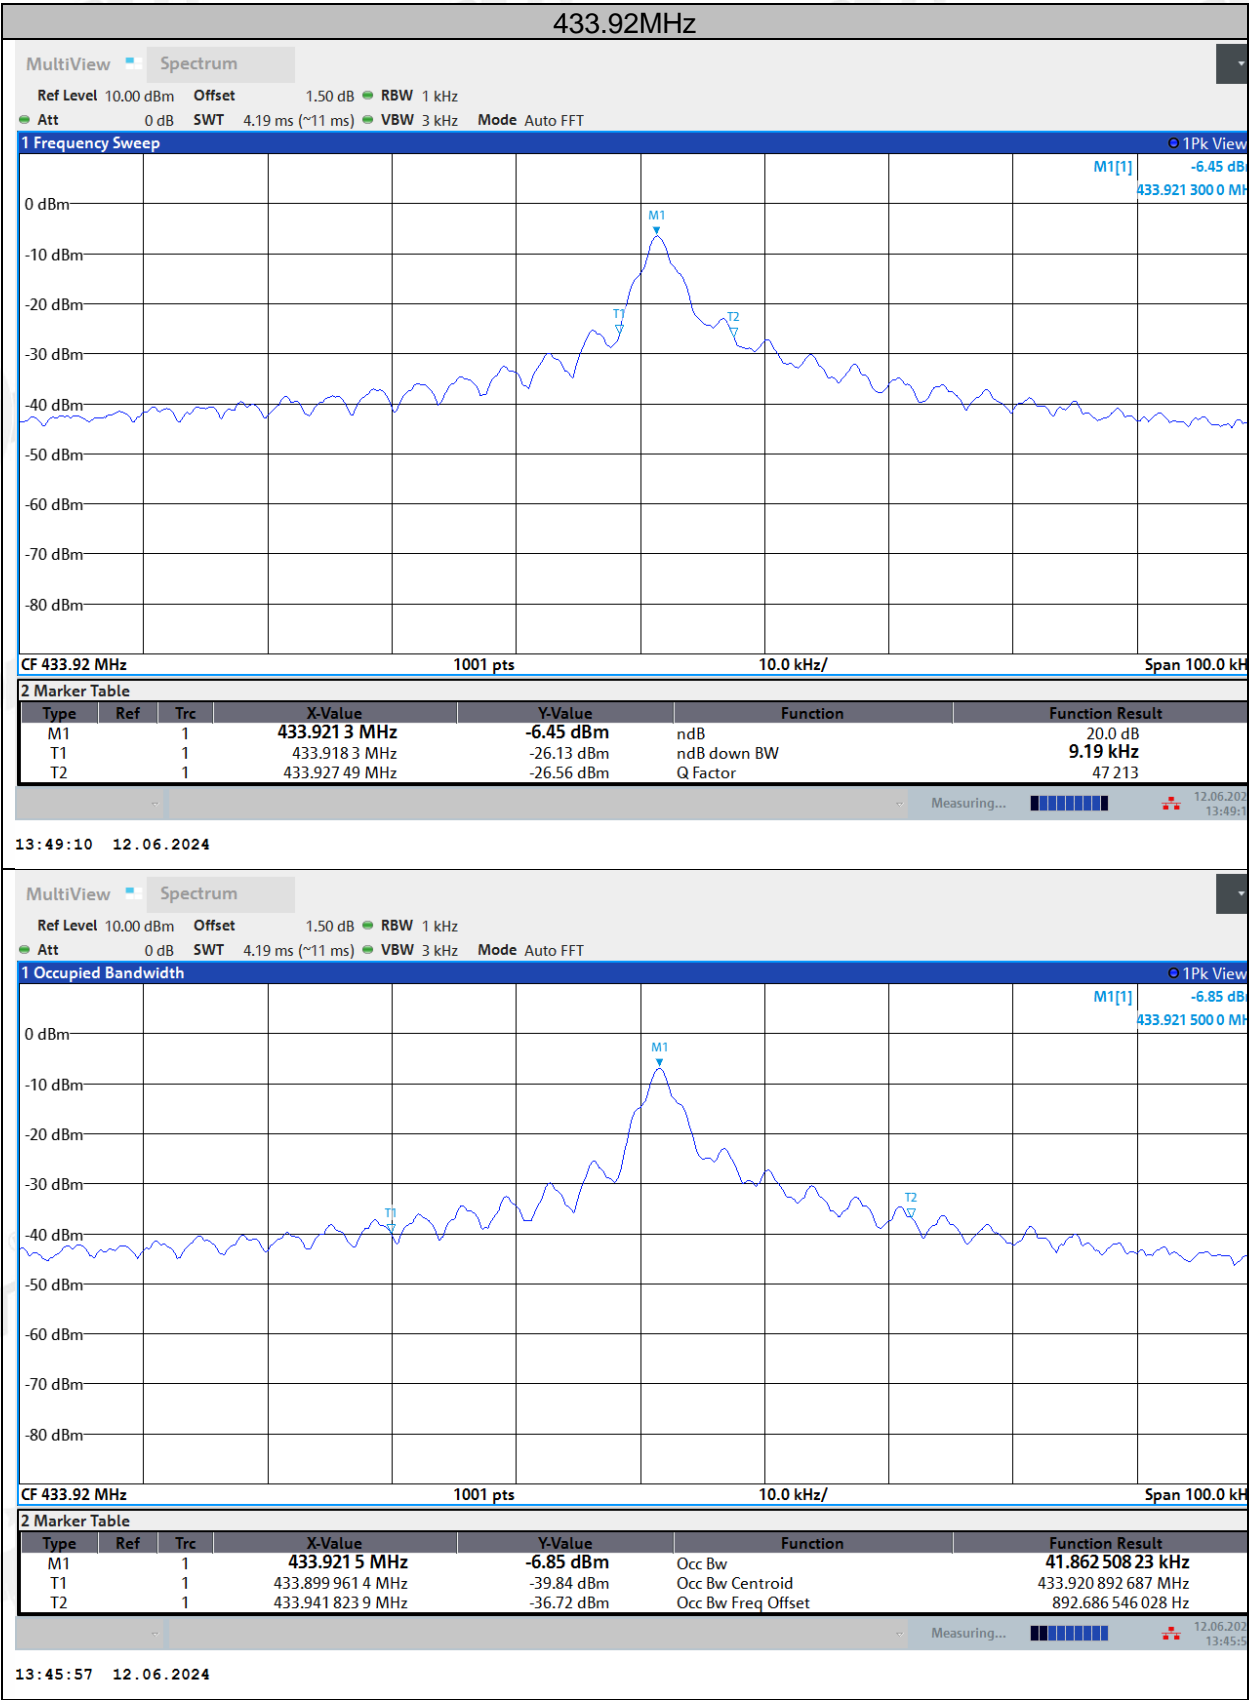



## 6. Stop transmitting time test

### 6.1. Block diagram of test setup

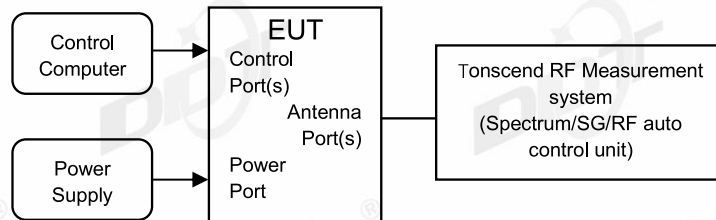

### 6.2. Limits

15.231(a), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.


### 6.3. Test Procedure

- (1) The EUT's RF signal was coupled to spectrum analyzer by antenna connected to spectrum analyzer.
- (2) Set the spectrum to zero span mode, and centered of EUT frequency.
- (3) Measure the stop transmitting time after release EUT button.

### 6.4. Test Result

Frequency (MHz)	Burst Duration[s]	Limit [s]	Verdict
433.92	2.452	≤5	PASS

6.5. Original test data

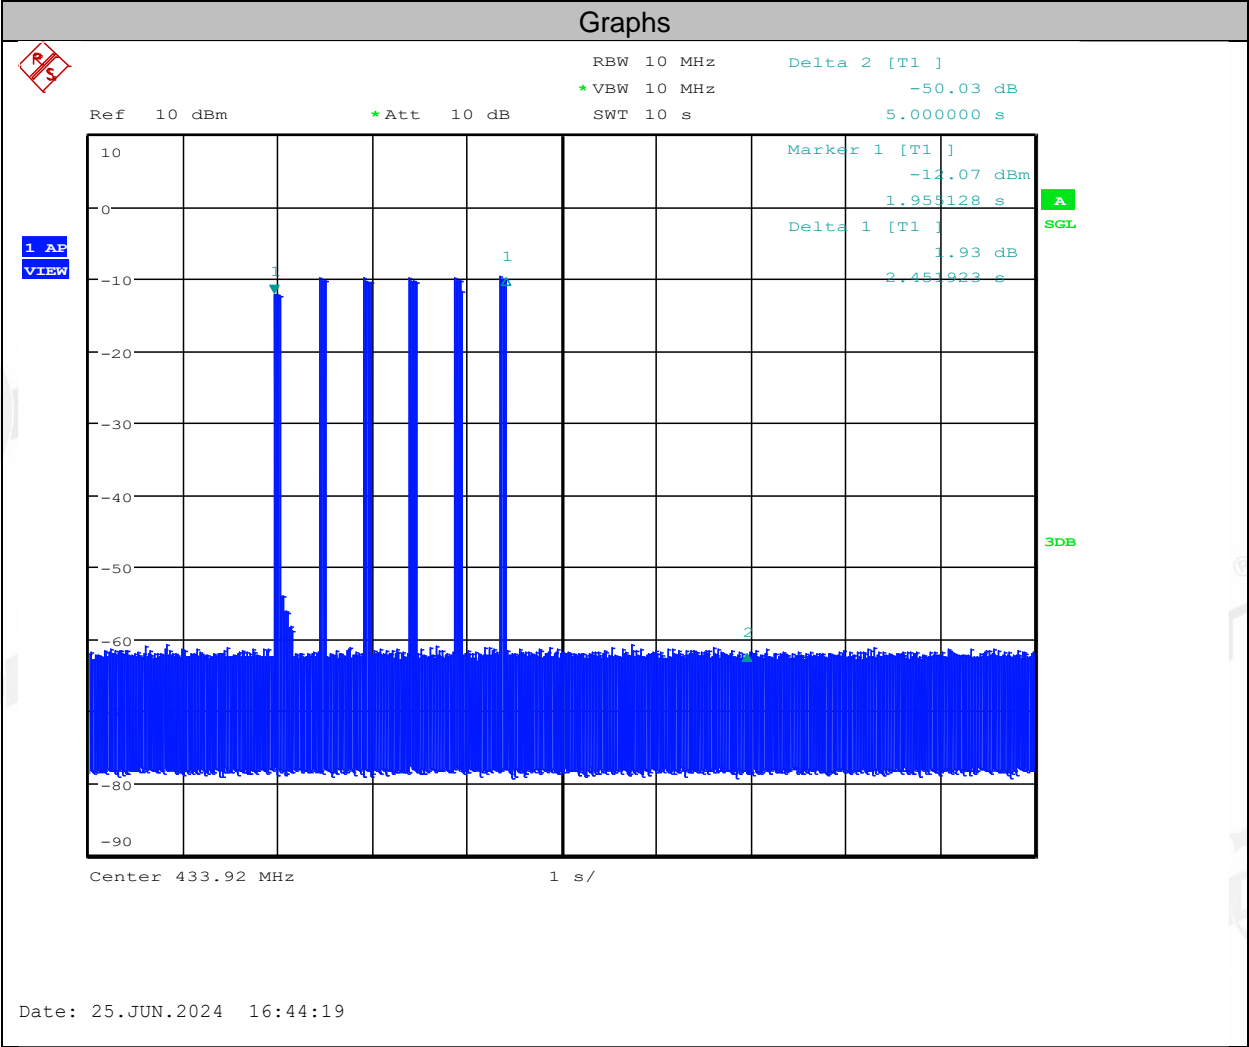


## 7. Radiated Emission

### 7.1. Test equipment


Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2025/04/01
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2024/07/15
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2025/04/01
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2025/04/01
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2024/07/12
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2025/04/01
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2025/04/26
ELECTRIC AND MAGNETIC FIELD ANALYZER	Narda	EHP-200A	DDT-ZC01401	2024/09/21
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2025/04/01
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2025/04/01
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2025/04/23
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2025/04/01
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2025/04/23
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2025/04/01
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2025/04/23
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC02129	2025/09/18

### 7.2. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

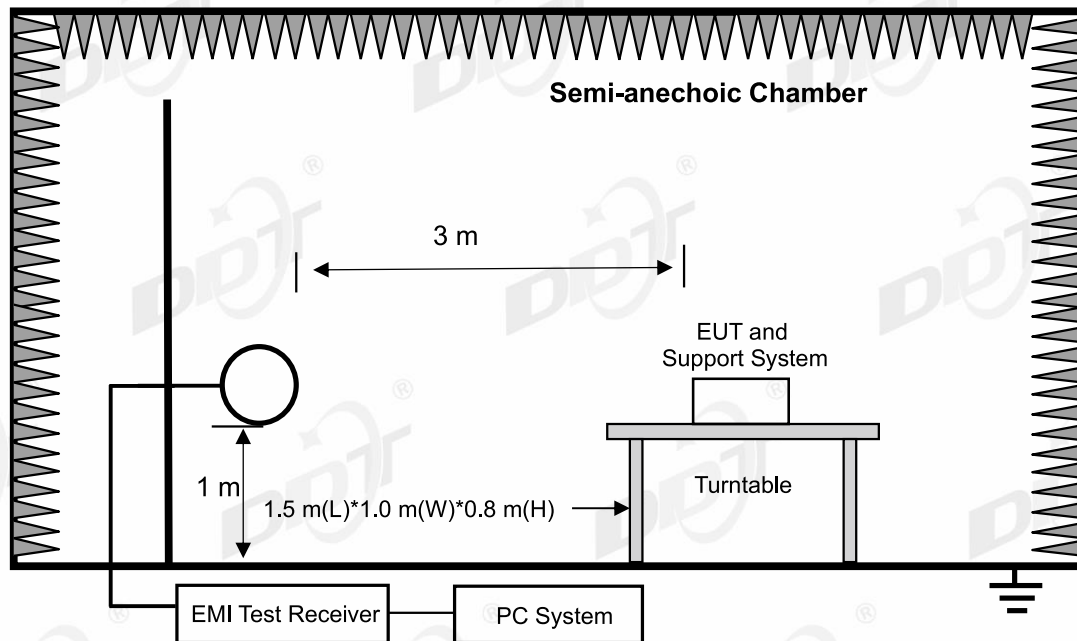

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

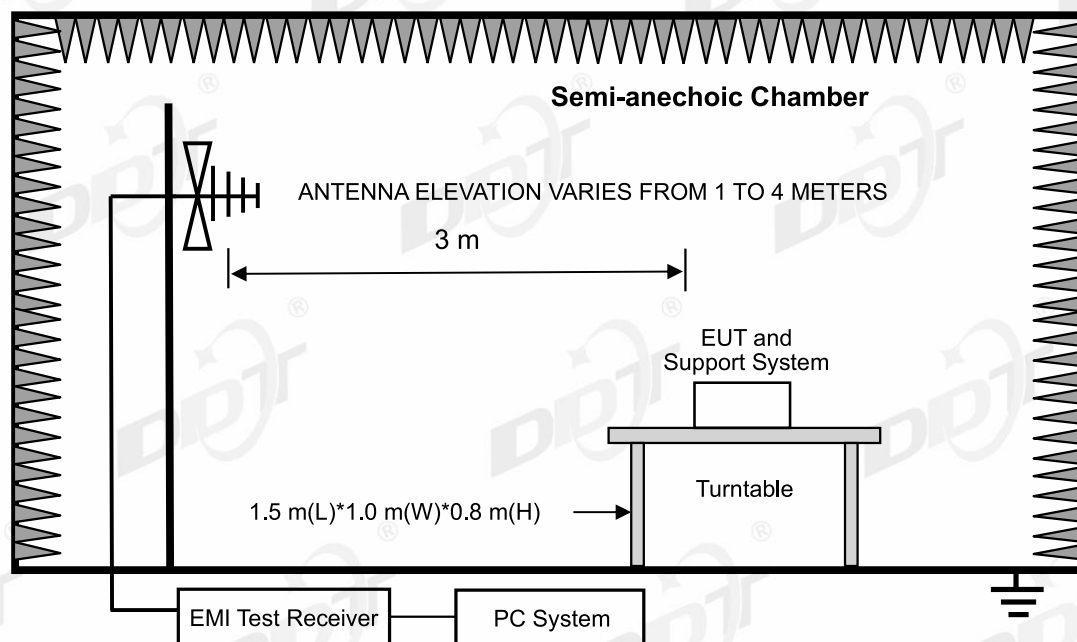

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

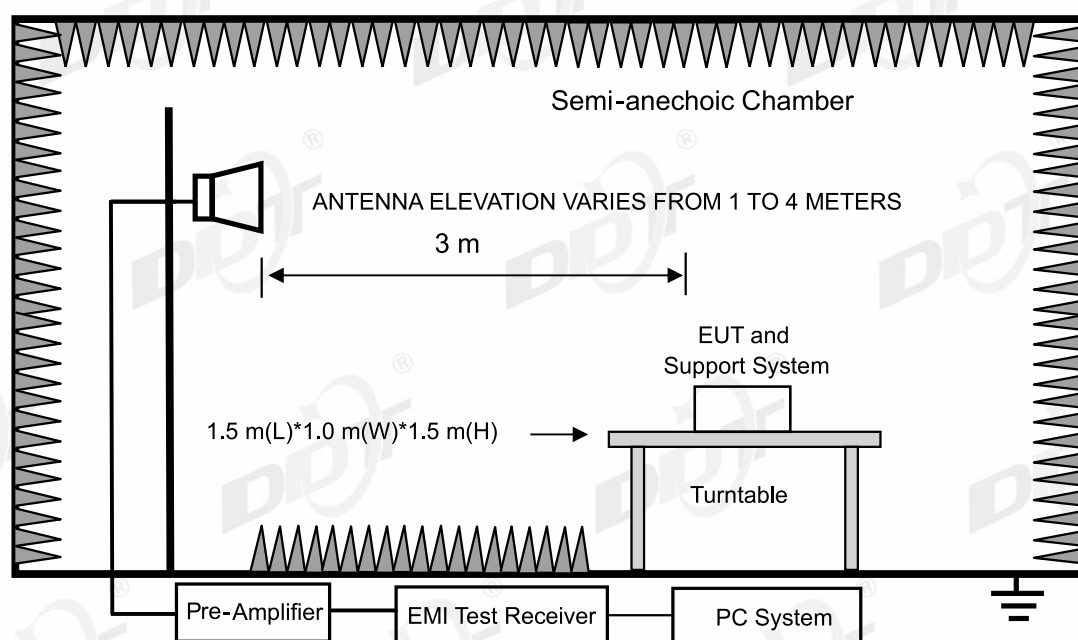

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

### 7.3. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6

## RSS-Gen section 8.10 Restricted frequency bands\*

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3.5-4.4
0.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			Above 38.6

\* Certain frequency bands listed in table and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

## (2) FCC 15.209 Limit &amp; RSS-Gen section 8.9 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

## (3)FCC 15.231 section (b) limit

Fundamental Frequency (MHz)	Field Strength of Fundamental	Field strength of spurious emission
433.92	AV:80.83dBuV/m @3m PK:100.83dBuV/m @3m	AV:60.83dBuV/m @3m PK:80.83dBuV/m @3m

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dBuV/m}) = \text{Limit}_{30m}(\text{dBuV/m}) + 40\text{Log}(30m/3m)$$

## (3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

## 7.4. Test Procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1 G and 150 cm above the ground plane inside a semi-anechoic chamber for above 1 G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz - 18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz - 40 GHz)	1 m

According ANSI C63.10:2013 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30 MHz, the Trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was

rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so below final test was performed with frequency range from 30 MHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

For emissions above 1 GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.

## 7.5. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits and RSS-Gen section 8.9 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: 30 MHz ~ 25 GHz: (Scan with 433.92M, the worst case is reported)

Note3: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in ASK 433.92 MHz mode.


Note4: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.



## Radiated Emission test (below 1 GHz)

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2024-06-20 **Tested By:** Junchang Du  
**EUT:** Remote control **Model Number:** AC127-01  
**Test Mode:** SRD TX 433.92MHz **Power Supply:** Battery  
**Condition:** Temp:21.9°C;Humi:60.0% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2024 report data\Q24052708-1E AC127\FCC BELOW 1G\20240620-171226\_H  
**Memo:** Sample Number:S24052708-002 Power Setting:NA

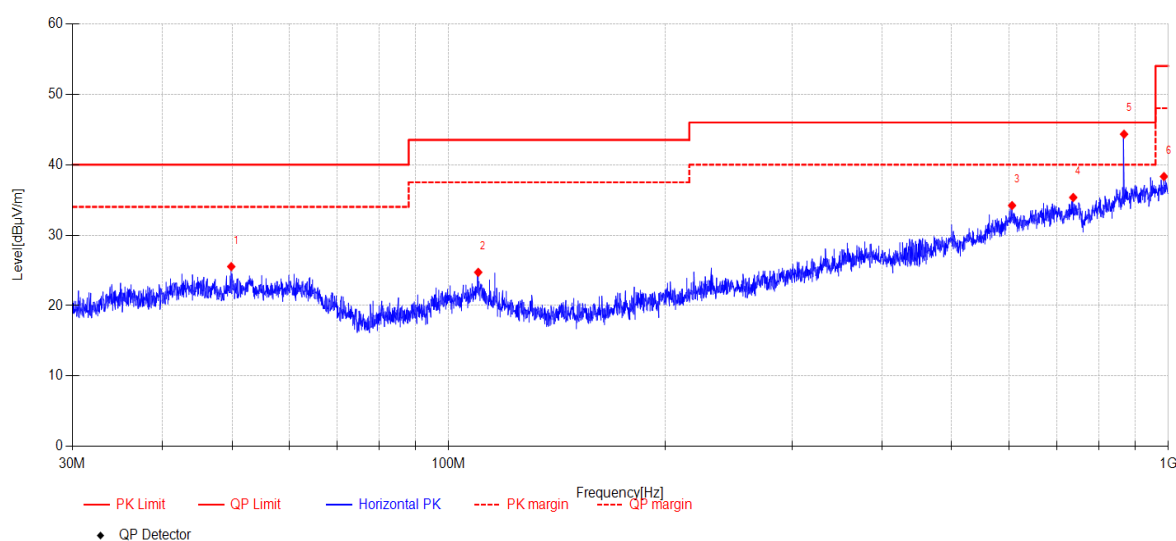


Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	49.876	8.70	12.96	3.88	0.00	25.54	40.00	14.46	PK	Horizontal
2	109.92	8.36	12.10	4.27	0.00	24.73	43.50	18.77	PK	Horizontal
3	606.57	8.69	19.13	6.39	0.00	34.21	46.00	11.79	PK	Horizontal
4	737.63	8.67	19.89	6.79	0.00	35.35	46.00	10.65	PK	Horizontal
5	867.93	15.98	21.23	7.12	0.00	44.33	46.00	1.67	PK	Horizontal
6	986.07	8.96	21.94	7.42	0.00	38.32	54.00	15.68	PK	Horizontal

## Note:

- Result Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
- Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
- AVG Level=Peak level+20log ( D ) , AVG limit : 60.83 dBμV/m , D= Duty Cycle =29.42%,
- NO.5: Spurious emission Peak level =44.33 dBμV/m , AVG Level =44.33 -10.63=33.7dBμV/m , PASS.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2024-06-20  
**Tested By:** Junchang Du  
**EUT:** Remote control  
**Model Number:** AC127-01  
**Test Mode:** SRD TX 433.92MHz  
**Power Supply:** Battery  
**Condition:** Temp:21.9°C;Humi:60.0%  
**Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2024 report data\Q24052708-1E AC127\FCC BELOW 1G\20240620-171307\_V  
**Memo:** Sample Number:S24052708-002 Power Setting:NA

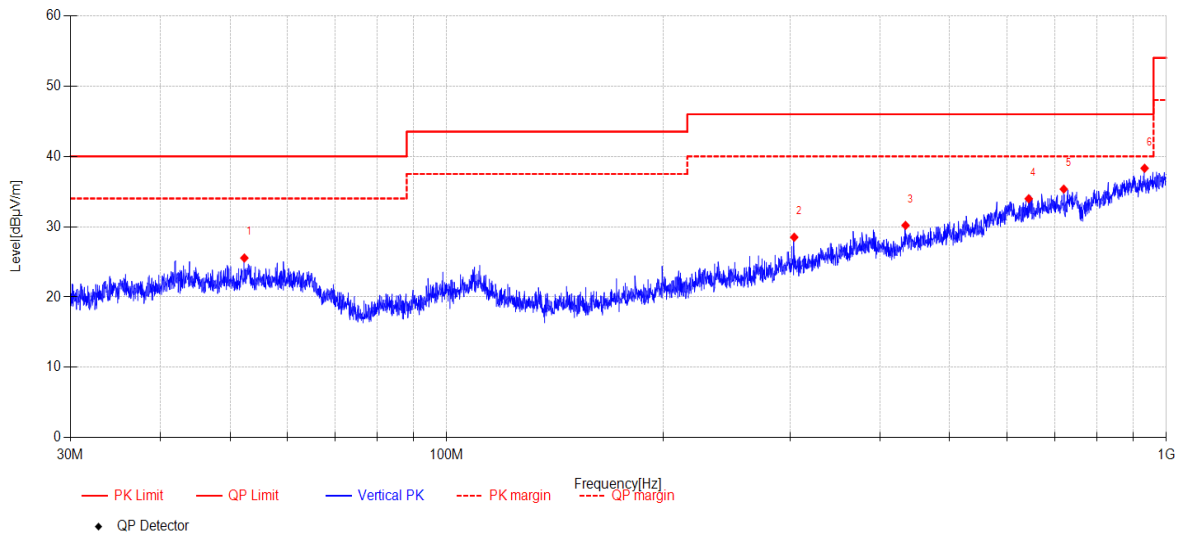


Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	52.349	8.51	13.14	3.90	0.00	25.55	40.00	14.45	PK	Vertical
2	304.04	9.57	13.70	5.24	0.00	28.51	46.00	17.49	PK	Vertical
3	434.13	8.51	15.93	5.75	0.00	30.19	46.00	15.81	PK	Vertical
4	643.82	8.51	18.96	6.51	0.00	33.98	46.00	12.02	PK	Vertical
5	720.25	9.42	19.19	6.74	0.00	35.35	46.00	10.65	PK	Vertical
6	932.93	9.17	21.85	7.29	0.00	38.31	46.00	7.69	PK	Vertical

**Note:**

- Result Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
- Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2024-06-20 **Tested By:** Junchang Du  
**EUT:** Remote control **Model Number:** AC127-01  
**Test Mode:** SRD TX 433.92MHz **Power Supply:** Battery  
**Condition:** Temp:21.9°C;Humi:60.0% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2024 report data\Q24052708-1E AC127\FCC BELOW 1G\20240620-171027\_H  
**Memo:** Sample Number:S24052708-002 Power Setting:NA

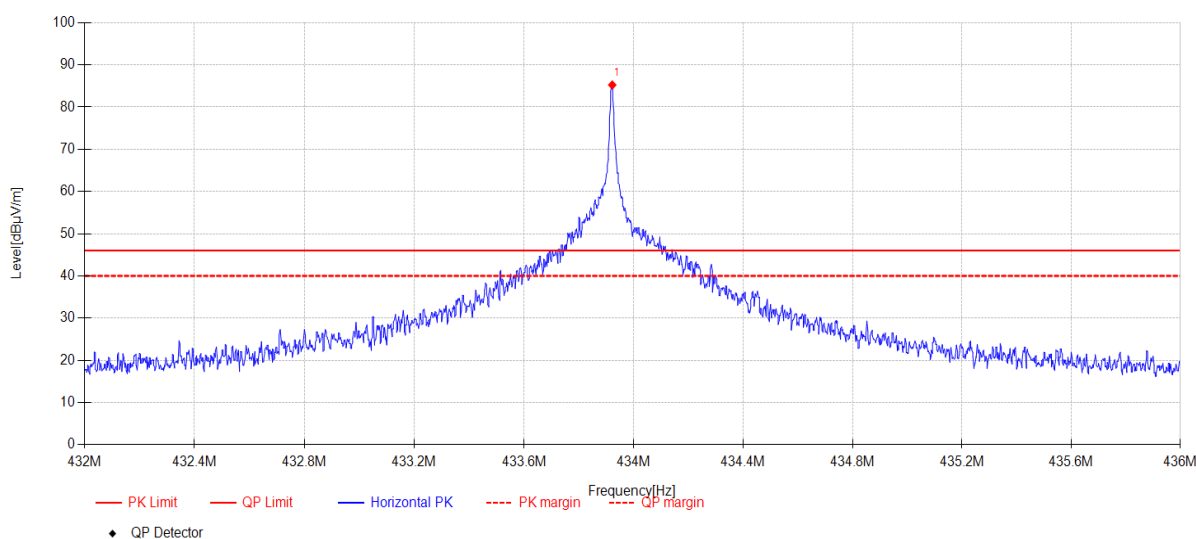

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	433.92	63.58	15.91	5.75	0.00	85.24	100.83	15.59	PK	Horizontal

**Note:**

- Result Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
- Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
- Field strength of fundamental : Peak limit= 100.83 dBμV/m ; AVG limit= 80.83 dBμV/m
- AVG Level=Peak level+20log ( D ) , AVG Level =85.24 -10.63=74.61dBμV/m,PASS.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-06-20

Tested By:

Junchang Du

EUT:

Remote control

Model Number:

AC127-01

Test Mode:

SRD TX 433.92MHz

Power Supply:

Battery

Condition:

Temp:21.9°C;Humi:60.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24052708-1E AC127\FCC BELOW 1G\20240620-171109\_V

Memo:

Sample Number:S24052708-002 Power Setting:NA

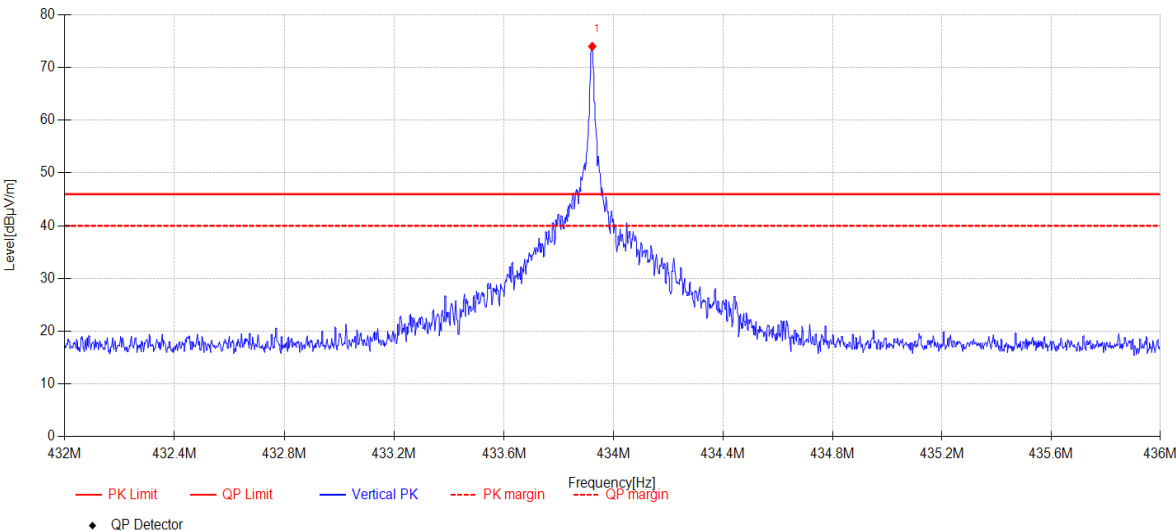

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	433.92	52.32	15.91	5.75	0.00	73.98	100.83	26.85	PK	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP


2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2024-06-20 **Tested By:** Junchang Du  
**EUT:** 遥控器 **Model Number:** AC127-01  
**Test Mode:** SRD TX 433.92MHz **Power Supply:** Battery  
**Condition:** Temp:21.9°C;Humi:60.0% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2024 report data\Q24052708-1E AC127\FCC ABOVE 1G\3  
**Memo:** Sample Number:S24052708-002 Power Setting:NA

### Test Graph

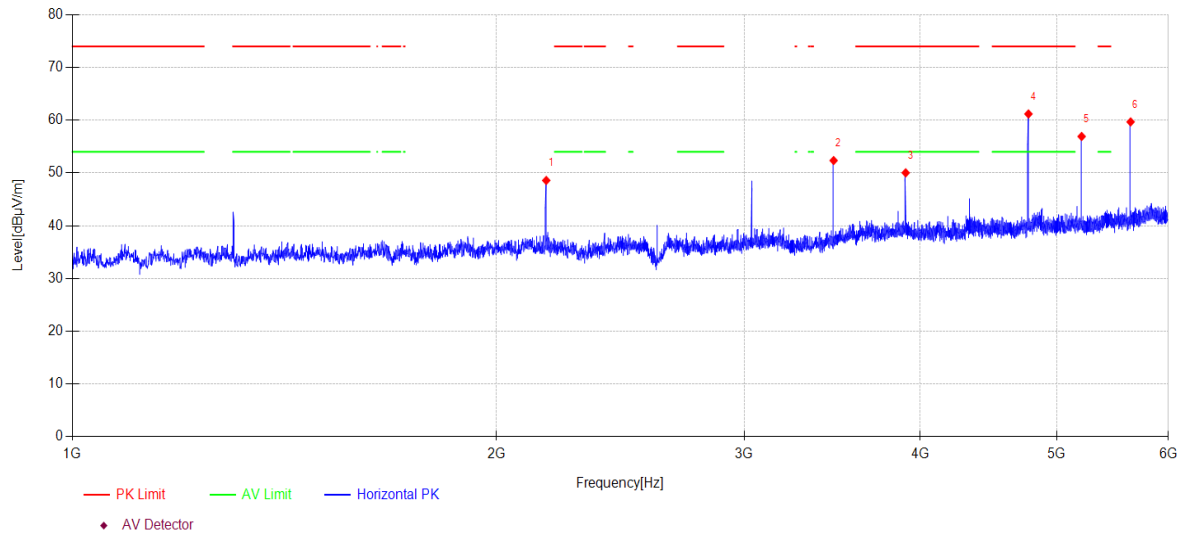

### Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2170.000	55.00	27.62	3.45	-37.49	48.58	-	-	PK	Horizontal
2	3471.500	58.73	29.56	4.20	-40.13	52.36	-	-	PK	Horizontal
3	3905.500	54.77	31.19	4.46	-40.39	50.03	74.00	23.97	PK	Horizontal
4	4773.500	63.92	32.39	5.03	-40.16	61.18	74.00	12.82	PK	Horizontal
5	5207.000	58.36	33.29	5.32	-40.05	56.92	-	-	PK	Horizontal
6	5641.000	60.70	33.38	5.60	-40.00	59.68	-	-	PK	Horizontal


### Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- AVG Level=Peak level+20log ( D ) , AVG limit : 60.83 dBμV/m , D= Duty Cycle =29.42%,
- NO.4: Spurious emission Peak level =61.18 dBμV/m , AVG Level =61.18 -10.63=50.55dBμV/m ,  
NO.5: Spurious emission Peak level =56.92dBμV/m , AVG Level =56.92 -10.63=46.29dBμV/m ,  
NO.6: Spurious emission Peak level =59.68dBμV/m , AVG Level =59.68 -10.63=49.05dBμV/m , pass.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2024-06-20 **Tested By:** Junchang Du  
**EUT:** 遥控器 **Model Number:** AC127-01  
**Test Mode:** SRD TX 433.92MHz **Power Supply:** Battery  
**Condition:** Temp:21.9°C;Humi:60.0% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2024 report data\Q24052708-1E AC127\FCC ABOVE 1G\4  
**Memo:** Sample Number:S24052708-002 Power Setting:NA

### Test Graph

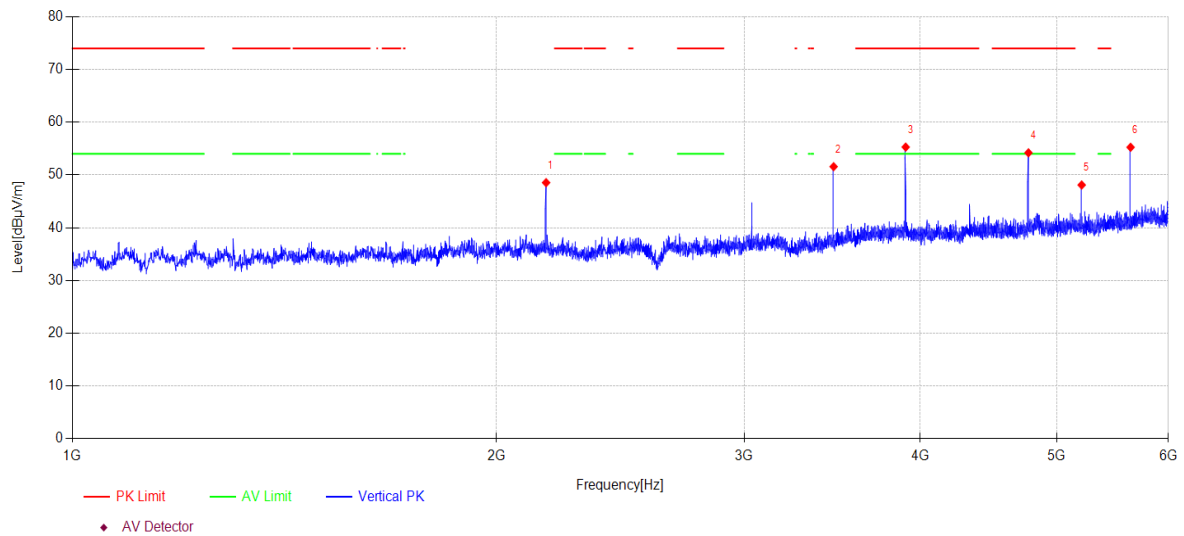

### Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2169.500	54.98	27.62	3.44	-37.49	48.55	-	-	PK	Vertical
2	3471.500	57.95	29.56	4.20	-40.13	51.58	-	-	PK	Vertical
3	3905.500	60.03	31.19	4.46	-40.39	55.29	74.00	18.71	PK	Vertical
4	4773.500	56.94	32.39	5.03	-40.16	54.20	74.00	19.80	PK	Vertical
5	5207.500	49.54	33.29	5.32	-40.05	48.10	-	-	PK	Vertical
6	5641.000	56.27	33.38	5.60	-40.00	55.25	-	-	PK	Vertical

### Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- NO.3: Spurious emission Peak level =55.29 dBμV/m , AVG Level =55.29 -10.63=44.66dBμV/m ,  
NO.4: Spurious emission Peak level =54.20dBμV/m , AVG Level =54.20-10.63=43.57dBμV/m ,  
NO.6: Spurious emission Peak level =55.25dBμV/m , AVG Level =55.25 -10.63=44.62dBμV/m , PASS.




## 8. Power Line Conducted Emission

### 8.1. Test equipment

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☑Power Line Conducted Emissions Test 1#				
Test Receiver	R&S	ESCI	100551	2024/07/10
LISN 1	R&S	ENV216	101109	2024/07/10
LISN 2	R&S	ESH2-Z5	100309	2024/07/11
Pulse Limiter	R&S	ESH3-Z2	101242	2024/07/14
CE Cable 1	HUBSER	N/A	W10.01	2024/07/14
Test software	Audix	E3	V 6.11111b	N/A

### 8.2. Block diagram of test setup

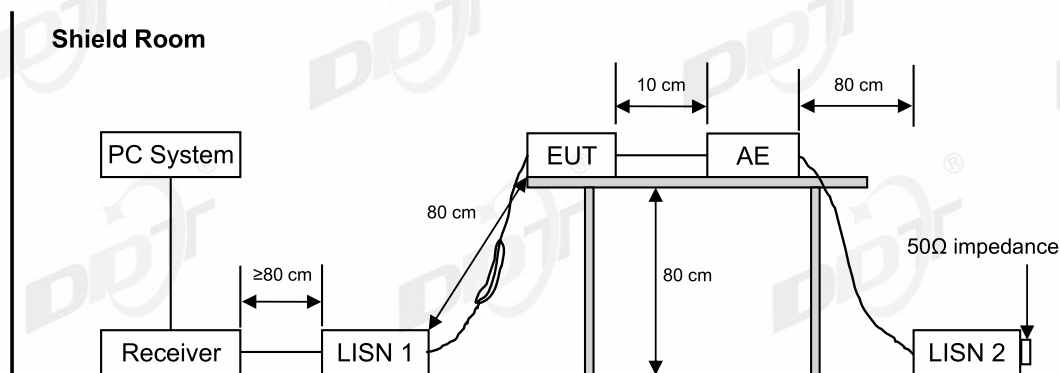

### 8.3. Power line conducted emission limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: \* Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

### 8.4. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80 cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver

connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

## **8.5. Test result**

**N/A**

This product is powered by Battery.



## **9. Antenna Requirements**

### **9.1. Limit**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

### **9.2. Result**

The antenna used for this product is Spring antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 0.32 dBi.

## 11. Photos of the EUT

Please refer to DDT-RE24052708-1E01 appendix I.

**END OF REPORT**