

Report No.: ZR/2020/A001609

Page: 1 of 65

FCC TEST REPORT

Application No.: ZR/2020/A0016 **Applicant:** HMD global Oy

Address of Applicant Bertel Jungin aukio 9, 02600 Espoo, Finland

Manufacturer: HMD global Oy

Address of Manufacturer Bertel Jungin aukio 9, 02600 Espoo, Finland

EUT Description: Smart Phone
Model No.: TA-1329
Trade Mark: NOKIA

FCC ID: 2AJOTTA-1329

Standards: 47 CFR FCC Part 2, Subpart J

47 CFR Part 15, Subpart C

Date of Receipt: 2020/10/19(for original report ZR/2020/A001603)

Date of Test: 2020/10/23 to 2020/12/10(for original report ZR/2020/A001603)

Date of Issue: 2020/12/11(for original report ZR/2020/A001603) 2020/12/16(for new report ZR/2020/A001609)

Test Result : PASS *

Remark:TA-1323 has the Dual SIM tray,TA-1329 has the Single SIM tray.

Authorized Sugnature:

Derek Yang Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Attention:**To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-7

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳•科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

^{*} In the configuration tested, the EUT detailed in this report complied with the standards specified above.



Report No.: ZR/2020/A001609

Page: 2 of 65

Version

Revision Record					
Version Chapter Date Modifier Remark				Remark	
01		2020-12-11		Original	

Authorized for issue by:		
Tested By	Mike Mu	
	(Mike Hu) /Project Engineer	
Checked By	David Chen	
Oncored By	(David Chen) /Reviewer	





Report No.: ZR/2020/A001609

Page: 3 of 65

Test Summary 2

Test Item	Test Requirement	Test Method	Test Result	Result
AC Power Line Conducted Emission	15.207	ANSI C63.10 2013	Clause 4.2	PASS
Conducted Output Power	15.247 (b)(3)	ANSI C63.10 2013	Clause 4.3	PASS
DTS (6 dB) Bandwidth & 99% Occupied Bandwidth	15.247 (a)(2)	ANSI C63.10 2013	Clause 4.4	PASS
Power Spectral Density	15.247 (e)	ANSI C63.10 2013	Clause 4.5	PASS
Band-edge for RF Conducted Emissions	15.247(d)	ANSI C63.10 2013	Clause 4.6	PASS
RF Conducted Spurious Emissions	15.247(d)	ANSI C63.10 2013	Clause 4.7	PASS
Radiated Spurious Emissions	15.205/15.209	ANSI C63.10 2013	Clause 4.8	PASS
Restricted bands around fundamental frequency (Radiated Emission)	15.205/15.209	ANSI C63.10 2013	Clause 4.9	PASS





Report No.: ZR/2020/A001609

Page: 4 of 65





Report No.: ZR/2020/A001609

5 of 65 Page:

Remark:

This test report (Report No.: ZR/2020/A001609) is base on the original test report (Report No.: ZR/2020/A001603) issued on 2020-12-11.

Review this report and original report, this report just changing the parts according to the declaration letter from client.

According to the declaration from the applicant, the models: TA-1323 and TA-1329 are identical in specifications, only different according to the declaration letter from client.

Considering to the difference, pre-scan were performed on the sample in this report to find the items which can be influential to the result in the original test report for fully retest.

Therefore in this report all items do not need to retest and all test data in this report are base on the previous report with report number ZR/2020/A001603.





Report No.: ZR/2020/A001609

Page: 6 of 65

Contents

1	vers	sion		2
2	Test	Sumn	nary	3
3	Gen	eral In	formation	8
	3.1	De	tails of Client	8
	3.2	Te	st Locationst	8
	3.3	Te	st Facility	9
	3.4	Ge	neral Description of EUT	10
	3.5	Te	st Environment	11
	3.6	De	scription of Support Units	11
4	Test	result	s and Measurement Data	12
	4.1	An	tenna Requirement	12
	4.2	AC	Power Line Conducted Emissions	13
	4.3	Du	ty Cycle	19
		4.3.1	Test Results	19
		4.3.2	Test Plots	20
	4.4	Co	nducted Output Power	21
		4.4.1	Test Results	21
		4.4.2	Test Plots	22
	4.5	DT	S (6 dB) Bandwidth & 99% Occupied Bandwidth	24
		4.5.1	Test Results	24
		4.5.2	Test Plots	25
	4.6	Po	wer Spectral Density	28
		4.6.1	Test Results	28
		4.6.2	Test Plots	29
	4.7	Ва	nd-edge for RF Conducted Emissions	31
		4.7.1	Test Plots	32
	4.8	RF	Conducted Spurious Emissions	34
		4.8.1	Test Plots	35
	4.9	Ra	diated Spurious Emissions	38
		4.9.1	Radiated Emission below 1GHz	41
		4.9.2	Transmitter Emission above 1GHz	43
		4.9.3	Radiated Emission below 1GHz	49





Report	No ·	ZR/2020/A001609
IZEDOI1	INU	

Page:	7 of	f 65
-------	------	------

	•	
	4.9.4 Transmitter Emission above 1GHz	51
	4.10 Restricted bands around fundamental frequency	53
	4.10.1 Test Plots	
5	Measurement Uncertainty (95% confidence levels, k=2)	61
6	Equipment List	62
	Photographs - EUT Constructional Details	





Report No.: ZR/2020/A001609

8 of 65 Page:

3 **General Information**

3.1 Details of Client

Applicant:	HMD global Oy
Address of Applicant	Bertel Jungin aukio 9, 02600 Espoo, Finland
Manufacturer:	HMD global Oy
Address of Manufacturer	Bertel Jungin aukio 9, 02600 Espoo, Finland

3.2 Test Location

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch		
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China		
Post code:	518057		





Report No.: ZR/2020/A001609

9 of 65 Page:

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC -Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.





Report No.: ZR/2020/A001609

10 of 65 Page:

3.4 General Description of EUT

EUT Description:	Smart Phone	
Model No.:	TA-1329	
Trade Mark:	NOKIA	
Hardware Version:	V1.0	
Software Version:	00WW_0_070	
Operation Frequency:	2400MHz~2483.5MHz fc = 2402 MHz + N * 2 MHz, where: -fc = "Operating Frequency" in MHz, -N = "Channel Number" with the range from 0 to 39.	
Bluetooth version:	Bluetooth V4.2	
Modulation Type: GFSK		
Number of Channel: 40		
Sample Type:		
Antenna Type: ☐ External, ☑ Integrated		
Antenna Gain:	-1.0dBi	
Power Supply	□ AC/DC Adapter; □ Battery □ PoE:; □ Other:	

	Operation Frequency of each channel						
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz





Report No.: ZR/2020/A001609

11 of 65 Page:

Remark:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel(CH0)	2402MHz
The Middle channel(CH19)	2440MHz
The Highest channel(CH39)	2480MHz

3.5 Test Environment

Operating Environment:			
Temperature:	25.0 °C		
Humidity:	50 % RH		
Atmospheric Pressure:	101.30 KPa		

3.6 Description of Support Units

The EUT has been tested independent unit.





Report No.: ZR/2020/A001609

12 of 65 Page:

4 **Test results and Measurement Data**

4.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -1.0dBi.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention. To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: ZR/2020/A001609

Page: 13 of 65

4.2 AC Power Line Conducted Emissions

Test Requirement:	47 CFR Part 15C Section	n 15.207		
Test Method:	ANSI C63.10: 2013			
Test Frequency Range:	150kHz to 30MHz			
Limit:	Fraguenov rango (MUz)	Limit (d	BuV)	
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the log	arithm of the frequency.		
Test Procedure:	room.	listurbance voltage test was		
	Impedance Stabilizati impedance. The position connected to a second plane in the same of multiple socket outled single LISN provided. 3) The tabletop EUT was ground reference placed on the horizon. 4) The test was perform the EUT shall be 0. vertical ground reference plane. The unit under test and mounted on top of the the closest points of and associated equip. 5) In order to find the mand all of the interface.	ected to AC power source ion Network) which provides ower cables of all other und LISN 2, which was bonded way as the LISN 1 for the attrip was used to connect method the rating of the LISN was not as placed upon a non-metalline. And for floor-standing arrotal ground reference plane. The was placed upon a mon-metalline of the LISN 1 was placed upon a mon-metalline. And for floor-standing arrotal ground reference plane was bonded to a ground reference plane was placed 0.8 m for the LISN 1 and the EUT. A soment was at least 0.8 m from the aximum emission, the relative cables must be changed as an conducted measurement.	a $50\Omega/50\mu H + 5\Omega$ linear units of the EUT were to to the ground reference unit being measured. A nultiple power cables to a pot exceeded. It table 0.8m above the rangement, the EUT was been a present the first properties of the horizontal ground from the boundary of the erence plane for LISNs has distance was between all other units of the EUT in the LISN 2.	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck-Rigas.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: ZR/2020/A001609

Page: 14 of 65

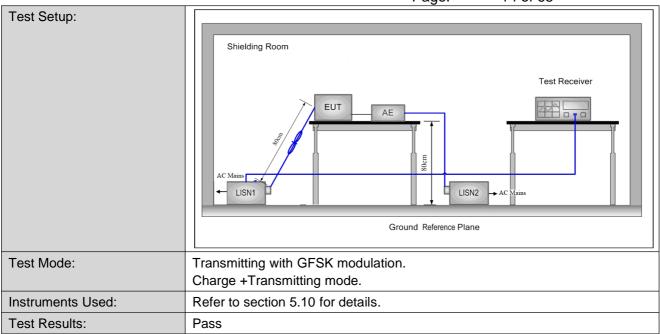



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excense parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Attention:**To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1643, **Totalogne in the content of the cont

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: ZR/2020/A001609

15 of 65 Page:


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

First Supply:

Live Line:

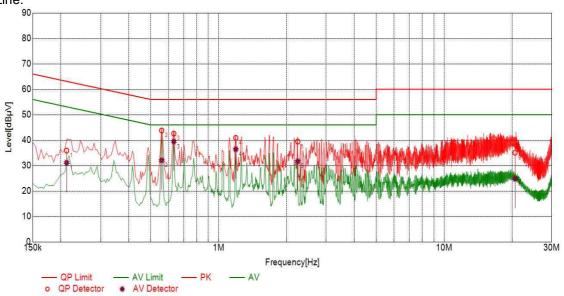

Final	Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Туре
1	0.2122	10.10	35.88	63.12	27.24	31.14	53.12	21.98	L
2	0.5595	10.10	43.78	56.00	12.22	32.11	46.00	13.89	L
3	0.6335	10.10	42.57	56.00	13.43	39.48	46.00	6.52	L
4	1.1924	10.10	40.89	56.00	15.11	36.44	46.00	9.56	L
5	2.2444	10.10	39.45	56.00	16.55	31.69	46.00	14.31	L
6	20.6122	10.11	35.06	60.00	24.94	24.85	50.00	25.15	L



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Clients instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulles extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing inspection report & certificate, be passe contact us at telephone. (86-755) 8307 1443.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 中国·深圳·科技园中区M-10栋一号厂房


邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: ZR/2020/A001609

Page: 16 of 65

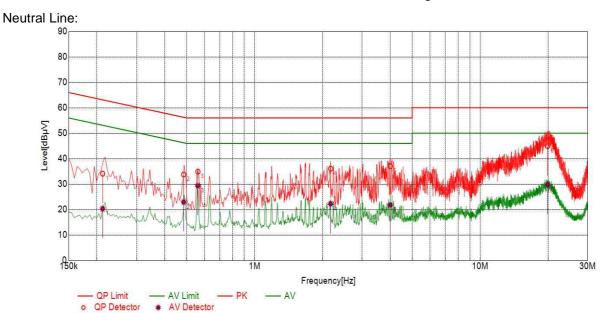

Final	Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Туре
1	0.2121	10.10	34.09	63.12	29.03	20.29	53.12	32.83	N
2	0.4852	10.10	33.77	56.25	22.48	22.94	46.25	23.31	N
3	0.5610	10.10	34.90	56.00	21.10	29.34	46.00	16.66	N
4	2.1747	10.10	36.07	56.00	19.93	22.27	46.00	23.73	N
5	3.9956	10.10	37.04	56.00	18.96	21.80	46.00	24.20	N
6	19.8937	10.11	44.94	60.00	15.06	29.72	50.00	20.28	N



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excense parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Attention:**To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1643, **Totalogne in the content of the cont

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594


www.sqsqroup.com.cn sgs.china@sgs.com



Report No.: ZR/2020/A001609

Page: 17 of 65

Secondly Supply:

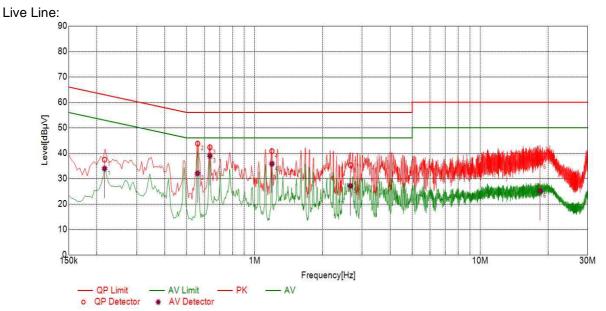

Final	Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Туре
1	0.2164	10.10	37.42	62.96	25.54	33.94	52.96	19.02	L
2	0.5593	10.10	43.76	56.00	12.24	32.07	46.00	13.93	L
3	0.6342	10.10	42.29	56.00	13.71	38.97	46.00	7.03	L
4	1.1939	10.10	40.78	56.00	15.22	35.83	46.00	10.17	L
5	2.6647	10.10	35.25	56.00	20.75	27.09	46.00	18.91	L
6	18.4493	10.11	36.54	60.00	23.46	25.20	50.00	24.80	L



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excense parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Attention:**To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1643, **Totalogne in the content of the cont

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594


sgs.china@sgs.com



Report No.: ZR/2020/A001609

Page: 18 of 65



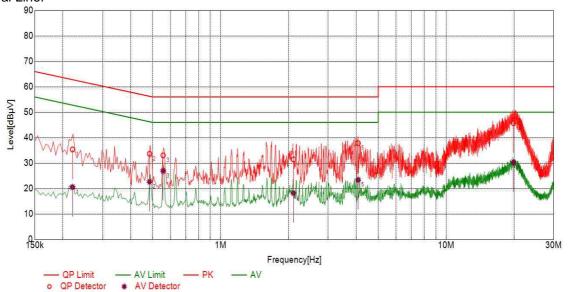

Final	Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	ΑV Limit [dBμV]	AV Margin [dB]	Туре
1	0.2207	10.10	35.37	62.79	27.42	20.55	52.79	32.24	Ν
2	0.4845	10.10	33.67	56.26	22.59	22.66	46.26	23.60	Ν
3	0.5565	10.10	33.04	56.00	22.96	26.95	46.00	19.05	Ν
4	2.1056	10.10	31.44	56.00	24.56	18.22	46.00	27.78	Ν
5	4.0745	10.10	37.83	56.00	18.17	23.40	46.00	22.60	Ν
6	19.8672	10.11	45.70	60.00	14.30	30.26	50.00	19.74	Ν

Remarks:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing inspection report & certificate. Deserved us at telephone: (86-755) 8397 1443, **Attention: To check the authenticity of testing inspection report & certificate us at telephone: (86-755) 8397 1443, **Attention: To check the authenticity of testing inspection report & certificate us at telephone: (86-755) 8397 1443, **Attention: To check the authenticity of testing inspection report & certificate us at telephone: (86-755) 8397 1443, **Attention: To check the authenticity of testing inspection report & certificate us at telephone: (86-755

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

sgs.china@sgs.com



Report No.: ZR/2020/A001609

Page: 19 of 65

4.3 Duty Cycle

4.3.1 **Test Results**

Test Mode	TX Freq. [MHz]	Duty cycle [%]
BLE_1M	CH0, CH19, CH39	62.50






Report No.: ZR/2020/A001609

20 of 65 Page:

4.3.2 **Test Plots**

ANT1 4.3.2.1

4.3.2.1.1 BLE_1M

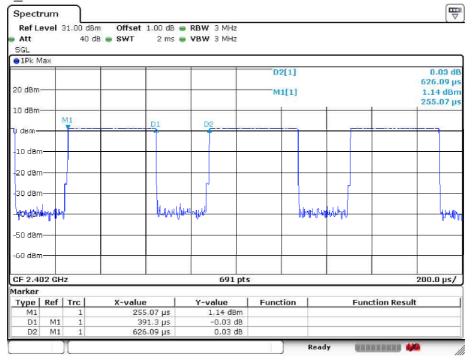

Date: 8.NOV.2020 15:17:20






Report No.: ZR/2020/A001609

21 of 65 Page:

4.4 Conducted Output Power

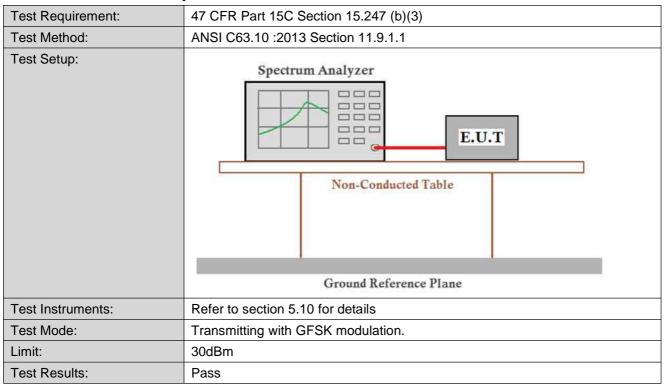

4.4.1 **Test Results**

Measurement Data of Peak Power:

	GFSK_1M mode					
Test Channel	t Channel Peak Output Power (dBm) Limit (dBm)		Result			
Lowest	1.47	30.00	Pass			
Middle	1.97	30.00	Pass			
Highest	1.97	30.00	Pass			





Report No.: ZR/2020/A001609

22 of 65 Page:

4.4.2 **Test Plots**

GFSK 1M_Lowest Channel 4.4.2.1



Date: 8.NOV.2020 15:07:52





Report No.: ZR/2020/A001609

23 of 65 Page:

GFSK 1M_Middle Channel 4.4.2.2



Date: 8.NOV.2020 15:08:15

GFSK 1M_Highest Channel 4.4.2.3



Date: 8.NOV.2020 15:08:29



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgety or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: ZR/2020/A001609

24 of 65 Page:

4.5 DTS (6 dB) Bandwidth & 99% Occupied Bandwidth

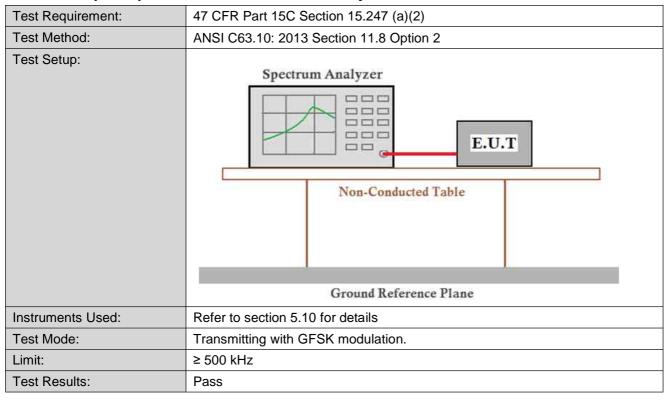

4.5.1 **Test Results**

Mode	Test Channel	99% Occupied Bandwidth (MHz)	6dB Emission Bandwidth (MHz)	Limit (kHz)	Result
	Lowest	1.06	0.68	≥500	Pass
GFSK_1M	Middle	1.06	0.68	≥500	Pass
	Highest	1.06	0.67	≥500	Pass





Report No.: ZR/2020/A001609


25 of 65 Page:

4.5.2 **Test Plots**

GFSK 1M_Lowest Channel 4.5.2.1



Date: 8.NOV.2020 15:09:13

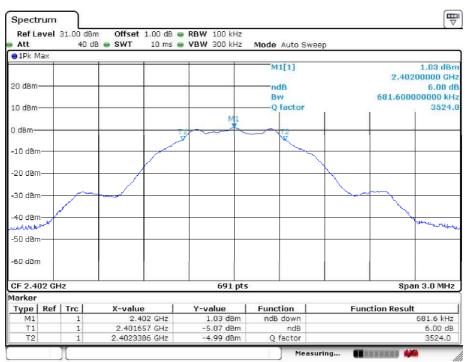

Date: 8.NOV.2020 15:09:26



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgety or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房




Report No.: ZR/2020/A001609

Page: 26 of 65

GFSK 1M Middle Channel 4.5.2.2



Date: 8.NOV.2020 15:09:00

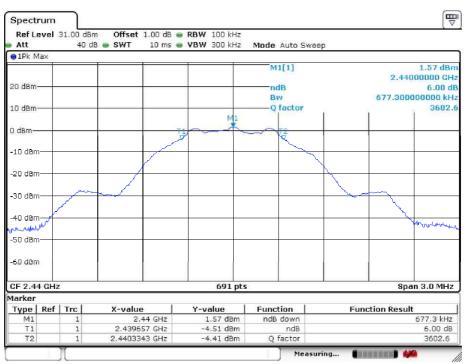

Date: 8.NOV.2020 15:10:21






Report No.: ZR/2020/A001609

Page: 27 of 65

4.5.2.3 GFSK 1M_Highest Channel



Date: 8.NOV.2020 15:08:44

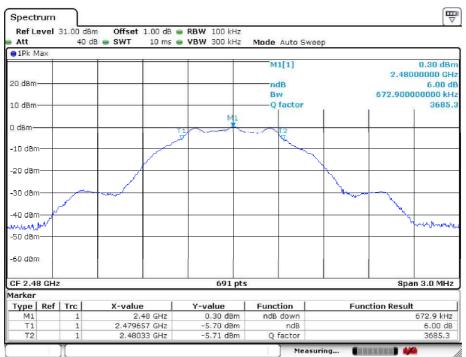

Date: 8.NOV.2020 15:10:34






Report No.: ZR/2020/A001609

28 of 65 Page:

4.6 Power Spectral Density

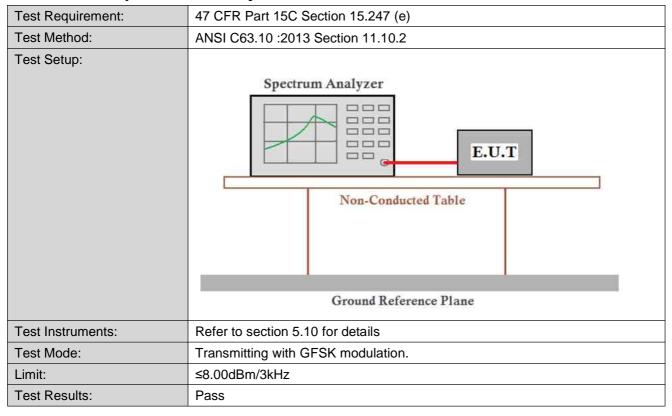

4.6.1 **Test Results**

Mode	Test Channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
	Lowest	-13.94	≤8.00	Pass
GFSK_1M	Middle	-13.34	≤8.00	Pass
	Highest	-14.58	≤8.00	Pass






Report No.: ZR/2020/A001609

29 of 65 Page:

4.6.2 **Test Plots**

GFSK 1M_Lowest Channel 4.6.2.1

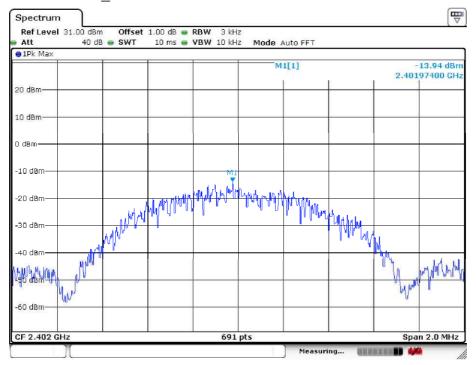

Date: 8.NOV.2020 15:11:15






Report No.: ZR/2020/A001609


30 of 65 Page:

GFSK 1M_Middle Channel 4.6.2.2

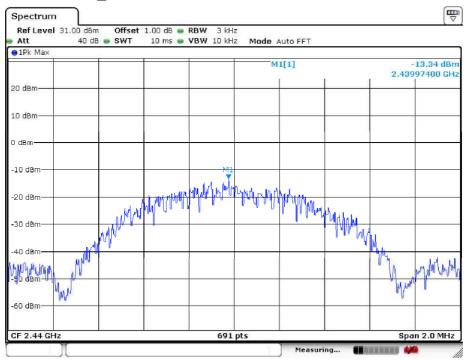

Date: 8.NOV.2020 15:11:00

GFSK 1M_Highest Channel 4.6.2.3

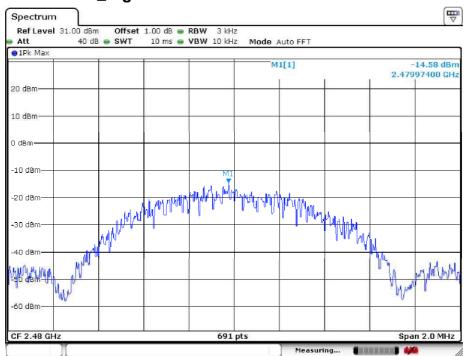

Date: 8.NOV.2020 15:10:46



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: ZR/2020/A001609

31 of 65 Page:

4.7 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)		
Test Method:	ANSI C63.10: 2013 Section 11.13		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table		
	Ground Reference Plane		
Instruments Used:	Refer to section 5.10 for details		
Test Mode:	Transmitting with GFSK modulation.		
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.		
Test Results:	Pass		






Report No.: ZR/2020/A001609

32 of 65 Page:

4.7.1 **Test Plots**

GFSK 1M Lowest Channel 4.7.1.1

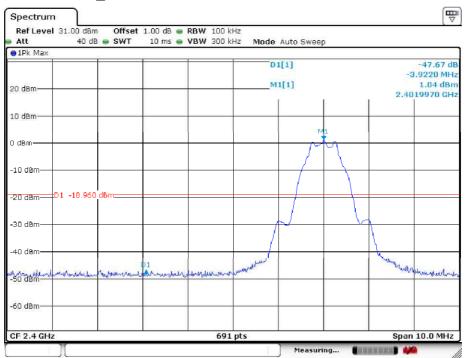

Date: 8.NOV.2020 15:12:14






Report No.: ZR/2020/A001609

33 of 65 Page:

GFSK 1M_Highest Channel 4.7.1.2

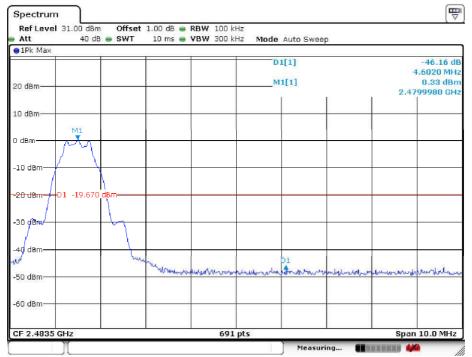

Date: 8 NOV 2020 15:12:53





Report No.: ZR/2020/A001609

34 of 65 Page:

4.8 RF Conducted Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)		
Test Method:	ANSI C63.10: 2013 Section 11.11		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Instruments Used:	Refer to section 5.10 for details		
Test Mode:	Transmitting with GFSK modulation.		
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.		
Test Results:	Pass		






Report No.: ZR/2020/A001609

35 of 65 Page:

4.8.1 **Test Plots**

GFSK 1M Lowest Channel 4.8.1.1

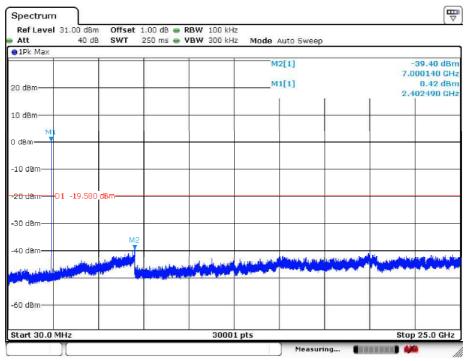

Date: 8.NOV.2020 15:16:42






Report No.: ZR/2020/A001609


36 of 65 Page:

GFSK 1M_Middle Channel 4.8.1.2

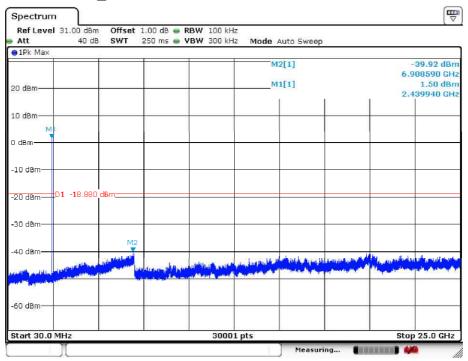

Date: 8.NOV.2020 15:15:40

GFSK 1M_Highest Channel 4.8.1.3

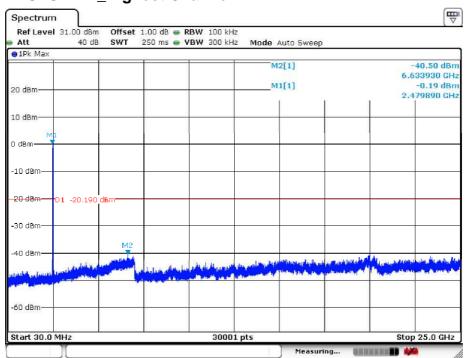

Date: 8.NOV.2020 15:14:36



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgety or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: ZR/2020/A001609

37 of 65 Page:

Remark:

Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.





Report No.: ZR/2020/A001609

38 of 65 Page:

4.9 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section	47 CFR Part 15C Section 15.209 and 15.205						
Test Method:	ANSI C63.10 :2013 Section 11.12							
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark			
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak			
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average			
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak			
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak			
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average			
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak			
	30MHz-1GHz	Quasi-peak	100kHz	30kHz	Quasi-peak			
	Above 1CHz	Peak	1MHz	3MHz	Peak			
	Above 1GHz	Peak	1MHz	10Hz	Average			
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)			
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300			
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30			
	1.705MHz-30MHz	30	-	-	30			
	30MHz-88MHz	100	40.0	Quasi-peak	3			
	88MHz-216MHz	150	43.5	Quasi-peak	3			
	216MHz-960MHz	200	46.0	Quasi-peak	3			
	960MHz-1GHz	500	54.0	Quasi-peak	3			
	Above 1GHz	500	54.0	Average	3			
Remark: 15.35(b),Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.								






Report No.: ZR/2020/A001609

39 of 65 Page:

Test Setup:






Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz




Figure 3. Above 1 GHz

Test Procedure:

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. Use the following spectrum analyzer settings:
 - Span shall wide enough to fully capture the emission being (1) measured:
 - (2)Set RBW=100 kHz for f < 1 GHz, RBW=1MHz for f>1GHz; VBW ≥ RBW; Sweep = auto;
 - Detector function = peak; Trace = max hold for peak
 - For average measurement: use duty cycle correction factor (3)method per 15.35(c).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755)8307 1443, **Attention:**To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755)8307 1443, **Totalon:**



Report No.: ZR/2020/A001609

40 of 65 Page:

Duty cycle = On time/100 milliseconds
On time = N 1 *L 1 +N 2 *L 2 ++N n-1 *LN n-1 +N n *L n
Where N 1 is number of type 1 pulses, L 1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + 20*log(Duty cycle)
f. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
g. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
h. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
i. Test the EUT in the lowest channel, the middle channel ,the Highest channel.
j. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.
k. Repeat above procedures until all frequencies measured was complete.
Transmitting with GFSK modulation.
Charge + Transmitting mode.
Transmitting with GFSK modulation.
Pretest the EUT at Charge + Transmitting mode,
For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Refer to section 5.10 for details
Pass






Report No.: ZR/2020/A001609

41 of 65 Page:

Firstly Supply:

Radiated Emission below 1GHz

Charge + Transmitting 4.9.1.1

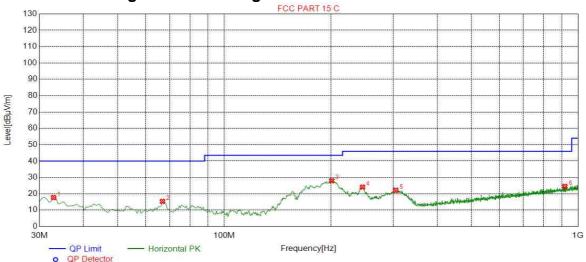

Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Polarity			
1	32.9115	17.73	-32.79	40.00	22.27	150	Horizontal			
2	66.8784	15.38	-33.39	40.00	24.62	150	Horizontal			
3	201.2906	28.00	-30.79	43.50	15.50	150	Horizontal			
4	245.9330	24.13	-29.40	46.00	21.87	150	Horizontal			
5	305.1326	22.21	-27.71	46.00	23.79	150	Horizontal			
6	917.9940	24.53	-14.96	46.00	21.47	150	Horizontal			


Final Data List





Report No.: ZR/2020/A001609

Page: 42 of 65

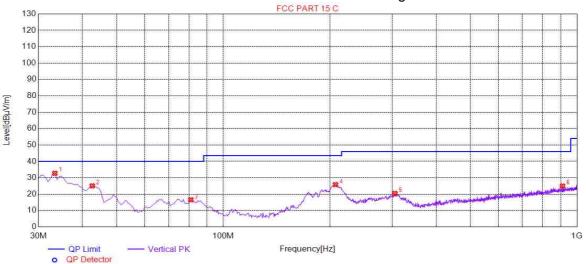

Suspe	Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Polarity		
1	33.3967	32.72	-32.79	40.00	7.28	150	Vertical		
2	42.6163	25.05	-30.66	40.00	14.95	150	Vertical		
3	80.9505	16.57	-35.64	40.00	23.43	150	Vertical		
4	207.5988	25.82	-30.67	43.50	17.68	150	Vertical		
5	305.6178	20.44	-27.69	46.00	25.56	150	Vertical		
6	910.2301	24.96	-15.07	46.00	21.04	150	Vertical		






Report No.: ZR/2020/A001609

Page: 43 of 65

Transmitter Emission above 1GHz 4.9.2 4.9.2.1 BLE 1M Channel 0

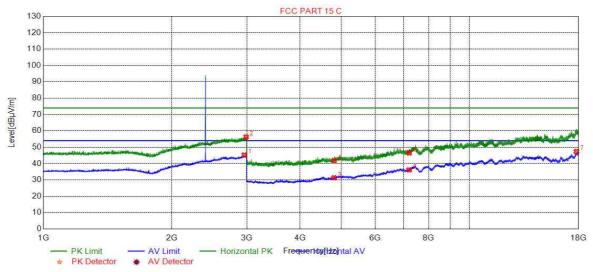

Suspe	Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Polarity		
1	2960.490	45.23	10.54	54.00	8.77	150	Horizontal		
2	2988.497	56.25	10.46	74.00	17.75	150	Horizontal		
3	4804.000	31.34	-17.18	54.00	22.66	150	Horizontal		
4	4804.000	41.74	-17.18	74.00	32.26	150	Horizontal		
5	7206.000	46.53	-9.48	74.00	27.47	150	Horizontal		
6	7206.000	36.17	-9.48	54.00	17.83	150	Horizontal		
7	17786.23	47.36	2.45	54.00	6.64	150	Horizontal		

Final Data List






Report No.: ZR/2020/A001609

Page: 44 of 65

4.9.2.2BLE 1M_Channel 0

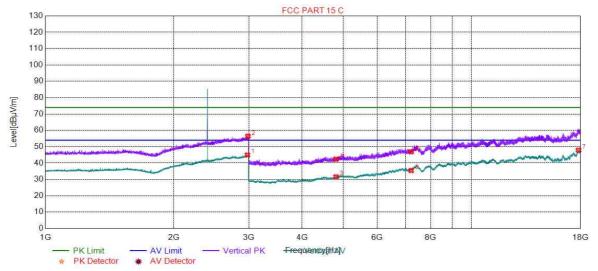

Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Polarity			
1	2976.994	44.93	10.49	54.00	9.07	150	Vertical			
2	2985.496	56.45	10.47	74.00	17.55	150	Vertical			
3	4804.000	31.60	-17.18	54.00	22.40	150	Vertical			
4	4804.000	42.36	-17.18	74.00	31.64	150	Vertical			
5	7206.000	46.91	-9.48	74.00	27.09	150	Vertical			
6	7206.000	35.44	-9.48	54.00	18.56	150	Vertical			
7	17795.23	47.88	2.45	54.00	6.12	150	Vertical			






Report No.: ZR/2020/A001609

45 of 65 Page:

4.9.2.3BLE 1M_Channel 19

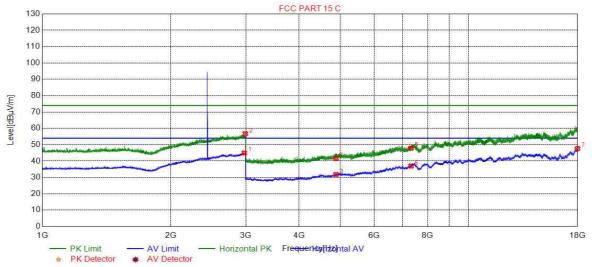

Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Polarity			
1	2975.493	44.95	10.50	54.00	9.05	150	Horizontal			
2	2991.497	56.73	10.45	74.00	17.27	150	Horizontal			
3	4880.000	31.77	-16.81	54.00	22.23	150	Horizontal			
4	4880.000	41.73	-16.81	74.00	32.27	150	Horizontal			
5	7320.000	47.87	-9.28	74.00	26.13	150	Horizontal			
6	7320.000	37.02	-9.28	54.00	16.98	150	Horizontal			
7	17978.99	47.65	2.68	54.00	6.35	150	Horizontal			

Final Data List






Report No.: ZR/2020/A001609

Page: 46 of 65

4.9.2.4BLE 1M_Channel 19

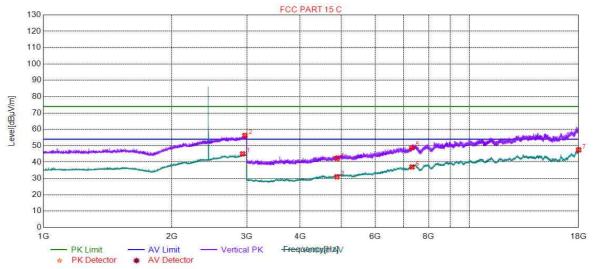

Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Polarity			
1	2932.983	45.06	10.35	54.00	8.94	150	Vertical			
2	2968.492	56.29	10.52	74.00	17.71	150	Vertical			
3	4880.000	31.01	-16.81	54.00	22.99	150	Vertical			
4	4880.000	42.18	-16.81	74.00	31.82	150	Vertical			
5	7320.000	48.81	-9.28	74.00	25.19	150	Vertical			
6	7320.000	37.02	-9.28	54.00	16.98	150	Vertical			
7	17997.74	47.49	2.81	54.00	6.51	150	Vertical			






Report No.: ZR/2020/A001609

47 of 65 Page:

4.9.2.5BLE 1M_Channel 39

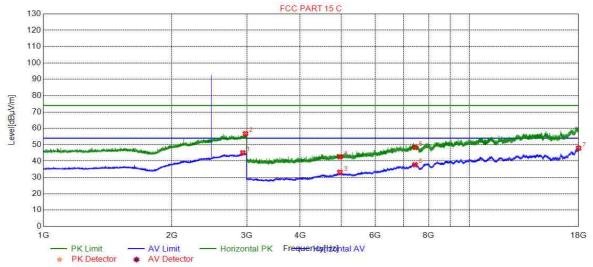

Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Polarity			
1	2935.483	45.08	10.38	54.00	8.92	150	Horizontal			
2	2978.494	56.78	10.49	74.00	17.22	150	Horizontal			
3	4960.000	33.21	-16.28	54.00	20.79	150	Horizontal			
4	4960.000	42.60	-16.28	74.00	31.40	150	Horizontal			
5	7440.000	48.33	-8.83	74.00	25.67	150	Horizontal			
6	7440.000	37.75	-8.83	54.00	16.25	150	Horizontal			
7	17993.99	47.91	2.78	54.00	6.09	150	Horizontal			






Report No.: ZR/2020/A001609

Page: 48 of 65

4.9.2.6BLE 1M_Channel 39

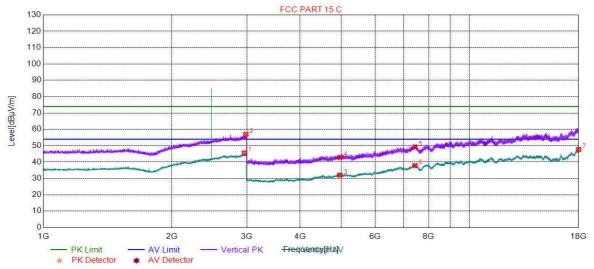

Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Polarity			
1	2961.490	45.59	10.53	54.00	8.41	150	Vertical			
2	2984.496	56.99	10.47	74.00	17.01	150	Vertical			
3	4960.000	32.06	-16.28	54.00	21.94	150	Vertical			
4	4960.000	42.84	-16.28	74.00	31.16	150	Vertical			
5	7440.000	49.25	-8.83	74.00	24.75	150	Vertical			
6	7440.000	37.82	-8.83	54.00	16.18	150	Vertical			
7	17996.99	47.76	2.80	54.00	6.24	150	Vertical			






Report No.: ZR/2020/A001609

49 of 65 Page:

Secondly Supply:

Radiated Emission below 1GHz 4.9.3

Charge + Transmitting 4.9.3.1

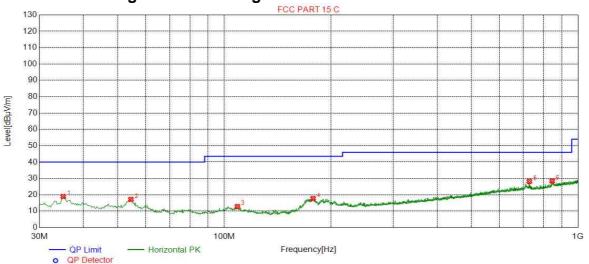

Suspecte	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity					
1	35.0450	18.98	40.00	21.02	Horizontal					
2	54.4489	17.17	40.00	22.83	Horizontal					
3	108.9738	12.84	43.50	30.66	Horizontal					
4	178.2456	17.78	43.50	25.72	Horizontal					
5	728.5397	28.18	46.00	17.82	Horizontal					
6	845.5451	28.39	46.00	17.61	Horizontal					


Final Data List





Report No.: ZR/2020/A001609

Page: 50 of 65

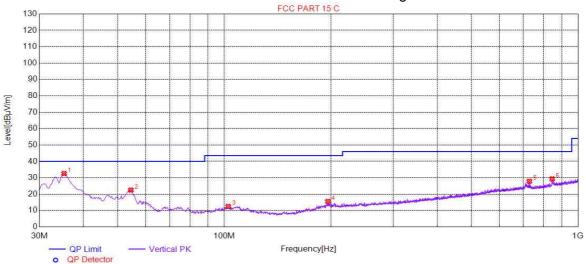

Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity				
1	35.2390	32.60	40.00	7.40	Vertical				
2	54.4489	22.48	40.00	17.52	Vertical				
3	102.5705	12.50	43.50	31.00	Vertical				
4	196.2913	15.56	43.50	27.94	Vertical				
5	728.7337	27.86	46.00	18.14	Vertical				
6	845.5451	29.33	46.00	16.67	Vertical				






Report No.: ZR/2020/A001609

51 of 65 Page:

4.9.4 **Transmitter Emission above 1GHz** 4.9.4.1 BLE_1M_Channel 39

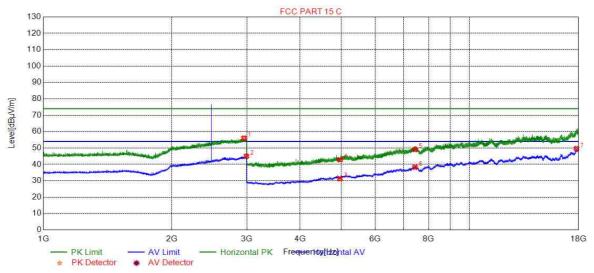

Suspecte	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity					
1	2953.4884	56.03	74.00	17.97	Horizontal					
2	2992.4981	44.99	54.00	9.01	Horizontal					
3	4960.0000	31.23	54.00	22.77	Horizontal					
4	4960.0000	42.85	74.00	31.15	Horizontal					
5	7440.0000	49.08	74.00	24.92	Horizontal					
6	7440.0000	38.30	54.00	15.70	Horizontal					
7	17788.4894	49.64	54.00	4.36	Horizontal					

Final Data List






Report No.: ZR/2020/A001609

52 of 65 Page:

4.9.4.2BLE_1M_Channel 39

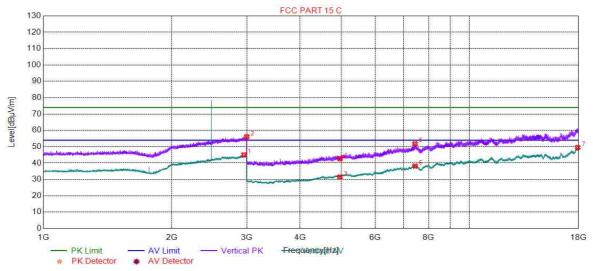

Suspecte	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity					
1	2953.9885	45.03	54.00	8.97	Vertical					
2	2998.9998	56.08	74.00	17.92	Vertical					
3	4960.0000	31.50	54.00	22.50	Vertical					
4	4960.0000	42.68	74.00	31.32	Vertical					
5	7440.0000	51.80	74.00	22.20	Vertical					
6	7440.0000	38.15	54.00	15.85	Vertical					
7	17904.7452	49.52	54.00	4.48	Vertical					

Final Data List

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.
- 4) All Modes have been tested, but only the worst case data displayed in this report.






Report No.: ZR/2020/A001609

Page: 53 of 65

4.10Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section	47 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10: 2013 Sectio	ANSI C63.10: 2013 Section 11.12							
Test Site:	Measurement Distance: 3r	n (Semi-Anechoic Chambe	er)						
Limit:	Frequency	Limit (dBuV/m)	Remark						
	30MHz-88MHz	40.0	Quasi-peak						
	88MHz-216MHz	43.5	Quasi-peak						
	216MHz-960MHz	46.0	Quasi-peak						
	960MHz-1GHz	54.0	Quasi-peak						
	Above 4011-	54.0	Average Value						
	Above 1GHz	74.0	Peak Value						
Test Setup:									






Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz




Figure 3. Above 1 GHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/A001609

54 of 65 Page:

	1 ago. 0 1 01 00
Test Procedure:	 a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h. Test the EUT in the lowest channel, the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with GFSK modulation. Charge + Transmitting mode.
Final Test Mode:	Transmitting with GFSK modulation.
	Pretest the EUT at Charge + Transmitting mode.
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass






Report No.: ZR/2020/A001609

55 of 65 Page:

Firstly Supply:

4.10.1 **Test Plots**

BLE 1M_Channel 0 4.10.1.1

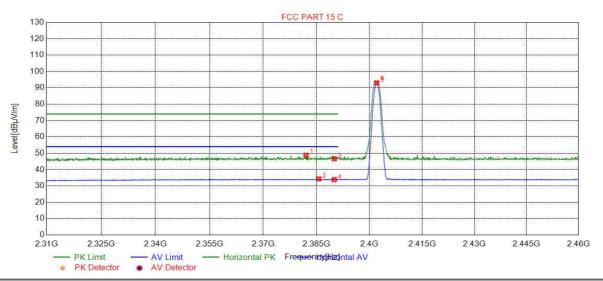

Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Polarity			
1	2382.036	48.77	7.88	74.00	25.23	150	Horizontal			
2	2385.637	34.30	7.88	54.00	19.70	150	Horizontal			
3	2390.000	46.66	7.87	74.00	27.34	150	Horizontal			
4	2390.000	33.84	7.87	54.00	20.16	150	Horizontal			
5	2402.000	93.05	7.86	0.00	-93.05	150	Horizontal			
6	2402.000	93.75	7.86	0.00	-93.75	150	Horizontal			

Final Data List






Report No.: ZR/2020/A001609

56 of 65 Page:

BLE 1M_Channel 0 4.10.1.2

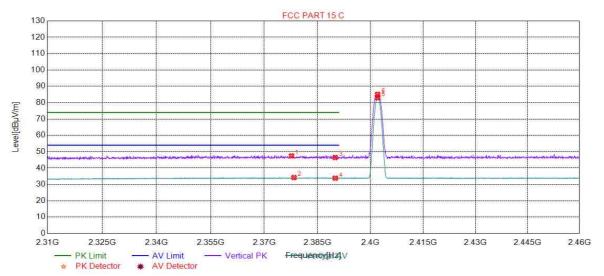

Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Polarity			
1	2377.683	47.48	7.89	74.00	26.52	150	Vertical			
2	2378.359	34.20	7.89	54.00	19.80	150	Vertical			
3	2390.000	46.47	7.87	74.00	27.53	150	Vertical			
4	2390.000	33.82	7.87	54.00	20.18	150	Vertical			
5	2402.000	82.98	7.86	0.00	-82.98	150	Vertical			
6	2402.000	85.15	7.86	0.00	-85.15	150	Vertical			

Final Data List






Report No.: ZR/2020/A001609

57 of 65 Page:

BLE 1M_Channel 39 4.10.1.3

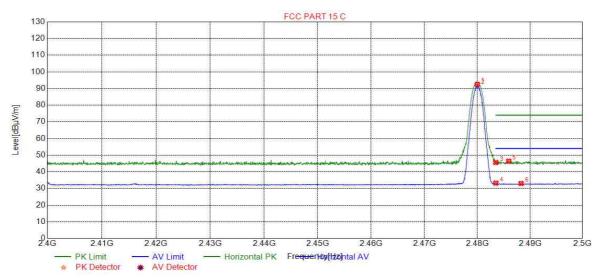

Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Polarity			
1	2480.000	92.56	8.05	0.00	-92.56	150	Horizontal			
2	2480.000	91.64	8.05	0.00	-91.64	150	Horizontal			
3	2483.500	45.61	8.05	74.00	28.39	150	Horizontal			
4	2483.500	33.25	8.05	54.00	20.75	150	Horizontal			
5	2485.943	46.39	8.05	74.00	27.61	150	Horizontal			
6	2488.294	33.04	8.05	54.00	20.96	150	Horizontal			

Final Data List






Report No.: ZR/2020/A001609

58 of 65 Page:

BLE 1M_Channel 39 4.10.1.4

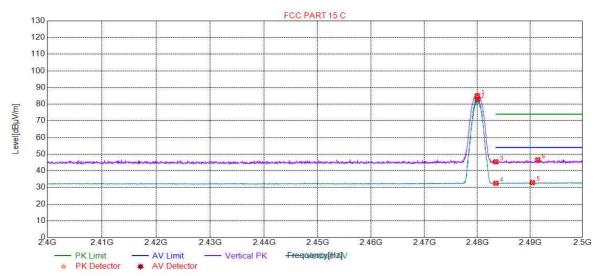

Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Polarity			
1	2480.000	85.07	8.05	0.00	-85.07	150	Vertical			
2	2480.000	82.94	8.05	0.00	-82.94	150	Vertical			
3	2483.500	45.44	8.05	74.00	28.56	150	Vertical			
4	2483.500	32.52	8.05	54.00	21.48	150	Vertical			
5	2490.445	32.93	8.05	54.00	21.07	150	Vertical			
6	2491.445	46.57	8.06	74.00	27.43	150	Vertical			

Final Data List






Report No.: ZR/2020/A001609

Page: 59 of 65

Secondly Supply: 4.10.1.1 BLE_1M_Channel 0

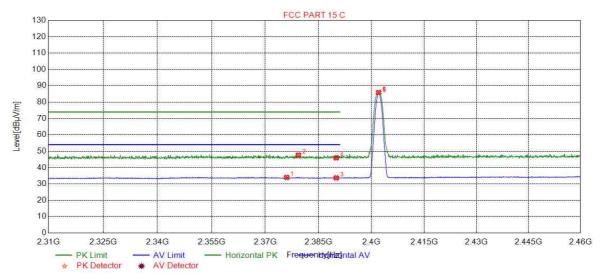

Suspecte	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity					
1	2376.0330	33.99	54.00	20.01	Horizontal					
2	2379.3347	47.63	74.00	26.37	Horizontal					
3	2390.0000	33.72	54.00	20.28	Horizontal					
4	2390.0000	45.96	74.00	28.04	Horizontal					
5	2402.0000	85.92	0.00	-85.92	Horizontal					
6	2402.0000	85.34	0.00	-85.34	Horizontal					






Report No.: ZR/2020/A001609

60 of 65 Page:

BLE_1M_Channel 0 4.10.1.2

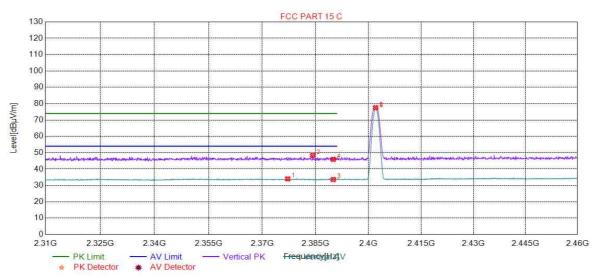

Suspecte	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity					
1	2377.1586	34.01	54.00	19.99	Vertical					
2	2384.2121	48.41	74.00	25.59	Vertical					
3	2390.0000	33.61	54.00	20.39	Vertical					
4	2390.0000	45.97	74.00	28.03	Vertical					
5	2402.0000	77.53	0.00	-77.53	Vertical					
6	2402.0000	76.84	0.00	-76.84	Vertical					

Final Data List

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor All Modes have been tested, but only the worst case data displayed in this report.





Report No.: ZR/2020/A001609

Page: 61 of 65

Measurement Uncertainty (95% confidence levels, k=2) 5

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.75dB
2	RF power density, conducted	±2.84dB
3	Spurious emissions, conducted	±0.75dB
4	Dadiated Churique emission test	±4.5dB (30MHz-1GHz)
4	Radiated Spurious emission test	±4.8dB (1GHz-25GHz)
5	Conduct emission test	±3.12 dB(9KHz- 30MHz)
6	Temperature test	±1°C
7	Humidity test	±3%
8	DC and low frequency voltages	±0.5%



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/A001609

62 of 65 Page:

Equipment List

Conducted Emission										
Test Equipment	Manufacturer	Model No.	Inventory No	Cal. date	Cal.Duedate					
rest Equipment	Wallulacturei	wodel No.	inventory No	(yyyy-mm-dd)	(yyyy-mm-dd)					
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2020/5/10	2023/5/9					
LISN	Rohde & Schwarz	ENV216	SEM007-01	2020/7/14	2021/7/14					
LISN	ETS-LINDGREN	Feb-16	SEM007-02	2020/4/1	2021/3/31					
Measurement Software	AUDIX	e3 V5.4.1221d	N/A	N/A	N/A					
Coaxial Cable	SGS	N/A	SEM024-01	2020/6/12	2021/6/11					
2 Line ISN	Fischer Custom Communications Inc	FCC-TLISN-T2 02	EMC0122	2020/2/11	2021/2/10					
EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2020/3/2	2021/3/1					

RF conducted test								
Test Equipment	Manufacturer	Model No.	Inventory No	Cal. date	Cal.Duedate			
				(yyyy-mm-dd)	(yyyy-mm-dd)			
DC Power Supply	Agilent Technologie Inc	66311B	W009-09	2020/7/15	2021/7/15			
Signal Analyzer	Rohde & Schwarz	FSV	W025-05	2020/1/3	2021/1/2			
Coaxial Cable	SGS	N/A	SEM031-01	2020/6/12	2021/6/11			
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A			
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2020/7/14	2021/7/14			
Temperature Chamber	GIANT FORCE	ICT-150-40-CP AR	W027-03	2020/10/27	2021/10/28			
				2019/10/26	2020/10/27			
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2020/7/14	2021/7/14			





Report No.: ZR/2020/A001609

63 of 65

			Page:	63 of 65)	
RE in Chamber						
Test Equipment	Manufacturer	Model No.	Inventory No	Cal. date	Cal.Due date	
				(yyyy-mm-dd)	(yyyy-mm-dd)	
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018/3/13	2021/3/12	
Measurement Software	AUDIX	e3V8.2014-6-2	N/A	N/A	N/A	
Coaxial Cable	SGS	N/A	SEM026-01	2020/6/12	2021/6/11	
EXA Signal Analyzer (10Hz-26.5GHz)	Agilent Technologie Inc	N9010A	SEM004-09	2020/3/12	2021/3/11	
BiConiLog Antenna (26- 3000MHz)	ETS-Lindgren	3142C	SEM003-01	2020/6/27	2023/6/26	
Horn Antenna (0.8- 18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018/4/13	2021/4/12	
Pre-amplifier(0.1-1.3GHz	HP	8447D	SEM005-02	2020/7/14	2021/7/14	
Low Noise Amplifier(100MHz- 18GHz)	Black Diamond Series	BDLNA-0118- 352810	SEM005-05	2020/9/3	2021/9/2	
Horn Antenna (15- 40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2020/10/17	2023/10/16	
Pre-amplifier(18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2020/3/2	2021/3/1	
Band filter	N/A	N/A	SEM023-01	N/A	N/A	
		RE in Chamb	er			
Test Equipment	Manufacturer	Model No.	Inventory No	Cal. date	Cal.Due date	
				(yyyy-mm-dd)	(yyyy-mm-dd)	
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2020/8/5	2023/8/4	
Measurement Software	AUDIX	e3 V8.2014-6- 27	N/A	N/A	N/A	
Coaxial Cable	SGS	N/A	SEM025-01	2020/6/12	2021/6/11	
MXE EMI Receiver (20Hz-8.4GHz)	Agilent Technologie	N9038A	SEM004-05	2020/7/14	2021/7/14	
BiConiLog Antenna (26 3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2020/6/27	2023/6/26	
Pre-amplifier (0.1- 1.3GHz)	Agilent Technologie	8447D	SEM005-01	2020/3/2	2021/3/1	





Report No.: ZR/2020/A001609

Page: 64 of 65

RE in Chamber							
Test Equipment	Manufacturer	Model No.	Inventory No	Cal. Date (yyyy- mm-dd)	Cal. Due date (yyyy-mm-dd)		
10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2018/3/31	2021/3/30		
EMI Test Receiver (9k- 7GHz)	Rohde & Schwarz	ESR	SEM004-03	2020/3/2	2021/3/1		
Trilog-Broadband Antenna(25M-2GHz)	Schwarzbeck	VULB9168	SEM003-18	2020/3/15	2022/3/14		
Pre-amplifier (9k-1GHz)	Sonoma	310N	SEM005-03	2020/3/12	2021/3/11		
Loop Antenna (9kHz- 30MHz)	ETS-Lindgren	6502	SEM003-08	2020/8/22	2023/8/21		
Measurement Software	AUDIX	e3 V8.2014-6- 27	N/A	N/A	N/A		
Coaxial Cable	SGS	N/A	SEM029-01	2020/6/12	2021/6/11		





Report No.: ZR/2020/A001609

Page: 65 of 65

7 **Photographs - EUT Constructional Details**

Refer to Appendix A - Photographs of Set-Up for ZR/2020/A0016.

The End

