



Test Mode: IEEE 802.11b
Test CH1: 2412MHz

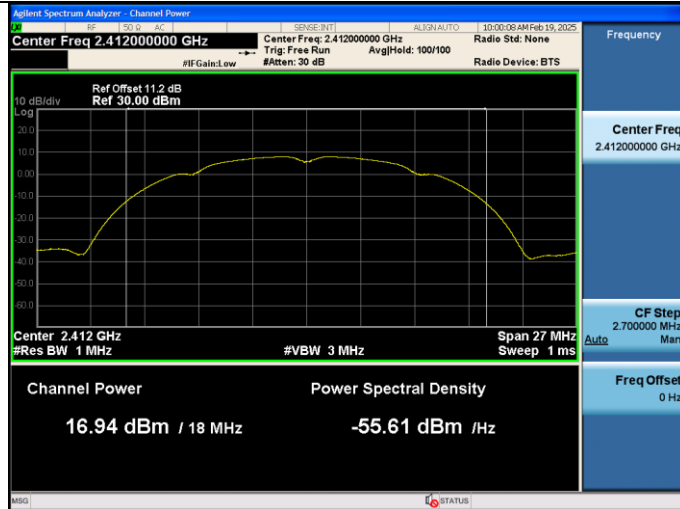


Test Mode: IEEE 802.11g
Test CH1: 2412MHz

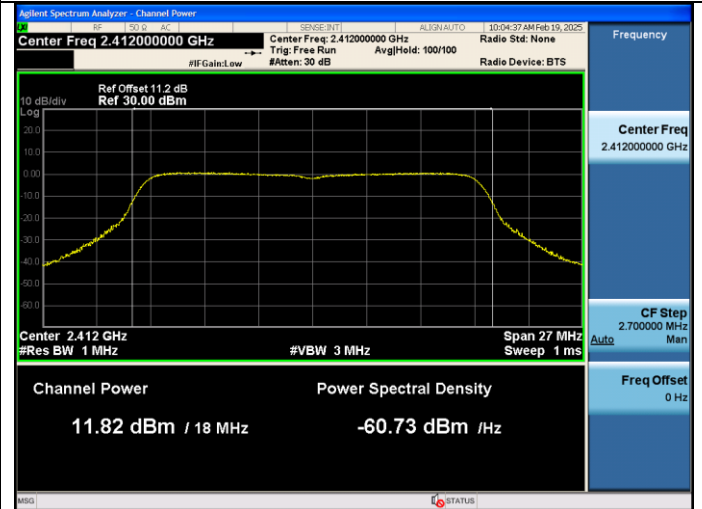

Test CH6: 2437MHz




Test CH6: 2437MHz

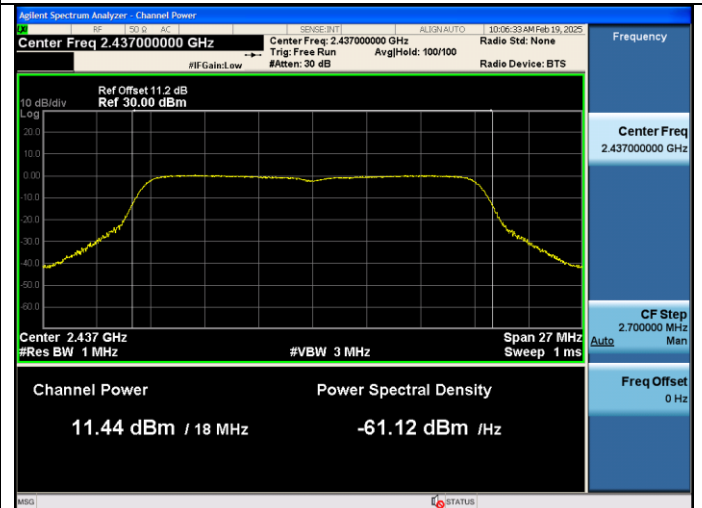


Test CH11: 2462MHz




Test CH11: 2462MHz

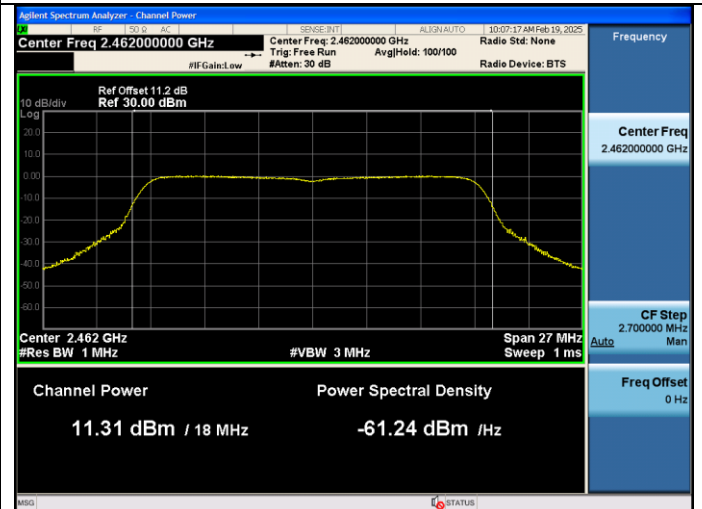

Test Mode: IEEE 802.11n HT20
Test CH1: 2412MHz

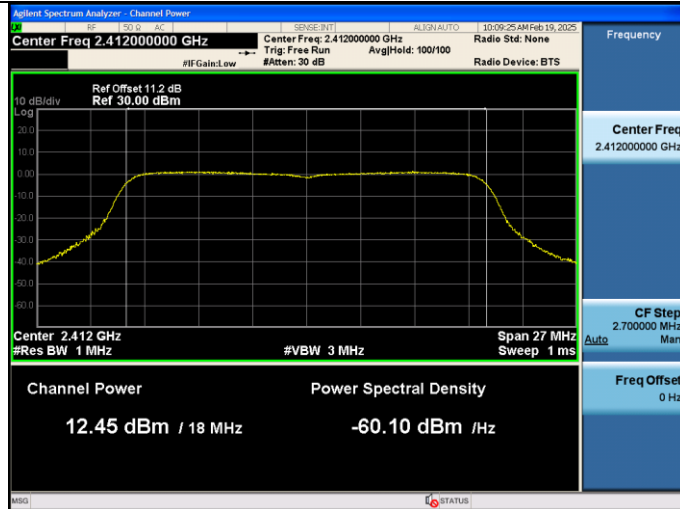


Test Mode: IEEE 802.11n HT40
Test CH1: 2422MHz

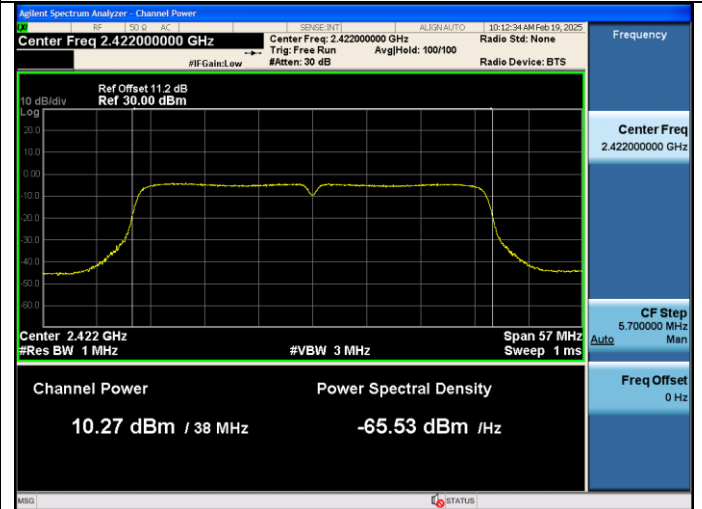

Test CH6: 2437MHz




Test CH6: 2437MHz

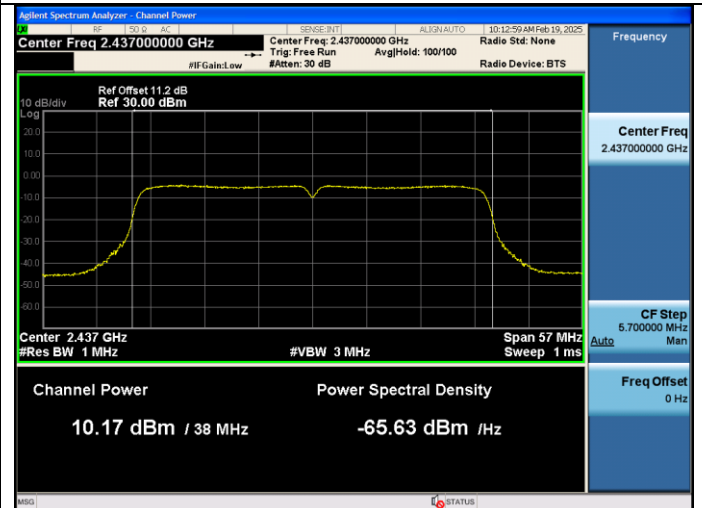

Test CH11: 2462MHz



Test CH11: 2452MHz

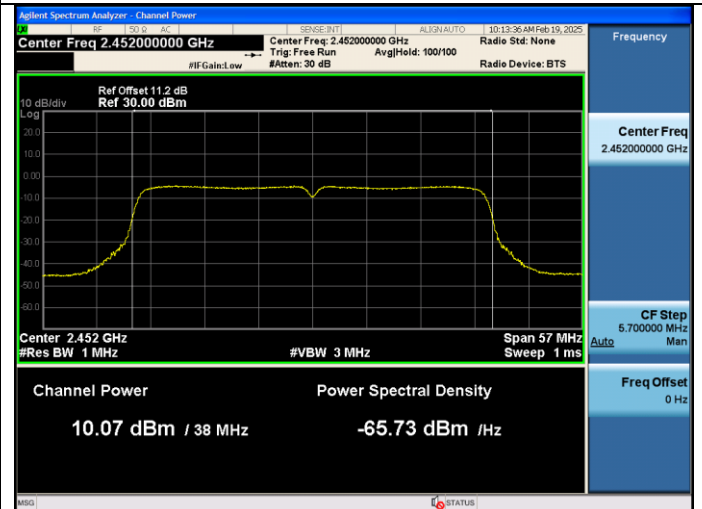

9. POWER SPECTRAL DENSITY TEST

9.1.Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

9.2.Test Procedure

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

9.3.Test Results


EUT: Notebook Computer		
M/N: N24G4		
Test date: 2025-03-06	Pressure: 103.1±1.0 kpa	Humidity: 51.5±3.0%
Tested by: Epoch	Test site: RF site	Temperature: 22.5±0.6℃

Test Mode	CH	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)
11b	CH1	-6.957	8
	CH6	-7.187	
	CH11	-7.537	
11g	CH1	-12.613	8
	CH6	-13.497	
	CH11	-13.681	
11n HT20	CH1	-12.310	8
	CH6	-13.143	
	CH11	-13.416	
11n HT40	CH3	-18.733	8
	CH6	-18.385	
	CH9	-19.203	
Conclusion: Pass			

Test Mode: IEEE 802.11b
Test CH1: 2412MHz




Test Mode: IEEE 802.11g
Test CH1: 2412MHz

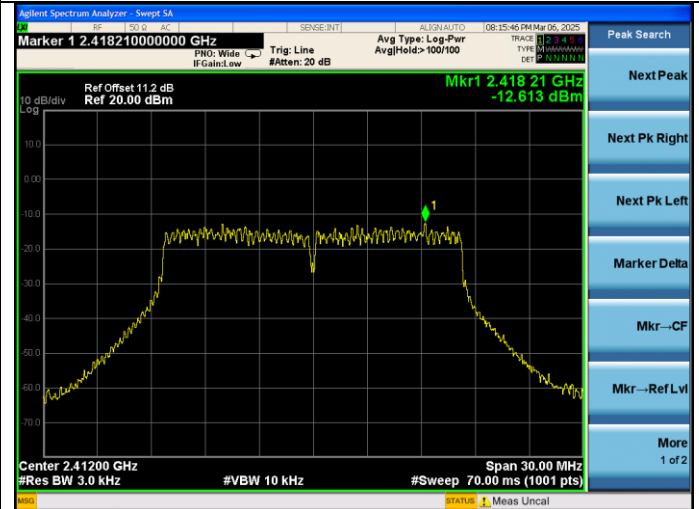

Test CH6: 2437MHz




Test CH6: 2437MHz

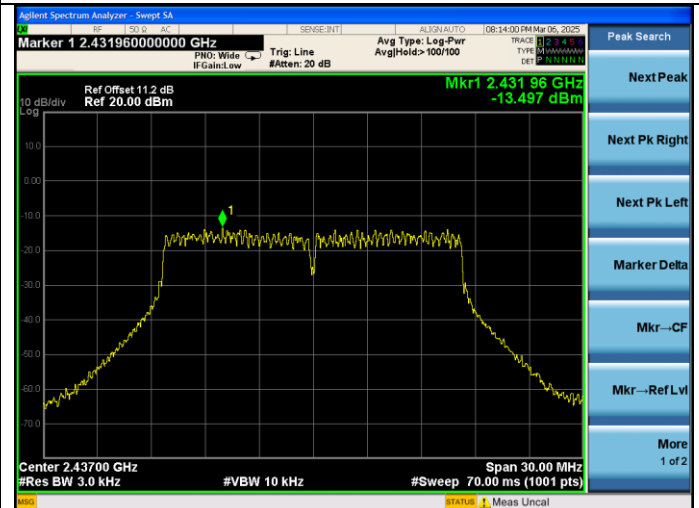


Test CH11: 2462MHz




Test CH11: 2462MHz

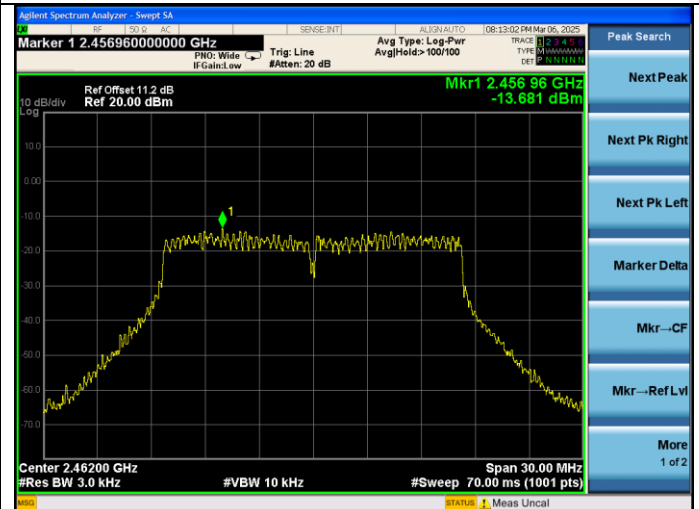


Test Mode: IEEE 802.11n HT20
Test CH1: 2412MHz

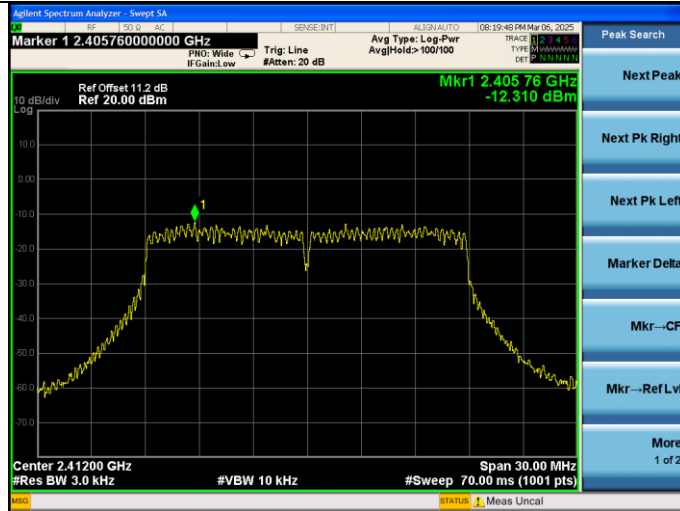


Test Mode: IEEE 802.11n HT40
Test CH1: 2422MHz

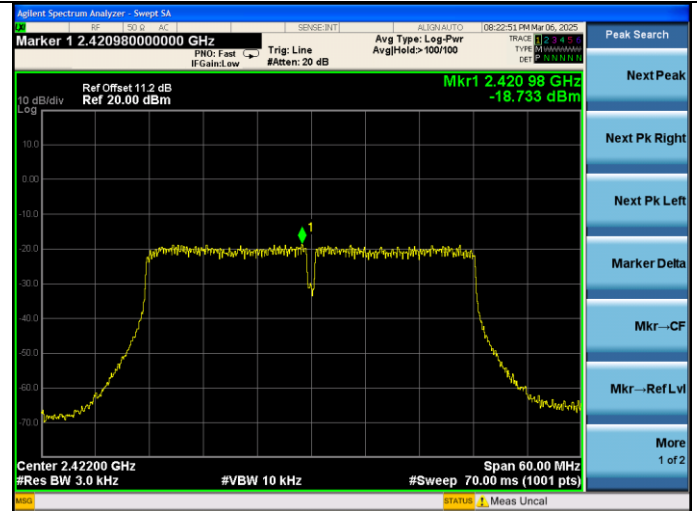


Test CH6: 2437MHz

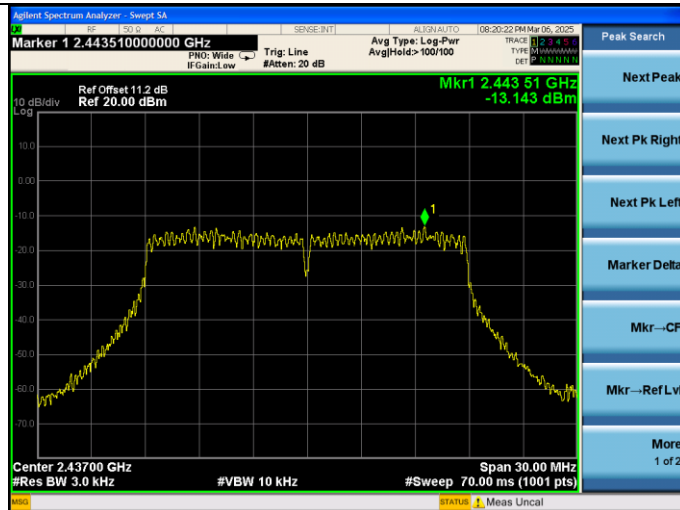


Test CH6: 2437MHz

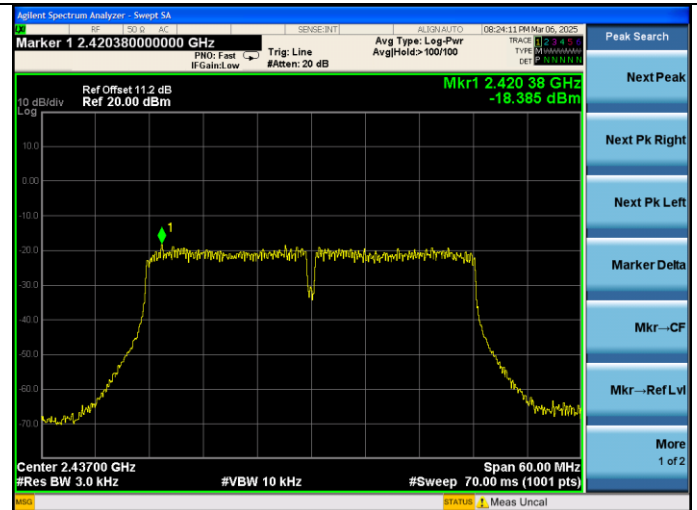

Test CH11: 2462MHz

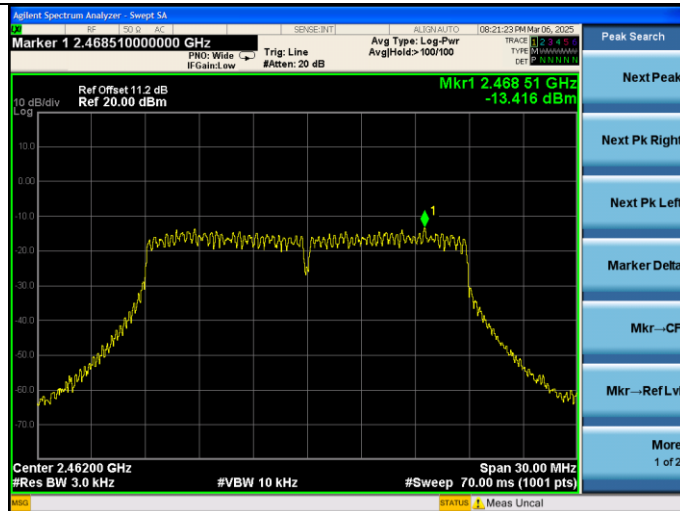

Test CH11: 2452MHz

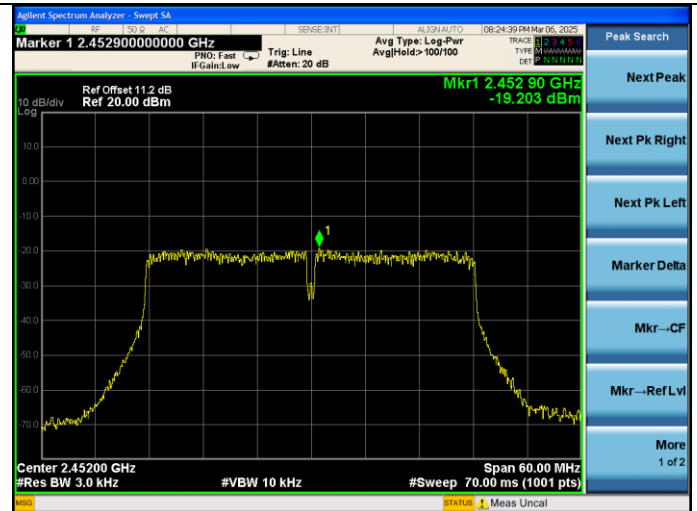

10. ANTENNA REQUIREMENT

10.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2. Antenna Connected Construction

The antennas used for this product are PIFA antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.43 dBi .

11. DEVIATION TO TEST SPECIFICATIONS

[NONE]

..... THE END