

Page: 1 of 214

# **ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT**

# INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART E REQUIREMENT

Sharp Corporation, Mobile Communication B.U.

Applicant: 2-13-1, Hachihonmatsu-lida, Higashi-hiroshima-shi,

Hiroshima 739-0192, Japan

**Sharp Corporation** Manufacturer:

1 Takumi-cho, Sakai-ku, Sakai City, Osaka 590-8522, Japan

**Product Name:** 

**Report Number:** T190308W01-RP5

FCC ID: APYHRO00273

**FCC Rule Part:** §15.407, Cat: NII

Issue Date: Apr. 09, 2019

**Date of Test:** Mar. 05, 2019 ~ Mar. 26, 2019 & Mar. 12, 2019 ~ Mar. 27, 2019

Date of EUT Received: Mar. 05, 2019

Compliance Certification Services Inc.Wugu Lab.

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Tai-Issued by:

wan. (R.O.C.)

service@ccsrf.com

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Tested By:

Wei Chang / Engineer

Approved By:

Kevin Tsai / Deputy Manager





1300



Page: 2 of 214

# **Revision History**

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
T190308W01-RP5	Rev.00	Initial creation of document	All	Apr. 09, 2019	Violetta Tang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 3 of 214

# **Contents**

1.	GENERAL INFORMATION	4
2.	SYSTEM TEST CONFIGURATION	7
3.	SUMMARY OF TEST RESULT	9
4.	DESCRIPTION OF TEST MODES	10
5.	MEASUREMENT UNCERTAINTY	15
6.	CONDUCTED EMISSION TEST	16
7.	DUTY CYCLE TEST SIGNAL	20
8.	26dB & 6dB EMISSION BANDWIDTH MEASUREMENT	26
9.	MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	49
10.	POWER SPECTRAL DENSITY	53
11.	UNDESIRABLE RADIATED EMISSION MEASUREMENT	66
12.	TRANSMISSION IN THE ABSENCE OF DATA	208
13.	FREQUENCY STABILITY	209
14	ANTENNA REQUIREMENT	214

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 4 of 214

## 1. GENERAL INFORMATION

# 1.1 Product Description

#### General:

21101 G.II		
Product Name:	Smart Phone	
Hardware Version:	DVT	
Software Version:	N/A	
Power Supply:	3.85V from Rechargeable Li-ion Battery	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 5 of 214

### WLAN 5GHz:

	_		4 5	NA 1 1 11	
Wi-Fi	Frequency Range	Channels	Avg. Power (dBm)	Modulation Technology	
	5180~5240		16.84		
44 - 00	5260~5320	4	16.88	OFDM	
11a_20	5500~5720	12	16.63	OFDIVI	
	5745~5825	5	16.90		
	5180~5240	4	HT: 16.98 (Worst Case)		
11n_HT /	5260~5320	4	HT: 16.93 (Worst Case)	OFDM	
ac_VHT 20M	5500~5720	12	HT: 16.91 (Worst Case)	OFDIVI	
	5745~5825	5	HT: 16.98 (Worst Case)		
	5190~5230	2	HT: 16.97 (Worst Case)		
11n_HT / ac VHT	5270~5310	2	HT: 16.85 (Worst Case)	OFDM	
40M	5500~5710	6	HT: 16.80 (Worst Case)		
	5745~5825	5	HT: 16.97 (Worst Case)		
	5210	1	14.37		
11ac	5290	1	14.42	OFDM	
VHT80M	5530~5690	3	16.35	OFDIVI	
	5775	1	14.75		
I Modulation IMpa		256QAM fo	64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 802.11ac only		
Transition Rate: 802.17 802.17 802.17 802.17		802.11 n_2 802.11 n_4 802.11 ac_ 802.11 ac_	6/9/12/18/24/36/48/54 Mbps 20MHz: 6.5 – 144.4Mbps 40MHz: 13.5 – 300.0Mbps _20MHz: 6.5 – 173.3Mbps _40MHz: 13.5 – 400.0Mbps _80MHz: 29.3 – 866.7Mbps		
Antenna Designation: 5150~529 5250~539 5470~572		5250~5350 5470~572	Antenna, 0MHz Gain: -0.3dBi (ANT0) / - 0MHz Gain: -0.3dBi (ANT0) / - 5MHz Gain: -0.1dBi (ANT0) / - 0MHz Gain: -0.7dBi (ANT0) / -	-2.8dBi (ANT1) -2.2dBi (ANT1)	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 6 of 214

# 1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart E §15.407

FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

# 1.3 Test Facility

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd.,

Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309)

FCC Designation number: TW1309

### 1.4 Special Accessories

There are no special accessories used while test was conducted.

# 1.5 Equipment Modifications

There was no modification incorporated into the EUT.

### 1.6 Referencing test data across separate equipment authorization

The test report T190304W03-RP5 under original FCC ID: APYHRO00272 are fully referred for the new FCC ID: APYHRO00273 in this report of U-NII-1, U-NII-2-A and U-NII-2-C bands. Furthermore, additional test plots of U-NII-2-C and U-NII-3 bands are newly tested for the new FCC ID: APYHRO00273.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留句天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 7 of 214

### 2. SYSTEM TEST CONFIGURATION

# 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

### 2.3 Test Procedure

#### 2.3.1 **Conducted Emissions**

The EUT is a placed on as turn table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

#### 2.3.2 **Conducted Test (RF)**

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

#### **Radiated Emissions** 2.3.3

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

# 2.4 Measurement Results Explanation Example

#### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

**Note:** The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留句天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 8 of 214

# 2.5 Configuration of Tested System


Fig. 2-1 Radiated Emission



Fig. 2-2 AC Power Line Conducted **Emission** 



Fig. 2-2 Conducted (Antenna Port) **Emission** 



**Table 2-1 Equipment Used in Tested System** 

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	<b>Power Cord</b>
1.	WLAN Test Software	N/A	N/A	N/A	N/A	N/A
2.	DC Power Supply	Anritsu	E3640A	MY52410006	N/A	Unshielded
3.	Notebook	Lenovo	T440P	PC-089AH5	Shielded	Unshielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 9 of 214

# 3. SUMMARY OF TEST RESULT

FCC Rules	Description Of Test	Result
§15.207	AC Power Line Conducted Emission	Compliant
§15.403(i) §15.407(e)	26 dB & 6dB & 99% Emission Bandwidth	Compliant
§15.407(a)	Maximum Conducted Output Power	Compliant
§15.407(a)	Power Spectral Density	Compliant
§15.205 §15.209 §15.407(b)	Undesirable Radiated Emissions	Compliant
§15.407(c)	Transmission in case of Absence of Information	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.203 §15.407(a)	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 10 of 214

# 4. DESCRIPTION OF TEST MODES

# 4.1 Operated in U-NII Bands

Operated band in 5150 MHz ~5250 MHz:

Operated ballu ili 3130 Mil			
802.11a / n HT20 Mode,			
802.11ac VHT20 Mode			
Channel	Frequency		
36	5180		
40	5200		
44	5220		
48	5240		

802.11 n HT40 Mode, 802.11ac VHT40 Mode			
channel	Frequency		
38	5190		
46	5230		

802.11ac VHT80 Mode		
channel	Frequency	
42	5210	

Operated band in 5250 MHz ~5350 MHz:

802.11a / n HT20 Mode, 802.11ac VHT20 Mode		
channel	Frequency	
52	5260	
56	5280	
60	5300	
64 5320		

802.11 n HT40 Mode, 802.11ac VHT40 Mode		
channel	Frequency	
54	5270	
62 5310		

802.11ac \	/HT80 Mode
Channel	Frequency
58	5290

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 11 of 214

# Operated band in 5470 MHz ~5725 MHz:

Operated Dand in 5470 Wil				
802.11a / n HT20 Mode,				
802.11ac V	802.11ac VHT20 Mode			
Channel	Frequency			
100	5500			
104	5520			
108	5540			
112	5560			
116	5580			
120	5600			
124	5620			
128	5640			
132	5660			
136	5680			
140	5700			
144	5720			

0720 1011121				
802.11 n H	802.11 n HT40 Mode,			
802.11ac VHT40 Mode				
channel	Frequency			
102	5510			
110	5550			
118	5590			
126	5630			
134	5670			
142	5710			
	•			

802.11ac VHT80 Mode		
channel	Frequency	
106	5530	
122	5610	
138	5690	

# Operated band in 5745 MHz ~5850 MHz:

802.11a / n HT20 Mode, 802.11ac VHT20 Mode			
Channel	Frequency		
149	5745		
153	5765		
157	5785		
161	5805		
165	5825		

802.11 n HT40 Mode, 802.11ac VHT40 Mode			
channel	Frequency		
151	5755		
159	5795		

802.11ac VHT80 Mode		
channel	Frequency	
155	5775	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 12 of 214

#### 4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting mode is prorammed.
- 3. Investigation has been done on all the possible configurations for searching the worst case. The gevin UE is pre-scanned among below modes.

Modulation	Transmiss	ion Chain	Multiple Transmission Spatial
□ 802.11 a	⊠ Ch0	⊠ Ch1	⊠ 2TX
□ 802.11 n	⊠ Ch0	⊠ Ch1	⊠ MIMO
☐ 802.11 ac	⊠ Ch0	⊠ Ch1	⊠ MIMO

4. Therefore, below summary is the modes of test configuration that yield the highest reading and generate the highest emission chosen to carry out the relevantly mandatory test items.

## AC POWER LINE CONDUCTED EMISSION TEST:

Test Condition	AC Power line conducted emission for line and neutral
Worst Case	Operation in normal mode

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留句天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 13 of 214

# RADIATED EMISSION TEST

RADIATED EMISSION TEST:						
RADIATED EMISSION TEST (BELOW 1 GHz)						
MODE	<b>FREQUENCY</b>	AVAILABLE	TESTED	MODIII ATION	DATA RATE	ANTENNA
MODE	BAND (MHz)	CHANNEL	CHANNEL	MODULATION	(Mbps)	PORT
802.11a	5180~5240	36 to 48	44	OFDM	6	2TX
802.11a	5260~5320	52 to 64	60	OFDM	6	2TX
802.11a	5500~5720	100 to 144	116	OFDM	6	2TX
802.11a	5745~5825	149 to 165	157	OFDM	6	2TX
	RAI	DIATED EMIS	SION TEST (ABO	OVE 1 GHz)		
MODE	<b>FREQUENCY</b>	AVAILABLE	TESTED	MODULATION	DATA RATE	ANTENNA
MODE	BAND (MHz)	CHANNEL	CHANNEL	MODULATION	(Mbps)	PORT
802.11a	5180~5240	36 to 48	36,44,48	OFDM	6	2TX
802.11n_HT20	3100~3240	30 10 40	30,44,40	OFDM	MCS8	MIMO
802.11n_HT40	5190~5230	38 to 46	38,46	OFDM	MCS8	MIMO
802.11ac_VHT80	5210	42	42	OFDM	MCS8	MIMO
802.11a	5260~5320	52 to 64	52,60,64	OFDM	6	2TX
802.11n_HT20	3200~3320	32 10 04	32,00,04	OFDM	MCS8	MIMO
802.11n_HT40	5270~5310	54 to 62	54,62	OFDM	MCS8	MIMO
802.11ac_VHT80	5290	58	58	OFDM	MCS8	MIMO
802.11a	5500~5720	100 to 144	100,116,140,144	OFDM	6	2TX
802.11n_HT20	5500~5720	100 to 144	100, 110, 140, 144	OFDM	MCS8	MIMO
802.11n_HT40	5510~5710	102 to 142	102,110,134,142	OFDM	MCS8	MIMO
802.11ac_VHT80	5530~5690	106 to 138	106,122,138	OFDM	MCS8	MIMO
802.11a	5745~5825	149 to 165 149,157,165		OFDM	6	2TX
802.11n_HT20	374070020	149 (0 100	149,157,165	OFDM	MCS8	MIMO
802.11n_HT40	5755~5795	151 to 159	151,159	OFDM	MCS8	MIMO
802.11ac_VHT80	5775	155	155	OFDM	MCS8	MIMO

**Note:** The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11a/n/ac Transmitter for channel Low, Mid and High, the worst case E1 position was reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 14 of 214

## ANTENNA PORT CONDUCTED MEASUREMENT:

7.11.21.11.71.01.1	CONDUCTED TEST					
MODE	FREQUENCY BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT
802.11a				OFDM	6	2TX
802.11n_HT20	5180~5240	36 to 48	36,44,48	OFDM	MCS8	MIMO
802.11ac_VHT20				OFDIVI	MCS0	IVIIIVIO
802.11n_HT40	5190~5230	38 to 46	38,46	OFDM	MCS8	MIMO
802.11ac_VHT40	5190~5230	30 10 40	30,40	OFDIVI	MCS0	IVIIIVIO
802.11ac_VHT80	5210	42	42	OFDM	MCS0	MIMO
802.11a				OFDM	6	2TX
802.11n_HT20	5260~5320	52 to 64	52,60,64	OFDM	MCS8	MIMO
802.11ac_VHT20				OFDIVI	MCS0	IVIIIVIO
802.11n_HT40	5270~5310	54 to 62	54,62	OFDM	MCS8	NAINAO
802.11ac_VHT40	5270~5510	54 10 62	34,02	OFDIVI	MCS0	MIMO
802.11ac_VHT80	5290	58	58	OFDM	MCS0	MIMO
802.11a				OFDM	6	2TX
802.11n_HT20	5500~5720	100 to 144	100,116,140,144	OFDM	MCS8	MIMO
802.11ac_VHT20				OI DIVI	MCS0	IVIIIVIO
802.11n_HT40	5510~5710	102 to 142	102,110,134,142	OFDM	MCS8	MIMO
802.11ac_VHT40	3310 37 10	102 (0 142	102,110,134,142	OI DIVI	MCS0	IVIIIVIO
802.11ac_VHT80	5530~5690	106 to 138	106,122,138	OFDM	MCS0	MIMO
802.11a				OFDM	6	2TX
802.11n_HT20	5745~5825	149 to 165	149,157,165	OFDM	MCS8	MIMO
802.11ac_VHT20				OI DIVI	MCS0	IVIIIVIO
802.11n_HT40	5755~5795 151 to 159	5 151 to 159	151,159	OFDM	MCS8	MIMO
802.11ac_VHT40			131,133		MCS0	
802.11ac_VHT80	5775	155	155	OFDM	MCS0	MIMO

The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 15 of 214

### **MEASUREMENT UNCERTAINTY**

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575 dB
26dB & 6dB Emission Bandwidth	+/- 147.256 Hz
The Maximum Output Power	+/- 2.128 dB
Peak Power Spectral Density	+/- 2.878 dB
Frequency Stability	+/- 147.256 Hz
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12 dB
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68 dB
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18 dB
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47 dB
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81 dB
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87 dB

### Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.
- 3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.



Page: 16 of 214

## 6. CONDUCTED EMISSION TEST

# 6.1 Standard Applicable

Frequency range within 150 kHz to 30 MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)			
MHz	Quasi-peak Average			
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

#### Note

## 6.2 Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
CABLE	EMCI	CFD300-NL	CERF	06/29/2018	06/28/2019		
EMI Test Receiver	R&S	ESCI	100064	07/24/2018	07/23/2019		
LISN	SCHWARZBECK	NSLK 8127	8127-541	01/31/2019	01/30/2020		
LISN	SCHAFFNER	NNB 41	03/10013	02/13/2019	02/12/2020		
Software	EZ-EMC(CCS-3A1-CE)						

# 6.3 EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留句天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law


<sup>1.</sup> The lower limit shall apply at the transition frequencies

<sup>2.</sup> The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50



Page: 17 of 214

## 6.4 Test SET-UP

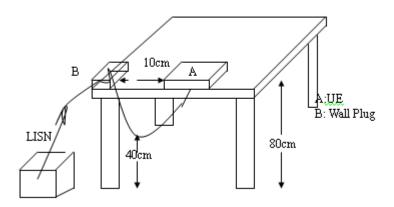

#### 6.5 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed.

## 6.6 Measurement Result

Note: Refer to next page for measurement data and plots.

Note2: The \* reveals the worst-case results that closet to the limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留句天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law




Page: 18 of 214

# AC POWER LINE CONDUCTED EMISSION TEST DATA

**Description: Operation** Date: 2019/3/11

**Temp.(℃)/Hum.(%):** 24(°C)/52% Line: L1

AC 120V/60Hz **Test Voltage:** Test By: Peter

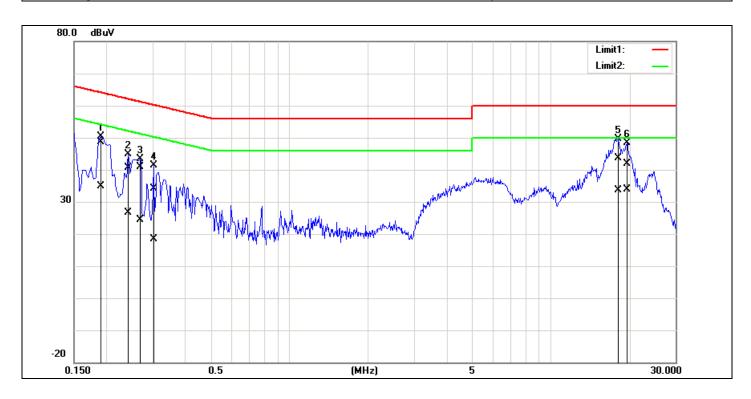

No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.1900	48.48	34.61	0.15	48.63	34.76	64.03	54.04	-15.40	-19.28	Pass
2	0.2420	40.36	26.44	0.15	40.51	26.59	62.02	52.03	-21.51	-25.44	Pass
3	0.2700	40.69	24.21	0.15	40.84	24.36	61.12	51.12	-20.28	-26.76	Pass
4	0.3020	34.00	18.13	0.16	34.16	18.29	60.19	50.19	-26.03	-31.90	Pass
5	18.1100	42.96	33.00	0.65	43.61	33.65	60.00	50.00	-16.39	-16.35	Pass
6	19.5340	41.17	33.17	0.69	41.86	33.86	60.00	50.00	-18.14	-16.14	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 19 of 214

**Description: Operation** Date: 2019/3/11

**Temp.(°C)/Hum.(%):** 24(°C)/52% Line:

AC 120V/60Hz Test By: **Test Voltage:** Peter

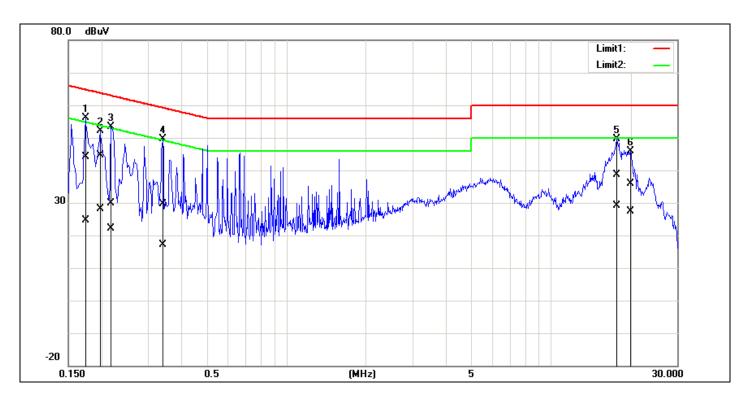

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1740	44.02	24.65	0.10	44.12	24.75	64.76	54.77	-20.64	-30.02	Pass
2*	0.1980	44.43	28.14	0.10	44.53	28.24	63.69	53.69	-19.16	-25.45	Pass
3	0.2180	29.75	22.13	0.10	29.85	22.23	62.89	52.89	-33.04	-30.66	Pass
4	0.3420	29.47	16.91	0.11	29.58	17.02	59.15	49.15	-29.57	-32.13	Pass
5	17.7099	38.12	28.61	0.51	38.63	29.12	60.00	50.00	-21.37	-20.88	Pass
6	19.9900	35.45	26.81	0.55	36.00	27.36	60.00	50.00	-24.00	-22.64	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 20 of 214

# 7. DUTY CYCLE TEST SIGNAL

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

#### Formula:

Duty Cycle = Ton / (Ton+Toff)

#### **Measurement Procedure:**

- 1. Set span = Zero
- 2. RBW = 8MHz
- 3. VBW = 8MHz,
- 4. Detector = Peak

# Duty Cycle (U-NII-1, U-NII-2-A and U-NII-2-C):

Mode	Duty Cycle (%)	Duty Factor (dB) =10*log(1/Duty Cycle)	1/T (kHz)	VBW setting (kHz)
802.11a	98.17	0.08	0.49	1.00
802.11n_20	98.00	0.09	0.53	1.00
802.11n_40	96.02	0.18	1.08	2.00
802.11ac_80	100.00	0.00	0.00	0.01

Duty Cycle Factor:  $10 * \log(1/0.9817) = 0.08$ Duty Cycle Factor:  $10 * \log(1/0.98) = 0.09$ Duty Cycle Factor:  $10 * \log(1/0.9602) = 0.18$ 

Duty Cycle Factor:  $10 * \log(1/1) = 0$ 

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留句天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.


Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



**DUTY CYCLE TEST SIGNAL Measurement Result** 802.11a



# 802.11n HT20

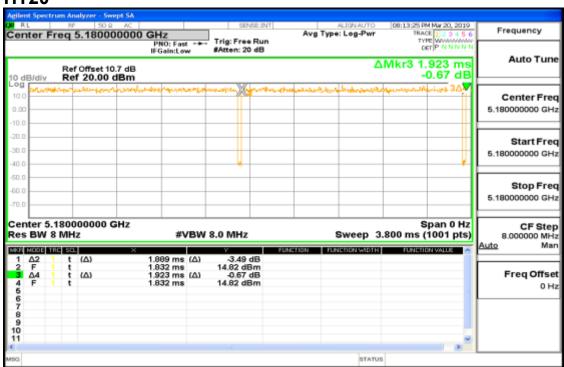

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Phis document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the report of the Company are unsubstrated electronic particular of the company are unsubstrated electronic particu transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Page: 22 of 214



# 802.11n HT 40



# 802.11 ac VHT 80



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Phis document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the report of the Company are unsubstrated electronic particular of the company are unsubstrated electronic particu transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 23 of 214

# **Duty Cycle (U-NII-3):**

Mode	Duty Cycle (%)	Duty Factor (dB) =10*log ( 1/Duty Cy- cle )	1/T (kHz)	VBW setting (kHz)
802.11a	98.17	0.08	0.49	1.00
802.11n_20	98.00	0.09	0.53	1.00
802.11n_40	96.26	0.17	1.08	2.00
802.11ac_80	92.54	0.34	2.19	3.00

Duty Cycle Factor:  $10 * \log(1/0.9817) = 0.08$ Duty Cycle Factor:  $10 * \log(1/0.98) = 0.09$ Duty Cycle Factor:  $10 * \log(1/0.9626) = 0.17$ Duty Cycle Factor:  $10 * \log(1/0.9619) = 0.17$ Duty Cycle Factor:  $10 * \log(1/0.9254) = 0.34$ 



# **DUTY CYCLE TEST SIGNAL Measurement Result** 802.11a



# 802.11n HT20



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Offices otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Phis document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the report of the Company are unsubstrated electronic particular of the company are unsubstrated electronic particu transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Page: 25 of 214



# 802.11n HT 40

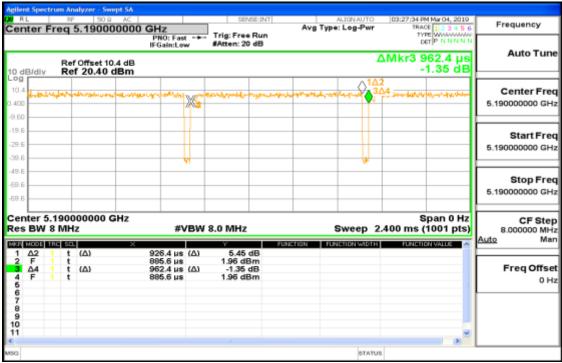

# 802.11 ac VHT 80



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Phis document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the report of the Company are unsubstrated electronic particular of the company are unsubstrated electronic particu transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 26 of 214

# 8. 26DB & 6DB EMISSION BANDWIDTH MEASUREMENT

# 8.1 Standard Applicable

There is no limit bandwidth for U-NII-1, U-NII-2-A and U-NII-2-C.

The minimum of 6dB Bandwidth measurement is 0.5 MHz for U-NII-3

#### 8.2 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the Antenna port to the spectrum analyzer.
  - a. 26dB Band width Measurement: Set the spectrum analyzer as 1% of emission BW Sweep=auto, Detector = Peak, Trace Mode = Max Hold, Manually readjust RBW until the RBW/EBW ratio is 1% based on EBW as observed on the result of pre-sequence measurement.
  - b. Mark the peak frequency and –26dB (upper and lower) frequency.
- 4. Repeat the procedures as list above until all test default channels (low, middle, and high) are completed.
- 5. Minimum Emission Bandwidth for the band 5.725-5.850GHz.
  - a. Set the spectrum analyzer as RBW = 100 kHz, VBW = 3\*RBW, Span = 30M/50MHz, Detector=Peak,
    - Sweep=auto
  - b. Mark the peak frequency and -6dB (upper and lower) frequency.
- 6. For 99% Bandwidth:

Set the spectrum analyzer as RBW=1%, VBW = 3\*RBW, Span = 30M/50MHz, Detector=Sample, Sweep=auto.

- 7. Turn on the 99% bandwidth function, max reading.
- 8. Repeat above procedures until all frequency of interest measured was complete.

### 8.3 Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
DC Power Supply	Agilent	E3640A	KR93300208	08/15/2018	08/14/2019		
PXA Spectrum Analyzer	Agilent	N9030A	MY53120760	04/09/2018	04/08/2019		
Thermostatic/Hrgrosatic Chamber	TAICHY	MHG-150LF	930619	10/08/2018	10/07/2019		
DC Block	Mini-Circuits	BLK-18-S+	31129(1)	02/26/2019	02/25/2020		
Attenuator	Mini-Circuit	BW-S10W2+	1	02/26/2019	02/25/2020		


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未絕本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 27 of 214

# 8.4 Test Set-up



### 8.5 Measurement Result

#### 26dB Bandwidth

802.11a Ch0

802.11a Ch1

Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)	Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5180	22.68	13.556	5180	22.53	13.528
5220	22.90	13.598	5220	22.44	13.510
5240	23.12	13.640	5240	23.17	13.649
5260	23.36	13.685	5260	22.19	13.462
5300	22.71	13.562	5300	22.75	13.570
5320	23.13	13.642	5320	22.66	13.552
5500	23.65	13.738	5500	23.01	13.619
5580	23.62	13.733	5580	23.40	13.692
5700	23.20	13.655	5700	23.74	13.755

802.11a\_Ch0

Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)	
5720(U-NII 2C)	15.96	12.030	
5720 (U-NII 3)	6.16	7.896	

802.11a\_Ch1

Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)	
5720(U-NII 2C)	16.68	12.222	
5720 (U-NII 3)	7.08	8.500	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 28 of 214

#### 802.11n\_HT20\_Ch0

### 802 11n HT20 Ch1

Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5180	23.54	13.717
5220	22.85	13.588
5240	23.67	13.742
5260	23.30	13.673
5300	23.68	13.743
5320	23.75	13.757
5500	23.47	13.706
5580	24.05	13.812
5700	23.62	13.733

Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)	
5180	22.43	13.508	
5220	23.31	13.675	
5240	23.30	13.673	
5260	23.67	13.741	
5300	23.92	13.788	
5320	22.25	13.474	
5500	24.20	13.838	
5580	23.65	13.738	
5700	23.39	13.690	

#### 802.11n\_HT20\_Ch0

### 802.11n\_HT20\_Ch1

Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)	
5720(U-NII 2C)	16.84	12.263	
5720 (U-NII 3)	6.44	8.089	

Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5720(U-NII 2C)	17.00	12.304
5720 (U-NII 3)	5.96	7.752

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 29 of 214

# 802.11n HT40 Ch0

802.11n HT40 Ch1

002.1111 _111 +0_0110		
Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5190	41.06	16.134
5230	41.59	16.190
5270	41.17	16.146
5310	40.97	16.125
5510	40.87	16.114
5550	40.29	16.052
5670	40.75	16.101

**=::::::		
26dB BW (MHz)	10 Log (B) (dB)	
41.03	16.130	
41.32	16.162	
40.51	16.076	
40.83	16.110	
40.97	16.124	
41.44	16.174	
41.35	16.165	
	BW (MHz) 41.03 41.32 40.51 40.83 40.97 41.44	

### 802.11n \_HT40\_Ch0

# 802.11n \_HT40\_Ch1

Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5710 (U-NII 2C)	35.64	15.519
5710 (U-NII 3)	5.40	7.324

Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5710 (U-NII 2C)	35.24	15.470
5710 (U-NII 3)	5.56	7.451

# 802.11ac \_VHT80\_Ch0

### 802.11ac \_VHT80\_Ch1

Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5210	83.60	19.222
5290	82.53	19.166
5530	83.82	19.233
5610	82.91	19.186

Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5210	83.96	19.241
5290	82.97	19.189
5530	82.84	19.182
5610	83.53	19.218

#### 802.11ac \_VHT80\_Ch0

# 802.11ac \_VHT80\_Ch1

Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5690 (U-NII 2C)	75.80	18.797
5690 (U-NII 3)	6.12	7.868

Frequency (MHz)	26dB BW (MHz)	10 Log (B) (dB)
5690 (U-NII 2C)	75.96	18.806
5690 (U-NII 3)	6.92	8.401

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 30 of 214

# 6dB Bandwidth (5725 MHz~ 5850 MHz) measure with Peak detector for FCC

### 802.11a Ch0

002.11u_0110		
Frequency (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5745	15.34	11.858
5785	15.10	11.789
5825	16.33	12.130

# 802.11a\_Ch1

Frequency (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5745	16.35	12.135
5785	13.42	11.277
5825	16.32	12.127

#### 802.11n\_HT20\_Ch0

Frequency (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5745	17.58	12.451
5785	15.17	11.810
5825	16.20	12.095

#### 802.11n\_HT20\_Ch1

Frequency (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5745	17.26	12.370
5785	16.90	12.278
5825	15.33	11.854

#### 802.11n\_HT40\_Ch0

Frequency (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5755	35.48	15.500
5795	36.33	15.603

#### 802.11n\_HT40\_Ch1

Frequency (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5755	35.45	15.496
5795	35.81	15.540

#### 802.11ac \_VHT80\_Ch0

Frequency (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5775	75.20	18.762

## 802.11ac \_VHT80\_Ch1

Frequency (MHz)	6dB BW (MHz)	10 Log (B) (dB)
5775	75.18	18.761

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 31 of 214

### 99% BW verification for DFS Function

#### 802.11a\_Ch0

### 802.11a\_Ch1

Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)	Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)
5240	5248.37	< 5250	5240	5248.37	< 5250

#### 802.11a Ch0

8	02	.11	la_	_Ch1

Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)
5745	5736.75	> 5725

Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)
5745	5736.75	> 5725

#### 802.11n\_HT20\_Ch0

#### 802.11n\_HT20\_Ch1

Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)	Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)
5240	5248.97	< 5250	5240	5248.97	< 5250

# 802.11n\_HT20\_Ch0

# 802.11n\_HT20\_Ch1

Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)	Frequency (MHz)	Me Fre
5745	5736.12	> 5725	5745	5

Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)
5745	5736.15	> 5725

#### 802.11n \_HT40\_Ch0

## 802.11n \_HT40\_Ch1

Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)	Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)
5230	5248.20	< 5250	5230	5248.15	< 5250

#### 802.11n \_HT40\_Ch0

#### 802.11n \_HT40\_Ch1

Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)	I
5755	5736.80	> 5725	

Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)
5755	5736.90	> 5725

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 32 of 214

#### 802.11ac \_VHT80\_Ch0

# 802.11n \_HT80\_Ch1

Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)	Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)
5210	5248.00	< 5250	5210	5248.00	< 5250

# 802.11ac \_VHT80\_Ch0

802.1	l1n	HT	80	Ch1
		_	_	

Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)
5775	5737.20	> 5725

Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)
5775	5737.20	> 5725

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 33 of 214


#### FCC 802.11a 20MHz Main 5180MHz



# FCC 802.11a 20MHz Main 5220MHz

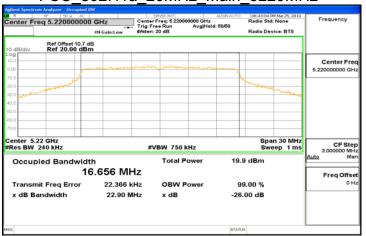


# FCC 802.11a 20MHz Main 5240MHz

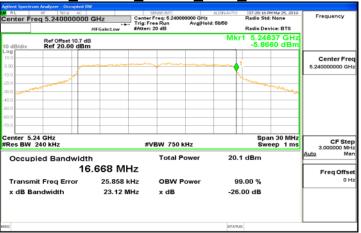


## FCC 802.11a 20MHz Main 5260MHz



# FCC 802.11a 20MHz Main 5300MHz

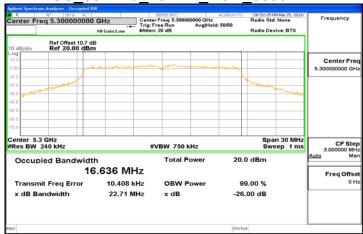

# FCC 802.11a 20MHz Main 5320MHz

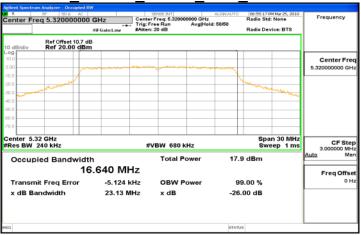

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 34 of 214


#### FCC 802.11a 20MHz Main 5500MHz



# FCC 802.11a 20MHz Main 5580MHz

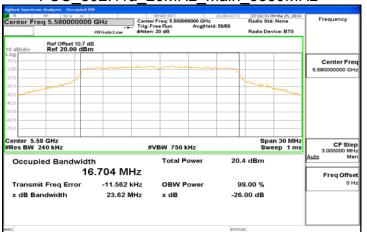


# FCC 802.11a 20MHz Main 5700MHz

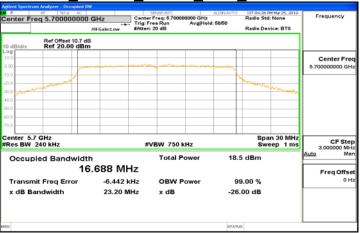


### FCC 802.11a 20MHz Main 5720MHz



# FCC 802.11a 20MHz Main

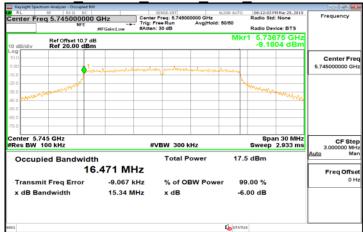

# FCC 802.11a 20MHz Main 5785MHz

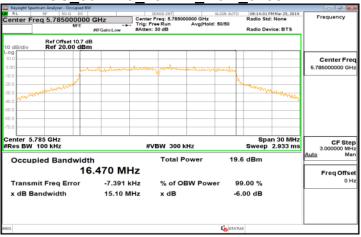


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 35 of 214


## FCC 802.11a 20MHz Main 5825MHz

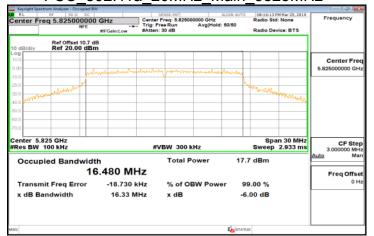


## FCC 802.11a 20MHz Aux1 5180MHz

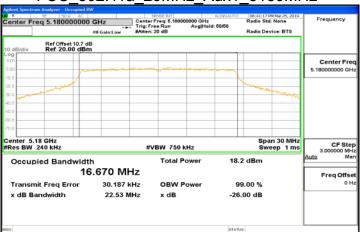

#### FCC 802.11a 20MHz Aux1 5220MHz

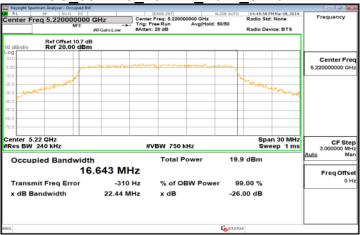

# FCC\_802.11a\_20MHz\_Aux1\_5240MHz

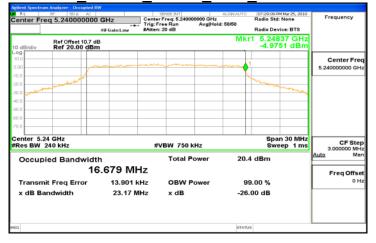


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 36 of 214


#### FCC 802.11a 20MHz Aux1 5260MHz

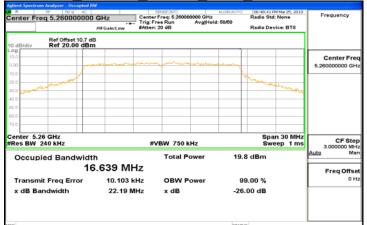


# FCC 802.11a 20MHz Aux1 5300MHz

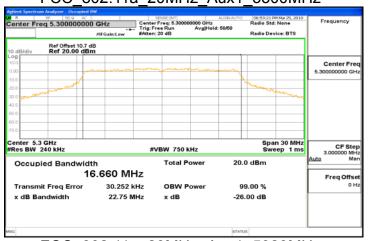


# FCC 802.11a 20MHz Aux1 5320MHz

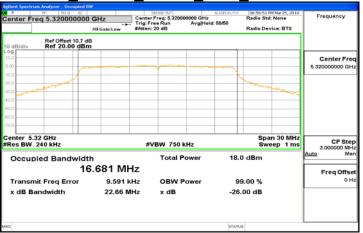


### FCC 802.11a 20MHz Aux1 5500MHz

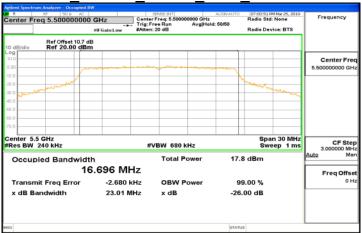

# FCC 802.11a 20MHz Aux1 5580MHz

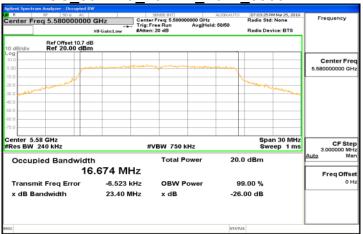

# FCC 802.11a 20MHz Aux1 5700MHz

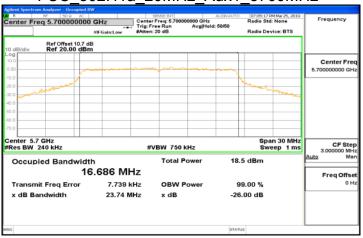

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 37 of 214


## FCC 802.11a 20MHz Aux1 5720MHz




#### FCC 802.11a 20MHz Aux1 5745MHz

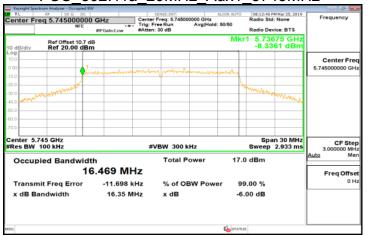

#### FCC 802.11a 20MHz Aux1 5785MHz

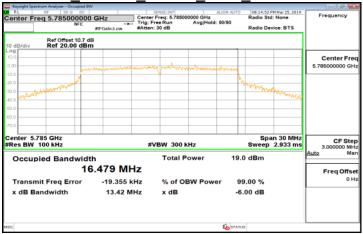

## FCC 802.11a 20MHz Aux1 5825MHz

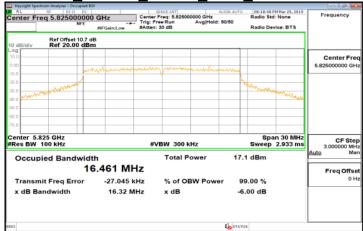


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 38 of 214

#### FCC 802.11n 20MHz Main 5180MHz




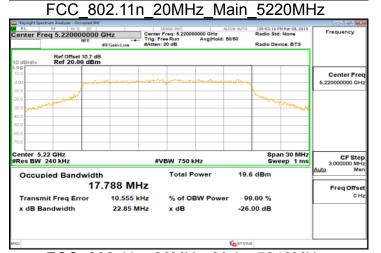


# FCC 802.11n 20MHz Main 5240MHz

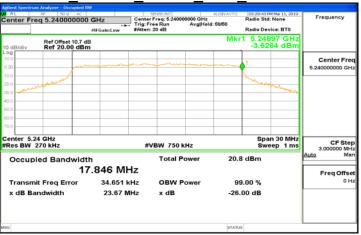


#### FCC 802.11n 20MHz Main 5260MHz

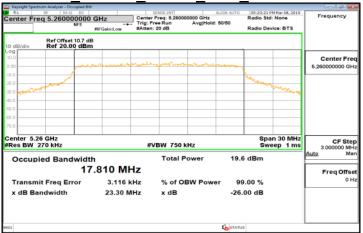

#### FCC 802.11n 20MHz Main 5300MHz

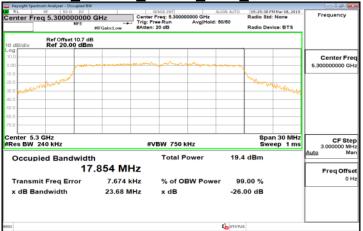

# FCC 802.11n 20MHz Main 5320MHz

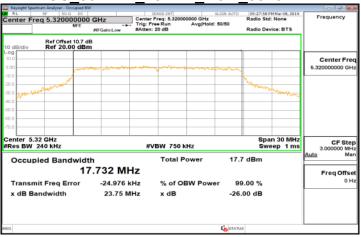

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 39 of 214


### FCC 802.11n 20MHz Main 5500MHz



# FCC 802.11n 20MHz Main 5580MHz

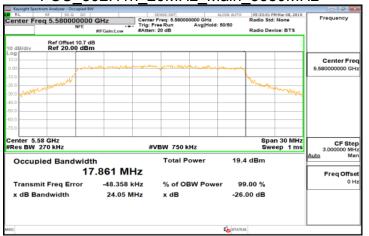


# FCC 802.11n 20MHz Main 5700MHz

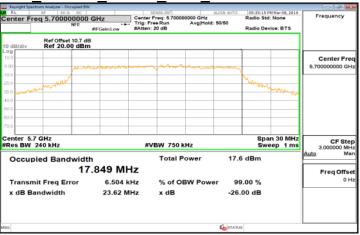


# FCC 802.11n 20MHz Main 5720MHz



# FCC 802.11n 20MHz Main 5745MHz

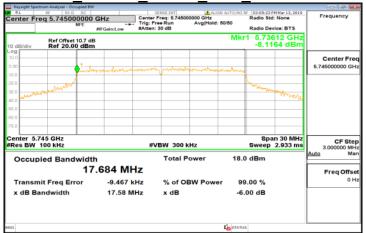

# FCC 802.11n 20MHz Main 5785MHz

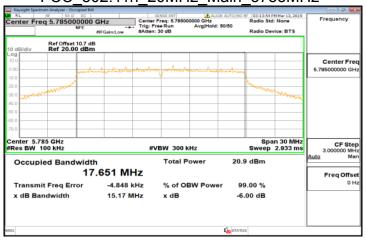

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 40 of 214


### FCC 802.11n 20MHz Main 5825MHz




## FCC 802.11n 20MHz AUX1 5180MHz

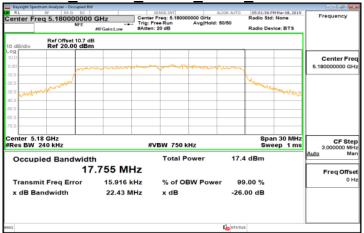

#### FCC 802.11n 20MHz AUX1 5220MHz

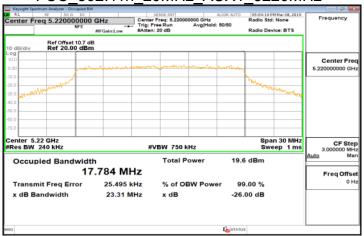

# FCC 802.11n 20MHz AUX1 5240MHz

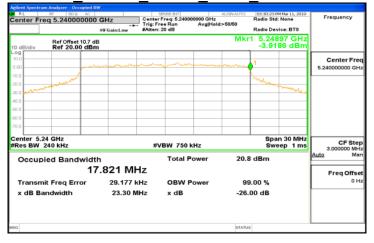

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 41 of 214


### FCC 802.11n 20MHz AUX1 5260MHz




#### FCC 802.11n 20MHz AUX1 5300MHz

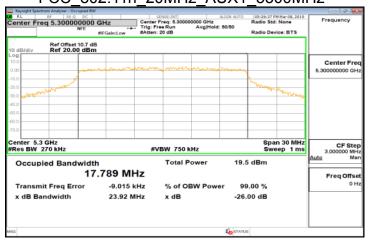


# FCC 802.11n 20MHz AUX1 5320MHz

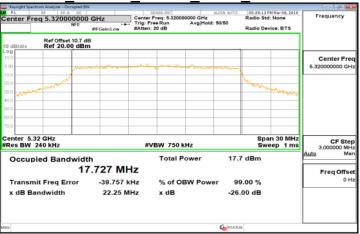


### FCC 802.11n 20MHz AUX1 5500MHz

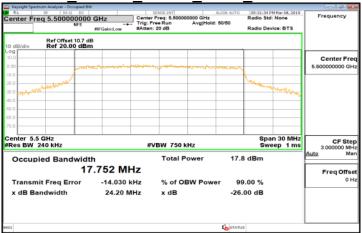

#### FCC 802.11n 20MHz AUX1 5580MHz

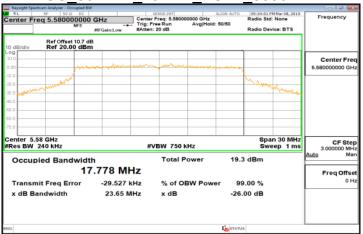

# FCC 802.11n 20MHz AUX1 5700MHz

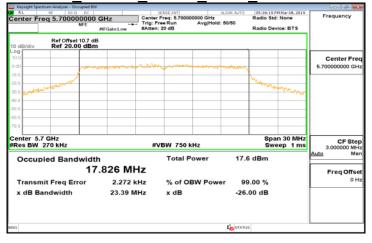

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 42 of 214


### FCC 802.11n 20MHz AUX1 5720MHz




#### FCC 802.11n 20MHz AUX1 5745MHz

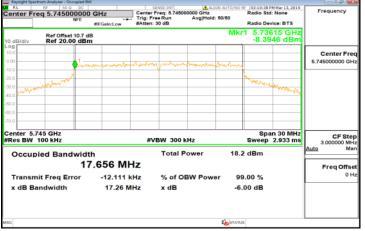

#### FCC 802.11n 20MHz AUX1 5785MHz

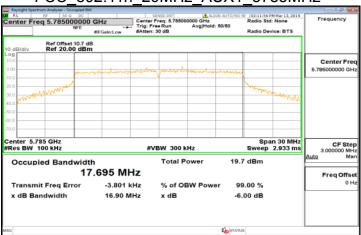

### FCC 802.11n 20MHz AUX1 5825MHz

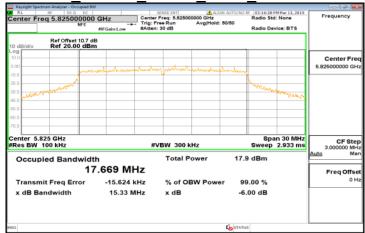

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 43 of 214


#### FCC 802.11n 40MHz Main 5190MHz




# FCC 802.11n 40MHz Main 5230MHz




# FCC 802.11n 40MHz Main 5270MHz

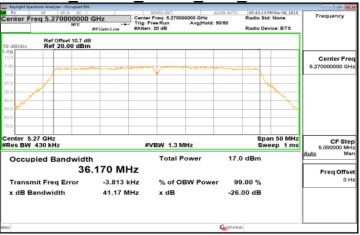


### FCC 802.11n 40MHz Main 5310MHz

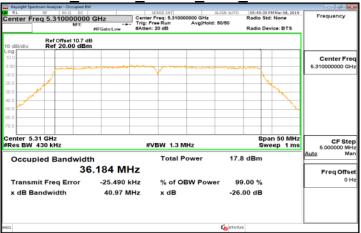

# FCC 802.11n 40MHz Main 5510MHz

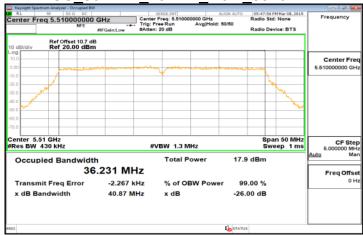

# FCC 802.11n 40MHz Main 5550MHz

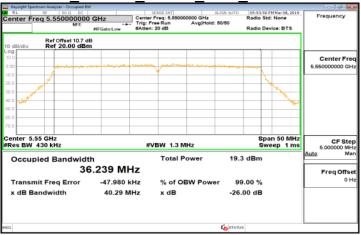

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 44 of 214


#### FCC 802.11n 40MHz Main 5670MHz




# FCC 802.11n 40MHz Main 5710MHz




# FCC 802.11n 40MHz Main 5755MHz

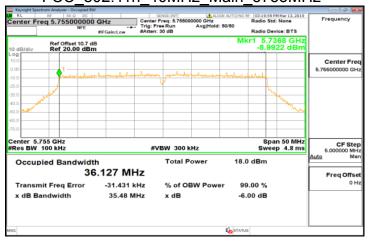


#### FCC 802.11n 40MHz Main 5795MHz

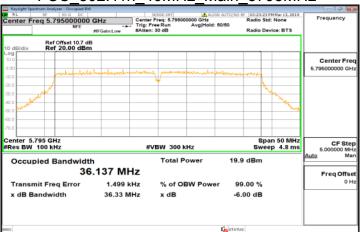

#### FCC 802.11n 40MHz AUX1 5190MHz

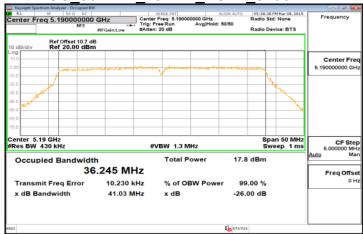

# FCC 802.11n 40MHz AUX1 5230MHz

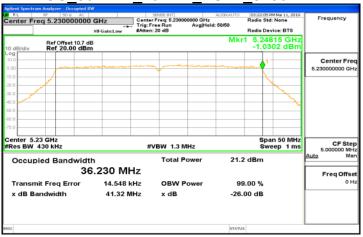


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 45 of 214


### FCC 802.11n 40MHz AUX1 5270MHz

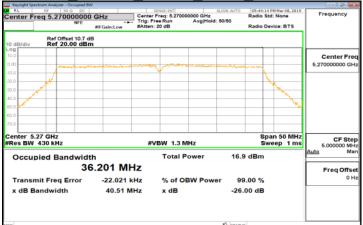


#### FCC 802.11n 40MHz AUX1 5310MHz

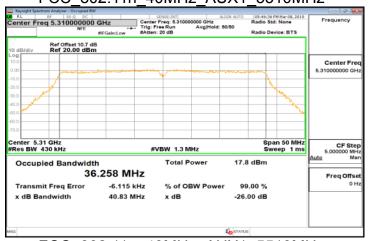


# FCC 802.11n 40MHz AUX1 5510MHz

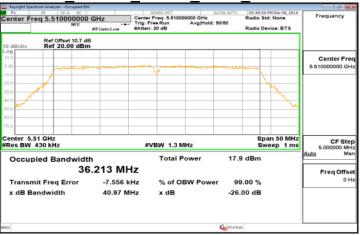


### FCC 802.11n 40MHz AUX1 5550MHz

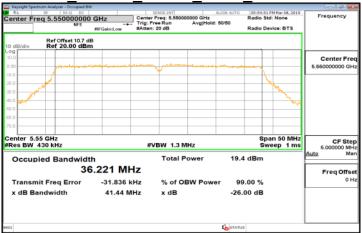

#### FCC 802.11n 40MHz AUX1 5670MHz

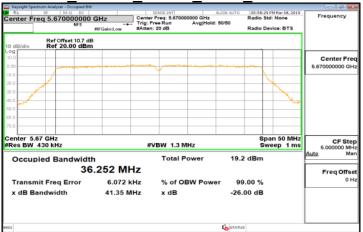

#### FCC 802.11n 40MHz AUX1 5710MHz

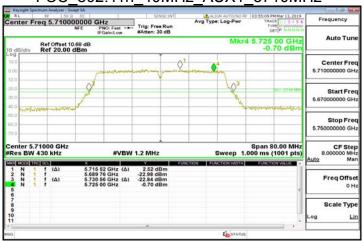

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.