

Test Plot1#: GSM 850_Head Left Cheek_Low**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GSM (0); Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f=824.2$ MHz; $\sigma=0.909$ S/m; $\epsilon_r=41.369$; $\rho=1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @824.2 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.790 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.63 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.781 W/kg; SAR(10 g) = 0.460 W/kg

Maximum value of SAR (measured) = 0.817 W/kg

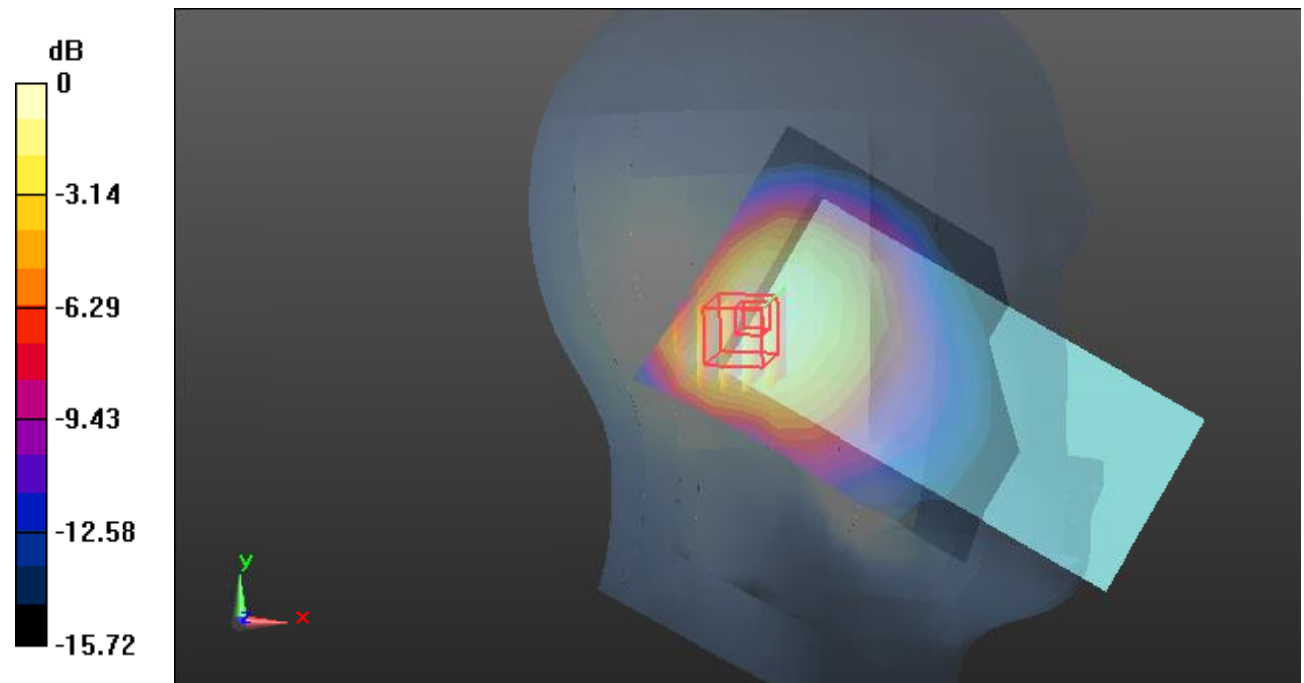

0 dB = 0.817 W/kg = -0.88 dB dBW/kg

Test Plot2#: GSM 850_Head Left Cheek_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f=836.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.237$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.6 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.824 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.63 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.817 W/kg; SAR(10 g) = 0.481 W/kg

Maximum value of SAR (measured) = 0.860 W/kg

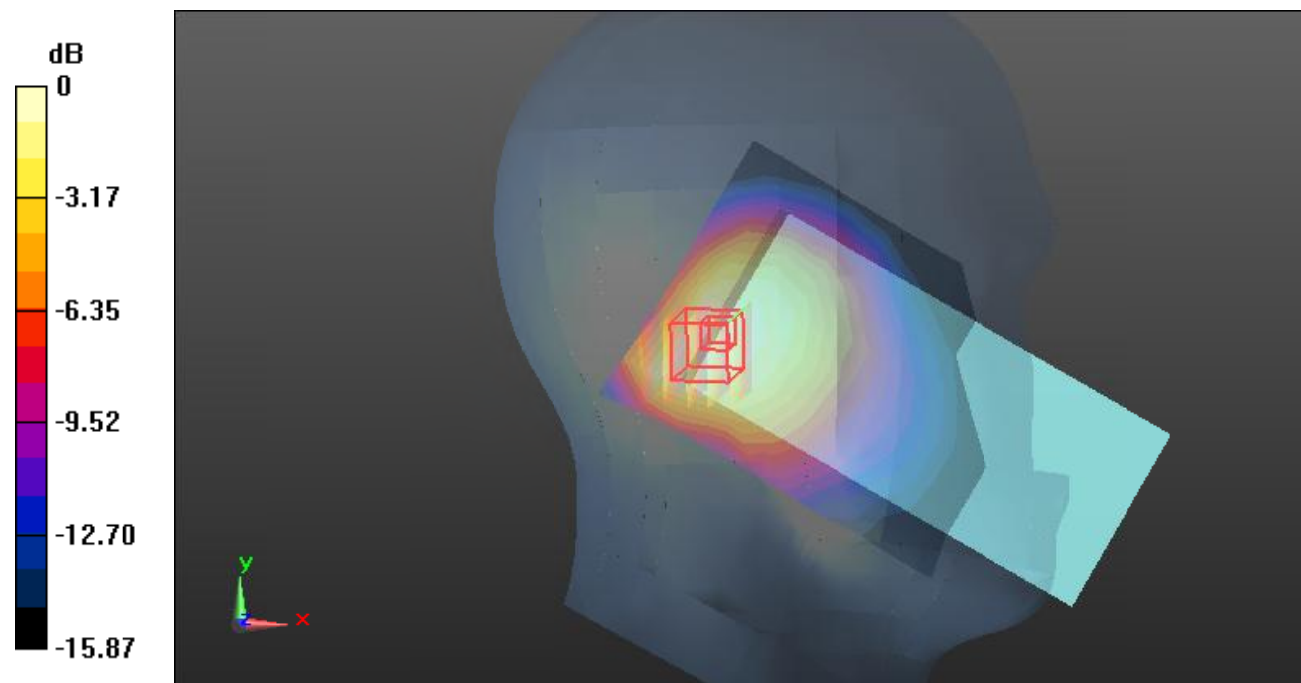

0 dB = 0.860 W/kg = -0.66 dB dBW/kg

Test Plot3#: GSM 850_Head Left Cheek_High**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GSM (0); Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f=848.8$ MHz; $\sigma=0.93$ S/m; $\epsilon_r=41.007$; $\rho=1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @848.8 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.763 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.75 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.757 W/kg; SAR(10 g) = 0.444 W/kg

Maximum value of SAR (measured) = 0.792 W/kg

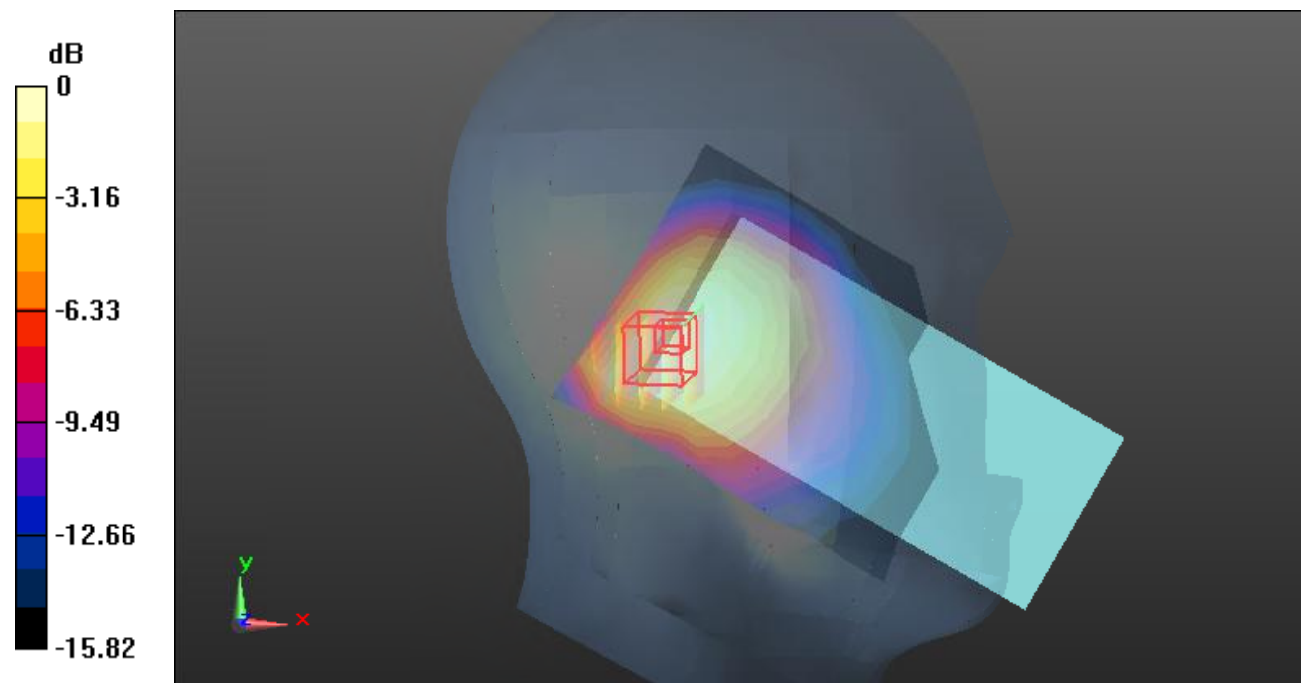

0 dB = 0.792 W/kg = -1.01 dB dBW/kg

Test Plot4#: GSM 850_Head Left Tilt_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f=836.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.237$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.6 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.711 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.97 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.734 W/kg; SAR(10 g) = 0.412 W/kg

Maximum value of SAR (measured) = 0.790 W/kg

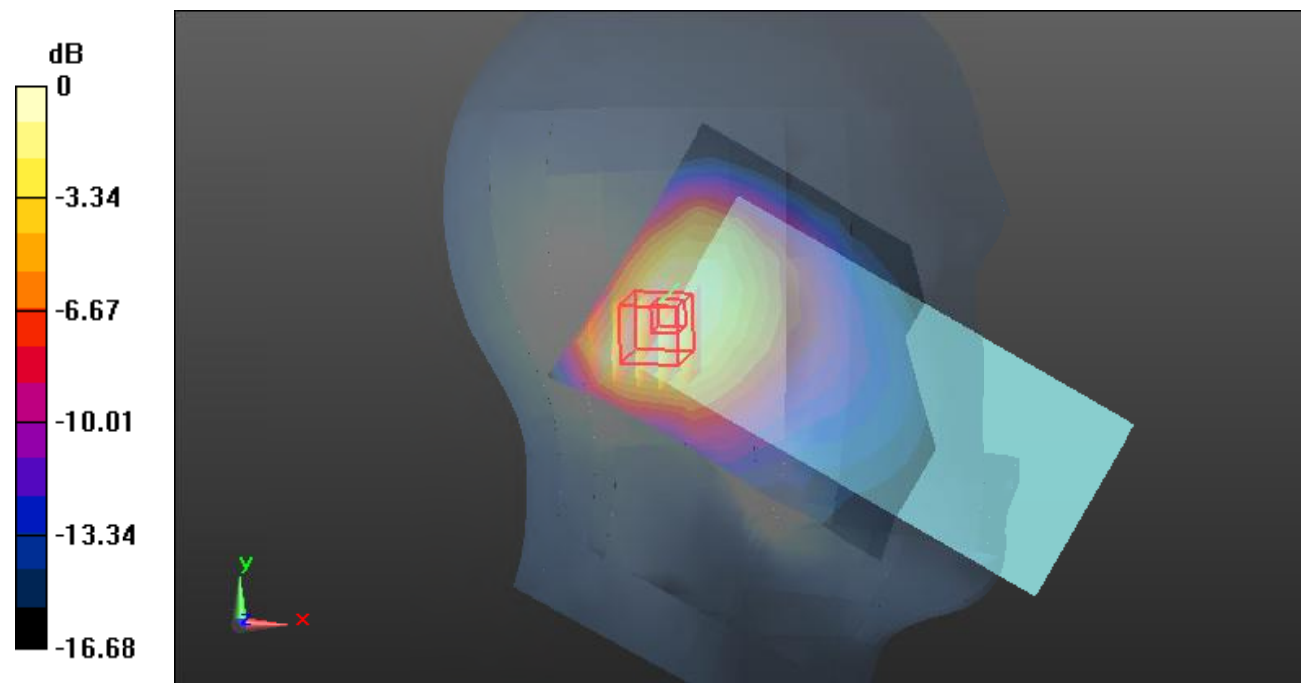

0 dB = 0.790 W/kg = -1.02 dB dBW/kg

Test Plot5#: GSM 850_Head Right Cheek_Low**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GSM (0); Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f=824.2$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 41.369$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @824.2 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.868 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.29 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 0.871 W/kg; SAR(10 g) = 0.540 W/kg

Maximum value of SAR (measured) = 0.907 W/kg

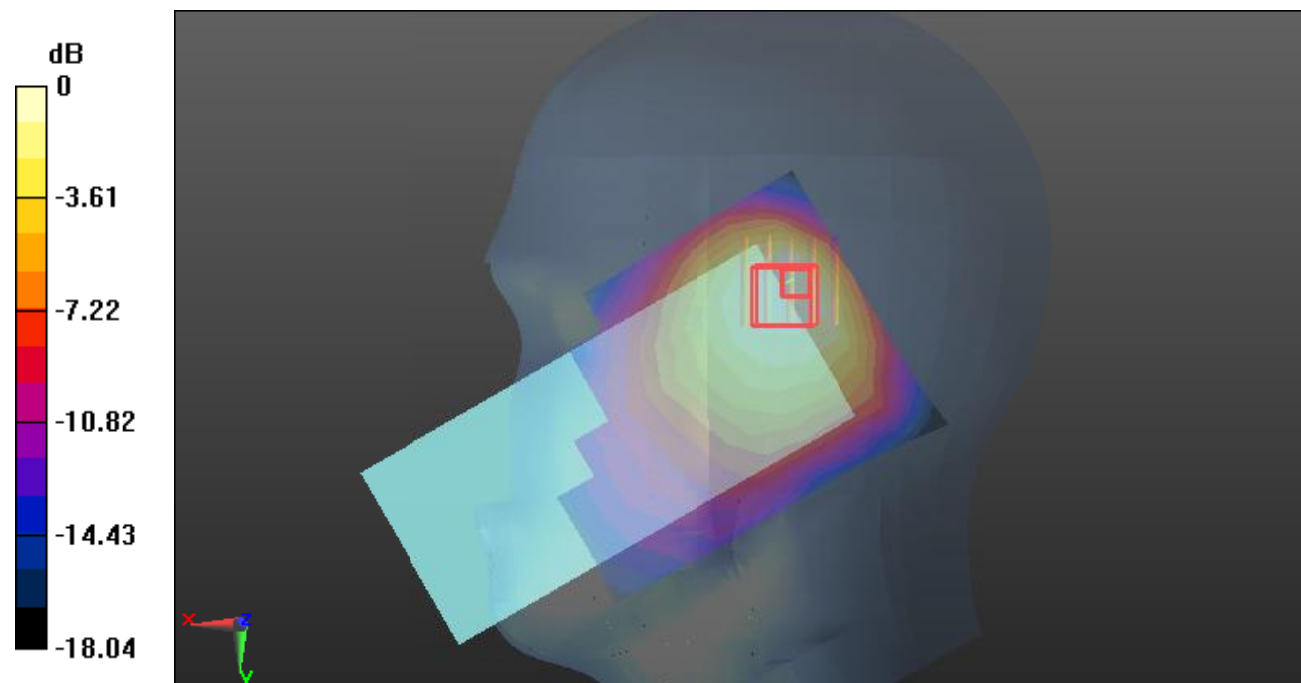

0 dB = 0.907 W/kg = -0.42 dB dBW/kg

Test Plot6#: GSM 850_Head Right Cheek_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f=836.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.237$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.6 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.880 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.53 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.893 W/kg; SAR(10 g) = 0.554 W/kg

Maximum value of SAR (measured) = 0.934 W/kg

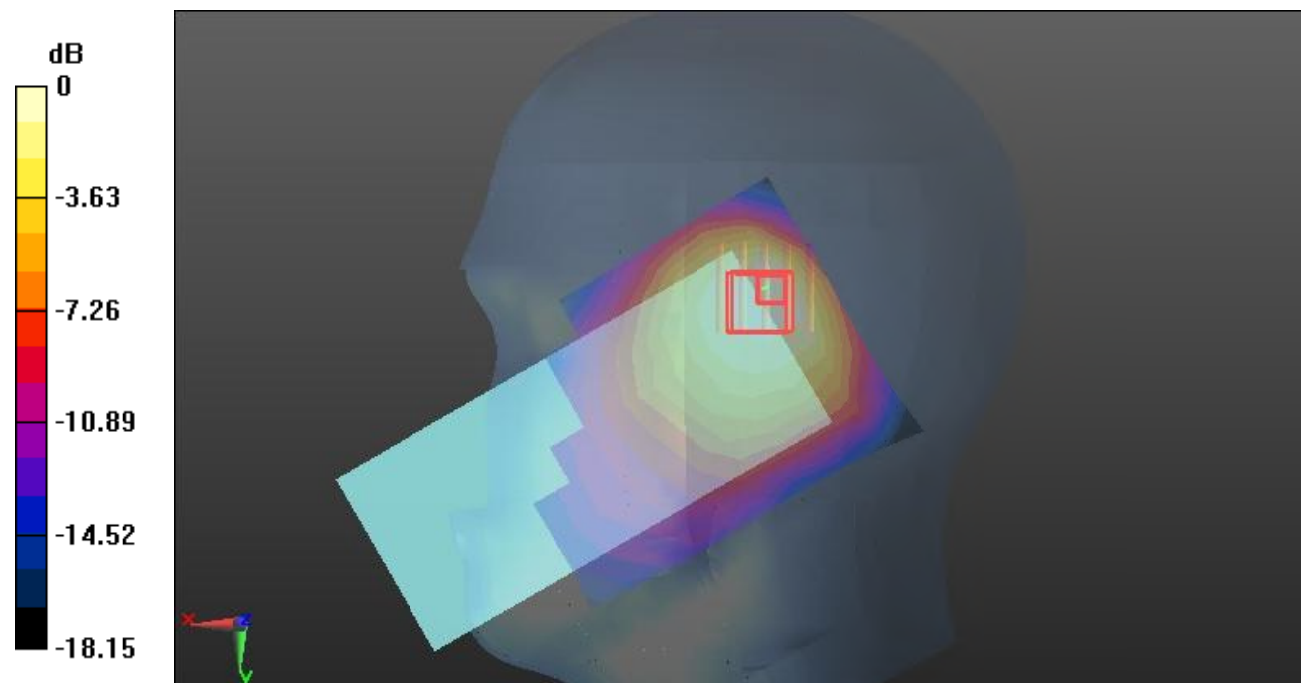

0 dB = 0.934 W/kg = -0.30 dB dBW/kg

Test Plot7#: GSM 850_Head Right Cheek_High**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GSM (0); Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f=848.8$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 41.007$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @848.8 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.835 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.87 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.865 W/kg; SAR(10 g) = 0.538 W/kg

Maximum value of SAR (measured) = 0.909 W/kg

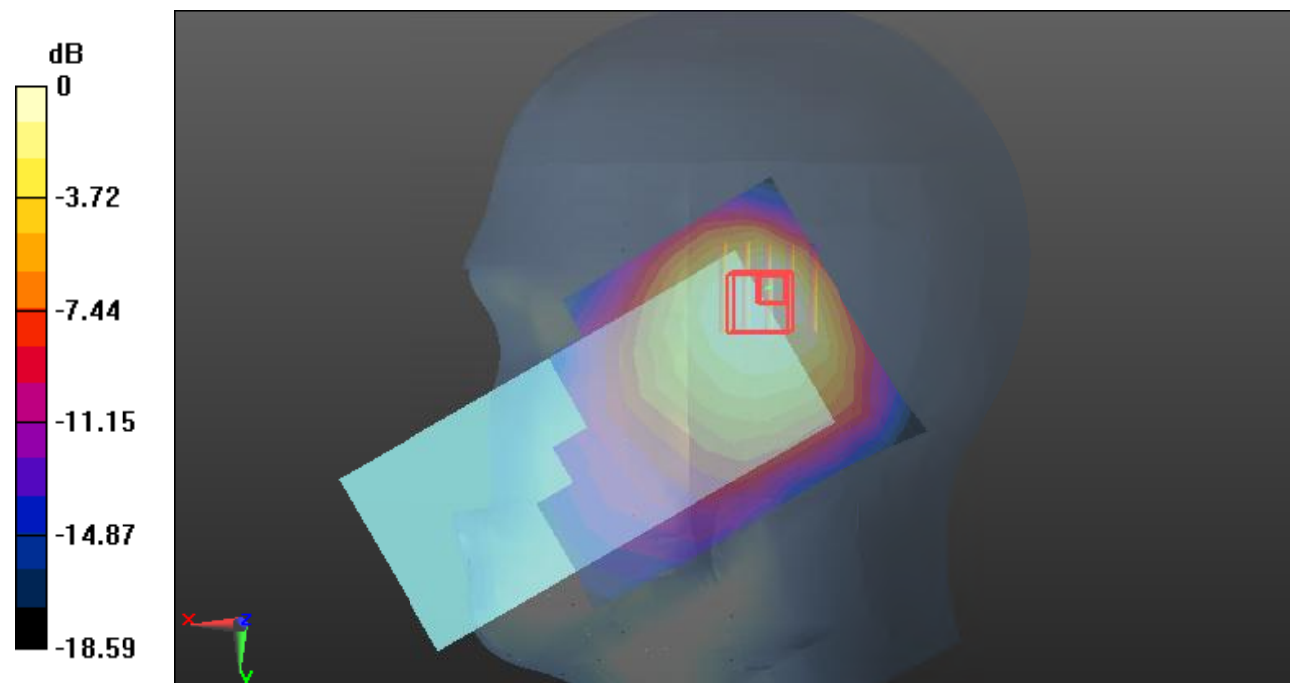

0 dB = 0.909 W/kg = -0.41 dB dBW/kg

Test Plot8#: GSM 850_Head Right Tilt_Low**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GSM (0); Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f=824.2$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 41.369$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @824.2 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.886 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.75 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.60 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.558 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

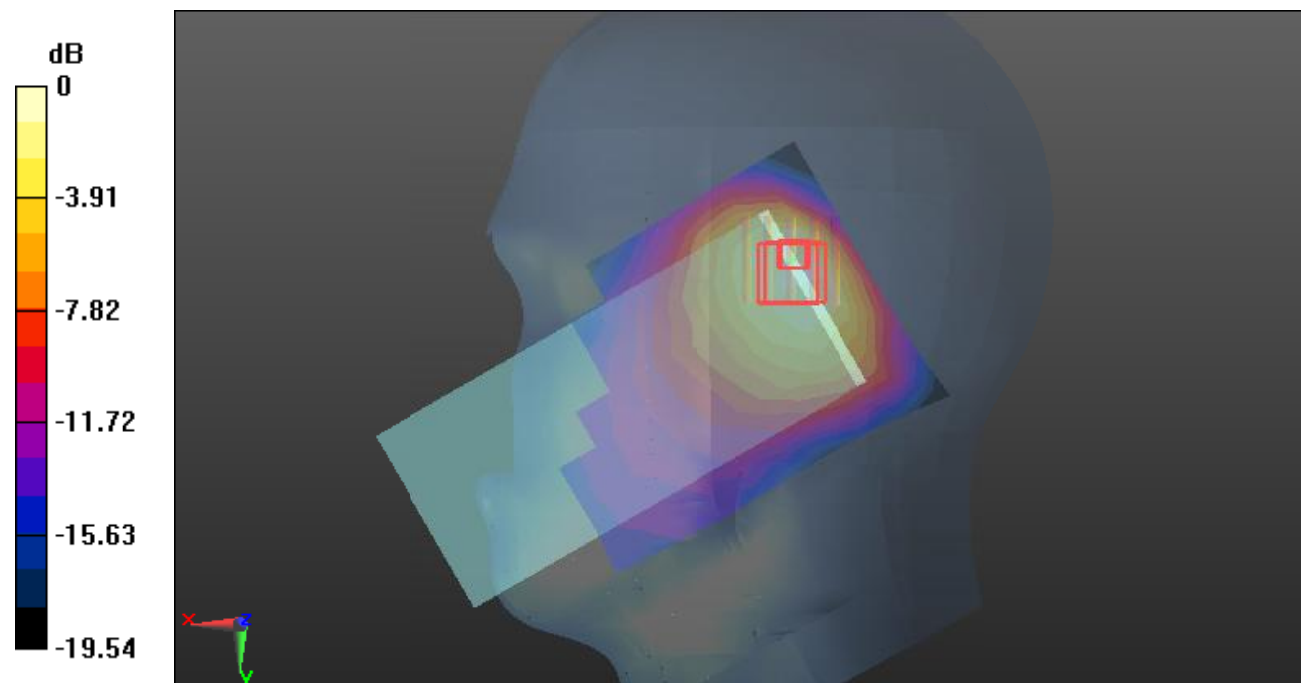

0 dB = 1.10 W/kg = 0.41 dB dBW/kg

Test Plot9#: GSM 850_Head Right Tilt_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f=836.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.237$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.6 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.843 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.01 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.43 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.550 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

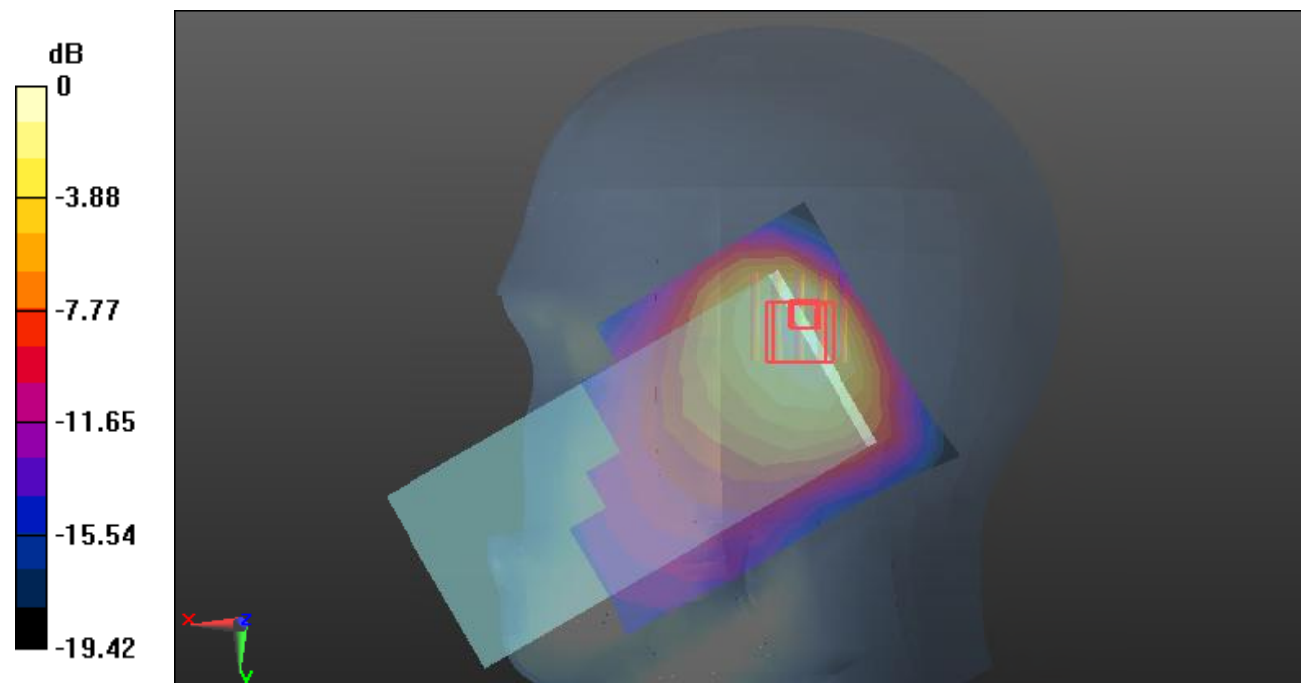

0 dB = 1.08 W/kg = 0.33 dB dBW/kg

Test Plot10#: GSM 850_Head Right Tilt_High**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GSM (0); Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f=848.8$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 41.007$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @848.8 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.841 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.28 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.26 W/kg

SAR(1 g) = 0.955 W/kg; SAR(10 g) = 0.522 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

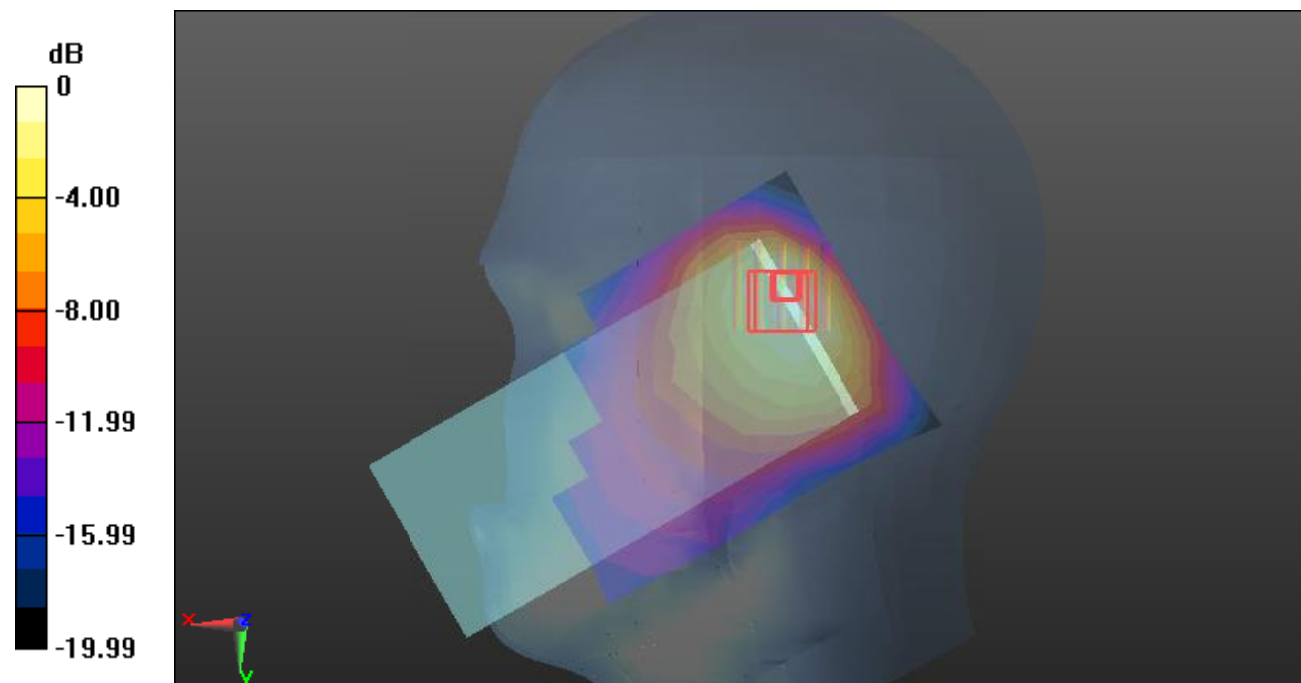

0 dB = 1.03 W/kg = 0.13 dB dBW/kg

Test Plot11#: GSM 850_Body Worn Front_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f=836.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.237$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.6 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.205 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.46 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.315 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.222 W/kg

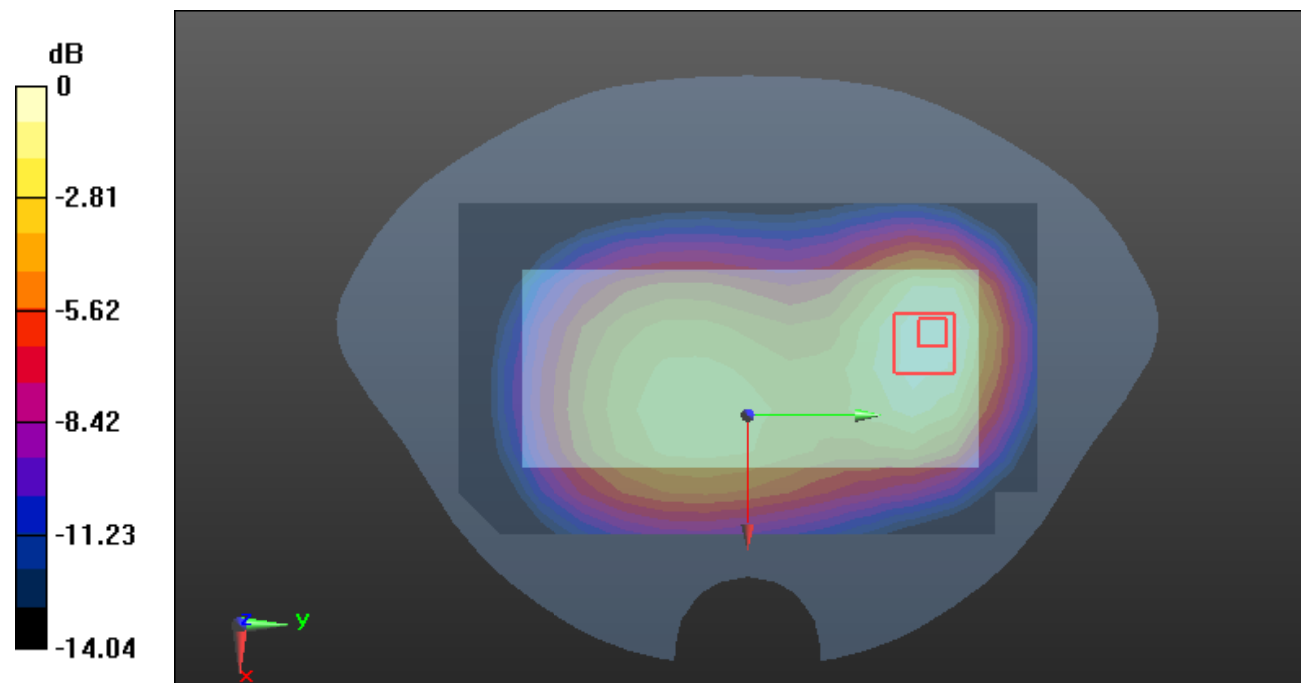

Test Plot12#: GSM 850_Body Worn Back_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f=836.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.237$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.6 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.279 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.72 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.482 W/kg

SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 0.314 W/kg

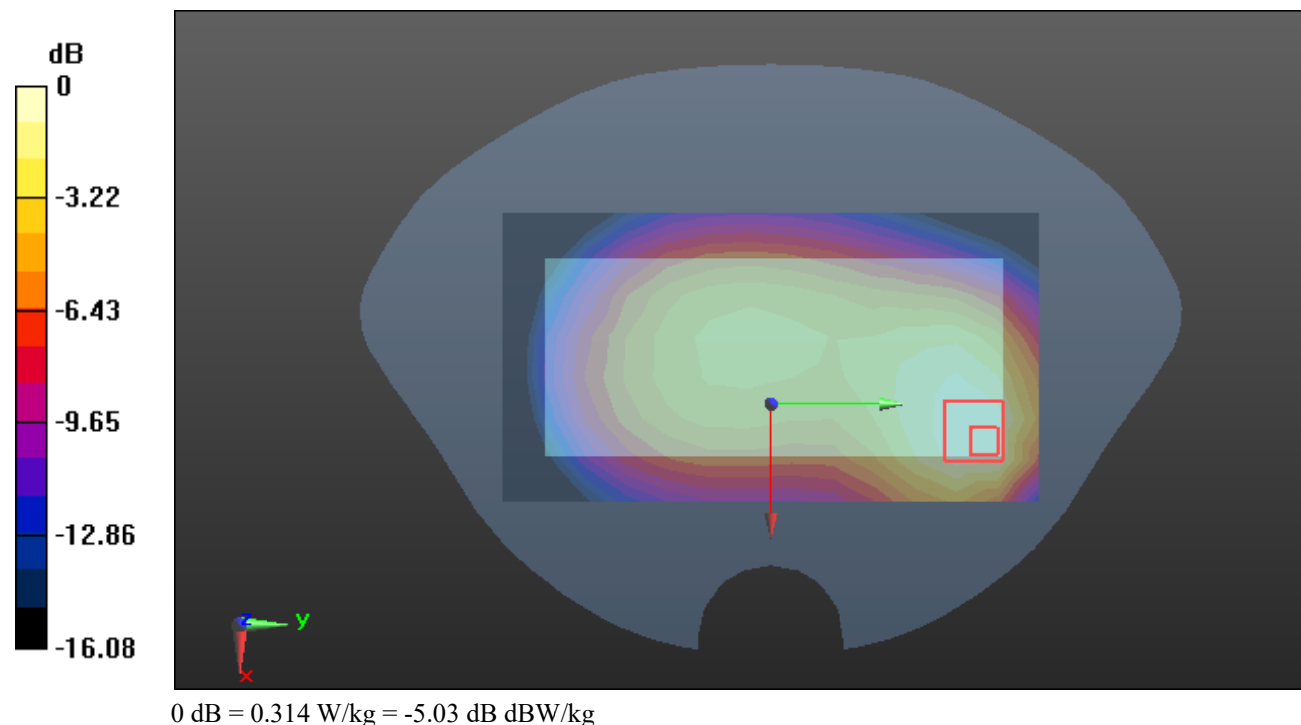

Test Plot13#: GSM 850_Body Front_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used (interpolated): $f=836.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.237$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.6 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.333 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.79 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.490 W/kg

SAR(1 g) = 0.324 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 0.348 W/kg

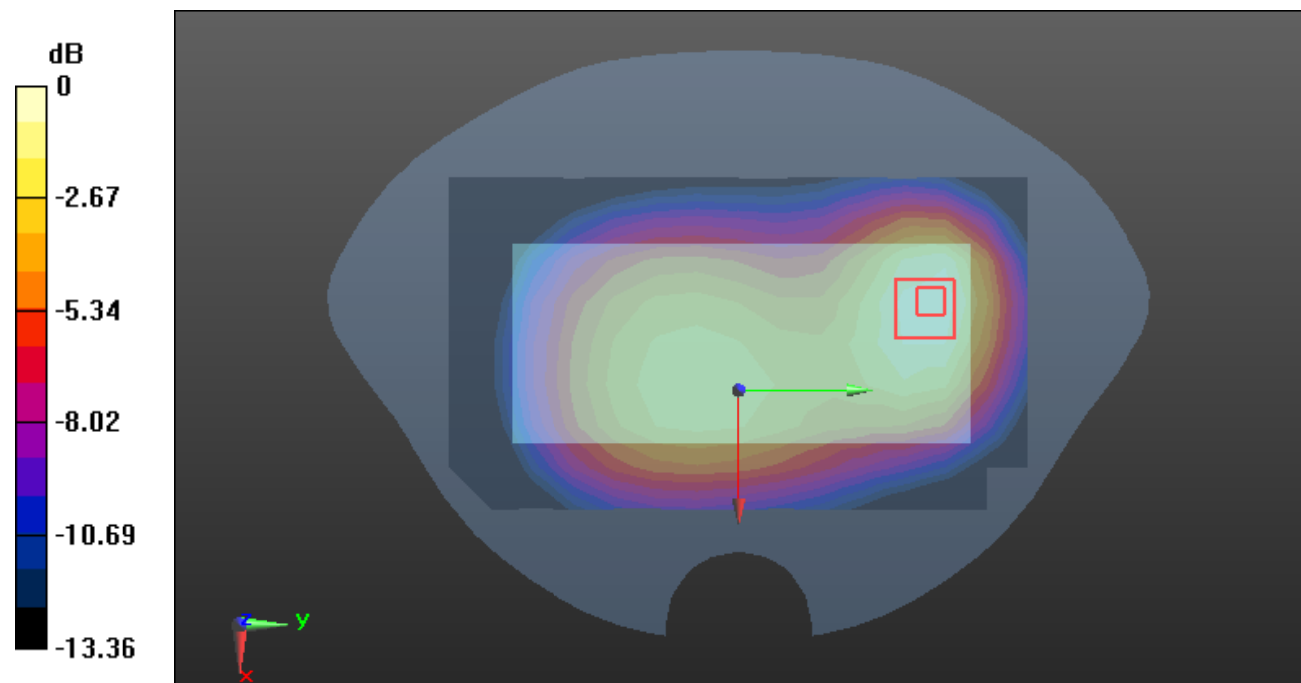

0 dB = 0.348 W/kg = -4.58 dB dBW/kg

Test Plot14#: GSM 850_Body Back_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used (interpolated): $f=836.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.237$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.6 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.503 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.52 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.768 W/kg

SAR(1 g) = 0.470 W/kg; SAR(10 g) = 0.298 W/kg

Maximum value of SAR (measured) = 0.497 W/kg

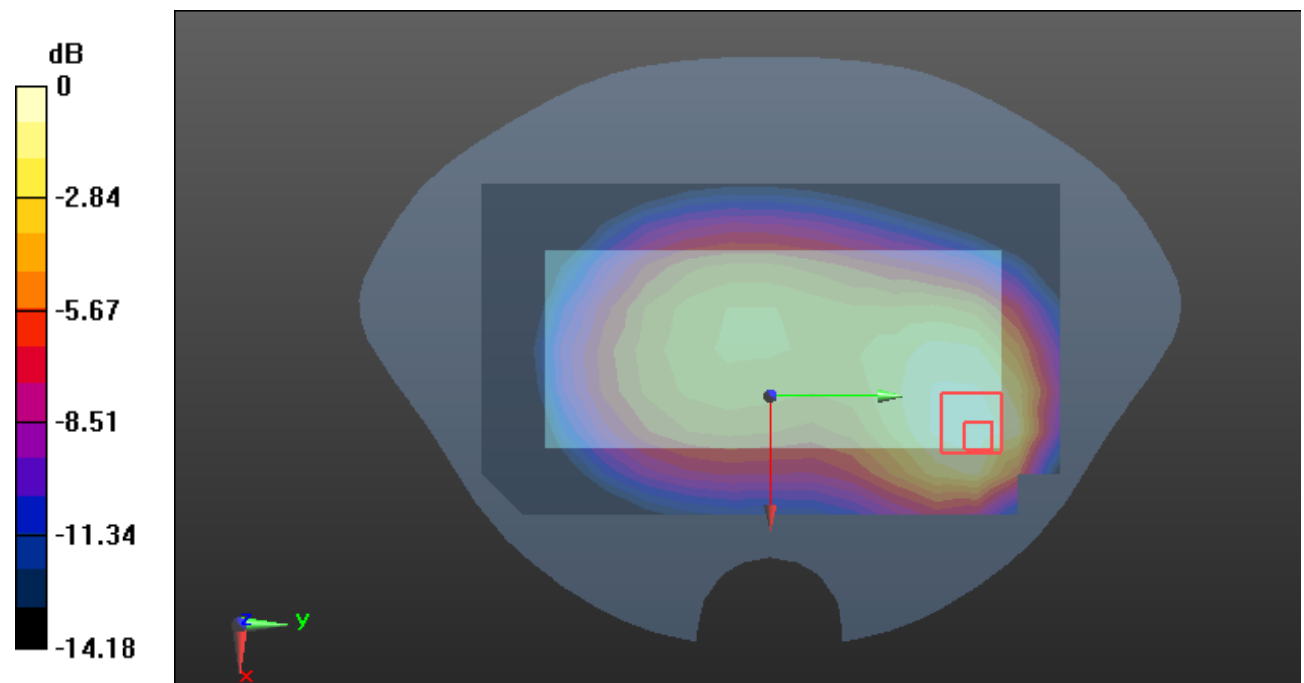

0 dB = 0.497 W/kg = -3.04 dB dBW/kg

Test Plot15#: GSM 850_Body Left_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used (interpolated): $f=836.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.237$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.6 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.243 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.13 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.317 W/kg

SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) = 0.242 W/kg

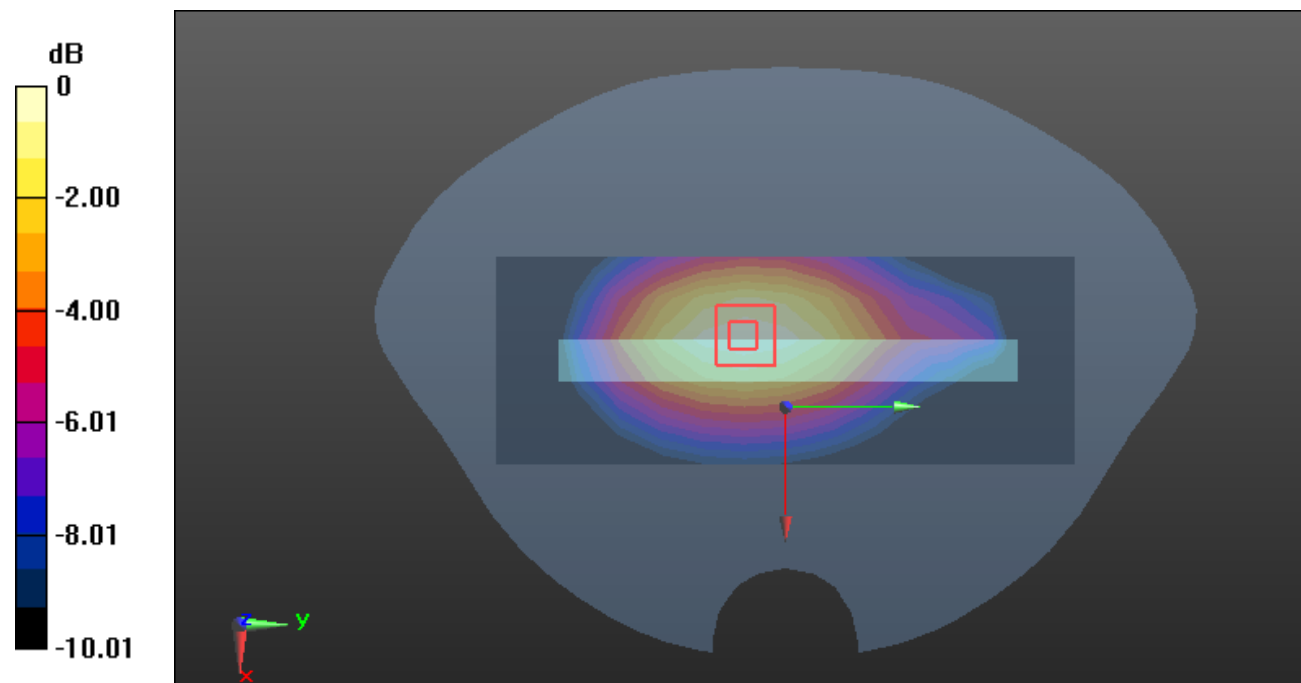

0 dB = 0.242 W/kg = -6.16 dB dBW/kg

Test Plot16#: GSM 850_Body Top_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used (interpolated): $f=836.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.237$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.6 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.342 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.86 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.522 W/kg

SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.213 W/kg

Maximum value of SAR (measured) = 0.365 W/kg

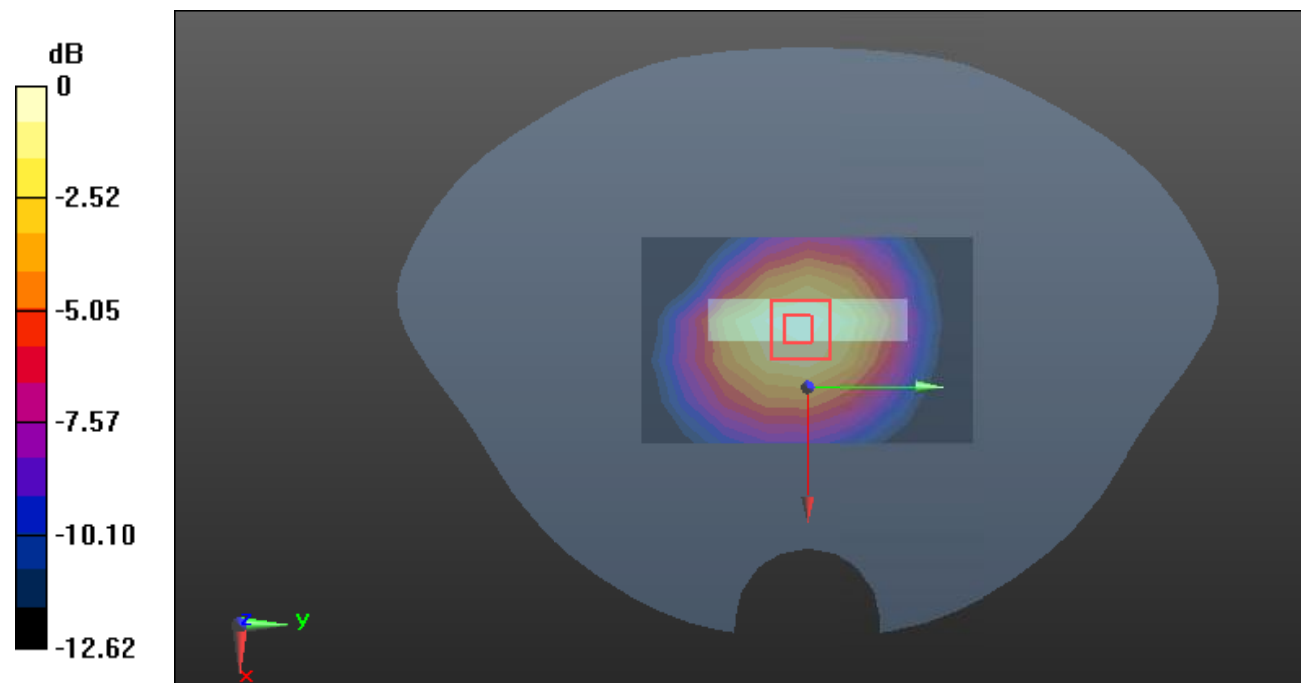

0 dB = 0.365 W/kg = -4.38 dB dBW/kg

Test Plot17#: PCS 1900_Head Left Cheek_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f=1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.617$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.253 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.56 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.436 W/kg

SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.277 W/kg

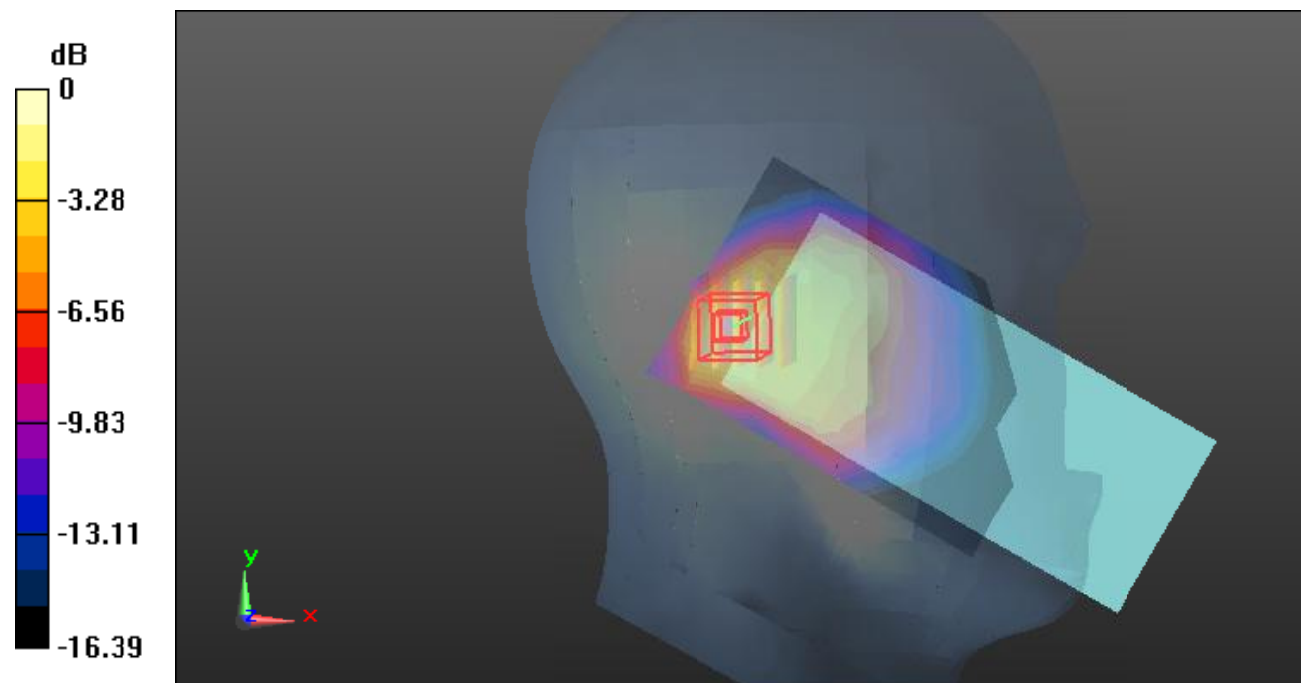

Test Plot18#: PCS 1900_Head Left Tilt_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f=1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.617$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.399 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.49 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.647 W/kg

SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 0.397 W/kg

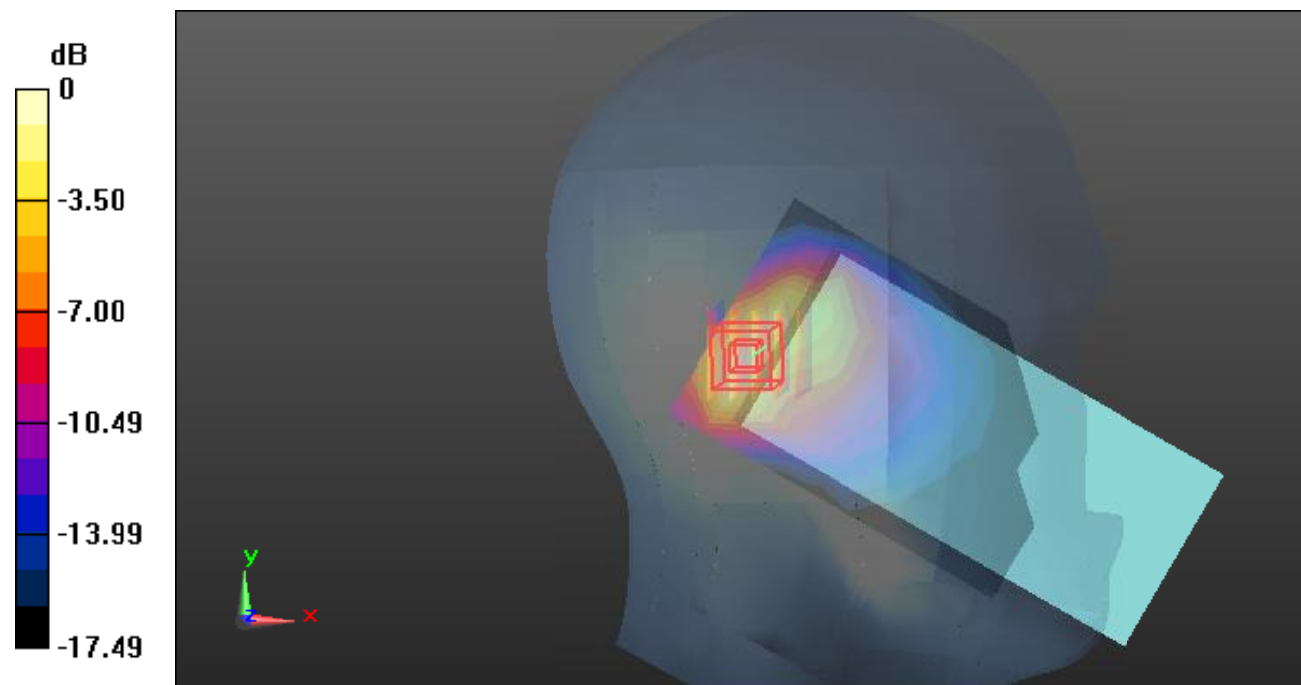

0 dB = 0.397 W/kg = -4.01 dB dBW/kg

Test Plot19#: PCS 1900_Head Right Cheek_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f=1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.617$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.520 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.21 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 0.557 W/kg

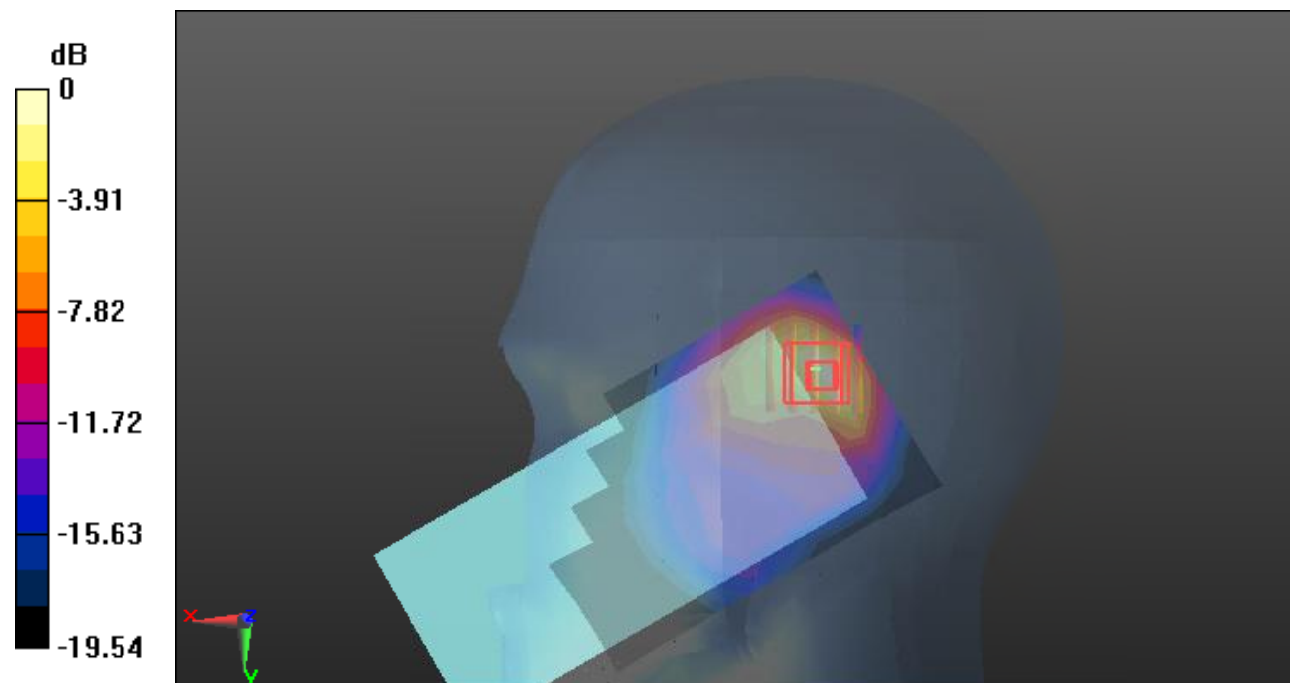

0 dB = 0.557 W/kg = -2.54 dB dBW/kg

Test Plot20#: PCS 1900_Head Right Tilt_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f=1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.617$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.637 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.72 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.620 W/kg; SAR(10 g) = 0.292 W/kg

Maximum value of SAR (measured) = 0.716 W/kg

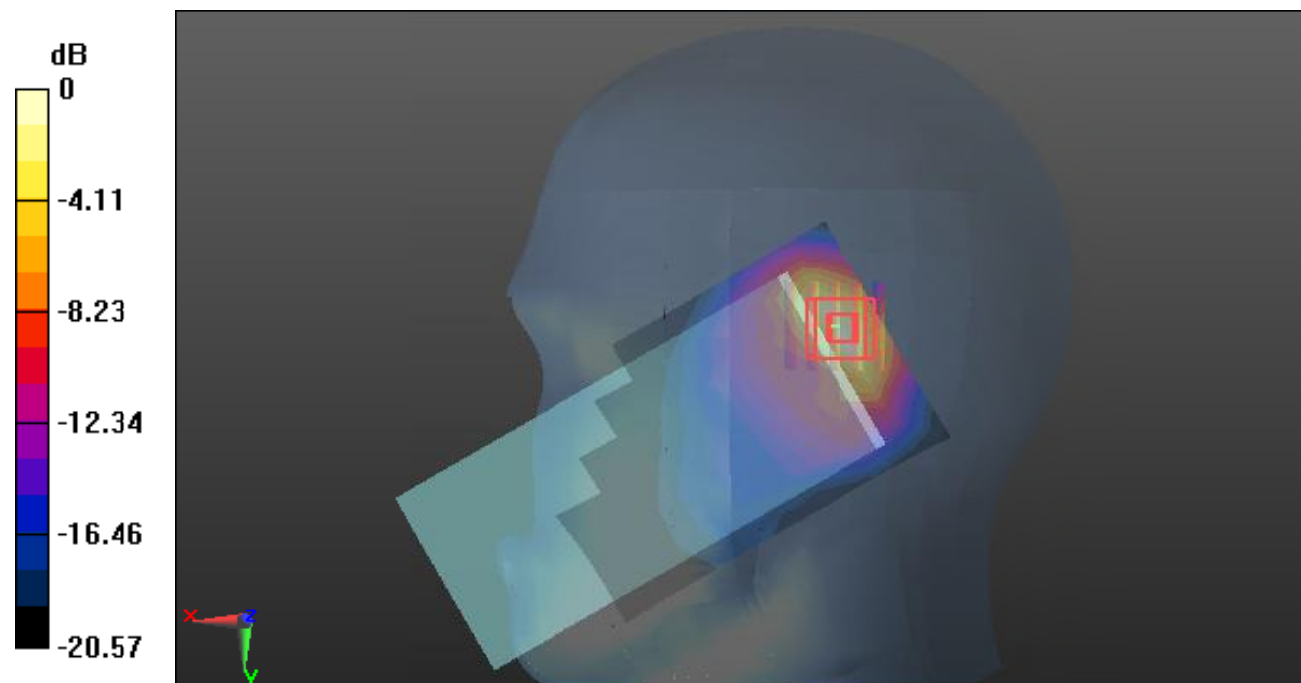

0 dB = 0.716 W/kg = -1.45 dB dBW/kg

Test Plot21#: PCS 1900_Body Worn Front_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f=1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.617$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.105 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.316 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.114 W/kg

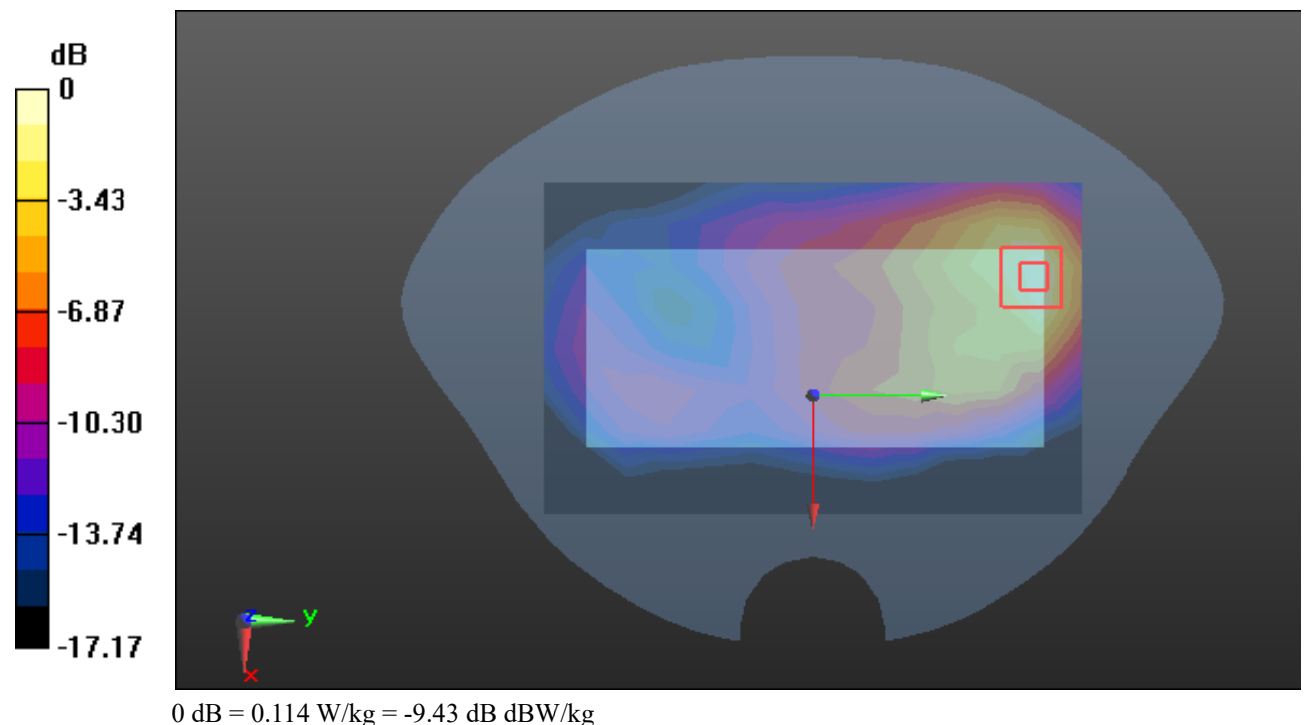

Test Plot22#: PCS 1900_Body Worn Back_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f=1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.617$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.155 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.946 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.292 W/kg

SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.183 W/kg

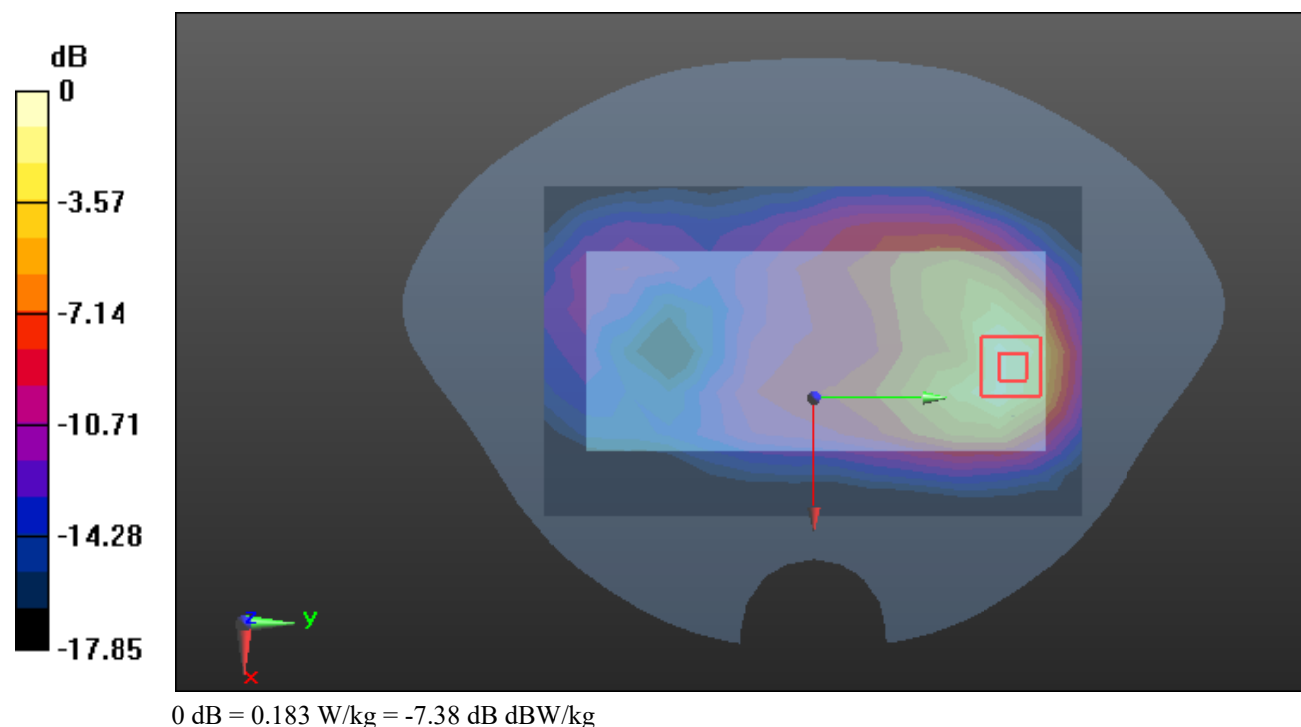

Test Plot23#: PCS 1900_Body Front_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used: $f=1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.617$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.257 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.549 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.460 W/kg

SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.289 W/kg

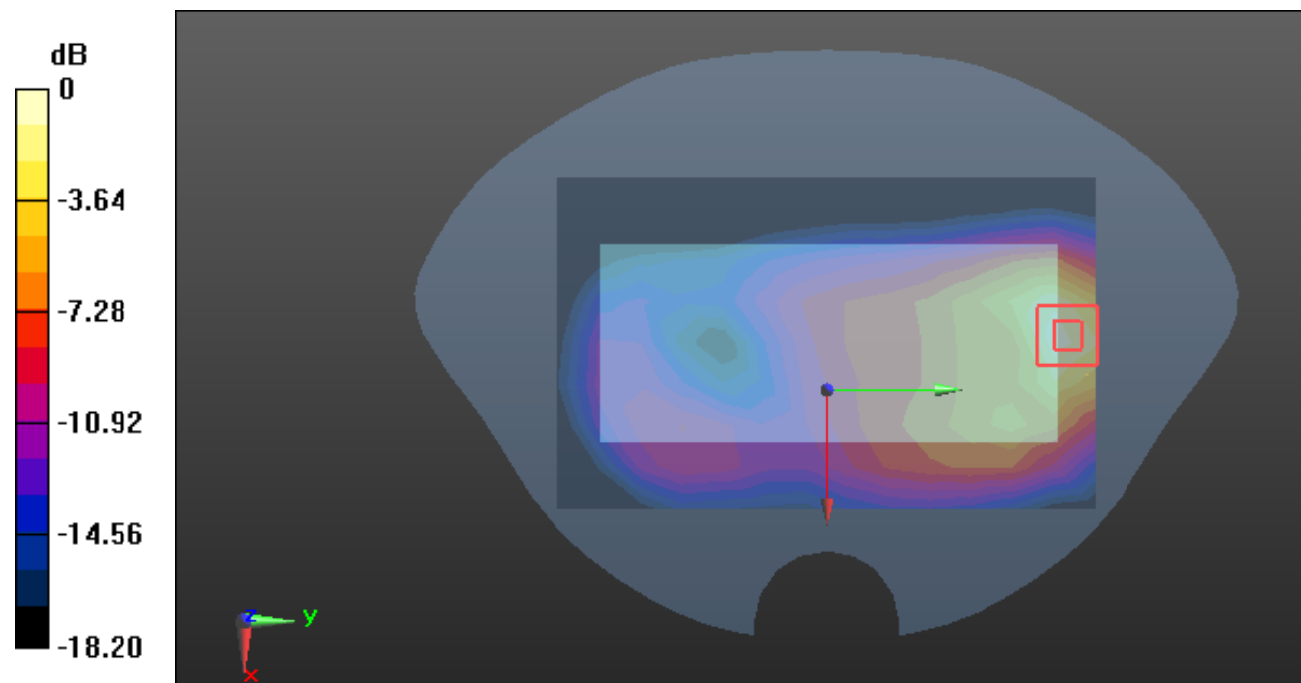

0 dB = 0.289 W/kg = -5.39 dB dBW/kg

Test Plot24#: PCS 1900_Body Back_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used: $f=1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.617$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.356 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.300 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.757 W/kg

SAR(1 g) = 0.423 W/kg; SAR(10 g) = 0.227 W/kg

Maximum value of SAR (measured) = 0.471 W/kg

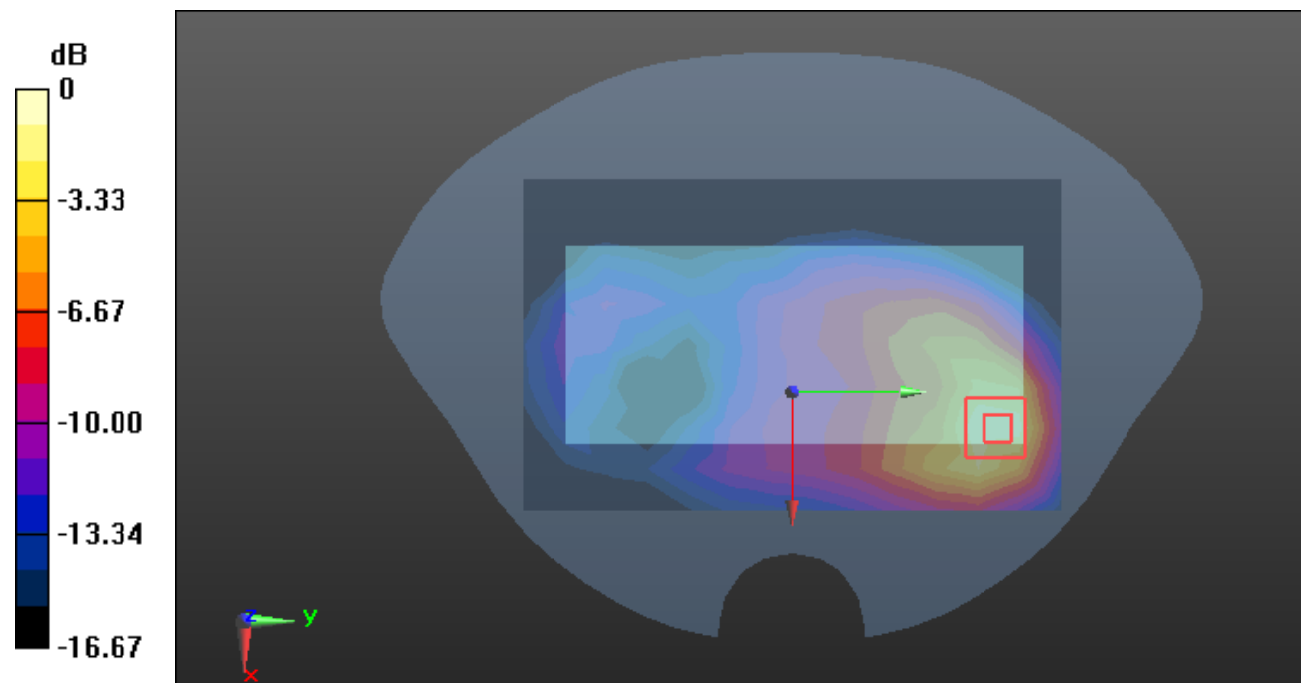

0 dB = 0.471 W/kg = -3.27 dB dBW/kg

Test Plot25#: PCS 1900_Body Left_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz;Duty Cycle: 1:2

Medium parameters used: $f=1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.617$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0686 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.254 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.0754 W/kg

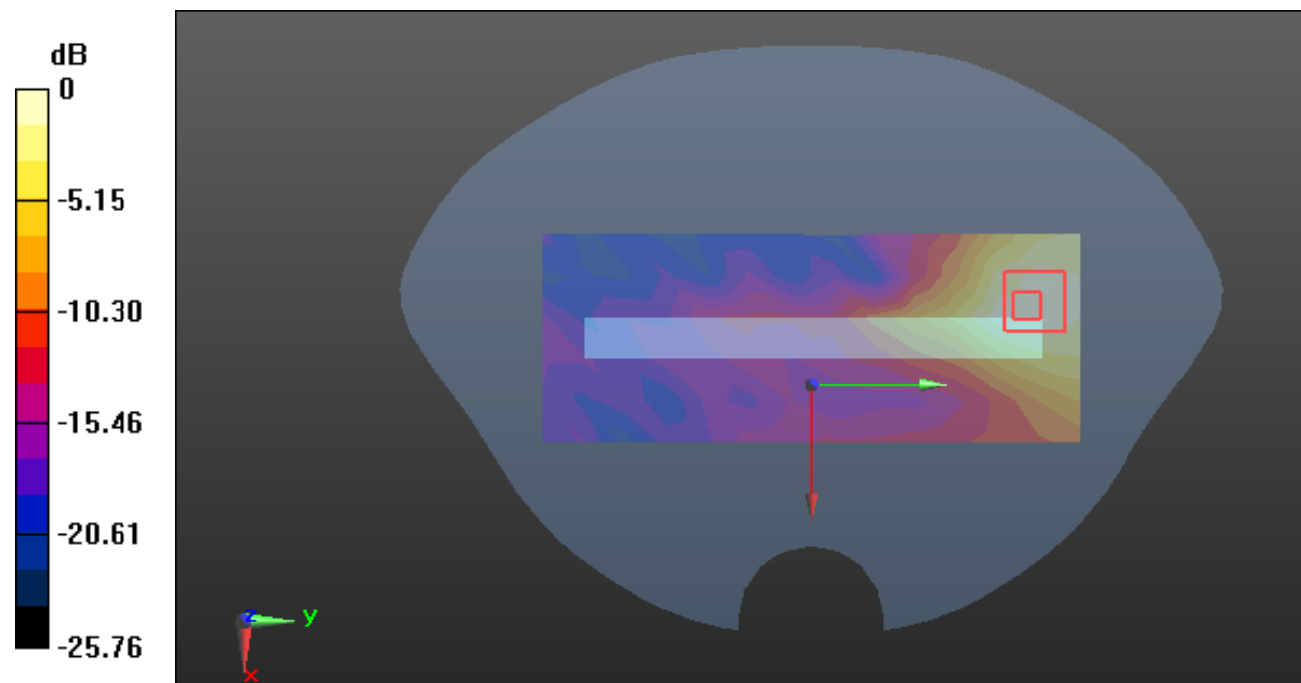

0 dB = 0.0754 W/kg = -11.23 dBW/kg

Test Plot26#: PCS 1900_Body Top_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used: $f=1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.617$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.569 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.11 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.986 W/kg

SAR(1 g) = 0.524 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 0.600 W/kg

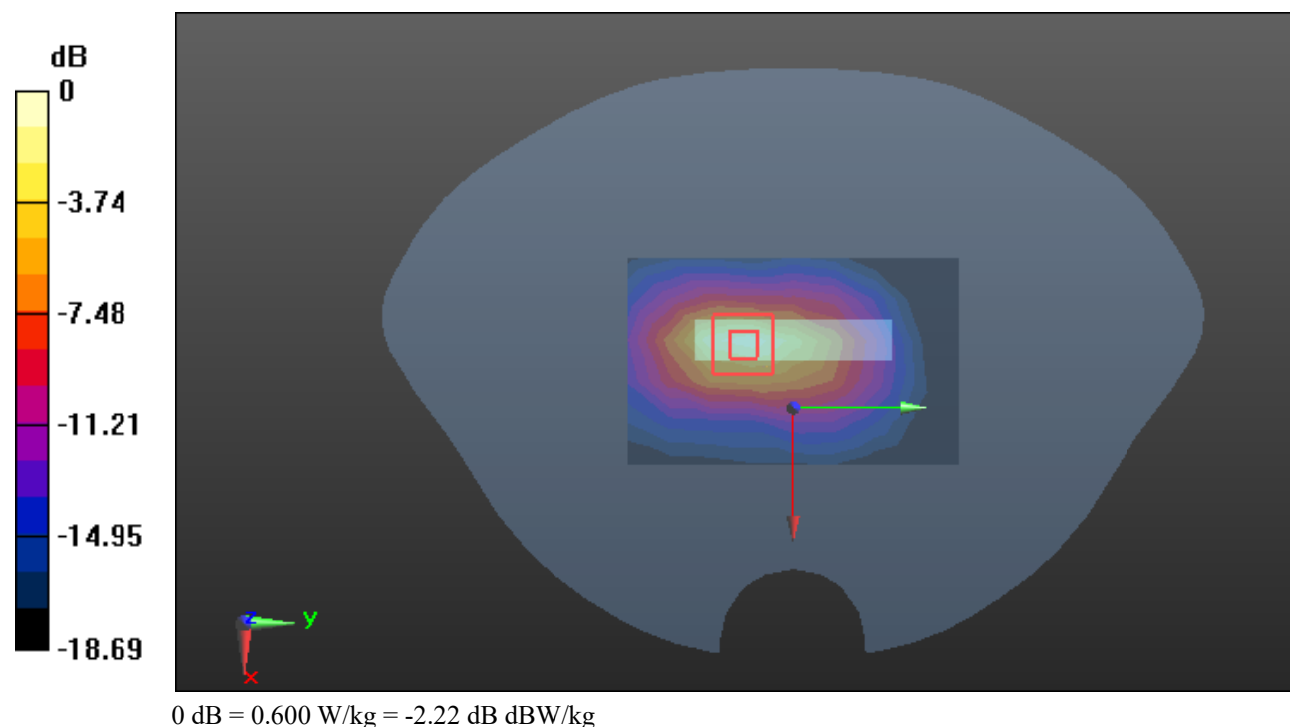

Test Plot27#: WCDMA Band 2_Head Left Cheek_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.617$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.442 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.04 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.741 W/kg

SAR(1 g) = 0.402 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.452 W/kg

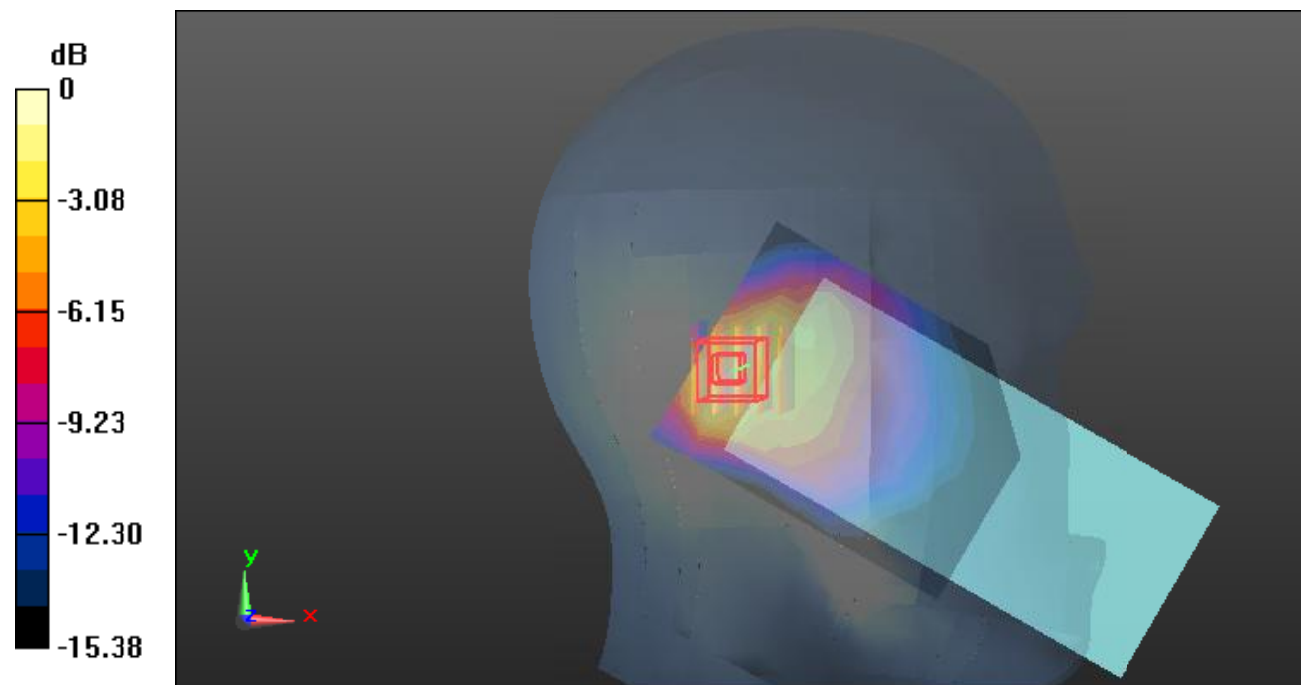

0 dB = 0.452 W/kg = -3.45 dB dBW/kg

Test Plot28#: WCDMA Band 2_Head Left Tilt_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.617$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.526 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.28 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.814 W/kg

SAR(1 g) = 0.451 W/kg; SAR(10 g) = 0.239 W/kg

Maximum value of SAR (measured) = 0.515 W/kg

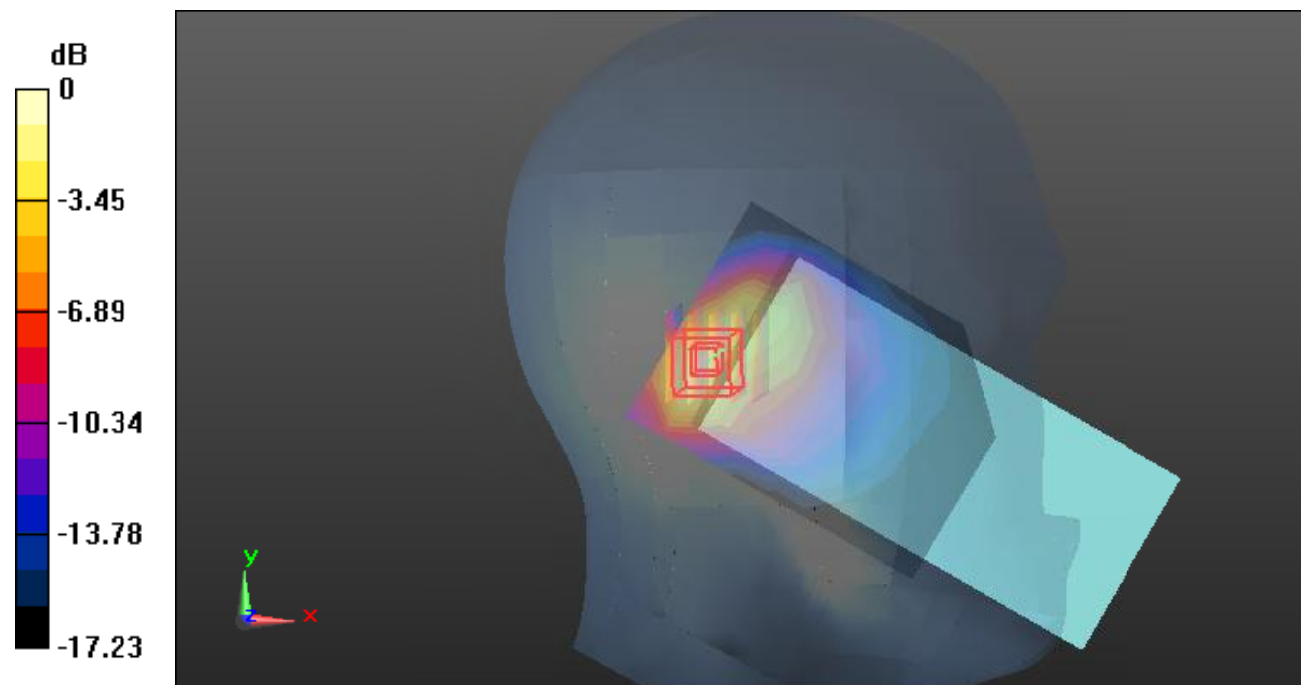

0 dB = 0.515 W/kg = -2.88 dB dBW/kg

Test Plot29#: WCDMA Band 2_Head Right Cheek_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.617$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.704 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.538 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.631 W/kg; SAR(10 g) = 0.312 W/kg

Maximum value of SAR (measured) = 0.727 W/kg

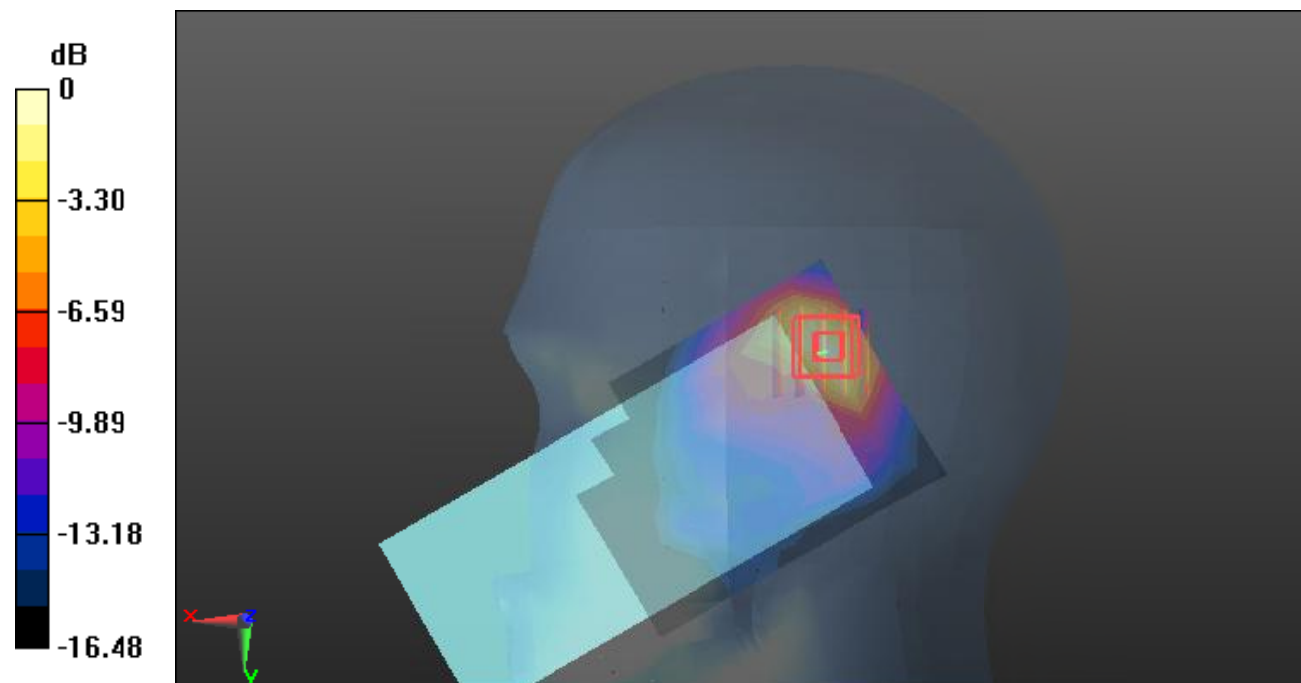

0 dB = 0.727 W/kg = -1.38 dB dBW/kg

Test Plot30#: WCDMA Band 2_Head Right Tilt_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.617$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.894 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.05 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.786 W/kg; SAR(10 g) = 0.368 W/kg

Maximum value of SAR (measured) = 0.915 W/kg

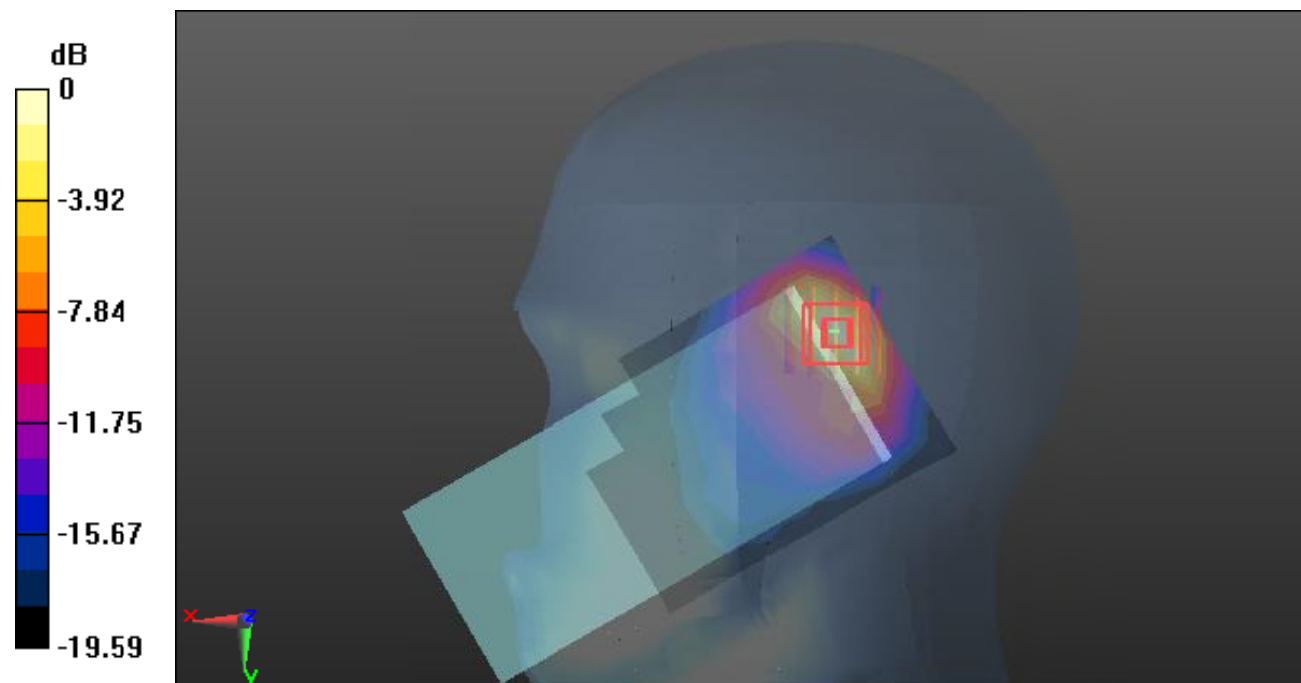

0 dB = 0.915 W/kg = -0.39 dB dBW/kg

Test Plot31#: WCDMA Band 2_Body Front_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.617$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.169 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.770 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.285 W/kg

SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.178 W/kg

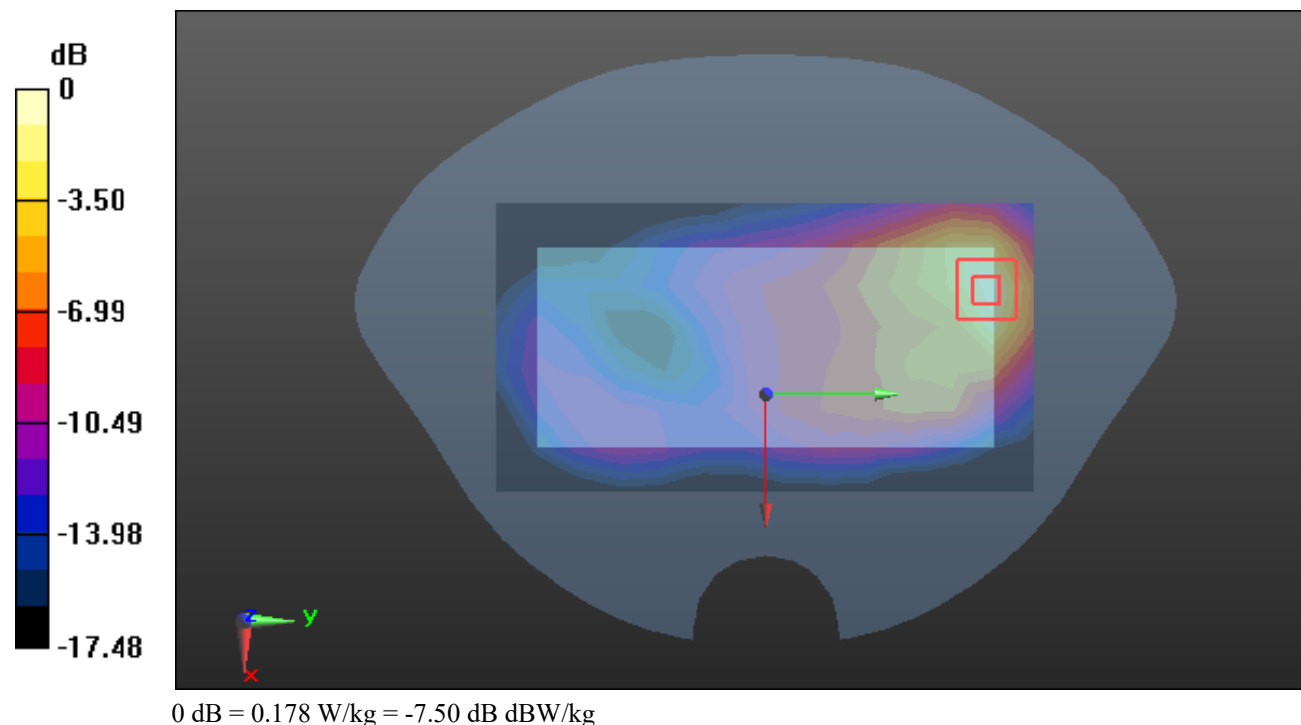

Test Plot32#: WCDMA Band 2_Body Back_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.617$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.223 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.416 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.398 W/kg

SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.118 W/kg

Maximum value of SAR (measured) = 0.252 W/kg

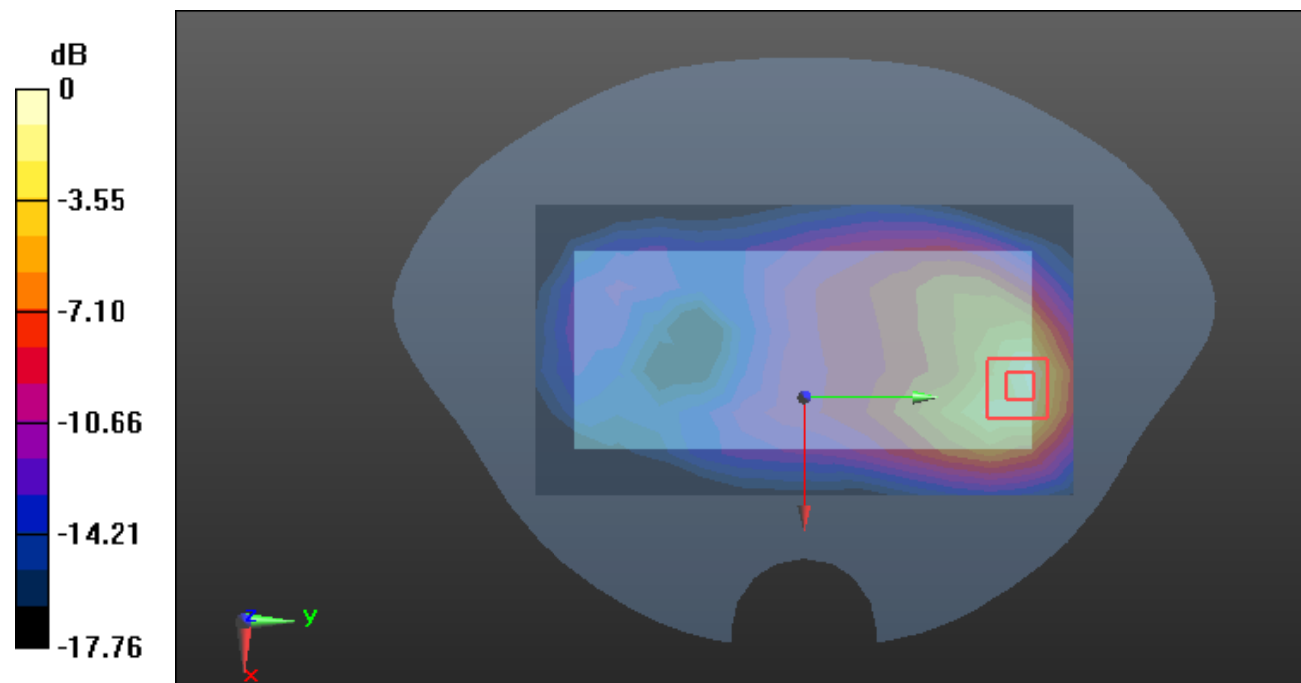

0 dB = 0.252 W/kg = -5.99 dB dBW/kg

Test Plot 33#: WCDMA Band 2_Body Left_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.617$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0485 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.461 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0770 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0494 W/kg

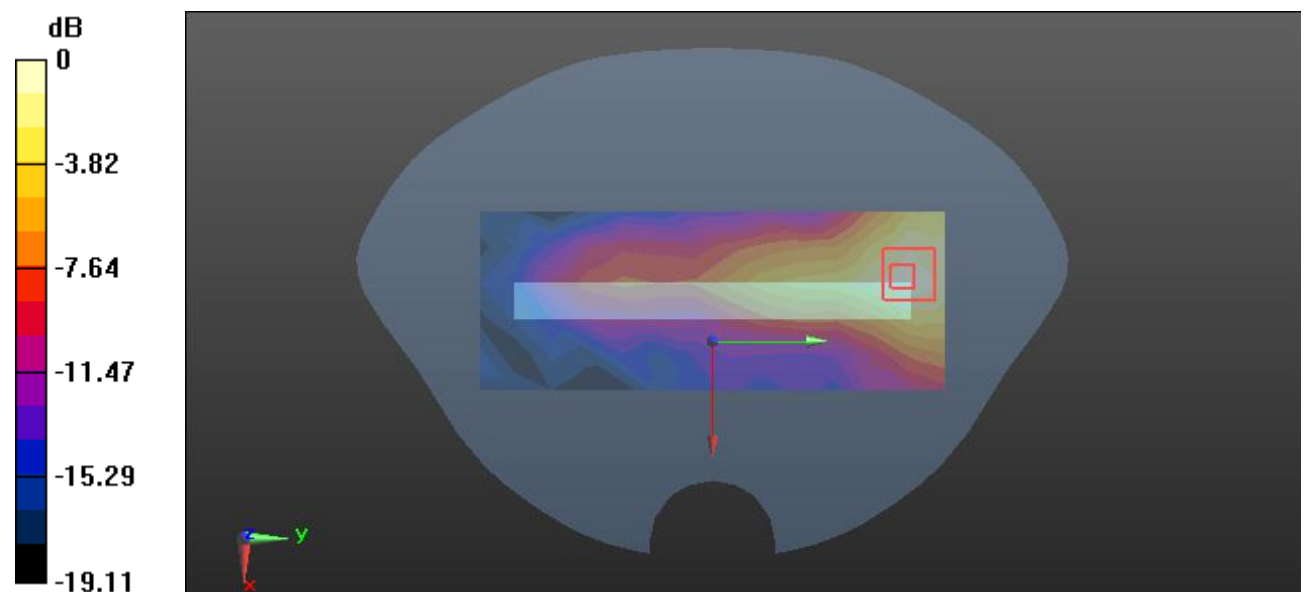

0 dB = 0.0494 W/kg = -13.06 dBW/kg

Test Plot 34#: WCDMA Band 2_Body Top_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 39.617$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.289 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.946 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.539 W/kg

SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.328 W/kg

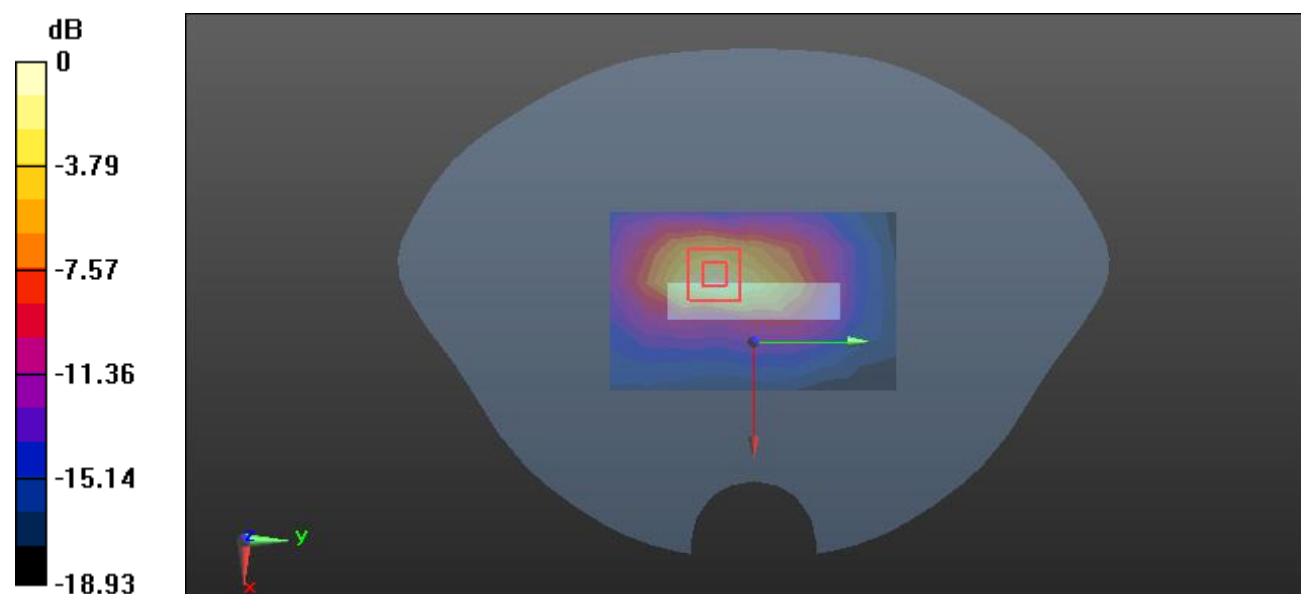

0 dB = 0.328 W/kg = -4.84 dBW/kg

Test Plot 35#: WCDMA Band 4_Head Left Cheek_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 1732.6$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 40.442$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1732.6 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.608 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.76 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.999 W/kg

SAR(1 g) = 0.553 W/kg; SAR(10 g) = 0.294 W/kg

Maximum value of SAR (measured) = 0.627 W/kg

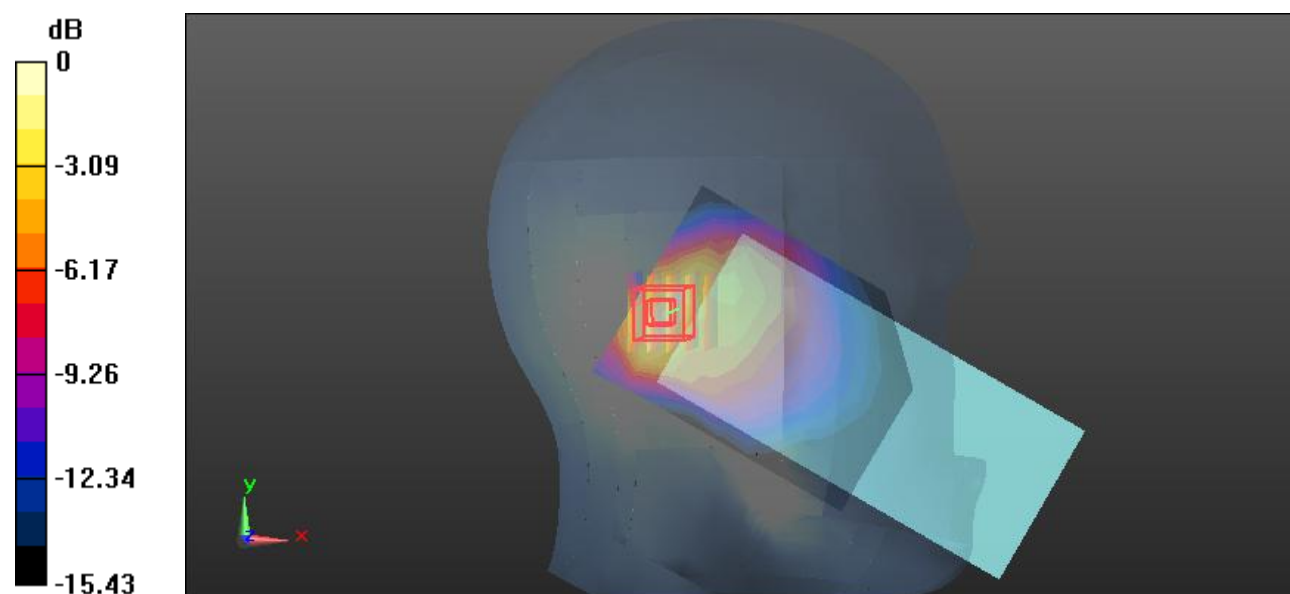

0 dB = 0.627 W/kg = -2.03 dBW/kg

Test Plot 36#: WCDMA Band 4_Head Left Tilt_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 1732.6$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 40.442$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1732.6 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.704 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.28 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.608 W/kg; SAR(10 g) = 0.328 W/kg

Maximum value of SAR (measured) = 0.699 W/kg

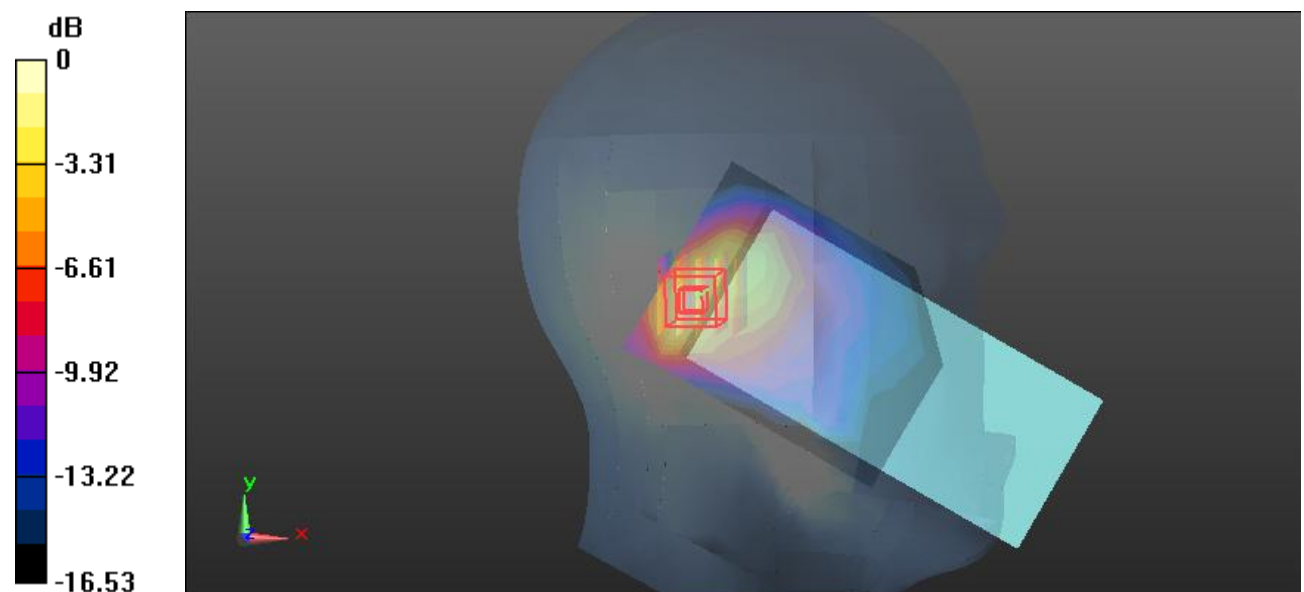

0 dB = 0.699 W/kg = -1.56 dBW/kg

Test Plot 37#: WCDMA Band 4_Head Right Cheek_Low**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 1712.4$ MHz; $\sigma = 1.317$ S/m; $\epsilon_r = 40.668$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1712.4 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.690 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.07 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.592 W/kg; SAR(10 g) = 0.289 W/kg

Maximum value of SAR (measured) = 0.688 W/kg

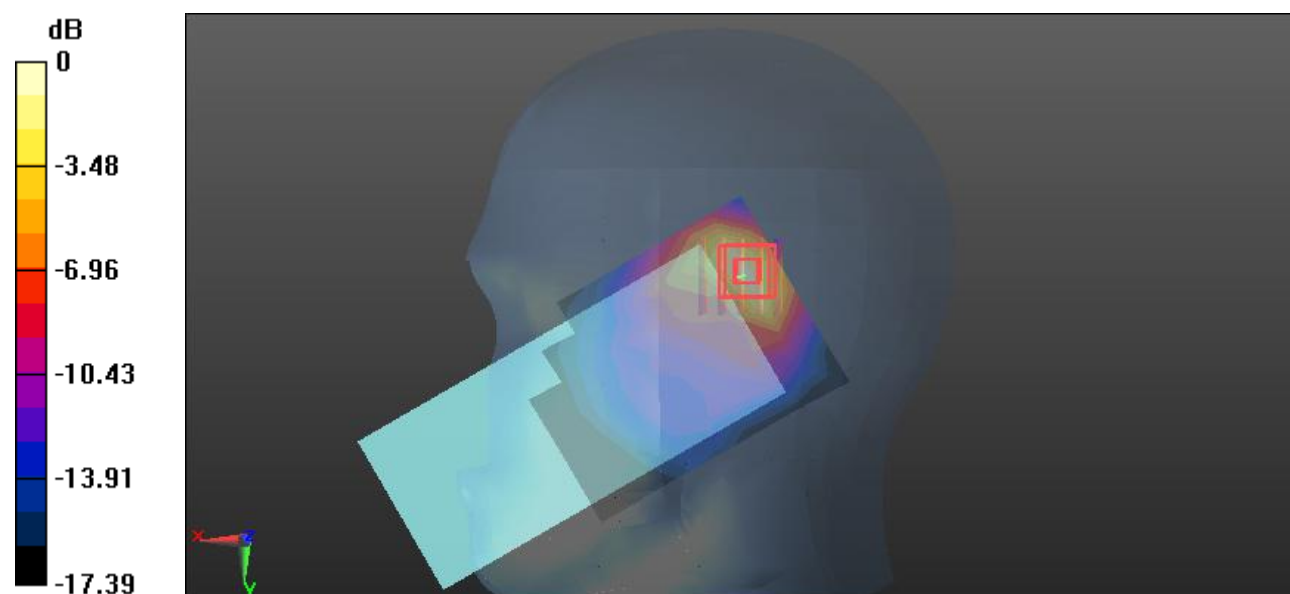

0 dB = 0.688 W/kg = -1.62 dBW/kg

Test Plot 38#: WCDMA Band 4_Head Right Cheek_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 1732.6$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 40.442$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1732.6 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.03 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.69 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 0.897 W/kg; SAR(10 g) = 0.440 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

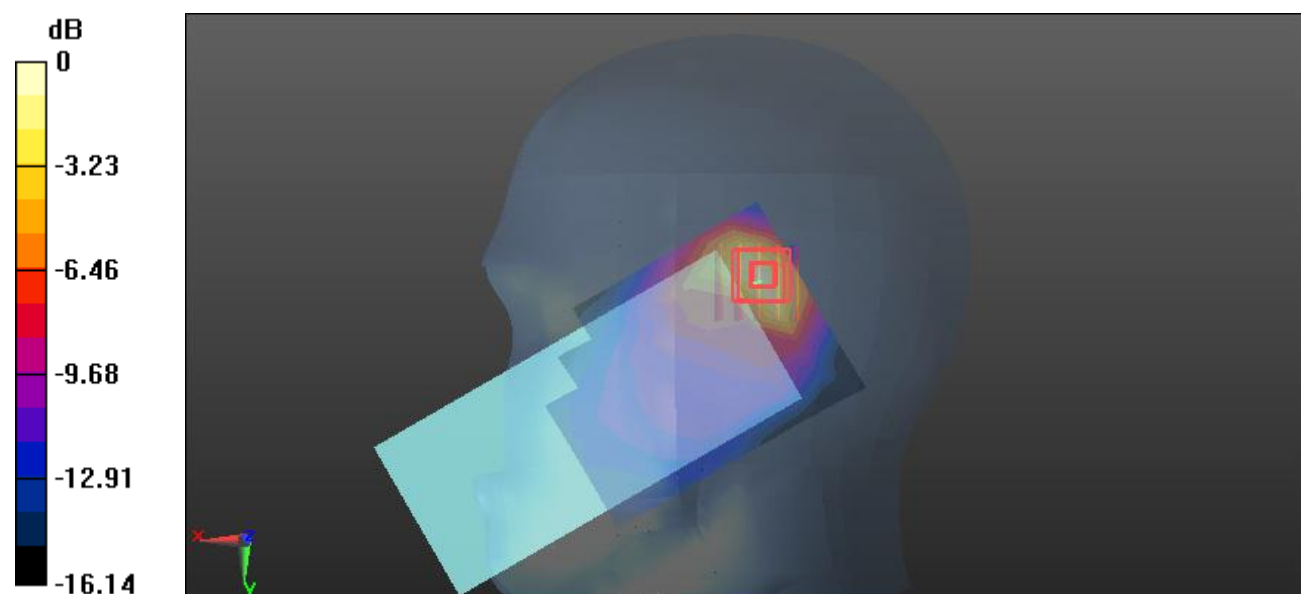

0 dB = 1.04 W/kg = 0.17 dBW/kg

Test Plot 39#: WCDMA Band 4_Head Right Cheek_High**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 1752.6$ MHz; $\sigma = 1.359$ S/m; $\epsilon_r = 40.199$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1752.6 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.579 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.968 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.979 W/kg

SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.245 W/kg

Maximum value of SAR (measured) = 0.582 W/kg

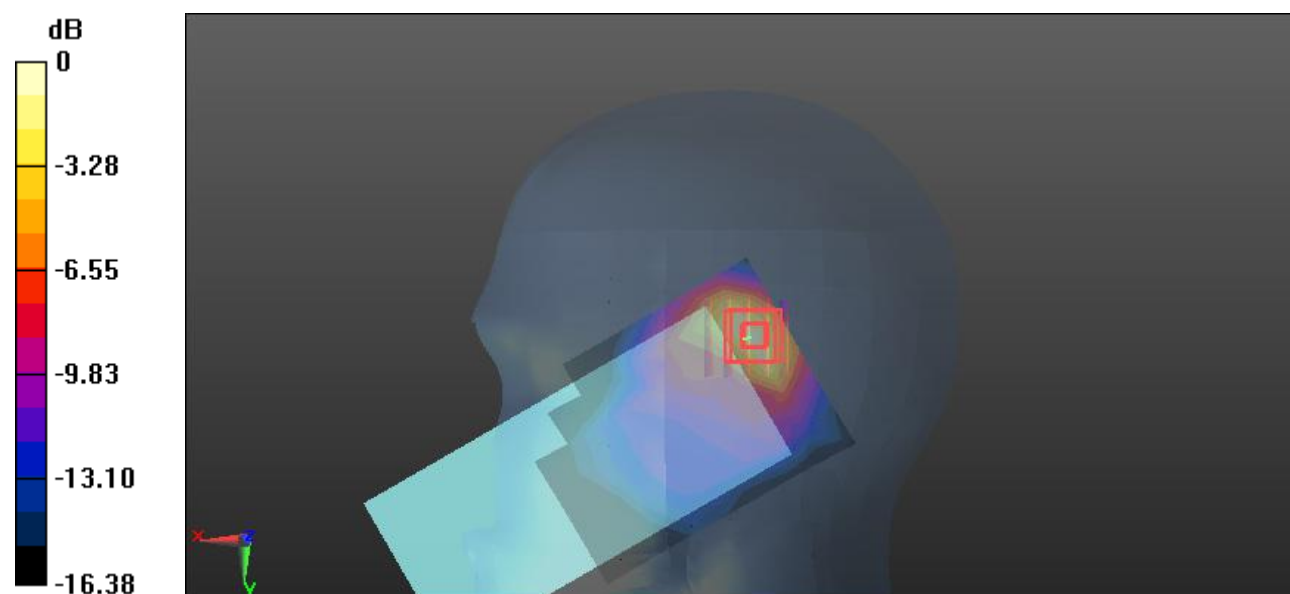

0 dB = 0.582 W/kg = -2.35 dBW/kg

Test Plot 40#: WCDMA Band 4_Head Right Tilt_Low**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 1712.4$ MHz; $\sigma = 1.317$ S/m; $\epsilon_r = 40.668$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1712.4 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.848 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.95 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.721 W/kg; SAR(10 g) = 0.340 W/kg

Maximum value of SAR (measured) = 0.861 W/kg

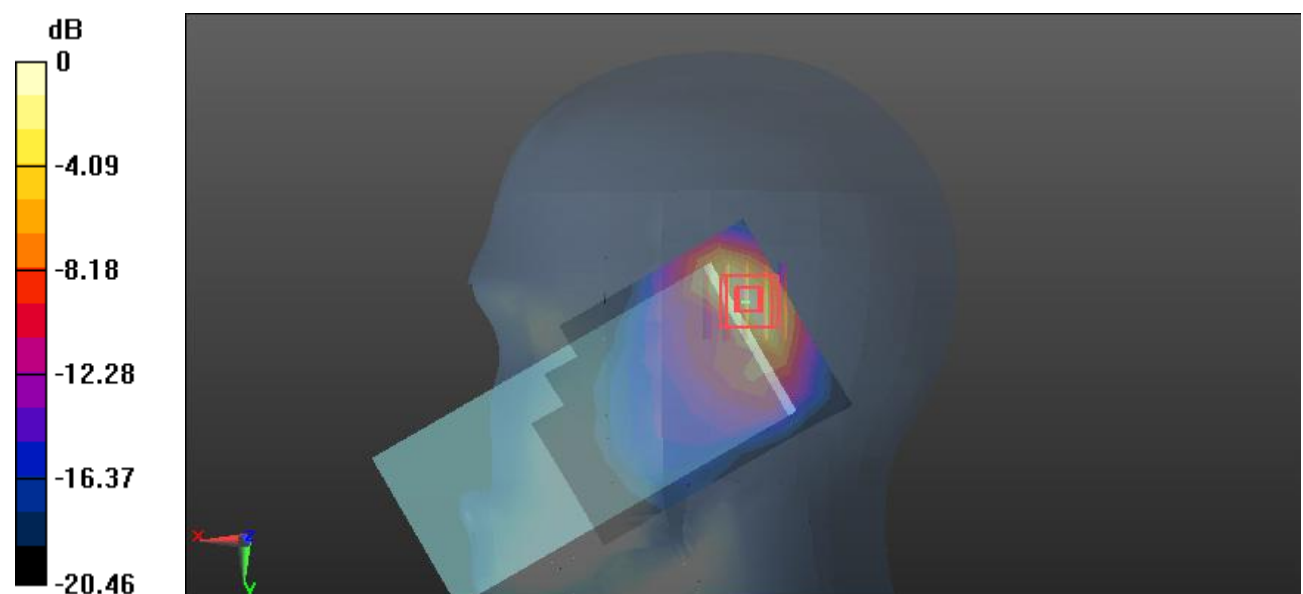

0 dB = 0.861 W/kg = -0.65 dBW/kg

Test Plot 41#: WCDMA Band 4_Head Right Tilt_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 1732.6$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 40.442$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1732.6 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.31 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.36 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.21 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.530 W/kg

Maximum value of SAR (measured) = 1.30 W/kg

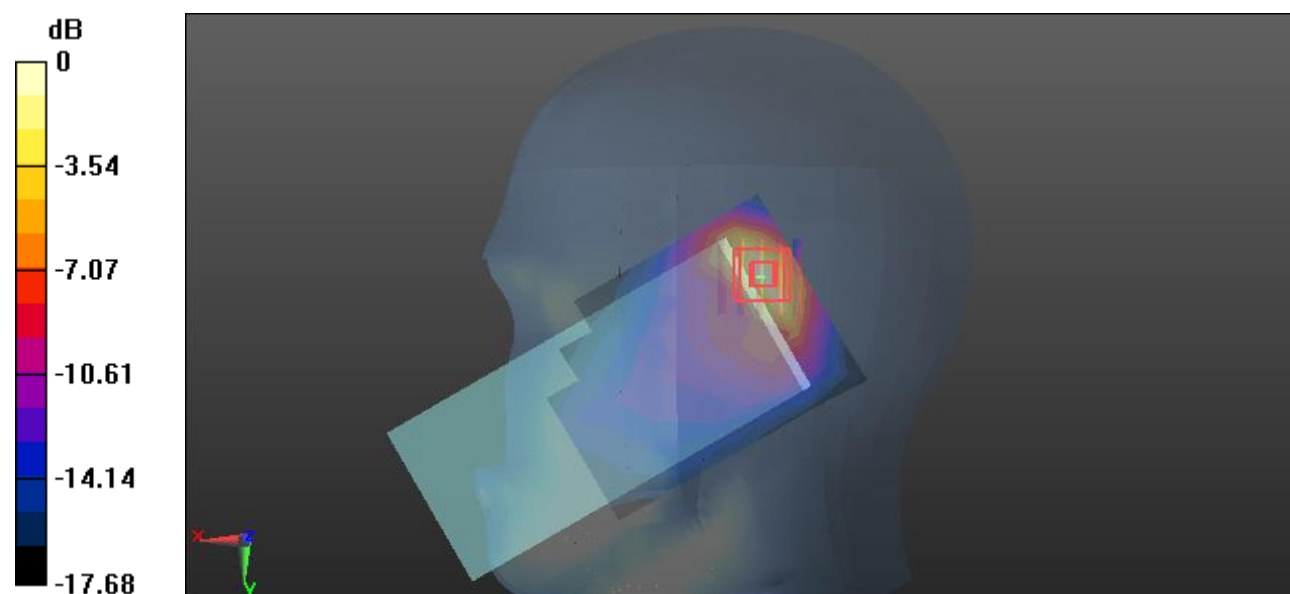

0 dB = 1.30 W/kg = 1.14 dBW/kg

Test Plot 42#: WCDMA Band 4_Head Right Tilt_High**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 1752.6$ MHz; $\sigma = 1.359$ S/m; $\epsilon_r = 40.199$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1752.6 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.726 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.18 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.621 W/kg; SAR(10 g) = 0.295 W/kg

Maximum value of SAR (measured) = 0.731 W/kg

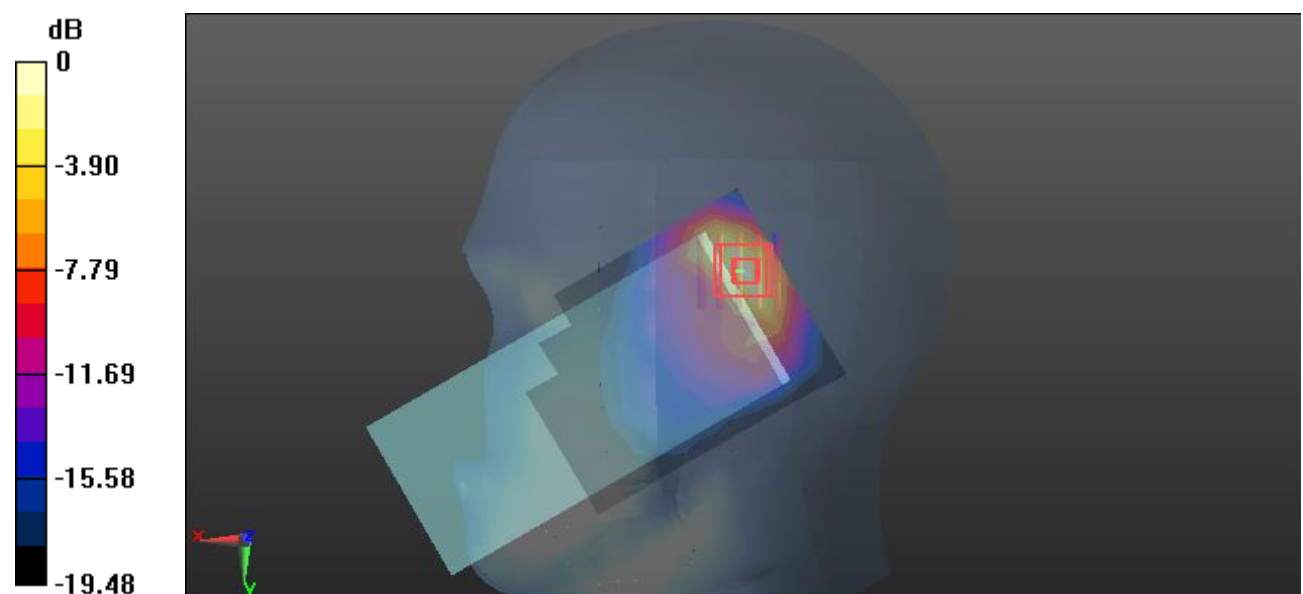

0 dB = 0.731 W/kg = -1.36 dBW/kg

Test Plot 43#: WCDMA Band 4_Body Front_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 1732.6$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 40.442$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1732.6 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.244 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.156 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.388 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.121 W/kg

Maximum value of SAR (measured) = 0.254 W/kg

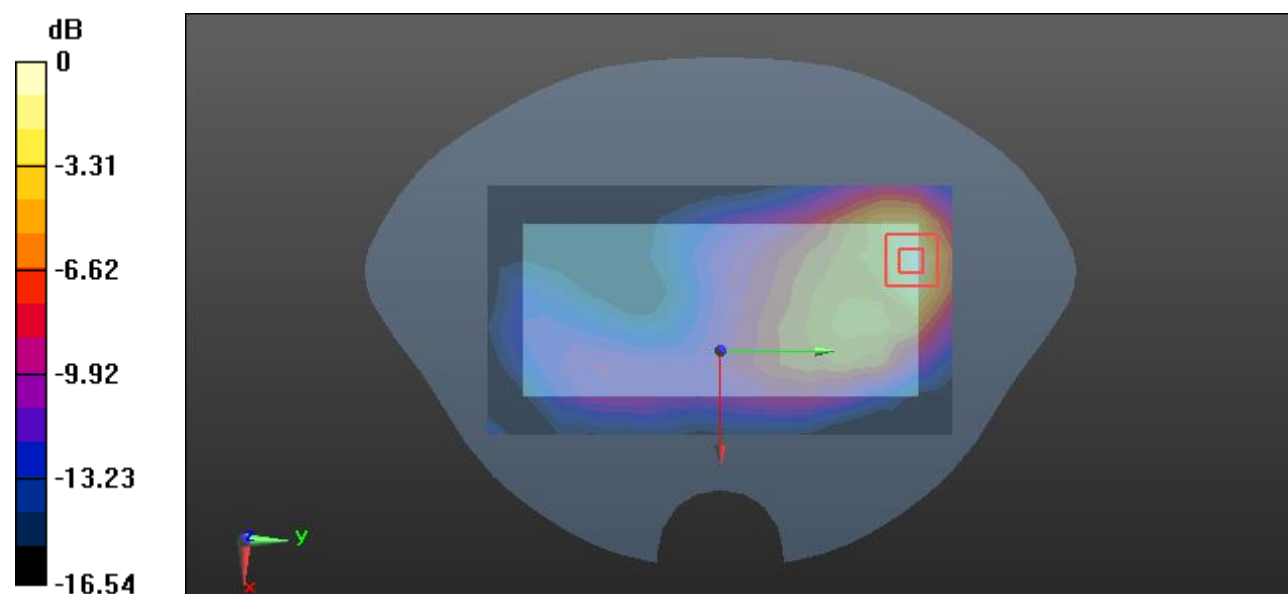

0 dB = 0.254 W/kg = -5.95 dBW/kg

Test Plot 44#: WCDMA Band 4_Body Back_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 1732.6$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 40.442$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1732.6 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.265 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.128 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.455 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.272 W/kg

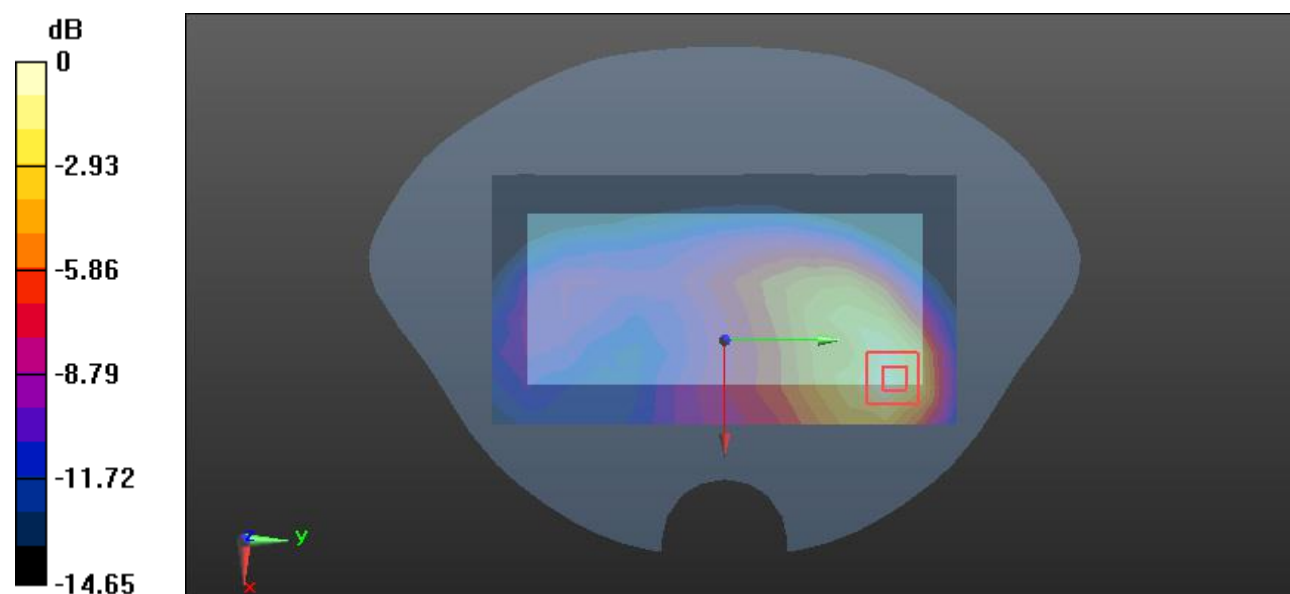

0 dB = 0.272 W/kg = -5.65 dBW/kg

Test Plot 45#: WCDMA Band 4_Body Left_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 1732.6$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 40.442$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1732.6 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0261 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.8500 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0480 W/kg

SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0285 W/kg

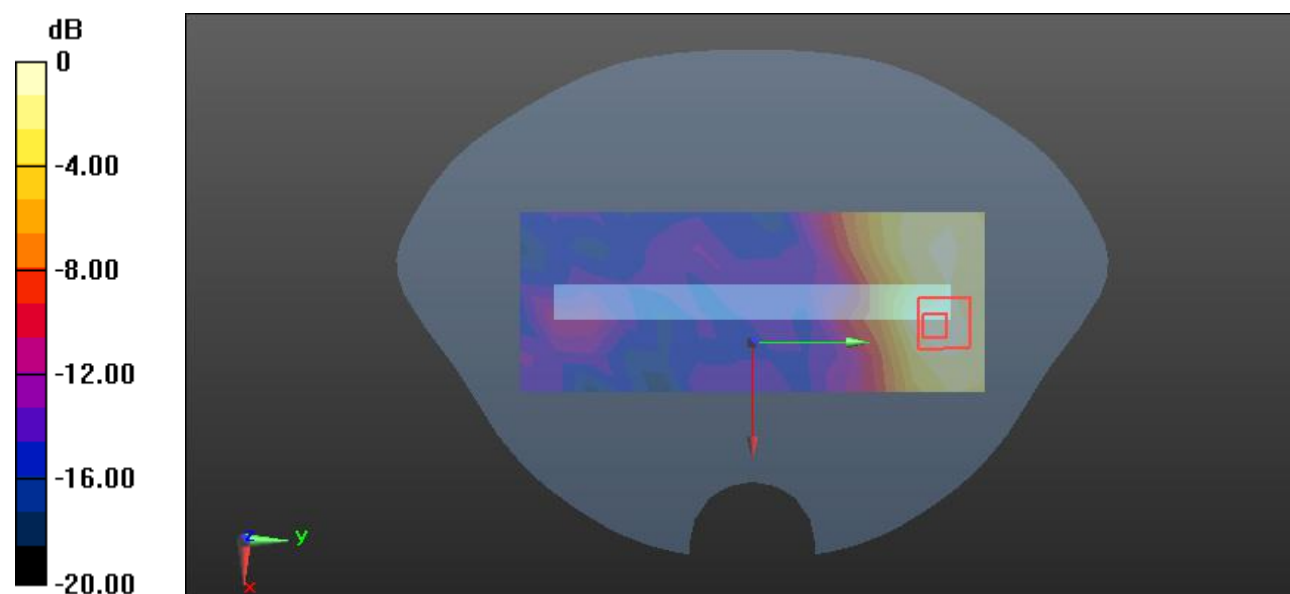

0 dB = 0.0285 W/kg = -15.45 dBW/kg

Test Plot *#: WCDMA Band 4_Body Top_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 1732.6$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 40.442$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1732.6 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.397 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.22 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.708 W/kg

SAR(1 g) = 0.381 W/kg; SAR(10 g) = 0.190 W/kg

Maximum value of SAR (measured) = 0.437 W/kg

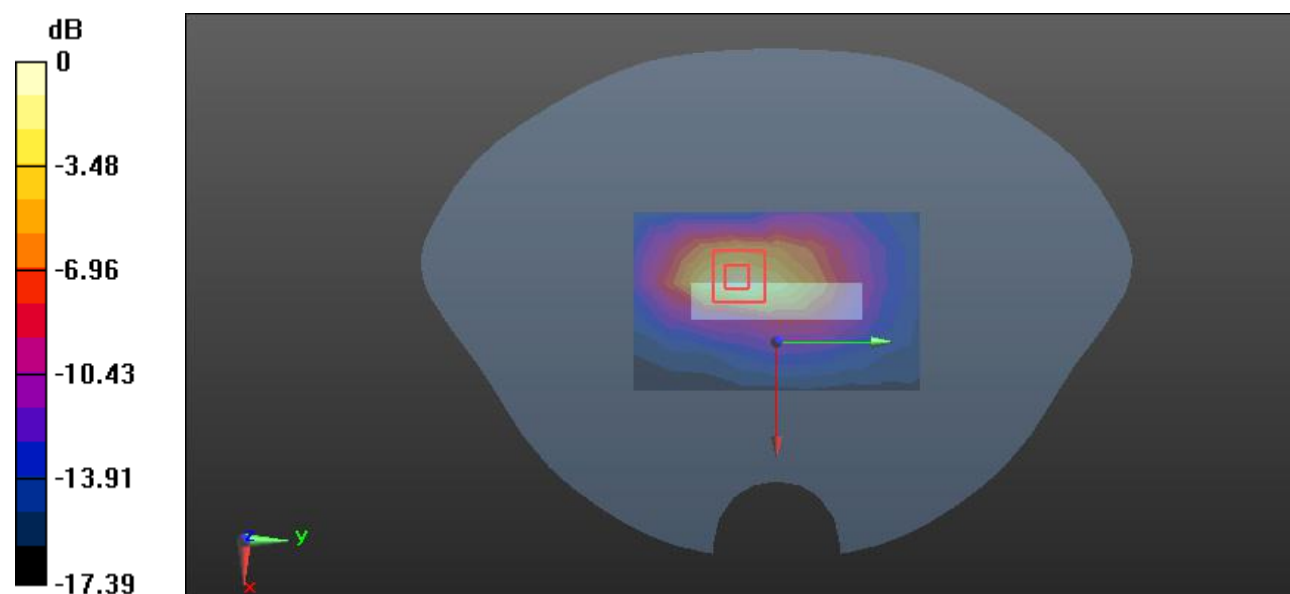

0 dB = 0.437 W/kg = -3.60 dBW/kg

Test Plot 47#: WCDMA Band 5_Head Left Cheek_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 836.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.237$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.6 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.559 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.23 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.822 W/kg

SAR(1 g) = 0.550 W/kg; SAR(10 g) = 0.376 W/kg

Maximum value of SAR (measured) = 0.571 W/kg

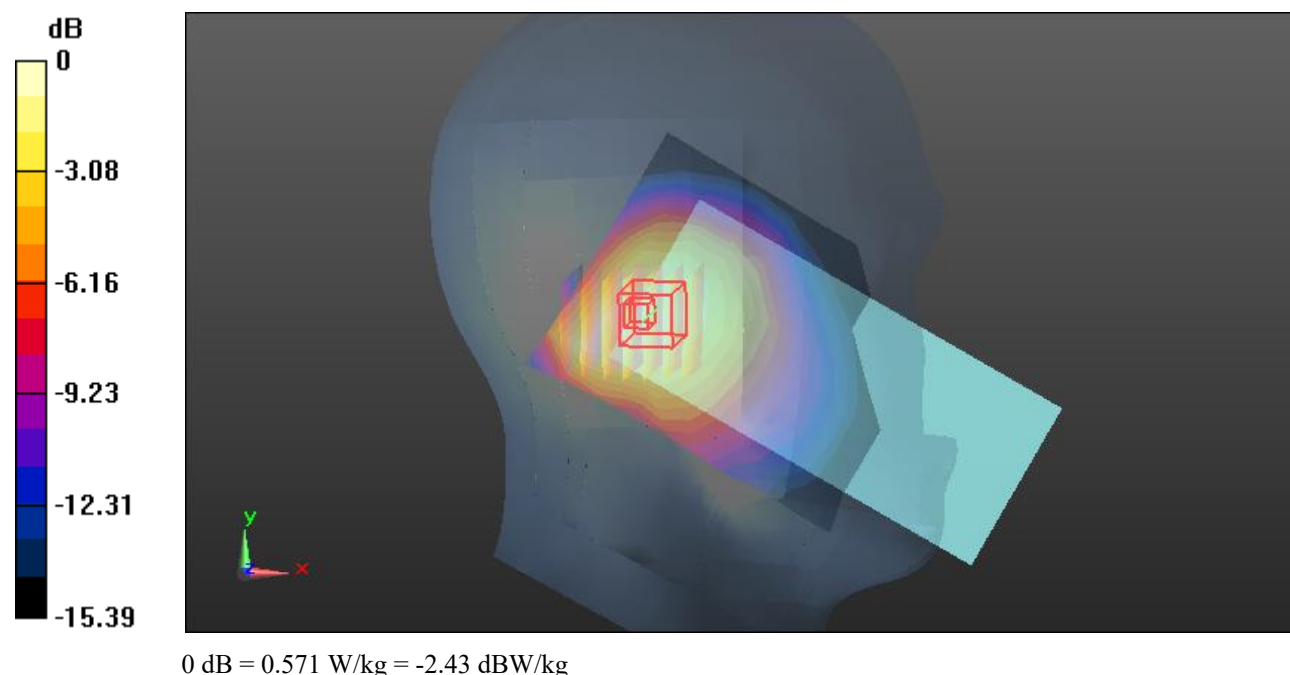

Test Plot 48#: WCDMA Band 5_Head Left Tilt_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f=836.6$ MHz; $\sigma=0.921$ S/m; $\epsilon_r=41.237$; $\rho=1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.6 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.362 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.62 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.557 W/kg

SAR(1 g) = 0.361 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 0.382 W/kg

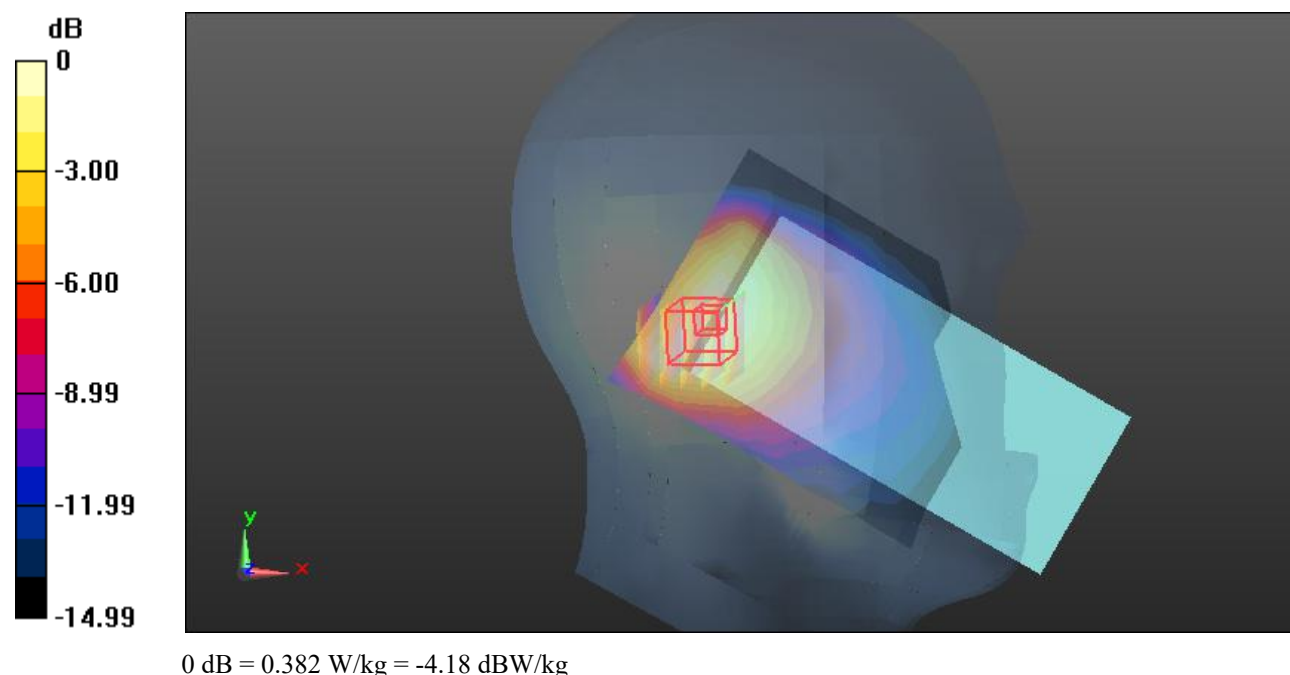

Test Plot 49#: WCDMA Band 5_Head Right Cheek_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 836.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.237$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.6 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.611 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.91 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.591 W/kg; SAR(10 g) = 0.377 W/kg

Maximum value of SAR (measured) = 0.618 W/kg

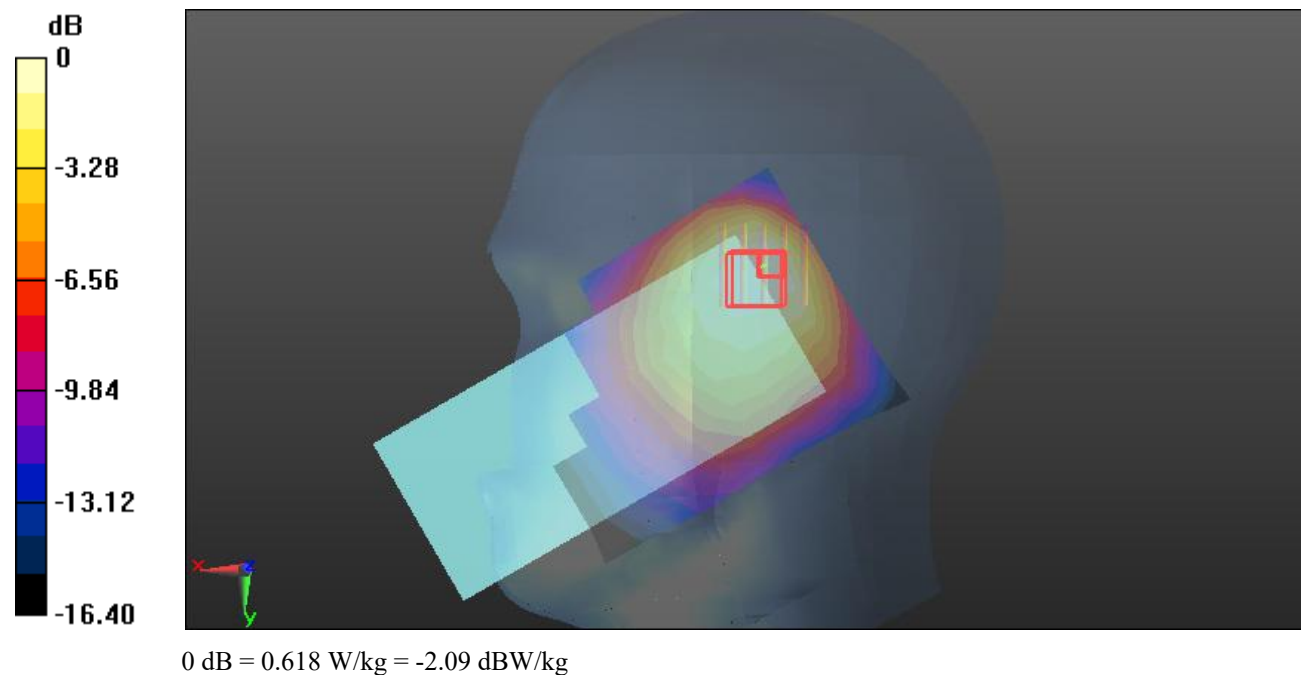

Test Plot 50#: WCDMA Band 5_Head Right Tilt_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 836.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.237$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.6 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.654 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.17 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.601 W/kg; SAR(10 g) = 0.345 W/kg

Maximum value of SAR (measured) = 0.619 W/kg

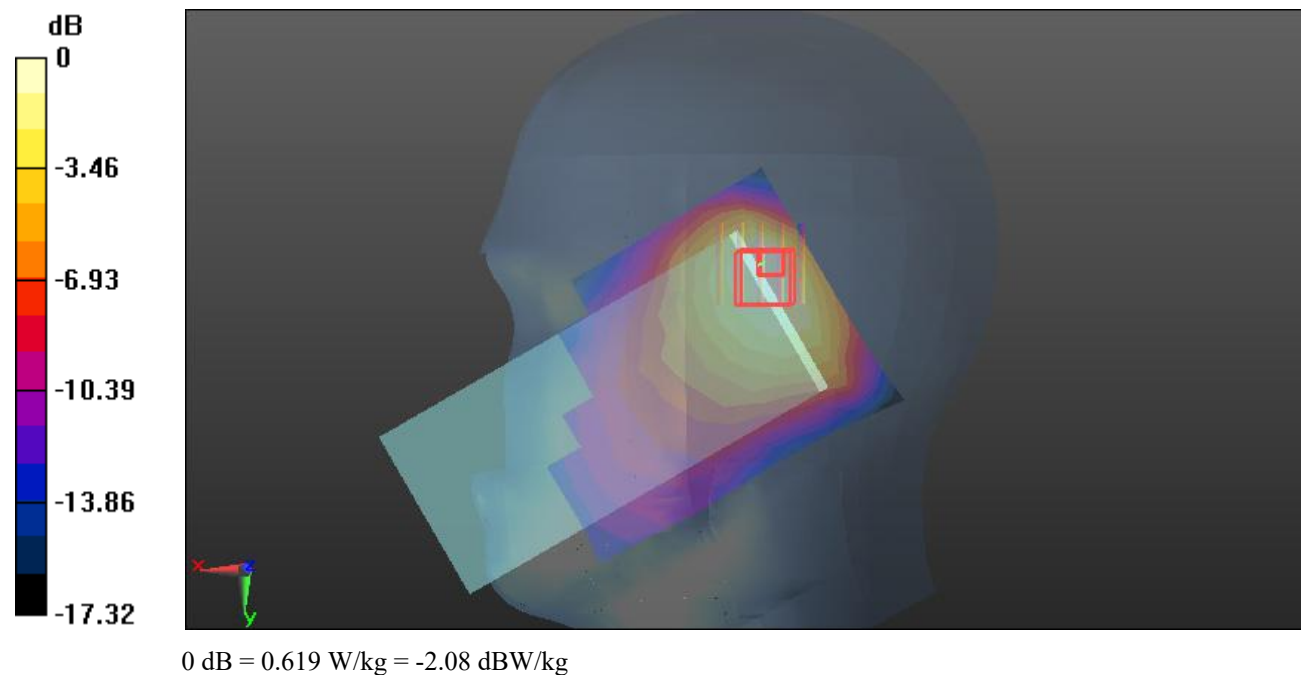

Test Plot 51#: WCDMA Band 5_Body Front_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 836.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.237$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.6 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.108 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.75 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.157 W/kg

SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.112 W/kg

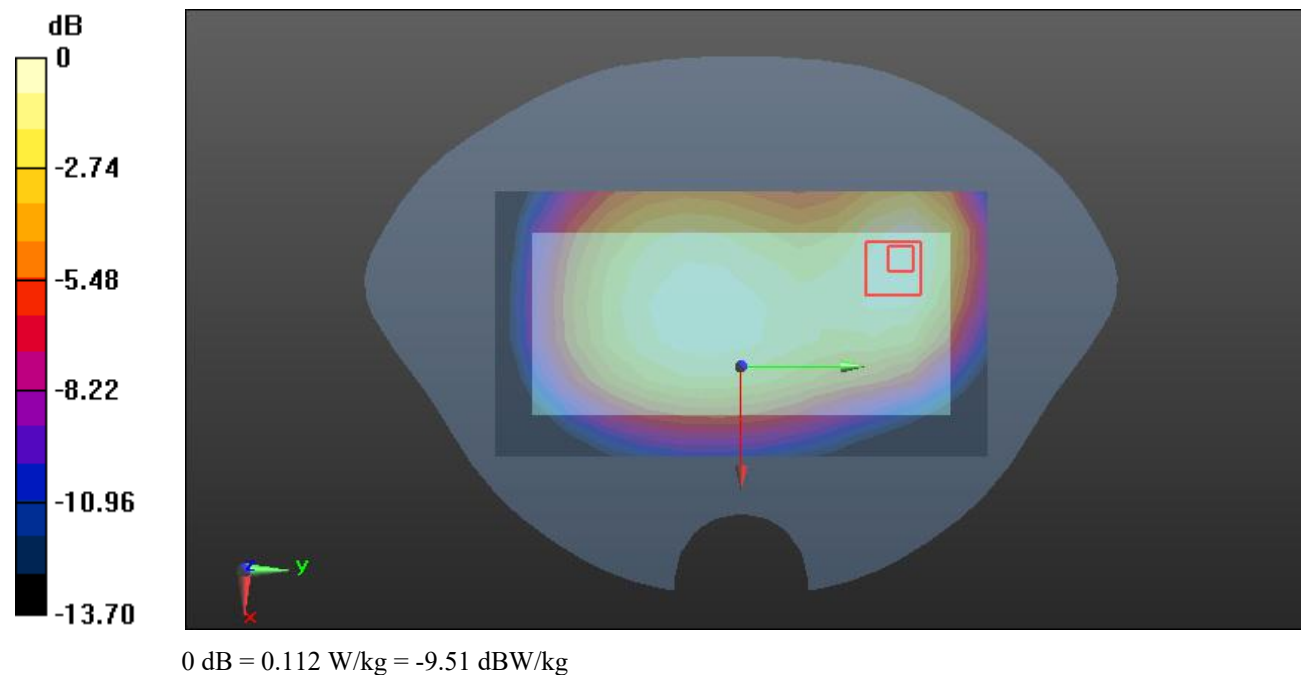

Test Plot 52#: WCDMA Band 5_Body Back_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f=836.6$ MHz; $\sigma=0.921$ S/m; $\epsilon_r=41.237$; $\rho=1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.6 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.157 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.69 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.167 W/kg

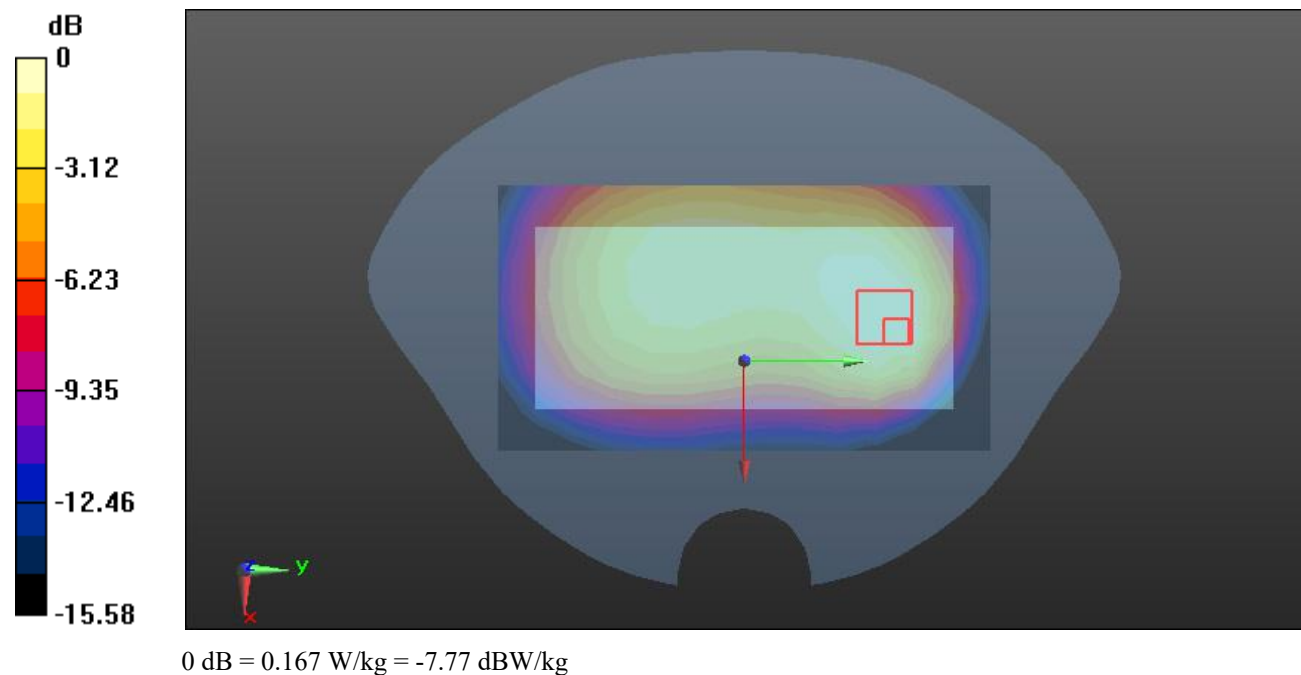

Test Plot 53#: WCDMA Band 5_Body Left_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f=836.6$ MHz; $\sigma=0.921$ S/m; $\epsilon_r=41.237$; $\rho=1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.6 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0990 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.840 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.0994 W/kg

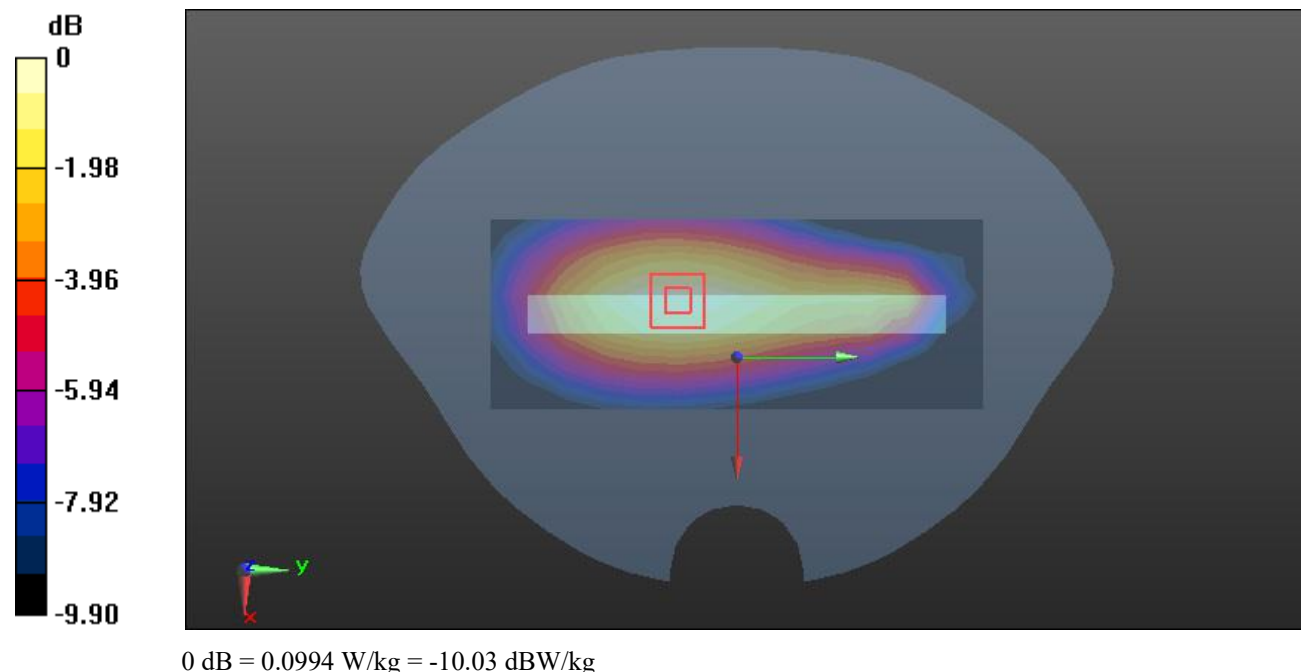

Test Plot 54#: WCDMA Band 5_Body Top_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 836.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.237$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.6 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.115 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.10 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.189 W/kg

SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.128 W/kg

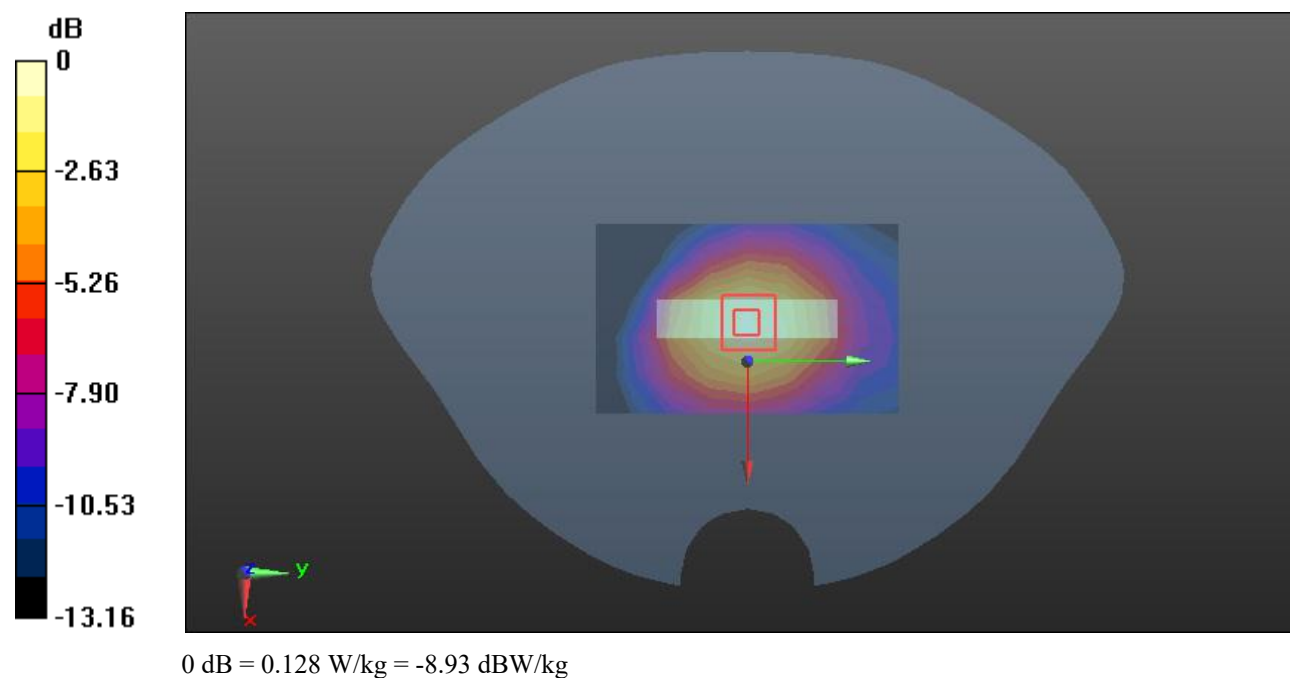

Test Plot55#: LTE Band 7_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 38.742$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2535 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.185 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.558 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.289 W/kg

SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.074 W/kg

Maximum value of SAR (measured) = 0.161 W/kg

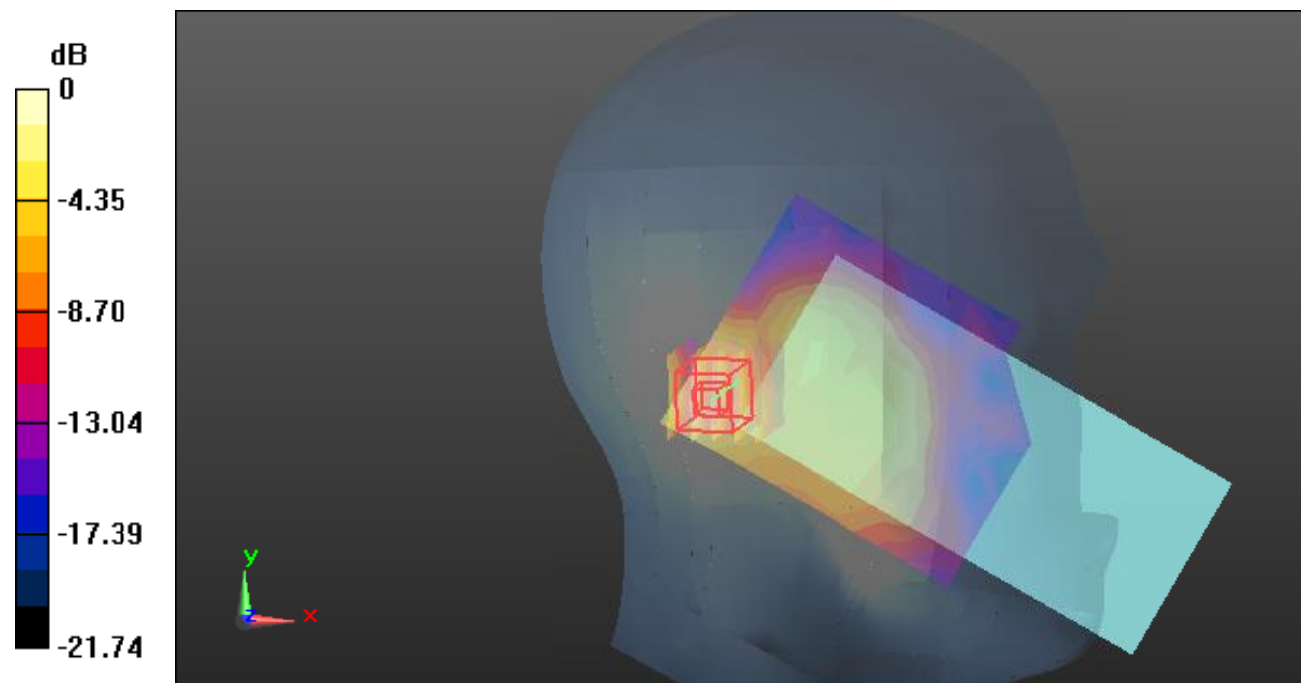

0 dB = 0.161 W/kg = -7.93 dB dBW/kg

Test Plot56#: LTE Band 7_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 38.742$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2535 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.162 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.091 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.256 W/kg

SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.136 W/kg

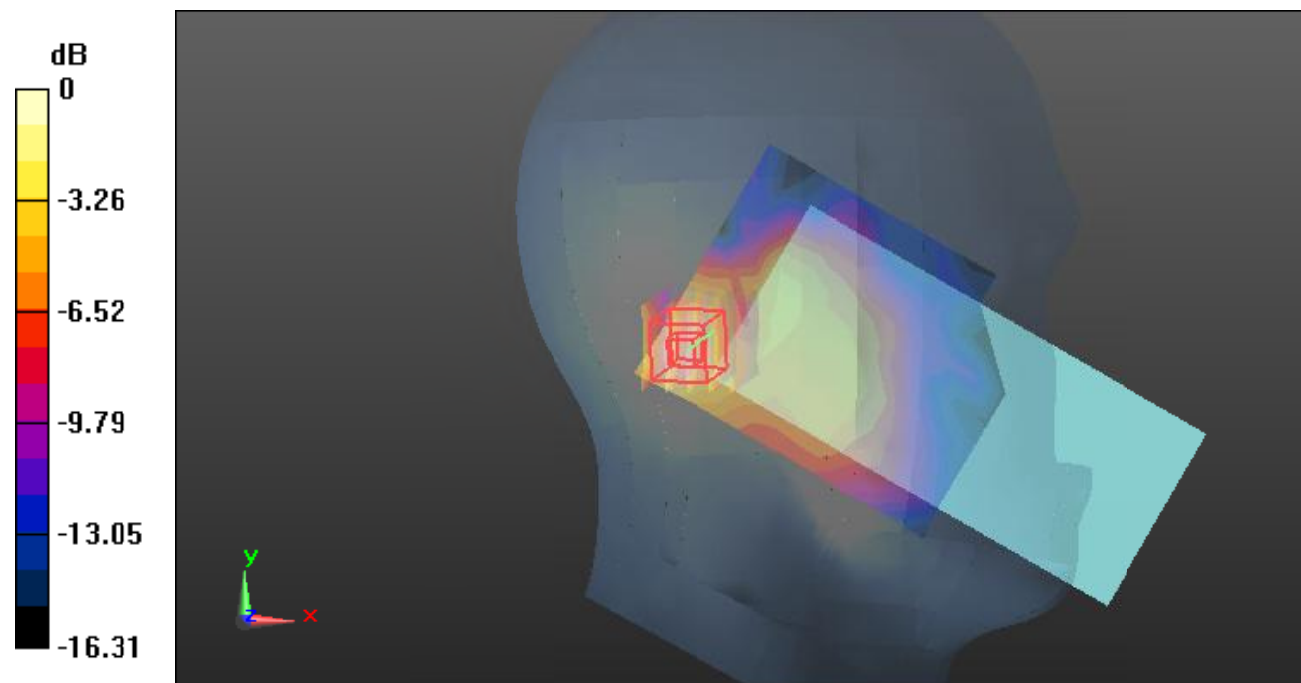

0 dB = 0.136 W/kg = -8.66 dB dBW/kg

Test Plot57#: LTE Band 7_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma=1.888$ S/m; $\epsilon_r=38.742$; $\rho=1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2535 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.289 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.447 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.513 W/kg

SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.274 W/kg

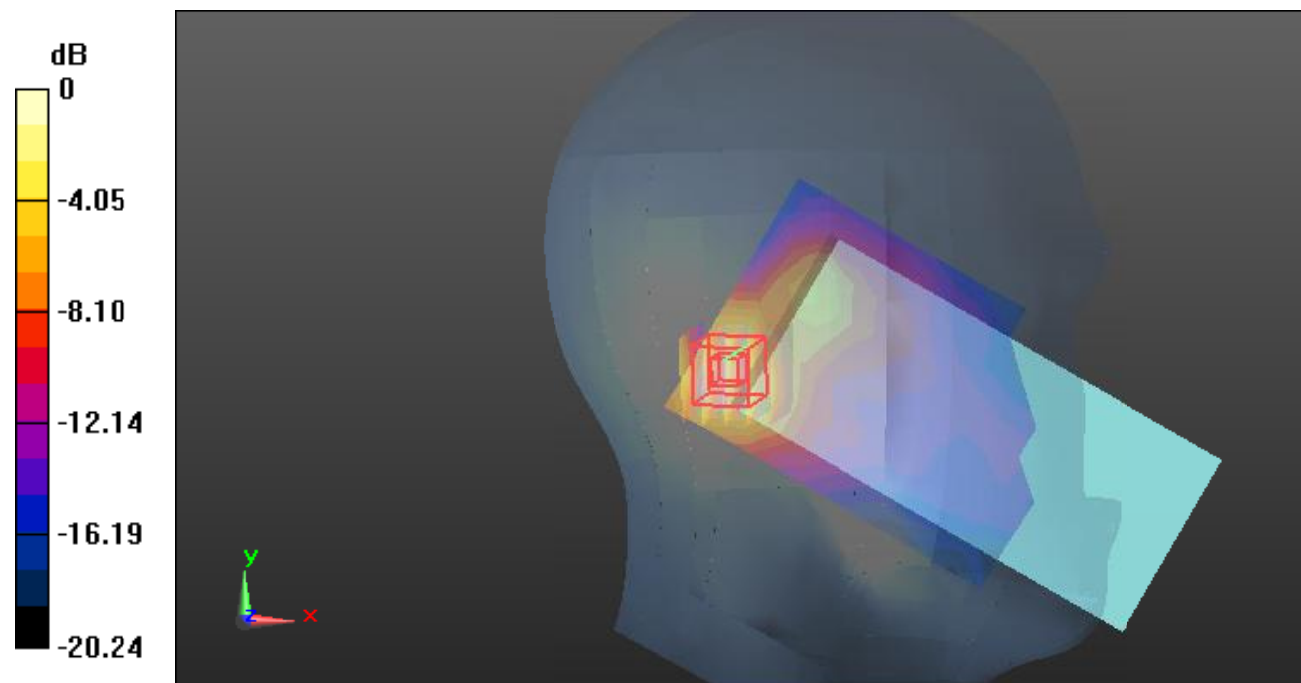

0 dB = 0.274 W/kg = -5.62 dB dBW/kg

Test Plot58#: LTE Band 7_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 38.742$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2535 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.278 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.809 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.543 W/kg

SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.285 W/kg

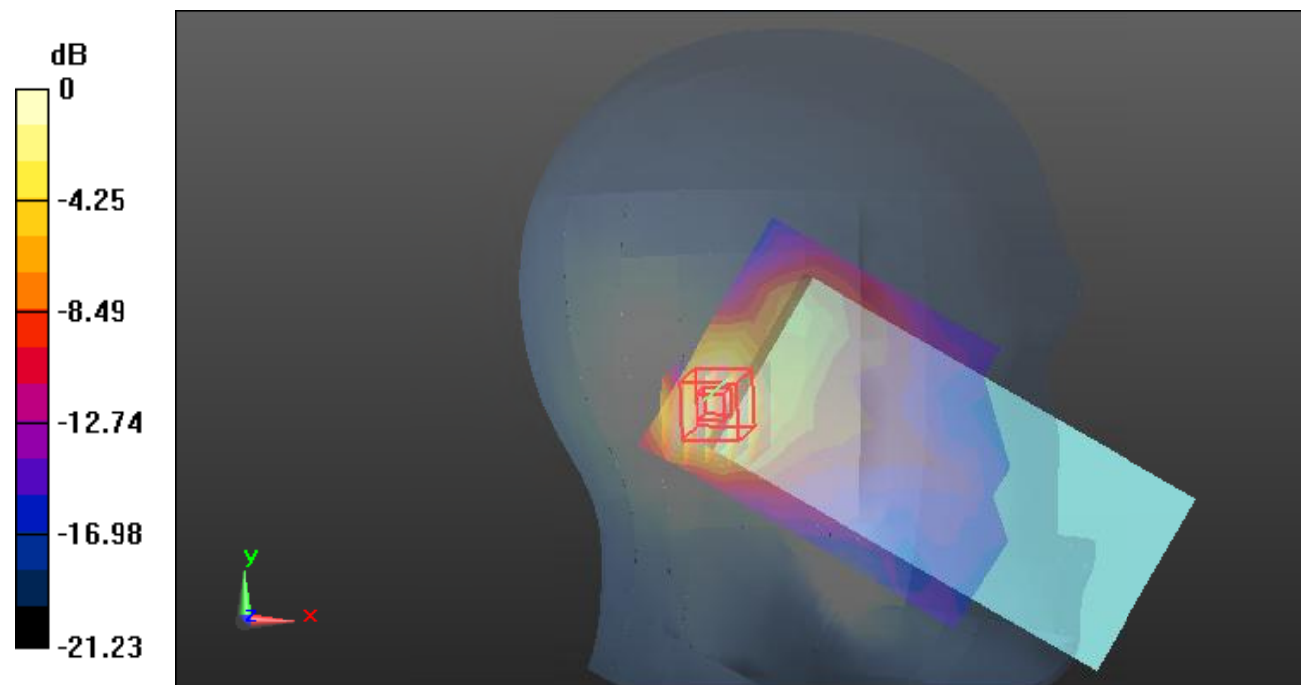

0 dB = 0.285 W/kg = -5.45 dB dBW/kg

Test Plot59#: LTE Band 7 _Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 38.742$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2535 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.531 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.661 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.562 W/kg; SAR(10 g) = 0.271 W/kg

Maximum value of SAR (measured) = 0.626 W/kg

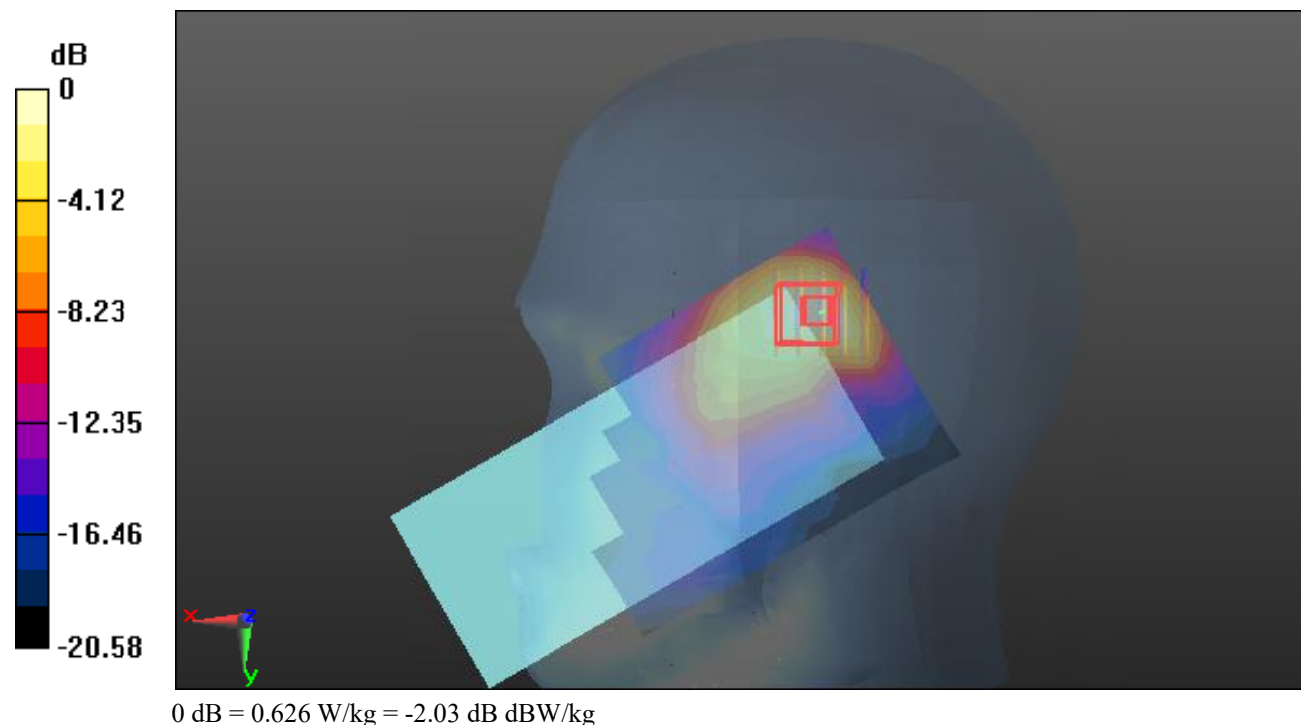

Test Plot60#: LTE Band 7_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 38.742$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2535 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.432 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.380 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.461 W/kg; SAR(10 g) = 0.224 W/kg

Maximum value of SAR (measured) = 0.512 W/kg

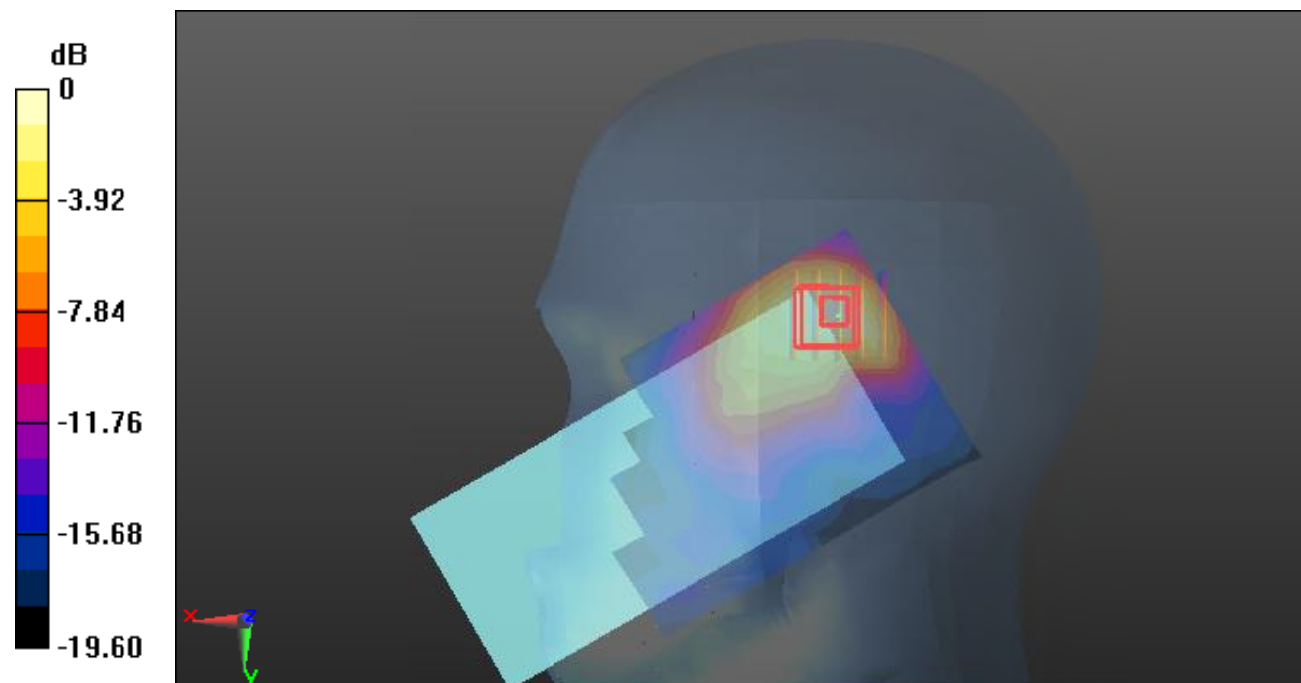

0 dB = 0.512 W/kg = -2.91 dB dBW/kg

Test Plot61#: LTE Band 7_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 38.742$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2535 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.673 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.143 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.623 W/kg; SAR(10 g) = 0.285 W/kg

Maximum value of SAR (measured) = 0.727 W/kg

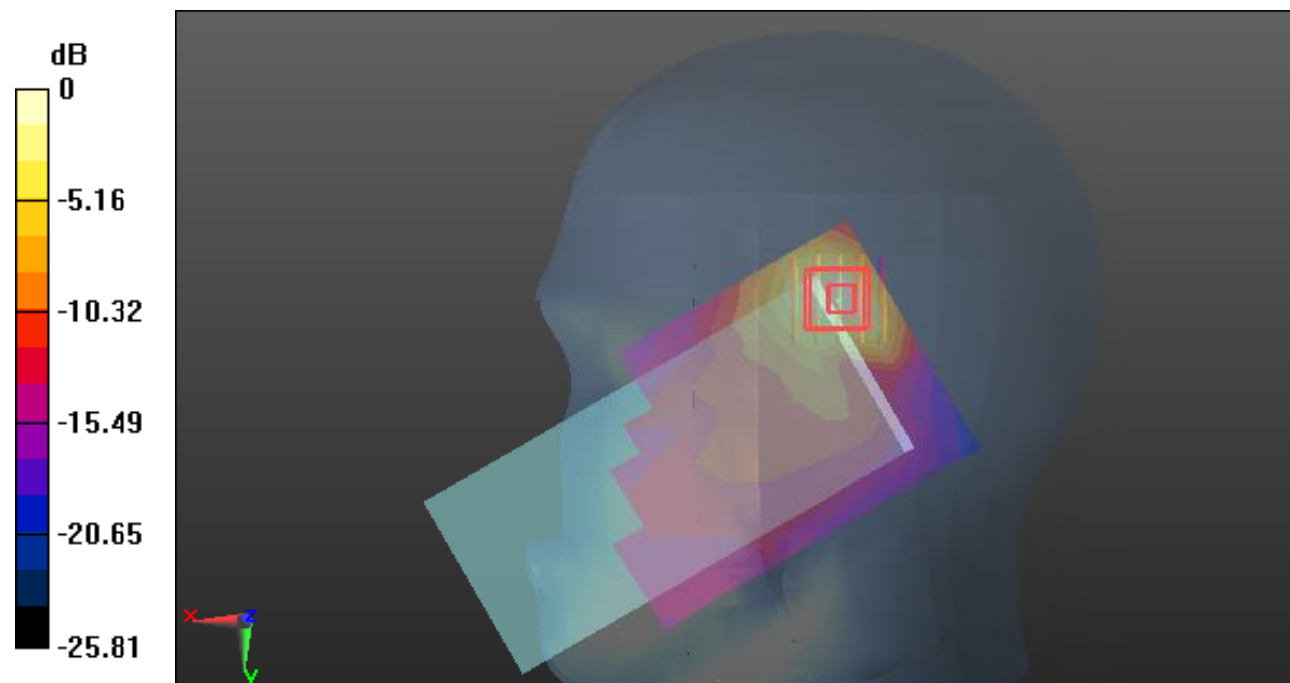

0 dB = 0.727 W/kg = -1.38 dB dBW/kg

Test Plot62#: LTE Band 7_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 38.742$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2535 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.541 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.041 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 0.573 W/kg

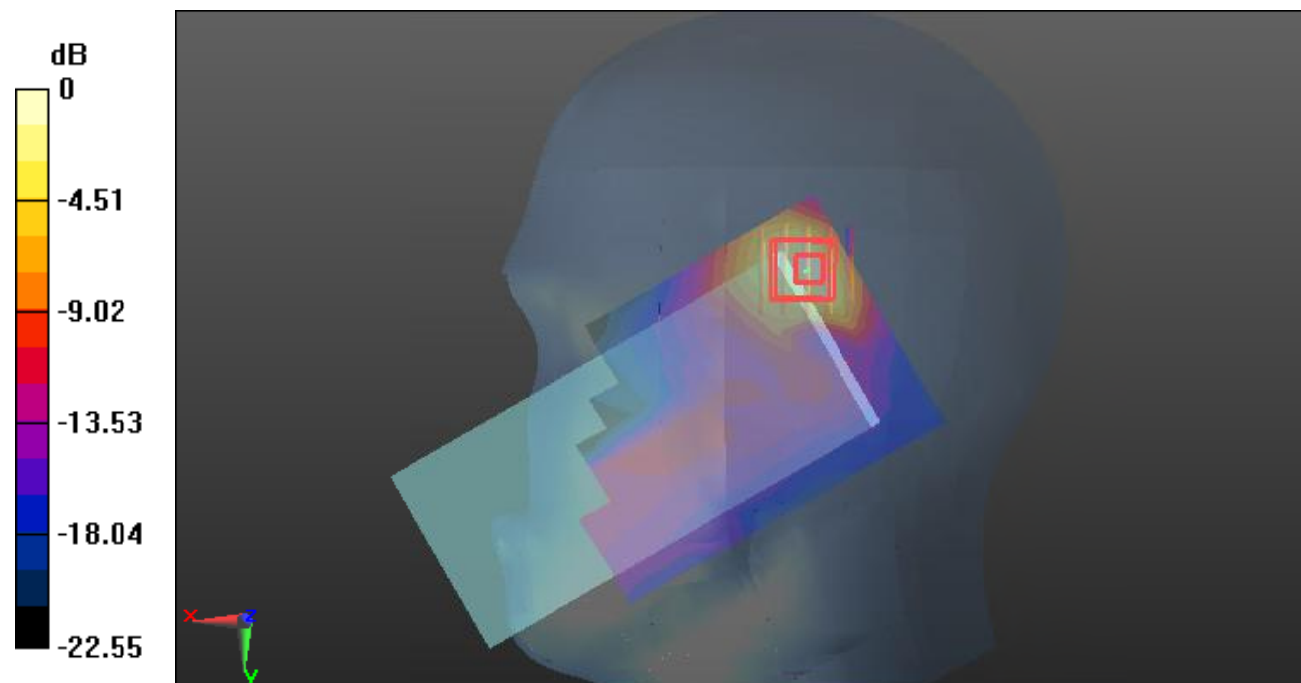

0 dB = 0.573 W/kg = -2.42 dB dBW/kg

Test Plot63#: LTE Band 7 _Body Front_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 38.742$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2535 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.152 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.384 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.335 W/kg

SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.180 W/kg

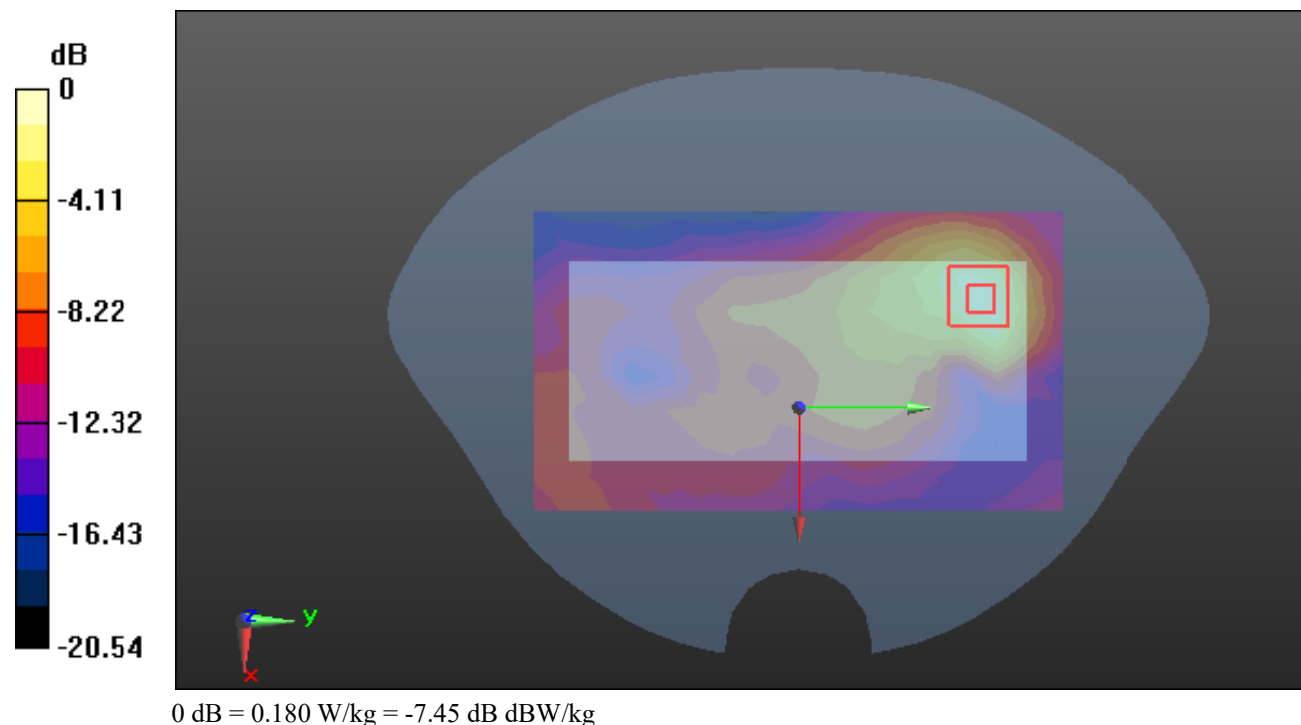

Test Plot64#: LTE Band 7 _Body Front _50%RB _Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 38.742$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2535 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.130 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.436 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.291 W/kg

SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.157 W/kg

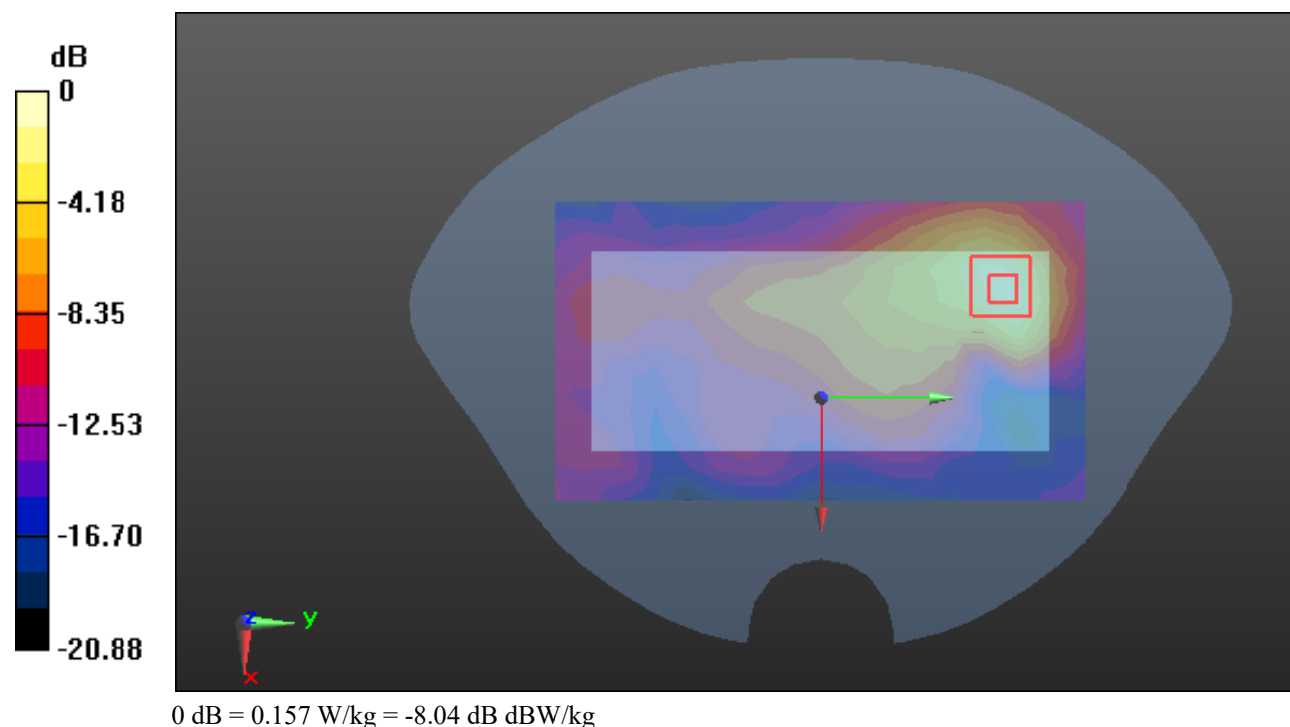

Test Plot65#: LTE Band 7 _Body Back_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 38.742$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2535 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.444 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.720 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.483 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.566 W/kg

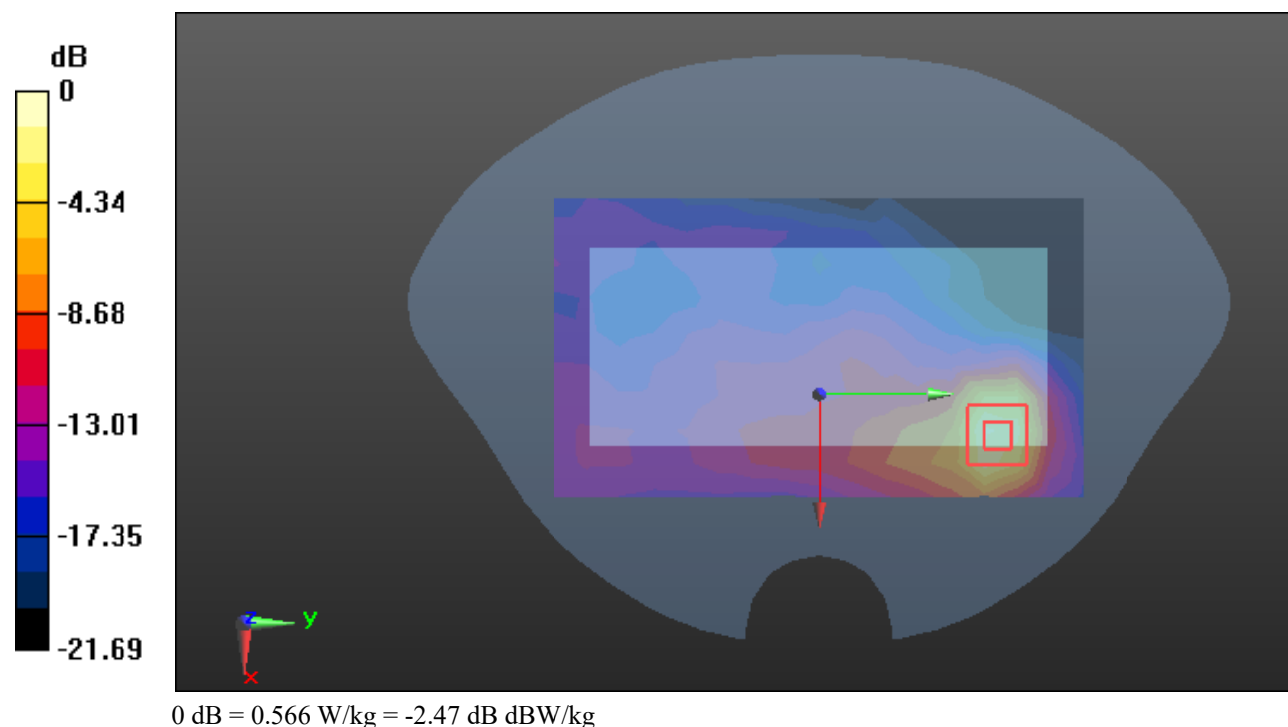

Test Plot66#: LTE Band 7_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 38.742$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2535 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.376 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.698 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.913 W/kg

SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.181 W/kg

Maximum value of SAR (measured) = 0.481 W/kg

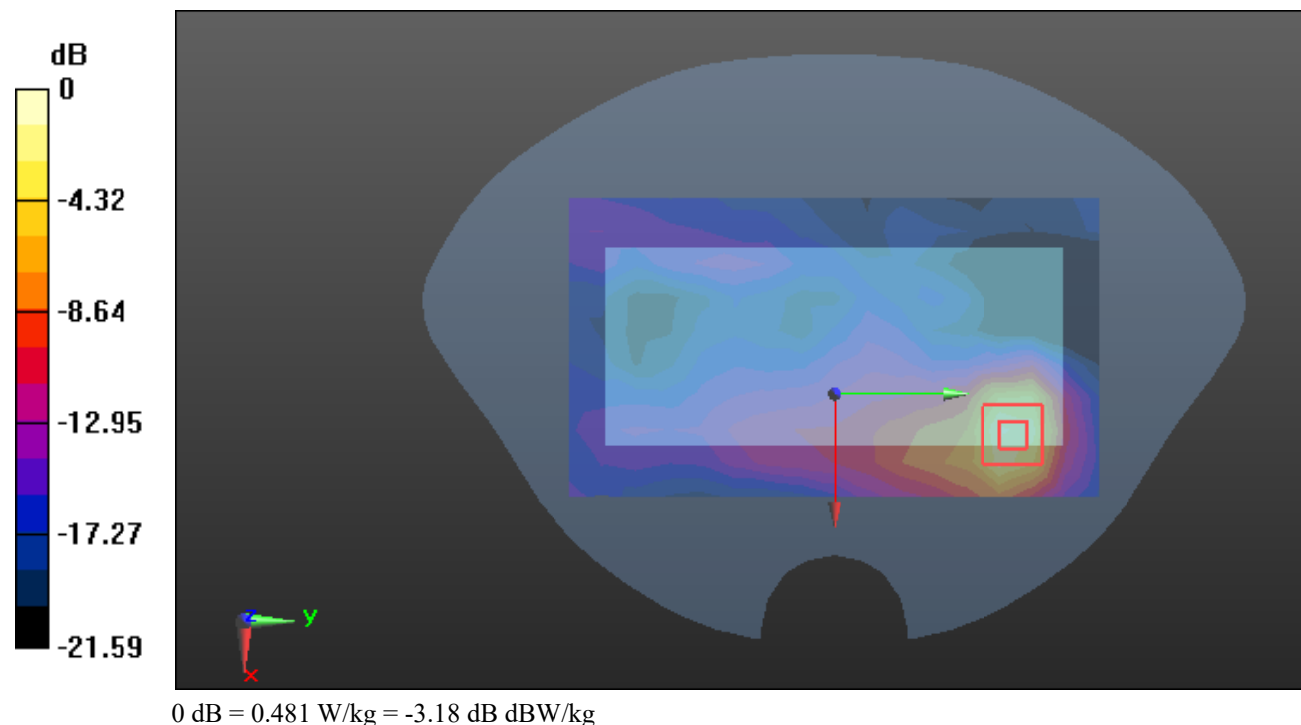

Test Plot67#: LTE Band 7_Body Left_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 38.742$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2535 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.137 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.796 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.272 W/kg

SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.149 W/kg

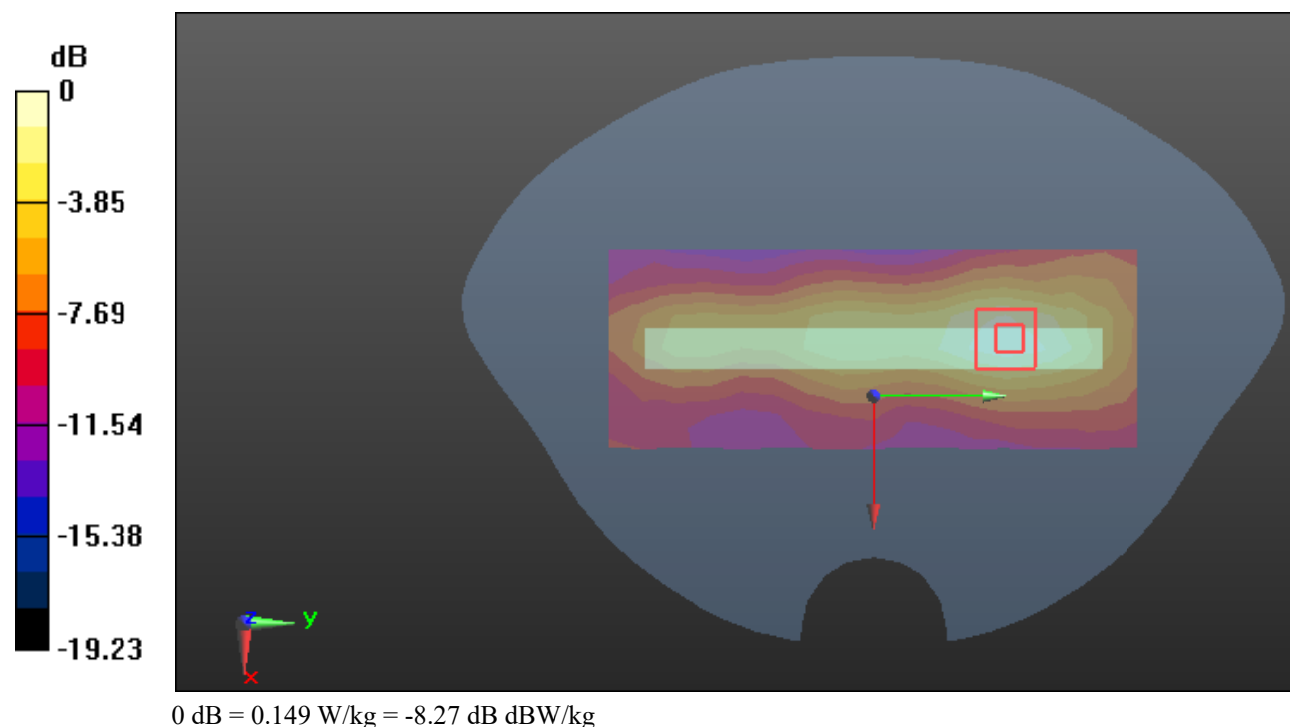

Test Plot68#: LTE Band 7_Body Left_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma=1.888$ S/m; $\epsilon_r=38.742$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2535 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.123 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.141 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.131 W/kg

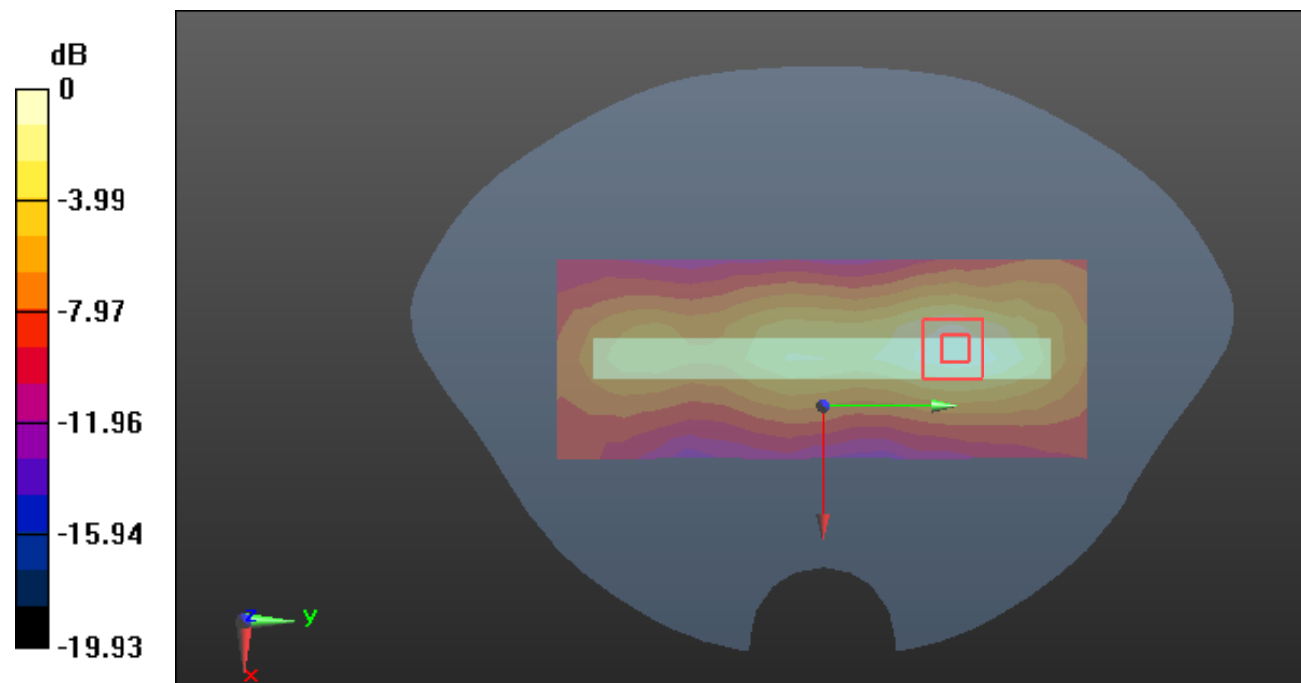

0 dB = 0.131 W/kg = -8.83 dB dBW/kg

Test Plot69#: LTE Band 7_Body Top_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 38.742$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2535 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.377 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.242 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.874 W/kg

SAR(1 g) = 0.400 W/kg; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 0.456 W/kg

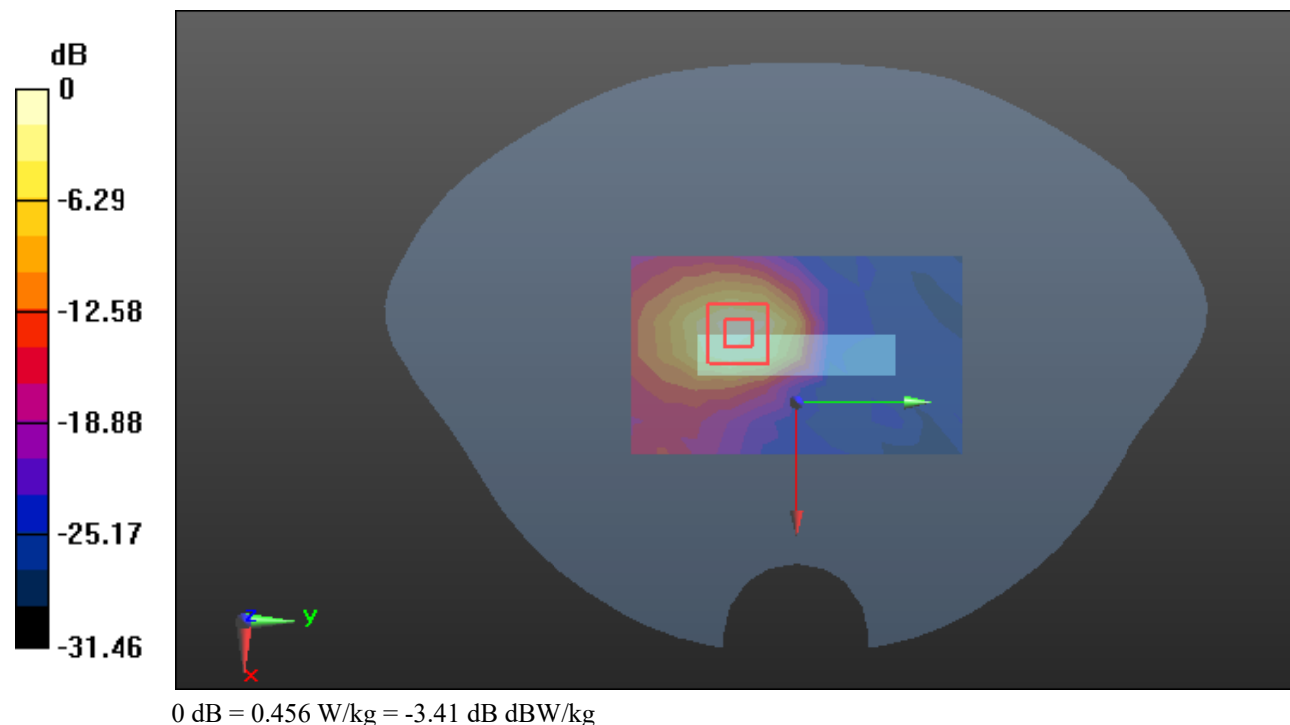

Test Plot70#: LTE Band 7 _Body Top _50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 38.742$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2535 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.330 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.086 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.815 W/kg

SAR(1 g) = 0.376 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 0.429 W/kg

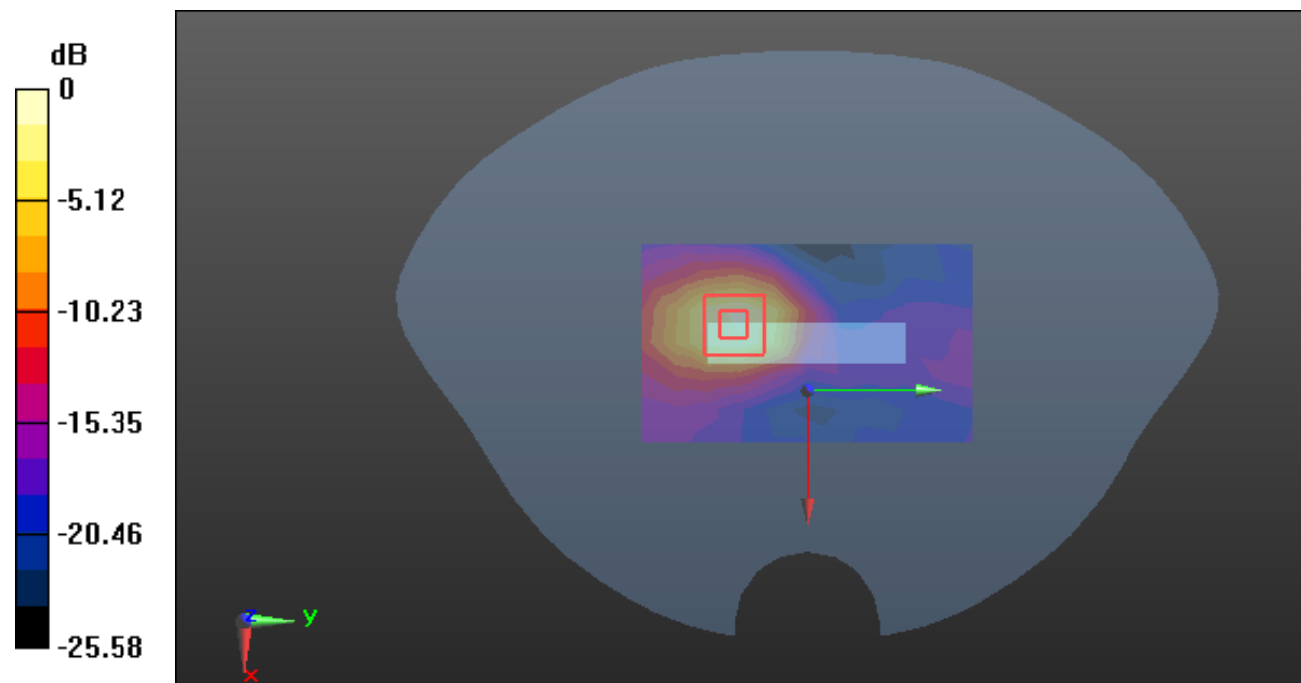

0 dB = 0.429 W/kg = -3.68 dB dBW/kg

Test Plot71#: LTE Band 12_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.321$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @707.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.325 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.44 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.496 W/kg

SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.224 W/kg

Maximum value of SAR (measured) = 0.330 W/kg

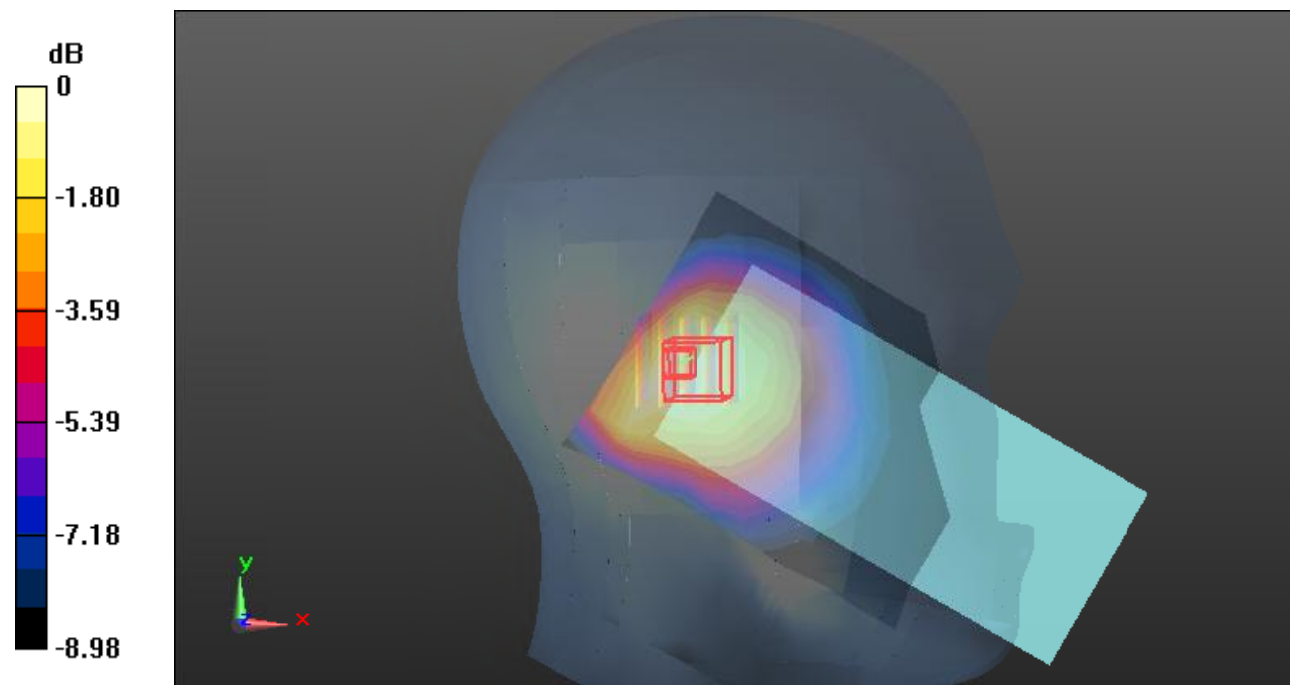

0 dB = 0.330 W/kg = -4.81 dB dBW/kg

Test Plot72#: LTE Band 12_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.321$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @707.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.267 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.51 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.270 W/kg

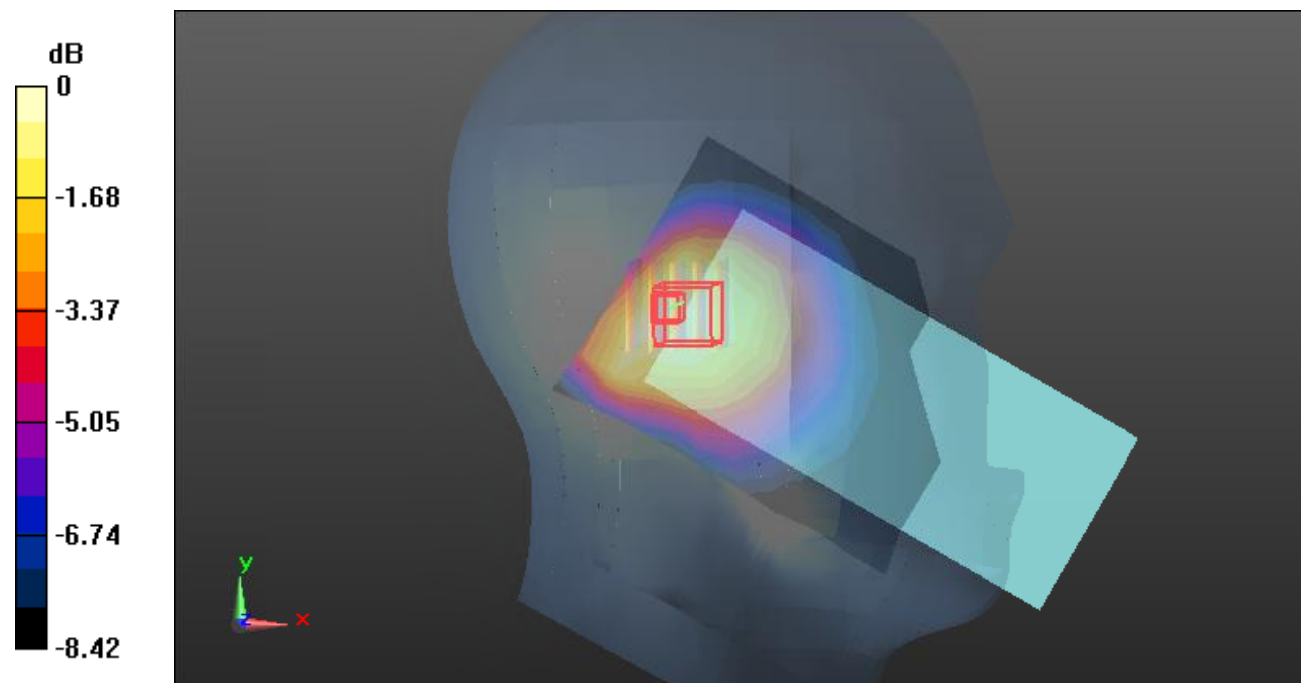

0 dB = 0.270 W/kg = -5.69 dB dBW/kg

Test Plot73#: LTE Band 12_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma=0.874$ S/m; $\epsilon_r=42.321$; $\rho=1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @707.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.307 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.88 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.516 W/kg

SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 0.304 W/kg

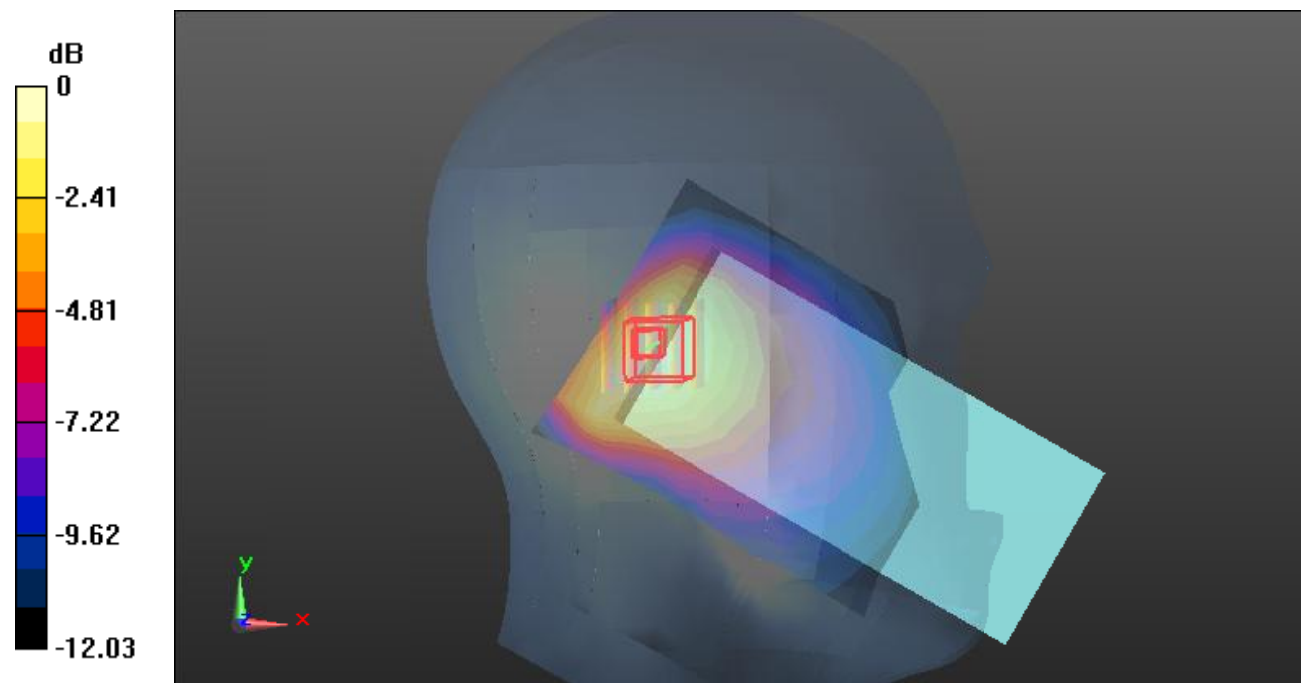

0 dB = 0.304 W/kg = -5.17 dB dBW/kg

Test Plot74#: LTE Band 12_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.321$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @707.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.252 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.09 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.418 W/kg

SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.247 W/kg

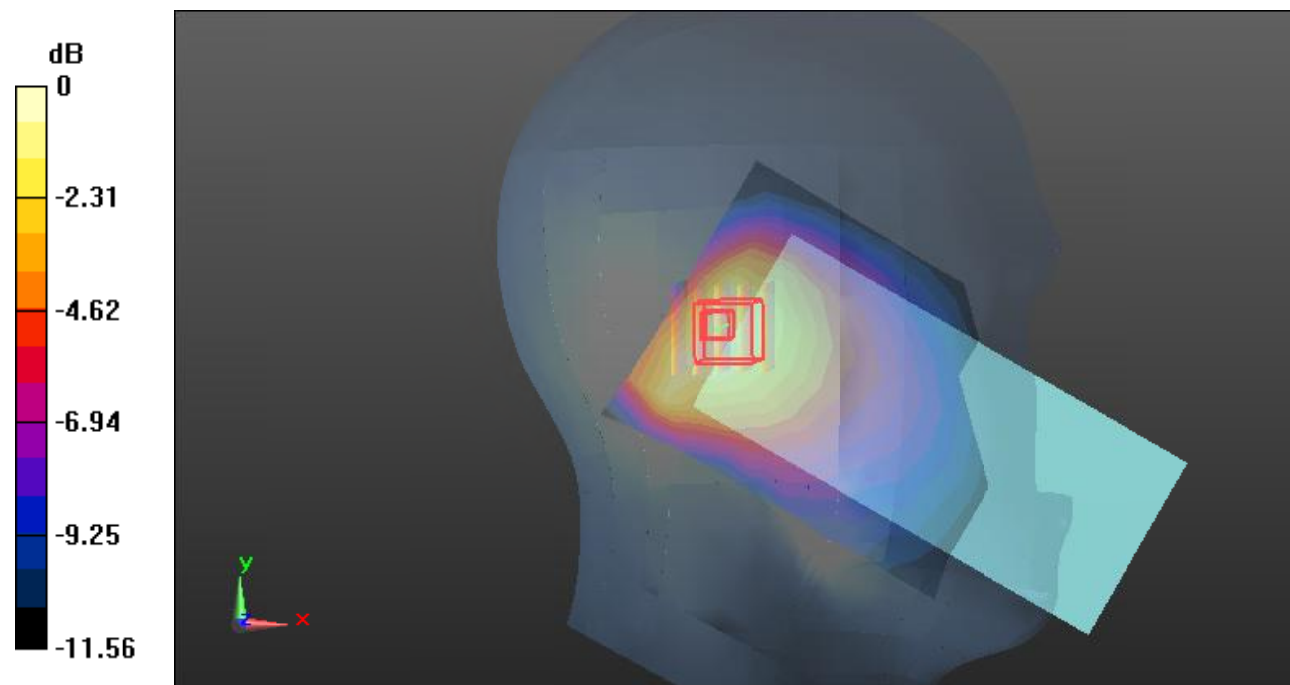

0 dB = 0.247 W/kg = -6.07 dB dBW/kg

Test Plot75#: LTE Band 12_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.321$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @707.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.452 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.93 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.992 W/kg

SAR(1 g) = 0.479 W/kg; SAR(10 g) = 0.296 W/kg

Maximum value of SAR (measured) = 0.502 W/kg

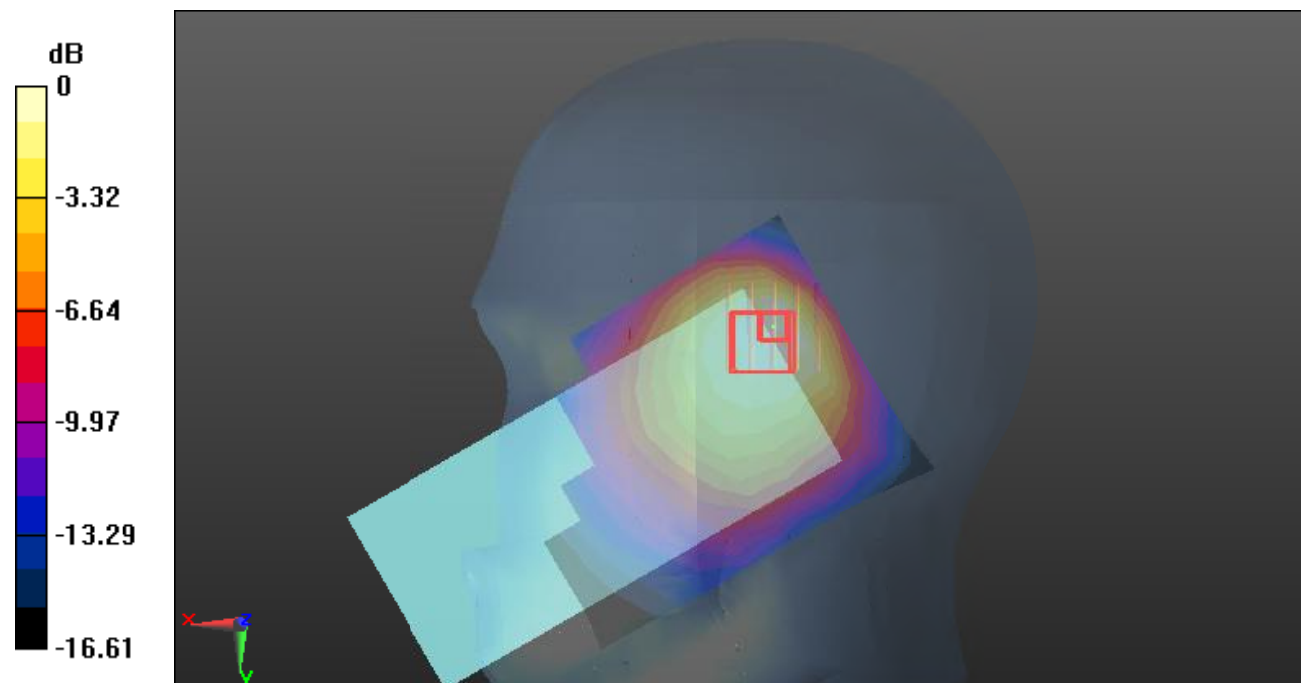

0 dB = 0.502 W/kg = -2.99 dB dBW/kg

Test Plot76#: LTE Band 12_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.321$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @707.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.367 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.67 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.777 W/kg

SAR(1 g) = 0.380 W/kg; SAR(10 g) = 0.238 W/kg

Maximum value of SAR (measured) = 0.398 W/kg

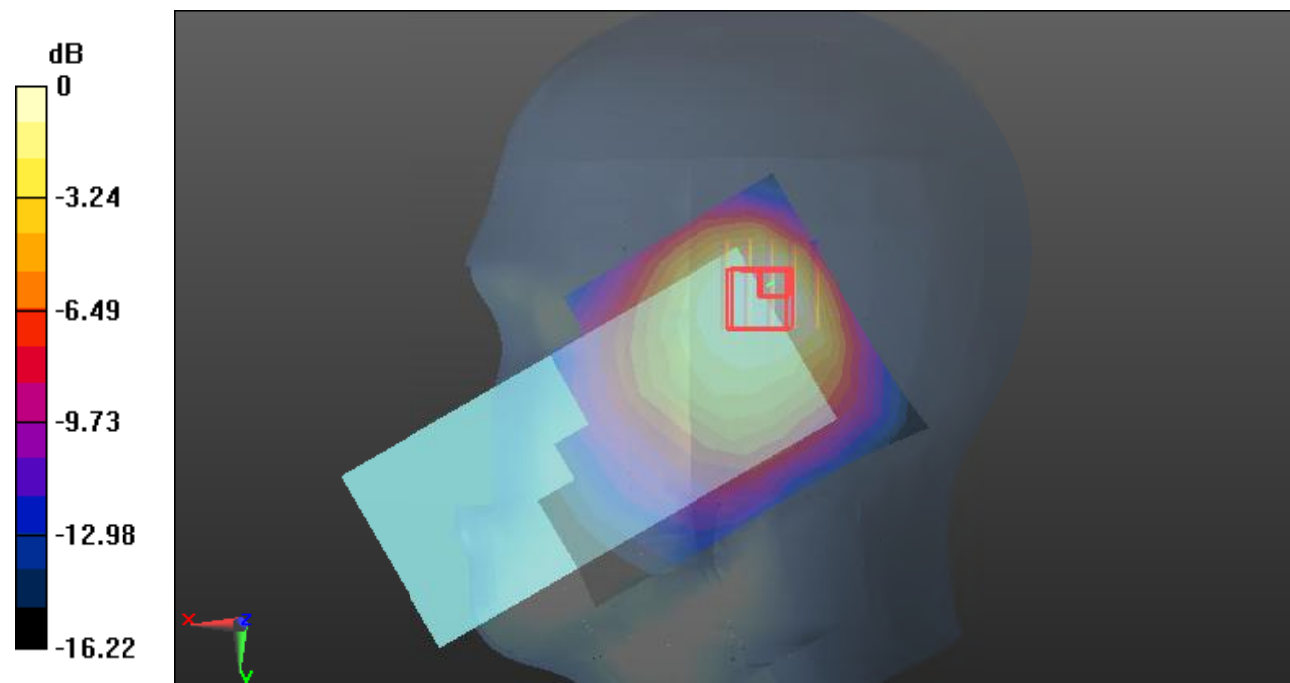

0 dB = 0.398 W/kg = -4.00 dB dBW/kg

Test Plot77#: LTE Band 12_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.321$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @707.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.324 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.95 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.850 W/kg

SAR(1 g) = 0.360 W/kg; SAR(10 g) = 0.196 W/kg

Maximum value of SAR (measured) = 0.397 W/kg

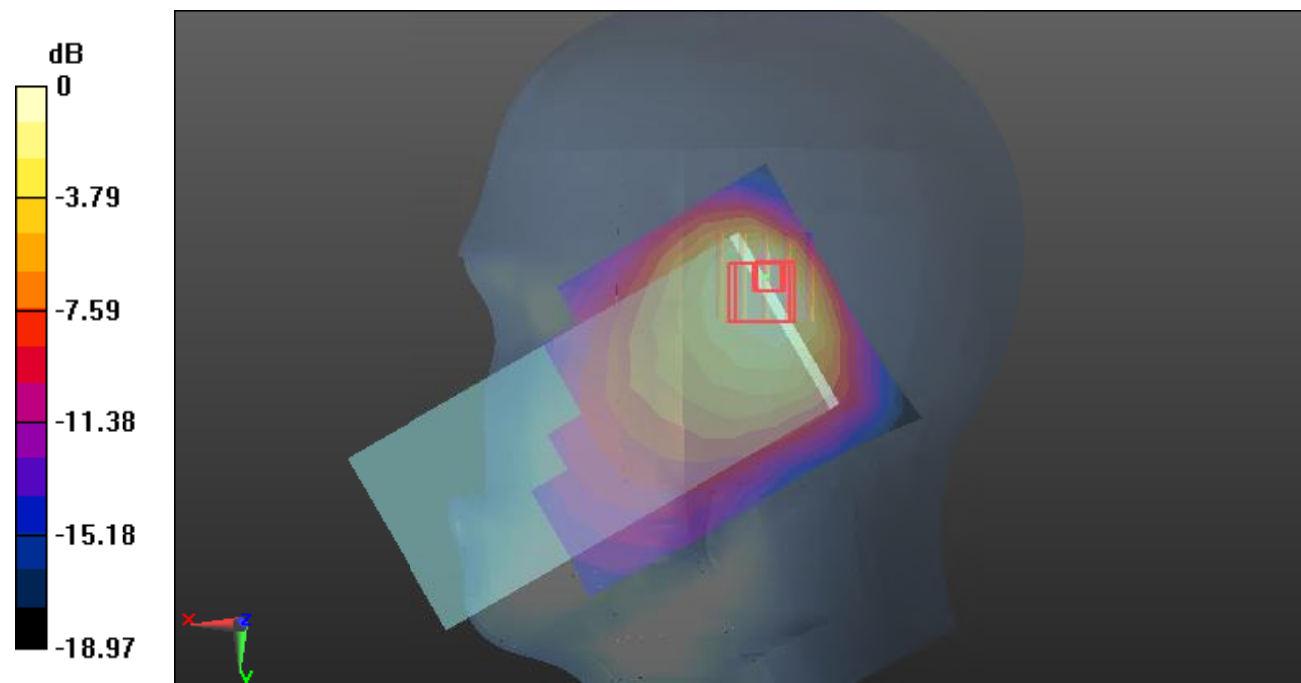

0 dB = 0.397 W/kg = -4.01 dB dBW/kg

Test Plot78#: LTE Band 12_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.321$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @707.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.283 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.65 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.627 W/kg

SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.301 W/kg

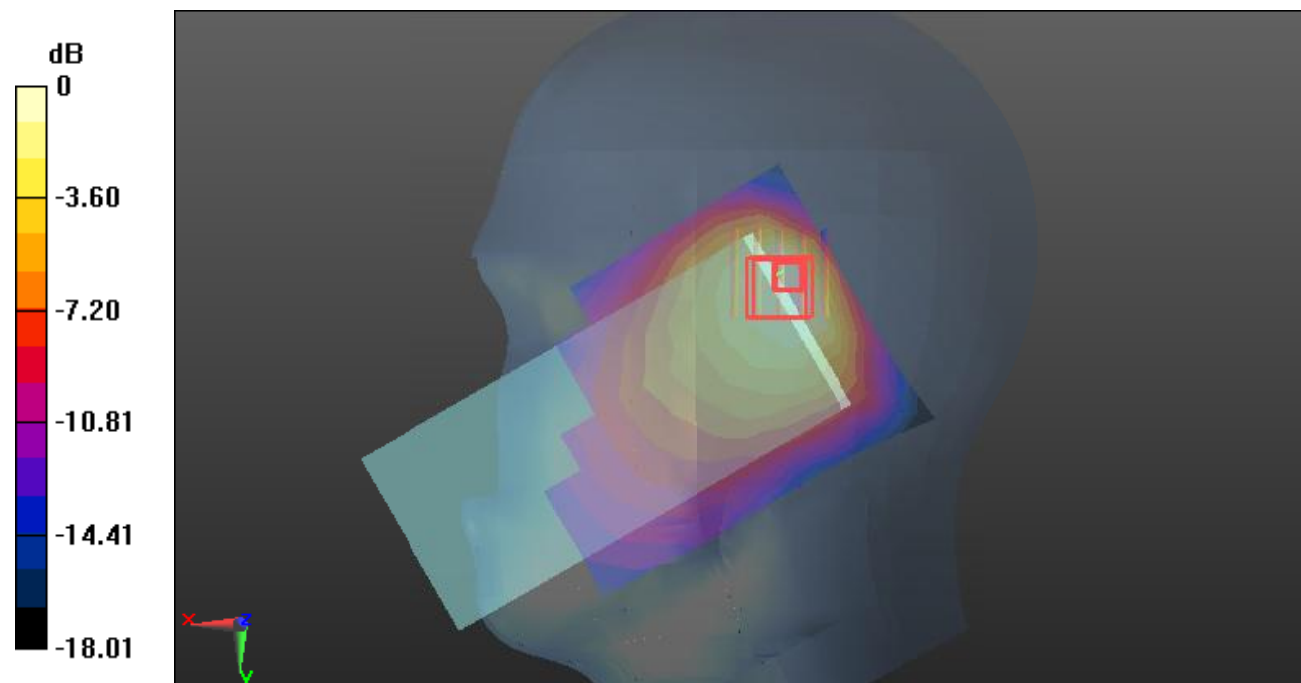

0 dB = 0.301 W/kg = -5.21 dB dBW/kg

Test Plot79#: LTE Band 12_Body Front_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.321$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @707.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0965 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.78 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.0965 W/kg

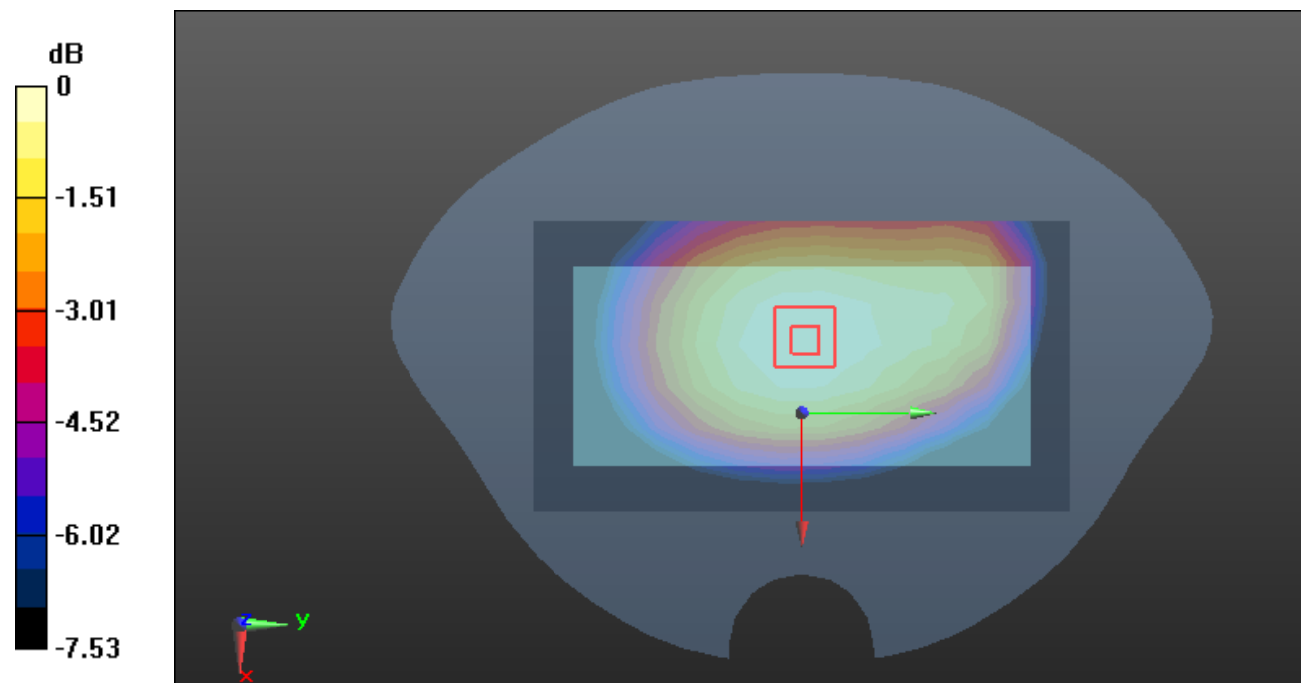

0 dB = 0.0965 W/kg = -10.15 dB dBW/kg

Test Plot80#: LTE Band 12_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.321$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @707.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0780 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.646 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0930 W/kg

SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.0781 W/kg

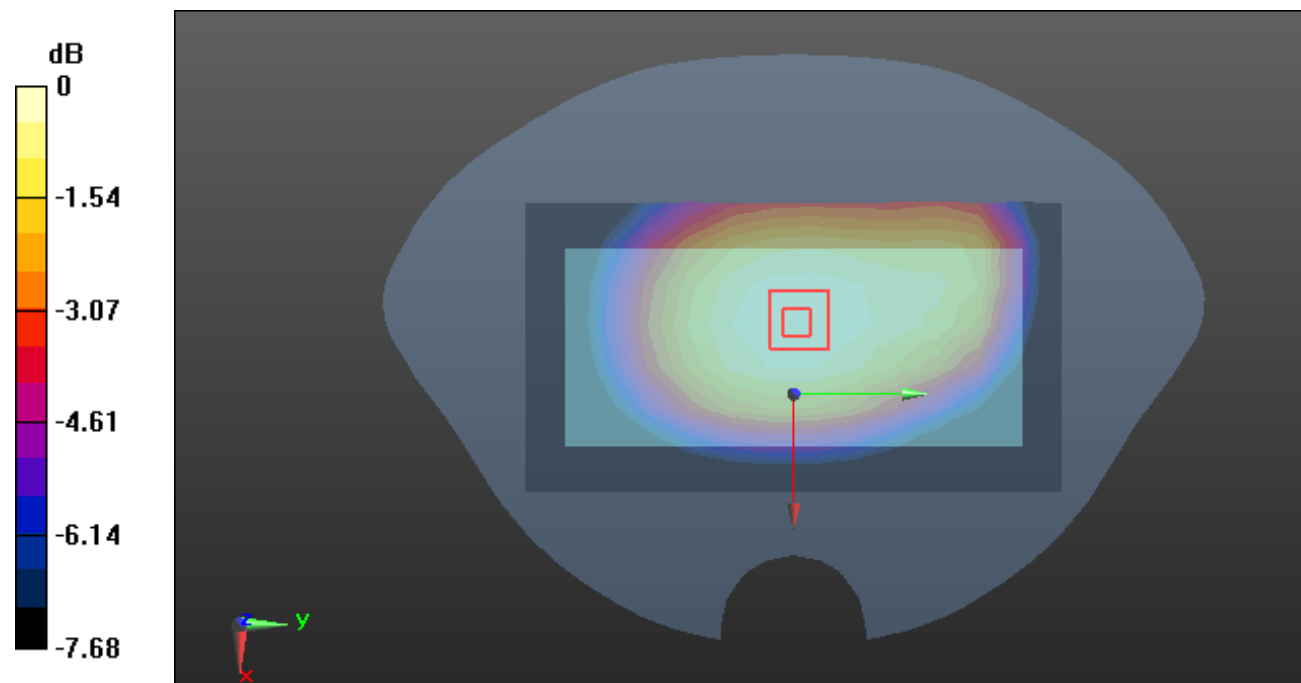

0 dB = 0.0781 W/kg = -11.07 dB dBW/kg

Test Plot81#: LTE Band 12_Body Back_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.321$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @707.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.115 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.63 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.116 W/kg

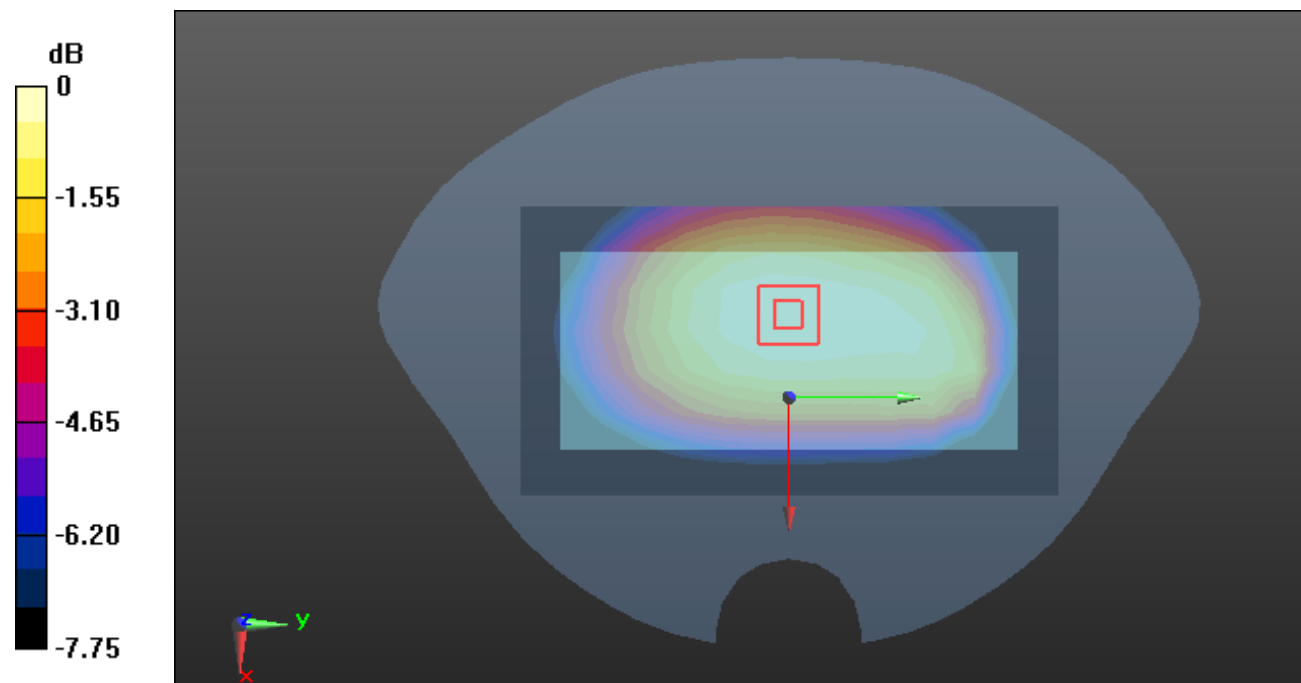

0 dB = 0.116 W/kg = -9.36 dB dBW/kg

Test Plot82#: LTE Band 12_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.321$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @707.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0938 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.48 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.112 W/kg

SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.0936 W/kg

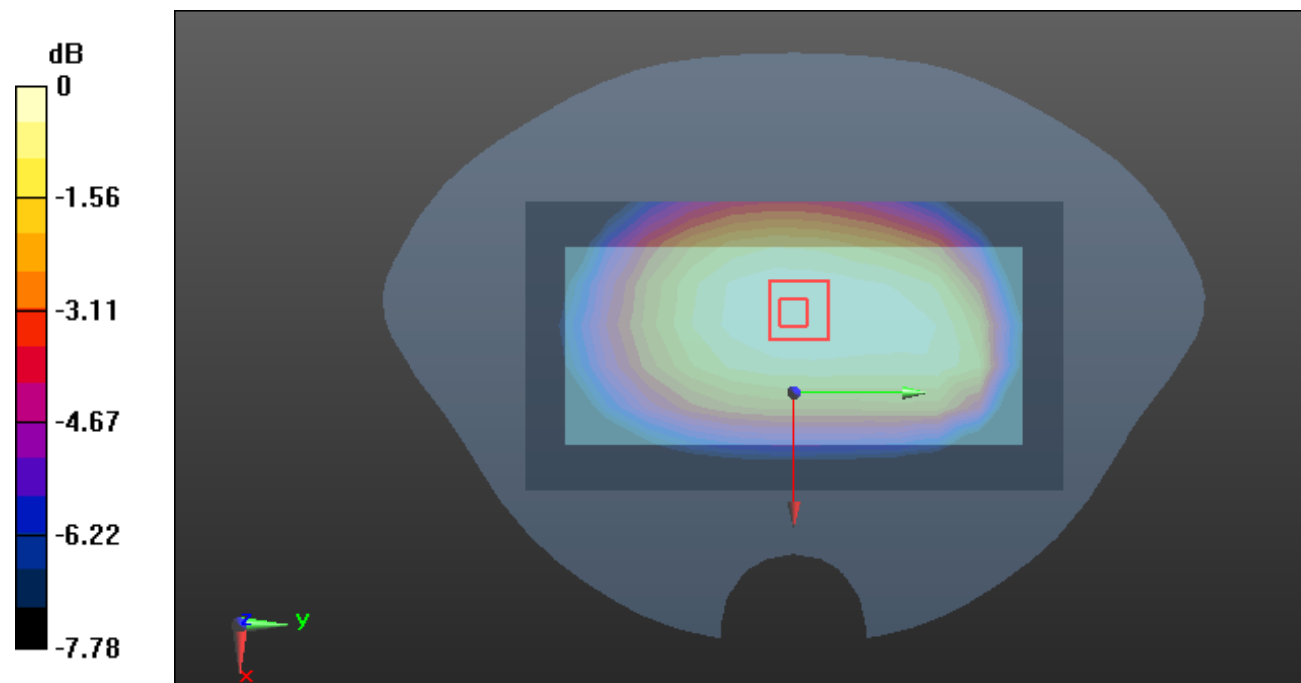

0 dB = 0.0936 W/kg = -10.29 dB dBW/kg

Test Plot83#: LTE Band 12_Body Left_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.321$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @707.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0267 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.543 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0570 W/kg

SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0292 W/kg

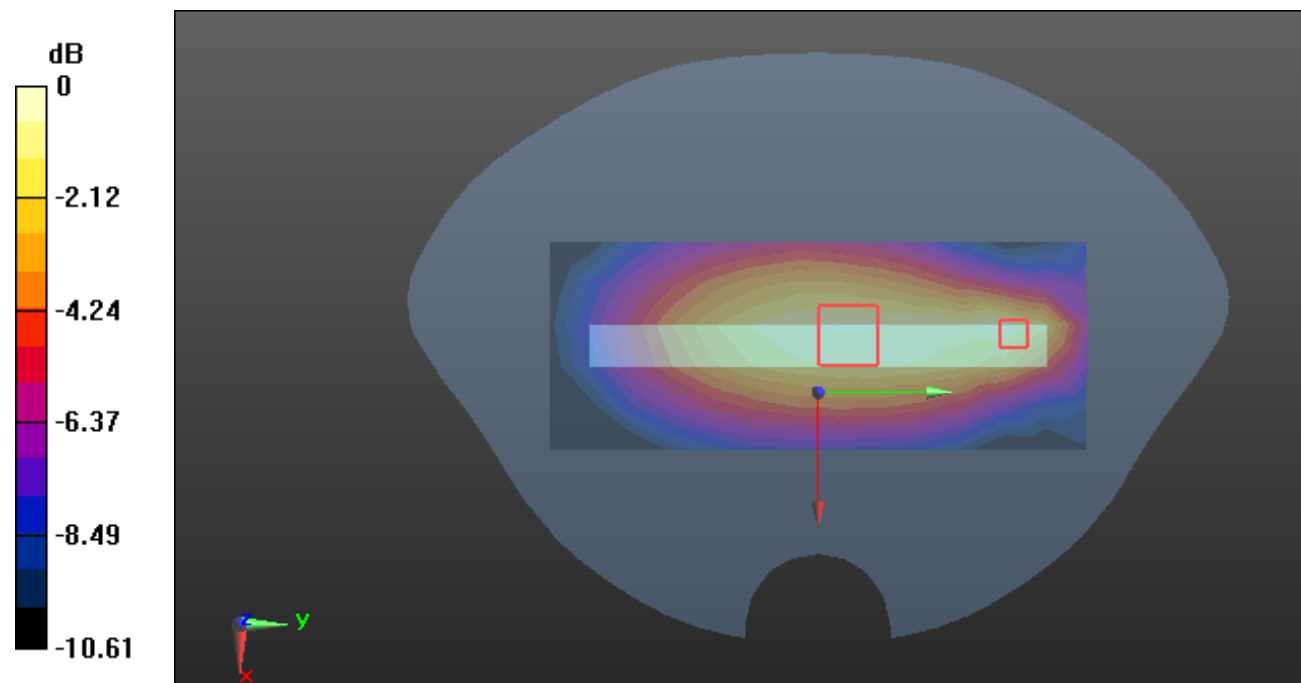

0 dB = 0.0292 W/kg = -15.35 dB dBW/kg

Test Plot84#: LTE Band 12_Body Left_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.321$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @707.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0214 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.955 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0460 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0237 W/kg

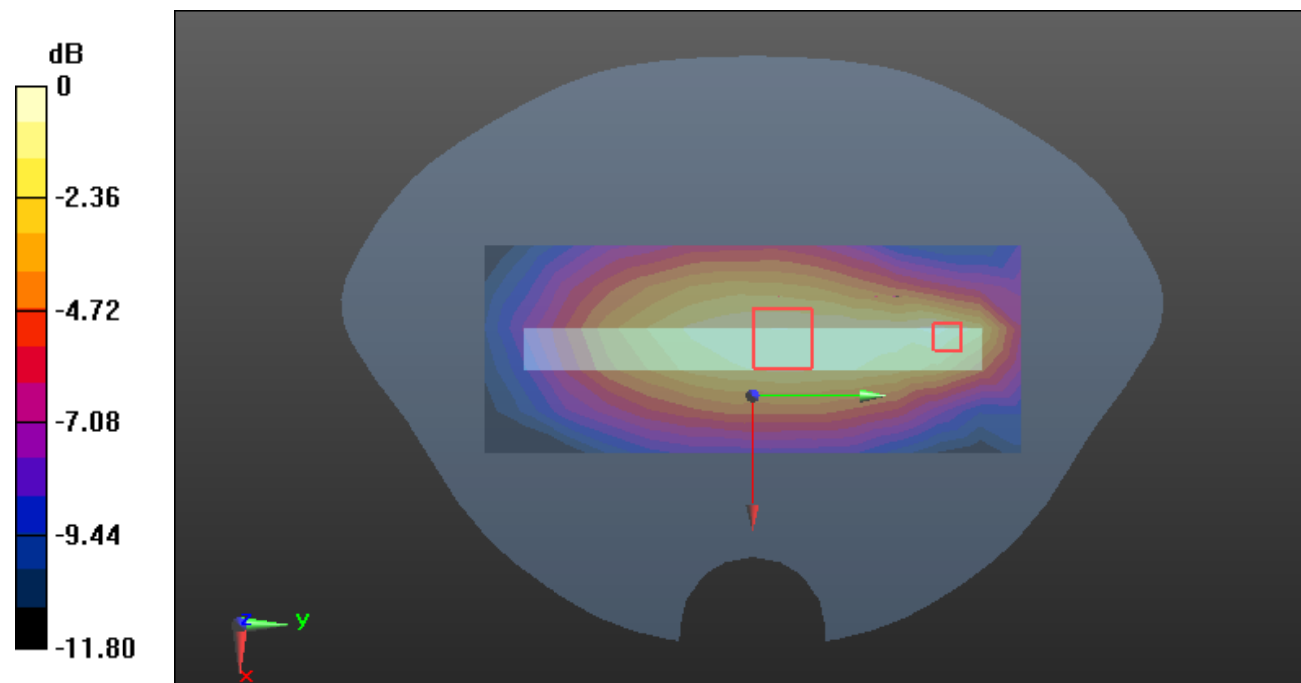

0 dB = 0.0237 W/kg = -16.25 dB dBW/kg

Test Plot85#: LTE Band 12_Body Top_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.321$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @707.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0429 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.129 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0650 W/kg

SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0442 W/kg

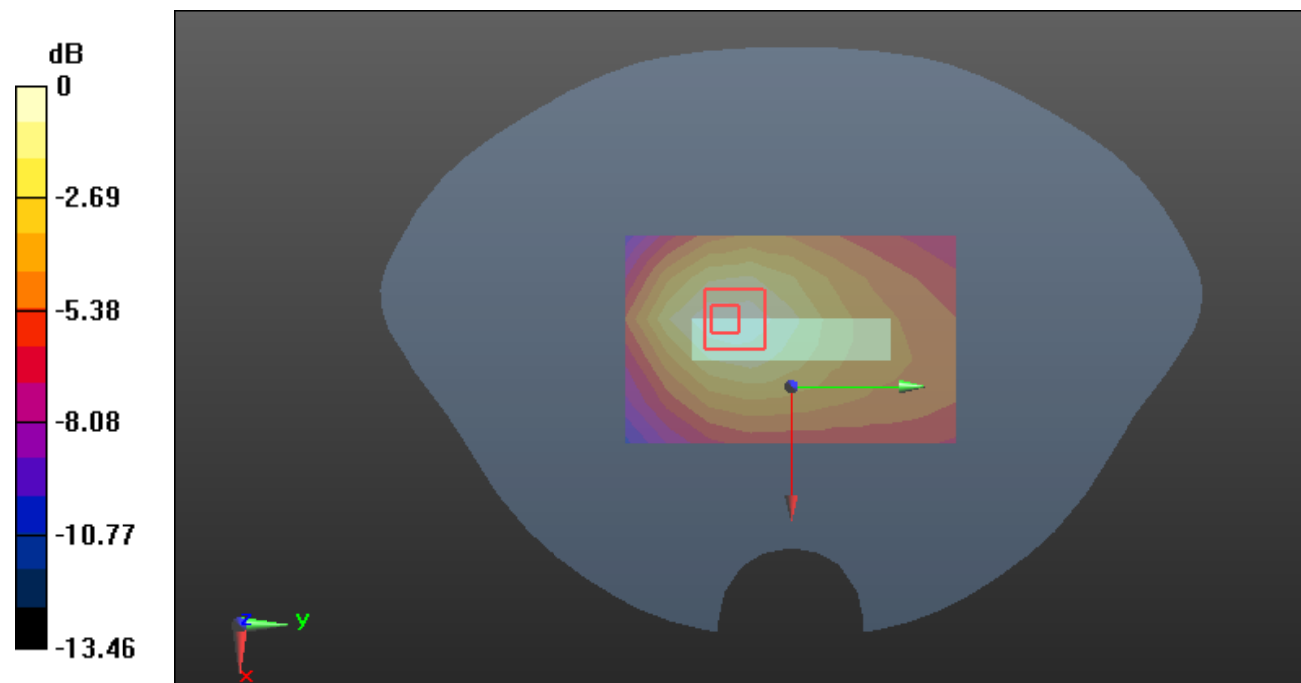

Test Plot86#: LTE Band 12_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=707.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.321$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @707.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0355 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.627 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0530 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0359 W/kg

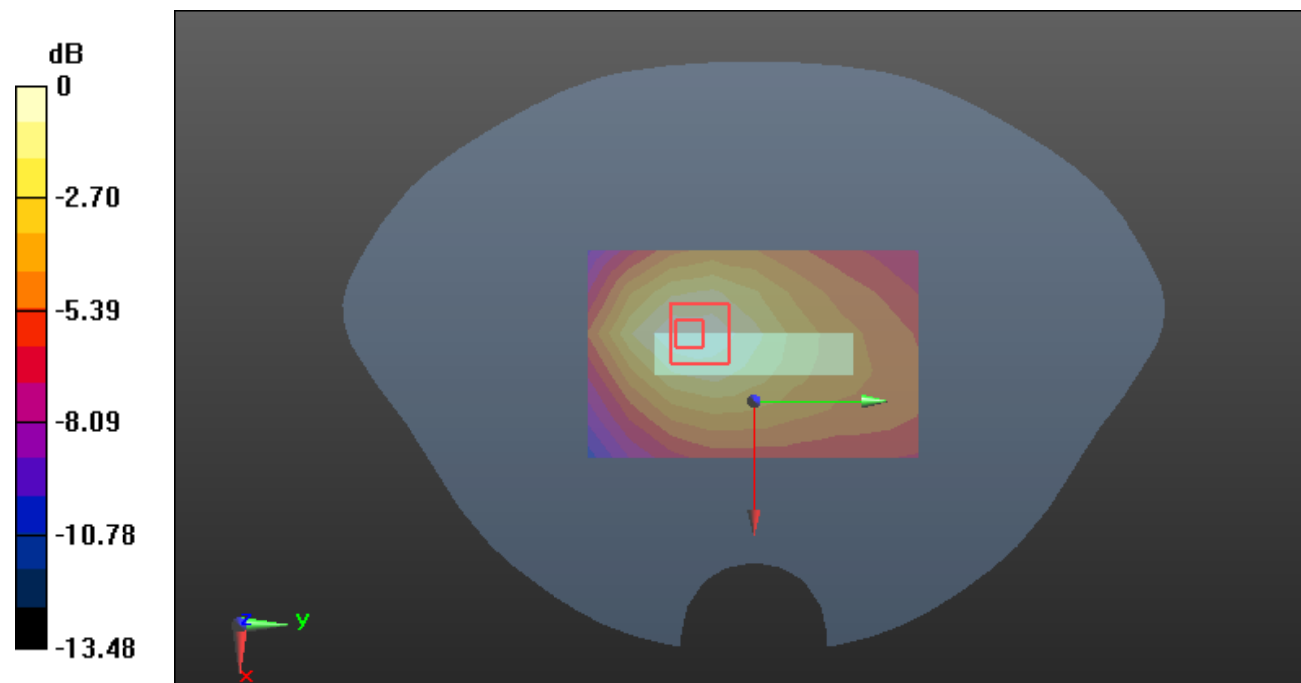

0 dB = 0.0359 W/kg = -14.45 dB dBW/kg

Test Plot87#: LTE Band 13_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=782$ MHz; $\sigma=0.873$ S/m; $\epsilon_r=41.924$; $\rho=1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @782 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.453 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.76 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.672 W/kg

SAR(1 g) = 0.442 W/kg; SAR(10 g) = 0.313 W/kg

Maximum value of SAR (measured) = 0.462 W/kg

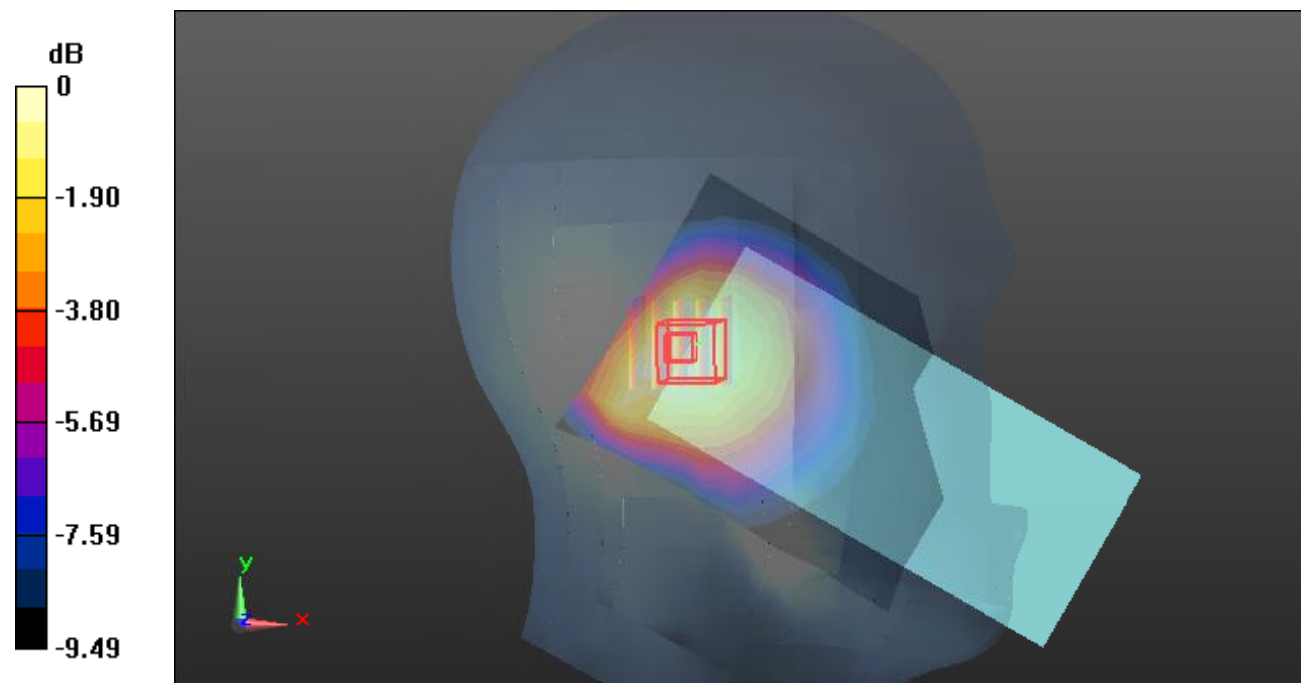

0 dB = 0.462 W/kg = -3.35 dB dBW/kg

Test Plot88#: LTE Band 13_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=782$ MHz; $\sigma=0.873$ S/m; $\epsilon_r=41.924$; $\rho=1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @782 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.375 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.61 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.559 W/kg

SAR(1 g) = 0.366 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 0.383 W/kg

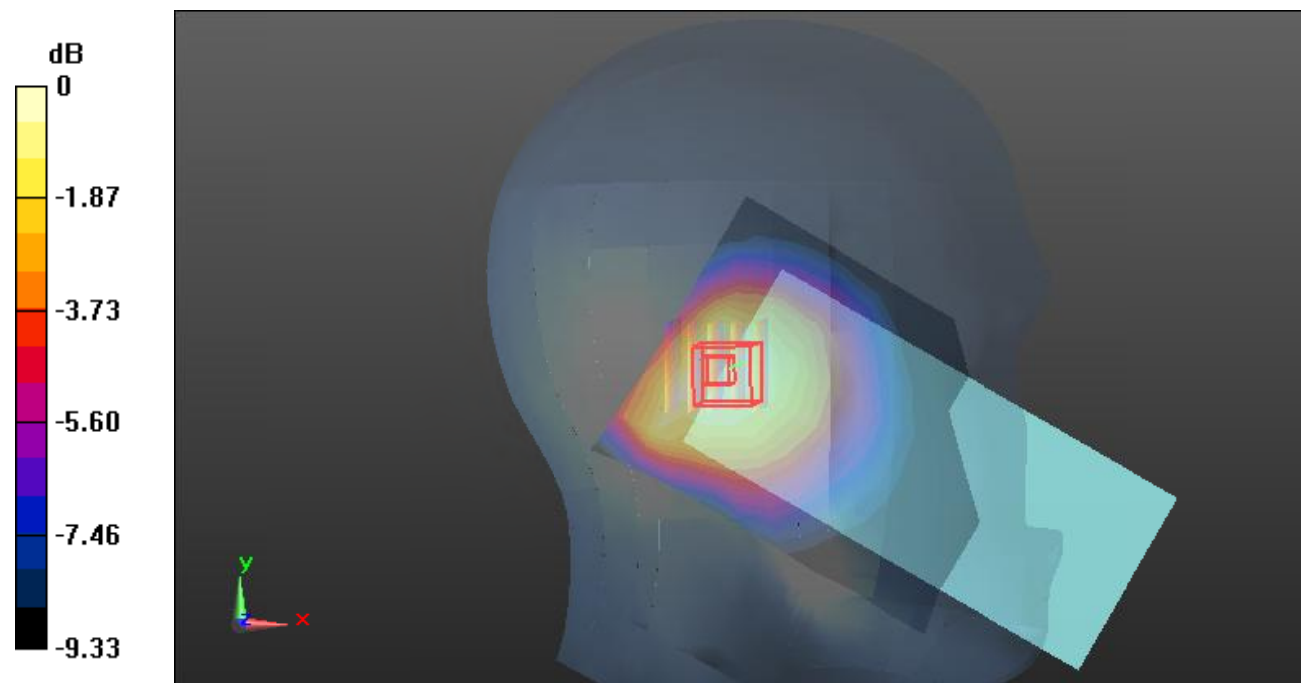

0 dB = 0.383 W/kg = -4.17 dB dBW/kg

Test Plot89#: LTE Band 13_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=782$ MHz; $\sigma=0.873$ S/m; $\epsilon_r=41.924$; $\rho=1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @782 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.382 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.27 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.632 W/kg

SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 0.387 W/kg

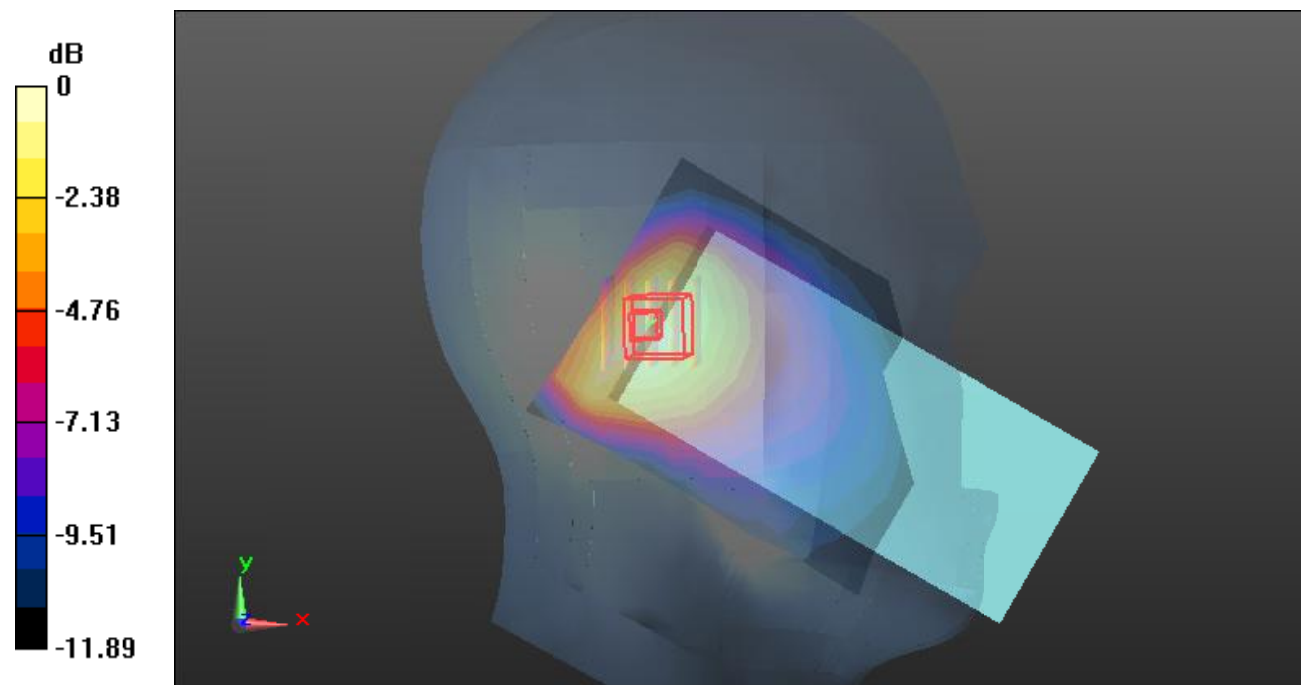

0 dB = 0.387 W/kg = -4.12 dB dBW/kg

Test Plot90#: LTE Band 13_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=782$ MHz; $\sigma=0.873$ S/m; $\epsilon_r=41.924$; $\rho=1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @782 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.317 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.59 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.518 W/kg

SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.191 W/kg

Maximum value of SAR (measured) = 0.317 W/kg

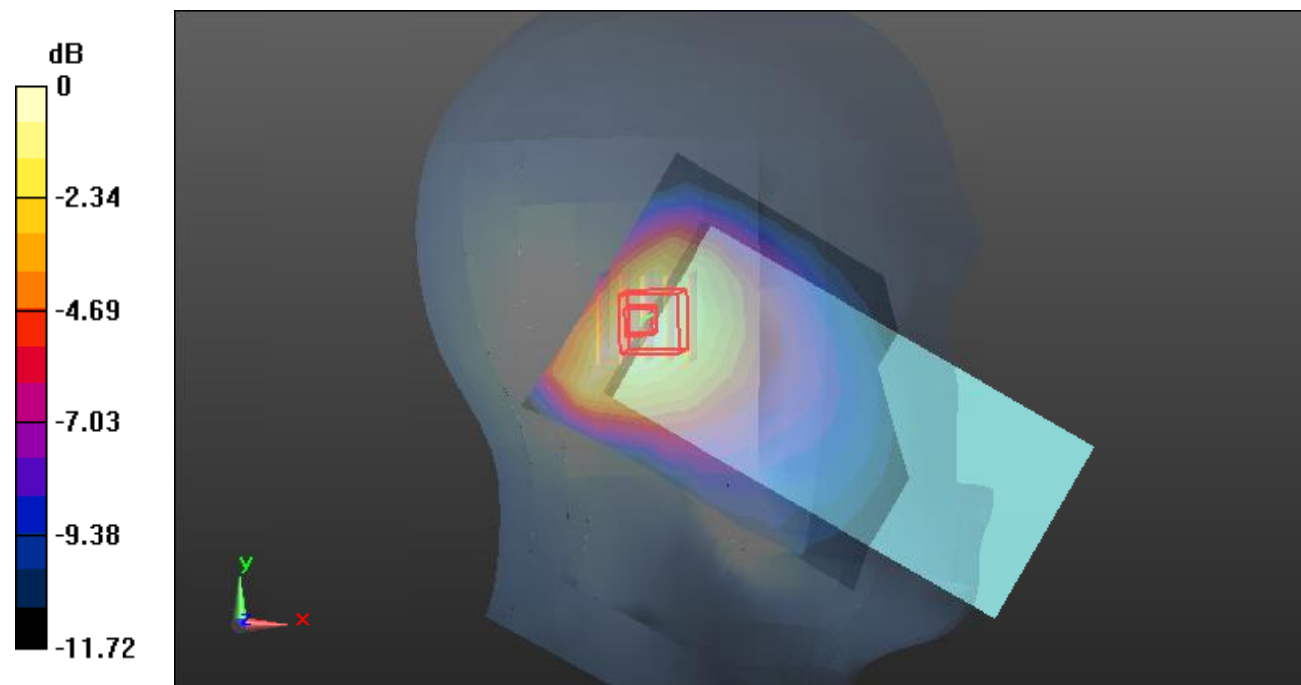

0 dB = 0.317 W/kg = -4.99 dB dBW/kg

Test Plot91#: LTE Band 13_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f=782$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 41.924$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @782 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.542 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.96 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.965 W/kg

SAR(1 g) = 0.540 W/kg; SAR(10 g) = 0.347 W/kg

Maximum value of SAR (measured) = 0.568 W/kg

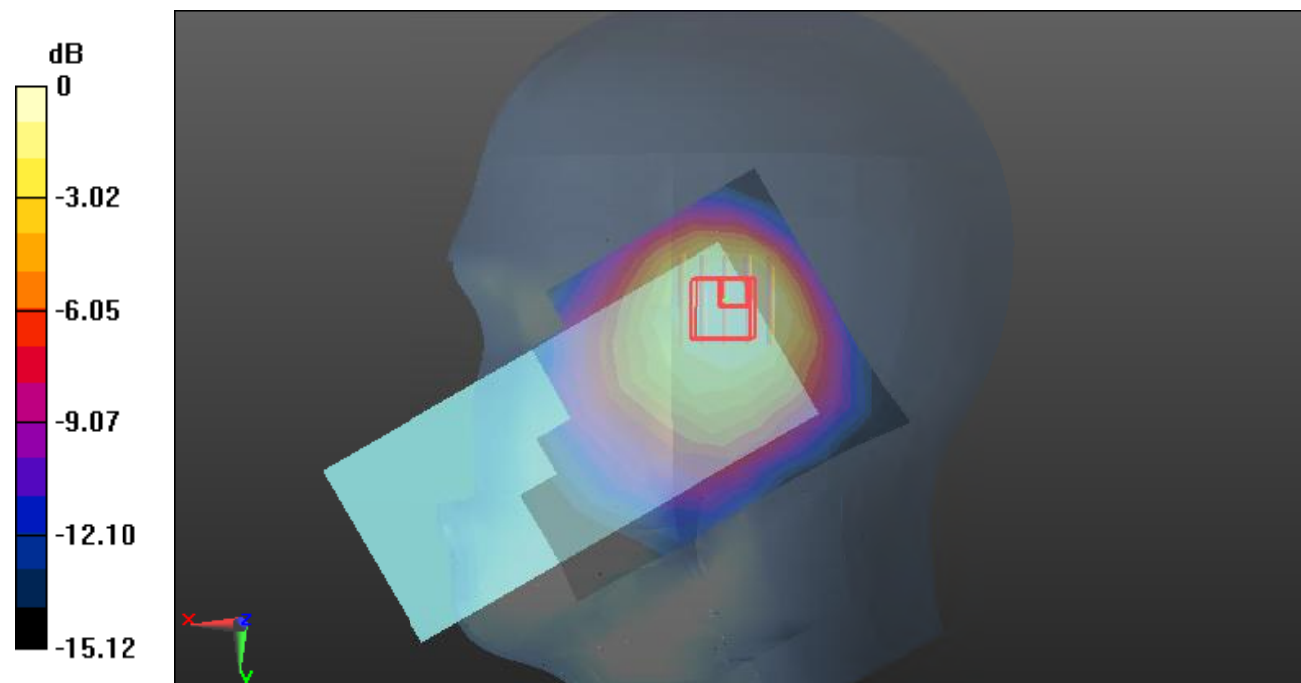

0 dB = 0.568 W/kg = -2.46 dB dBW/kg

Test Plot92#: LTE Band 13_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=782$ MHz; $\sigma=0.873$ S/m; $\epsilon_r=41.924$; $\rho=1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @782 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.458 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.87 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.919 W/kg

SAR(1 g) = 0.467 W/kg; SAR(10 g) = 0.301 W/kg

Maximum value of SAR (measured) = 0.480 W/kg

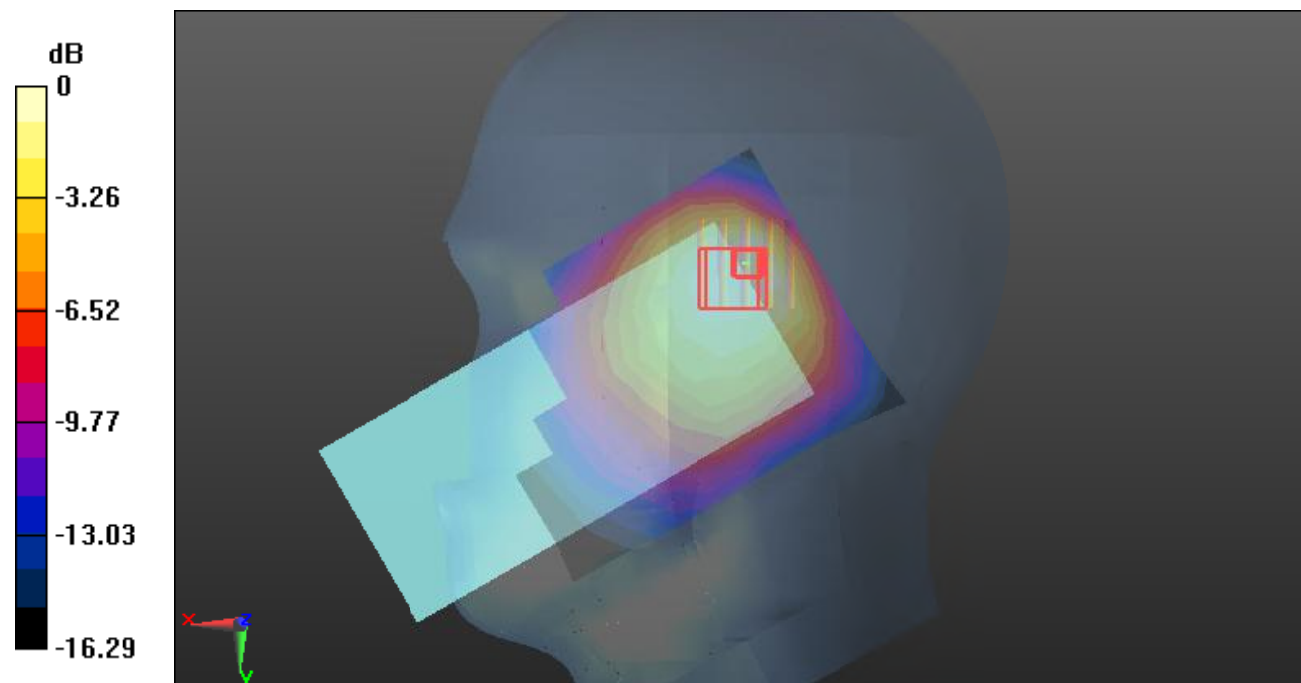

0 dB = 0.480 W/kg = -3.19 dB dBW/kg

Test Plot93#: LTE Band 13_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=782$ MHz; $\sigma=0.873$ S/m; $\epsilon_r=41.924$; $\rho=1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @782 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.402 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.32 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.981 W/kg

SAR(1 g) = 0.445 W/kg; SAR(10 g) = 0.253 W/kg

Maximum value of SAR (measured) = 0.485 W/kg

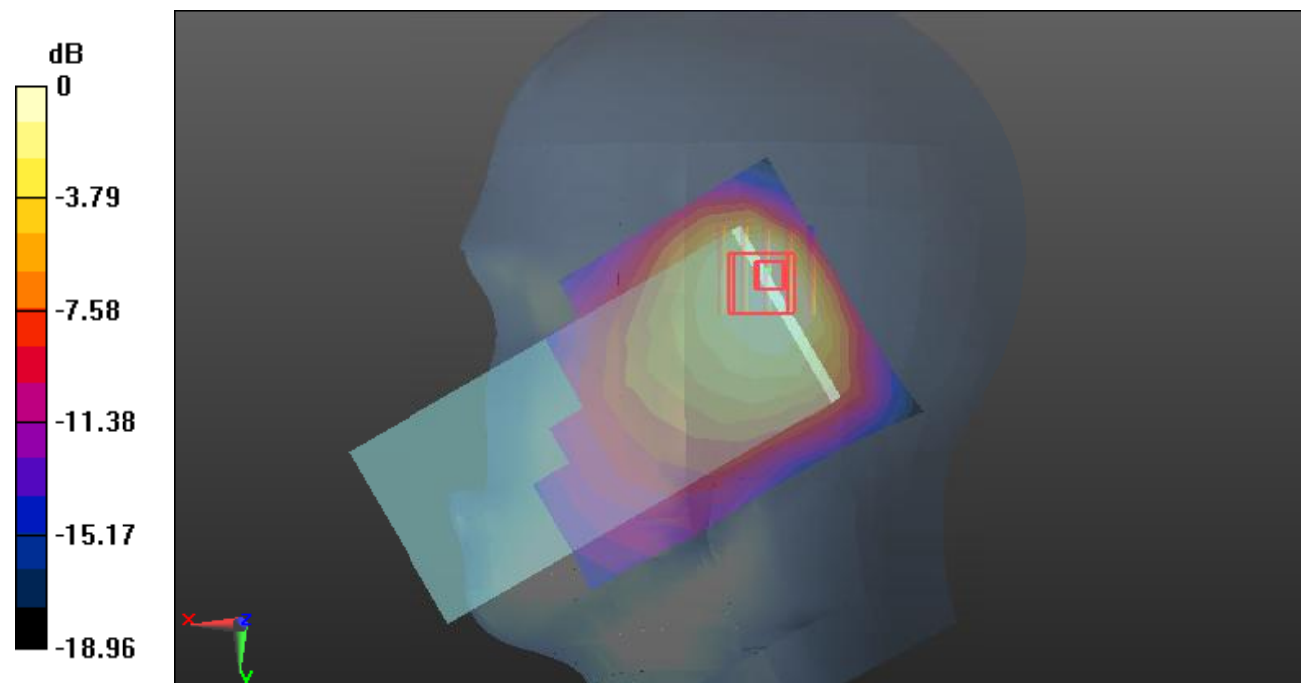

0 dB = 0.485 W/kg = -3.14 dB dBW/kg

Test Plot94#: LTE Band 13_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=782$ MHz; $\sigma=0.873$ S/m; $\epsilon_r=41.924$; $\rho=1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @782 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.374 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.24 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.806 W/kg

SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.207 W/kg

Maximum value of SAR (measured) = 0.376 W/kg

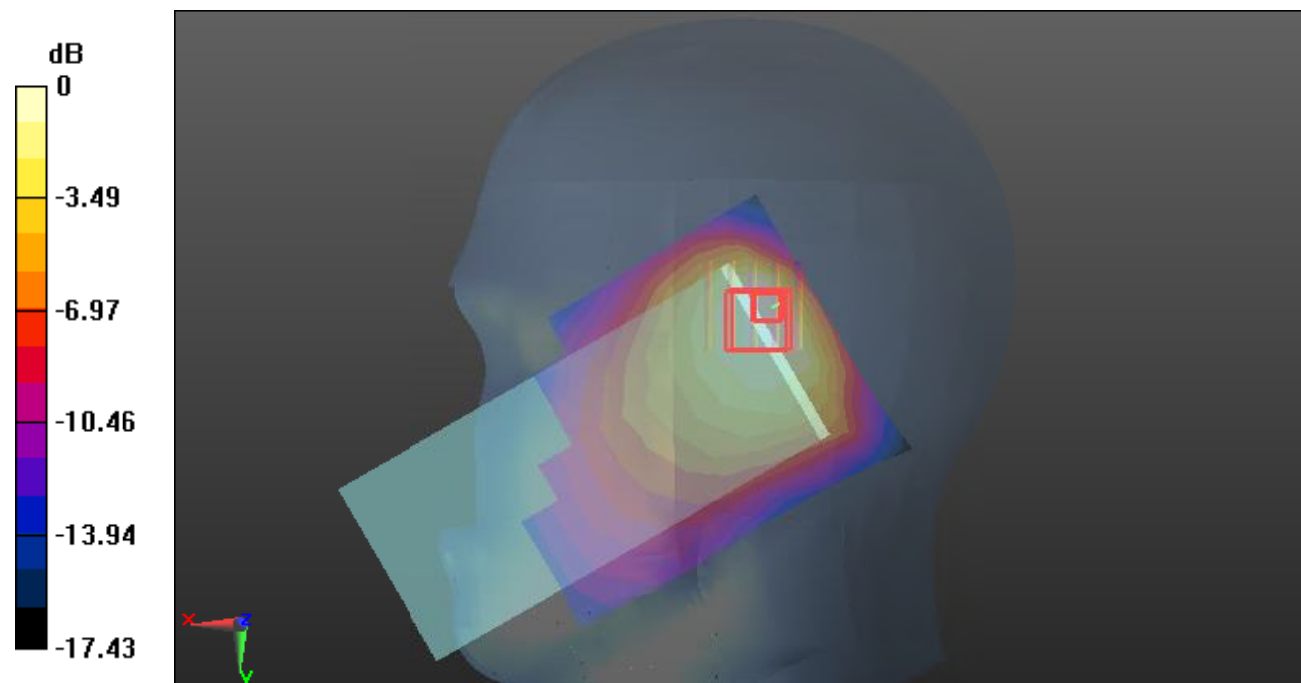

0 dB = 0.376 W/kg = -4.25 dB dBW/kg

Test Plot95#: LTE Band 13_Body Front_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=782$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 41.924$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @782 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.124 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.96 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.151 W/kg

SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.125 W/kg

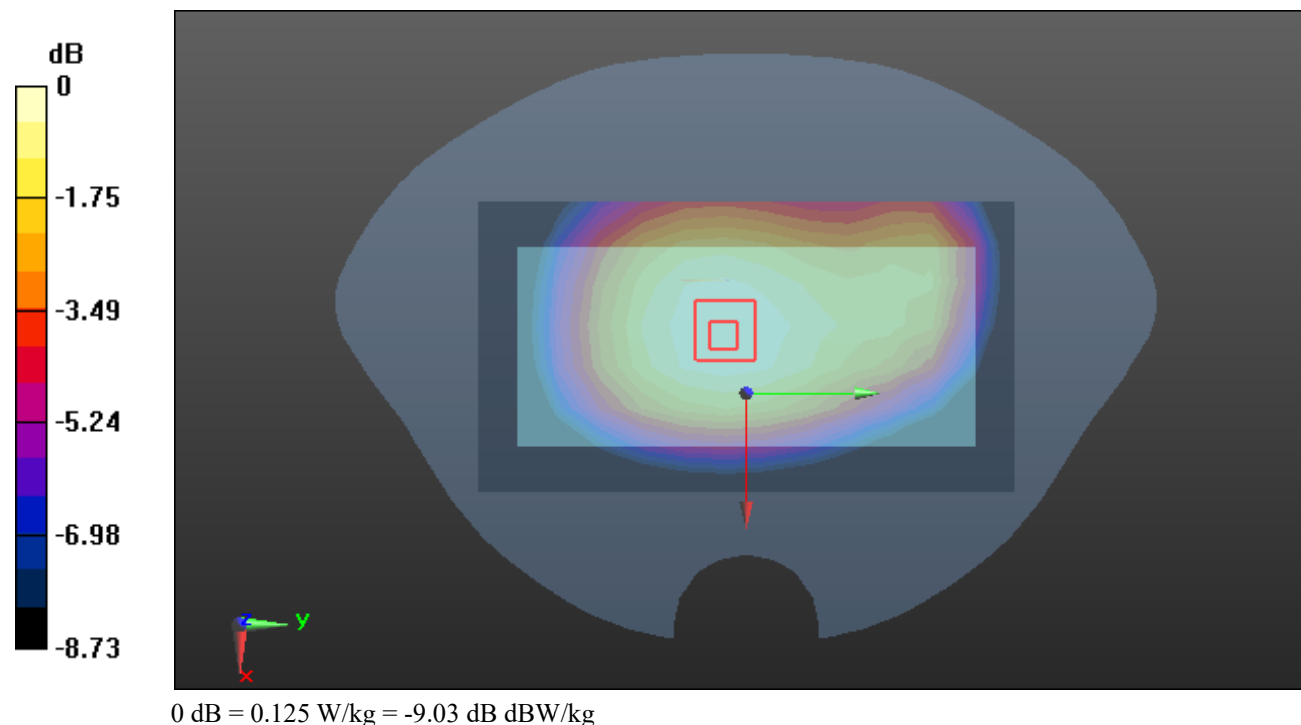

Test Plot96#: LTE Band 13_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f=782$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 41.924$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @782 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0994 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.69 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.073 W/kg

Maximum value of SAR (measured) = 0.102 W/kg

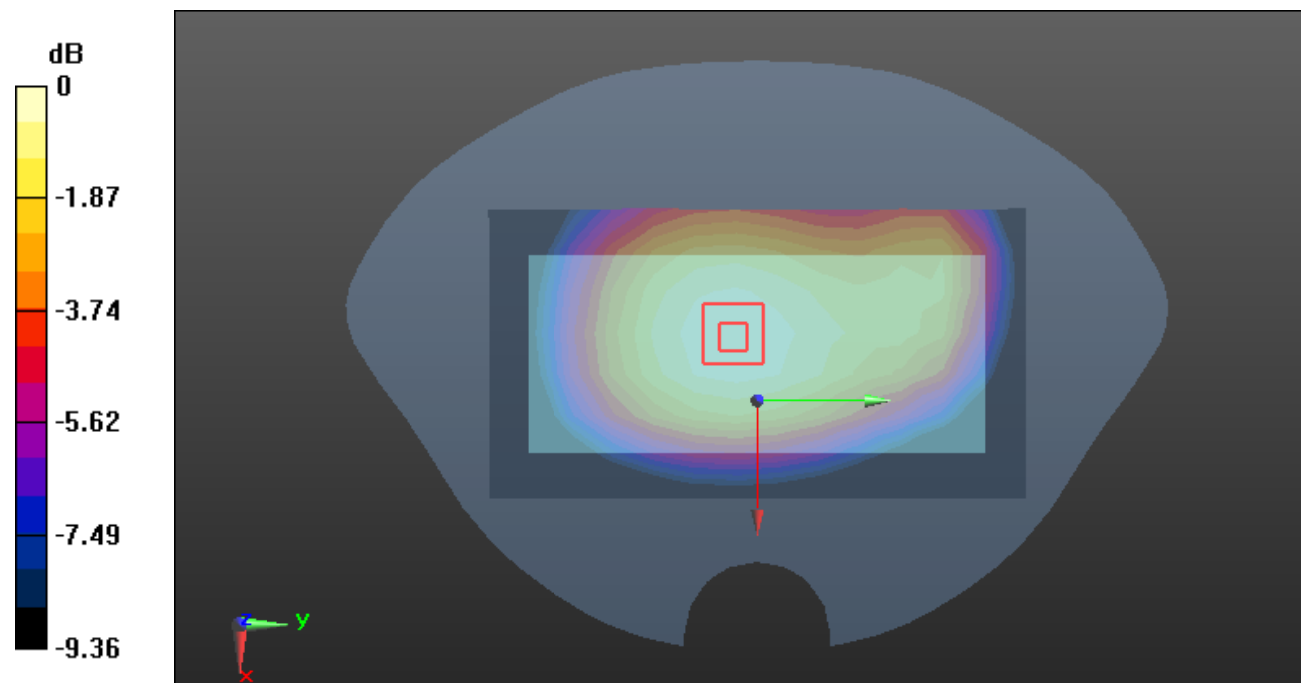

0 dB = 0.102 W/kg = -9.91 dB dBW/kg

Test Plot97#: LTE Band 13_Body Back_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=782$ MHz; $\sigma=0.873$ S/m; $\epsilon_r=41.924$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @782 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.151 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.51 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.182 W/kg

SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.152 W/kg

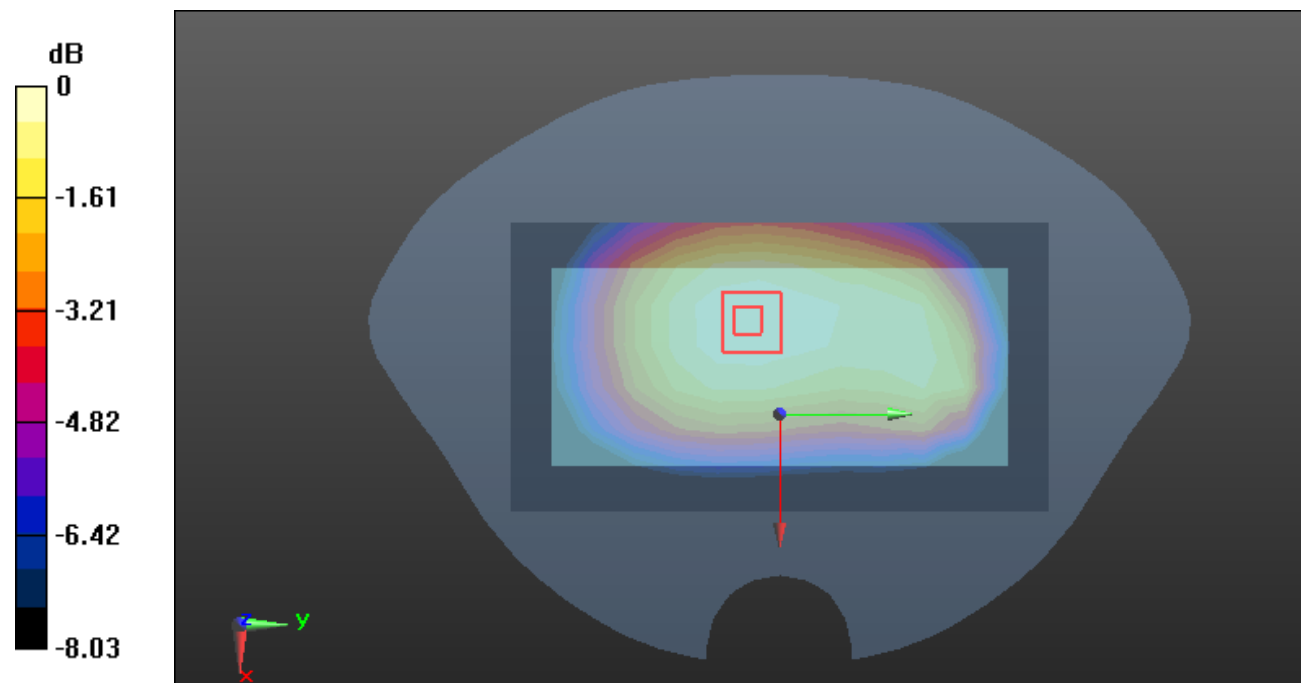

0 dB = 0.152 W/kg = -8.18 dB dBW/kg

Test Plot98#: LTE Band 13_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=782$ MHz; $\sigma=0.873$ S/m; $\epsilon_r=41.924$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @782 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.123 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.18 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.149 W/kg

SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.123 W/kg

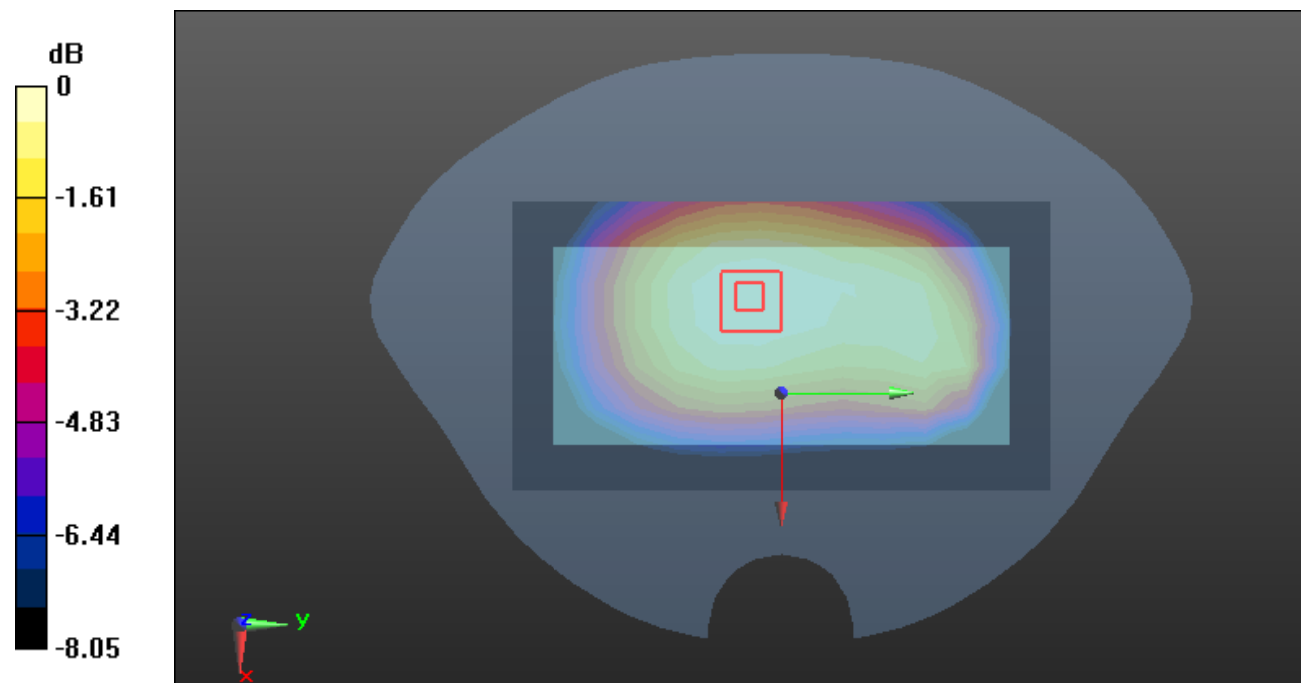

0 dB = 0.123 W/kg = -9.10 dB dBW/kg

Test Plot99#: LTE Band 13_Body Left_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f=782$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 41.924$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @782 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0569 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.182 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0780 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.0590 W/kg

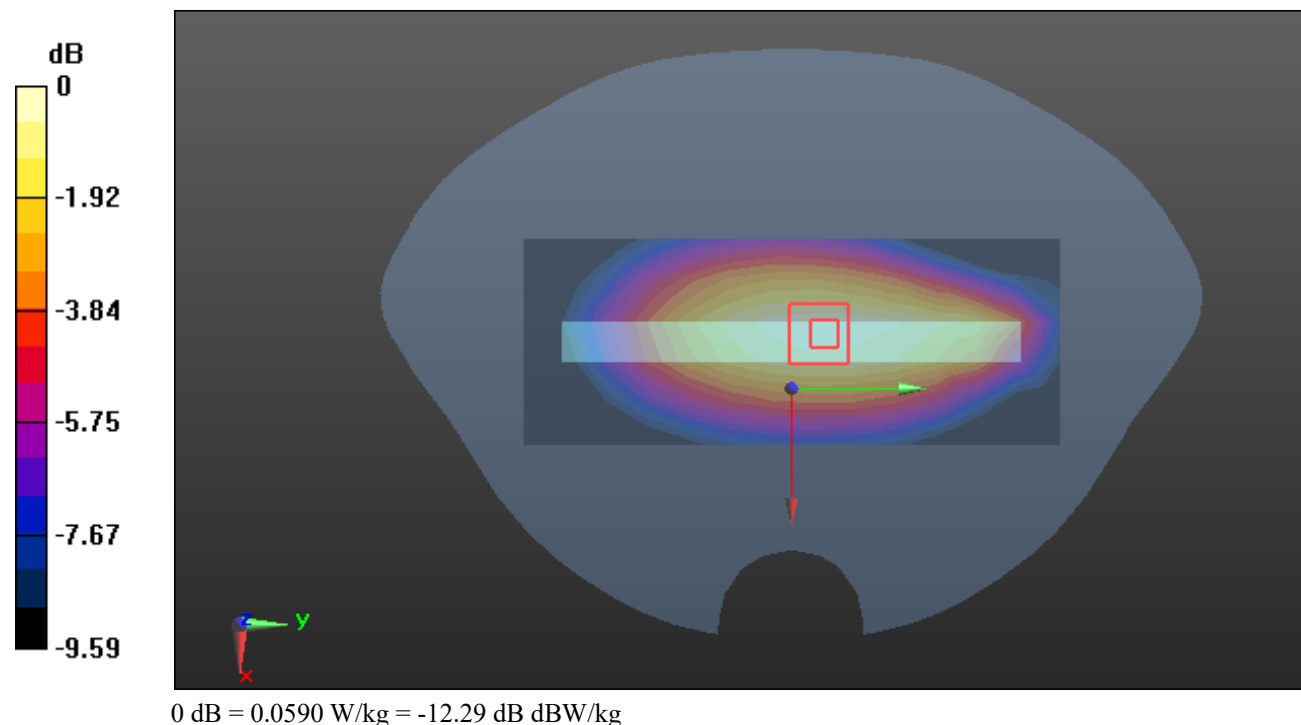

Test Plot100#: LTE Band 13_Body Left_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f=782$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 41.924$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @782 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0480 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.523 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0650 W/kg

SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.0491 W/kg

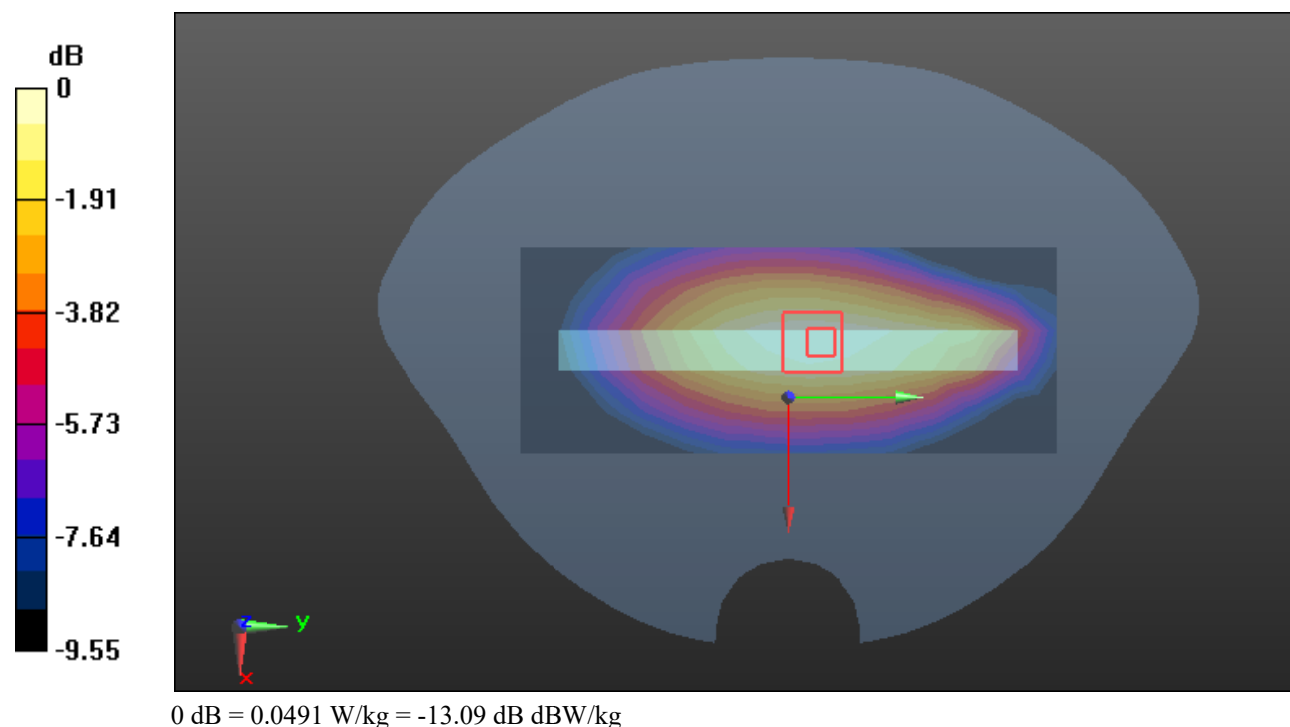

Test Plot101#: LTE Band 13_Body Top_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz;Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=782$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 41.924$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @782 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0427 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.868 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0620 W/kg

SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0436 W/kg

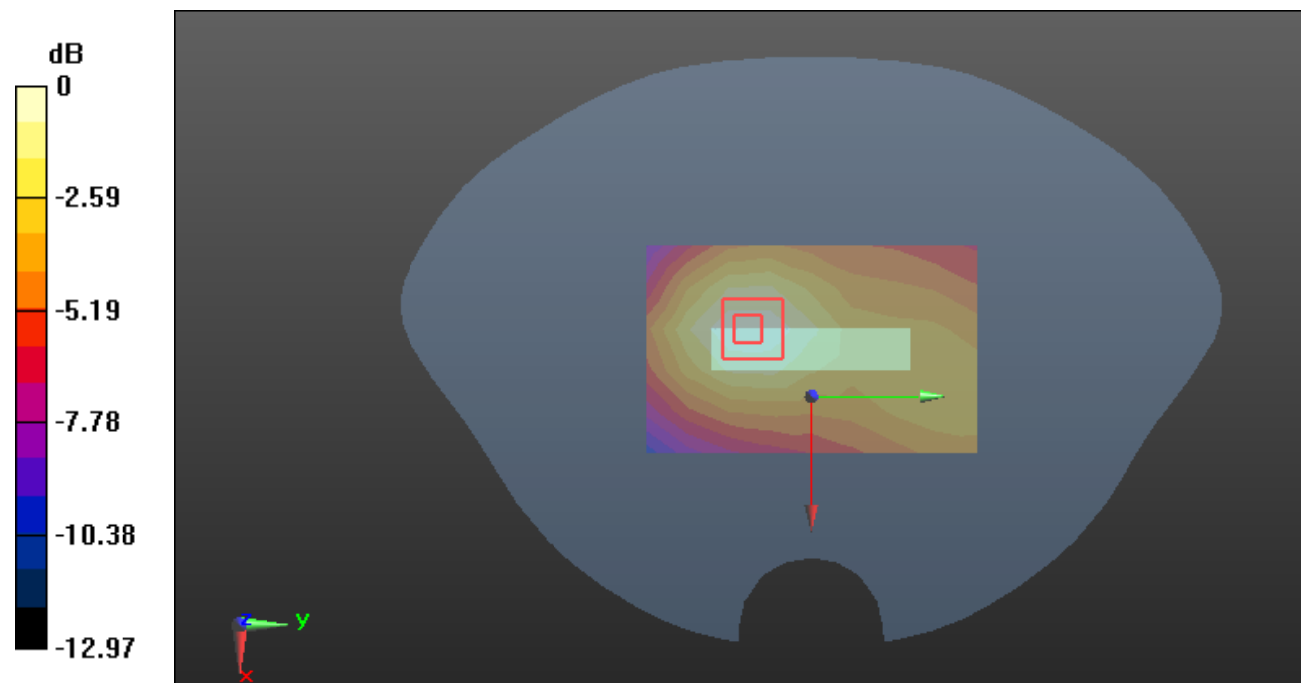

0 dB = 0.0436 W/kg = -13.61 dB dBW/kg

Test Plot102#: LTE Band 13_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f=782$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 41.924$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @782 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0333 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.084 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0490 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0342 W/kg

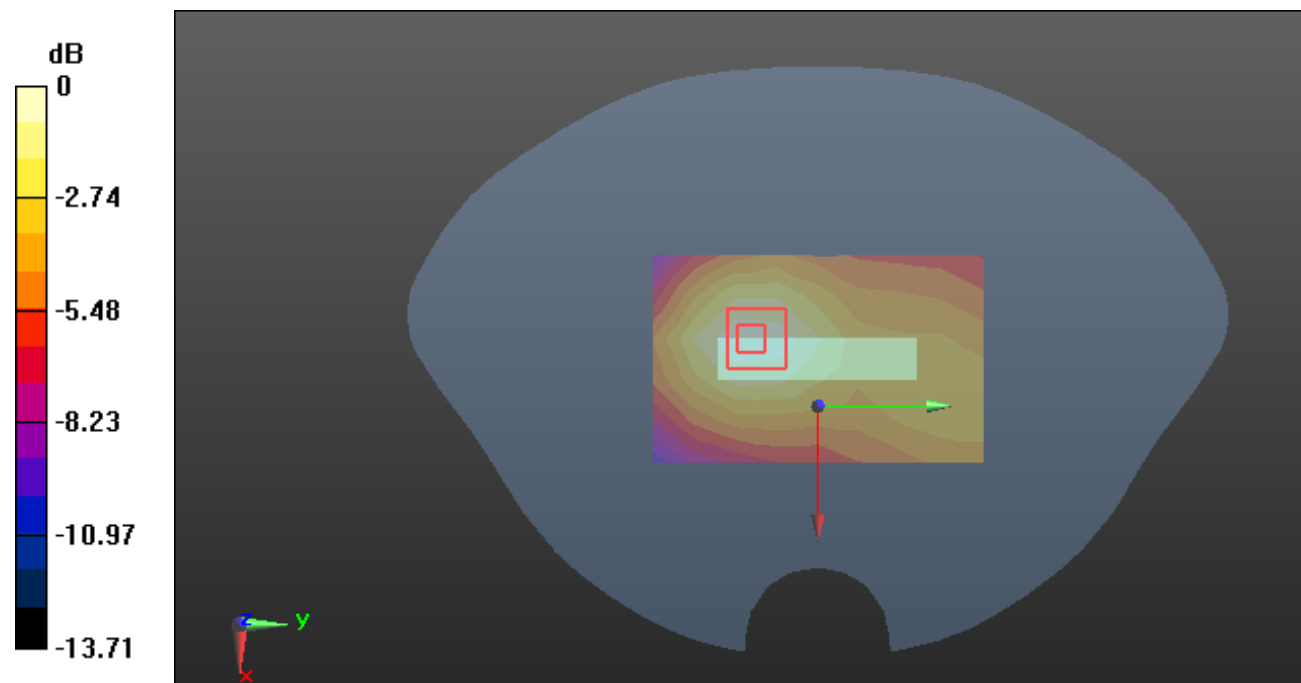

0 dB = 0.0342 W/kg = -14.66 dB dBW/kg

Test Plot103#: LTE Band 25_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f=1882.5$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.589$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1882.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.219 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.696 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.432 W/kg

SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.126 W/kg

Maximum value of SAR (measured) = 0.269 W/kg

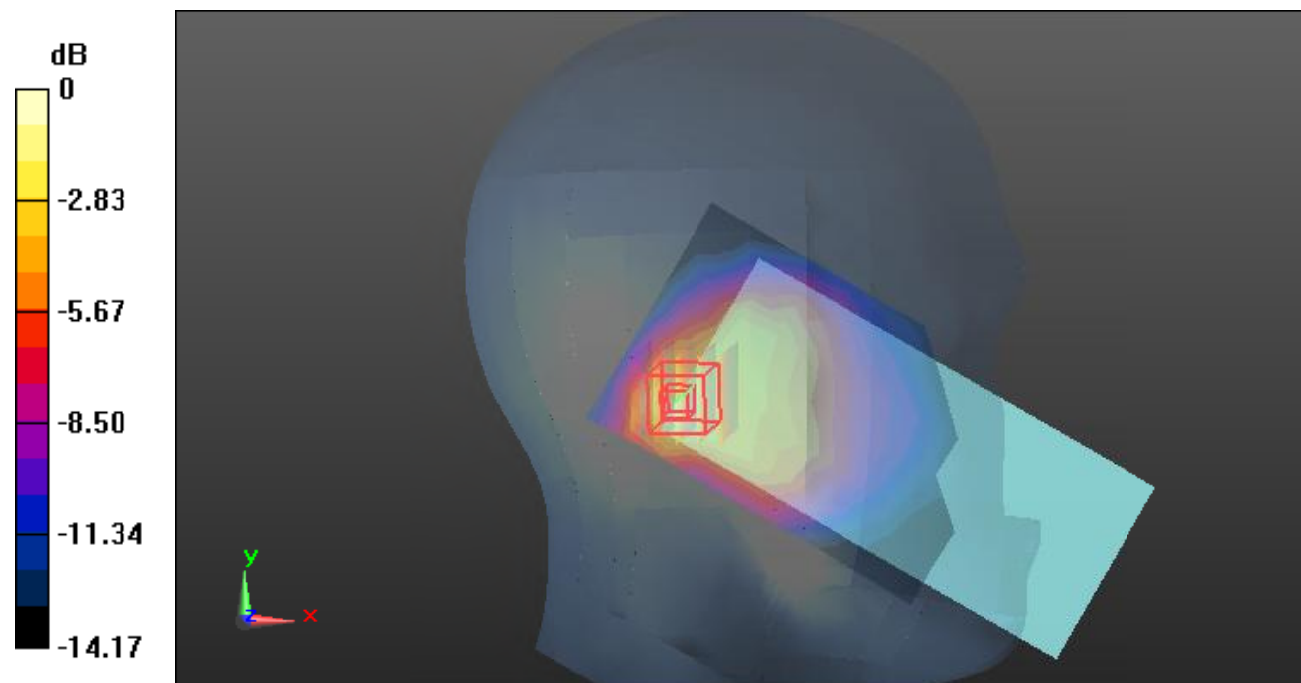

Test Plot104#: LTE Band 25_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f=1882.5$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.589$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1882.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.178 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.682 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.343 W/kg

SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.216 W/kg

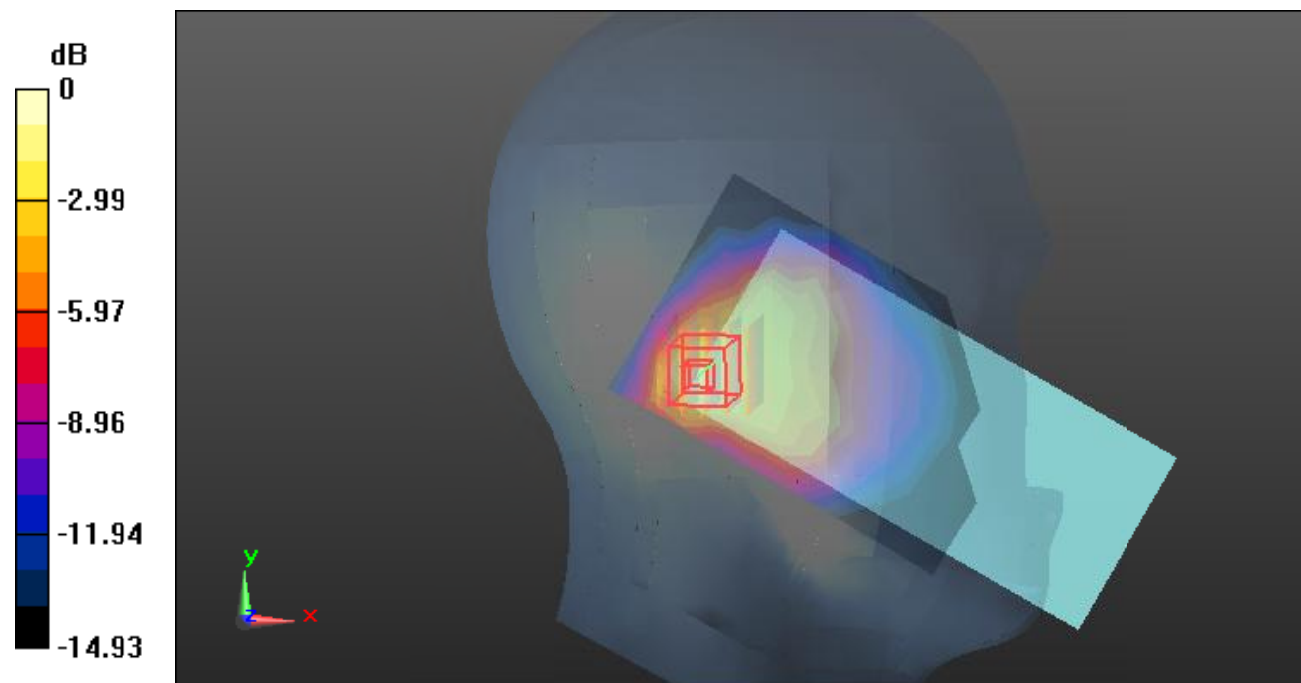

0 dB = 0.216 W/kg = -6.66 dB dBW/kg

Test Plot105#: LTE Band 25_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f=1882.5$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.589$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1882.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.286 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.10 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.547 W/kg

SAR(1 g) = 0.291 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.330 W/kg

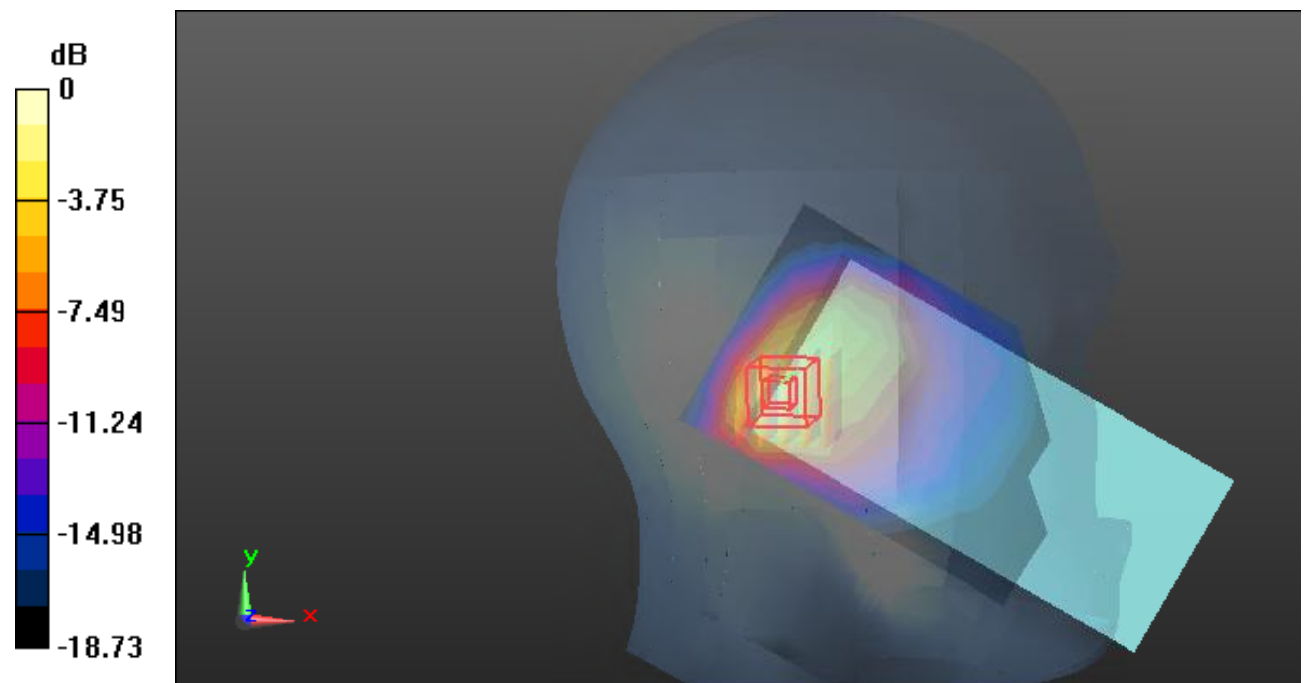

0 dB = 0.330 W/kg = -4.81 dB dBW/kg

Test Plot106#: LTE Band 25_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f=1882.5$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.589$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1882.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.234 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.84 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.450 W/kg

SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 0.269 W/kg

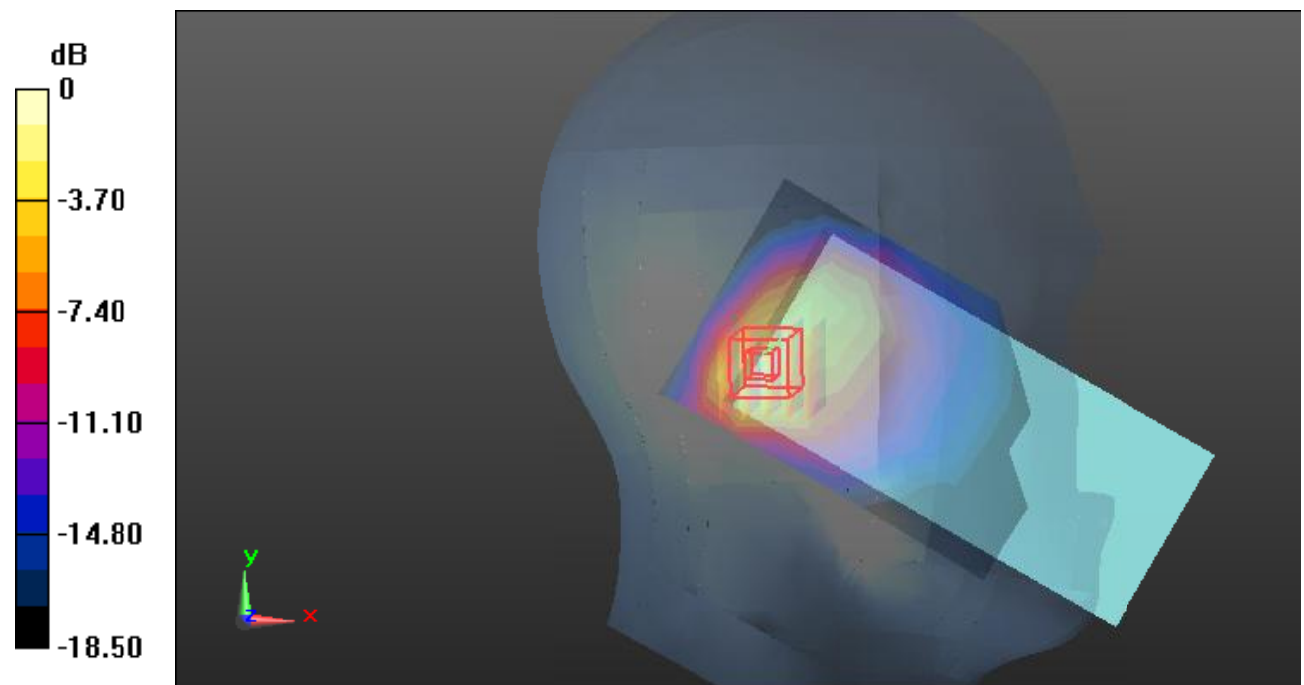

0 dB = 0.269 W/kg = -5.70 dB dBW/kg

Test Plot107#: LTE Band 25_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f=1882.5$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.589$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1882.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.376 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.34 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.875 W/kg

SAR(1 g) = 0.423 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 0.455 W/kg

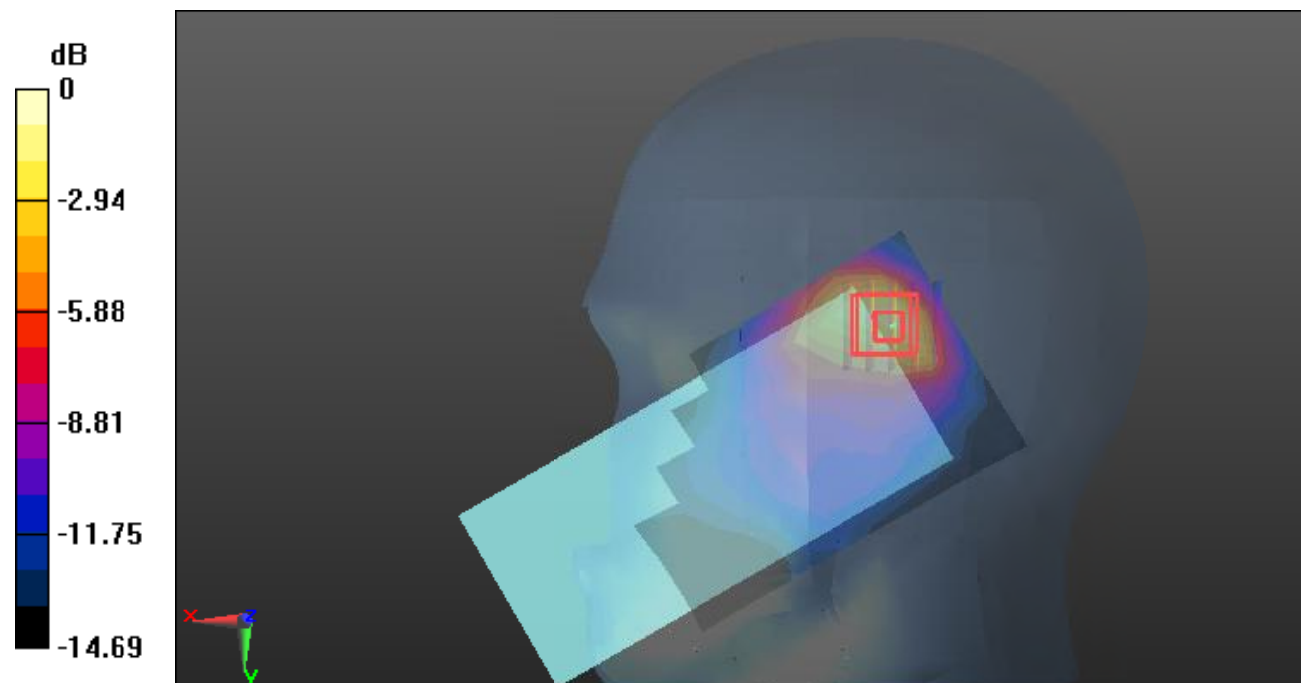

0 dB = 0.455 W/kg = -3.42 dB dBW/kg

Test Plot108#: LTE Band 25_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f=1882.5$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.589$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1882.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.306 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.16 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.683 W/kg

SAR(1 g) = 0.337 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.370 W/kg

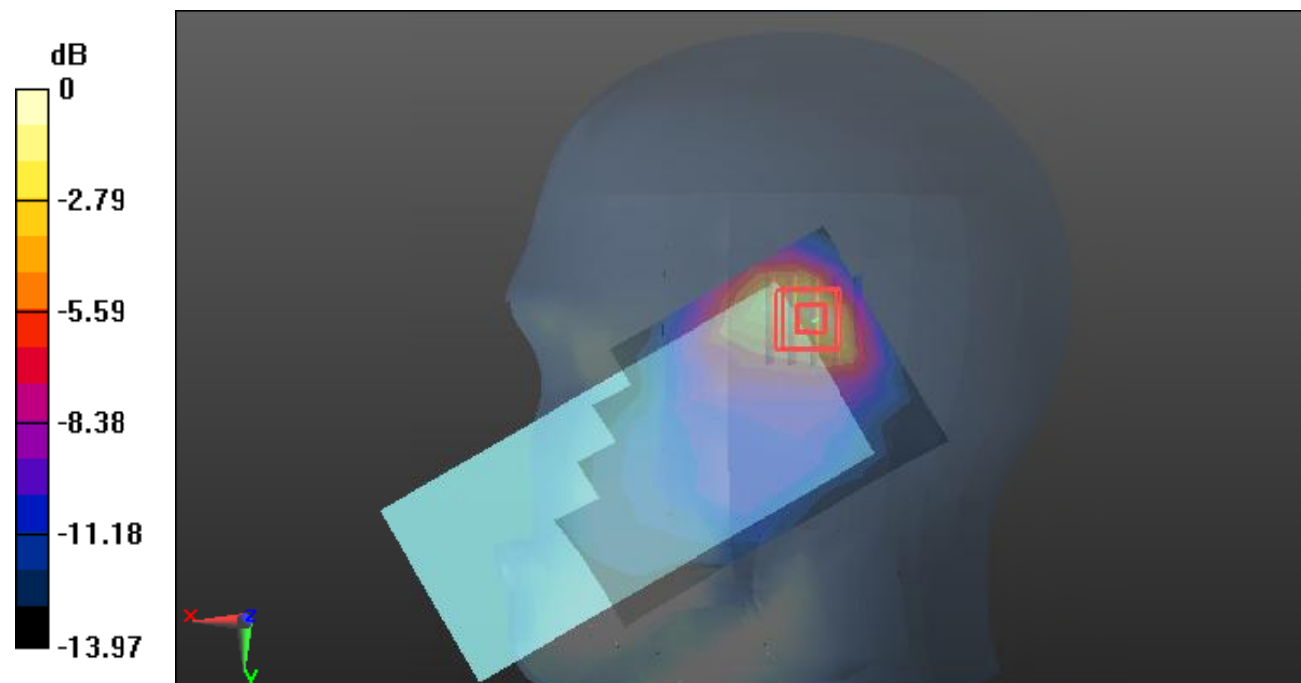

0 dB = 0.370 W/kg = -4.32 dB dBW/kg

Test Plot 109#:LTE Band 25_Head Right Tilt_1RB_Low**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1860 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 39.909$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1860 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.859 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.80 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.773 W/kg; SAR(10 g) = 0.424 W/kg

Maximum value of SAR (measured) = 0.873 W/kg

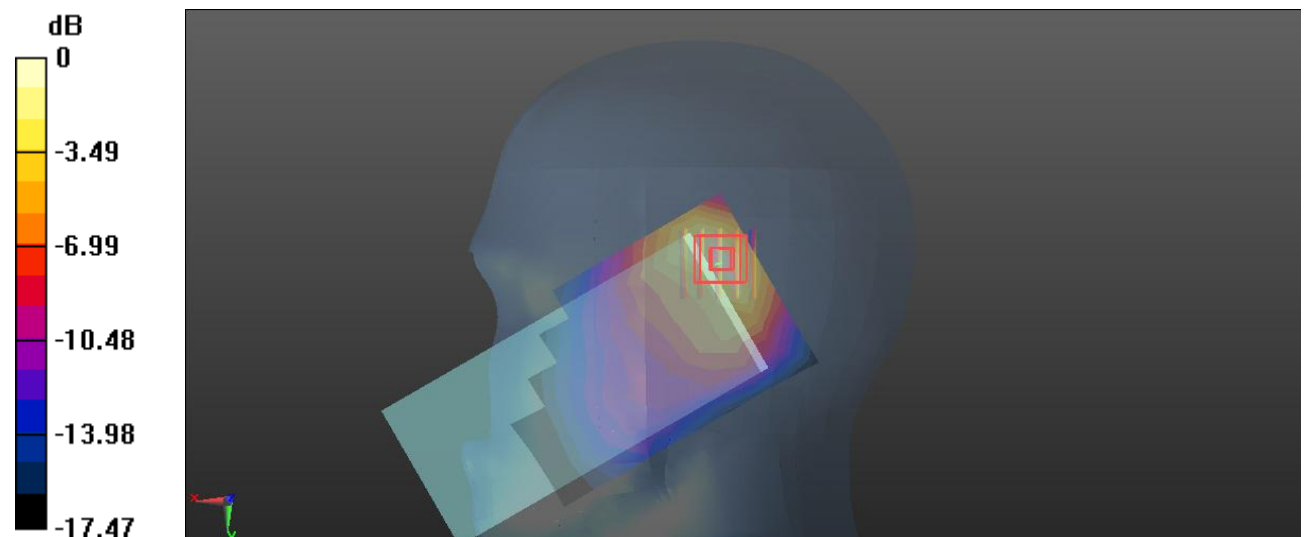

0 dB = 0.873 W/kg = -0.59 dBW/kg

Test Plot110#: LTE Band 25_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f=1882.5$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.589$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1882.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.787 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.62 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.815 W/kg; SAR(10 g) = 0.364 W/kg

Maximum value of SAR (measured) = 0.954 W/kg

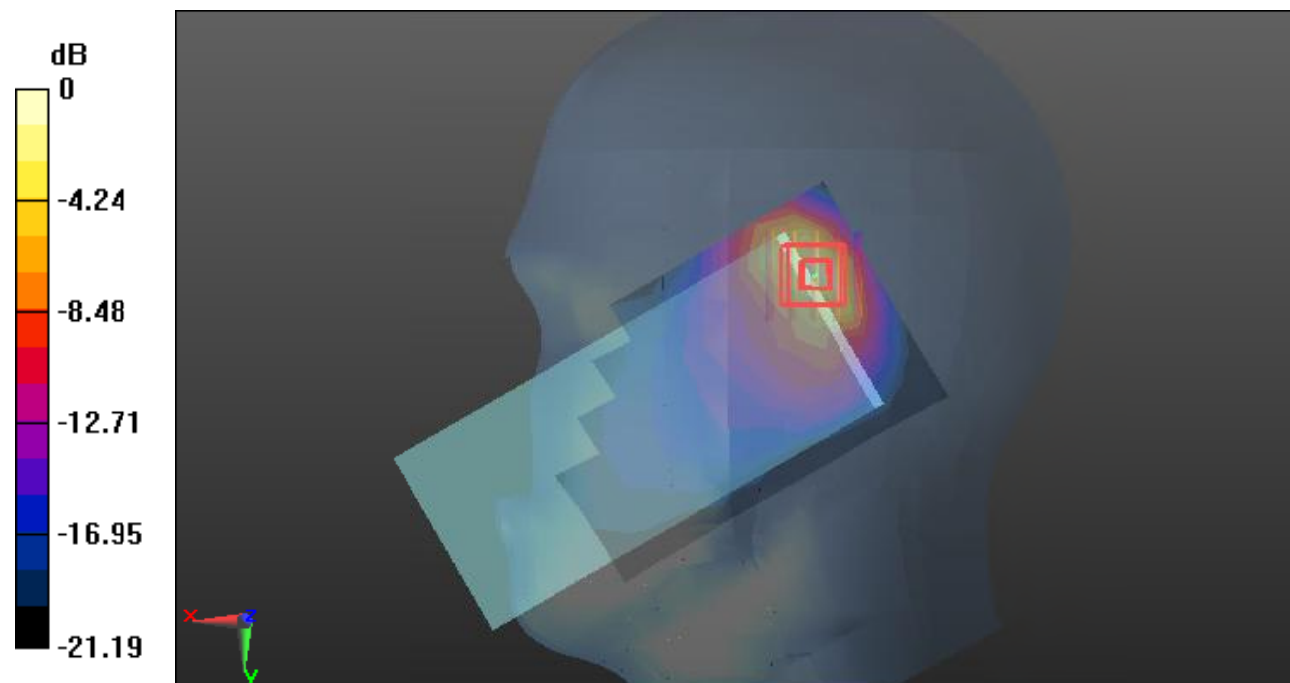

0 dB = 0.954 W/kg = -0.20 dB dBW/kg

Test Plot 111#:LTE Band 25_Head Right Tilt_1RB_High**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1905 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1905$ MHz; $\sigma = 1.448$ S/m; $\epsilon_r = 39.315$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1905 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.05 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.36 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.942 W/kg; SAR(10 g) = 0.517 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

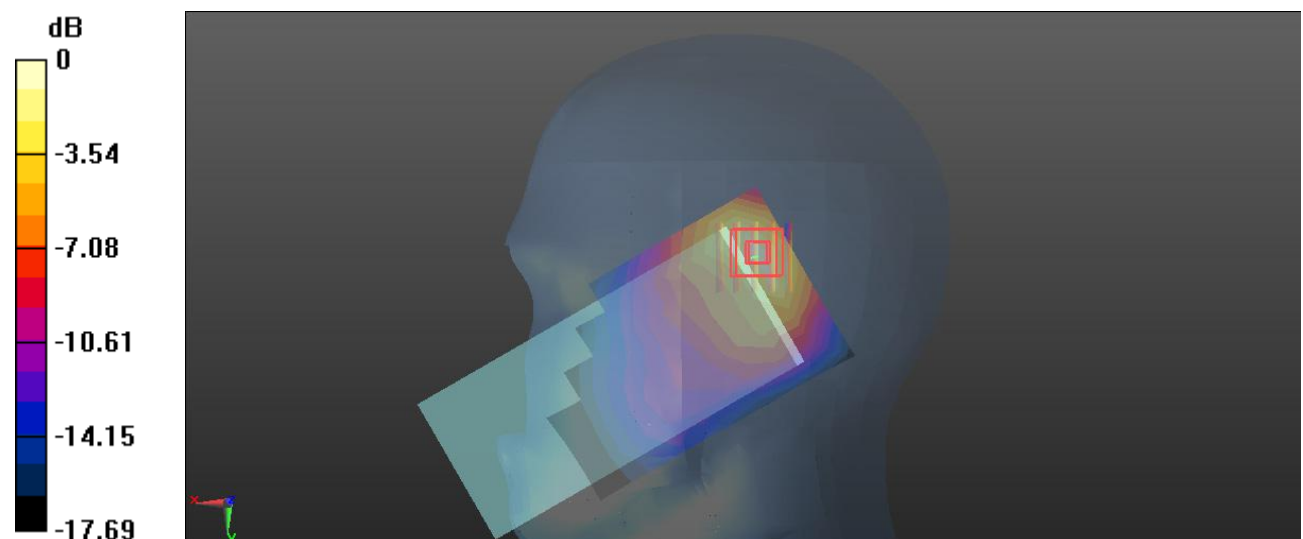

0 dB = 1.07 W/kg = 0.29 dBW/kg

Test Plot112#: LTE Band 25_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f=1882.5$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.589$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1882.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.320 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.84 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 0.560 W/kg

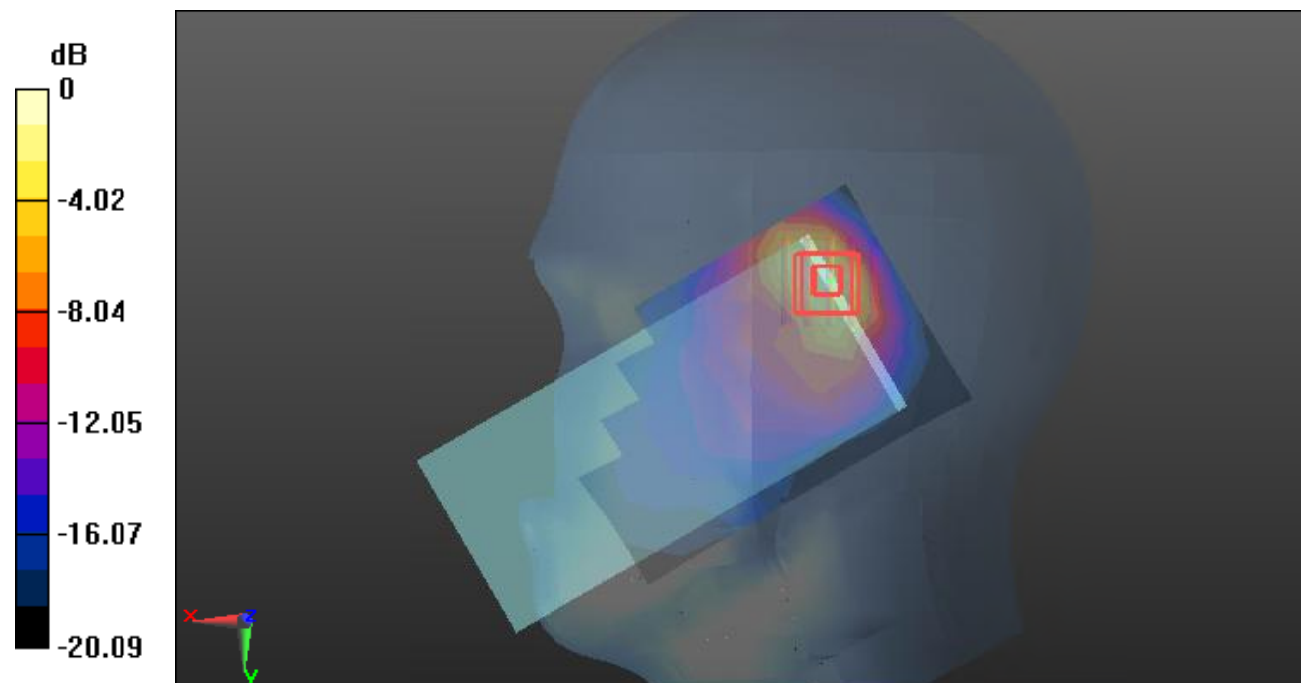

0 dB = 0.560 W/kg = -2.52 dB dBW/kg

Test Plot 113#:LTE Band 25_Head Right Tilt_100%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f=1882.5$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.589$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1882.5 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.850 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.72 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.765 W/kg; SAR(10 g) = 0.418 W/kg

Maximum value of SAR (measured) = 0.868 W/kg

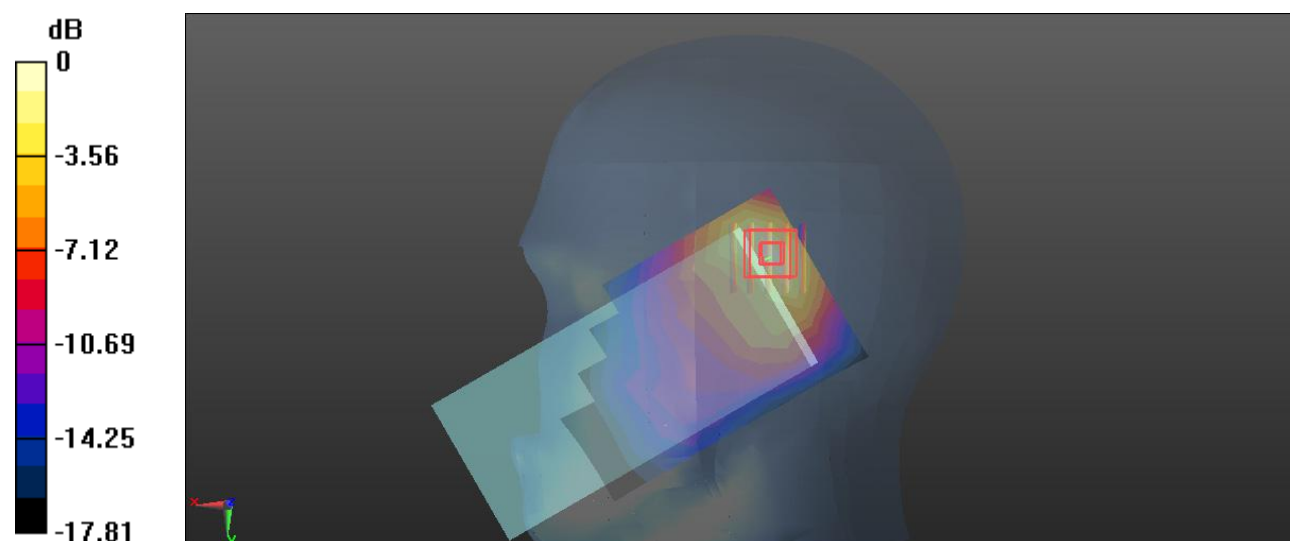

0 dB = 0.868 W/kg = -0.61 dBW/kg

Test Plot114#: LTE Band 25_Body Front_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f=1882.5$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.589$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1882.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.148 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.845 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.256 W/kg

SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.074 W/kg

Maximum value of SAR (measured) = 0.161 W/kg

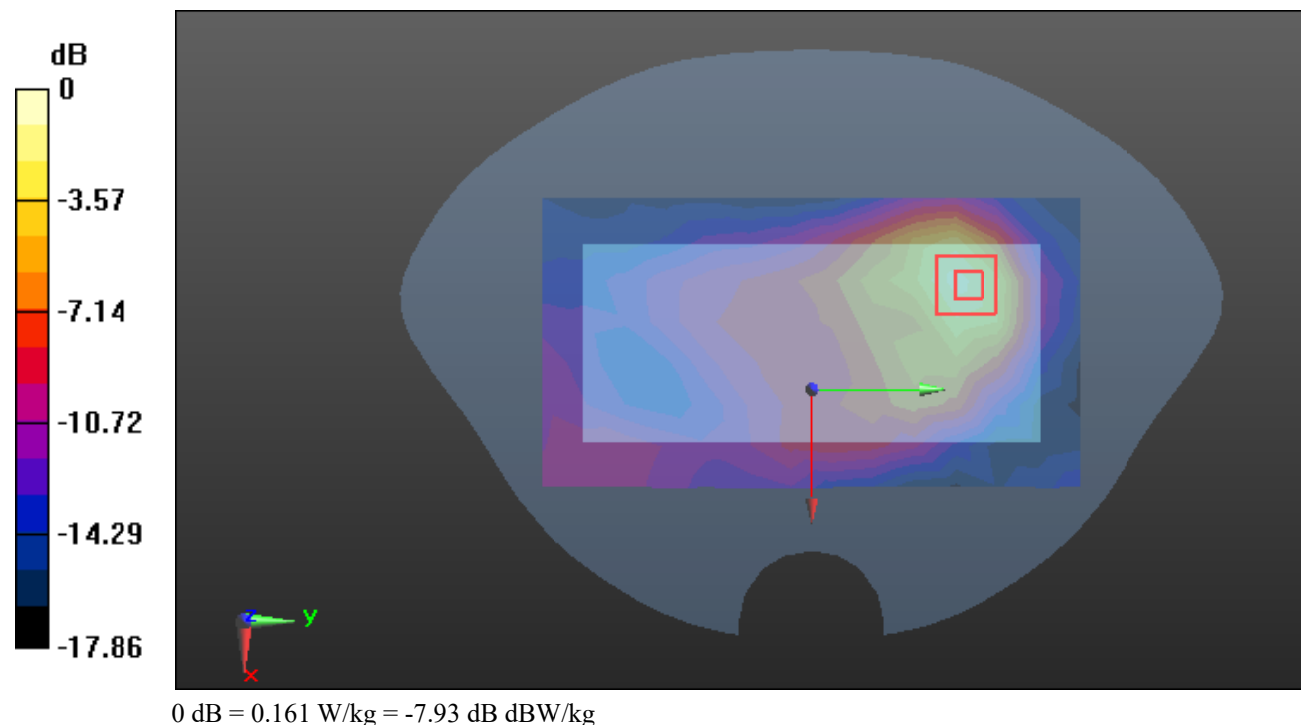

Test Plot115#: LTE Band 25_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f=1882.5$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.589$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1882.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.124 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.412 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.221 W/kg

SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.136 W/kg

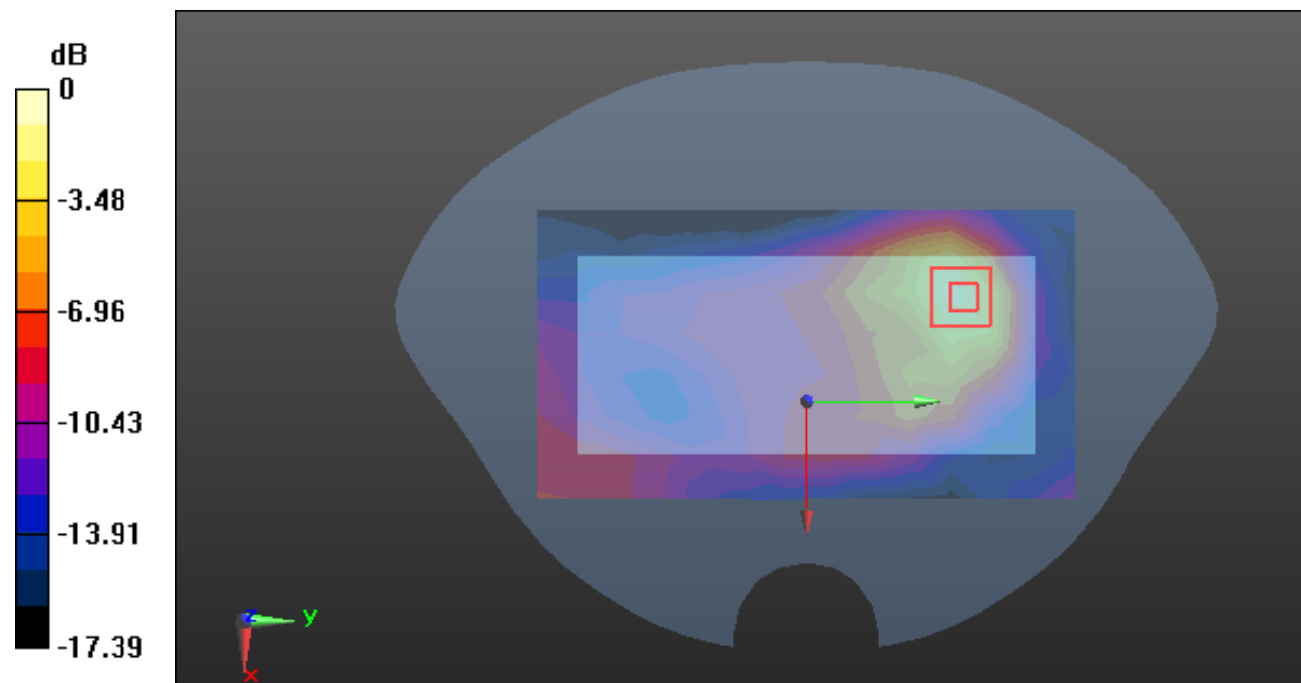

0 dB = 0.136 W/kg = -8.66 dB dBW/kg

Test Plot116#: LTE Band 25_Body Back_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f=1882.5$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.589$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1882.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.186 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.171 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.347 W/kg

SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.097 W/kg

Maximum value of SAR (measured) = 0.216 W/kg

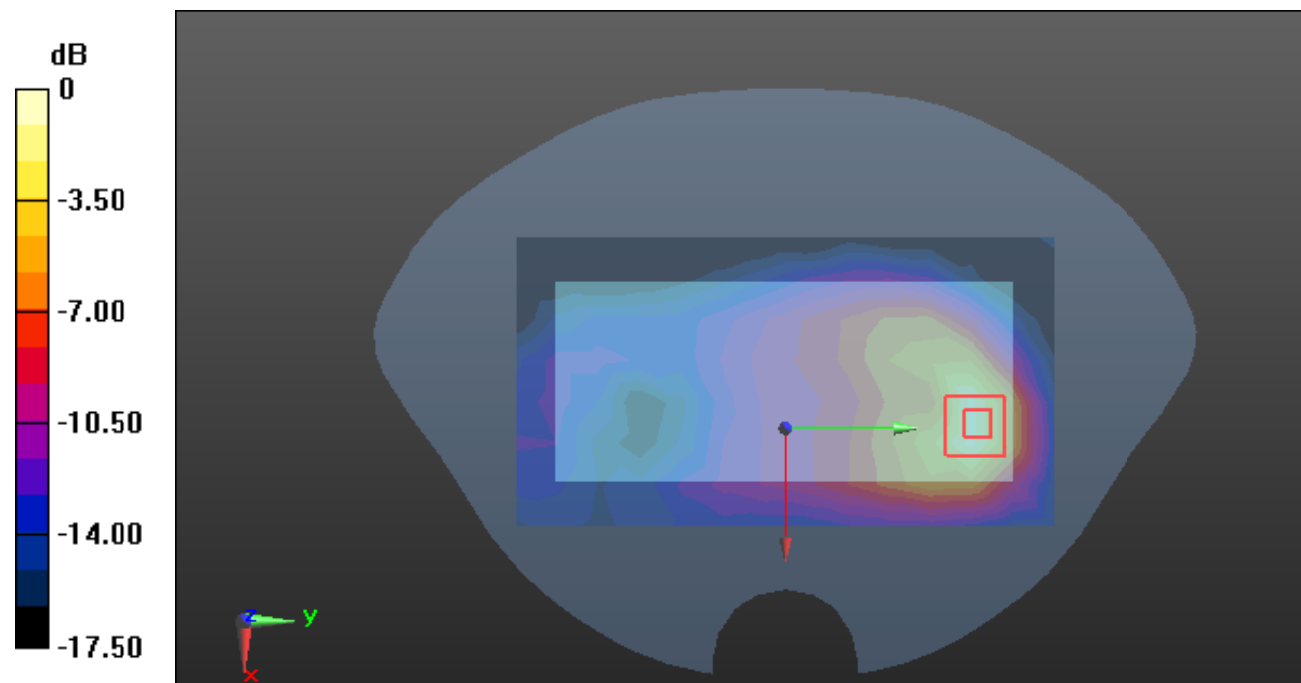

0 dB = 0.216 W/kg = -6.66 dB dBW/kg

Test Plot117#: LTE Band 25_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f=1882.5$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.589$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1882.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.162 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.817 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.306 W/kg

SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.187 W/kg

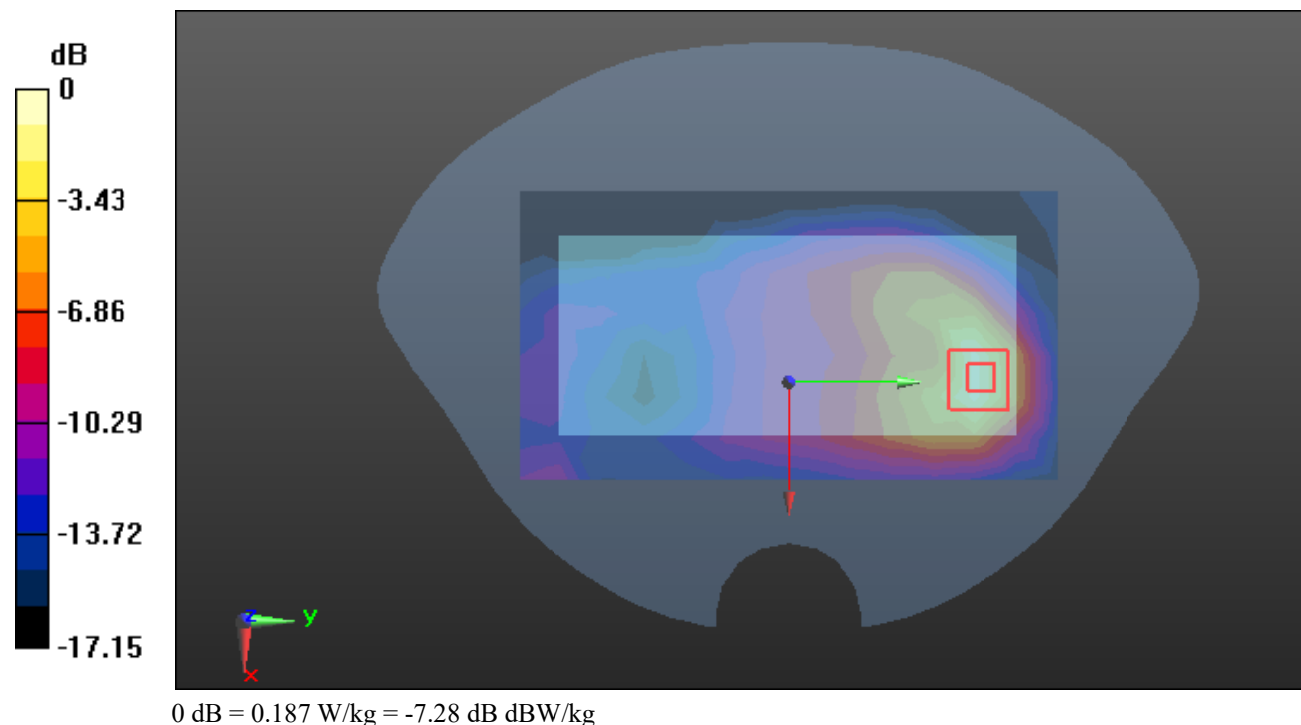

Test Plot118#: LTE Band 25_Body Left_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f=1882.5$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.589$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1882.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0255 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.302 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0420 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.0265 W/kg

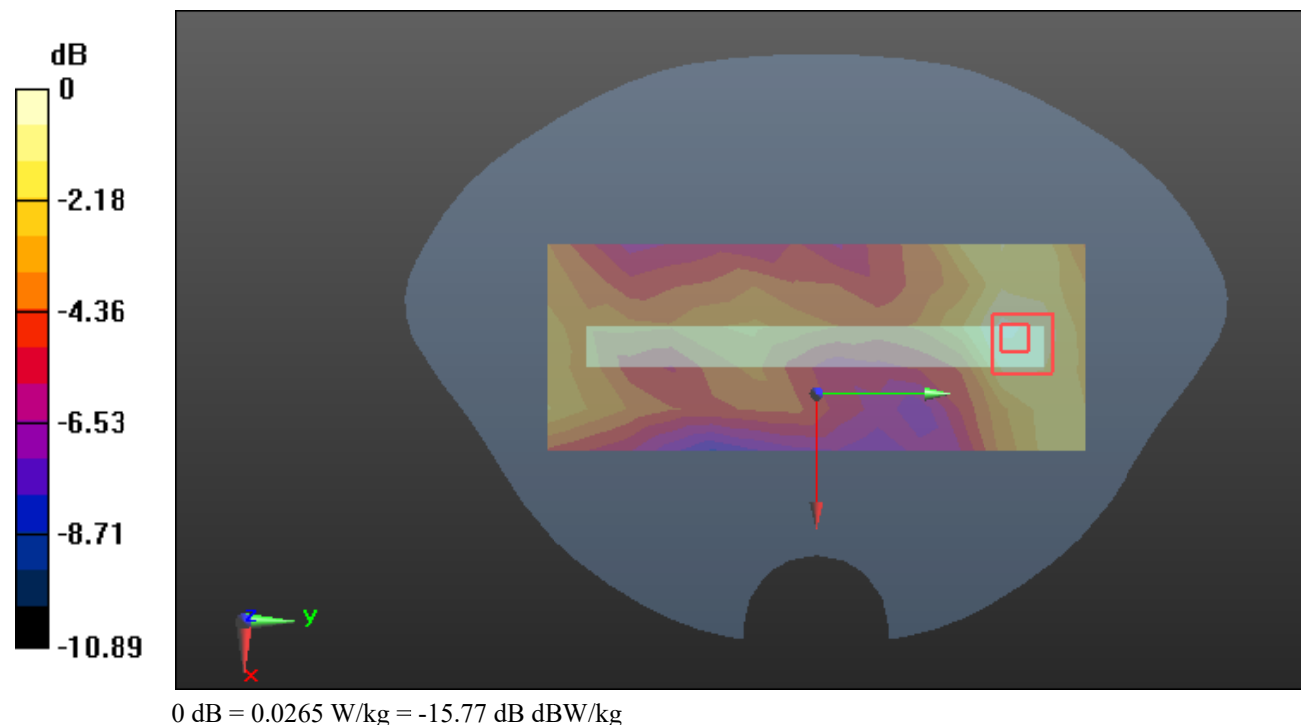

Test Plot119#: LTE Band 25_Body Left_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f=1882.5$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.589$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1882.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0200 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.359 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0410 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0263 W/kg

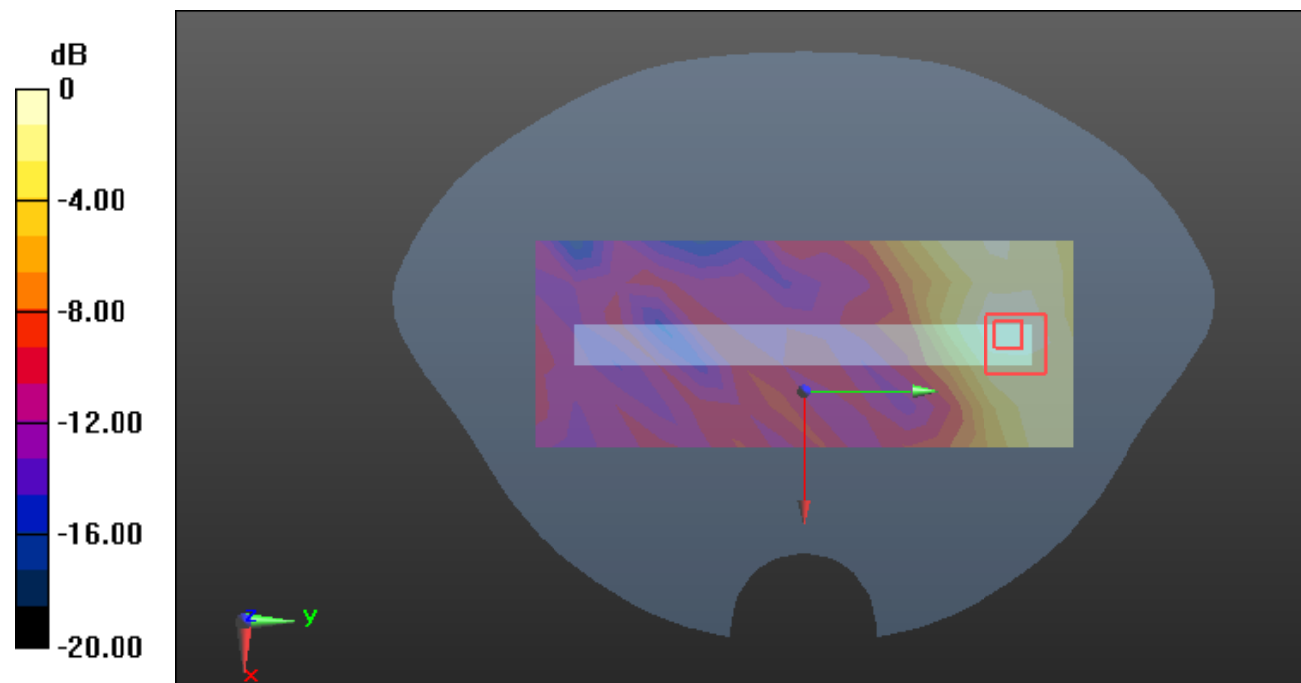

0 dB = 0.0263 W/kg = -15.80 dB dBW/kg

Test Plot120#: LTE Band 25_Body Top_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f=1882.5$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.589$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1882.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.208 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.281 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.384 W/kg

SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 0.235 W/kg

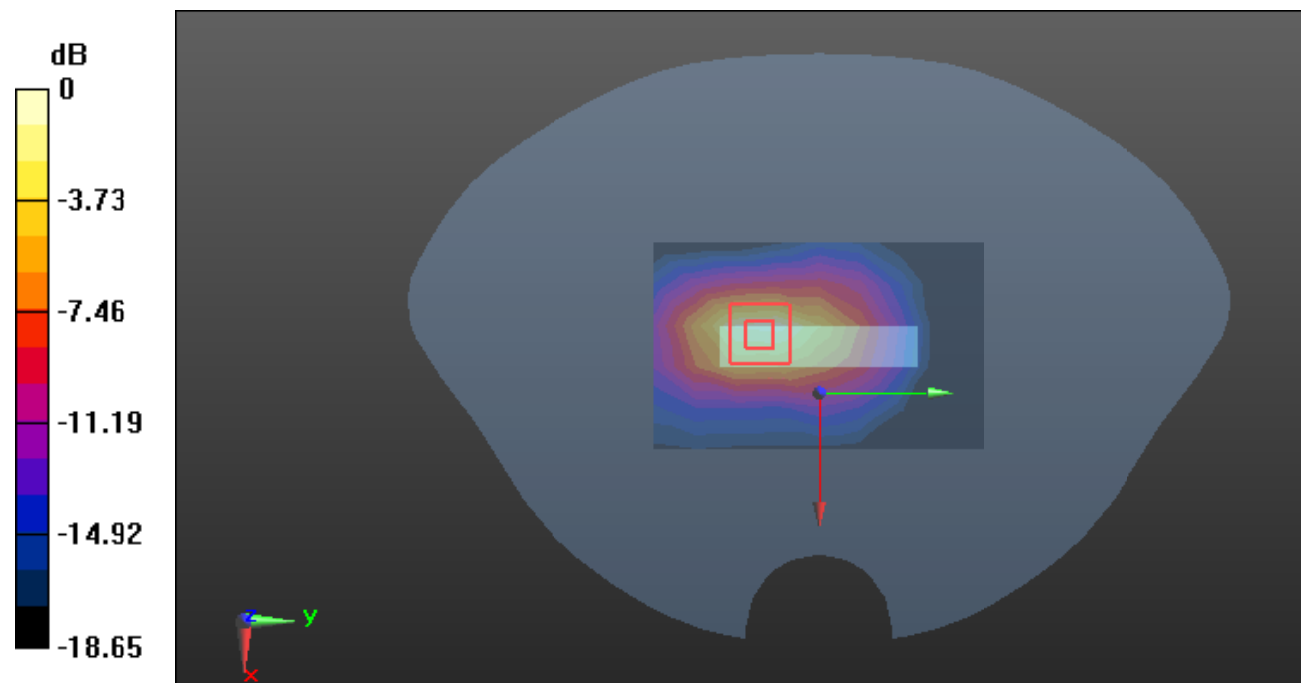

0 dB = 0.235 W/kg = -6.29 dB dBW/kg

Test Plot121#: LTE Band 25_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f=1882.5$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.589$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1882.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.167 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.304 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.312 W/kg

SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.190 W/kg

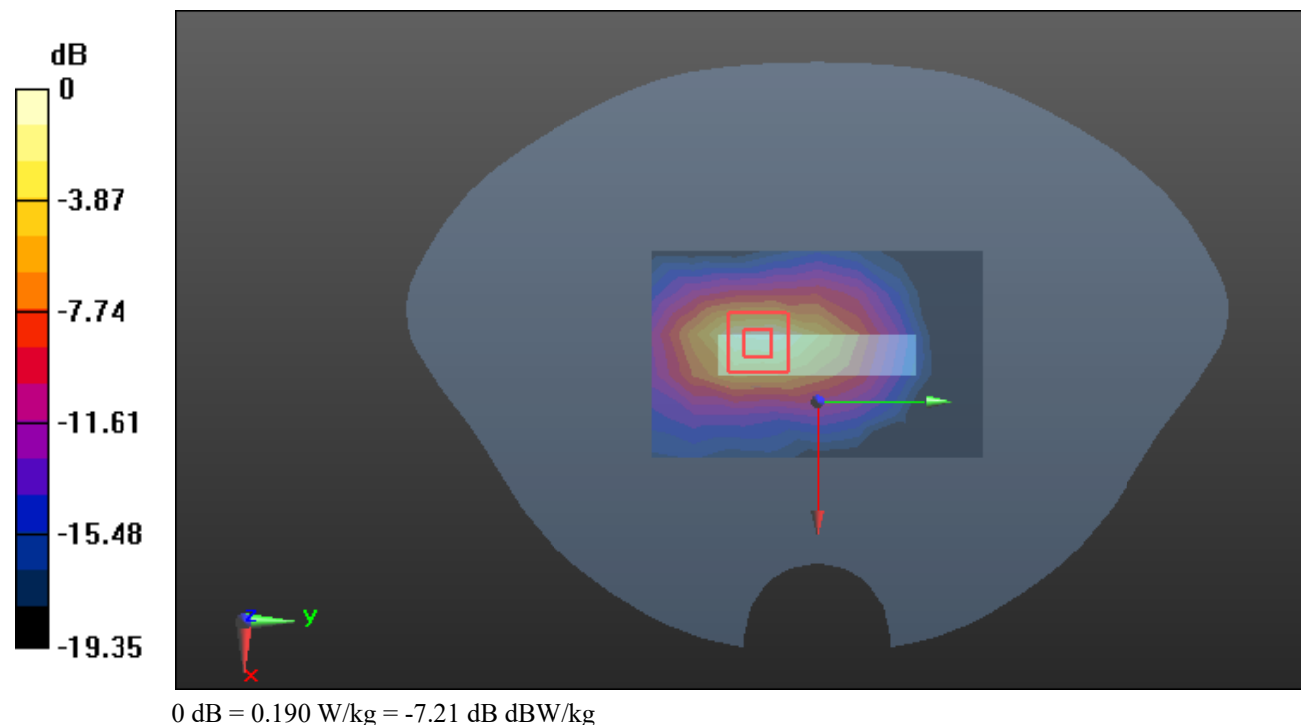

Test Plot122#: LTE Band 26_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma=0.943$ S/m; $\epsilon_r=41.258$; $\rho=1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @831.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.682 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.77 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.988 W/kg

SAR(1 g) = 0.659 W/kg; SAR(10 g) = 0.459 W/kg

Maximum value of SAR (measured) = 0.691 W/kg

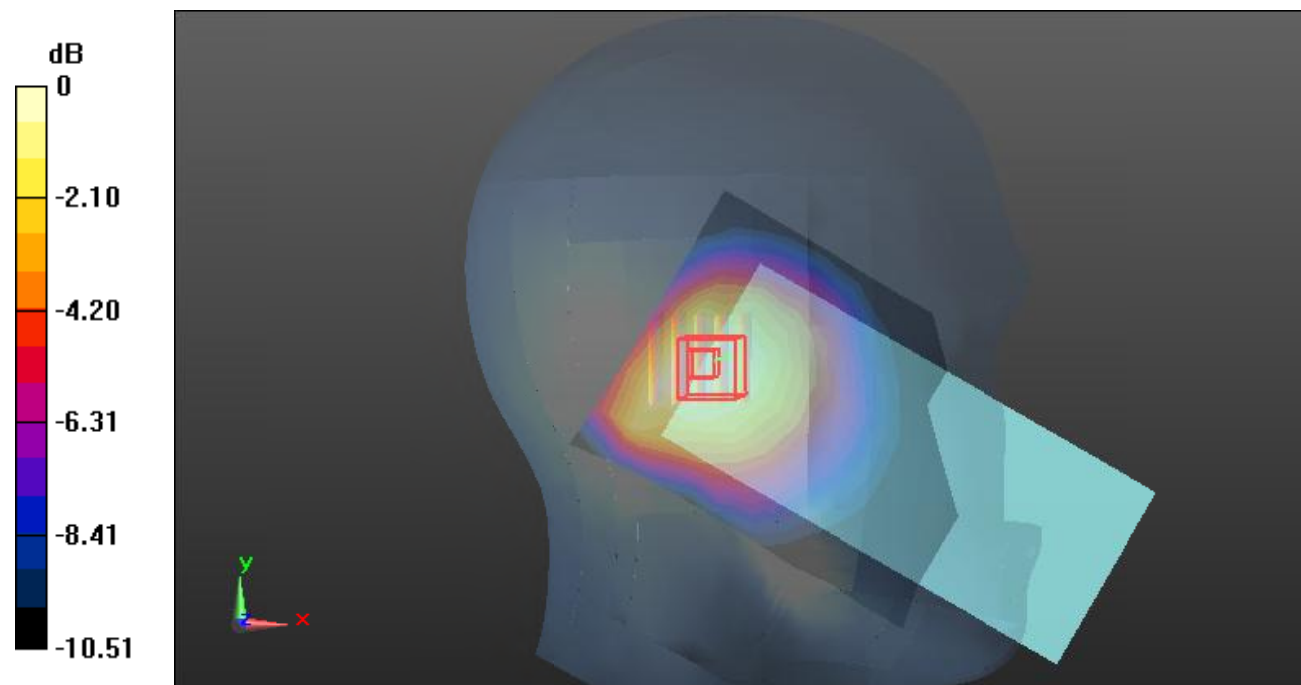

0 dB = 0.691 W/kg = -1.61 dB dBW/kg

Test Plot123#: LTE Band 26_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma=0.943$ S/m; $\epsilon_r=41.258$; $\rho=1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @831.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.574 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.41 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.827 W/kg

SAR(1 g) = 0.551 W/kg; SAR(10 g) = 0.385 W/kg

Maximum value of SAR (measured) = 0.578 W/kg

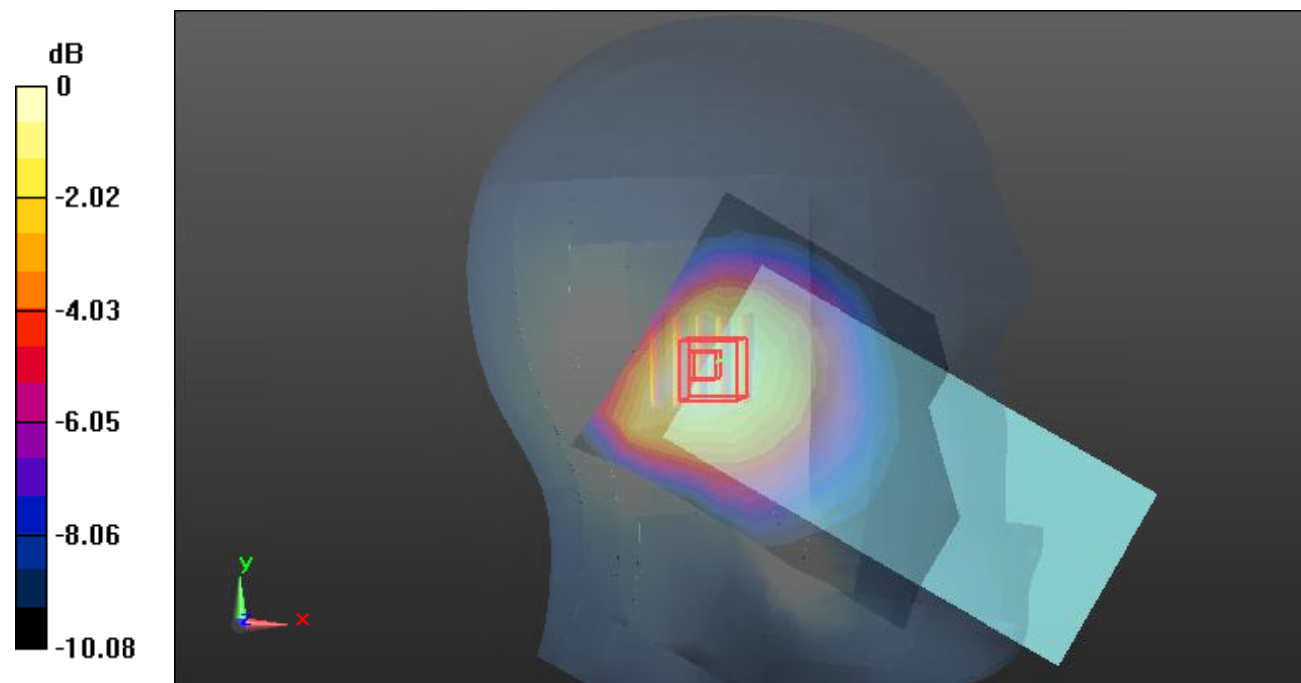

0 dB = 0.578 W/kg = -2.38 dB dBW/kg

Test Plot124#: LTE Band 26_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma=0.943$ S/m; $\epsilon_r=41.258$; $\rho=1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @831.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.552 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.70 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.883 W/kg

SAR(1 g) = 0.529 W/kg; SAR(10 g) = 0.338 W/kg

Maximum value of SAR (measured) = 0.563 W/kg

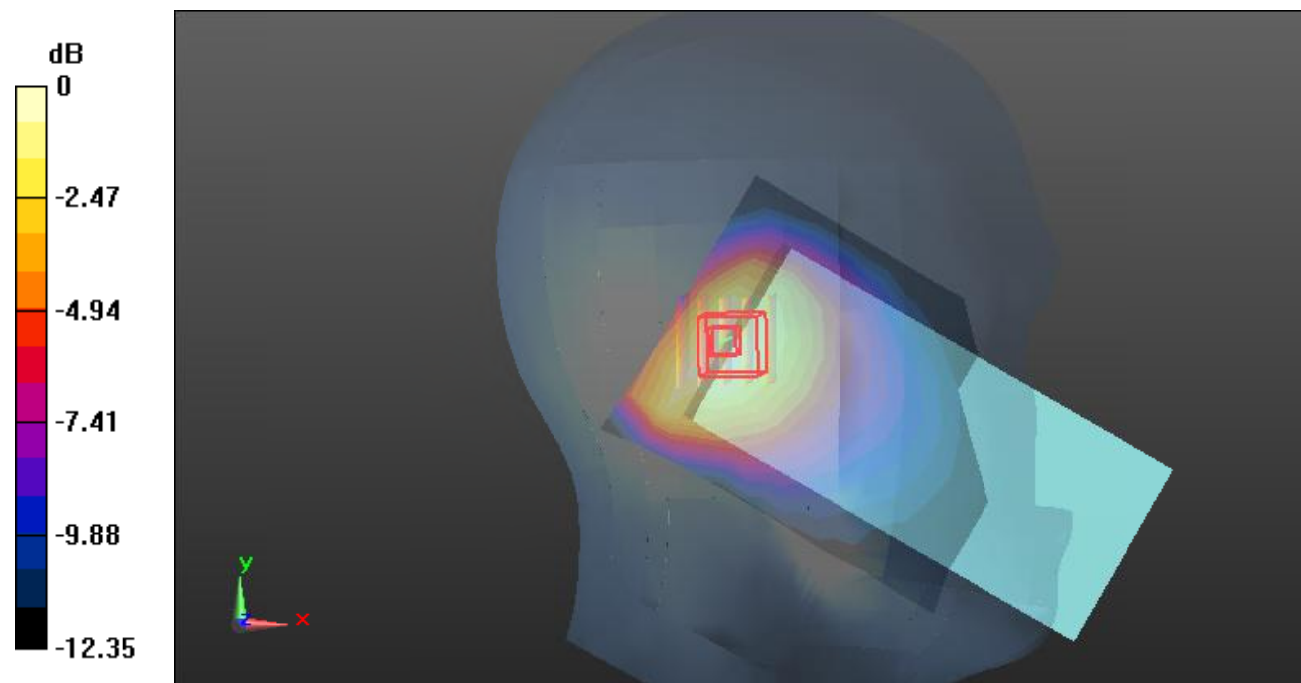

0 dB = 0.563 W/kg = -2.49 dB dBW/kg

Test Plot125#: LTE Band 26_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma=0.943$ S/m; $\epsilon_r=41.258$; $\rho=1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @831.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.453 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.52 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.740 W/kg

SAR(1 g) = 0.441 W/kg; SAR(10 g) = 0.281 W/kg

Maximum value of SAR (measured) = 0.471 W/kg

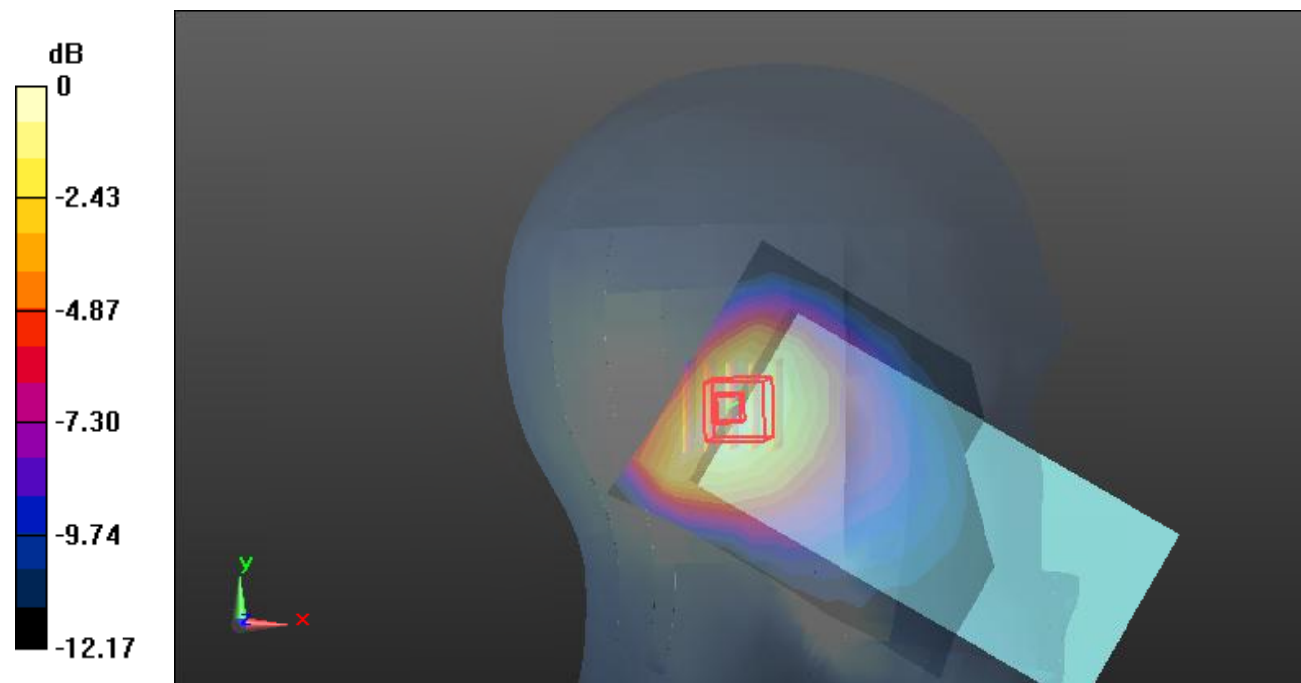

0 dB = 0.471 W/kg = -3.27 dB dBW/kg

Test Plot126#: LTE Band 26_Head Right Cheek_1RB_Low**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 821.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=821.5$ MHz; $\sigma=0.939$ S/m; $\epsilon_r=41.333$; $\rho=1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @821.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.733 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.93 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.753 W/kg; SAR(10 g) = 0.476 W/kg

Maximum value of SAR (measured) = 0.786 W/kg

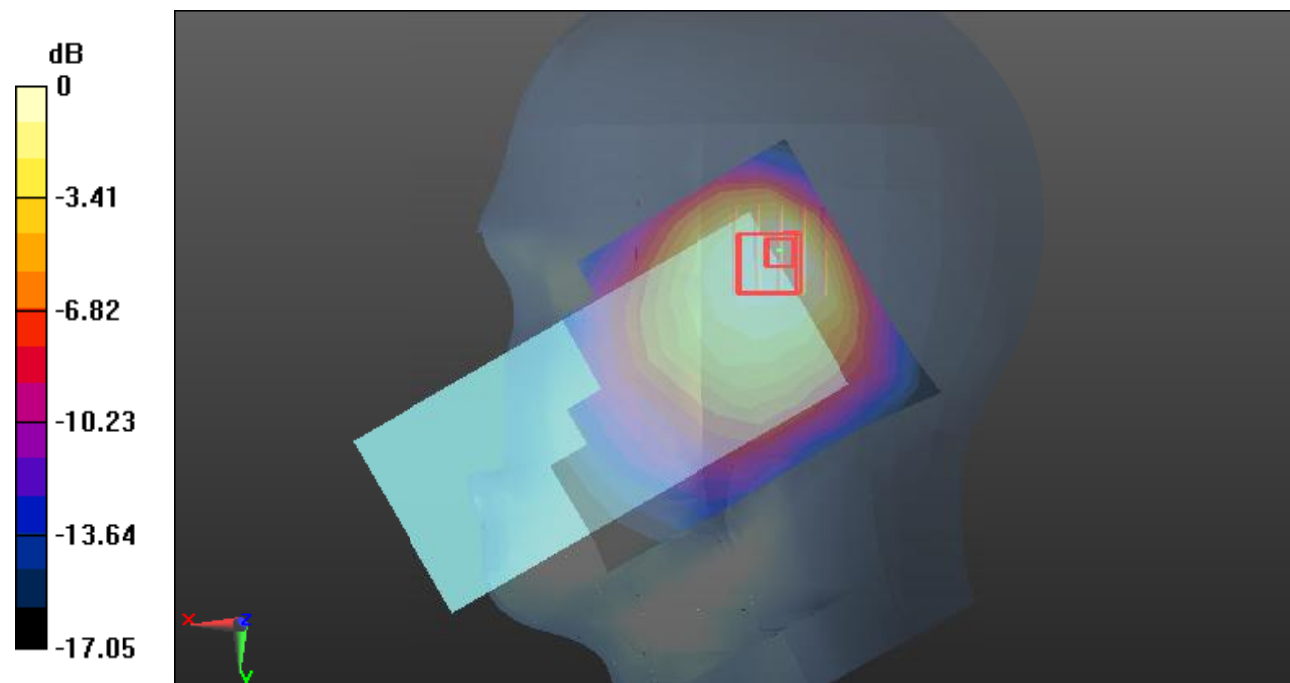

0 dB = 0.786 W/kg = -1.05 dB dBW/kg

Test Plot127#: LTE Band 26_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma=0.943$ S/m; $\epsilon_r=41.258$; $\rho=1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @831.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.817 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.22 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.822 W/kg; SAR(10 g) = 0.518 W/kg

Maximum value of SAR (measured) = 0.860 W/kg

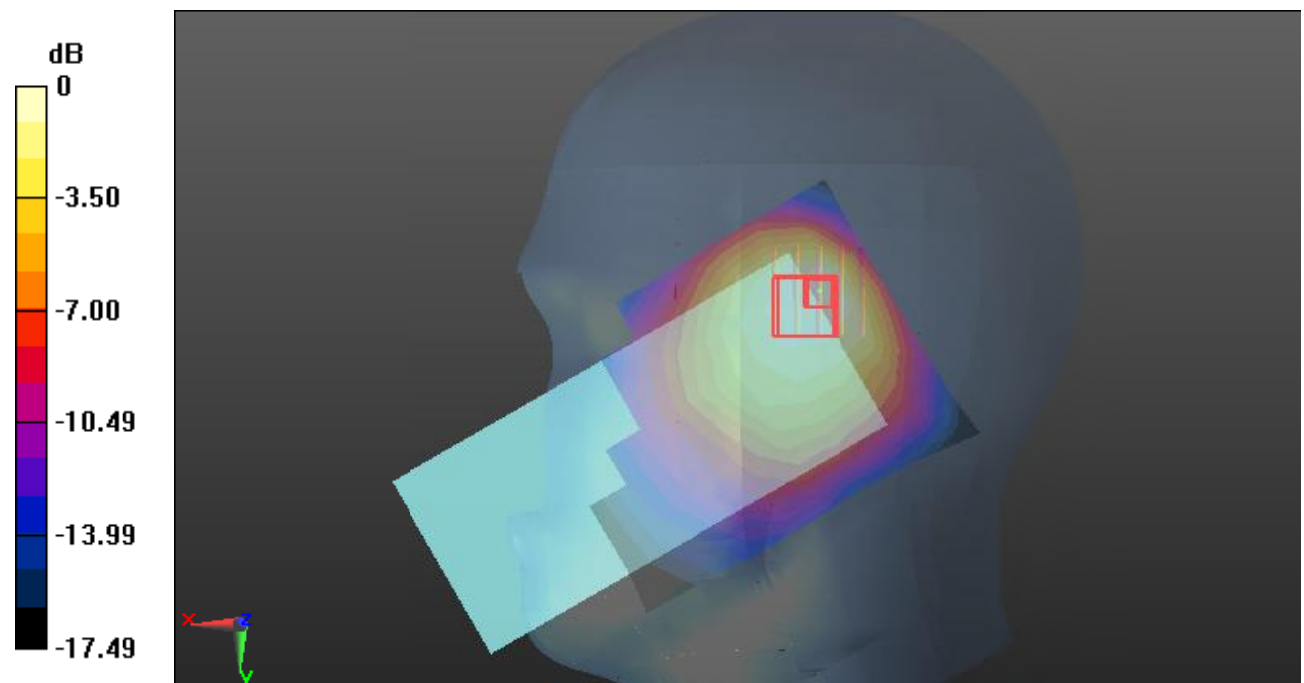

0 dB = 0.860 W/kg = -0.66 dB dBW/kg

Test Plot128#: LTE Band 26_Head Right Cheek_1RB_High**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 841.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=841.5$ MHz; $\sigma = 0.948$ S/m; $\epsilon_r = 41.18$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @841.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.868 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.92 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.880 W/kg; SAR(10 g) = 0.556 W/kg

Maximum value of SAR (measured) = 0.918 W/kg

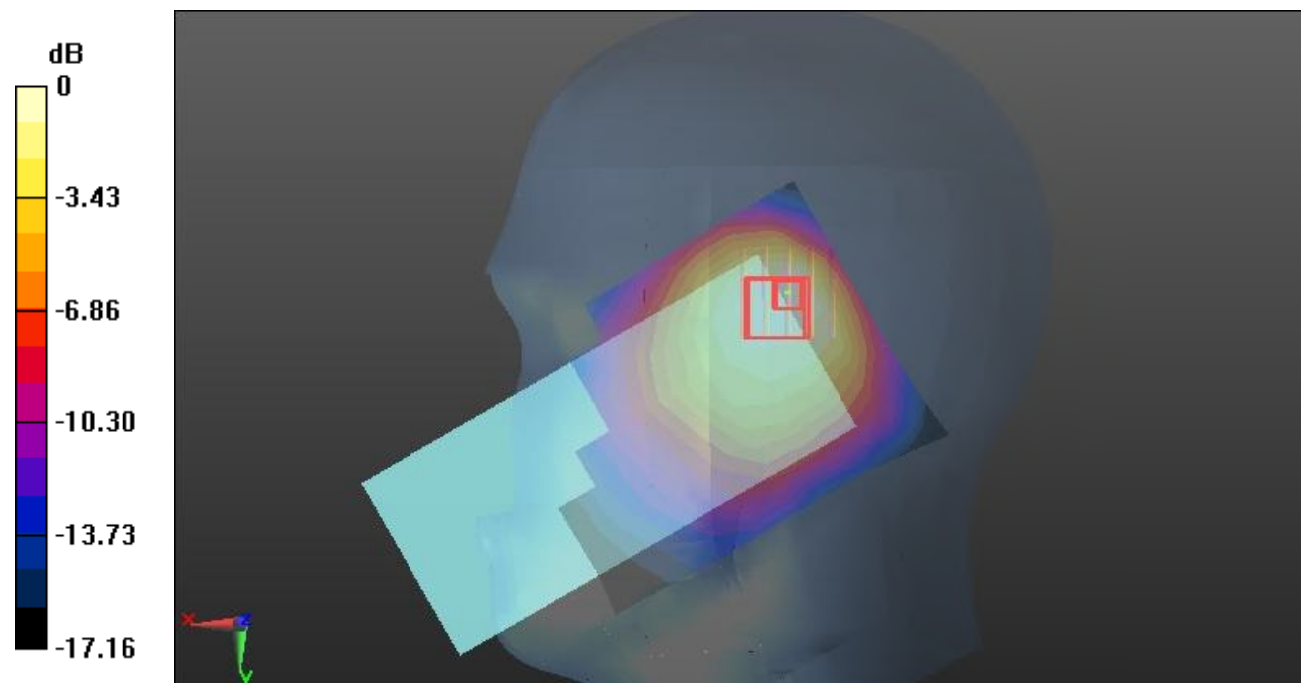

0 dB = 0.918 W/kg = -0.37 dB dBW/kg

Test Plot129#: LTE Band 26_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma=0.943$ S/m; $\epsilon_r=41.258$; $\rho=1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @831.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.688 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.60 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.671 W/kg; SAR(10 g) = 0.423 W/kg

Maximum value of SAR (measured) = 0.699 W/kg

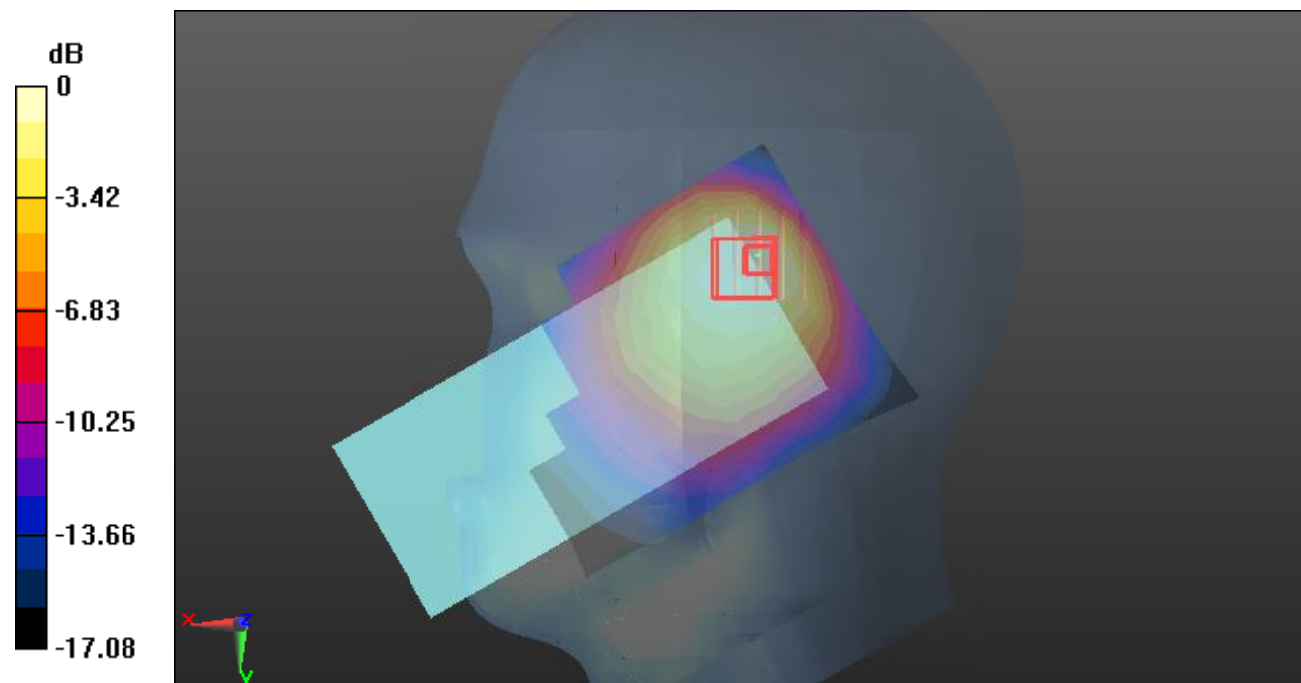

0 dB = 0.699 W/kg = -1.56 dB dBW/kg

Test Plot130#: LTE Band 26_Head Right Cheek_100%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma=0.943$ S/m; $\epsilon_r=41.258$; $\rho=1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @831.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.676 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.69 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.693 W/kg; SAR(10 g) = 0.436 W/kg

Maximum value of SAR (measured) = 0.724 W/kg

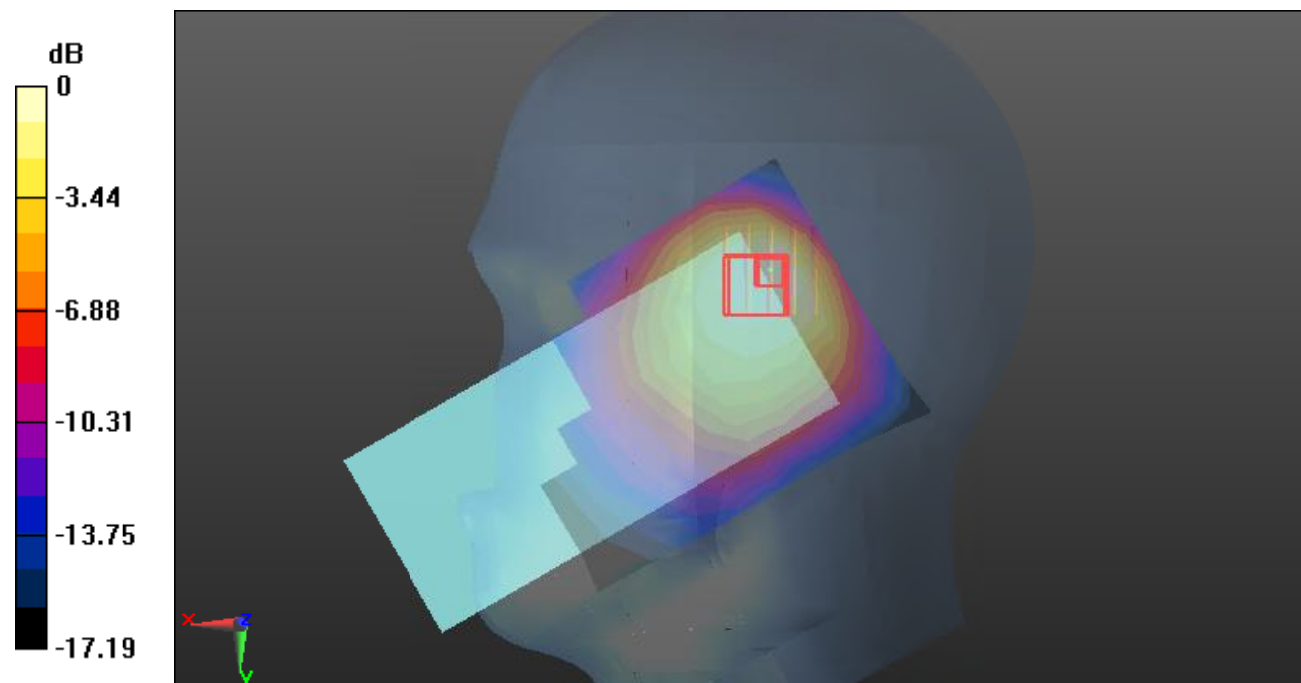

0 dB = 0.724 W/kg = -1.40 dB dBW/kg

Test Plot131#: LTE Band 26_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma=0.943$ S/m; $\epsilon_r=41.258$; $\rho=1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @831.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.444 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.52 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.908 W/kg

SAR(1 g) = 0.452 W/kg; SAR(10 g) = 0.270 W/kg

Maximum value of SAR (measured) = 0.474 W/kg

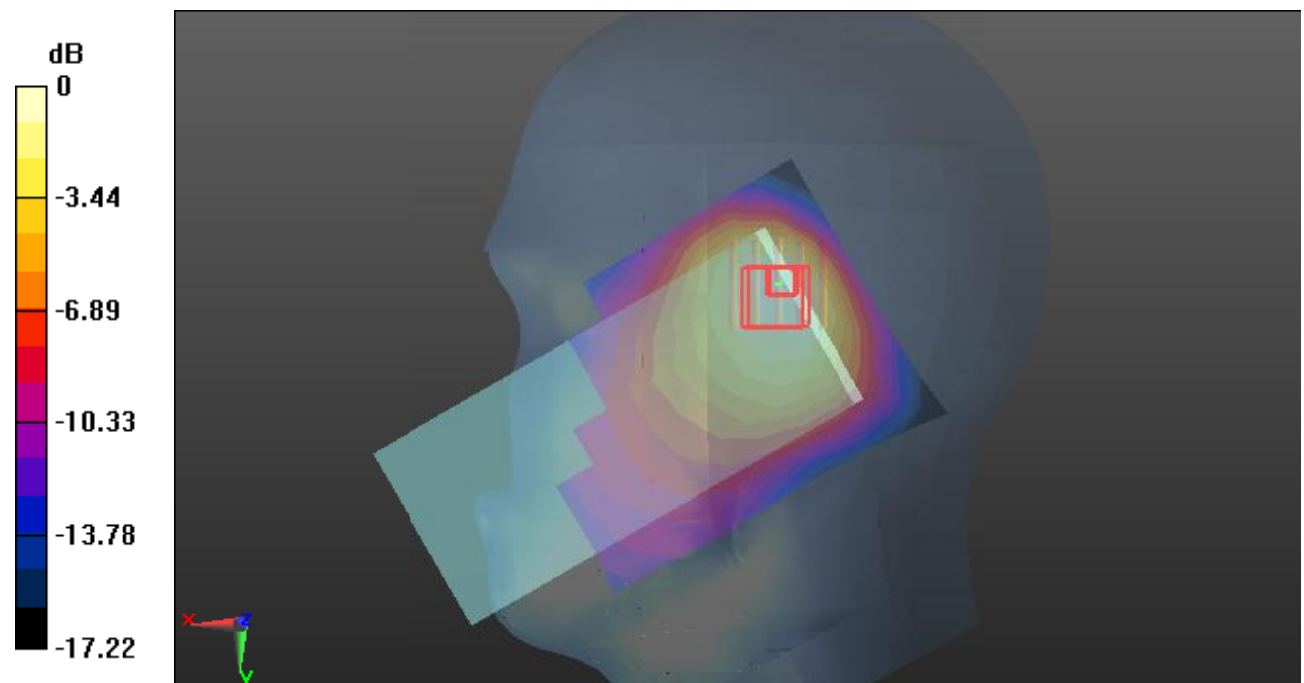

0 dB = 0.474 W/kg = -3.24 dB dBW/kg

Test Plot132#: LTE Band 26_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma=0.943$ S/m; $\epsilon_r=41.258$; $\rho=1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @831.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.426 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.08 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.476 W/kg; SAR(10 g) = 0.272 W/kg

Maximum value of SAR (measured) = 0.501 W/kg

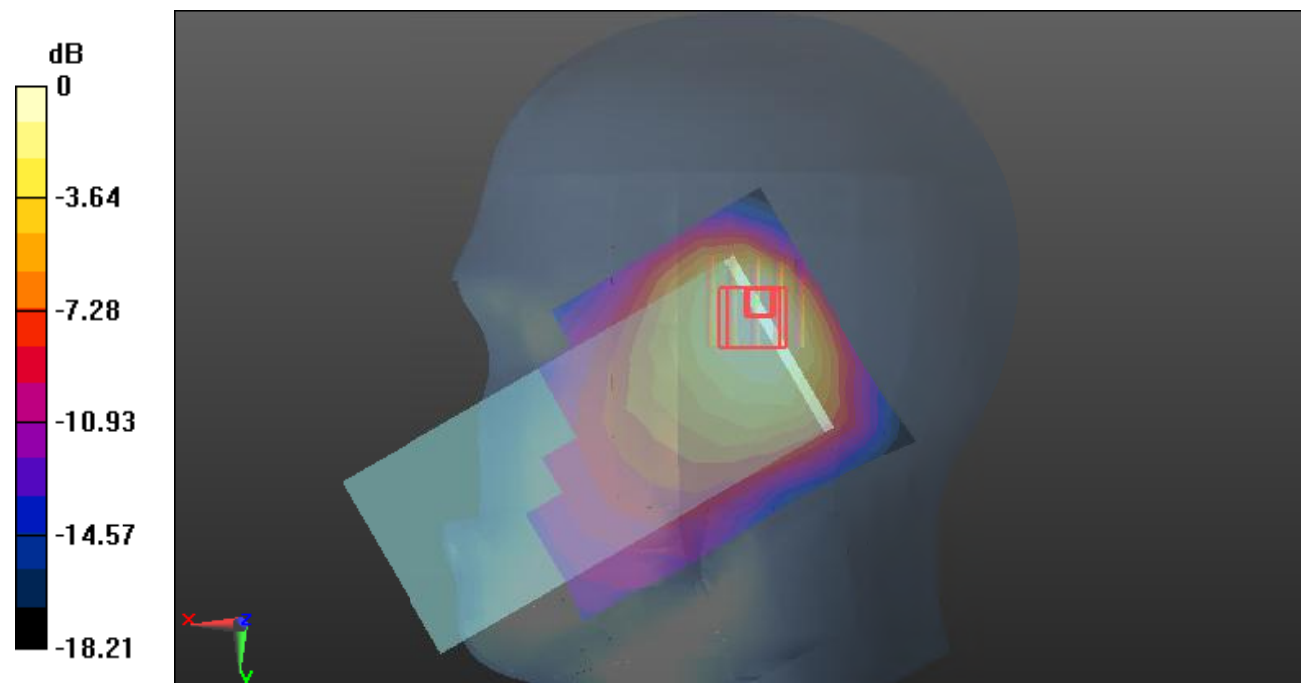

0 dB = 0.501 W/kg = -3.00 dB dBW/kg

Test Plot133#: LTE Band 26_Body Front_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.258$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @831.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.102 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.77 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.104 W/kg

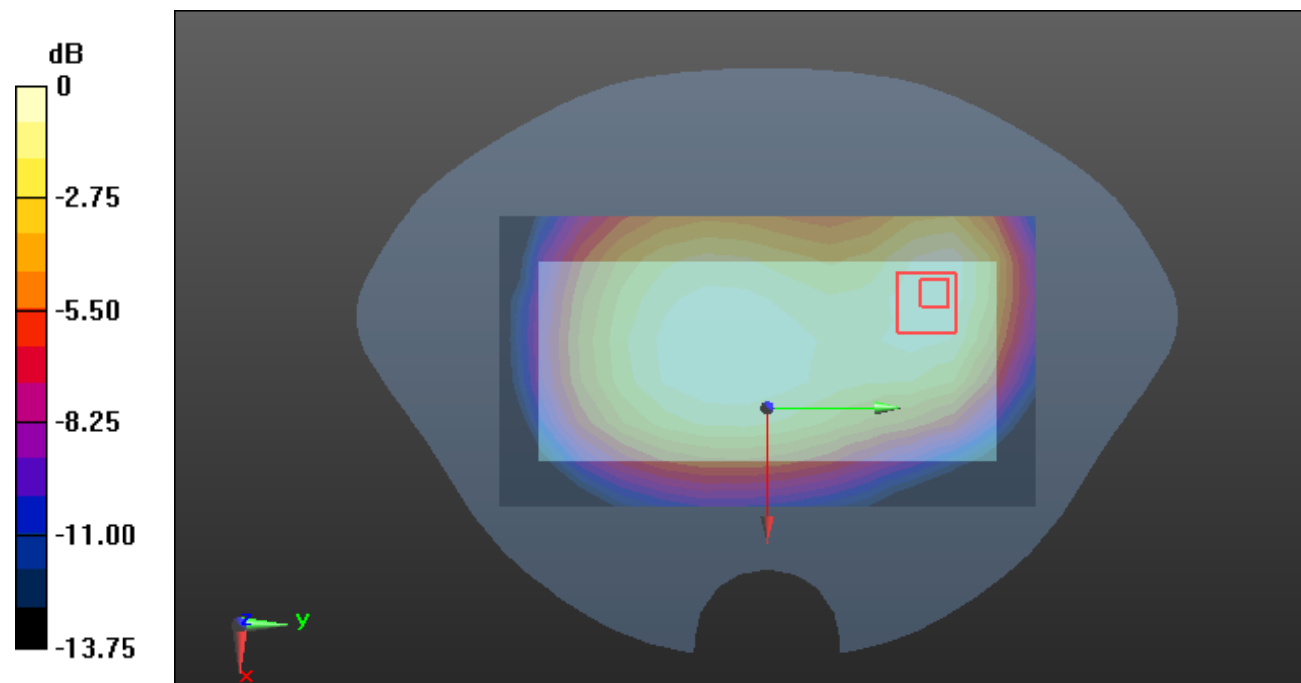

0 dB = 0.104 W/kg = -9.83 dB dBW/kg

Test Plot134#: LTE Band 26_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma=0.943$ S/m; $\epsilon_r=41.258$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @831.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0833 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.653 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.0862 W/kg

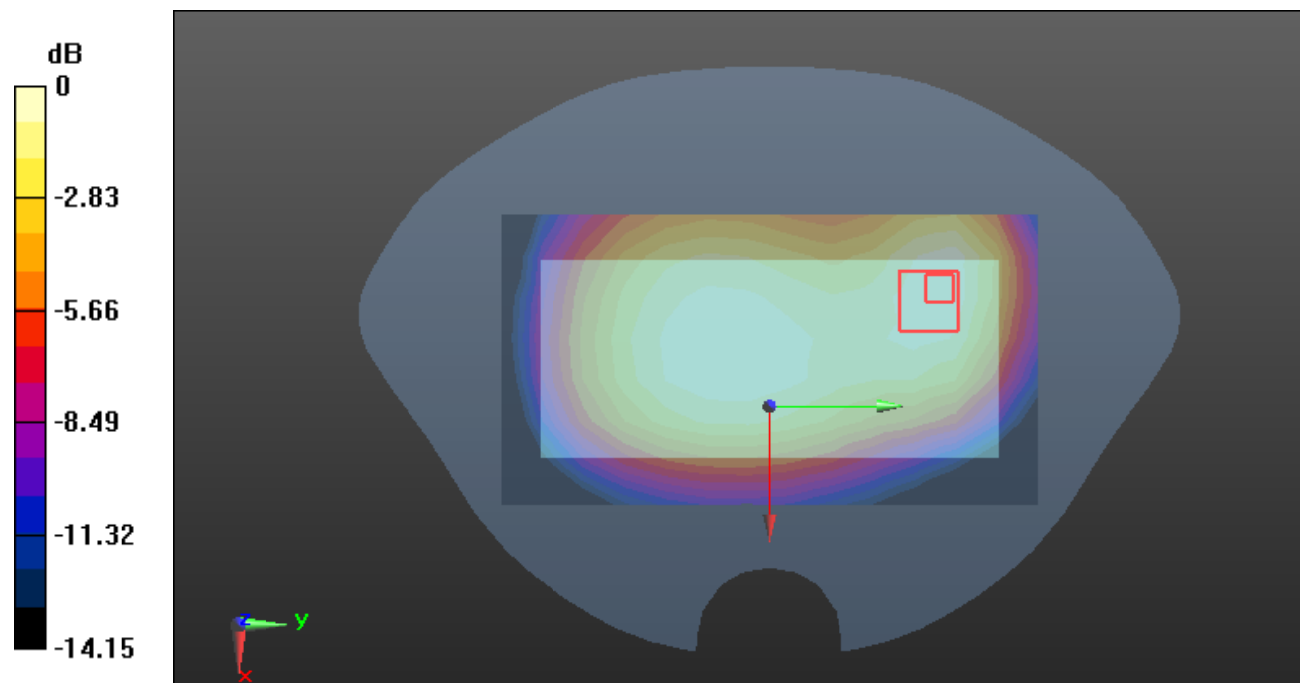

Test Plot135#: LTE Band 26_Body Back_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.258$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @831.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.146 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.90 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.231 W/kg

SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.153 W/kg

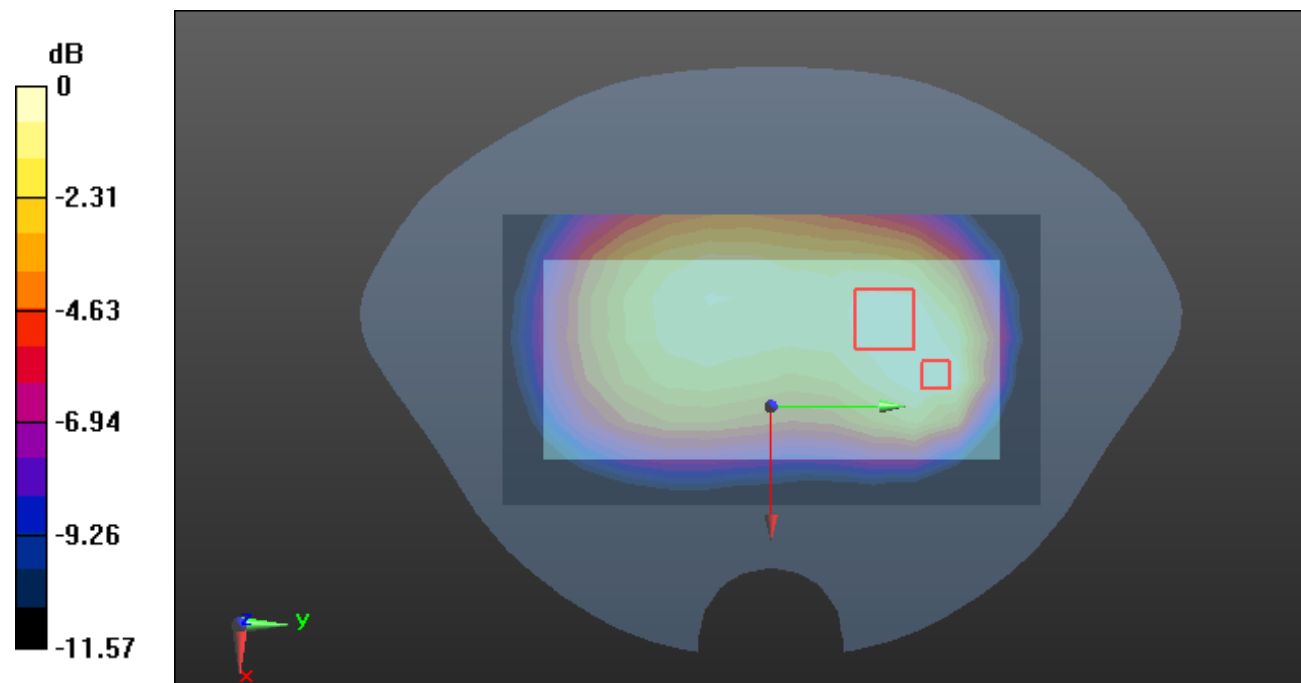

0 dB = 0.153 W/kg = -8.15 dB dBW/kg

Test Plot136#: LTE Band 26_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma=0.943$ S/m; $\epsilon_r=41.258$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @831.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.120 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.817 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.192 W/kg

SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.126 W/kg

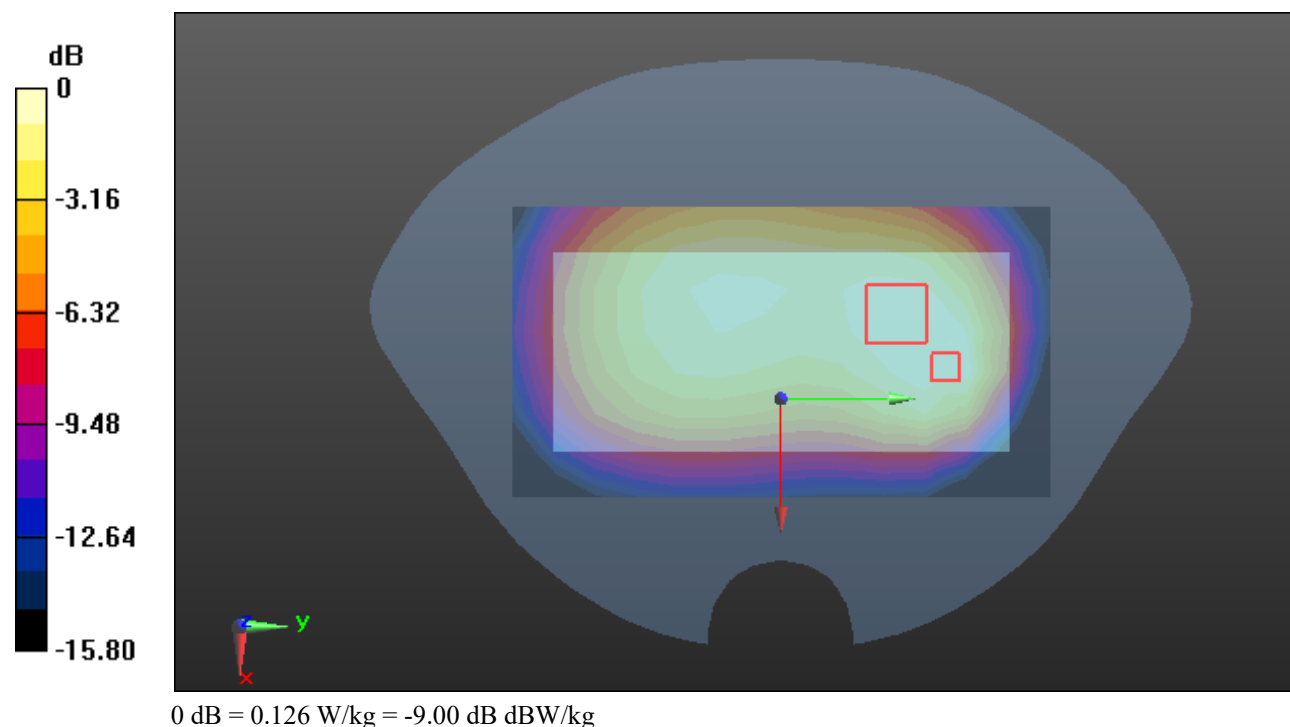

Test Plot137#: LTE Band 26_Body Left_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma=0.943$ S/m; $\epsilon_r=41.258$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @831.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0953 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.51 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.126 W/kg

SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.0963 W/kg

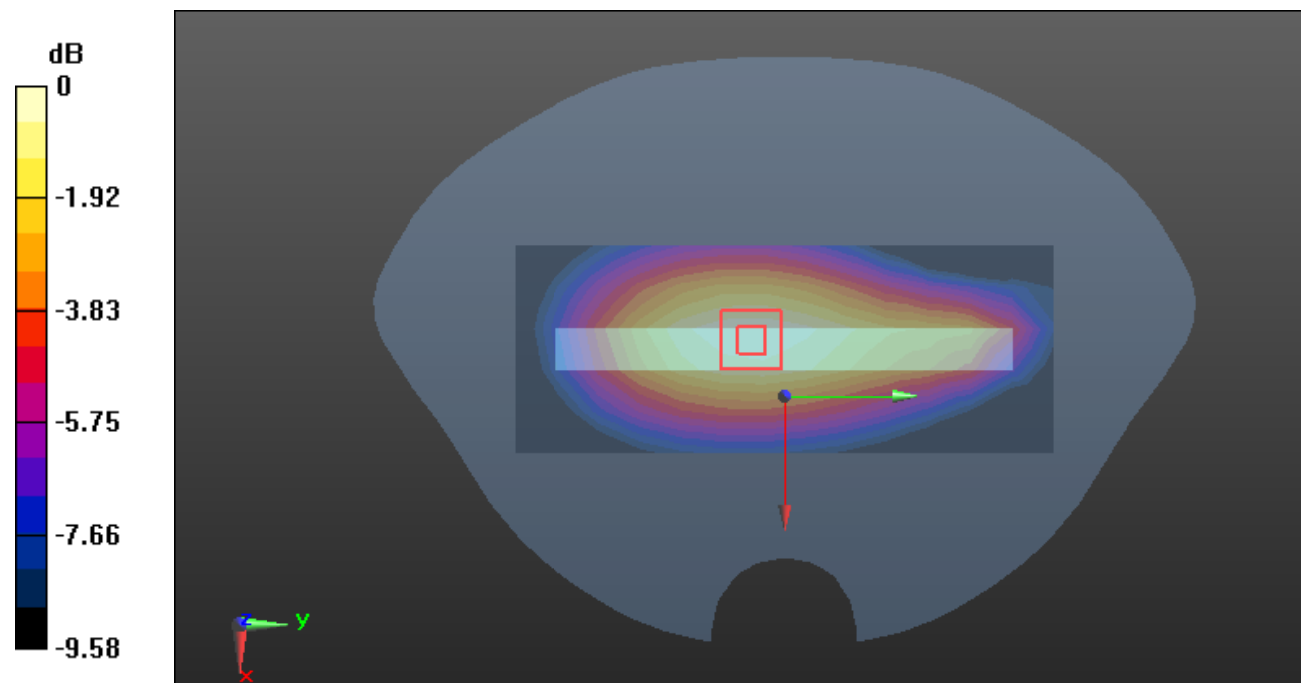

Test Plot138#: LTE Band 26_Body Left_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.258$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @831.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0920 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.42 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.117 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.0883 W/kg

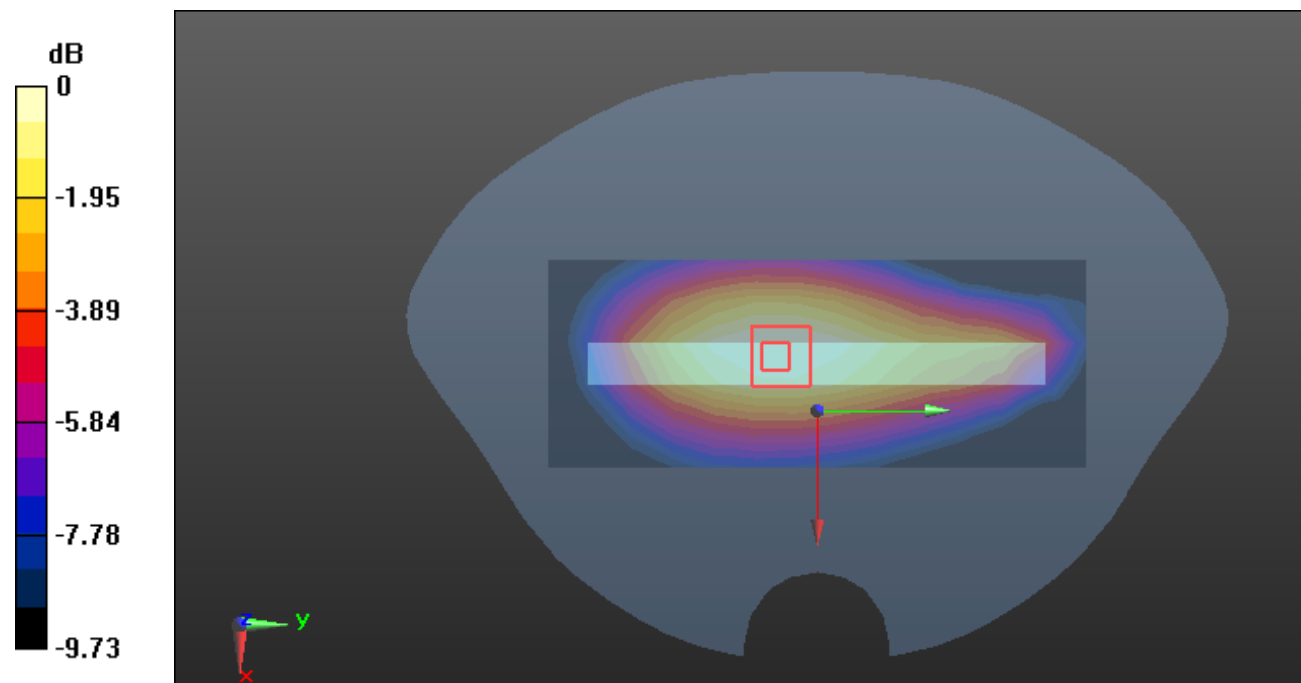

Test Plot139#: LTE Band 26_Body Top_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma=0.943$ S/m; $\epsilon_r=41.258$; $\rho=1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @831.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0540 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.900 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0750 W/kg

SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.0547 W/kg

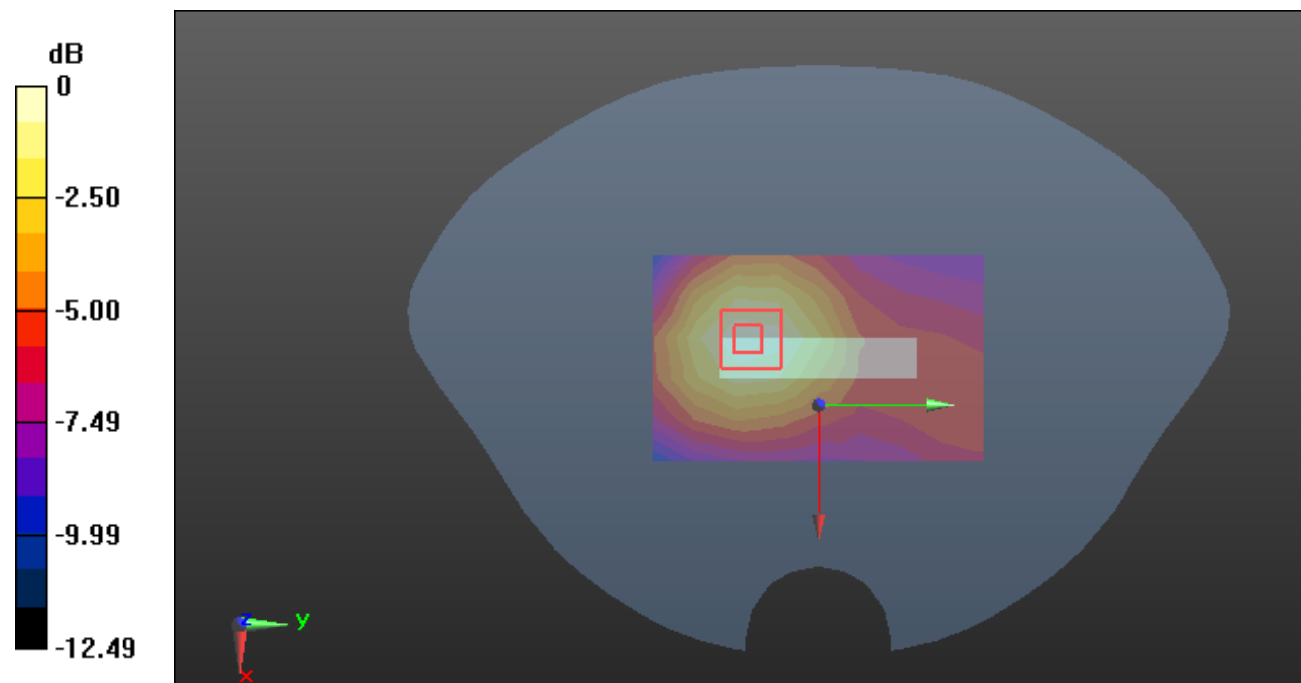

0 dB = 0.0547 W/kg = -12.62 dB dBW/kg

Test Plot140#: LTE Band 26_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma=0.943$ S/m; $\epsilon_r=41.258$; $\rho=1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @831.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0459 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.383 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0650 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.0466 W/kg

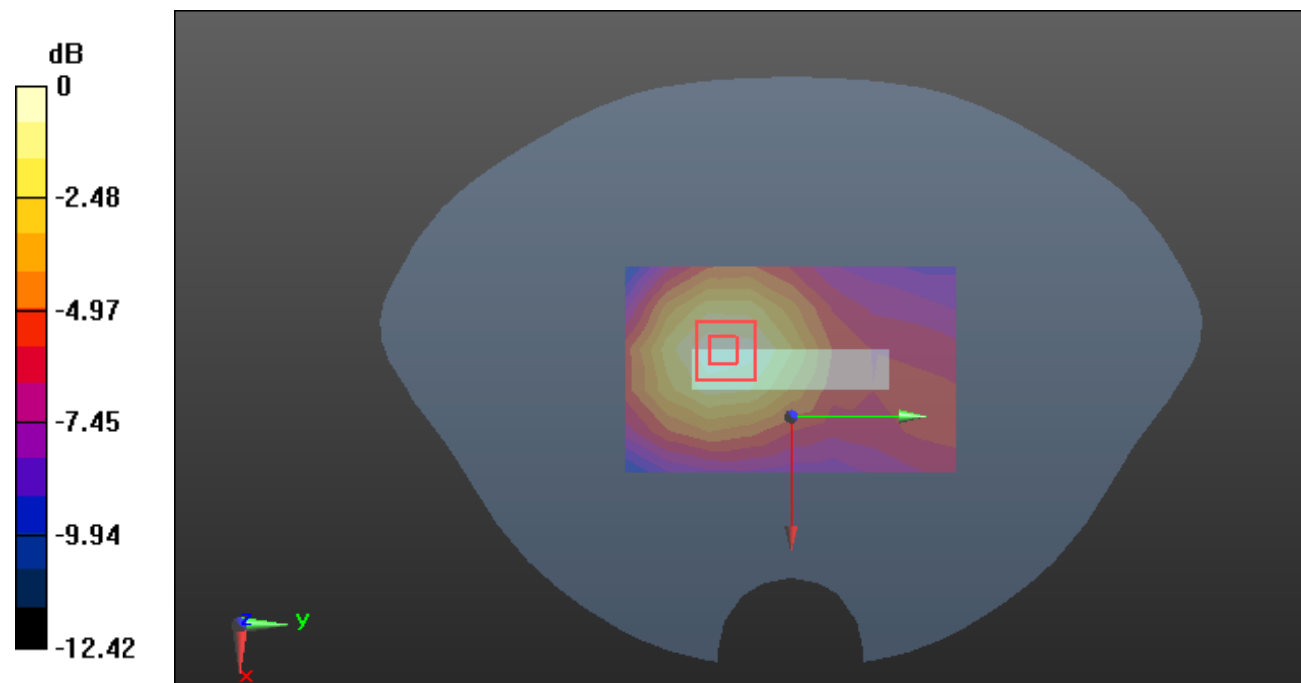

0 dB = 0.0466 W/kg = -13.32 dBW/kg

Test Plot141#: LTE Band 40A_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:3.33

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.664$ S/m; $\epsilon_r = 39.848$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @2310 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.175 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.712 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.384 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.185 W/kg

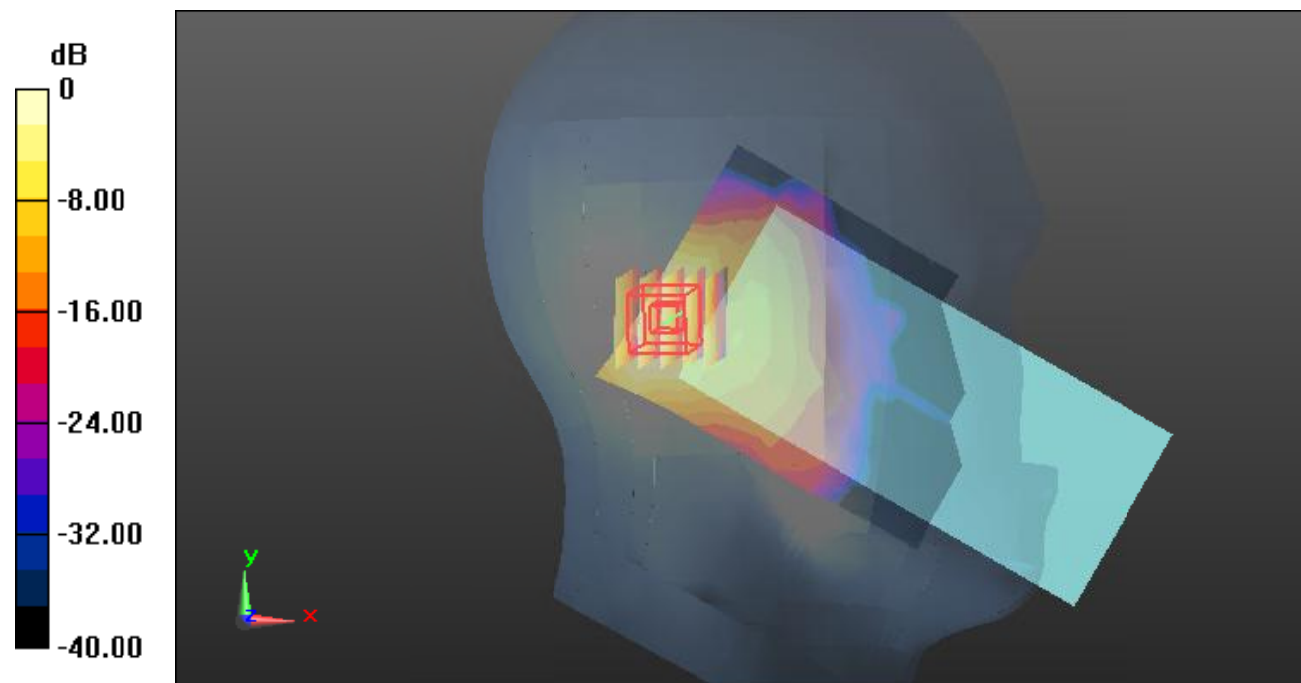

0 dB = 0.185 W/kg = -7.33 dB dBW/kg

Test Plot142#: LTE Band 40A_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:3.33

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.664$ S/m; $\epsilon_r = 39.848$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @2310 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.148 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.358 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.326 W/kg

SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.157 W/kg

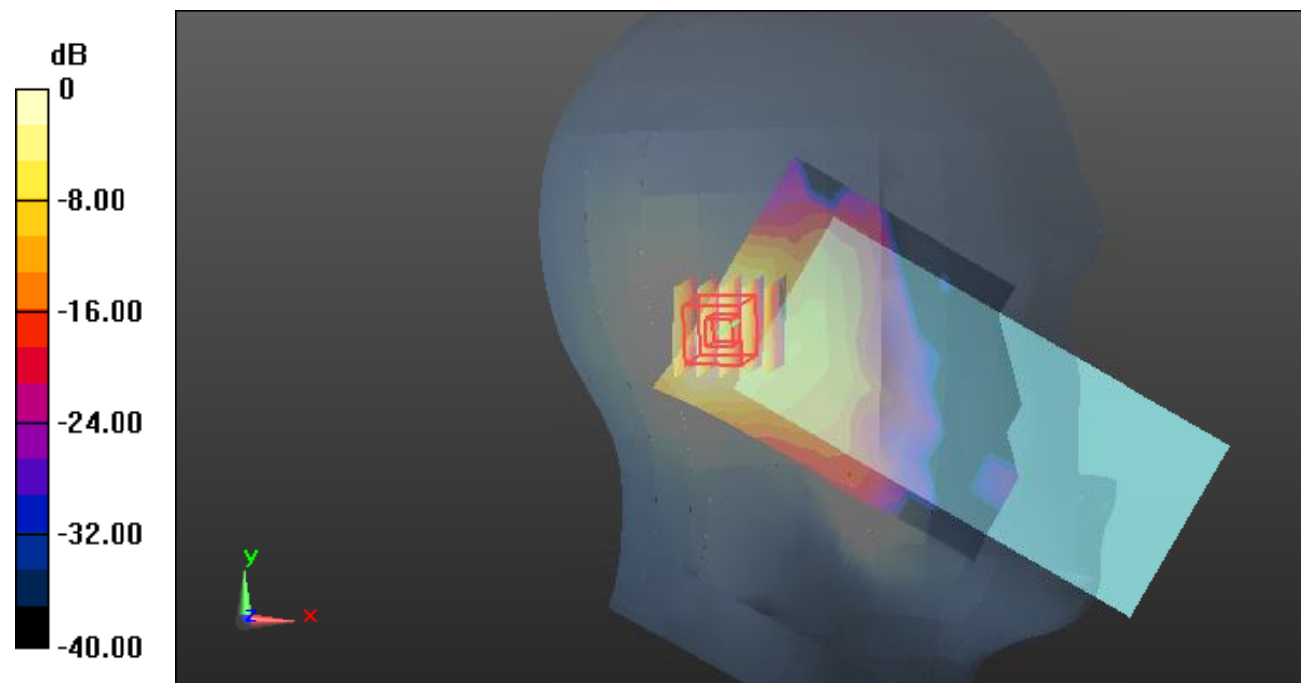

0 dB = 0.157 W/kg = -8.04 dB dBW/kg

Test Plot143#: LTE Band 40A_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz;Duty Cycle: 1:3.33

Medium parameters used: $f=2310$ MHz; $\sigma = 1.664$ S/m; $\epsilon_r = 39.848$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @2310 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.218 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.435 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.509 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.228 W/kg

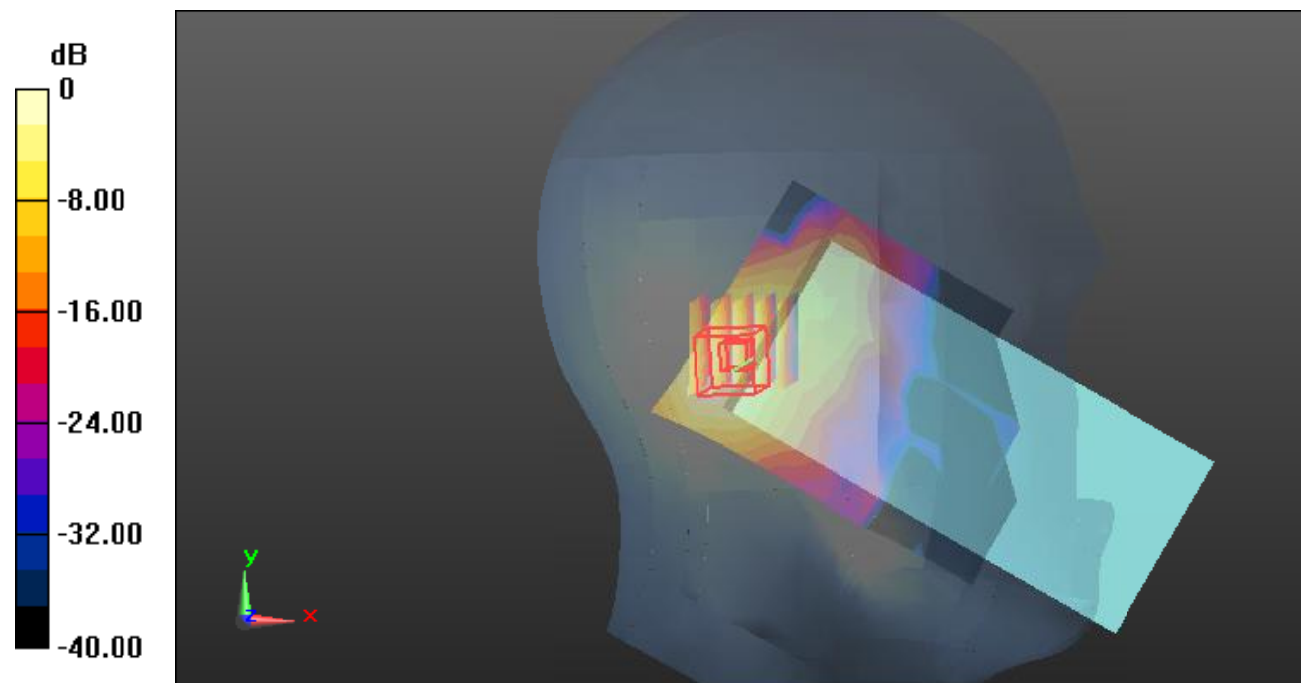

0 dB = 0.228 W/kg = -6.42 dB dBW/kg

Test Plot144#: LTE Band 40A_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz;Duty Cycle: 1:3.33

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.664$ S/m; $\epsilon_r = 39.848$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @2310 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.167 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.327 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.344 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.164 W/kg

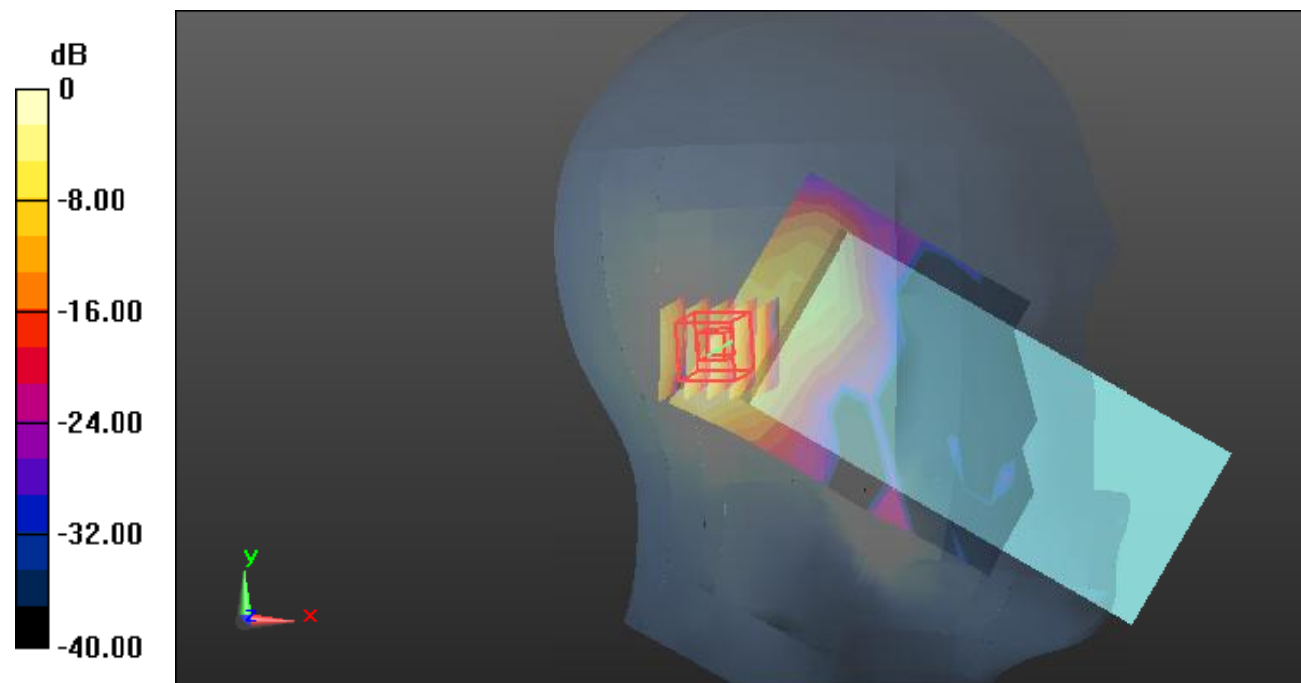

0 dB = 0.164 W/kg = -7.85 dB dBW/kg

Test Plot145#: LTE Band 40A_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz;Duty Cycle: 1:3.33

Medium parameters used: $f=2310$ MHz; $\sigma = 1.664$ S/m; $\epsilon_r = 39.848$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @2310 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.132 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.548 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.371 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.172 W/kg

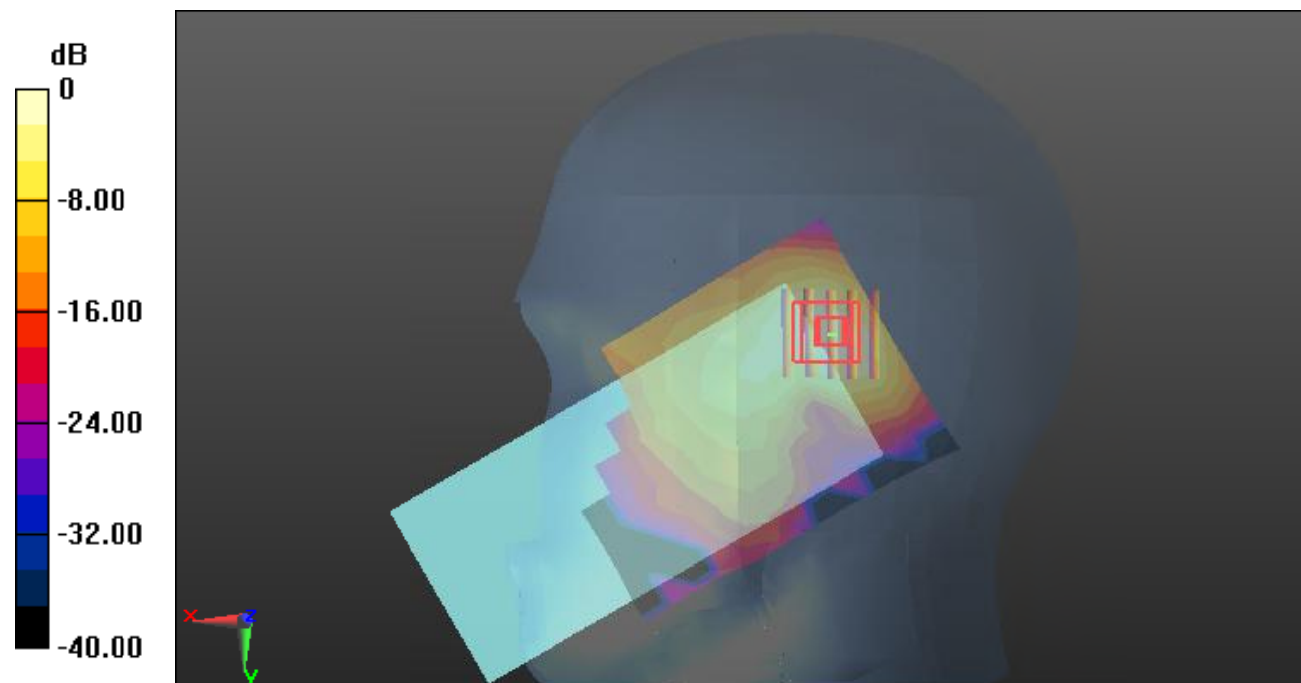

0 dB = 0.172 W/kg = -7.64 dB dBW/kg

Test Plot146#: LTE Band 40A_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:3.33

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.664$ S/m; $\epsilon_r = 39.848$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @2310 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.112 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.944 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.322 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.144 W/kg

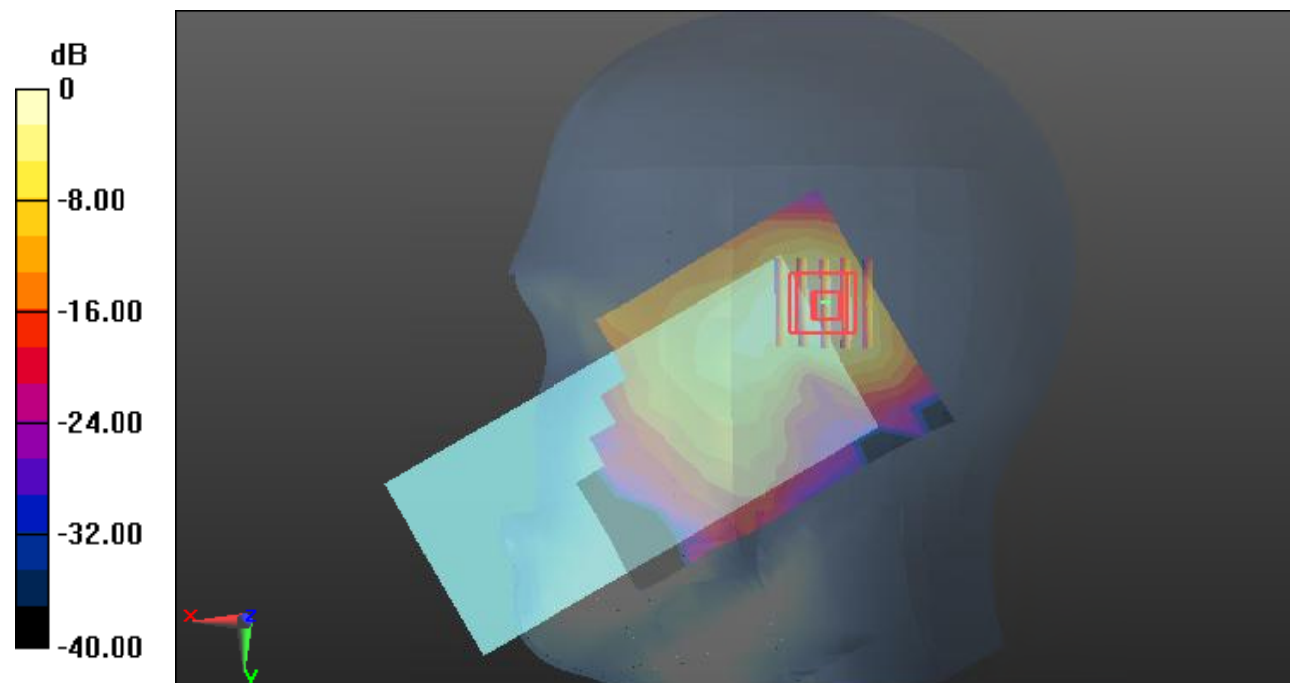

0 dB = 0.144 W/kg = -8.42 dB dBW/kg

Test Plot147#: LTE Band 40A_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:3.33

Medium parameters used: $f=2310$ MHz; $\sigma = 1.664$ S/m; $\epsilon_r = 39.848$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @2310 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.335 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.550 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.867 W/kg

SAR(1 g) = 0.362 W/kg; SAR(10 g) = 0.156 W/kg

Maximum value of SAR (measured) = 0.414 W/kg

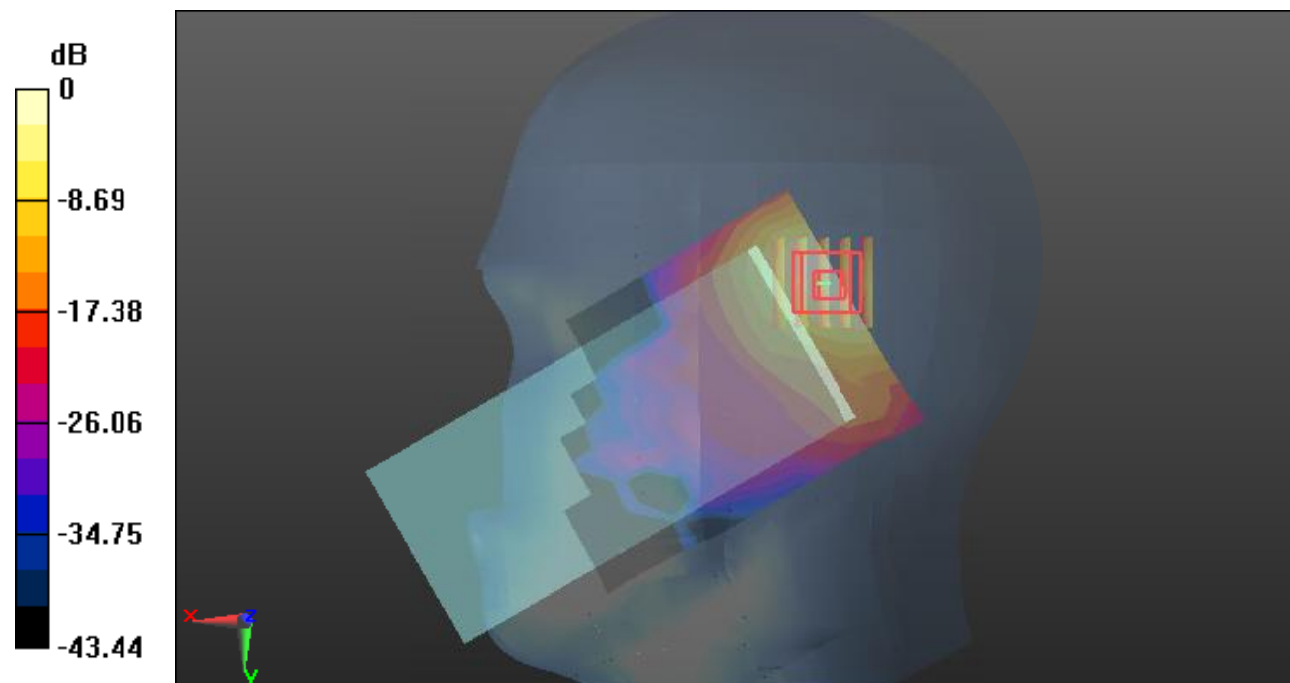

0 dB = 0.414 W/kg = -3.83 dB dBW/kg

Test Plot148#: LTE Band 40A_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:3.33

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.664$ S/m; $\epsilon_r = 39.848$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @2310 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.269 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.152 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.753 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.132 W/kg

Maximum value of SAR (measured) = 0.325 W/kg

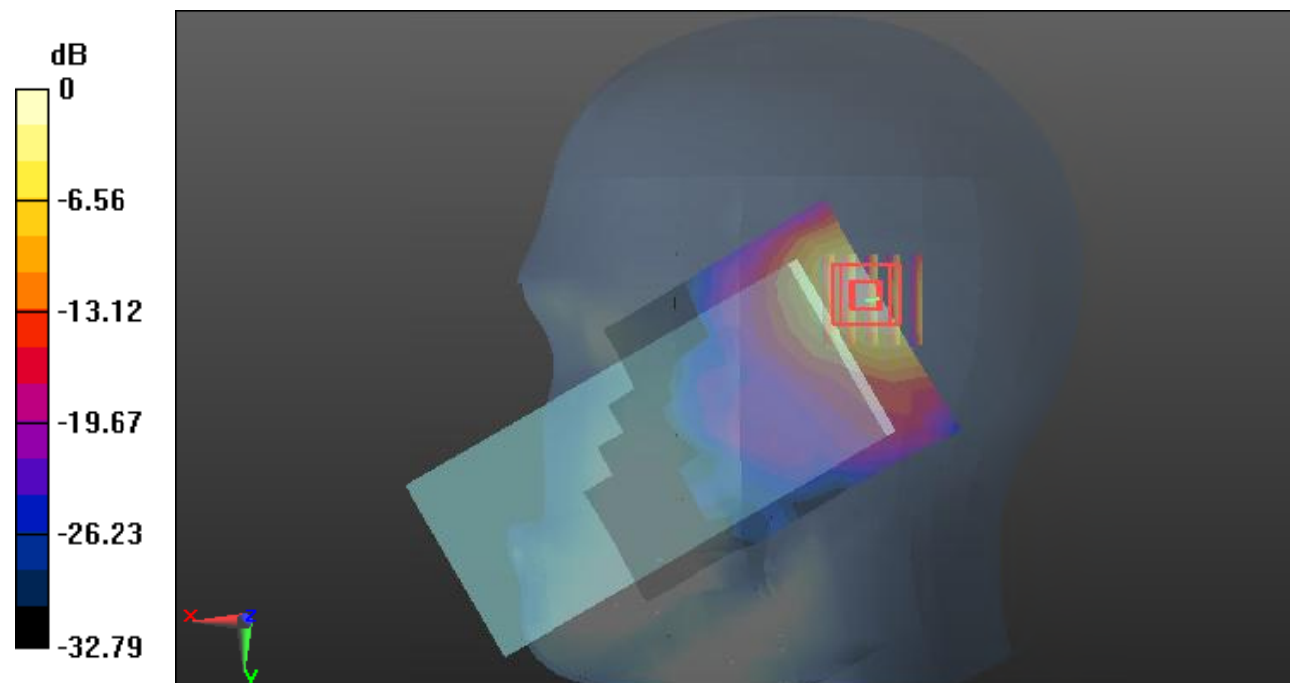

0 dB = 0.325 W/kg = -4.88 dB dBW/kg

Test Plot149#: LTE Band 40A_Body Front_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz;Duty Cycle: 1:3.33

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.664$ S/m; $\epsilon_r = 39.848$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @2310 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0516 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.9000 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.106 W/kg

SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0571 W/kg

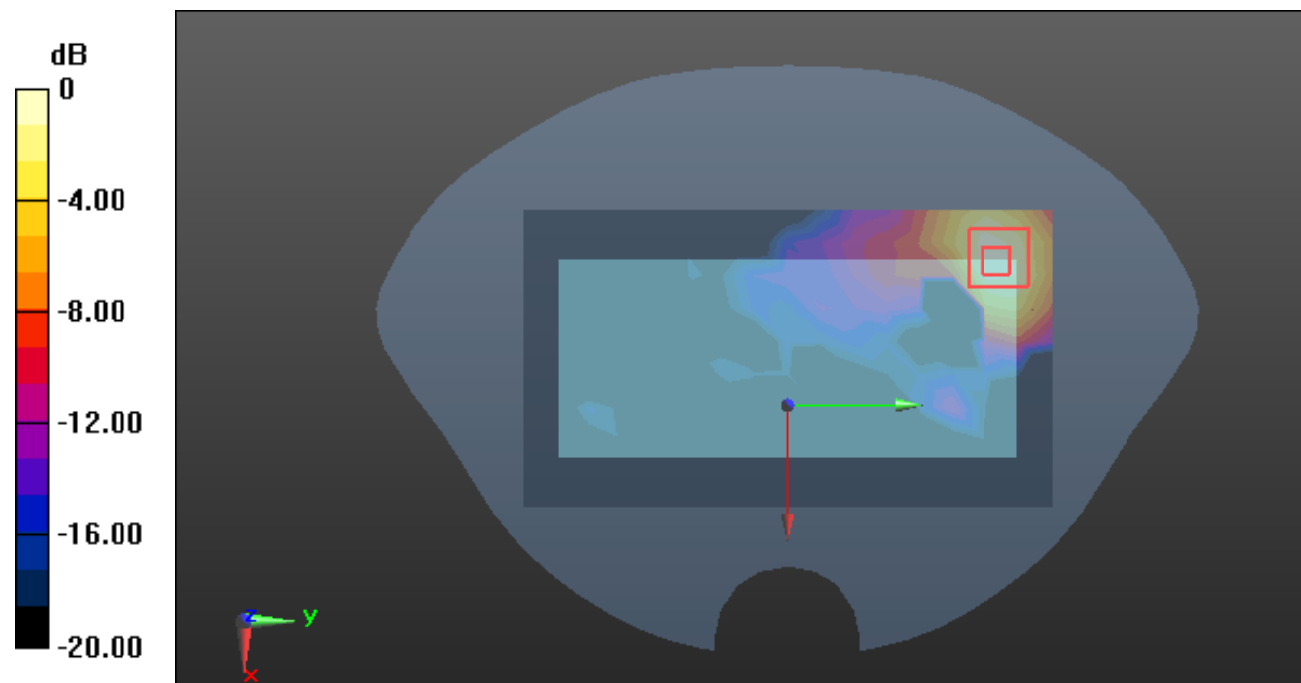

0 dB = 0.0571 W/kg = -12.43 dB dBW/kg

Test Plot150#: LTE Band 40A_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz;Duty Cycle: 1:3.33

Medium parameters used: $f=2310$ MHz; $\sigma = 1.664$ S/m; $\epsilon_r = 39.848$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @2310 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0430 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.6370 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.228 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0476 W/kg

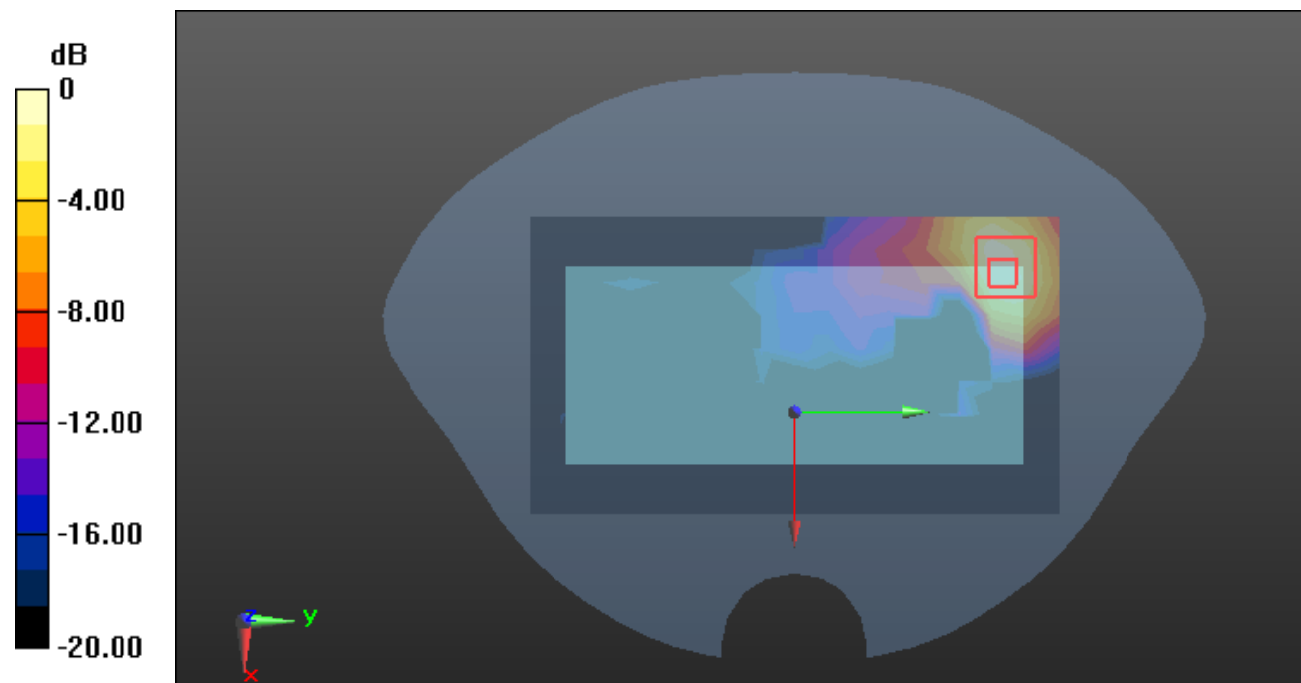

Test Plot151#: LTE Band 40A_Body Back_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:3.33

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.664$ S/m; $\epsilon_r = 39.848$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @2310 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.198 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.164 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.387 W/kg

SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.202 W/kg

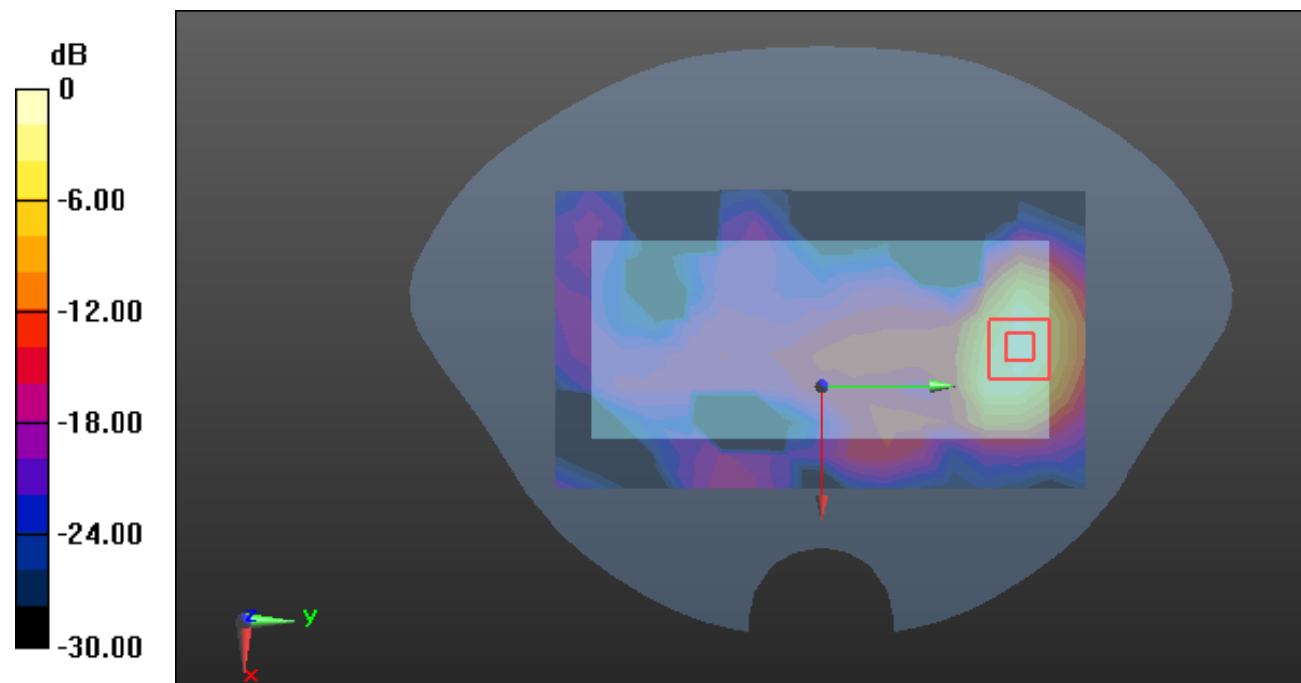

0 dB = 0.202 W/kg = -6.95 dB dBW/kg

Test Plot152#: LTE Band 40A_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:3.33

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.664$ S/m; $\epsilon_r = 39.848$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @2310 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.171 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.480 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.328 W/kg

SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.173 W/kg

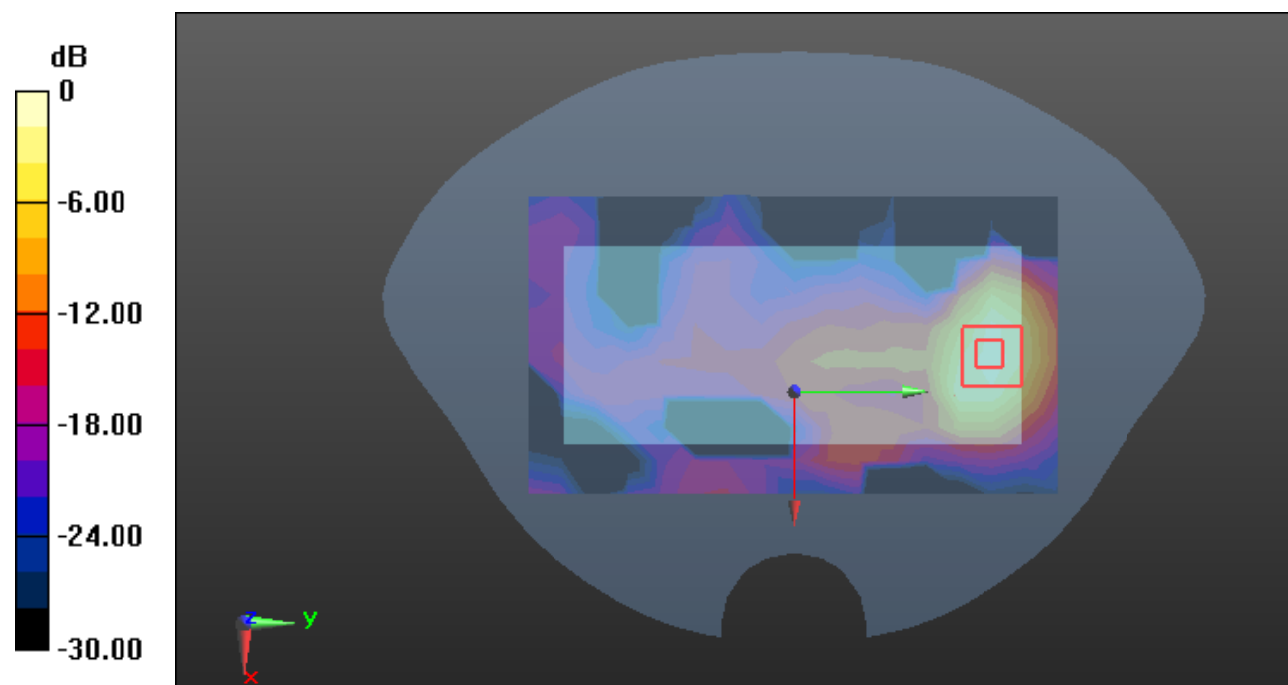

0 dB = 0.173 W/kg = -7.62 dB dBW/kg

Test Plot153#: LTE Band 40A_Body Left_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz;Duty Cycle: 1:3.33

Medium parameters used: $f=2310$ MHz; $\sigma = 1.664$ S/m; $\epsilon_r = 39.848$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @2310 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x17x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0317 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.832 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0670 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0357 W/kg

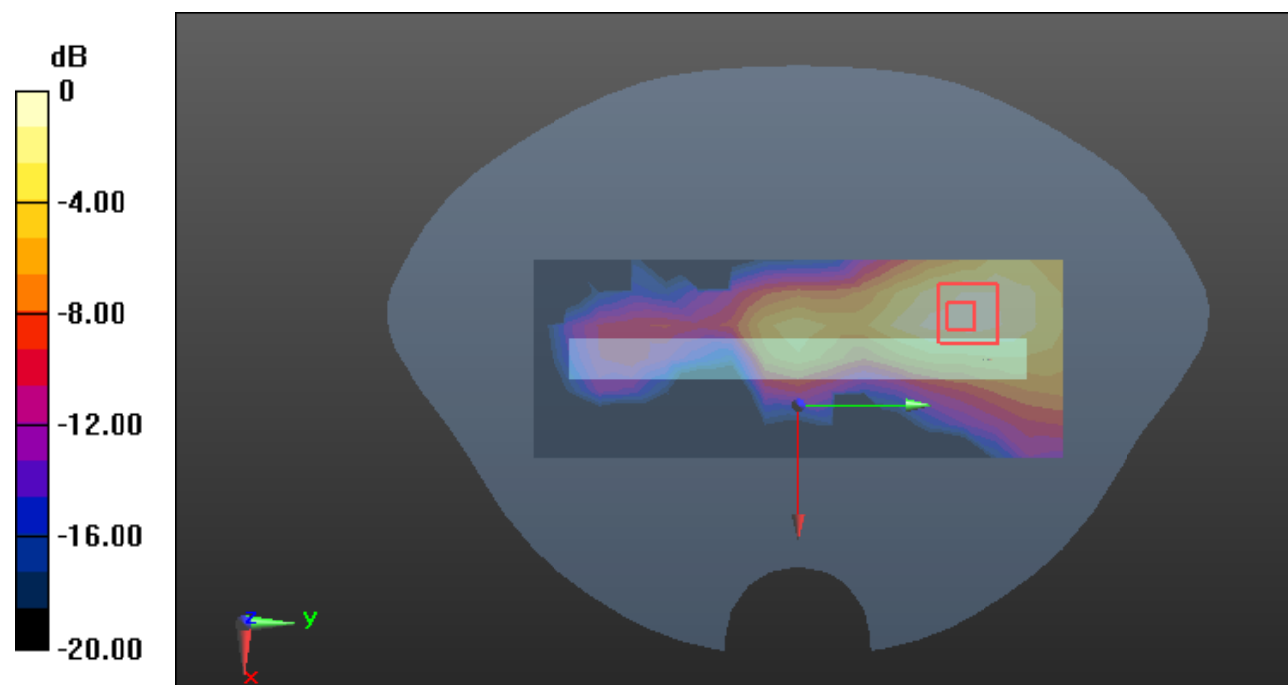

0 dB = 0.0357 W/kg = -14.47 dB dBW/kg

Test Plot154#: LTE Band 40A_Body Left_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz;Duty Cycle: 1:3.33

Medium parameters used: $f=2310$ MHz; $\sigma = 1.664$ S/m; $\epsilon_r = 39.848$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @2310 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x17x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0288 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.577 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0560 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0296 W/kg

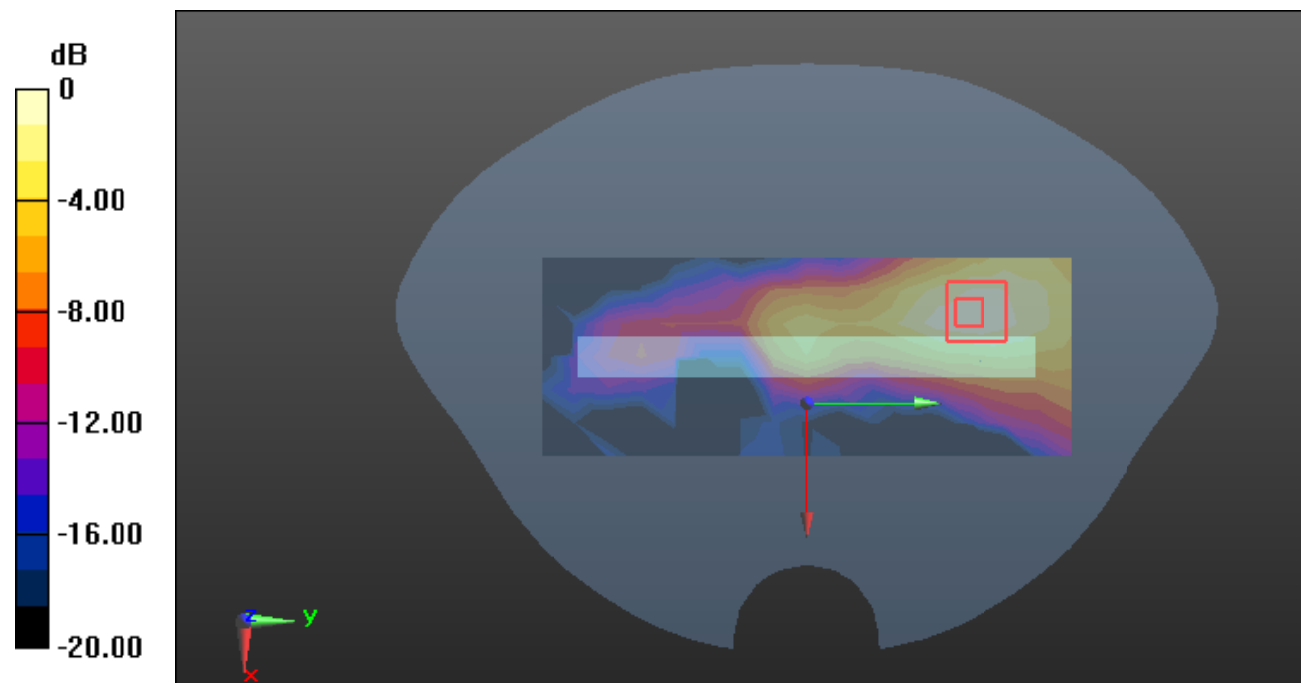

0 dB = 0.0296 W/kg = -15.29 dB dBW/kg

Test Plot155#: LTE Band 40A_Body Top_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz;Duty Cycle: 1:3.33

Medium parameters used: $f=2310$ MHz; $\sigma = 1.664$ S/m; $\epsilon_r = 39.848$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @2310 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.209 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.817 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.466 W/kg

SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.236 W/kg

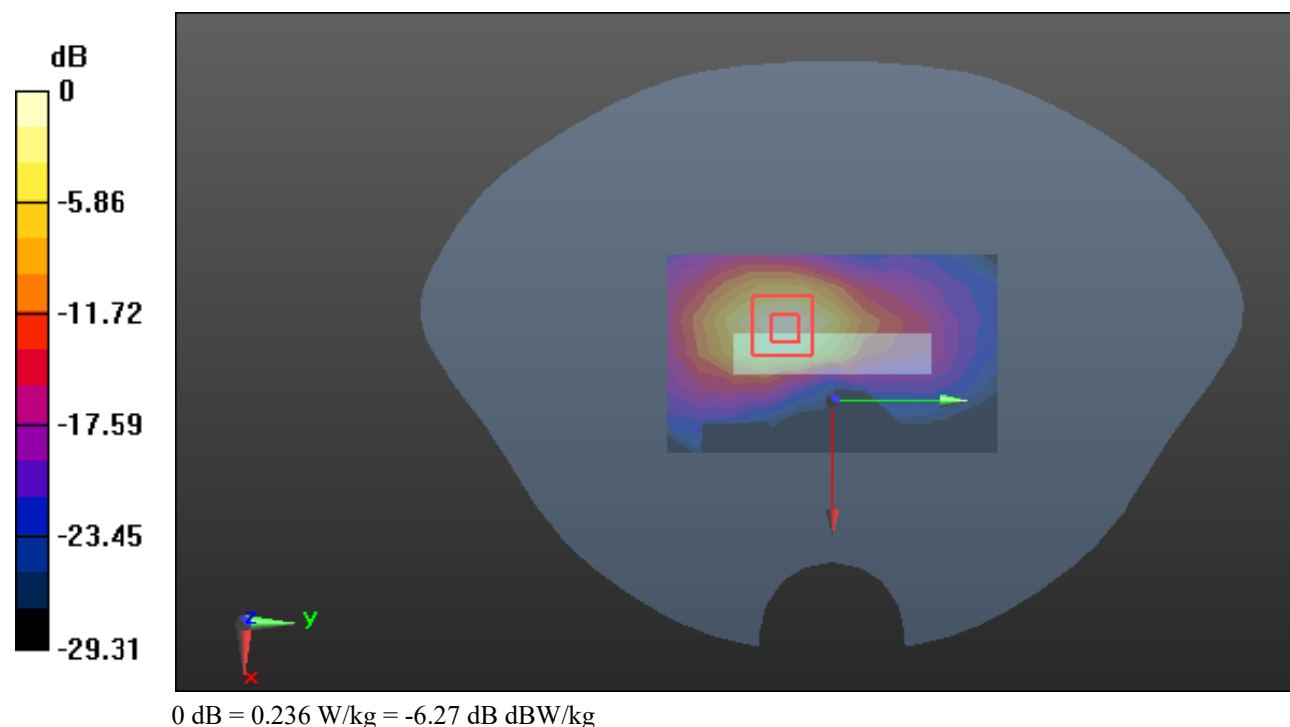

Test Plot156#: LTE Band 40A_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:3.33

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.664$ S/m; $\epsilon_r = 39.848$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @2310 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.180 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.343 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.401 W/kg

SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.202 W/kg

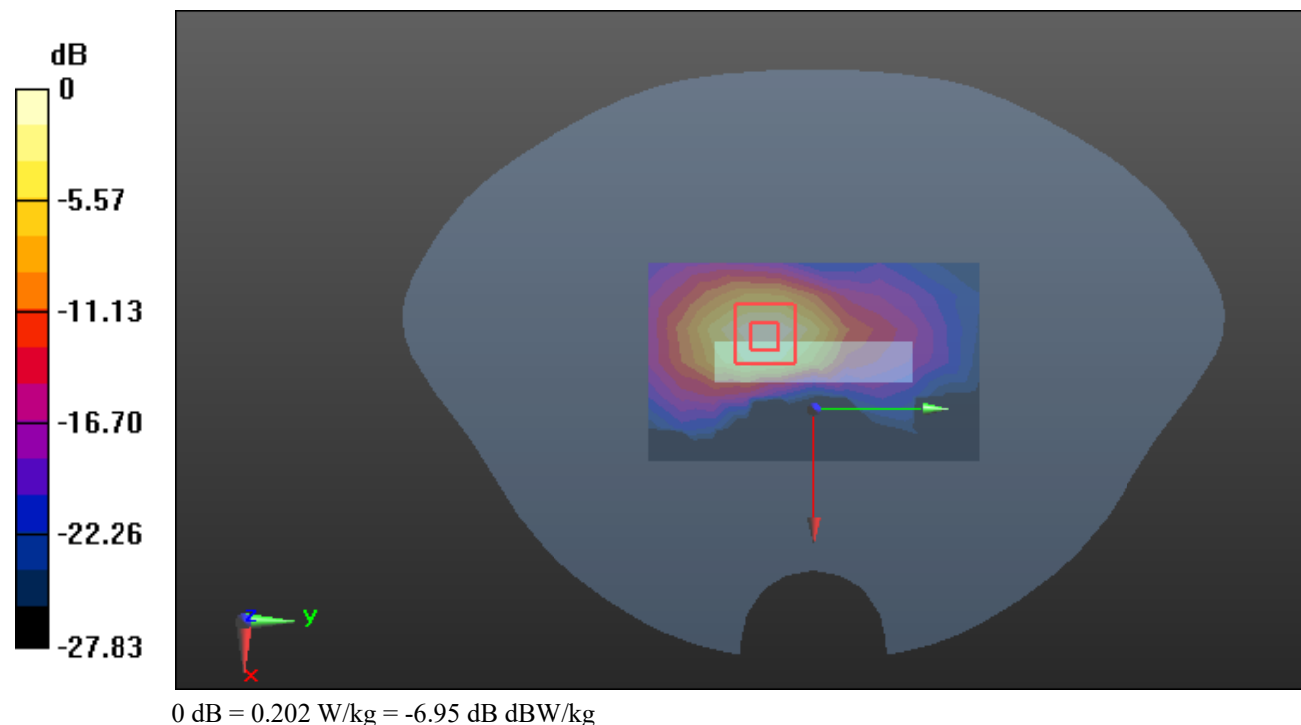

Test Plot157#: LTE Band 40B_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33
Medium parameters used (interpolated): $f=2355$ MHz; $\sigma = 1.695$ S/m; $\epsilon_r = 39.477$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2355 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.210 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.693 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.419 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.199 W/kg

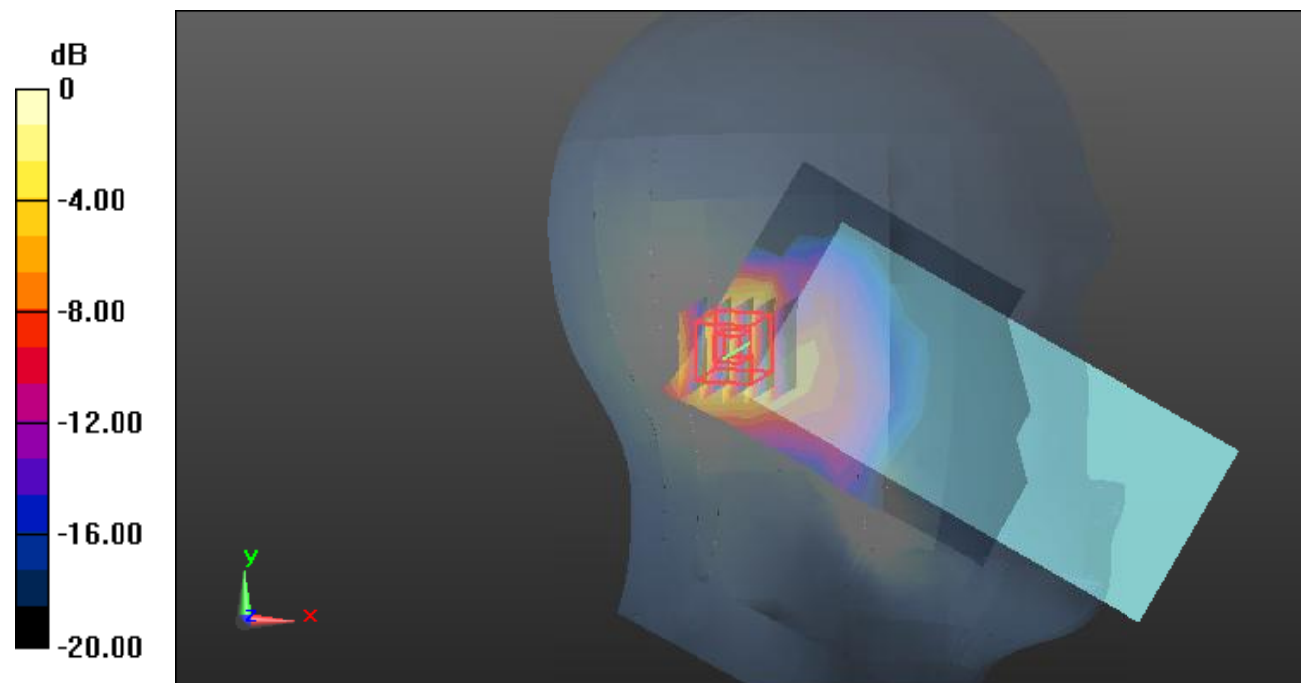

0 dB = 0.199 W/kg = -7.01 dB dBW/kg

Test Plot158#: LTE Band 40B_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33
Medium parameters used (interpolated): $f=2355$ MHz; $\sigma = 1.695$ S/m; $\epsilon_r = 39.477$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2355 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.182 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.506 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.358 W/kg

SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.073 W/kg

Maximum value of SAR (measured) = 0.172 W/kg

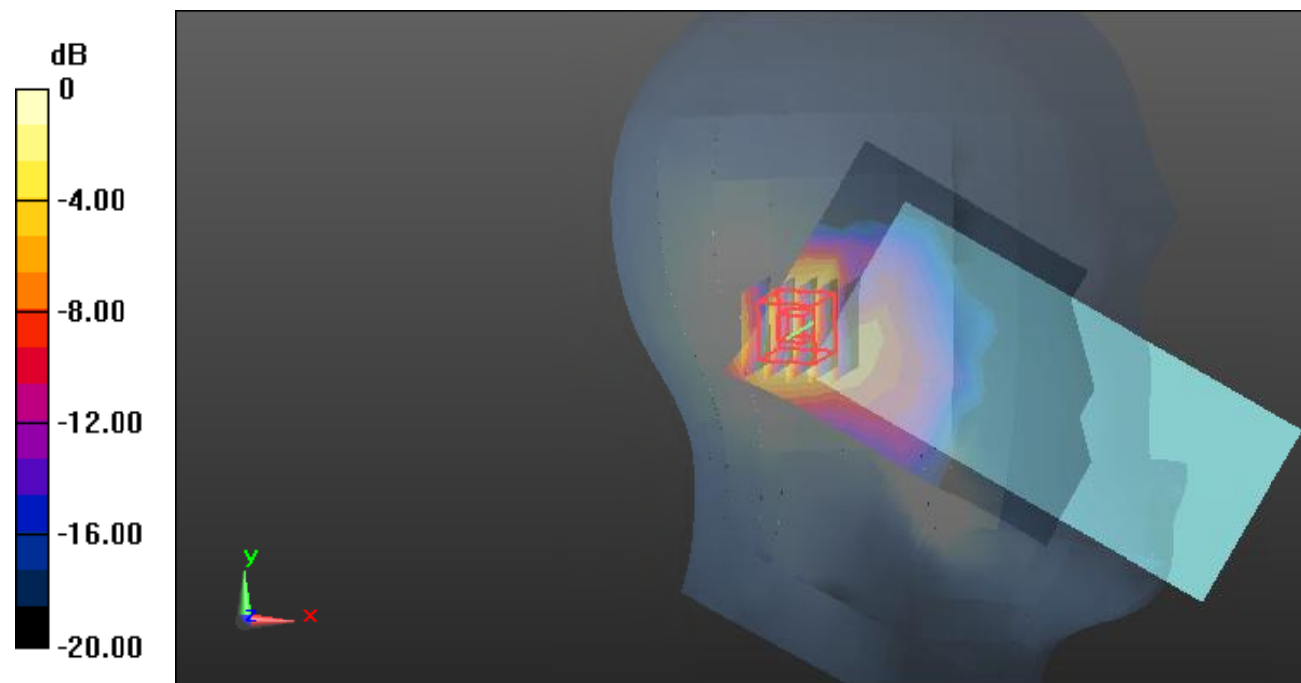

0 dB = 0.172 W/kg = -7.64 dB dBW/kg

Test Plot159#: LTE Band 40B_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33
Medium parameters used (interpolated): $f=2355$ MHz; $\sigma = 1.695$ S/m; $\epsilon_r = 39.477$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2355 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.356 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.970 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.756 W/kg

SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.352 W/kg

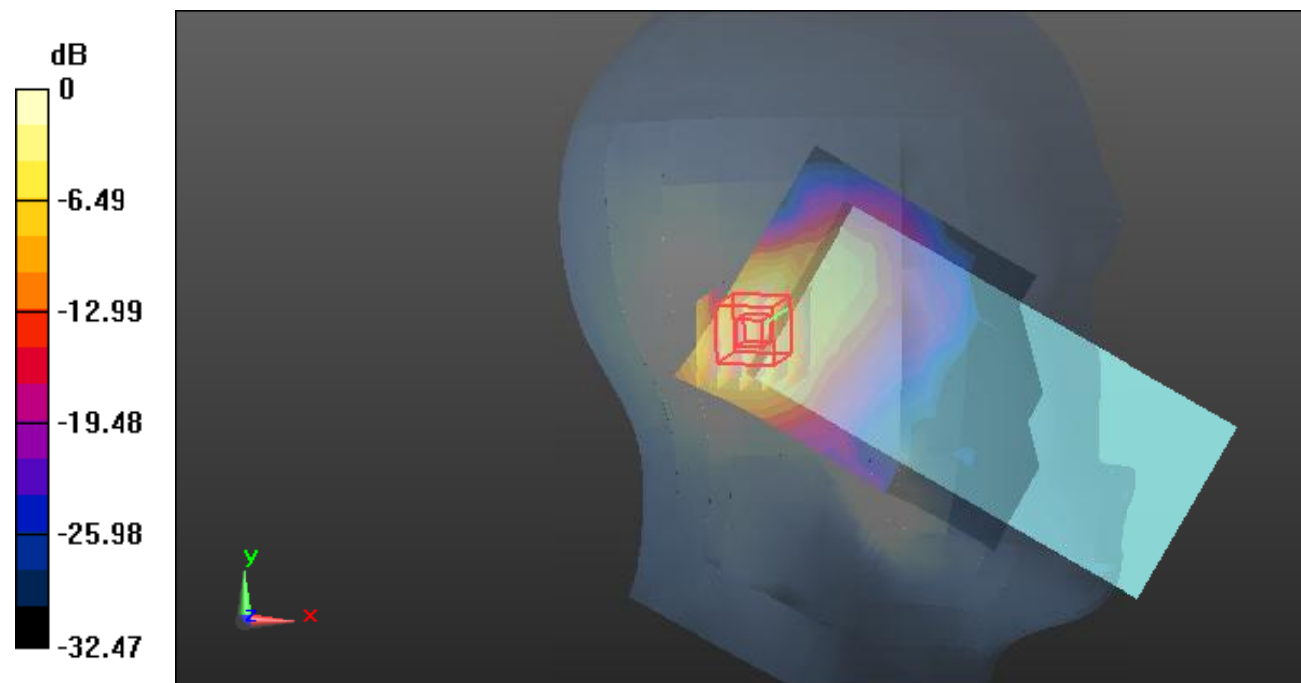

0 dB = 0.352 W/kg = -4.53 dB dBW/kg

Test Plot160#: LTE Band 40B_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33
Medium parameters used (interpolated): $f=2355$ MHz; $\sigma = 1.695$ S/m; $\epsilon_r = 39.477$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2355 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.314 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.700 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.681 W/kg

SAR(1 g) = 0.289 W/kg; SAR(10 g) = 0.130 W/kg

Maximum value of SAR (measured) = 0.318 W/kg

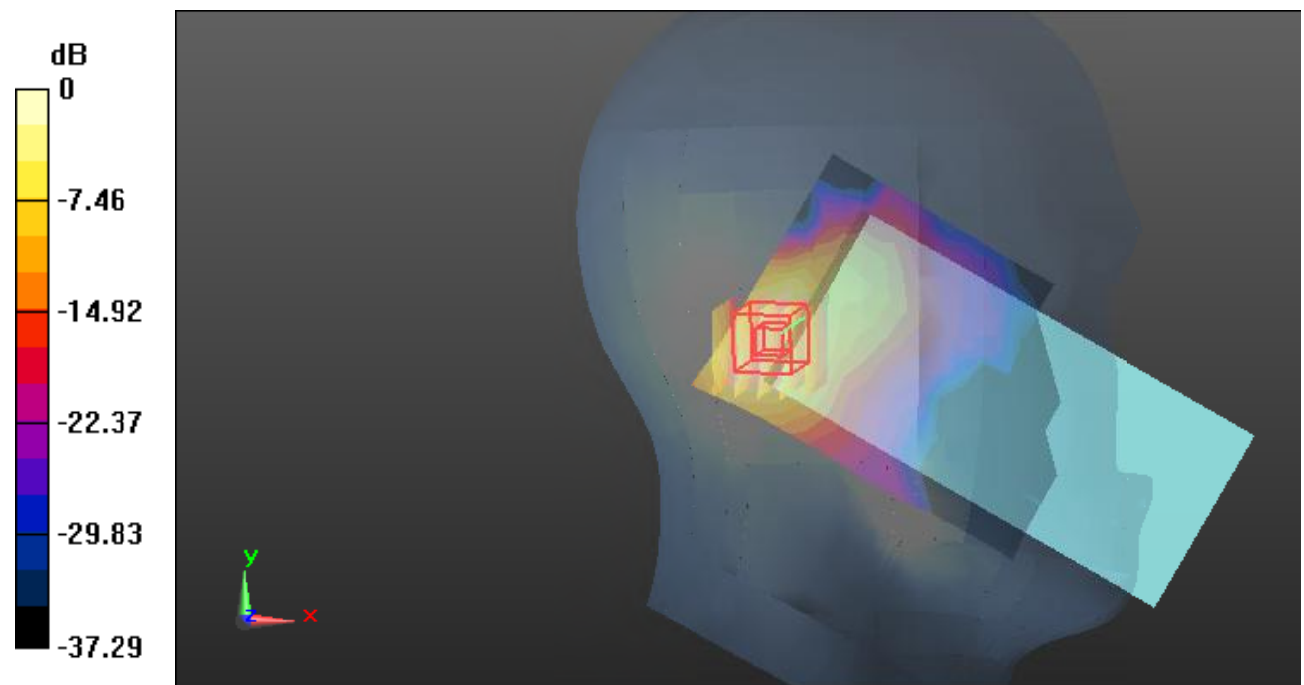

0 dB = 0.318 W/kg = -4.98 dB dBW/kg

Test Plot161#: LTE Band 40B_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33
Medium parameters used (interpolated): $f=2355$ MHz; $\sigma = 1.695$ S/m; $\epsilon_r = 39.477$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2355 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.282 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.175 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.670 W/kg

SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.329 W/kg

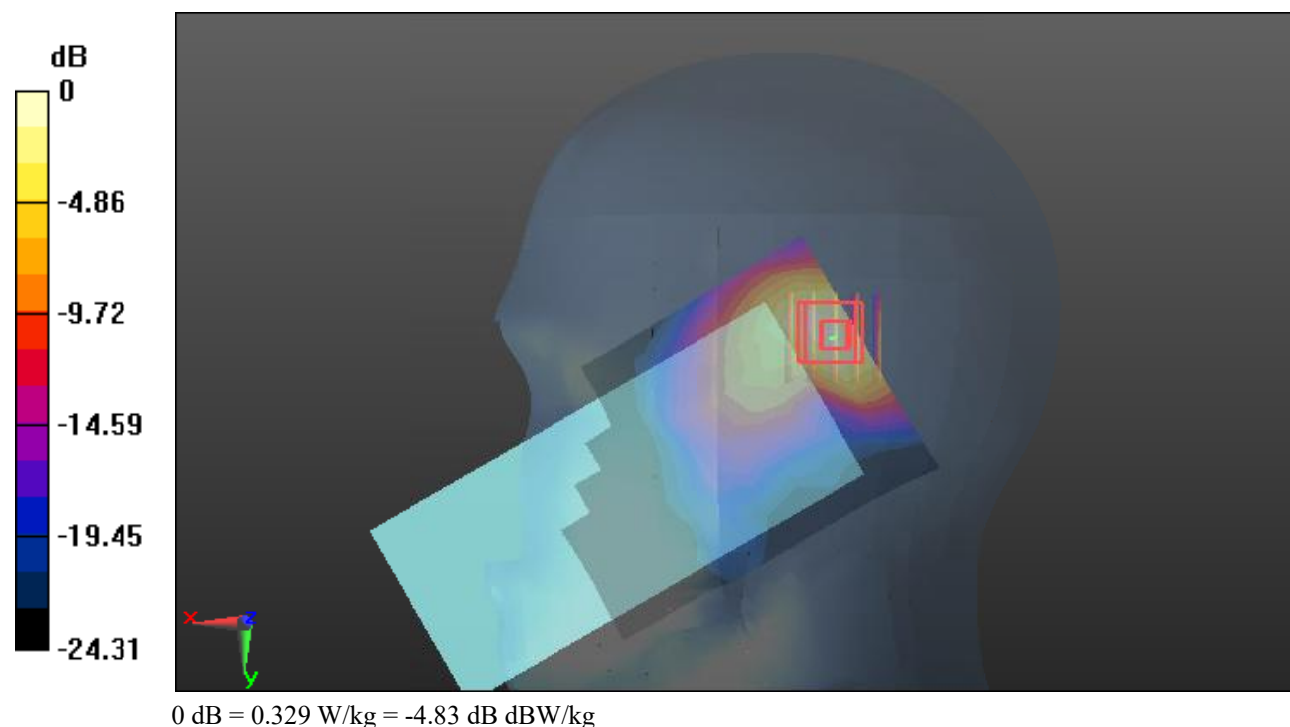

Test Plot162#: LTE Band 40B_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33
Medium parameters used (interpolated): $f=2355$ MHz; $\sigma = 1.695$ S/m; $\epsilon_r = 39.477$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2355 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.247 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.802 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.585 W/kg

SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.286 W/kg

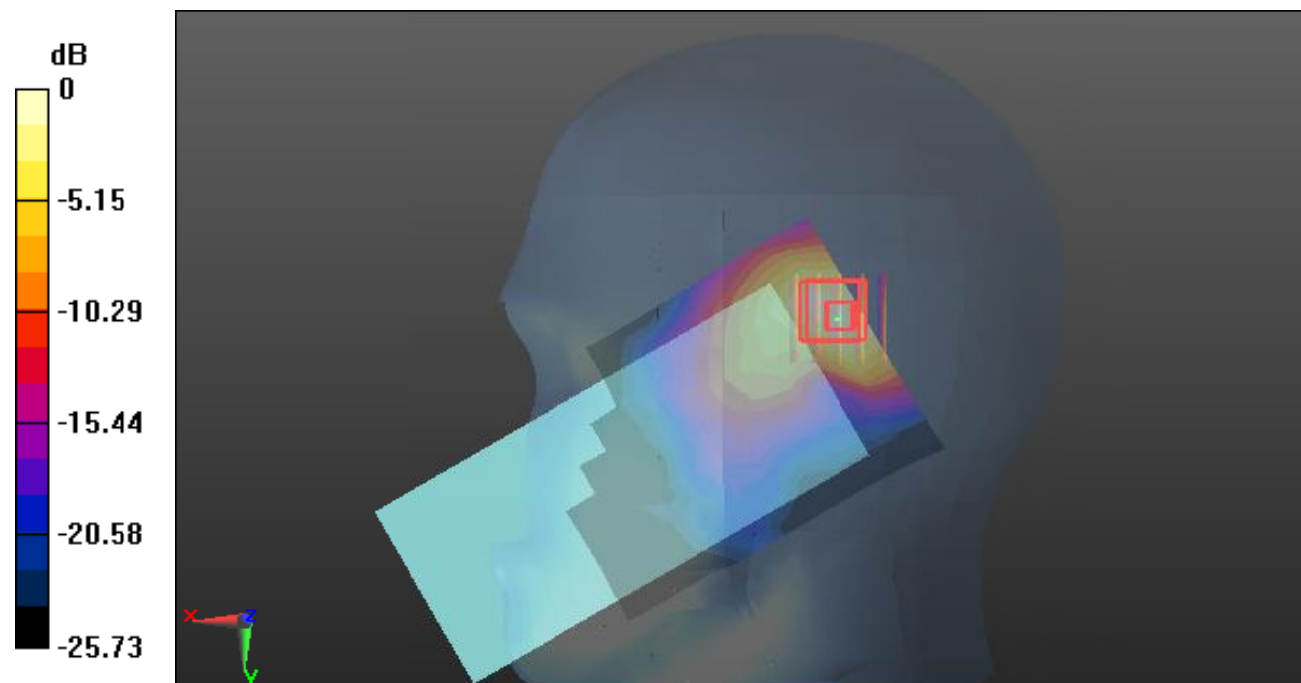

0 dB = 0.286 W/kg = -5.44 dB dBW/kg

Test Plot163#: LTE Band 40B_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33
Medium parameters used (interpolated): $f=2355$ MHz; $\sigma = 1.695$ S/m; $\epsilon_r = 39.477$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2355 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.684 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.705 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.571 W/kg; SAR(10 g) = 0.241 W/kg

Maximum value of SAR (measured) = 0.651 W/kg

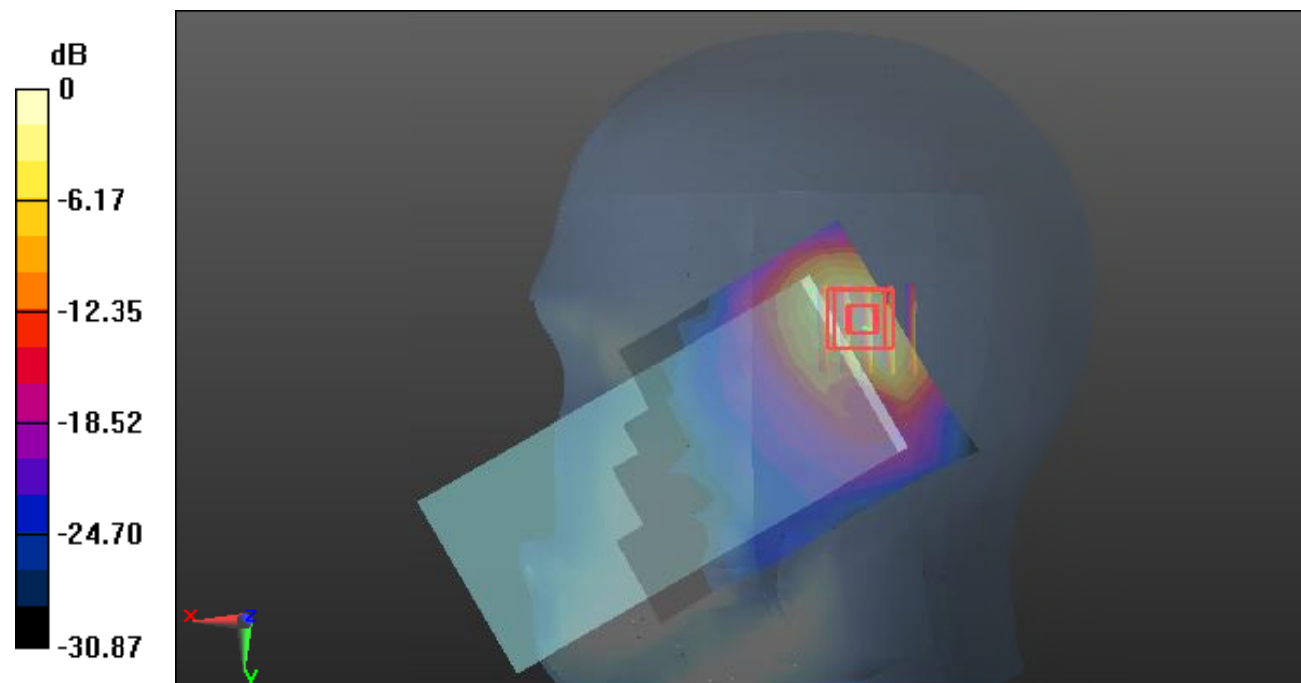

0 dB = 0.651 W/kg = -1.86 dB dBW/kg

Test Plot164#: LTE Band 40B_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33
Medium parameters used (interpolated): $f=2355$ MHz; $\sigma = 1.695$ S/m; $\epsilon_r = 39.477$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2355 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.578 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.346 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.489 W/kg; SAR(10 g) = 0.207 W/kg

Maximum value of SAR (measured) = 0.570 W/kg

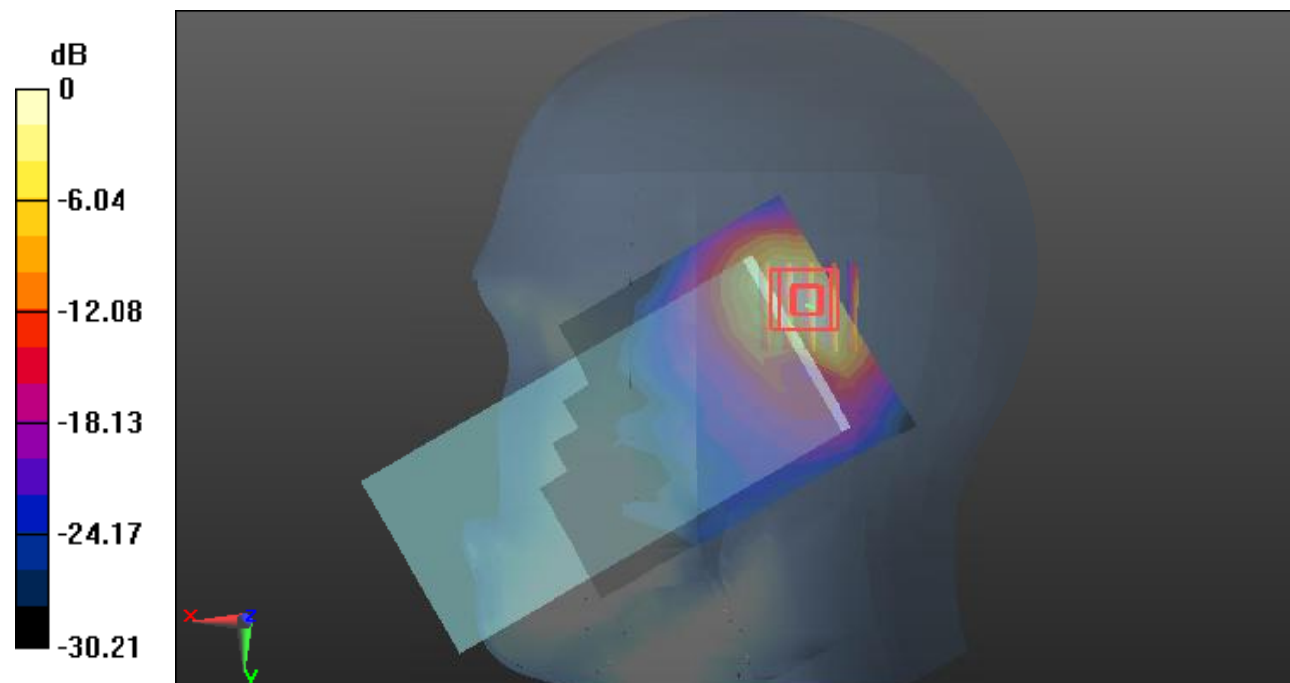

Test Plot165#: LTE Band 40B_Body Front_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33
Medium parameters used (interpolated): $f=2355$ MHz; $\sigma = 1.695$ S/m; $\epsilon_r = 39.477$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2355 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.111 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.149 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.210 W/kg

SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.112 W/kg

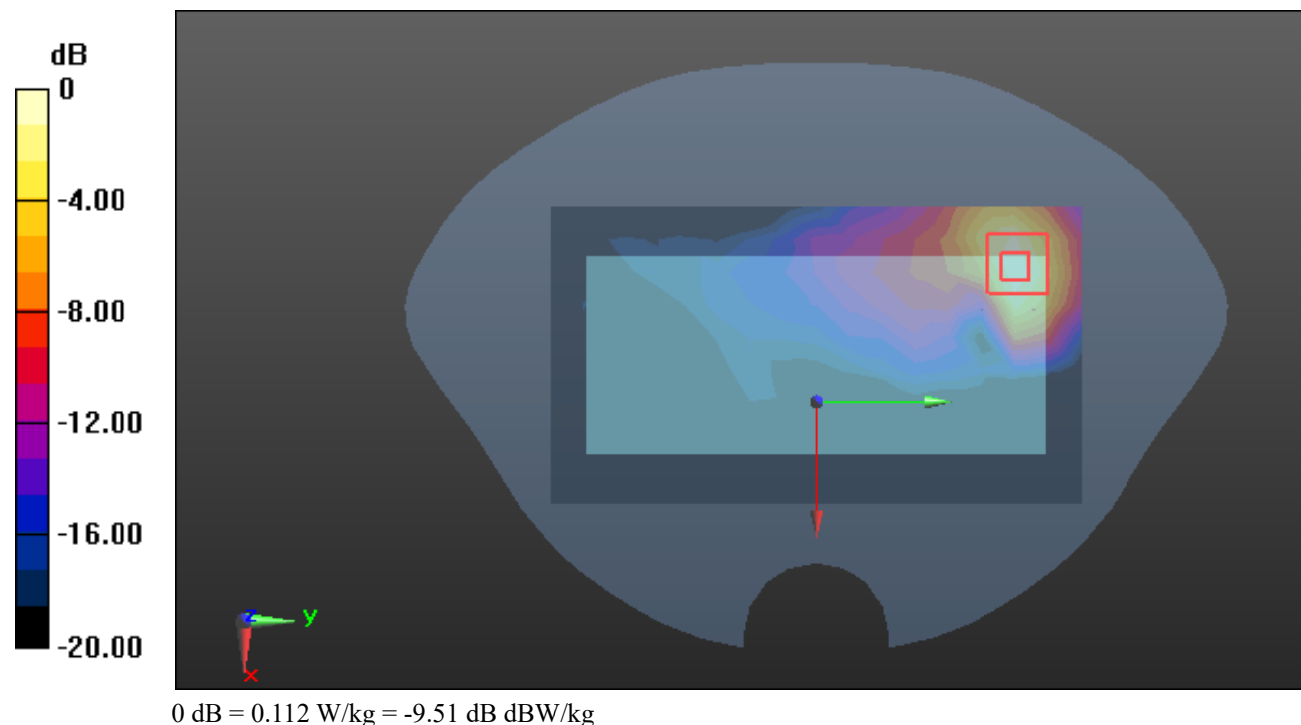

Test Plot166#: LTE Band 40B_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33
Medium parameters used (interpolated): $f=2355$ MHz; $\sigma = 1.695$ S/m; $\epsilon_r = 39.477$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2355 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0956 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.8450 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.186 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.0962 W/kg

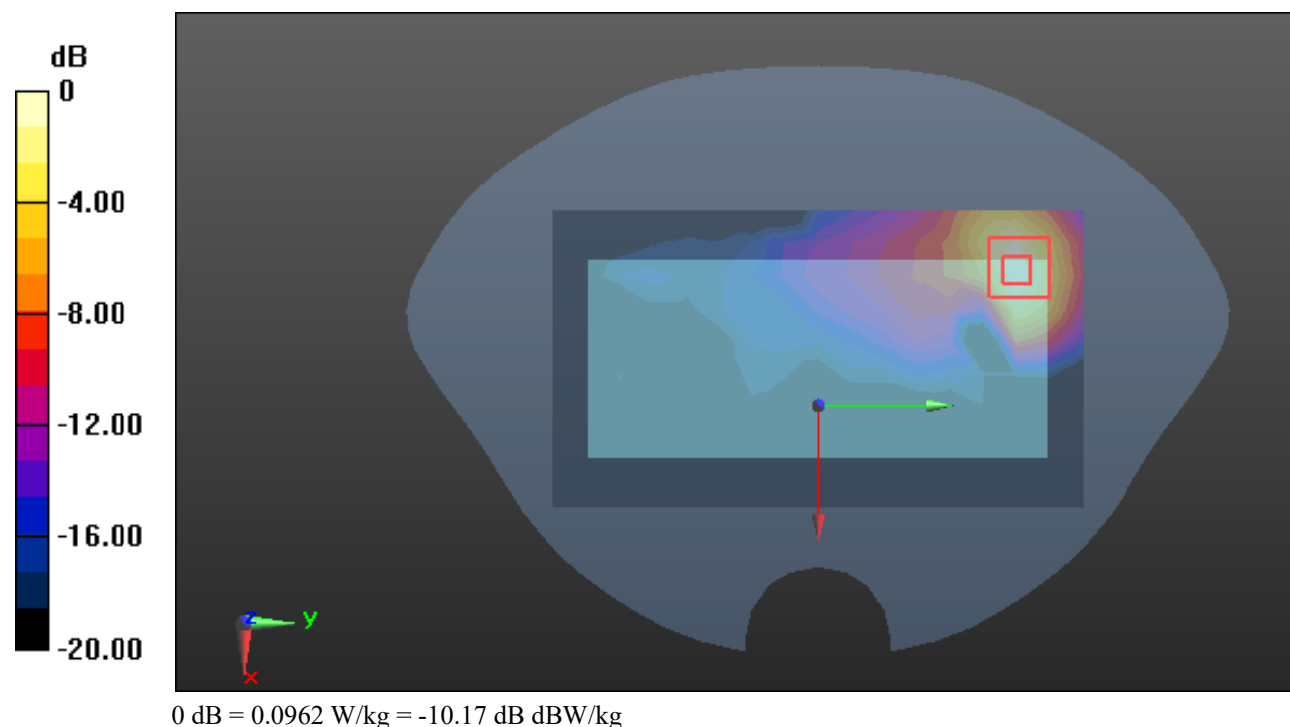

Test Plot167#: LTE Band 40B_Body Back_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33

Medium parameters used (interpolated): $f=2355$ MHz; $\sigma = 1.695$ S/m; $\epsilon_r = 39.477$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2355 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.166 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.746 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.412 W/kg

SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.210 W/kg

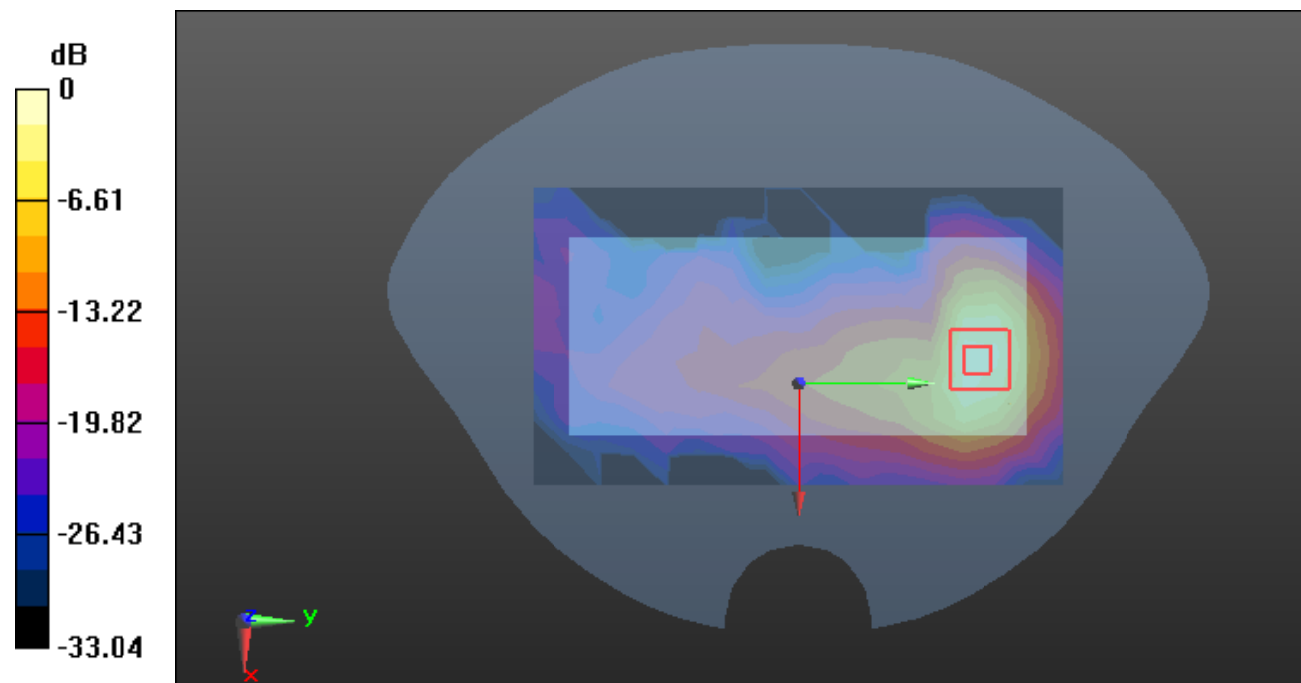

0 dB = 0.210 W/kg = -6.78 dB dBW/kg

Test Plot168#: LTE Band 40B_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33

Medium parameters used (interpolated): $f=2355$ MHz; $\sigma = 1.695$ S/m; $\epsilon_r = 39.477$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2355 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.188 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.209 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.380 W/kg

SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.195 W/kg

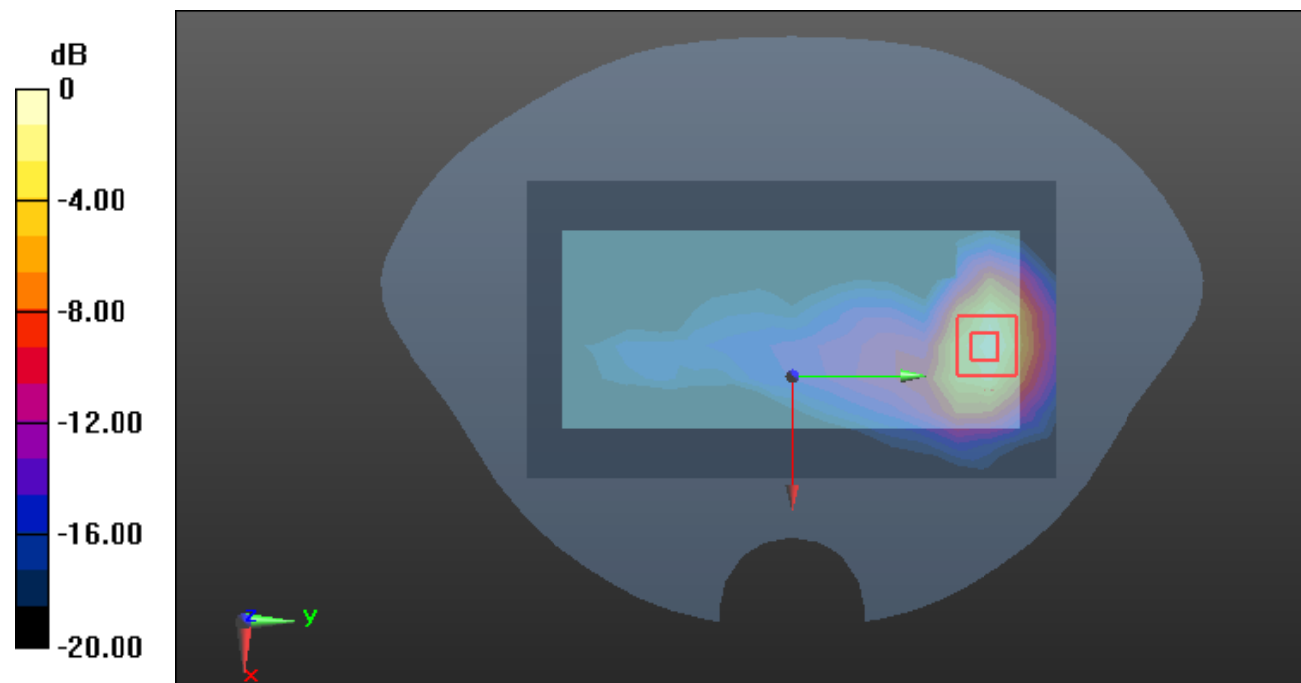

0 dB = 0.195 W/kg = -7.10 dB dBW/kg

Test Plot169#: LTE Band 40B_Body Left_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz;Duty Cycle: 1:3.33

Medium parameters used (interpolated): $f=2355$ MHz; $\sigma = 1.695$ S/m; $\epsilon_r = 39.477$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2355 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x17x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0436 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.208 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0920 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0462 W/kg

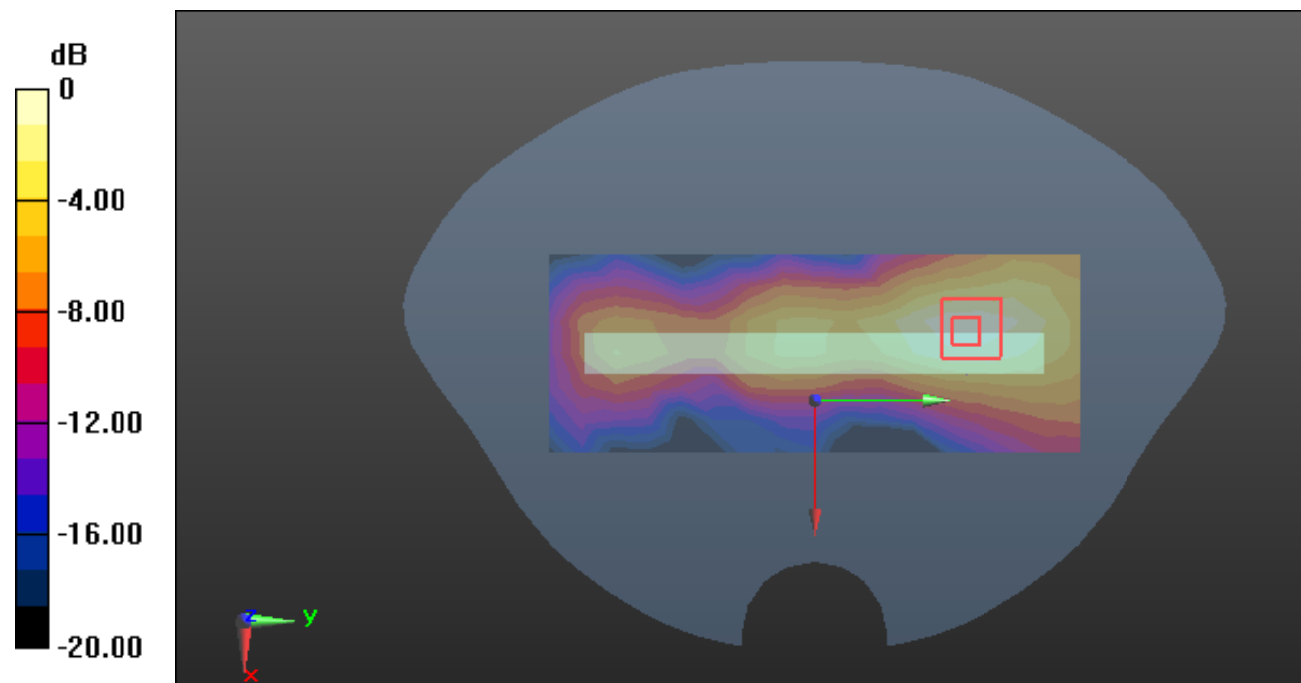

0 dB = 0.0462 W/kg = -13.35 dB dBW/kg

Test Plot170#: LTE Band 40B_Body Left_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33

Medium parameters used (interpolated): $f=2355$ MHz; $\sigma = 1.695$ S/m; $\epsilon_r = 39.477$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2355 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0364 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.162 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0800 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0398 W/kg

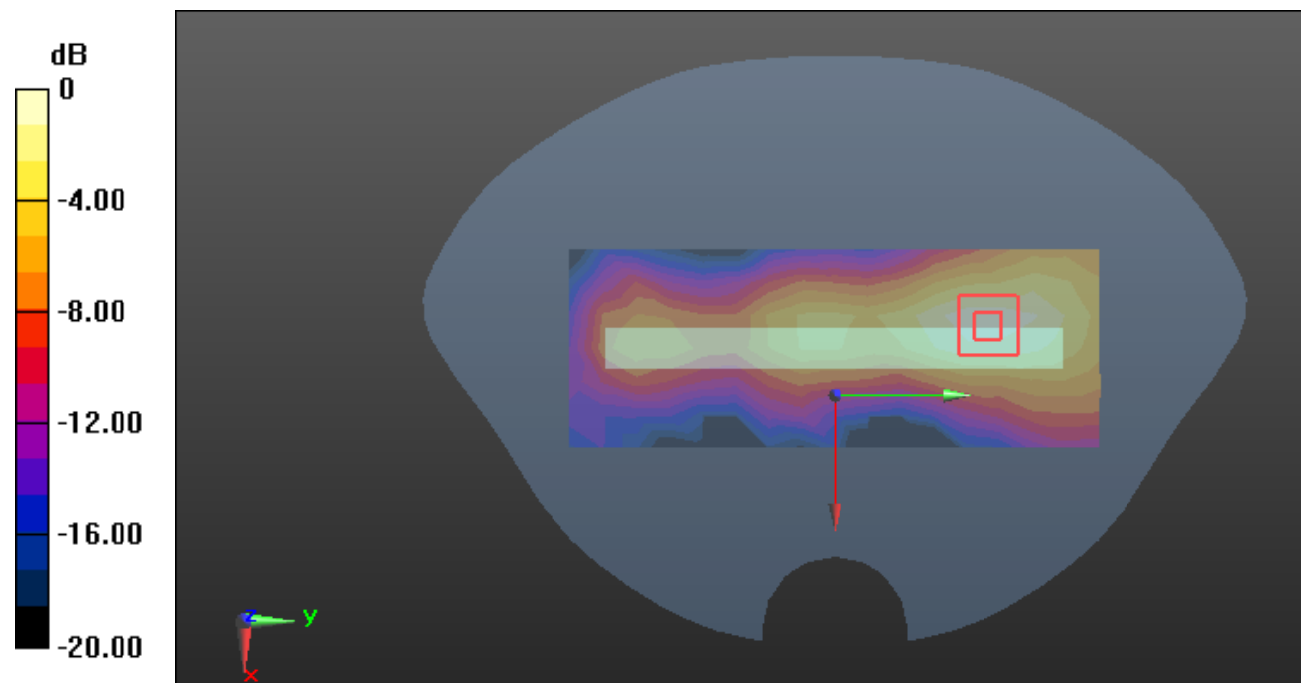

0 dB = 0.0398 W/kg = -14.00 dB dBW/kg

Test Plot171#: LTE Band 40B_Body Top_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33

Medium parameters used (interpolated): $f=2355$ MHz; $\sigma = 1.695$ S/m; $\epsilon_r = 39.477$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2355 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.232 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.728 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.535 W/kg

SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.269 W/kg

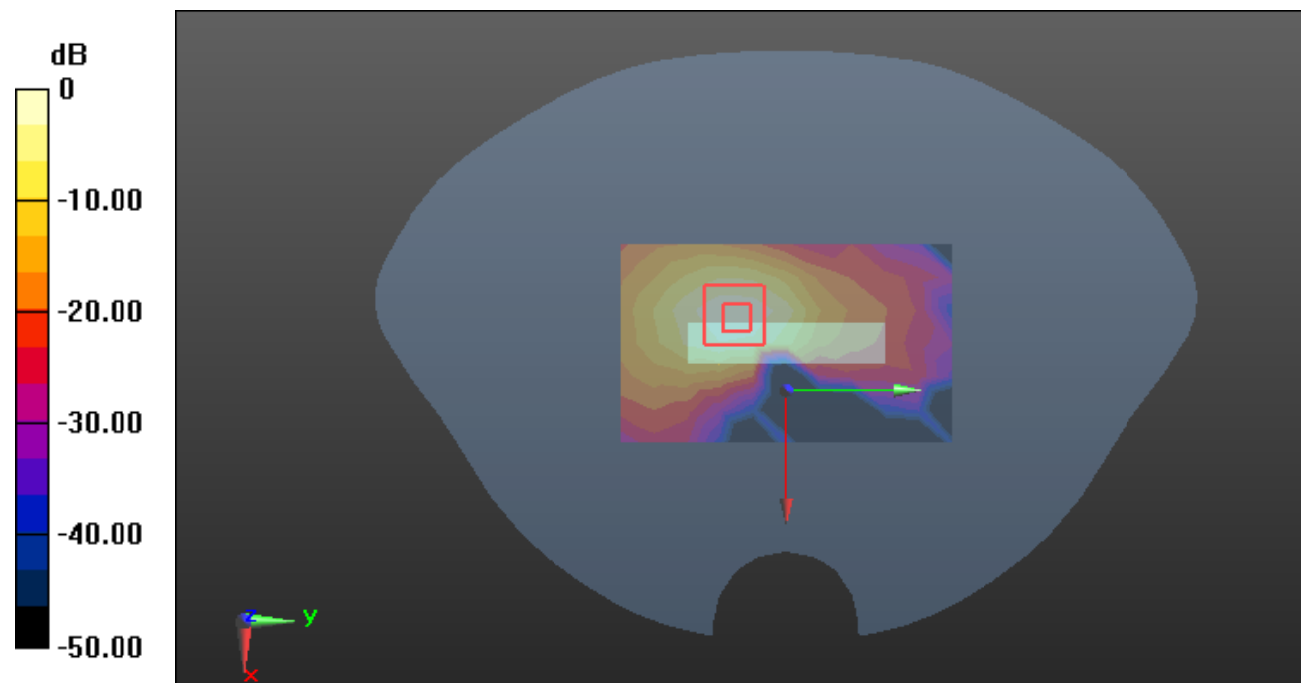

0 dB = 0.269 W/kg = -5.70 dB dBW/kg

Test Plot172#: LTE Band 40B_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33

Medium parameters used (interpolated): $f=2355$ MHz; $\sigma = 1.695$ S/m; $\epsilon_r = 39.477$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @2355 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.206 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.290 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.464 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.089 W/kg

Maximum value of SAR (measured) = 0.235 W/kg

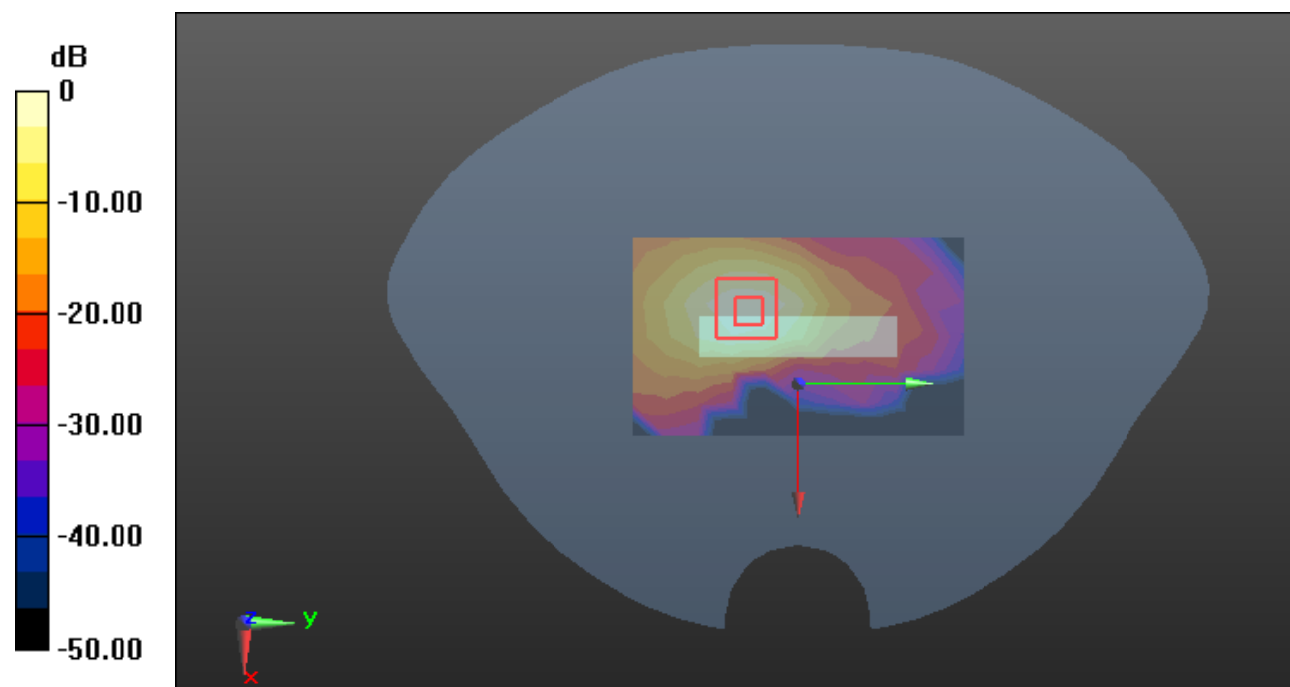

0 dB = 0.235 W/kg = -6.29 dB dBW/kg

Test Plot173#: LTE Band 41_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.978$ S/m; $\epsilon_r = 38.257$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2593 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.153 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.946 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.139 W/kg

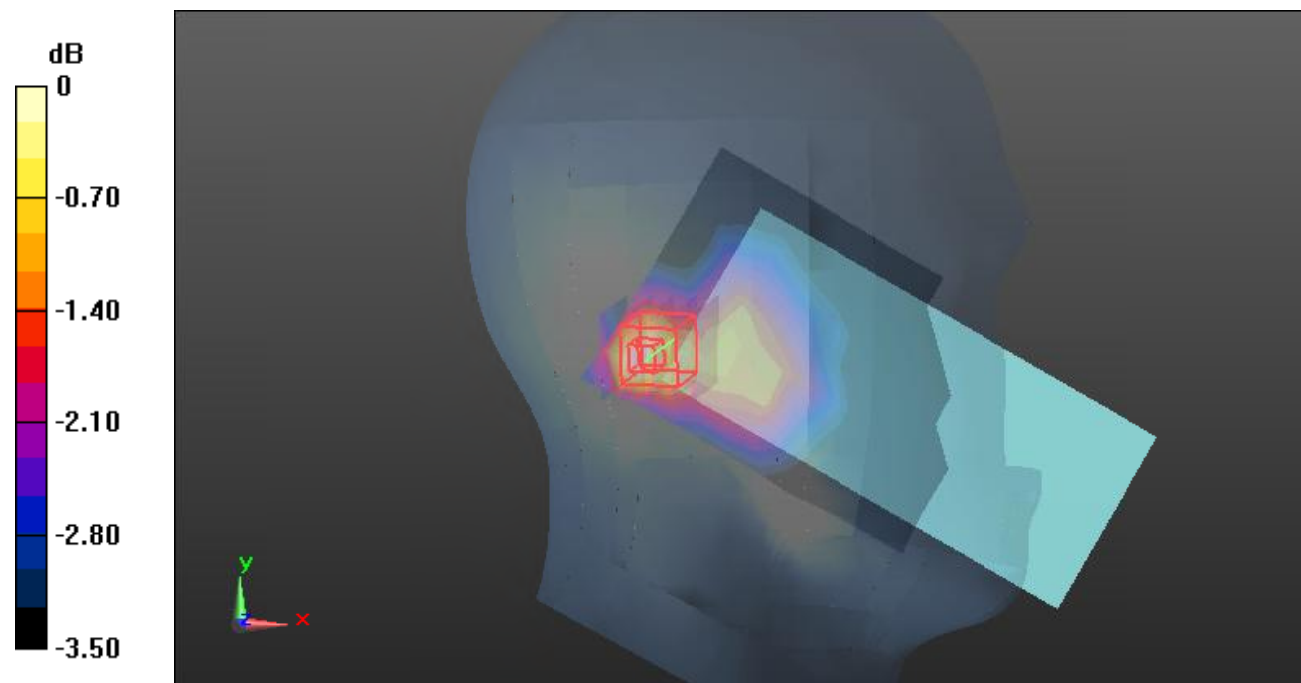

0 dB = 0.139 W/kg = -8.57 dB dBW/kg

Test Plot174#: LTE Band 41_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.978$ S/m; $\epsilon_r = 38.257$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2593 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.145 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.562 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.214 W/kg

SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.110 W/kg

Maximum value of SAR (measured) = 0.138 W/kg

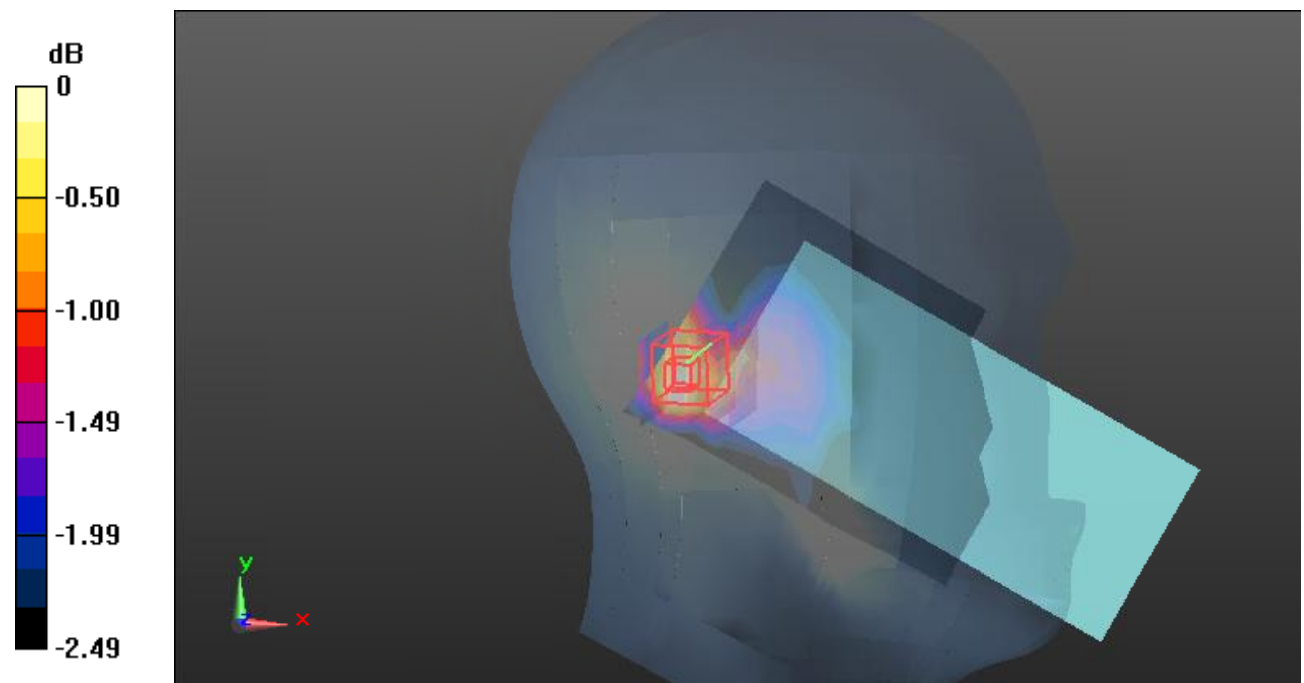

0 dB = 0.138 W/kg = -8.60 dB dBW/kg

Test Plot175#: LTE Band 41_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.978$ S/m; $\epsilon_r = 38.257$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2593 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.146 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.174 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.135 W/kg

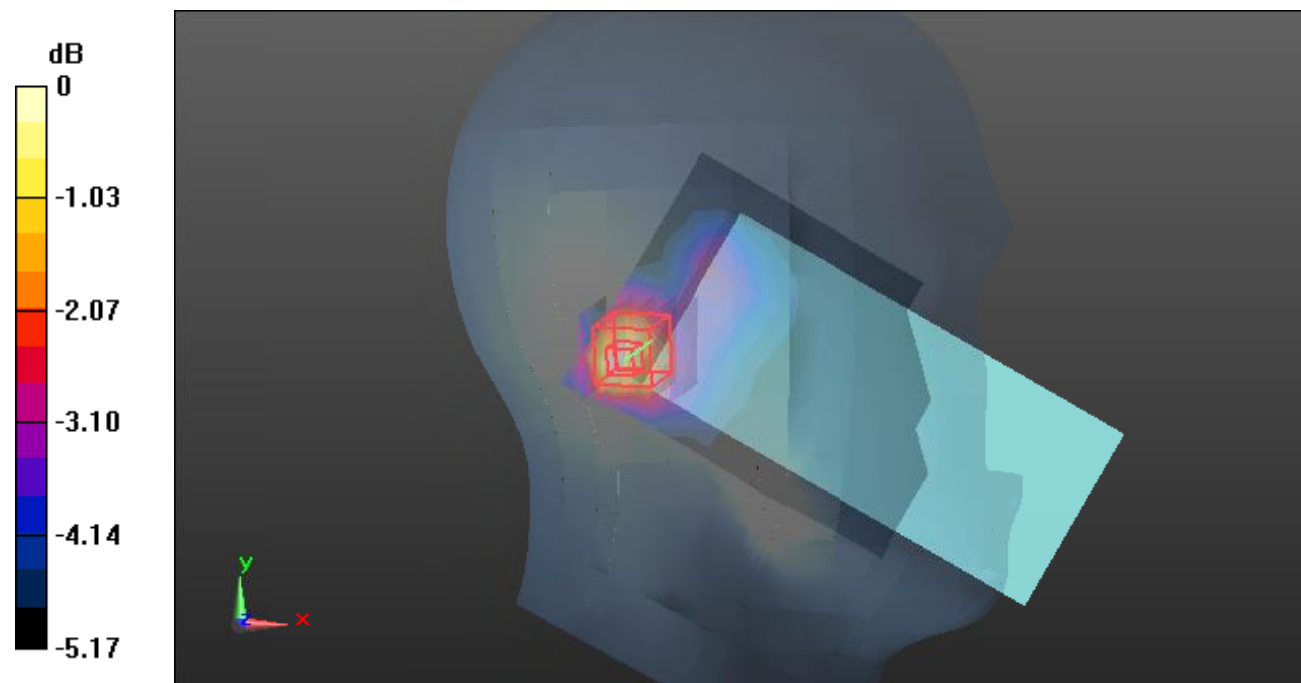

0 dB = 0.135 W/kg = -8.70 dB dBW/kg

Test Plot176#: LTE Band 41_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.978$ S/m; $\epsilon_r = 38.257$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2593 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.117 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.696 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.192 W/kg

SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.110 W/kg

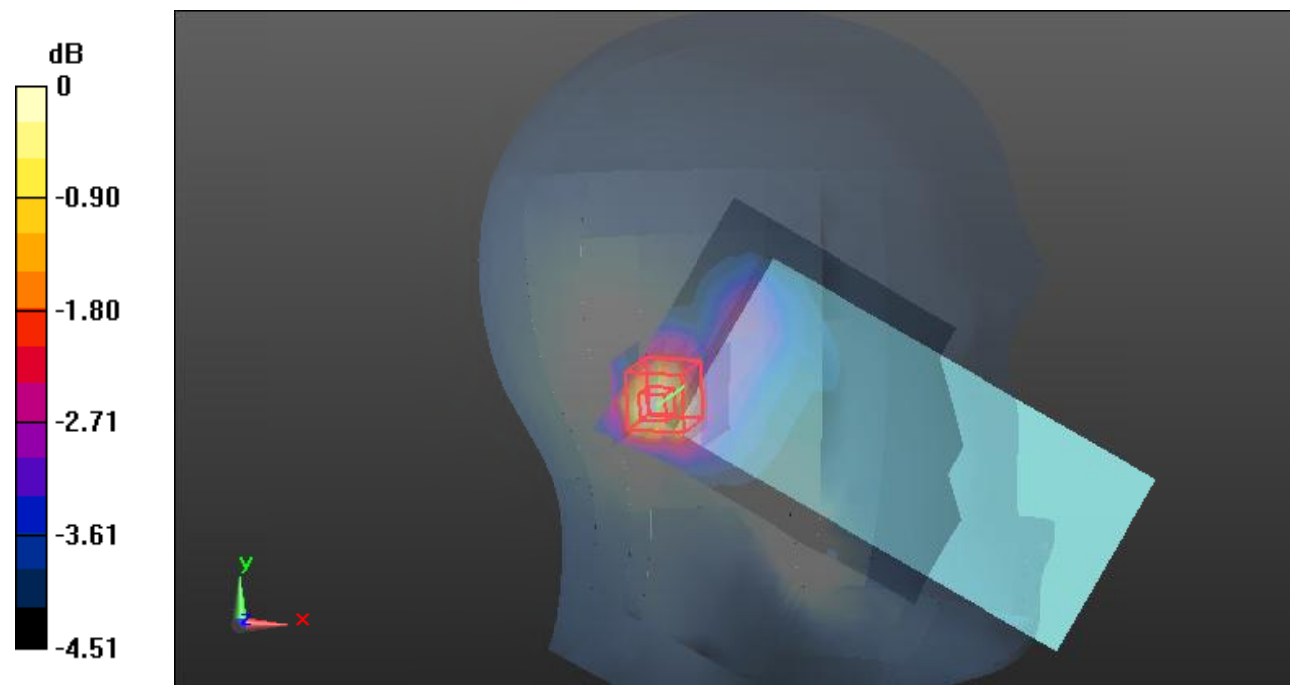

0 dB = 0.110 W/kg = -9.59 dB dBW/kg

Test Plot177#: LTE Band 41_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.978$ S/m; $\epsilon_r = 38.257$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2593 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.197 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.333 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.432 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.215 W/kg

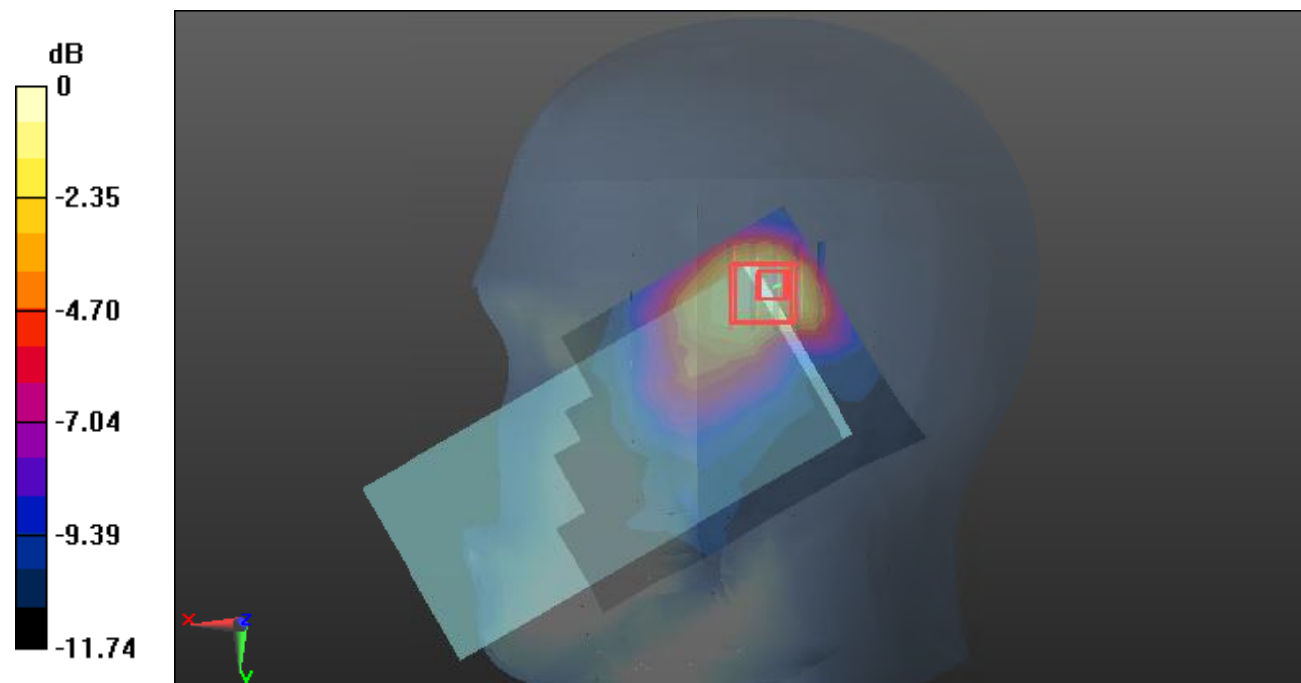

0 dB = 0.215 W/kg = -6.68 dB dBW/kg

Test Plot178#: LTE Band 41_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.978$ S/m; $\epsilon_r = 38.257$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2593 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.157 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.185 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.358 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.168 W/kg

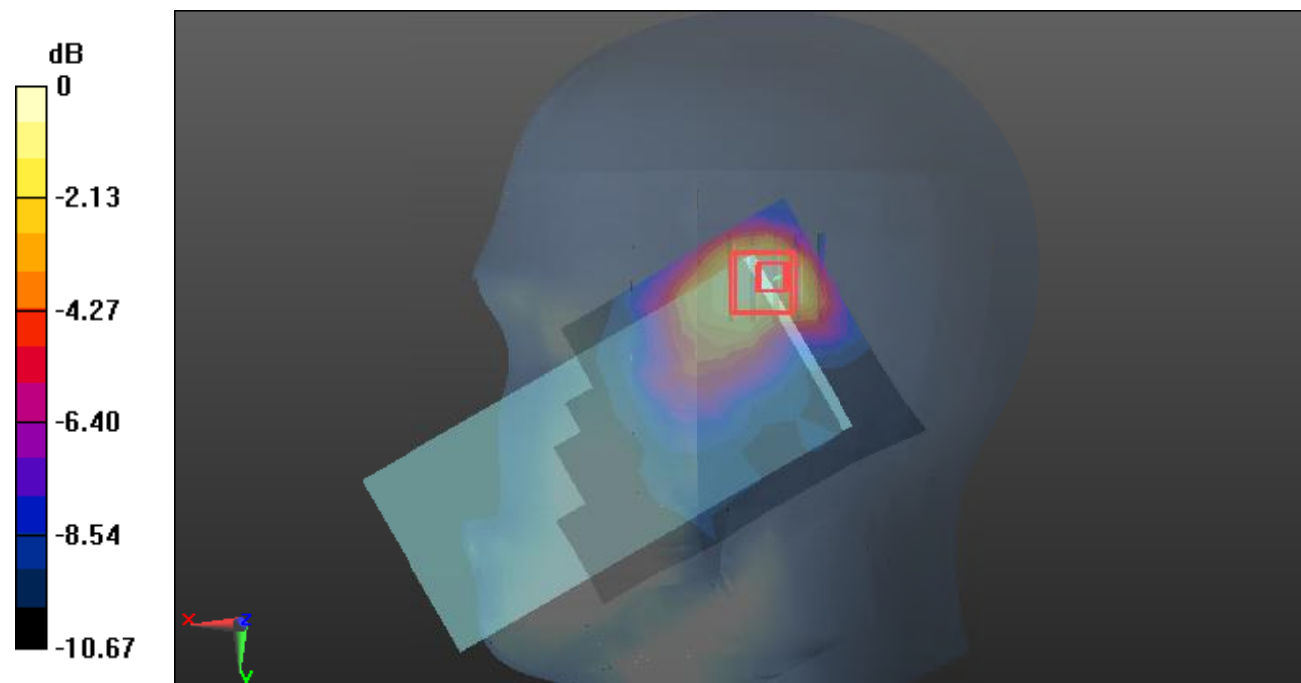

0 dB = 0.168 W/kg = -7.75 dB dBW/kg

Test Plot179#: LTE Band 41_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.978$ S/m; $\epsilon_r = 38.257$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2593 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.231 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.472 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.547 W/kg

SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.254 W/kg

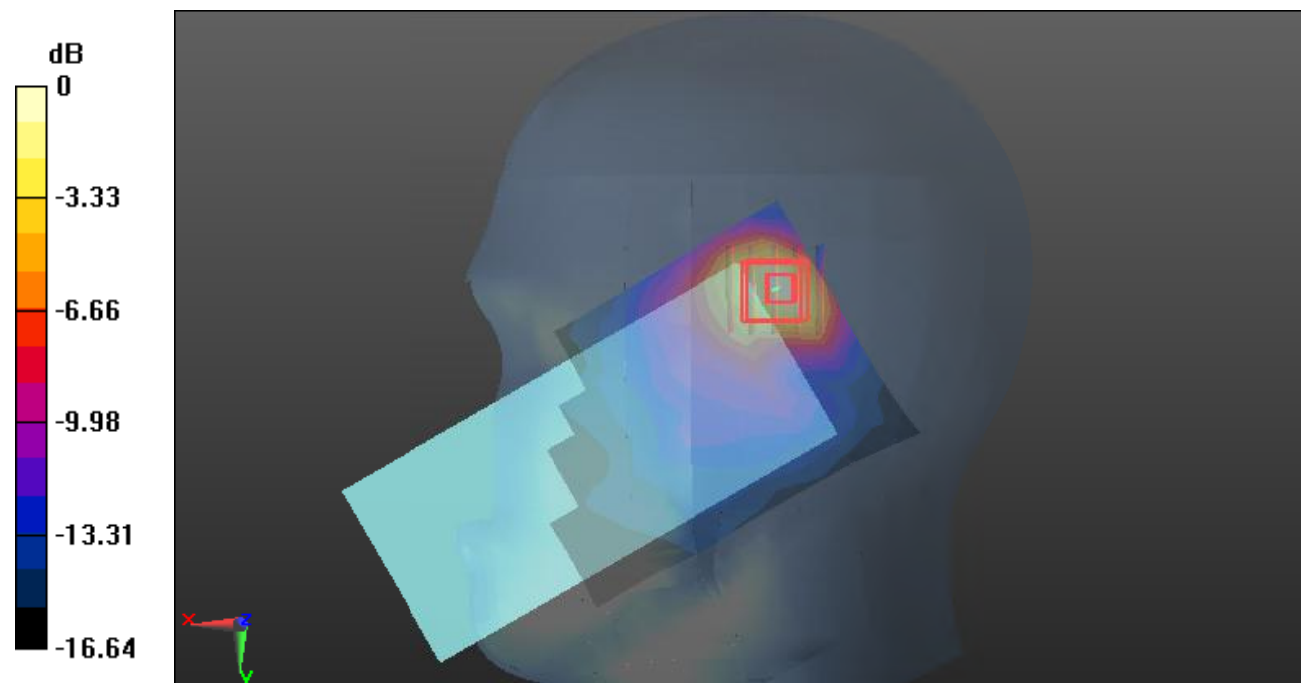

0 dB = 0.254 W/kg = -5.95 dB dBW/kg

Test Plot180#: LTE Band 41_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.978$ S/m; $\epsilon_r = 38.257$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2593 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.175 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.252 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.200 W/kg

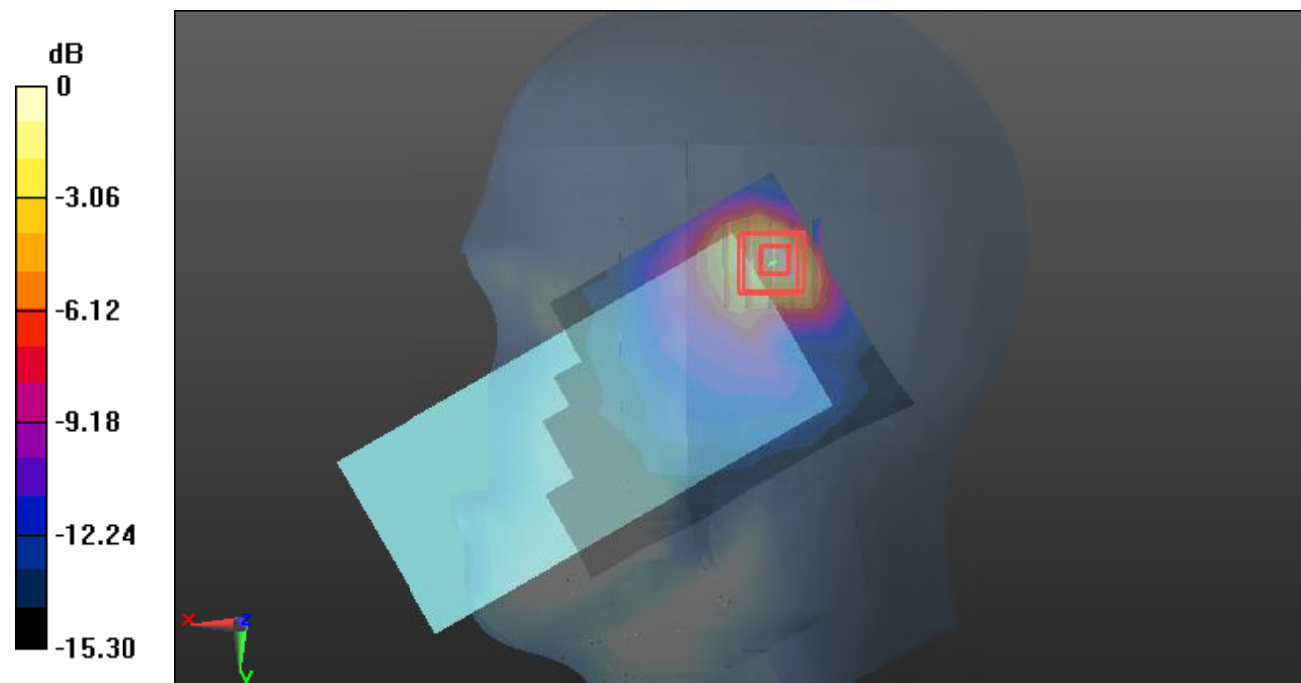

0 dB = 0.200 W/kg = -6.99 dB dBW/kg

Test Plot181#: LTE Band 41_Body Front_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 2593 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.978$ S/m; $\epsilon_r = 38.257$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2593 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0146 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.039 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.0270 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00762 W/kg

Maximum value of SAR (measured) = 0.0141 W/kg

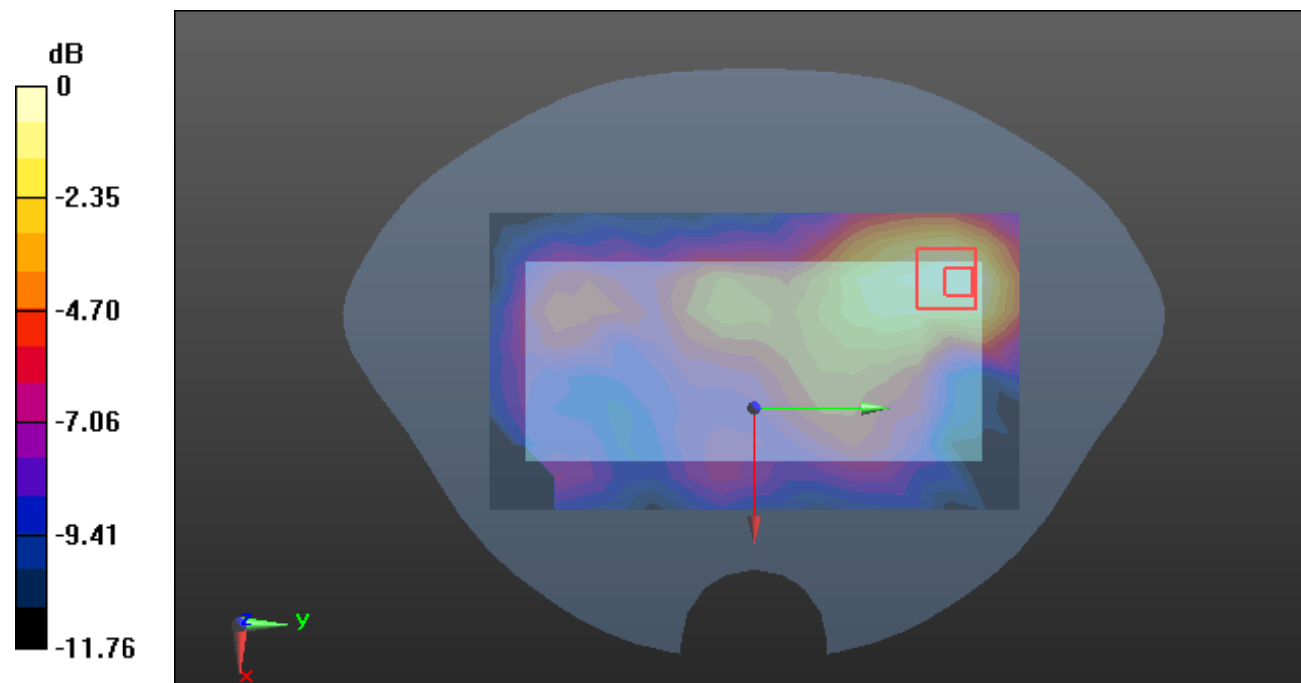

0 dB = 0.0141 W/kg = -18.51 dB dBW/kg

Test Plot182#: LTE Band 41_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 2593 MHz;Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.978$ S/m; $\epsilon_r = 38.257$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2593 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0118 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.747 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0230 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00647 W/kg

Maximum value of SAR (measured) = 0.0115 W/kg

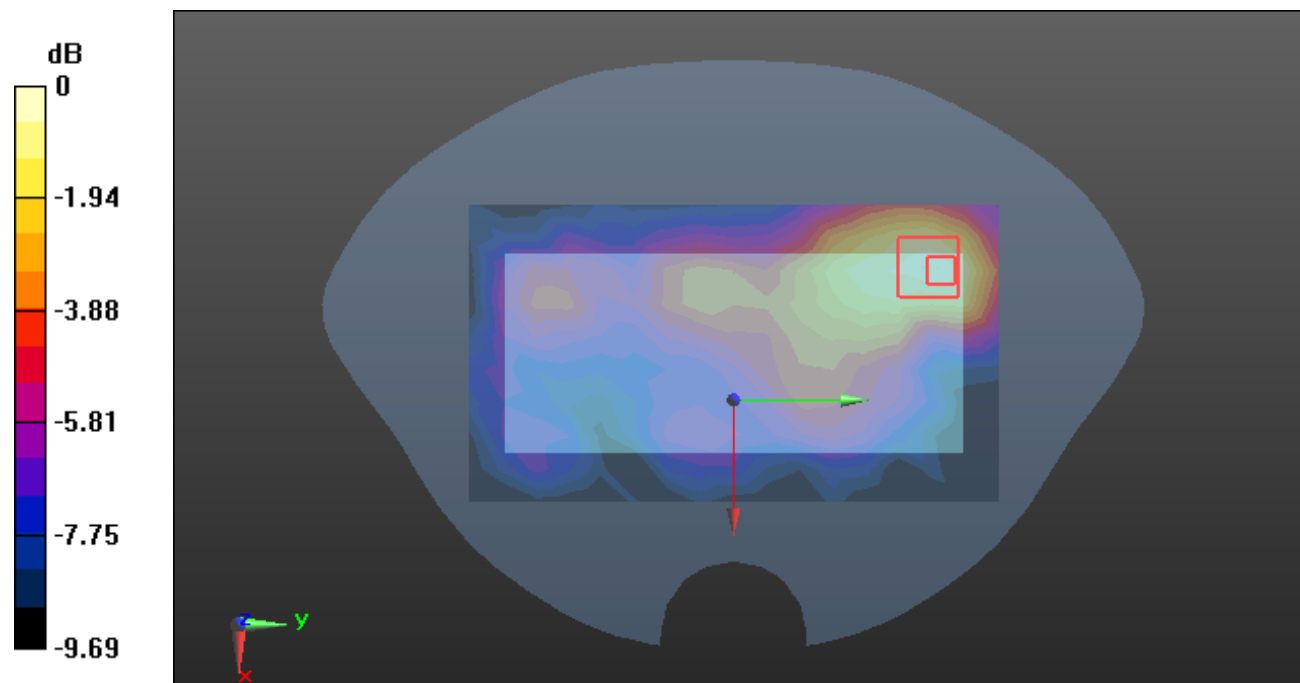

0 dB = 0.0115 W/kg = -19.39 dB dBW/kg

Test Plot183#: LTE Band 41_Body Back_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 2593 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.978$ S/m; $\epsilon_r = 38.257$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2593 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0211 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.8720 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0530 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0276 W/kg

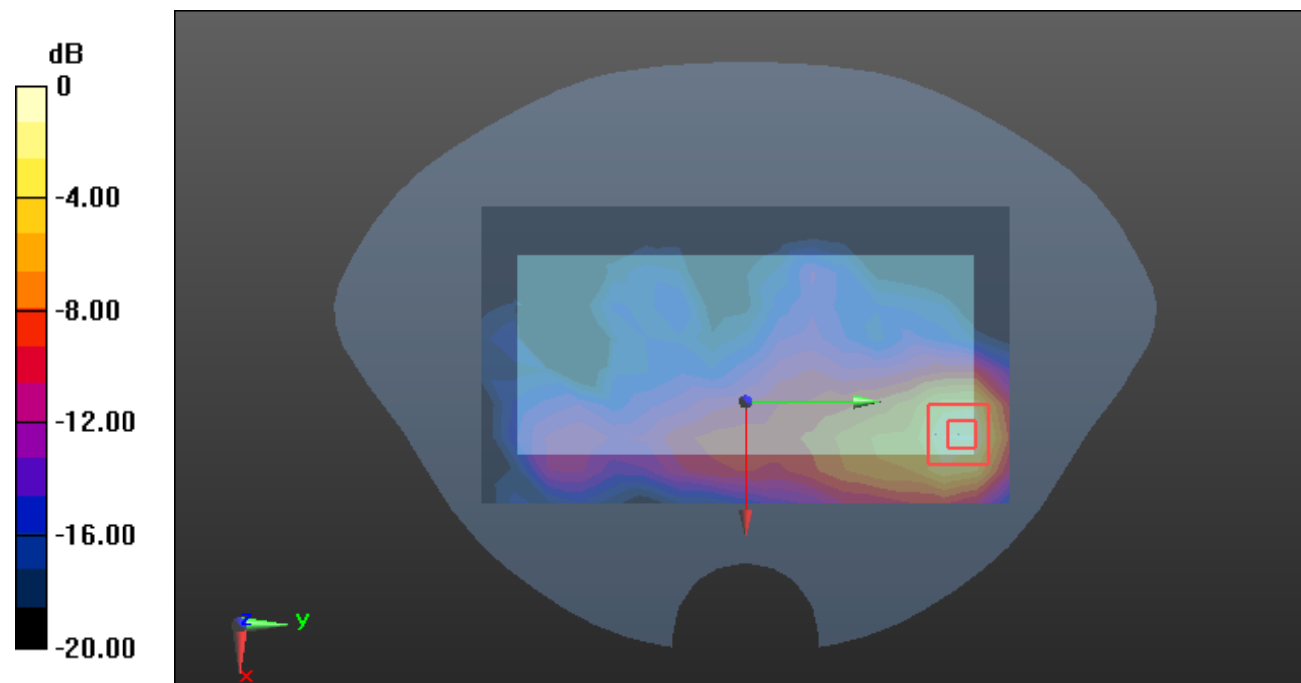

0 dB = 0.0276 W/kg = -15.59 dB dBW/kg

Test Plot184#: LTE Band 41_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 2593 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.978$ S/m; $\epsilon_r = 38.257$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2593 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0212 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.9310 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0510 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0277 W/kg

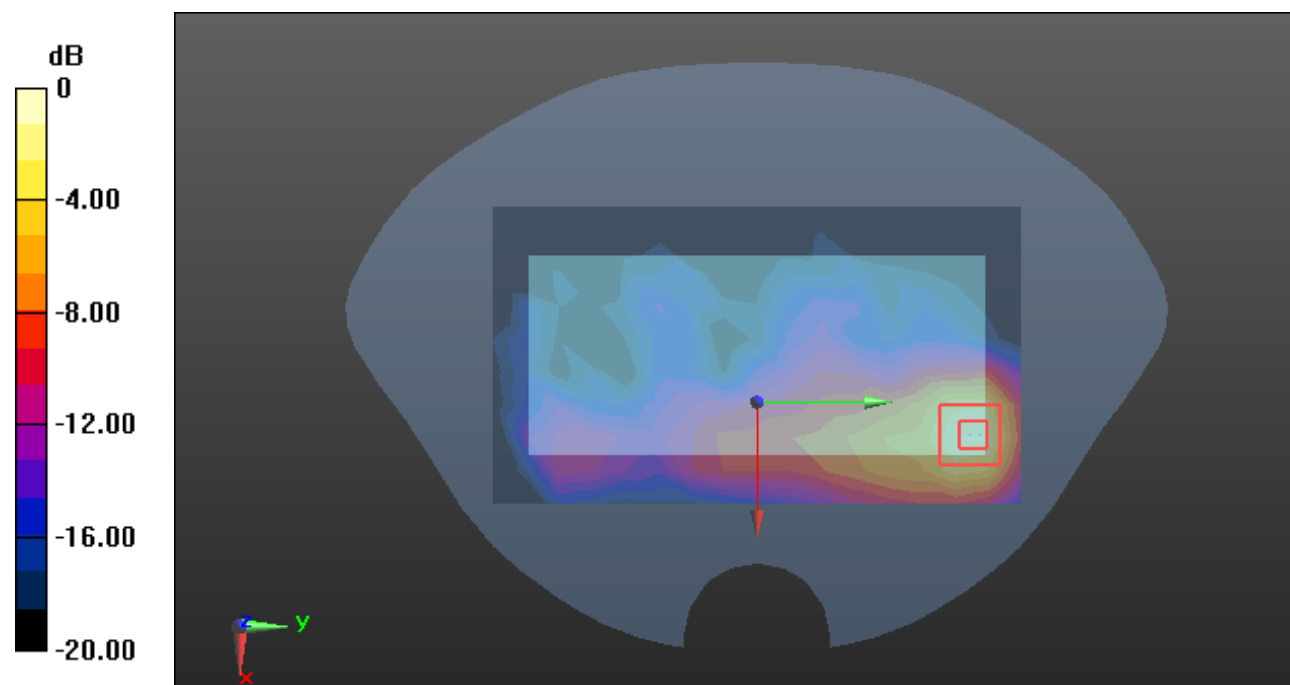

0 dB = 0.0277 W/kg = -15.58 dB dBW/kg

Test Plot185#: LTE Band 41_Body Left_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 2593 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.978$ S/m; $\epsilon_r = 38.257$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2593 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x17x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0156 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.442 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.00846 W/kg

Maximum value of SAR (measured) = 0.0171 W/kg

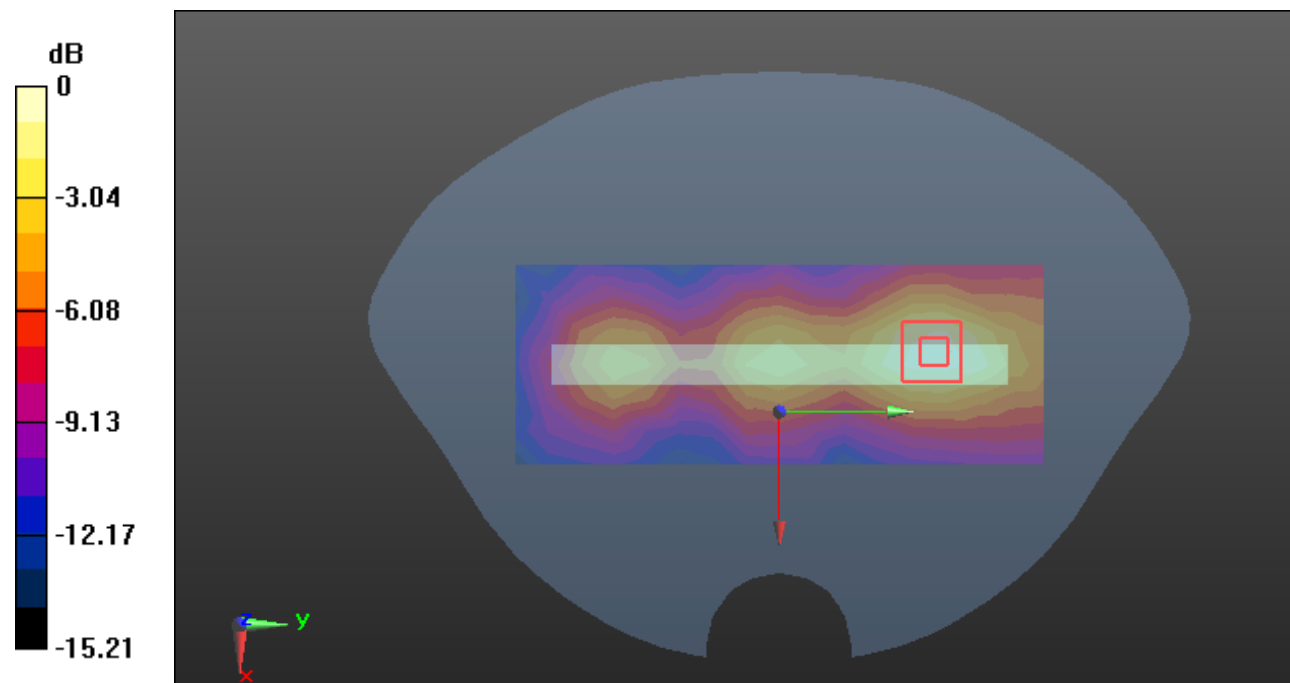

0 dB = 0.0171 W/kg = -17.67 dB dBW/kg

Test Plot186#: LTE Band 41_Body Left_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic WCDMA (0); Frequency: 2593 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.978$ S/m; $\epsilon_r = 38.257$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2593 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x17x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0122 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.061 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0250 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00669 W/kg

Maximum value of SAR (measured) = 0.0135 W/kg

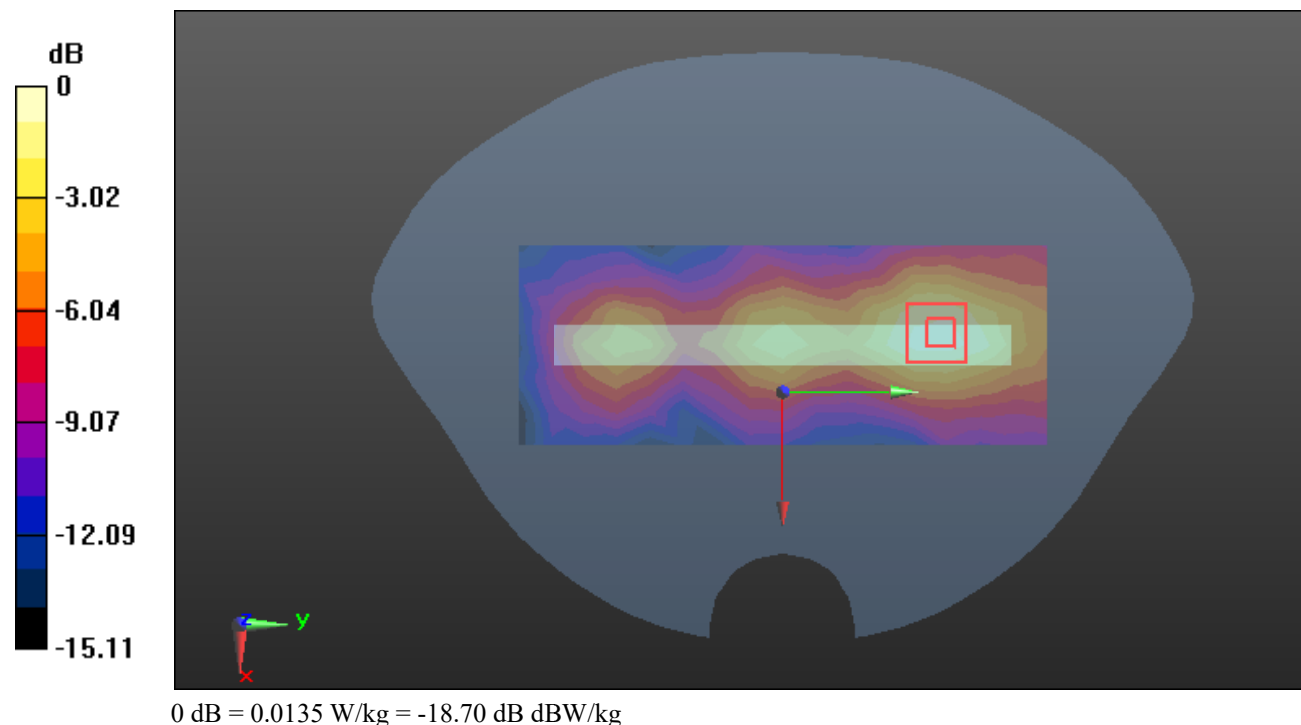

Test Plot187#: LTE Band 41_Body Top_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.978$ S/m; $\epsilon_r = 38.257$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2593 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0695 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.531 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0619 W/kg

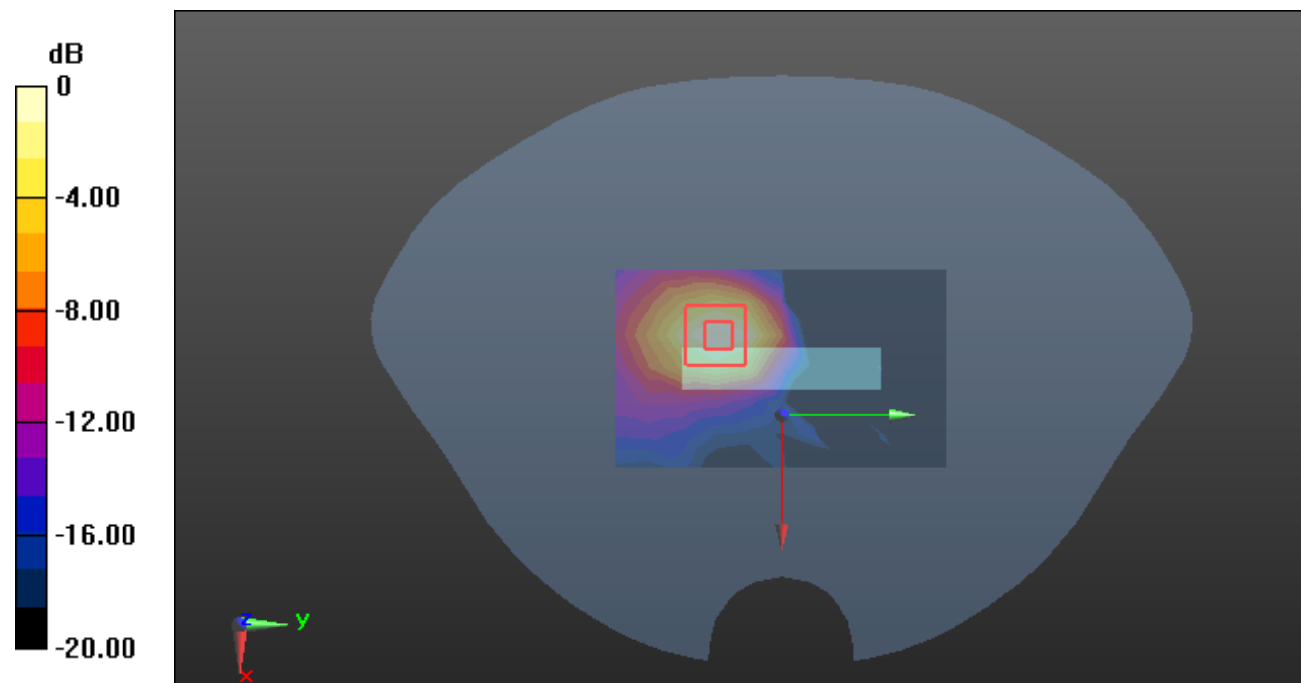

0 dB = 0.0619 W/kg = -12.08 dB dBW/kg

Test Plot188#: LTE Band 41_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.978$ S/m; $\epsilon_r = 38.257$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2593 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0406 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.440 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0434 W/kg

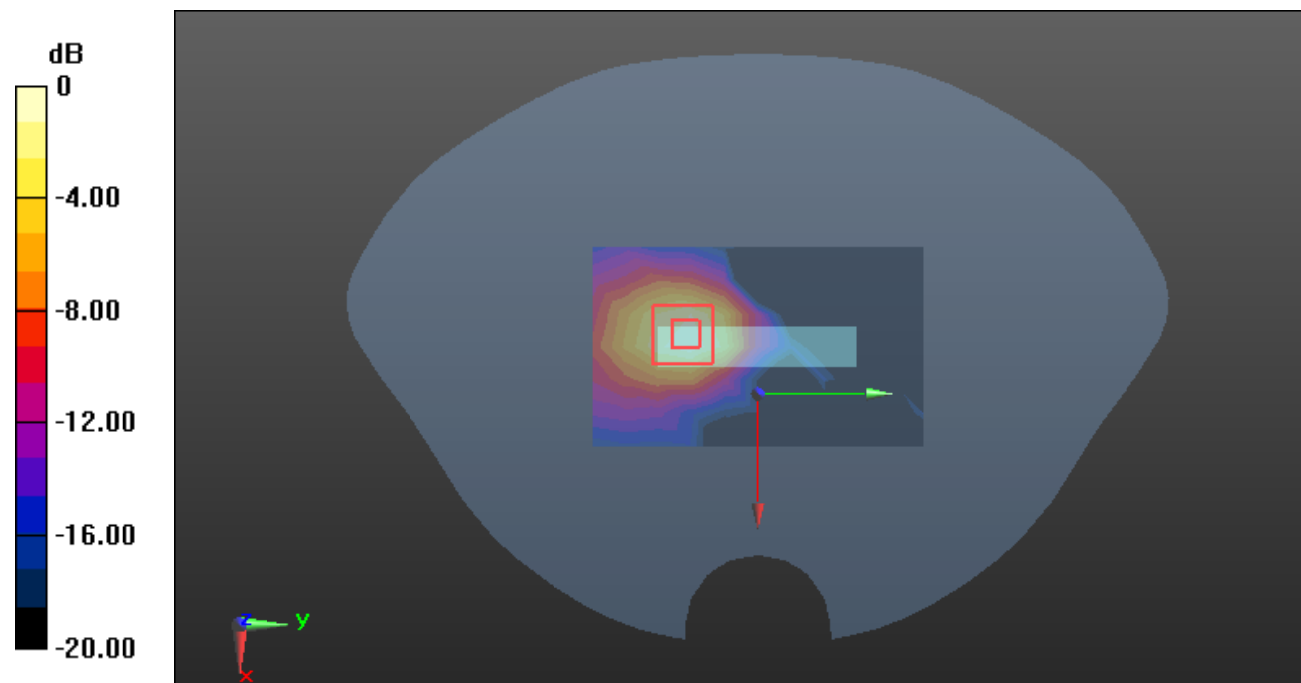

Test Plot189#: LTE Band 66_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 40.281$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.240 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.51 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.502 W/kg

SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.303 W/kg

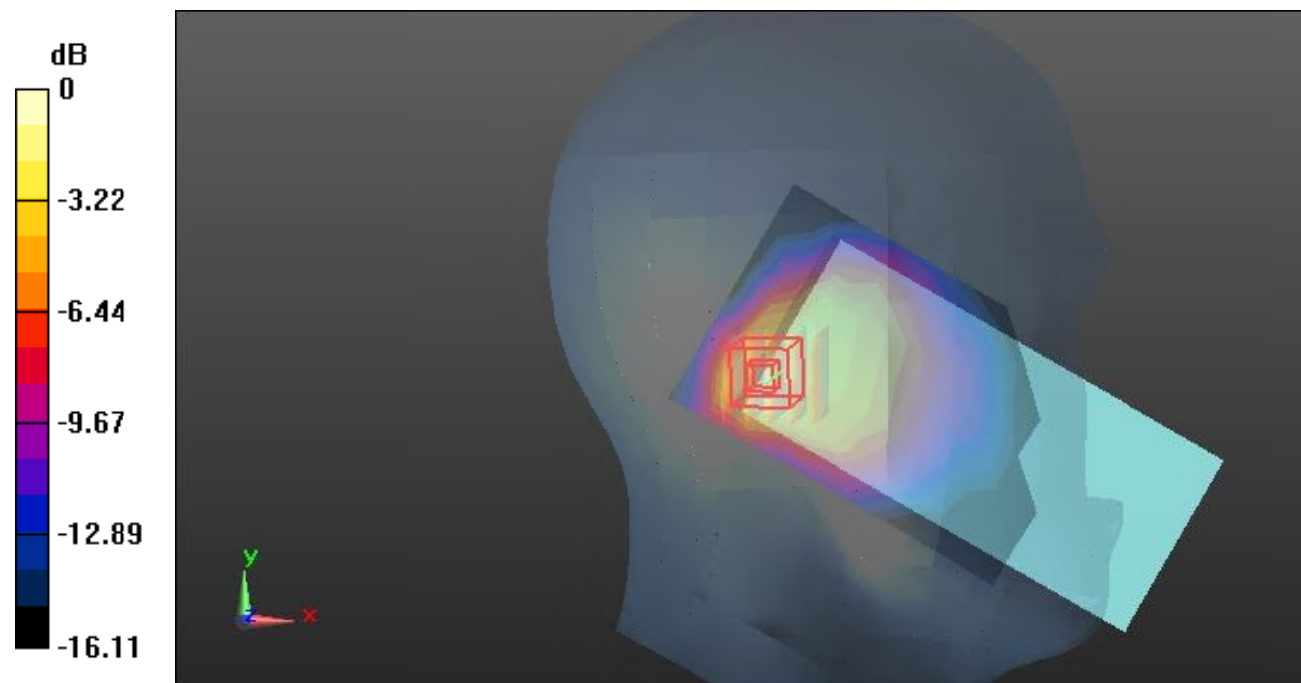

0 dB = 0.303 W/kg = -5.19 dB dBW/kg

Test Plot190#: LTE Band 66_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 40.281$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.200 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.44 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.118 W/kg

Maximum value of SAR (measured) = 0.258 W/kg

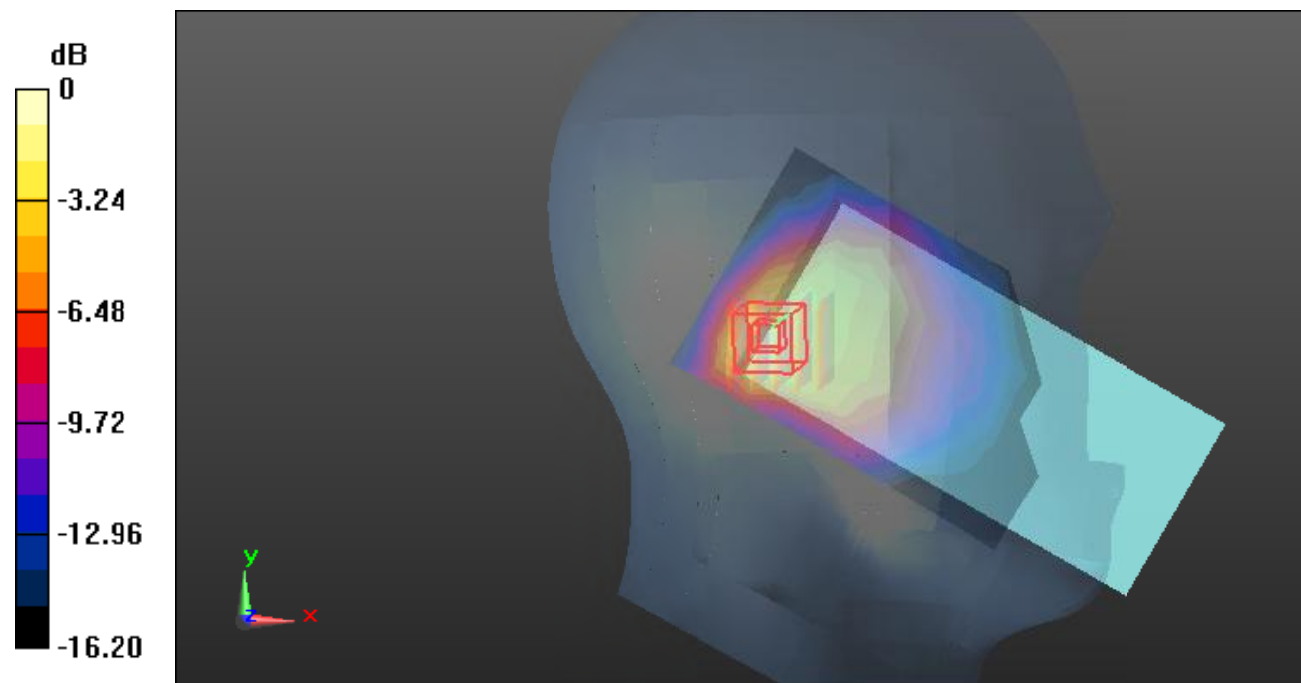

0 dB = 0.258 W/kg = -5.88 dB dBW/kg

Test Plot191#: LTE Band 66_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 40.281$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.278 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.38 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.499 W/kg

SAR(1 g) = 0.276 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.313 W/kg

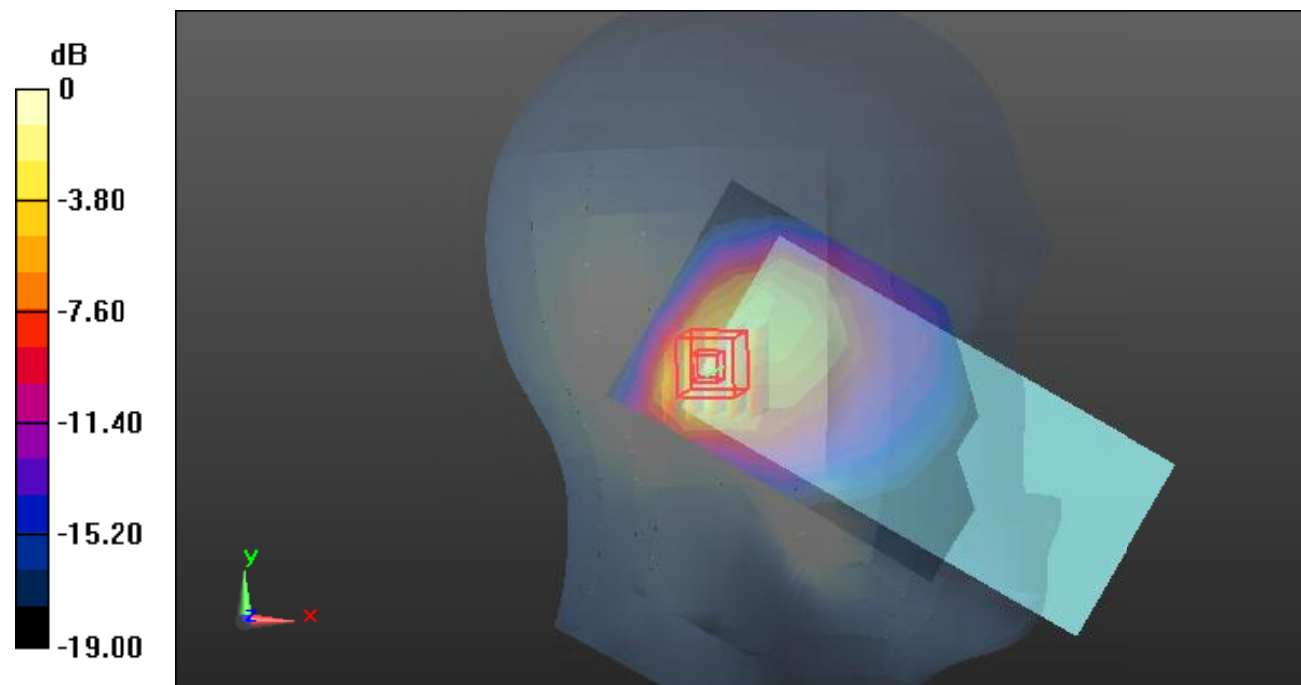

0 dB = 0.313 W/kg = -5.04 dB dBW/kg

Test Plot192#: LTE Band 66_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 40.281$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.235 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.25 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.261 W/kg

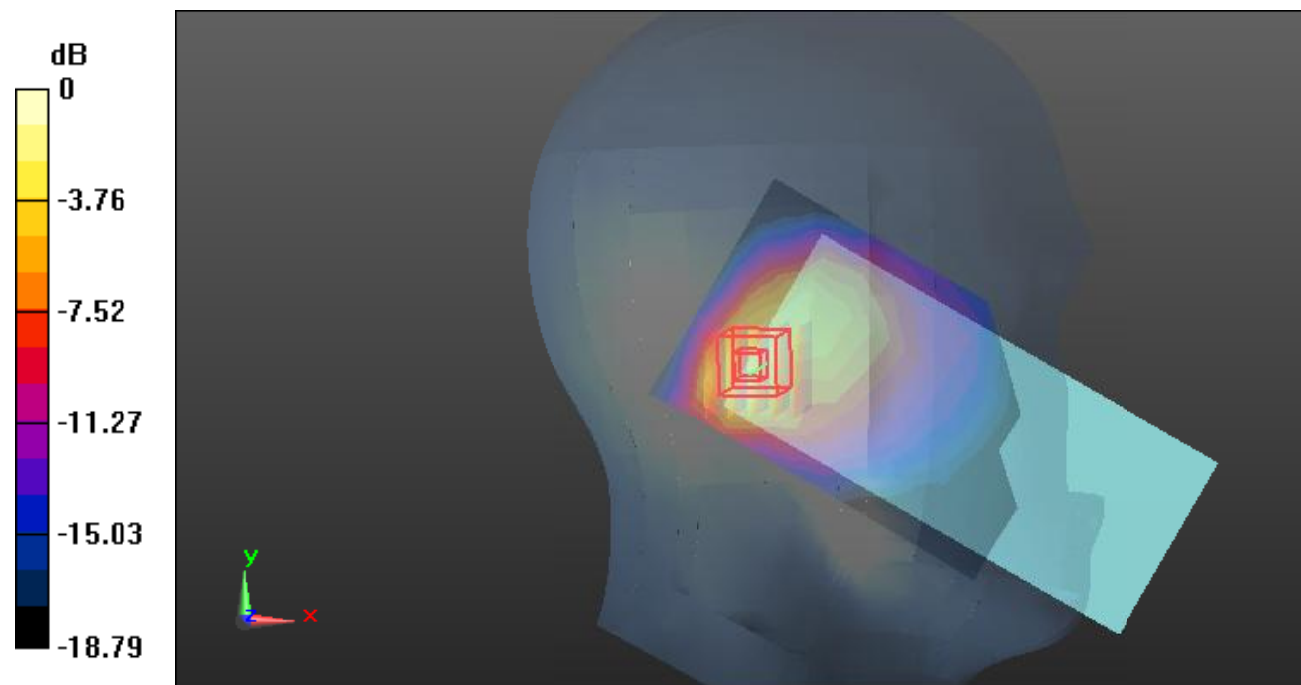

0 dB = 0.261 W/kg = -5.83 dB dBW/kg

Test Plot193#: LTE Band 66_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 40.281$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.534 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.60 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.998 W/kg

SAR(1 g) = 0.486 W/kg; SAR(10 g) = 0.230 W/kg

Maximum value of SAR (measured) = 0.561 W/kg

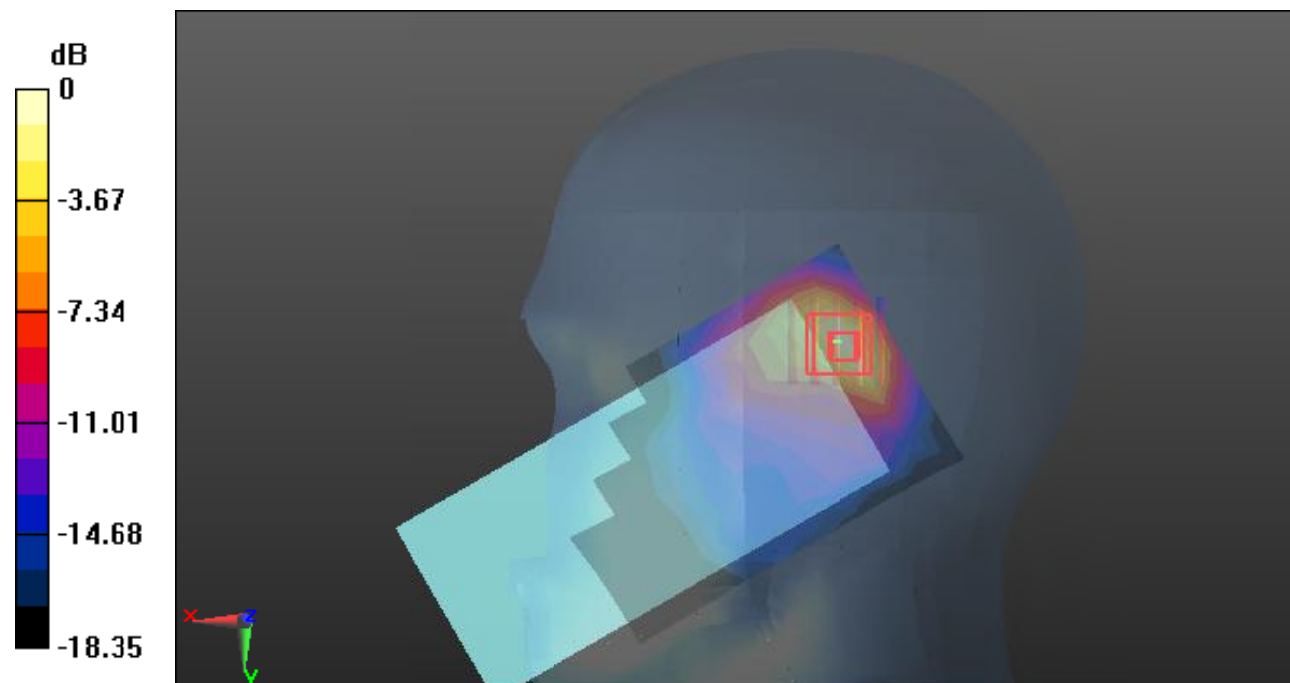

0 dB = 0.561 W/kg = -2.51 dB dBW/kg

Test Plot194#: LTE Band 66_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 40.281$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.440 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.63 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.816 W/kg

SAR(1 g) = 0.396 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.458 W/kg

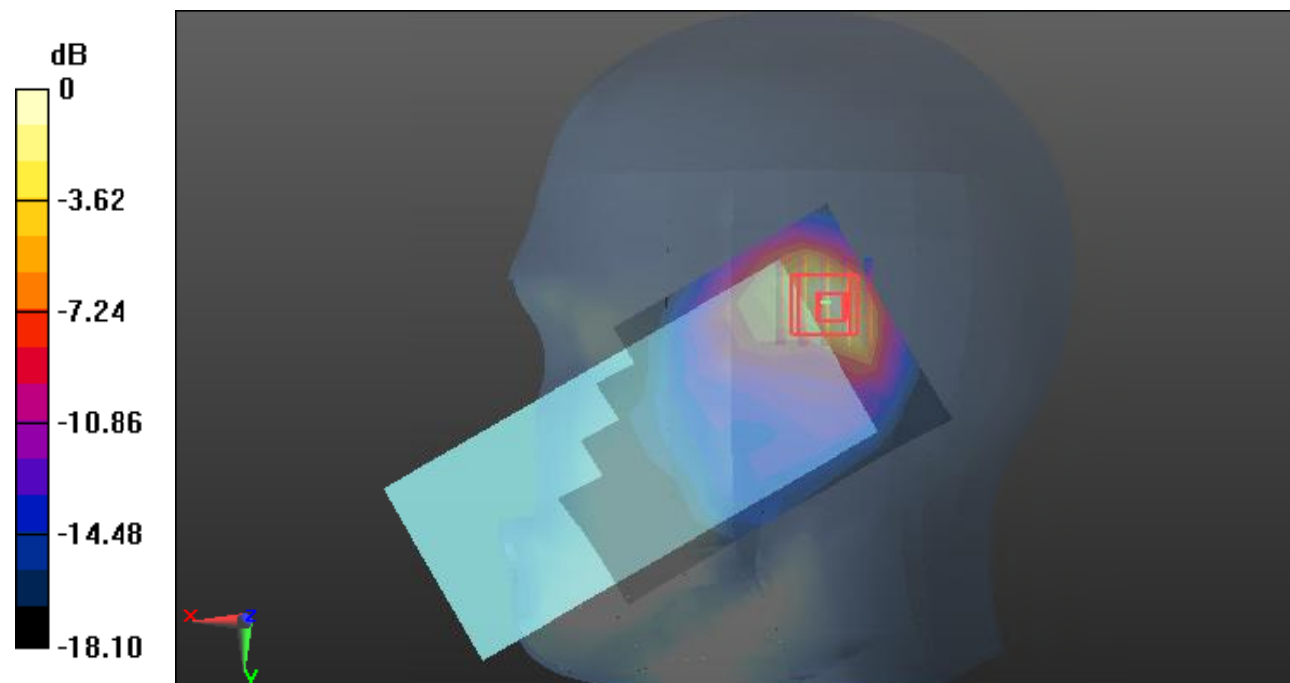

0 dB = 0.458 W/kg = -3.39 dB dBW/kg

Test Plot195#: LTE Band 66_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 40.281$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.738 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.58 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.735 W/kg; SAR(10 g) = 0.332 W/kg

Maximum value of SAR (measured) = 0.866 W/kg

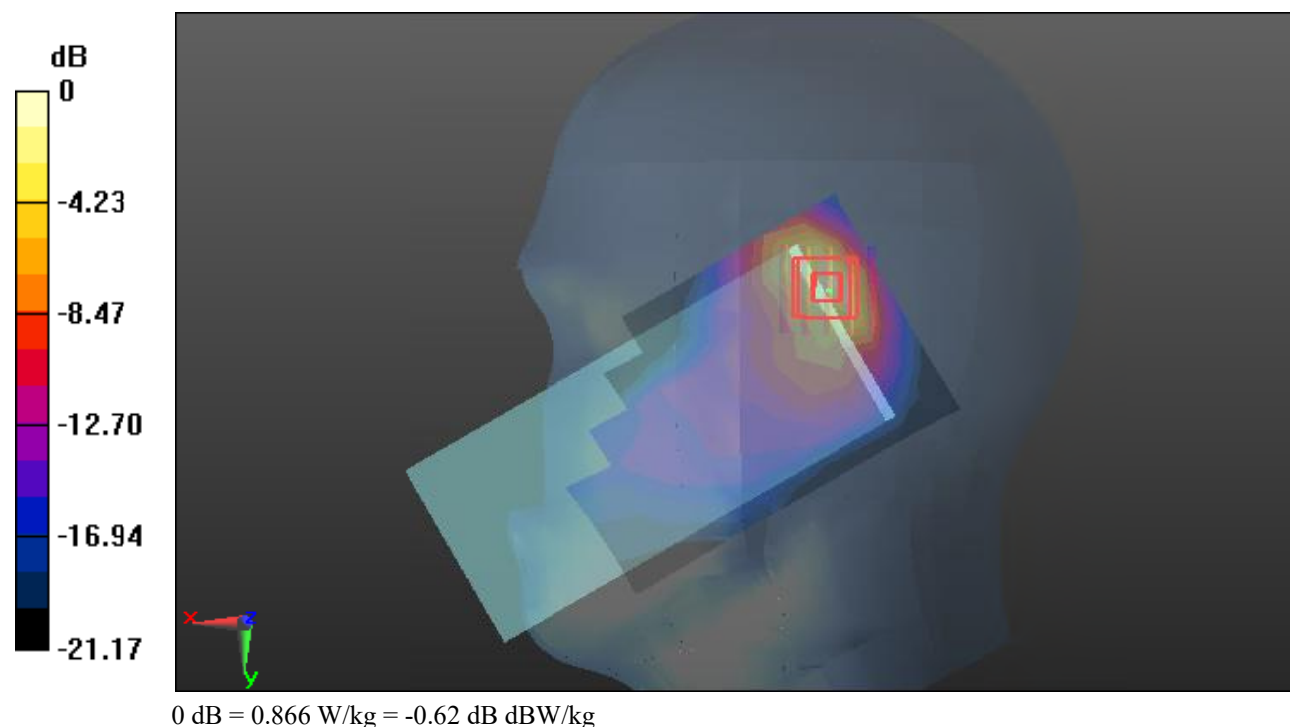

Test Plot196#: LTE Band 66_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 40.281$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.651 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.44 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.620 W/kg; SAR(10 g) = 0.282 W/kg

Maximum value of SAR (measured) = 0.664 W/kg

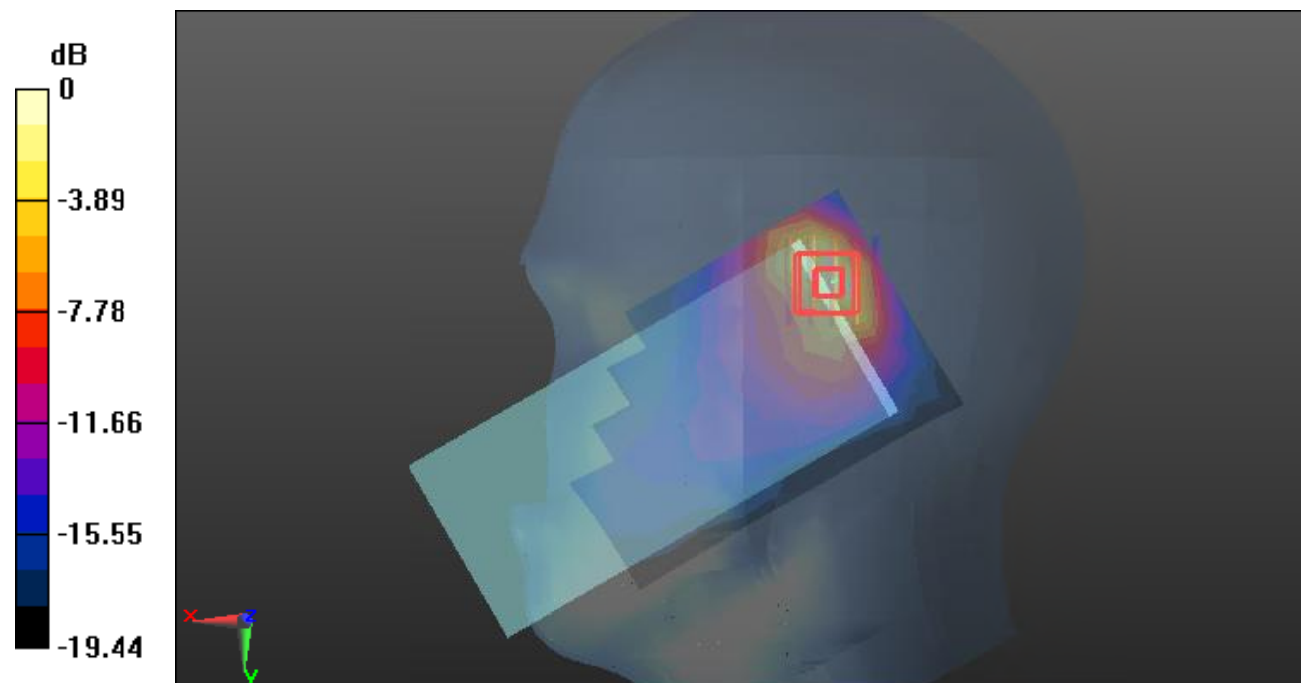

0 dB = 0.664 W/kg = -1.78 dB dBW/kg

Test Plot197#: LTE Band 66_Body Front_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 40.281$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.122 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.437 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.215 W/kg

SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.134 W/kg

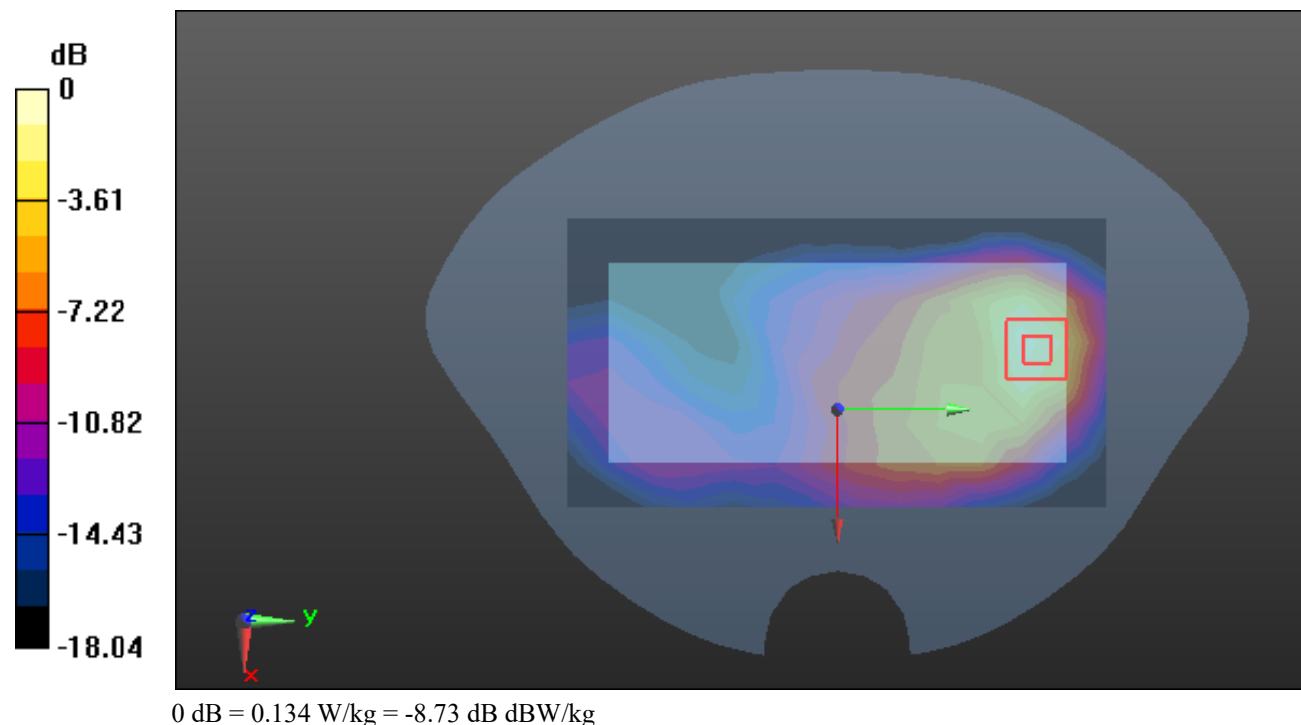

Test Plot198#: LTE Band 66_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 40.281$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.106 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.057 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.121 W/kg

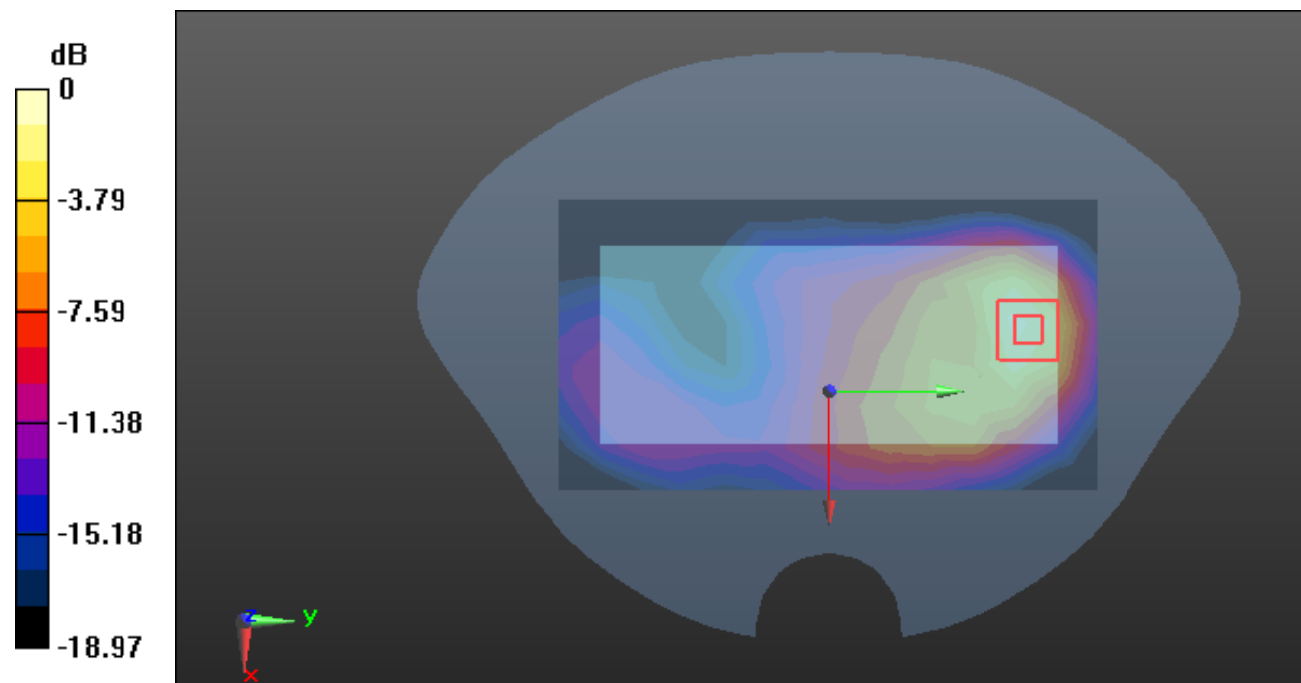

0 dB = 0.121 W/kg = -9.17 dB dBW/kg

Test Plot199#: LTE Band 66_Body Back_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 40.281$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.196 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.177 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.306 W/kg

SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.193 W/kg

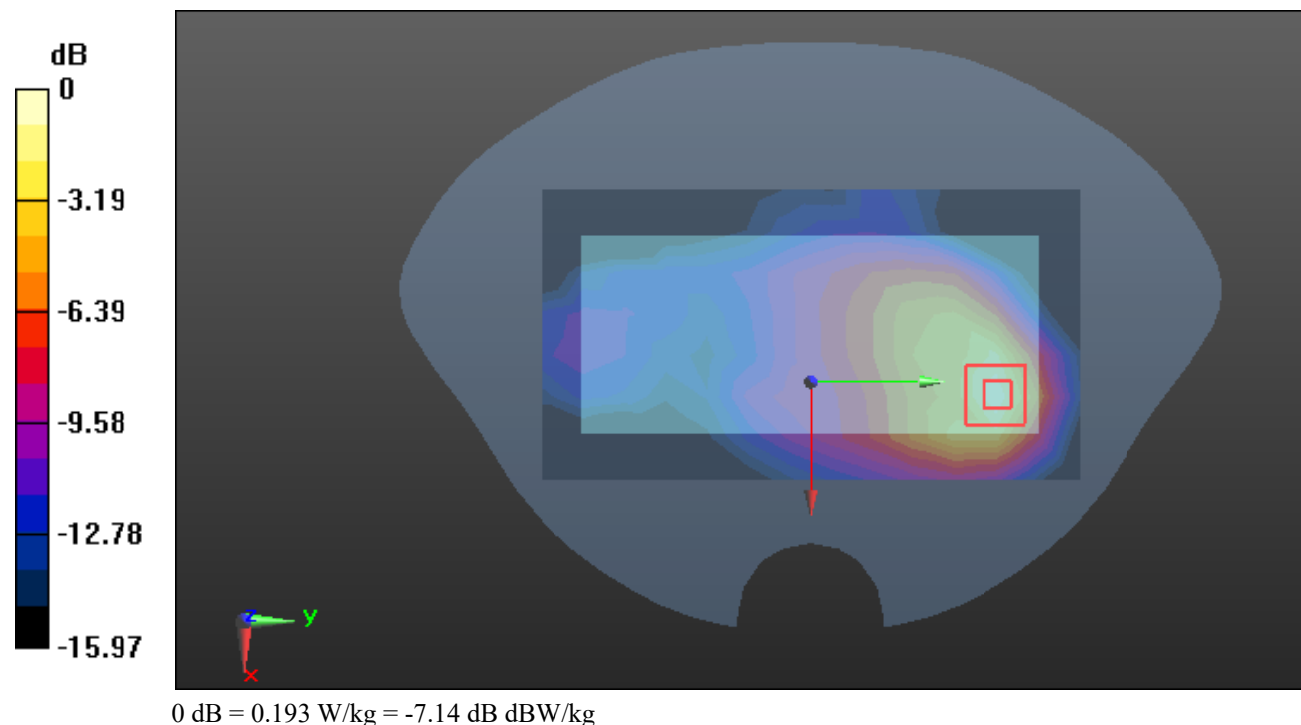

Test Plot200#: LTE Band 66_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 40.281$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.180 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.103 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.275 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.174 W/kg

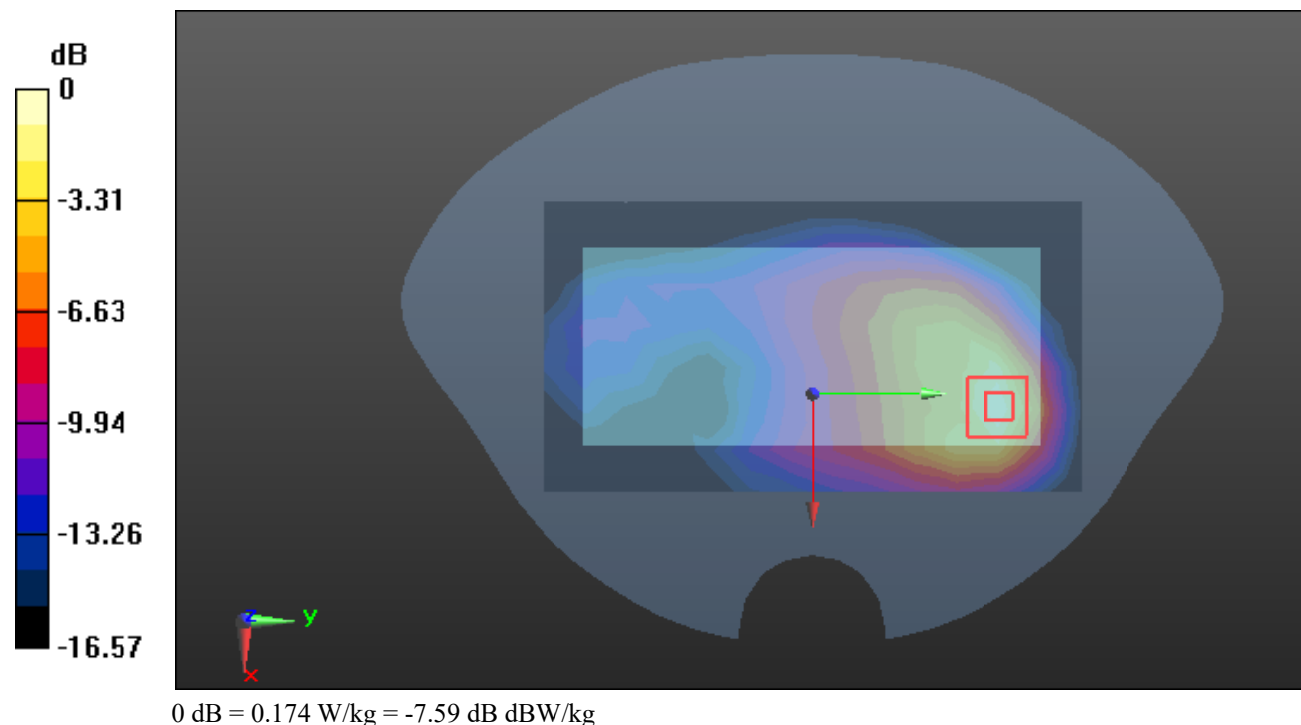

Test Plot201#: LTE Band 66_Body Left_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 40.281$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0233 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.334 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0350 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0228 W/kg

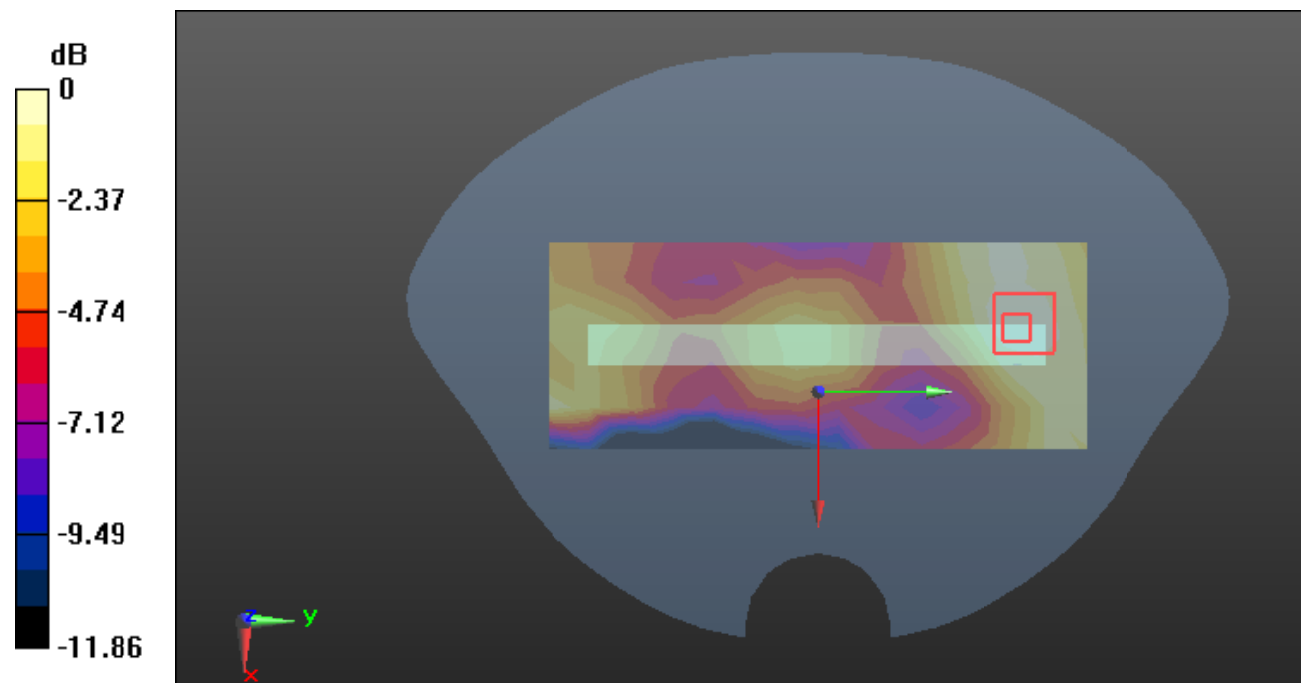

0 dB = 0.0228 W/kg = -16.42 dB dBW/kg

Test Plot202#: LTE Band 66_Body Left_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 40.281$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0231 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.323 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0290 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0194 W/kg

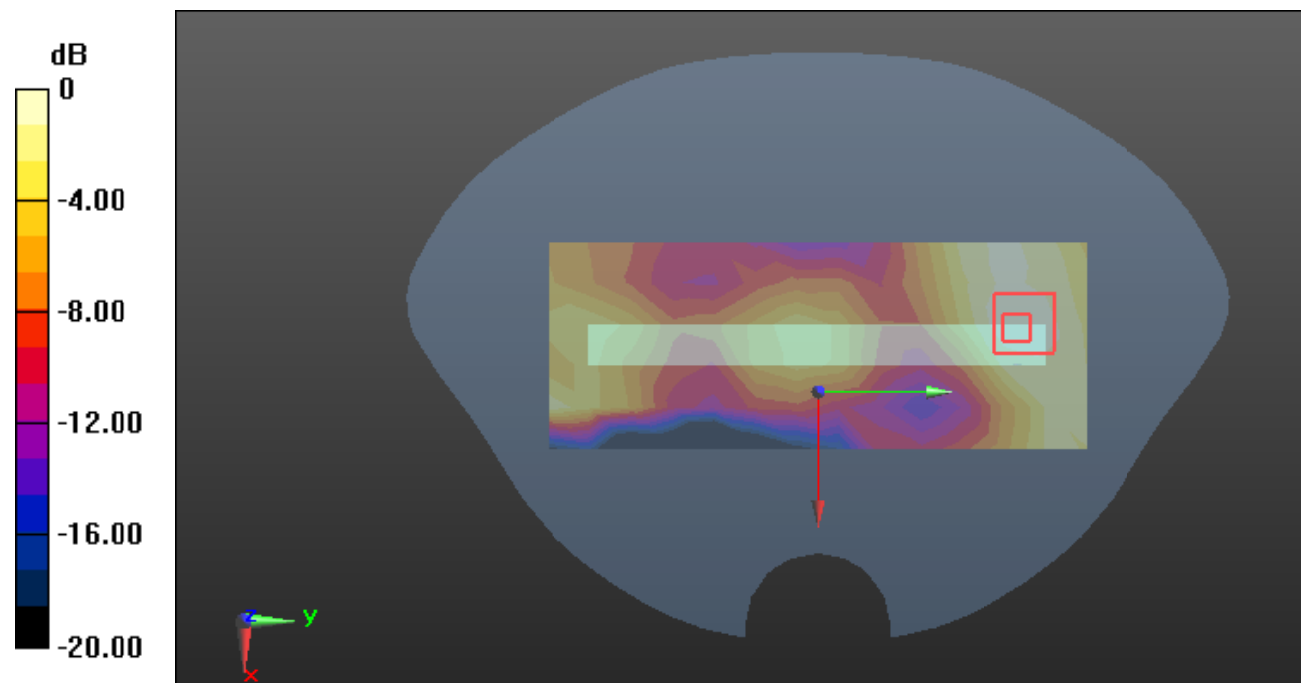

0 dB = 0.0194 W/kg = -17.12 dB dBW/kg

Test Plot203#: LTE Band 66_Body Top_1RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 40.281$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.227 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.757 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.397 W/kg

SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.249 W/kg

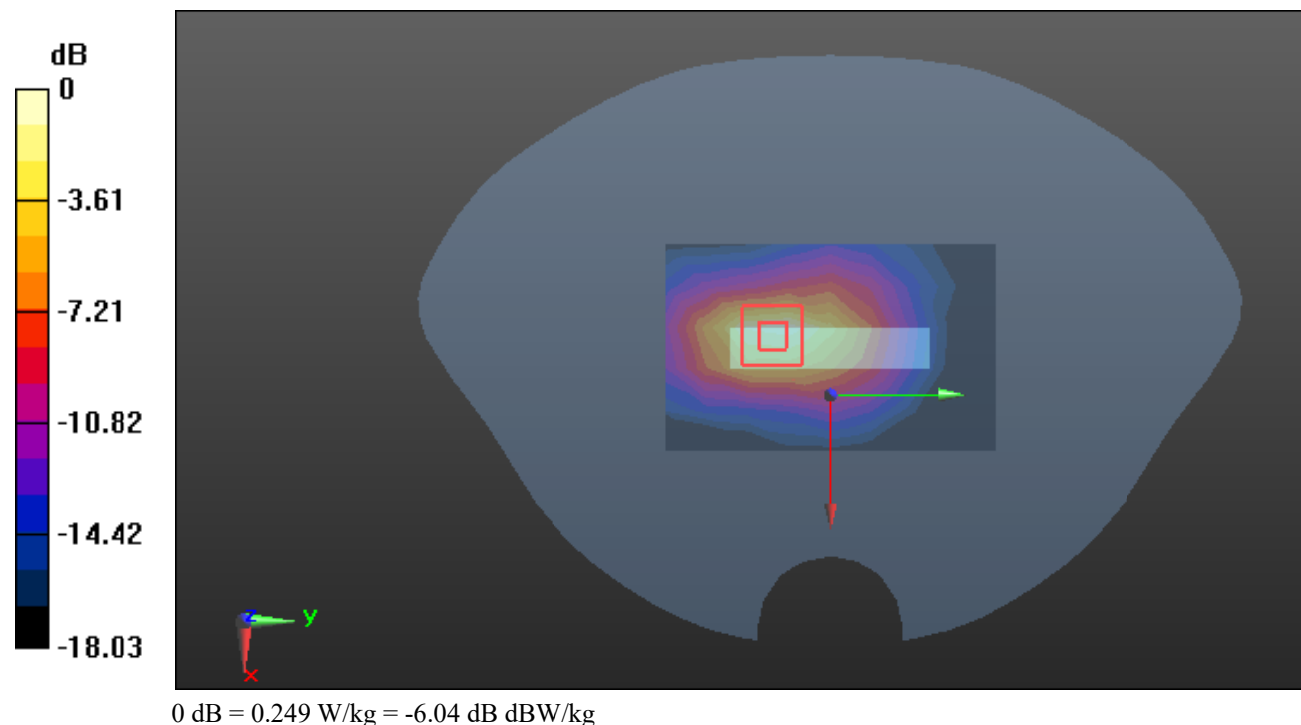

Test Plot204#: LTE Band 66_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 40.281$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.163 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.630 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.307 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.190 W/kg

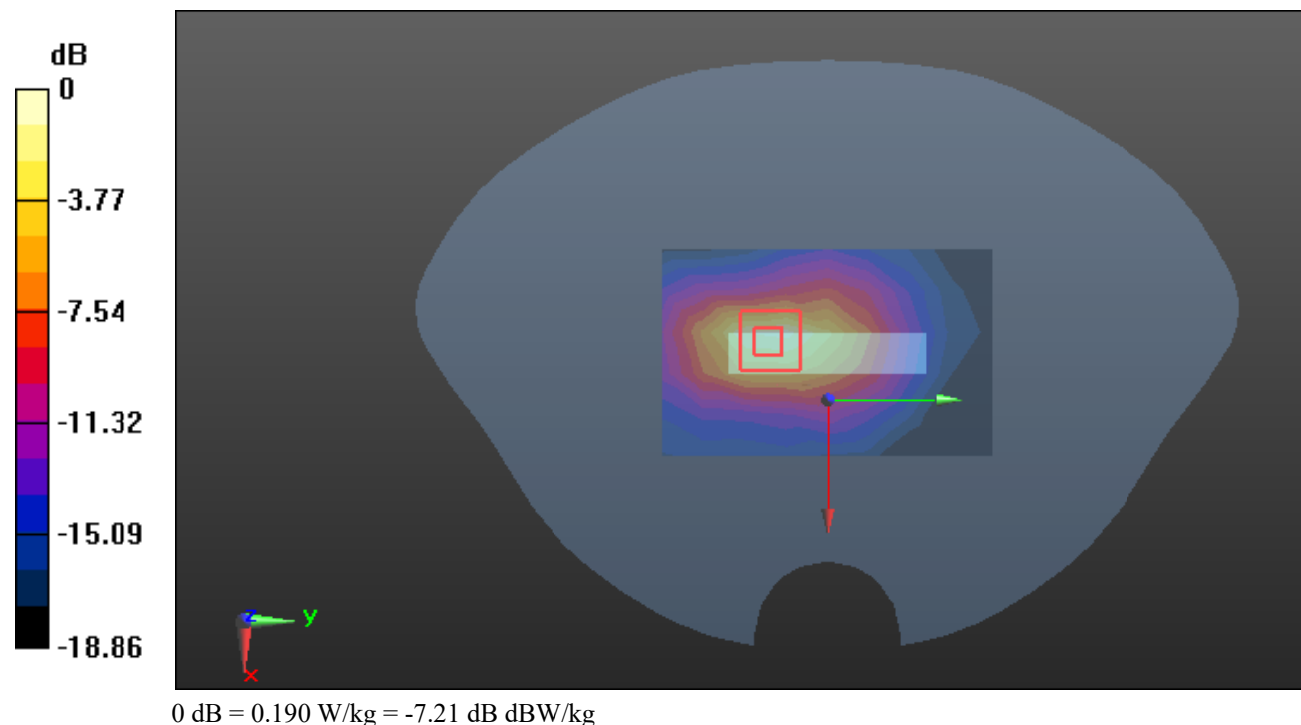

Test Plot 205#: 2.4G WIFI_ Head Left Cheek_Middle ANT1**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11 b (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 39.017$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.174 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.988 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.354 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.191 W/kg

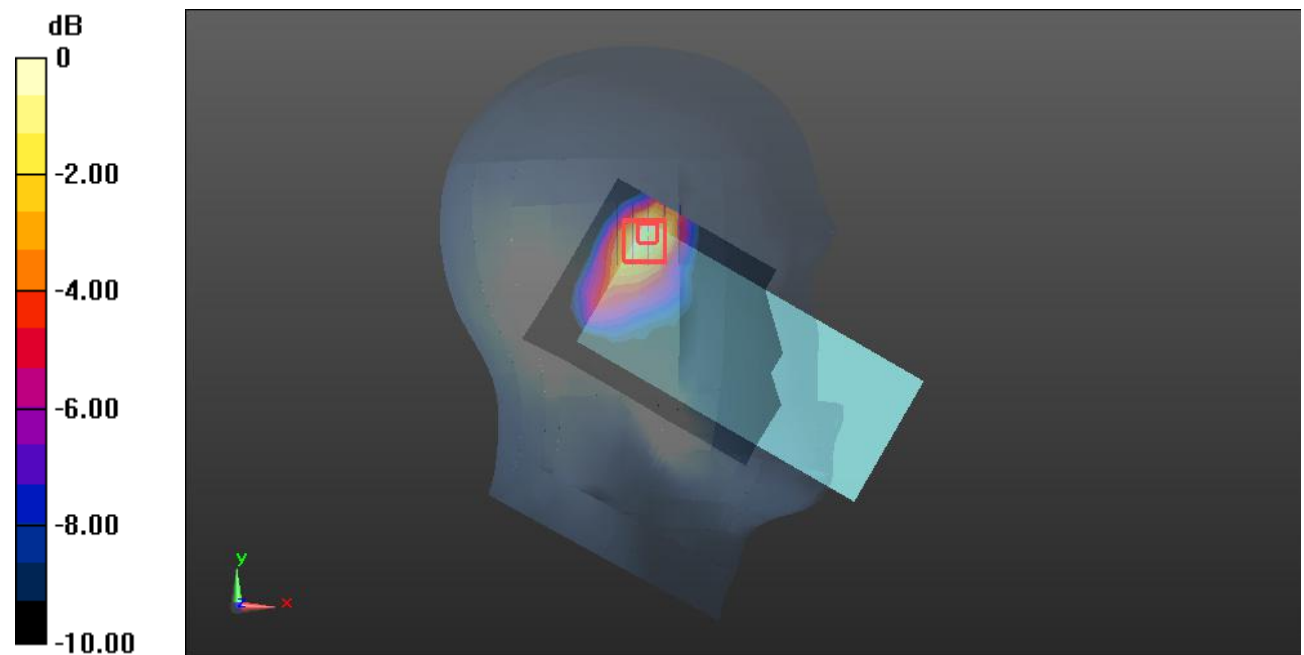

Test Plot 206#: 2.4G WIFI_ Head Left Tilt_Middle ANT1**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11 b (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 39.017$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.155 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.452 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.304 W/kg

SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.169 W/kg

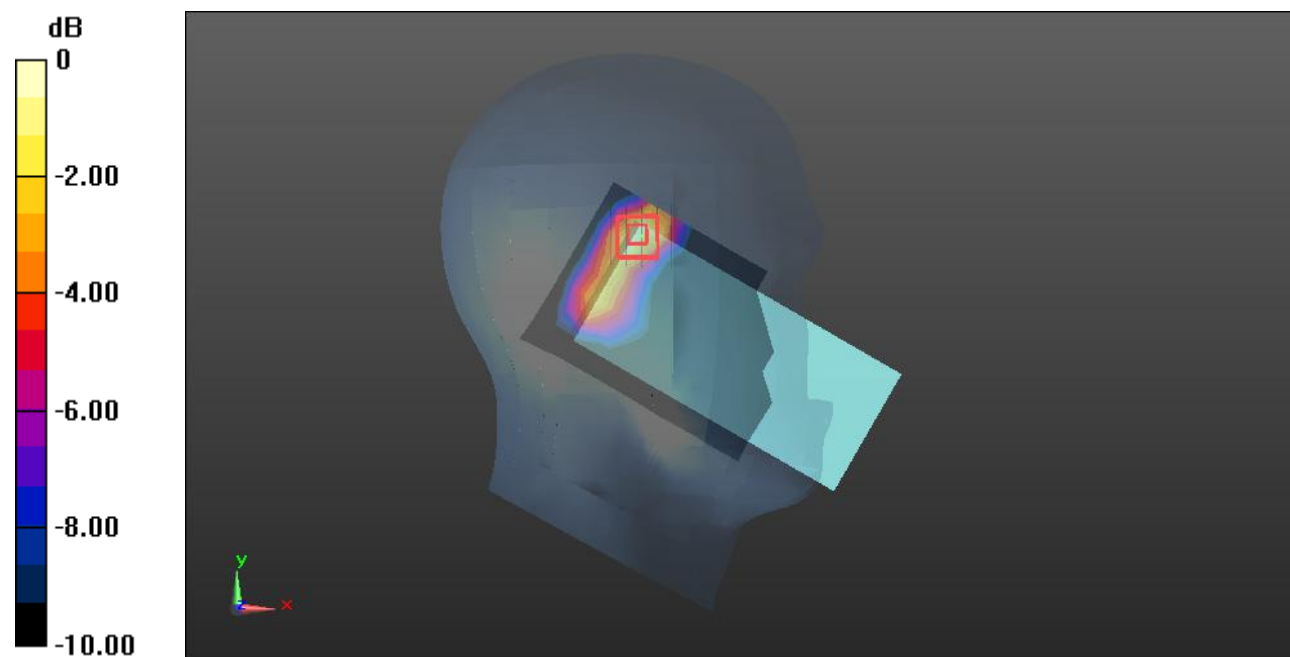

0 dB = 0.169 W/kg = -7.72 dBW/kg

Test Plot 207#: 2.4G WIFI_ Head Right Cheek_Middle ANT1**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11 b (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 39.017$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.107 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.886 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.108 W/kg

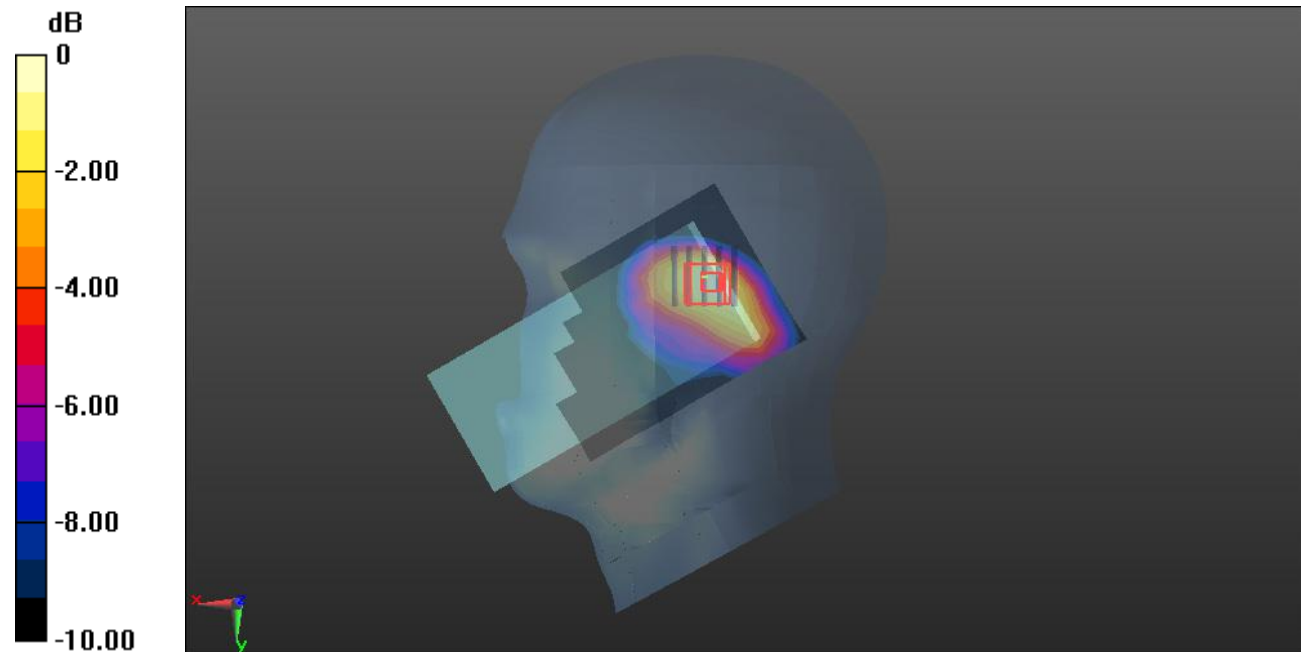

0 dB = 0.108 W/kg = -9.67 dBW/kg

Test Plot 208#: 2.4G WIFI_ Head Right Tilt_Middle ANT1**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11 b (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 39.017$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.129 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.657 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.237 W/kg

SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.138 W/kg

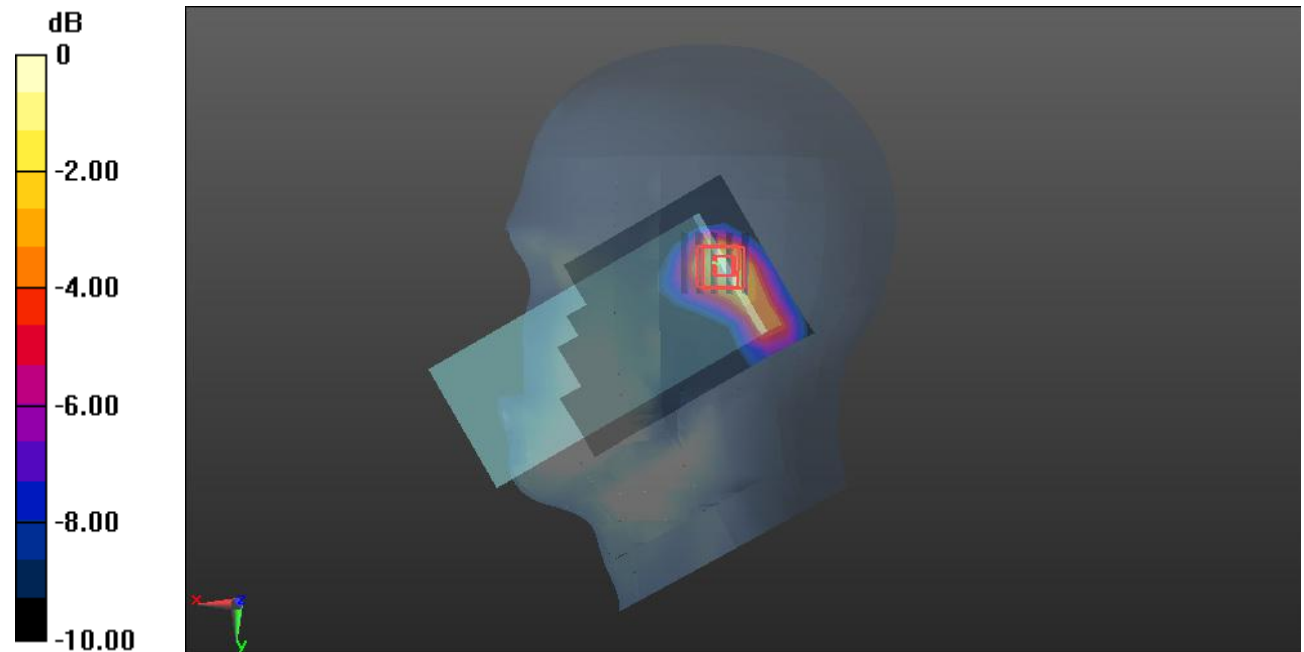

0 dB = 0.138 W/kg = -8.60 dBW/kg

Test Plot 209#: 2.4G WIFI_ Body Front_Middle ANT1**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11 b (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 39.017$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0516 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.352 V/m; Power Drift = 0.36 dB

Peak SAR (extrapolated) = 0.100 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0553 W/kg

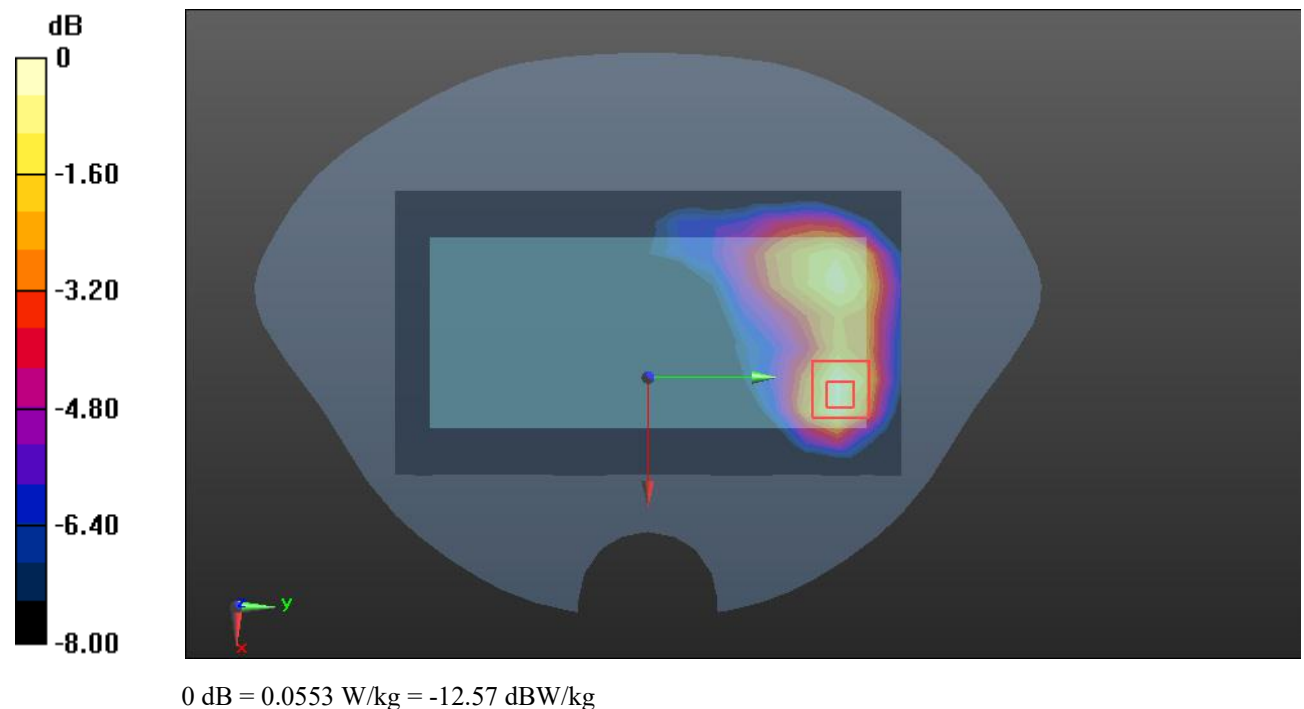

Test Plot 210#: 2.4G WIFI_Body Back_Middle ANT1**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11 b (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 39.017$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0866 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.352 V/m; Power Drift = 0.92 dB

Peak SAR (extrapolated) = 0.162 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.0890 W/kg

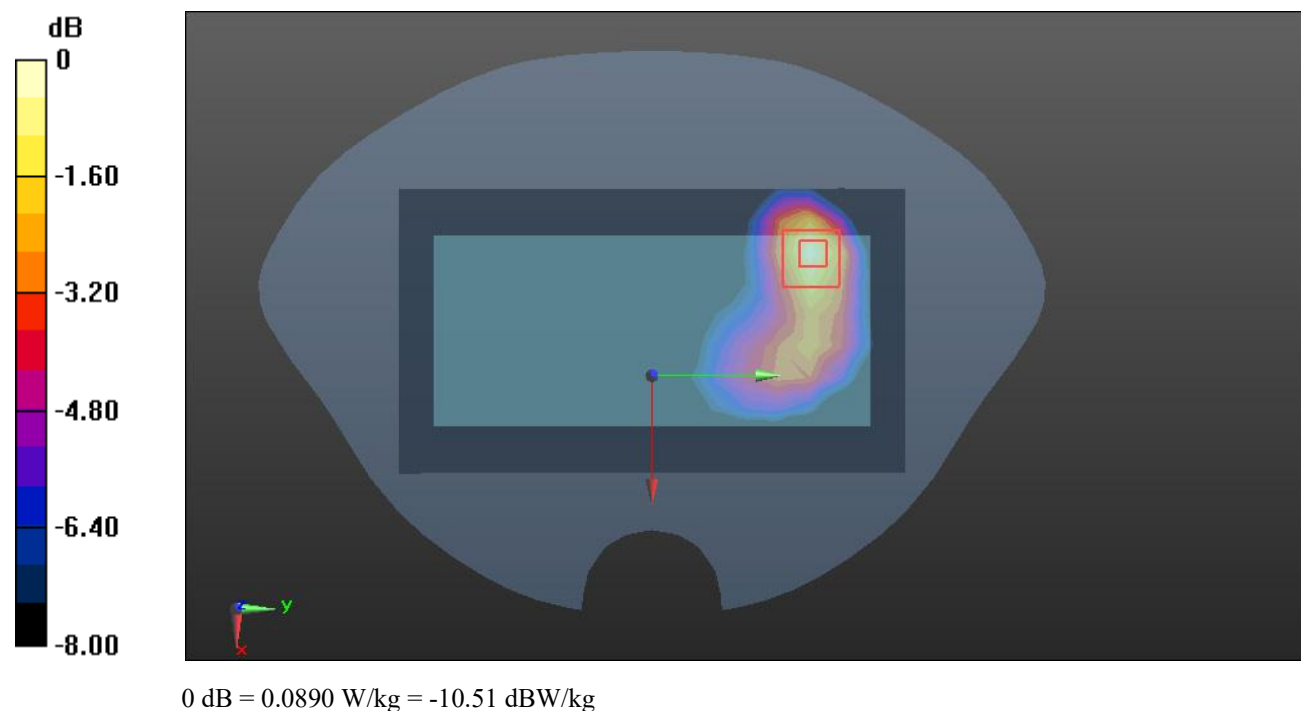

Test Plot 211#: 2.4G WIFI_Body Right_Middle ANT1**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11 b (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 39.017$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0570 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.225 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0980 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.0564 W/kg

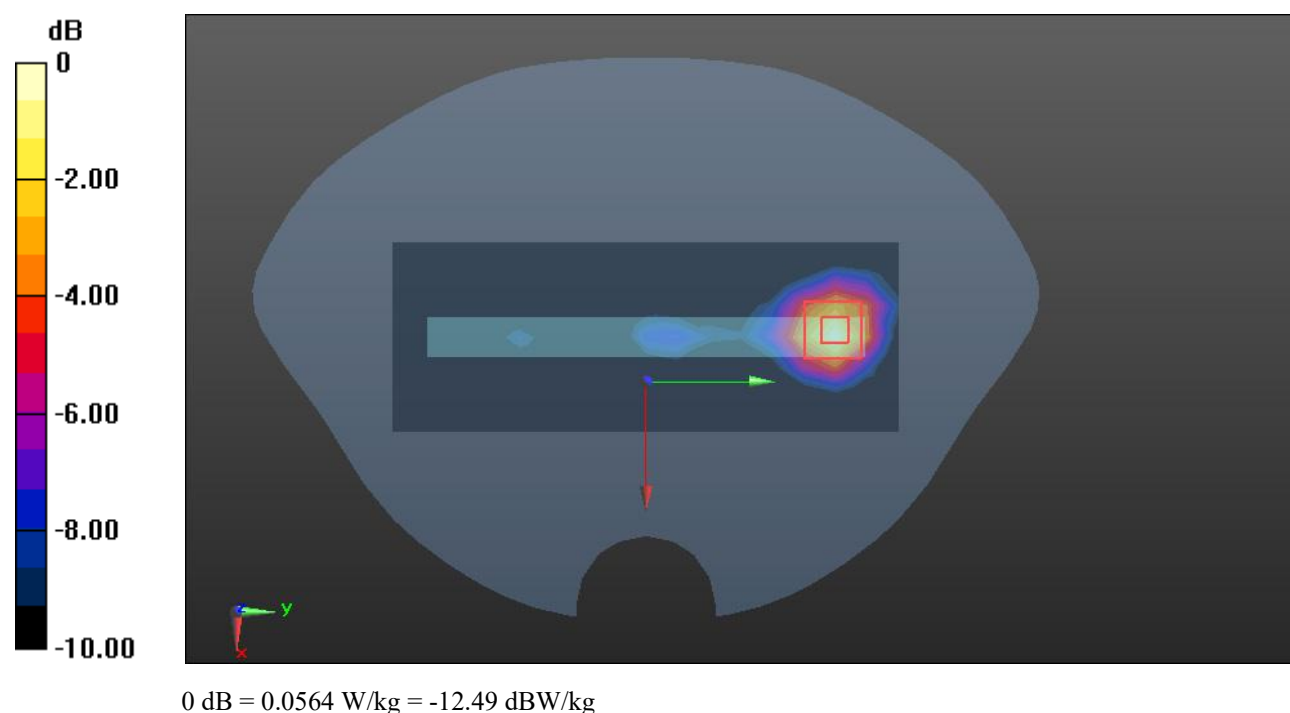

Test Plot 212#: 2.4G WIFI_ Body Top_Middle ANT1**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11 b (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 39.017$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0867 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.686 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.0898 W/kg

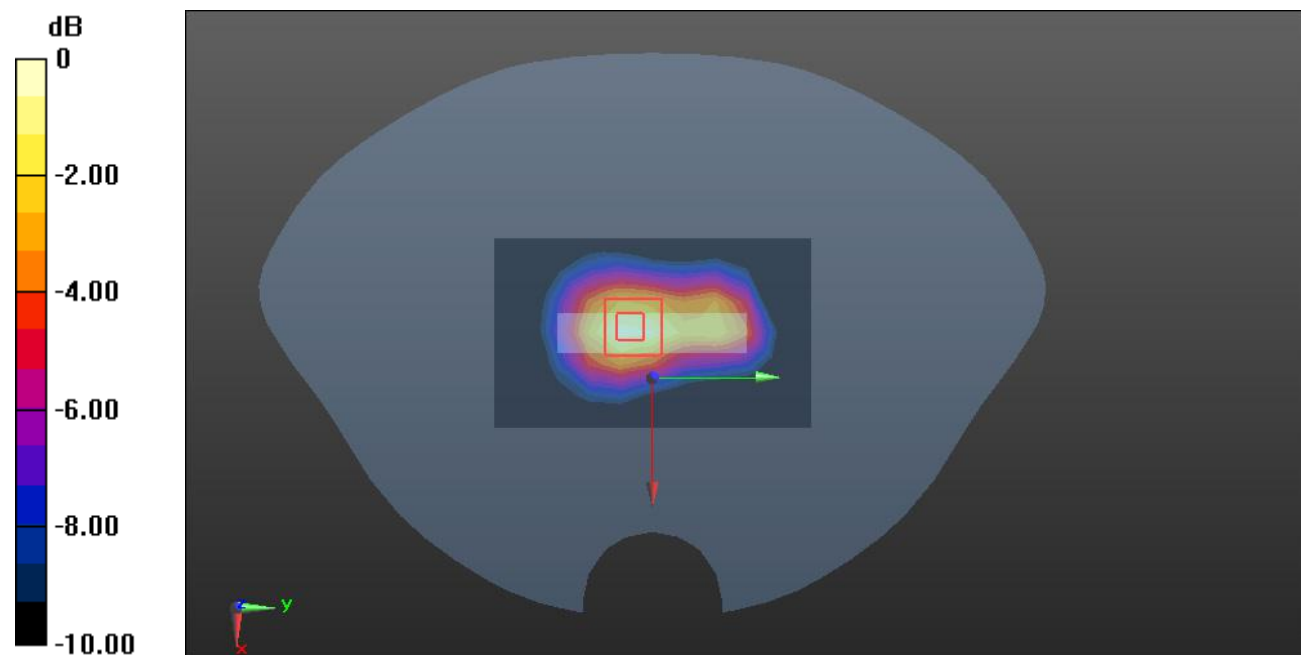

Test Plot 213#: 2.4G WIFI_ Head Left Cheek_Middle ANT2**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11b (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 39.017$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.265 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.829 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.416 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.089 W/kg

Maximum value of SAR (measured) = 0.331 W/kg

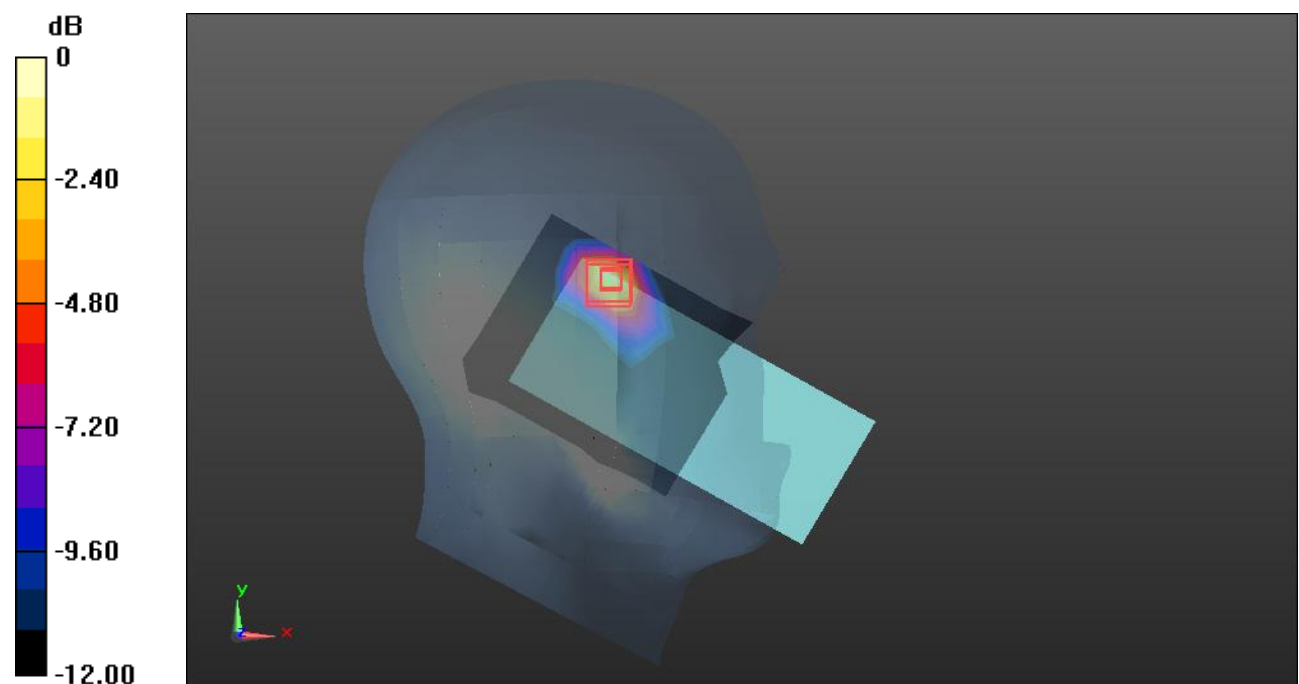

0 dB = 0.331 W/kg = -4.80 dBW/kg

Test Plot 214#: 2.4G WIFI_ Head Left Tilt_Middle ANT2**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11b (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 39.017$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.128 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.563 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.151 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.112 W/kg

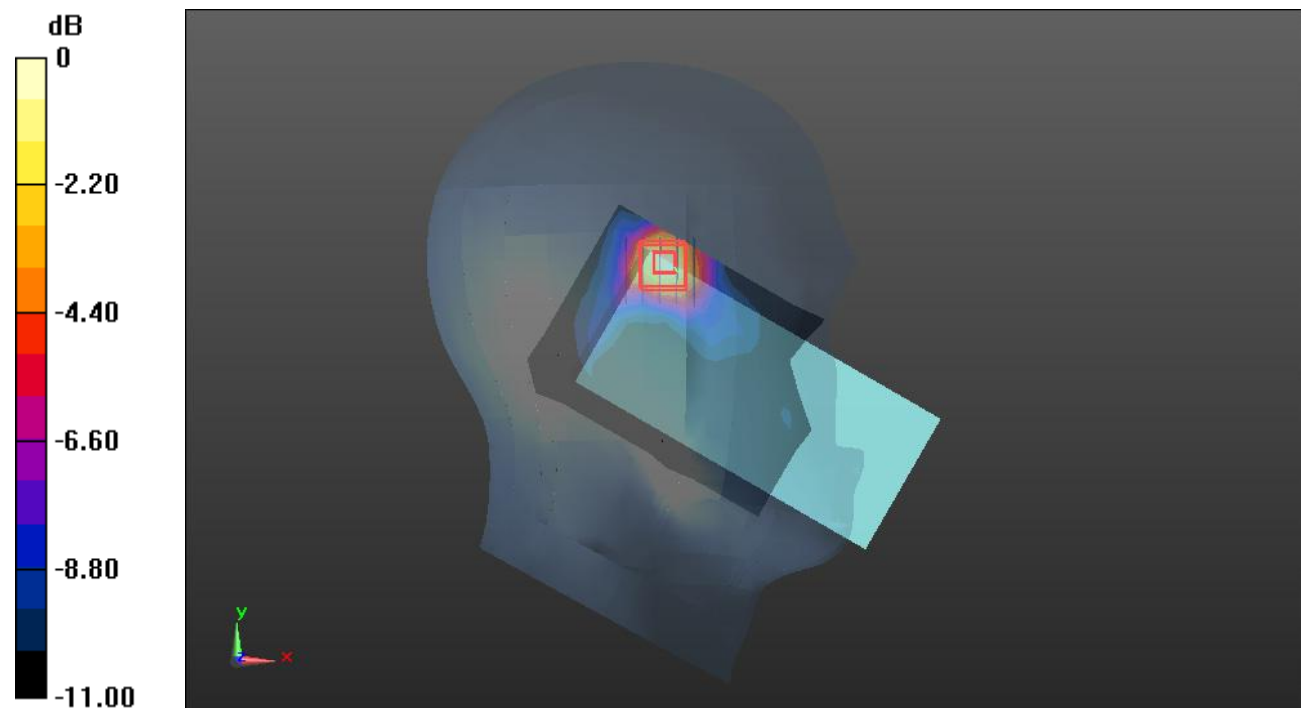

0 dB = 0.112 W/kg = -9.51 dBW/kg

Test Plot 215#: 2.4G WIFI_ Head Right Cheek_Middle ANT2**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11b (0); Frequency: 2442 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 39.017$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0821 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.954 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.103 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.0841 W/kg

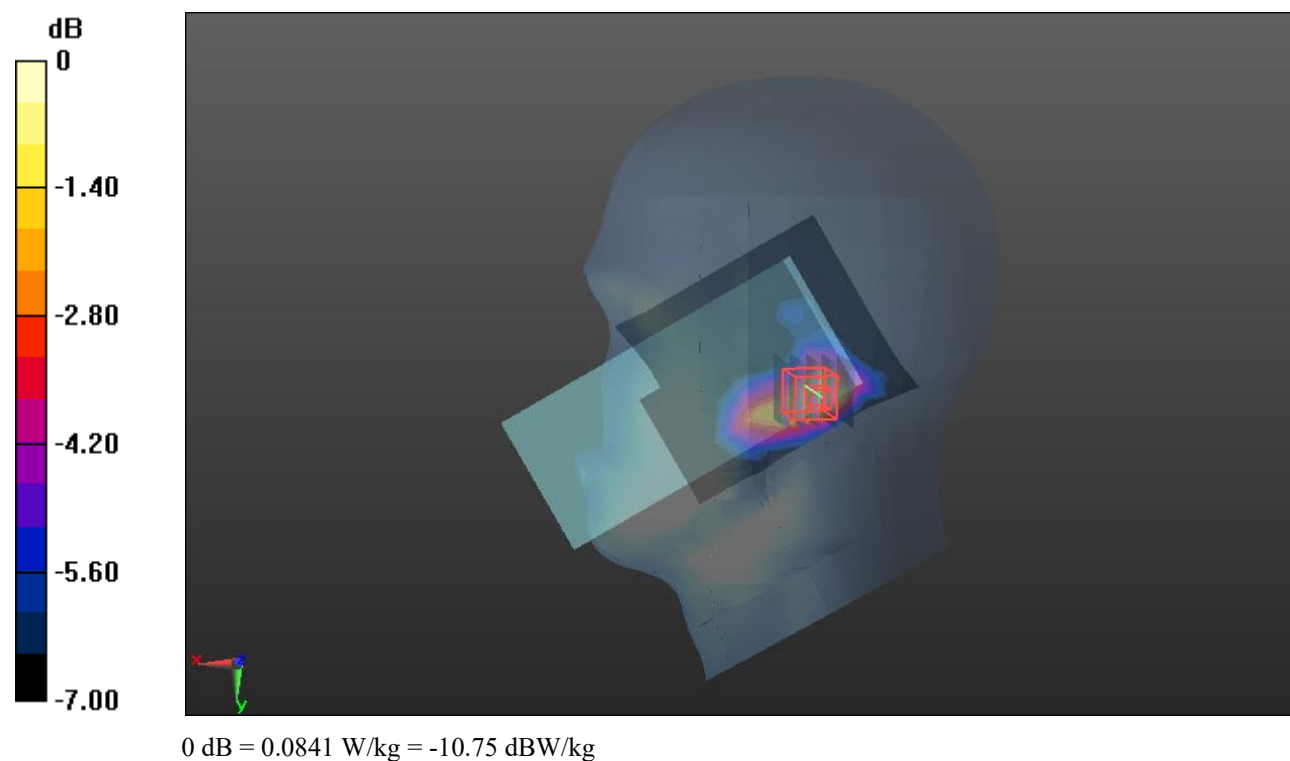

Test Plot 216#: 2.4G WIFI_ Head Right Tilt_Middle ANT2**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11b (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 39.017$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0463 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.080 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0800 W/kg

SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0575 W/kg

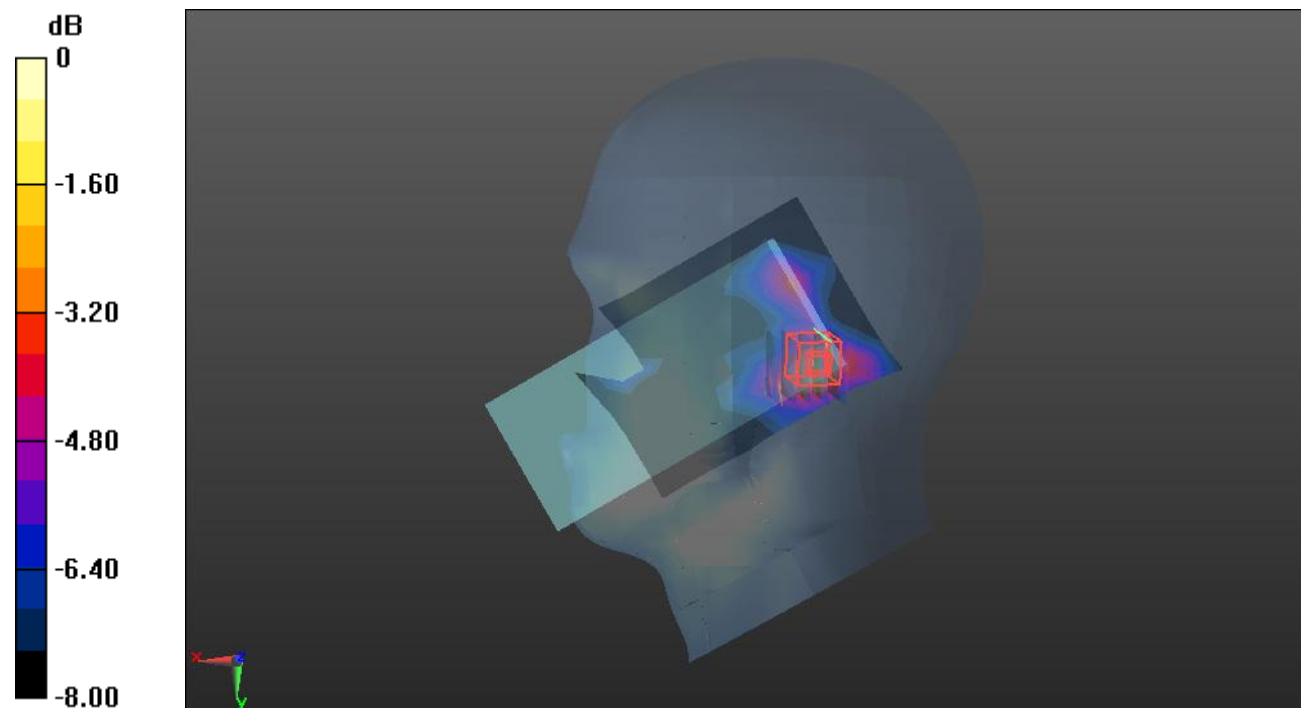

Test Plot 217#: 2.4G WIFI_ Body Front_Middle ANT2**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11b (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 39.017$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0632 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.964 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0830 W/kg

SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.0722 W/kg

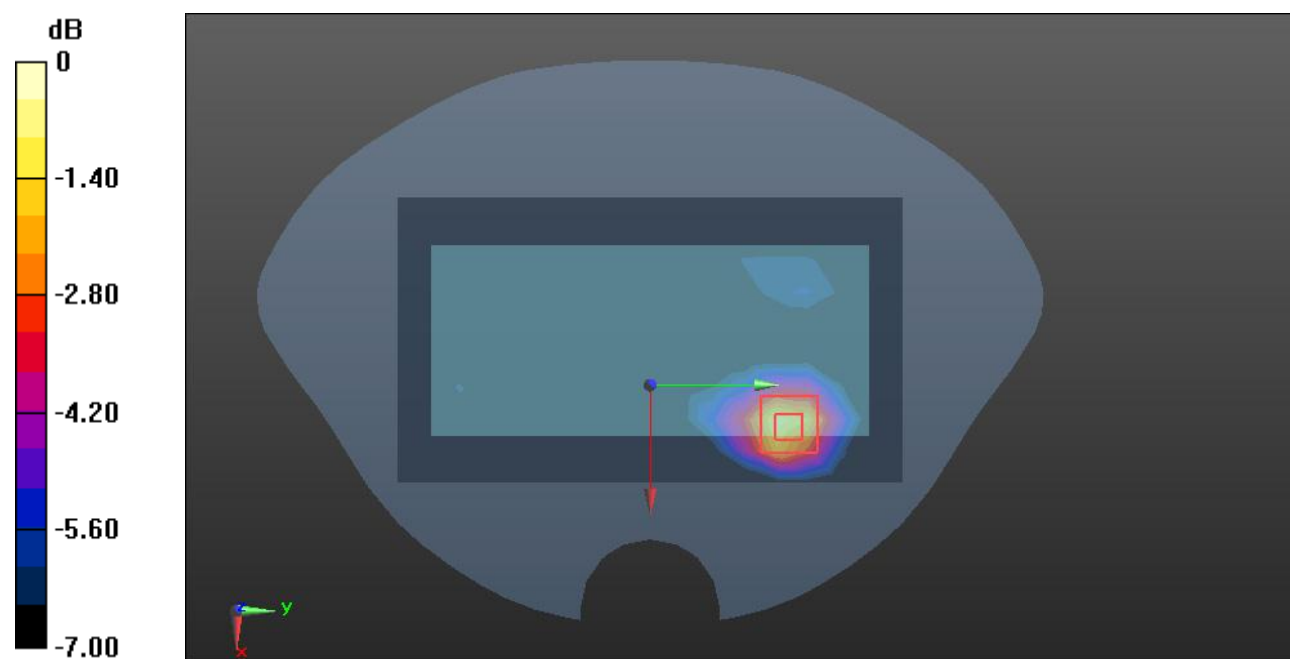

Test Plot 218#: 2.4G WIFI_ Body Back_Middle ANT2**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11b (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 39.017$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.143 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.607 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.260 W/kg

SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.157 W/kg

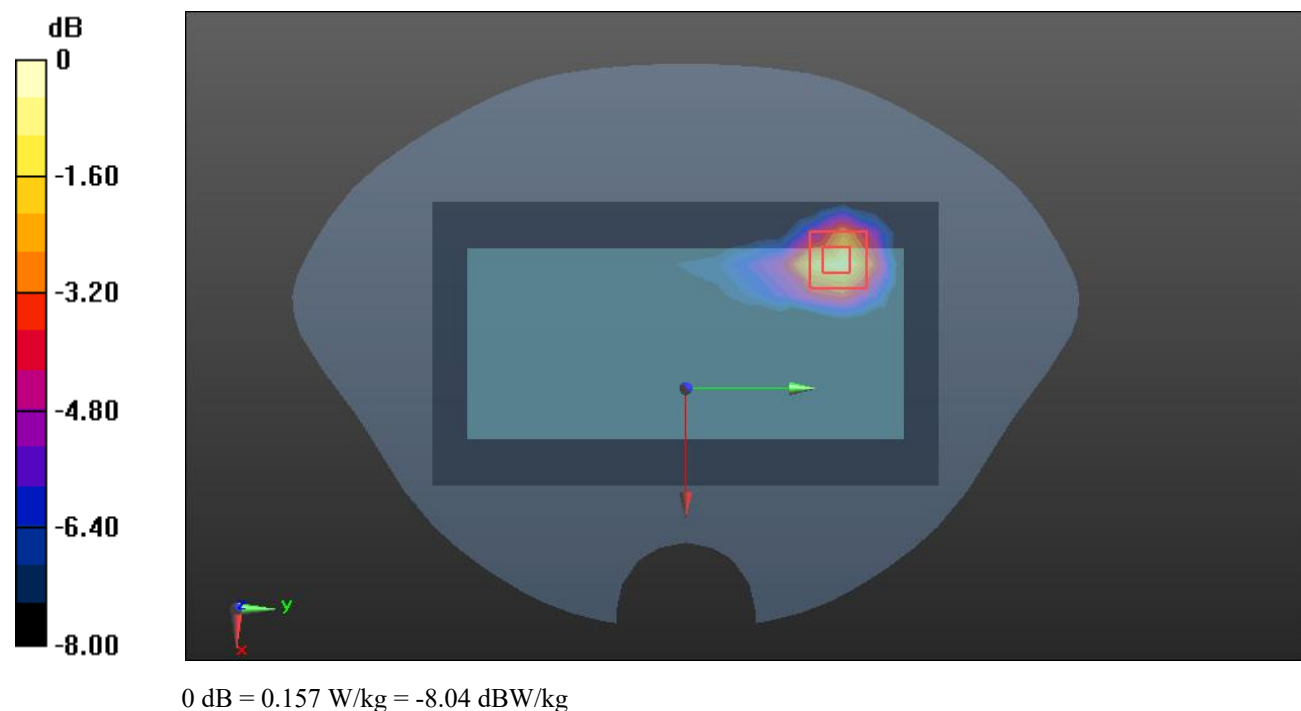

Test Plot 219#: 2.4G WIFI_ Body Right_Middle ANT2**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11b (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 39.017$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.106 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.973 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.130 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.106 W/kg

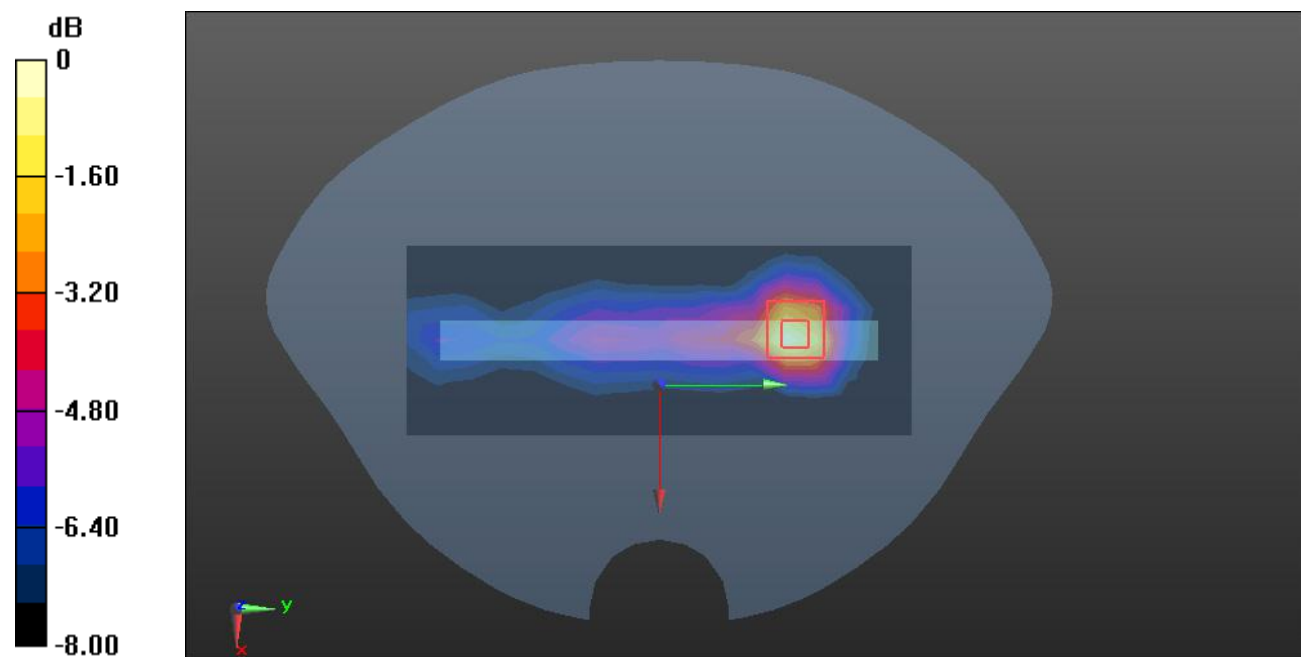

Test Plot 220#: 2.4G WIFI_ Body Top_Middle ANT2**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11b (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 39.017$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0259 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.858 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.0450 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0537 W/kg

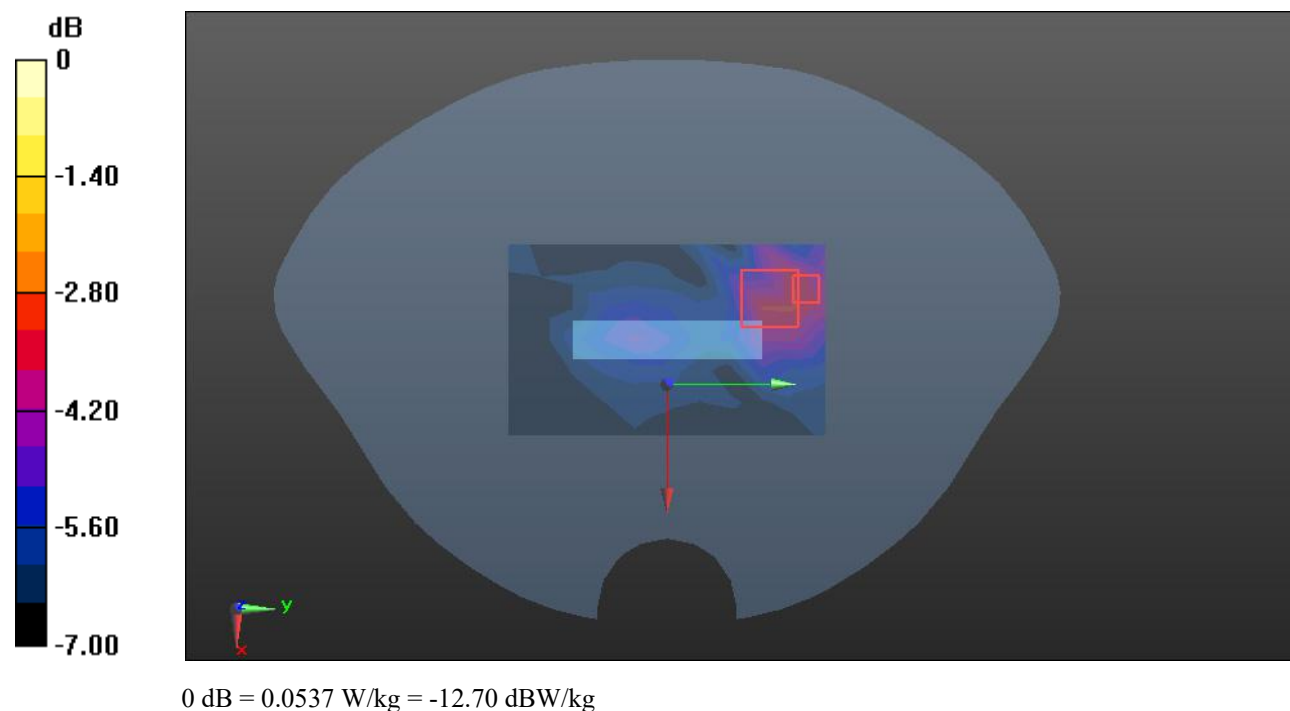

Test Plot 221#: 5.2G WIFI_ Head Left Cheek_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11a (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.67$ S/m; $\epsilon_r = 36.429$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.645 W/kg


Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.947 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 0.667 W/kg

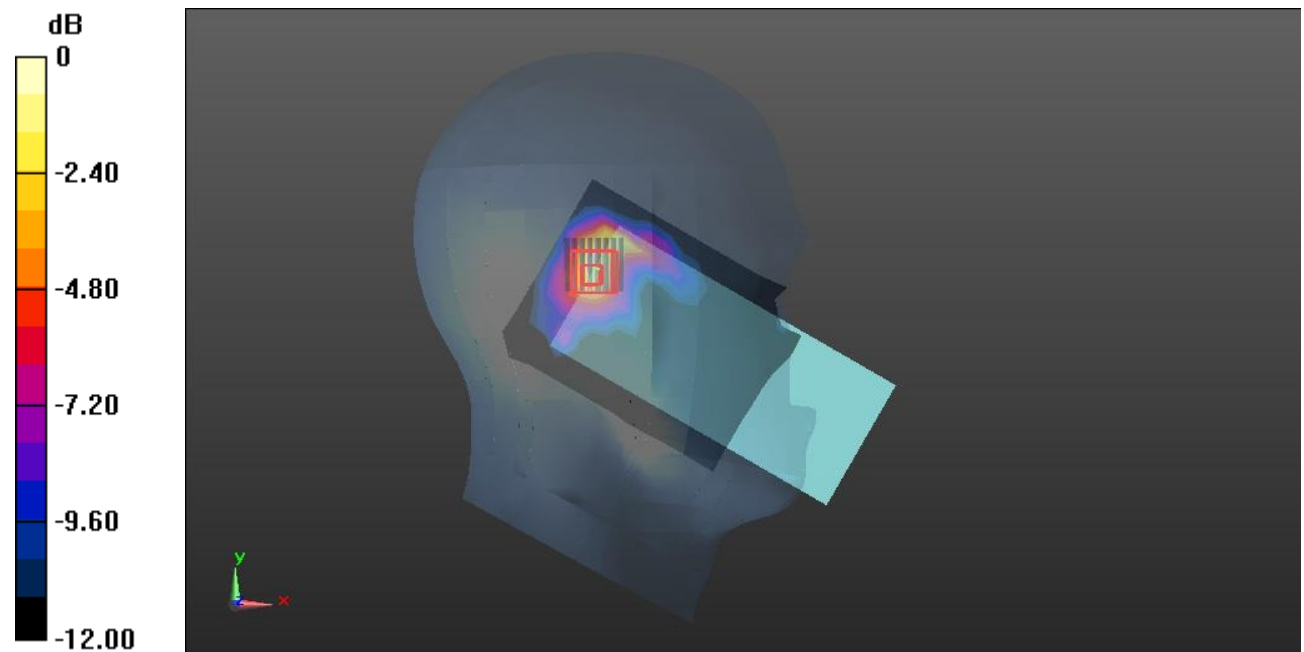

0 dB = 0.667 W/kg = -1.76 dBW/kg

Test Plot 222#: 5.2G WIFI_ Head Left Tilt_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11a (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.67$ S/m; $\epsilon_r = 36.429$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.735 W/kg


Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.349 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.402 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 0.823 W/kg

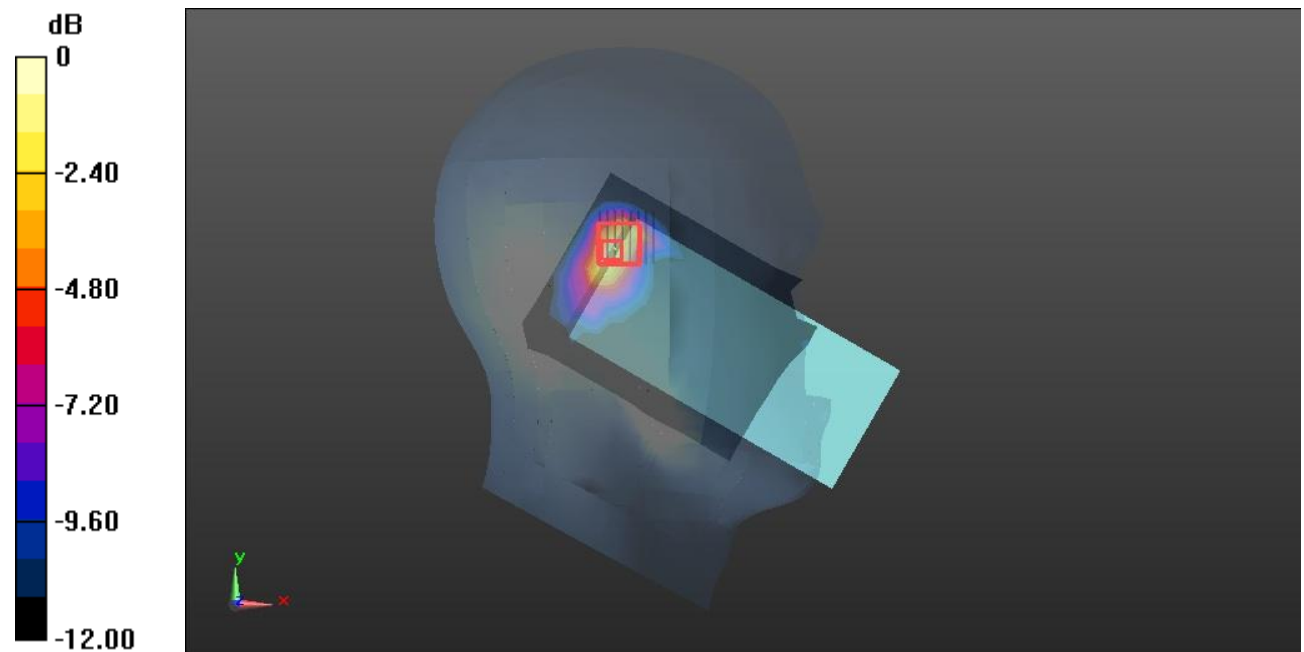

0 dB = 0.823 W/kg = -0.85 dBW/kg

Test Plot 223#: 5.2G WIFI_ Head Right Cheek_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11a (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.67$ S/m; $\epsilon_r = 36.429$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.382 W/kg


Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.194 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.401 W/kg

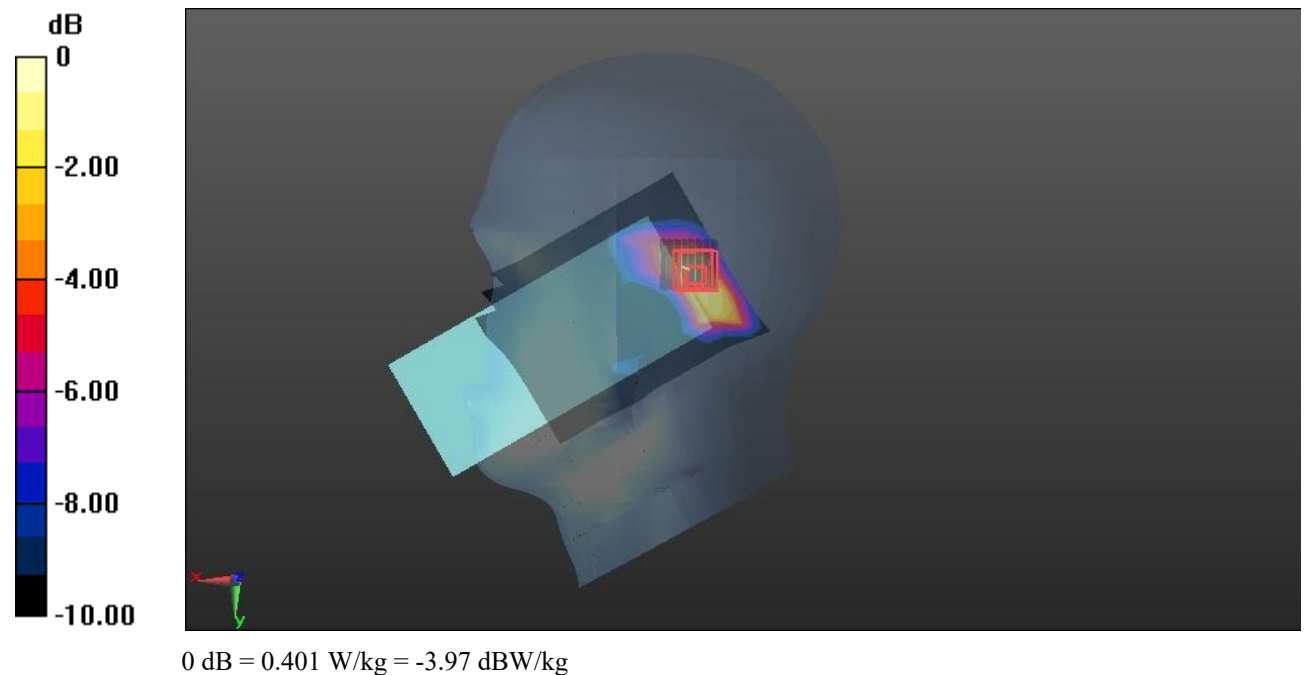

Test Plot 224#: 5.2G WIFI_ Head Right Tilt_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11a (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.67$ S/m; $\epsilon_r = 36.429$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.573 W/kg


Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.514 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.840 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.609 W/kg

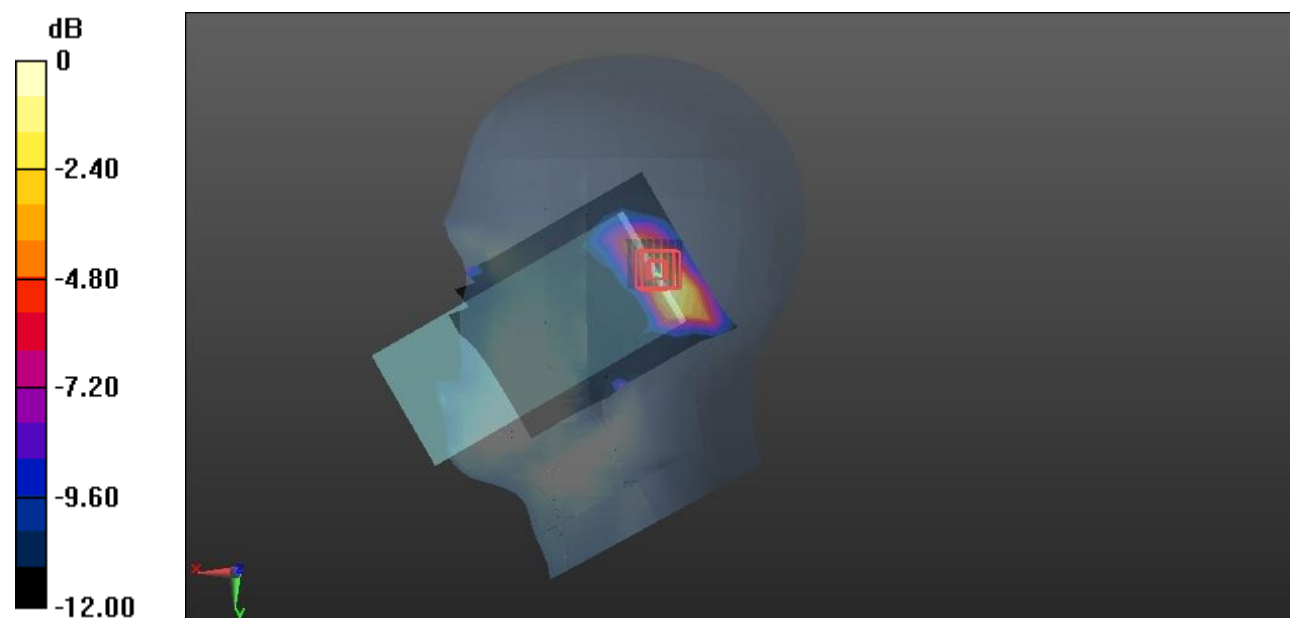

0 dB = 0.609 W/kg = -2.15 dBW/kg

Test Plot 225#: 5.2G WIFI_ Body Front_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11a (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.67$ S/m; $\epsilon_r = 36.429$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.153 W/kg


Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.422 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.231 W/kg

SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.171 W/kg

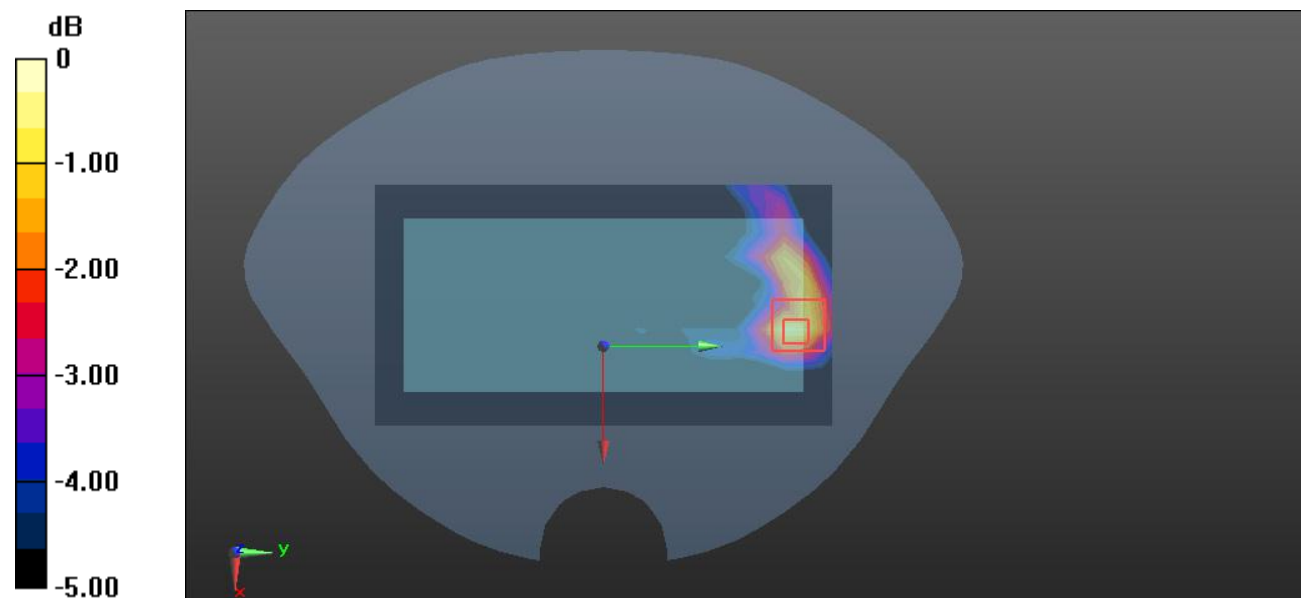

Test Plot 226#: 5.2G WIFI Mid_Body Back_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11a (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.67$ S/m; $\epsilon_r = 36.429$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.446 W/kg


Zoom Scan (9x9x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.970 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.646 W/kg

SAR(1 g) = 0.249 W/kg; SAR(10 g) = 0.132 W/kg

Maximum value of SAR (measured) = 0.455 W/kg

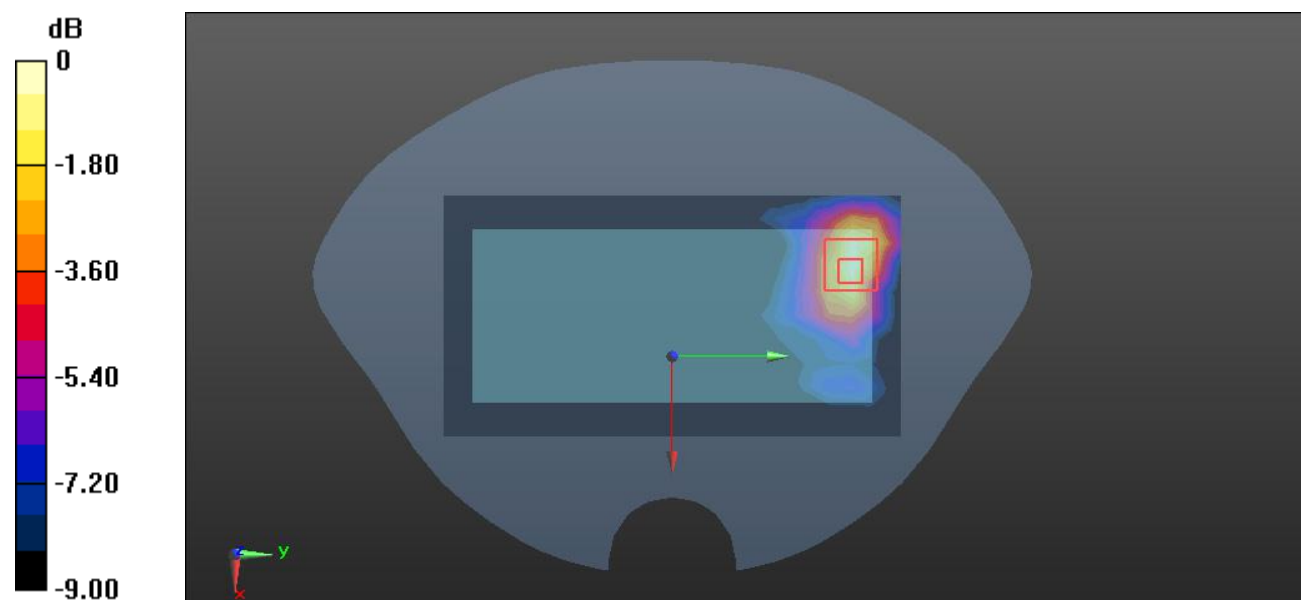

Test Plot 227#: 5.2G WIFI_ Body Right_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11a (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.67$ S/m; $\epsilon_r = 36.429$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.185 W/kg


Zoom Scan (10x13x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.195 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.572 W/kg

SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.241 W/kg

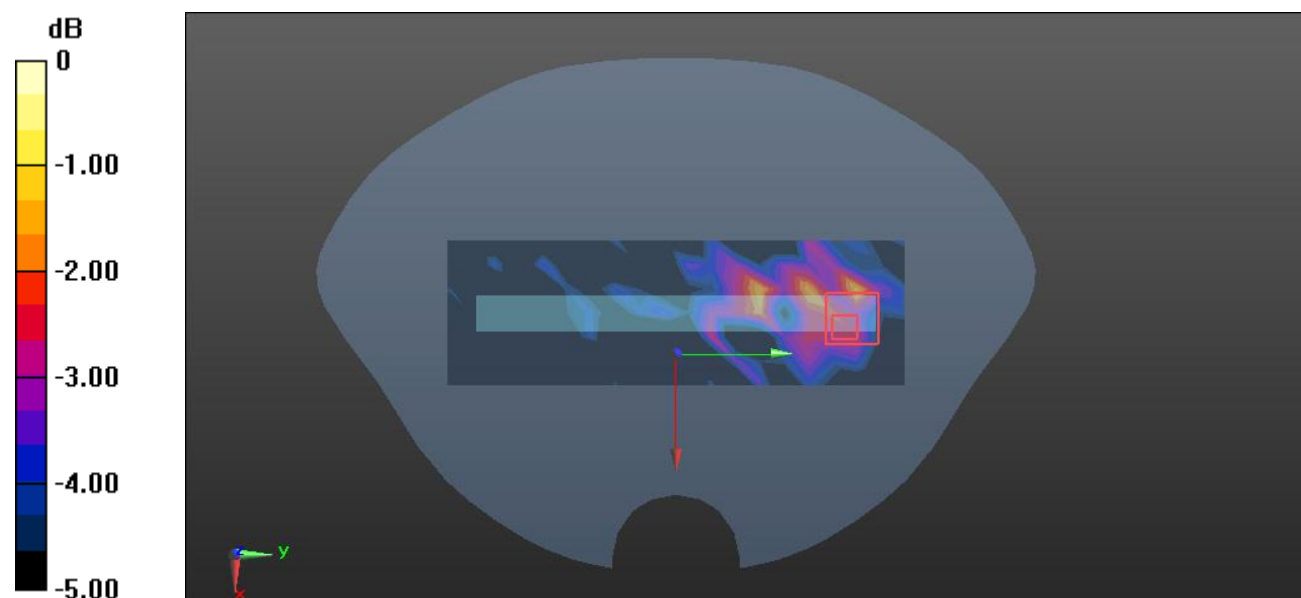

0 dB = 0.241 W/kg = -6.18 dBW/kg

Test Plot 228#: 5.2G WIFI_ Body Top_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11a (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.67$ S/m; $\epsilon_r = 36.429$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.382 W/kg


Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.371 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.461 W/kg

SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.124 W/kg

Maximum value of SAR (measured) = 0.359 W/kg

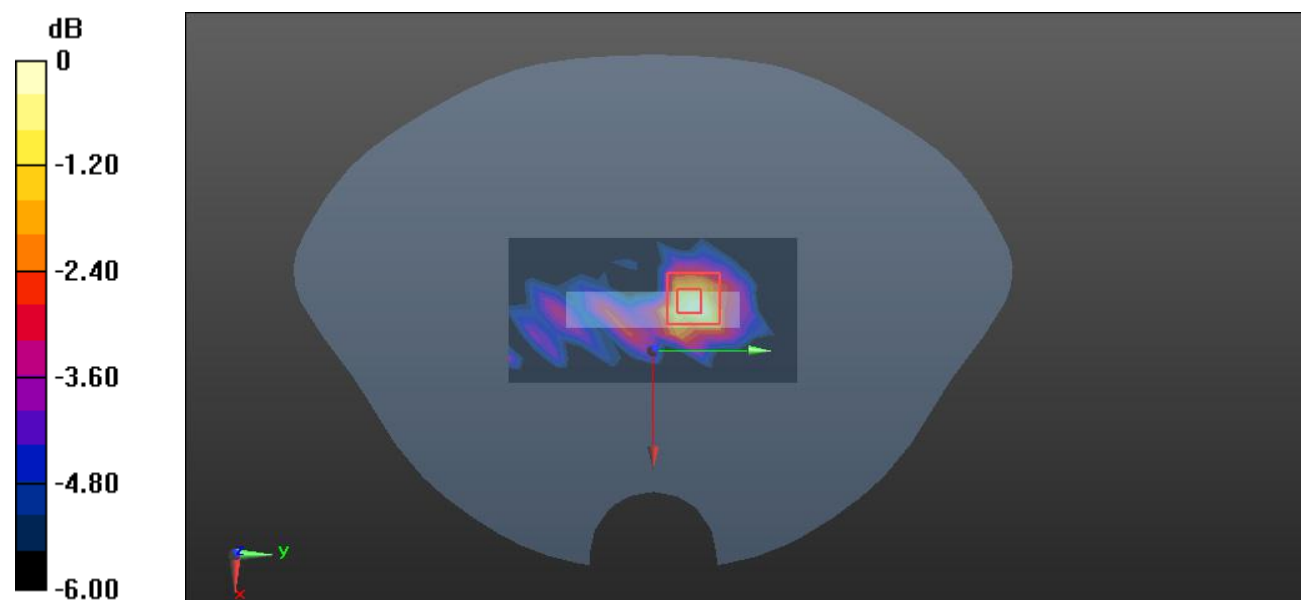

Test Plot229#: 5.8G WIFI_ Head Left Cheek_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11a (0); Frequency: 5785 MHz;Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 5785$ MHz; $\sigma = 5.26$ S/m; $\epsilon_r = 35.165$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.9, 4.9, 4.9) @ 5785 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.582 W/kg


Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.318 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.118 W/kg

Maximum value of SAR (measured) = 0.690 W/kg

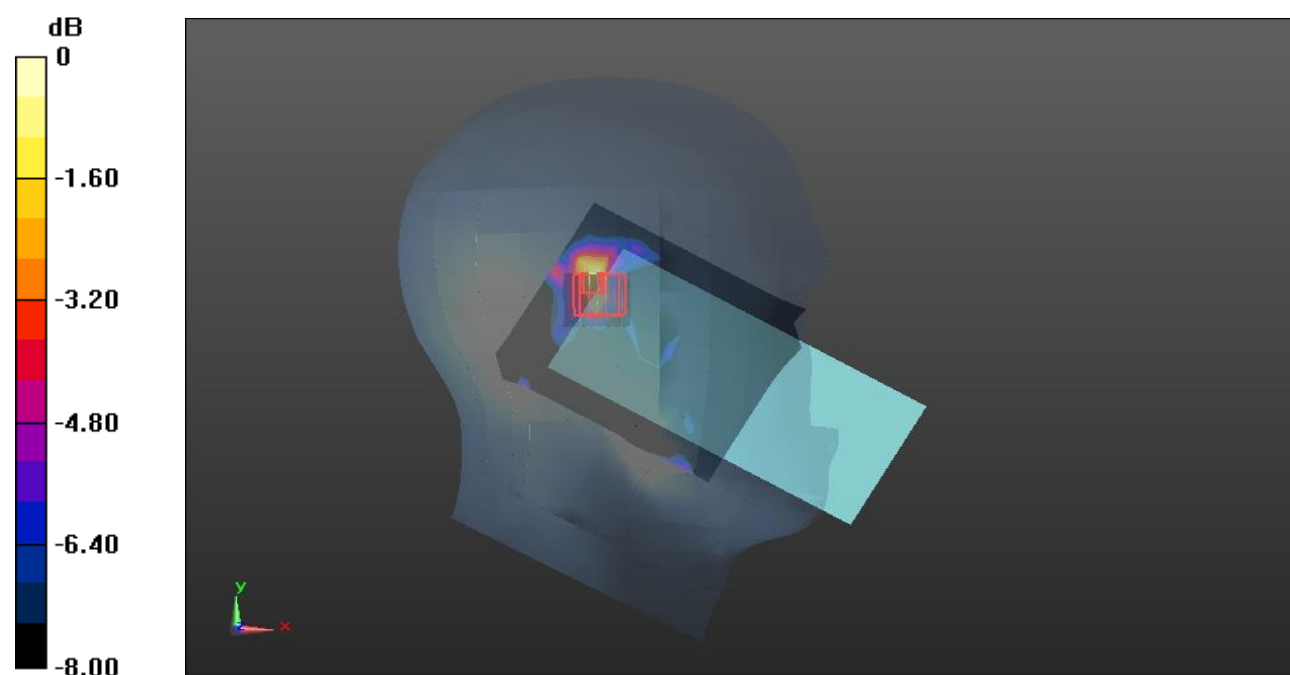

0 dB = 0.690 W/kg = -1.61 dBW/kg

Test Plot230#: 5.8G WIFI_ Head Left Tilt_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11a (0); Frequency: 5785 MHz;Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 5785$ MHz; $\sigma = 5.26$ S/m; $\epsilon_r = 35.165$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.9, 4.9, 4.9) @ 5785 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.741 W/kg


Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.371 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.388 W/kg; SAR(10 g) = 0.151 W/kg

Maximum value of SAR (measured) = 0.854 W/kg

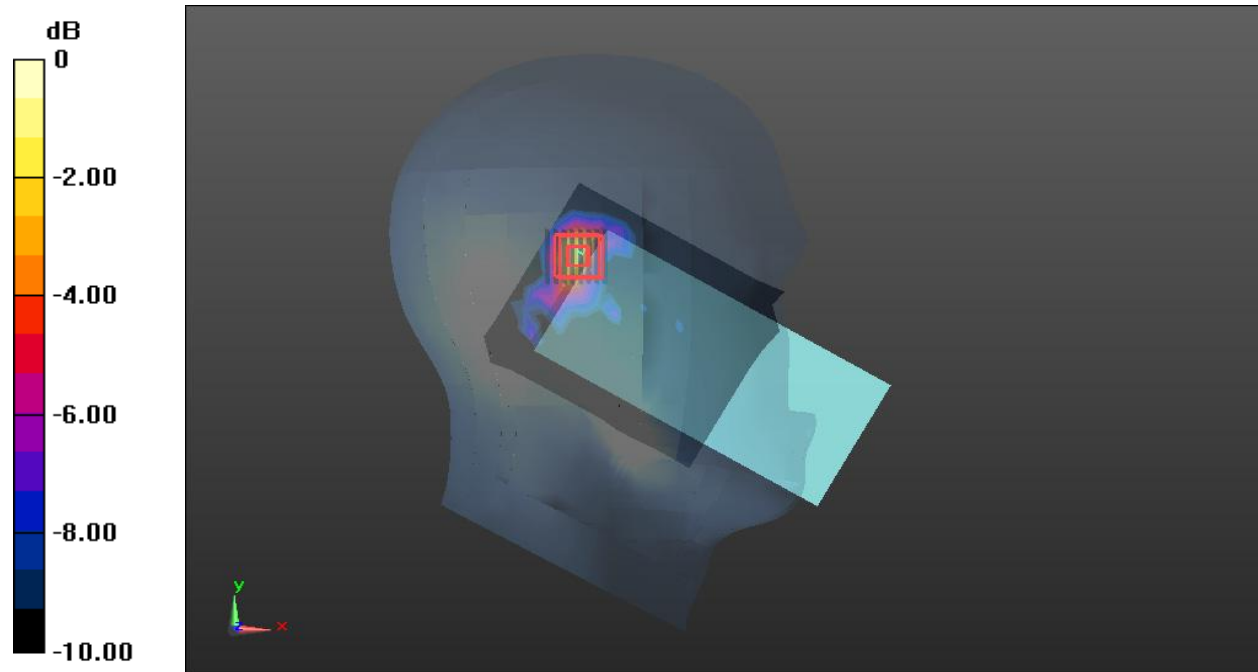

0 dB = 0.854 W/kg = -0.69 dBW/kg

Test Plot231#: 5.8G WIFI_ Head Right Cheek_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11a (0); Frequency: 5785 MHz;Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 5785$ MHz; $\sigma = 5.26$ S/m; $\epsilon_r = 35.165$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.9, 4.9, 4.9) @ 5785 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.494 W/kg


Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.917 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.266 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.612 W/kg

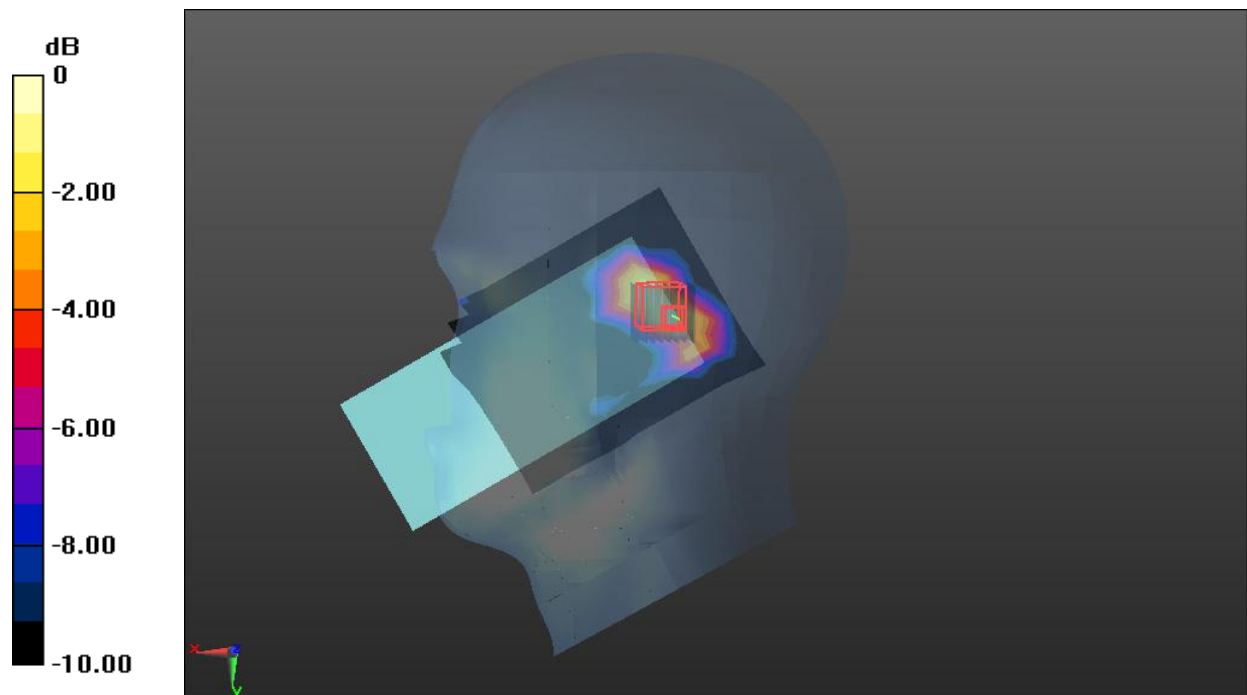

0 dB = 0.612 W/kg = -2.13 dBW/kg

Test Plot232#: 5.8G WIFI_ Head Right Tilt_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 5785$ MHz; $\sigma = 5.26$ S/m; $\epsilon_r = 35.165$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.9, 4.9, 4.9) @ 5785 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.674 W/kg


Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.385 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.347 W/kg; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 0.752 W/kg

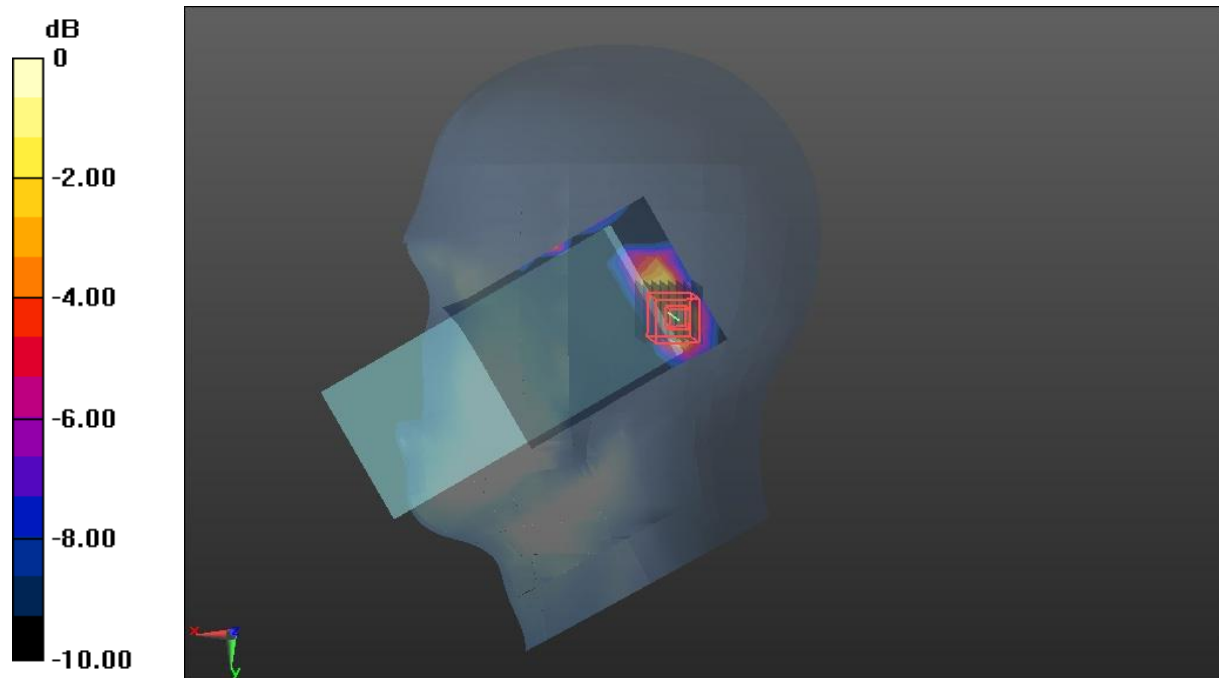

0 dB = 0.752 W/kg = -1.24 dBW/kg

Test Plot233#: 5.8G WIFI_Body Front_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 5785$ MHz; $\sigma = 5.26$ S/m; $\epsilon_r = 35.165$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.9, 4.9, 4.9) @ 5785 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.212 W/kg


Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.547 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.350 W/kg

SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.217 W/kg

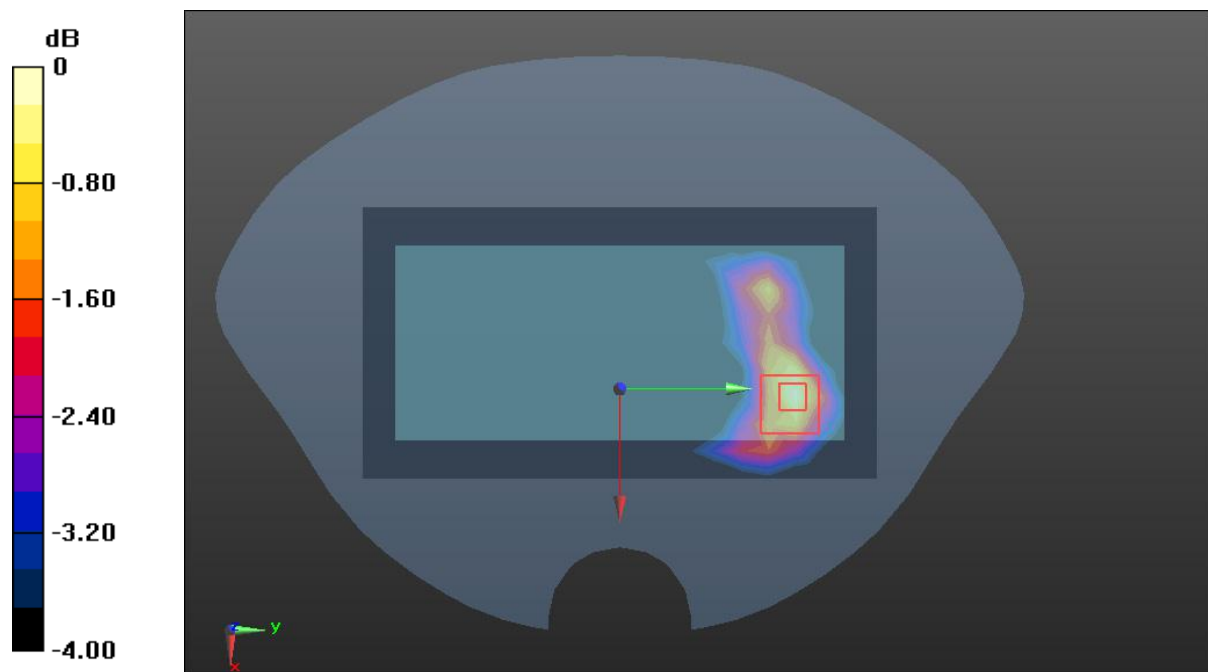

0 dB = 0.217 W/kg = -6.64 dBW/kg

Plot 234#: 5.8G WIFI_ Body Back_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 5785$ MHz; $\sigma = 5.26$ S/m; $\epsilon_r = 35.165$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.9, 4.9, 4.9) @ 5785 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.410 W/kg


Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.136 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.724 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.418 W/kg

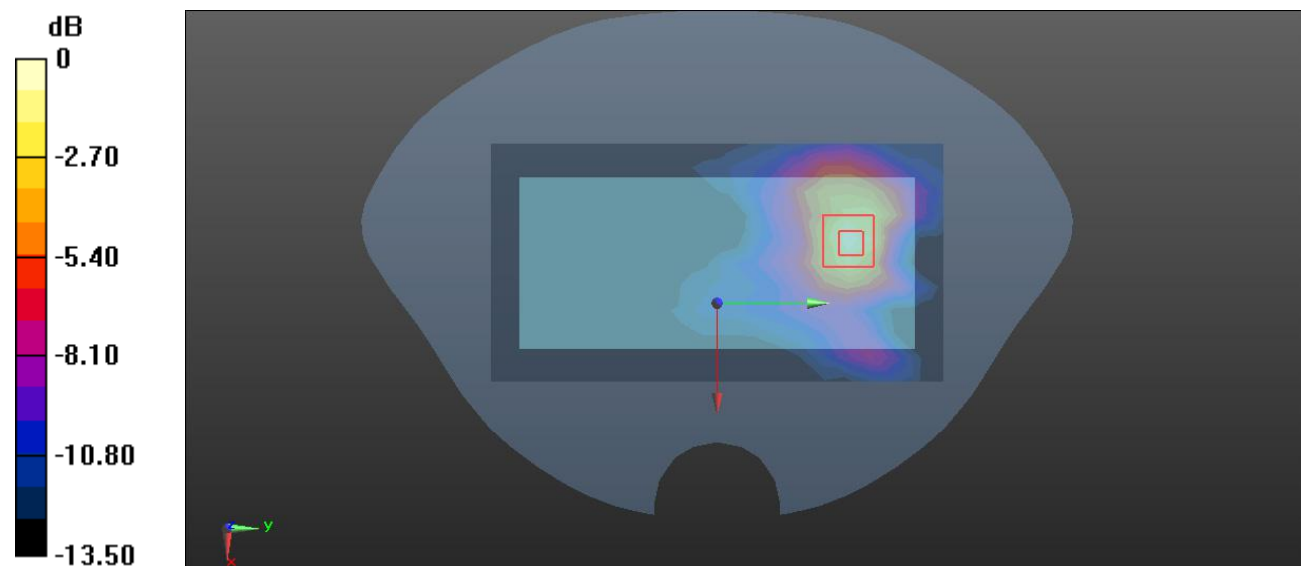

0 dB = 0.418 W/kg = -3.79 dBW/kg

Test Plot235#: 5.8G WIFI_Body Right_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 5785$ MHz; $\sigma = 5.26$ S/m; $\epsilon_r = 35.165$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.9, 4.9, 4.9) @ 5785 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.188 W/kg


Zoom Scan (11x9x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.835 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.271 W/kg

SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.189 W/kg

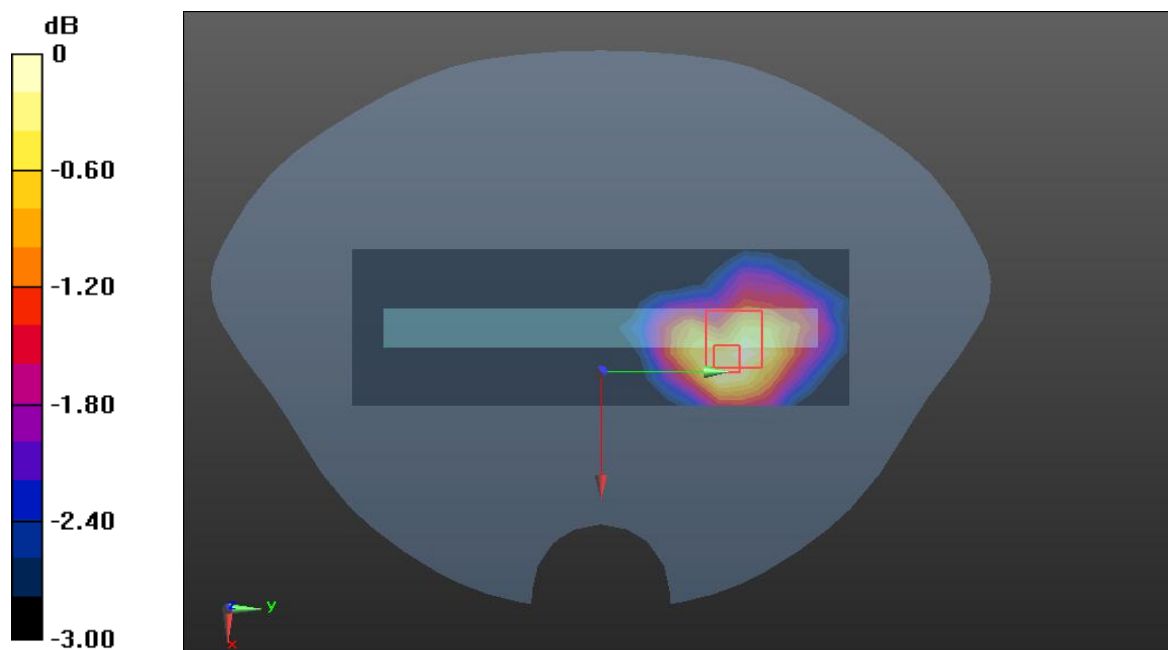

0 dB = 0.189 W/kg = -7.24 dBW/kg

Test Plot236#: 5.8G WIFI_Body Top_Middle**DUT: Mobile Phone; Type: X6836; Serial: 2BUG-1**

Communication System: 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used(interpolated): $f = 5785$ MHz; $\sigma = 5.26$ S/m; $\epsilon_r = 35.165$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.9, 4.9, 4.9) @ 5785 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.445 W/kg

Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.277 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.691 W/kg

SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.489 W/kg

