

*FCC PART 15, SUBPART B and C; FCC 15.231; and RSS-210 & RSS GEN
TEST REPORT*

for
FLOOD TEMPERATURE SENSOR
Model: WST-621v2
HVIN: WST-621v2

Prepared for

ECOLINK INTELLIGENT TECHNOLOGY, INC.
2055 CORTE DEL NOGAL
CARLSBAD, CALIFORNIA 92011

Prepared by: _____

KYLE FUJIMOTO

Approved by: _____

JAMES ROSS

COMPATIBLE ELECTRONICS INC.
114 OLINDA DRIVE
BREA, CALIFORNIA 92823
(714) 579-0500

DATE: JANUARY 9, 2024

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	21	2	2	2	15	48	90

This report shall not be reproduced except in full, without the written approval of Compatible Electronics, Inc.



NVLAP LAB CODE 200528-0

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	5
1. PURPOSE	6
1.1 Decision Rule & Risk	7
2. ADMINISTRATIVE DATA	8
2.1 Location of Testing	8
2.2 Traceability Statement	8
2.3 Cognizant Personnel	8
2.4 Date Test Sample was Received	8
2.5 Disposition of the Test Sample	8
2.6 Abbreviations and Acronyms	8
3. APPLICABLE DOCUMENTS	9
4. DESCRIPTION OF TEST CONFIGURATION	10
4.1 Description of Test Configuration – Emissions	10
4.1.1 Cable Construction and Termination	10
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	11
5.1 EUT and Accessory List	11
5.2 Emissions Test Equipment	12
6. TEST SITE DESCRIPTION	13
6.1 Test Facility Description	13
6.2 EUT Mounting, Bonding and Grounding	13
6.3 Measurement Uncertainty	13
7. TEST PROCEDURES	14
7.1 RF Emissions	14
7.1.1 Conducted Emissions Test	14
7.1.2 Radiated Emissions Test	15
7.1.3 RF Emissions Test Results	16
7.1.4 Sample Calculations	17
7.1.5 Duty Cycle Calculation	18
7.1.6 99 % Bandwidth	19
7.1.7 -20 dB Bandwidth	19
7.1.8 Transmission Time	20
7.1.9 Variation of the Input Power	20
8. CONCLUSIONS	21

LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Accreditations and Recognitions
B	Modifications to the EUT
C	Models Covered Under This Report
D	Diagrams, Charts, and Photos • Test Setup Diagrams • Antenna and Effective Gain Factors • Radiated Emissions Photos
E	Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Conducted Emissions Test Setup
2	Layout of the Semi-Anechoic Test Chamber

LIST OF TABLES

TABLE	TITLE
1	Radiated Emission Results

GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used by the client to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the United States government.

Device Tested: Flood Temperature Sensor
Model: WST-621v2
S/N: 007-4116

Product Description: The equipment under test is a battery-powered wireless sensor for detecting flooding or freezing conditions and wirelessly reporting these conditions to a wireless security panel.
The transmit frequency is 319.50 MHz.
The clock oscillator is 39 MHz.
Dimensions: 2.50" diameter, 0.375" thick.

Modifications: The EUT was not modified to meet the specifications.

Customer: Ecolink Intelligent Technology, Inc.
2055 Corte Del Nogal
Carlsbad, California 92011

Test Dates: September 26 and 27, 2023

Test Specifications covered by accreditation:

Test Specifications: Emissions requirements
CFR Title 47, Part 15, Subpart B;
CFR Title 47, Part 15, Subpart C, sections 15.205, 15.209, and 15.231;
RSS-210 and RSS-Gen



Test Procedures: ANSI C63.4 and ANSI C63.10

Test Deviations: The test procedure was not deviated from during the testing.

SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz – 30 MHz	This test was not performed because the EUT operates on battery power only and cannot be plugged into the AC public mains.
2	Spurious Radiated RF Emissions, 9 kHz – 3.195 GHz (Transmitter and Digital portion)	Complies with the Class B limits of CFR Title 47, Part 15 Subpart B; the limits of CFR Title 47, Part 15 Subpart C, sections 15.205, 15.209, and 15.231; and the limits of RSS-210 and RSS-Gen. See section 6.3 for Measurement Uncertainty.
3	-20 dB Bandwidth	Complies with limits of CFR Title 47, Part 15 Subpart C, section 15.231 (c); and the limits of RSS-210
4	Transmission Time	Complies with limits of CFR Title 47, Part 15 Subpart C, section 15.231 (a)(1) and (a)(2); and the limits of RSS-210.

*U = Expanded Uncertainty with a coverage factor of k=2

1. PURPOSE

This document is a qualification test report based on the emissions tests performed on the Flood Temperature Sensor, Model: WST-621v2. The emissions measurements were performed according to the measurement procedure described in ANSI C63.4 and ANSI C63.10. The tests were performed to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the **Class B** specification limits defined by CFR Title 47, Part 15 Subpart B section, 15.109; the specification limits defined by CFR Title 47, Part 15 Subpart C sections 15.205, 15.209 and 15.231; and the specifications limits defined by RSS-210 and RSS-Gen.



1.1 Decision Rule & Risk

If a measured value exceeds a specification limit it implies non-compliance. If the value is below a specification limit it implies compliance. Measurement uncertainty of the laboratory is reported with all measurement results but generally not taken into consideration unless a standard, rule or law requires it to be considered.

Qualification test reports are only produced for products that are in compliance with the test requirements, therefore results are always in conformity. Otherwise, an engineering report or just the data is provided to the customer.

When performing a measurement and making a statement of conformity, in or out-of-specification to manufacturer's specifications or Pass/Fail against a requirement, there are two possible outcomes:

- The result is reported as conforming with the specification
- The result is reported as not conforming with the specification

The decision rule is defined below.

When the test result is found to be below the limit but within our measurement uncertainty of the limit, it is our policy that the final acceptance decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be exactly on the specification, it is our policy, in the case of unwanted emissions measurements to consider the result non-compliant, however, the final decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be over the specification limit under any condition, it is our policy to consider the result non-compliant.

In terms of uncertainty of measurement, the laboratory is a calibrated and tightly controlled environment and generally exceptionally stable, the measurement uncertainties are evaluated without the considering of the test sample. When it comes to the test sample however, as most testing is performed on a single sample rather than a sample population, and that sample is often a pre-production representation of the final product, that test sample represents a significantly higher source of measurement uncertainty. We advise our customers of this and that when in doubt (small test to limit margins), they may wish to perform statistical sampling on a population to gain a higher confidence in the results. All lab reported results are that of a single sample in any event.



2. ADMINISTRATIVE DATA

2.1 Location of Testing

The emissions tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Ecolink Intelligent Technology, Inc.

David Shepard	Product Compliance/QA Specialist
Jay Stone	Director of Engineering

Compatible Electronics Inc.

Kyle Fujimoto	Senior Test Engineer
James Ross	Senior Test Engineer

2.4 Date Test Sample was Received

The test sample was received prior to the initial test date in this report.

2.5 Disposition of the Test Sample

The test sample has not been returned to Ecolink Intelligent Technology, Inc. as of the date of this report.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
FCC	Federal Communications Commission
DoC	Declaration of Conformity
N/A	Not Applicable
Tx	Transmit
Rx	Receive
Inc.	Incorporated
RSS	Radio Standards Specification
RF	Radio Frequency
BLE	Bluetooth Low Energy
CFR	Code of Federal Regulations
PCB	Printed Circuit Board
DC	Direct Current
LED	Light Emitting Diode

3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this emission Test Report.

SPEC	TITLE
FCC Title 47, Part 15 Subpart B	FCC Rules – Radio frequency devices (including digital devices) – Unintentional Radiators
FCC Title 47, Part 15 Subpart C	FCC Rules – Radio frequency devices (including digital devices) – Intentional Radiators
RSS-210 Issue 10: 2019 + Amendment (April 2020)	License-exempt Radio Apparatus: Category I Equipment
RSS-Gen Issue 5: 2018 + Amendment 1: 2019 + Amendment 2: 2021	General Requirements for Compliance of Radio Apparatus
ANSI C63.4: 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.4a: 2017	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz Amendment 1: Test Site Validation
ANSI C63.10: 2013	American National Standard of procedure for compliance testing of unlicensed wireless devices

4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration – Emissions

The Flood Temperature Sensor, Model: WST-621V2 (EUT) tested in the following two configurations:

- Configuration 1 – The EUT was tested as a standalone device and placed in the center of the test table
- Configuration 2 – The EUT was tested with its optional External Sensor Adapter and placed at the edge of the test table. The External Sensor Adapter contained a Water Detection Rope connected to its sensor port.

In each configuration, the EUT was transmitting at 319.5 MHz on a continuous basis.

The EUT was tested for emissions while in the X, Y and Z axis. The X orientation is when the EUT is parallel to the ground mounted horizontally. The Y orientation is when the EUT is perpendicular to the ground mounted vertically. The Z orientation is when the EUT is perpendicular to the ground mounted horizontally.

The EUT had a fresh battery installed prior to the testing.

The firmware inside the EUT allowed the EUT to continuously transmit at 319.5 MHz.

The firmware is stored on the company's servers.

The final radiated emissions data for the EUT was taken in the configuration described above. Please see Appendix E for the data sheets.

4.1.1 Cable Construction and Termination

Cable 1:

This is a 2-meter unshielded cable connecting the EUT's External Sensor Adapter to the Water Detection Rope. The cable has a 1/8 inch mono connector at the EUT end and a hard wired water detection sensor at the opposite end.

5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	ID
FLOOD TEMPERATURE SENSOR (EUT)	ECOLINK INTELLIGENT TECHNOLOGY, INC.	WST-621v2	007-4116	FCC: XQC-WST621V2 IC: 9863B-WST621V2
EXTERNAL SENSOR ADAPTER (EUT OPTIONAL)	ECOLINK INTELLIGENT TECHNOLOGY, INC.	WST-621v2	N/A	N/A
WATER DETECTION ROPE (EUT OPTIONAL)	ECOLINK INTELLIGENT TECHNOLOGY, INC.	WST-621v2	N/A	N/A
FIRMWARE	ECOLINK INTELLIGENT TECHNOLOGY, INC.	1.0	N/A	N/A

5.2 Emissions Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
RF RADIATED AND AC CONDUCTED EMISSIONS TEST EQUIPMENT					
TDK TestLab	TDK RF Solutions, Inc.	9.22	700145	N/A	N/A
EMI Receiver, 20 Hz – 26.5 GHz	Keysight Technologies, Inc.	N9038A	MY51210510	November 17, 2021	November 17, 2023
EMI Receiver, 3 Hz – 44 GHz	Keysight Technologies, Inc.	N9038A	MY559050117	November 9, 2022	November 9, 2023
System Controller	Sunol Sciences Corporation	SC110V	112213-1	N/A	N/A
Turntable	Sunol Sciences Corporation	2011VS	N/A	N/A	N/A
Antenna-Mast	Sunol Sciences Corporation	TWR95-4	112213-3	N/A	N/A
Loop Antenna	Com-Power	AL-130R	121090	February 10, 2022	February 10, 2025
CombiLog Antenna	Com-Power	AC-220	61093	December 14, 2021	December 14, 2023
Horn Antenna	Com-Power	AH-118	10050113	December 16, 2021	December 16, 2023
Preamplifier	Com-Power	PA-118	181653	March 7, 2022	March 7, 2024
Below 1 GHz Radiated Cable	N/A	N/A	Asset #: 0006	October 27, 2023	October 27, 2025
Above 1 GHz Cable	Suhner	Sucoflex 102EA	2291	August 22, 2023	August 22, 2024
Above 1 GHz Cable	Suhner	Sucoflex 102EA	501393	August 22, 2023	August 22, 2024
Above 1 GHz Cable	Suhner	Sucoflex 102EA	501394	August 22, 2023	August 22, 2024
Computer	Hewlett Packard	p6716f	MXX1030PX0	N/A	N/A
LCD Monitor	Hewlett Packard	52031a	3CQ046N3MG	N/A	N/A



6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 of this report for emissions test location.

6.2 EUT Mounting, Bonding and Grounding

For frequencies 1 GHz and below: The EUT was mounted on a 0.6 by 1.2 meter non-conductive table 0.8 meters above the ground plane.

For frequencies above 1 GHz: The EUT was mounted on a 0.6 by 1.2 meter non-conductive table 1.5 meters above the ground plane.

The EUT was not grounded.

6.3 Measurement Uncertainty

Compatible Electronics' U_{lab} value is less than U_{cispr} , thus based on this – compliance is deemed to occur if no measured disturbance exceeds the disturbance limit

$$u_c(y) = \sqrt{\sum_i c_i^2 u^2(x_i)}$$

Measurement		U_{cispr}	$U_{lab} = 2 u_c(y)$
Conducted disturbance (mains port)	(150 kHz – 30 MHz)	3.4 dB	2.72 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(30 MHz – 1 000 MHz)	6.3 dB	3.32 dB (Vertical) 3.30 dB (Horizontal)
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(1 GHz - 6 GHz)	5.2 dB	4.06 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(6 GHz – 18 GHz)	5.5 dB	4.06 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(18 GHz – 26.5 GHz)	N/A	4.43 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(26.5 GHz – 40 GHz)	N/A	4.57 dB



7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

7.1 RF Emissions

7.1.1 Conducted Emissions Test

The EMI Receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. A 10 dB attenuator was used for the protection of the EMI Receiver input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the EMI Receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63:4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by computer software. The final qualification data is located in Appendix E.

Test Results:

This test was not performed because the EUT operates on battery power only and cannot be plugged into the AC public mains.

7.1.2 Radiated Emissions Test

The EMI Receiver was used as the measuring meter. An internal preamplifier was used to increase the sensitivity of the instrument during emissions tests up to 1000 MHz, and an external preamplifier was used to increase the sensitivity of the instrument during emissions tests above 1 GHz. The EMI Receiver was initially used with the Analyzer mode feature activated. In this mode, the EMI receiver can then record the actual frequency to be measured. This final reading is then taken accurately in the EMI Receiver mode, which considers the cable loss, amplifier gain and antenna factors, so that a true reading is compared to the true limit. The effective measurement bandwidth used for the radiated emissions test was according to the frequency measured.

The frequencies below 1 GHz, except for the fundamental frequency, and the 2nd and 3rd harmonic of the fundamental frequency, were quasi-peaked using the quasi-peak detector of the EMI Receiver.

The harmonic frequencies above 1 GHz were averaged using the duty cycle correction calculation.

All other frequencies above 1 GHz were averaged using the average detector of the EMI Receiver.

The EMI test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna to ensure accurate results.

The EUT was tested at a 3-meter test distance. The six highest emissions are listed in Table 1.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
9 kHz to 150 kHz	200 Hz	Loop Antenna
150 kHz to 30 MHz	9 kHz	Loop Antenna
30 MHz to 1 GHz	120 kHz	CombiLog Antenna
1 GHz to 3.195 GHz	1 MHz	Horn Antenna

Test Results:

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; the limits of CFR Title 47, Part 15, Subpart C sections 15.205, 15.209 and 15.231; and the limits of RSS-210 and RSS-Gen for radiated emissions.

7.1.3 RF Emissions Test Results

Table 1 RADIATED EMISSION RESULTS
Flood Temperature Sensor, Model: WST-621V2

Frequency (MHz)	Corrected Reading* (dBμV/m)	Specification Limit (dBμV/m)	Delta (Cor. Reading – Spec. Limit) (dB)
319.50 (H) (X-Axis) (#2)	74.41 (Avg)	75.89	-1.48
319.50 (V) (Y-Axis) (#1)	71.85 (Avg)	75.89	-4.04
319.50 (V) (Z-Axis) (#1)	71.57 (Avg)	75.89	-4.32
319.50 (V) (Y-Axis) (#2)	71.63 (Avg)	75.89	-4.43
319.50 (V) (Z-Axis) (#2)	70.89 (Avg)	75.89	-5.00
319.50 (H) (Z-Axis) (#1)	68.81 (Avg)	75.89	-7.08

Notes:

- * The complete emissions data is given in Appendix E of this report.
- (V) Vertical
- (H) Horizontal
- (QP) Quasi-Peak
- (Avg) Average
- (FD) Fundamental
- (#1) No External Sensor Adapter
- (#2) With External Sensor Adapter

7.1.4 Sample Calculations

A correction factor for the antenna, cable and a distance factor (if any) must be applied to the meter reading before a true field strength reading can be obtained. This Corrected Meter Reading is then compared to the specification limit in order to determine compliance with the limits.

Conversion to logarithmic terms: Specification limit ($\mu\text{V}/\text{m}$) $\log \times 20$ = Specification Limit in $\text{dB}\mu\text{V}/\text{m}$

To correct for distance when measuring at a distance other than the specification

For measurements below 30 MHz: (Specification distance / test distance) $\log \times 40$ = distance factor

For measurements above 30 MHz: (Specification distance / test distance) $\log \times 20$ = distance factor

Note: When using an Active Antenna, the Antenna factor shall be subtracted due to the combination of the internal amplification and antenna loss.

Corrected Meter Reading = meter reading + F – A + C

where: F = antenna factor
A = amplifier gain
C = cable loss

The correction factors for the antenna and the amplifier gain are attached in Appendix D of this report. The data sheets are attached in Appendix E.

The distance factor D is 0 when the test is performed at the required specification distance.

When the limit is in terms of magnetic field, the following equation applies:

$$H[\text{dB}(\mu\text{A}/\text{m})] = V[\text{dB}(\mu\text{V})] + L_C [\text{dB}] - G_{PA} [\text{dB}] + AF^H [\text{dB}(\text{S}/\text{m})]$$

where: H is the magnetic field strength (to be compared with the limit),
 V is the voltage level measured by the receiver or spectrum analyzer,
 L_C is the cable loss,
 G_{PA} is the gain of the preamplifier (if used), and
 AF^H is the magnetic antenna factor.

The G_{PA} term is only included in the equation when an external preamplifier is used in the measurement chain, in front of the receiver or spectrum analyzer. An external preamplifier is not usually necessary (or even advisable, due to risk of saturating the input mixer of the receiver) when an active loop antenna is used. In that case, the antenna factor of the loop already includes the gain of its built-in preamplifier.

If the “electrical” antenna factor is used instead, the above equation becomes:

$$H[\text{dB}(\mu\text{A}/\text{m})] = V[\text{dB}(\mu\text{V})] + L_C [\text{dB}] - G_{PA} [\text{dB}] + AF^E [\text{dB}(\text{m}^{-1})] - 51.5 [\text{dB}\Omega]$$

where: AF^E is the “electric” antenna factor, as provided by the antenna calibration laboratory.

When the limit is in terms of electric field, the following equation applies:

$$E[\text{dB}(\mu\text{V}/\text{m})] = V[\text{dB}(\mu\text{V})] + L_C [\text{dB}] - G_{PA} [\text{dB}] + AF^E [\text{dB}(\text{m}^{-1})]$$

or, if the magnetic antenna factor is used:

$$E[\text{dB}(\mu\text{V}/\text{m})] = V[\text{dB}(\mu\text{V})] + L_C [\text{dB}] - G_{PA} [\text{dB}] + AF^H [\text{dB}(\text{S}/\text{m})] + 51.5 [\text{dB}\Omega]$$

The display of the receiver (or spectrum analyzer) **shall not** be configured in units of current, e.g. μA or $\text{dB}(\mu\text{A})$. That conversion is calculated inside the receiver (or spectrum analyzer) using its input impedance, which is 50Ω , while the magnetic field calculation is based on the free-space impedance of 377Ω .

7.1.5 Duty Cycle Calculation

The fundamental and harmonics were measured at a 3-meter test distance. The EMI Receiver was used to obtain the final test data. The final qualification data sheets are in Appendix E.

Where

$$\delta(\text{dB}) = 20 \log \left[\sum (nt_1 + mt_2 + \dots + \xi t_x) / T \right]$$

n is the number of pulses of duration t_1

m is the number of pulses of duration t_2

ξ is the number of pulses of duration t_x

T is the period of the pulse train or 100 ms if the pulse train length is greater than 100 ms

Duty Cycle Correction Factor = -20.00 dB

Time of One Small Pulse = 150 μs

Time of One Large Pulse = 520 μs

Number of Small Pulses = 59

Number of Large Pulses = 1

Total On Time = 9370 μs = 9.370 ms

The time between pulses is greater than 100 ms

Duty Cycle = 9.370 ms / 100 ms = 9.37 %

7.1.6 99 % Bandwidth

The 99 % bandwidth was measured using an EMI Receiver.

The following steps were performed for measuring the 99 % bandwidth per RSS-GEN, Issue 5, clause 6.7:

1. Set RBW to 1 % to 5 % of the actual occupied bandwidth
2. Set VBW to greater than 3 times the RBW
3. Set the EMI Receiver to the occupied bandwidth Function set at 99 %
4. Set the peak detector to max hold
5. Set the sweep time to auto
6. Allow the trace to stabilize

Please note that this was only used to determine the emission bandwidth and that there are no limits or pass/fail criteria for this test. Please see the data sheets located in Appendix E.

7.1.7 -20 dB Bandwidth

The -20 dB bandwidth was measured using an EMI Receiver.

The following steps were performed for measuring the -20 dB bandwidth:

1. Set RBW from 1% to 5% of the Occupied Bandwidth
2. Set the span to 200 kHz
3. Set VBW to greater than 3 times the RBW
4. Set the peak detector to max hold
5. Set the sweep time to auto
6. Allow the trace to stabilize
7. Set the markers to -20 dB of the peak fundamental emission

Test Results:

The EUT complies with limits of CFR Title 47, Part 15, Subpart C section 15.231 (c); and the limits of RSS-210.

7.1.8 Transmission Time

The transmission time was measured using an EMI Receiver.

The following steps were performed for measuring transmission time:

1. Set RBW = 100 kHz
2. Set VBW = 300 kHz
3. Span = 0 Hz
4. Set the sweep time to 10 seconds
5. Push a button on the EUT, which automatically activated the transmitter
6. Allow the trace to stabilize
7. Set the 1st marker to start of the transmission
8. Set the 2nd marker to the end of the transmission
9. Verify the transmission does not go beyond 5 seconds

Test Results:

The EUT complies with limits of CFR Title 47, Part 15, Subpart C section 15.231 (a)(1) and (a)(2); and the limits of RSS-210.

7.1.9 Variation of the Input Power

The variation of the input power test was performed using the EMI Receiver. The EUT input power was varied between 85% and 115% of the nominal rated supply voltage. The carrier frequency was monitored for any change in amplitude.

Test Results:


This test was not performed because the EUT is battery power only.



8. CONCLUSIONS

The Flood Temperature Sensor, Model: WST-621V2 (EUT), as tested, meets all the specification limits defined in RSS-210, RSS-Gen, the **Class B** specification limits defined in CFR Title 47, Part 15, Subpart B; and the specification limits defined in CFR Title 47, Part, 15, Subpart C, sections 15.205, 15.209 and 15.231.



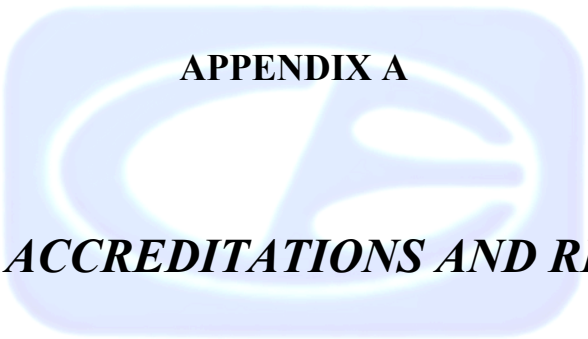

APPENDIX A

LABORATORY ACCREDITATIONS AND RECOGNITIONS

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



LABORATORY ACCREDITATIONS AND RECOGNITIONS



For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025.

For the most up-to-date version of our scopes and certificates please visit

<http://celectronics.com/quality/scope/>

Quote from ISO-ILAC-IAF Communiqué on the Management Systems Requirements of ISO/IEC 17025, General Requirements for the competence of testing and calibration laboratories:

"A laboratory's fulfilment of the requirements of ISO/IEC 17025 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025 are written in language relevant to laboratory operations and operate generally in accordance with the principles of ISO 9001"

Innovation, Science and Economic Development Canada
Lab Code 2154A



APPENDIX B

MODIFICATIONS TO THE EUT



MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC Subpart B, FCC 15.231, RSS-210, and RSS-Gen specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modifications were made to the EUT during the testing.





APPENDIX C

MODELS COVERED UNDER THIS REPORT

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

Flood Temperature Sensor

Model: WST-621V2

S/N: 007-4116

There are no additional models or part numbers covered under this report.






APPENDIX D

DIAGRAMS, CHARTS, AND PHOTOS




FIGURE 1: CONDUCTED EMISSIONS TEST SETUP

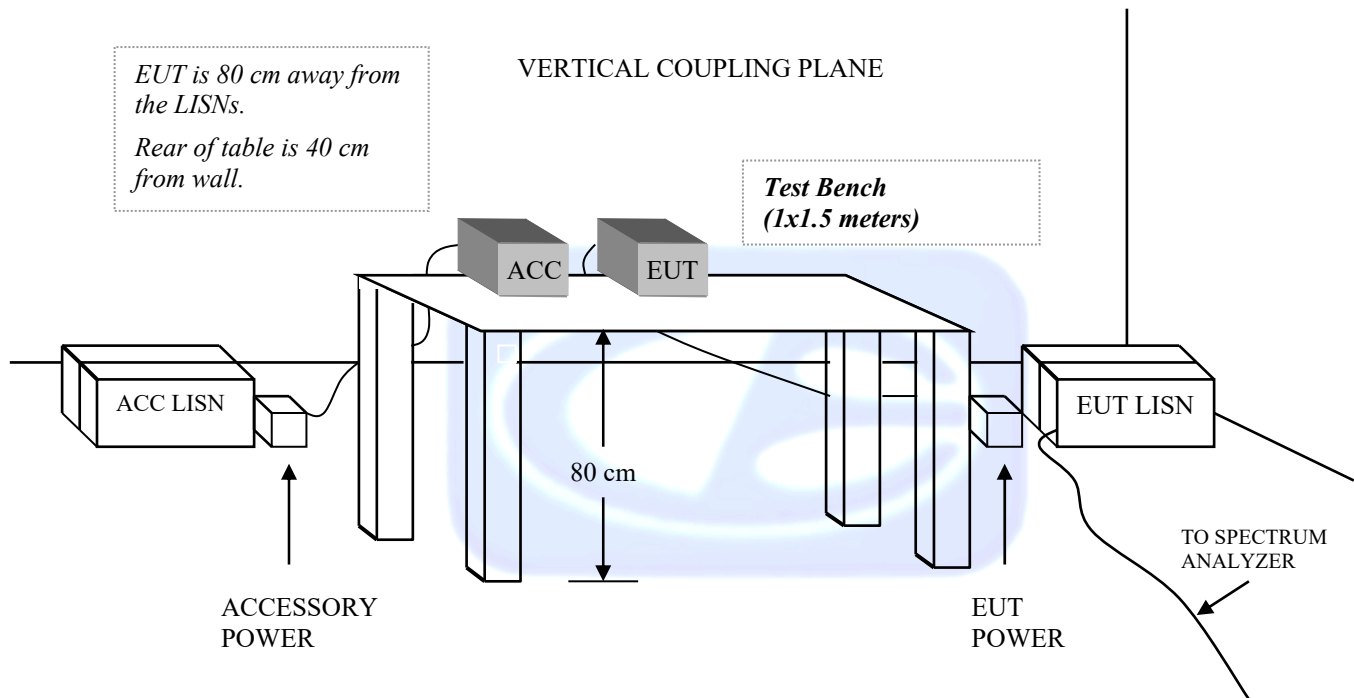



***FIGURE 2: LAYOUT OF THE SEMI-ANECHOIC
TEST CHAMBER***

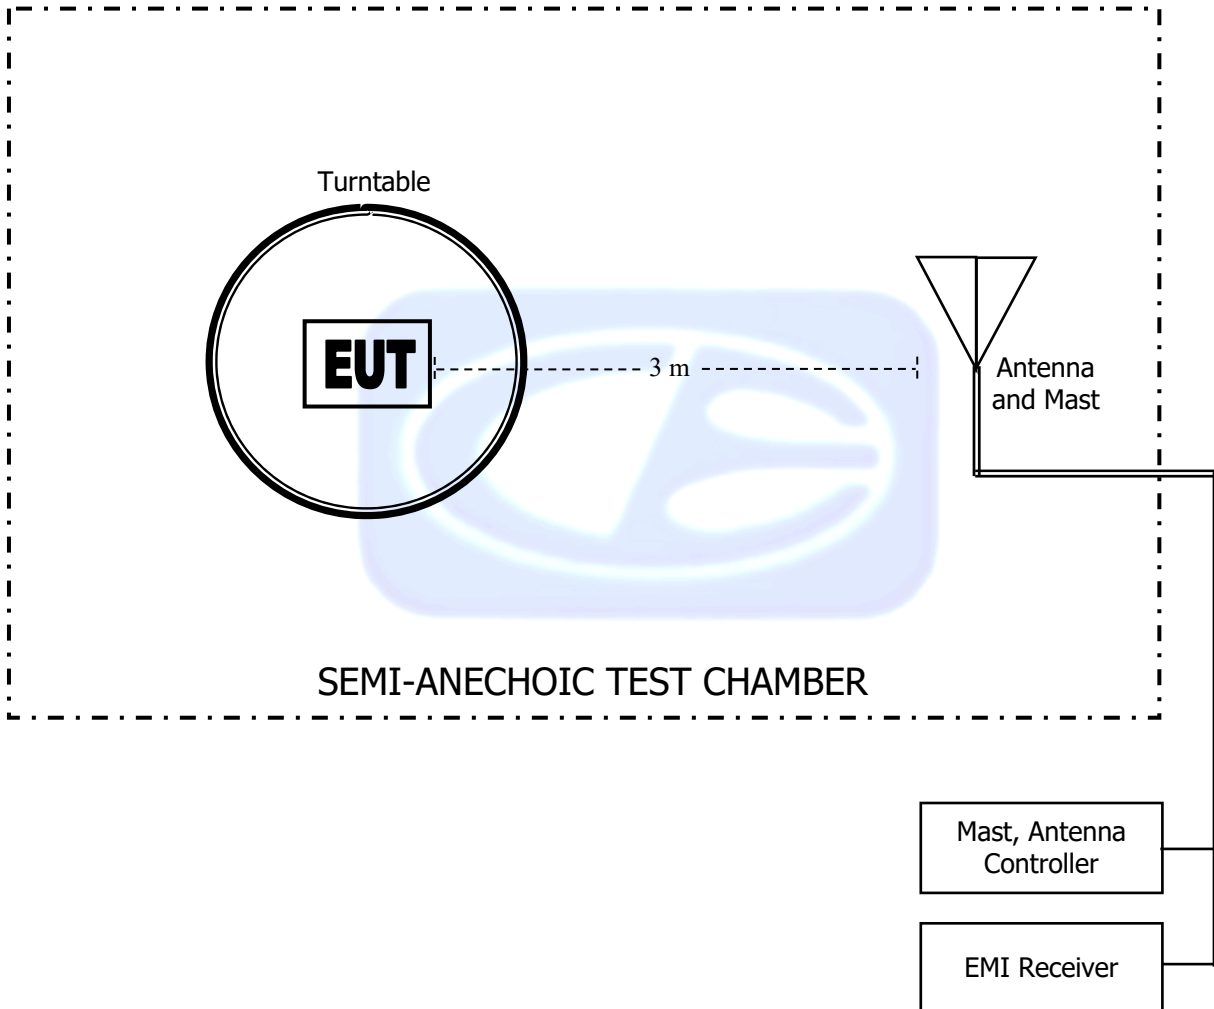

COM-POWER AL-130R**LOOP ANTENNA****S/N: 121090****CALIBRATION DATE: FEBRUARY 10, 2022**

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	15.6	-35.8
0.01	15.8	-35.6
0.02	14.8	-36.6
0.03	15.6	-35.9
0.04	15.0	-36.5
0.05	14.4	-37.1
0.06	14.6	-36.9
0.07	14.3	-37.2
0.08	14.3	-37.2
0.09	14.4	-37.0
0.10	14.1	-37.4
0.20	14.1	-37.4
0.30	14.0	-37.5
0.40	13.9	-37.6
0.50	14.1	-37.3
0.60	14.1	-37.3
0.70	14.2	-37.3
0.80	14.2	-37.3
0.90	14.2	-37.2
1.00	14.4	-37.0
2.00	14.6	-36.9
3.00	14.6	-36.8
4.00	14.9	-36.6
5.00	14.9	-36.7
6.00	14.8	-36.7
7.00	14.6	-36.8
8.00	14.5	-37.0
9.00	14.3	-37.2
10.00	14.5	-37.0
11.00	14.6	-36.9
12.00	14.7	-36.7
13.00	14.9	-36.6
14.00	15.0	-36.5
15.00	14.9	-36.6
16.00	14.9	-36.6
17.00	14.6	-36.8
18.00	14.4	-37.1
19.00	14.5	-37.0
20.00	14.5	-37.0
21.00	14.2	-37.3
22.00	13.9	-37.5
23.00	13.9	-37.5
24.00	13.8	-37.7
25.00	13.4	-38.0
26.00	13.2	-38.2
27.00	13.2	-38.3
28.00	12.7	-38.7
29.00	12.7	-38.8
30.00	12.4	-39.0



COM-POWER AC-220

COMBILOG ANTENNA

S/N: 61093

CALIBRATION DATE: DECEMBER 14, 2021


FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	22.50	200	16.00
35	21.40	250	17.40
40	21.00	300	19.70
45	20.60	350	20.00
50	19.70	400	22.20
60	16.10	450	22.40
70	12.80	500	23.10
80	12.50	550	23.40
90	14.20	600	24.90
100	15.40	650	25.30
120	16.50	700	25.40
125	16.80	750	26.40
140	15.90	800	26.70
150	16.60	850	27.10
160	18.50	900	27.90
175	15.90	950	28.00
180	15.50	1000	28.00

COM POWER AH-118**HORN ANTENNA****S/N: 10050113****CALIBRATION DATE: DECEMBER 16, 2021**

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	23.86	10.0	38.91
1.5	25.67	10.5	39.94
2.0	28.25	11.0	39.10
2.5	29.17	11.5	39.70
3.0	29.78	12.0	40.29
3.5	30.88	12.5	41.93
4.0	31.21	13.0	41.34
4.5	32.96	13.5	40.57
5.0	33.30	14.0	40.23
5.5	34.24	14.5	42.25
6.0	34.57	15.0	43.63
6.5	35.61	15.5	39.96
7.0	36.60	16.0	40.38
7.5	37.49	16.5	40.56
8.0	37.44	17.0	40.93
8.5	37.98	17.5	42.27
9.0	38.01	18.0	43.77
9.5	38.53		

COM-POWER PA-118**PREAMPLIFIER****S/N: 181653****CALIBRATION DATE: MARCH 7, 2022**

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	40.02	6.0	38.84
1.1	39.72	6.5	39.20
1.2	39.93	7.0	39.46
1.3	39.98	7.5	39.67
1.4	39.99	8.0	39.28
1.5	40.20	8.5	38.63
1.6	40.05	9.0	38.96
1.7	40.15	9.5	39.33
1.8	40.20	10.0	39.58
1.9	40.33	11.0	38.25
2.0	40.33	12.0	40.03
2.5	40.60	13.0	40.55
3.0	40.76	14.0	40.36
3.5	40.87	15.0	39.34
4.0	40.39	16.0	37.34
4.5	39.55	17.0	42.14
5.0	40.34	18.0	42.54
5.5	39.45		

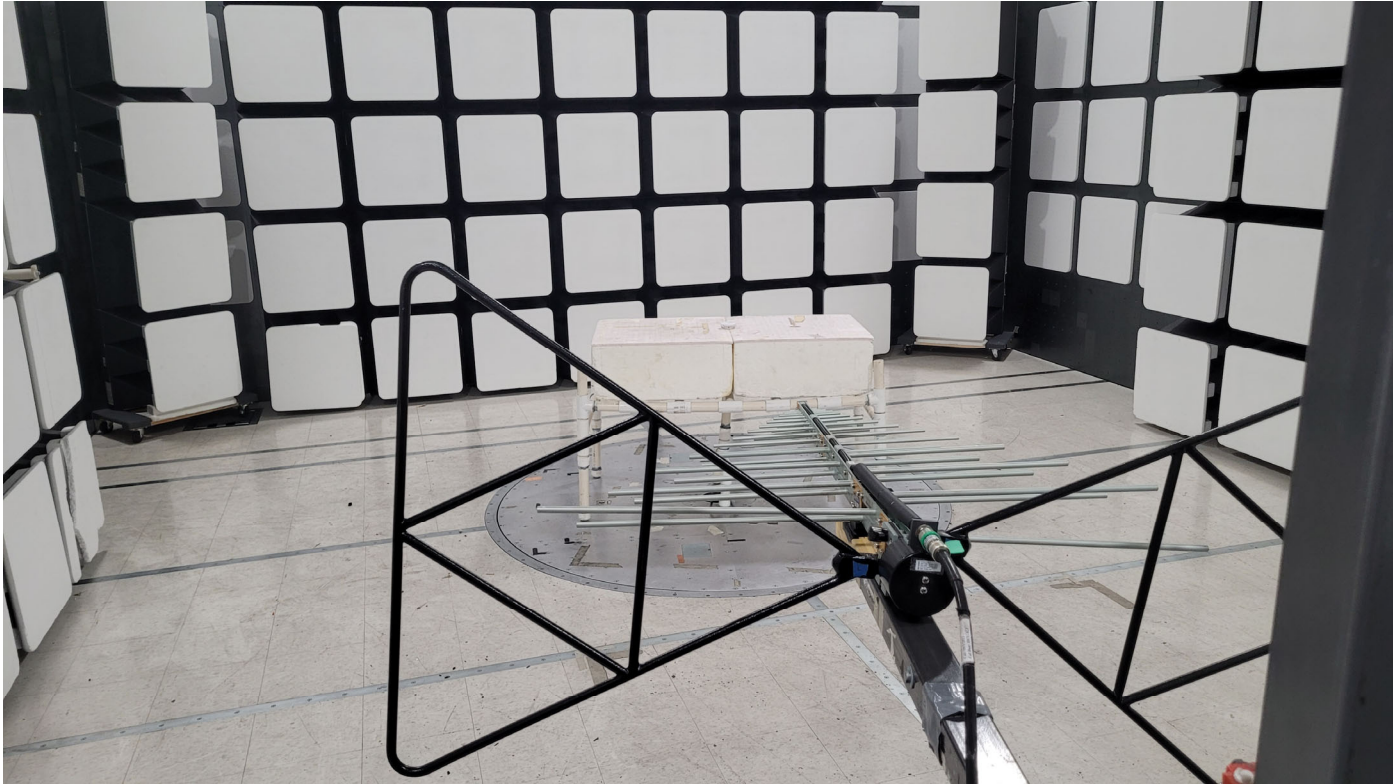

FRONT VIEW

WITHOUT EXTERNAL SENSOR ADAPTER


ECOLINK INTELLIGENT TECHNOLOGY, INC.

FLOOD TEMPERATURE SENSOR

MODEL: WST-621V2

FCC SUBPART B AND C; RSS-210 AND RSS-GEN – RADIATED EMISSIONS – BELOW 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

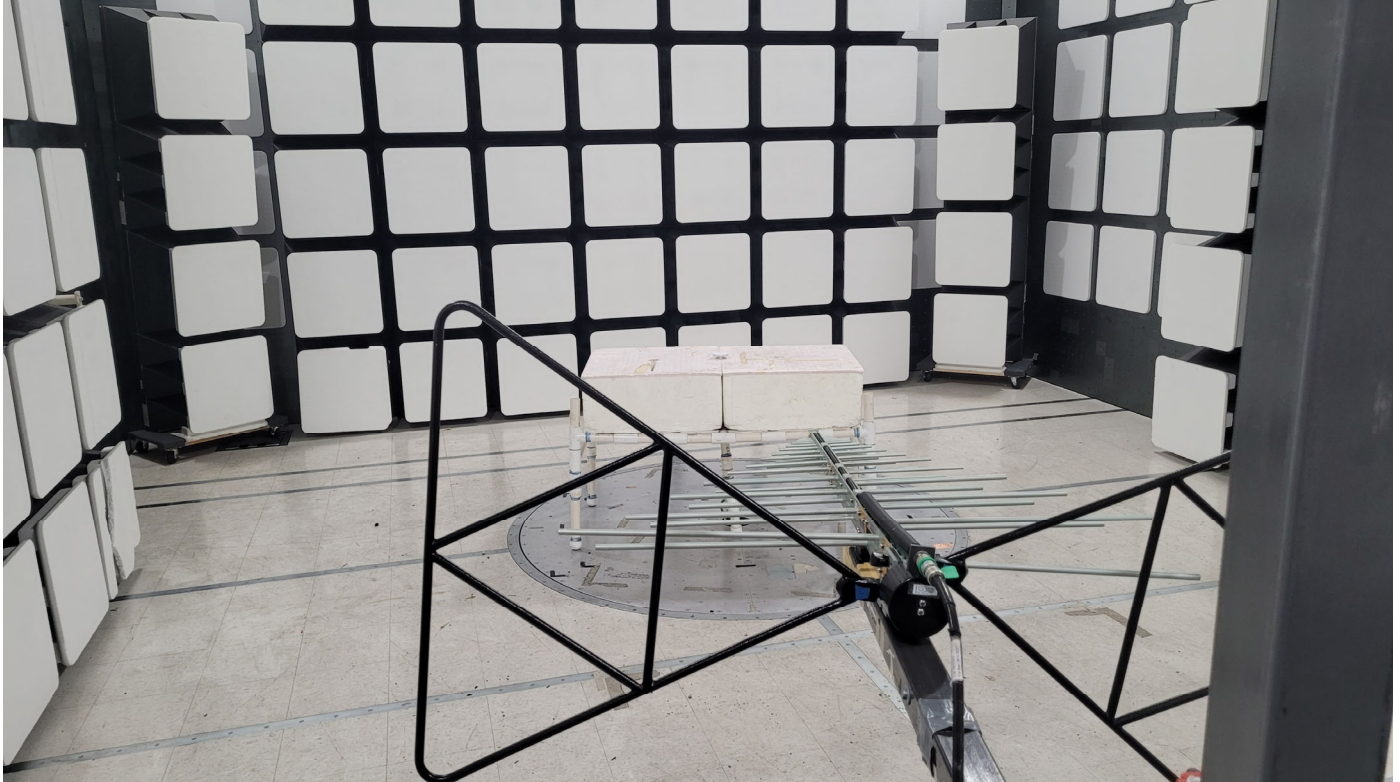

REAR VIEW

WITHOUT EXTERNAL SENSOR ADAPTER


ECOLINK INTELLIGENT TECHNOLOGY, INC.

FLOOD TEMPERATURE SENSOR

MODEL: WST-621V2

FCC SUBPART B AND C; RSS-210 AND RSS-GEN – RADIATED EMISSIONS – BELOW 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

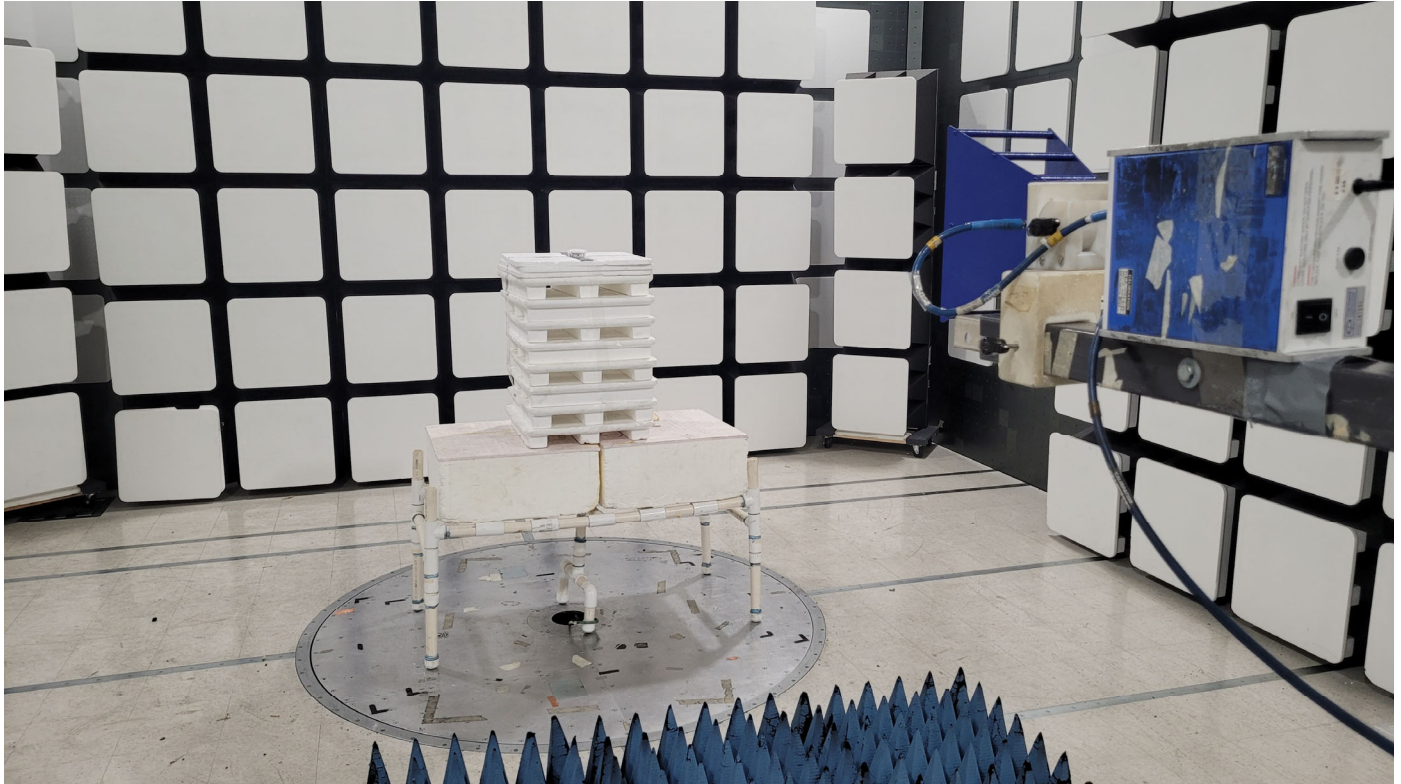

FRONT VIEW

WITHOUT EXTERNAL SENSOR ADAPTER


ECOLINK INTELLIGENT TECHNOLOGY, INC.

FLOOD TEMPERATURE SENSOR

MODEL: WST-621V2

FCC SUBPART B AND C; RSS-210 AND RSS-GEN – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

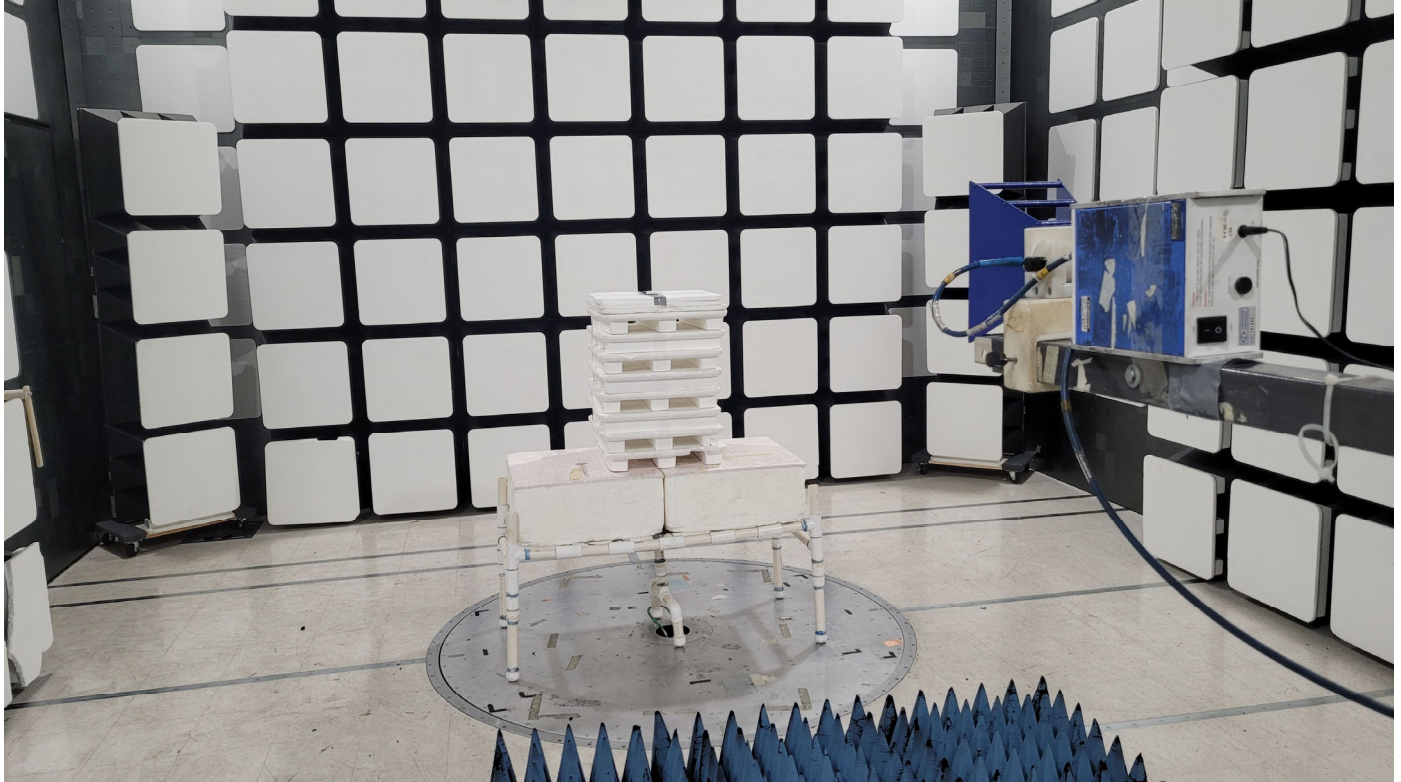

REAR VIEW

WITHOUT EXTERNAL SENSOR ADAPTER


ECOLINK INTELLIGENT TECHNOLOGY, INC.

FLOOD TEMPERATURE SENSOR

MODEL: WST-621V2

FCC SUBPART B AND C; RSS-210 AND RSS-GEN – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

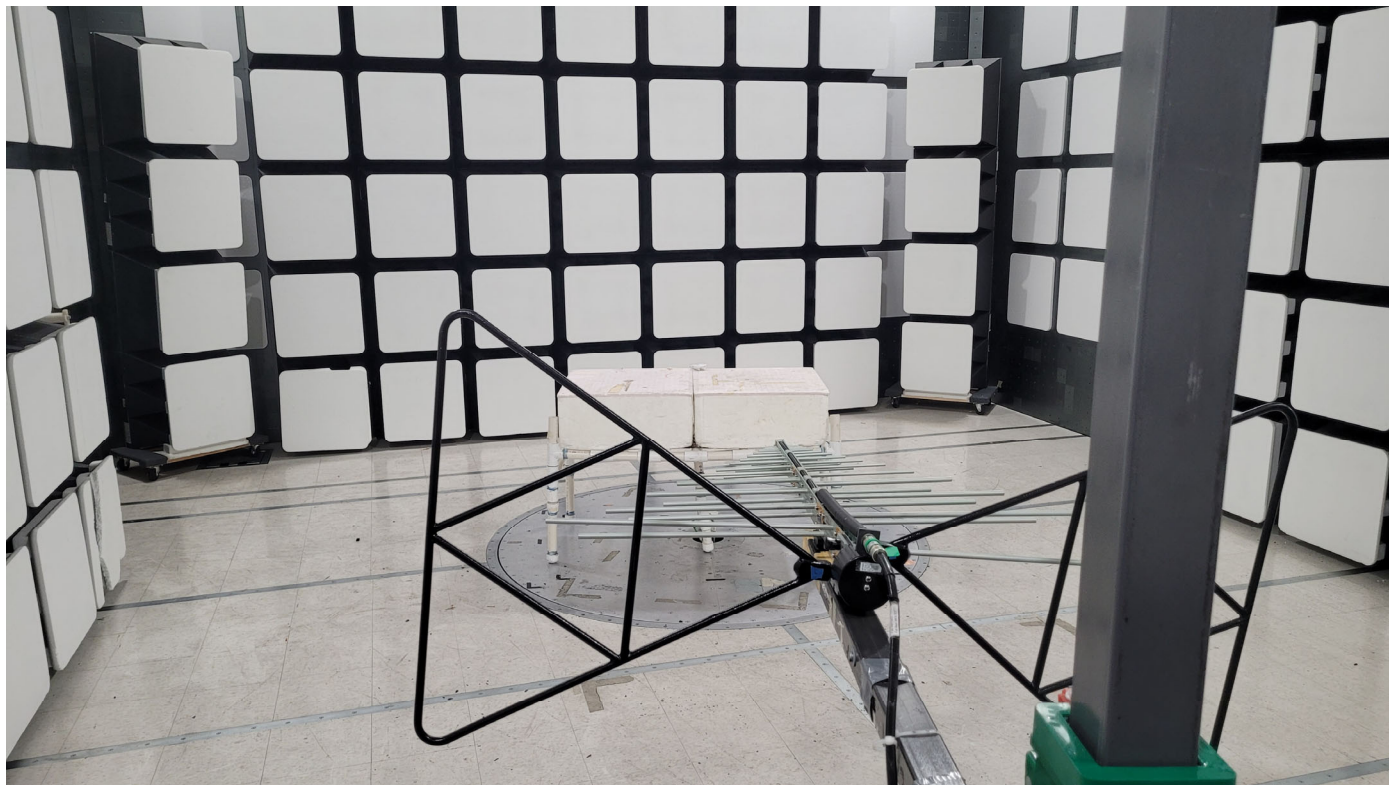

FRONT VIEW

WITH EXTERNAL SENSOR ADAPTER


ECOLINK INTELLIGENT TECHNOLOGY, INC.

FLOOD TEMPERATURE SENSOR

MODEL: WST-621V2

FCC SUBPART B AND C; RSS-210 AND RSS-GEN – RADIATED EMISSIONS – BELOW 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

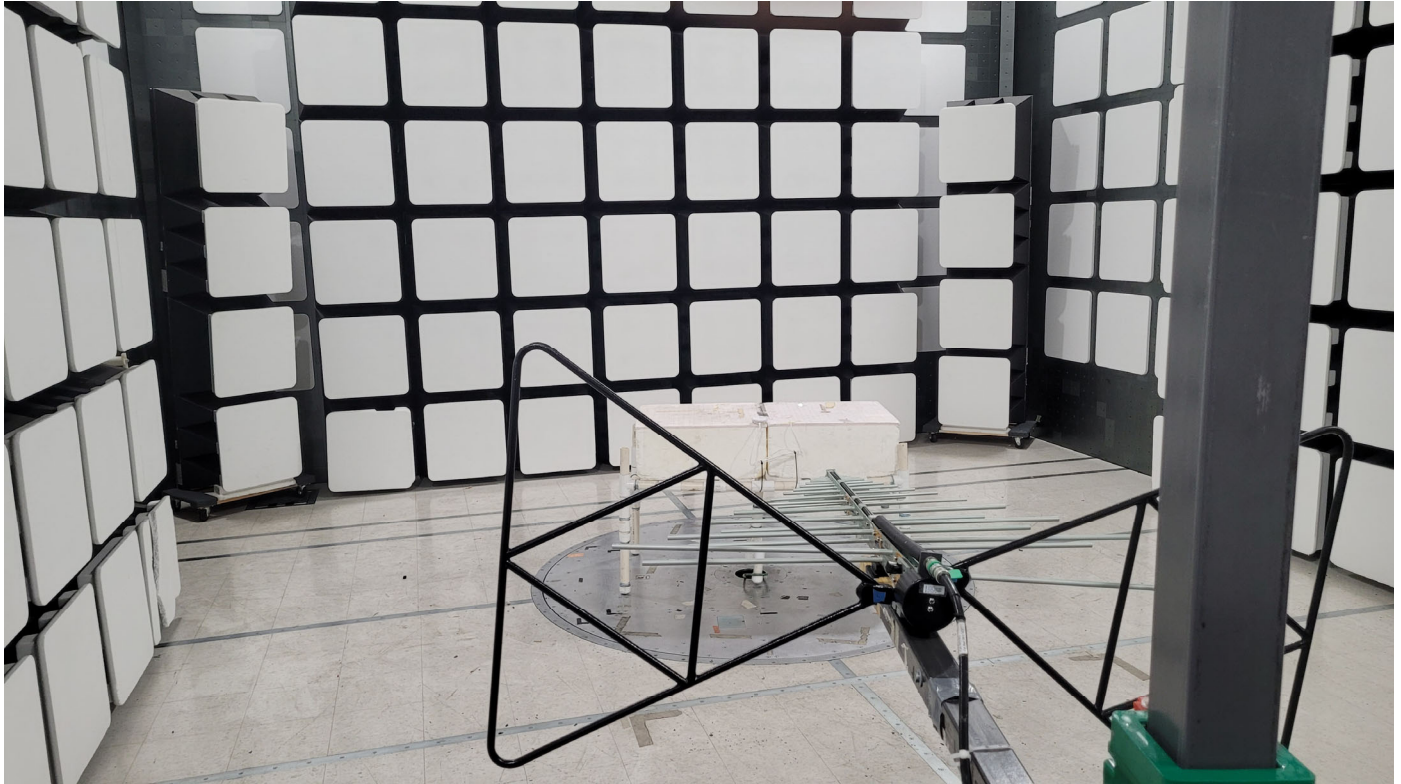

REAR VIEW

WITH EXTERNAL SENSOR ADAPTER


ECOLINK INTELLIGENT TECHNOLOGY, INC.

FLOOD TEMPERATURE SENSOR

MODEL: WST-621V2

FCC SUBPART B AND C; RSS-210 AND RSS-GEN – RADIATED EMISSIONS – BELOW 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

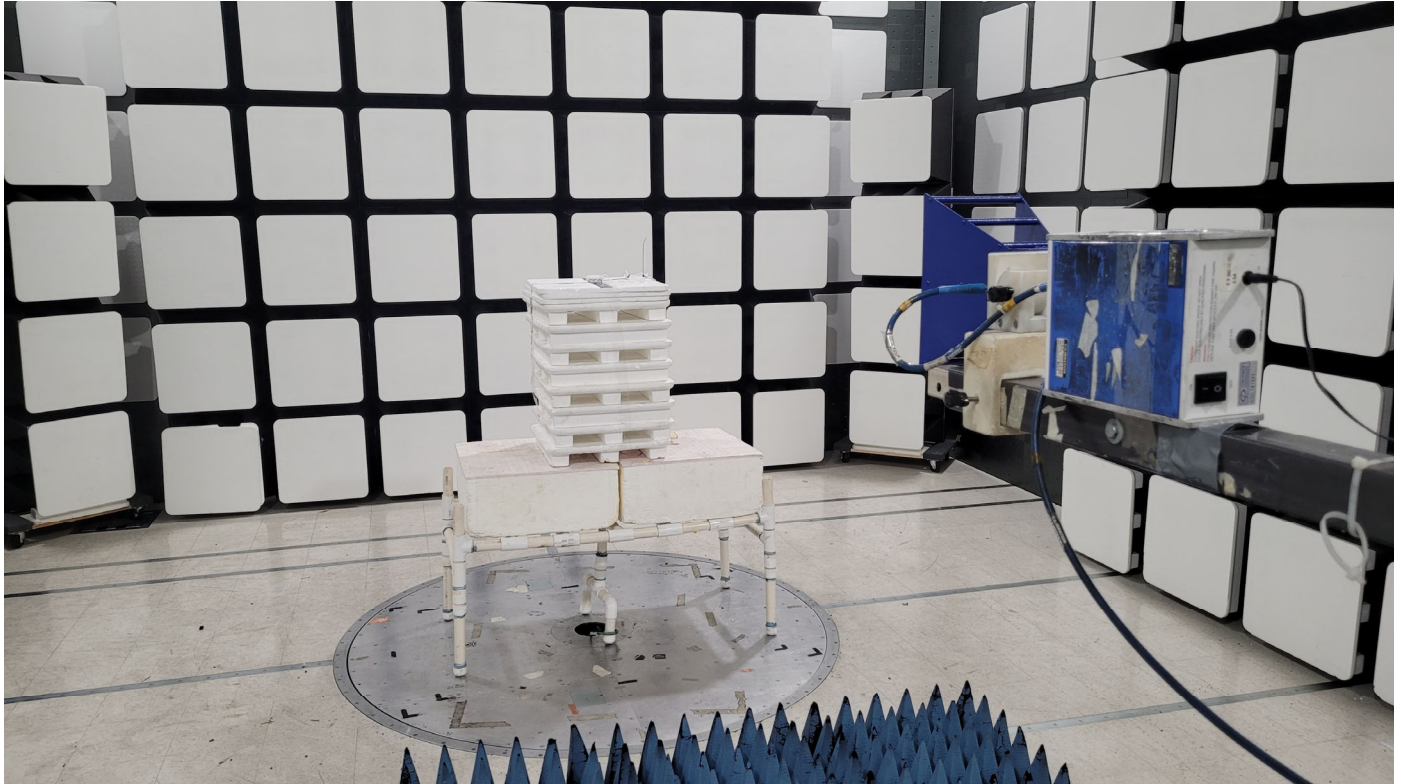

FRONT VIEW

WITH EXTERNAL SENSOR ADAPTER


ECOLINK INTELLIGENT TECHNOLOGY, INC.

FLOOD TEMPERATURE SENSOR

MODEL: WST-621V2

FCC SUBPART B AND C; RSS-210 AND RSS-GEN – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

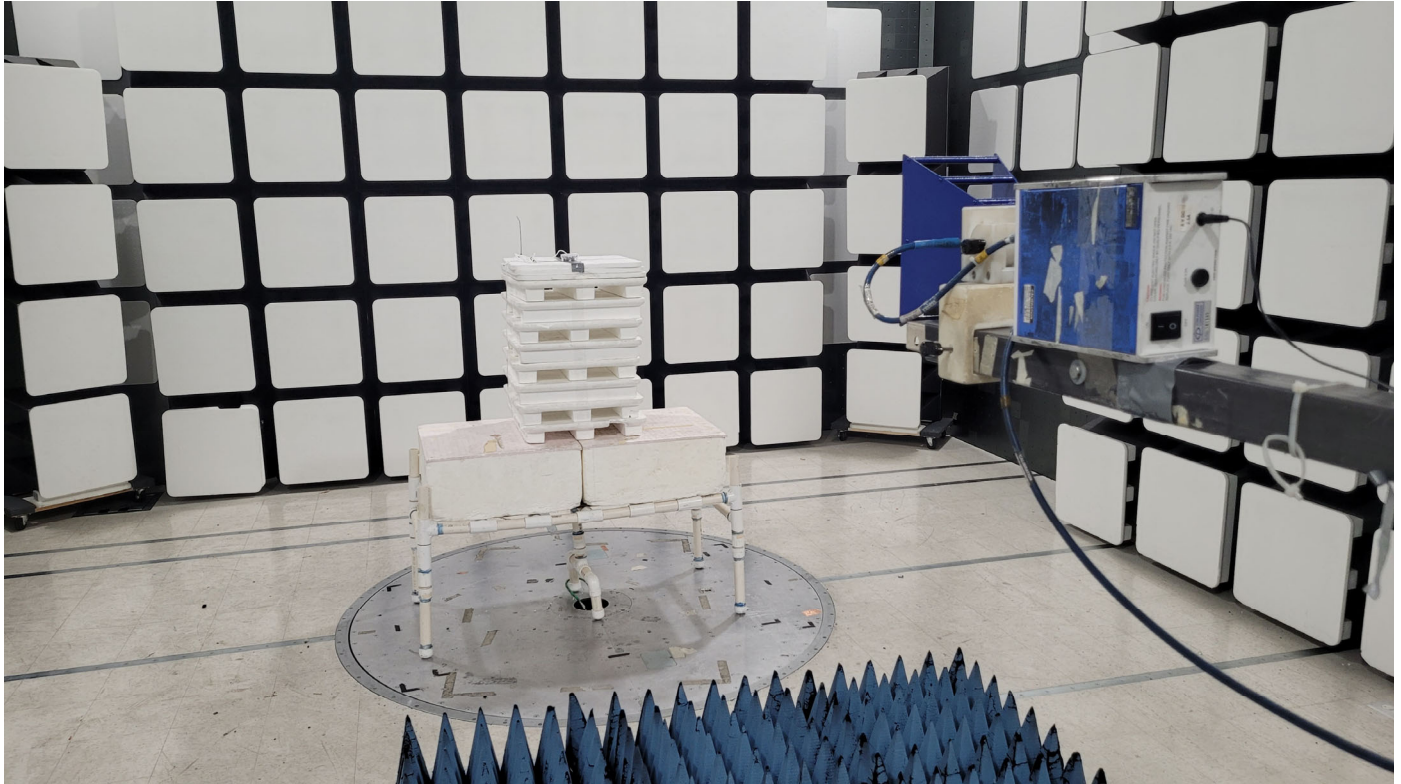

REAR VIEW

WITH EXTERNAL SENSOR ADAPTER

ECOLINK INTELLIGENT TECHNOLOGY, INC.

FLOOD TEMPERATURE SENSOR

MODEL: WST-621V2

FCC SUBPART B AND C; RSS-210 AND RSS-GEN – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



APPENDIX E

DATA SHEETS



RADIATED EMISSIONS

DATA SHEETS



Title: Pre-Scan - FCC Class B

File: 5 - Pre-Scan - X-Axis - 319.50 MHz - Stand Alone - FCC Class B - 07-17-2023.set

Operator: Kyle Fujimoto

EUT Type: Flood Temperature Sensor

EUT Condition: The EUT is continuously transmitting at 319.50 MHz in Stand Alone Mode

Company: Ecolink Intelligent Technology, Inc.

Model: WST-621v2

S/N: 007-4116

X-Axis (Worst Case)


Note: The Frequencies at 319.50 MHz, 639.00 MHz, and 958.50 MHz are subject to the limits of FCC 15.231 instead

9/27/2023 11:20:36 AM

Sequence: Preliminary Scan

FCC Class B

Electric Field Strength (dBuV/m)

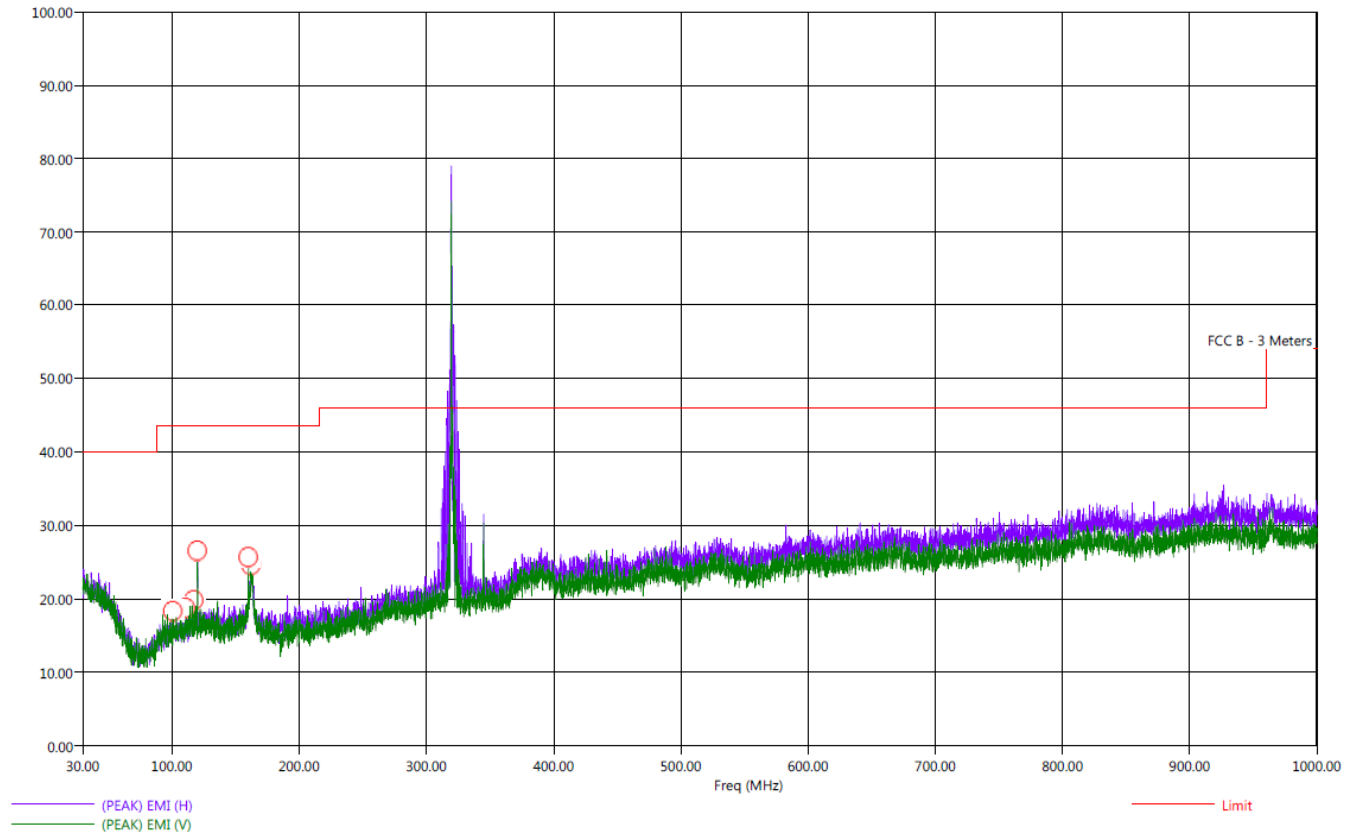

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



Title: Radiated Final - FCC Class B
File: 5 - Final Scan - X-Axis - 319.50 MHz - Stand Alone - FCC Class B - 07-17-2023.set
Operator: Kyle Fujimoto
EUT Type: Flood Temperature Sensor
EUT Condition: The EUT is continuously transmitting at 319.50 MHz in Stand Alone Mode
Company: Ecolink Intelligent Technology, Inc.
Model: WST-621v2
S/N: 007-4116
X-Axis

9/27/2023 11:30:09 AM
Sequence: Final Measurements

FCC Class B


Freq (MHz)	Pol	(PEAK) EMI (dBµV/m)	(QP) EMI (dBµV/m)	(PEAK) Margin (dB)	(QP) Margin (dB)	Limit (dBµV/m)	Transducer (dB)	Cable (dB)	Ttbl Aql (deg)	Twr Ht (cm)
100.60	H	18.79	13.37	-24.71	-30.13	43.50	15.48	0.68	79.50	381.59
110.70	H	18.88	13.86	-24.62	-29.64	43.50	15.89	0.74	143.00	397.65
117.20	H	19.86	14.50	-23.64	-29.00	43.50	16.32	0.78	209.00	175.14
120.00	H	27.80	25.55	-15.70	-17.95	43.50	16.50	0.79	136.50	254.91
120.00	V	28.72	26.66	-14.78	-16.84	43.50	16.50	0.79	104.50	302.43
160.00	V	29.06	25.46	-14.44	-18.04	43.50	18.53	0.93	182.25	142.91
162.10	H	26.42	21.00	-17.08	-22.50	43.50	22.97	0.94	311.50	238.49





Title: Pre-Scan - FCC Class B
File: 6 - Pre-Scan - X-Axis - 319.50 MHz - With Cradle - FCC Class B - 07-17-2023.set
Operator: Kyle Fujimoto
EUT Type: Flood Temperature Sensor
EUT Condition: The EUT is continuously transmitting at 319.50 MHz with External Sensor Cable
Company: Ecolink Intelligent Technology, Inc.
Model: WST-621v2
S/N: 007-4116
X-Axis (Worst Case)
Note: The Frequencies at 319.50 MHz, 639.00 MHz, and 958.50 MHz are subject to the limits of FCC 15.231 instead

9/27/2023 12:19:08 PM
Sequence: Preliminary Scan

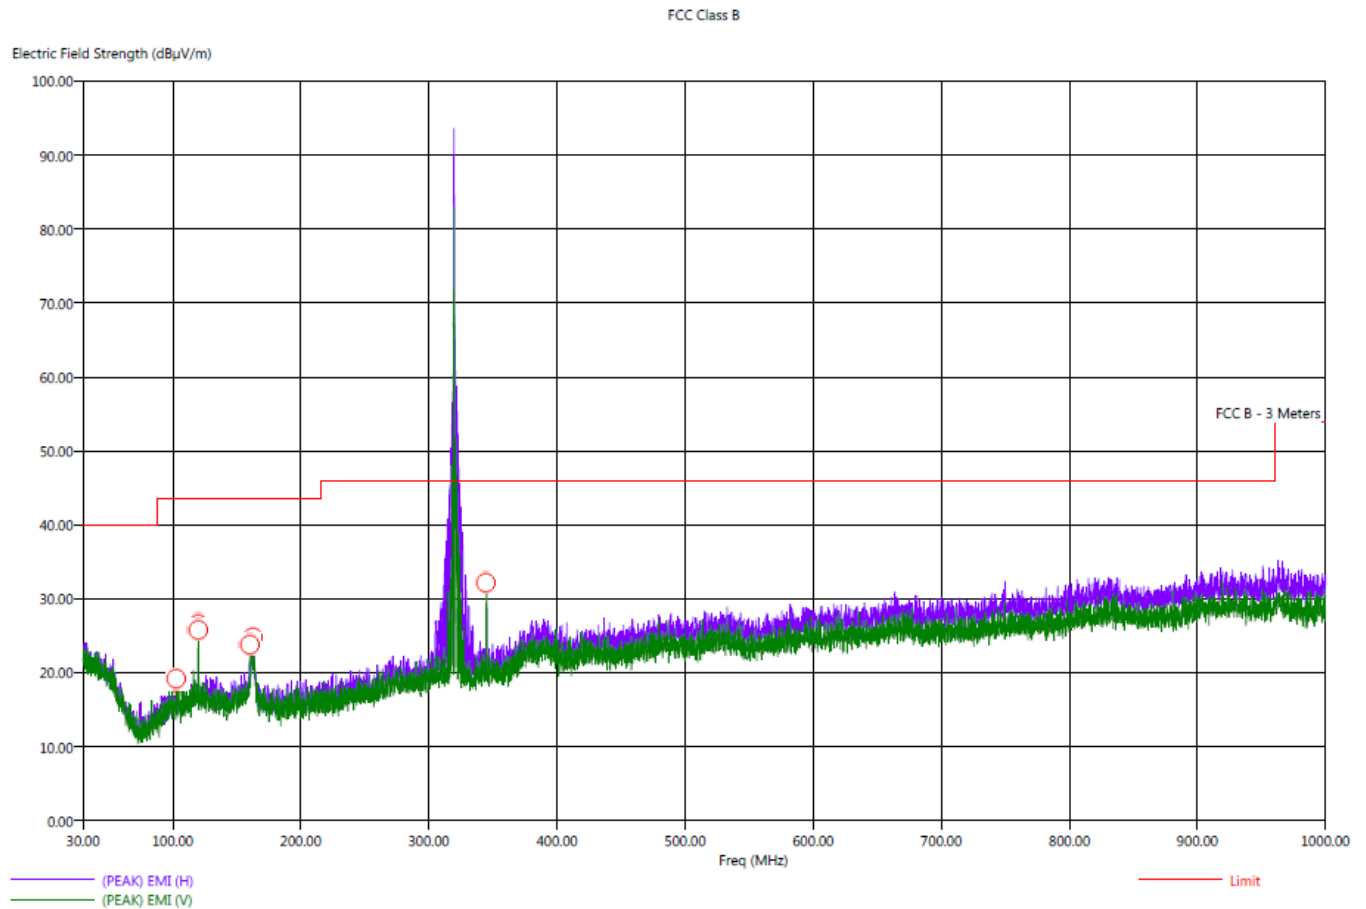



Title: Radiated Final - FCC Class B
File: 6 - Final Scan - X-Axis - 319.50 MHz - With Cradle - FCC Class B - 07-17-2023.set
Operator: Kyle Fujimoto
EUT Type: Flood Temperature Sensor
EUT Condition: The EUT is continuously transmitting at 319.50 MHz with External Sensor Cable
Company: Ecolink Intelligent Technology, Inc.
Model: WST-621v2
S/N: 007-4116
X-Axis

9/27/2023 12:31:21 PM
Sequence: Final Measurements

FCC Class B

Freq (MHz)	Pol	(PEAK) EMI (dB μ V/m)	(QP) EMI (dB μ V/m)	(PEAK) Margin (dB)	(QP) Margin (dB)	Limit (dB μ V/m)	Transducer (dB)	Cable (dB)	Ttl Aql (da)	Twr Ht (cm)
102.90	V	20.78	14.32	-22.72	-29.18	43.50	15.58	0.70	184.25	223.08
104.40	H	18.32	13.47	-25.18	-30.03	43.50	15.60	0.71	62.00	285.95
120.00	H	30.00	27.27	-13.50	-16.23	43.50	16.50	0.79	108.50	222.49
120.00	V	29.38	26.87	-14.12	-16.63	43.50	16.50	0.79	246.50	302.31
160.00	V	29.39	25.70	-14.11	-17.80	43.50	18.55	0.93	13.75	158.85
162.60	H	25.52	20.68	-17.98	-22.82	43.50	22.58	0.94	159.75	142.73
345.00	V	24.30	19.09	-21.70	-26.91	46.00	20.20	1.44	127.50	350.37





FUNDAMENTAL AND HARMONICS

DATA SHEETS



EUT WITH NO EXTERNAL SENSOR ADAPTER

DATA SHEETS

FCC 15.231

Ecolink Intelligent Technology, Inc.
Flood Temperature Sensor
Model: WST-621v2

Date: 09/27/2023
Lab: D
Tested By: Kyle Fujimoto

Fundamental - Stand Alone Mode

[illegible]

FCC 15.231

Ecolink Intelligent Technology, Inc.

Flood and Freeze Sensor

Model: WST-621v2

Date: 09/27/2023

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Stand Alone Mode
Transmit Mode - X-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
639.00	30.09	V	75.89	-45.80	Peak	204.25	127.38	
639.00	10.09	V	55.89	-45.80	Avg	204.25	127.38	
958.50	37.21	V	75.89	-38.68	Peak	44.75	191.20	
958.50	17.21	V	55.89	-38.68	Avg	44.75	191.20	
1278.00	31.12	V	73.97	-42.85	Peak	143.25	143.26	
1278.00	11.12	V	53.97	-42.85	Avg	143.25	143.26	
1597.50	31.58	V	73.97	-42.39	Peak	0.00	223.68	
1597.50	11.58	V	53.97	-42.39	Avg	0.00	223.68	
1917.00	34.13	V	75.89	-41.76	Peak	327.00	159.14	
1917.00	14.13	V	55.89	-41.76	Avg	327.00	159.14	
2236.50	36.46	V	73.97	-37.51	Peak	193.50	175.50	
2236.50	16.46	V	53.97	-37.51	Avg	193.50	175.50	
2556.00	37.90	V	75.89	-37.99	Peak	79.00	159.38	
2556.00	17.90	V	55.89	-37.99	Avg	79.00	159.38	
2875.50	37.75	V	73.97	-36.22	Peak	324.25	207.26	
2875.50	17.75	V	53.97	-36.22	Avg	324.25	207.26	
3195.00	37.41	V	75.89	-38.48	Peak	138.25	143.38	
3195.00	17.41	V	55.89	-38.48	Avg	138.25	143.38	



FCC 15.231

Ecolink Intelligent Technology, Inc.
Flood and Freeze Sensor
Model: WST-621v2

Date: 09/27/2023
Lab: D
Tested By: Kyle Fujimoto

**Harmonics - Stand Alone Mode
Transmit Mode - Y-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
639.00	30.22	V	75.89	-45.67	Peak	0.00	143.08	
639.00	10.22	V	55.89	-45.67	Avg	0.00	143.08	
958.50	36.37	V	75.89	-39.52	Peak	310.50	159.44	
958.50	16.37	V	55.89	-39.52	Avg	310.50	159.44	
1278.00	31.48	V	73.97	-42.49	Peak	235.50	159.62	
1278.00	11.48	V	53.97	-42.49	Avg	235.50	159.62	
1597.50	32.17	V	73.97	-41.80	Peak	299.00	159.56	
1597.50	12.17	V	53.97	-41.80	Avg	299.00	159.56	
1917.00	34.16	V	75.89	-41.73	Peak	288.00	207.32	
1917.00	14.16	V	55.89	-41.73	Avg	288.00	207.32	
2236.50	35.48	V	73.97	-38.49	Peak	74.75	223.38	
2236.50	15.48	V	53.97	-38.49	Avg	74.75	223.38	
2556.00	38.11	V	75.89	-37.78	Peak	58.25	223.32	
2556.00	18.11	V	55.89	-37.78	Avg	58.25	223.32	
2875.50	37.66	V	73.97	-36.31	Peak	357.00	143.32	
2875.50	17.66	V	53.97	-36.31	Avg	357.00	143.32	
3195.00	37.43	V	75.89	-38.46	Peak	116.25	223.20	
3195.00	17.43	V	55.89	-38.46	Avg	116.25	223.20	



FCC 15.231

Ecolink Intelligent Technology, Inc.
Flood and Freeze Sensor
Model: WST-621v2

Date: 09/27/2023
Lab: D
Tested By: Kyle Fujimoto

**Harmonics - Stand Alone Mode
Transmit Mode - Z-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
639.00	29.90	V	75.89	-45.99	Peak	100.25	127.26	
639.00	9.90	V	55.89	-45.99	Avg	100.25	127.26	
958.50	37.62	V	75.89	-38.27	Peak	0.75	158.97	
958.50	17.62	V	55.89	-38.27	Avg	0.75	158.97	
1278.00	30.72	V	73.97	-43.25	Peak	351.25	175.26	
1278.00	10.72	V	53.97	-43.25	Avg	351.25	175.26	
1597.50	34.18	V	73.97	-39.79	Peak	1.00	175.20	
1597.50	14.18	V	53.97	-39.79	Avg	1.00	175.20	
1917.00	33.98	V	75.89	-41.91	Peak	194.00	223.56	
1917.00	13.98	V	55.89	-41.91	Avg	194.00	223.56	
2236.50	35.27	V	73.97	-38.70	Peak	303.50	191.32	
2236.50	15.27	V	53.97	-38.70	Avg	303.50	191.32	
2556.00	37.88	V	75.89	-38.01	Peak	329.00	143.20	
2556.00	17.88	V	55.89	-38.01	Avg	329.00	143.20	
2875.50	37.77	V	73.97	-36.20	Peak	227.50	191.14	
2875.50	17.77	V	53.97	-36.20	Avg	227.50	191.14	
3195.00	37.71	V	75.89	-38.18	Peak	321.50	207.38	
3195.00	17.71	V	55.89	-38.18	Avg	321.50	207.38	

FCC 15.231

Ecolink Intelligent Technology, Inc.

Flood and Freeze Sensor

Model: WST-621v2

Date: 09/27/2023

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Stand Alone Mode
Transmit Mode - X-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
639.00	29.81	H	75.89	-46.08	Peak	154.25	367.80	
639.00	9.81	H	55.89	-46.08	Avg	154.25	367.80	
958.50	37.43	H	75.89	-38.46	Peak	154.75	143.20	
958.50	17.43	H	55.89	-38.46	Avg	154.75	143.20	
1278.00	31.06	H	73.97	-42.91	Peak	162.00	142.97	
1278.00	11.06	H	53.97	-42.91	Avg	162.00	142.97	
1597.50	33.65	H	73.97	-40.32	Peak	52.50	110.13	
1597.50	13.65	H	53.97	-40.32	Avg	52.50	110.13	
1917.00	33.64	H	75.89	-42.25	Peak	29.75	157.89	
1917.00	13.64	H	55.89	-42.25	Avg	29.75	157.89	
2236.50	36.69	H	73.97	-37.28	Peak	25.25	222.01	
2236.50	16.69	H	53.97	-37.28	Avg	25.25	222.01	
2556.00	38.61	H	75.89	-37.28	Peak	191.25	126.25	
2556.00	18.61	H	55.89	-37.28	Avg	191.25	126.25	
2875.50	37.60	H	73.97	-36.37	Peak	79.75	111.20	
2875.50	17.60	H	53.97	-36.37	Avg	79.75	111.20	
3195.00	37.28	H	75.89	-38.61	Peak	100.00	249.89	
3195.00	17.28	H	55.89	-38.61	Avg	100.00	249.89	

FCC 15.231

Ecolink Intelligent Technology, Inc.

Flood and Freeze Sensor

Model: WST-621v2

Date: 09/27/2023

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Stand Alone Mode
Transmit Mode - Y-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
639.00	29.64	H	75.89	-46.25	Peak	85.50	350.43	
639.00	9.64	H	55.89	-46.25	Avg	85.50	350.43	
958.50	38.35	H	75.89	-37.54	Peak	173.25	191.20	
958.50	18.35	H	55.89	-37.54	Avg	173.25	191.20	
1278.00	31.52	H	73.97	-42.45	Peak	298.00	111.20	
1278.00	11.52	H	53.97	-42.45	Avg	298.00	111.20	
1597.50	33.67	H	73.97	-40.30	Peak	297.50	111.32	
1597.50	13.67	H	53.97	-40.30	Avg	297.50	111.32	
1917.00	34.43	H	75.89	-41.46	Peak	156.50	249.07	
1917.00	14.43	H	55.89	-41.46	Avg	156.50	249.07	
2236.50	35.98	H	73.97	-37.99	Peak	195.50	190.91	
2236.50	15.98	H	53.97	-37.99	Avg	195.50	190.91	
2556.00	38.07	H	75.89	-37.82	Peak	191.75	249.89	
2556.00	18.07	H	55.89	-37.82	Avg	191.75	249.89	
2875.50	38.40	H	73.97	-35.57	Peak	64.50	249.20	
2875.50	18.40	H	53.97	-35.57	Avg	64.50	249.20	
3195.00	37.14	H	75.89	-38.75	Peak	162.25	159.32	
3195.00	17.14	H	55.89	-38.75	Avg	162.25	159.32	



FCC 15.231

Ecolink Intelligent Technology, Inc.
Flood and Freeze Sensor
Model: WST-621v2

Date: 09/27/2023
Lab: D
Tested By: Kyle Fujimoto

**Harmonics - Stand Alone Mode
Transmit Mode - Z-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
639.00	29.90	H	75.89	-45.99	Peak	100.50	127.26	
639.00	9.90	H	55.89	-45.99	Avg	100.25	127.26	
958.50	34.44	H	75.89	-41.45	Peak	152.50	318.97	
958.50	14.44	H	55.89	-41.45	Avg	152.50	318.97	
1278.00	31.36	H	73.97	-42.61	Peak	93.00	143.50	
1278.00	11.36	H	53.97	-42.61	Avg	93.00	143.50	
1597.50	31.73	H	73.97	-42.24	Peak	19.00	191.26	
1597.50	11.73	H	53.97	-42.24	Avg	19.00	191.26	
1917.00	34.03	H	75.89	-41.86	Peak	123.50	159.20	
1917.00	14.03	H	55.89	-41.86	Avg	123.50	159.20	
2236.50	35.96	H	73.97	-38.01	Peak	70.50	191.38	
2236.50	15.96	H	53.97	-38.01	Avg	70.50	191.38	
2556.00	38.31	H	75.89	-37.58	Peak	193.00	249.07	
2556.00	18.31	H	55.89	-37.58	Avg	193.00	249.07	
2875.50	37.85	H	73.97	-36.12	Peak	77.50	175.26	
2875.50	17.85	H	53.97	-36.12	Avg	77.50	175.26	
3195.00	37.20	H	75.89	-38.69	Peak	44.25	143.44	
3195.00	17.20	H	55.89	-38.69	Avg	44.25	143.44	



EUT WITH EXTERNAL SENSOR ADAPTER

DATA SHEETS



FCC 15.231

Ecolink Intelligent Technology, Inc.
Flood and Freeze Sensor
Model: WST-621v2

Date: 09/27/2023
Lab: D
Tested By: Kyle Fujimoto

Fundamental - With External Sensor Cable

[illegible]



FCC 15.231

Ecolink Intelligent Technology, Inc.
Flood and Freeze Sensor
Model: WST-621v2

Date: 09/26/2023
Lab: D
Tested By: Kyle Fujimoto

**Harmonics with External Sensor Cable
Transmit Mode - X-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
639.00	37.84	V	75.89	-38.05	Peak	19.25	270.97	
639.00	17.84	V	55.89	-38.05	Avg	19.25	270.97	
958.50	39.45	V	75.89	-36.44	Peak	33.00	255.14	
958.50	19.45	V	55.89	-36.44	Avg	33.00	255.14	
1278.00	31.75	V	73.97	-42.22	Peak	289.25	206.91	
1278.00	11.75	V	53.97	-42.22	Avg	289.25	206.91	
1597.50	32.07	V	73.97	-41.90	Peak	26.25	127.56	
1597.50	12.07	V	53.97	-41.90	Avg	26.25	127.56	
1917.00	34.32	V	75.89	-41.57	Peak	234.75	127.32	
1917.00	14.32	V	55.89	-41.57	Avg	234.75	127.32	
2236.50	36.16	V	73.97	-37.81	Peak	189.00	175.26	
2236.50	16.16	V	53.97	-37.81	Avg	189.00	175.26	
2556.00	39.22	V	75.89	-36.67	Peak	204.50	127.32	
2556.00	19.22	V	55.89	-36.67	Avg	204.50	127.32	
2875.50	37.94	V	73.97	-36.03	Peak	141.75	127.32	
2875.50	17.94	V	53.97	-36.03	Avg	141.75	127.32	
3195.00	37.23	V	75.89	-38.66	Peak	338.00	191.20	
3195.00	17.23	V	55.89	-38.66	Avg	335.00	191.20	



FCC 15.231

Ecolink Intelligent Technology, Inc.
Flood and Freeze Sensor
Model: WST-621v2

Date: 09/26/2023
Lab: D
Tested By: Kyle Fujimoto

**Harmonics with External Sensor Cable
Transmit Mode - Y-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
639.00	39.16	V	75.89	-36.73	Peak	265.50	191.26	
639.00	19.16	V	55.89	-36.73	Avg	265.50	191.26	
958.50	42.54	V	75.89	-33.35	Peak	24.50	110.97	
958.50	22.54	V	55.89	-33.35	Avg	24.50	110.97	
1278.00	31.40	V	73.97	-42.57	Peak	20.25	191.26	
1278.00	11.40	V	53.97	-42.57	Avg	20.25	191.26	
1597.50	32.03	V	73.97	-41.94	Peak	316.50	249.95	
1597.50	12.03	V	53.97	-41.94	Avg	316.50	249.95	
1917.00	34.53	V	75.89	-41.36	Peak	266.00	175.32	
1917.00	14.53	V	55.89	-41.36	Avg	266.00	175.32	
2236.50	36.19	V	73.97	-37.78	Peak	18.00	239.08	
2236.50	16.19	V	53.97	-37.78	Avg	18.00	239.08	
2556.00	39.12	V	75.89	-36.77	Peak	33.25	239.26	
2556.00	19.12	V	55.89	-36.77	Avg	33.25	239.26	
2875.50	37.58	V	73.97	-36.39	Peak	307.50	239.14	
2875.50	17.58	V	53.97	-36.39	Avg	307.50	239.14	
3195.00	37.49	V	75.89	-38.40	Peak	330.25	143.26	
3195.00	17.49	V	55.89	-38.40	Avg	330.25	143.26	



FCC 15.231

Ecolink Intelligent Technology, Inc.
Flood and Freeze Sensor
Model: WST-621v2

Date: 09/26/2023
Lab: D
Tested By: Kyle Fujimoto

**Harmonics with External Sensor Cable
Transmit Mode - Z-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
639.00	38.67	V	75.89	-37.22	Peak	74.75	334.91	
639.00	18.67	V	55.89	-37.22	Avg	74.75	334.91	
958.50	39.76	V	75.89	-36.13	Peak	232.50	255.20	
958.50	19.76	V	55.89	-36.13	Avg	232.50	255.20	
1278.00	32.29	V	73.97	-41.68	Peak	122.25	207.02	
1278.00	12.29	V	53.97	-41.68	Avg	122.25	207.02	
1597.50	32.43	V	73.97	-41.54	Peak	197.00	249.01	
1597.50	12.43	V	53.97	-41.54	Avg	197.00	249.01	
1917.00	34.56	V	75.89	-41.33	Peak	49.75	127.32	
1917.00	14.56	V	55.89	-41.33	Avg	49.75	127.32	
2236.50	36.37	V	73.97	-37.60	Peak	145.00	249.95	
2236.50	16.37	V	53.97	-37.60	Avg	145.00	249.95	
2556.00	38.03	V	75.89	-37.86	Peak	148.00	127.32	
2556.00	18.03	V	55.89	-37.86	Avg	148.00	127.32	
2875.50	38.01	V	73.97	-35.96	Peak	275.50	143.20	
2875.50	18.01	V	53.97	-35.96	Avg	275.50	143.20	
3195.00	37.27	V	75.89	-38.62	Peak	297.50	191.20	
3195.00	17.27	V	55.89	-38.62	Avg	297.50	191.20	



FCC 15.231

Ecolink Intelligent Technology, Inc.
Flood and Freeze Sensor
Model: WST-621v2

Date: 09/26/2023
Lab: D
Tested By: Kyle Fujimoto

**Harmonics with External Sensor Cable
Transmit Mode - X-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
639.00	37.79	H	75.89	-38.10	Peak	172.50	366.79	
639.00	17.79	H	55.89	-38.10	Avg	172.50	366.79	
958.50	42.06	H	75.89	-33.83	Peak	161.00	111.26	
958.50	22.06	H	55.89	-33.83	Avg	161.00	111.26	
1278.00	31.49	H	73.97	-42.48	Peak	307.50	111.20	
1278.00	11.49	H	53.97	-42.48	Avg	307.50	111.20	
1597.50	32.68	H	73.97	-41.29	Peak	166.75	249.83	
1597.50	12.68	H	53.97	-41.29	Avg	166.75	249.83	
1917.00	33.99	H	75.89	-41.90	Peak	276.00	143.14	
1917.00	13.99	H	55.89	-41.90	Avg	276.00	143.14	
2236.50	36.23	H	73.97	-37.74	Peak	59.25	111.32	
2236.50	16.23	H	53.97	-37.74	Avg	59.25	111.32	
2556.00	38.13	H	75.89	-37.76	Peak	205.25	111.32	
2556.00	18.13	H	55.89	-37.76	Avg	205.25	111.32	
2875.50	37.61	H	73.97	-36.36	Peak	191.25	223.32	
2875.50	17.61	H	53.97	-36.36	Avg	191.25	223.32	
3195.00	37.64	H	75.89	-38.25	Peak	243.50	191.32	
3195.00	17.64	H	55.89	-38.25	Avg	243.50	191.32	

FCC 15.231

Ecolink Intelligent Technology, Inc.

Flood and Freeze Sensor

Model: WST-621v2

Date: 09/26/2023

Lab: D

Tested By: Kyle Fujimoto

Harmonics with External Sensor Cable
Transmit Mode - Y-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
639.00	39.10	H	75.89	-36.79	Peak	255.50	192.46	
639.00	19.10	H	55.89	-36.79	Avg	255.50	192.46	
958.50	42.07	H	75.89	-33.82	Peak	114.50	143.02	
958.50	22.07	H	55.89	-33.82	Avg	114.50	143.02	
1278.00	31.26	H	73.97	-42.71	Peak	178.25	191.08	
1278.00	11.26	H	53.97	-42.71	Avg	178.25	191.08	
1597.50	34.33	H	73.97	-39.64	Peak	214.75	249.95	
1597.50	14.33	H	53.97	-39.64	Avg	214.75	249.95	
1917.00	33.86	H	75.89	-42.03	Peak	237.50	250.13	
1917.00	13.86	H	55.89	-42.03	Avg	237.50	250.13	
2236.50	35.76	H	73.97	-38.21	Peak	299.75	206.85	
2236.50	15.76	H	53.97	-38.21	Avg	299.75	206.85	
2556.00	38.29	H	75.89	-37.60	Peak	130.25	190.25	
2556.00	18.29	H	55.89	-37.60	Avg	130.25	190.25	
2875.50	37.58	H	73.97	-36.39	Peak	0.00	223.14	
2875.50	17.58	H	53.97	-36.39	Avg	0.00	223.14	
3195.00	37.84	H	75.89	-38.05	Peak	250.00	127.32	
3195.00	17.84	H	55.89	-38.05	Avg	250.00	127.32	



FCC 15.231

Ecolink Intelligent Technology, Inc.
Flood and Freeze Sensor
Model: WST-621v2

Date: 09/26/2023
Lab: D
Tested By: Kyle Fujimoto

**Harmonics with External Sensor Cable
Transmit Mode - Z-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
639.00	38.50	H	75.89	-37.39	Peak	172.75	191.38	
639.00	18.50	H	55.89	-37.39	Avg	172.75	191.38	
958.50	43.80	H	75.89	-32.09	Peak	135.25	111.32	
958.50	23.80	H	55.89	-32.09	Avg	15.25	111.32	
1278.00	31.19	H	73.97	-42.78	Peak	221.25	143.14	
1278.00	11.19	H	53.97	-42.78	Avg	221.25	143.14	
1597.50	34.93	H	73.97	-39.04	Peak	108.00	249.01	
1597.50	14.93	H	53.97	-39.04	Avg	108.00	249.01	
1917.00	34.37	H	75.89	-41.52	Peak	138.25	111.20	
1917.00	14.37	H	55.89	-41.52	Avg	138.25	111.20	
2236.50	36.55	H	73.97	-37.42	Peak	333.50	127.56	
2236.50	16.55	H	53.97	-37.42	Avg	333.50	127.56	
2556.00	38.33	H	75.89	-37.56	Peak	162.75	159.14	
2556.00	18.33	H	55.89	-37.56	Avg	162.75	159.14	
2875.50	37.92	H	73.97	-36.05	Peak	305.00	111.38	
2875.50	17.92	H	53.97	-36.05	Avg	305.00	111.38	
3195.00	37.78	H	75.89	-38.11	Peak	9.25	111.74	
3195.00	17.78	H	55.89	-38.11	Avg	9.25	111.74	



FCC 15.231

Ecolink Intelligent Technology, Inc.
Flood Temperature Sensor
Model: WST-621v2

Date: 09/27/2023
Lab: D
Tested By: Kyle Fujimoto

Non Harmonic Emissions from the Tx and Digital Portion - 9 kHz to 30 MHz

Non Harmonic Emissions from the Tx and Digital Portion - 1 GHz To 3195 MHz

[illegible]



BAND EDGES

DATA SHEETS



EUT WITH NO EXTERNAL SENSOR ADAPTER

DATA SHEETS



FCC 15.231

Ecolink Intelligent Technology, Inc.
Flood and Freeze Sensor
Model: WST-621v2


Date: 09/27/2023

Lab: D


Tested By: Kyle Fujimoto

Band Edges at 322 MHz Stand Alone Mode

[illegible]

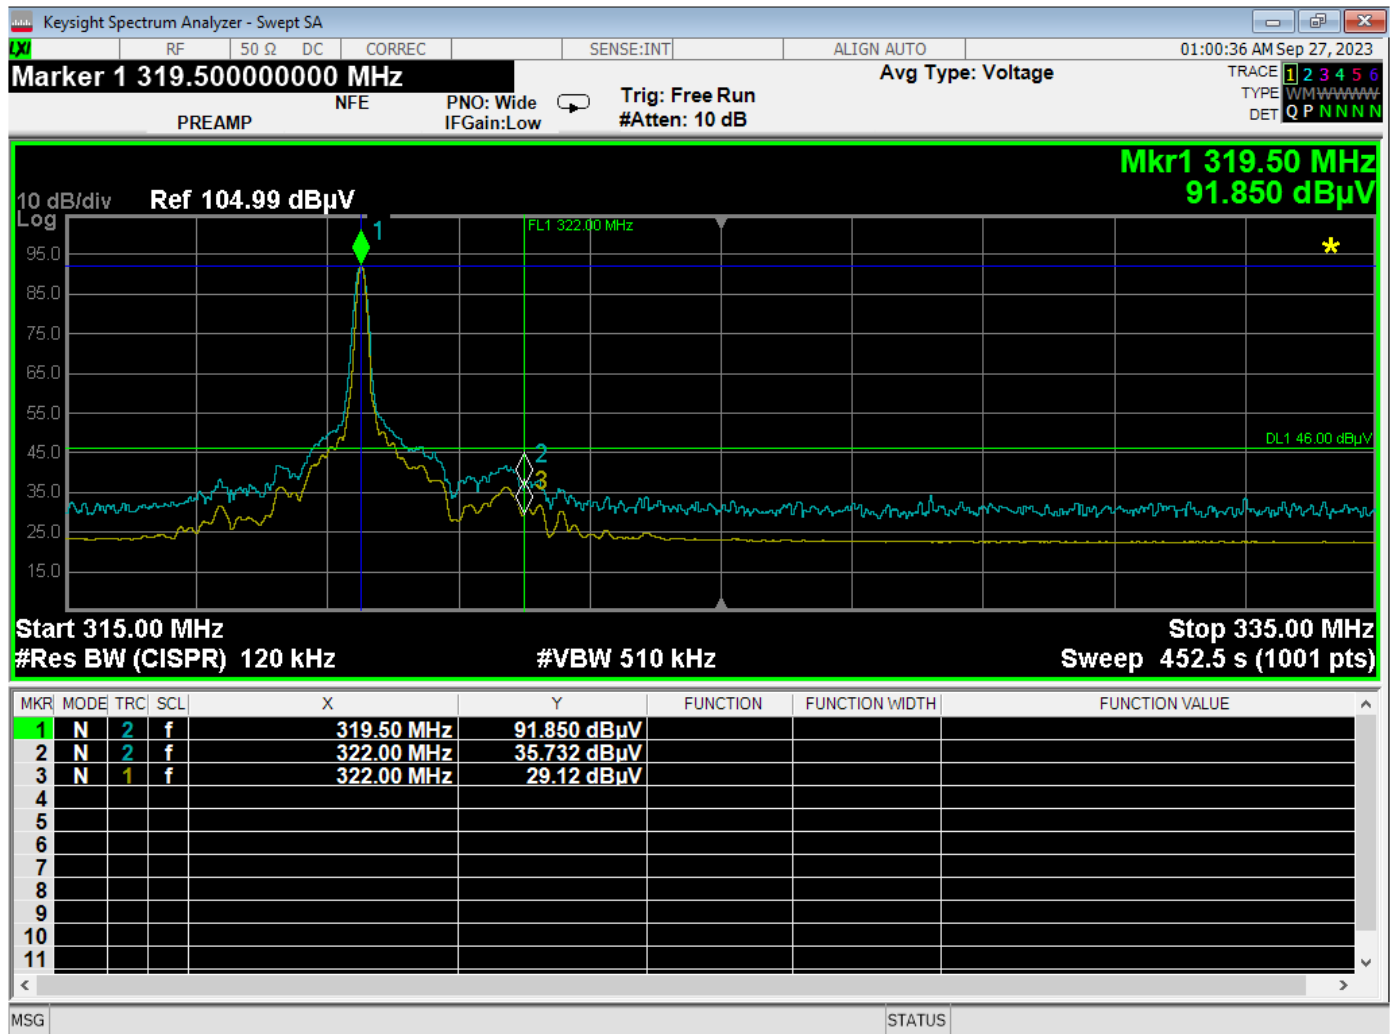

Band Edge - 322 MHz - Vertical Polarization - Y-Axis

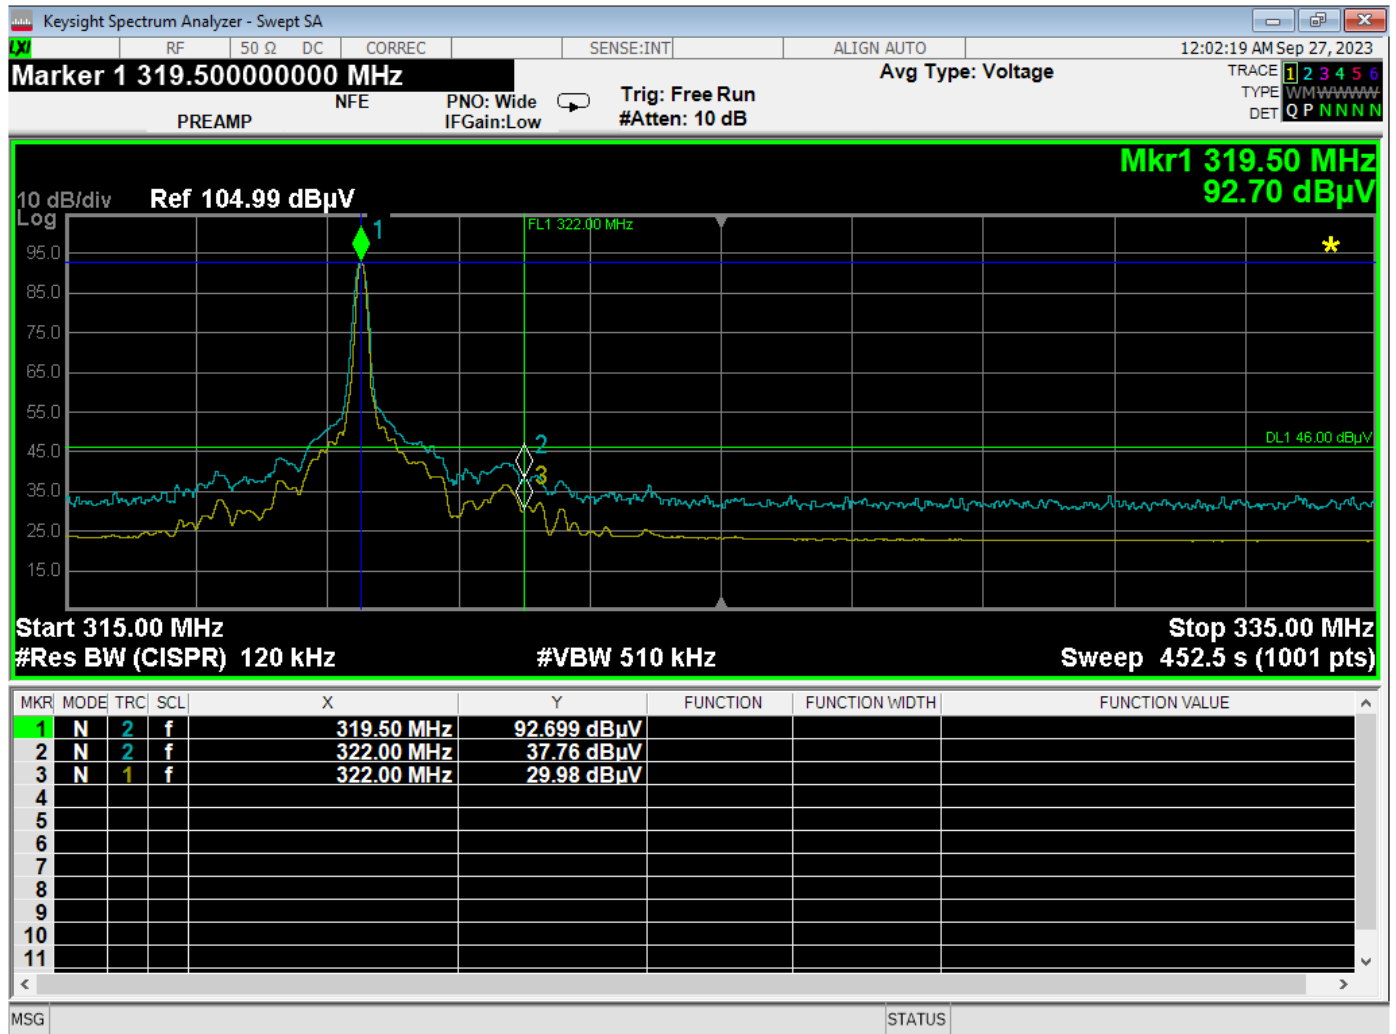

Band Edge - 322 MHz - Horizontal Polarization - X-Axis



EUT WITH EXTERNAL SENSOR ADAPTER

DATA SHEETS




FCC 15.231

Ecolink Intelligent Technology, Inc.
Flood Temperature Sensor
Model: WST-621v2


Date: 09/27/2023
Lab: D
Tested By: Kyle Fujimoto

Band Edges at 322 MHz With External Sensor Cable

[illegible]

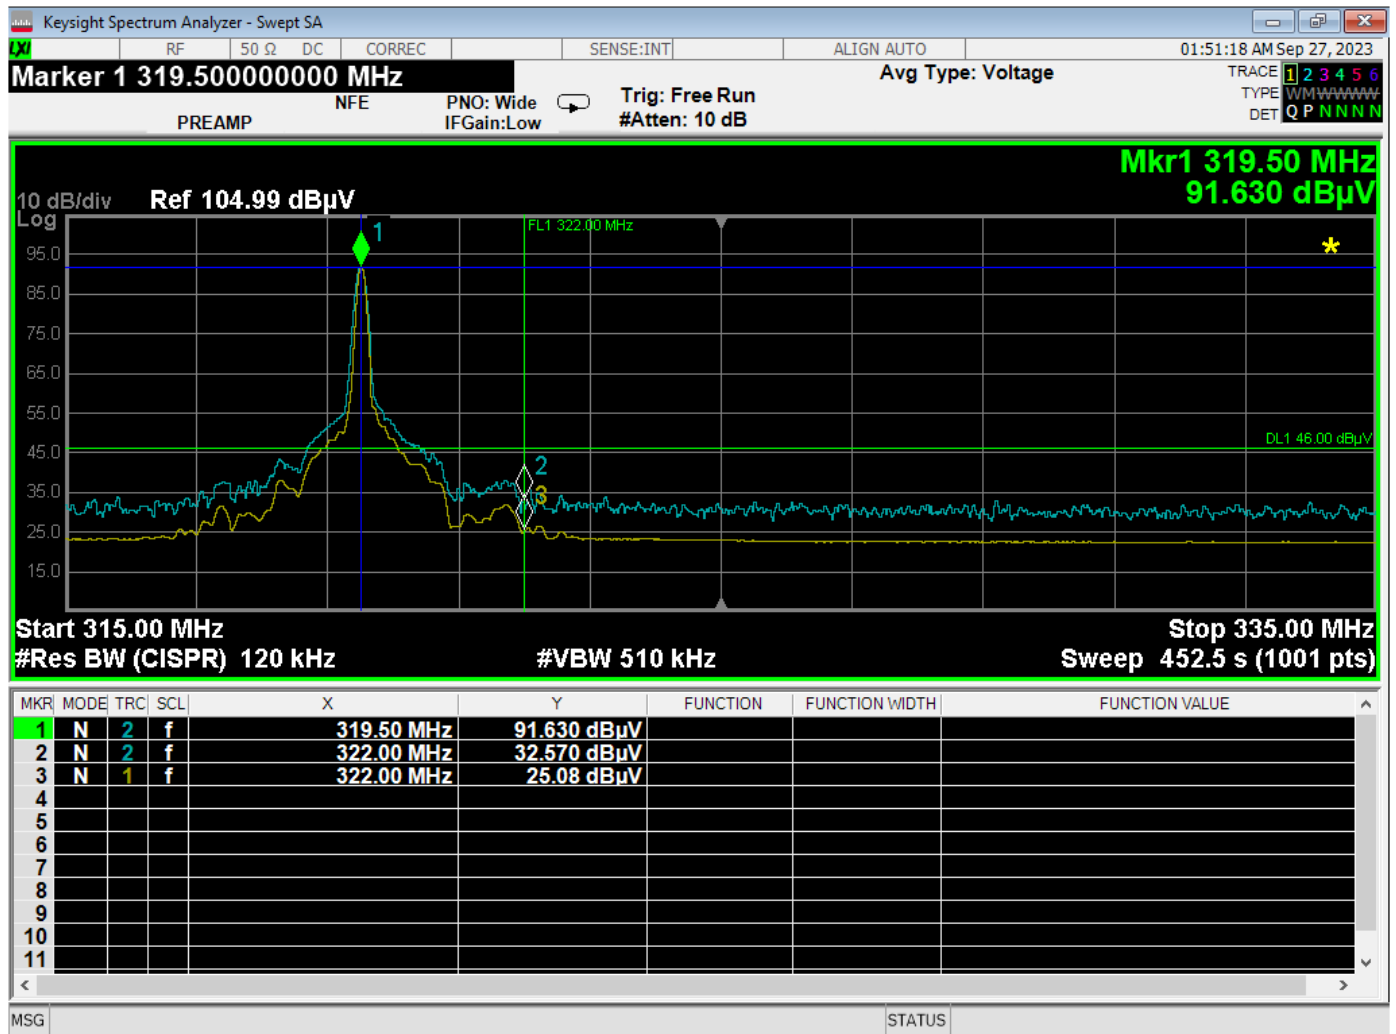

Band Edge – 322.02 MHz - Vertical Polarization - Y-Axis

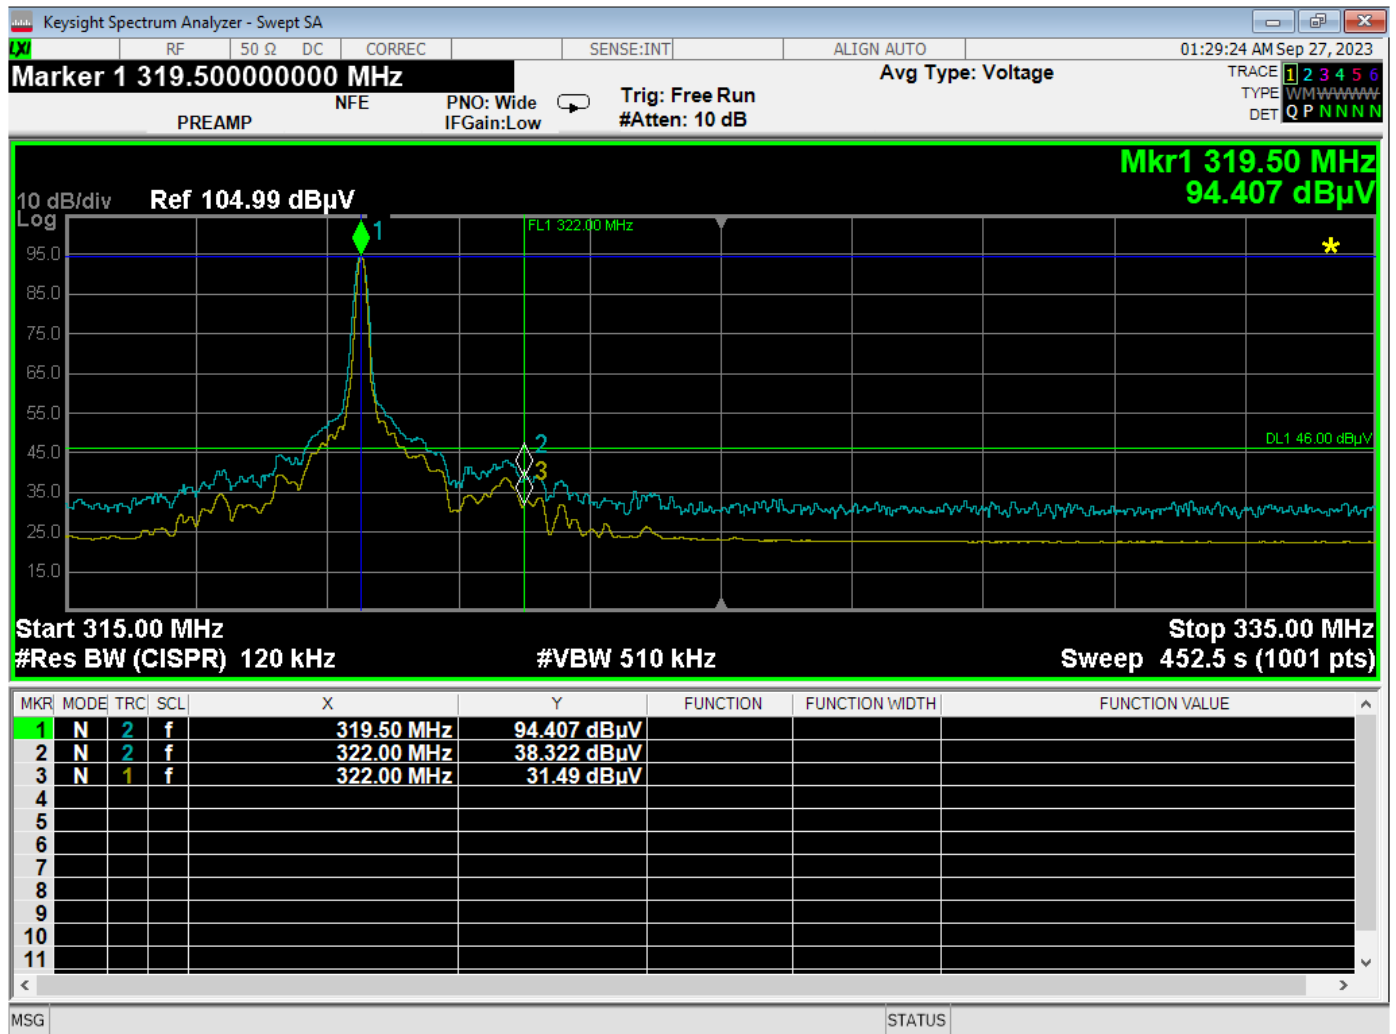


Band Edge – 322 MHz - Horizontal Polarization - X-Axis



-20 dB BANDWIDTH PLOT


DATA SHEET

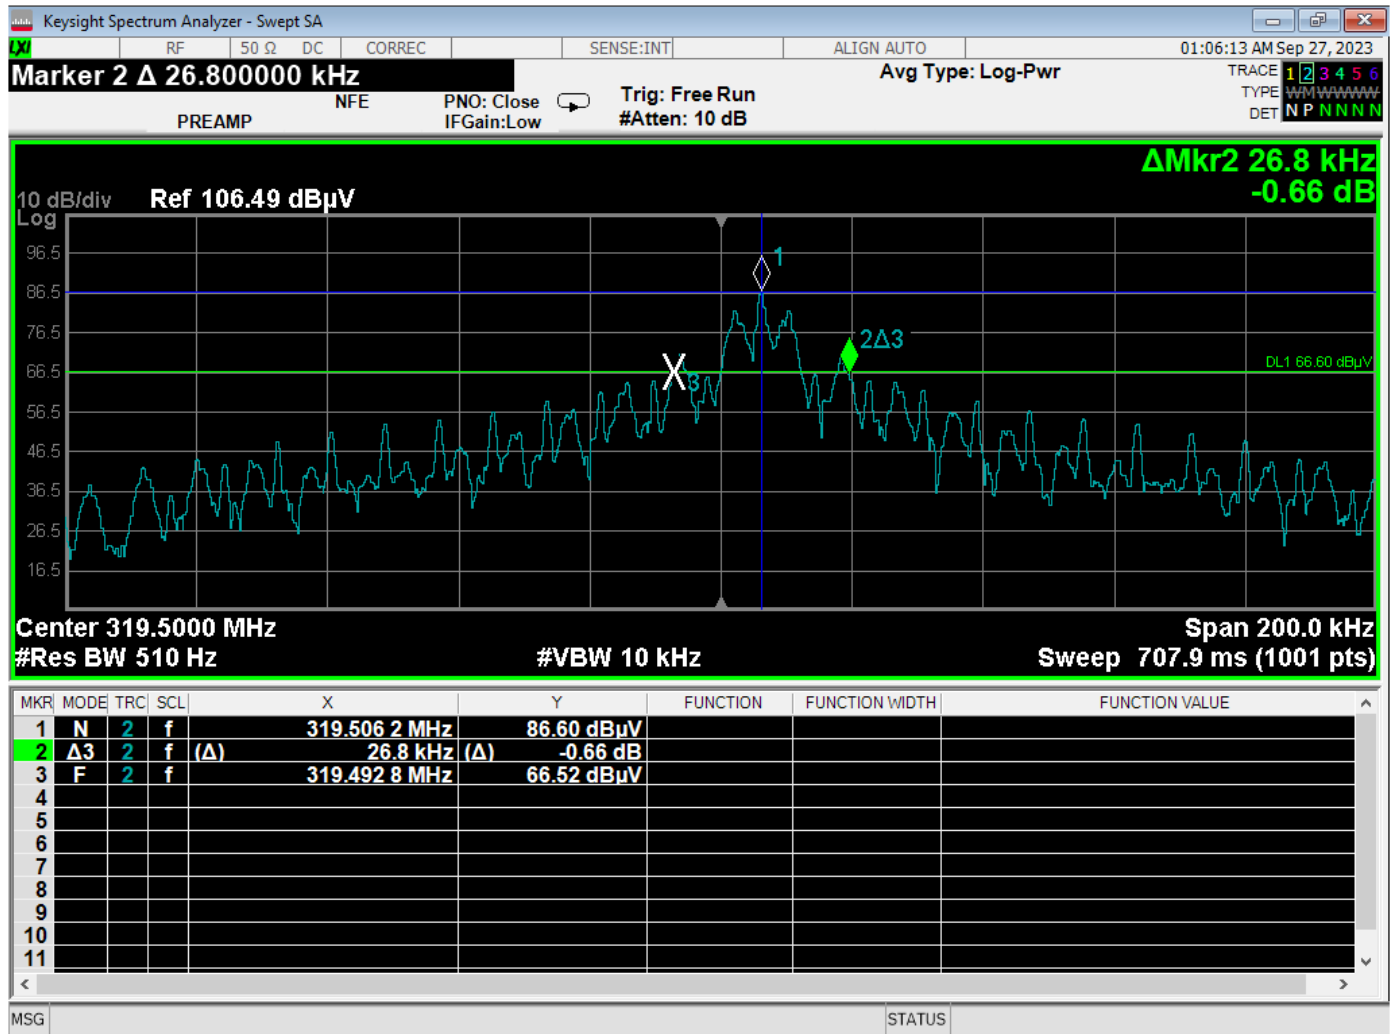

-20 dB Bandwidth Plot – 510 Hz RBW



***TRANSMISSION TIME
DATA SHEET***

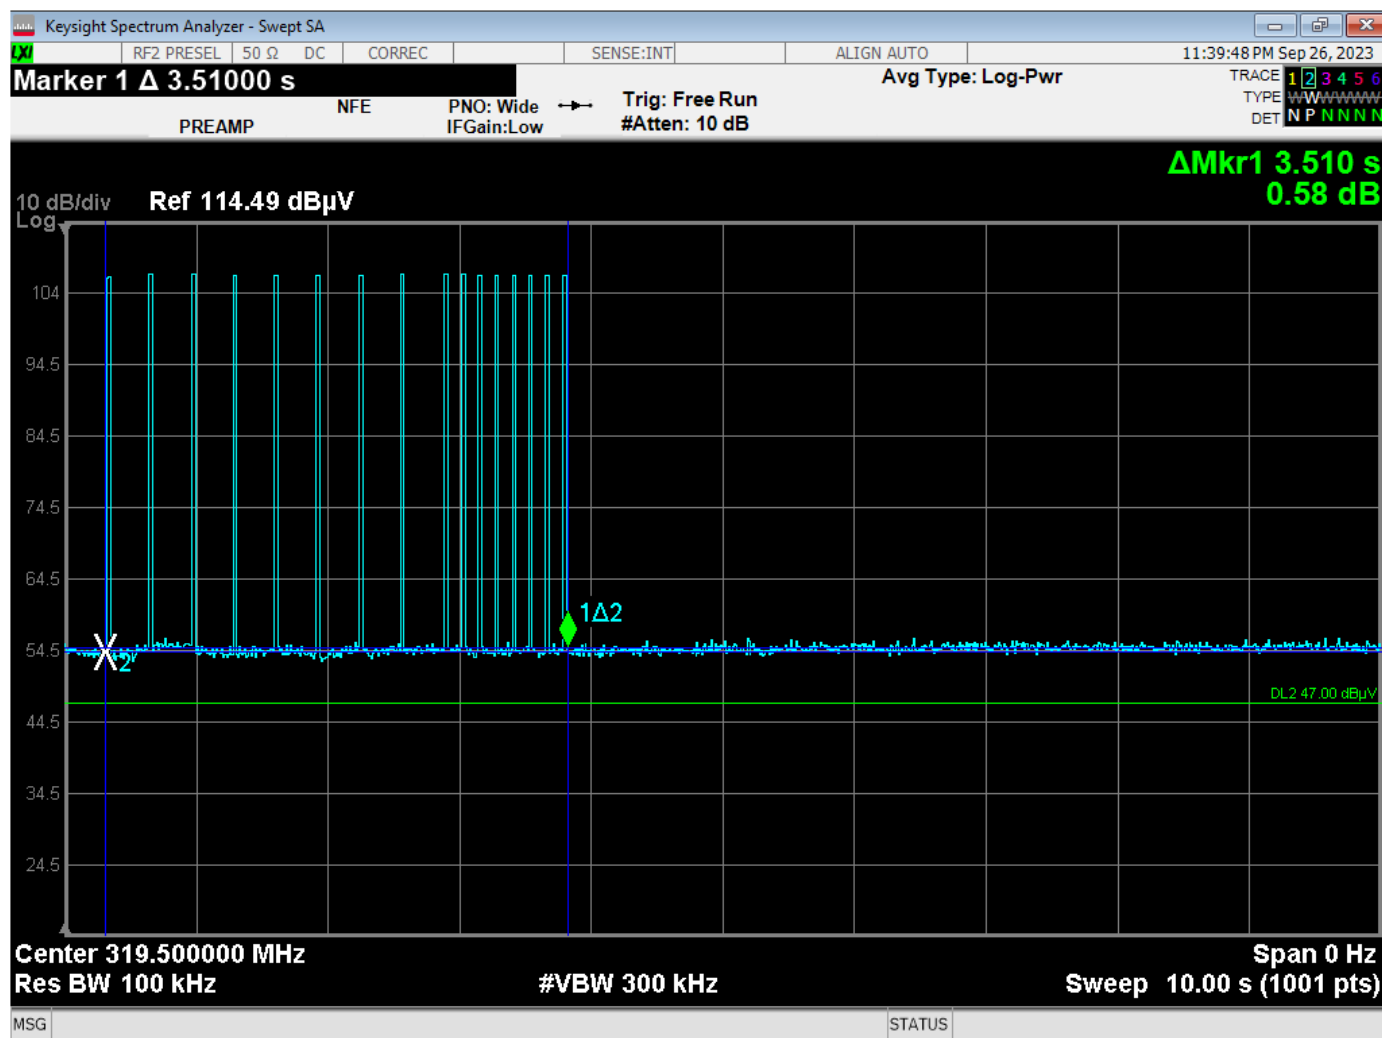


Plot Showing Time of Full Transmission – 3.51 Seconds

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

**Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044**

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

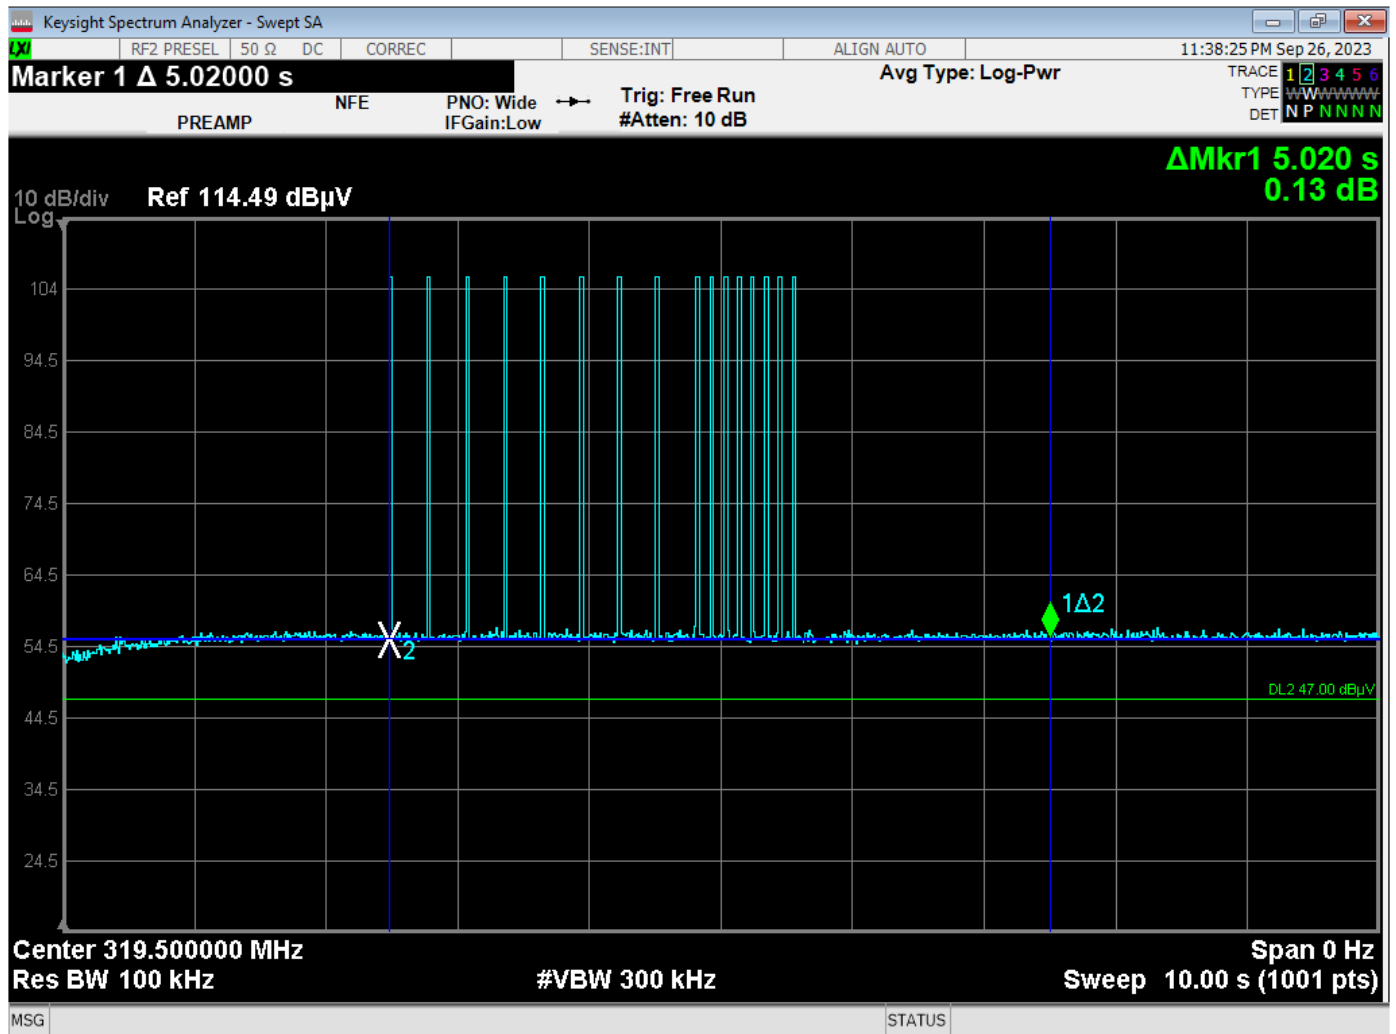

Transmission Limit Time is 5 Seconds


Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



***99% BANDWIDTH
DATA SHEET***

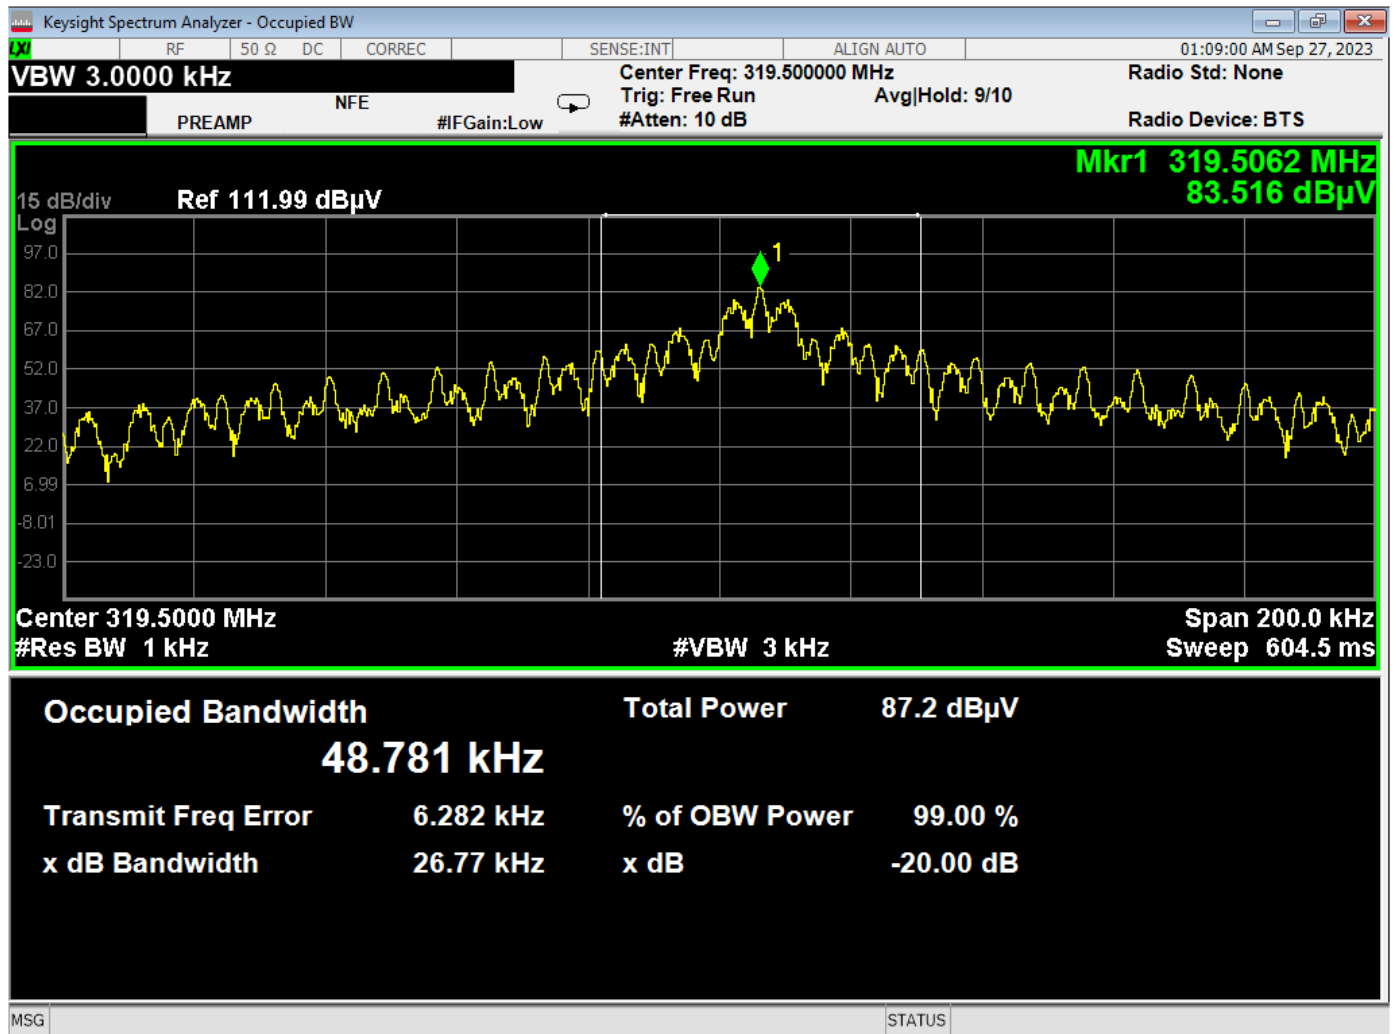


99% Bandwidth Plot




DUTY CYCLE


DATA SHEETS

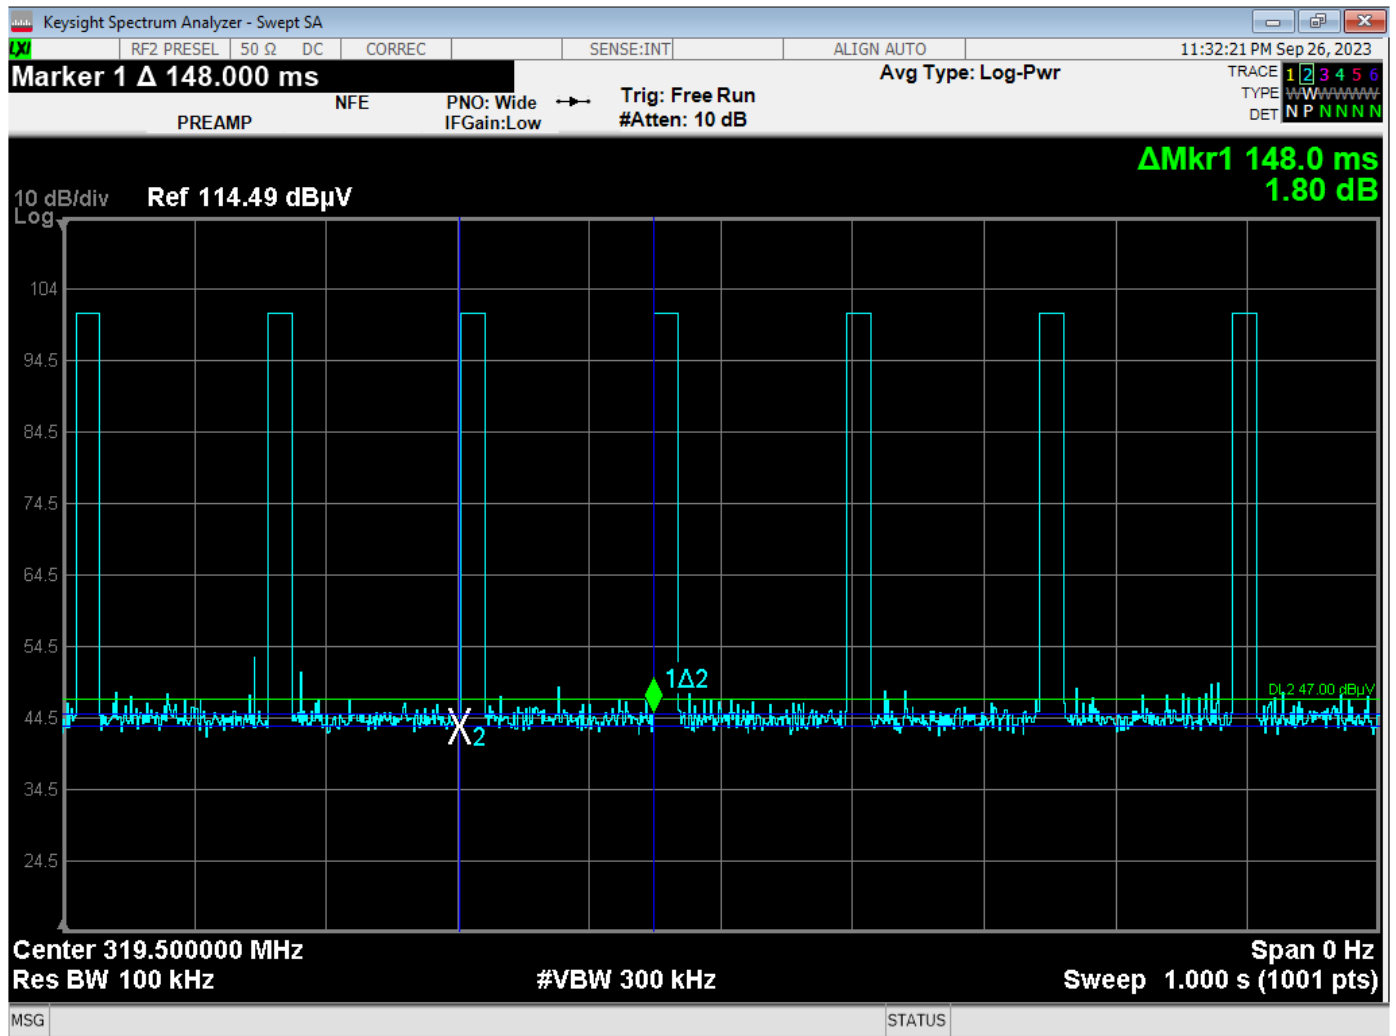


The worst case where the pulse train repeats itself will always be at least 100 ms

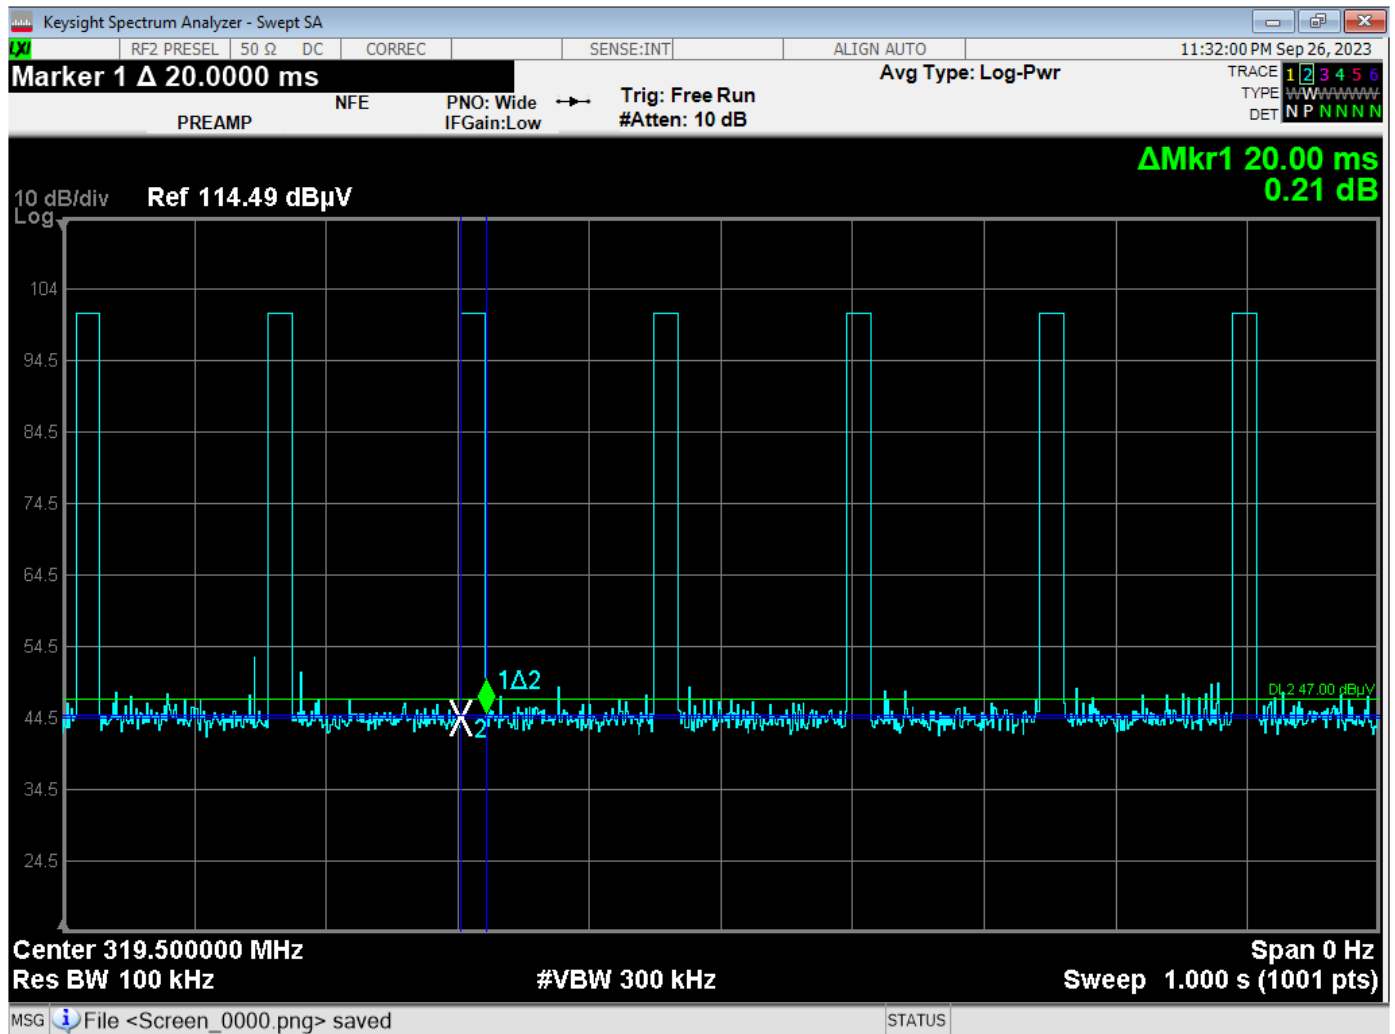

Time of One Complete Pulse Train

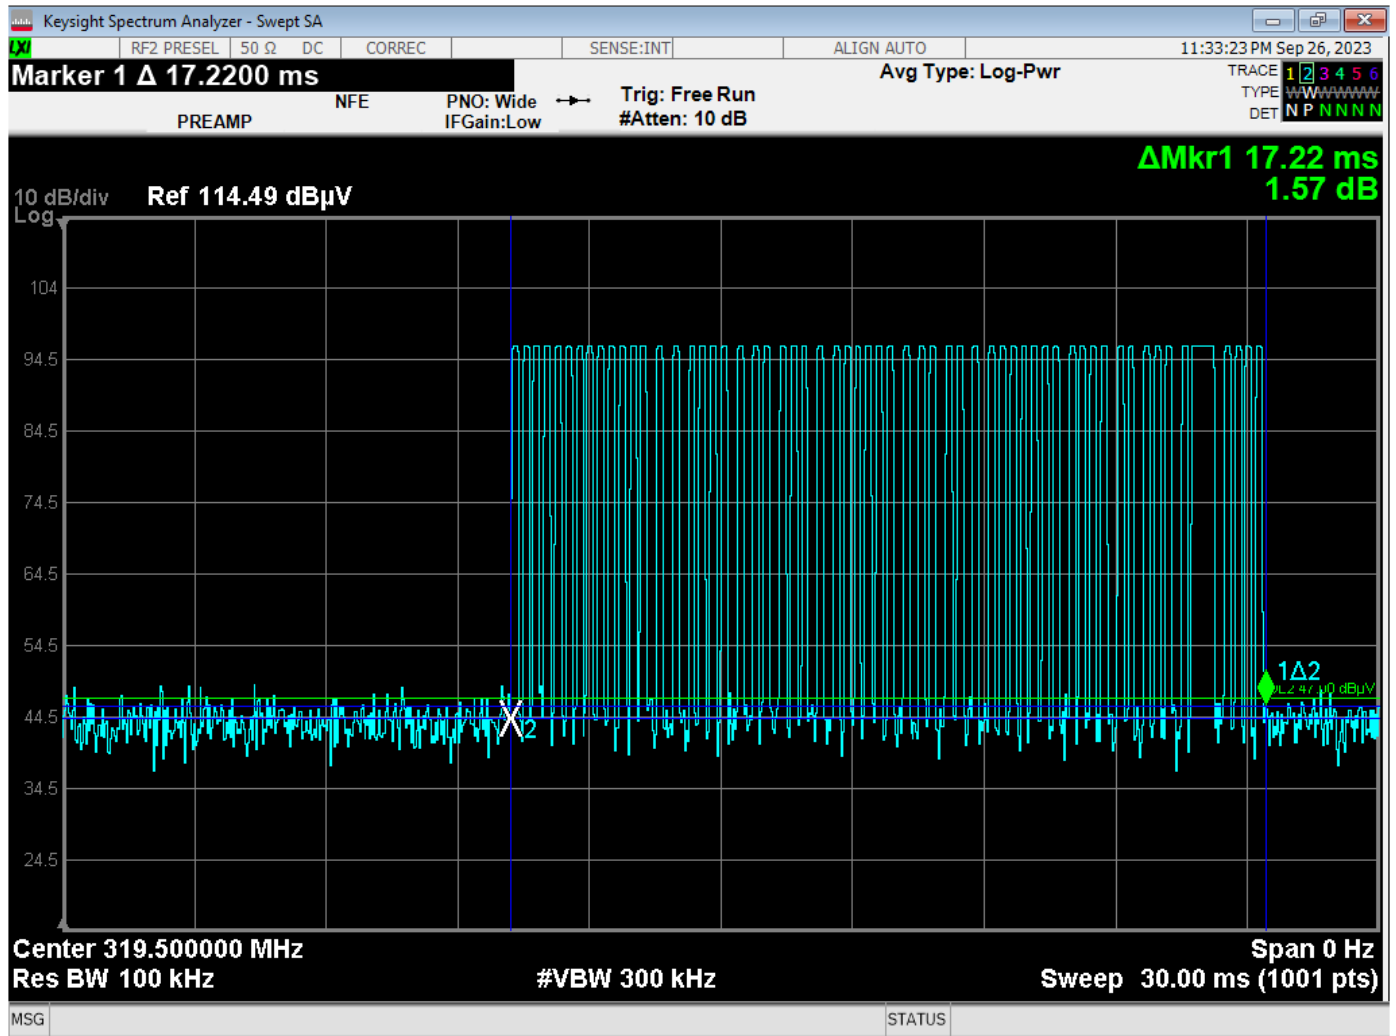

Time of Pulse Train on 30 ms scale

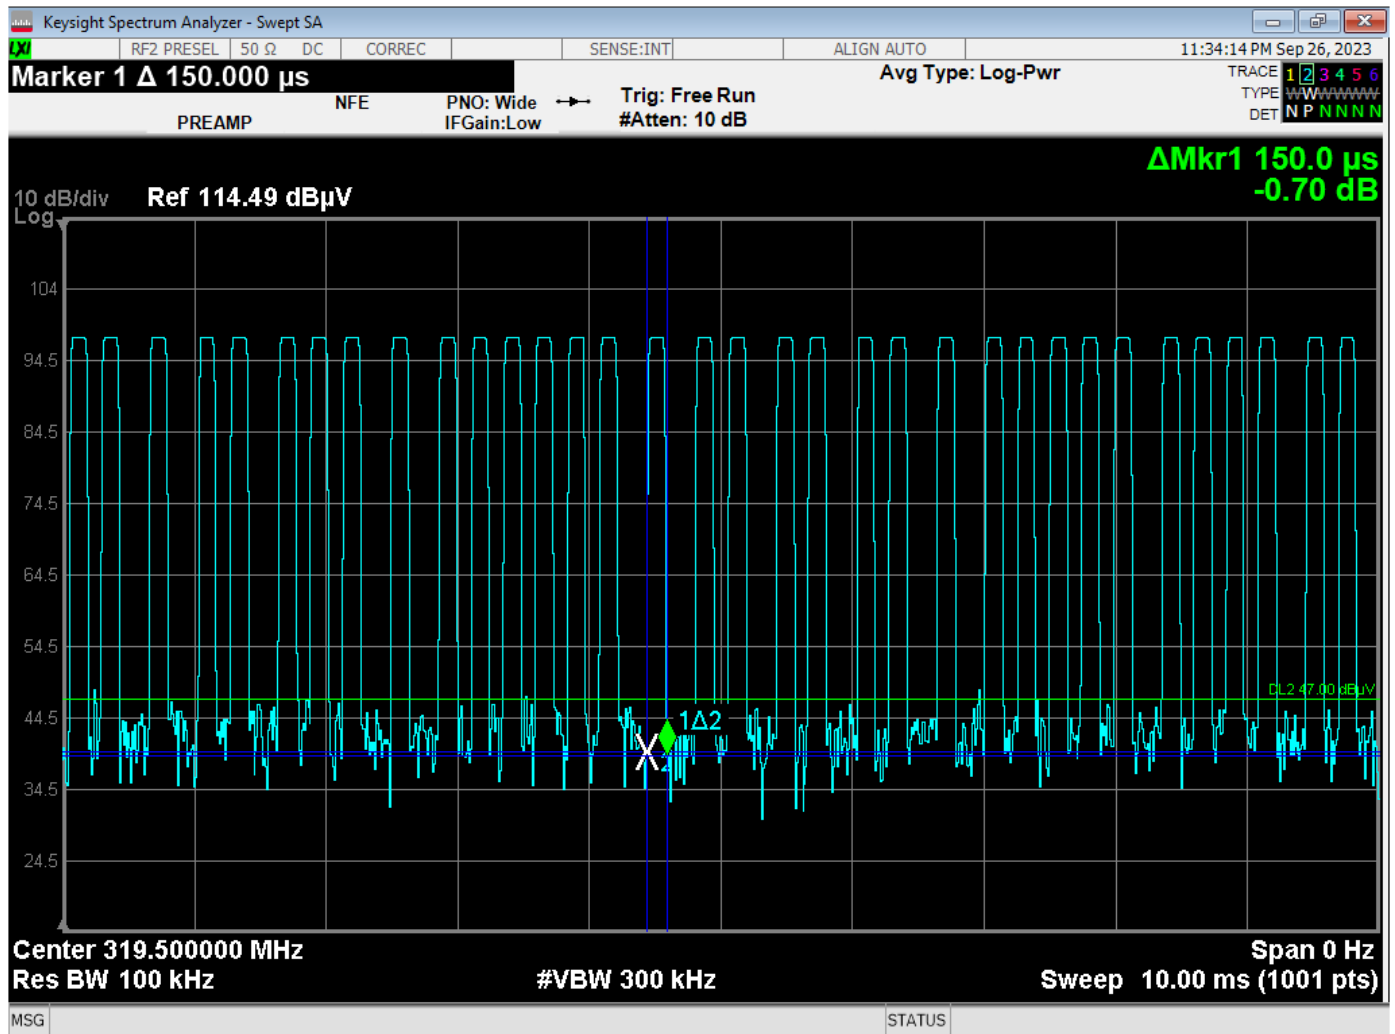


Time of One Small Pulse = 150 us

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

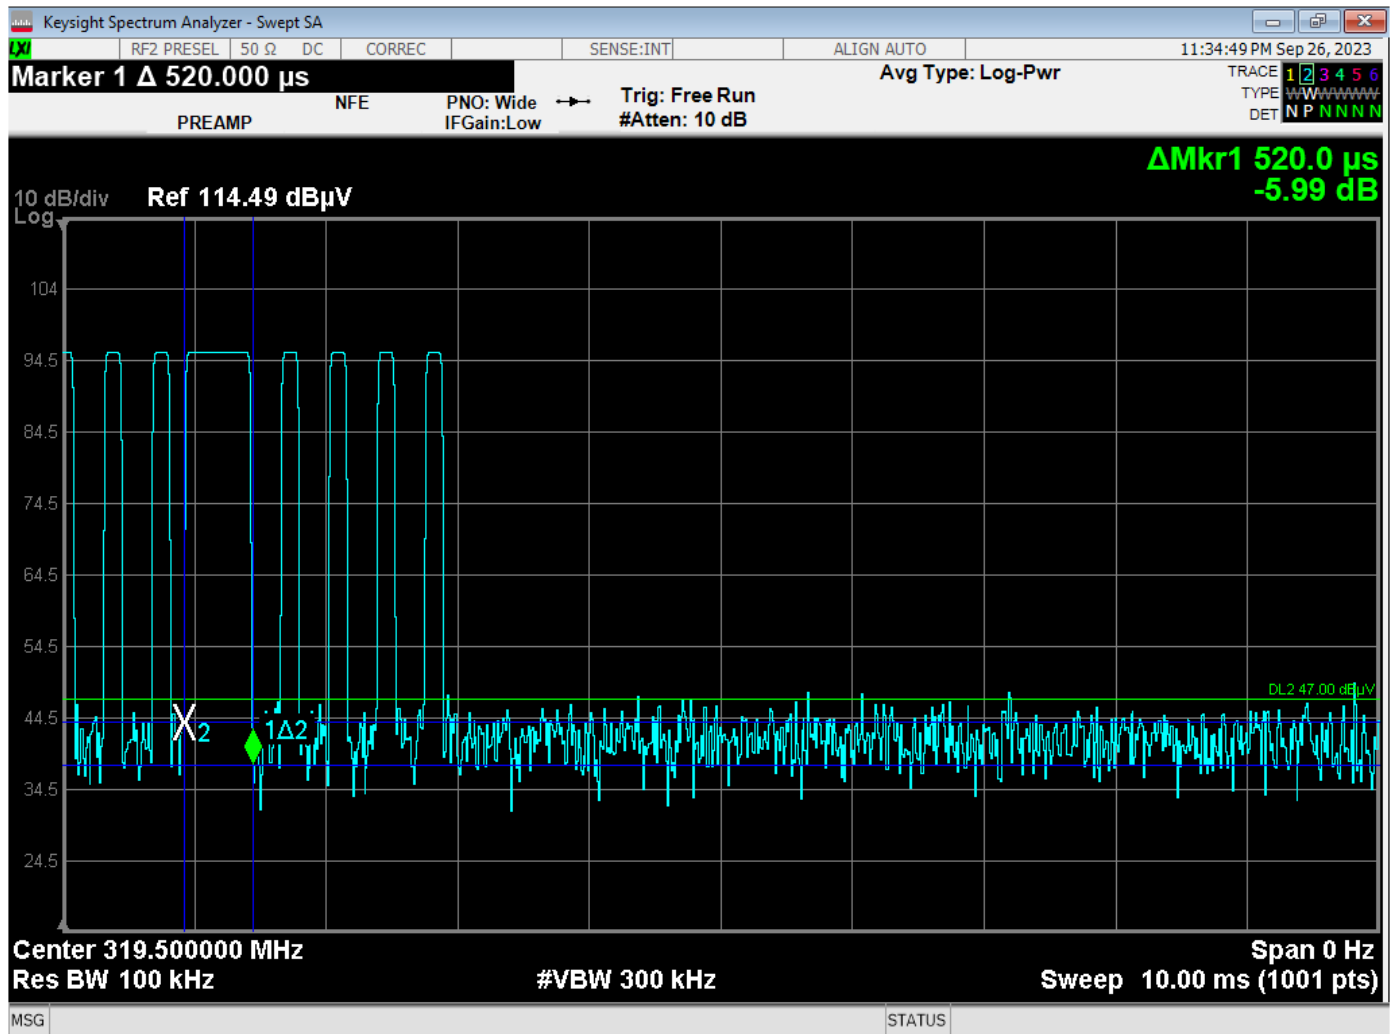


Time of One Large Pulse = 520 us

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

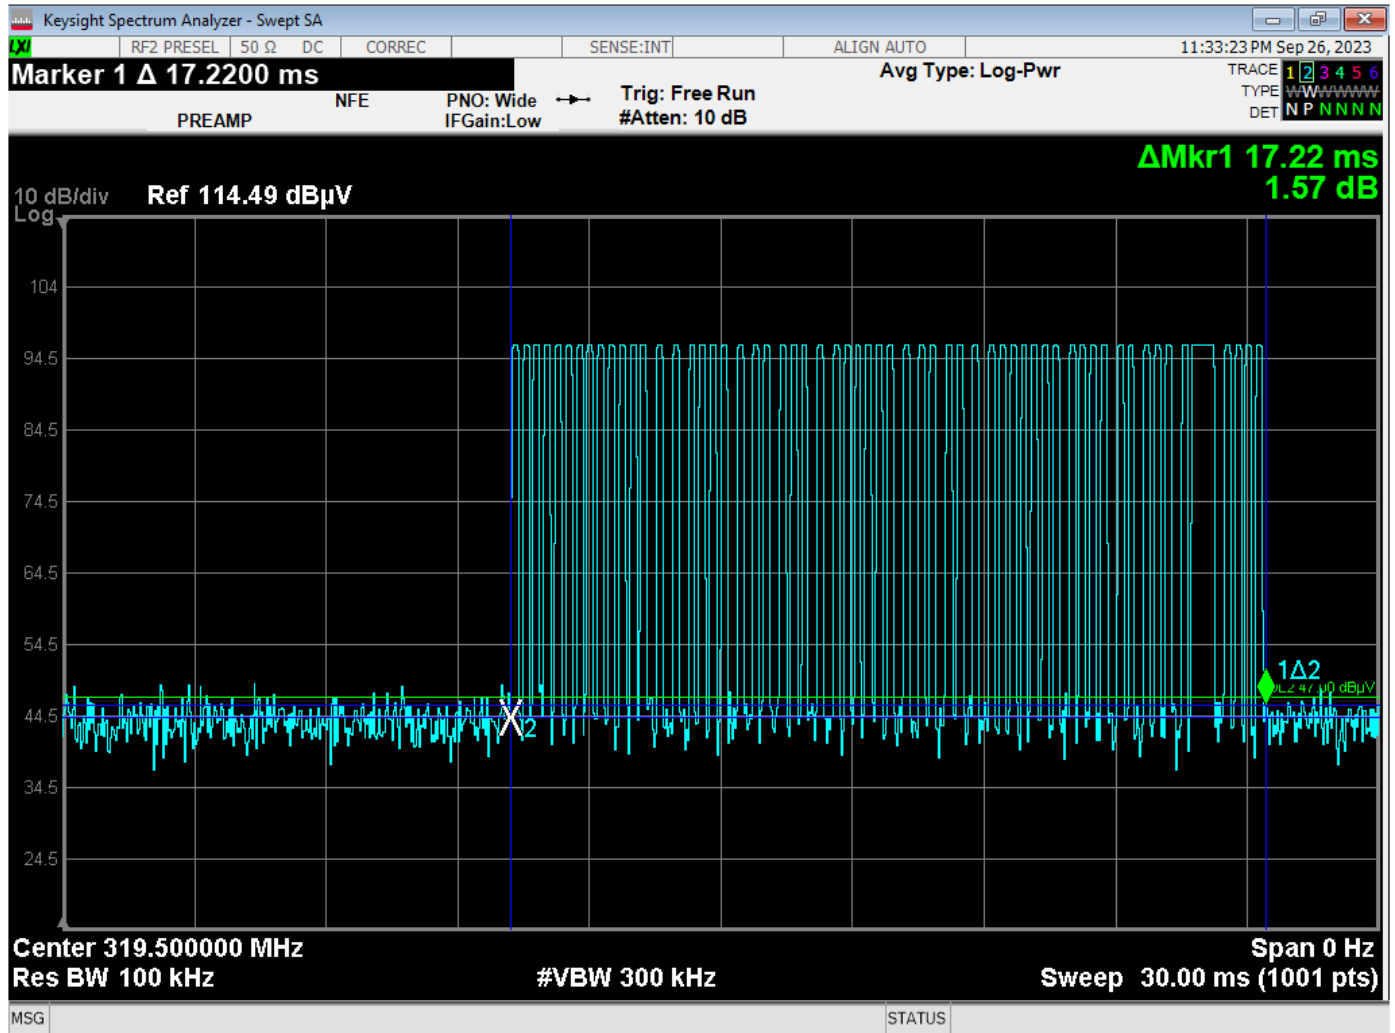

Number of Small Pulses = 59 = (59*150 us) = 8850 us

Number of Large Pulses = 1 = (1*520 us) = 520 us

Total On Time = 9370 us = 9.370 ms

Duty Cycle = 9.370 ms / 100 ms = 9.370%

The peak to average ratio is -20.00 dB