

Test Report



INTENTIONAL RADIATOR TESTS ACCORDING TO FCC PART 15 C AND ISED CANADA REQUIREMENTS

Equipment Under Test: Multi-Protocol Wireless Module

Model: MGM13P02A
MGM13P02E

Manufacturer: Silicon Laboratories Finland Oy
Bertel Jungin aukio 3
FI-02600 ESPOO
FINLAND

Customer: Silicon Laboratories Finland Oy
Bertel Jungin aukio 3
FI-02600 ESPOO
FINLAND

FCC Rule Part: 15.247: 2017
IC Rule Part: RSS-247, Issue 2, 2017
RSS-GEN Issue 4, 2014

KDB: Guidance for Performing Compliance
Measurements on Digital Transmission Systems
(DTS) Operating Under §15.247 (April 5, 2017)

Date: 2 November 2017

Issued by:

A blue ink signature of Emil Haverinen.

Emil Haverinen
Testing Engineer

Date:

2 November 2017

Checked by:

A blue ink signature of Rauno Repo.

Rauno Repo
Testing Engineer

PRODUCT DESCRIPTION	3
Equipment Under Test (EUT)	3
Description of the EUT	3
Ratings and declarations	3
Power Supply	3
Mechanical Size of the EUT	3
Samples	3
GENERAL REMARKS	4
Disclaimer	4
SUMMARY OF TESTING	5
EUT Test Conditions during Testing	5
TEST RESULTS	6
Maximum Peak Conducted Output Power	6
99% Occupied Bandwidth	8
TEST EQUIPMENT	10

Equipment Under Test (EUT)

Trade mark: Silicon Labs
Model: MGM13P02A, MGM13P02E
Type: Multi-Protocol Wireless Module
Serial no: -
FCC ID: QOQMGM13P
IC: 5123A-MGM13P

Description of the EUT

MGM13P is a multi-protocol wireless module with two antenna variants. Variant A is equipped with chip antenna while the E variant has RF connector for the use of external antenna.

This test report contains test results for Bluetooth Low Energy.

Classification of the device

Fixed device ☐
Mobile Device (Human body distance > 20cm) ☒
Portable Device (Human body distance < 20cm) ☒

Modifications Incorporated in the EUT

-

Ratings and declarations

Operating Frequency Range (OFR): 2402 - 2480 MHz
Channels: 40
Channel separation: 2 MHz
Effective conducted power: 10.69 dBm (Peak)
Modulation: GFSK
Integral Antenna gain: A-variant: 1 dBi
External Antenna gain: E-variant: 2.14 dBi

Power Supply

Operating voltage range: 2.0 - 3.8 VDC (tested with 3.3V regulated by the development board)

The EUT was powered from the development board which was powered by PC.

Mechanical Size of the EUT

Height: 2 mm Width: 20 mm Length: 15 mm

Samples

One sample was used in tests.

EUT	Description
1. MGM13P02E	Original E variant

Disclaimer

This document is issued by the Company under its General Conditions of service accessible at [http://www.sgs.com/terms and conditions.htm](http://www.sgs.com/terms_and_conditions.htm). attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This document cannot be reproduced except in full, without prior approval of the Company.

SUMMARY OF TESTING

Test Specification	Description of Test	Result
§15.207(a) / RSS-GEN 8.8	Conducted Emissions on Power Supply Lines	N/T
§15.247(b)(3) / RSS-247 5.4(d)	Maximum Peak Conducted Output Power	PASS
§15.247(a)(2) / RSS-247 5.2(a)	6 dB Bandwidth	N/T
§15.247(e) / RSS-247 5.2(b)	Power Spectral Density	N/T
RSS-GEN 6.6	99% Occupied Bandwidth	PASS
§15.247(d) / RSS-247 5.5	100 kHz Bandwidth of Frequency Band Edges and Conducted Spurious Emissions	N/T
§15.209(a), §15.247(d) / RSS-247 5.5	Radiated Emissions Within the Restricted Bands	N/T

Possible test case verdicts:

EUT does meet the requirement: P (Pass)
EUT does not meet the requirement: F (Fail)
Test was not performed by SGS Fimko: N/T

EUT Test Conditions during Testing

The EUT was in continuous transmit mode during all the tests. The hopping was stopped and the EUT was configured into the wanted channel using software provided by the manufacturer.

During conducted measurements, the EUT was connected to WSTK development board.

Following channels and settings were used during the tests;

EUT 1. MGM13P02E

Channel	Frequency (MHz)	Power setting	PHY	Low energy transmit	Packet Length
0	2402	100	125K Coded	PRBS9 (GFSK)	255
19	2440	100	125K Coded	PRBS9 (GFSK)	255
39	2480	100	125K Coded	PRBS9 (GFSK)	255

Test Facility

<input type="checkbox"/> Testing Location / address: FCC registration number: 90598	SGS Fimko Ltd Särkiniementie 3 FI-00210, HELSINKI FINLAND
<input checked="" type="checkbox"/> Testing Location / address: FCC registration number: 178986 Industry Canada registration number: 8708A-2	SGS Fimko Ltd Karakaarenkuja 4 FI-02610, ESPOO FINLAND

TEST RESULTS

Maximum Peak Conducted Output Power

Standard: ANSI C63.10 (2013)
Tested by: JAT
Date: 19 October 2017
Temperature: 23 ± 3 °C
Humidity: 20 - 60 % RH
Measurement uncertainty: ± 2.87 dB Level of confidence 95 % (k = 2)

FCC Rule: 15.247(b)(3)
RSS-247 5.4(d)

For systems using digital modulation in the 2400-2483.5 MHz bands the limit is 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

Measured values are peak values.

Results:

Table 1: Maximum conducted output power

Channel	Conducted Power [dBm]	Limit [dBm]	Margin [dBm]	Result
0 Low	10.69	30	19.31	PASS
19 Mid	10.49	30	19.51	PASS
39 High	10.31	30	19.69	PASS

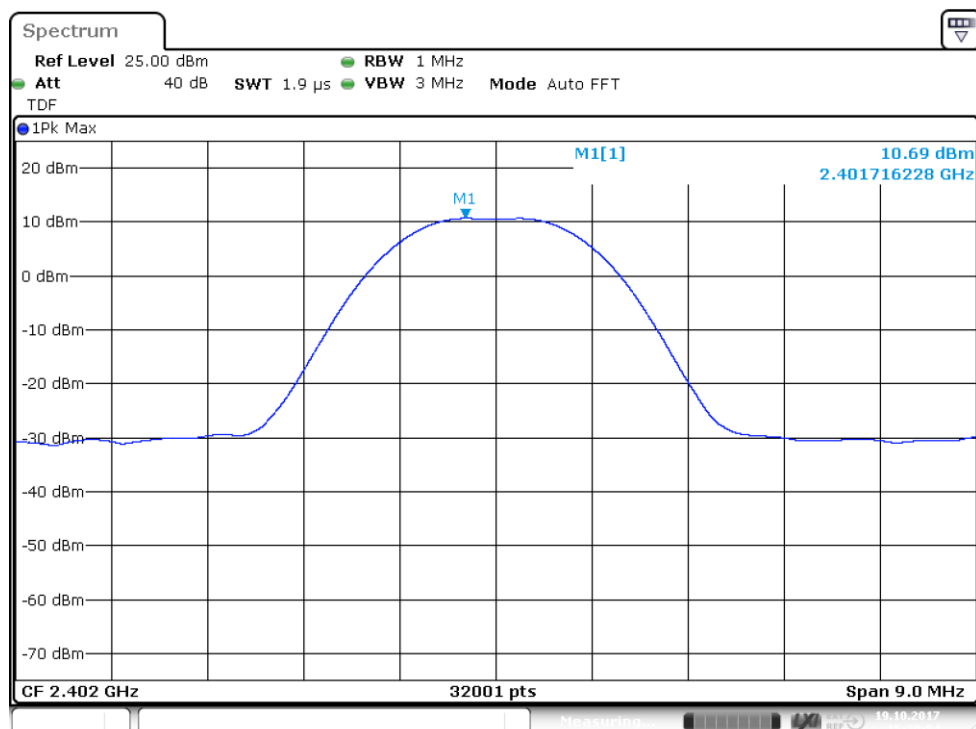


Figure 1: Conducted power, Channel 0 low

Maximum Peak Conducted Output Power

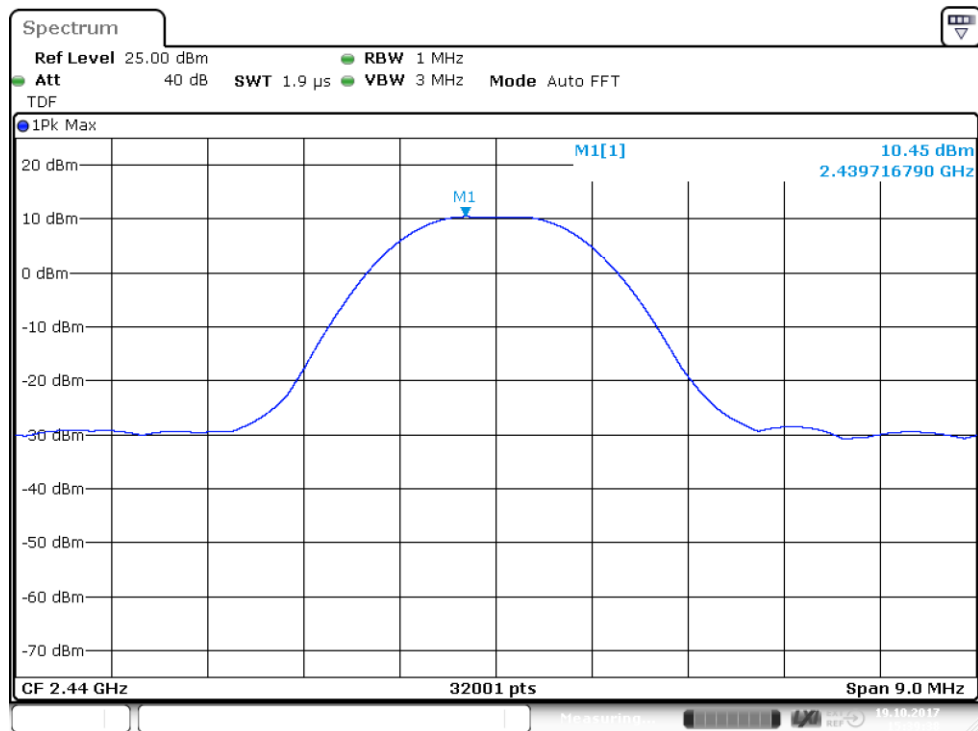


Figure 2: Conducted power, Channel 19 mid

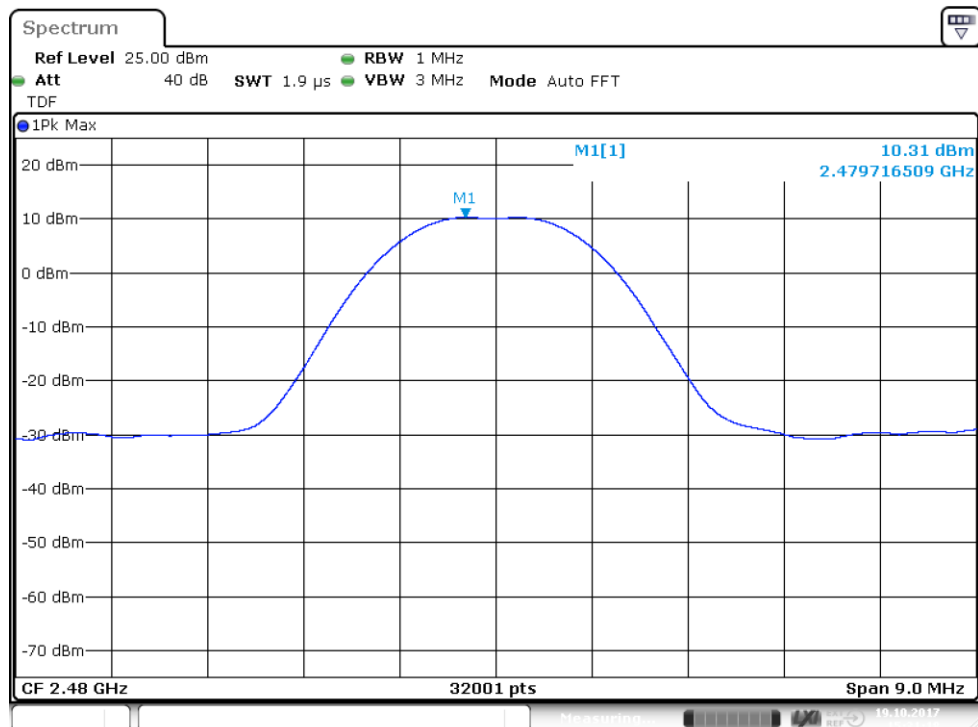


Figure 3: Conducted power, Channel 39 high

99% Occupied Bandwidth

Standard: RSS-GEN (2014)
Tested by: JAT
Date: 19 October 2017
Temperature: 23 ± 3 °C
Humidity: 20 - 60 % RH

RSS-GEN 6.6

Results:

Table 2: 99% occupied bandwidth test results

Channel	Limit	99 % BW [MHz]	Result
0 Low	-	1.049967189	PASS
19 Mid	-	1.056716978	PASS
39 High	-	1.057091966	PASS

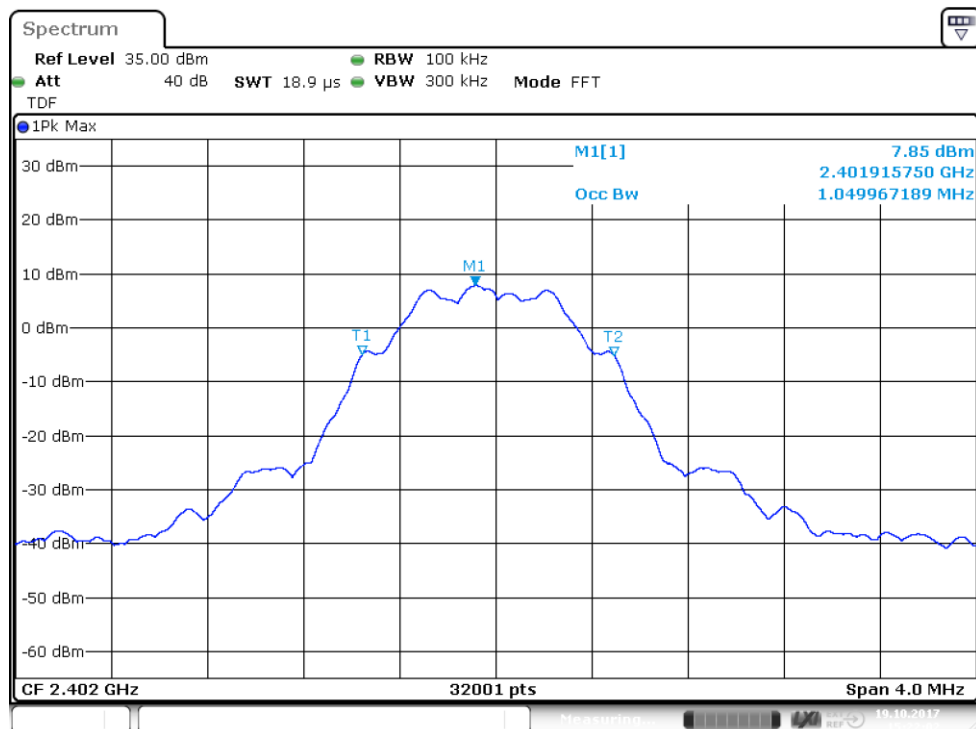


Figure 4: 99% OBW, Channel 0 low

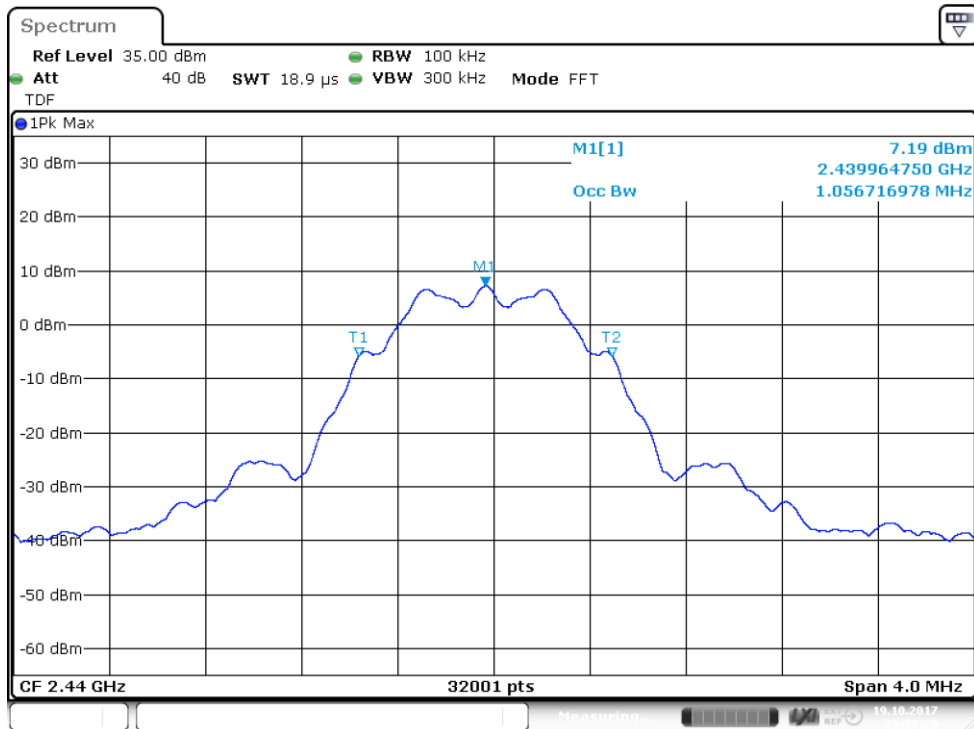


Figure 5: 99% OBW, Channel 19 mid

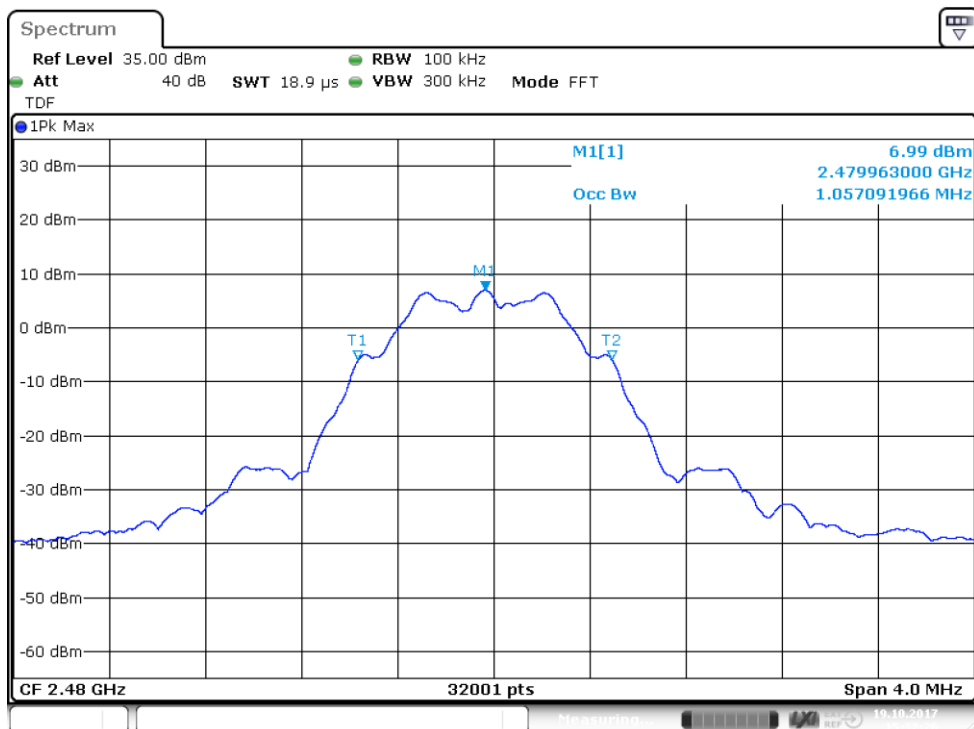


Figure 6: 99% OBW, Channel 39 high

TEST EQUIPMENT

RF-Test Equipment

Equipment	Manufacturer	Type	Inv or serial	Prev Calib	Next Calib
ATTENUATOR	PASTERNAK	10dB DC-40GHz	-	-	-
SIGNAL ANALYZER	ROHDE & SCHWARZ	FSV40	inv:9093	2017-07-07	2018-07-07