



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Inrico Technologies Co.,Ltd

Address: A1703, Shenzhen National Engineering Laboratory Building, No. 20 Gaoxin
South 7th Road , Shenzhen,China

FCC ID: 2AIV6- IRC380

Product Name: SMART MULTI-MODE RADIO

**Standard(s): 47 CFR Part 15, Subpart C(15.247)
ANSI C63.10-2013
KDB 558074 D01 15.247 Meas Guidance v05r02**

The above device has been tested and found compliant with the requirement of the relative standards by
China Certification ICT Co., Ltd (Dongguan)

Report Number: CR231058645-00B

Date Of Issue: 2024/6/1

Reviewed By: Calvin Chen

Title: RF Engineer

Approved By: Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)
No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	7
1.2.1 EUT Operation Condition:	7
1.2.2 Support Equipment List and Details	7
1.2.3 Support Cable List and Details	7
1.2.4 Block Diagram of Test Setup.....	8
1.3 MEASUREMENT UNCERTAINTY	10
2. SUMMARY OF TEST RESULTS	11
3. REQUIREMENTS AND TEST PROCEDURES	12
3.1 AC LINE CONDUCTED EMISSIONS.....	12
3.1.1 Applicable Standard.....	12
3.1.2 EUT Setup.....	13
3.1.3 EMI Test Receiver Setup	13
3.1.4 Test Procedure	14
3.1.5 Corrected Amplitude & Margin Calculation.....	14
3.2 RADIATED SPURIOUS EMISSIONS.....	15
3.2.1 Applicable Standard.....	15
3.2.2 EUT Setup.....	15
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	16
3.2.4 Test Procedure	17
3.2.5 Corrected Amplitude & Margin Calculation.....	17
3.3 20 DB EMISSION BANDWIDTH	18
3.3.1 Applicable Standard.....	18
3.3.2 EUT Setup.....	18
3.3.3 Test Procedure	18
3.4 CHANNEL SEPARATION	20
3.4.1 Applicable Standard.....	20
3.4.2 EUT Setup.....	20
3.4.3 Test Procedure	20
3.5 NUMBER OF HOPPING FREQUENCY.....	21
3.5.1 Applicable Standard.....	21
3.5.2 EUT Setup.....	21
3.5.3 Test Procedure	21
3.6 TIME OF OCCUPANCY (DWELL TIME).....	22
3.6.1 Applicable Standard.....	22
3.6.2 EUT Setup.....	22
3.6.3 Test Procedure	22
3.7 MAXIMUM CONDUCTED OUTPUT POWER.....	23
3.7.1 Applicable Standard.....	23
3.7.2 EUT Setup.....	23

3.7.3 Test Procedure	23
3.8 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....	24
3.8.1 Applicable Standard.....	24
3.8.2 EUT Setup.....	24
3.8.3 Test Procedure	24
3.9 ANTENNA REQUIREMENT.....	25
3.9.1 Applicable Standard.....	25
3.9.2 Judgment.....	25
4. TEST DATA AND RESULTS	26
4.1 AC LINE CONDUCTED EMISSIONS.....	26
4.2 RADIATED SPURIOUS EMISSIONS.....	35
4.3 20 dB EMISSION BANDWIDTH	66
4.4 CHANNEL SEPARATION	70
4.5 NUMBER OF HOPPING FREQUENCY.....	74
4.6 TIME OF OCCUPANCY (DWELL TIME).....	76
4.7 MAXIMUM CONDUCTED OUTPUT POWER.....	80
4.8 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....	81
5. RF EXPOSURE EVALUATION	88
5.1 APPLICABLE STANDARD.....	88
5.2 MEASUREMENT RESULT	88
6. EUT PHOTOGRAPHS	89
7. TEST SETUP PHOTOGRAPHS	90

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR231058645-00B	Original Report	2024/6/1

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	SMART MULTI-MODE RADIO
EUT Model:	IRC380
Operation Frequency:	2402-2480 MHz
Maximum Peak Output Power (Conducted):	2.58 dBm
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Rated Input Voltage:	DC 5V charging from adapter or 7.6V from battery or DC 12V charging from Charging Dock
Serial Number:	CE/RE:2C04-2, RF: 2C04-3
EUT Received Date:	2023/10/13
EUT Received Status:	Good

Operation Frequency Detail:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	41	2443
...
...
...	...	78	2480
39	2441	/	/

Per section 15.31(m), the below frequencies were performed to test:

Test Channel	Frequency (MHz)
Lowest	2402
Middle	2441
Highest	2480

Antenna Information Detail▲:

Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
FPC	50	2.4~2.5GHz	4.12 dBi

The Method of §15.203 Compliance:

Antenna was permanently attached to the unit.

Antenna use a unique type of connector to attach to the EUT.

Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Accessory Information:

Accessory Description	Manufacturer	Model
Adapter	ShenZhen HuaJin Electronics CO.,LTD	HJ-0503000-US
Small Hand Microphone	Unknown	Unknown
Big Hand Microphone	Unknown	Unknown
Charging Dock	Unknown	CI-80G

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.		
Equipment Modifications:	No		
EUT Exercise Software:	QRCT3		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:			
Test Modes	Power Level Setting		
	Lowest	Middle	Highest
GFSK	7	7	7
$\pi/4$ -DQPSK	7	7	7
8DPSK	7	7	7

1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/


1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	No	No	1	Adapter	EUT
Hand Microphone Cable	No	No	1.2	EUT	Hand Microphone
Hand Microphone Cable	No	No	0.8	EUT	Hand Microphone
USB Cable	No	No	1	Adapter	Charging Dock


1.2.4 Block Diagram of Test Setup

AC Line Conducted Emissions:


Powered by Adapter:

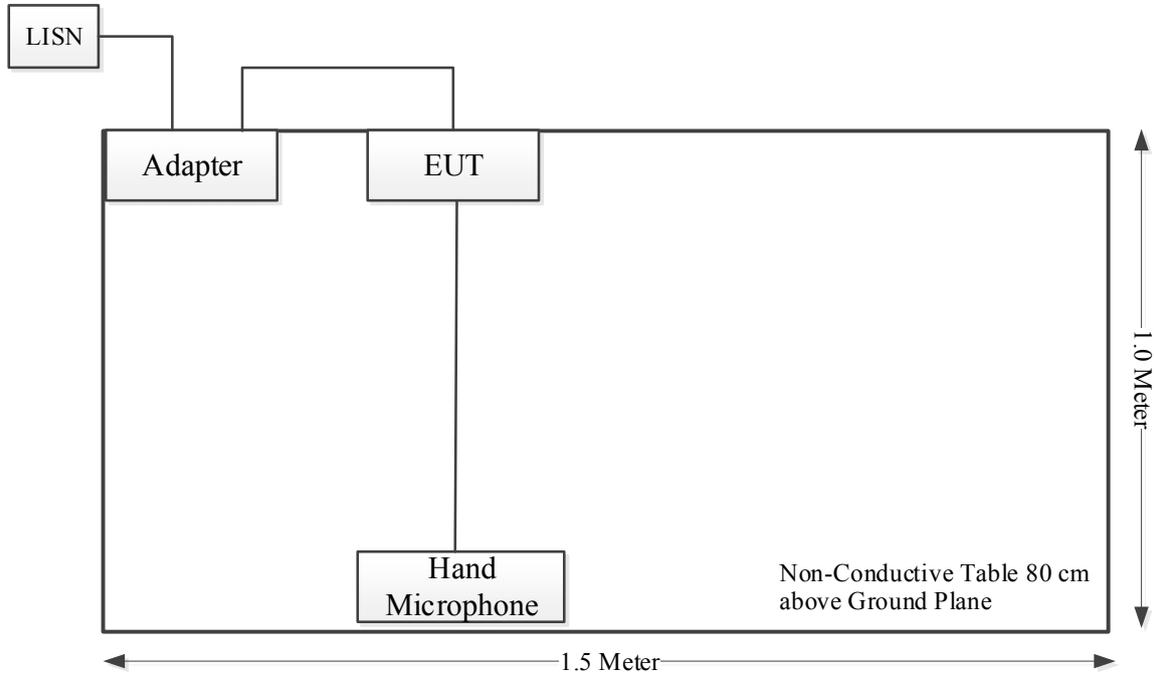


Powered by Charging Dock:

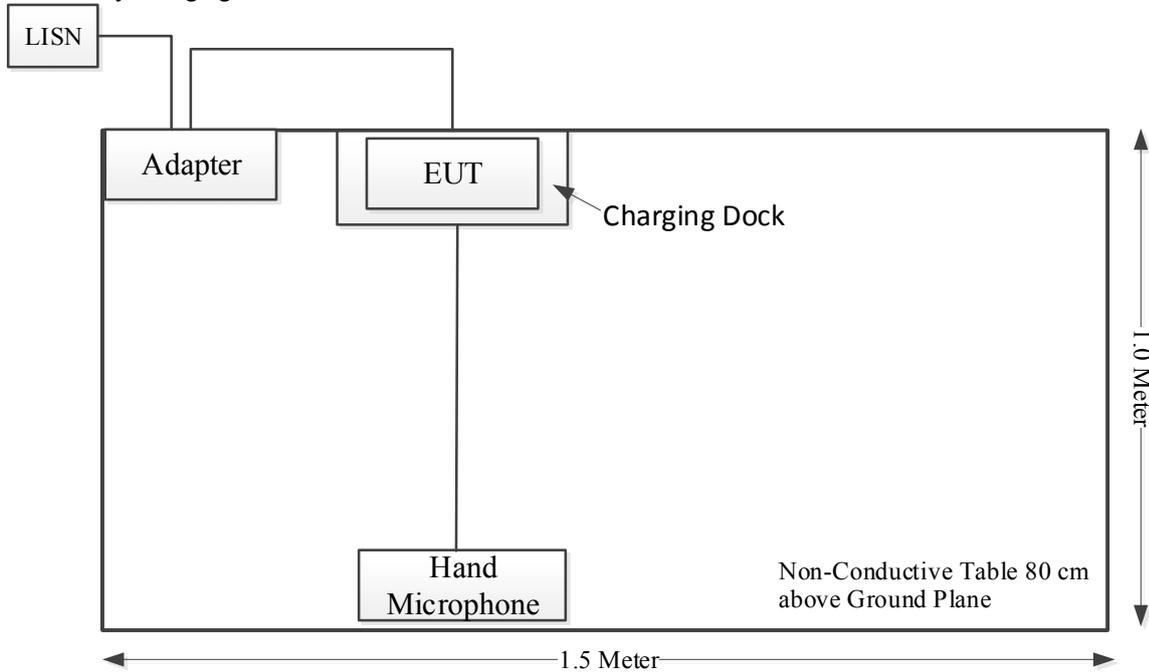

Radiation Spurious Emissions:
Powered by Adapter:

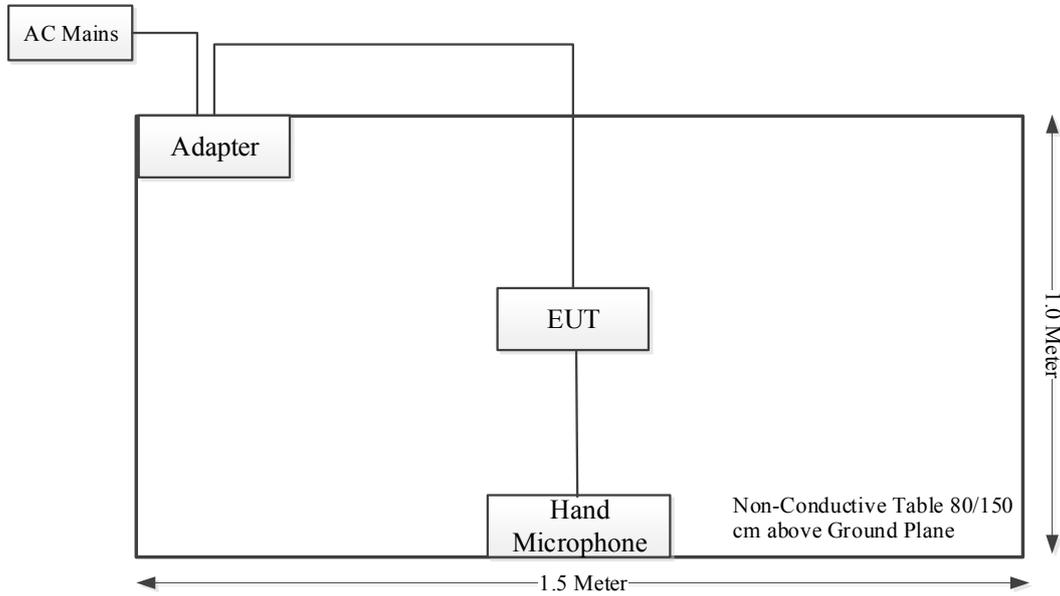

Powered by Charging Dock:

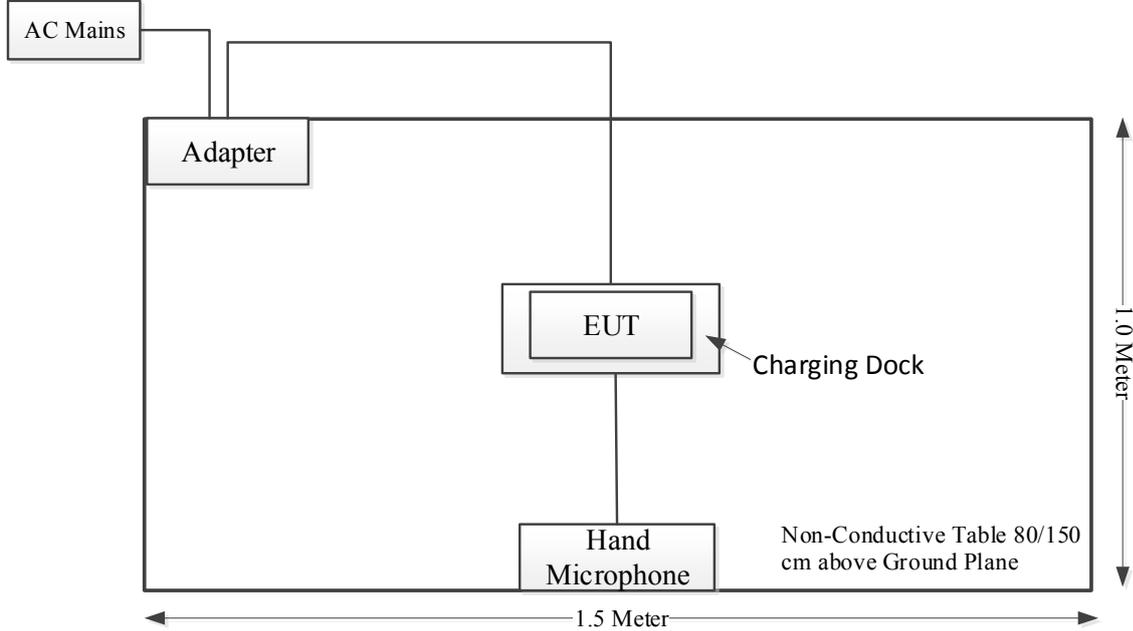

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	9kHz~30MHz: 4.12dB, 30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207(a)	AC Line Conducted Emissions	Compliant
FCC §15.205, §15.209, §15.247(d)	Radiated Spurious Emissions	Compliant
FCC §15.247(a)(1)	20 dB Emission Bandwidth	Compliant
FCC §15.247(a)(1)	Channel Separation	Compliant
FCC §15.247(a)(1)(iii)	Number of Hopping Frequency	Compliant
FCC §15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
FCC §15.247(b)(1)	Maximum Conducted Output Power	Compliant
FCC §15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.203	Antenna Requirement	Compliant
FCC§15.247 (i) & §1.1310	RF Exposure Evaluation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup

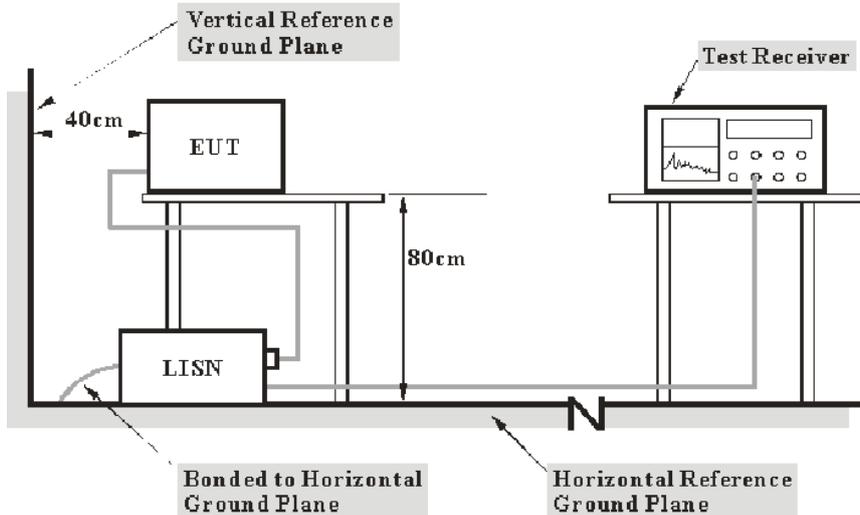

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiated Spurious Emissions


3.2.1 Applicable Standard

FCC §15.247 (d);


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


3.2.2 EUT Setup

9kHz~30MHz:

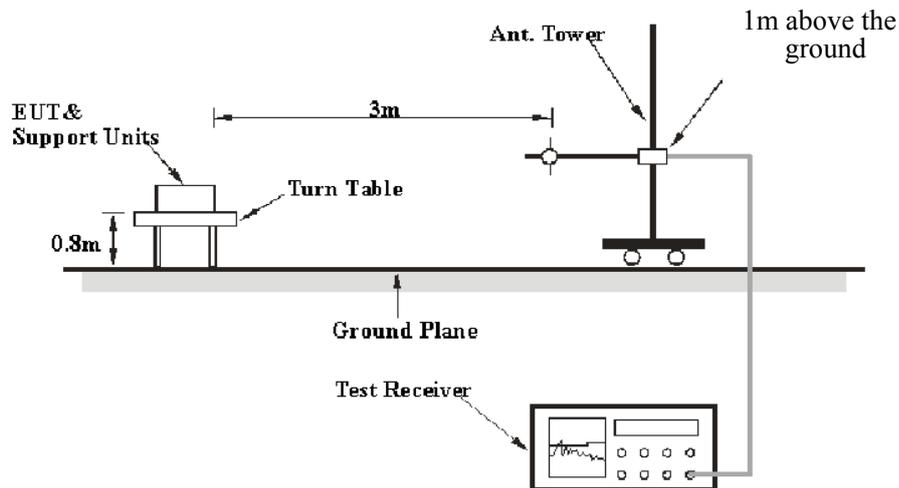

30MHz~1GHz:

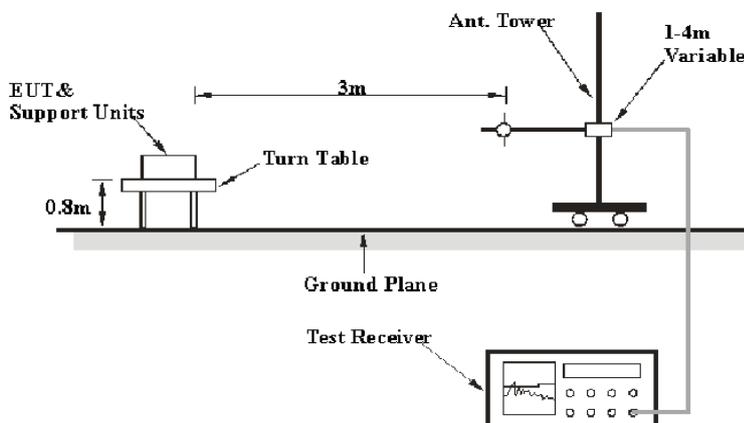

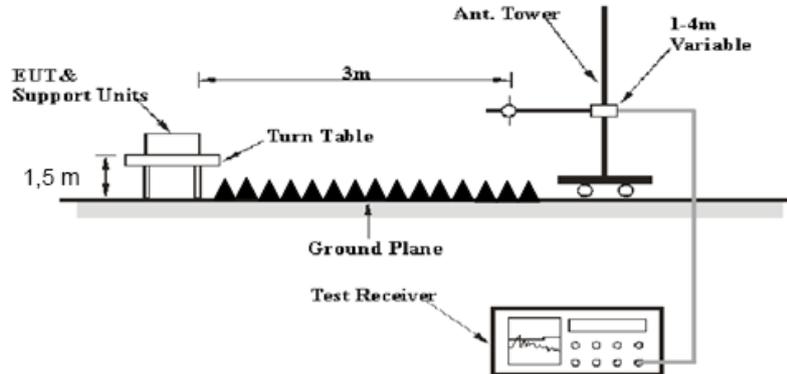Above 1GHz:

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	300 Hz	1 kHz	/	PK
	/	/	200 Hz	QP/AV
150 kHz – 30 MHz	9 kHz	30 kHz	/	PK
	/	/	9 kHz	QP/AV
30 MHz – 1000 MHz	100 kHz	300 kHz	---	PK
	---	---	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-1 GHz except 9 - 90 kHz, 110 - 490 kHz, employing an average detector, peak and Average detection modes for frequencies above 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.3 20 dB Emission Bandwidth

3.3.1 Applicable Standard

FCC §15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

3.3.2 EUT Setup

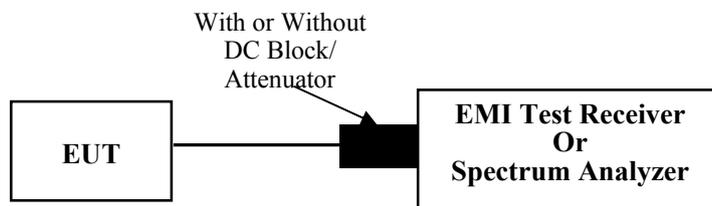

3.3.3 Test Procedure

According to ANSI C63.10-2013 Section 6.9.2

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log(\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - \text{xx}]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).

- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.
- k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).


3.4 Channel Separation

3.4.1 Applicable Standard

FCC §15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

3.4.2 EUT Setup

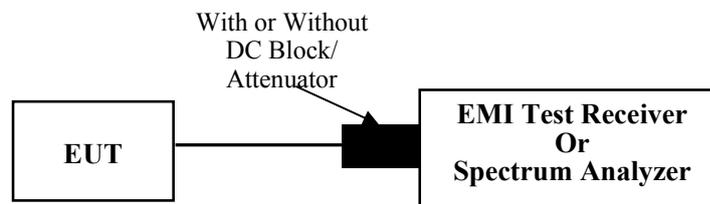

3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.2

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW) \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.


3.5 Number of Hopping Frequency

3.5.1 Applicable Standard

FCC §15.247 (a)(1)(iii)

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

3.5.2 EUT Setup

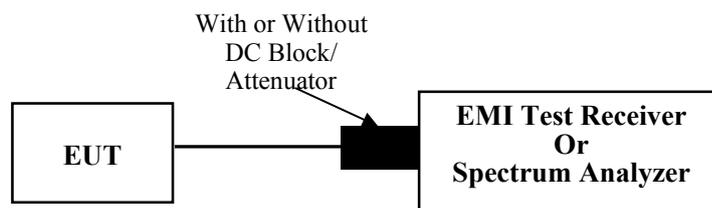

3.5.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.3

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize


It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

3.6 Time of Occupancy (Dwell Time)

3.6.1 Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

3.6.2 EUT Setup

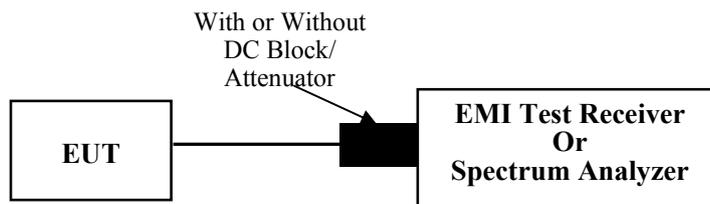

3.6.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.4

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Zero span, centered on a hopping channel.
- b) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function: Peak.
- e) Trace: Max hold.

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

$$\text{(Number of hops in the period specified in the requirements)} = \text{(number of hops on spectrum analyzer)} \times \text{(period specified in the requirements / analyzer sweep time)}$$

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

The measured transmit time and time between hops shall be consistent with the values described in the operational description for the EUT.


3.7 Maximum Conducted Output Power

3.7.1 Applicable Standard

FCC §15.247 (b)(1)

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

3.7.2 EUT Setup

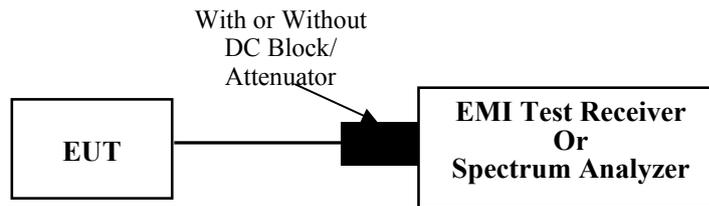

3.7.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.5

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. Offset the Insertion loss of the RF cable, DC Block/ Attenuator into the spectrum analyzer. The hopping shall be disabled for this test:

- a) Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW ≥ RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

NOTE—A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.


3.8 100 kHz Bandwidth of Frequency Band Edge

3.8.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.8.2 EUT Setup

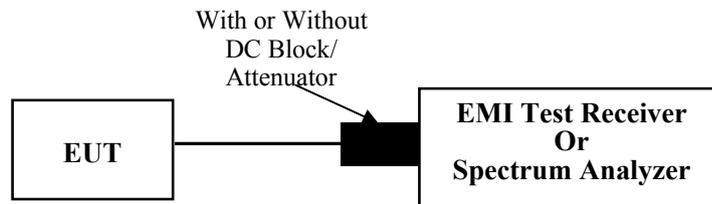

3.8.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.6

For band-edge measurements, use the band-edge procedure in 6.10. Band-edge measurements shall be tested both on single channels, and with the EUT hopping.

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

3.9 Antenna Requirement

3.9.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.9.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.

4. TEST DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	2C04-2	Test Date:	2024/1/15
Test Site:	CE	Test Mode:	Transmitting(maximum output power mode BDR Mode (GFSK) Middle Channel)
Tester:	David Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.9	Relative Humidity: (%)	44	ATM Pressure: (kPa)	101.3
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2023/3/31	2024/3/30
R&S	EMI Test Receiver	ESR3	102726	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2023/8/6	2024/8/5
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Power by Adapter with Big Hand Microphone

Project No.: CR231058645-RF
 Tester: David Huang
 Port: Line
 Note: Trasmitting(BT)


Date: 2024-01-15

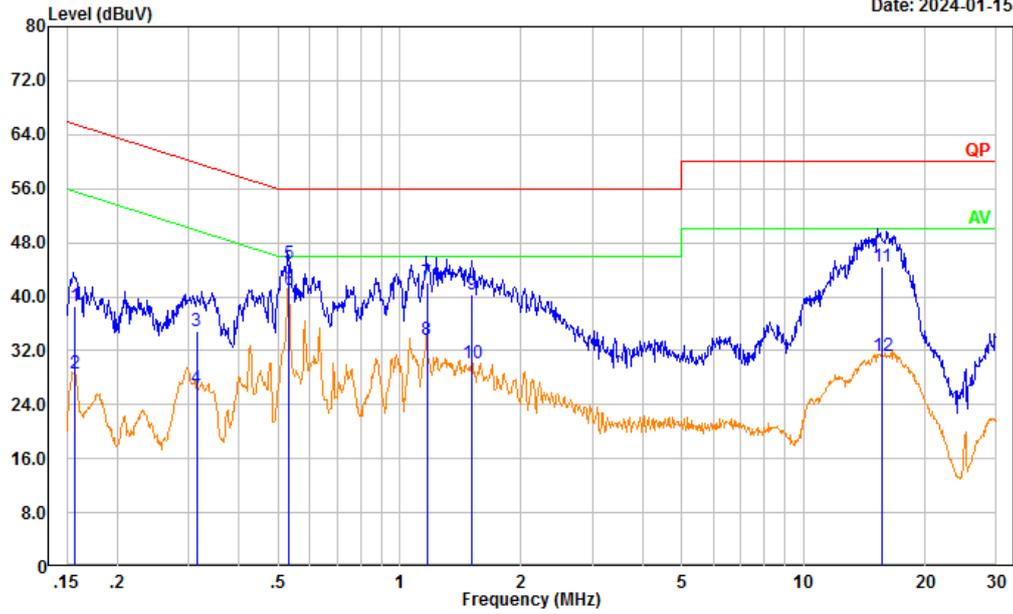

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.156	28.90	9.61	38.51	65.65	27.14	QP
2	0.156	18.93	9.61	28.54	55.65	27.11	Average
3	0.314	25.28	9.61	34.89	59.86	24.97	QP
4	0.314	16.86	9.61	26.47	49.86	23.39	Average
5	0.530	35.24	9.61	44.85	56.00	11.15	QP
6	0.530	31.43	9.61	41.04	46.00	4.96	Average
7	1.167	32.43	9.62	42.05	56.00	13.95	QP
8	1.167	23.95	9.62	33.57	46.00	12.43	Average
9	1.513	30.75	9.63	40.38	56.00	15.62	QP
10	1.513	20.42	9.63	30.05	46.00	15.95	Average
11	15.625	34.72	9.70	44.42	60.00	15.58	QP
12	15.625	21.42	9.70	31.12	50.00	18.88	Average

Project No.: CR231058645-RF
 Tester: David Huang
 Port: neutral
 Note: Trasmitting(BT)

Date: 2024-01-15

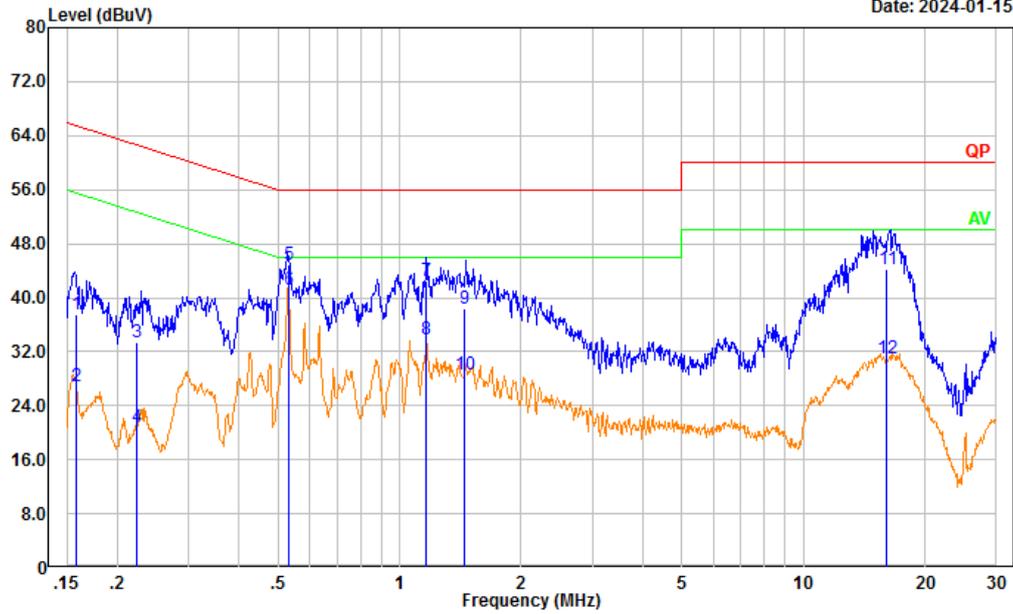


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.158	27.91	9.61	37.52	65.56	28.04	QP
2	0.158	17.35	9.61	26.96	55.56	28.60	Average
3	0.224	23.79	9.61	33.40	62.68	29.28	QP
4	0.224	11.21	9.61	20.82	52.68	31.86	Average
5	0.530	35.19	9.61	44.80	56.00	11.20	QP
6	0.530	31.51	9.61	41.12	46.00	4.88	Average
7	1.165	32.79	9.62	42.41	56.00	13.59	QP
8	1.165	24.20	9.62	33.82	46.00	12.18	Average
9	1.443	28.81	9.62	38.43	56.00	17.57	QP
10	1.443	19.02	9.62	28.64	46.00	17.36	Average
11	16.092	34.58	9.69	44.27	60.00	15.73	QP
12	16.092	21.30	9.69	30.99	50.00	19.01	Average

Power by Adapter with Small Hand Microphone

Project No.: CR231058645-RF
 Tester: David Huang
 Port: Line
 Note: Trasmitting(BT)


Date: 2024-01-15

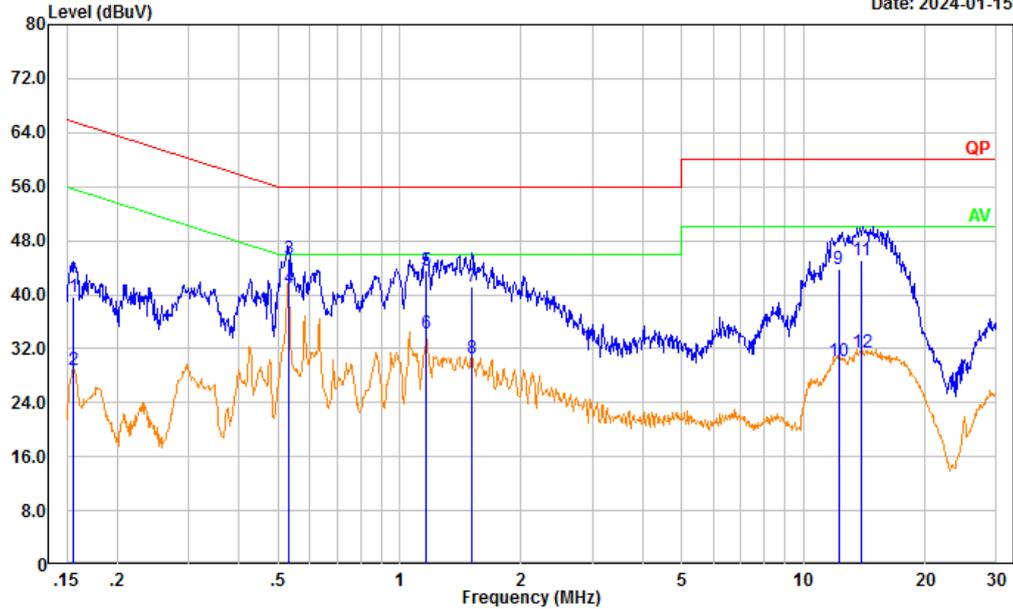

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.156	30.09	9.61	39.70	65.69	25.99	QP
2	0.156	19.23	9.61	28.84	55.69	26.85	Average
3	0.532	35.72	9.61	45.33	56.00	10.67	QP
4	0.532	31.46	9.61	41.07	46.00	4.93	Average
5	1.164	33.87	9.62	43.49	56.00	12.51	QP
6	1.164	24.67	9.62	34.29	46.00	11.71	Average
7	1.511	31.65	9.63	41.28	56.00	14.72	QP
8	1.511	20.83	9.63	30.46	46.00	15.54	Average
9	12.207	34.15	9.67	43.82	60.00	16.18	QP
10	12.207	20.57	9.67	30.24	50.00	19.76	Average
11	13.865	35.47	9.68	45.15	60.00	14.85	QP
12	13.865	21.67	9.68	31.35	50.00	18.65	Average

Project No.: CR231058645-RF
 Tester: David Huang
 Port: neutral
 Note: Trasmitting(BT)

Date: 2024-01-15

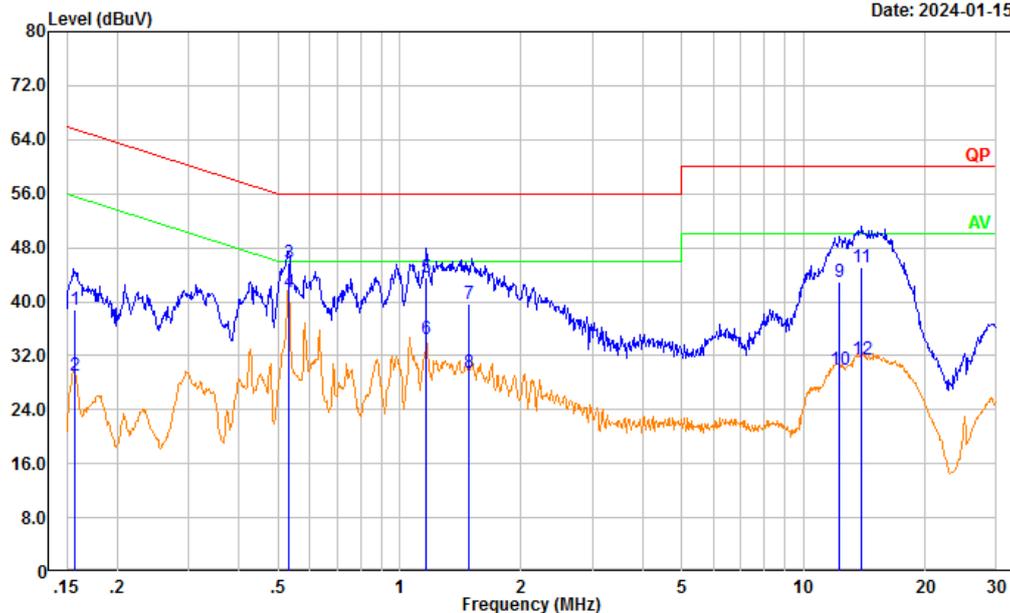


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.157	29.30	9.61	38.91	65.63	26.72	QP
2	0.157	19.42	9.61	29.03	55.63	26.60	Average
3	0.531	36.09	9.61	45.70	56.00	10.30	QP
4	0.531	31.79	9.61	41.40	46.00	4.60	Average
5	1.166	34.03	9.62	43.65	56.00	12.35	QP
6	1.166	24.83	9.62	34.45	46.00	11.55	Average
7	1.490	29.98	9.62	39.60	56.00	16.40	QP
8	1.490	19.80	9.62	29.42	46.00	16.58	Average
9	12.242	33.17	9.67	42.84	60.00	17.16	QP
10	12.242	20.14	9.67	29.81	50.00	20.19	Average
11	13.907	35.47	9.68	45.15	60.00	14.85	QP
12	13.907	21.76	9.68	31.44	50.00	18.56	Average

Power by Charging Dock with Big Hand Microphone

Project No.: CR231058645-RF
 Tester: David Huang
 Port: Line
 Note: Trasmitting(BT)


Date: 2024-01-15

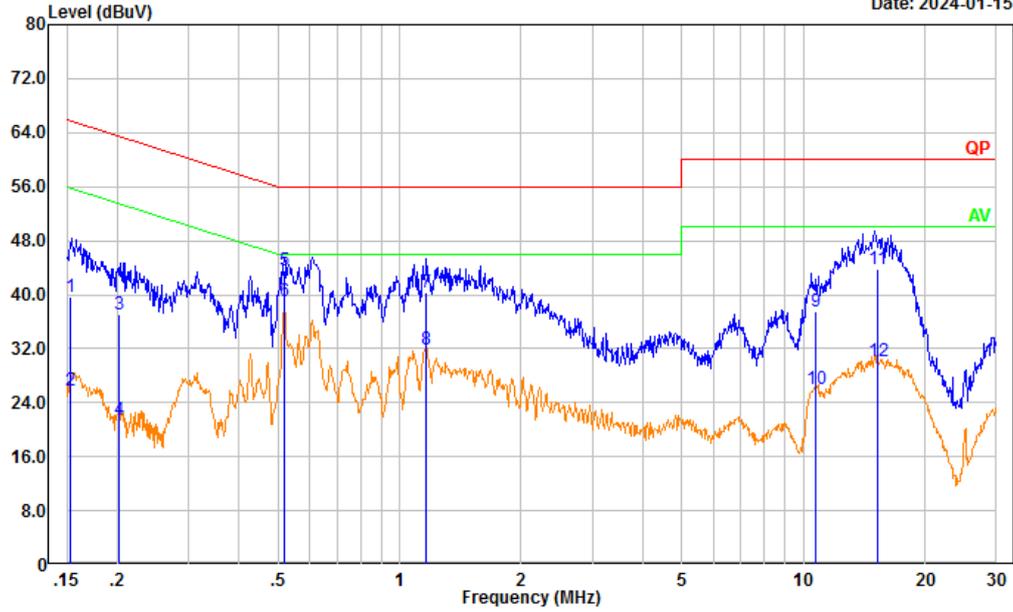

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.153	30.10	9.61	39.71	65.85	26.14	QP
2	0.153	16.12	9.61	25.73	55.85	30.12	Average
3	0.202	27.43	9.61	37.04	63.54	26.50	QP
4	0.202	11.75	9.61	21.36	53.54	32.18	Average
5	0.519	33.98	9.61	43.59	56.00	12.41	QP
6	0.519	29.44	9.61	39.05	46.00	6.95	Average
7	1.164	30.73	9.62	40.35	56.00	15.65	QP
8	1.164	22.27	9.62	31.89	46.00	14.11	Average
9	10.680	27.94	9.67	37.61	60.00	22.39	QP
10	10.680	16.44	9.67	26.11	50.00	23.89	Average
11	15.215	34.17	9.69	43.86	60.00	16.14	QP
12	15.215	20.45	9.69	30.14	50.00	19.86	Average

Project No.: CR231058645-RF
 Tester: David Huang
 Port: neutral
 Note: Transmitting(BT)

Date: 2024-01-15

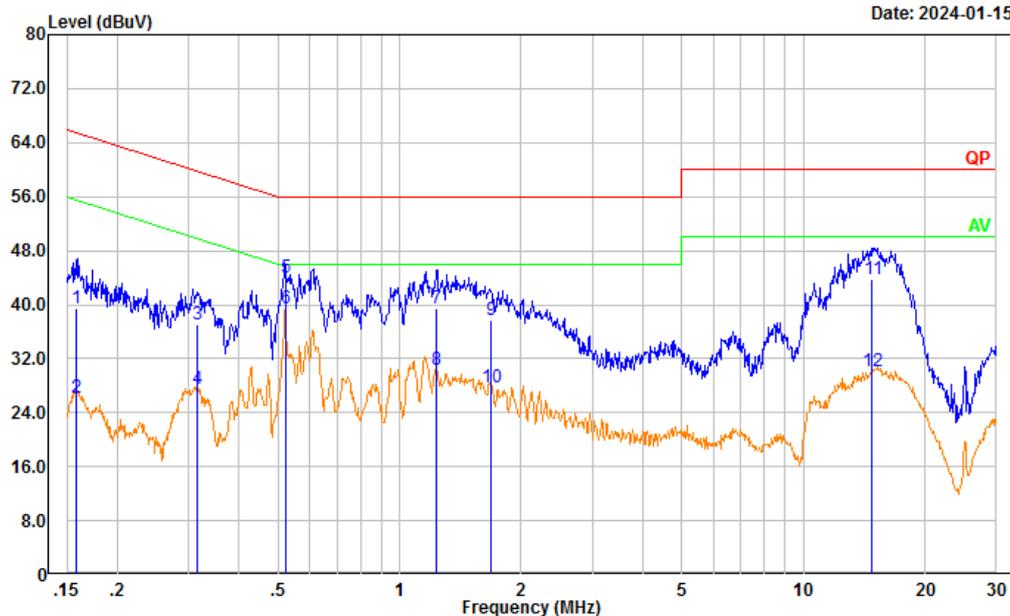


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.159	29.81	9.61	39.42	65.54	26.12	QP
2	0.159	16.72	9.61	26.33	55.54	29.21	Average
3	0.315	27.39	9.61	37.00	59.84	22.84	QP
4	0.315	18.00	9.61	27.61	49.84	22.23	Average
5	0.521	34.38	9.61	43.99	56.00	12.01	QP
6	0.521	29.91	9.61	39.52	46.00	6.48	Average
7	1.236	29.92	9.62	39.54	56.00	16.46	QP
8	1.236	20.74	9.62	30.36	46.00	15.64	Average
9	1.690	28.07	9.63	37.70	56.00	18.30	QP
10	1.690	18.17	9.63	27.80	46.00	18.20	Average
11	14.790	34.15	9.69	43.84	60.00	16.16	QP
12	14.790	20.40	9.69	30.09	50.00	19.91	Average

Power by Charging Dock with Small Hand Microphone

Project No.: CR231058645-RF
 Tester: David Huang
 Port: Line
 Note: Trasmitting(BT)


Date: 2024-01-15

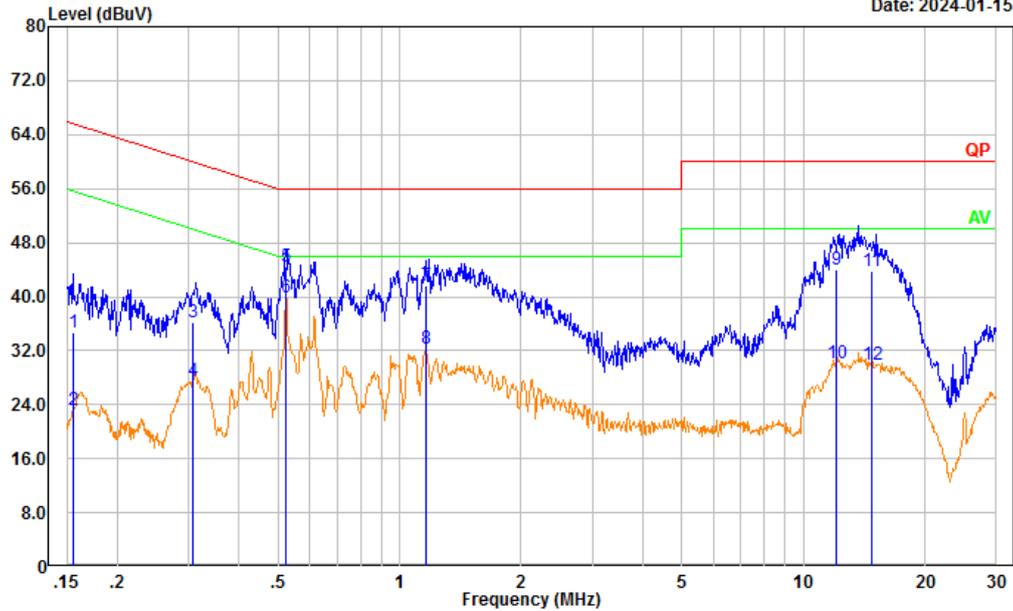

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.156	25.04	9.61	34.65	65.67	31.02	QP
2	0.156	13.53	9.61	23.14	55.67	32.53	Average
3	0.308	26.65	9.61	36.26	60.02	23.76	QP
4	0.308	18.03	9.61	27.64	50.02	22.38	Average
5	0.523	34.78	9.61	44.39	56.00	11.61	QP
6	0.523	30.38	9.61	39.99	46.00	6.01	Average
7	1.164	31.96	9.62	41.58	56.00	14.42	QP
8	1.164	22.75	9.62	32.37	46.00	13.63	Average
9	12.103	34.27	9.67	43.94	60.00	16.06	QP
10	12.103	20.46	9.67	30.13	50.00	19.87	Average
11	14.698	34.14	9.69	43.83	60.00	16.17	QP
12	14.698	20.32	9.69	30.01	50.00	19.99	Average

Project No.: CR231058645-RF
 Tester: David Huang
 Port: neutral
 Note: Transmitting(BT)

Date: 2024-01-15

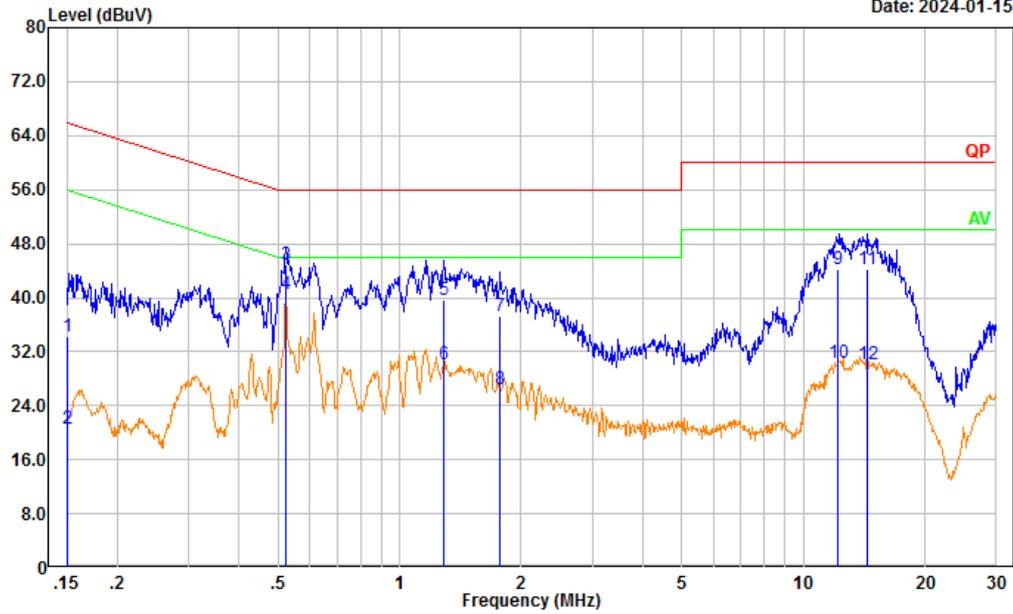

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.150	24.62	9.61	34.23	65.98	31.75	QP
2	0.150	11.08	9.61	20.69	55.98	35.29	Average
3	0.523	35.21	9.61	44.82	56.00	11.18	QP
4	0.523	30.93	9.61	40.54	46.00	5.46	Average
5	1.285	30.05	9.62	39.67	56.00	16.33	QP
6	1.285	20.55	9.62	30.17	46.00	15.83	Average
7	1.764	27.60	9.63	37.23	56.00	18.77	QP
8	1.764	16.91	9.63	26.54	46.00	19.46	Average
9	12.186	34.66	9.67	44.33	60.00	15.67	QP
10	12.186	20.59	9.67	30.26	50.00	19.74	Average
11	14.340	34.58	9.68	44.26	60.00	15.74	QP
12	14.340	20.46	9.68	30.14	50.00	19.86	Average

4.2 Radiated Spurious Emissions

Serial Number:	2C04-2	Test Date:	Above 1GHz: 2024/1/13 Below 1GHz: 2024/6/1
Test Site:	966-2,966-1	Test Mode:	Transmitting
Tester:	Carl Xue, Mack Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.4-26.2	Relative Humidity: (%)	60-61	ATM Pressure: (kPa)	100.1-101.3
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation Spurious Emissions Below 1GHz					
Sunol Sciences	Antenna	JB6	A082520-5	2023/12/1	2026/11/30
BACL	Loop Antenna	1313-1A	3110611	2023/12/4	2026/12/3
Daruikang	Coaxial Cable	BNC-JJ-RG58	C-0300-01	2024/1/11	2025/1/10
Daruikang	Coaxial Cable	BNC-JJ-RG58	C-0500-01	2024/1/11	2025/1/10
R&S	EMI Test Receiver	ESR3	102724	2024/2/29	2025/2/28
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0100-03	2023/12/4	2024/12/3
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0370-01	2023/12/4	2024/12/3
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/12/4	2024/12/3
Sonoma	Amplifier	310N	186165	2023/12/4	2024/12/3
Audix	Test Software	E3	191218 (V9)	N/A	N/A
Radiation Spurious Emissions Above 1GHz					
AH	Double Ridge Guide Horn Antenna	SAS-571	1394	2023/2/22	2026/2/21
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2023/11/8	2024/11/7
Audix	Test Software	E3	201021 (V9)	N/A	N/A
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/2/5	2024/2/4
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2023/9/15	2024/9/14
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2023/8/6	2024/8/5
E-Microwave	Band Rejection Filter	2400-2483.5MHz	OE01902424	2023/8/6	2024/8/5
Mini Circuits	High Pass Filter	VHF-6010+	31119	2023/8/6	2024/8/5

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:


1) 9kHz~30MHz

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

2) 30MHz-1GHz(maximum output power mode, BDR Mode(GFSK) Middle Channel)
Power by Charging Dock with Big Hand Microphone:

Project No.: CR231058645-RF
 Tester: Carl Xue
 Polarization: horizontal
 Note: Transmitting BT


Date: 2024-06-01

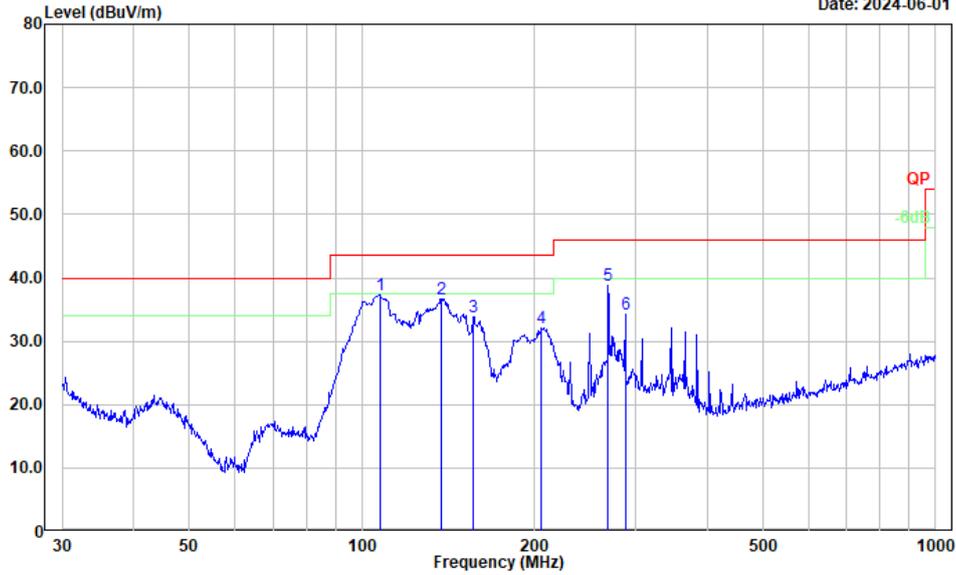

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	107.510	49.97	-12.70	37.27	43.50	6.23	Peak
2	137.420	48.38	-11.74	36.64	43.50	6.86	Peak
3	156.458	45.73	-11.87	33.86	43.50	9.64	Peak
4	205.675	45.52	-13.40	32.12	43.50	11.38	Peak
5	268.485	49.72	-10.97	38.75	46.00	7.25	Peak
6	287.990	44.68	-10.41	34.27	46.00	11.73	Peak

Project No.: CR231058645-RF
 Tester: Carl Xue
 Polarization: vertical
 Note: Transmitting BT

Date: 2024-06-01

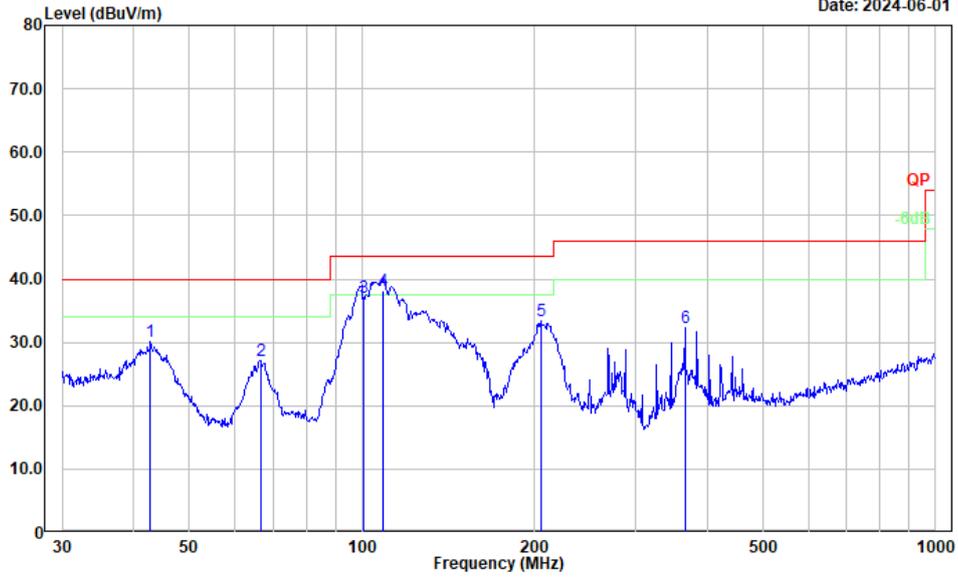


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	42.750	43.34	-13.31	30.03	40.00	9.97	Peak
2	66.499	44.41	-17.35	27.06	40.00	12.94	Peak
3	100.880	51.38	-14.23	37.15	43.50	6.35	QP
4	108.647	50.66	-12.52	38.14	43.50	5.36	QP
5	204.955	46.61	-13.30	33.31	43.50	10.19	Peak
6	365.539	41.62	-9.22	32.40	46.00	13.60	Peak

Power by Adapter with Big Hand Microphone:


Project No.: CR231058645-RF
 Tester: Carl Xue
 Polarization: horizontal
 Note: Transmitting(BT)

Date: 2024-06-01

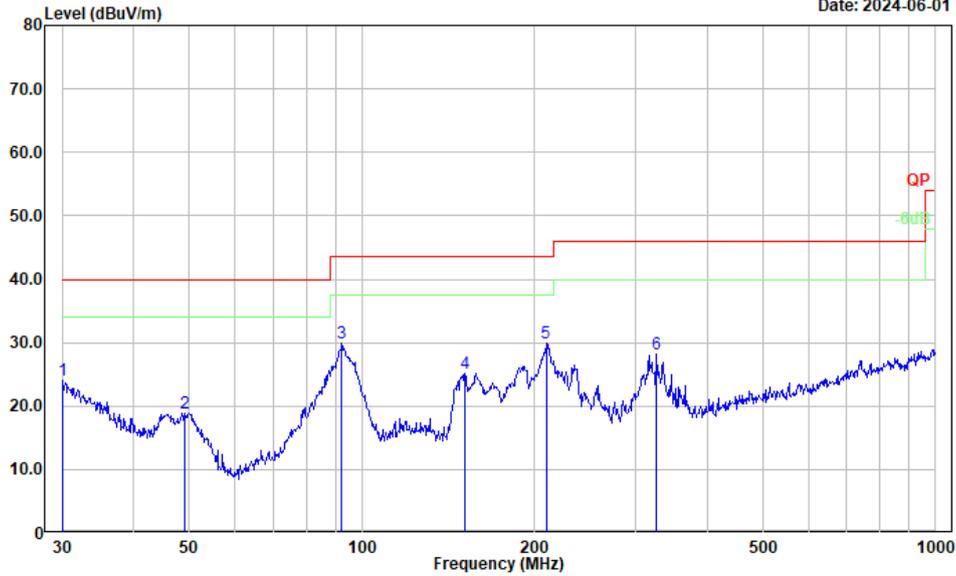

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.105	28.00	-3.93	24.07	40.00	15.93	Peak
2	49.187	35.67	-16.74	18.93	40.00	21.07	Peak
3	92.139	46.47	-16.58	29.89	43.50	13.61	Peak
4	151.067	37.37	-12.18	25.19	43.50	18.31	Peak
5	209.313	43.73	-13.89	29.84	43.50	13.66	Peak
6	326.740	38.08	-9.91	28.17	46.00	17.83	Peak

Project No.: CR231058645-RF
 Tester: Carl Xue
 Polarization: vertical
 Note: Transmitting(BT)

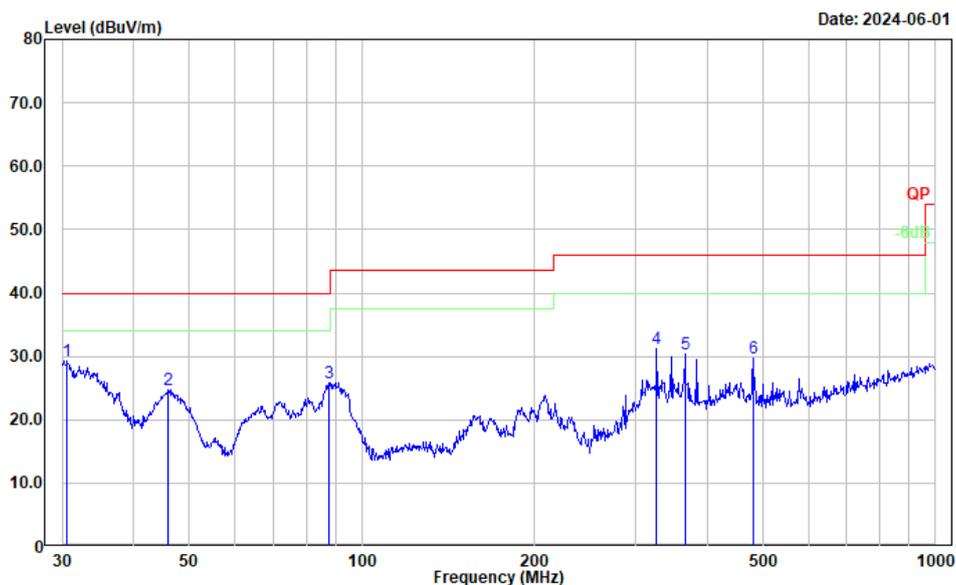


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	30.638	33.53	-4.24	29.29	40.00	10.71	Peak
2	45.855	39.83	-15.21	24.62	40.00	15.38	Peak
3	87.418	42.98	-17.20	25.78	40.00	14.22	Peak
4	326.740	41.03	-9.91	31.12	46.00	14.88	Peak
5	365.539	39.55	-9.22	30.33	46.00	15.67	Peak
6	480.528	35.89	-6.16	29.73	46.00	16.27	Peak

Power by Charging Dock with Small Hand Microphone:


Project No.: CR231058645-RF
 Tester: Carl Xue
 Polarization: horizontal
 Note: Transmitting BT

Date: 2024-06-01

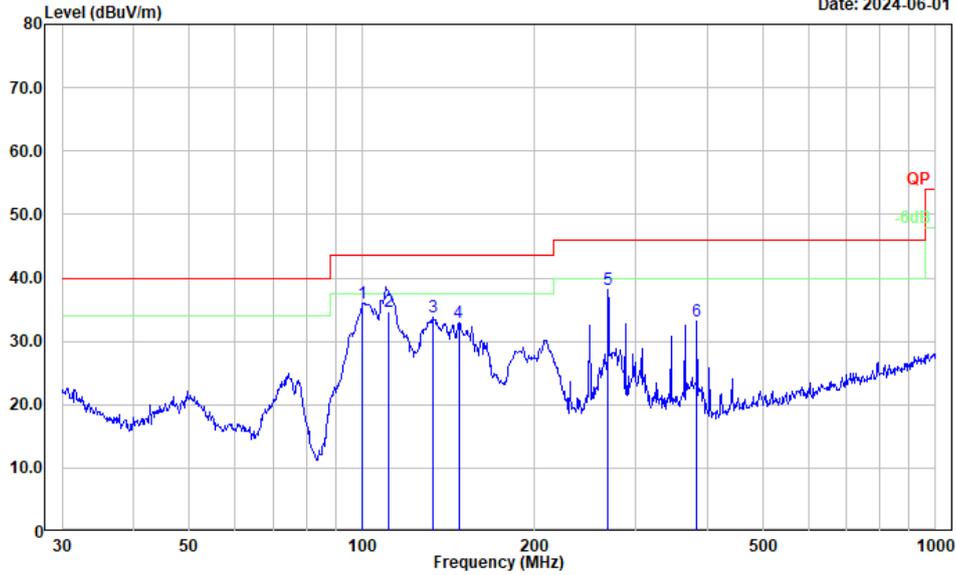

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	100.229	50.46	-14.50	35.96	43.50	7.54	Peak
2	111.459	46.68	-12.04	34.64	43.50	8.86	QP
3	132.685	45.24	-11.42	33.82	43.50	9.68	Peak
4	147.404	45.16	-12.13	33.03	43.50	10.47	Peak
5	268.485	49.12	-10.97	38.15	46.00	7.85	Peak
6	383.932	41.87	-8.61	33.26	46.00	12.74	Peak

Project No.: CR231058645-RF
 Tester: Carl Xue
 Polarization: vertical
 Note: Transmitting BT

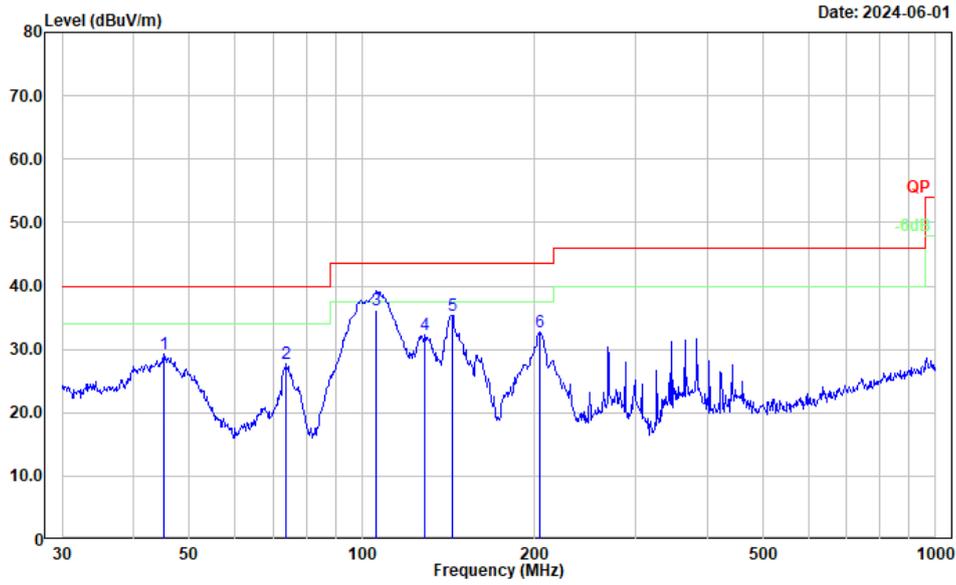


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	45.058	43.90	-14.74	29.16	40.00	10.84	Peak
2	73.876	44.92	-17.17	27.75	40.00	12.25	Peak
3	106.055	49.21	-12.95	36.26	43.50	7.24	QP
4	128.563	43.38	-11.17	32.21	43.50	11.29	Peak
5	143.830	47.49	-12.07	35.42	43.50	8.08	Peak
6	204.238	45.79	-13.16	32.63	43.50	10.87	Peak

Power by Adapter with Small Hand Microphone:


Project No.: CR231058645-RF
 Tester: Carl Xue
 Polarization: horizontal
 Note: Transmitting(BT)

Date: 2024-06-01

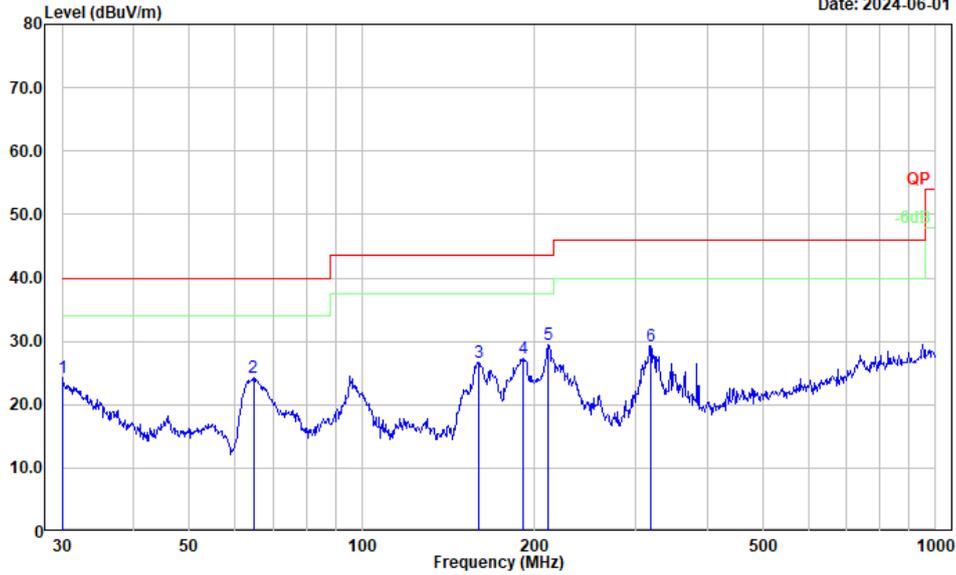

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.105	28.12	-3.93	24.19	40.00	15.81	Peak
2	64.659	41.89	-17.51	24.38	40.00	15.62	Peak
3	159.784	38.69	-11.95	26.74	43.50	16.76	Peak
4	191.074	40.89	-13.55	27.34	43.50	16.16	Peak
5	211.527	43.40	-13.96	29.44	43.50	14.06	Peak
6	318.817	39.43	-10.07	29.36	46.00	16.64	Peak

Project No.: CR231058645-RF
 Tester: Carl Xue
 Polarization: vertical
 Note: Transmitting(BT)

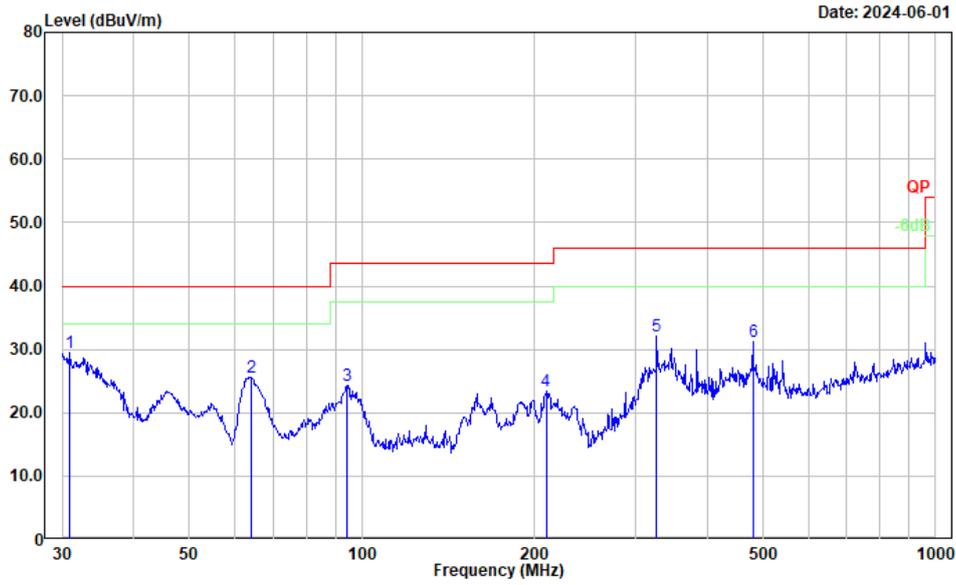

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.962	33.85	-4.44	29.41	40.00	10.59	Peak
2	63.983	43.15	-17.51	25.64	40.00	14.36	Peak
3	94.098	40.52	-16.19	24.33	43.50	19.17	Peak
4	209.313	37.35	-13.89	23.46	43.50	20.04	Peak
5	326.740	41.97	-9.91	32.06	46.00	13.94	Peak
6	480.528	37.41	-6.16	31.25	46.00	14.75	Peak

**3) 1-25GHz(Power by Charging Dock with Big Hand Microphone was the worst):
BDR Mode(GFSK):**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2402 MHz							
4804.000	35.56	PK	H	11.19	46.75	74.00	27.25
4804.000	22.50	AV	H	11.19	33.69	54.00	20.31
4804.000	36.40	PK	V	11.19	47.59	74.00	26.41
4804.000	22.25	AV	V	11.19	33.44	54.00	20.56
7206.000	36.24	PK	H	15.03	51.27	74.00	22.73
7206.000	24.60	AV	H	15.03	39.63	54.00	14.37
7206.000	36.90	PK	V	15.03	51.93	74.00	22.07
7206.000	23.54	AV	V	15.03	38.57	54.00	15.43
Middle Channel: 2441 MHz							
4882.000	35.96	PK	H	11.48	47.44	74.00	26.56
4882.000	22.61	AV	H	11.48	34.09	54.00	19.91
4882.000	35.71	PK	V	11.48	47.19	74.00	26.81
4882.000	22.54	AV	V	11.48	34.02	54.00	19.98
7323.000	38.78	PK	H	15.57	54.35	74.00	19.65
7323.000	26.37	AV	H	15.57	41.94	54.00	12.06
7323.000	37.95	PK	V	15.57	53.52	74.00	20.48
7323.000	25.70	AV	V	15.57	41.27	54.00	12.73
High Channel: 2480 MHz							
4960.000	35.79	PK	H	11.77	47.56	74.00	26.44
4960.000	22.37	AV	H	11.77	34.14	54.00	19.86
4960.000	36.14	PK	V	11.77	47.91	74.00	26.09
4960.000	22.36	AV	V	11.77	34.13	54.00	19.87
7440.000	37.03	PK	H	15.98	53.01	74.00	20.99
7440.000	23.32	AV	H	15.98	39.30	54.00	14.70
7440.000	37.87	PK	V	15.98	53.85	74.00	20.15
7440.000	23.40	AV	V	15.98	39.38	54.00	14.62

2EDR Mode ($\pi/4$ -DQPSK):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2402 MHz							
4804.000	35.39	PK	H	11.19	46.58	74.00	27.42
4804.000	22.39	AV	H	11.19	33.58	54.00	20.42
4804.000	36.62	PK	V	11.19	47.81	74.00	26.19
4804.000	22.49	AV	V	11.19	33.68	54.00	20.32
7206.000	36.30	PK	H	15.03	51.33	74.00	22.67
7206.000	23.39	AV	H	15.03	38.42	54.00	15.58
7206.000	36.52	PK	V	15.03	51.55	74.00	22.45
7206.000	23.25	AV	V	15.03	38.28	54.00	15.72
Middle Channel: 2441 MHz							
4882.000	36.06	PK	H	11.48	47.54	74.00	26.46
4882.000	22.56	AV	H	11.48	34.04	54.00	19.96
4882.000	36.99	PK	V	11.48	48.47	74.00	25.53
4882.000	22.99	AV	V	11.48	34.47	54.00	19.53
7323.000	35.42	PK	H	15.57	50.99	74.00	23.01
7323.000	22.90	AV	H	15.57	38.47	54.00	15.53
7323.000	36.29	PK	V	15.57	51.86	74.00	22.14
7323.000	23.42	AV	V	15.57	38.99	54.00	15.01
High Channel: 2480 MHz							
4960.000	35.87	PK	H	11.77	47.64	74.00	26.36
4960.000	22.87	AV	H	11.77	34.64	54.00	19.36
4960.000	37.30	PK	V	11.77	49.07	74.00	24.93
4960.000	22.76	AV	V	11.77	34.53	54.00	19.47
7440.000	35.91	PK	H	15.98	51.89	74.00	22.11
7440.000	22.92	AV	H	15.98	38.90	54.00	15.10
7440.000	35.93	PK	V	15.98	51.91	74.00	22.09
7440.000	22.85	AV	V	15.98	38.83	54.00	15.17

3EDR Mode (8DPSK):


Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2402 MHz							
4804.000	35.13	PK	H	11.19	46.32	74.00	27.68
4804.000	22.28	AV	H	11.19	33.47	54.00	20.53
4804.000	37.16	PK	V	11.19	48.35	74.00	25.65
4804.000	22.63	AV	V	11.19	33.82	54.00	20.18
7206.000	38.93	PK	H	15.03	53.96	74.00	20.04
7206.000	26.35	AV	H	15.03	41.38	54.00	12.62
7206.000	39.22	PK	V	15.03	54.25	74.00	19.75
7206.000	26.85	AV	V	15.03	41.88	54.00	12.12
Middle Channel: 2441 MHz							
4882.000	36.04	PK	H	11.48	47.52	74.00	26.48
4882.000	22.63	AV	H	11.48	34.11	54.00	19.89
4882.000	36.55	PK	V	11.48	48.03	74.00	25.97
4882.000	22.91	AV	V	11.48	34.39	54.00	19.61
7323.000	37.97	PK	H	15.57	53.54	74.00	20.46
7323.000	25.15	AV	H	15.57	40.72	54.00	13.28
7323.000	37.64	PK	V	15.57	53.21	74.00	20.79
7323.000	23.92	AV	V	15.57	39.49	54.00	14.51
High Channel: 2480 MHz							
4960.000	34.34	PK	H	11.77	46.11	74.00	27.89
4960.000	23.64	AV	H	11.77	35.41	54.00	18.59
4960.000	35.39	PK	V	11.77	47.16	74.00	26.84
4960.000	22.78	AV	V	11.77	34.55	54.00	19.45
7440.000	35.56	PK	H	15.98	51.54	74.00	22.46
7440.000	22.95	AV	H	15.98	38.93	54.00	15.07
7440.000	37.47	PK	V	15.98	53.45	74.00	20.55
7440.000	24.57	AV	V	15.98	40.55	54.00	13.45

Worst Radiation Spurious Emissions Margin Test plots(BDR Mode (GFSK) Middle channel)

Horizontal

Project No.: CR231058645-RF
 Tester: Mack Huang
 Polarization: horizontal
 Note: BDR Middle Channel

Date: 2024-01-13

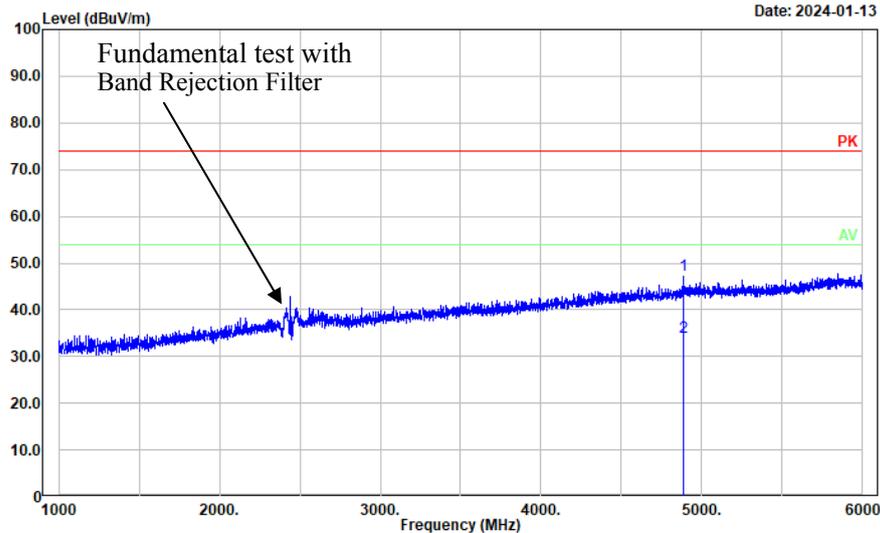


1-6GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4882.000	35.96	11.48	47.44	74.00	26.56	Peak
2	4882.000	22.61	11.48	34.09	54.00	19.91	Average

Horizontal

Project No.: CR231058645-RF
 Tester: Mack Huang
 Polarization: horizontal
 Note: BDR Middle Channel

Date: 2024-01-13

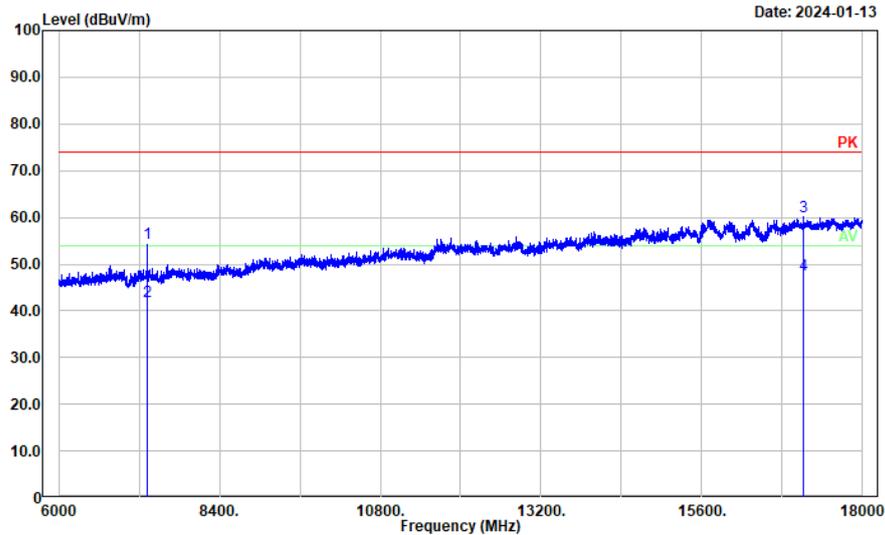


6-18GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7323.000	38.78	15.57	54.35	74.00	19.65	Peak
2	7323.000	26.37	15.57	41.94	54.00	12.06	Average
3	17112.000	31.56	28.52	60.08	74.00	13.92	Peak
4	17112.000	19.22	28.52	47.74	54.00	6.26	Average

Horizontal

Project No.: CR231058645-RF
 Tester: Mack Huang
 Polarization: Horizontal
 Note: BDR Middle Channel

Date: 2024-01-13

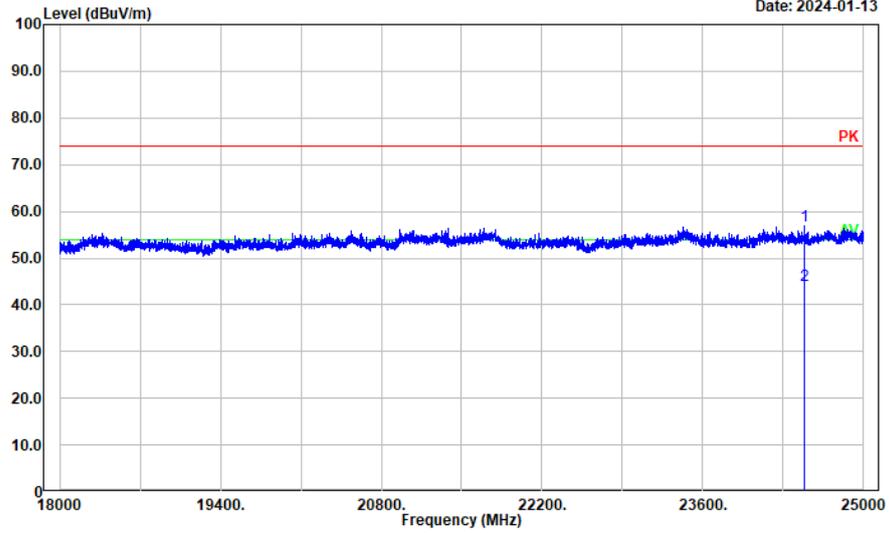


18-25GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	24482.000	51.58	5.34	56.92	74.00	17.08	Peak
2	24482.000	38.89	5.34	44.23	54.00	9.77	Average

Vertical

Project No.: CR231058645-RF
 Tester: Mack Huang
 Polarization: vertical
 Note: BDR Middle Channel

Date: 2024-01-13

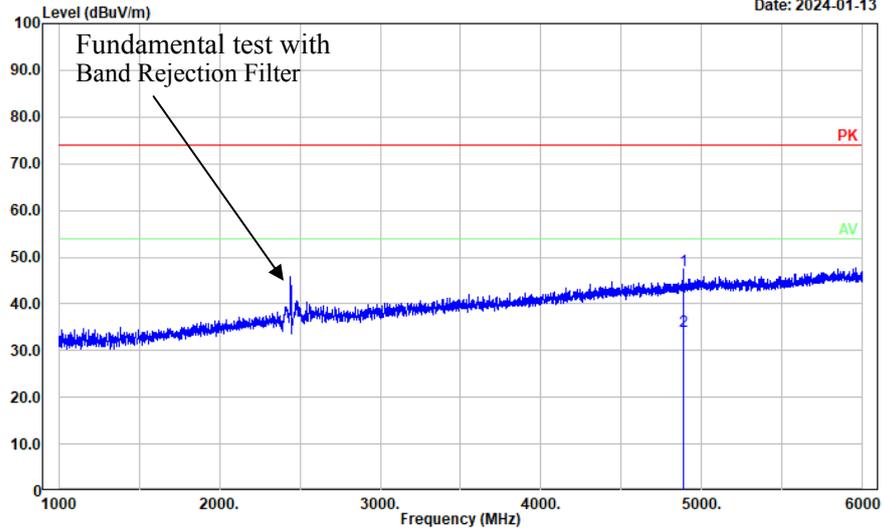


1-6GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4882.000	35.71	11.48	47.19	74.00	26.81	Peak
2	4882.000	22.54	11.48	34.02	54.00	19.98	Average

Vertical

Project No.: CR231058645-RF
 Tester: Mack Huang
 Polarization: vertical
 Note: BDR Middle Channel

Date: 2024-01-13

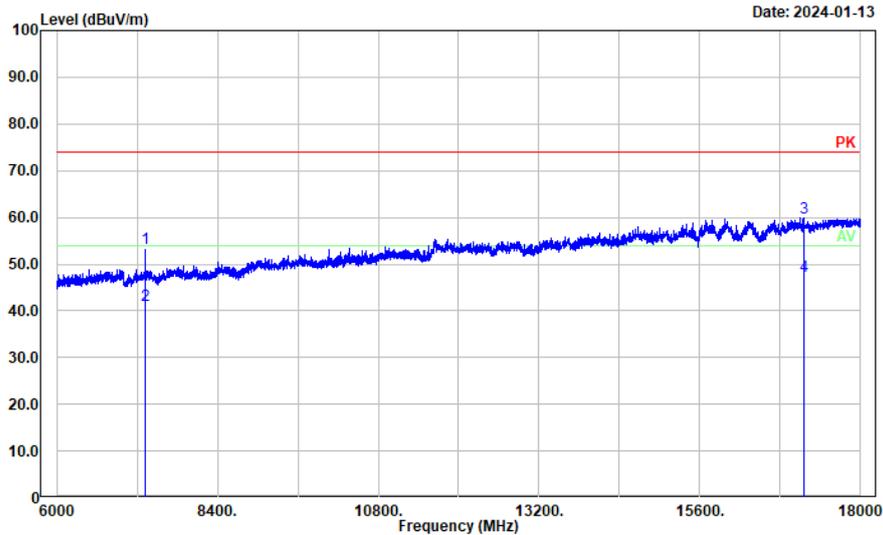


6-18GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7323.000	37.95	15.57	53.52	74.00	20.48	Peak
2	7323.000	25.70	15.57	41.27	54.00	12.73	Average
3	17160.000	31.44	28.56	60.00	74.00	14.00	Peak
4	17160.000	19.00	28.56	47.56	54.00	6.44	Average

Vertical

Project No.: CR231058645-RF
 Tester: Mack Huang
 Polarization: Vertical
 Note: BDR Middle Channel

Date: 2024-01-13

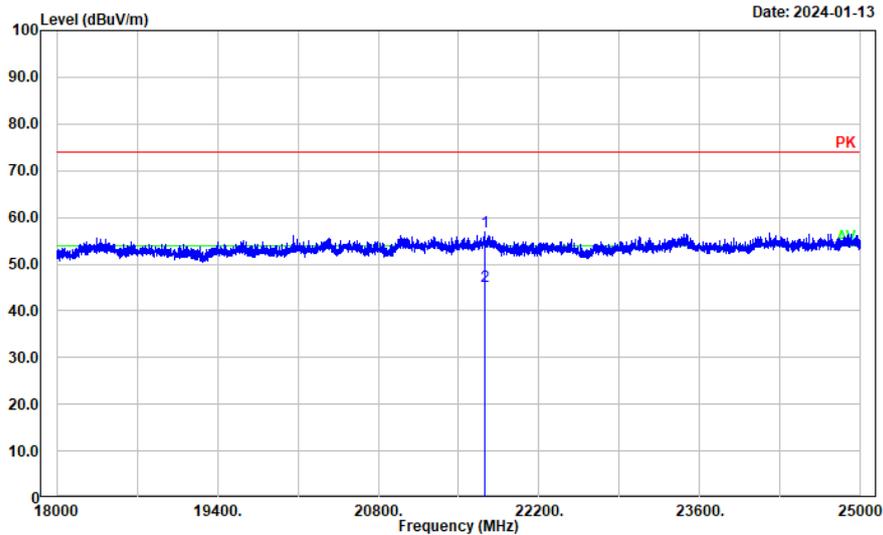

18-25GHz


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	21724.000	52.04	4.98	57.02	74.00	16.98	Peak
2	21724.000	40.41	4.98	45.39	54.00	8.61	Average

Band Edge Test Plots:
BDR Mode (GFSK) Low Channel:

Horizontal

Project No.: CR231058645-RF
 Tester: Mack Huang
 Polarization: Horizontal
 Note: BT


Date: 2024-01-13

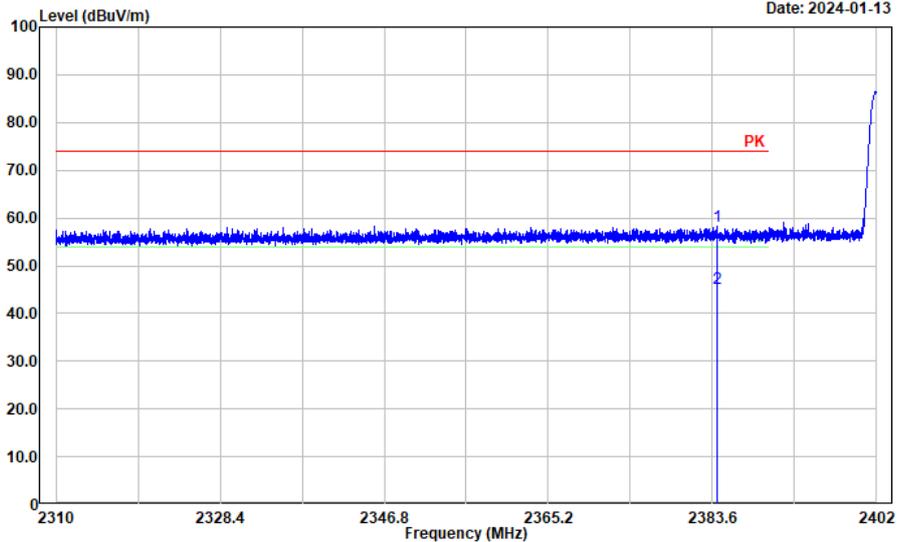

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2384.134	26.60	31.67	58.27	74.00	15.73	Peak
2	2384.134	13.60	31.67	45.27	54.00	8.73	Average

Vertical

Project No.: CR231058645-RF
 Tester: Mack Huang
 Polarization: vertical
 Note: BT

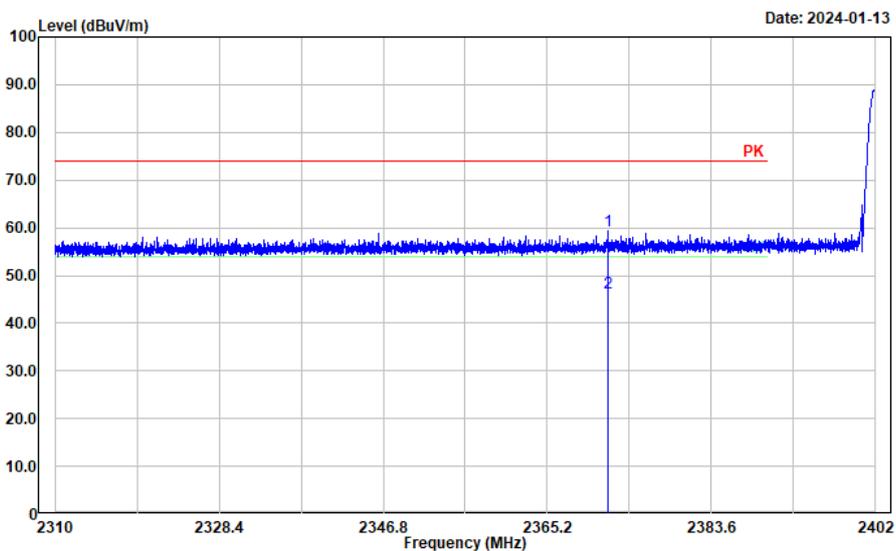


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2372.008	27.72	31.57	59.29	74.00	14.71	Peak
2	2372.008	14.80	31.57	46.37	54.00	7.63	Average

BDR Mode (GFSK) High Channel:

Horizontal

Project No.: CR231058645-RF
 Tester: Mack Huang
 Polarization: Horizontal
 Note: BT


Date: 2024-01-13

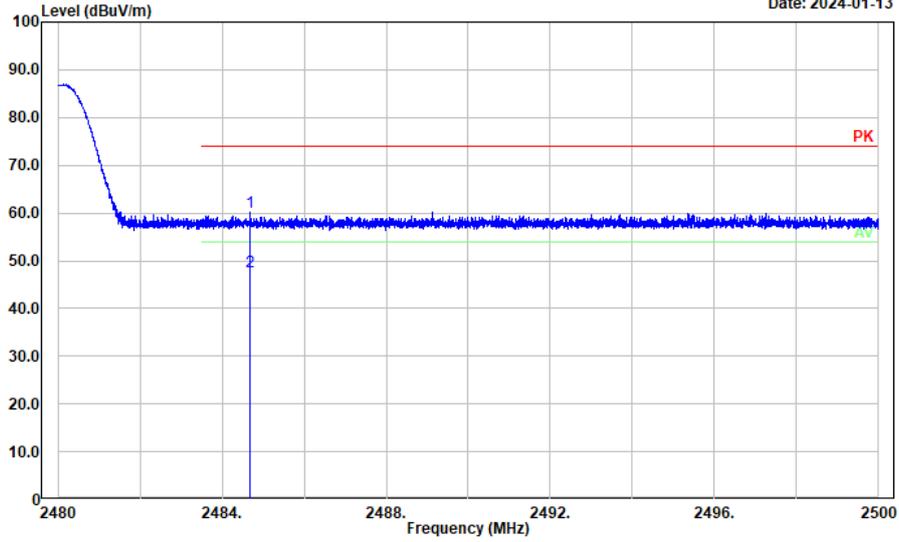

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2484.696	28.10	32.19	60.29	74.00	13.71	Peak
2	2484.696	15.49	32.19	47.68	54.00	6.32	Average


Vertical

Project No.: CR231058645-RF
 Tester: Mack Huang
 Polarization: vertical
 Note: BT

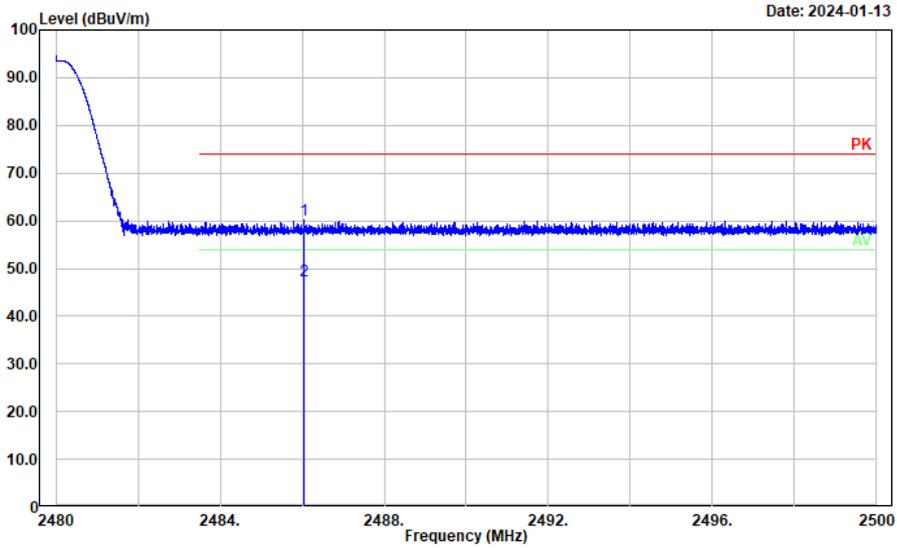


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2486.044	27.89	32.20	60.09	74.00	13.91	Peak
2	2486.044	15.12	32.20	47.32	54.00	6.68	Average

2EDR Mode ($\pi/4$ -DQPSK) Low Channel:

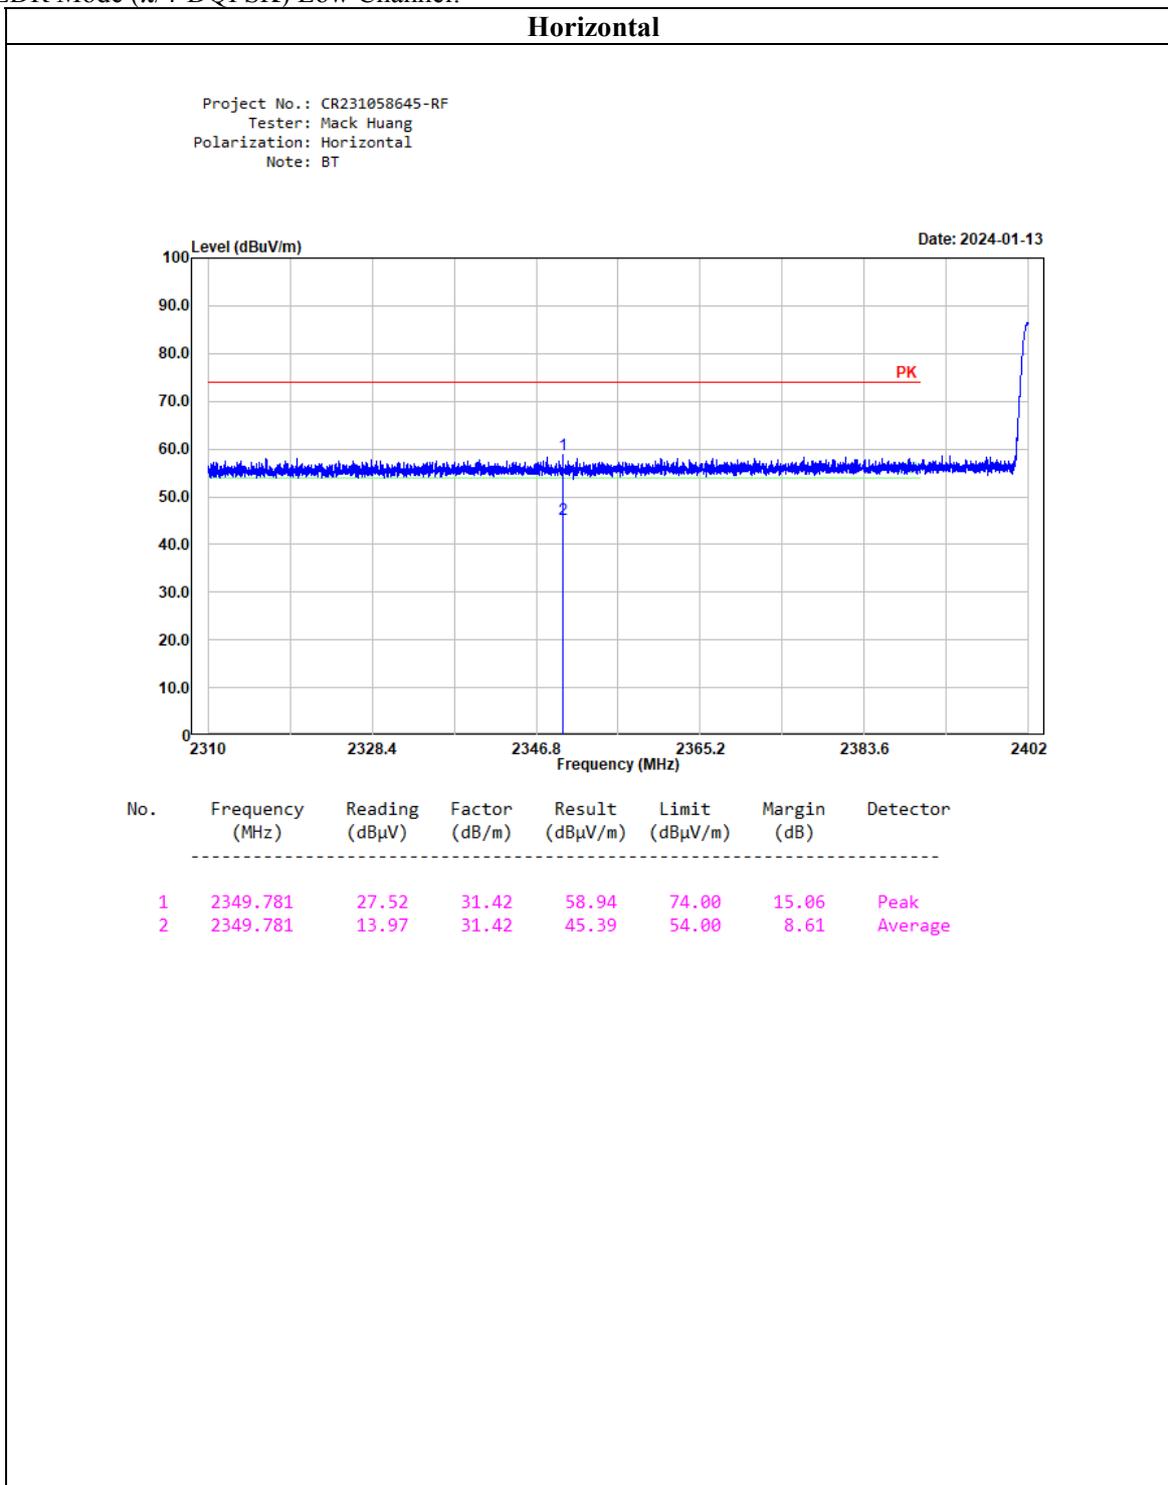


Vertical

Project No.: CR231058645-RF
 Tester: Mack Huang
 Polarization: vertical
 Note: BT

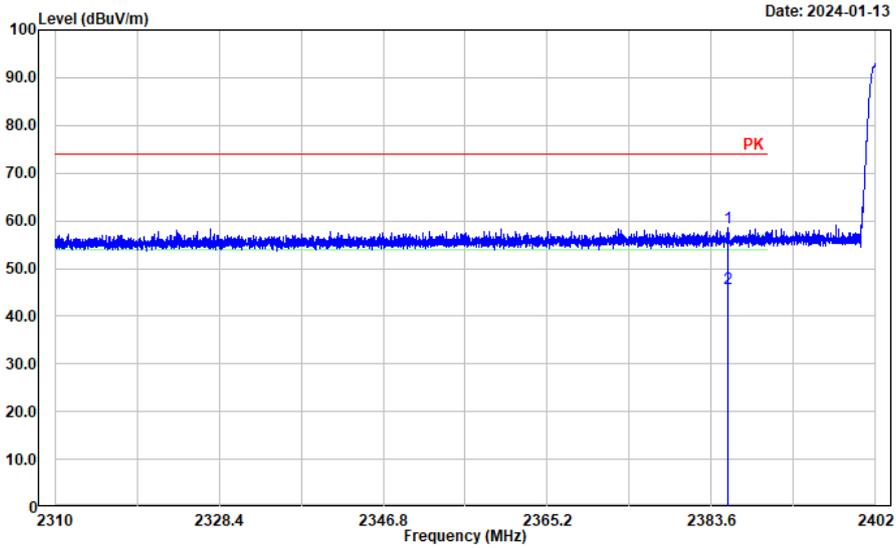


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2385.477	26.95	31.67	58.62	74.00	15.38	Peak
2	2385.477	14.06	31.67	45.73	54.00	8.27	Average

2EDR Mode ($\pi/4$ -DQPSK) High Channel:

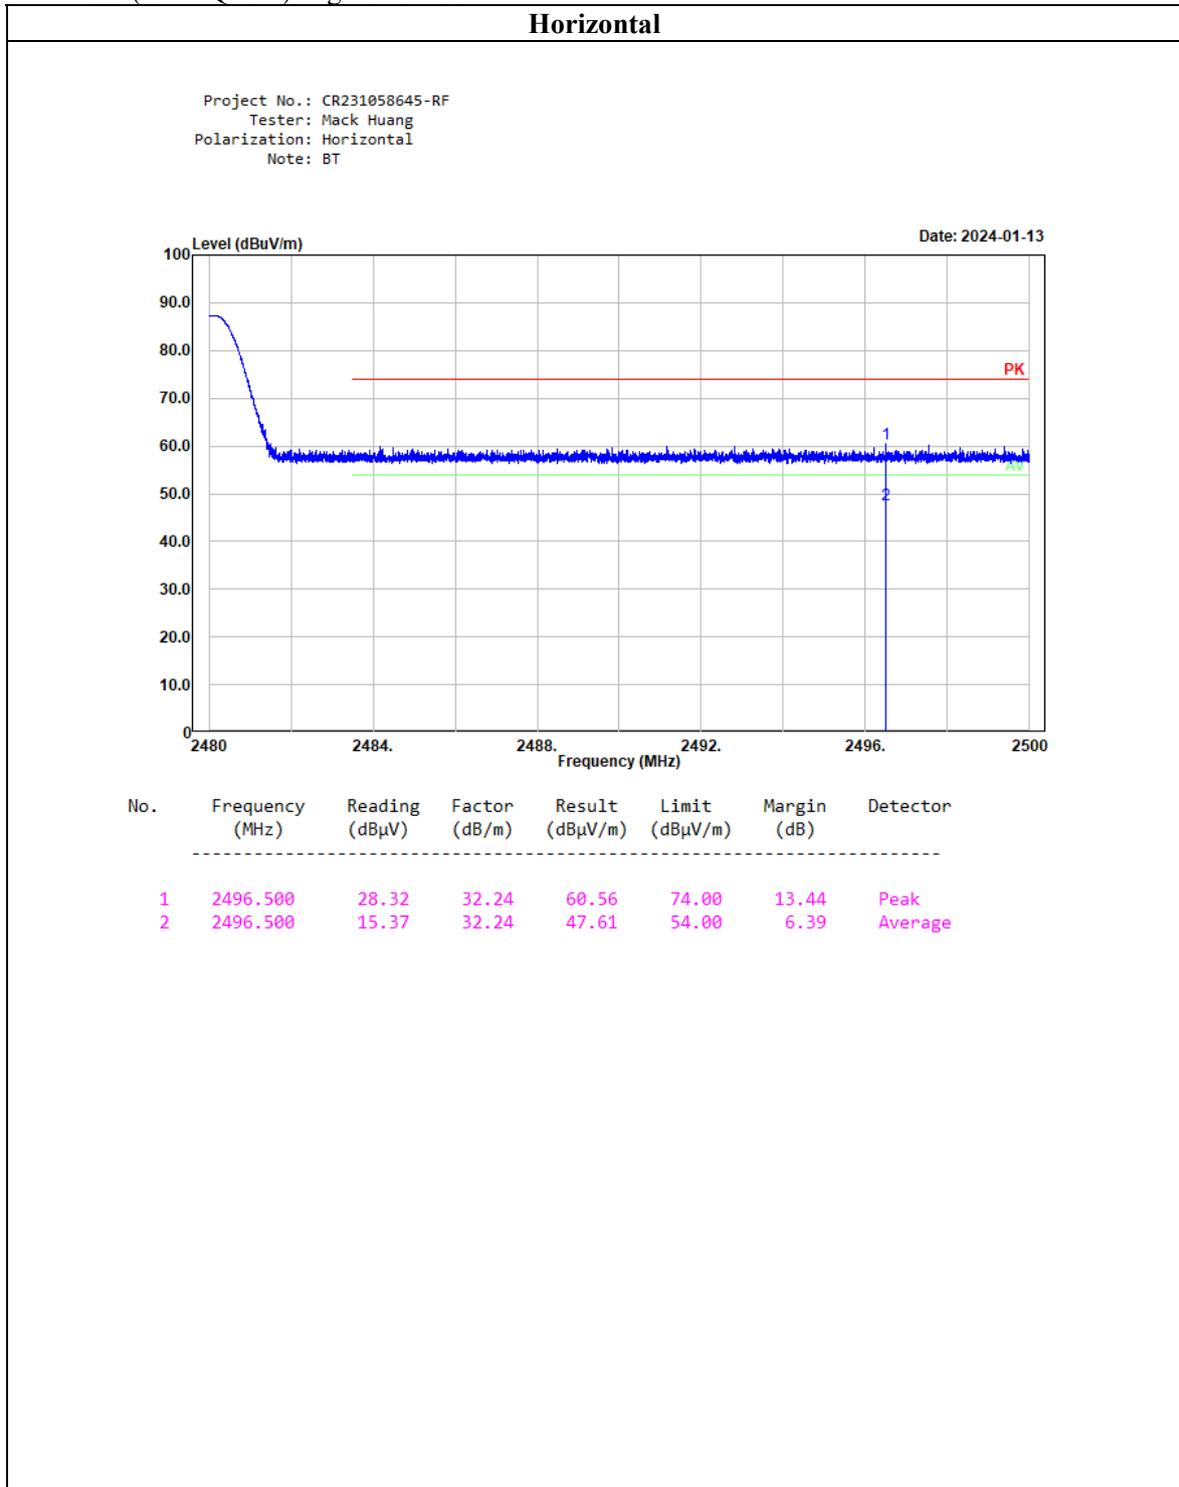

Vertical

Project No.: CR231058645-RF
 Tester: Mack Huang
 Polarization: vertical
 Note: BT

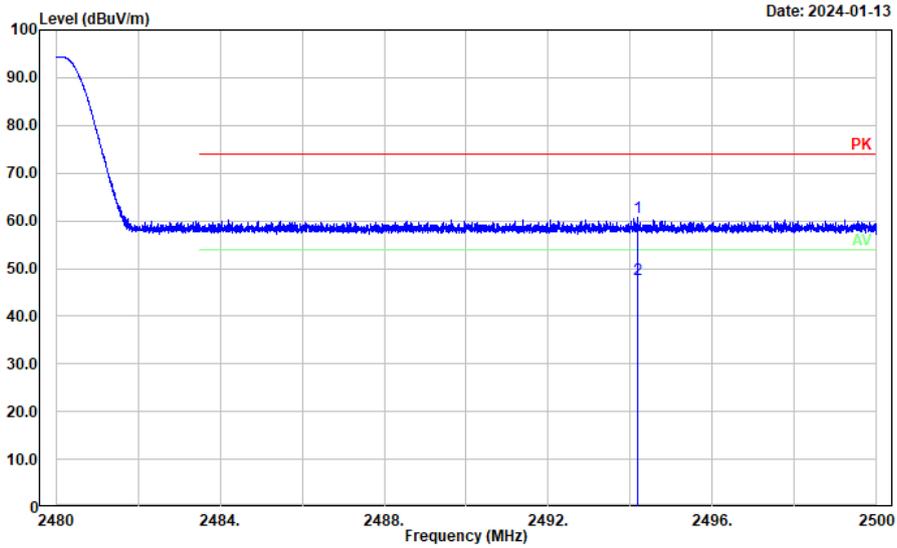


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2494.172	28.47	32.23	60.70	74.00	13.30	Peak
2	2494.172	15.45	32.23	47.68	54.00	6.32	Average

3EDR Mode (8DPSK) Low Channel:

Horizontal

Project No.: CR231058645-RF
 Tester: Mack Huang
 Polarization: Horizontal
 Note: BT


Date: 2024-01-13

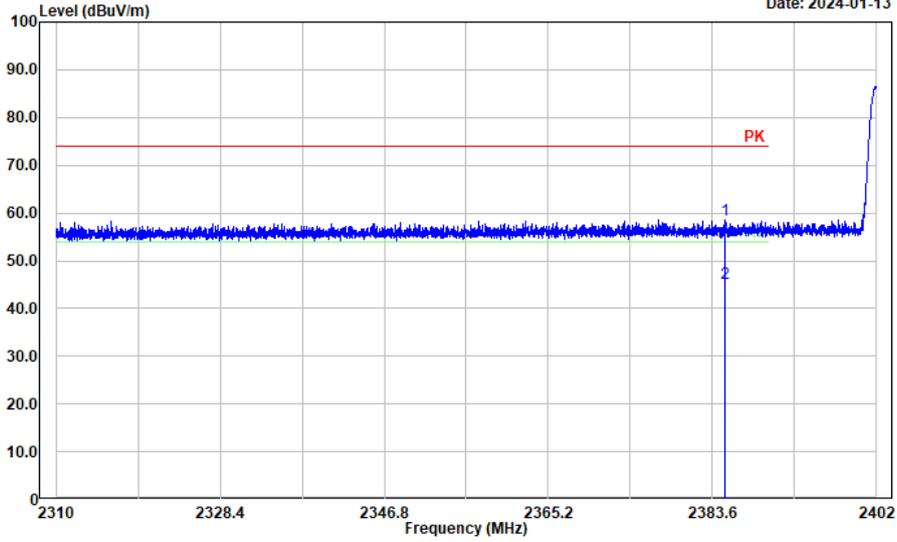

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2385.017	26.96	31.67	58.63	74.00	15.37	Peak
2	2385.017	13.70	31.67	45.37	54.00	8.63	Average

Vertical

Project No.: CR231058645-RF
 Tester: Mack Huang
 Polarization: vertical
 Note: BT

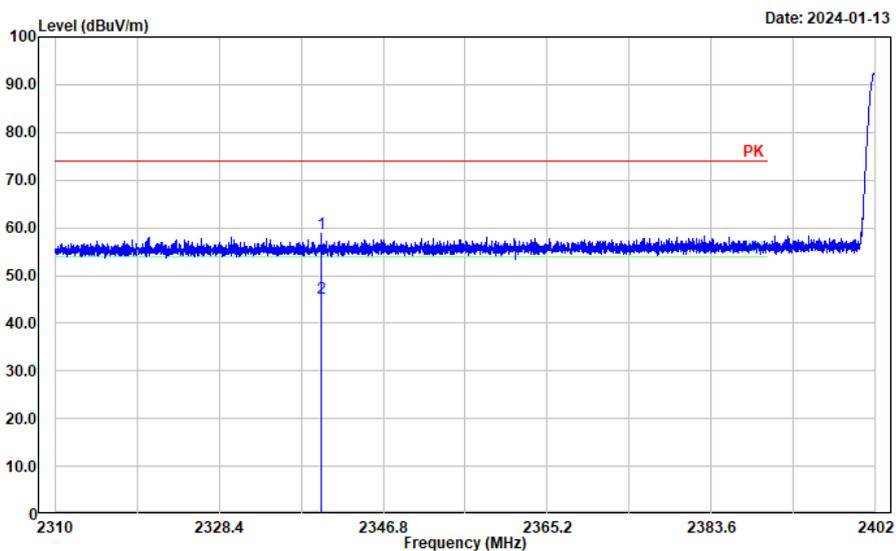


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2339.808	27.51	31.36	58.87	74.00	15.13	Peak
2	2339.808	14.01	31.36	45.37	54.00	8.63	Average

3EDR Mode (8DPSK) High Channel:

Horizontal

Project No.: CR231058645-RF
 Tester: Mack Huang
 Polarization: Horizontal
 Note: BT


Date: 2024-01-13

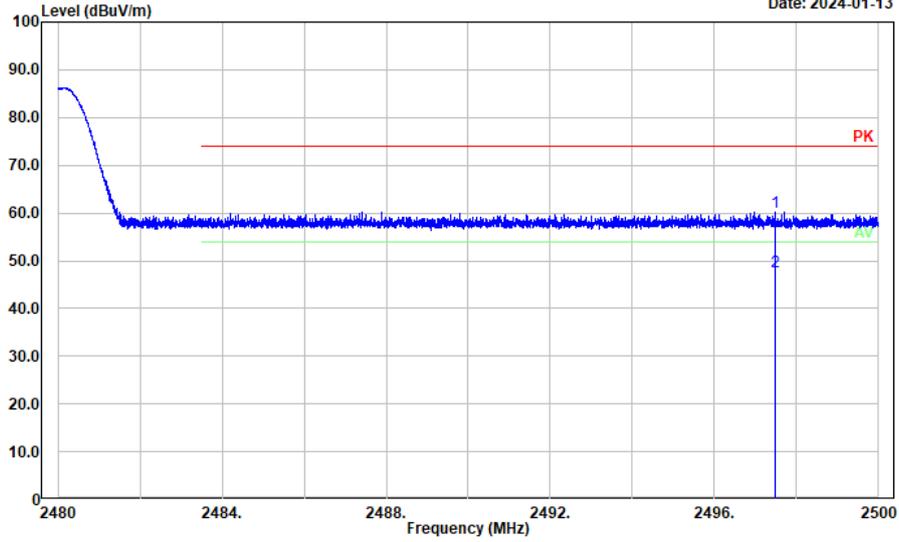

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2497.484	28.03	32.24	60.27	74.00	13.73	Peak
2	2497.484	15.41	32.24	47.65	54.00	6.35	Average

Vertical

Project No.: CR231058645-RF
 Tester: Mack Huang
 Polarization: vertical
 Note: BT

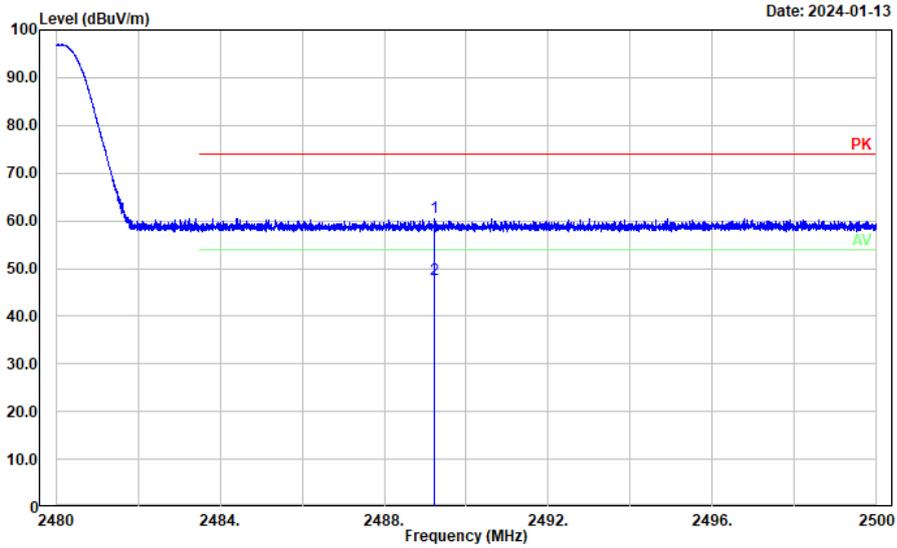

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2489.216	28.36	32.21	60.57	74.00	13.43	Peak
2	2489.216	15.44	32.21	47.65	54.00	6.35	Average

4.3 20 dB Emission Bandwidth

Serial Number:	2C04-3	Test Date:	2023/12/11
Test Site:	RF	Test Mode:	Transmitting
Tester:	Lingling Li	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	23	Relative Humidity: (%)	54	ATM Pressure: (kPa)	101.54
----------------------	----	---------------------------	----	------------------------	--------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101590	2022/11/25	2023/11/24
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A


* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Modes	Test Channel	Test Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Lowest	2402	0.957
	Middle	2441	0.954
	Highest	2480	0.957
EDR Mode ($\pi/4$ -DQPSK)	Lowest	2402	1.284
	Middle	2441	1.287
	Highest	2480	1.287
EDR Mode (8DPSK)	Lowest	2402	1.29
	Middle	2441	1.293
	Highest	2480	1.293


BDR Mode (GFSK)

Lowest Channel

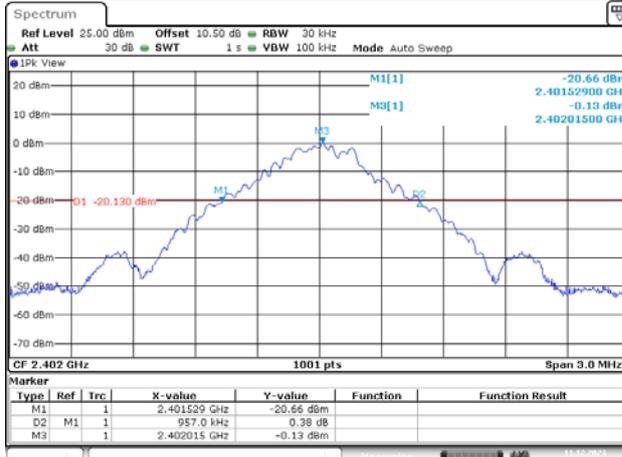


ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 10:05:22

Middle Channel

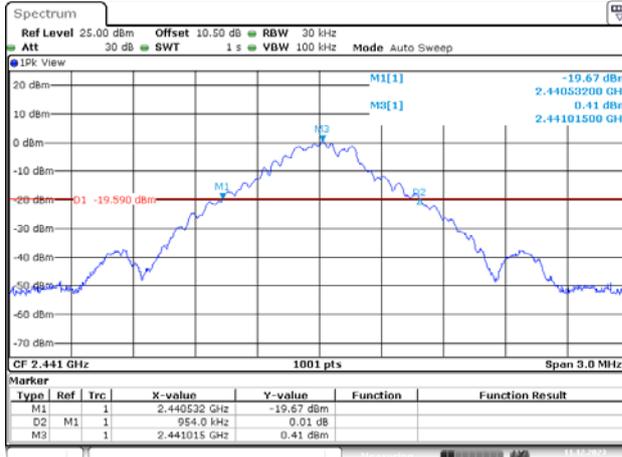

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 10:36:27


Highest Channel

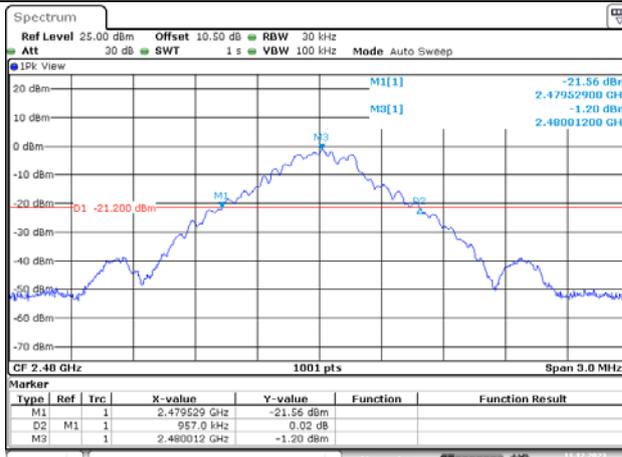

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 10:43:24


EDR Mode ($\pi/4$ -DQPSK)

Lowest Channel

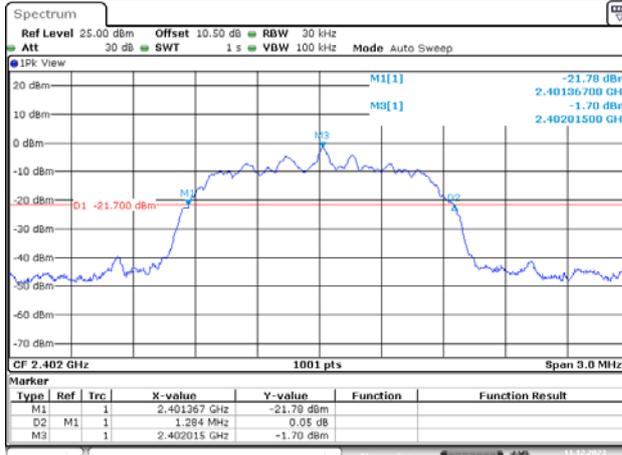


ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 10:07:51

Middle Channel

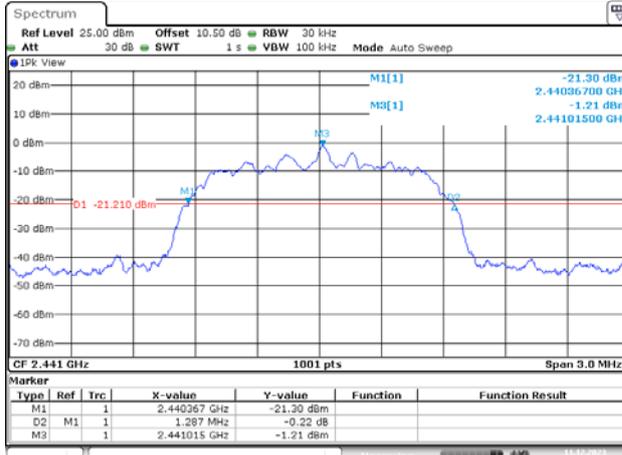

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 10:38:36


Highest Channel

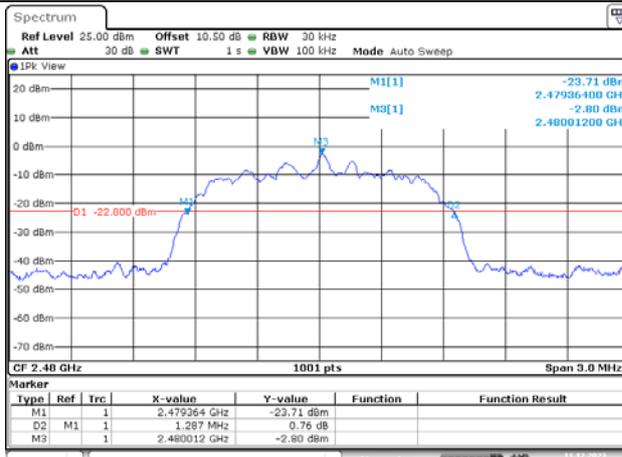

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 10:45:34


EDR Mode (8DPSK)

Lowest Channel

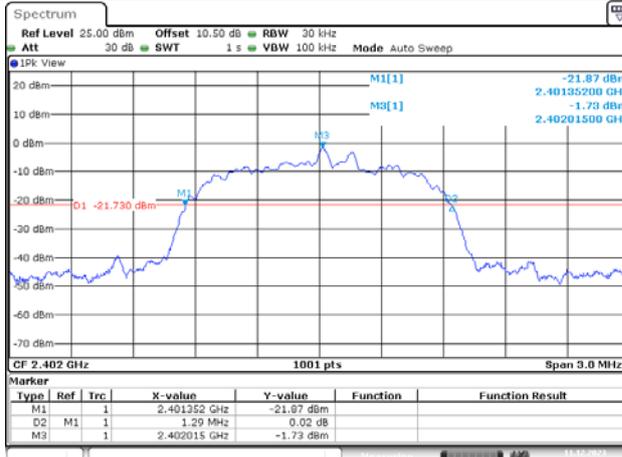


ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 10:10:29

Middle Channel

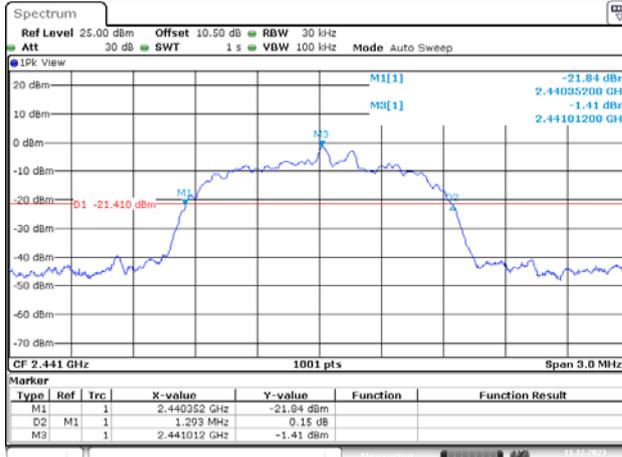

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 10:40:44

Highest Channel

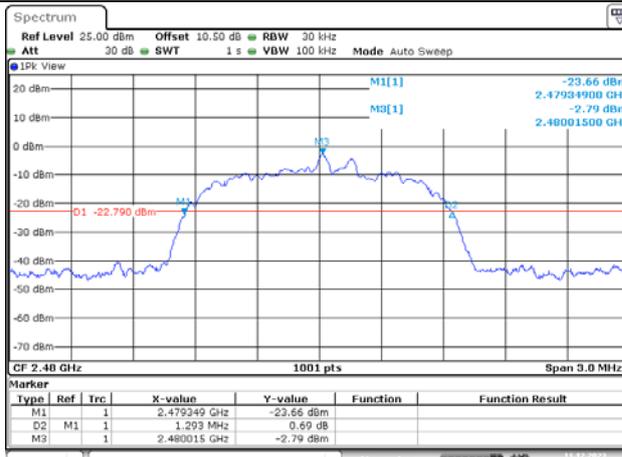

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 10:48:02

4.4 Channel Separation

Serial Number:	2C04-3	Test Date:	2023/12/11
Test Site:	RF	Test Mode:	Transmitting
Tester:	Lingling Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23	Relative Humidity: (%)	54	ATM Pressure: (kPa)	101.54
----------------------	----	---------------------------	----	------------------------	--------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101590	2022/11/25	2023/11/24
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A


* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Test Modes	Test Frequency (MHz)	Channel Separation (MHz)	Limits (MHz)
BDR Mode (GFSK)	2402	1.004	0.638
	2441	1.002	0.636
	2480	1.002	0.638
EDR Mode ($\pi/4$ -DQPSK)	2402	1	0.856
	2441	1	0.858
	2480	1.002	0.858
EDR Mode (8DPSK)	2402	1.002	0.860
	2441	1	0.862
	2480	1.002	0.862

BDR Mode (GFSK)


Lowest Channel

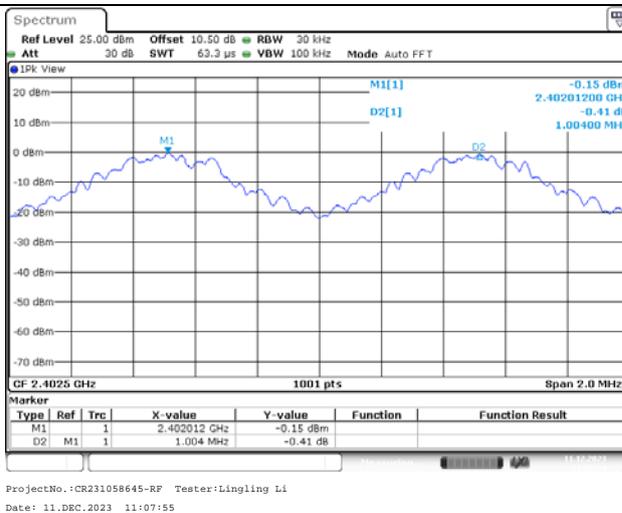

Middle Channel

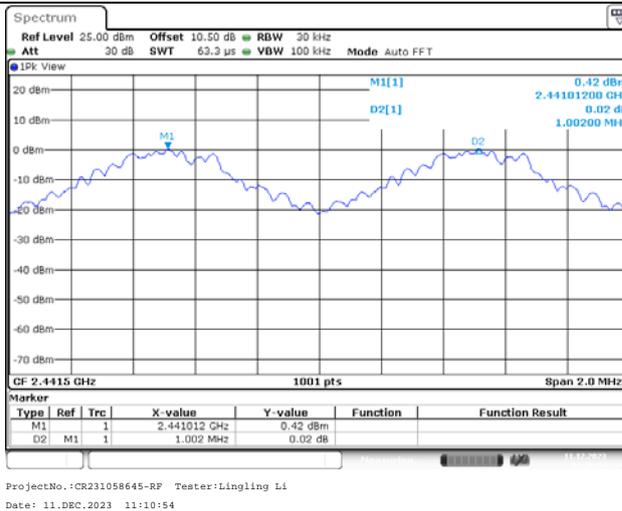


Highest Channel

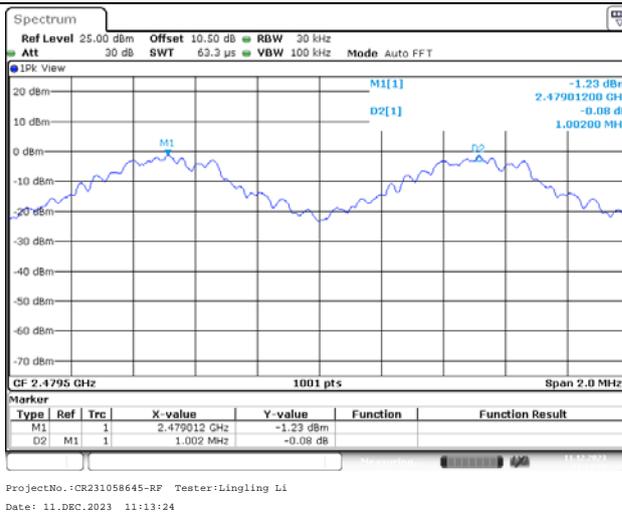


EDR Mode ($\pi/4$ -DQPSK)

Lowest Channel

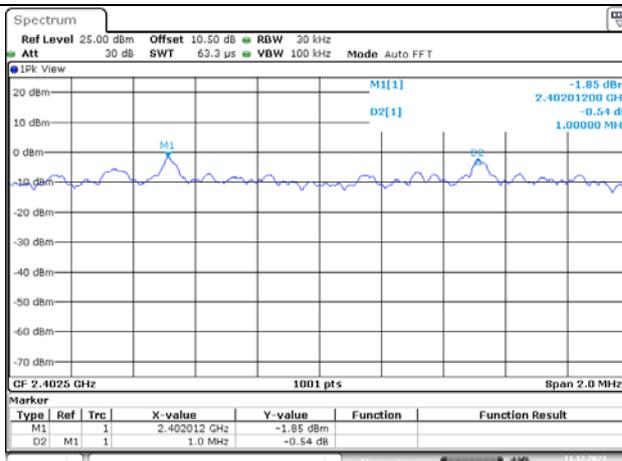


ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 11:08:26

Middle Channel

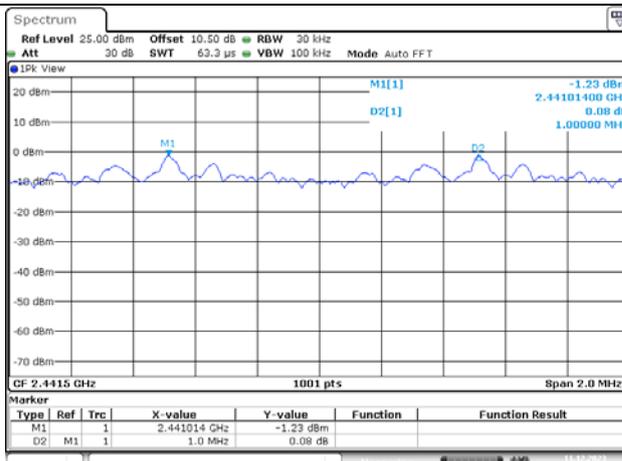




ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 11:11:47

Highest Channel

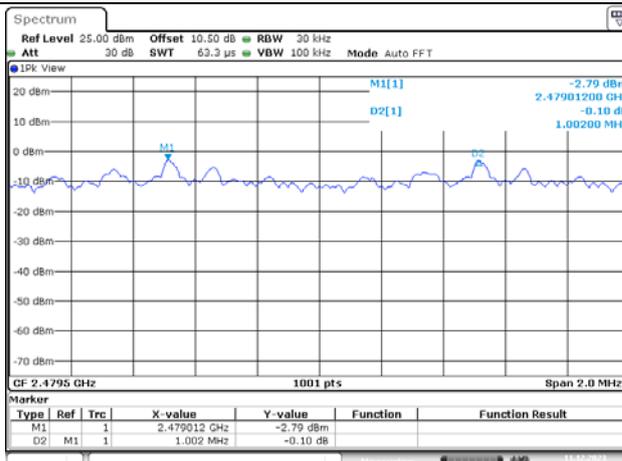

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 11:14:07

EDR Mode (8DPSK)
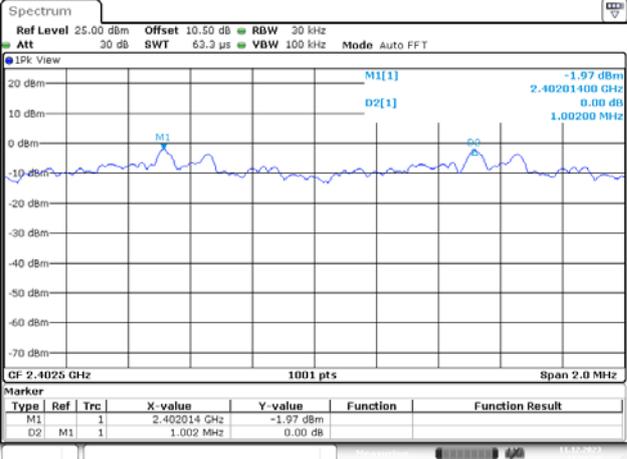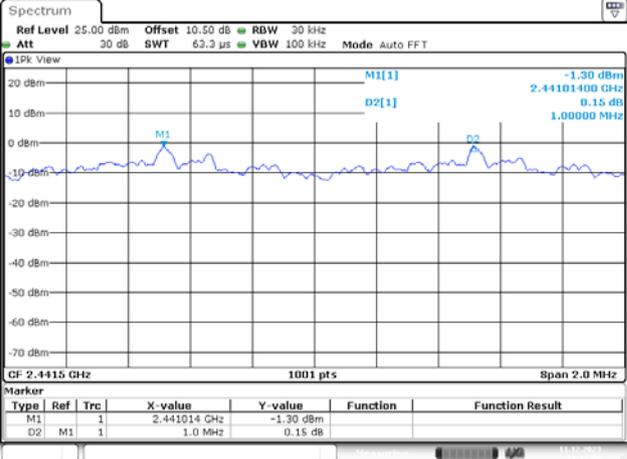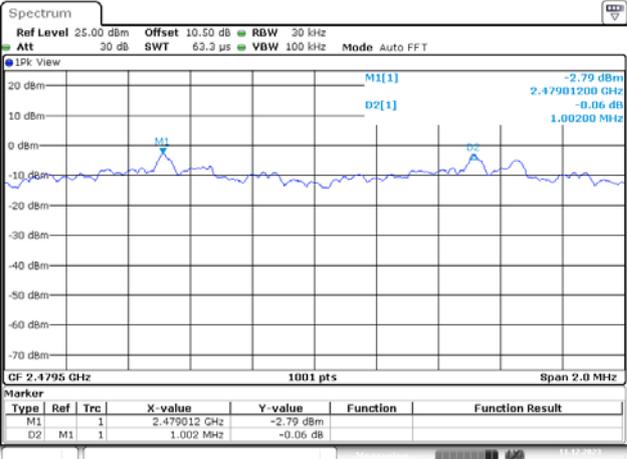
<p>Lowest Channel</p>	 <p>ProjectNo.:CR231058645-RF Tester:Lingling Li Date: 11.DEC.2023 11:09:34</p>
<p>Middle Channel</p>	 <p>ProjectNo.:CR231058645-RF Tester:Lingling Li Date: 11.DEC.2023 11:12:40</p>
<p>Highest Channel</p>	 <p>ProjectNo.:CR231058645-RF Tester:Lingling Li Date: 11.DEC.2023 11:14:53</p>

4.5 Number of Hopping Frequency

Serial Number:	2C04-3	Test Date:	2023/12/11
Test Site:	RF	Test Mode:	Transmitting
Tester:	Lingling Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23	Relative Humidity: (%)	54	ATM Pressure: (kPa)	101.54
----------------------	----	---------------------------	----	------------------------	--------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101590	2022/11/25	2023/11/24
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A


* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Modes	Frequency Range (MHz)	Number of Hopping Channel	Limits
GFSK	2400-2483.5	79	≥15
$\pi/4$ -DQPSK	2400-2483.5	79	≥15
8DPSK	2400-2483.5	79	≥15


Number of Hopping Channel

**BDR Mode
(GFSK)**

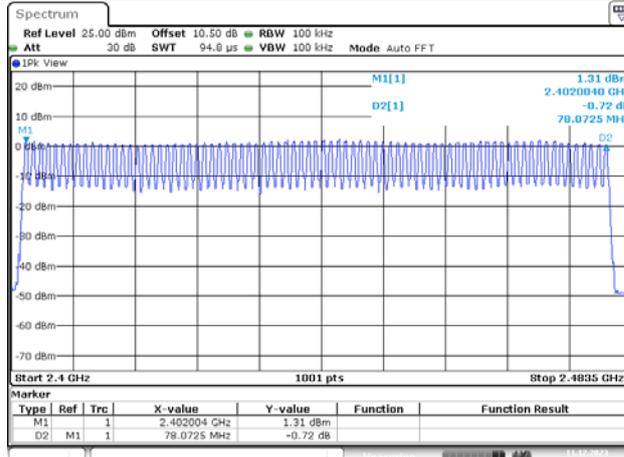


ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 10:53:40

**EDR Mode
($\pi/4$ -DQPSK)**

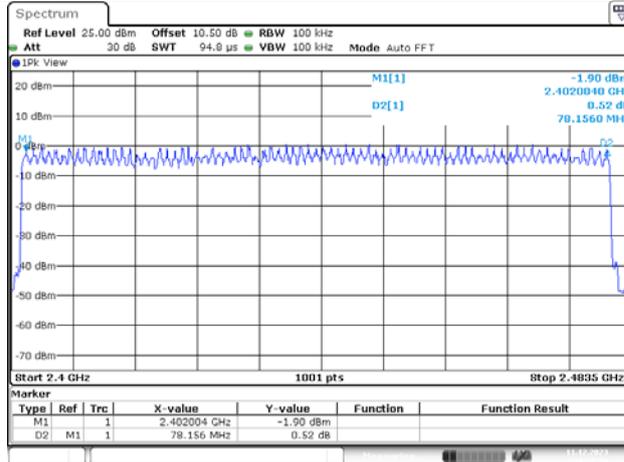

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 10:58:57

**EDR Mode
(8DPSK)**

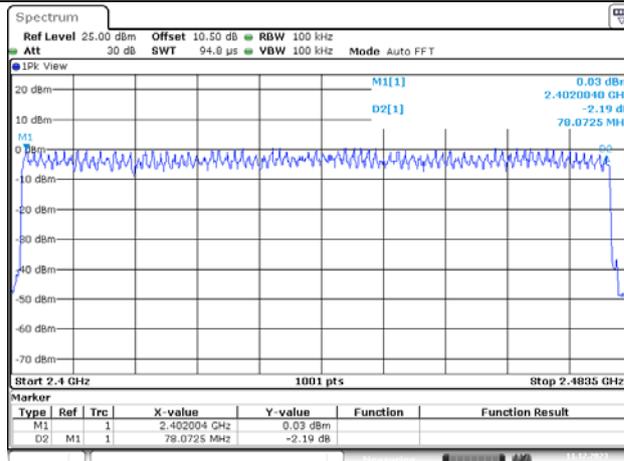

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 11:04:44

4.6 Time of Occupancy (Dwell Time)

Serial Number:	2C04-3	Test Date:	2023/12/11
Test Site:	RF	Test Mode:	Transmitting
Tester:	Lingling Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23	Relative Humidity: (%)	54	ATM Pressure: (kPa)	101.54
----------------------	----	---------------------------	----	------------------------	--------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101590	2022/11/25	2023/11/24
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Modes	Packet Type	Test Frequency (MHz)	Pulse width (ms)	Result (s)	Limit (s)
BDR Mode (GFSK)	DH1	2441	0.383	0.123	0.400
	DH3	2441	1.638	0.262	0.400
	DH5	2441	2.890	0.308	0.400
EDR Mode ($\pi/4$ -DQPSK)	2DH1	2441	0.388	0.124	0.400
	2DH3	2441	1.641	0.263	0.400
	2DH5	2441	2.890	0.308	0.400
EDR Mode (8DPSK)	3DH1	2441	0.388	0.124	0.400
	3DH3	2441	1.641	0.263	0.400
	3DH5	2441	2.895	0.309	0.400

Note:


DH1:Dwell time=Pulse time (ms) \times (1600/2/79) \times 31.6 s

DH3:Dwell time=Pulse time (ms) \times (1600/4/79) \times 31.6 s


DH5:Dwell time=Pulse time (ms) \times (1600/6/79) \times 31.6 s

BDR Mode (GFSK)


DH1:

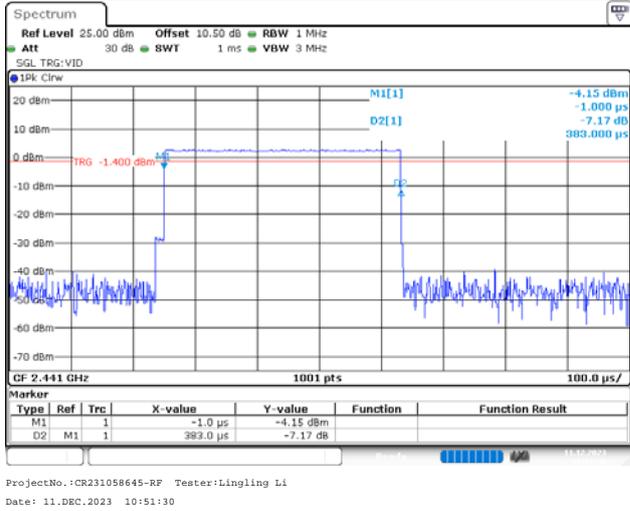

DH3:

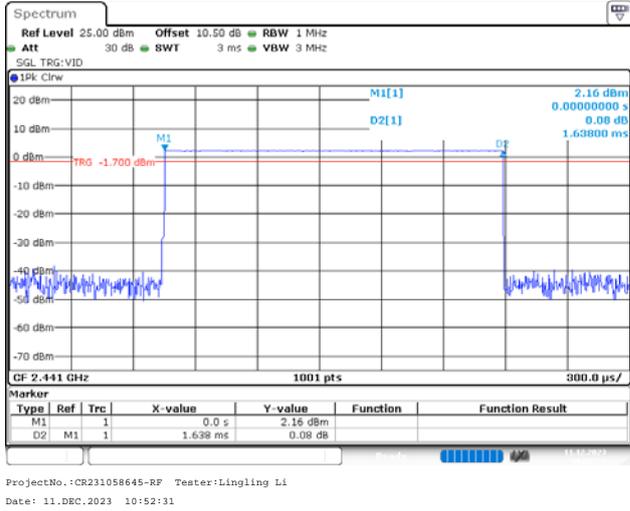


DH5:

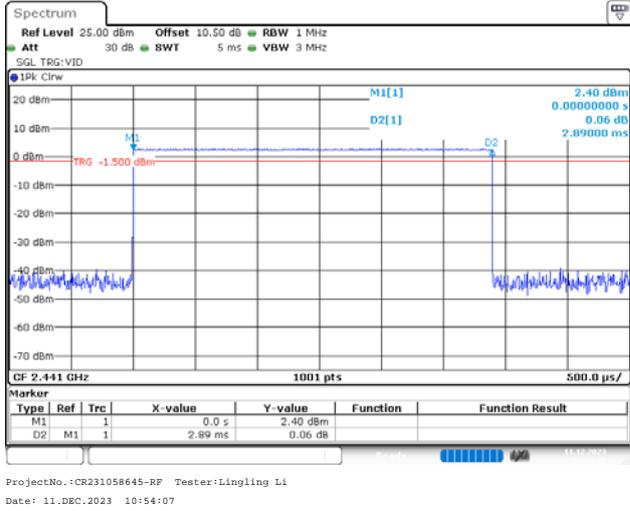


EDR Mode ($\pi/4$ -DQPSK)


2DH1:

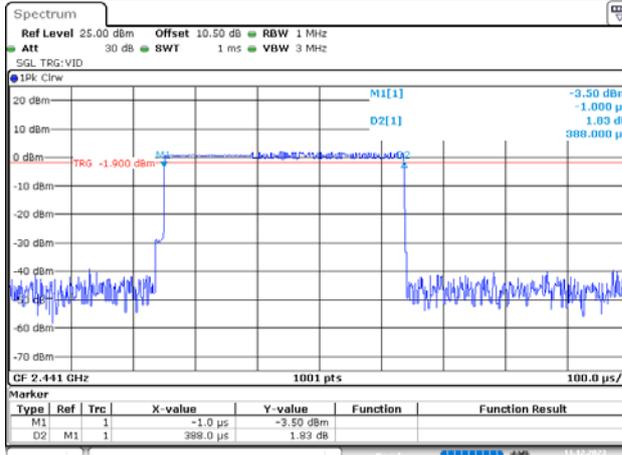

2DH3:

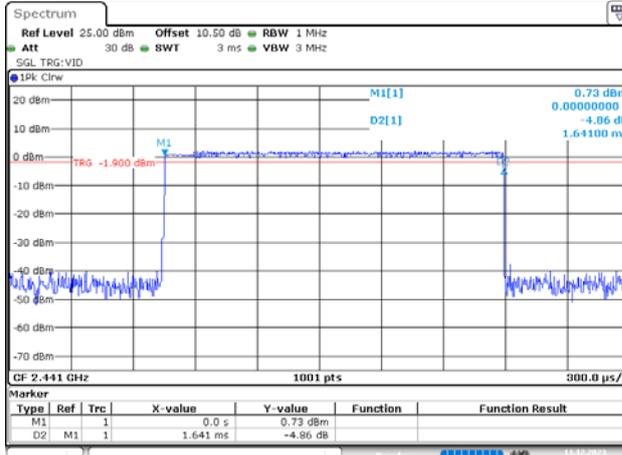


2DH5:

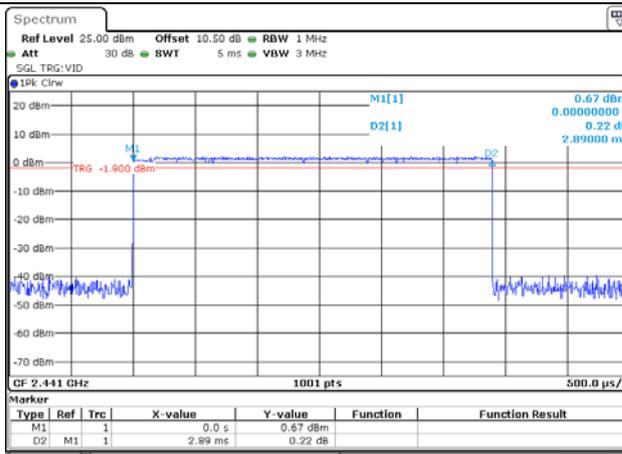


EDR Mode (8DPSK)

3DH1:

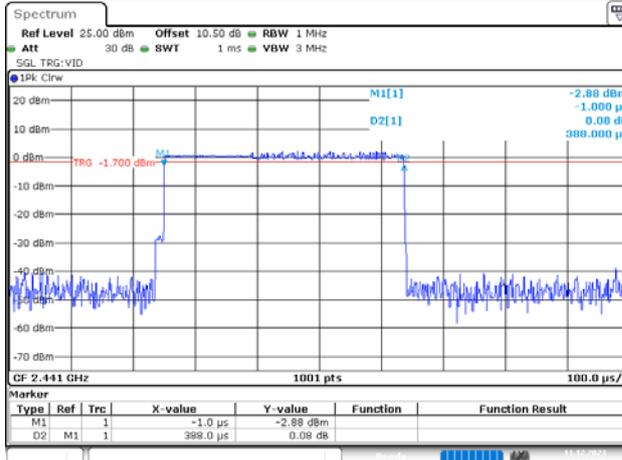


ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 11:02:26

3DH3:

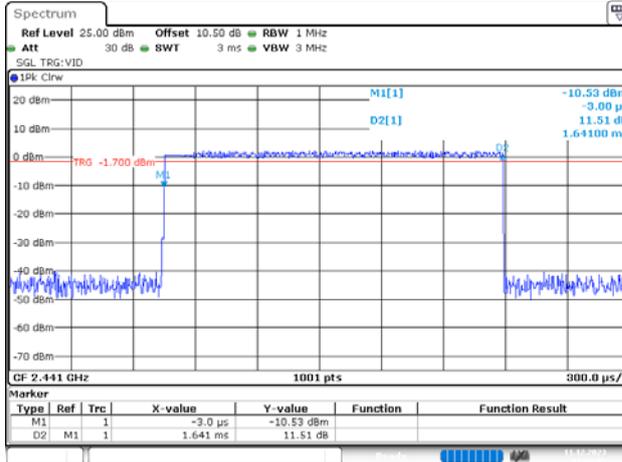

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 11:03:06

3DH5:

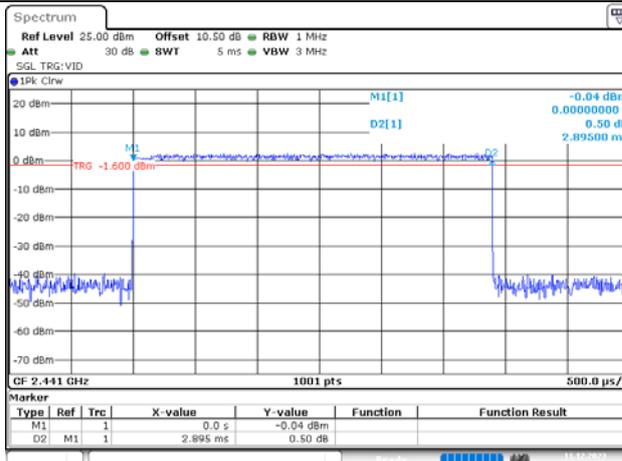

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 11:05:12

4.7 Maximum Conducted Output Power

Serial Number:	2C04-3	Test Date:	2023/12/11
Test Site:	RF	Test Mode:	Transmitting
Tester:	Lingling Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23	Relative Humidity: (%)	54	ATM Pressure: (kPa)	101.54
----------------------	----	---------------------------	----	------------------------	--------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Anritsu	Power Meter	ML2495A	1106009	2023/8/4	2024/8/3
Anritsu	Pulse Power Sensor	MA2411A	10780	2023/8/4	2024/8/3
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Modes	Test Frequency (MHz)	Peak Conducted Output Power (dBm)	Limits (dBm)
BDR Mode (GFSK)	2402	2.01	21
	2441	2.58	21
	2480	0.98	21
EDR Mode ($\pi/4$ -DQPSK)	2402	2.1	21
	2441	2.52	21
	2480	0.87	21
EDR Mode (8DPSK)	2402	2.18	21
	2441	2.54	21
	2480	0.98	21

4.8 100 kHz Bandwidth of Frequency Band Edge

Serial Number:	2C04-3	Test Date:	2023/12/11
Test Site:	RF	Test Mode:	Transmitting
Tester:	Lingling Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23	Relative Humidity: (%)	54	ATM Pressure: (kPa)	101.54
----------------------	----	---------------------------	----	------------------------	--------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101590	2022/11/25	2023/11/24
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Band Edge, Single Channel

**BDR Mode
(GFSK),
Left Side**

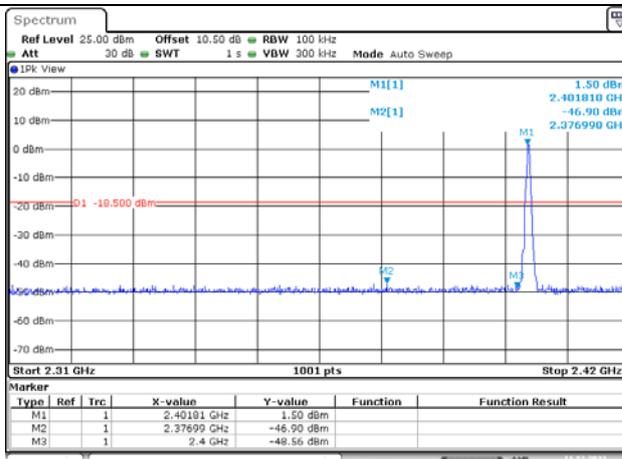

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 10:05:40


**BDR Mode
(GFSK),
Right Side**

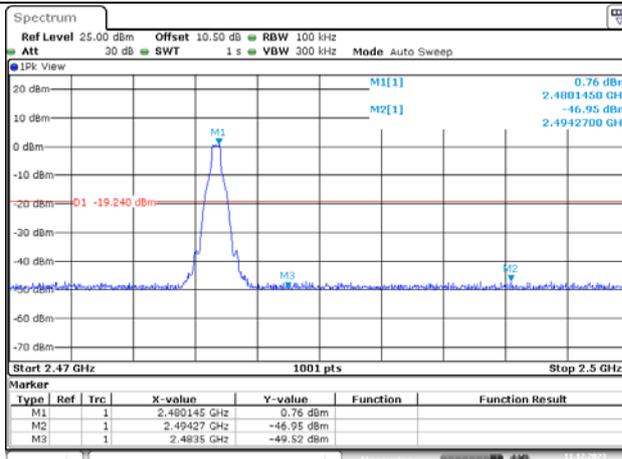

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 10:43:43


Band Edge, Single Channel

**EDR Mode
($\pi/4$ -DQPSK),
Left Side**

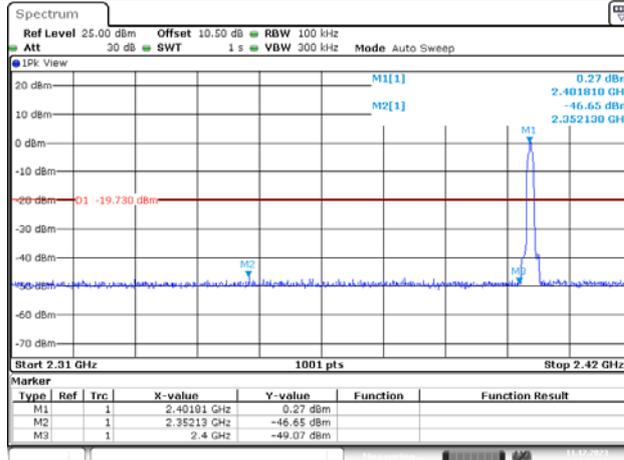

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 10:08:10


**EDR Mode
($\pi/4$ -DQPSK),
Right Side**

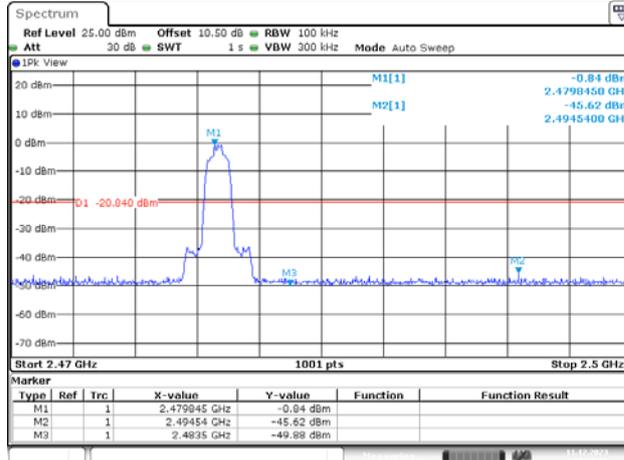

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 10:46:05


Band Edge, Single Channel

**EDR Mode
(8DPSK),
Left Side**

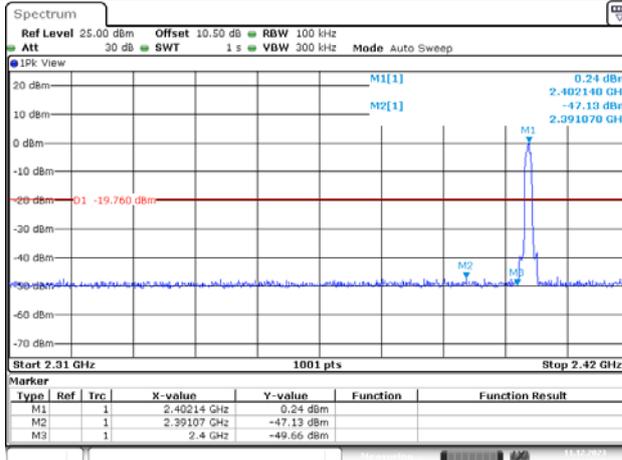

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 10:10:48


**EDR Mode
(8DPSK),
Right Side**

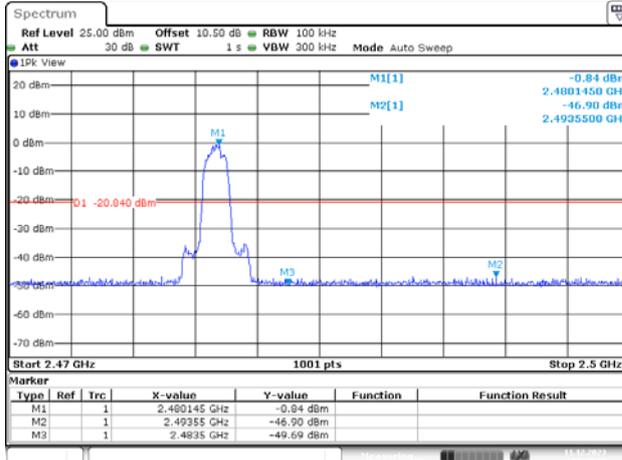

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 10:48:21


Band Edge, Hopping Channel

**BDR Mode
(GFSK),
Left Side**

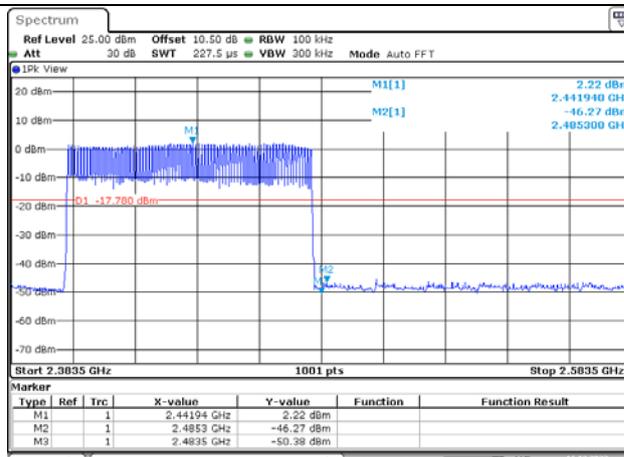

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 10:55:52


**BDR Mode
(GFSK),
Right Side**

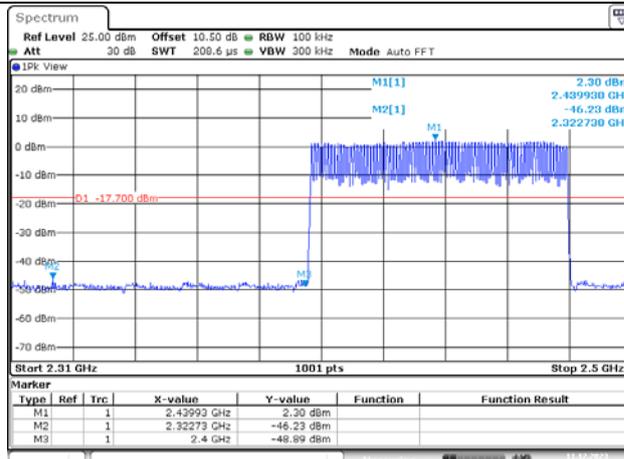

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 10:54:55


Band Edge, Hopping Channel

**EDR Mode
($\pi/4$ -DQPSK),
Left Side**

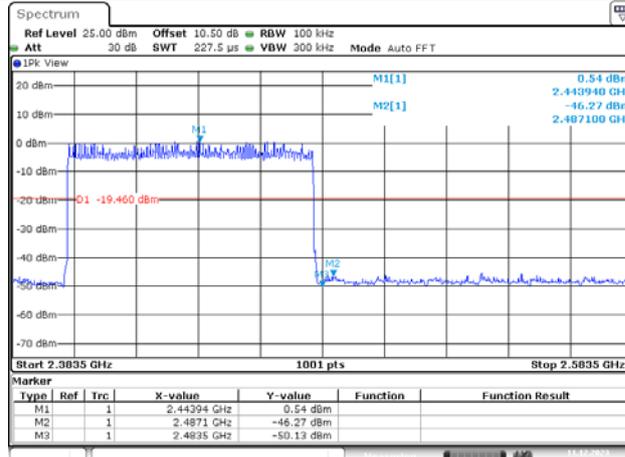

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 11:01:10


**EDR Mode
($\pi/4$ -DQPSK),
Right Side**

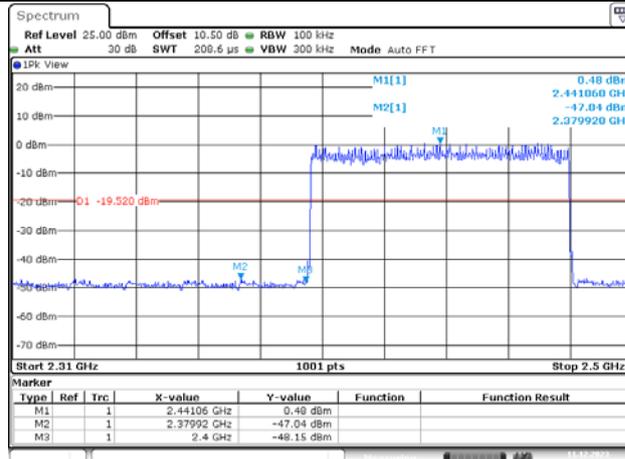

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 11:00:14


Band Edge, Hopping Channel

**EDR Mode
(8DPSK),
Left Side**

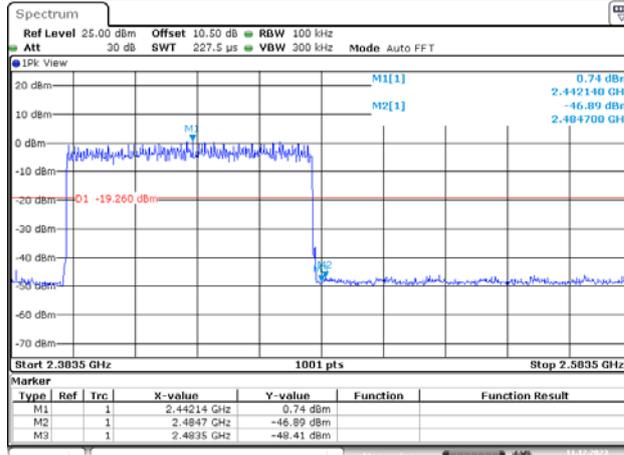

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 11:07:07

**EDR Mode
(8DPSK),
Right Side**

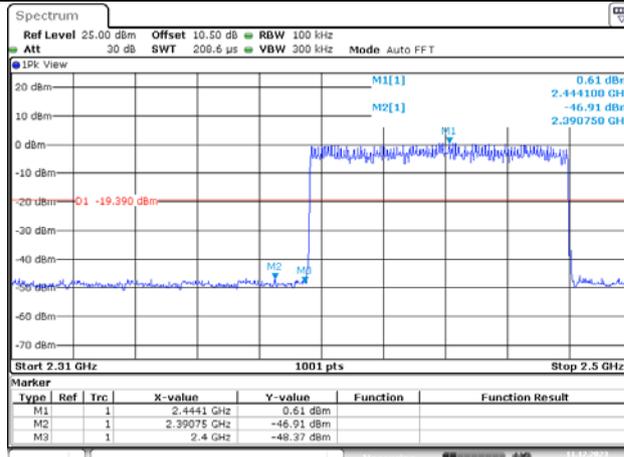

ProjectNo.:CR231058645-RF Tester:Lingling Li
Date: 11.DEC.2023 11:06:20

5. RF EXPOSURE EVALUATION

5.1 Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

5.2 Measurement Result

The max conducted power including tune-up tolerance is 3 dBm (2mW).

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 2/5 * (\sqrt{2.480}) = 0.6 < 3.0$

Result: Compliant. The stand-alone SAR test is not necessary.

6. EUT PHOTOGRAPHS

Please refer to the attachment CR231058645-EXP EUT EXTERNAL PHOTOGRAPHS and CR231058645-INP EUT INTERNAL PHOTOGRAPHS

7. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR231058645-00B-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====