FCC RADIO TEST REPORT

FCC ID	:	**A4RGGE4J**
Equipment	:	**Wireless Device**
Model Name	:	**GGE4J**
Applicant	:	**Google LLC** **1600 Amphitheatre Parkway,** **Mountain View, California, 94043 USA**
Standard	:	**47 CFR FCC Part 15.519**

The product was received on Mar. 14, 2024, and testing was performed from Apr. 09, 2024 to Apr. 16, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory
No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

Table of Contents

History of this test report **3**

Summary of Test Result **4**

1 General Description **5**

1.1 Product Feature of Equipment Under Test 5
1.2 Modification of EUT 5
1.3 Type of EUT 6
1.4 Testing Applied Standards 6
1.5 Testing Location Information 7
1.6 Measurement Uncertainty 7

2 Test Configuration of EUT **8**

2.1 Test Mode 8
2.2 The Worst Case Measurement Configuration 9
2.3 Test Setup Diagram 10
2.4 Support Unit used in test configuration and system 10

3 Transmitter Test Result **11**

3.1 AC Power-line Conducted Emissions 11
3.2 UWB bandwidth 12
3.3 Technical requirements for hand held UWB systems 19
3.4 Peak Power Measurement 22
3.5 Radiated Emissions 29

4 Test Equipment and Calibration Data **60**

Appendix A. Conducted Emissions Test Results

Appendix B. Setup Photographs

History of this test report

Report No.	Version	Description	Issue Date
FR420107I	01	Initial issue of report	Apr. 23, 2024
FR420107I	02	Revise UWB bandwidth and Radiated Emissions This report is an updated version, replacing the report issued on Apr. 23, 2024.	Apr. 26, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1	15.203	Antenna Requirement	PASS	15.203
3.1	15.207	AC Power-line Conducted Emissions	PASS	15.207
3.2	15.503	UWB Bandwidth	PASS	≥ 500MHz
3.3	15.519(a)(1)	Technical requirements for Hand Held UWB systems	PASS	15.519(a)(1)
3.4	15.519(e)	Peak Power Measurement	PASS	≤ 0 dBm/50MHz
3.5	15.519(c) /15.519(d)	Radiated Emissions	PASS	UWB Emissions: 15.519(c) GPS Emissions: 15.519(d) Digital Emissions: 15.209

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section “Measurement Uncertainty”.

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Ming Chen

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs Bluetooth, BLE, BLE (CH2-76), Wi-Fi 2.4GHz 802.11b/g/n/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, NFC, GPS and UWB. **Antenna Type** UWB: PIFA Antenna

Antenna information		
6489.6 MHz	**Peak Gain (dBi)**	-2.0
7987.2 MHz	**Peak Gain (dBi)**	1.2

Remark: The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.

EUT Information List	
S/N	Performed Test Item
41291JEAYW00T1	Equivalent Isotropic Radiated Power
	Radiated Spurious Emission
41311JEAYL01N6	Conducted Emission

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Type of EUT

Operational Condition	
EUT Power Type	AC mains: AC voltage 120 V
Type of EUT	
■	Stand-alone
☐	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: …
☐	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: …
☐	Other:

1.4 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2013
- FCC KDB 414788 D01 Radiated Test Site v01r01

Remark: The TAF code is not including all the FCC KDB listed without accreditation.

1.5 Testing Location Information

Test Site	Sporton International Inc. Wensan Laboratory	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	**Sporton Site No.**	
	CO07-HY	03CH22-HY

Note: The test site complies with ANSI C63.4 2014 requirement.
FCC designation No.: TW3786

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
Conduction	CO07-HY	Louis Chung	23.1~25.7 °C 42.2~53.3 %	Apr. 15, 2024
Radiated	03CH22-HY	Bank Lin, Ken Kuo and Karl Hou	22.5~23.5 °C 61.7~65.3 %	Apr. 09, 2024~ Apr. 16, 2024

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Test Items	Uncertainty	Remark
AC Conduction (150kHz ~ 30MHz)	3.44 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1000MHz)	6.5 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 6GHz)	4.5 dB	Confidence levels of 95%
Radiated Emission (6GHz ~ 18GHz)	4.5 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	5.4 dB	Confidence levels of 95%

2 Test Configuration of EUT

2.1 Test Mode

Test Configuration					
Config	**Channel**	**Modulation**	**UWB Frame**	**HPRF Set #**	**Payload Length (bytes)**
Mode 1	5	BPRF9	0	0	127
Mode 2	5	BPRF10	0	0	127
Mode 3	5	BPRF9	1	1	127
Mode 4	5	BPRF10	1	1	127
Mode 5	5	BPRF9	3	1	0
Mode 6	5	BPRF10	3	1	0
Mode 7	5	HPRF27	0	0	127
Mode 8	5	HPRF27	1	2	127
Mode 9	5	HPRF27	3	2	0
Mode 10	9	BPRF9	0	0	127
Mode 11	9	BPRF10	0	0	127
Mode 12	9	BPRF9	1	1	127
Mode 13	9	BPRF10	1	1	127
Mode 14	9	BPRF9	3	1	0
Mode 15	9	BPRF10	3	1	0
Mode 16	9	HPRF27	0	0	127
Mode 17	9	HPRF27	1	2	127
Mode 18	9	HPRF27	3	2	0

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	Adapter Mode
Remark: Please refer to 15.207 which states, “Measurements to demonstrate compliance with the conducted limits are not required for devices employ Battery for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines”.	

The Worst Case Mode for Following Conformance Tests			
Tests Item	UWB Bandwidth, Peak Power Measurement, Radiated Emissions		
Test Condition	Radiated measurement		
Operating Mode	CTX		
1	Adapter Mode		
Mode 1 configuration was tested and found to be the worst case and measured during the test.			
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	**X Plane**	**Y Plane**	**Z Plane**
CH05		V	
CH09	V		
Remark: The measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find as worst plane, and recorded in this report.			

2.3 Test Setup Diagram

Test Setup Diagram - Radiated Test

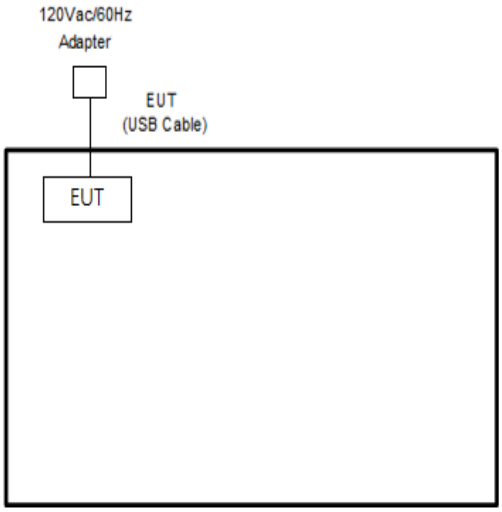

Test Setup Diagram - AC Power-Line Conducted Emissions Test

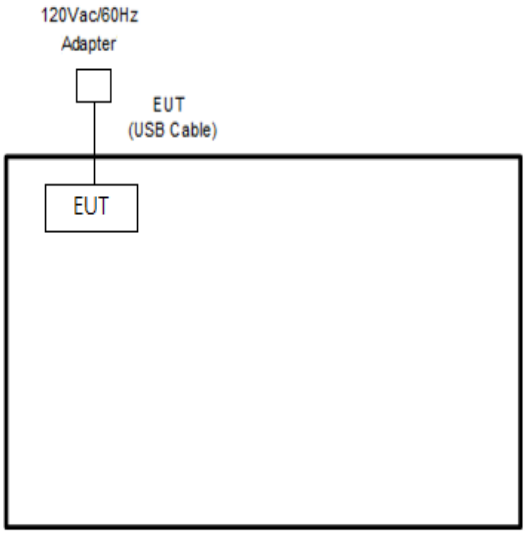

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	Chicony	G9BR1	N/A	N/A	N/A
2.	Adapter	Aohai	G9BR1	N/A	N/A	N/A

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	**Quasi-Peak**	**Average**
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		

3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
■ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

AC Power-line Conducted Emissions

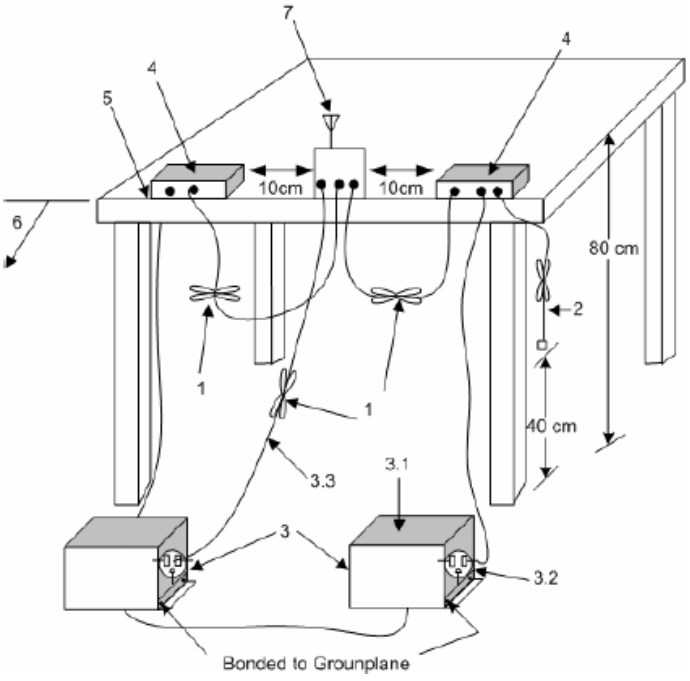

3.1.5 Test Result

Please refer to Appendix A.

3.2 UWB bandwidth

3.2.1 UWB bandwidth Limit

UWB bandwidth Limit
UWB bandwidth ≥ 500 MHz or Fractional bandwidth ≥ 0.2; Fractional bandwidth = $2(f_H - f_L)/ (f_H + f_L)$

3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
■	For the UWB bandwidth shall be measured using one of the options below:
	■ Refer as ANSI C63.10, clause 6.9.2 and clause 10.1 for UWB bandwidth testing.

3.2.4 Test Setup

UWB Bandwidth - Test Distance: 3m

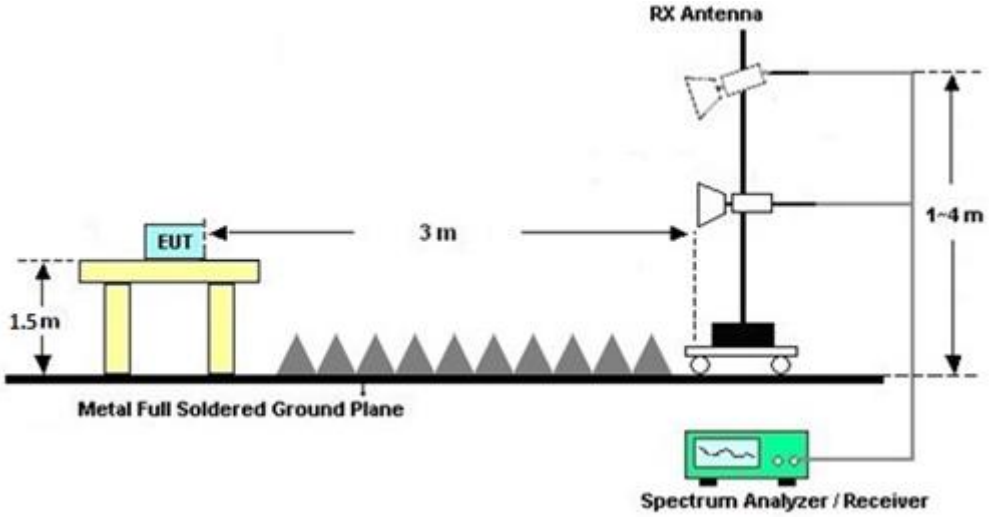

3.2.5 Test Result of UWB Bandwidth

Test mode	F_L (MHz)	F_H (MHz)	UWB Bandwidth (MHz)	Bandwidth limit (MHz)	Result	PoI [H/V]
1	6098	6881	783	≥ 500	Pass	V
2	6298	6881	583	≥ 500	Pass	V
3	6099	6881	782	≥ 500	Pass	V
4	6298	6881	583	≥ 500	Pass	V
5	6098	6881	783	≥ 500	Pass	V
6	6098	6881	783	≥ 500	Pass	V
7	6098	6881	783	≥ 500	Pass	V
8	6227	6881	654	≥ 500	Pass	V
9	6098	6881	783	≥ 500	Pass	V
10	7596	8379	783	≥ 500	Pass	V
11	7723	8378	655	≥ 500	Pass	V
12	7596	8379	783	≥ 500	Pass	V
13	7795	8378	583	≥ 500	Pass	V
14	7595	8379	784	≥ 500	Pass	V
15	7596	8379	783	≥ 500	Pass	V
16	7596	8379	783	≥ 500	Pass	V
17	7596	8379	783	≥ 500	Pass	V
18	7595	8379	784	≥ 500	Pass	V

UWB Bandwidth

Mode 1

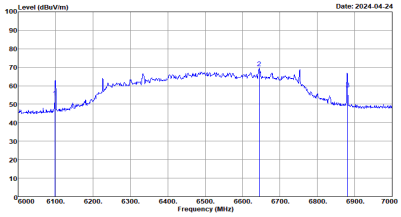

Site : 03CH22-HY
Condition : 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:3.000sec
: .
Detector : Peak
Project : 420107
Channel : CH5
Modulation : BPRF 9
Config : 0
STS Nums : 0
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos Factor	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6098.00	53.63	------	------	39.81	34.58	13.95	34.71	---	---	Peak
2	6645.00	69.68	------	------	53.76	36.50	14.65	35.23	---	---	Peak
3	6881.00	58.18	------	------	42.03	36.76	14.89	35.50	---	---	Peak

Mode 2

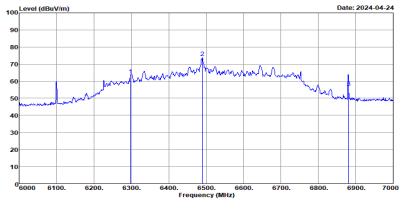

Site : 03CH22-HY
Condition : 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:3.000sec
: .
Detector : Peak
Project : 420107
Channel : CH5
Modulation : BPRF 10
Config : 0
STS Nums : 0
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x9

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos Factor	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6298.00	63.53	------	------	48.52	35.69	14.21	34.89	---	---	Peak
2	6490.00	73.82	------	------	58.06	36.36	14.46	35.06	---	---	Peak
3	6881.00	56.39	------	------	40.24	36.76	14.89	35.50	---	---	Peak

Mode 3

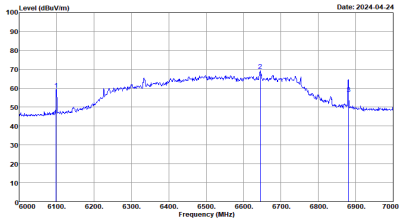

Site : 03CH22-HY
Condition : 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:3.000sec
: .
Detector : Peak
Project : 420107
Channel : CH5
Modulation : BPRF 9
Config : 1
STS Nums : 1
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos Factor	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6099.00	59.38	------	------	45.55	34.59	13.95	34.71	---	---	Peak
2	6645.00	69.49	------	------	53.57	36.50	14.65	35.23	---	---	Peak
3	6881.00	57.01	------	------	40.86	36.76	14.89	35.50	---	---	Peak

Mode 4

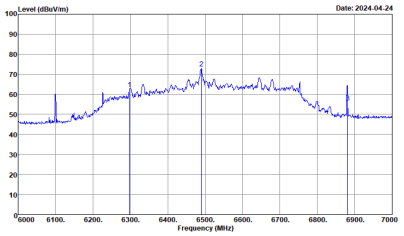

Site : 03CH22-HY
Condition : 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:3.000sec
: .
Detector : Peak
Project : 420107
Channel : CH5
Modulation : BPRF 10
Config : 1
STS Nums : 1
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos Factor	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6298.00	62.65	------	------	47.64	35.69	14.21	34.89	---	---	Peak
2	6490.00	72.92	------	------	57.16	36.36	14.46	35.06	---	---	Peak
3	6881.00	56.12	------	------	39.97	36.76	14.89	35.50	---	---	Peak

UWB Bandwidth

Mode 5

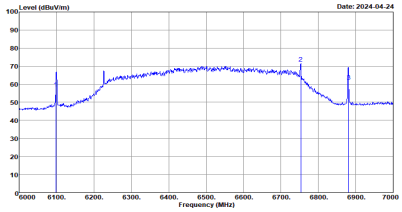

Site : 03CH22-HY
Condition : 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:3.000sec
:
Detector : Peak
Project : 420107
Channel : CH5
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6098.00	57.76	------	------	43.94	34.58	13.95	34.71	---	---	Peak
2	6753.00	71.64	------	------	55.54	36.70	14.75	35.35	---	---	Peak
3	6881.00	61.43	------	------	45.28	36.76	14.89	35.50	---	---	Peak

Mode 6

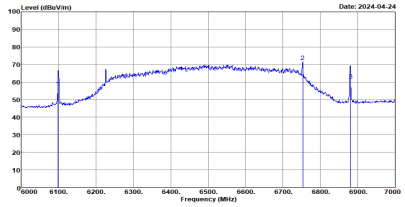

Site : 03CH22-HY
Condition : 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:3.000sec
:
Detector : Average
Project : 420107
Channel : CH5
Modulation : BPRF 10
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6098.00	56.73	------	------	42.91	34.58	13.95	34.71	---	---	Peak
2	6753.00	71.54	------	------	55.44	36.70	14.75	35.35	---	---	Peak
3	6881.00	61.07	------	------	44.92	36.76	14.89	35.50	---	---	Peak

Mode 7

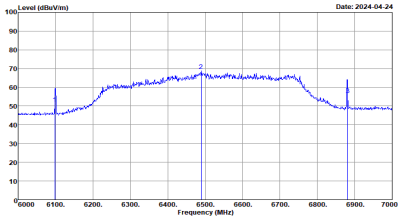

Site : 03CH22-HY
Condition : 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:3.000sec
:
Detector : Average
Project : 420107
Channel : CH5
Modulation : HPRF 27
Config : 0
STS Nums : 0
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6098.00	51.34	------	------	37.52	34.58	13.95	34.71	---	---	Peak
2	6489.00	68.85	------	------	53.10	36.36	14.45	35.06	---	---	Peak
3	6881.00	56.08	------	------	39.93	36.76	14.89	35.50	---	---	Peak

Mode 8

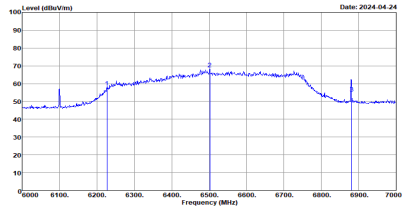

Site : 03CH22-HY
Condition : 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:3.000sec
:
Detector : Average
Project : 420107
Channel : CH5
Modulation : HPRF 27
Config : 1
STS Nums : 2
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6227.00	57.85	------	------	43.28	35.27	14.12	34.82	---	---	Peak
2	6502.00	68.17	------	------	52.37	36.40	14.47	35.07	---	---	Peak
3	6881.00	54.51	------	------	38.36	36.76	14.89	35.50	---	---	Peak

UWB Bandwidth

Mode 9

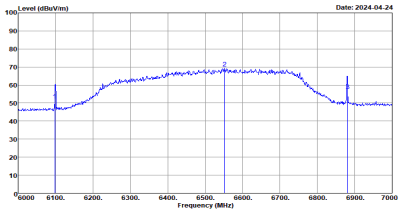

Site : 03CH22-HY
Condition : 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:3.000sec
:
Detector : Average
Project : 420107
Channel : CH5
Modulation : HPRF 27
Config : 3
STS Nums : 2
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6098.00	51.43	------	------	37.61	34.58	13.95	34.71	---	---	Peak
2	6552.00	69.34	------	------	53.43	36.50	14.54	35.13	---	---	Peak
3	6881.00	56.89	------	------	40.74	36.76	14.89	35.50	---	---	Peak

Mode 10

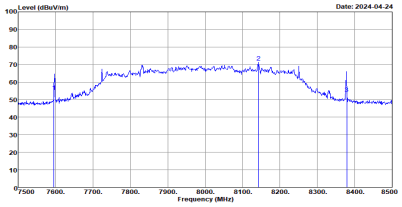

Site : 03CH22-HY
Condition : 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:3.000sec
:
Detector : Peak
Project : 420107
Channel : CH9
Modulation : BPRF 9
Config : 0
STS Nums : 0
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7596.00	54.69	------	------	37.87	37.19	15.72	36.09	---	---	Peak
2	8143.00	71.18	------	------	54.51	37.20	16.21	36.74	---	---	Peak
3	8379.00	53.57	------	------	36.79	37.26	16.51	36.99	---	---	Peak

Mode 11

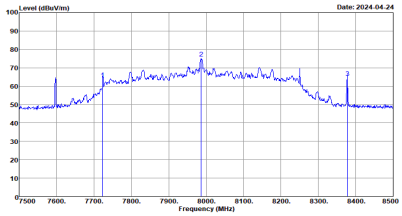

Site : 03CH22-HY
Condition : 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:3.000sec
:
Detector : Peak
Project : 420107
Channel : CH9
Modulation : BPRF 10
Config : 0
STS Nums : 0
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7723.00	63.68	------	------	47.05	37.00	15.88	36.25	---	---	Peak
2	7987.00	75.15	------	------	58.32	37.27	16.13	36.57	---	---	Peak
3	8378.00	64.62	------	------	47.84	37.26	16.51	36.99	---	---	Peak

Mode 12

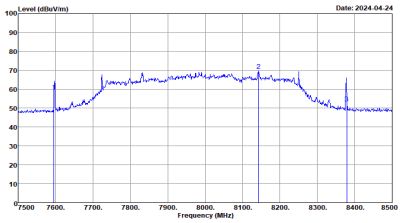

Site : 03CH22-HY
Condition : 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:3.000sec
:
Detector : Peak
Project : 420107
Channel : CH9
Modulation : BPRF 9
Config : 1
STS Nums : 1
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7596.00	59.04	------	------	42.22	37.19	15.72	36.09	---	---	Peak
2	8143.00	69.87	------	------	53.20	37.20	16.21	36.74	---	---	Peak
3	8379.00	52.71	------	------	35.93	37.26	16.51	36.99	---	---	Peak

UWB Bandwidth

Mode 13

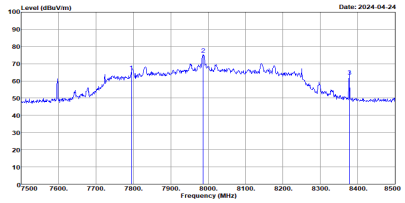

Site : 03CH22-HY
Condition : 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:3.000sec
:
Detector : Peak
Project : 420107
Channel : CH9
Modulation : BPRF 10
Config : 1
STS Nums : 1
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7795.00	65.39	------	------	48.67	37.09	15.97	36.34	---	---	Peak
2	7987.00	75.46	------	------	58.63	37.27	16.13	36.57	---	---	Peak
3	8378.00	62.80	------	------	46.02	37.26	16.51	36.99	---	---	Peak

Mode 14

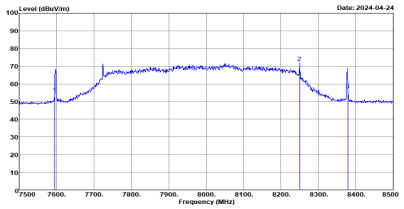

Site : 03CH22-HY
Condition : 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:1.000sec
:
Detector : Peak
Project : 420107
Channel : CH9
Modulation : BPRF 9
Config : 3
STS Nums : 2
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7595.00	54.27	------	------	37.45	37.19	15.72	36.09	---	---	Peak
2	8250.00	71.83	------	------	55.16	37.20	16.32	36.85	---	---	Peak
3	8379.00	56.49	------	------	39.71	37.26	16.51	36.99	---	---	Peak

Mode 15

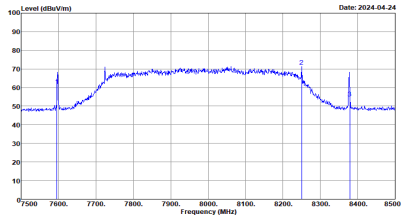

Site : 03CH22-HY
Condition : 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:3.000sec
:
Detector : Peak
Project : 420107
Channel : CH9
Modulation : BPRF 10
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7596.00	61.02	------	------	44.20	37.19	15.72	36.09	---	---	Peak
2	8250.00	71.42	------	------	54.75	37.20	16.32	36.85	---	---	Peak
3	8379.00	54.36	------	------	37.58	37.26	16.51	36.99	---	---	Peak

Mode 16

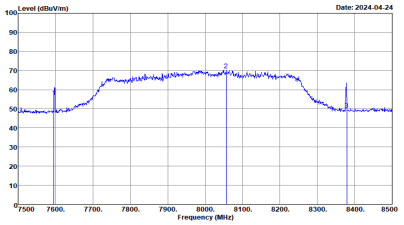

Site : 03CH22-HY
Condition : 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:3.000sec
:
Detector : Peak
Project : 420107
Channel : CH9
Modulation : HPRF 27
Config : 0
STS Nums : 0
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7596.00	56.39	------	------	39.57	37.19	15.72	36.09	---	---	Peak
2	8056.00	70.27	------	------	53.55	37.20	16.17	36.65	---	---	Peak
3	8379.00	49.70	------	------	32.92	37.26	16.51	36.99	---	---	Peak

UWB Bandwidth	
Mode 17	**Mode 18**

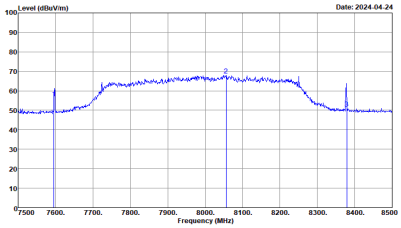

Site : 03CH22-HY
Condition : 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:3.000sec
:
Detector : Peak
Project : 420107
Channel : CH9
Modulation : HPRF 27
Config : 1
STS Nums : 2
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos Factor	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1	7596.00	56.24	------	------	39.42	37.19	15.72	36.09	---	--- Peak
2	8056.00	67.95	------	------	51.23	37.20	16.17	36.65	---	--- Peak
3	8379.00	51.07	------	------	34.29	37.26	16.51	36.99	---	--- Peak

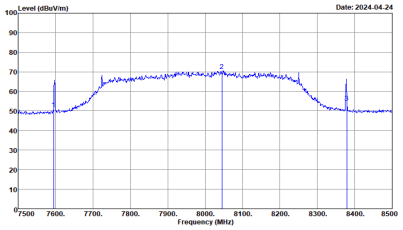

Site : 03CH22-HY
Condition : 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:3.000sec
:
Detector : Peak
Project : 420107
Channel : CH9
Modulation : HPRF 27
Config : 3
STS Nums : 2
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos Factor	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1	7595.00	51.10	------	------	34.28	37.19	15.72	36.09	---	--- Peak
2	8045.00	70.49	------	------	53.76	37.21	16.16	36.64	---	--- Peak
3	8379.00	54.23	------	------	37.45	37.26	16.51	36.99	---	--- Peak

3.3 Technical requirements for hand held UWB systems

3.3.1 Technical Requirements for transmission Limit

FCC 15.519(a) (1) A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedure

Follow the test step as below:

1. Turn on both EUT and companion receiver.
2. Set the EUT to TX mode, and EUT starts polling.
3. Set the companion receiver to associate EUT and EUT starts to transmit.
4. Disable the RX function of the companion receiver to disassociate the EUT.
5. Check if EUT stop transmitting once step 4 is made.

3.3.4 Test Setup

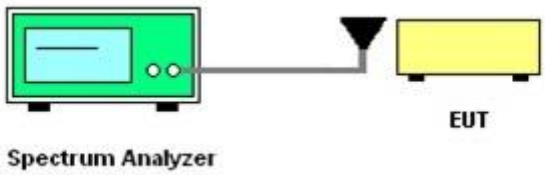

3.3.5 Test Result

Plot 1

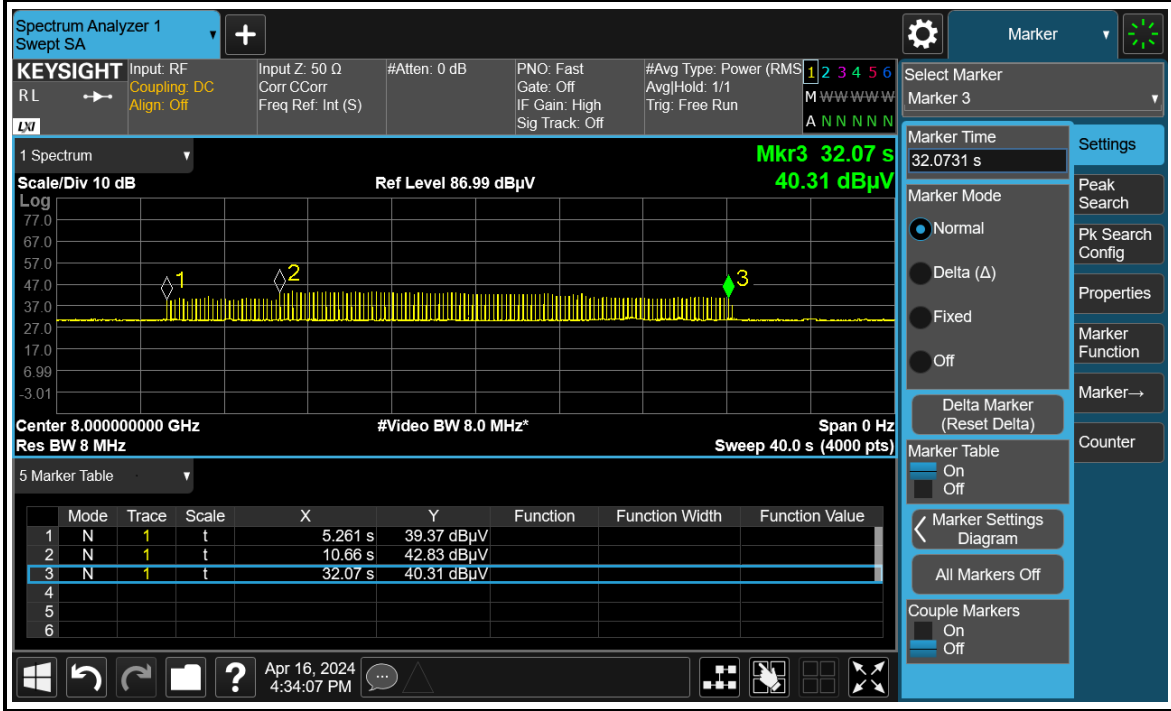

M1 to M2: Set the EUT to TX mode, and EUT starts polling.
M2 to M3: Set the companion receiver to associate EUT and EUT starts to transmit.
M3: Disable the TX function of EUT. EUT stops transmitting and polling.

Plot 2

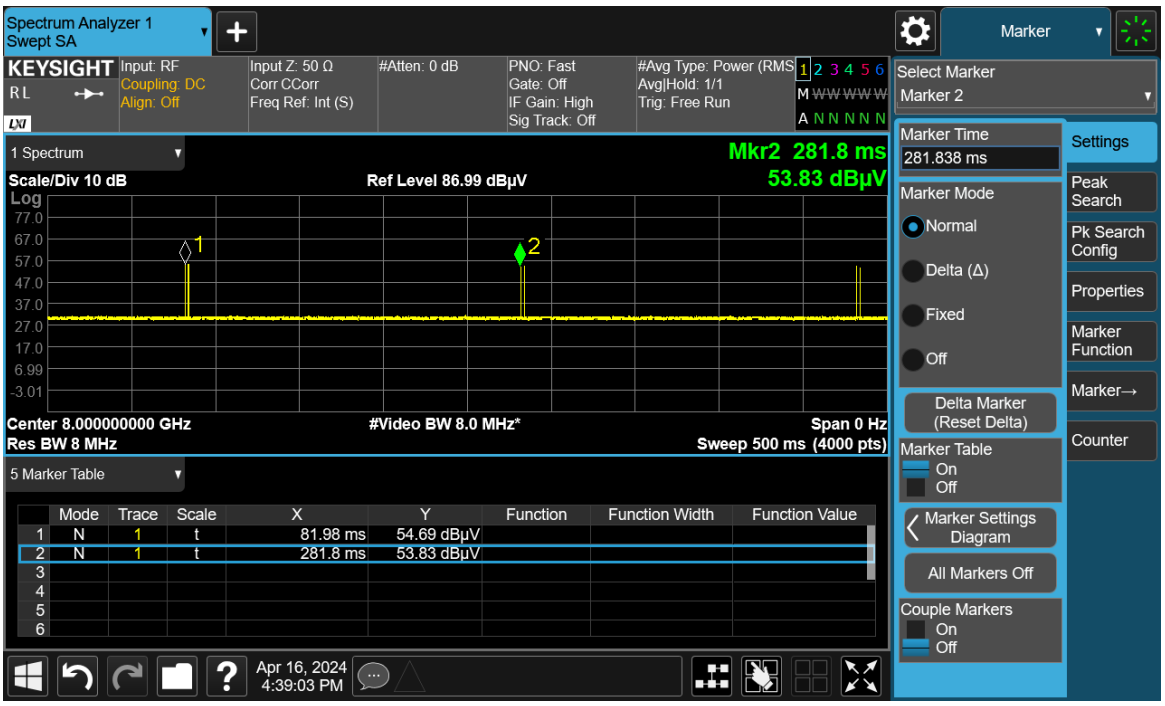

M1 to M2: Set the EUT to TX mode, and EUT starts polling.
M2 to M3: Set the companion receiver to associate EUT and EUT starts to transmit.
M3: RX function of the companion receiver is disabled. EUT disassociates the companion receiver and stops transmitting, but continues polling.

Plot 3

Plot 4

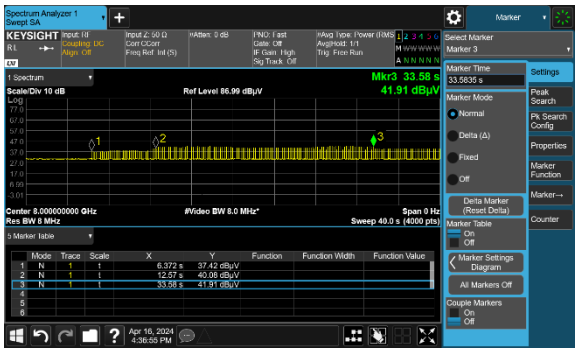

Plot 3 is zoom in plot of M2 to M3 (transmission)
Plot 4 is zoom in plot after M3 (polling only)

3.4 Peak Power Measurement

3.4.1 Peak Power Measurement Limit

Peak Power Measurement Limit
P_{eirp} = 0 dBm/50MHz

3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
■	Peak Power Measurement
	■ Refer as ANSI C63.10, clause 10.3.1 for radiated measurement procedure testing.
	■ Refer as ANSI C63.10, clause 10.3.2 for measurement distance is 3m.
	■ Refer as ANSI C63.10, clause 10.3.5 for peak detector procedure testing.
	■ Refer as ANSI C63.10, clause 10.3.6 for bandwidth conversion of peak power.
■	Frequency of max peak power is pre-located: The span bandwidth is continuously reduced to find the worst frequency. Once the worst frequency is found, the setting of spectrum analyzer is set as below: • Central frequency: Worst frequency point • Span: Zero span • RBW: 50MHz • VBW: 80MHz • Detector: Peak detector • Trace: Max hold

3.4.4 Test Setup

Peak Power Measurement
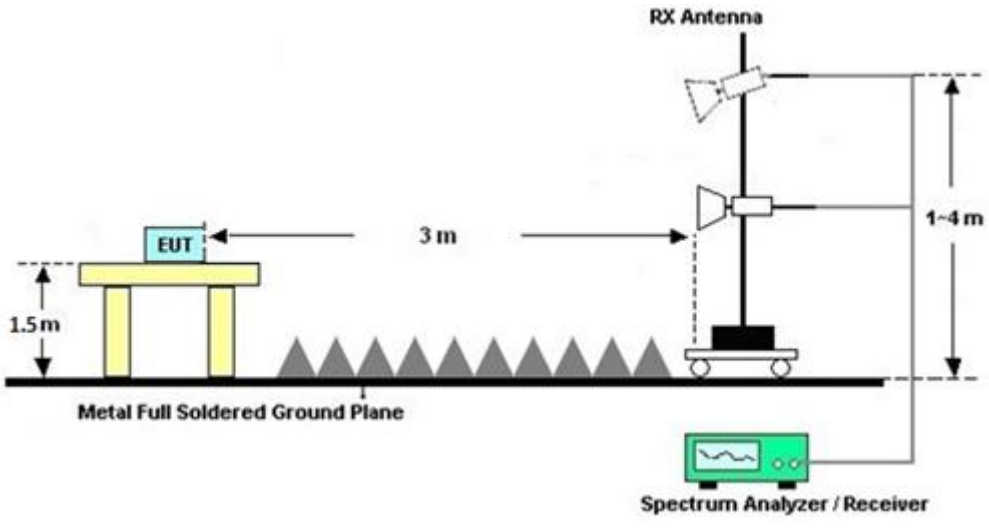

3.4.5 Test Result of Peak Power Measurement

Peak Measurement Result							
Test Mode	Freq. (MHz)	E-Field (dBuV/m)	$ERIP_{50MHz}$ (dBm)	$ERIP_{50MHz}$ Limit (dBm)	Margin (dB)	Result	Pol [H/V]
1	6489	92.22	-3.01	0	-3.01	Pass	V
2	6492	92.17	-3.06	0	-3.06	Pass	V
3	6498	91.61	-3.62	0	-3.62	Pass	V
4	6488	91.34	-3.89	0	-3.89	Pass	V
5	6555	86.68	-8.55	0	-8.55	Pass	V
6	6553	84.38	-10.85	0	-10.85	Pass	V
7	6613	85.98	-9.25	0	-9.25	Pass	V
8	6616	84.38	-10.85	0	-10.85	Pass	V
9	6549	86.02	-9.21	0	-9.21	Pass	V
10	7989	94.70	-0.53	0	-0.53	Pass	V
11	7989	93.75	-1.48	0	-1.48	Pass	V
12	7991	93.40	-1.83	0	-1.83	Pass	V
13	7987	93.56	-1.67	0	-1.67	Pass	V
14	8050	88.23	-7.00	0	-7.00	Pass	V
15	8049	88.12	-7.11	0	-7.11	Pass	V
16	7989	87.84	-7.39	0	-7.39	Pass	V
17	7987	85.74	-9.49	0	-9.49	Pass	V
18	8049	84.68	-10.55	0	-10.55	Pass	V
Note 1: EIRP [dBm] = E-Field [dBuV/m] - 95.23; Note 2: Measurement worst emissions of receive antenna polarization.							

Pre-located worst frequency Plots

Mode 1

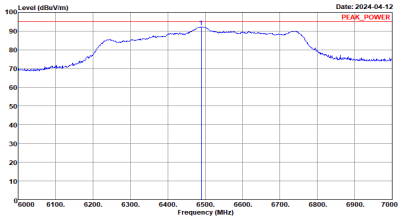

Site : 03CH22-HY
Condition : PEAK_POWER 3m LE2C04A18EN_230712 VERTICAL
: RBW:50000.000KHz VBW:80000.000KHz SWT:1.000sec
:
Detector : Peak
Project : 420107
Channel : CH5
Modulation : BPRF 9
Config : 0
STS Nums : 0
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6489.00	92.22	-3.01	95.23	76.47	36.36	14.45	35.06	---	---	Peak

Mode 2

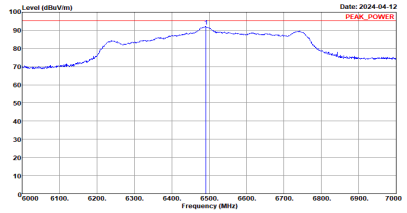

Site : 03CH22-HY
Condition : PEAK_POWER 3m LE2C04A18EN_230712 VERTICAL
: RBW:50000.000KHz VBW:80000.000KHz SWT:1.000sec
:
Detector : Peak
Project : 420107
Channel : CH5
Modulation : BPRF 10
Config : 0
STS Nums : 0
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6492.00	92.17	-3.06	95.23	76.40	36.37	14.46	35.06	---	---	Peak

Mode 3

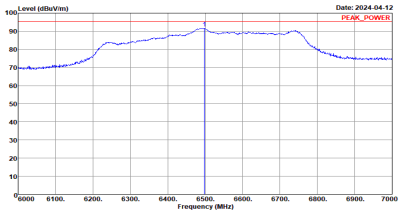

Site : 03CH22-HY
Condition : PEAK_POWER 3m LE2C04A18EN_230712 VERTICAL
: RBW:50000.000KHz VBW:80000.000KHz SWT:1.000sec
:
Detector : Peak
Project : 420107
Channel : CH5
Modulation : BPRF 9
Config : 1
STS Nums : 1
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6498.00	91.61	-3.62	95.23	75.82	36.39	14.47	35.07	---	---	Peak

Mode 4

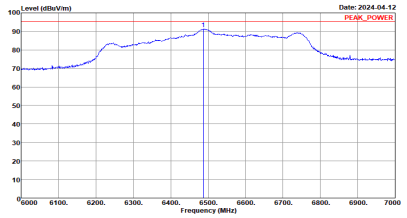

Site : 03CH22-HY
Condition : PEAK_POWER 3m LE2C04A18EN_230712 VERTICAL
: RBW:50000.000KHz VBW:80000.000KHz SWT:1.000sec
:
Detector : Peak
Project : 420107
Channel : CH5
Modulation : BPRF 10
Config : 1
STS Nums : 1
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x00

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6488.00	91.34	-3.89	95.23	75.60	36.35	14.45	35.06	---	---	Peak

Pre-located worst frequency Plots

Mode 5

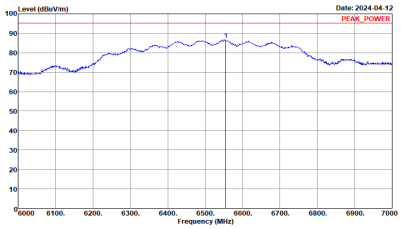

Site : 03CH22-HY
Condition : PEAK_POWER 3m LE2C04A18EN_230712 VERTICAL
: RBW:50000.000KHz VBW:80000.000KHz SWT:1.000sec
:
Detector : Average
Project : 420107
Channel : CH5
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6555.00	86.68	-8.55	95.23	70.76	36.50	14.55	35.13	---	---	Peak

Mode 6

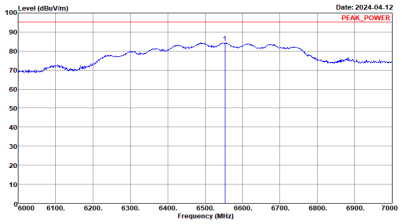

Site : 03CH22-HY
Condition : PEAK_POWER 3m LE2C04A18EN_230712 VERTICAL
: RBW:50000.000KHz VBW:80000.000KHz SWT:1.000sec
:
Detector : Peak
Project : 420107
Channel : CH5
Modulation : BPRF 10
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6553.00	84.38	-10.85	95.23	68.47	36.50	14.54	35.13	---	---	Peak

Mode 7

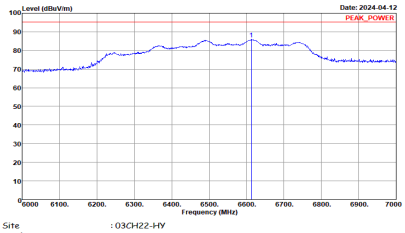

Site : 03CH22-HY
Condition : PEAK_POWER 3m LE2C04A18EN_230712 VERTICAL
: RBW:50000.000KHz VBW:80000.000KHz SWT:1.000sec
:
Detector : Peak
Project : 420107
Channel : CH5
Modulation : BPRF 27
Config : 0
STS Nums : 0
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6613.00	85.98	-9.25	95.23	70.06	36.50	14.62	35.20	---	---	Peak

Mode 8

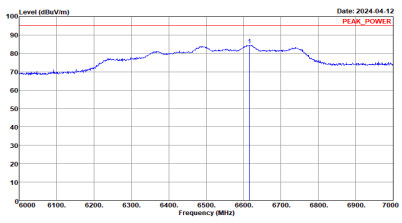

Site : 03CH22-HY
Condition : PEAK_POWER 3m LE2C04A18EN_230712 VERTICAL
: RBW:50000.000KHz VBW:80000.000KHz SWT:1.000sec
:
Detector : Peak
Project : 420107
Channel : CH5
Modulation : HPRF 27
Config : 1
STS Nums : 2
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6616.00	84.38	-10.85	95.23	68.46	36.50	14.62	35.20	---	---	Peak

Pre-located worst frequency Plots

Mode 9

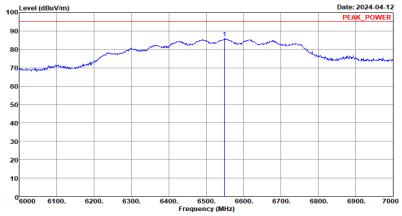

Site : 03CH22-HY
Condition : PEAK_POWER 3m LE2C04A18EN_230712 VERTICAL
: RBW:50000.000KHz VBW:80000.000KHz SWT:1.000sec
: .
Detector : Peak
Project : 420107
Channel : CH5
Modulation : HPRF 27
Config : 3
STS Nums : 2
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6549.00	86.02	-9.21	95.23	70.10	36.50	14.54	35.12	---	---	Peak

Mode 10

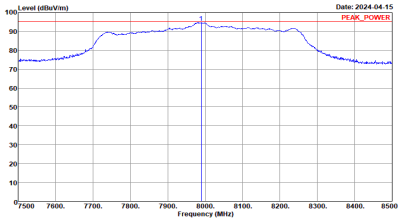

Site : 03CH22-HY
Condition : PEAK_POWER 3m LE2C04A18EN_230712 VERTICAL
: RBW:50000.000KHz VBW:80000.000KHz SWT:1.000sec
: .
Detector : Peak
Project : 420107
Channel : CH9
Modulation : HPRF 9
Config : 0
STS Nums : 0
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7989.00	94.70	-0.53	95.23	77.87	37.28	16.13	36.58	---	---	Peak

Mode 11

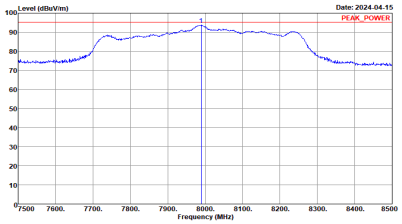

Site : 03CH22-HY
Condition : PEAK_POWER 3m LE2C04A18EN_230712 VERTICAL
: RBW:50000.000KHz VBW:80000.000KHz SWT:1.000sec
: .
Detector : Peak
Project : 420107
Channel : CH9
Modulation : HPRF 10
Config : 0
STS Nums : 0
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7989.00	93.75	-1.48	95.23	76.92	37.28	16.13	36.58	---	---	Peak

Mode 12

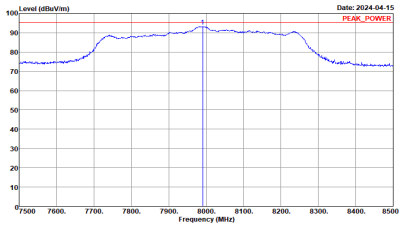

Site : 03CH22-HY
Condition : PEAK_POWER 3m LE2C04A18EN_230712 VERTICAL
: RBW:50000.000KHz VBW:80000.000KHz SWT:1.000sec
: .
Detector : Peak
Project : 420107
Channel : CH9
Modulation : BPRF 9
Config : 1
STS Nums : 1
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7991.00	93.40	-1.83	95.23	76.57	37.28	16.13	36.58	---	---	Peak

Pre-located worst frequency Plots

Mode 13

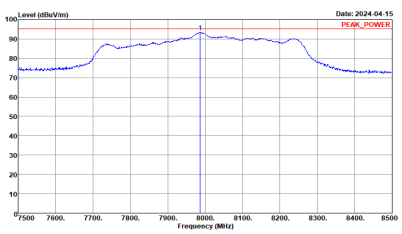

Site : 03CH22-HV
Condition : PEAK_POWER 3m LE2C04A18EN_230712 VERTICAL
: RBW:50000.000KHz VBW:80000.000KHz SWT:1.000sec
: .
Detector : Peak
Project : 420107
Channel : CH9
Modulation : BPRF 10
Config : 1
STS Nums : 1
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7987.00	93.56	-1.67	95.23	76.73	37.27	16.13	36.57	---	---	Peak

Mode 14

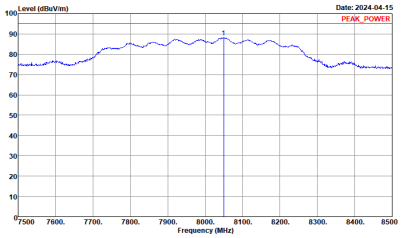

Site : 03CH22-HV
Condition : PEAK_POWER 3m LE2C04A18EN_230712 VERTICAL
: RBW:50000.000KHz VBW:80000.000KHz SWT:1.000sec
: .
Detector : Peak
Project : 420107
Channel : CH9
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8050.00	88.23	-7.00	95.23	71.51	37.20	16.16	36.64	---	---	Peak

Mode 15

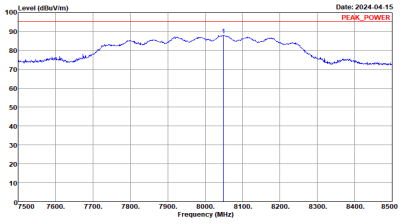

Site : 03CH22-HV
Condition : PEAK_POWER 3m LE2C04A18EN_230712 VERTICAL
: RBW:50000.000KHz VBW:80000.000KHz SWT:1.000sec
: .
Detector : Peak
Project : 420107
Channel : CH9
Modulation : BPRF 10
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8049.00	88.12	-7.11	95.23	71.40	37.20	16.16	36.64	---	---	Peak

Mode 16

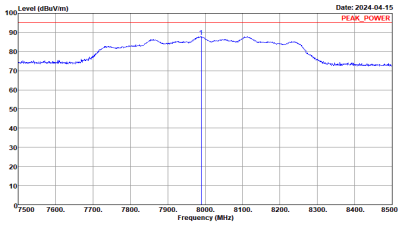

Site : 03CH22-HV
Condition : PEAK_POWER 3m LE2C04A18EN_230712 VERTICAL
: RBW:50000.000KHz VBW:80000.000KHz SWT:1.000sec
: .
Detector : Peak
Project : 420107
Channel : CH9
Modulation : HPRF 27
Config : 0
STS Nums : 0
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7989.00	87.84	-7.39	95.23	71.01	37.28	16.13	36.58	---	---	Peak

Pre-located worst frequency Plots	
Mode 17	**Mode 18**

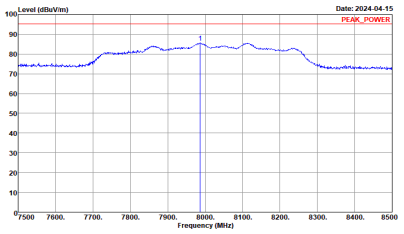

Site : 03CH22-HY
Condition : PEAK_POWER 3m LE2C04A18EN_230712 VERTICAL
: RBW:50000.000KHz VBW:80000.000KHz SWT:1.000sec
: ,
Detector : Peak
Project : 420107
Channel : CH9
Modulation : HPRF 27
Config : 1
STS Nums : 2
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos Factor	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7987.00	85.74	-9.49	95.23	68.91	37.27	16.13	36.57	---	---	Peak

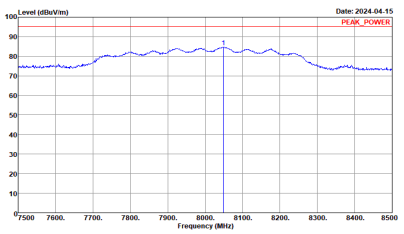

Site : 03CH22-HY
Condition : PEAK_POWER 3m LE2C04A18EN_230712 VERTICAL
: RBW:50000.000KHz VBW:80000.000KHz SWT:1.000sec
: ,
Detector : Peak
Project : 420107
Channel : CH9
Modulation : HPRF 27
Config : 3
STS Nums : 2
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos Factor	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8049.00	84.68	-10.55	95.23	67.96	37.20	16.16	36.64	---	---	Peak

3.5 Radiated Emissions

3.5.1 Radiated Emissions Limit

Radiated Emissions below 960MHz and Emissions from Digital Circuitry Limit			
Frequency Range (MHz)	**Field Strength (uV/m)**	**Field Strength (dBuV/m)**	**Measure Distance (m)**
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Radiated Emissions above 960MHz Limit	
Frequency Range (MHz)	**EIRP (dBm), RBW = 1MHz**
960-1610	−75.3
1610-1990	−63.3
1990-3100	−61.3
3100-10600	−41.3
Above 10600	−61.3

Note: Distance extrapolation factor = 20 log (test distance [X m]/specific distance [3 m]) (dB)

Radiated Emissions in GPS Bands Limit	
Frequency Range (MHz)	**EIRP (dBm), RBW ≥ 1kHz**
1164-1240	-85.3
1559-1610	-85.3

Note E (dBuv/m) = EIRP (dBm) + 95.23, example, E(dBuV/m) = -85.3 + 95.23 = 9.93dBuV/m

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method for Radiated Emissions above 960MHz	
■	Radiated Emissions above 960MHz
	■ Refer as ANSI C63.10, clause 10.3.1 for radiated measurement procedure testing.
	■ Refer as ANSI C63.10, clause 10.3.2 for measurement distance is 3m. In some cases, it may be necessary to measure the radiated UWB emissions at a closer distance to obtain enough signal and margin to overcome the measurement system noise floor. Distance extrapolation factor = 20 log (test distance [X m]/specific distance [3 m]) (dB)
	■ Refer as ANSI C63.10, clause 10.3.4 for rms detector procedure testing.
	■ Refer as ANSI C63.10, clause 10.3.7 for evaluating AVG-PSD (RBW=1MHz).
	■ Refer as ANSI C63.10, clause 10.3.10 for evaluating AVG-PSD in GPS Band (RBW≥1kHz).
■	For radiated measurement.
	■ Refer as ANSI C63.10, clause 10.3.8 following eirp can be used radiated test configuration.
	■ Refer as ANSI C63.10, clause 10.3.9 following eirp can be directly determined using the field strength.

Test Method for Radiated Emissions below 960MHz and Emissions from Digital Circuitry	
■	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements) for above 30MHz-960MHz; 40dB/decade for frequency below 30MHz.
■	For the transmitter unwanted emissions shall be measured using following options below:
	■ Refer as ANSI C63.10, clause 4.1.4 Detector functions and selection of bandwidth
	□ Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions. Adjusted by a “duty cycle correction factor”, derived from 20log (dwell time/100 ms). Average emission = peak emission + 20 log (duty cycle).
	■ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
■	For radiated measurement.
	■ Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	■ Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	■ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.
	■ If the noise floor can’t meet the limit, the test distance will be shorten and described in the report.
■	Any unwanted emissions level shall not exceed the fundamental emission level.

3.5.4 Test Setup

Radiated Emissions below 30MHz

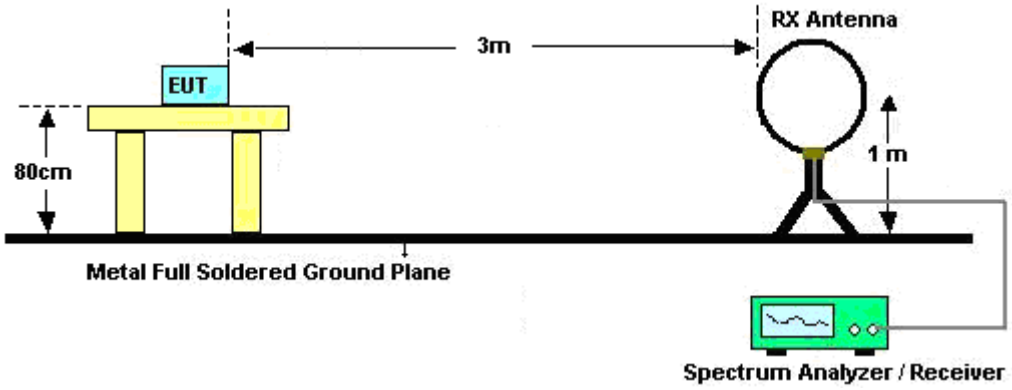

Radiated Emissions from 30MHz to 960 MHz and Emissions from Digital Circuitry

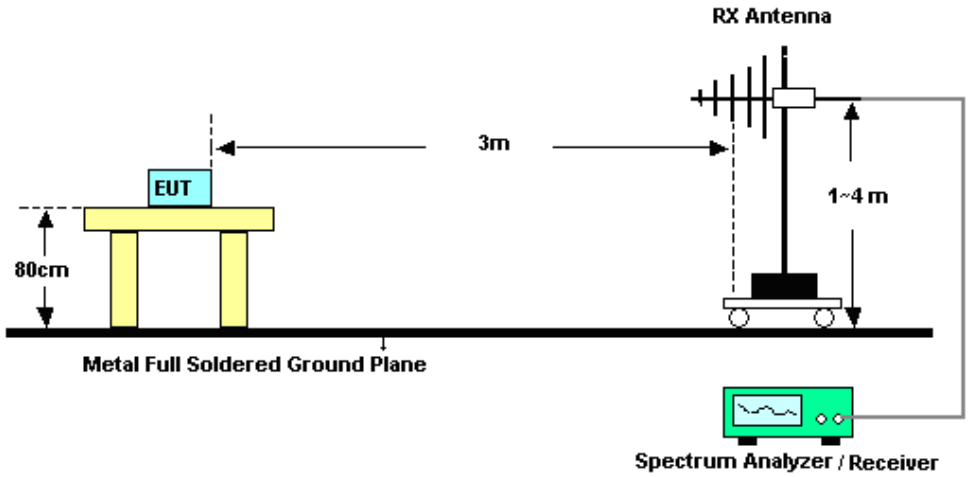

Radiated Emissions from 960 MHz to 1GHz

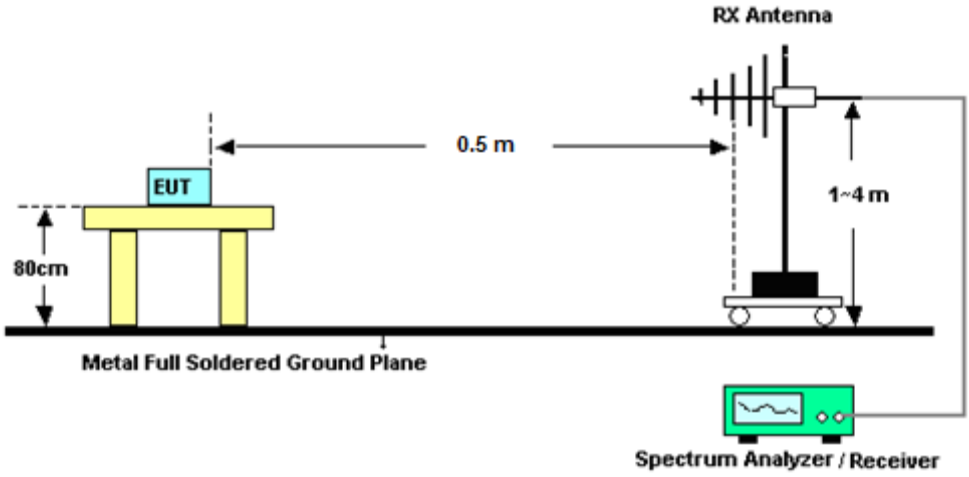

Radiated Emissions from 1GHz to 1.61 GHz

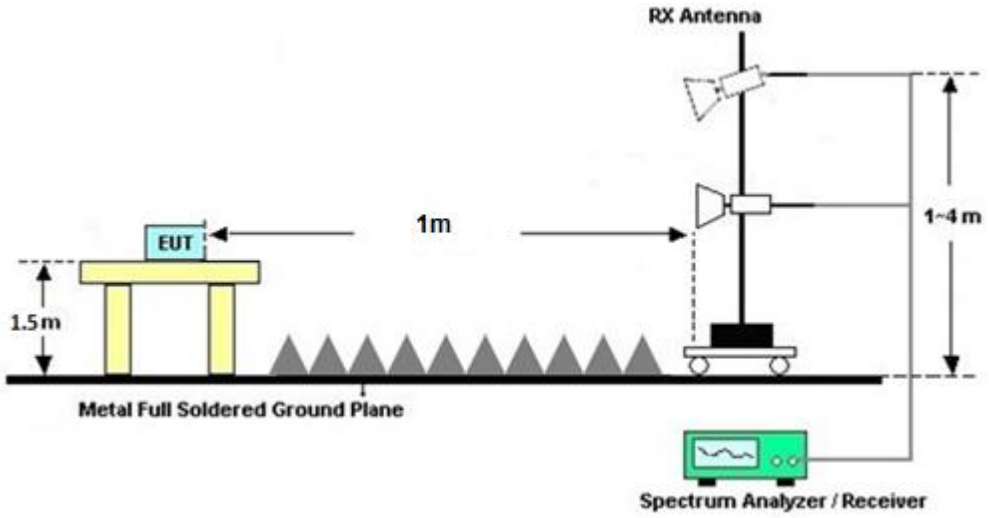

Radiated Emissions from 1.61 GHz to 10.60 GHz

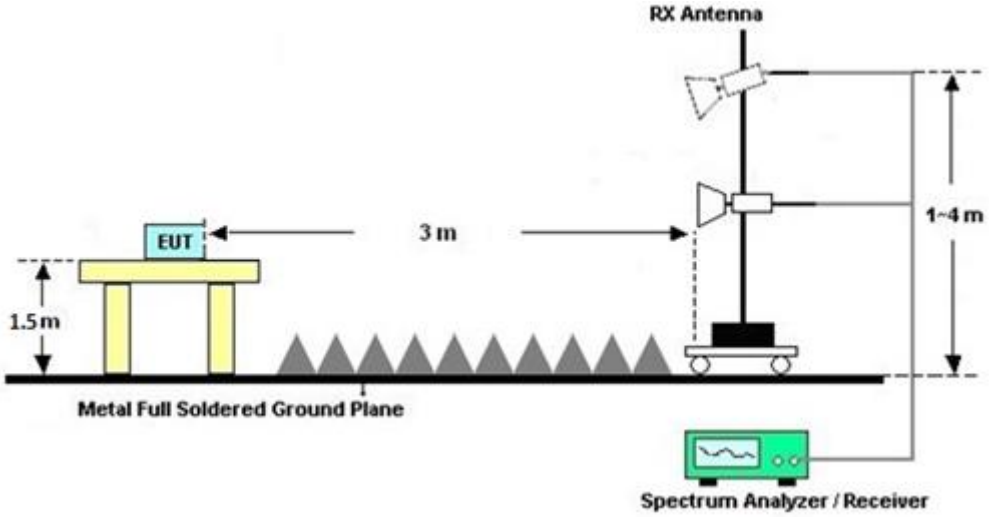

Radiated Emissions from 10.60 GHz to 18GHz

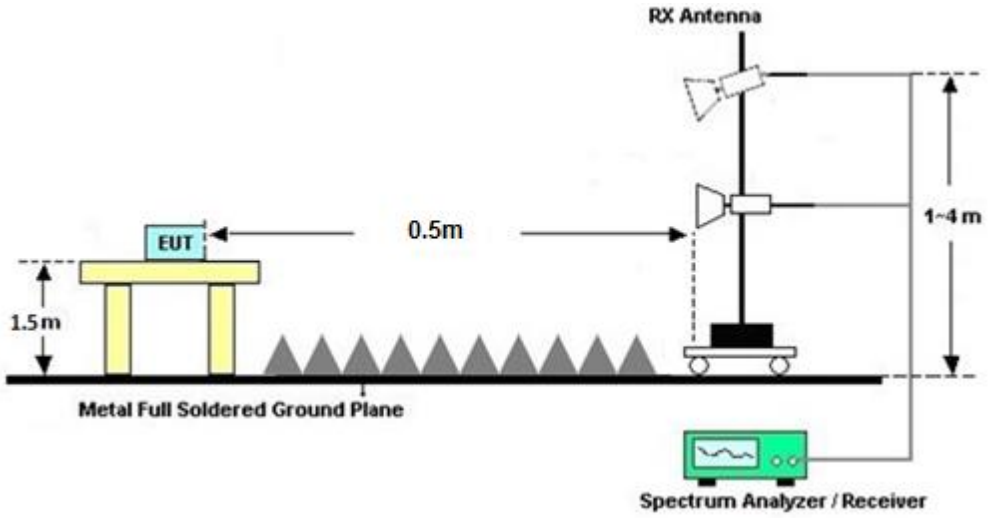

Radiated Emissions above 18GHz

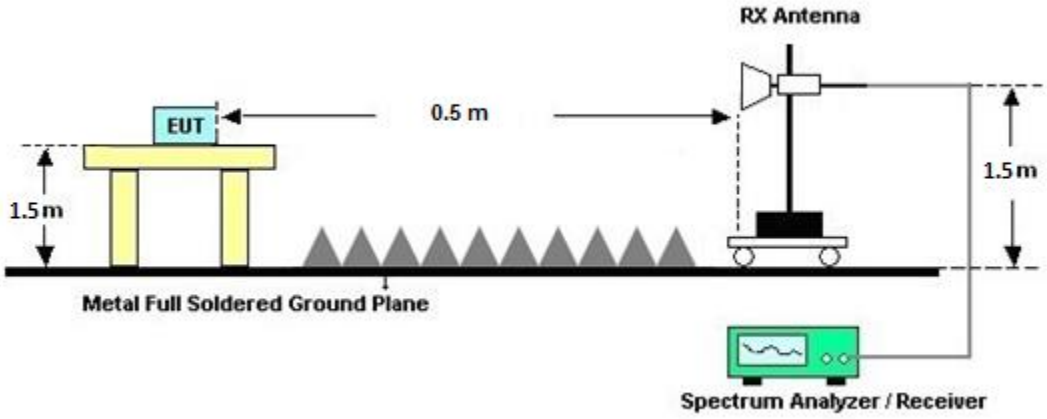

Note 1: Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna and the frequency range of 1 GHz to 40 GHz using a calibrated horn antenna.
Note 2: If test distance other than 3m is used, the used test distance will be recorded in test result.

3.5.5 Radiated Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.
There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.5.6 Average Power Spectral Density

Test mode	Frequency (MHz)	Emission Level (dBuV/m)	Emission Limit (dBm/MHz)	Emission Limit (dBuV/m)	Margin (dB)	Result	Pol [H/V]
1	6490	51.27	-41.3	53.93	-2.66	Pass	V
2	6490	50.77	-41.3	53.93	-3.16	Pass	V
3	6548	51.80	-41.3	53.93	-2.13	Pass	V
4	6490	50.79	-41.3	53.93	-3.14	Pass	V
5	6490	53.60	-41.3	53.93	-0.33	Pass	V
6	6490	52.39	-41.3	53.93	-1.54	Pass	V
7	6544	50.97	-41.3	53.93	-2.96	Pass	V
8	6549	51.89	-41.3	53.93	-2.04	Pass	V
9	6560	52.00	-41.3	53.93	-1.93	Pass	V
10	8048	53.60	-41.3	53.93	-0.33	Pass	V
11	7987	52.69	-41.3	53.93	-1.24	Pass	V
12	8049	53.34	-41.3	53.93	-0.59	Pass	V
13	7987	53.45	-41.3	53.93	-0.48	Pass	V
14	7987	53.71	-41.3	53.93	-0.22	Pass	V
15	8063	53.50	-41.3	53.93	-0.43	Pass	V
16	8048	53.69	-41.3	53.93	-0.24	Pass	V
17	8046	53.06	-41.3	53.93	-0.87	Pass	V
18	8042	53.70	-41.3	53.93	-0.23	Pass	V

Radiated Emissions (Fundamental)			
Operating Function	Adapter Mode	**Polarization**	V
		Test Distance	3m

Mode 1

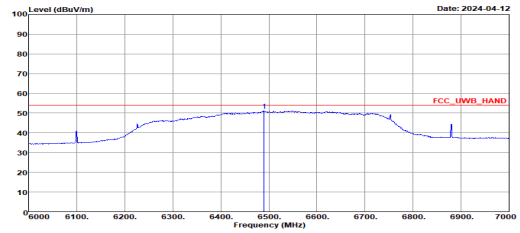

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:1.000sec
: .
Detector : Average
Project : 420107
Channel : CH5
Modulation : BPRF 9
Config : 0
STS Nums : 0
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6490.00	51.27	-2.66	53.93	35.51	36.36	14.46	35.06	---	---	Average

Mode 2

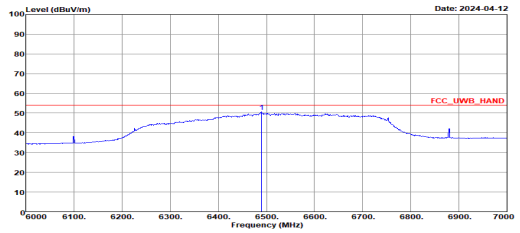

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:1.000sec
: .
Detector : Average
Project : 420107
Channel : CH5
Modulation : BPRF 10
Config : 0
STS Nums : 0
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6490.00	50.77	-3.16	53.93	35.01	36.36	14.46	35.06	---	---	Average

Mode 3

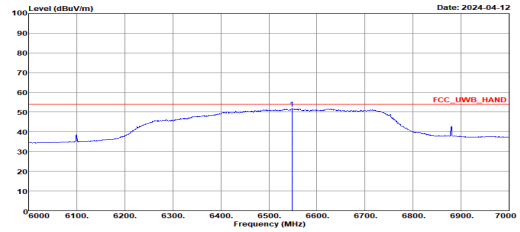

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:1.000sec
: .
Detector : Average
Project : 420107
Channel : CH5
Modulation : BPRF 9
Config : 1
STS Nums : 1
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6548.00	51.80	-2.13	53.93	35.88	36.50	14.54	35.12	---	---	Average

Mode 4

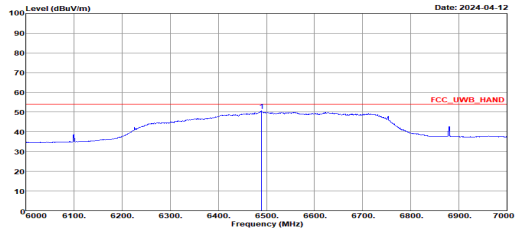

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:1.000sec
: .
Detector : Average
Project : 420107
Channel : CH5
Modulation : BPRF 10
Config : 1
STS Nums : 1
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6490.00	50.79	-3.14	53.93	35.03	36.36	14.46	35.06	---	---	Average

Radiated Emissions (Fundamental)			
Operating Function	Adapter Mode	**Polarization**	V
		Test Distance	3m

Mode 5

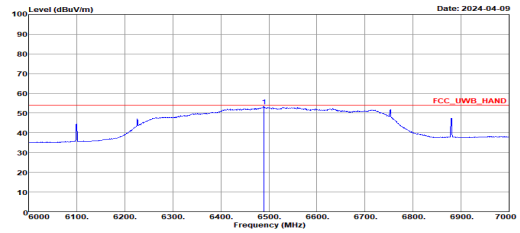

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:1.000sec
: .
Detector : Average
Project : 420107
Channel : CH5
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6490.00	53.60	-0.33	53.93	37.84	36.36	14.46	35.06	---	---	Average

Mode 6

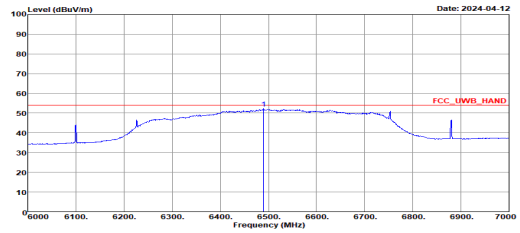

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:1.000sec
: .
Detector : Average
Project : 420107
Channel : CH5
Modulation : BPRF 10
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6490.00	52.39	-1.54	53.93	36.63	36.36	14.46	35.06	---	---	Average

Mode 7

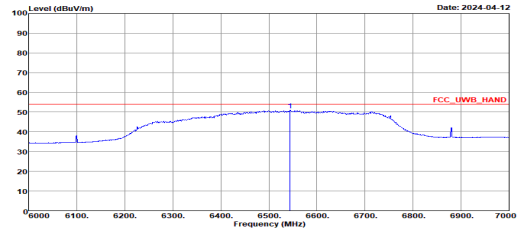

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:1.000sec
: .
Detector : Average
Project : 420107
Channel : CH5
Modulation : HPRF 27
Config : 0
STS Nums : 0
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6544.00	50.97	-2.96	53.93	35.07	36.49	14.53	35.12	---	---	Average

Mode 8

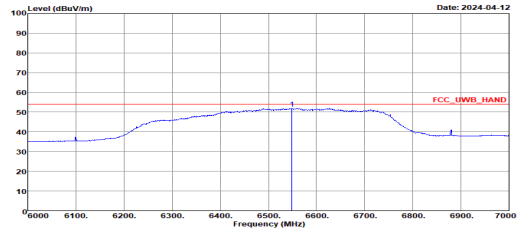

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:1.000sec
: .
Detector : Average
Project : 420107
Channel : CH5
Modulation : HPRF 27
Config : 1
STS Nums : 2
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6549.00	51.89	-2.04	53.93	35.97	36.50	14.54	35.12	---	---	Average

Radiated Emissions (Fundamental)			
Operating Function	Adapter Mode	**Polarization**	V
		Test Distance	3m

Mode 9

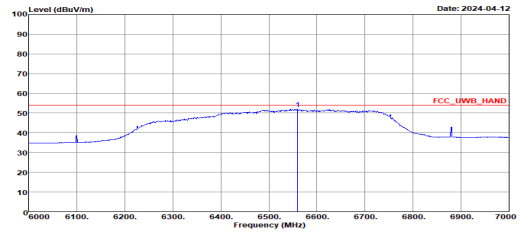

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:1.000sec
:
Detector : Average
Project : 420107
Channel : CH5
Modulation : HPRF 27
Config : 3
STS Nums : 2
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	6560.00	52.00	-1.93	53.93	36.09	36.50	14.55	35.14	---	---	Average

Mode 10

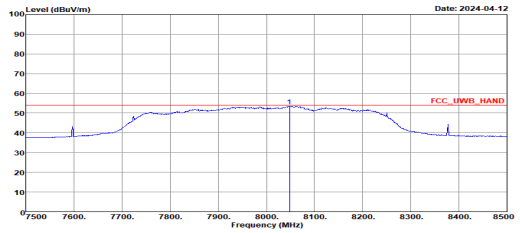

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:1.000sec
:
Detector : Average
Project : 420107
Channel : CH9
Modulation : BPRF 9
Config : 0
STS Nums : 0
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8048.00	53.60	-0.33	53.93	36.88	37.20	16.16	36.64	---	---	Average

Mode 11

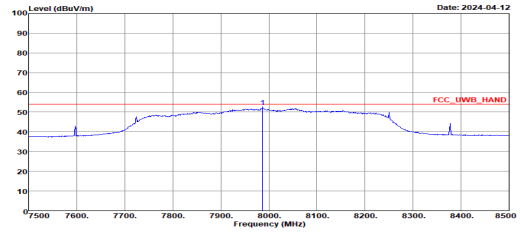

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:1.000sec
:
Detector : Average
Project : 420107
Channel : CH9
Modulation : BPRF 10
Config : 0
STS Nums : 0
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7987.00	52.69	-1.24	53.93	35.86	37.27	16.13	36.57	---	---	Average

Mode 12

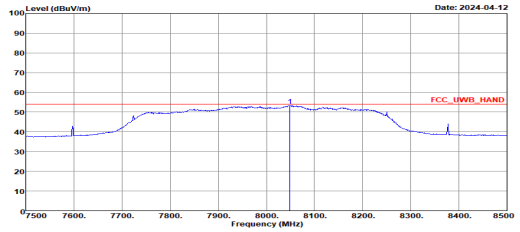

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:1.000sec
:
Detector : Average
Project : 420107
Channel : CH9
Modulation : BPRF 9
Config : 1
STS Nums : 1
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8049.00	53.34	-0.59	53.93	36.62	37.20	16.16	36.64	---	---	Average

Radiated Emissions (Fundamental)			
Operating Function	Adapter Mode	**Polarization**	V
		Test Distance	3m

Mode 13

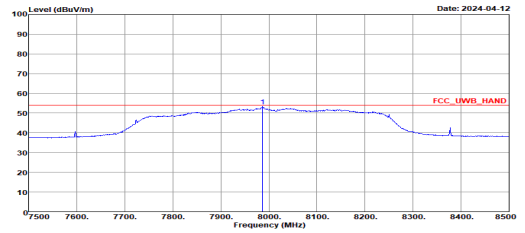

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:1.000sec
: .
Detector : Average
Project : 420107
Channel : CH9
Modulation : BPRF 10
Config : 1
STS Nums : 1
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7987.00	53.45	-0.48	53.93	36.62	37.27	16.13	36.57	---	---	Average

Mode 14

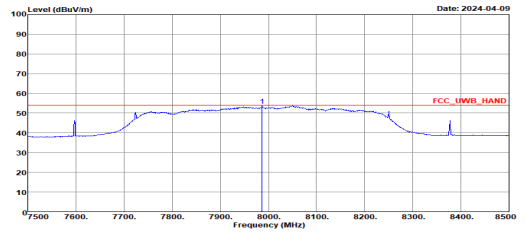

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:10.000KHz SWT:Auto
: .
Detector : Average
Project : 420107
Channel : CH9
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7987.00	53.71	-0.22	53.93	36.88	37.27	16.13	36.57	---	---	Average

Mode 15

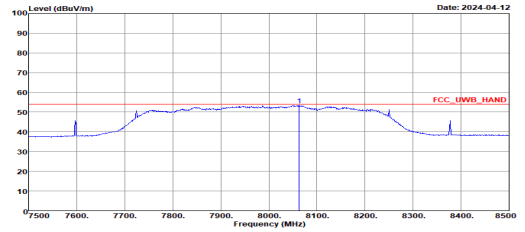

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:1.000sec
: .
Detector : Average
Project : 420107
Channel : CH9
Modulation : BPRF 10
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8063.00	53.50	-0.43	53.93	36.79	37.20	16.17	36.66	---	---	Average

Mode 16

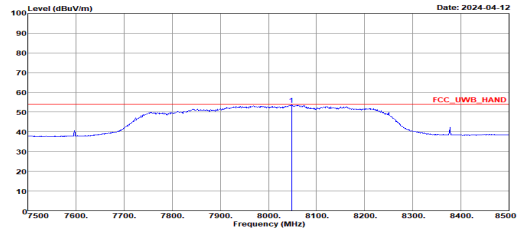

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:1.000sec
: .
Detector : Average
Project : 420107
Channel : CH9
Modulation : HPRF 27
Config : 0
STS Nums : 0
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8048.00	53.69	-0.24	53.93	36.97	37.20	16.16	36.64	---	---	Average

Radiated Emissions (Fundamental)			
Operating Function	Adapter Mode	**Polarization**	V
		Test Distance	3m

Mode 17

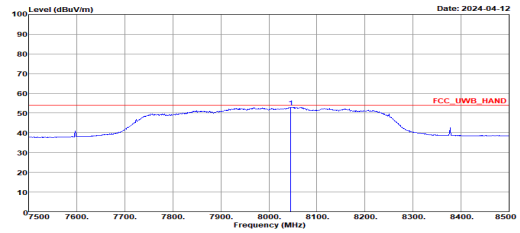

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:1.000sec
:
Detector : Average
Project : 420107
Channel : CH9
Modulation : HPRF 27
Config : 1
STS Nums : 2
Payload Length : 127
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8046.00	53.06	-0.87	53.93	36.33	37.21	16.16	36.64	---	---	Average

Mode 18

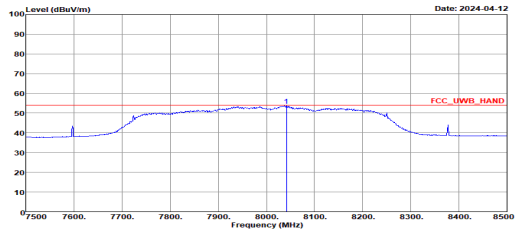

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:1.000sec
:
Detector : Average
Project : 420107
Channel : CH9
Modulation : HPRF 27
Config : 3
STS Nums : 2
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8042.00	53.70	-0.23	53.93	36.95	37.22	16.16	36.63	---	---	Average

3.5.7 Radiated Emissions (30MHz – 1GHz)

CH05 Radiated Emissions (30MHz – 1GHz)			
Test Mode	Mode 5	**Polarization**	H
Operating Function	Adapter Mode	**Test Distance**	3m

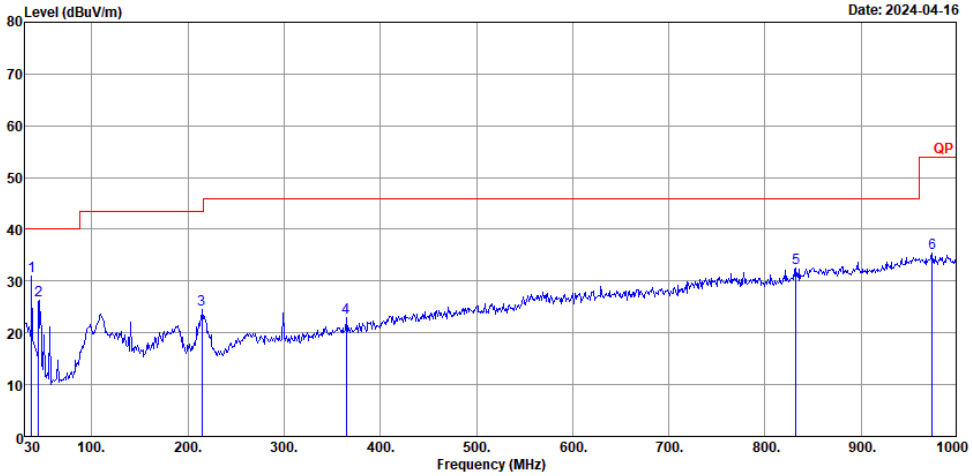

Site : 03CH22-HY
Condition : QP 3m BILO663304_231015_16 HORIZONTAL
: RBW:120.000KHz VBW:300.000KHz SWT:0.500sec
: .
Detector : Peak
Project : 420107
Channel : CH5
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Aux Factor	Aux2 Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		dB	dB
1	37.56	30.91	-9.09	40.00	41.43	21.21	1.00	32.74	---	---	Peak	0.01	0.00
2	44.85	26.19	-13.81	40.00	40.37	17.39	1.13	32.72	---	---	Peak	0.02	0.00
3	214.68	24.49	-19.01	43.50	39.67	14.88	2.54	32.67	---	---	Peak	0.07	0.00
4	364.40	22.96	-23.04	46.00	31.56	20.75	3.32	32.74	---	---	Peak	0.07	0.00
5	832.00	32.47	-13.53	46.00	30.99	28.59	4.98	32.30	---	---	Peak	0.21	0.00
6	974.10	35.33	-18.67	54.00	29.99	30.84	5.41	31.14	---	---	Peak	0.23	0.00

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Peak emission setting: RBW=120kHz; VBW = 300kHz.

CH05 Radiated Emissions (30MHz – 1GHz)			
Test Mode	Mode 5	**Polarization**	V
Operating Function	Adapter Mode	**Test Distance**	3m

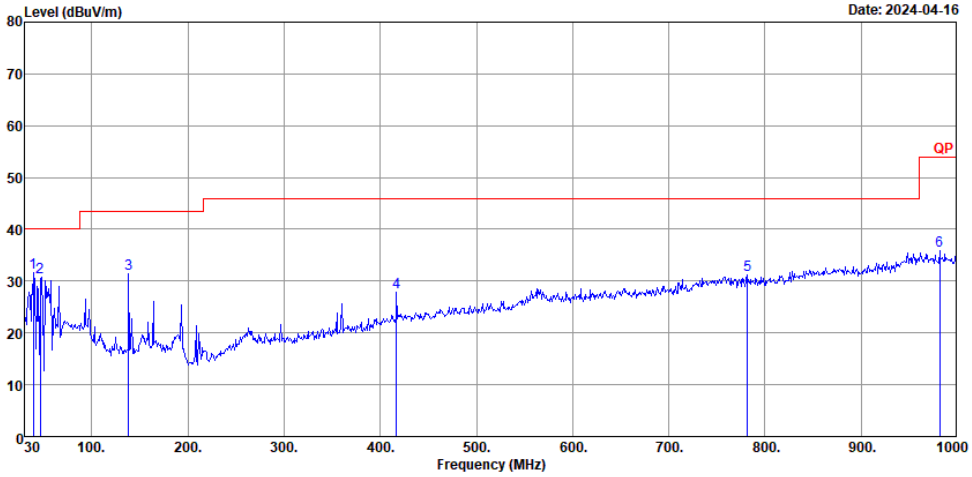

Site : 03CH22-HY
Condition : QP 3m BILO663304_231015_1G VERTICAL
: RBW:120.000KHz VBW:300.000KHz SWT:0.500sec
: .
Detector : Peak
Project : 420107
Channel : CH5
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Aux Factor	Aux2 Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		dB	dB
1	39.45	31.66	-8.34	40.00	43.04	20.31	1.04	32.74	---	---	Peak	0.01	0.00
2	46.74	30.82	-9.18	40.00	45.95	16.41	1.16	32.72	---	---	Peak	0.02	0.00
3	138.54	31.38	-12.12	43.50	44.53	17.48	2.05	32.70	---	---	Peak	0.02	0.00
4	416.90	27.82	-18.18	46.00	34.34	22.55	3.56	32.72	---	---	Peak	0.09	0.00
5	781.60	31.10	-14.90	46.00	30.54	28.10	4.85	32.56	---	---	Peak	0.17	0.00
6	981.80	35.93	-18.07	54.00	30.65	30.66	5.44	31.06	---	---	Peak	0.24	0.00

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Peak emission setting: RBW=120kHz; VBW = 300kHz.

CH09 Radiated Emissions (30MHz – 1GHz)			
Test Mode	Mode 14	**Polarization**	H
Operating Function	Adapter Mode	**Test Distance**	3m

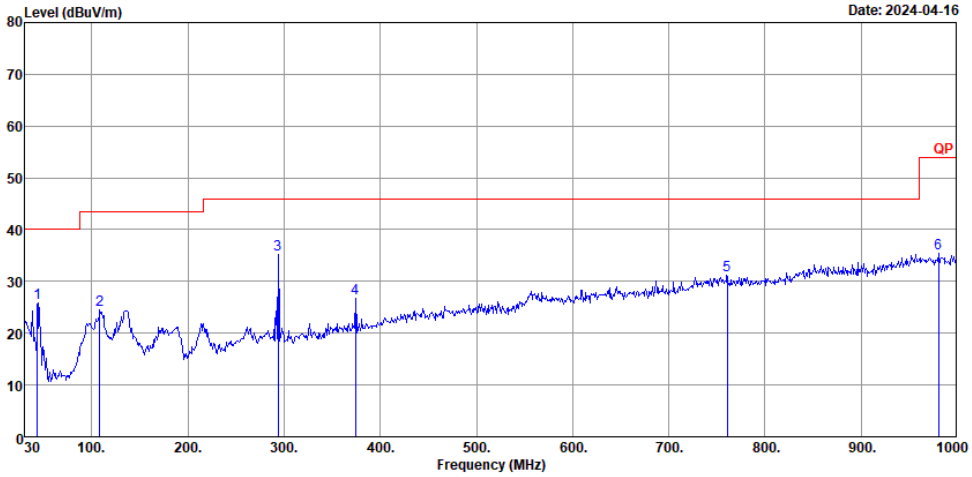

Site : 03CH22-HY
Condition : QP 3m BILOG63304_231015_16 HORIZONTAL
: RBW:120.000KHz VBW:300.000KHz SWT:0.500sec
: .
Detector : Peak
Project : 420107
Channel : CH9
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Aux Factor	Aux2 Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		dB	dB
1	43.77	25.77	-14.23	40.00	39.38	17.98	1.11	32.72	---	---	Peak	0.02	0.00
2	108.30	24.42	-19.08	43.50	38.56	16.71	1.82	32.72	---	---	Peak	0.05	0.00
3	293.52	35.32	-10.68	46.00	45.90	19.09	2.98	32.71	---	---	Peak	0.06	0.00
4	374.20	26.75	-19.25	46.00	35.15	20.90	3.36	32.73	---	---	Peak	0.07	0.00
5	760.60	31.10	-14.90	46.00	30.49	28.30	4.80	32.63	---	---	Peak	0.14	0.00
6	980.40	35.33	-18.67	54.00	30.10	30.64	5.43	31.08	---	---	Peak	0.24	0.00

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Peak emission setting: RBW=120kHz; VBW = 300kHz.

CH09 Radiated Emissions (30MHz – 1GHz)			
Test Mode	Mode 14	**Polarization**	V
Operating Function	Adapter Mode	**Test Distance**	3m

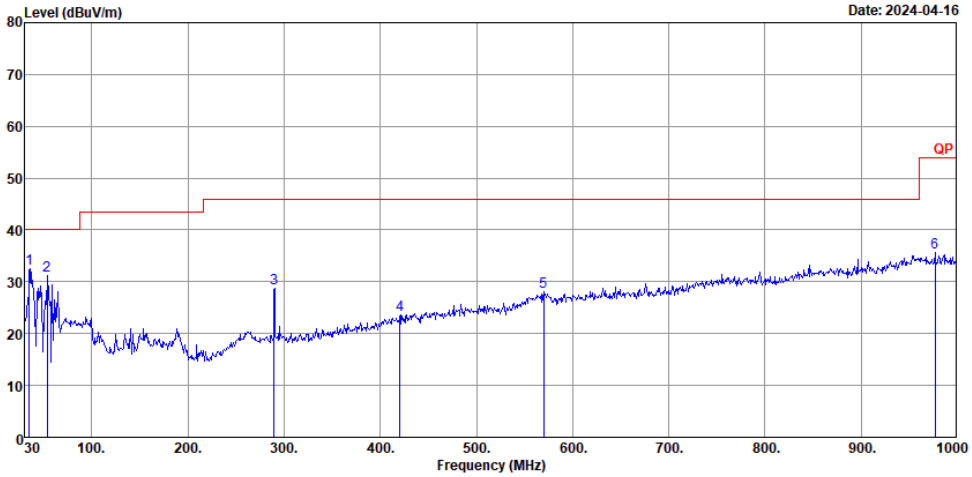

Site : 03CH22-HY
Condition : QP 3m BILOG63304_231015_1G VERTICAL
: RBW:120.000KHz VBW:300.000KHz SWT:0.500sec
: .
Detector : Peak
Project : 420107
Channel : CH9
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Aux Factor	Aux2 Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		dB	dB
1	35.13	32.44	-7.56	40.00	41.80	22.42	0.95	32.74	---	---	Peak	0.01	0.00
2	53.49	31.22	-8.78	40.00	49.67	13.01	1.24	32.73	---	---	Peak	0.03	0.00
3	289.74	28.81	-17.19	46.00	39.49	19.01	2.96	32.71	---	---	Peak	0.06	0.00
4	420.40	23.52	-22.48	46.00	29.95	22.64	3.57	32.73	---	---	Peak	0.09	0.00
5	570.20	28.01	-17.99	46.00	30.43	26.13	4.16	32.86	---	---	Peak	0.15	0.00
6	976.90	35.73	-18.27	54.00	30.38	30.80	5.42	31.11	---	---	Peak	0.24	0.00

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Peak emission setting: RBW=120kHz; VBW = 300kHz.

3.5.8 Radiated Emissions (960MHz – 18GHz)

CH05 Radiated Emissions (960MHz – 18GHz)			
Test Mode	Mode 5	**Polarization**	H
Operating Function	Adapter Mode		
Test Distance	The test distance between the receiving antenna and the EUT is as following: 3m for 1.61 GHz ~ 10.60 GHz frequency range, 1 m for 1GHz ~ 1.61 GHz, and 0.5 m for other frequency ranges.		

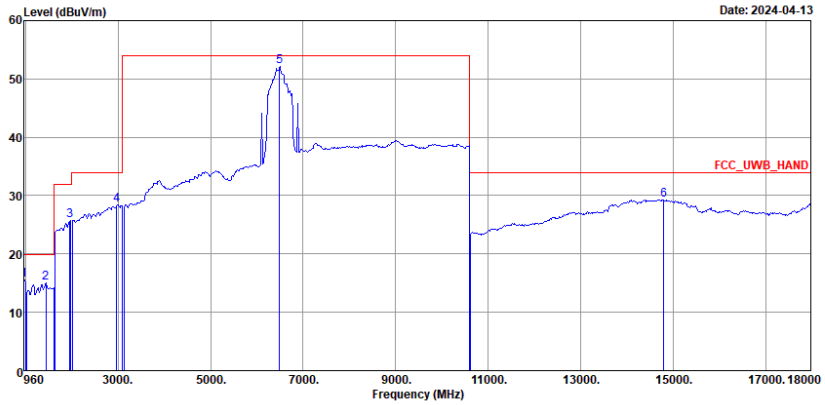

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 HORIZONTAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:7.500sec
: .
Detector : Average
Project : 420107
Channel : CH5
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Aux Factor	Aux2 Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		dB	dB
1	963.56	15.55	-4.38	19.93	25.83	30.94	5.38	31.26	---	---	Average	0.22	-15.56
2	1436.15	15.06	-4.87	19.93	24.96	24.90	6.56	31.82	---	---	Average	-9.54	0.00
3	1953.90	25.66	-6.27	31.93	24.11	25.94	7.70	32.09	---	---	Average	0.00	0.00
4	2973.46	28.41	-5.52	33.93	23.04	28.30	9.55	32.48	---	---	Average	0.00	0.00
5	6490.00	52.17	-1.76	53.93	36.41	36.36	14.46	35.06	---	---	Average	0.00	0.00
6	14795.80	29.32	-4.61	33.93	23.32	42.69	22.28	43.41	---	---	Average	-15.56	0.00

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Average emission setting outside GPS Bands: RBW=1MHz; VBW=3MHz.
Note 5: Average emission setting in GPS bands: RBW=1kHz; VBW=3kHz.
Note 6: #5 is fundamental signal.

Note 7:

- Distance extrapolation factor = 20 log (test distance [X m]/specific distance [3 m]) (dB)
  Example: Distance extrapolation factor = 20log (0.5m/3m) = -15.56 (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Aux Factor (dB) + Aux 2 Factor (dB) = Level (dBuV/m)
  (Note: For test item below 1GHz, Aux = Filter loss; Aux 2 = Distance extrapolation factor)
  (Note: For test item above 1GHz, Aux = Distance extrapolation factor; Aux 2 = 0, which means the measuring units are not connecting to the Filter)
  Example: Corrected Reading: 42.69 (dB/m) + 22.28 (dB) + 23.32 (dBuV) – 43.41 (dB) + (-15.56) (dB) = 29.32 (dBuV/m

CH05 Radiated Emissions (960MHz – 18GHz)			
Test Mode	Mode 5	**Polarization**	V
Operating Function	Adapter Mode		
Test Distance	The test distance between the receiving antenna and the EUT is as following: 3m for 1.61 GHz ~ 10.60 GHz frequency range, 1 m for 1GHz ~ 1.61 GHz, and 0.5 m for other frequency ranges.		

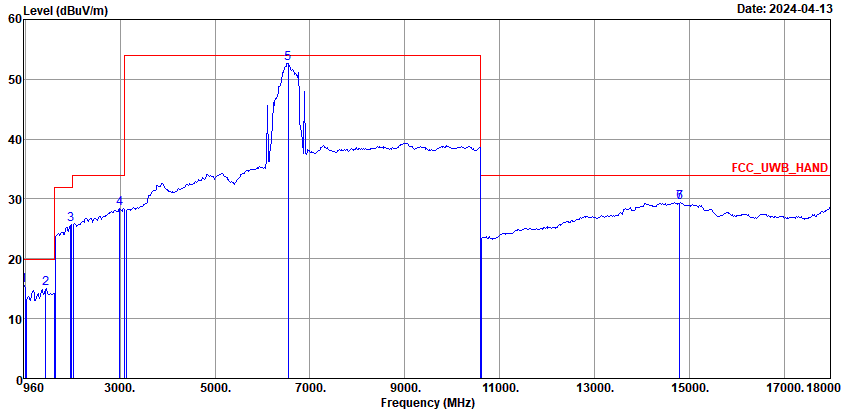

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:7.500sec
: .
Detector : Average
Project : 420107
Channel : CH5
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Aux Factor	Aux2 Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		dB	dB
1	964.36	15.49	-4.44	19.93	25.77	30.93	5.38	31.25	---	---	Average	0.22	-15.56
2	1431.27	15.06	-4.87	19.93	24.97	24.90	6.55	31.82	---	---	Average	-9.54	0.00
3	1954.66	25.70	-6.23	31.93	24.14	25.95	7.70	32.09	---	---	Average	0.00	0.00
4	2984.56	28.48	-5.45	33.93	23.09	28.30	9.57	32.48	---	---	Average	0.00	0.00
5	6542.50	52.65	-1.28	53.93	36.75	36.49	14.53	35.12	---	---	Average	0.00	0.00
6	14803.20	29.47	-4.46	33.93	23.48	42.69	22.28	43.42	---	---	Average	-15.56	0.00
7	14803.20	29.47	-4.46	33.93	23.48	42.69	22.28	43.42	---	---	Average	-15.56	0.00

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Average emission setting outside GPS Bands: RBW=1MHz; VBW=3MHz.
Note 5: Average emission setting in GPS bands: RBW=1kHz; VBW=3kHz.
Note 6: #5 is fundamental signal.

Note 7:

- Distance extrapolation factor = 20 log (test distance [X m]/specific distance [3 m]) (dB)

- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Aux Factor (dB) = Level (dBuV/m)
  (Note: For test item below 1GHz, Aux = Filter loss; Aux 2 = Distance extrapolation factor)
  (Note: For test item above 1GHz, Aux = Distance extrapolation factor; Aux 2 = 0, which means the measuring units are not connecting to the Filter)

CH09 Radiated Emissions (960MHz – 18GHz)			
Test Mode	Mode 14	**Polarization**	H
Operating Function	Adapter Mode		
Test Distance	The test distance between the receiving antenna and the EUT is as following: 3m for 1.61 GHz ~ 10.60 GHz frequency range, 1 m for 1GHz ~ 1.61 GHz, and 0.5 m for other frequency ranges.		

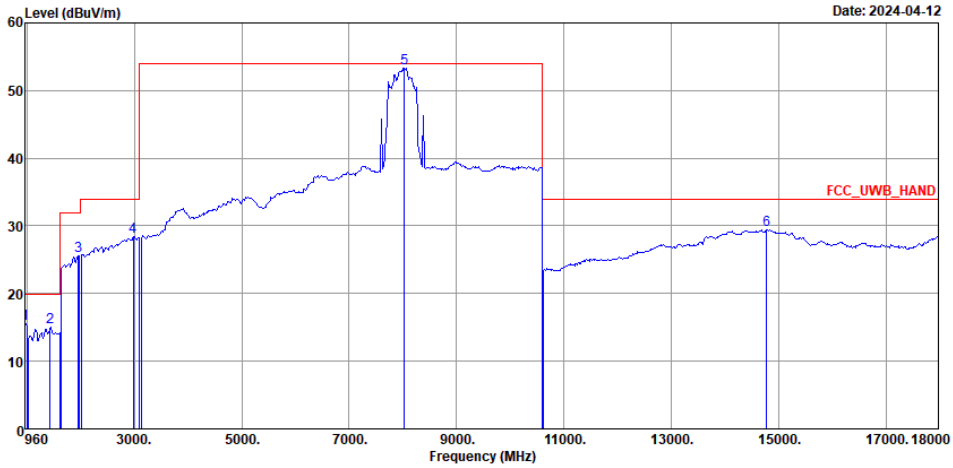

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 HORIZONTAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:7.500sec
: .
Detector : Average
Project : 420107
Channel : CH9
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Aux Factor	Aux2 Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		dB	dB
1	968.20	15.57	-4.36	19.93	25.80	30.92	5.39	31.21	---	---	Average	0.23	-15.56
2	1434.32	15.07	-4.86	19.93	24.98	24.90	6.55	31.82	---	---	Average	-9.54	0.00
3	1954.66	25.63	-6.30	31.93	24.07	25.95	7.70	32.09	---	---	Average	0.00	0.00
4	2977.90	28.37	-5.56	33.93	22.99	28.30	9.56	32.48	---	---	Average	0.00	0.00
5	8035.00	53.26	-0.67	53.93	36.50	37.23	16.16	36.63	---	---	Average	0.00	0.00
6	14781.00	29.48	-4.45	33.93	23.50	42.66	22.27	43.39	---	---	Average	-15.56	0.00

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Average emission setting outside GPS Bands: RBW=1MHz; VBW=3MHz.
Note 5: Average emission setting in GPS bands: RBW=1kHz; VBW=3kHz.
Note 6: #5 is fundamental signal.

Note 7:

- Distance extrapolation factor = 20 log (test distance [X m]/specific distance [3 m]) (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Aux Factor (dB) = Level (dBuV/m)
  (Note: For test item below 1GHz, Aux = Filter loss; Aux 2 = Distance extrapolation factor)
  (Note: For test item above 1GHz, Aux = Distance extrapolation factor; Aux 2 = 0, which means the measuring units are not connecting to the Filter)

CH09 Radiated Emissions (960MHz – 18GHz)			
Test Mode	Mode 14	**Polarization**	V
Operating Function	Adapter Mode		
Test Distance	The test distance between the receiving antenna and the EUT is as following: 3m for 1.61 GHz ~ 10.60 GHz frequency range, 1 m for 1GHz ~ 1.61 GHz, and 0.5 m for other frequency ranges.		

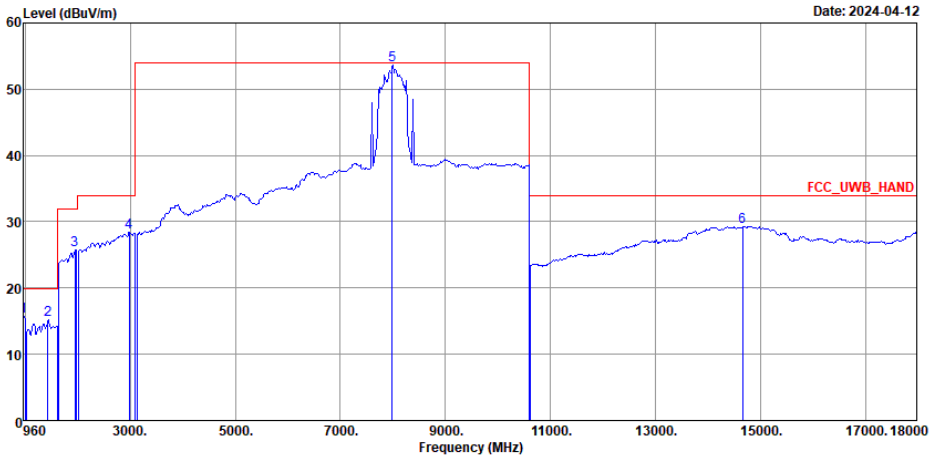

Site : 03CH22-HY
Condition : FCC_UWB_HAND 3m LE2C04A18EN_230712 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:7.500sec
: .
Detector : Average
Project : 420107
Channel : CH9
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Aux Factor	Aux2 Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		dB	dB
1	964.16	15.63	-4.30	19.93	25.91	30.93	5.38	31.25	---	---	Average	0.22	-15.56
2	1431.88	15.14	-4.79	19.93	25.05	24.90	6.55	31.82	---	---	Average	-9.54	0.00
3	1949.72	25.68	-6.25	31.93	24.18	25.90	7.69	32.09	---	---	Average	0.00	0.00
4	2976.79	28.33	-5.60	33.93	22.95	28.30	9.56	32.48	---	---	Average	0.00	0.00
5	7990.00	53.60	-0.33	53.93	36.77	37.28	16.13	36.58	---	---	Average	0.00	0.00
6	14662.60	29.31	-4.62	33.93	23.19	42.73	22.16	43.21	---	---	Average	-15.56	0.00

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Average emission setting outside GPS Bands: RBW=1MHz; VBW=3MHz.
Note 5: Average emission setting in GPS bands: RBW=1kHz; VBW=3kHz.
Note 6: #5 is fundamental signal.

Note 7:

- Distance extrapolation factor = 20 log (test distance [X m]/specific distance [3 m]) (dB)

- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Aux Factor (dB) = Level (dBuV/m)
  (Note: For test item below 1GHz, Aux = Filter loss; Aux 2 = Distance extrapolation factor)
  (Note: For test item above 1GHz, Aux = Distance extrapolation factor; Aux 2 = 0, which means the measuring units are not connecting to the Filter)

3.5.9 Radiated Emissions (1164MHz – 1240MHz)

CH05 Radiated Emissions (1164MHz – 1240MHz)			
Test Mode	Mode 5	**Polarization**	H
Operating Function	Adapter Mode	**Test Distance**	3m

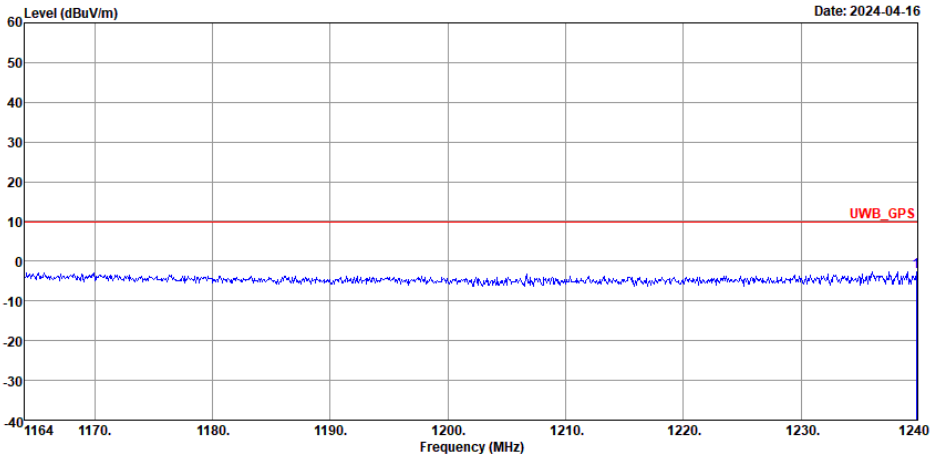

Site : 03CH22-HY
Condition : UWB_GPS 3m LE2C04A18EN_230712 HORIZONTAL
: RBW:1.000KHz VBW:3.000KHz SWT:40.000sec
: .
Detector : Peak
Project : 420107
Channel : CH5
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Aux Factor	Aux2 Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		dB	dB
1	1239.77	-2.76	-12.69	9.93	-1.01	23.90	6.13	31.78	---	---	Peak	0.00	0.00

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Average emission setting: RBW=1kHz; VBW=3kHz.
Note 5: E (dBuv/m) = EIRP Limit (dBm) + 95.23. E(dBuV/m) = -85.3 + 95.23 = 9.93dBuV/m.

CH05 Radiated Emissions (1164MHz – 1240MHz)			
Test Mode	Mode 5	**Polarization**	V
Operating Function	Adapter Mode	**Test Distance**	3m

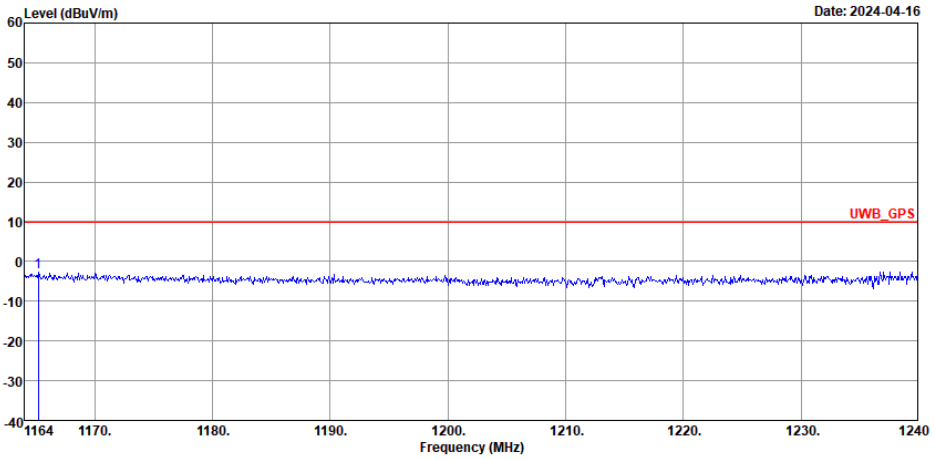

Site : 03CH22-HY
Condition : UWB_GPS 3m LE2C04A18EN_230712 VERTICAL
: RBW:1.000KHz VBW:3.000KHz SWT:40.000sec
: .
Detector : Peak
Project : 420107
Channel : CH5
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Aux Factor	Aux2 Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		dB	dB
1	1165.22	-2.71	-12.64	9.93	-1.23	24.35	5.94	31.77	---	---	Peak	0.00	0.00

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Average emission setting: RBW=1kHz; VBW=3kHz.
Note 5: E (dBuv/m) = EIRP Limit (dBm) + 95.23. E(dBuV/m) = -85.3 + 95.23 = 9.93dBuV/m.

CH09 Radiated Emissions (1164MHz – 1240MHz)			
Test Mode	Mode 14	**Polarization**	H
Operating Function	Adapter Mode	**Test Distance**	3m

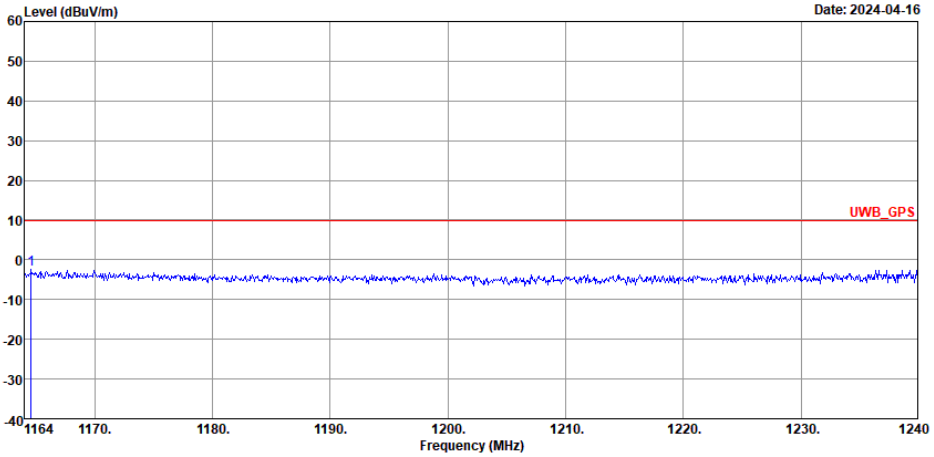

Site : 03CH22-HY
Condition : UWB_GPS 3m LE2C04A18EN_230712 HORIZONTAL
: RBW:1.000KHz VBW:3.000KHz SWT:40.000sec
: .
Detector : Peak
Project : 420107
Channel : CH9
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Aux Factor	Aux2 Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		dB	dB
1	1164.61	-2.51	-12.44	9.93	-1.03	24.35	5.94	31.77	---	---	Peak	0.00	0.00

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Average emission setting: RBW=1kHz; VBW=3kHz.
Note 5: E (dBuv/m) = EIRP Limit (dBm) + 95.23. E(dBuV/m) = -85.3 + 95.23 = 9.93dBuV/m.

CH09 Radiated Emissions (1164MHz – 1240MHz)			
Test Mode	Mode 14	**Polarization**	V
Operating Function	Adapter Mode	**Test Distance**	3m

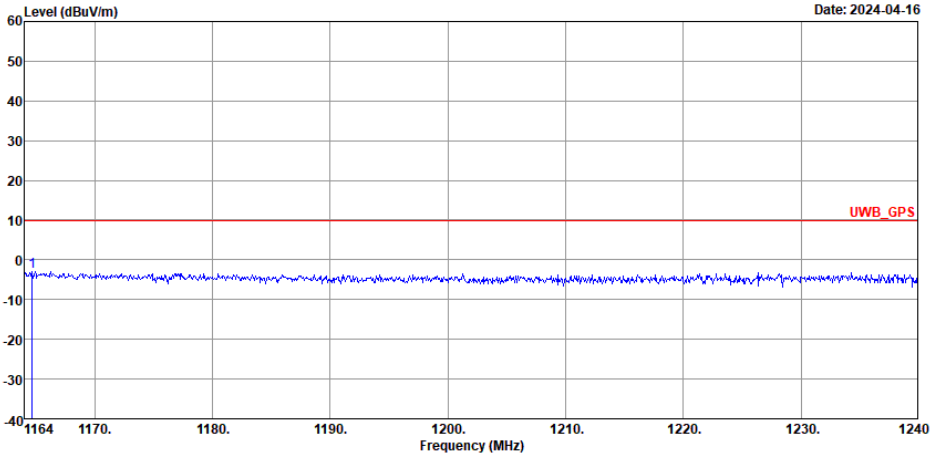

Site : 03CH22-HY
Condition : UWB_GPS 3m LE2C04A18EN_230712 VERTICAL
: RBW:1.000KHz VBW:3.000KHz SWT:40.000sec
: .
Detector : Peak
Project : 420107
Channel : CH9
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Aux Factor	Aux2 Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		dB	dB
1	1164.68	-3.00	-12.93	9.93	-1.52	24.35	5.94	31.77	---	---	Peak	0.00	0.00

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Average emission setting: RBW=1kHz; VBW=3kHz.
Note 5: E (dBuv/m) = EIRP Limit (dBm) + 95.23. E(dBuV/m) = -85.3 + 95.23 = 9.93dBuV/m.

3.5.10 Radiated Emissions (1559MHz – 1610MHz)

CH05 Radiated Emissions (1559MHz – 1610MHz)			
Test Mode	Mode 5	**Polarization**	H
Operating Function	Adapter Mode	**Test Distance**	3m

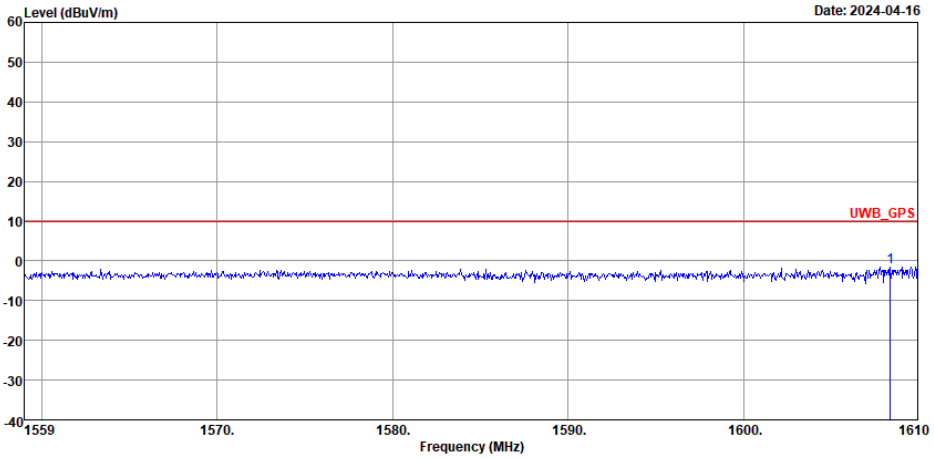

Site : 03CH22-HY
Condition : UWB_GPS 3m LE2C04A18EN_230712 HORIZONTAL
: RBW:1.000KHz VBW:3.000KHz SWT:40.000sec
: .
Detector : Peak
Project : 420107
Channel : CH5
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Aux Factor	Aux2 Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		dB	dB
1	1608.37	-1.44	-11.37	9.93	-1.00	24.48	6.97	31.89	---	---	Peak	0.00	0.00

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Average emission setting: RBW=1kHz; VBW=3kHz.
Note 5: E (dBuv/m) = EIRP Limit (dBm) + 95.23. E(dBuV/m) = -85.3 + 95.23 = 9.93dBuV/m.

CH05_Ranging Antenna Radiated Emissions (1559MHz – 1610MHz)			
Test Mode	Mode 5	**Polarization**	V
Operating Function	Adapter Mode	**Test Distance**	3m

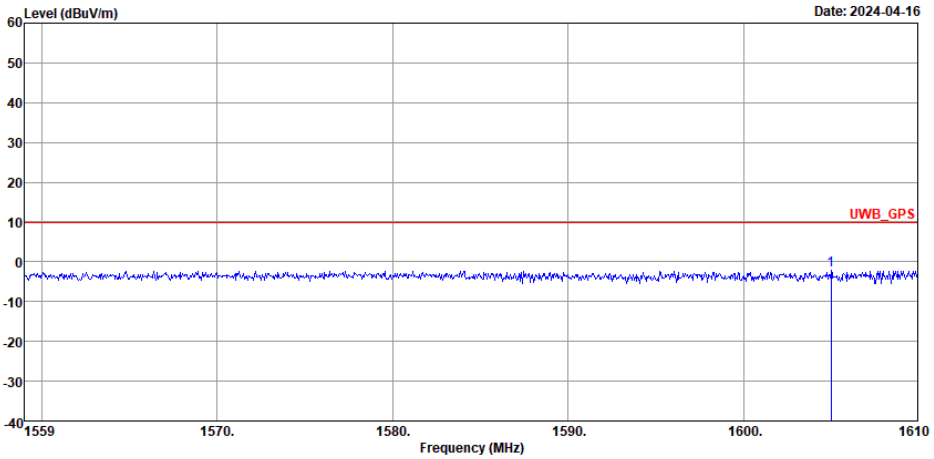

Site : 03CH22-HY
Condition : UWB_GPS 3m LE2C04A18EN_230712 VERTICAL
: RBW:1.000KHz VBW:3.000KHz SWT:40.000sec
: .
Detector : Peak
Project : 420107
Channel : CH5
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Aux Factor	Aux2 Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		dB	dB
1	1605.00	-2.03	-11.96	9.93	-1.55	24.45	6.96	31.89	---	---	Peak	0.00	0.00

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Average emission setting: RBW=1kHz; VBW=3kHz.
Note 5: E (dBuv/m) = EIRP Limit (dBm) + 95.23. E(dBuV/m) = -85.3 + 95.23 = 9.93dBuV/m.

CH09 Radiated Emissions (1559MHz – 1610MHz)			
Test Mode	Mode 14	**Polarization**	H
Operating Function	Adapter Mode	**Test Distance**	3m

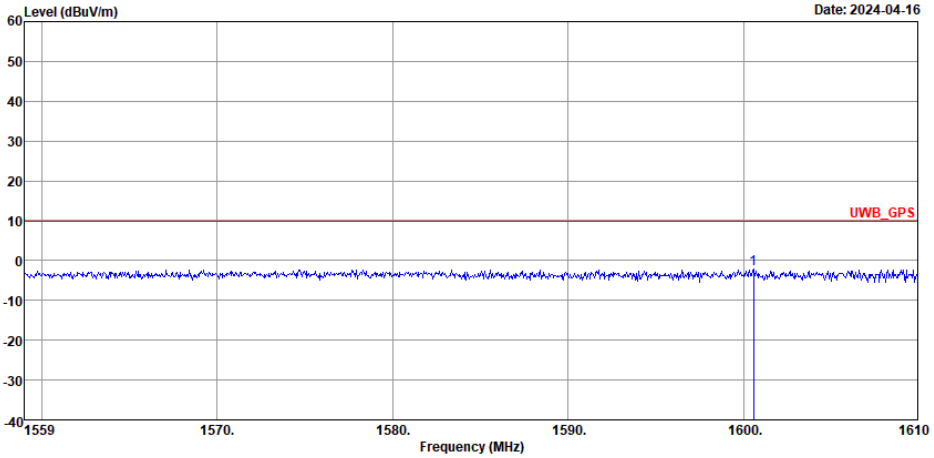

Site : 03CH22-HY
Condition : UWB_GPS 3m LE2C04A18EN_230712 HORIZONTAL
: RBW:1.000KHz VBW:3.000KHz SWT:40.000sec
: .
Detector : Peak
Project : 420107
Channel : CH9
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Aux Factor	Aux2 Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		dB	dB
1	1600.57	-2.10	-12.03	9.93	-1.57	24.41	6.95	31.89	---	---	Peak	0.00	0.00

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Average emission setting: RBW=1kHz; VBW=3kHz.
Note 5: E (dBuv/m) = EIRP Limit (dBm) + 95.23. E(dBuV/m) = -85.3 + 95.23 = 9.93dBuV/m.

CH09 Radiated Emissions (1559MHz – 1610MHz)			
Test Mode	Mode 14	**Polarization**	V
Operating Function	Adapter Mode	**Test Distance**	3m

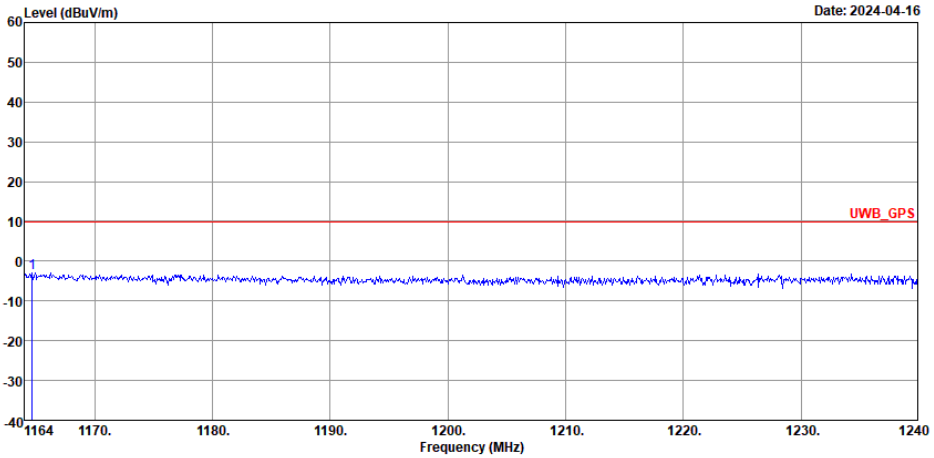

Site : 03CH22-HY
Condition : UWB_GPS 3m LE2C04A18EN_230712 VERTICAL
: RBW:1.000KHz VBW:3.000KHz SWT:40.000sec
: .
Detector : Peak
Project : 420107
Channel : CH9
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Aux Factor	Aux2 Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		dB	dB
1	1164.68	-3.00	-12.93	9.93	-1.52	24.35	5.94	31.77	---	---	Peak	0.00	0.00

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Average emission setting: RBW=1kHz; VBW=3kHz.
Note 5: E (dBuv/m) = EIRP Limit (dBm) + 95.23. E(dBuV/m) = -85.3 + 95.23 = 9.93dBuV/m.

3.5.11 Radiated Emissions (18GHz – 40GHz)

CH05 Radiated Emissions (18GHz – 40GHz)			
Test Mode	Mode 5	**Polarization**	H
Operating Function	Adapter Mode	**Test Distance**	0.5m

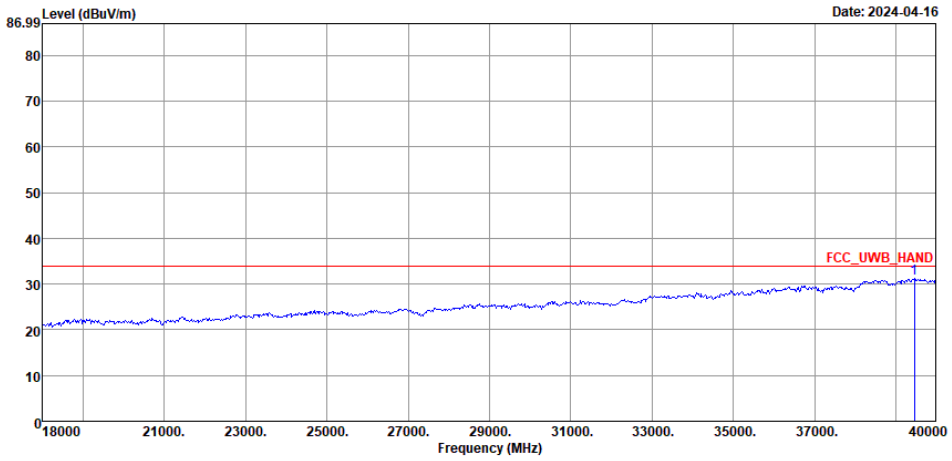

Site : 03CH22-HY
Condition : FCC_UWB_HAND 1m SHF HORN 1224_230710 HORIZONTAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:11.000sec
: .
Detector : Average
Project : 420107
Channel : CH5
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Aux Factor	Aux2 Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		dB	dB
1	39454.00	31.23	-2.70	33.93	48.35	45.76	9.21	56.53	---	---	Average	-15.56	0.00

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Average emission setting: RBW=1MHz; VBW=3MHz.

Note 5:

- Distance extrapolation factor = 20 log (test distance [X m]/specific distance [3 m]) (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Aux (dB) + Aux 2 (dB) = Level (dBuV/m)
  (Note: Aux = Distance extrapolation factor; Aux 2 = 0, which means the measuring units are not connecting to the Filter)

CH05 Radiated Emissions (18GHz – 40GHz)			
Test Mode	Mode 5	**Polarization**	V
Operating Function	Adapter Mode	**Test Distance**	0.5m

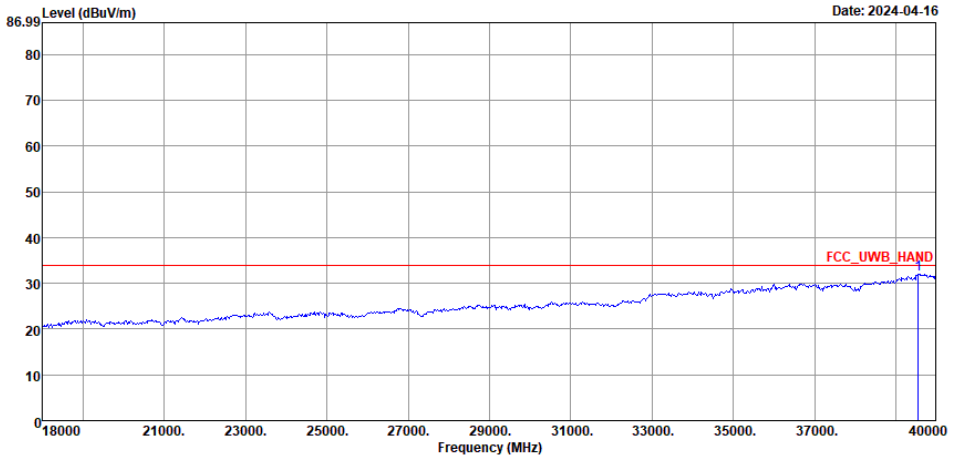

Site : 03CH22-HY
Condition : FCC_UWB_HAND 1m SHF HORN 1224_230710 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:11.000sec
: .
Detector : Average
Project : 420107
Channel : CH5
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x09

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Aux Factor	Aux2 Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		dB	dB
1	39538.00	32.03	-1.90	33.93	49.35	45.45	9.24	56.45	---	---	Average	-15.56	0.00

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Average emission setting: RBW=1MHz; VBW=3MHz.

Note 5:

- Distance extrapolation factor = 20 log (test distance [X m]/specific distance [3 m]) (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Aux (dB) + Aux 2 (dB) = Level (dBuV/m)
  (Note: Aux = Distance extrapolation factor; Aux 2 = 0, which means the measuring units are not connecting to the Filter)

CH09 Radiated Emissions (18GHz – 40GHz)			
Test Mode	Mode 14	**Polarization**	H
Operating Function	Adapter Mode	**Test Distance**	0.5m

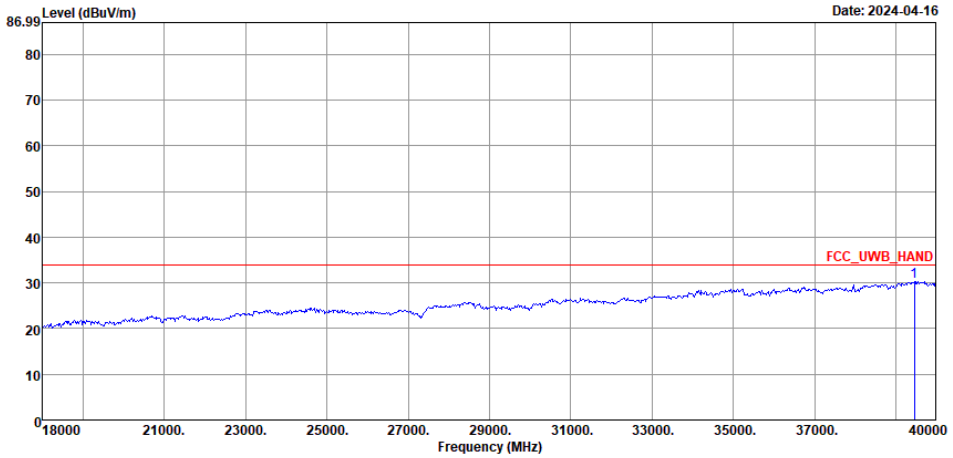

Site : 03CH22-HY
Condition : FCC_UWB_HAND 1m SHF HORN 1224_230710 HORIZONTAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:11.000sec
: .
Detector : Average
Project : 420107
Channel : CH9
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Aux Factor	Aux2 Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		dB	dB
1	39454.00	30.33	-3.60	33.93	47.45	45.76	9.21	56.53	---	---	Average	-15.56	0.00

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Average emission setting: RBW=1MHz; VBW=3MHz.

Note 5:

- Distance extrapolation factor = 20 log (test distance [X m]/specific distance [3 m]) (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Aux (dB) + Aux 2 (dB) = Level (dBuV/m)
  (Note: Aux = Distance extrapolation factor; Aux 2 = 0, which means the measuring units are not connecting to the Filter)

CH09 Radiated Emissions (18GHz – 40GHz)			
Test Mode	Mode 14	**Polarization**	V
Operating Function	Adapter Mode	**Test Distance**	0.5m

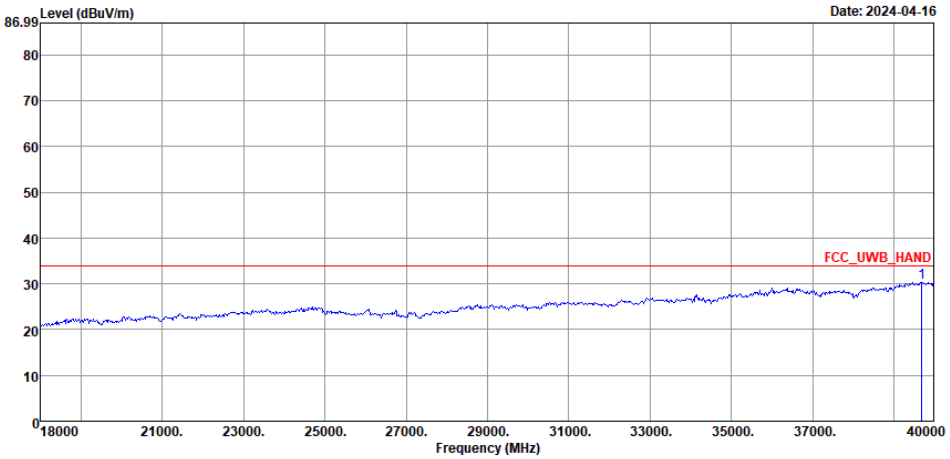

Site : 03CH22-HY
Condition : FCC_UWB_HAND 1m SHF HORN 1224_230710 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:11.000sec
: .
Detector : Average
Project : 420107
Channel : CH9
Modulation : BPRF 9
Config : 3
STS Nums : 1
Payload Length : 0
SN : 41291JEAYW00T1
Setting : 0x10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Aux Factor	Aux2 Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		dB	dB
1	39678.00	30.38	-3.55	33.93	47.60	45.36	9.27	56.29	---	---	Average	-15.56	0.00

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Average emission setting: RBW=1MHz; VBW=3MHz.

Note 5:

- Distance extrapolation factor = 20 log (test distance [X m]/specific distance [3 m]) (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Aux (dB) + Aux 2 (dB) = Level (dBuV/m)
  (Note: Aux = Distance extrapolation factor; Aux 2 = 0, which means the measuring units are not connecting to the Filter)

4 Test Equipment and Calibration Data

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Apr. 15, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Apr. 15, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 20, 2023	Apr. 15, 2024	Oct. 19, 2024	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Apr. 15, 2024	Mar. 09, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 07, 2024	Apr. 15, 2024	Mar. 06, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 20, 2023	Apr. 15, 2024	Sep. 19, 2024	Conduction (CO07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep .12, 2023	Apr. 09, 2024~ Apr. 16, 2024	Sep. 11, 2024	Radiation (03CH22-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D-06	63304 & 002	30MHz~1GHz	Oct. 15, 2023	Apr. 09, 2024~ Apr. 16, 2024	Oct. 14, 2024	Radiation (03CH22-HY)
Amplifier	SONOMA	310N	421581	N/A	Jul. 15, 2023	Apr. 09, 2024~ Apr. 16, 2024	Jul. 14, 2024	Radiation (03CH22-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C04A18EN	1GHz~18GHz	Jul. 12, 2023	Apr. 09, 2024~ Apr. 16, 2024	Jul. 11, 2024	Radiation (03CH22-HY)
Amplifier	EMEC	EM01G18GA	060877	N/A	Sep. 28, 2023	Apr. 09, 2024~ Apr. 16, 2024	Sep. 27, 2024	Radiation (03CH22-HY)
Signal Analyzer	Keysight	N9010B	MY62170278	10Hz~44GHz	Aug. 31, 2023	Apr. 09, 2024~ Apr. 16, 2024	Aug. 30, 2024	Radiation (03CH22-HY)
Hygrometer	TECPEL	DTM-303A	TP211559	N/A	Nov. 16, 2023	Apr. 09, 2024~ Apr. 16, 2024	Nov. 15, 2024	Radiation (03CH22-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Apr. 09, 2024~ Apr. 16, 2024	N/A	Radiation (03CH22-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Apr. 09, 2024~ Apr. 16, 2024	N/A	Radiation (03CH22-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Apr. 09, 2024~ Apr. 16, 2024	N/A	Radiation (03CH22-HY)
Software	Audix	E3 6.09824_2019122	RK-002347	N/A	N/A	Apr. 09, 2024~ Apr. 16, 2024	N/A	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 06, 2024	Apr. 09, 2024~ Apr. 16, 2024	Mar. 05, 2025	Radiation (03CH22-HY)
RF Cablejavascript: void(0)	HUBER + SUHNER	SUCOFLEX 102	804390/2,804611/2,804615/2	N/A	Oct. 24, 2023	Apr. 09, 2024~ Apr. 16, 2024	Oct. 23, 2024	Radiation (03CH22-HY)
Spectrum Analyzer	Rohde & Schwarz	FSW43	101456	RBW 50MHz	Fed. 19, 2024	Apr. 09, 2024~ Apr. 16, 2024	Fed. 18, 2025	Radiation (03CH22-HY)

Appendix A. AC Conducted Emission Test Results

EUT Information

Report NO :	412915
Test Mode :	Mode 1
Test Voltage :	120Vac/60Hz
Phase :	Line

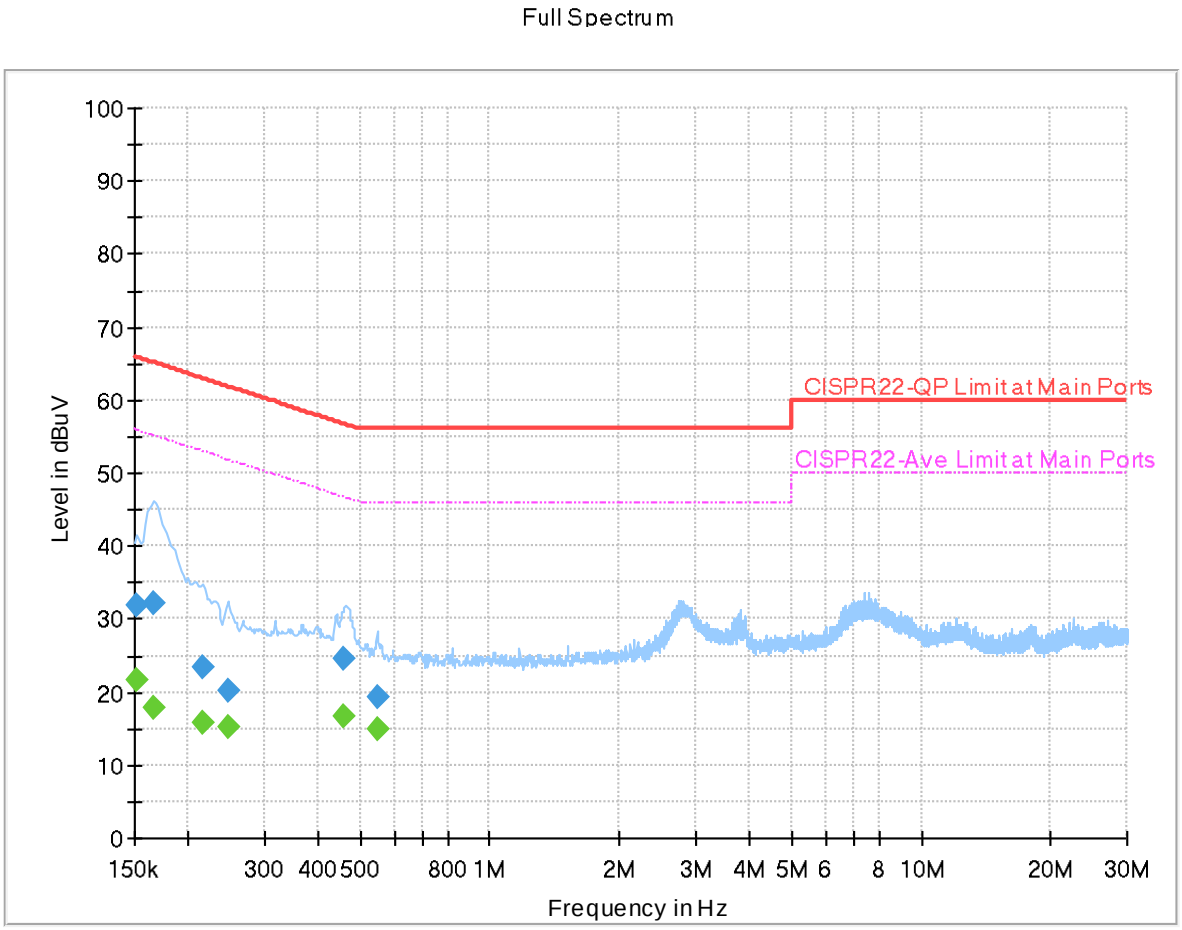

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152160	---	21.51	55.88	34.37	L1	OFF	19.9
0.152160	31.95	---	65.88	33.93	L1	OFF	19.9
0.165570	---	17.83	55.18	37.35	L1	OFF	19.9
0.165570	32.18	---	65.18	33.00	L1	OFF	19.9
0.215070	---	15.93	53.01	37.08	L1	OFF	19.9
0.215070	23.31	---	63.01	39.70	L1	OFF	19.9
0.246840	---	15.17	51.86	36.69	L1	OFF	19.9
0.246840	20.13	---	61.86	41.73	L1	OFF	19.9
0.460680	---	16.76	46.68	29.92	L1	OFF	19.9
0.460680	24.55	---	56.68	32.13	L1	OFF	19.9
0.551940	---	14.80	46.00	31.20	L1	OFF	19.9
0.551940	19.33	---	56.00	36.67	L1	OFF	19.9

EUT Information

Report NO :	412915
Test Mode :	Mode 1
Test Voltage :	120Vac/60Hz
Phase :	Neutral

Full Spectrum

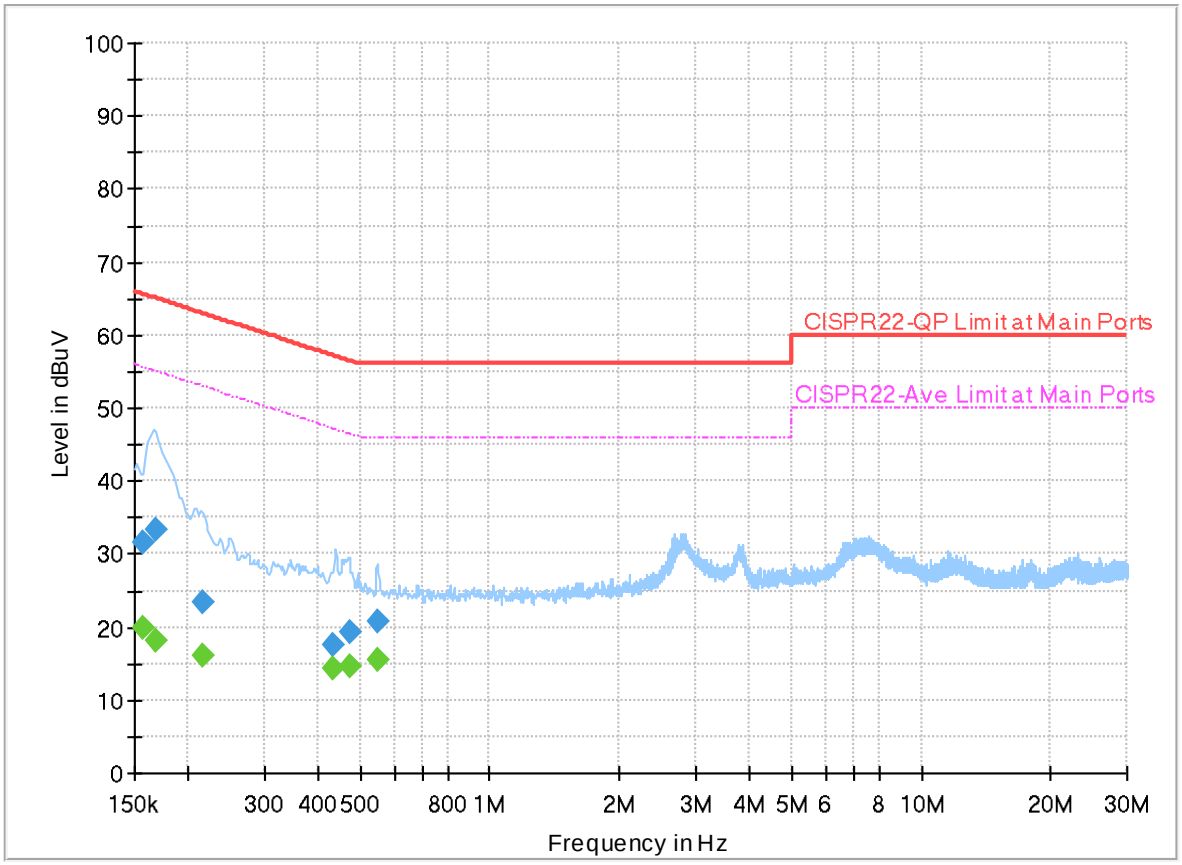

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	19.80	55.63	35.83	N	OFF	19.9
0.156750	31.56	---	65.63	34.07	N	OFF	19.9
0.167820	---	18.17	55.07	36.90	N	OFF	19.9
0.167820	33.28	---	65.07	31.79	N	OFF	19.9
0.214980	---	16.00	53.01	37.01	N	OFF	19.9
0.214980	23.51	---	63.01	39.50	N	OFF	19.9
0.431340	---	14.42	47.23	32.81	N	OFF	19.9
0.431340	17.53	---	57.23	39.70	N	OFF	19.9
0.475890	---	14.68	46.41	31.73	N	OFF	19.9
0.475890	19.43	---	56.41	36.98	N	OFF	19.9
0.547440	---	15.36	46.00	30.64	N	OFF	19.9
0.547440	20.73	---	56.00	35.27	N	OFF	19.9

————THE END————