

FCC Test Report

FCC ID	:	R3USCBT25
Product Description	:	USB Gaming Headset with Bluetooth
Model No.	:	SCBT25
Brand Name	:	EPOS
Applicant	:	DSEA A/S
Address	:	Kongebakken 9, DK-2765 Smoerum, Denmark
Factory	:	Charter Media (Dongguan) Co., Ltd.
Address	:	Dabandi Industrial Zone, Daning District, Humen Town. Dongguan City, Guangdong 523930, P.R.C
Standard	:	47 CFR FCC Part 15.247
Received Date	:	Jan. 26, 2021
Tested Date	:	Feb. 04 ~ Feb. 22, 2021

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Along Cher // Assistant Manager

Approved by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	Test Equipment List and Calibration Data	8
1.5	Test Standards	9
1.6	Reference Guidance	9
1.7	Deviation from Test Standard and Measurement Procedure	9
1.8	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Facility	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions	11
3.2	6dB and Occupied Bandwidth	14
3.3	RF Output Power	19
3.4	Power Spectral Density	21
3.5	Emissions in Restricted Frequency Bands	
3.6	Emissions in non-restricted Frequency Bands	42
4	TEST LABORATORY INFORMATION	46



Release Record

Report No.	Version	Description	Issued Date
FR112601AE	Rev. 01	Initial issue	Apr. 20, 2021



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.779MHz 21.95 (Margin -24.05dB) - AV	Pass
15.247(d)	Radiated Emissions	[dBuV/m at 3m]: 2483.50MHz	Pass
15.209		43.75 (Margin -10.25dB) - AV	F 855
15.247(b)(3)	Maximum Output Power	Power [dBm]: 4.34	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information							
Frequency Range (MHz)Bluetooth ModeCh. Freq. (MHz)Channel NumberData Rate							
2400-2483.5 LE 2402-2480 0-39 [40] 1 Mbps							
2400-2483.5 LE 2402-2480 0-39 [40] 2 Mbps							
Note: Bluetooth LE (L	Note: Bluetooth LE (Low energy) uses GFSK modulation.						

1.1.2 Antenna Details

Ant. No.	Brand	Model	Туре	Connector	Gain (dBi)	
1	FJK	metal rod antenna	IFA	No	3	

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type 5Vdc from host 3.7Vdc from battery	
---	--

1.1.4 Accessories

No.	Equipment	Description
1	Battery	Brand: Sennheiser Model: AHB552826TPC Rating: 3.7Vdc, 335mA
2	USB cable	Brand: EPOS Model: EPUL2001 Power line: 2m shielded without core
3	Audio Cable	Brand: EPOS Model: EPAL2001 Power line: 1.5m non-shielded without core



1.1.5 Channel List

	Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	
37	2402	9	2422	18	2442	28	2462	
0	2404	10	2424	19	2444	29	2464	
1	2406	38	2426	20	2446	30	2466	
2	2408	11	2428	21	2448	31	2468	
3	2410	12	2430	22	2450	32	2470	
4	2412	13	2432	23	2452	33	2472	
5	2414	14	2434	24	2454	34	2474	
6	2416	15	2436	25	2456	35	2476	
7	2418	16	2438	26	2458	36	2478	
8	2420	17	2440	27	2460	39	2480	

1.1.6 Test Tool and Duty Cycle

Test Tool	BlueTest3(Qualcomm Host Tools), Version: 3.2.2.144				
Modulation Mode	Duty Cycle Of Test Signal (%) Duty Factor (dB)				
GFSK-1Mbps	65.58%	1.83			
GFSK-2Mbps	37.38%	4.27			

1.1.7 Power Index of Test Tool


Madulation Mada	Test Frequency (MHz)				
Modulation Mode	2402	2440	2480		
GFSK/1Mbps	default	default	default		
GFSK/2Mbps	default	default	default		



1.2 Local Support Equipment List

	Support Equipment List						
No.	No. Equipment Brand Model FCC ID Remarks						
1	Adapter	Samsung	ETA-U90JWS				
2	Notebook	DELL	Latitude E5470	DoC			

1.3 Test Setup Chart

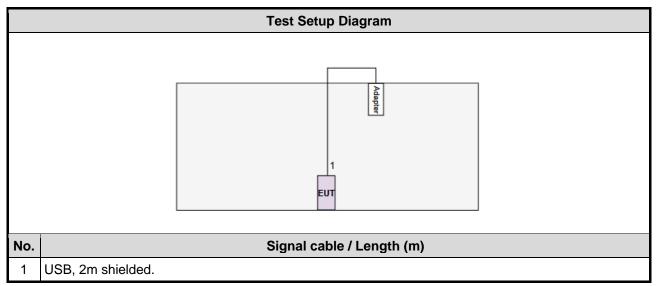

Note: The notebook is disconnected from EUT and removed from test table when EUT is set to transmit continuously.



1.4 Test Equipment List and Calibration Data

Test Item	Conducted Emission	Conducted Emission				
Test Site	Conduction room 1 / (Conduction room 1 / (CO01-WS)				
Test Data	Feb. 22, 2021	Feb. 22, 2021				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until	
Receiver	R&S	ESR3	101658	Feb. 08, 2021	Feb. 07, 2022	
LISN	R&S	ENV216	101579	Mar. 12, 2020	Mar. 11, 2021	
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 21, 2020	Oct. 20, 2021	
Measurement Software	AUDIX	e3	6.120210k	NA	NA	
Note: Calibration Interval of instruments listed above is one year.						

Test Item	Radiated Emission				
Test Site	966 chamber 3 / (03CH03-WS)				
Test Data	Feb. 04 ~ Feb. 09, 2021				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 04, 2020	Dec. 03, 2021
Receiver	R&S	ESR3	101657	Feb. 14, 2020	Feb. 13, 2021
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 29, 2020	Apr. 28, 2021
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Dec. 22, 2020	Dec. 21, 2021
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 06, 2020	Nov. 05, 2021
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 17, 2020	Nov. 16, 2021
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 06, 2020	Oct. 05, 2021
Preamplifier	EMC	EMC02325	980187	Aug. 05, 2020	Aug. 04, 2021
Preamplifier	Agilent	83017A	MY39501309	Sep. 02, 2020	Sep. 01, 2021
Preamplifier	EMC	EMC184045B	980192	Jul. 21, 2020	Jul. 20, 2021
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/ 4	Sep. 26, 2020	Sep. 25, 2021
RF cable-8M	EMC	EMC104-SM-SM-80 00	181107	Sep. 26, 2020	Sep. 25, 2021
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Sep. 26, 2020	Sep. 25, 2021
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800 -001	Sep. 26, 2020	Sep. 25, 2021
LF cable-3M	EMC	EMC8D-NM-NM-300 0	131103	Sep. 26, 2020	Sep. 25, 2021
LF cable-13M	EMC	EMC8D-NM-NM-130 00	131104	Sep. 26, 2020	Sep. 25, 2021
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Inter	val of instruments liste	d above is one year.			



RF Conducted				
(TH01-WS)				
Feb. 17, 2021				
Brand	Model No.	Serial No.	Calibration Date	Calibration Until
R&S	FSV40	101063	Apr. 30, 2020	Apr. 29, 2021
Anritsu	ML2495A	1241002	Nov. 04, 2020	Nov. 03, 2021
Anritsu	MA2411B	1207366	Nov. 04, 2020	Nov. 03, 2021
GW INSTEK	GPC-6030D	GES855395	Nov. 09, 2020	Nov. 08, 2021
APC	AFC-500W	F312060012	Dec. 04, 2020	Dec. 03, 2021
Sporton	Sporton_1	1.3.30	NA	NA
	(TH01-WS) Feb. 17, 2021 Brand R&S Anritsu Anritsu GW INSTEK APC	(TH01-WS)Feb. 17, 2021BrandModel No.R&SFSV40AnritsuML2495AAnritsuMA2411BGW INSTEKGPC-6030DAPCAFC-500W	Model No. Serial No. Brand Model No. Serial No. R&S FSV40 101063 Anritsu ML2495A 1241002 Anritsu MA2411B 1207366 GW INSTEK GPC-6030D GES855395 APC AFC-500W F312060012	ITHOLOWS) Feb. 17, 2021 Model No. Serial No. Calibration Date R&S FSV40 101063 Apr. 30, 2020 Anritsu ML2495A 1241002 Nov. 04, 2020 Anritsu MA2411B 1207366 Nov. 04, 2020 GW INSTEK GPC-6030D GES855395 Nov. 09, 2020 APC AFC-500W F312060012 Dec. 04, 2020

1.5 Test Standards

47 CFR FCC Part 15.247 ANSI C63.10-2013

1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty				
Parameters	Uncertainty			
Bandwidth	±34.130 Hz			
Conducted power	±0.808 dB			
Power density	±0.583 dB			
Conducted emission	±2.715 dB			
AC conducted emission	±2.92 dB			
Radiated emission ≤ 1GHz	±3.96 dB			
Radiated emission > 1GHz	±4.51 dB			



2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)
Test Site	03CH03-WS
Address of Test Site	No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 333, Taiwan (R.O.C.)
ECC Designation No :	TW0000

FCC Designation No.: TW0009

➢ FCC site registration No.: 207696

➢ ISED#: 10807A

➤ CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions Radiated Emissions ≤ 1GHz	BT LE	2402	1Mbps	
Maximum Output Power 6dB bandwidth Power spectral density	BT LE	2402, 2440, 2480	1Mbps 2Mbps	
Radiated Emissions > 1GHz	BT LE	2402, 2440, 2480	1Mbps	
NOTE: The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Z-plane result was found as the worst case and was shown in this report.				



3 Transmitter Test Results

3.1 Conducted Emissions


3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit					
Frequency Emission (MHz)	Quasi-Peak	Average			
0.15-0.5	66 - 56 *	56 - 46 *			
0.5-5	56	46			
5-30 60 50					
Note 1: * Decreases with the logarithm of the frequency.					

3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V/60Hz

3.1.3 Test Setup

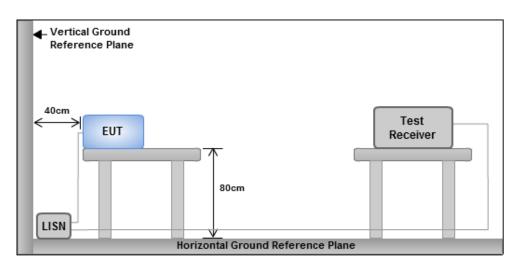


Note: 1. Support units were connected to second LISN.


2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes





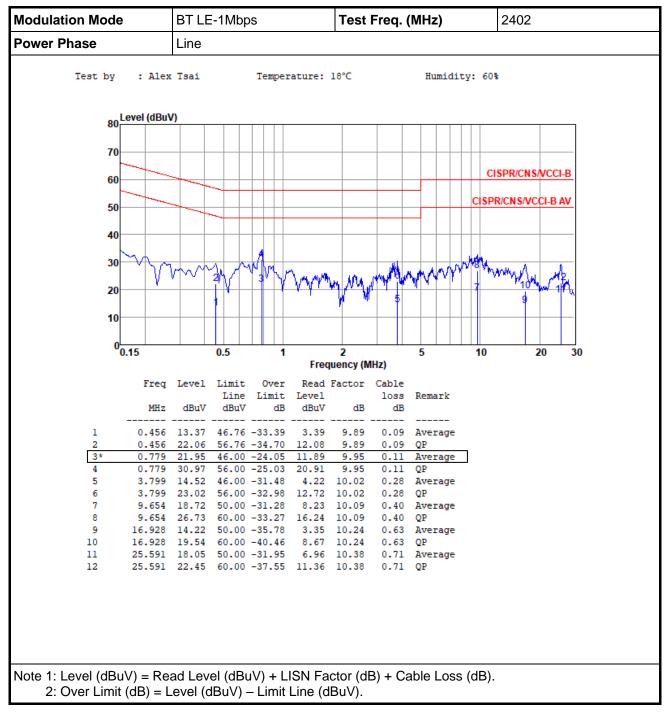



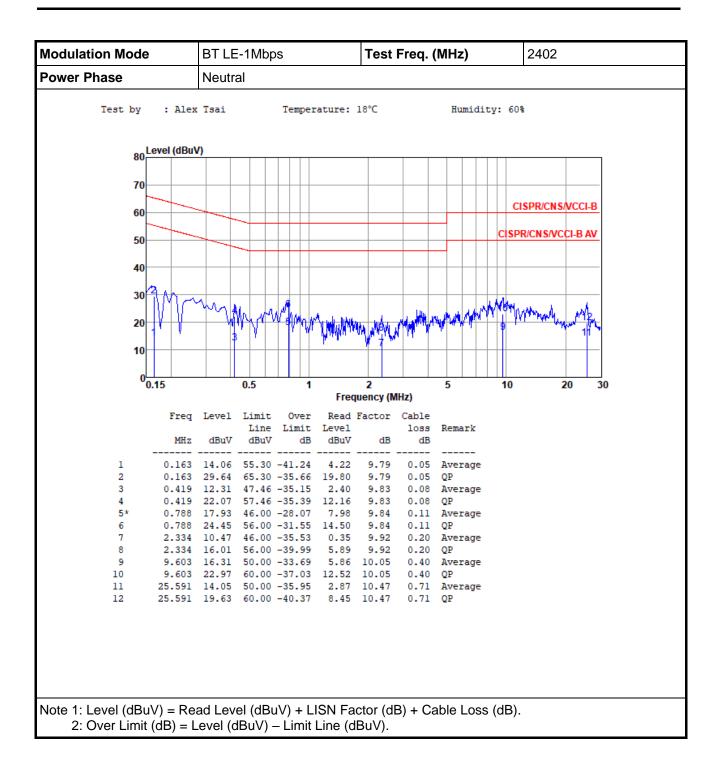



3.2 6dB and Occupied Bandwidth

3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures


6dB Bandwidth

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

- 1. Set resolution bandwidth (RBW) = $1\% \sim 5\%$ of OBW, Video bandwidth = $3 \times RBW$.
- 2. Detector = Sample, Trace mode = max hold.
- 3 Sweep = auto couple, Allow the trace to stabilize.
- 4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.2.3 Test Setup





3.2.4 Test Result of 6dB and Occupied Bandwidth

ted By Brad Wu	Ambient Condition 22°C / 64%
----------------	------------------------------

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	717.391k	1.031M	1M03F1D	706.522k	1.031M
BT-LE(2Mbps)	1.254M	2.048M	2M05F1D	1.246M	2.041M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth; Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth


Result

Mode	Result	Limit	Port 1-N dB	Port 1-OBW
		(Hz)	(Hz)	(Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	717.391k	1.031M
2440MHz	Pass	500k	717.391k	1.031M
2480MHz	Pass	500k	706.522k	1.031M
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	500k	1.246M	2.048M
2440MHz	Pass	500k	1.254M	2.041M
2480MHz	Pass	500k	1.246M	2.041M


Port X-N dB = Port X 6dB down bandwidth;

Port X-OBW = Port X 99% occupied bandwidth




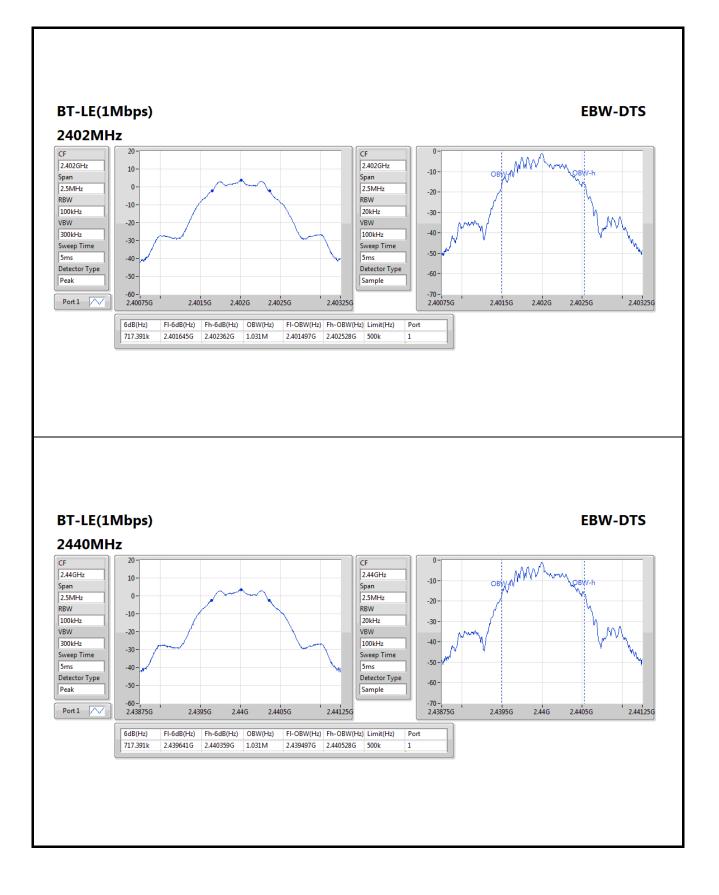



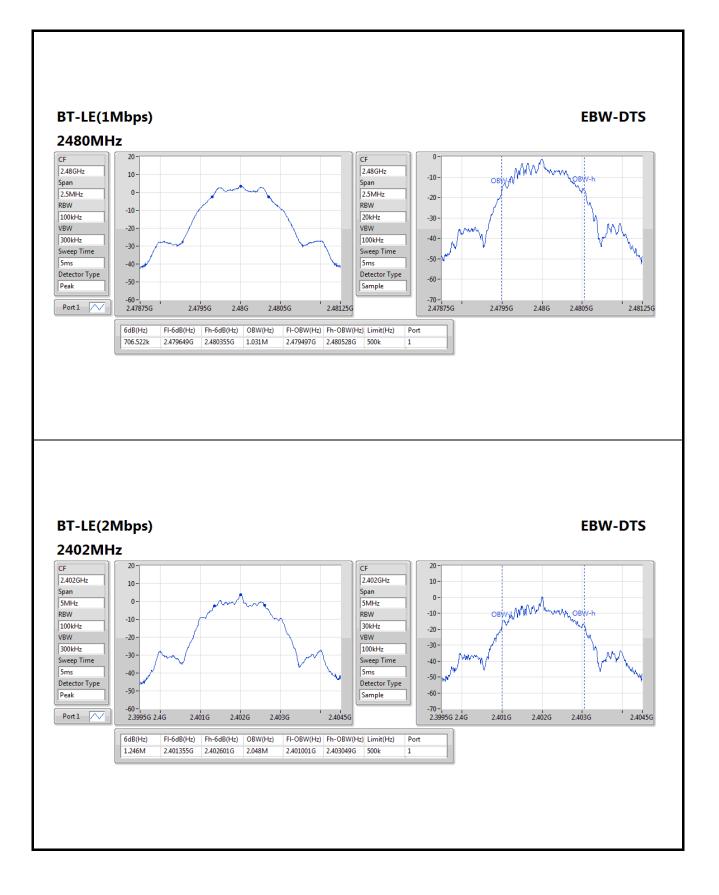



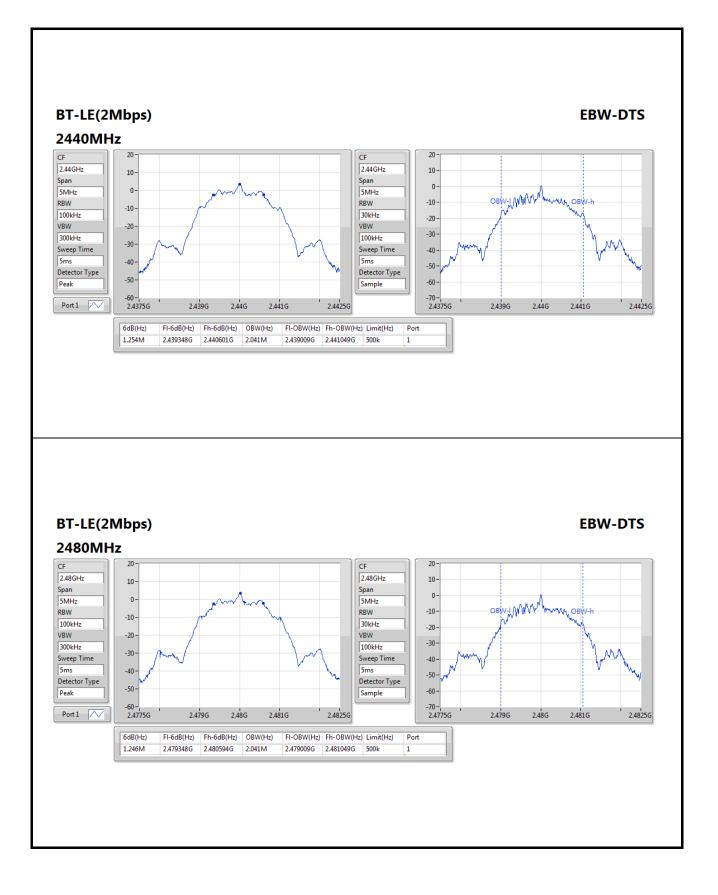



3.3 **RF Output Power**

3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1 Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup





3.3.4 Test Result of Maximum Output Power

Ambient Condition	22°C / 64%	Tested By	Brad Wu

Summary of Peak Conducted Output Power

Mode	Power	Power
	(dBm)	(W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	4.34	0.00272
BT-LE(2Mbps)	4.33	0.00271

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	3.00	4.34	30.00
2440MHz	Pass	3.00	4.27	30.00
2480MHz	Pass	3.00	4.15	30.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	3.00	4.33	30.00
2440MHz	Pass	3.00	4.26	30.00
2480MHz	Pass	3.00	4.13	30.00

DG = Directional Gain; Port X = Port X output power

Summary of Conducted (Average) Output Power

Mode	Power	Power
	(dBm)	(W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	4.21	0.00264
BT-LE(2Mbps)	4.20	0.00263

Result

Mode	Result	Gain	Power	Power Limit
		(dBi)	(dBm)	(dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	3.00	4.21	-
2440MHz	Pass	3.00	4.15	-
2480MHz	Pass	3.00	4.02	-
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	3.00	4.20	-
2440MHz	Pass	3.00	4.14	-
2480MHz	Pass	3.00	4.01	-

Note: Average power is for reference only.



3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

- 1. Set the RBW = 3 kHz, VBW = 10 kHz.
- 2. Detector = Peak, Sweep time = auto couple.
- 3. Trace mode = max hold, allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.

3.4.3 Test Setup





3.4.4 Test Result of Power Spectral Density

	Ambient Condition	22°C / 64%	Tested By	Brad Wu
--	-------------------	------------	-----------	---------

Summary

Mode	PD (dBm/3kHz)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-11.21
BT-LE(2Mbps)	-14.13


Result

Mode	Result	Gain	PD	PD Limit
		(dBi)	(dBm/3kHz)	(dBm/3kHz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	3.00	-11.21	8.00
2440MHz	Pass	3.00	-11.40	8.00
2480MHz	Pass	3.00	-11.46	8.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	3.00	-14.13	8.00
2440MHz	Pass	3.00	-14.15	8.00
2480MHz	Pass	3.00	-14.32	8.00


DG = Directional Gain;

PD =Maximum power density; Port X = Port X Power Density;




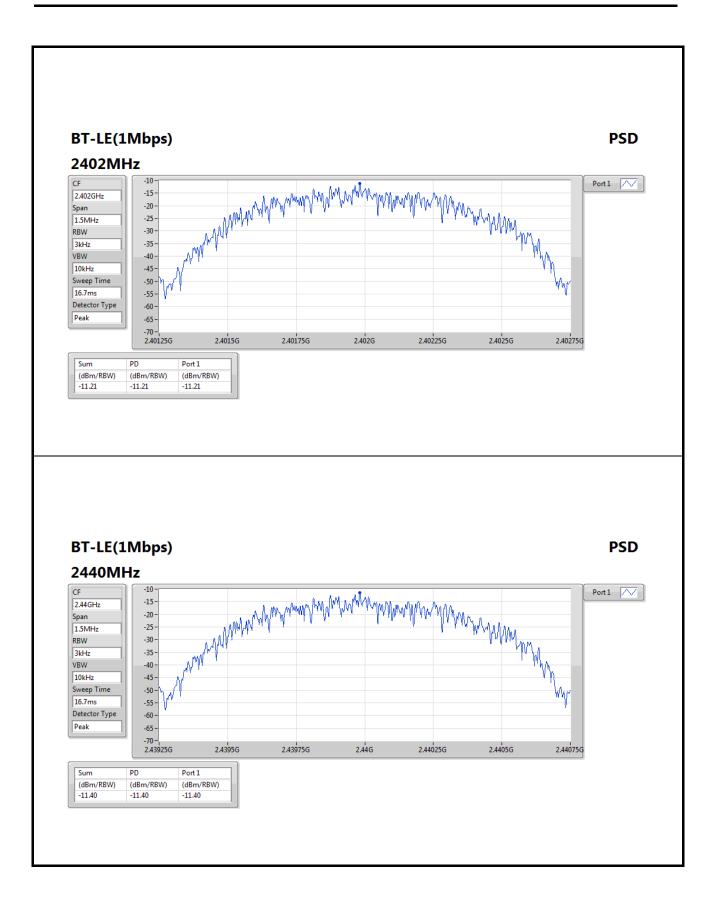



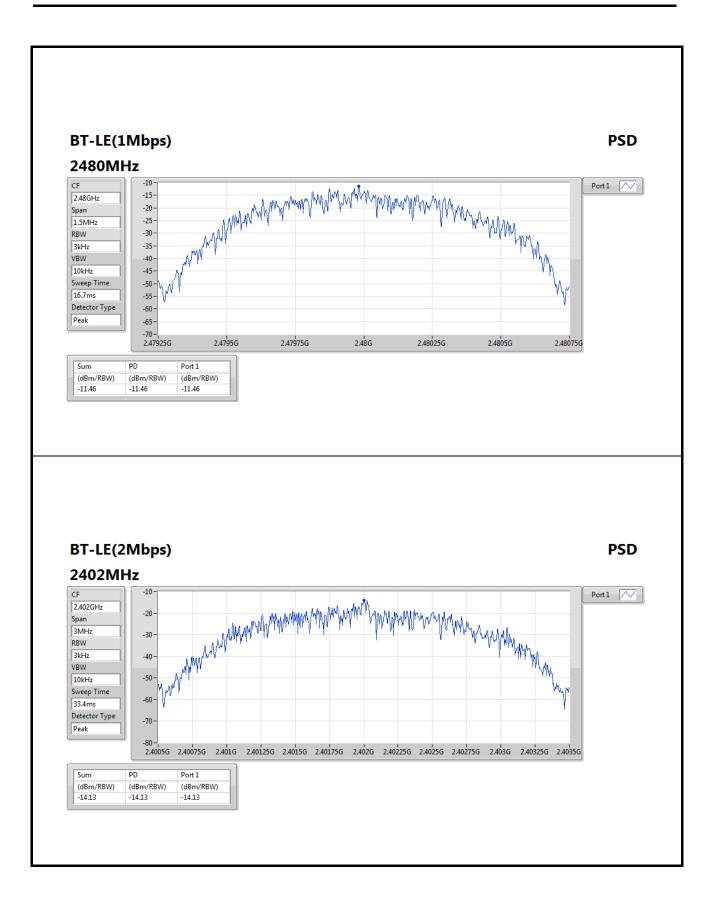



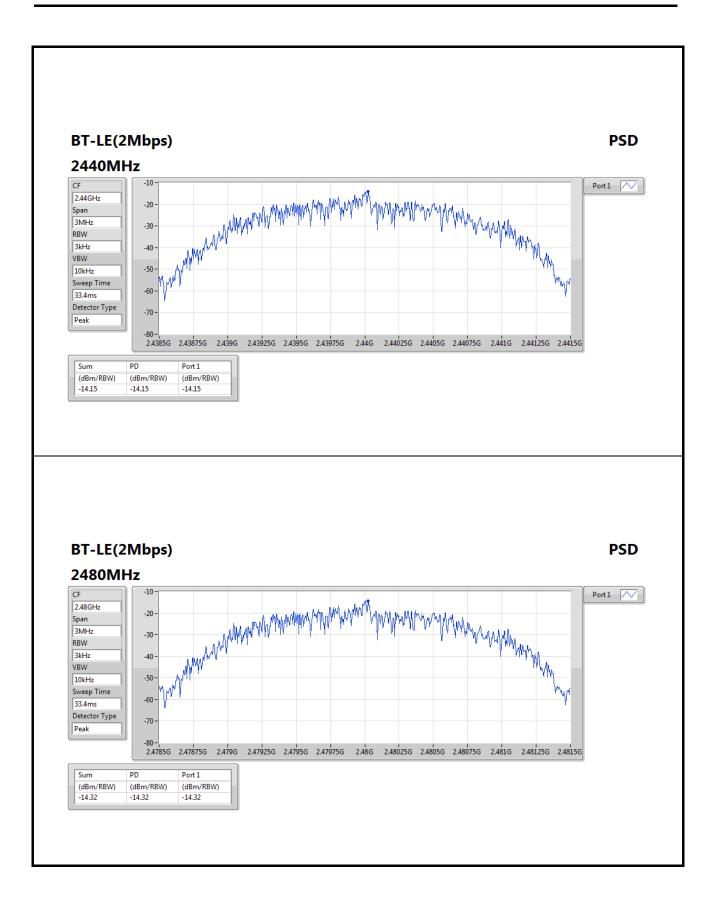



3.5 Emissions in Restricted Frequency Bands

3.5.1 Limit of Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit					
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)		
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300		
0.490~1.705	24000/F(kHz)	33.8 - 23	30		
1.705~30.0	30	29	30		
30~88	100	40	3		
88~216	150	43.5	3		
216~960	200	46	3		
Above 960	500	54	3		

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:**

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures


- Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.



3.5.3 Test Setup

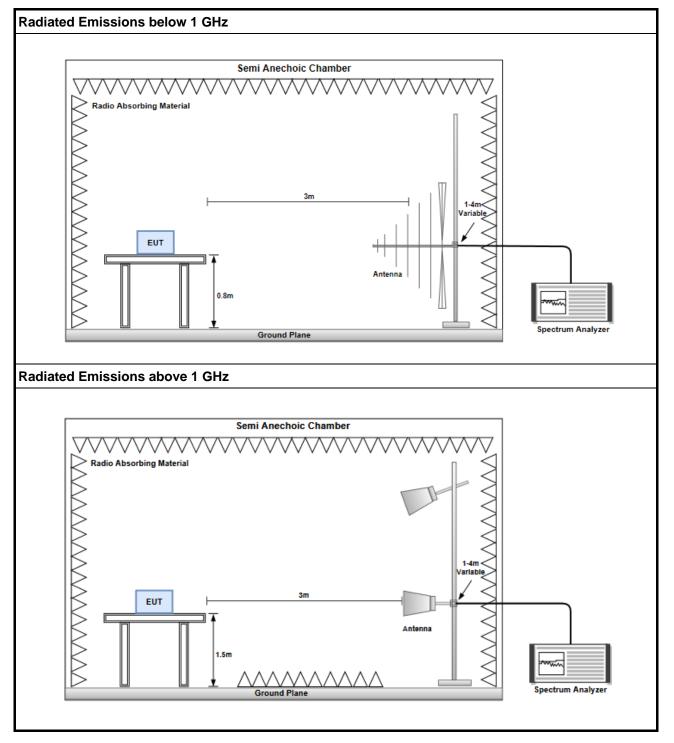




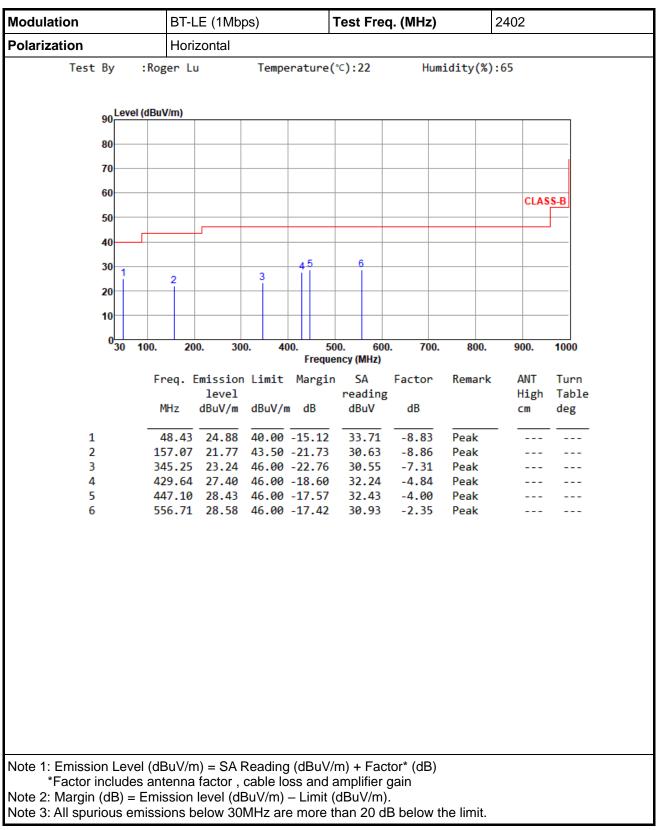


3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)



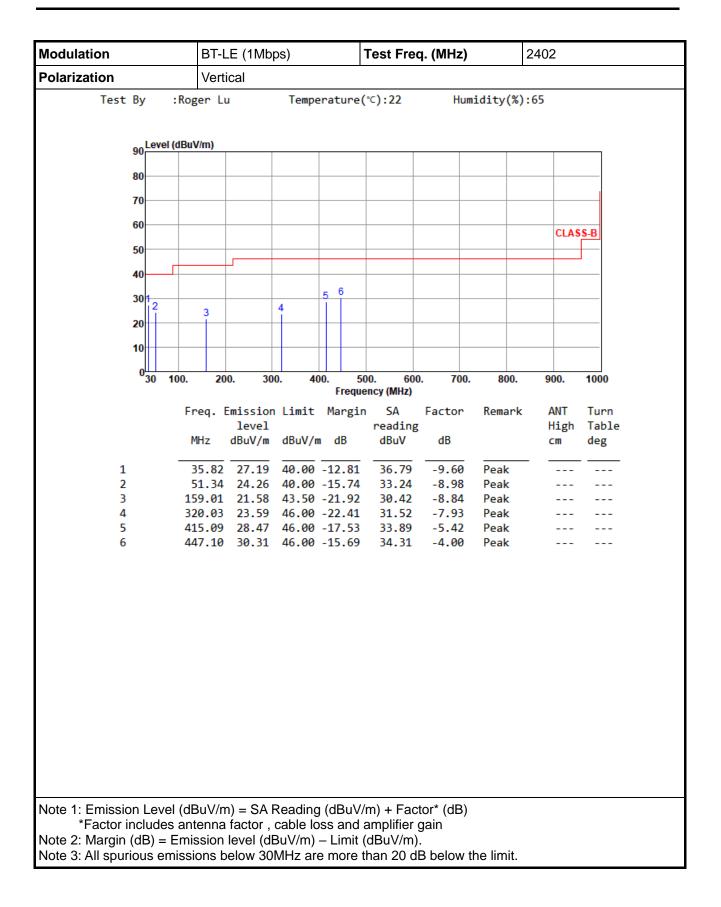




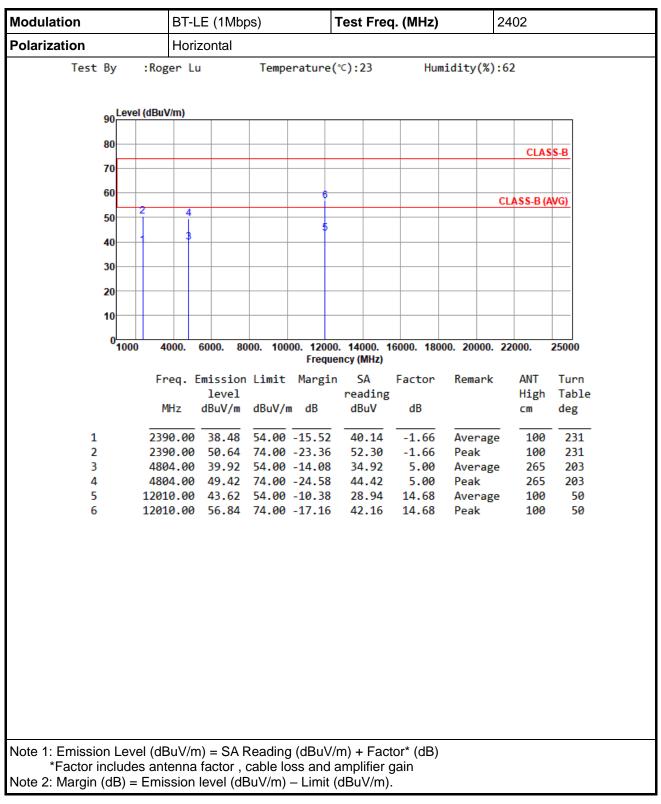


3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)




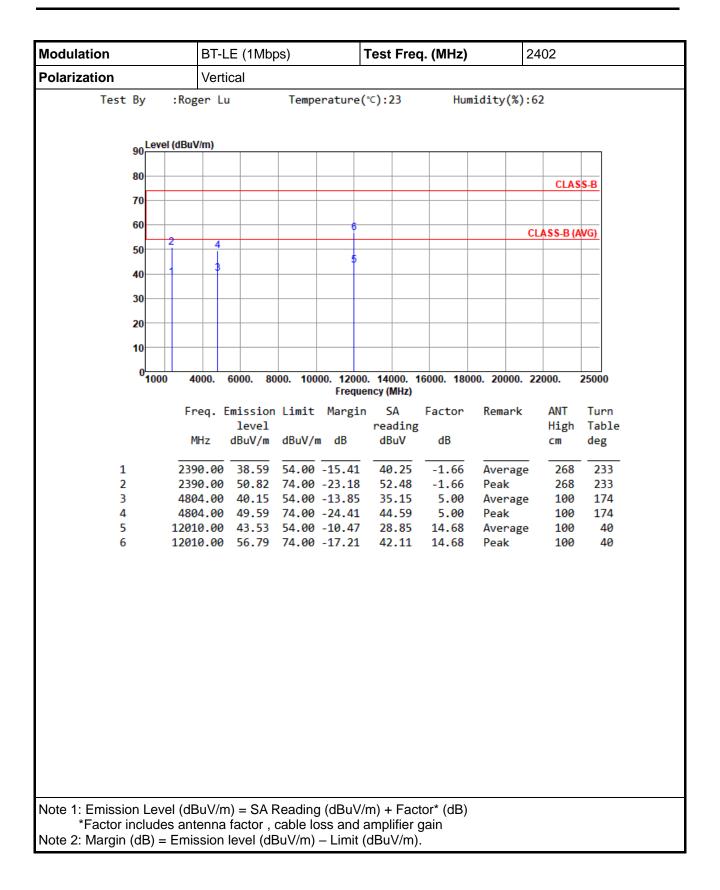




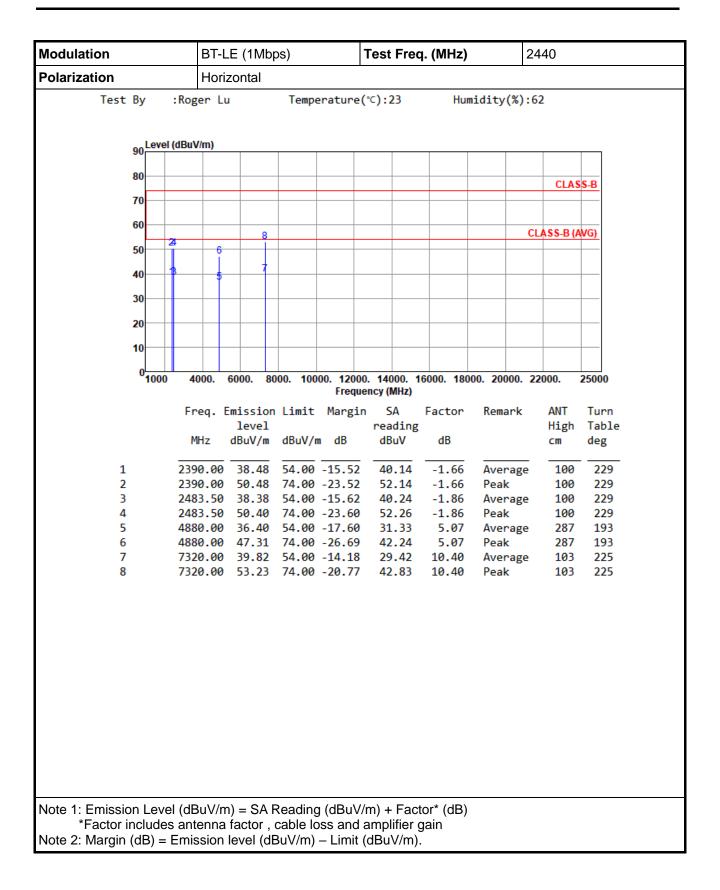




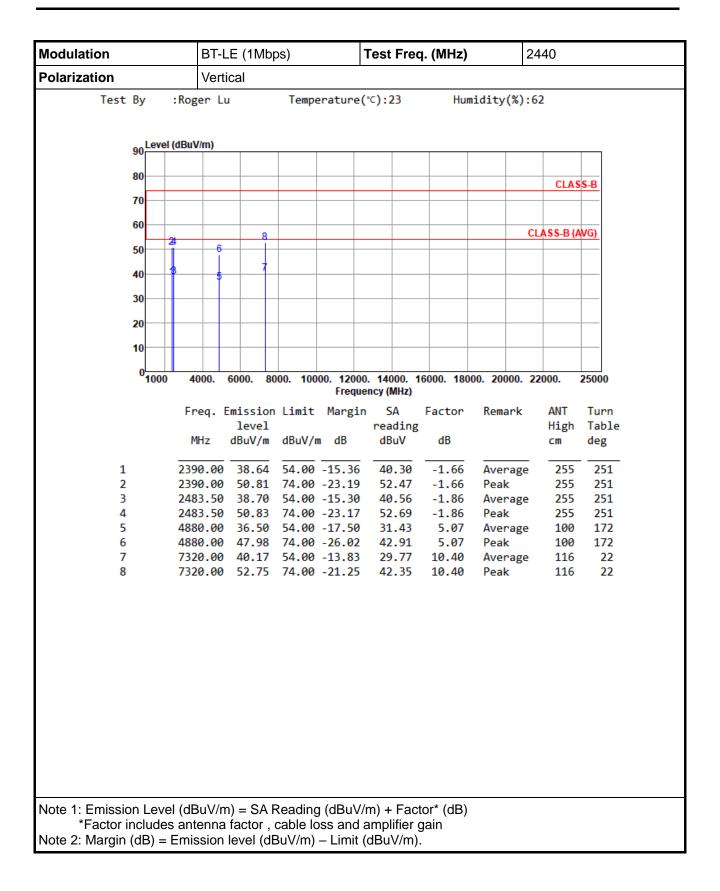




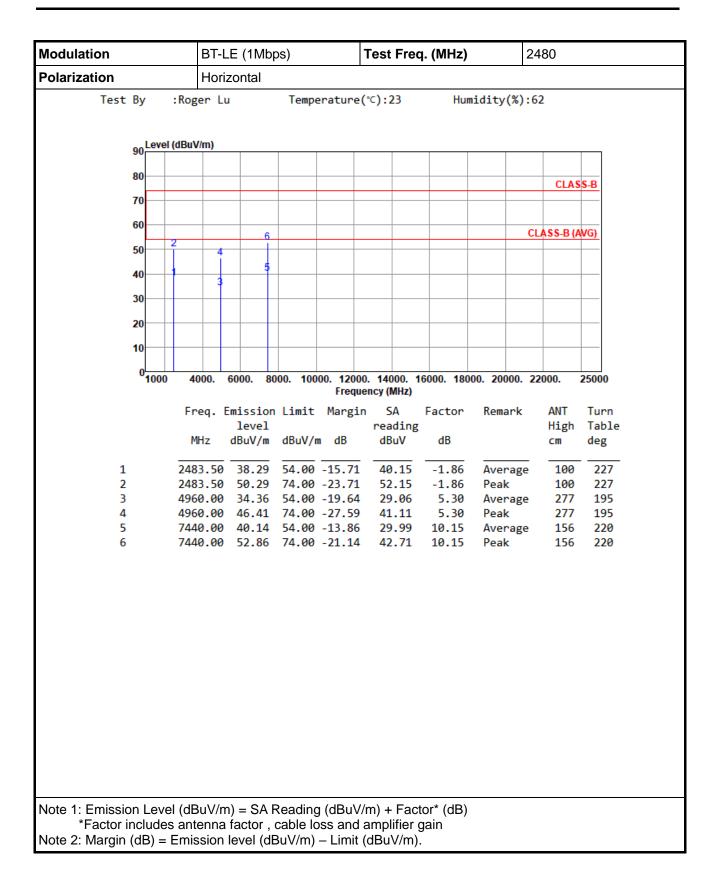




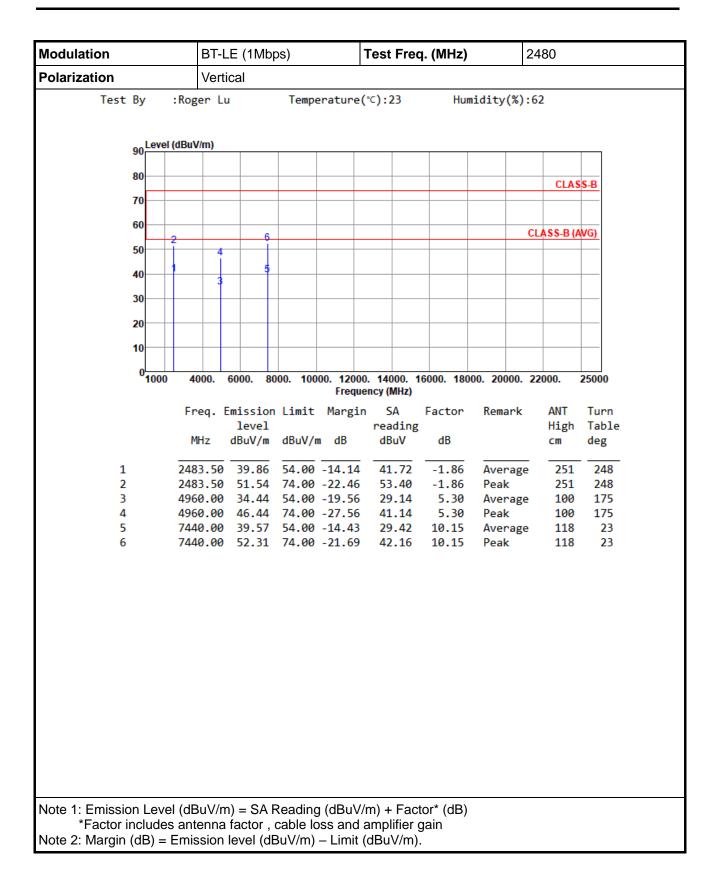




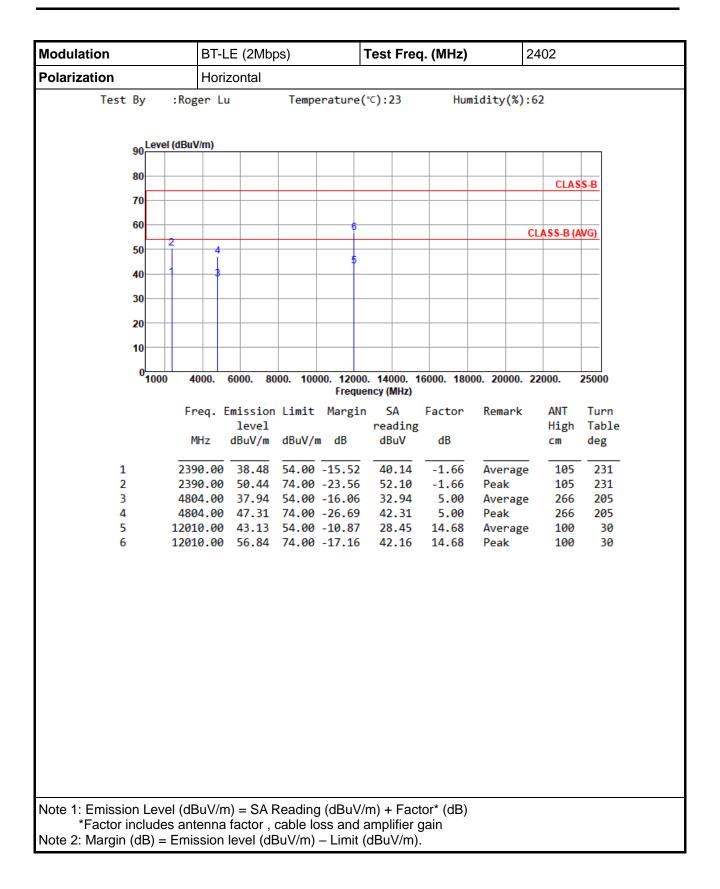




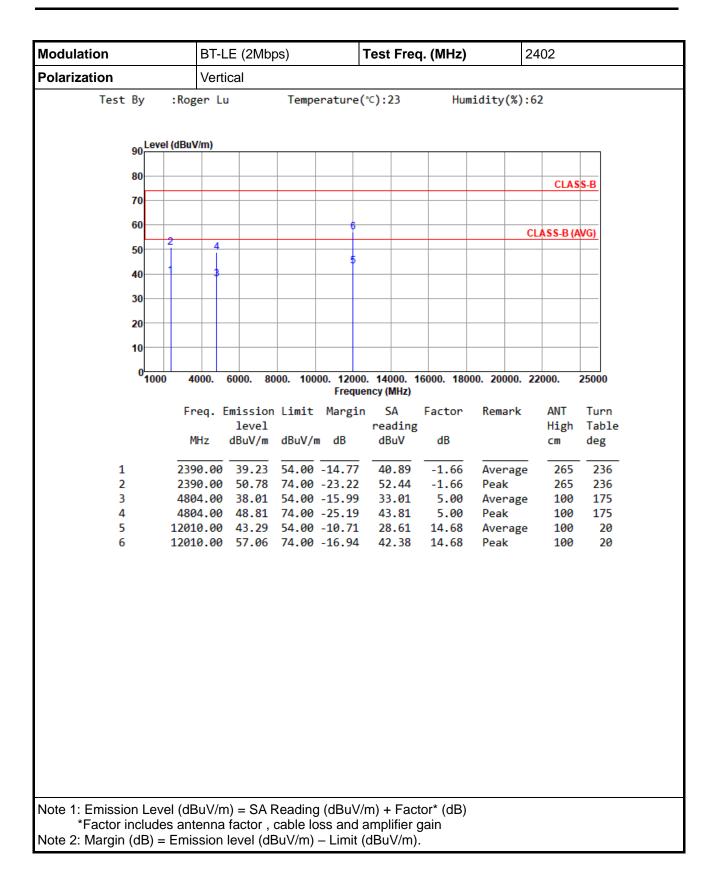




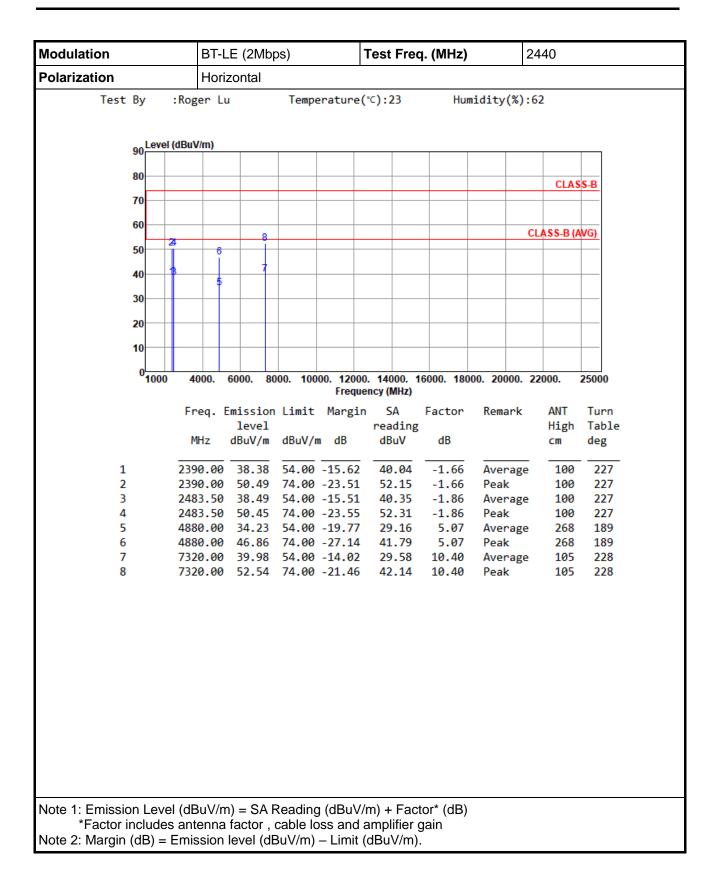




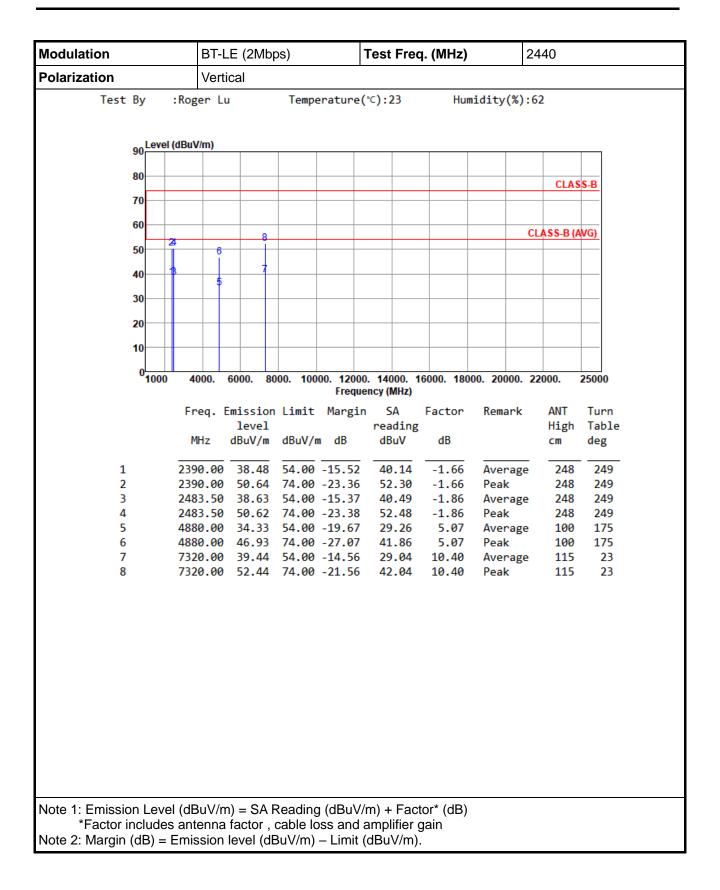



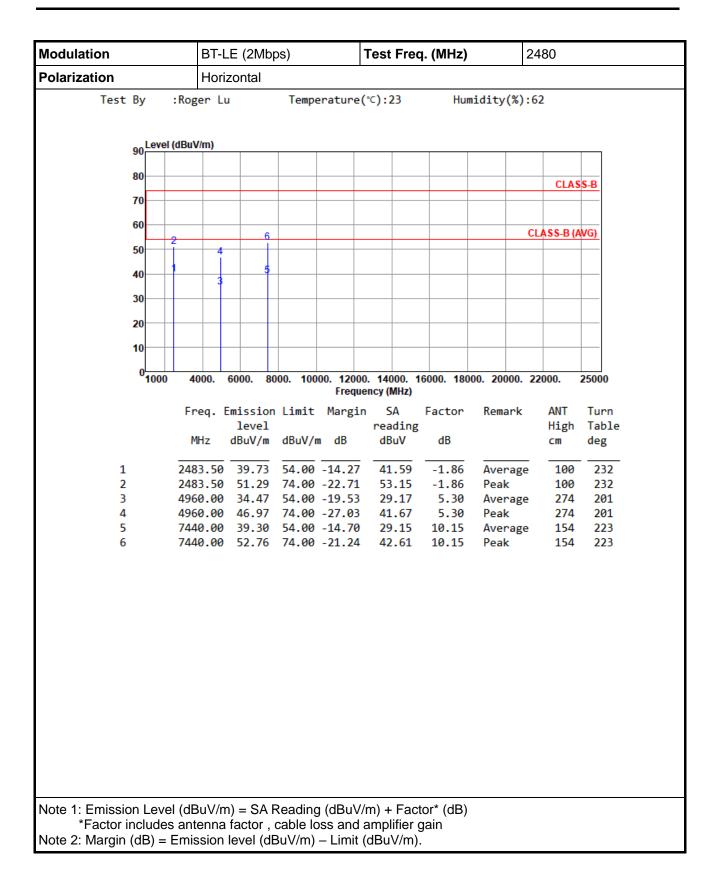



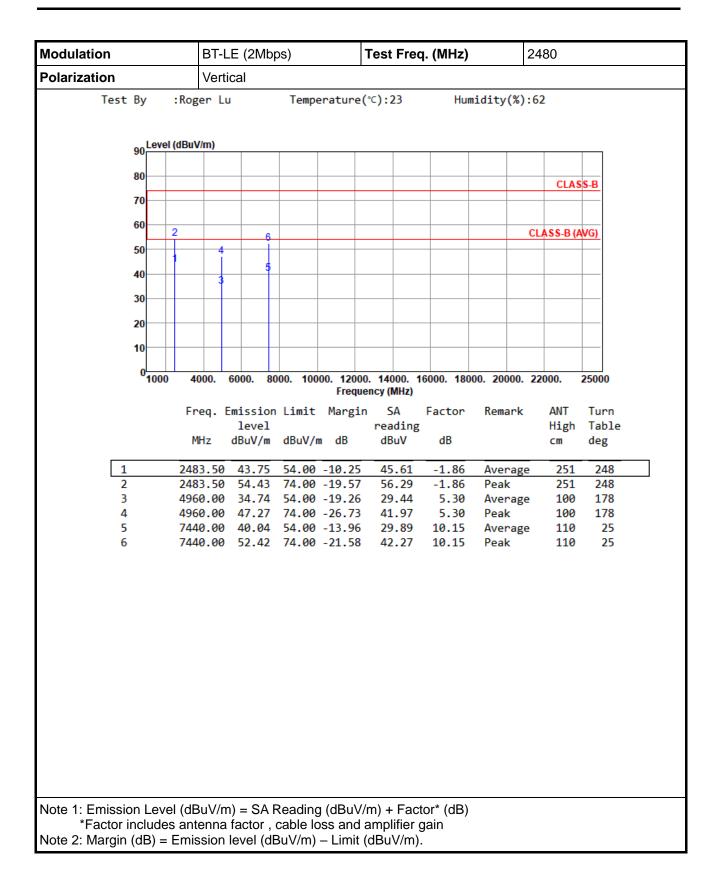



3.6 Emissions in non-restricted Frequency Bands

3.6.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

3.6.2 Test Procedures


Reference level measurement

- 1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
- 2. Trace = max hold , Allow Trace to fully stabilize
- 3. Use the peak marker function to determine the maximum PSD level

Emission level measurement


- 1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
- 2. Trace = max hold , Allow Trace to fully stabilize
- 3. Scan Frequency range is up to 25GHz
- 4. Use the peak marker function to determine the maximum amplitude level

3.6.3 Test Setup







3.6.4 Test Result of Emissions in non-restricted Frequency Bands

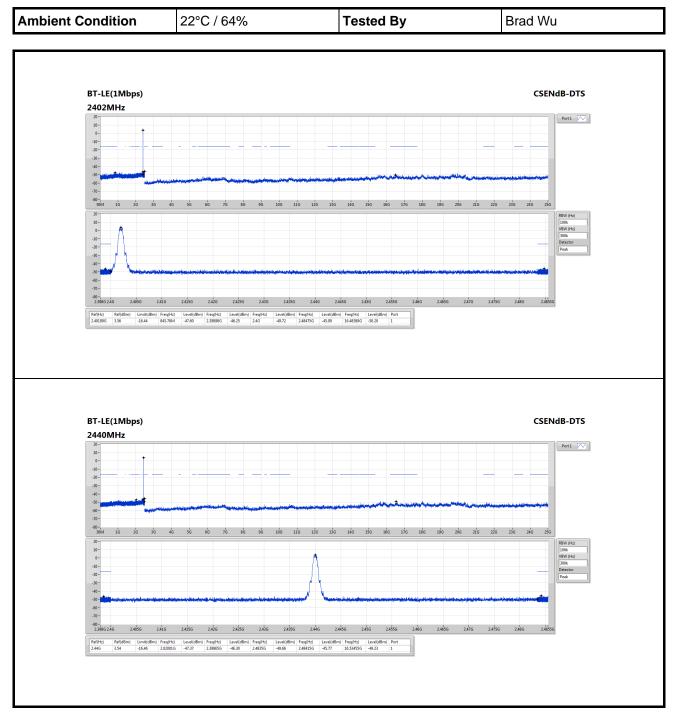



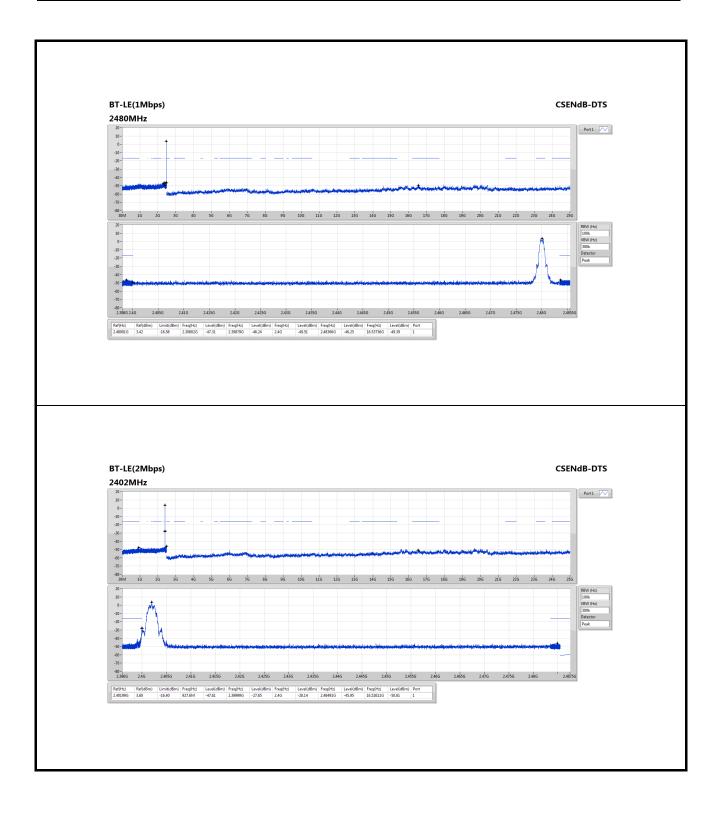



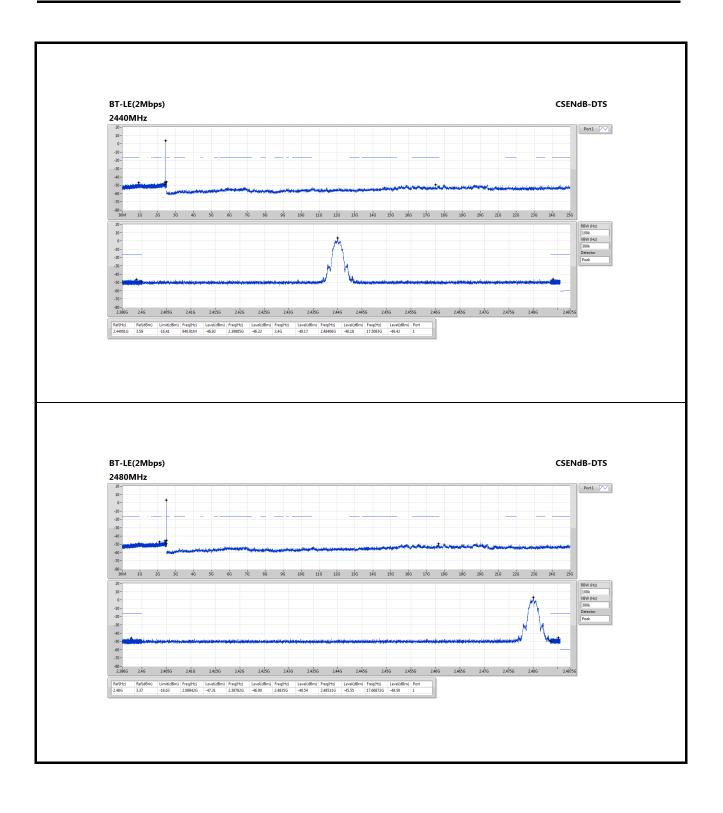



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <u>http://www.icertifi.com.tw</u>.

Linkou

Tel: 886-2-2601-1640 No.30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan (R.O.C.) Kwei Shan Tel: 886-3-271-8666 No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.) Kwei Shan Site II Tel: 886-3-271-8640 No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155 Email: ICC_Service@icertifi.com.tw

—END—