



BR Mode, Hopping Band Edge

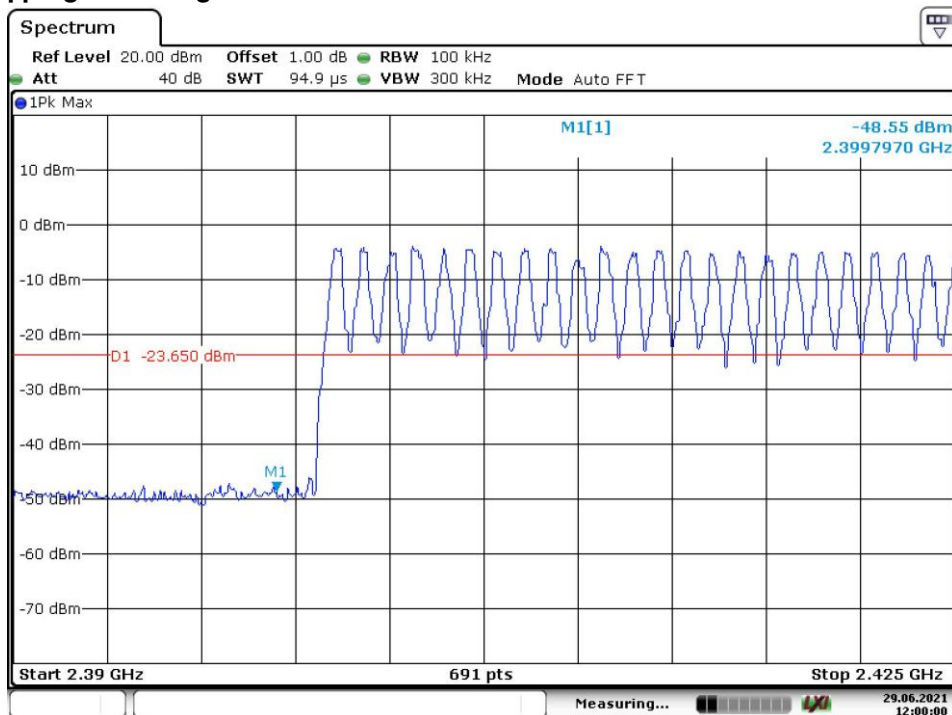


Date: 29.JUN.2021 12:00:00

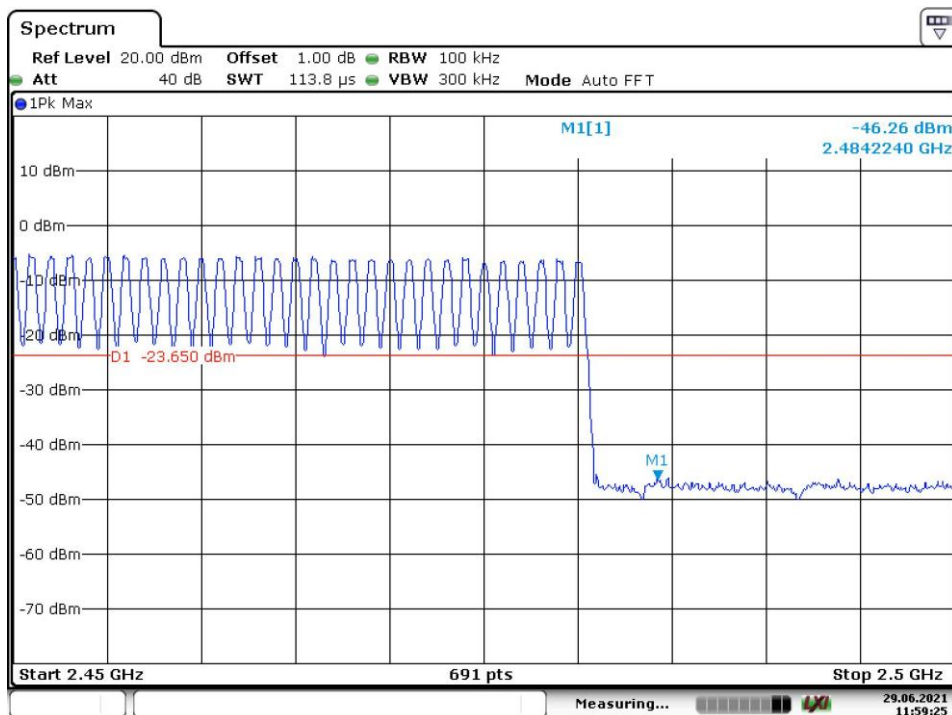


Date: 29.JUN.2021 11:59:25

EDR Mode, Band Edge, Low Channel

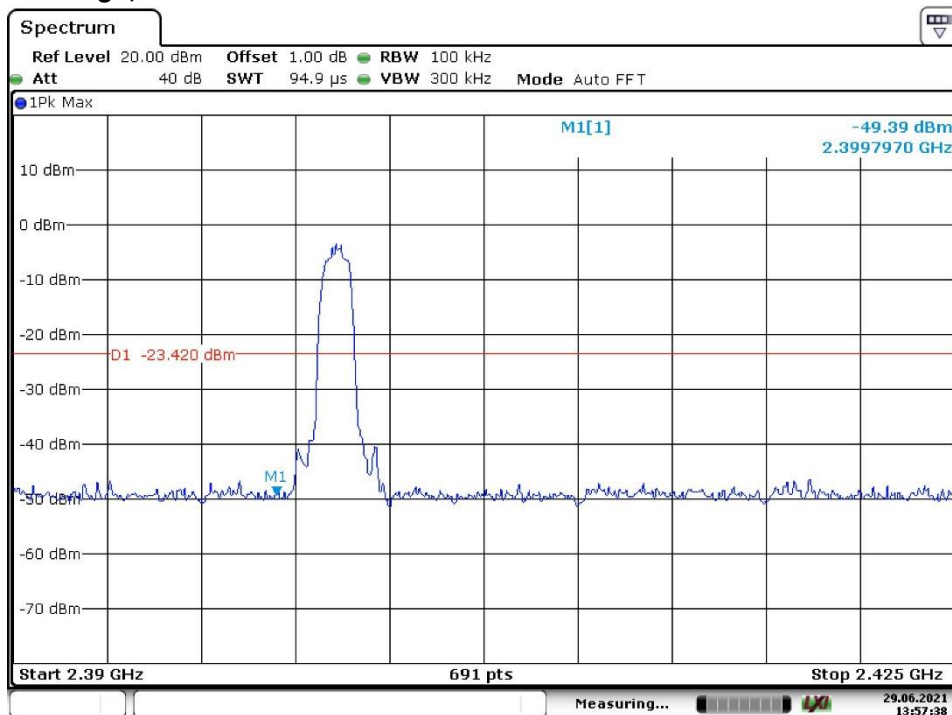


Date: 29.JUN.2021 13:57:37

EDR Mode, Band Edge, High Channel

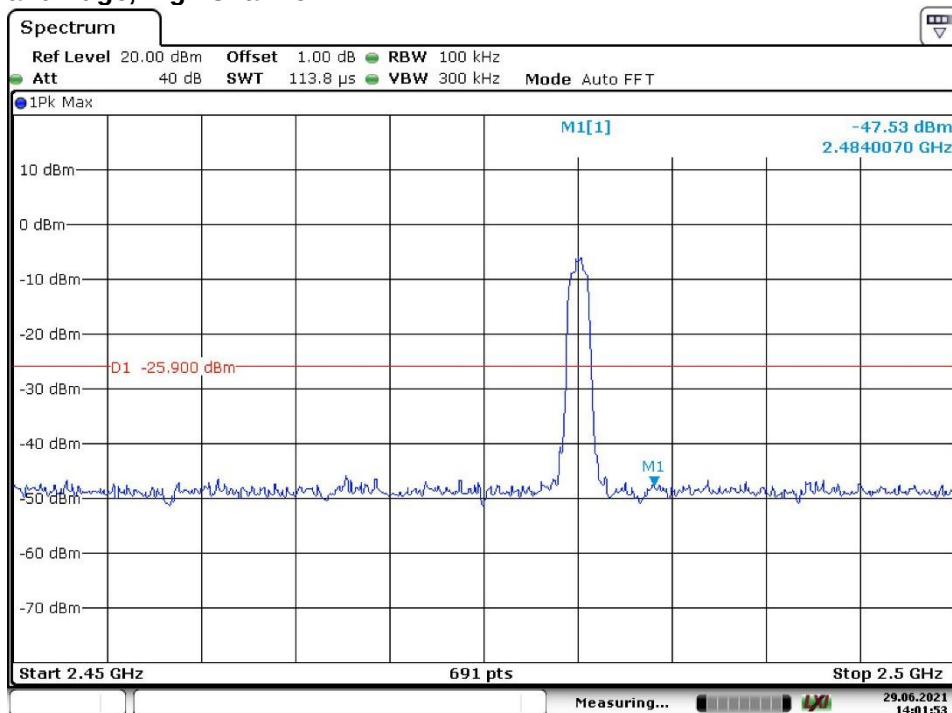


Date: 29.JUN.2021 14:01:53

EDR Mode, Hopping Band Edge

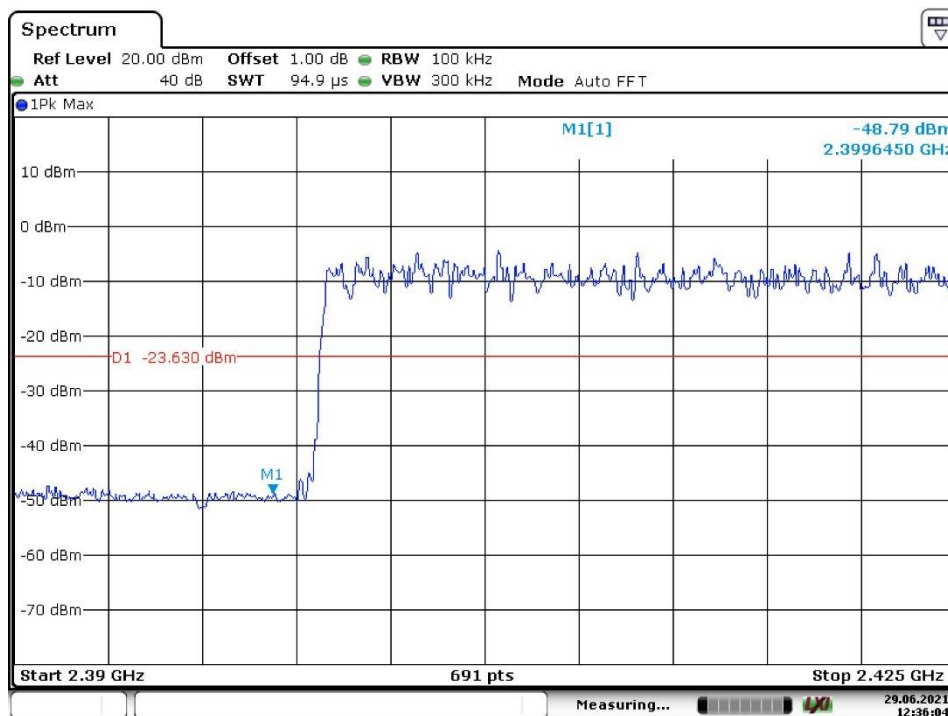

Date: 29.JUN.2021 12:36:03

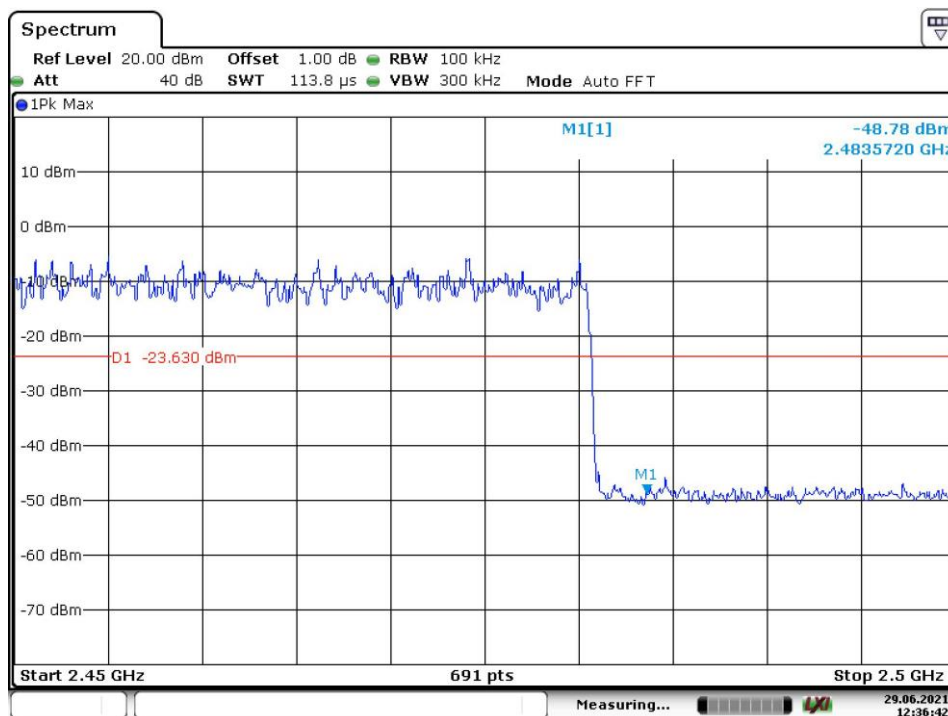

Date: 29.JUN.2021 12:36:42

Appendix C

Test Results of Radiated Emission & AC Mains Conducted Emission

APPENDIX C.....	1
APPENDIX C.1: TEST PLOTS OF RADIATED SPURIOUS EMISSION	2
30MHz - 1GHz.....	2
1GHz - 6.2GHz.....	6
6.2GHz - 18GHz.....	12
APPENDIX C.2: TEST PLOTS OF BAND EDGE (RADIATED)	18
Low Channel.....	18
High Channel.....	20
APPENDIX C.3: TEST PLOTS OF AC MAINS CONDUCTED EMISSION.....	22

Note: The radiated spurious emission were measured from 9KHz to 26.5GHz, the measurement results below 30MHz and above 18GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.


Appendix C.1: Test Plots of Radiated Spurious Emission

30MHz - 1GHz

Test Report

EUT Information

EUT Name:	Tower Speaker
Model:	EE2928
Test Mode:	BR_DH5_Low channel
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

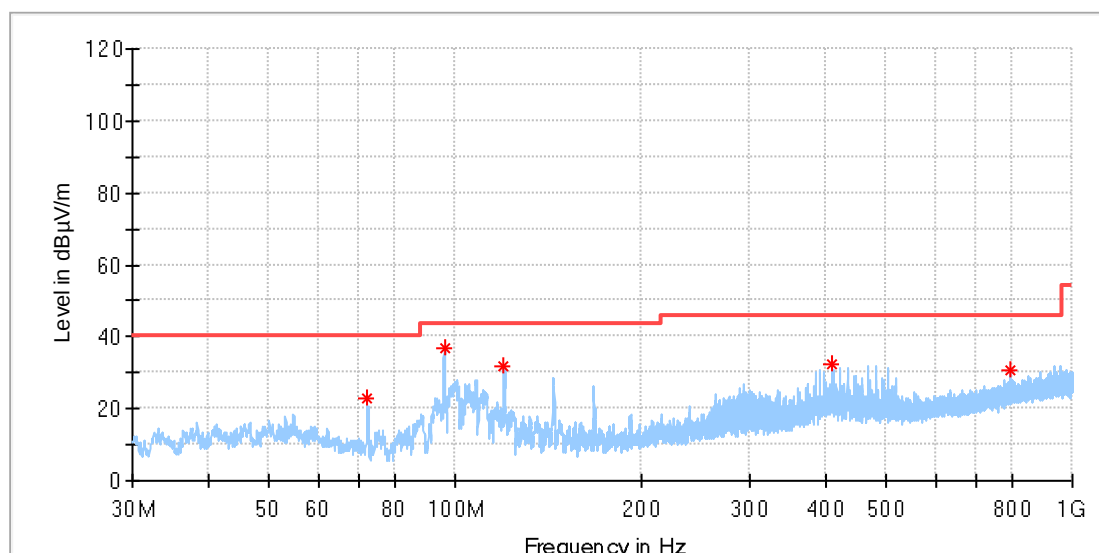

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
72.001000	22.82	40.00	17.18	100.0	H	0.0	-22.5
96.154000	36.78	43.50	6.72	100.0	H	206.0	-19.6
119.967500	31.89	43.50	11.61	100.0	H	0.0	-20.8
408.009000	32.53	46.00	13.47	100.0	H	0.0	-13.5
794.796500	30.94	46.00	15.06	100.0	H	353.0	-6.5


Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Tower Speaker
Model: EE2928
Test Mode: BR_DH5_Low channel
Test Voltage: DC 5V from USB
Remark: Temp 23 Humi:51%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

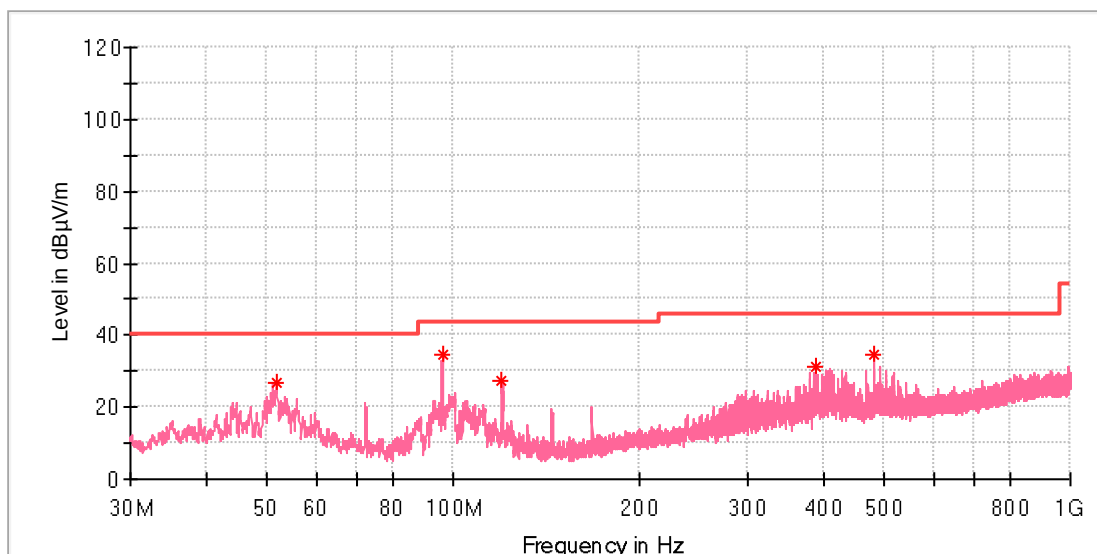

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
51.679500	26.82	40.00	13.18	100.0	V	279.0	-18.4
96.251000	34.79	43.50	8.71	100.0	V	103.0	-19.6
119.967500	27.20	43.50	16.30	100.0	V	279.0	-20.8
387.978500	31.10	46.00	14.90	100.0	V	347.0	-14.0
480.031500	34.82	46.00	11.18	100.0	V	295.0	-12.2


Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name:	Tower Speaker
Model:	EE2928
Test Mode:	BR_DH5_High channel
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

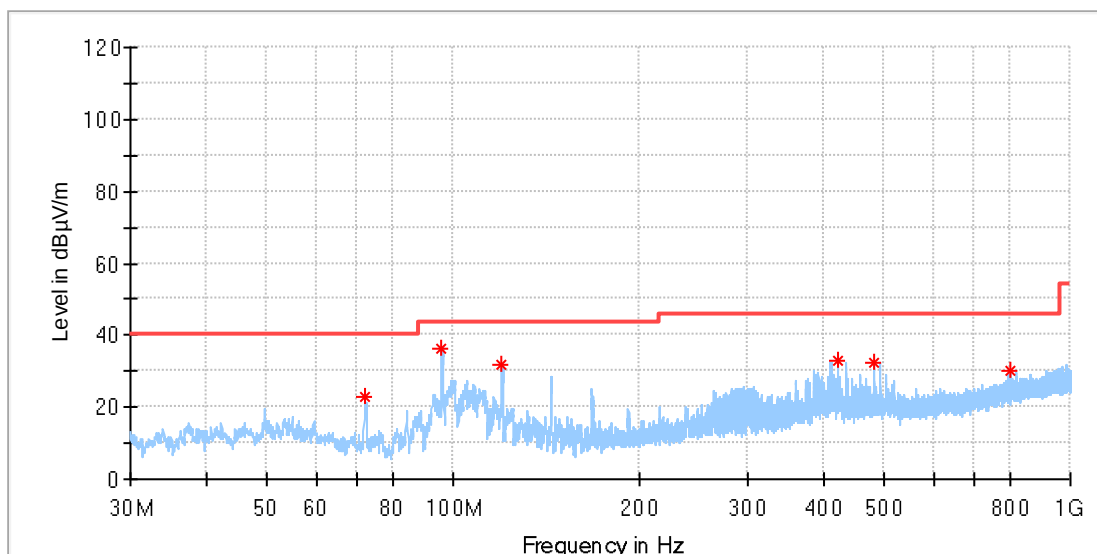

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
72.001000	22.74	40.00	17.26	100.0	H	0.0	-22.5
95.911500	36.54	43.50	6.96	100.0	H	202.0	-19.6
120.064500	32.03	43.50	11.47	100.0	H	0.0	-20.8
419.940000	33.01	46.00	12.99	100.0	H	10.0	-13.4
480.031500	32.58	46.00	13.42	100.0	H	0.0	-12.2
798.967500	30.11	46.00	15.89	100.0	H	0.0	-6.4


Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Tower Speaker
Model: EE2928
Test Mode: BR_DH5_High channel
Test Voltage: DC 5V from USB
Remark: Temp 23 Humi:51%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

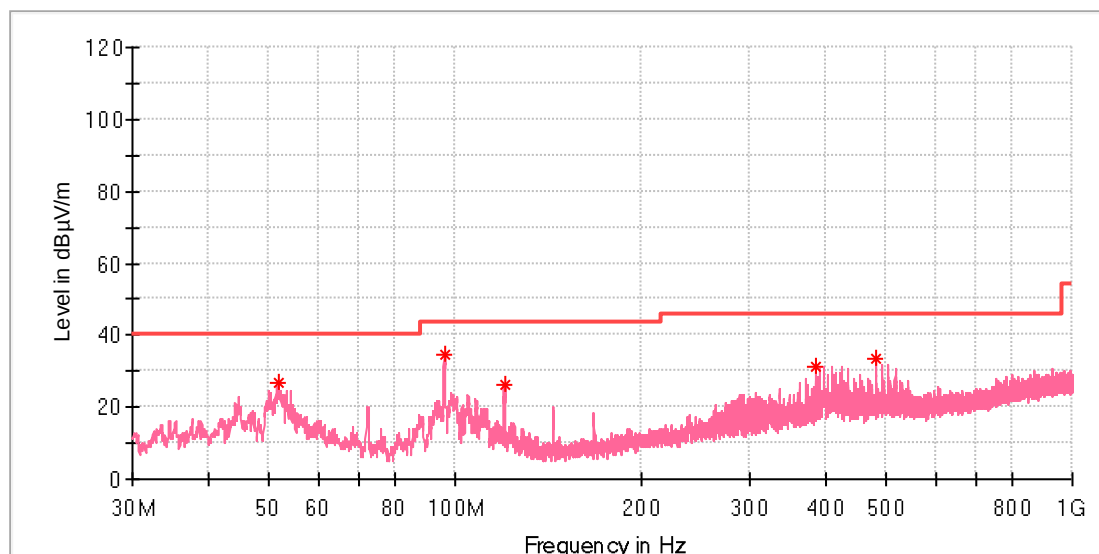

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
51.679500	26.86	40.00	13.14	100.0	V	261.0	-18.4
95.960000	34.44	43.50	9.06	100.0	V	114.0	-19.6
120.113000	26.36	43.50	17.14	100.0	V	282.0	-20.8
384.826000	31.43	46.00	14.57	100.0	V	261.0	-14.1
480.031500	33.52	46.00	12.48	100.0	V	275.0	-12.2

Final_Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

1GHz - 6.2GHz

Test Report

EUT Information

EUT Name: Tower Speaker
Model: EE2928
Test Mode: BR_DH5_Low channel
Test Voltage:: DC 5V from USB
Remark: Temp 23 Humi:51%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

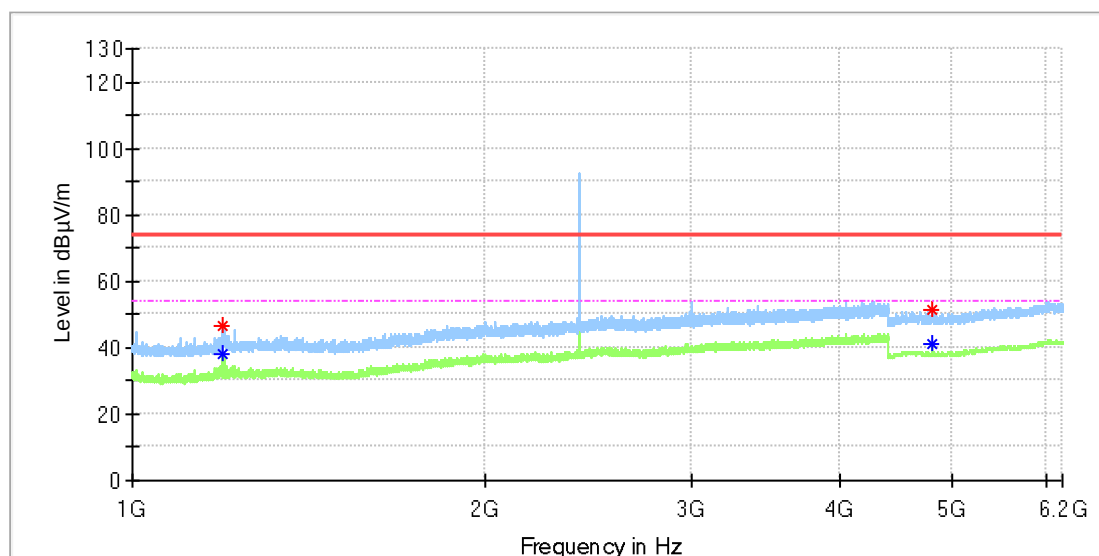

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1195.840000	---	38.14	54.00	15.86	100.0	H	42.0	1.1
1195.840000	46.71	---	74.00	27.29	100.0	H	42.0	1.1
4803.000000	51.11	---	74.00	22.89	100.0	H	346.0	11.8
4804.000000	---	41.35	54.00	12.65	100.0	H	346.0	11.8


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Tower Speaker
Model: EE2928
Test Mode: BR_DH5_Low channel
Test Voltage: DC 5V from USB
Remark: Temp 23 Humi:51%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

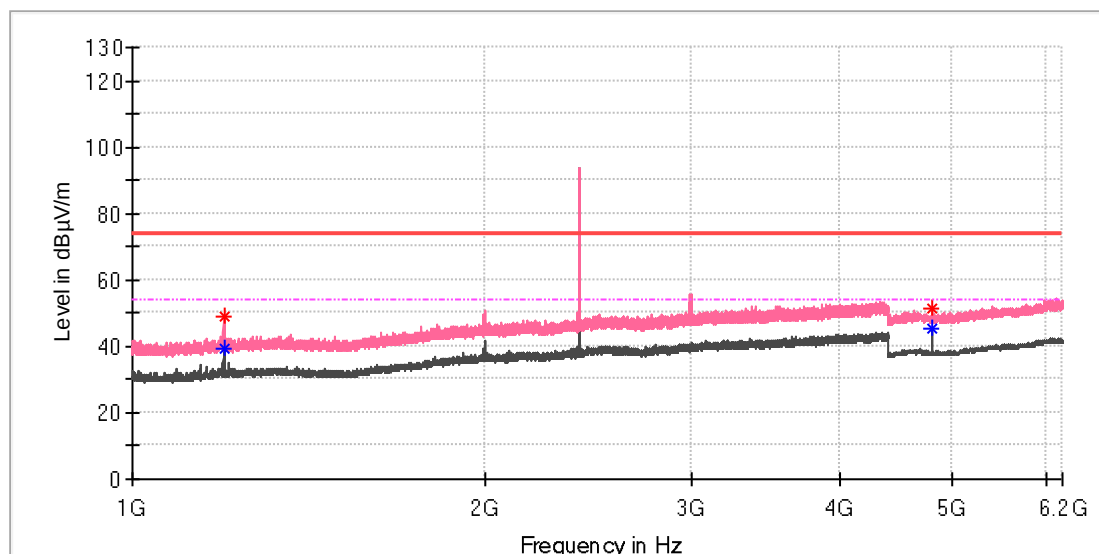

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1196.010000	49.00	---	74.00	25.00	100.0	V	219.0	1.1
1198.730000	---	39.18	54.00	14.82	100.0	V	230.0	1.1
4803.500000	51.66	---	74.00	22.34	100.0	V	281.0	11.8
4804.000000	---	45.14	54.00	8.86	100.0	V	281.0	11.8


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Tower Speaker
Model: EE2928
Test Mode: BR_DH5_Mid channel
Test Voltage: DC 5V from USB
Remark: Temp 23 Humi:51%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

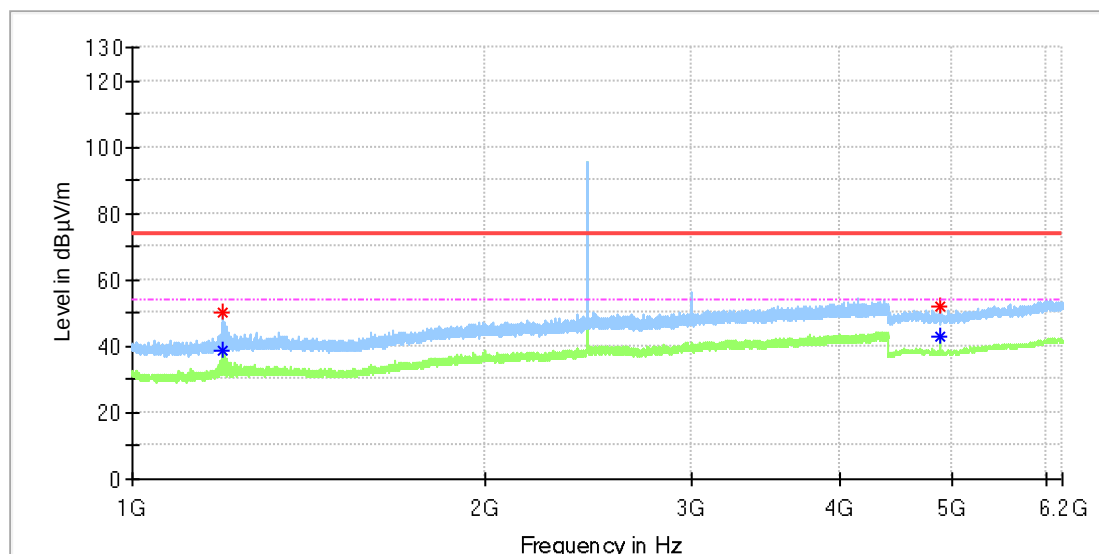

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1195.670000	---	38.93	54.00	15.07	100.0	H	246.0	1.1
1195.670000	49.92	---	74.00	24.08	100.0	H	246.0	1.1
4882.000000	---	43.19	54.00	10.81	100.0	H	272.0	11.8
4882.500000	51.74	---	74.00	22.26	100.0	H	279.0	11.8


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Tower Speaker
Model: EE2928
Test Mode: BR_DH5_Mid channel
Test Voltage: DC 5V from USB
Remark: Temp 23 Humi:51%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

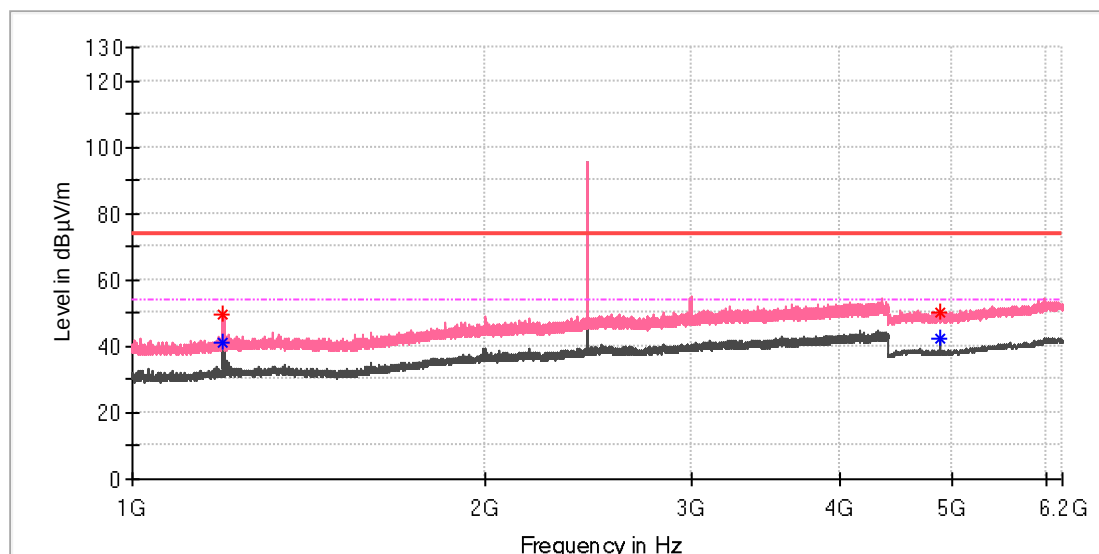

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1194.480000	---	40.99	54.00	13.01	100.0	V	179.0	1.1
1194.820000	49.72	---	74.00	24.28	100.0	V	179.0	1.1
4882.000000	49.93	---	74.00	24.07	100.0	V	259.0	11.8
4882.000000	---	42.50	54.00	11.50	100.0	V	259.0	11.8


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Tower Speaker
Model: EE2928
Test Mode: BR_DH5_High channel
Test Voltage: DC 5V from USB
Remark: Temp 23 Humi:51%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

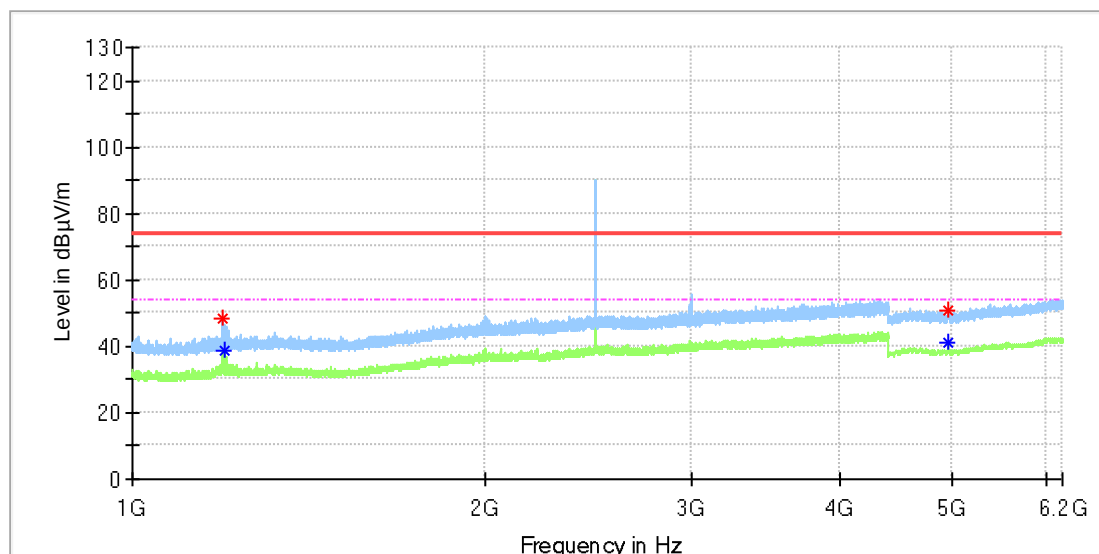

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1194.140000	48.57	---	74.00	25.43	100.0	H	217.0	1.1
1196.350000	---	38.67	54.00	15.33	100.0	H	196.0	1.1
4959.000000	50.91	---	74.00	23.09	100.0	H	341.0	11.8
4960.000000	---	41.17	54.00	12.83	100.0	H	341.0	11.8


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Tower Speaker
Model: EE2928
Test Mode: BR_DH5_High channel
Test Voltage: DC 5V from USB
Remark: Temp 23 Humi:51%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

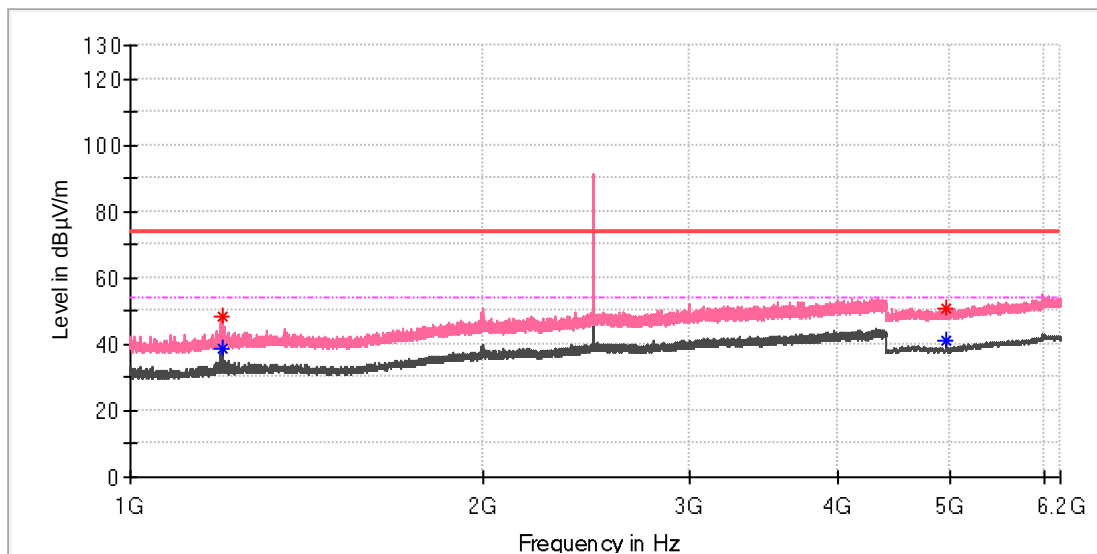

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1196.180000	48.41	---	74.00	25.59	100.0	V	196.0	1.1
1199.750000	---	38.76	54.00	15.24	100.0	V	196.0	1.1
4959.500000	50.62	---	74.00	23.38	100.0	V	260.0	11.8
4960.000000	---	41.10	54.00	12.90	100.0	V	253.0	11.8

Final Result


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

6.2GHz - 18GHz

Test Report

EUT Information

EUT Name:	Tower Speaker
Model:	EE2928
Test Mode:	BR_DH5_Low channel
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

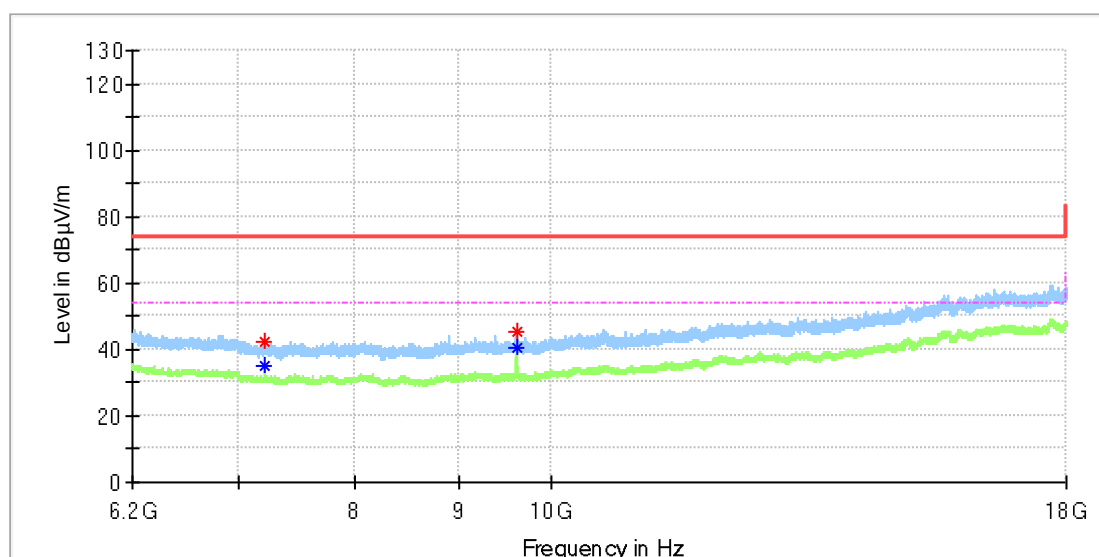

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.950000	42.10	---	74.00	31.90	100.0	H	323.0	8.8
7205.950000	---	34.81	54.00	19.19	100.0	H	323.0	8.8
9607.741667	45.17	---	74.00	28.83	100.0	H	195.0	10.4
9607.741667	---	40.69	54.00	13.31	100.0	H	195.0	10.4


Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name: Tower Speaker
Model: EE2928
Test Mode: BR_DH5_Low channel
Test Voltage: DC 5V from USB
Remark: Temp 23 Humi:51%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

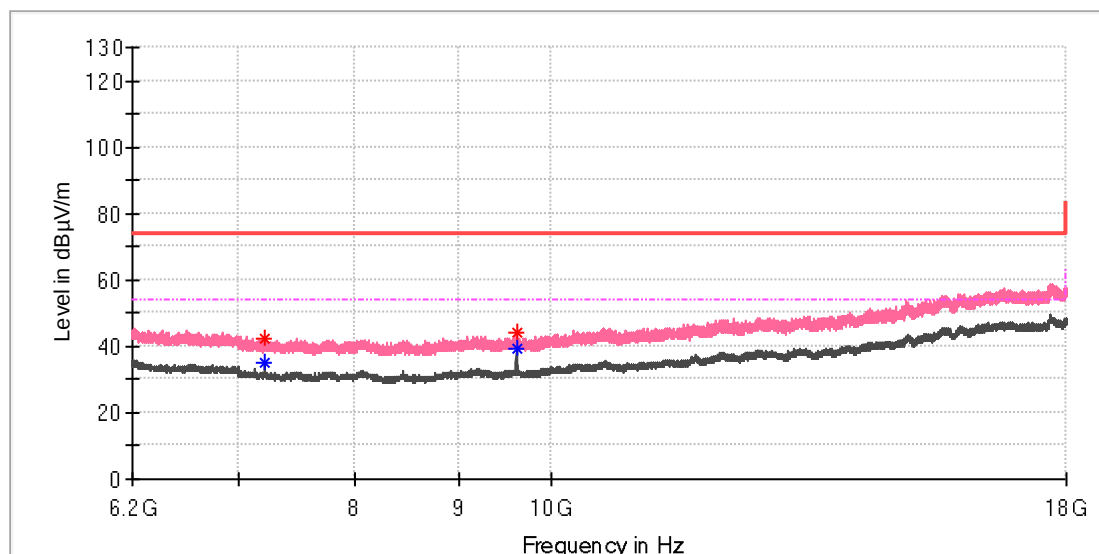

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.458333	---	35.08	54.00	18.92	100.0	V	138.0	8.8
7205.950000	42.12	---	74.00	31.88	100.0	V	280.0	8.8
9607.741667	---	39.07	54.00	14.93	100.0	V	236.0	10.4
9607.741667	44.29	---	74.00	29.71	100.0	V	236.0	10.4


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Tower Speaker
Model: EE2928
Test Mode: BR_DH5_Mid channel
Test Voltage: DC 5V from USB
Remark: Temp 23 Humi:51%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

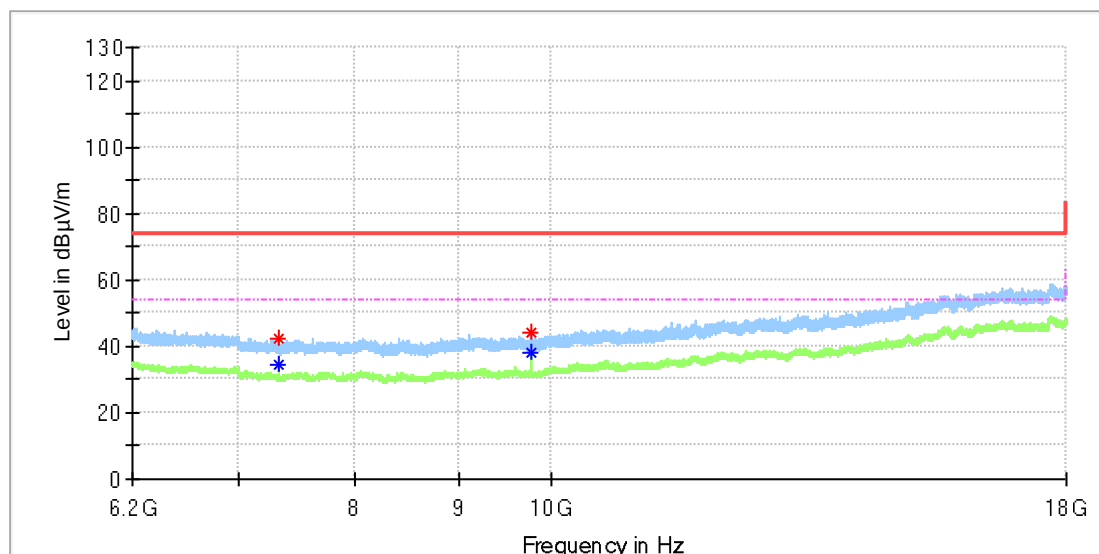

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7322.966667	42.28	---	74.00	31.72	100.0	H	296.0	8.2
7322.966667	---	34.22	54.00	19.78	100.0	H	296.0	8.2
9763.600000	---	38.07	54.00	15.93	100.0	H	209.0	10.4
9763.600000	43.98	---	74.00	30.02	100.0	H	209.0	10.4


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Tower Speaker
Model: EE2928
Test Mode: BR_DH5_Mid channel
Test Voltage: DC 5V from USB
Remark: Temp 23 Humi:51%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

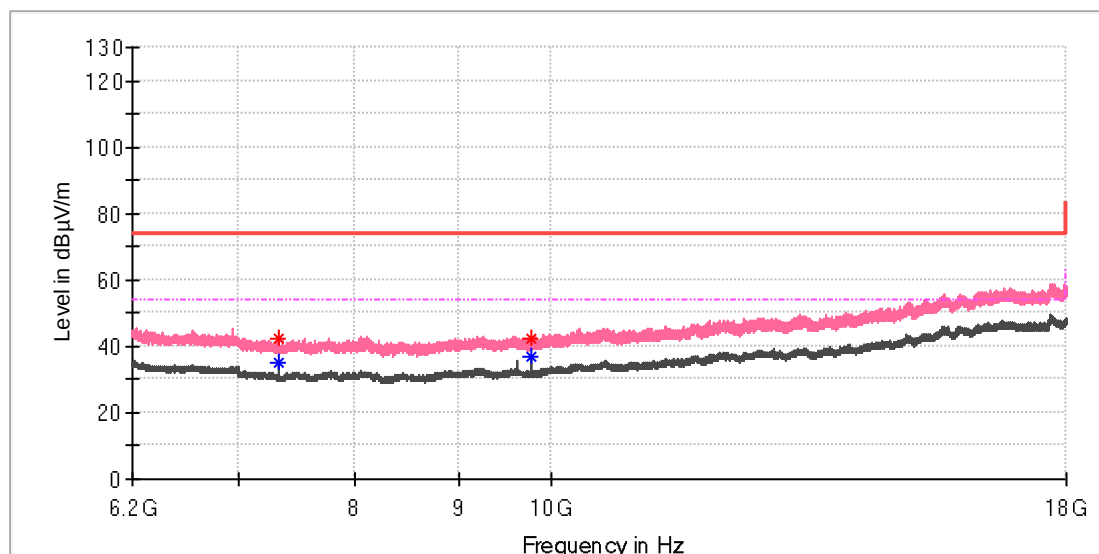

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7322.966667	42.59	---	74.00	31.41	100.0	V	221.0	8.2
7322.966667	---	35.00	54.00	19.00	100.0	V	221.0	8.2
9763.600000	---	36.64	54.00	17.36	100.0	V	236.0	10.4
9764.091667	42.15	---	74.00	31.86	100.0	V	265.0	10.4


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Tower Speaker
Model: EE2928
Test Mode: BR_DH5_High channel
Test Voltage: DC 5V from USB
Remark: Temp 23 Humi:51%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

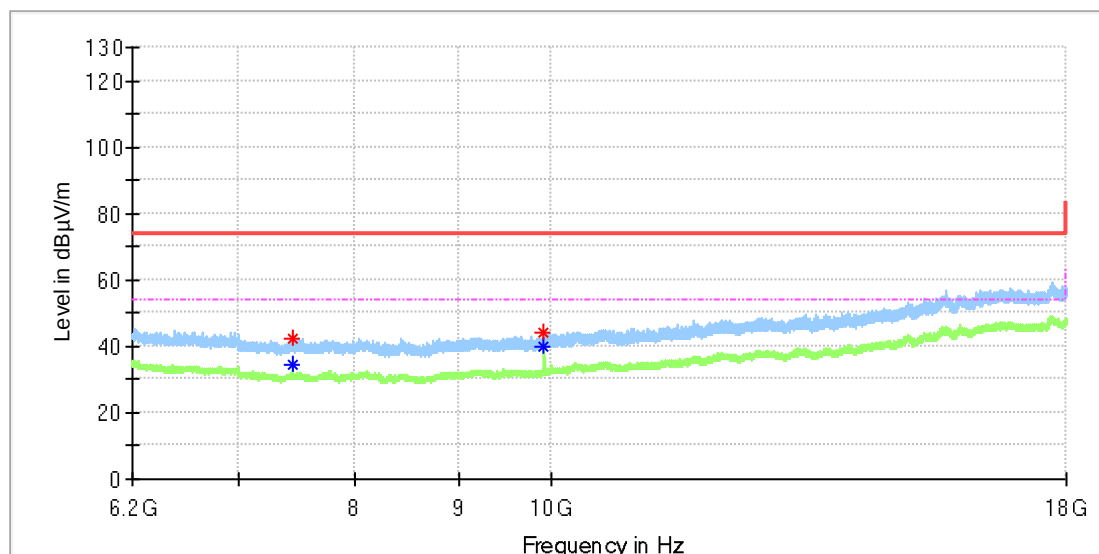

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.983333	42.11	---	74.00	31.89	100.0	H	225.0	8.4
7439.983333	---	34.66	54.00	19.34	100.0	H	225.0	8.4
9919.458333	---	39.73	54.00	14.27	100.0	H	238.0	10.8
9919.950000	44.19	---	74.00	29.81	100.0	H	238.0	10.8


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Tower Speaker
Model: EE2928
Test Mode: BR_DH5_High channel
Test Voltage: DC 5V from USB
Remark: Temp 23 Humi:51%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

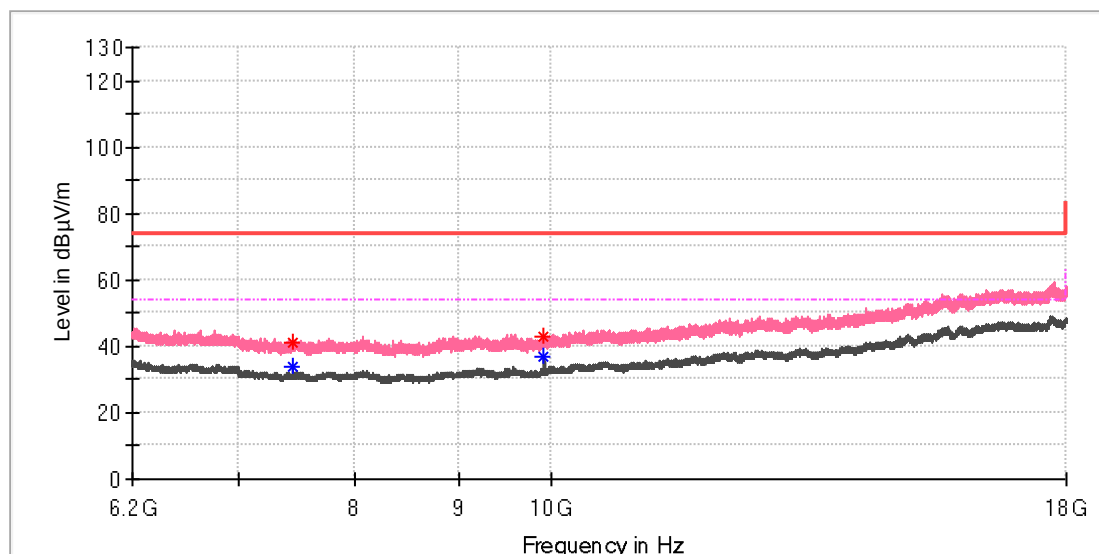

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.983333	---	34.09	54.00	19.91	100.0	V	263.0	8.4
7442.933333	40.89	---	74.00	33.11	100.0	V	163.0	8.4
9919.950000	42.82	---	74.00	31.18	100.0	V	302.0	10.8
9919.950000	---	36.79	54.00	17.21	100.0	V	302.0	10.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---


Appendix C.2: Test Plots of Band Edge (Radiated)

Low Channel

Test Report

EUT Information

EUT Name:	Tower Speaker
Model:	EE2928
Test Mode:	BR_DH5_Low channel
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

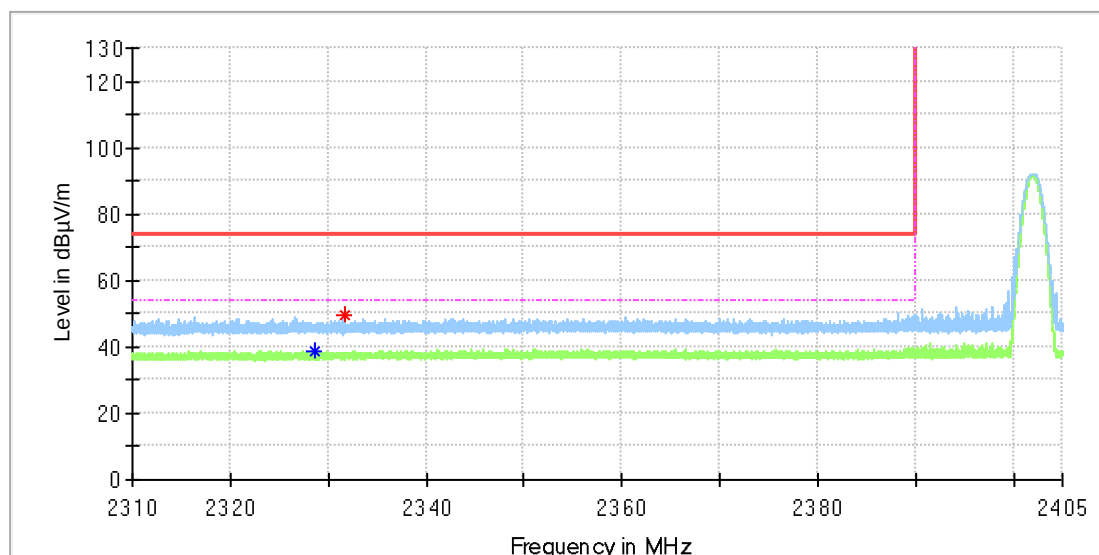

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2328.711000	---	38.47	54.00	15.53	100.0	H	155.0	6.7
2331.654000	49.46	---	74.00	24.54	100.0	H	133.0	6.7


Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name:	Tower Speaker
Model:	EE2928
Test Mode:	BR_DH5_Low channel
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

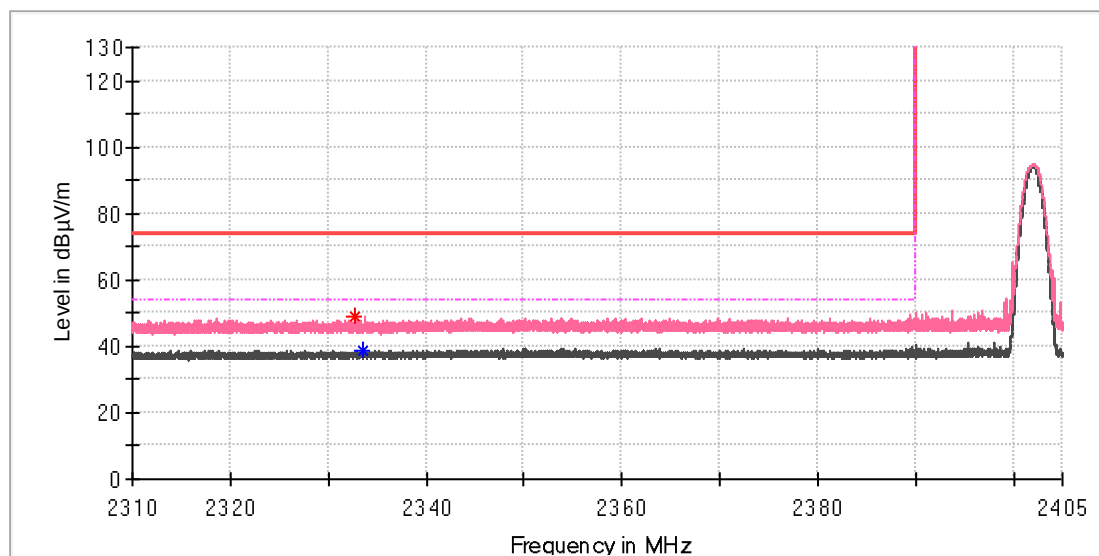

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2332.713750	48.86	---	74.00	25.14	100.0	V	223.0	6.7
2333.449500	---	38.72	54.00	15.28	100.0	V	155.0	6.7

Final_Result


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

High Channel

Test Report

EUT Information

EUT Name: Tower Speaker
Model: EE2928
Test Mode: BR_DH5_High channel
Test Voltage:: DC 5V from USB
Remark: Temp 23 Humi:51%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

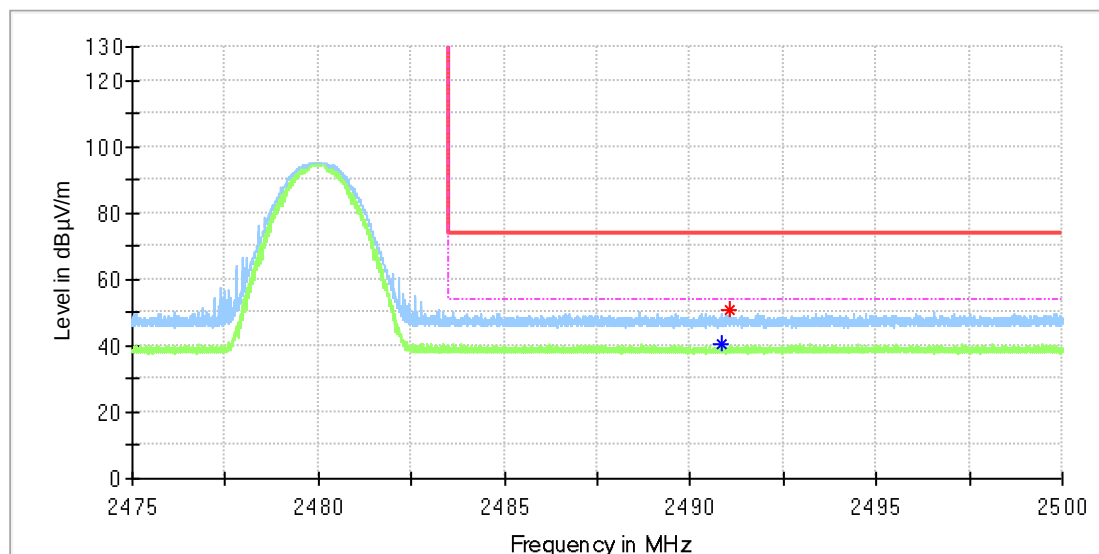

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2490.857500	---	40.22	54.00	13.78	100.0	H	109.0	7.4
2491.037500	50.60	---	74.00	23.40	100.0	H	100.0	7.4


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name:	Tower Speaker
Model:	EE2928
Test Mode:	BR_DH5_High channel
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

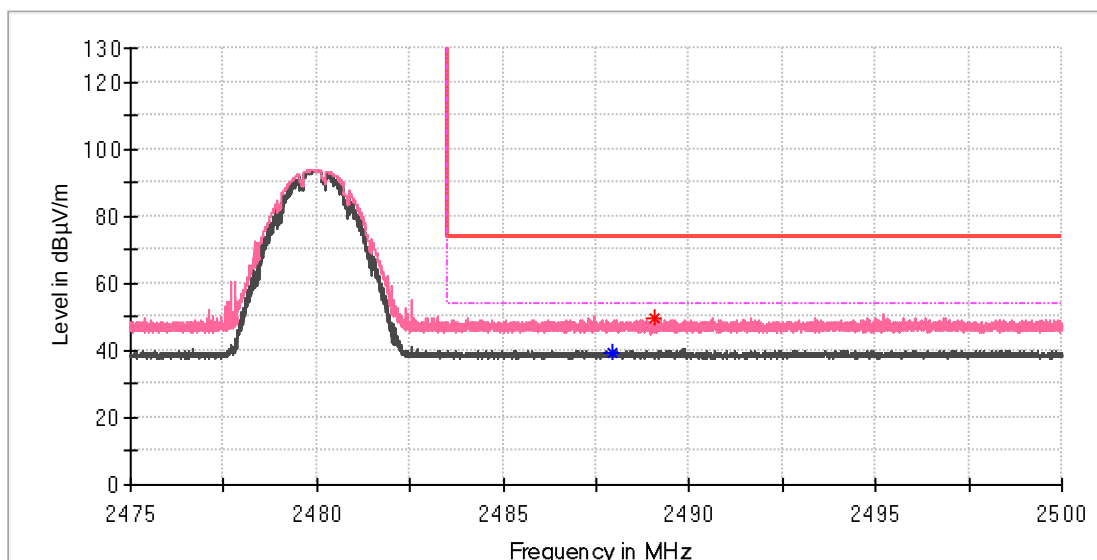

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2487.930000	---	39.50	54.00	14.51	100.0	V	174.0	7.4
2489.047500	49.38	---	74.00	24.62	100.0	V	347.0	7.4

Final_Result


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix C.3: Test Plots of AC Mains Conducted Emission

EMC32 Report

EUT Information

EUT Name: Tower SPEAKER
Order No: 168322127 70
Model: EE2928
Test Voltage: AC 230V/50Hz
Test By: Steve Lan
Review By: Gary Chen
Remark: SR2

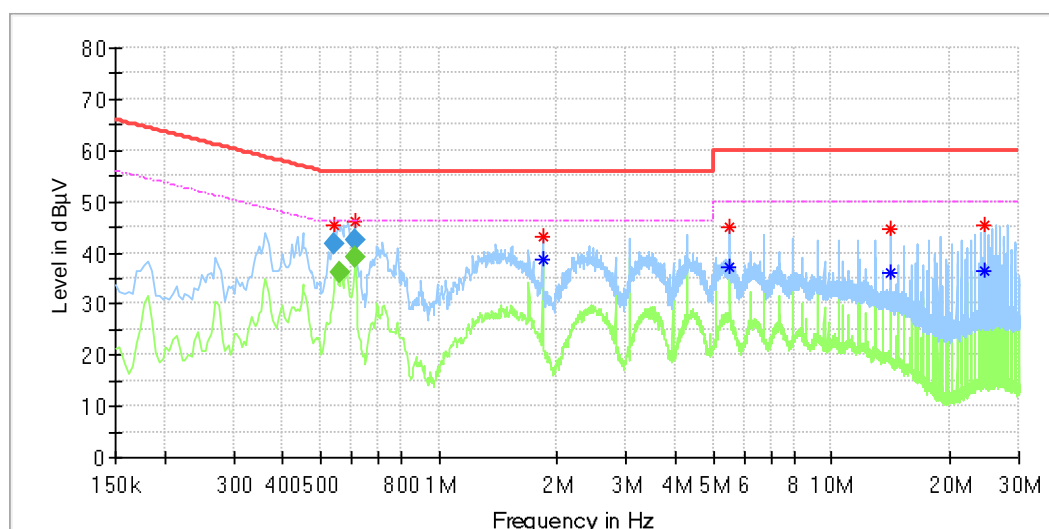

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.541500	45.41	---	56.00	10.59	L1	10.0
0.561500	---	36.07	46.00	9.93	L1	10.0
0.613500	46.05	---	56.00	9.95	L1	10.0
0.613500	---	39.35	46.00	6.65	L1	10.0
1.838000	43.15	---	56.00	12.85	L1	10.1
1.838000	---	38.71	46.00	7.29	L1	10.1
5.514000	45.08	---	60.00	14.92	L1	10.3
5.514000	---	37.34	50.00	12.66	L1	10.3
14.086000	44.80	---	60.00	15.20	L1	10.4
14.086000	---	36.19	50.00	13.81	L1	10.4
24.498000	---	36.45	50.00	13.55	L1	10.4
24.502000	45.26	---	60.00	14.74	L1	10.4


Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.541500	41.55	---	56.00	14.45	200.0	9.000	L1	10.0
0.561500	---	36.12	46.00	9.88	200.0	9.000	L1	10.0
0.613500	42.50	---	56.00	13.50	200.0	9.000	L1	10.0
0.613500	---	39.21	46.00	6.79	200.0	9.000	L1	10.0

EMC32 Report

EUT Information

EUT Name: Tower SPEAKER
Order No: 168322127 70
Model: EE2928
Test Voltage: AC 230V/50Hz
Test By: Steve Lan
Review By: Gary Chen
Remark: SR2

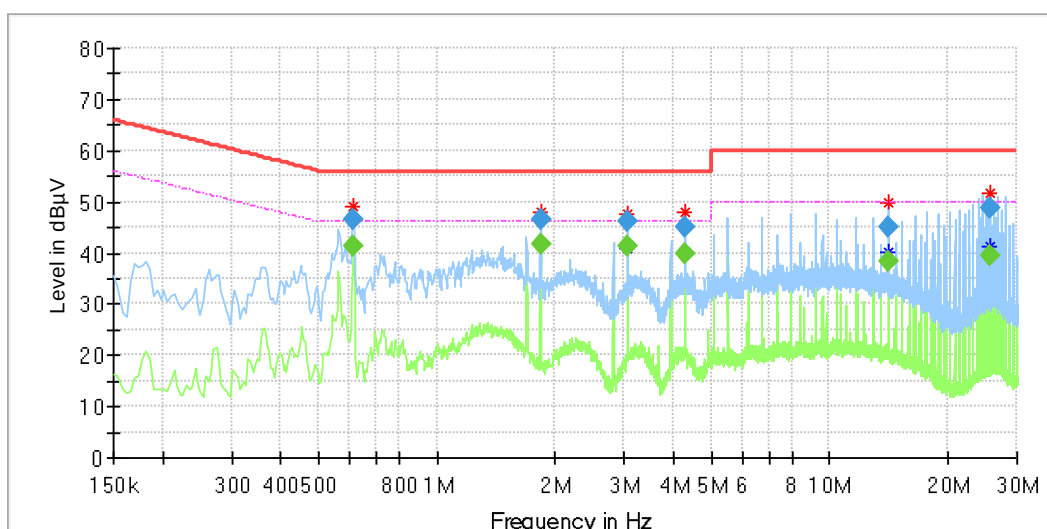

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.613500	49.02	---	56.00	6.98	N	9.8
0.613500	---	41.66	46.00	4.34	N	9.8
1.837500	---	41.74	46.00	4.26	N	9.8
1.837500	48.02	---	56.00	7.98	N	9.8
3.061500	---	40.80	46.00	5.20	N	9.9
3.061500	47.50	---	56.00	8.50	N	9.9
4.285500	47.86	---	56.00	8.14	N	9.9
4.285500	---	40.32	46.00	5.68	N	9.9
14.081500	49.89	---	60.00	10.11	N	10.1
14.085500	---	40.21	50.00	9.79	N	10.1
25.725500	51.89	---	60.00	8.11	N	10.3
25.725500	---	41.30	50.00	8.70	N	10.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.613500	---	41.37	46.00	4.63	200.0	9.000	N	9.8
0.613500	46.36	---	56.00	9.64	200.0	9.000	N	9.8
1.837500	---	41.67	46.00	4.33	200.0	9.000	N	9.8
1.837500	46.50	---	56.00	9.50	200.0	9.000	N	9.8
3.061500	---	41.15	46.00	4.85	200.0	9.000	N	9.9
3.061500	46.02	---	56.00	9.98	200.0	9.000	N	9.9
4.285500	45.09	---	56.00	10.91	200.0	9.000	N	9.9
4.285500	---	39.88	46.00	6.12	200.0	9.000	N	9.9
14.081500	45.06	---	60.00	14.94	200.0	9.000	N	10.1
14.085500	---	38.27	50.00	11.73	200.0	9.000	N	10.1
25.725500	---	39.38	50.00	10.62	200.0	9.000	N	10.3
25.725500	48.67	---	60.00	11.33	200.0	9.000	N	10.3