



## 802.11 n40 CH06 (2437MHz)




## 802.11 n40 CH06 (2437MHz)

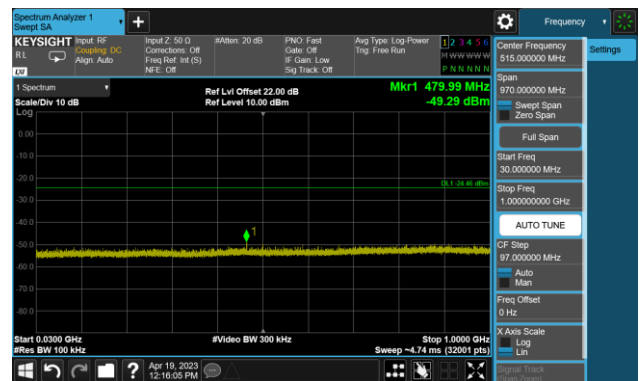


## 802.11 n40 CH06 (2437MHz)

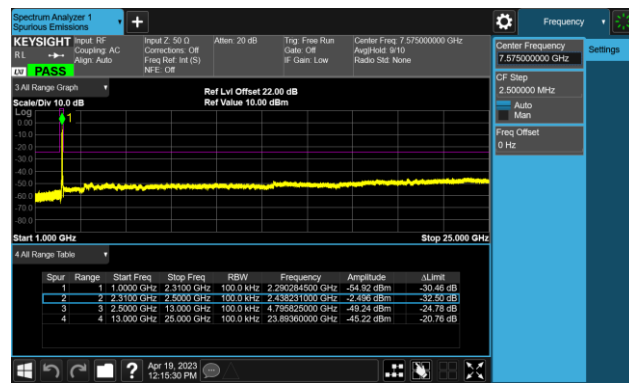


## 802.11 n40 CH09 (2452MHz)

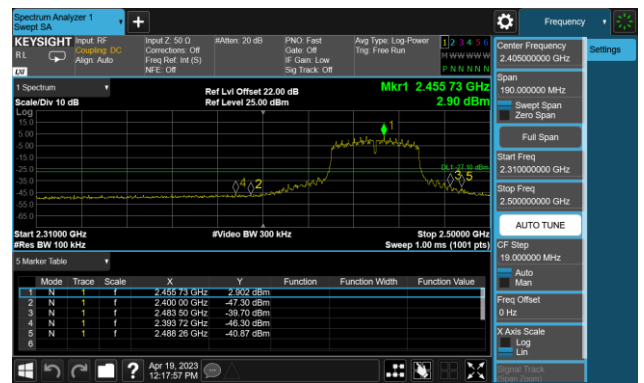

## 802.11 n40 CH09 (2452MHz)

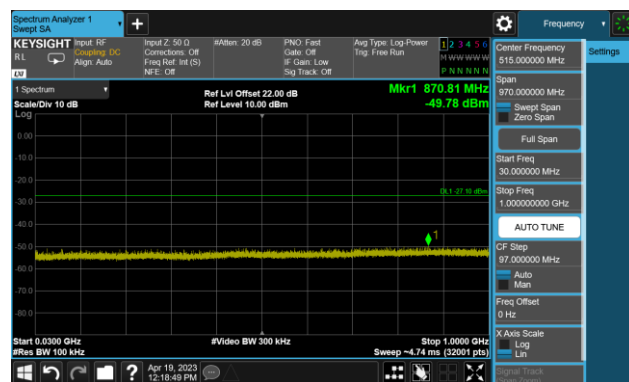

## 802.11 n40 CH09 (2452MHz)

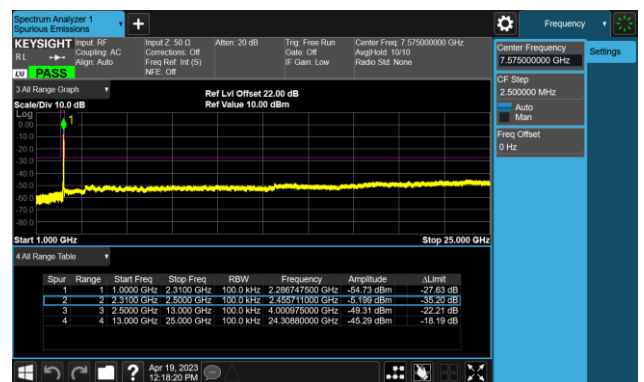


## Antenna 1


### 802.11 b CH01 (2412MHz)



### 802.11 b CH01 (2412MHz)

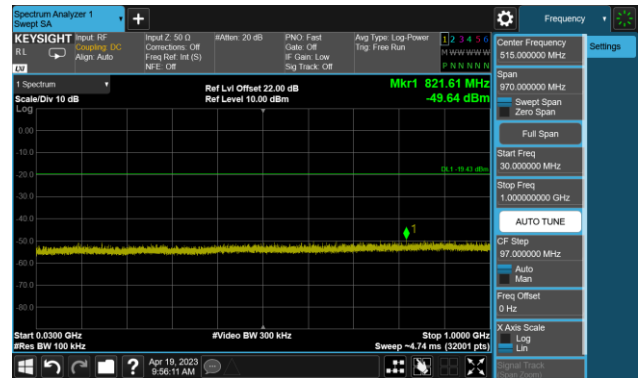


### 802.11 b CH01 (2412MHz)

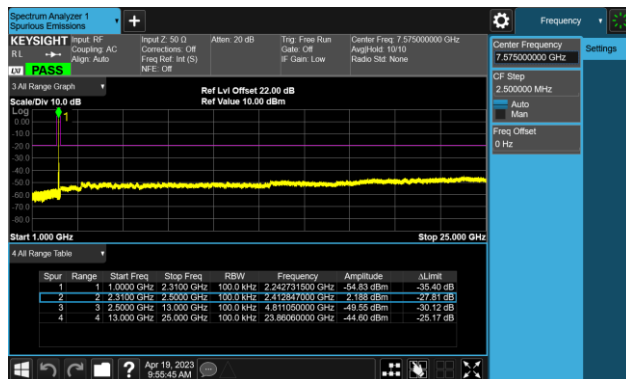


### 802.11 b CH06 (2437MHz)



### 802.11 b CH06 (2437MHz)

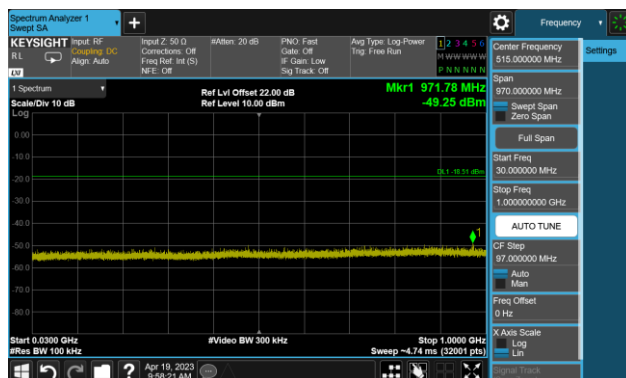


### 802.11 b CH06 (2437MHz)

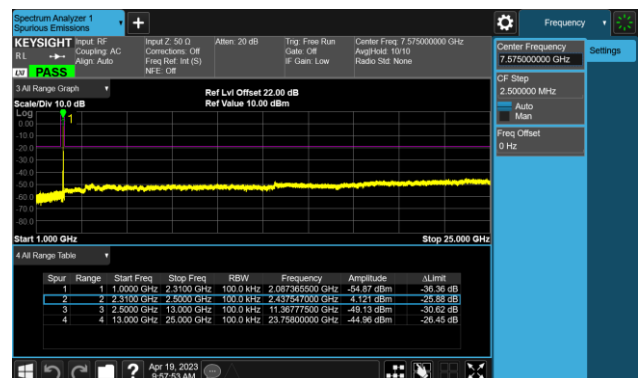


## 802.11 b CH11 (2462MHz)



## 802.11 b CH11 (2462MHz)

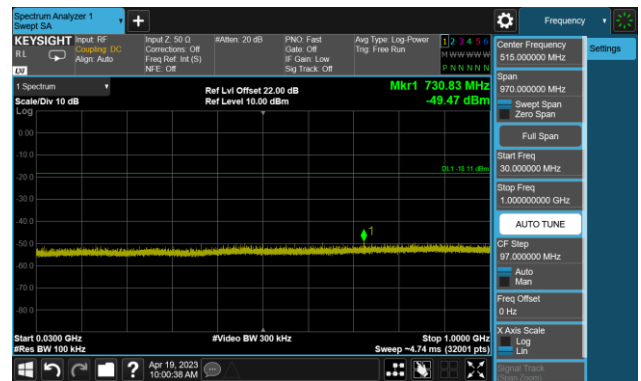


## 802.11 b CH11 (2462MHz)

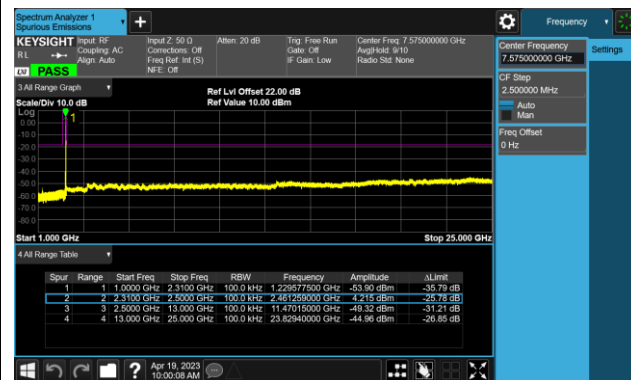


## 802.11 g CH01 (2412MHz)



## 802.11 g CH01 (2412MHz)

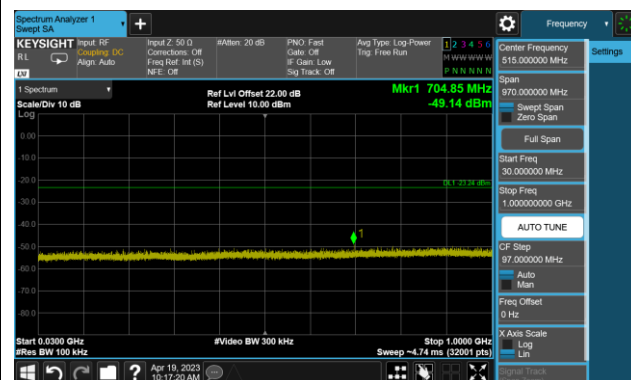


## 802.11 g CH01 (2412MHz)

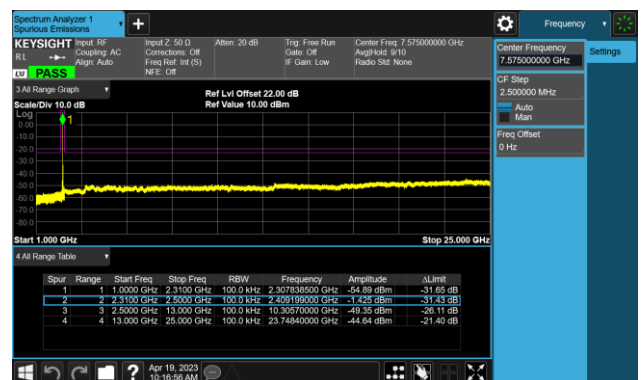


## 802.11 g CH06 (2437MHz)




## 802.11 g CH06 (2437MHz)

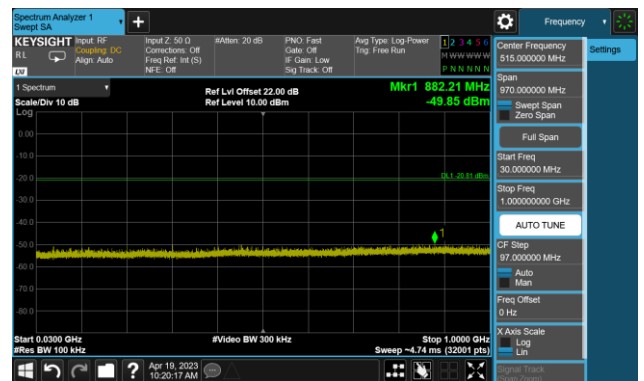


## 802.11 g CH06 (2437MHz)

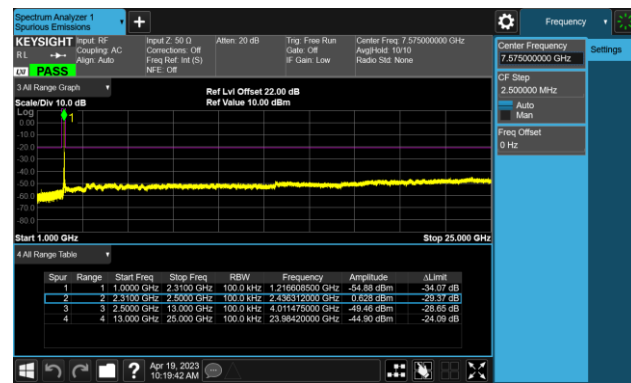


## 802.11 g CH11 (2462MHz)

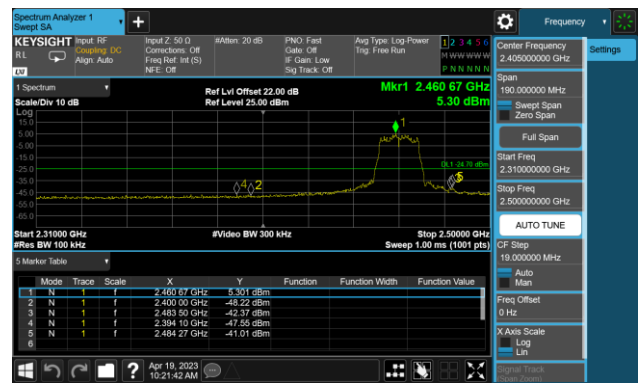


## 802.11 g CH11 (2462MHz)

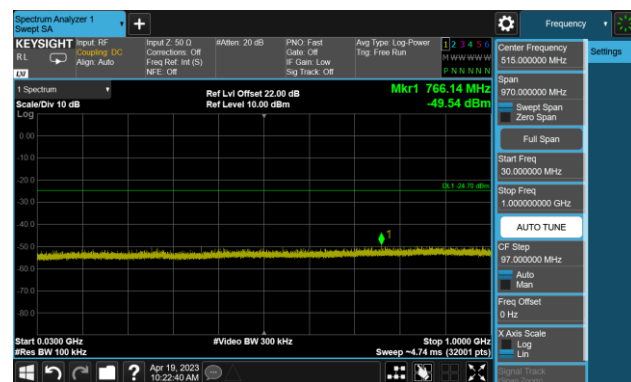


## 802.11 g CH11 (2462MHz)

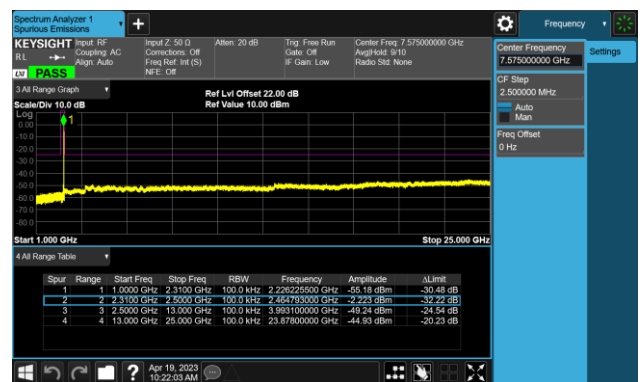


## 802.11 n20 CH01 (2412MHz)

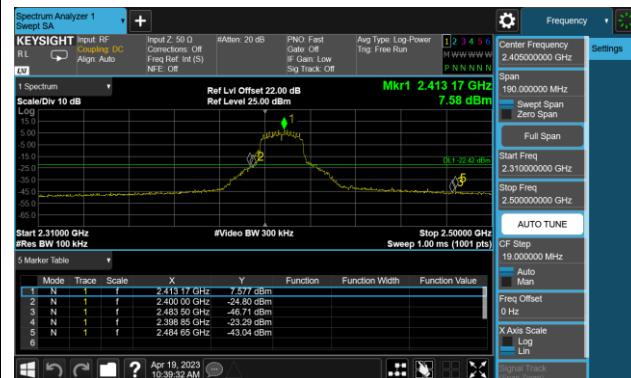


## 802.11 n20 CH01 (2412MHz)

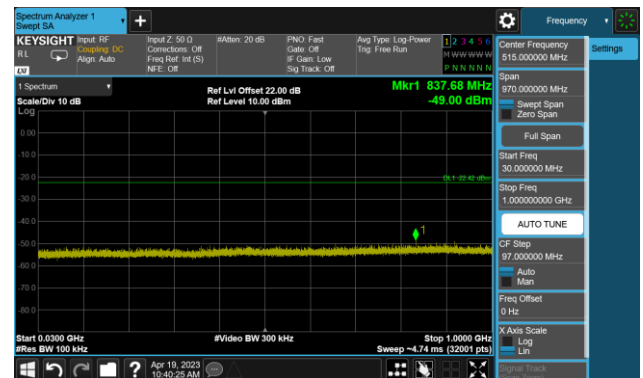


## 802.11 n20 CH01 (2412MHz)

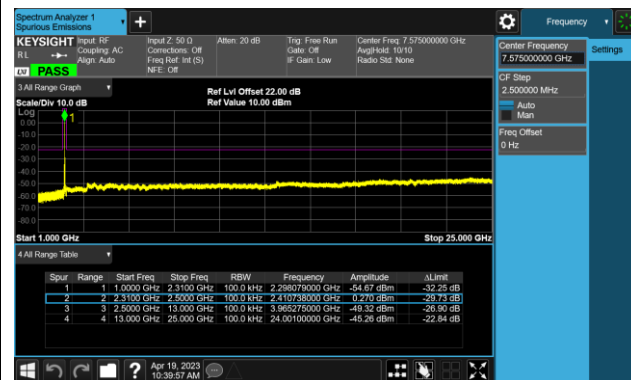


## 802.11 n20 CH06 (2437MHz)

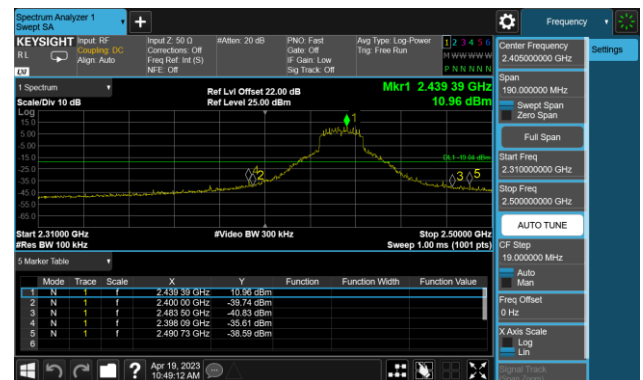

## 802.11 n20 CH06 (2437MHz)

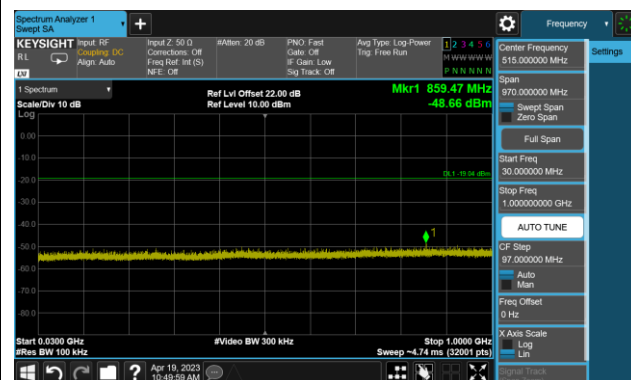


## 802.11 n20 CH06 (2437MHz)

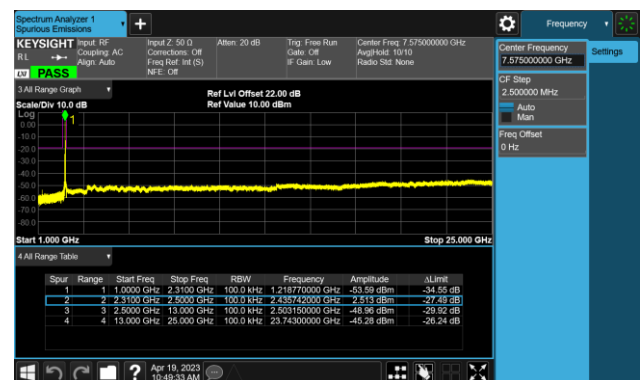


## 802.11 n20 CH11 (2462MHz)



## 802.11 n20 CH11 (2462MHz)

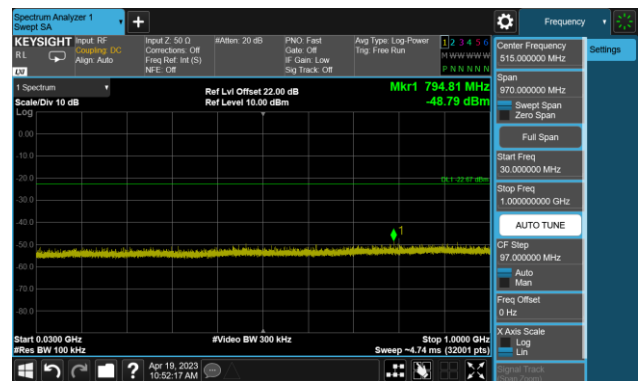

## 802.11 n20 CH11 (2462MHz)

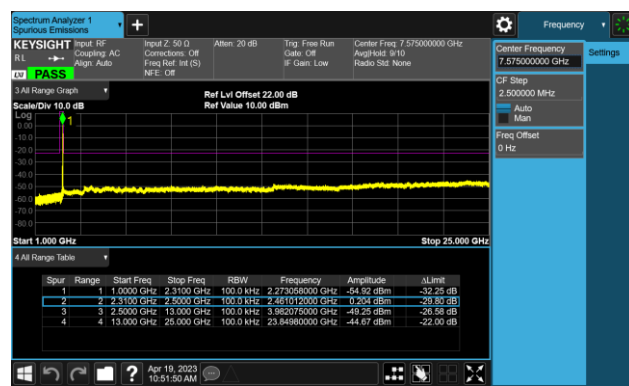


## 802.11 n40 CH03 (2422MHz)



## 802.11 n40 CH03 (2422MHz)




## 802.11 n40 CH03 (2422MHz)

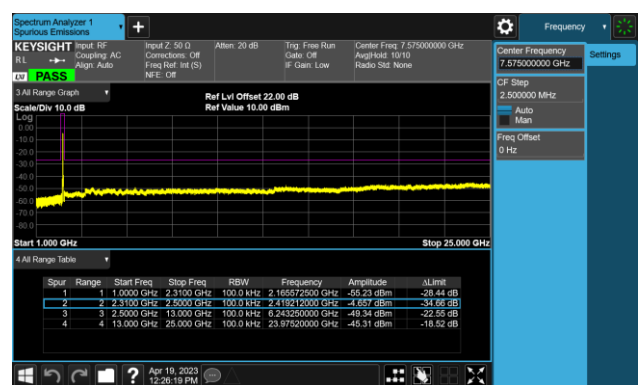


## 802.11 n40 CH06 (2437MHz)




## 802.11 n40 CH06 (2437MHz)

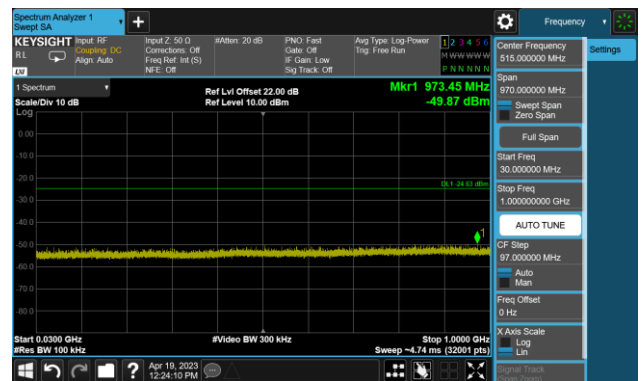


## 802.11 n40 CH06 (2437MHz)

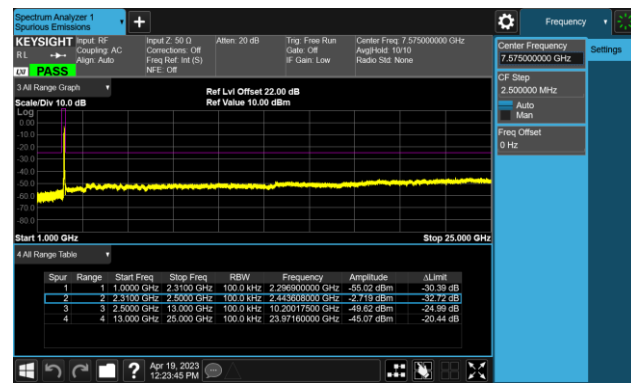


## 802.11 n40 CH09 (2452MHz)

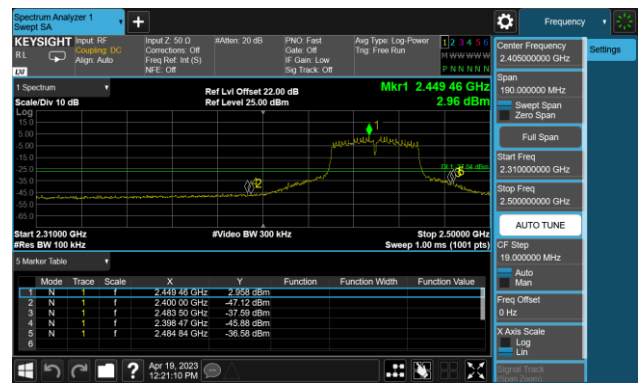

## 802.11 n40 CH09 (2452MHz)

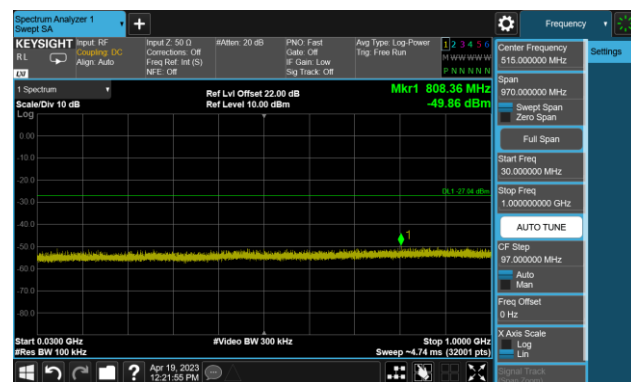

## 802.11 n40 CH09 (2452MHz)

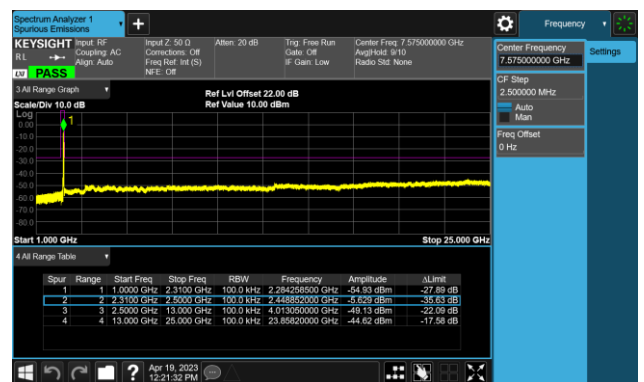



## 7.6. Radiated Spurious Emission Measurement

### 7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                          |                               |
|----------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[Uv/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)            | 30                            |
| 1.705 - 30                             | 30                       | 30                            |
| 30 - 88                                | 100                      | 3                             |
| 88 - 216                               | 150                      | 3                             |
| 216 - 960                              | 200                      | 3                             |
| Above 960                              | 500                      | 3                             |

### 7.6.2. Test Procedure Used

ANSI C63.10-2013 Section 11.11 & 11.12

ANSI C63.10-2013 Section 6.3 (General Requirements)

ANSI C63.10-2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10-2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10-2013 Section 6.6 (Standard test method above 1GHz)

### 7.6.3. Test Setting

**Table 1 - RBW as a function of frequency**

| Frequency     | RBW           |
|---------------|---------------|
| 9 ~ 150 kHz   | 200 ~ 300 Hz  |
| 0.15 ~ 30 MHz | 9 ~ 10 kHz    |
| 30 ~ 1000 MHz | 100 ~ 120 kHz |
| > 1000MHz     | 1MHz          |



**Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

**Peak Measurements above 1GHz**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

**Average Measurements above 1GHz (Method VB)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

### 7.6.4. Test Setup

#### Below 1GHz Test Setup:

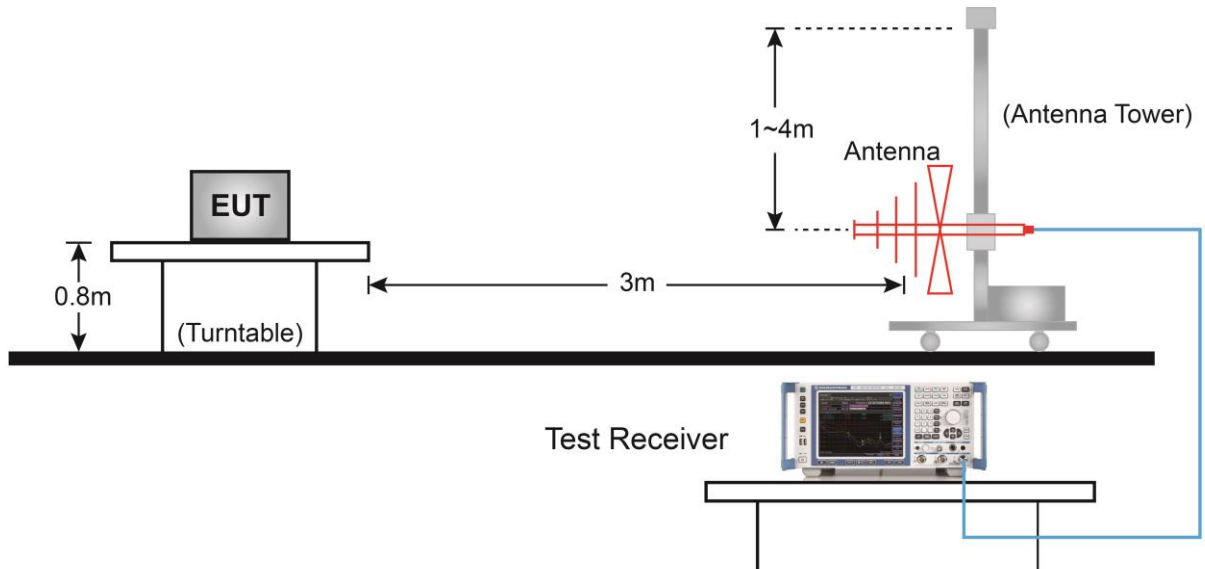


#### Above 1GHz Test Setup:

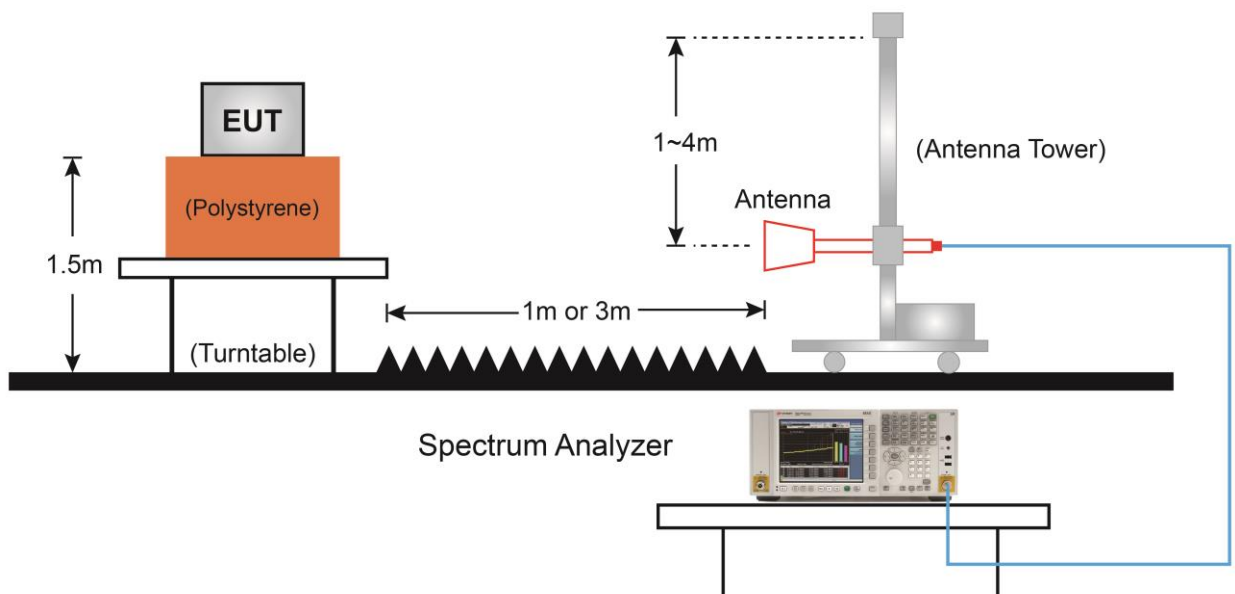

### 7.6.5. Test Result

|           |                               |                      |               |
|-----------|-------------------------------|----------------------|---------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-05-03    |
| Factor    | VULB 9162                     | Temp. / Humidity     | 22°C /63%     |
| Polarity  | Horizontal                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX CH 6 ANT 0+1 | Test Voltage         | AC 120V/60Hz  |

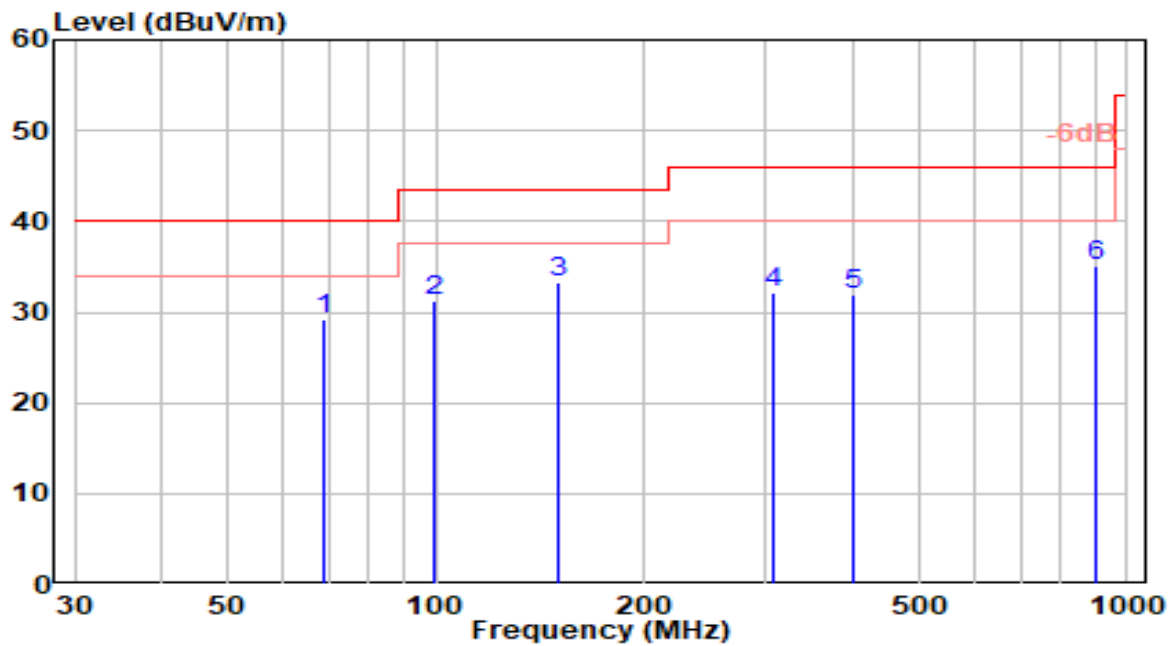


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 68.550          | 13.23          | 16.06      | 29.29                | -10.71      | 40.00          | 200         | 53          | QP                |
| 2  | 99.760          | 12.85          | 18.38      | 31.23                | -12.27      | 43.50          | 150         | 14          | QP                |
| 3  | * 150.410       | 18.22          | 14.98      | 33.20                | -10.30      | 43.50          | 200         | 94          | QP                |
| 4  | 308.370         | 11.38          | 20.79      | 32.17                | -13.83      | 46.00          | 100         | 334         | QP                |
| 5  | 401.870         | 8.73           | 23.10      | 31.82                | -14.18      | 46.00          | 150         | 174         | QP                |
| 6  | 898.750         | 4.26           | 30.87      | 35.13                | -10.87      | 46.00          | 100         | 311         | QP                |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |               |
|-----------|-------------------------------|----------------------|---------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-05-03    |
| Factor    | VULB 9162                     | Temp. / Humidity     | 22°C /63%     |
| Polarity  | Vertical                      | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX CH 6 ANT 0+1 | Test Voltage         | AC 120V/60Hz  |

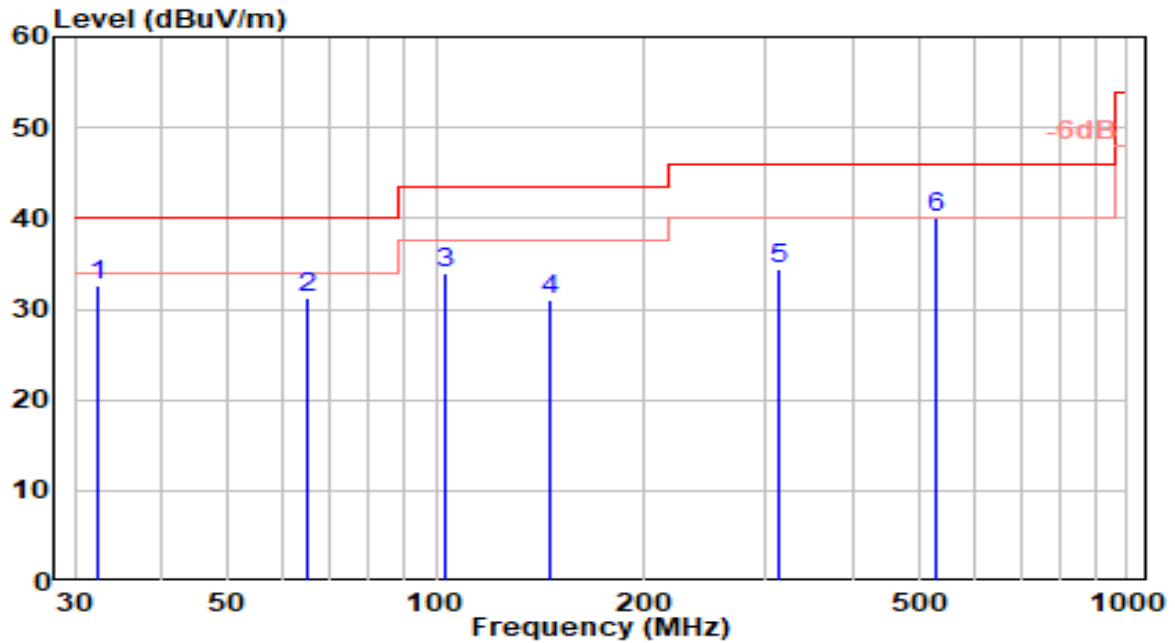


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 32.300          | 15.62          | 16.97      | 32.59                | -7.41       | 40.00          | 100         | 73          | QP                |
| 2  | 64.880          | 13.90          | 17.36      | 31.27                | -8.73       | 40.00          | 200         | 82          | QP                |
| 3  | 103.300         | 15.70          | 18.30      | 34.00                | -9.50       | 43.50          | 100         | 300         | QP                |
| 4  | 146.390         | 16.22          | 14.83      | 31.06                | -12.44      | 43.50          | 100         | 7           | QP                |
| 5  | 313.420         | 13.53          | 20.98      | 34.51                | -11.49      | 46.00          | 100         | 345         | QP                |
| 6  | * 529.850       | 14.85          | 25.29      | 40.14                | -5.86       | 46.00          | 150         | 7           | QP                |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11b_TX_CH 1_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

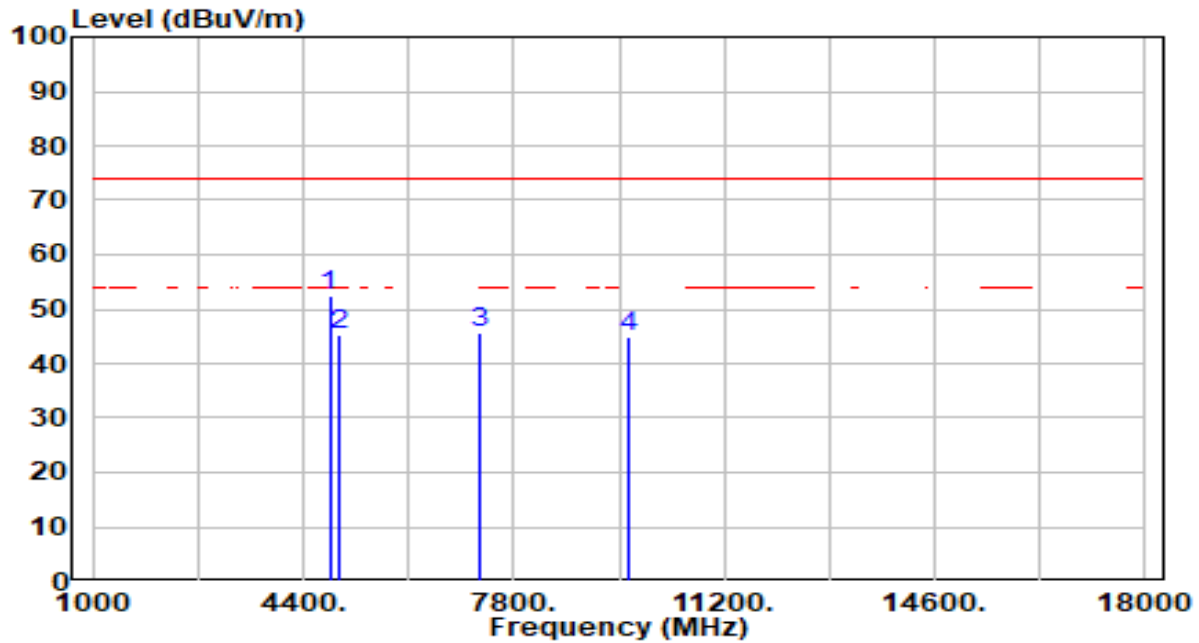


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 4824.000        | 53.71          | -1.23      | 52.48                | -21.52      | 74.00          | 300         | 322         | Peak              |
| 2  |   | 4999.000        | 45.99          | -0.87      | 45.12                | -28.88      | 74.00          | 300         | 275         | Peak              |
| 3  |   | 7236.000        | 41.56          | 4.16       | 45.72                | -28.28      | 74.00          | 300         | 308         | Peak              |
| 4  |   | 9648.000        | 41.72          | 3.29       | 45.01                | -28.99      | 74.00          | 300         | 103         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-19   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11b_TX_CH 1_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

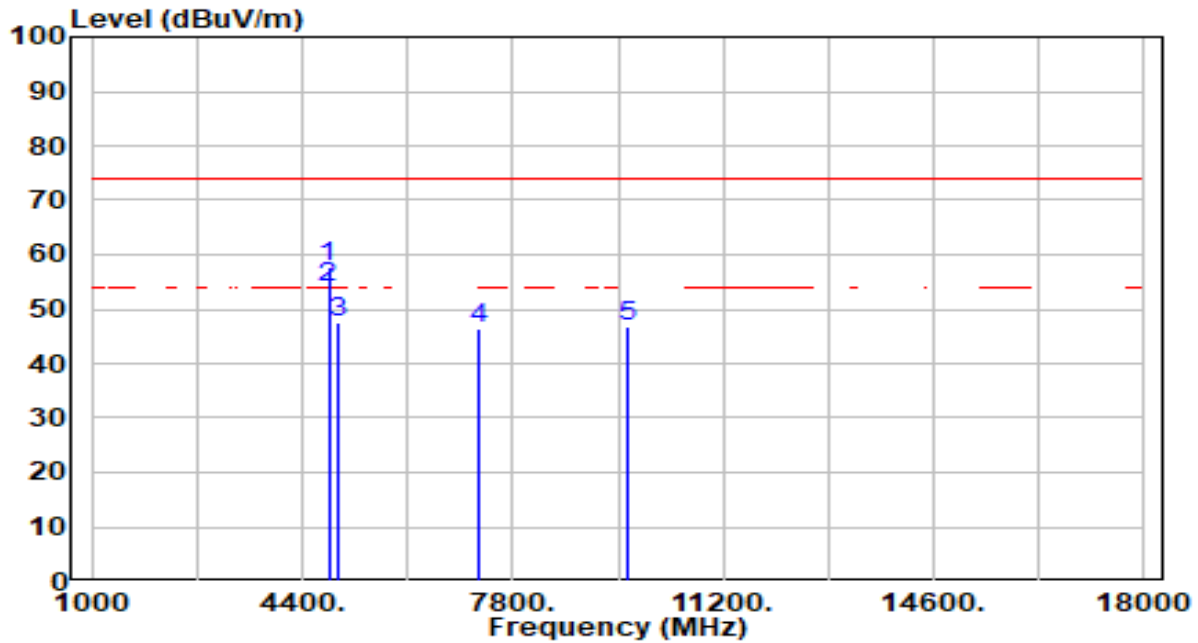


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 4824.000        | 58.79          | -1.23      | 57.56                | -16.44      | 74.00          | 312         | 246         | Peak              |
| 2  | * | 4824.000        | 55.04          | -1.23      | 53.81                | -0.19       | 54.00          | 312         | 246         | Average           |
| 3  |   | 4999.000        | 48.34          | -0.87      | 47.46                | -26.54      | 74.00          | 300         | 246         | Peak              |
| 4  |   | 7236.000        | 42.38          | 4.16       | 46.54                | -27.46      | 74.00          | 300         | 288         | Peak              |
| 5  |   | 9648.000        | 43.43          | 3.29       | 46.72                | -27.28      | 74.00          | 300         | 336         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11b_TX_CH 6_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

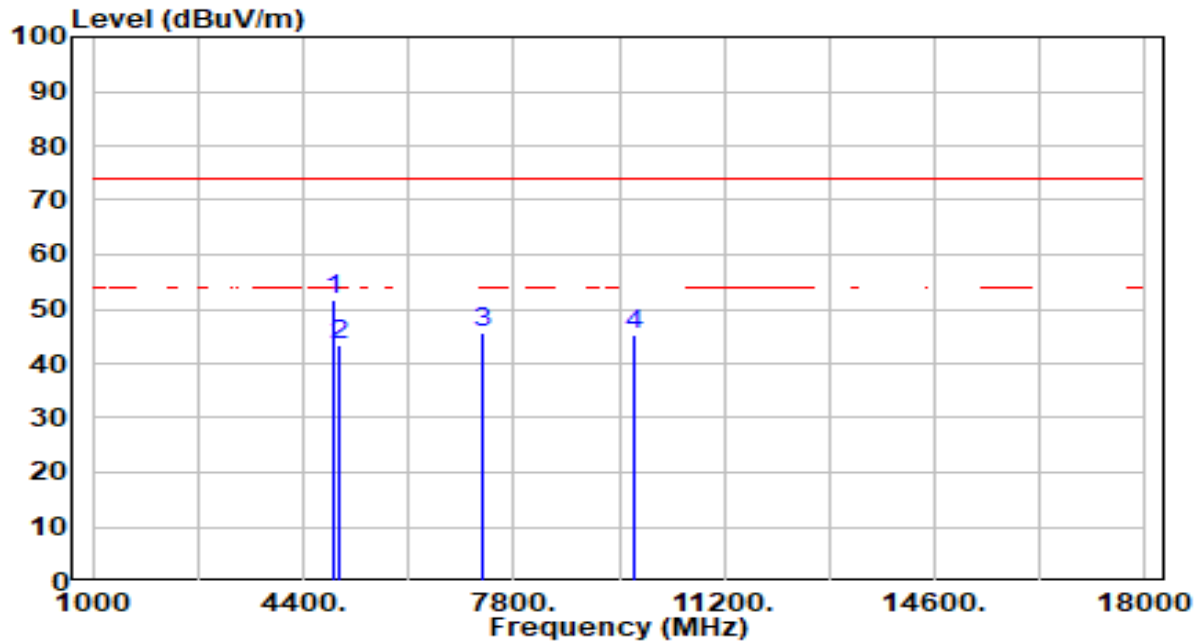


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 4874.000        | 52.82          | -1.13      | 51.69                | -22.31      | 74.00          | 300         | 40          | Peak              |
| 2  |   | 4995.000        | 44.45          | -0.88      | 43.57                | -30.43      | 74.00          | 300         | 276         | Peak              |
| 3  |   | 7311.000        | 41.37          | 4.14       | 45.51                | -28.49      | 74.00          | 300         | 348         | Peak              |
| 4  |   | 9748.000        | 42.13          | 3.33       | 45.46                | -28.54      | 74.00          | 300         | 240         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11b_TX_CH 6_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

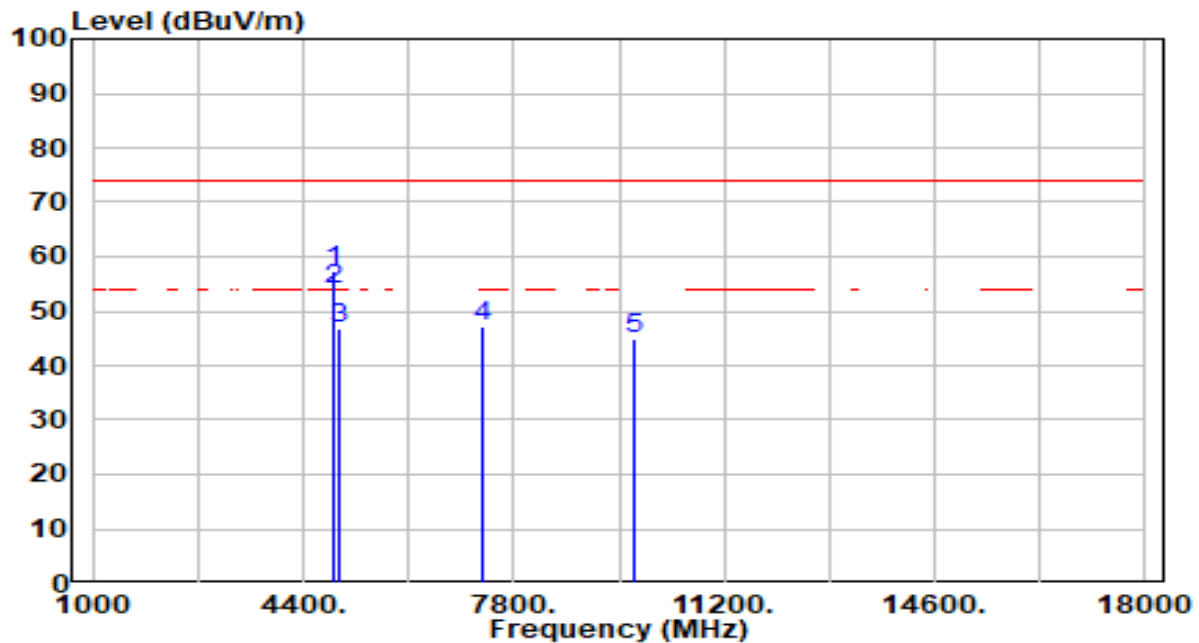


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 4874.000        | 58.61          | -1.13      | 57.48                | -16.52      | 74.00          | 295         | 246         | Peak              |
| 2  | * | 4874.000        | 55.02          | -1.13      | 53.89                | -0.11       | 54.00          | 295         | 246         | Average           |
| 3  |   | 4995.000        | 47.60          | -0.88      | 46.72                | -27.28      | 74.00          | 300         | 244         | Peak              |
| 4  |   | 7311.000        | 43.03          | 4.14       | 47.17                | -26.83      | 74.00          | 300         | 89          | Peak              |
| 5  |   | 9748.000        | 41.57          | 3.33       | 44.90                | -29.10      | 74.00          | 300         | 86          | Peak              |

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11b_TX_CH 11_ANT 0+1     | Test Voltage         | AC 120V/60Hz |

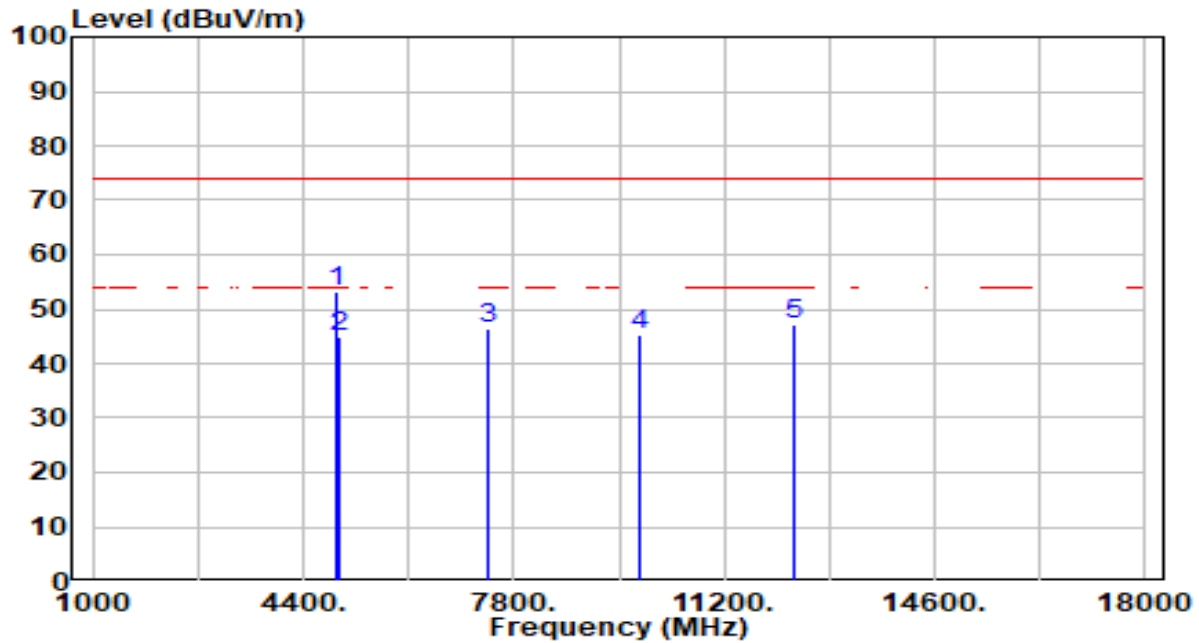


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 4924.000        | 54.23          | -1.03      | 53.20                | -20.80      | 74.00          | 300         | 30          | Peak              |
| 2  |   | 4984.000        | 45.80          | -0.90      | 44.90                | -29.10      | 74.00          | 300         | 234         | Peak              |
| 3  |   | 7386.000        | 42.16          | 4.11       | 46.27                | -27.73      | 74.00          | 300         | 352         | Peak              |
| 4  |   | 9848.000        | 42.04          | 3.39       | 45.42                | -28.58      | 74.00          | 300         | 198         | Peak              |
| 5  |   | 12310.000       | 42.82          | 4.52       | 47.34                | -26.66      | 74.00          | 300         | 299         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11b_TX_CH 11_ANT 0+1     | Test Voltage         | AC 120V/60Hz |

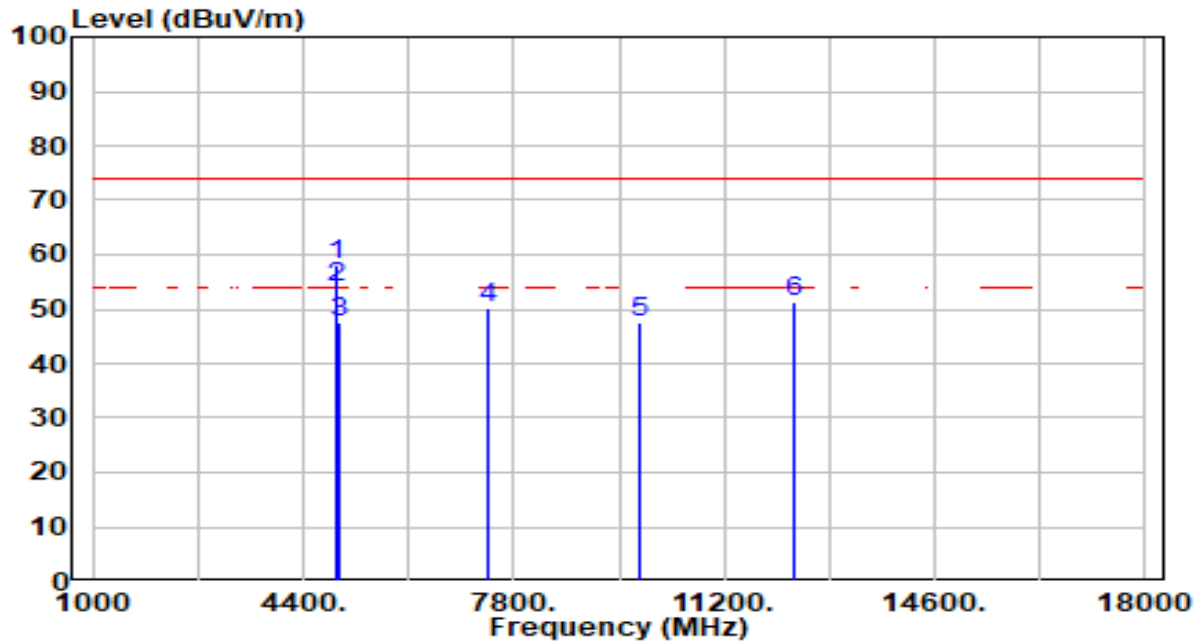


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 4924.000        | 59.14          | -1.03      | 58.11                | -15.89      | 74.00          | 300         | 246         | Peak              |
| 2  | * | 4924.000        | 54.93          | -1.03      | 53.90                | -0.10       | 54.00          | 300         | 246         | Average           |
| 3  |   | 4984.000        | 48.40          | -0.90      | 47.50                | -26.50      | 74.00          | 300         | 160         | Peak              |
| 4  |   | 7386.000        | 46.03          | 4.11       | 50.15                | -23.85      | 74.00          | 300         | 304         | Peak              |
| 5  |   | 9848.000        | 44.03          | 3.39       | 47.42                | -26.58      | 74.00          | 300         | 166         | Peak              |
| 6  |   | 12310.000       | 46.61          | 4.52       | 51.13                | -22.87      | 74.00          | 300         | 169         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 1_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

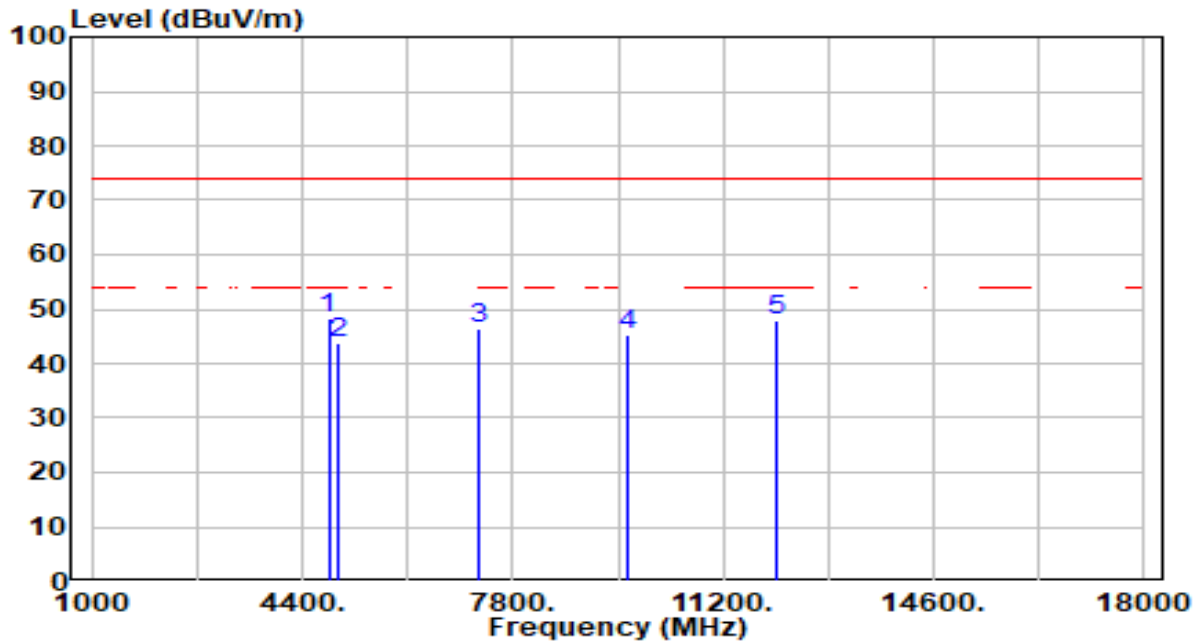


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 4824.000        | 49.66          | -1.23      | 48.43                | -25.57      | 74.00          | 300         | 316         | Peak              |
| 2  |   | 4997.000        | 44.68          | -0.88      | 43.81                | -30.19      | 74.00          | 300         | 237         | Peak              |
| 3  |   | 7236.000        | 42.34          | 4.16       | 46.50                | -27.50      | 74.00          | 300         | 237         | Peak              |
| 4  |   | 9648.000        | 41.95          | 3.29       | 45.24                | -28.76      | 74.00          | 300         | 58          | Peak              |
| 5  |   | 12060.000       | 43.74          | 4.30       | 48.04                | -25.96      | 74.00          | 300         | 290         | Peak              |

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 1_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

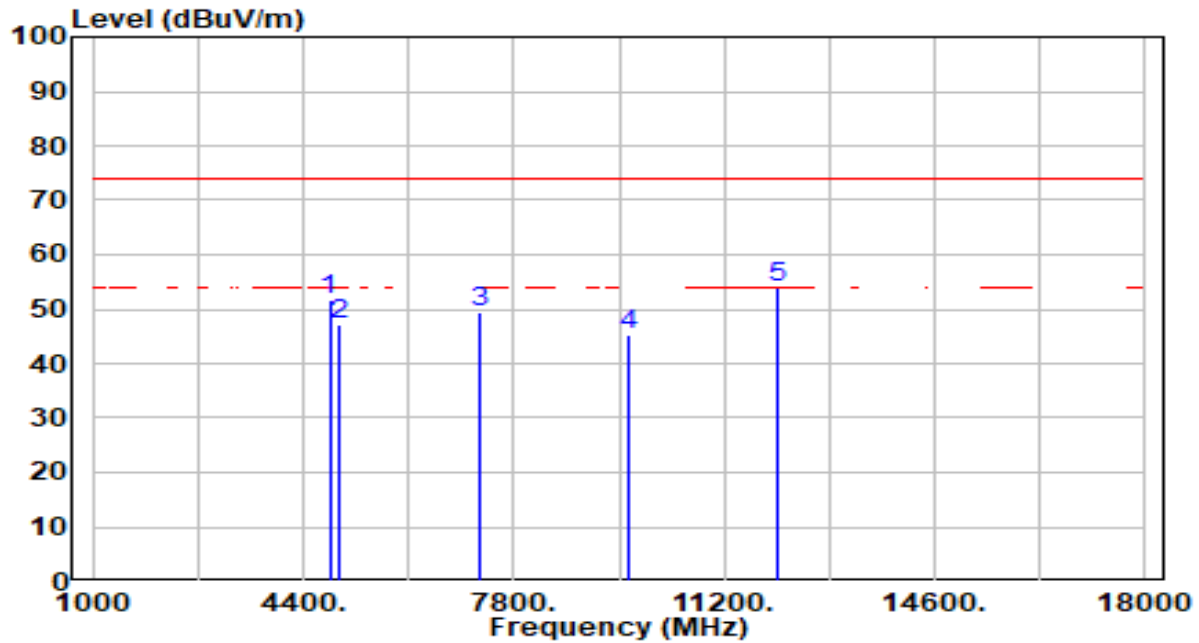


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4824.000        | 52.81          | -1.23      | 51.58                | -22.42      | 74.00          | 300         | 241         | Peak              |
| 2  | 4997.000        | 48.07          | -0.88      | 47.20                | -26.80      | 74.00          | 300         | 226         | Peak              |
| 3  | 7236.000        | 45.35          | 4.16       | 49.51                | -24.49      | 74.00          | 300         | 199         | Peak              |
| 4  | 9648.000        | 42.11          | 3.29       | 45.40                | -28.60      | 74.00          | 300         | 271         | Peak              |
| 5  | * 12060.000     | 49.67          | 4.30       | 53.97                | -20.03      | 74.00          | 300         | 316         | Peak              |

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 6_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

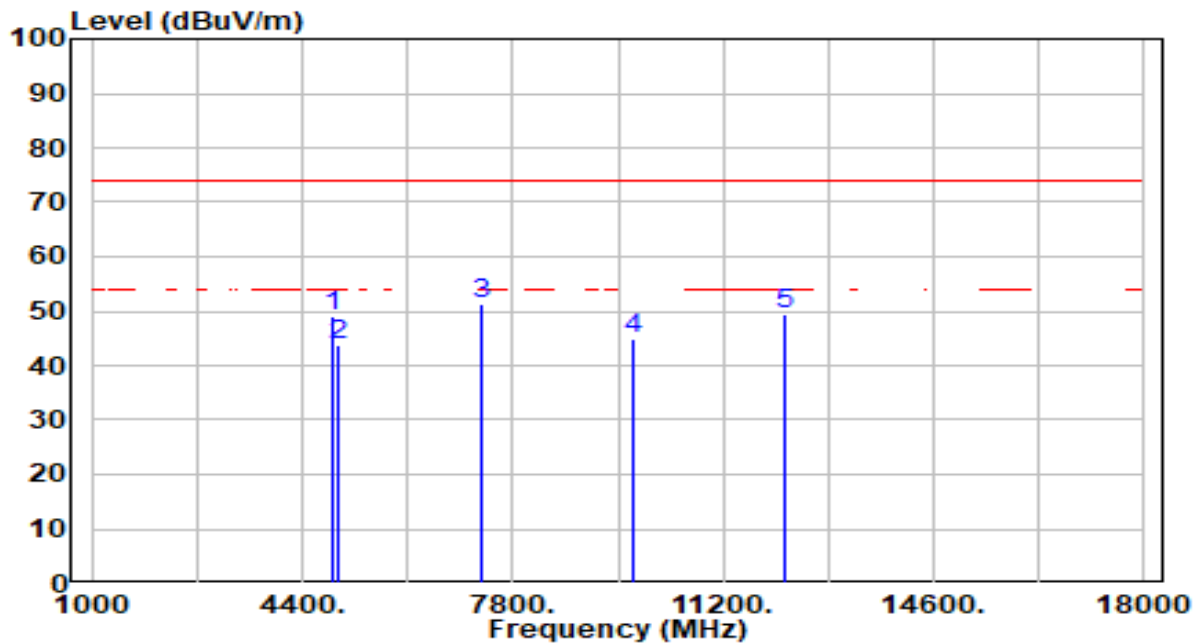


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4874.000        | 50.17          | -1.13      | 49.05                | -24.95      | 74.00          | 300         | 176         | Peak              |
| 2  | 4999.000        | 44.48          | -0.87      | 43.61                | -30.39      | 74.00          | 300         | 188         | Peak              |
| 3  | * 7311.000      | 47.32          | 4.14       | 51.46                | -22.54      | 74.00          | 300         | 218         | Peak              |
| 4  | 9748.000        | 41.66          | 3.33       | 44.99                | -29.01      | 74.00          | 300         | 286         | Peak              |
| 5  | 12185.000       | 45.01          | 4.38       | 49.39                | -24.61      | 74.00          | 300         | 203         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 6_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

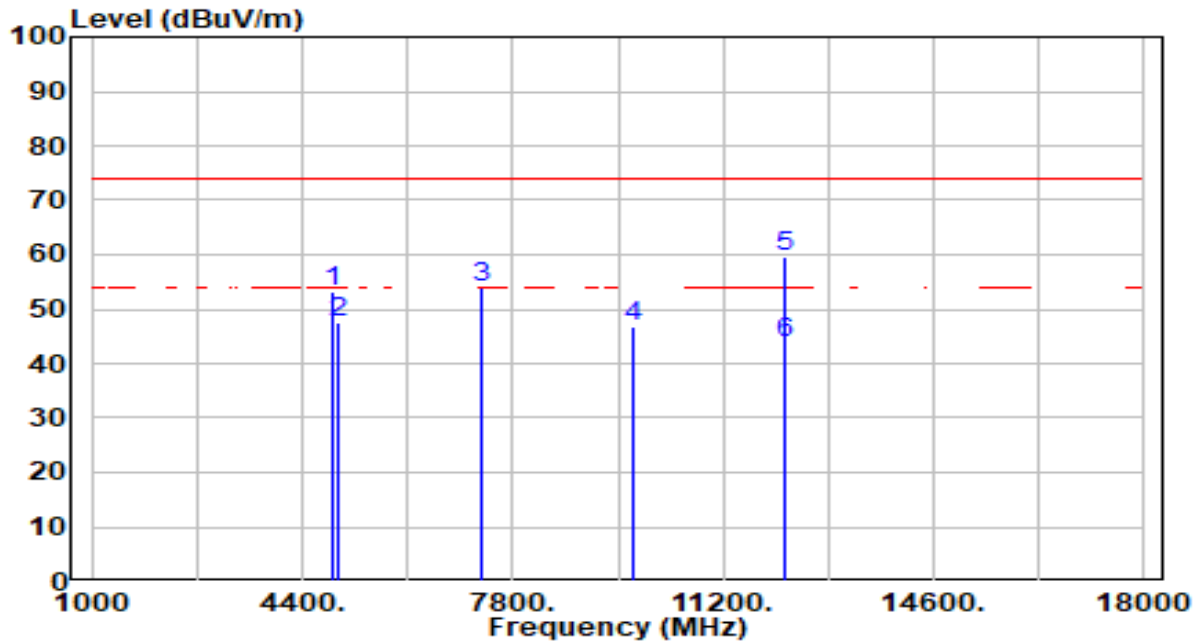


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4874.000        | 54.46          | -1.13      | 53.33                | -20.67      | 74.00          | 300         | 245         | Peak              |
| 2  | 4999.000        | 48.41          | -0.87      | 47.54                | -26.46      | 74.00          | 300         | 161         | Peak              |
| 3  | 7311.000        | 49.76          | 4.14       | 53.90                | -20.10      | 74.00          | 300         | 188         | Peak              |
| 4  | 9748.000        | 43.65          | 3.33       | 46.97                | -27.03      | 74.00          | 300         | 275         | Peak              |
| 5  | * 12185.000     | 55.41          | 4.38       | 59.79                | -14.21      | 74.00          | 313         | 308         | Peak              |
| 6  | * 12185.000     | 39.41          | 4.38       | 43.79                | -10.21      | 54.00          | 313         | 308         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 11_ANT 0+1     | Test Voltage         | AC 120V/60Hz |

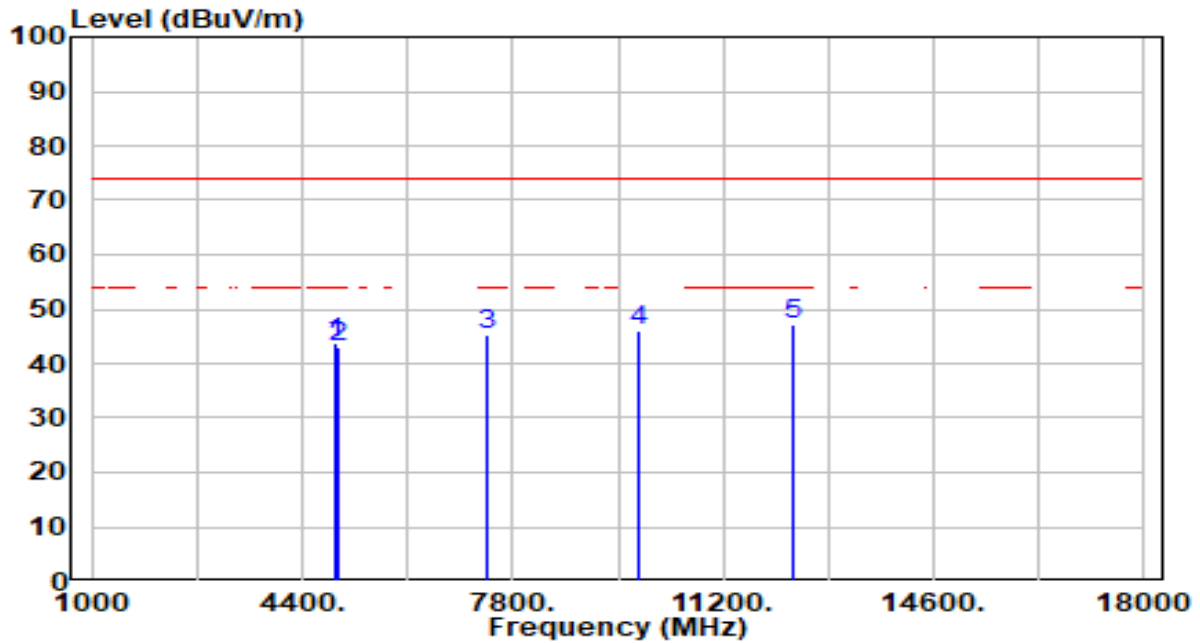


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4924.000        | 44.94          | -1.03      | 43.92                | -30.08      | 74.00          | 300         | 325         | Peak              |
| 2  | 4994.000        | 44.01          | -0.88      | 43.13                | -30.87      | 74.00          | 300         | 192         | Peak              |
| 3  | 7386.000        | 41.25          | 4.11       | 45.36                | -28.64      | 74.00          | 300         | 203         | Peak              |
| 4  | 9848.000        | 42.54          | 3.39       | 45.92                | -28.08      | 74.00          | 300         | 263         | Peak              |
| 5  | * 12310.000     | 42.77          | 4.52       | 47.29                | -26.71      | 74.00          | 300         | 113         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 11_ANT 0+1     | Test Voltage         | AC 120V/60Hz |

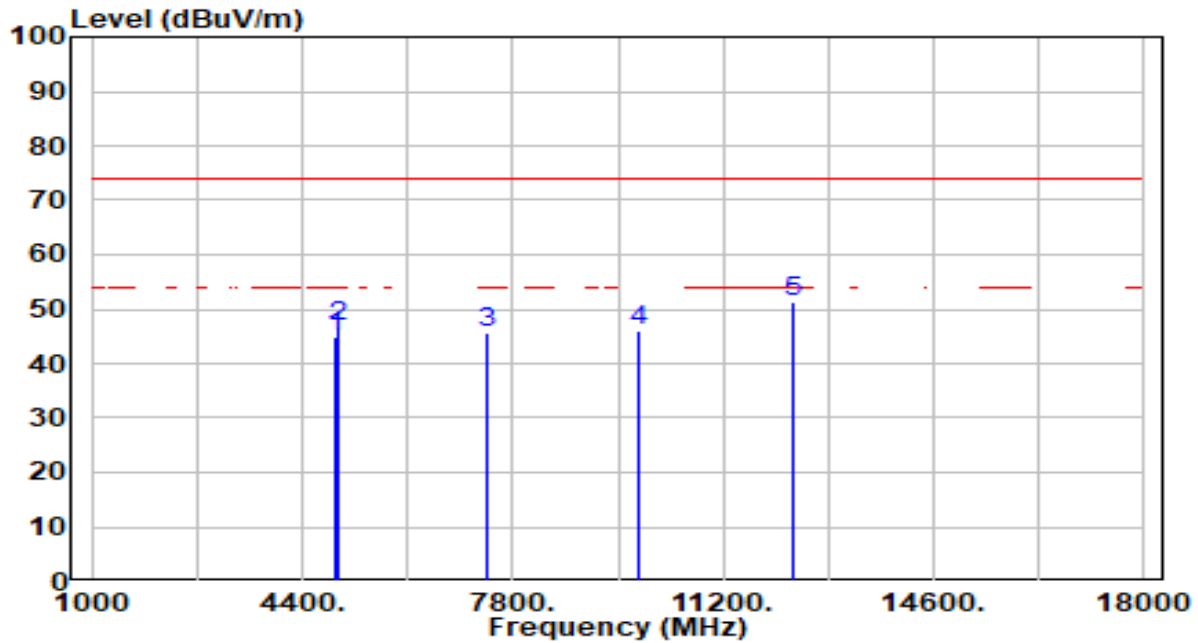


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4924.000        | 45.88          | -1.03      | 44.86                | -29.14      | 74.00          | 300         | 257         | Peak              |
| 2  | 4994.000        | 47.63          | -0.88      | 46.75                | -27.25      | 74.00          | 300         | 227         | Peak              |
| 3  | 7386.000        | 41.39          | 4.11       | 45.50                | -28.50      | 74.00          | 300         | 149         | Peak              |
| 4  | 9848.000        | 42.80          | 3.39       | 46.19                | -27.81      | 74.00          | 300         | 360         | Peak              |
| 5  | * 12310.000     | 46.67          | 4.52       | 51.19                | -22.81      | 74.00          | 300         | 305         | Peak              |

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 1_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

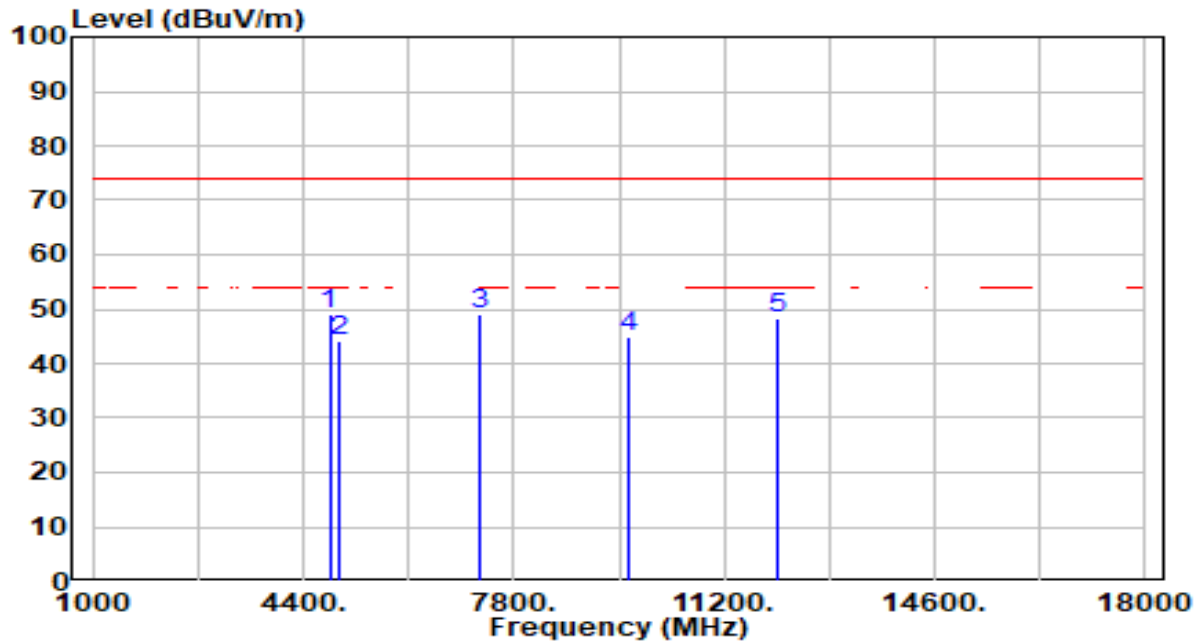


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 4824.000        | 50.27          | -1.23      | 49.05                | -24.95      | 74.00          | 300         | 324         | Peak              |
| 2  |   | 4999.000        | 45.12          | -0.87      | 44.24                | -29.76      | 74.00          | 300         | 252         | Peak              |
| 3  |   | 7236.000        | 44.82          | 4.16       | 48.98                | -25.02      | 74.00          | 300         | 49          | Peak              |
| 4  |   | 9648.000        | 41.72          | 3.29       | 45.01                | -28.99      | 74.00          | 300         | 114         | Peak              |
| 5  |   | 12060.000       | 44.17          | 4.30       | 48.47                | -25.53      | 74.00          | 300         | 263         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 1_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

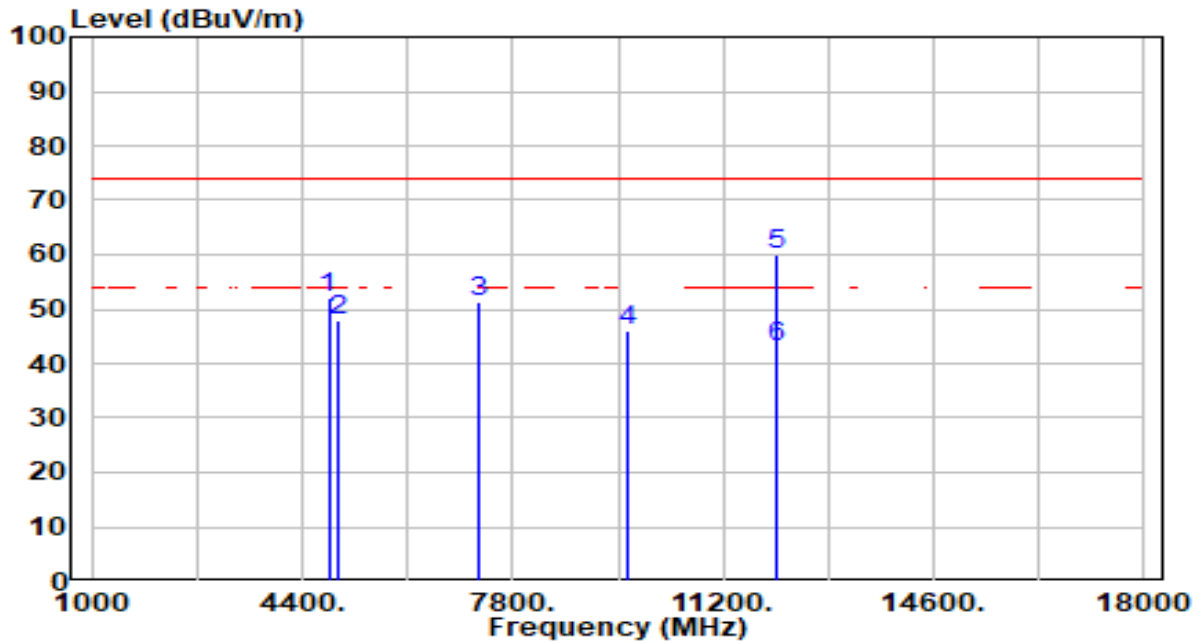


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 4824.000        | 53.15          | -1.23      | 51.92                | -22.08      | 74.00          | 300         | 253         | Peak              |
| 2  |   | 4999.000        | 48.83          | -0.87      | 47.96                | -26.04      | 74.00          | 300         | 231         | Peak              |
| 3  |   | 7236.000        | 47.07          | 4.16       | 51.22                | -22.78      | 74.00          | 300         | 26          | Peak              |
| 4  |   | 9648.000        | 42.80          | 3.29       | 46.09                | -27.91      | 74.00          | 300         | 145         | Peak              |
| 5  | * | 12060.000       | 55.67          | 4.30       | 59.97                | -14.03      | 74.00          | 313         | 307         | Peak              |
| 6  | * | 12060.000       | 38.83          | 4.30       | 43.13                | -10.87      | 54.00          | 313         | 307         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

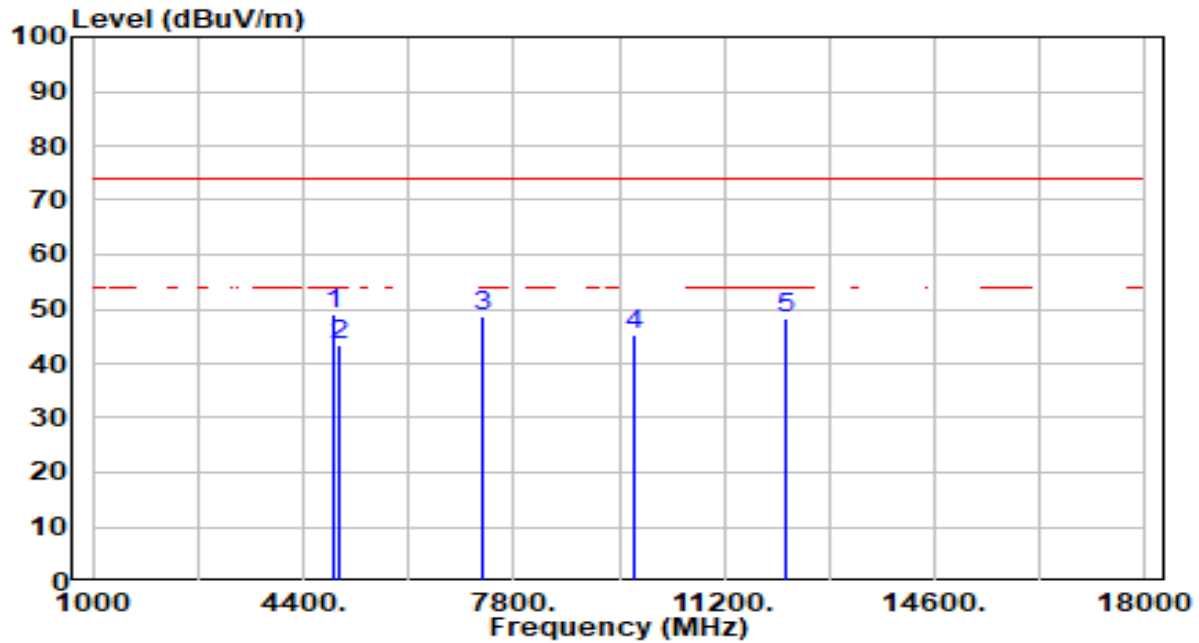


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 4874.000        | 50.02          | -1.13      | 48.89                | -25.11      | 74.00          | 300         | 313         | Peak              |
| 2  |   | 5000.000        | 44.38          | -0.87      | 43.51                | -30.49      | 74.00          | 300         | 229         | Peak              |
| 3  |   | 7311.000        | 44.71          | 4.14       | 48.84                | -25.16      | 74.00          | 300         | 244         | Peak              |
| 4  |   | 9748.000        | 41.88          | 3.33       | 45.21                | -28.79      | 74.00          | 300         | 64          | Peak              |
| 5  |   | 12185.000       | 43.92          | 4.38       | 48.30                | -25.70      | 74.00          | 300         | 277         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

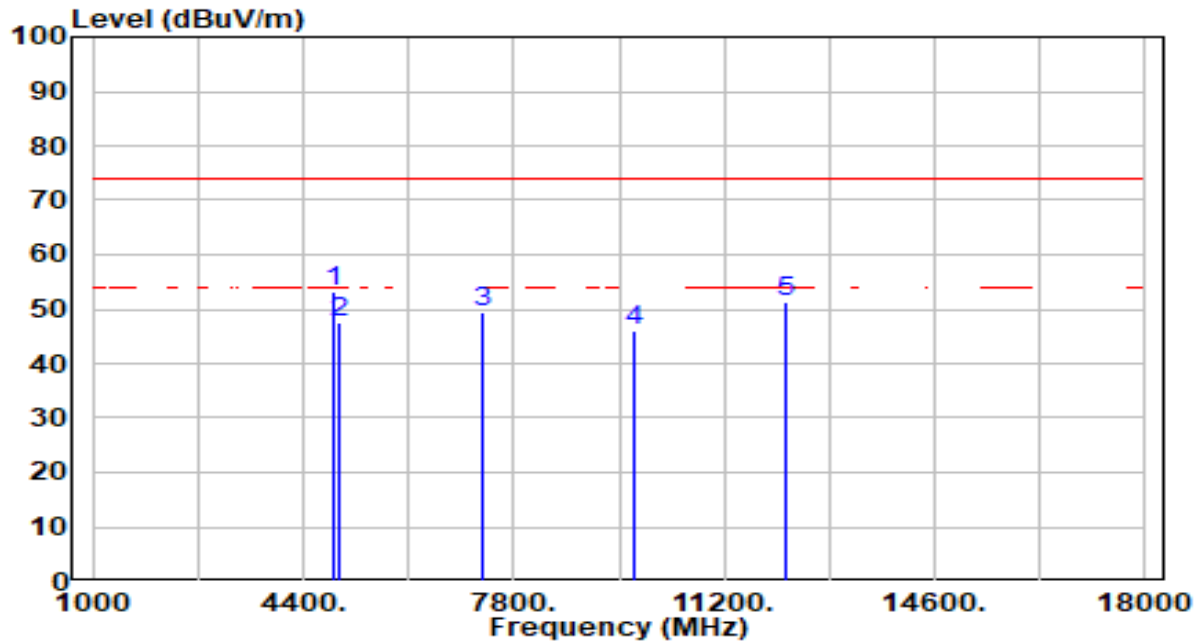


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 4874.000        | 54.20          | -1.13      | 53.07                | -20.93      | 74.00          | 300         | 241         | Peak              |
| 2  |   | 5000.000        | 48.60          | -0.87      | 47.73                | -26.27      | 74.00          | 300         | 244         | Peak              |
| 3  |   | 7311.000        | 45.20          | 4.14       | 49.33                | -24.67      | 74.00          | 300         | 160         | Peak              |
| 4  |   | 9748.000        | 42.68          | 3.33       | 46.01                | -27.99      | 74.00          | 300         | 199         | Peak              |
| 5  |   | 12185.000       | 47.02          | 4.38       | 51.40                | -22.60      | 74.00          | 300         | 294         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router   | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                        | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 11_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

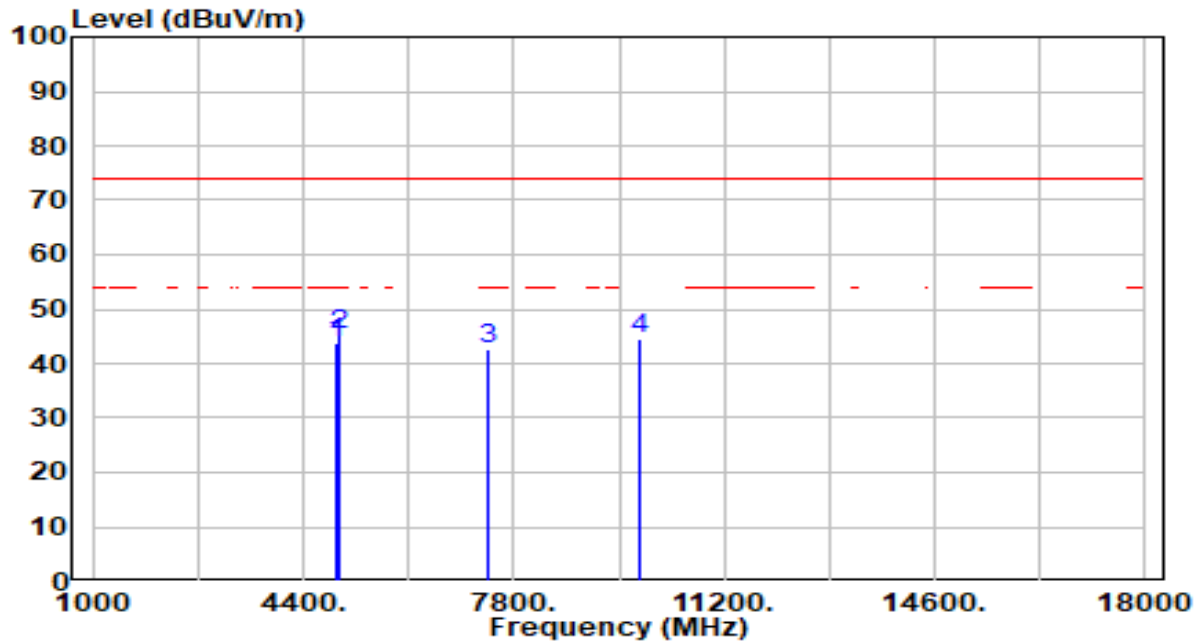


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 4924.000        | 44.84          | -1.03      | 43.81                | -30.19      | 74.00          | 300         | 332         | Peak              |
| 2  | * | 4994.000        | 46.11          | -0.88      | 45.22                | -28.78      | 74.00          | 300         | 190         | Peak              |
| 3  |   | 7386.000        | 38.43          | 4.11       | 42.54                | -31.46      | 74.00          | 300         | 317         | Peak              |
| 4  |   | 9848.000        | 41.05          | 3.39       | 44.44                | -29.56      | 74.00          | 300         | 317         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router   | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                        | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                       | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 11_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

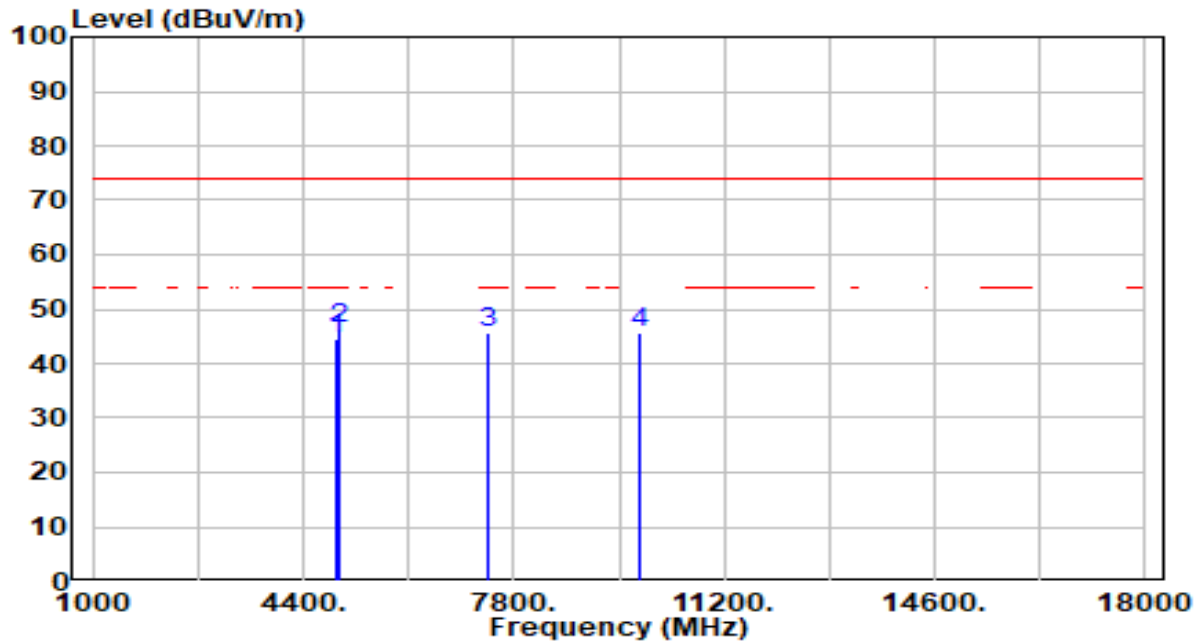


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 4924.000        | 45.70          | -1.03      | 44.68                | -29.32      | 74.00          | 300         | 251         | Peak              |
| 2  | * | 4994.000        | 47.35          | -0.88      | 46.47                | -27.53      | 74.00          | 300         | 229         | Peak              |
| 3  |   | 7386.000        | 41.60          | 4.11       | 45.71                | -28.29      | 74.00          | 300         | 161         | Peak              |
| 4  |   | 9848.000        | 42.24          | 3.39       | 45.63                | -28.37      | 74.00          | 300         | 0           | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-40MHz_TX_CH 3_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

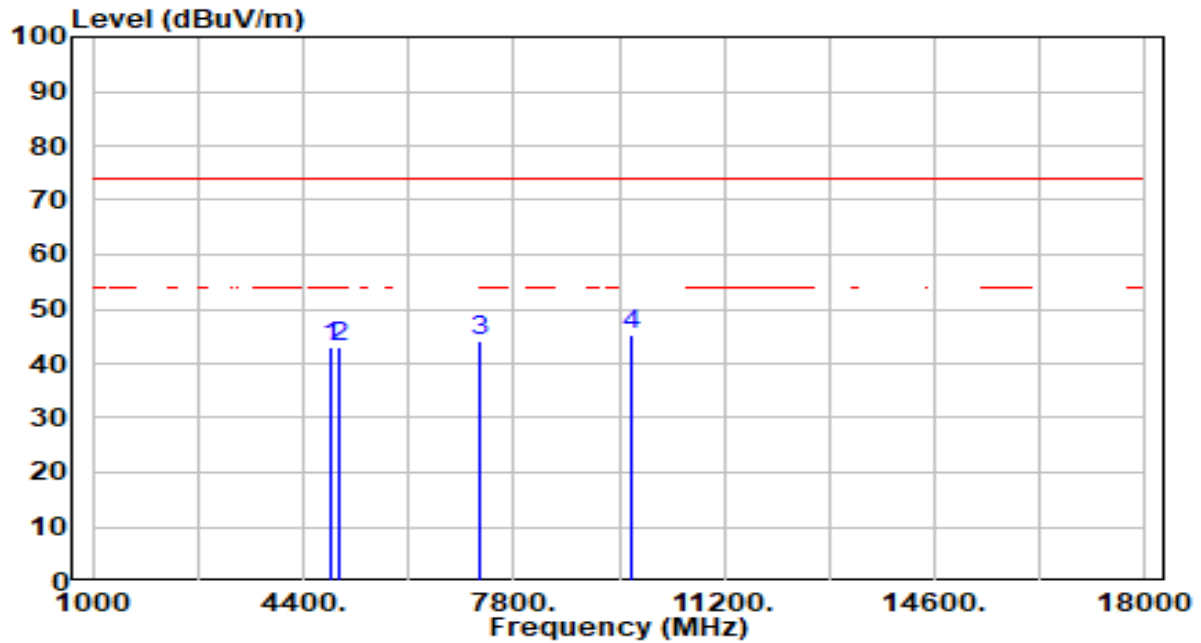


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4844.000        | 44.15          | -1.19      | 42.96                | -31.04      | 74.00          | 300         | 176         | Peak              |
| 2  | 4986.000        | 43.80          | -0.90      | 42.90                | -31.10      | 74.00          | 300         | 230         | Peak              |
| 3  | 7266.000        | 39.95          | 4.15       | 44.10                | -29.90      | 74.00          | 300         | 244         | Peak              |
| 4  | * 9688.000      | 41.85          | 3.30       | 45.15                | -28.85      | 74.00          | 300         | 32          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-40MHz_TX_CH 3_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

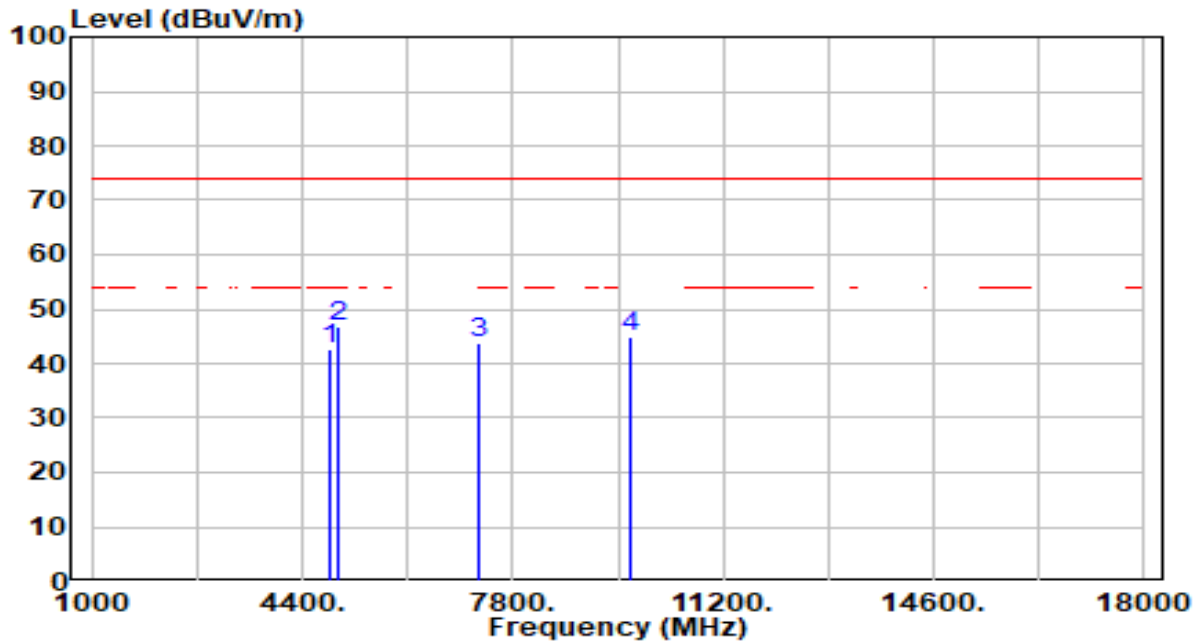


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 4844.000        | 43.82          | -1.19      | 42.63                | -31.37      | 74.00          | 300         | 250         | Peak              |
| 2  | * | 4986.000        | 47.66          | -0.90      | 46.77                | -27.23      | 74.00          | 300         | 229         | Peak              |
| 3  |   | 7266.000        | 39.75          | 4.15       | 43.90                | -30.10      | 74.00          | 300         | 253         | Peak              |
| 4  |   | 9688.000        | 41.48          | 3.30       | 44.78                | -29.22      | 74.00          | 300         | 119         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-40MHz_TX_CH 6_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

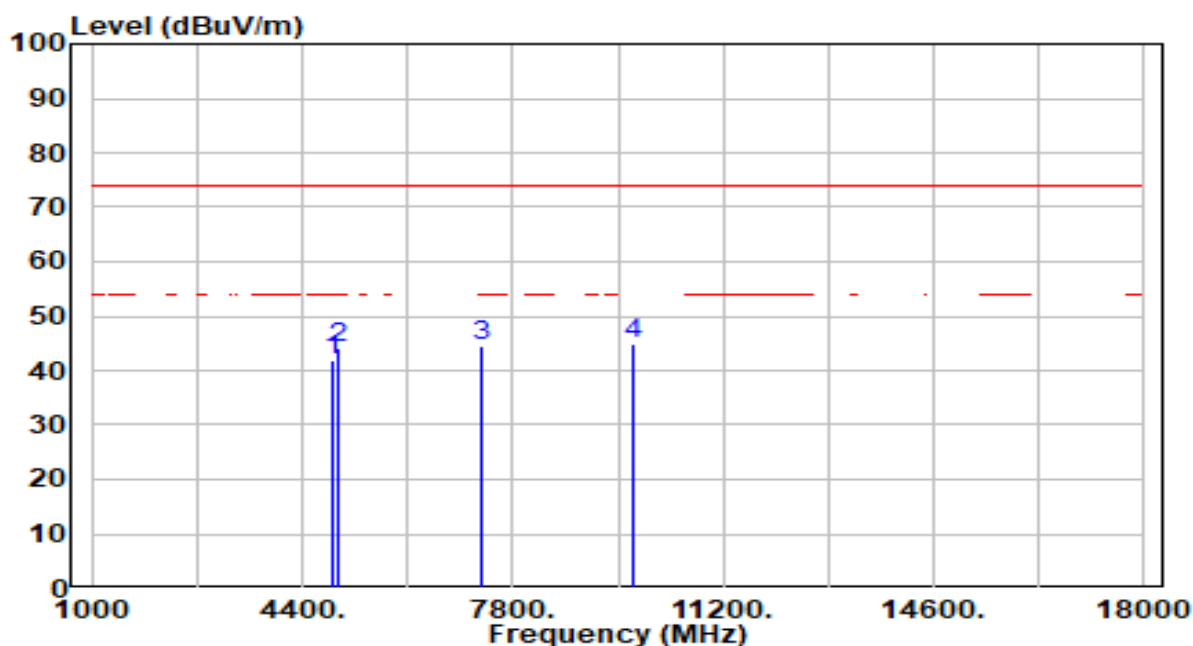


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4874.000        | 43.08          | -1.13      | 41.95                | -32.05      | 74.00          | 300         | 15          | Peak              |
| 2  | 4999.000        | 44.90          | -0.87      | 44.03                | -29.97      | 74.00          | 300         | 275         | Peak              |
| 3  | 7311.000        | 40.45          | 4.14       | 44.59                | -29.41      | 74.00          | 300         | 224         | Peak              |
| 4  | * 9748.000      | 41.63          | 3.33       | 44.96                | -29.04      | 74.00          | 300         | 54          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-40MHz_TX_CH 6_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

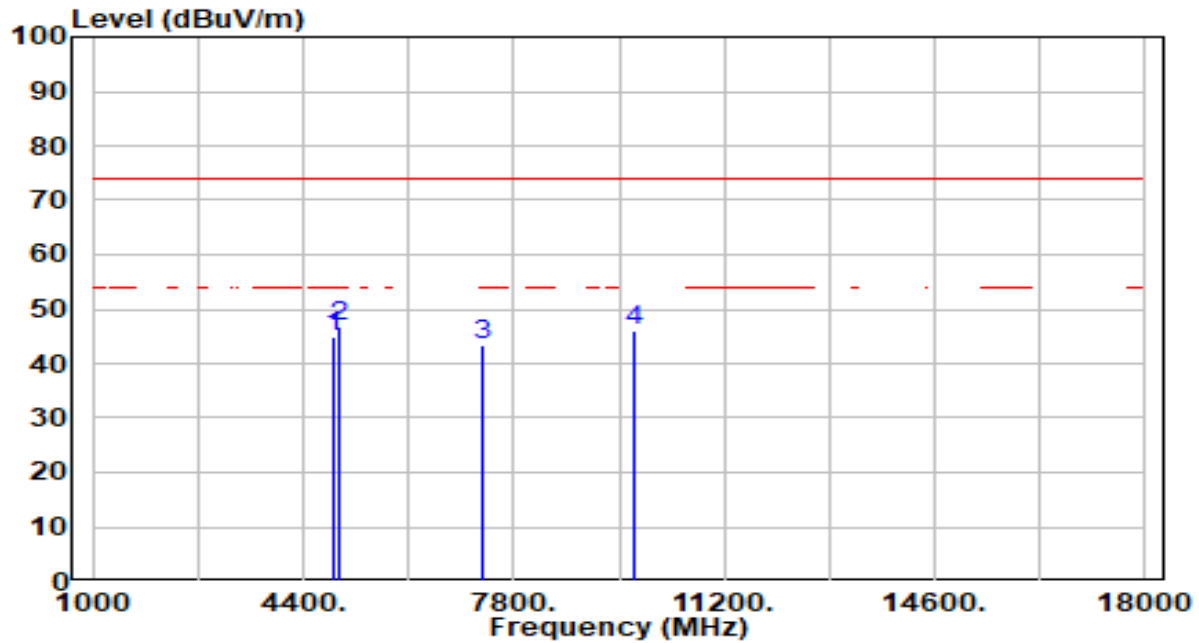


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 4874.000        | 46.11          | -1.13      | 44.99                | -29.01      | 74.00          | 300         | 249         | Peak              |
| 2  | * | 4999.000        | 47.66          | -0.87      | 46.79                | -27.21      | 74.00          | 300         | 232         | Peak              |
| 3  |   | 7311.000        | 39.37          | 4.14       | 43.50                | -30.50      | 74.00          | 300         | 360         | Peak              |
| 4  |   | 9748.000        | 42.54          | 3.33       | 45.87                | -28.13      | 74.00          | 300         | 109         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-40MHz_TX_CH 9_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

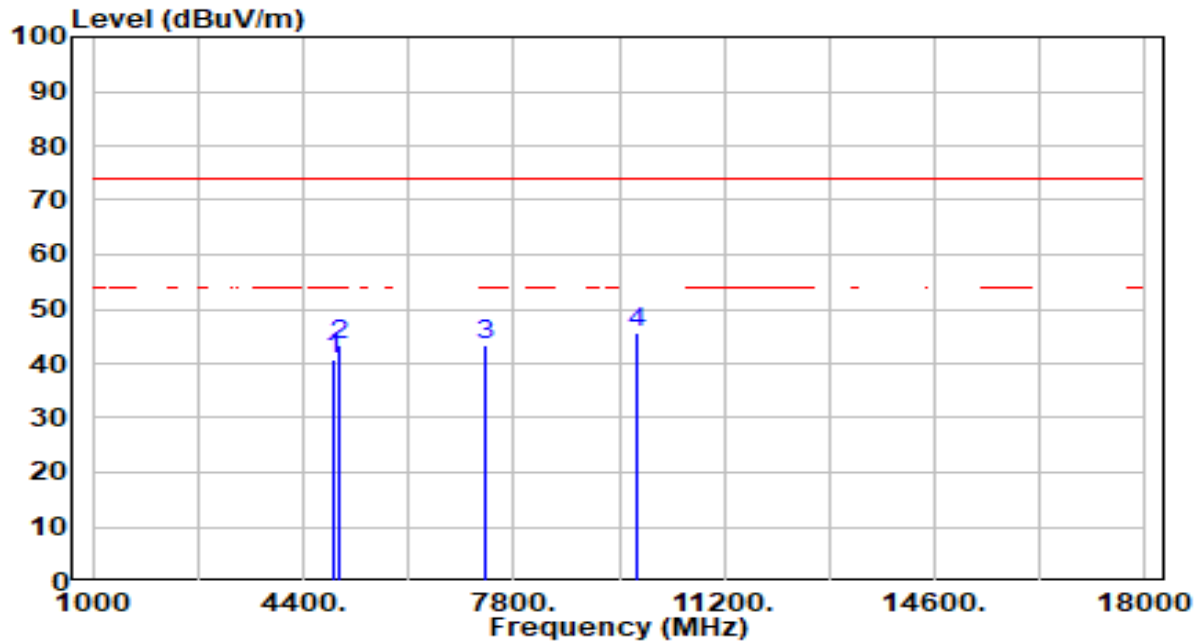


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4904.000        | 42.00          | -1.07      | 40.94                | -33.06      | 74.00          | 300         | 90          | Peak              |
| 2  | 4983.000        | 44.21          | -0.90      | 43.31                | -30.69      | 74.00          | 300         | 276         | Peak              |
| 3  | 7356.000        | 39.24          | 4.12       | 43.37                | -30.63      | 74.00          | 300         | 153         | Peak              |
| 4  | * 9808.000      | 42.25          | 3.35       | 45.60                | -28.40      | 74.00          | 300         | 326         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-40MHz_TX_CH 9_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

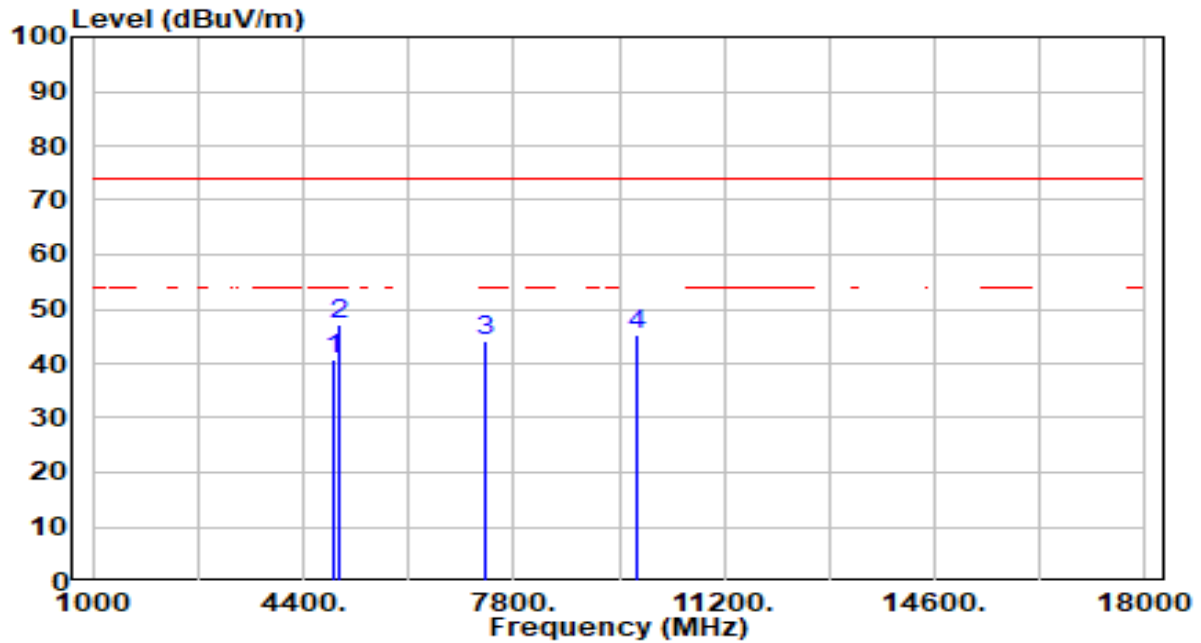

| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 4904.000        | 41.74          | -1.07      | 40.67                | -33.33      | 74.00          | 300         | 125         | Peak              |
| 2  | * | 4983.000        | 48.11          | -0.90      | 47.21                | -26.79      | 74.00          | 300         | 230         | Peak              |
| 3  |   | 7356.000        | 39.94          | 4.12       | 44.07                | -29.93      | 74.00          | 300         | 301         | Peak              |
| 4  |   | 9808.000        | 41.77          | 3.35       | 45.12                | -28.88      | 74.00          | 300         | 149         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7.7. Radiated Restricted Band Edge Measurement

### 7.7.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency<br>(MHz)         | Frequency<br>(MHz)    | Frequency<br>(MHz) | Frequency<br>(GHz) |
|----------------------------|-----------------------|--------------------|--------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410        | 4.5 - 5.15         |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614          | 5.35 - 5.46        |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240         | 7.25 - 7.75        |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427        | 8.025 - 8.5        |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5      | 9.0 - 9.2          |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5    | 9.3 - 9.5          |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710        | 10.6 - 12.7        |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2    | 13.25 - 13.4       |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300        | 14.47 - 14.5       |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390        | 15.35 - 16.2       |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500      | 17.7 - 21.4        |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900        | 22.01 - 23.12      |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267        | 23.6 - 24.0        |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339        | 31.2 - 31.8        |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358      | 36.43 - 36.5       |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400        | ( <sup>2</sup> )   |
| 13.36 - 13.41              | --                    | --                 | --                 |

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 Limits |                          |                               |
|-----------------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                            | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                                 | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                                 | 24000/F (kHz)            | 30                            |
| 1.705 - 30                                    | 30                       | 30                            |
| 30 - 88                                       | 100                      | 3                             |
| 88 - 216                                      | 150                      | 3                             |
| 216 - 960                                     | 200                      | 3                             |
| Above 960                                     | 500                      | 3                             |

### 7.7.2.Test Procedure Used

ANSI C63.10-2013 Section 6.3 (General Requirements)

ANSI C63.10-2013 Section 6.6 (Standard test method above 1GHz)

### 7.7.3.Test Setting

#### Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

**Average Measurements above 1GHz (Method VB)**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.

If the EUT duty cycle is  $< 98\%$ , set  $\text{VBW} \geq 1/T$ . T is the minimum transmission duration.


4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

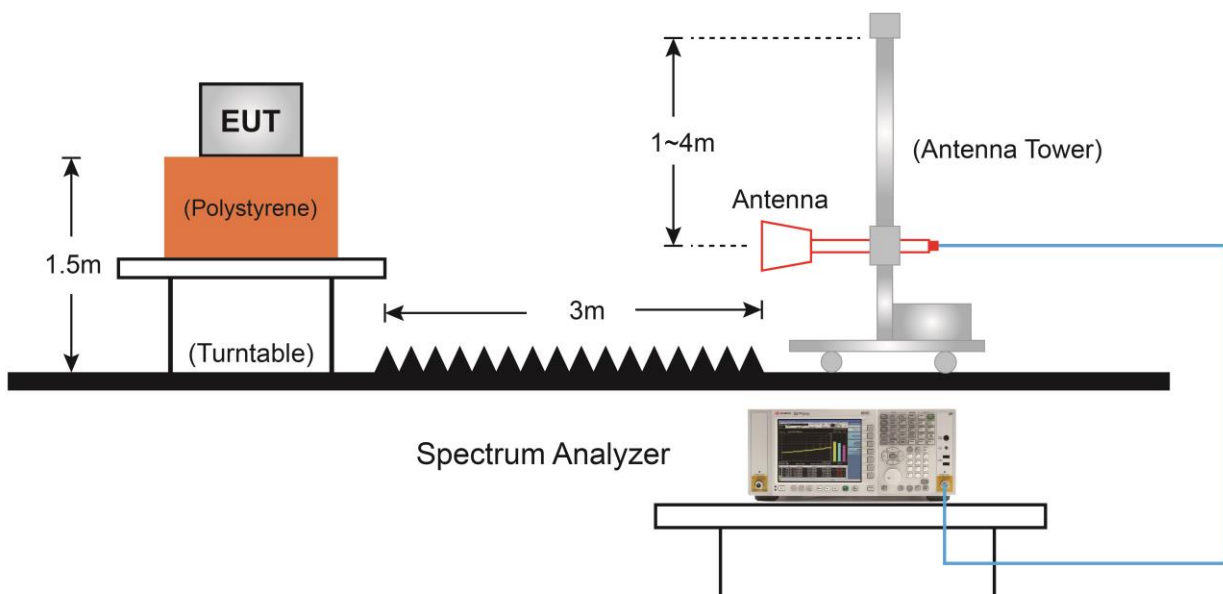**7.7.4.Test Setup**



### 7.7.5. Test Result

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11b_TX_CH 1_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

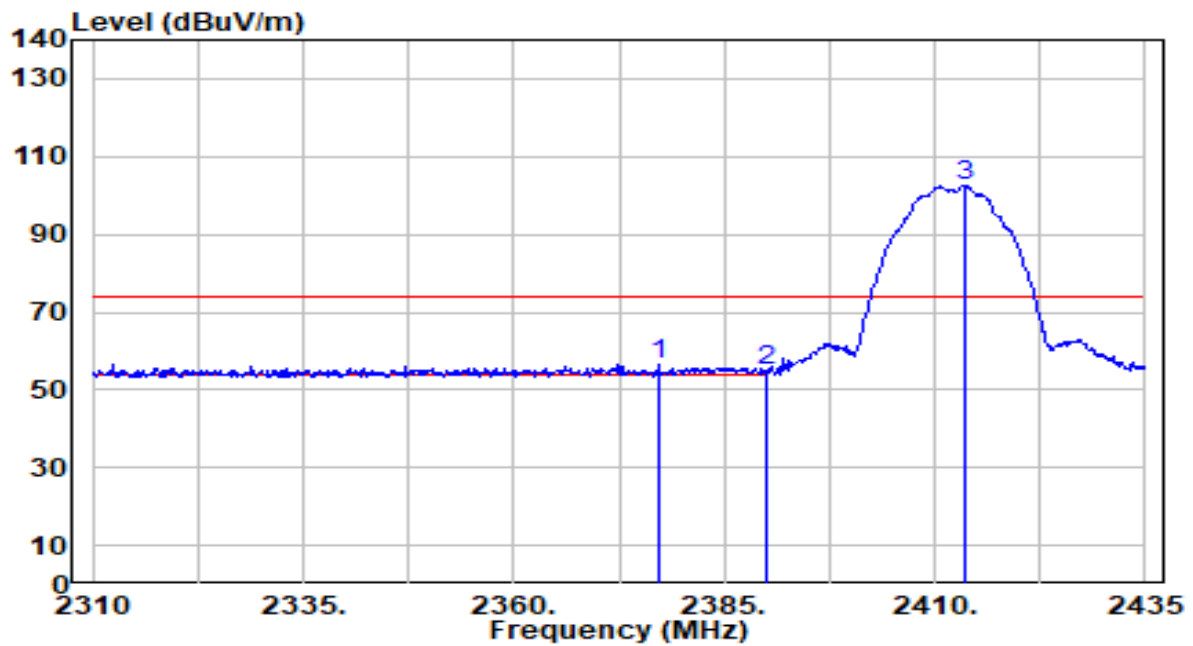


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2377.125        | 26.58          | 29.98      | 56.56                | -17.44      | 74.00          | 173         | 246         | Peak              |
| 2  |   | 2390.000        | 24.69          | 29.99      | 54.69                | -19.31      | 74.00          | 173         | 246         | Peak              |
| 3  |   | 2413.500        | 72.45          | 30.05      | 102.50               | N/A         | N/A            | 173         | 246         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11b_TX_CH 1_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

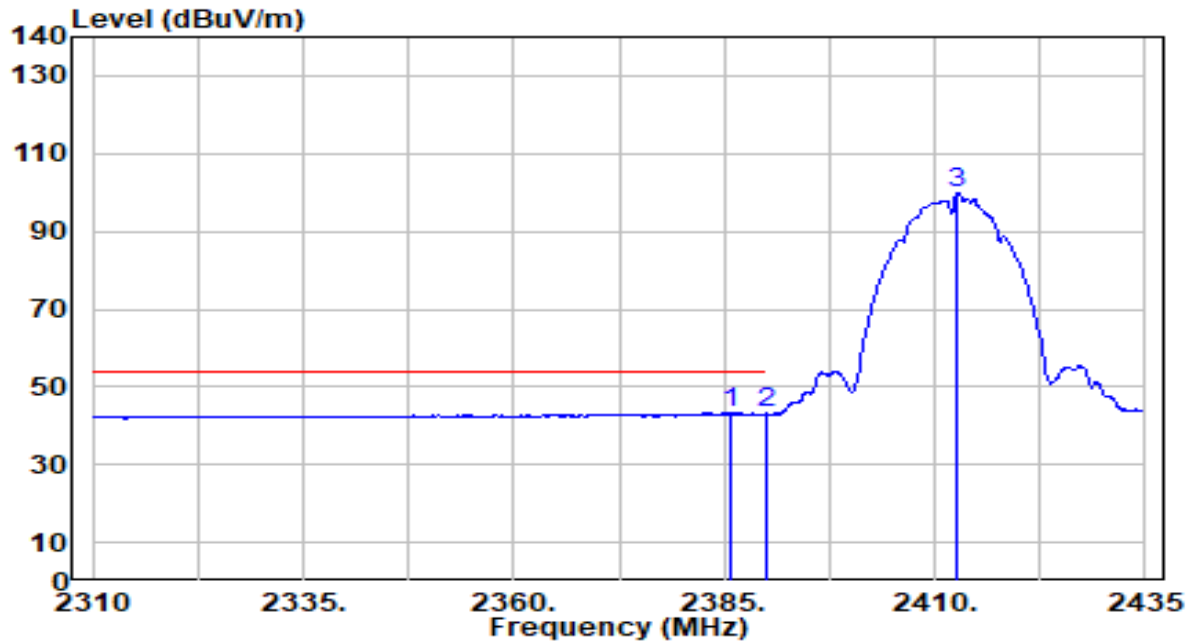


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2385.875        | 13.26          | 29.99      | 43.25                | -10.75      | 54.00          | 173         | 246         | Average           |
| 2  |   | 2390.000        | 13.07          | 29.99      | 43.06                | -10.94      | 54.00          | 173         | 246         | Average           |
| 3  |   | 2412.750        | 69.82          | 30.05      | 99.87                | N/A         | N/A            | 173         | 246         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11b_TX_CH 1_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

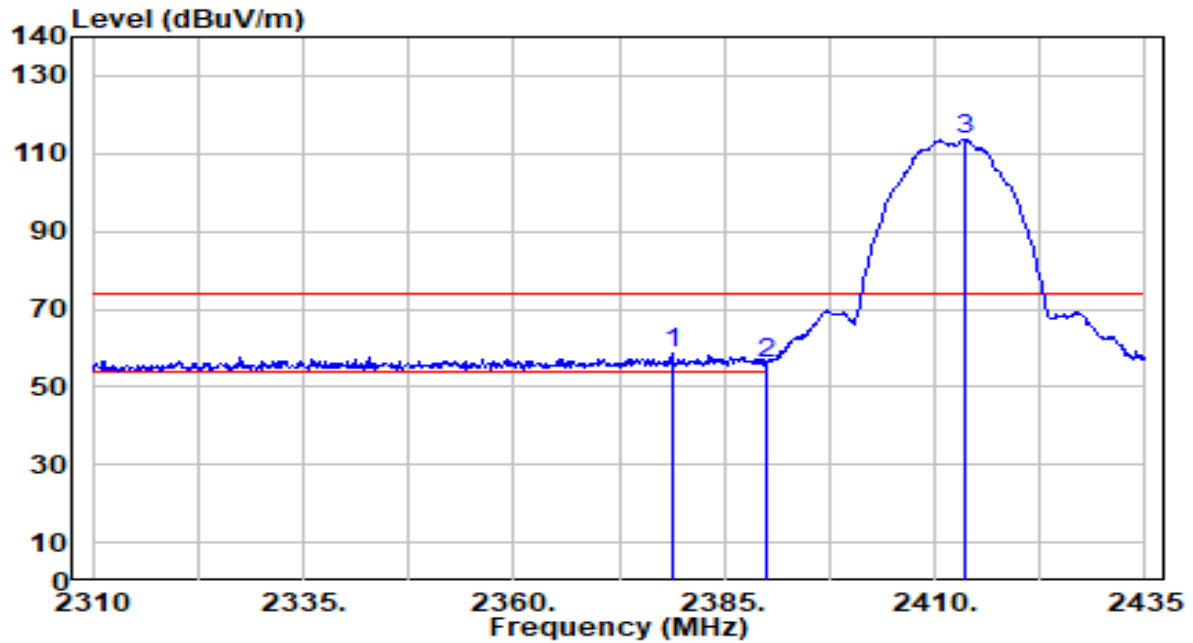


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2378.750        | 28.57          | 29.98      | 58.55                | -15.45      | 74.00          | 129         | 283         | Peak              |
| 2  |   | 2390.000        | 25.99          | 29.99      | 55.99                | -18.01      | 74.00          | 129         | 283         | Peak              |
| 3  |   | 2413.500        | 83.55          | 30.05      | 113.61               | N/A         | N/A            | 129         | 283         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11b_TX_CH 1_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

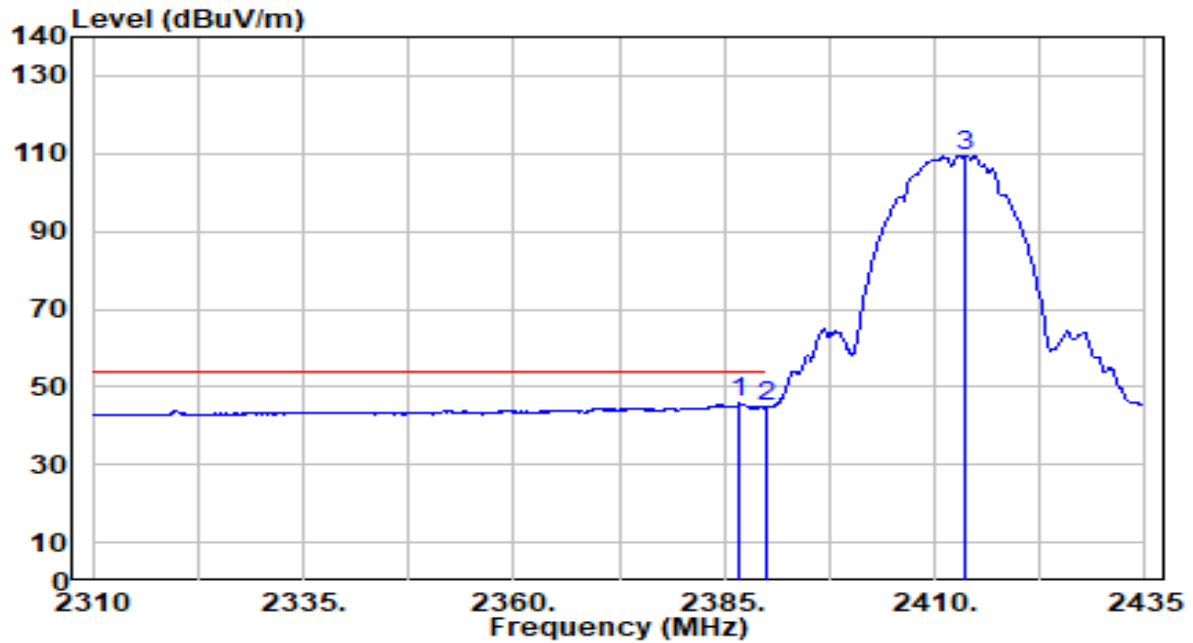


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2386.875        | 15.78          | 29.99      | 45.77                | -8.23       | 54.00          | 129         | 283         | Average           |
| 2  |   | 2390.000        | 14.69          | 29.99      | 44.68                | -9.32       | 54.00          | 129         | 283         | Average           |
| 3  |   | 2413.750        | 79.50          | 30.05      | 109.56               | N/A         | N/A            | 129         | 283         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11b_TX_CH 6_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

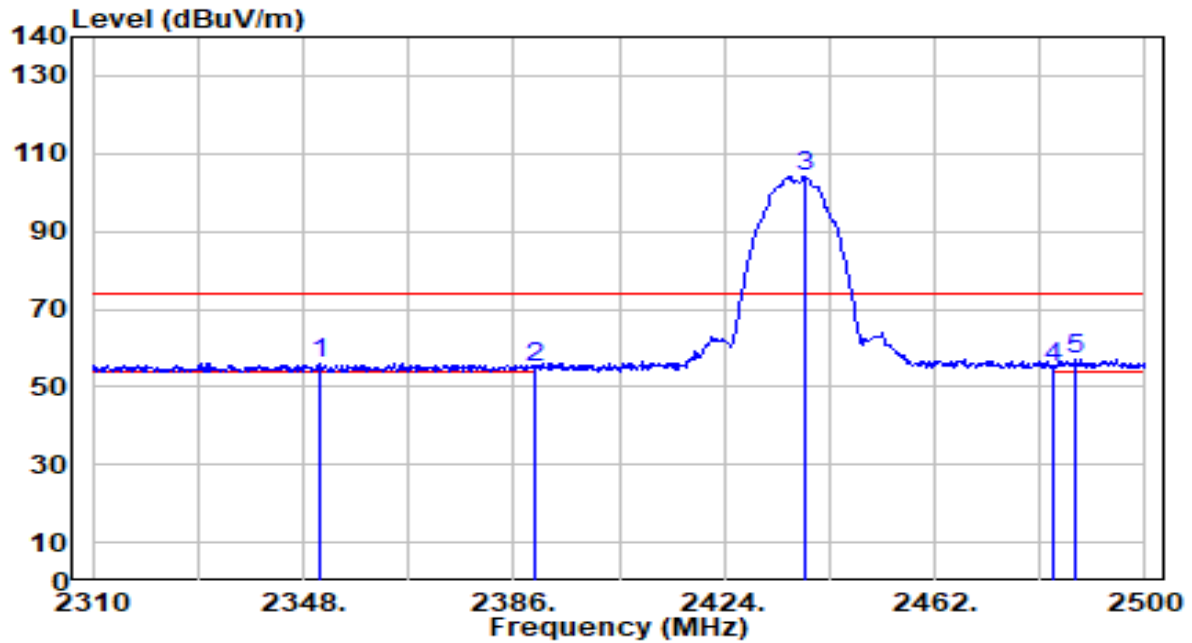


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2350.850        | 25.99          | 29.94      | 55.93                | -18.07      | 74.00          | 141         | 255         | Peak              |
| 2  | 2390.000        | 24.77          | 29.99      | 54.76                | -19.24      | 74.00          | 141         | 255         | Peak              |
| 3  | 2438.440        | 73.91          | 30.14      | 104.05               | N/A         | N/A            | 141         | 255         | Peak              |
| 4  | 2483.500        | 24.59          | 30.29      | 54.88                | -19.12      | 74.00          | 141         | 255         | Peak              |
| 5  | * 2487.460      | 27.02          | 30.30      | 57.32                | -16.68      | 74.00          | 141         | 255         | Peak              |

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11b_TX_CH 6_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

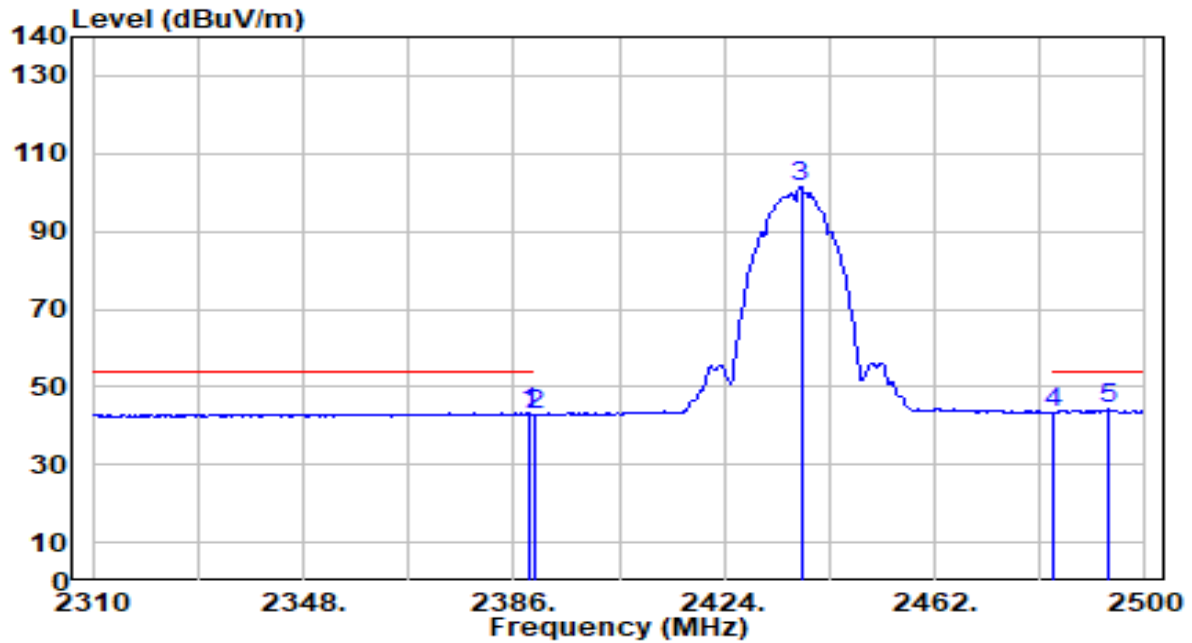


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2388.660        | 13.11          | 29.99      | 43.10                | -10.90      | 54.00          | 141         | 255         | Average           |
| 2  | 2390.000        | 13.04          | 29.99      | 43.03                | -10.97      | 54.00          | 141         | 255         | Average           |
| 3  | 2437.870        | 71.27          | 30.13      | 101.40               | N/A         | N/A            | 141         | 255         | Average           |
| 4  | 2483.500        | 13.26          | 30.29      | 43.55                | -10.45      | 54.00          | 141         | 255         | Average           |
| 5  | * 2493.350      | 13.84          | 30.32      | 44.16                | -9.84       | 54.00          | 141         | 255         | Average           |

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11b_TX_CH 6_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

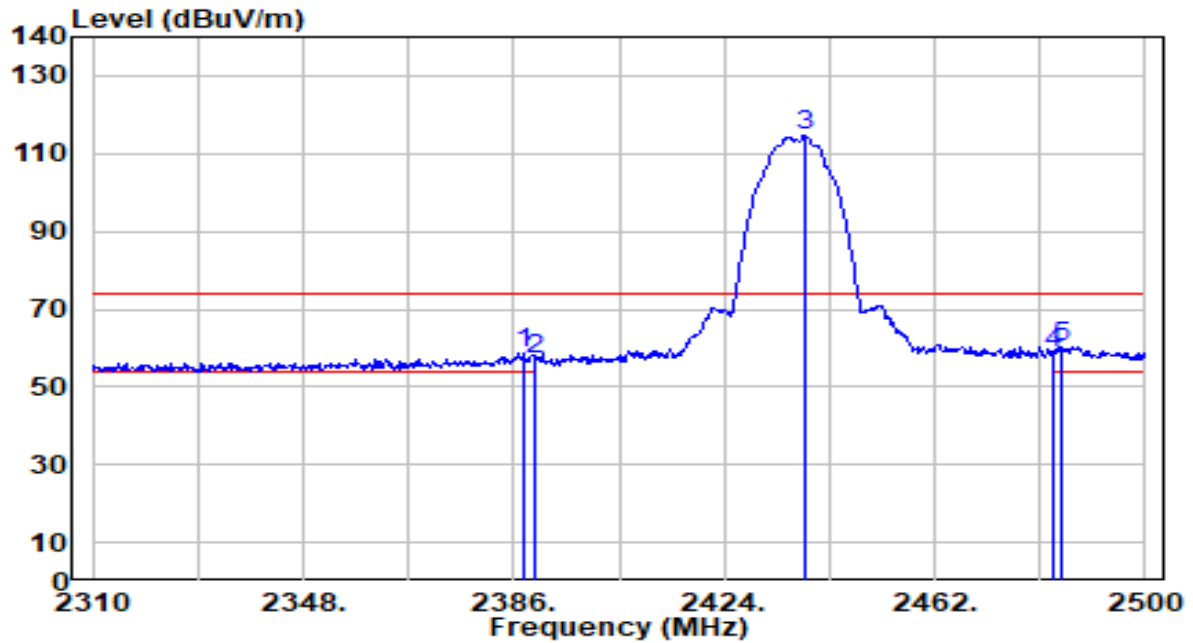


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2387.900        | 28.63          | 29.99      | 58.62                | -15.38      | 74.00          | 153         | 276         | Peak              |
| 2  | 2390.000        | 26.93          | 29.99      | 56.92                | -17.08      | 74.00          | 153         | 276         | Peak              |
| 3  | 2438.440        | 84.34          | 30.14      | 114.47               | N/A         | N/A            | 153         | 276         | Peak              |
| 4  | 2483.500        | 28.48          | 30.29      | 58.77                | -15.23      | 74.00          | 153         | 276         | Peak              |
| 5  | * 2484.990      | 30.15          | 30.29      | 60.44                | -13.56      | 74.00          | 153         | 276         | Peak              |

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11b_TX_CH 6_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

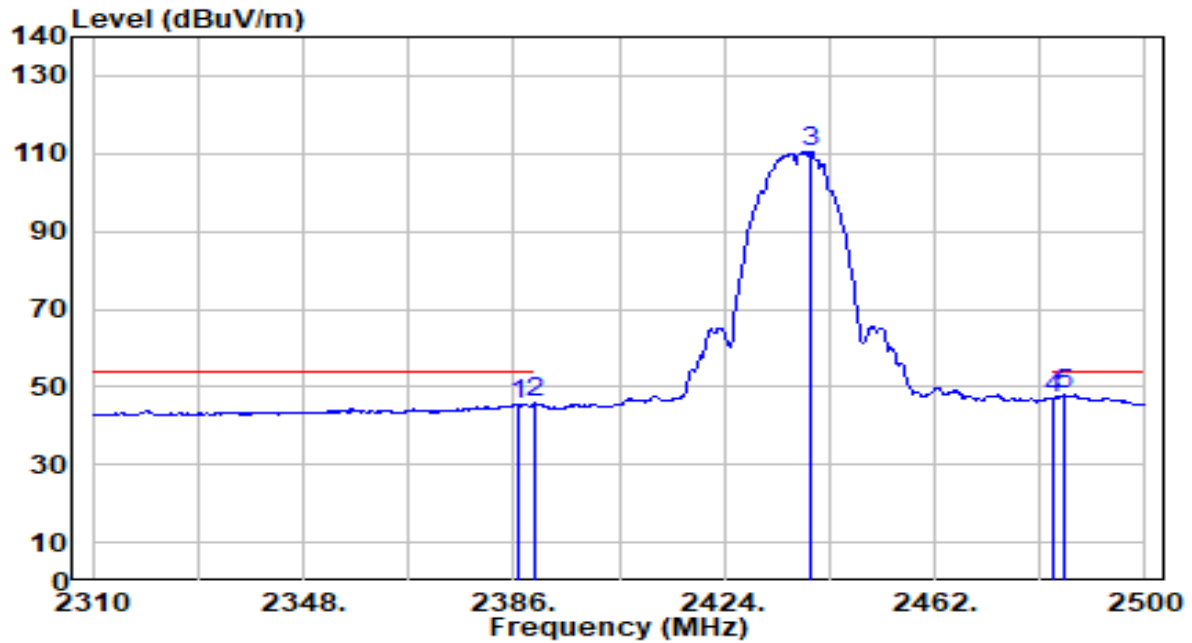


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2386.950        | 15.42          | 29.99      | 45.41                | -8.59       | 54.00          | 153         | 276         | Average           |
| 2  | 2390.000        | 15.82          | 29.99      | 45.82                | -8.18       | 54.00          | 153         | 276         | Average           |
| 3  | 2439.770        | 80.26          | 30.14      | 110.40               | N/A         | N/A            | 153         | 276         | Average           |
| 4  | 2483.500        | 16.81          | 30.29      | 47.09                | -6.91       | 54.00          | 153         | 276         | Average           |
| 5  | * 2485.560      | 17.59          | 30.29      | 47.88                | -6.12       | 54.00          | 153         | 276         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11b_TX_CH 11_ANT 0+1     | Test Voltage         | AC 120V/60Hz |

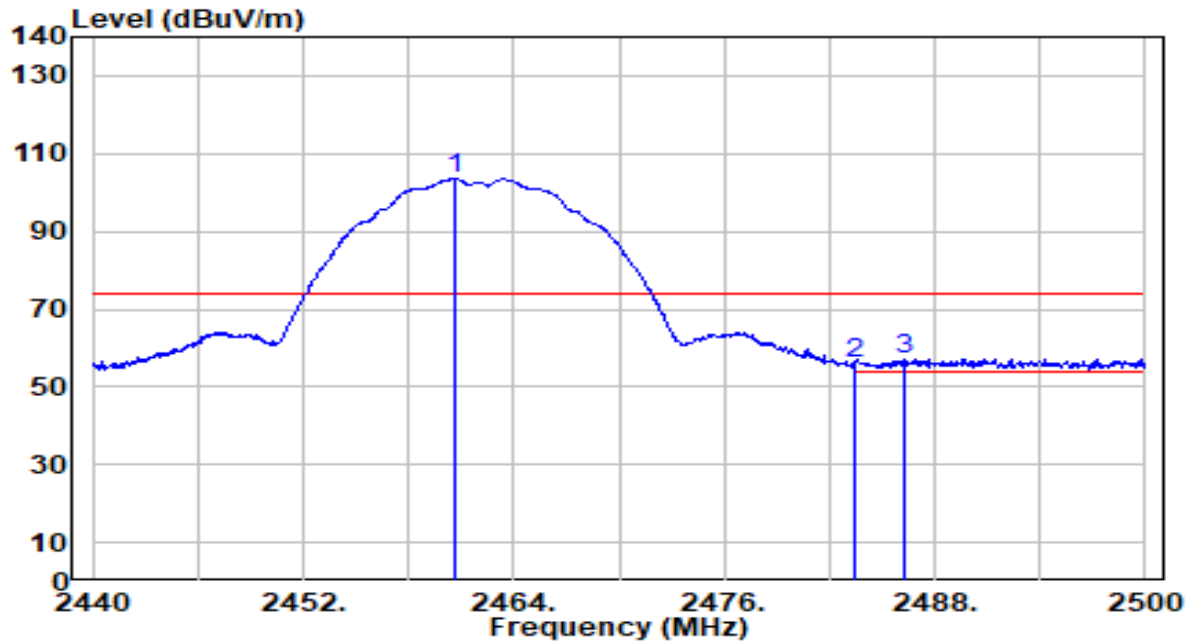


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2460.640        | 73.27          | 30.21      | 103.48               | N/A         | N/A            | 167         | 285         | Peak              |
| 2  | 2483.500        | 25.84          | 30.29      | 56.12                | -17.88      | 74.00          | 167         | 285         | Peak              |
| 3  | * 2486.200      | 26.84          | 30.29      | 57.14                | -16.86      | 74.00          | 167         | 285         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11b_TX_CH 11_ANT 0+1     | Test Voltage         | AC 120V/60Hz |

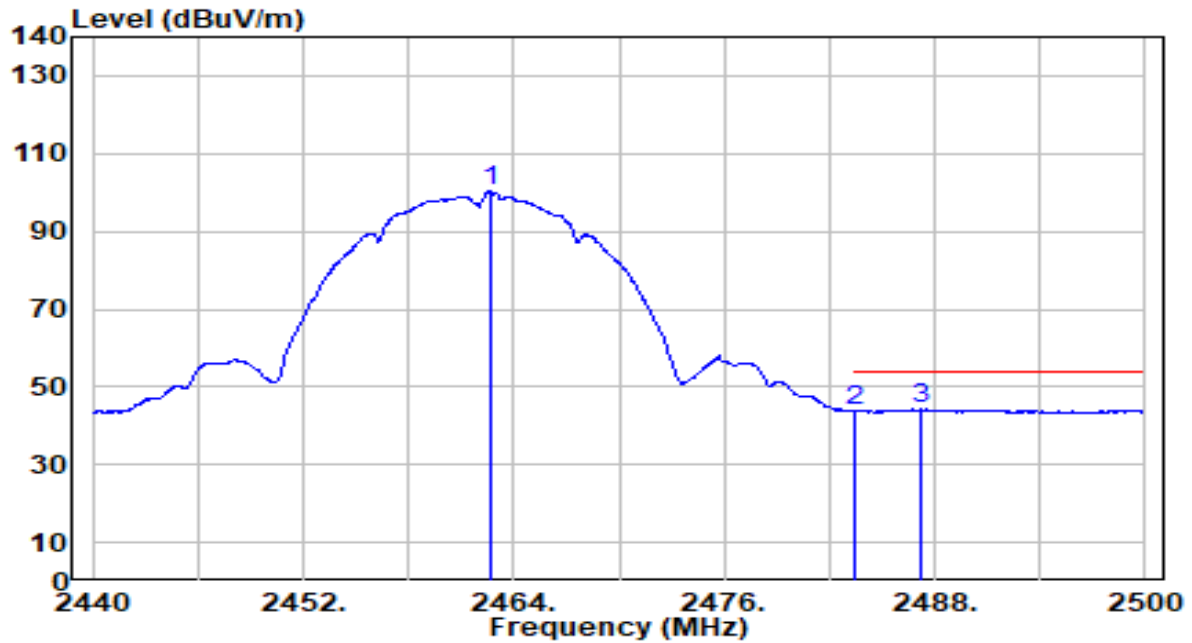


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2462.740        | 70.39          | 30.22      | 100.60               | N/A         | N/A            | 167         | 285         | Average           |
| 2  | 2483.500        | 13.47          | 30.29      | 43.75                | -10.25      | 54.00          | 167         | 285         | Average           |
| 3  | * 2487.280      | 13.85          | 30.30      | 44.15                | -9.85       | 54.00          | 167         | 285         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11b_TX_CH 11_ANT 0+1     | Test Voltage         | AC 120V/60Hz |

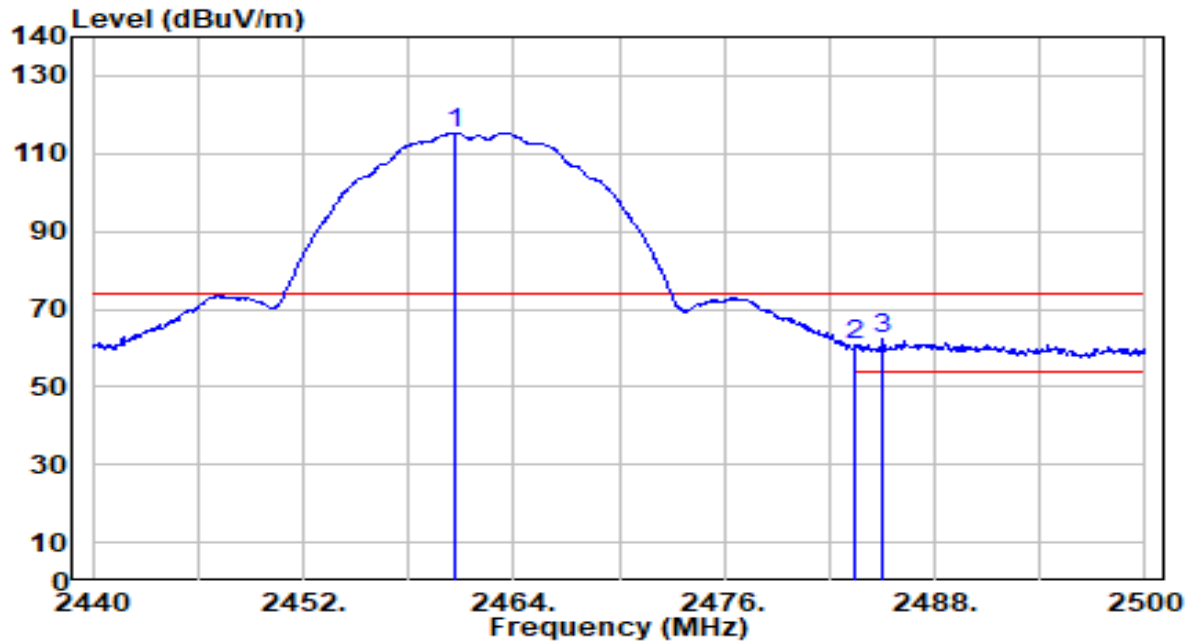


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2460.640        | 85.08          | 30.21      | 115.29               | N/A         | N/A            | 100         | 60          | Peak              |
| 2  | 2483.500        | 30.71          | 30.29      | 60.99                | -13.01      | 74.00          | 100         | 60          | Peak              |
| 3  | * 2485.060      | 31.88          | 30.29      | 62.18                | -11.82      | 74.00          | 100         | 60          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11b_TX_CH 11_ANT 0+1     | Test Voltage         | AC 120V/60Hz |

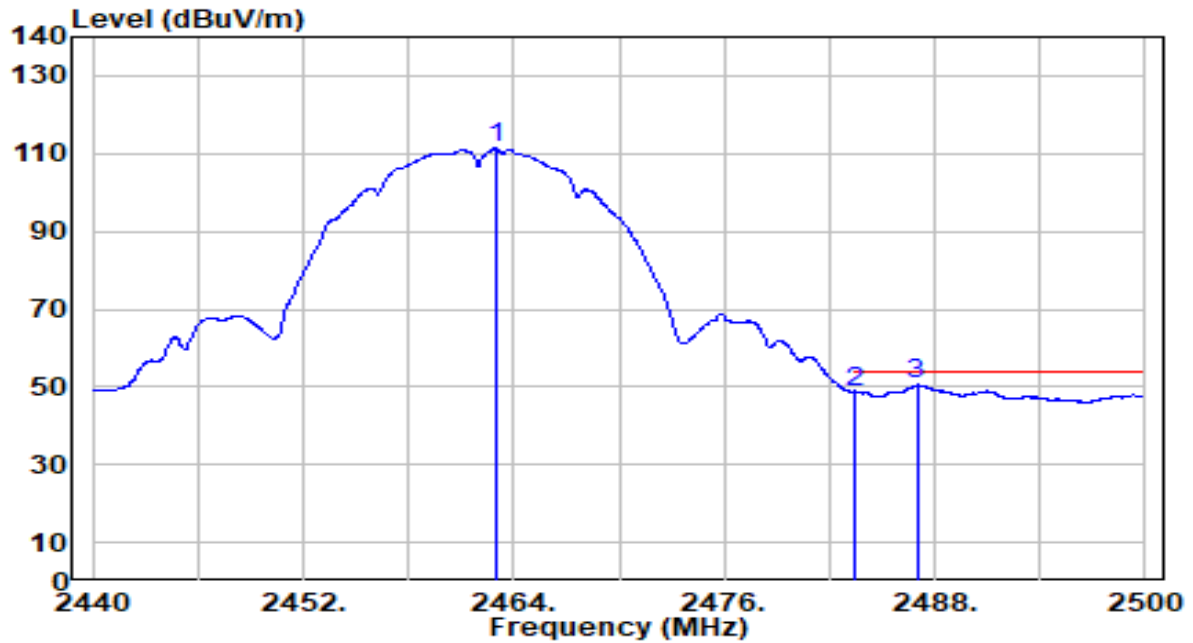


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2462.980        | 81.29          | 30.22      | 111.51               | N/A         | N/A            | 100         | 60          | Average           |
| 2  | 2483.500        | 18.53          | 30.29      | 48.81                | -5.19       | 54.00          | 100         | 60          | Average           |
| 3  | * 2486.980      | 20.26          | 30.30      | 50.56                | -3.44       | 54.00          | 100         | 60          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 1_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

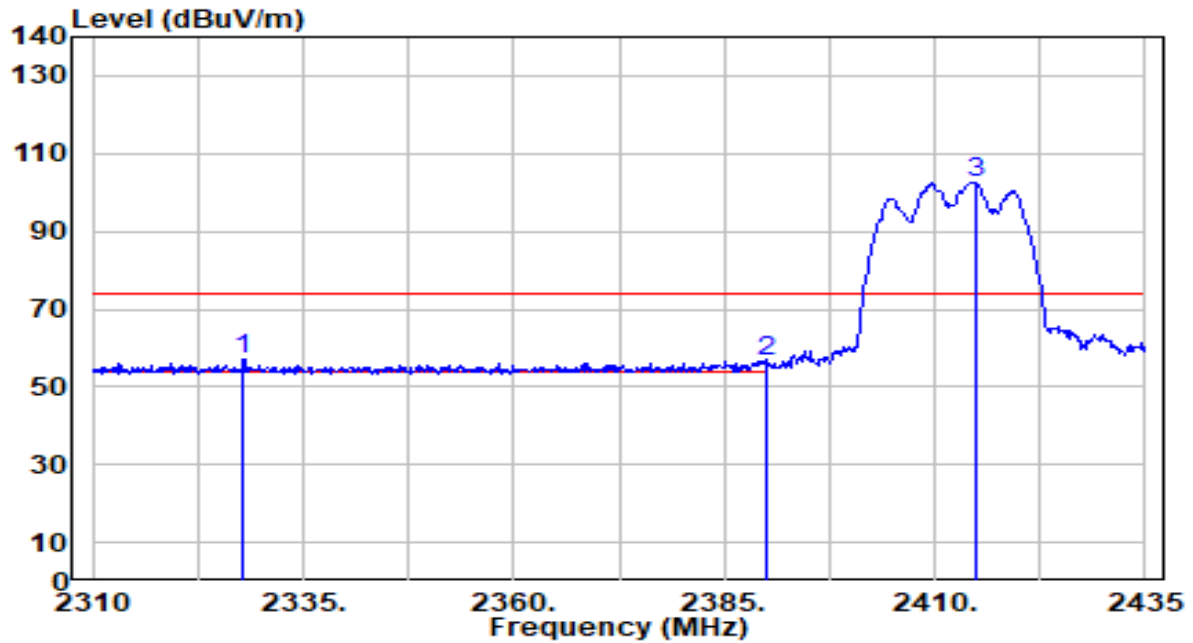


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2327.875        | 27.02          | 29.91      | 56.94                | -17.06      | 74.00          | 100         | 229         | Peak              |
| 2  |   | 2390.000        | 26.56          | 29.99      | 56.56                | -17.44      | 74.00          | 100         | 229         | Peak              |
| 3  |   | 2414.875        | 72.69          | 30.06      | 102.75               | N/A         | N/A            | 100         | 229         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 1_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

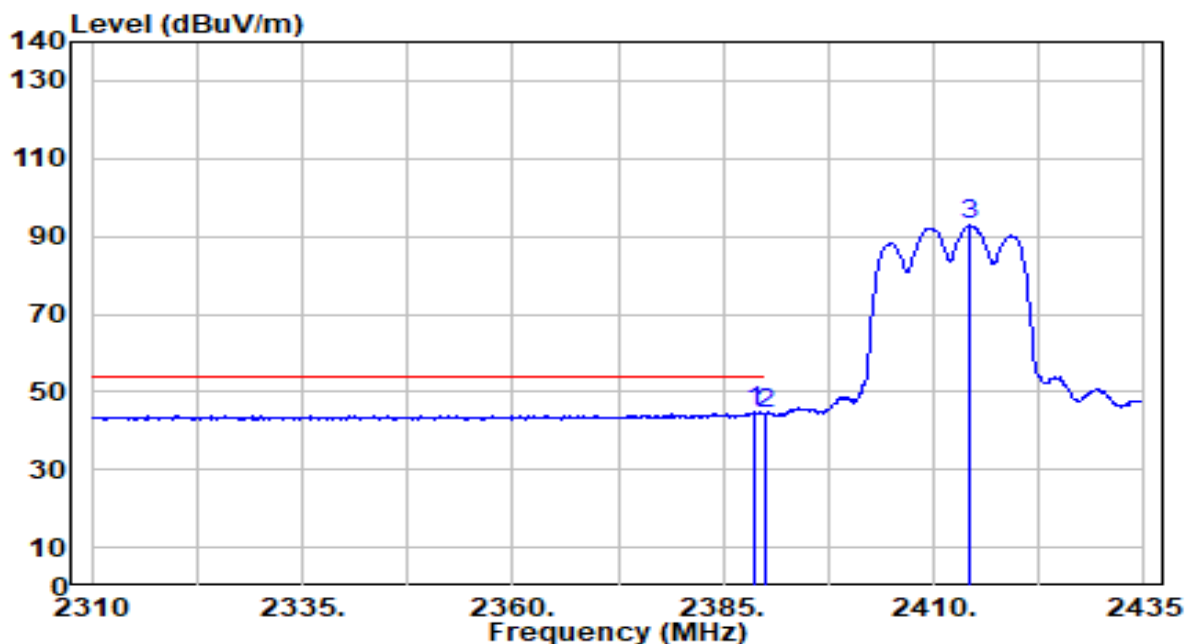


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2388.750        | 14.72          | 29.99      | 44.72                | -9.28       | 54.00          | 100         | 229         | Average           |
| 2  |   | 2390.000        | 14.38          | 29.99      | 44.38                | -9.62       | 54.00          | 100         | 229         | Average           |
| 3  |   | 2414.375        | 62.83          | 30.06      | 92.89                | N/A         | N/A            | 100         | 229         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 1_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

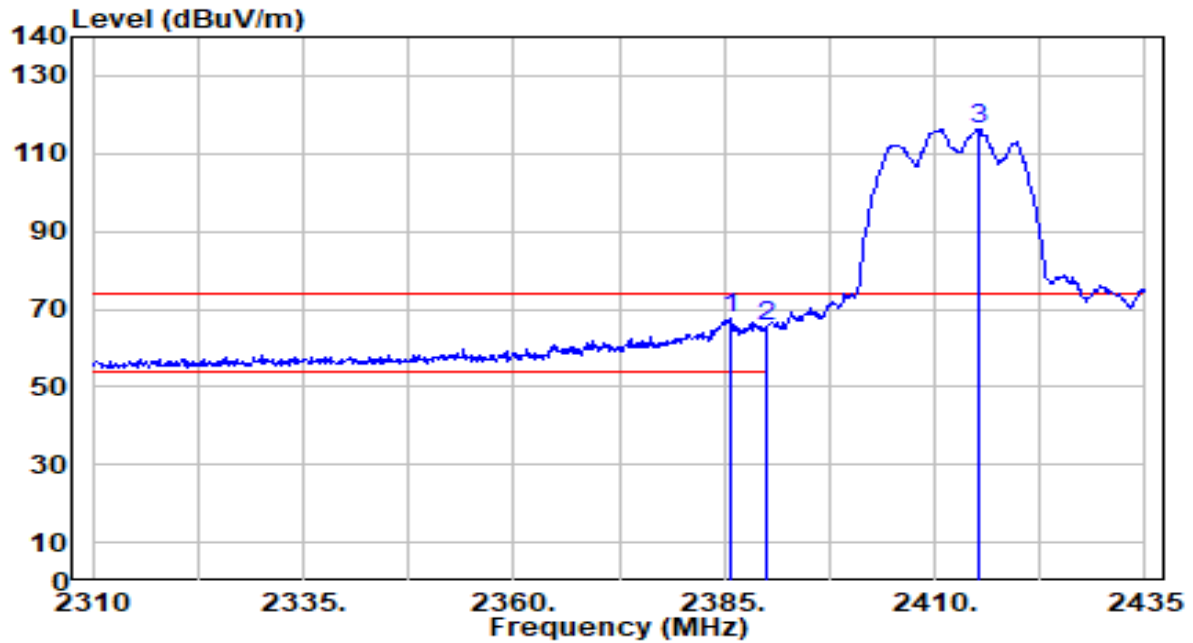


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2385.625        | 37.38          | 29.99      | 67.37                | -6.63       | 74.00          | 140         | 234         | Peak              |
| 2  |   | 2390.000        | 35.76          | 29.99      | 65.75                | -8.25       | 74.00          | 140         | 234         | Peak              |
| 3  |   | 2415.125        | 86.14          | 30.06      | 116.20               | N/A         | N/A            | 140         | 234         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 1_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

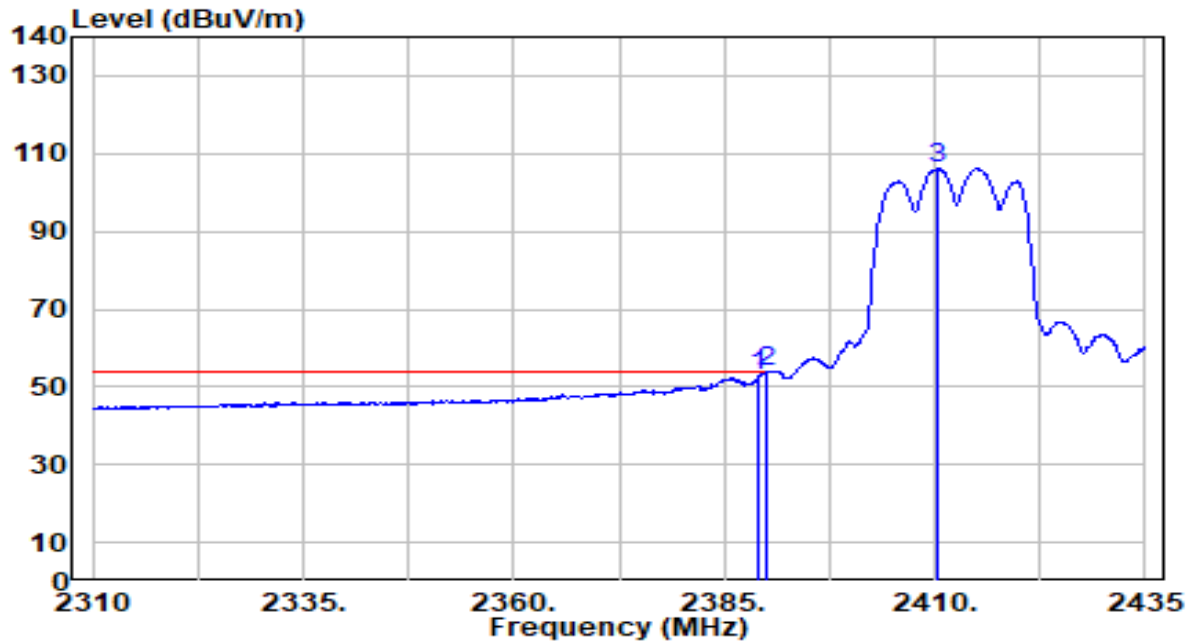


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2389.000        | 22.58          | 29.99      | 52.57                | -1.43       | 54.00          | 140         | 234         | Average           |
| 2  | * | 2390.000        | 23.84          | 29.99      | 53.84                | -0.16       | 54.00          | 140         | 234         | Average           |
| 3  |   | 2410.375        | 76.10          | 30.04      | 106.15               | N/A         | N/A            | 140         | 234         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 6_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

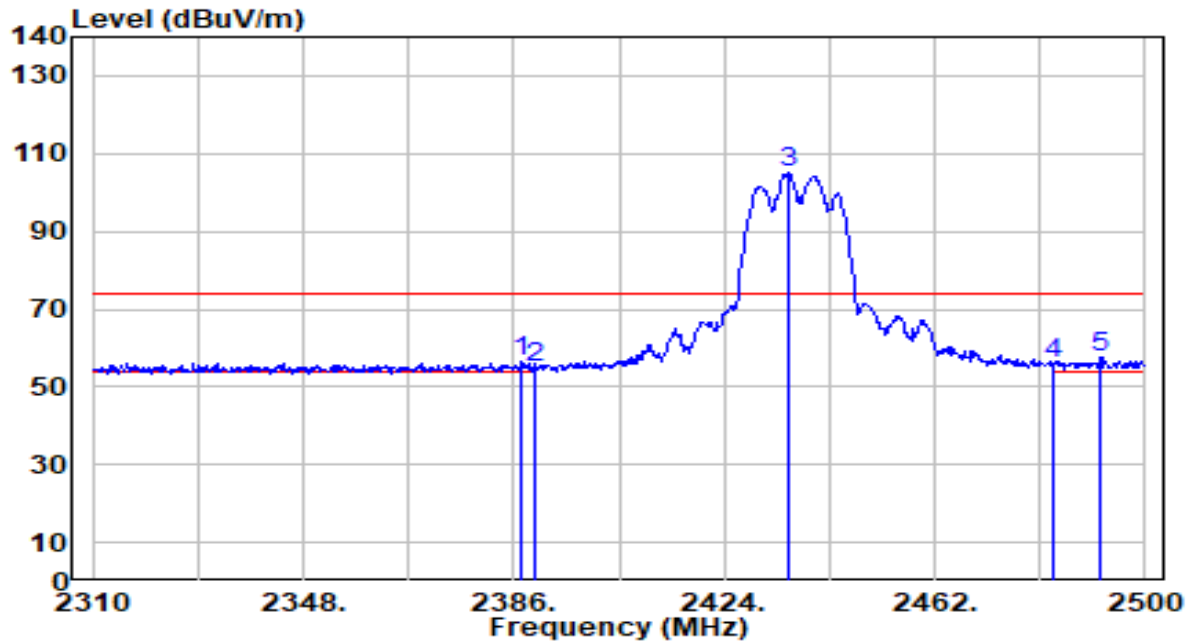


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2387.520        | 26.33          | 29.99      | 56.32                | -17.68      | 74.00          | 100         | 360         | Peak              |
| 2  | 2390.000        | 24.73          | 29.99      | 54.72                | -19.28      | 74.00          | 100         | 360         | Peak              |
| 3  | 2435.780        | 74.99          | 30.13      | 105.11               | N/A         | N/A            | 100         | 360         | Peak              |
| 4  | 2483.500        | 25.91          | 30.29      | 56.20                | -17.80      | 74.00          | 100         | 360         | Peak              |
| 5  | * 2492.020      | 27.25          | 30.31      | 57.56                | -16.44      | 74.00          | 100         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 6_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

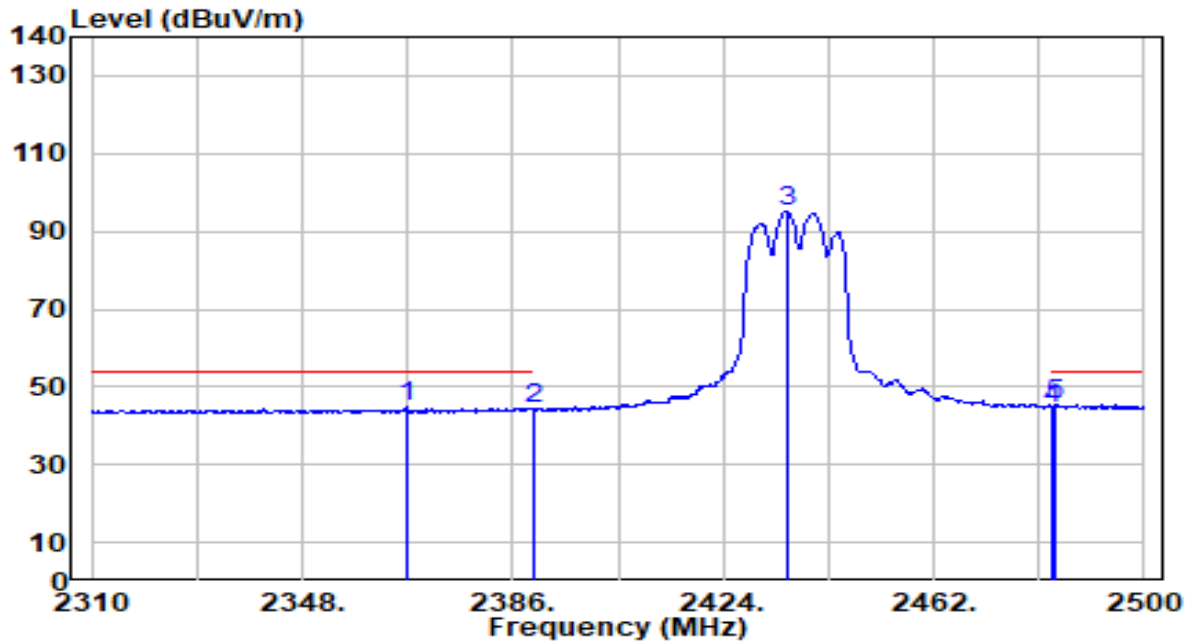


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2366.810        | 14.77          | 29.96      | 44.74                | -9.26       | 54.00          | 100         | 360         | Average           |
| 2  | 2390.000        | 14.22          | 29.99      | 44.21                | -9.79       | 54.00          | 100         | 360         | Average           |
| 3  | 2435.400        | 64.96          | 30.13      | 95.08                | N/A         | N/A            | 100         | 360         | Average           |
| 4  | 2483.500        | 14.27          | 30.29      | 44.55                | -9.45       | 54.00          | 100         | 360         | Average           |
| 5  | * 2484.040      | 15.02          | 30.29      | 45.31                | -8.69       | 54.00          | 100         | 360         | Average           |

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 6_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

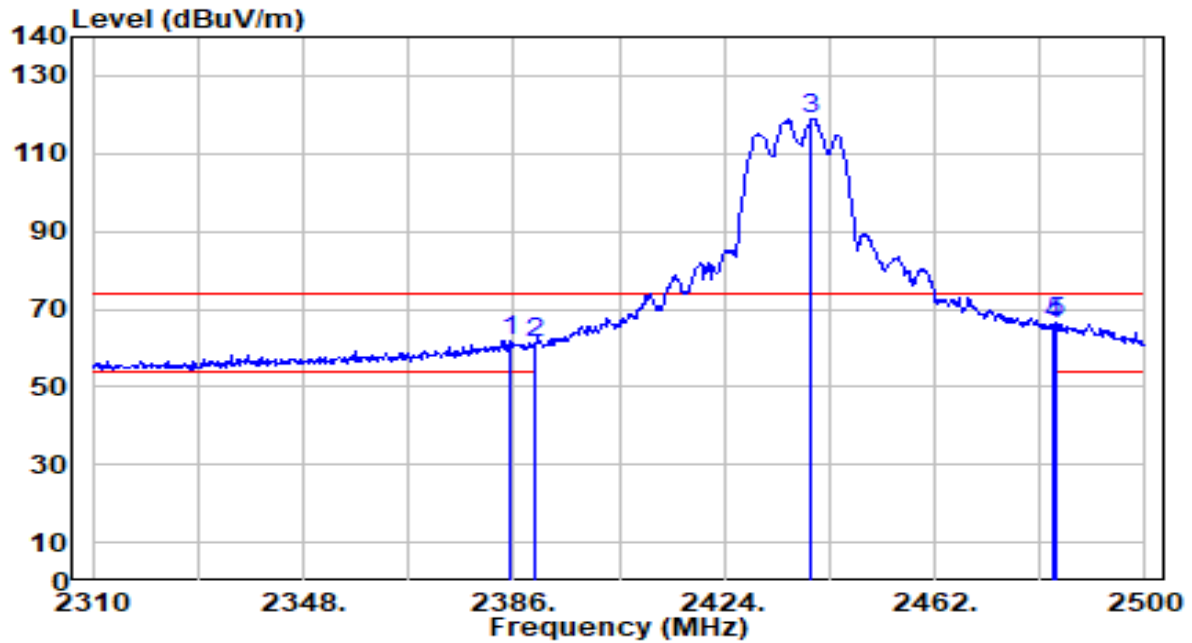


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2385.240        | 31.69          | 29.99      | 61.68                | -12.32      | 74.00          | 172         | 234         | Peak              |
| 2  | 2390.000        | 31.18          | 29.99      | 61.17                | -12.83      | 74.00          | 172         | 234         | Peak              |
| 3  | 2439.770        | 88.51          | 30.14      | 118.65               | N/A         | N/A            | 172         | 234         | Peak              |
| 4  | 2483.500        | 35.72          | 30.29      | 66.00                | -8.00       | 74.00          | 172         | 234         | Peak              |
| 5  | * 2484.040      | 36.02          | 30.29      | 66.31                | -7.69       | 74.00          | 172         | 234         | Peak              |

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 6_ANT 0+1      | Test Voltage         | AC 120V/60Hz |

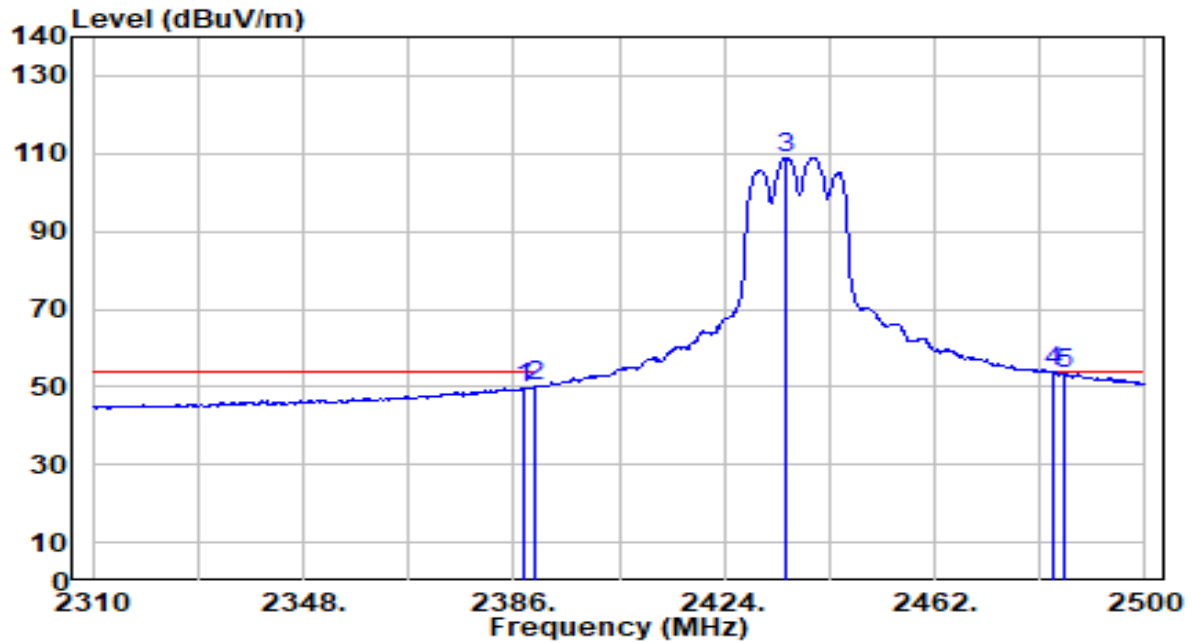


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2387.710        | 19.87          | 29.99      | 49.86                | -4.14       | 54.00          | 172         | 234         | Average           |
| 2  |   | 2390.000        | 20.13          | 29.99      | 50.13                | -3.87       | 54.00          | 172         | 234         | Average           |
| 3  |   | 2435.210        | 78.91          | 30.12      | 109.03               | N/A         | N/A            | 172         | 234         | Average           |
| 4  | * | 2483.500        | 23.56          | 30.29      | 53.85                | -0.15       | 54.00          | 172         | 234         | Average           |
| 5  |   | 2485.180        | 23.28          | 30.29      | 53.57                | -0.43       | 54.00          | 172         | 234         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 10_ANT 0+1     | Test Voltage         | AC 120V/60Hz |

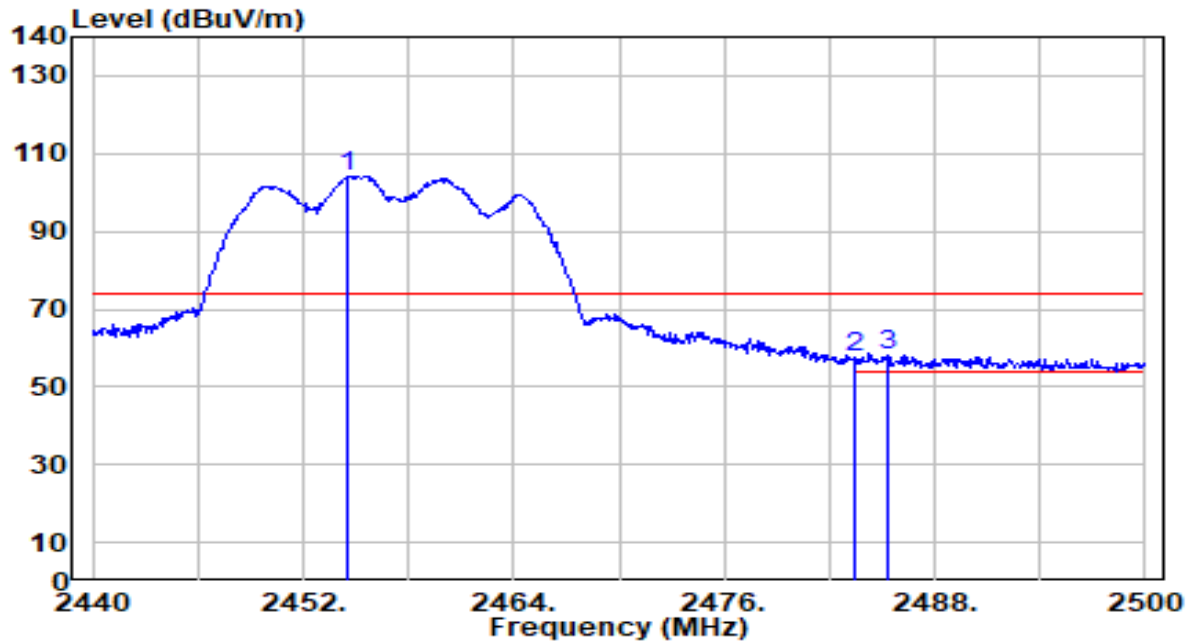


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2454.520        | 73.93          | 30.19      | 104.12               | N/A         | N/A            | 100         | 220         | Peak              |
| 2  | 2483.500        | 27.35          | 30.29      | 57.64                | -16.36      | 74.00          | 100         | 220         | Peak              |
| 3  | * 2485.300      | 28.08          | 30.29      | 58.37                | -15.63      | 74.00          | 100         | 220         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 10_ANT 0+1     | Test Voltage         | AC 120V/60Hz |

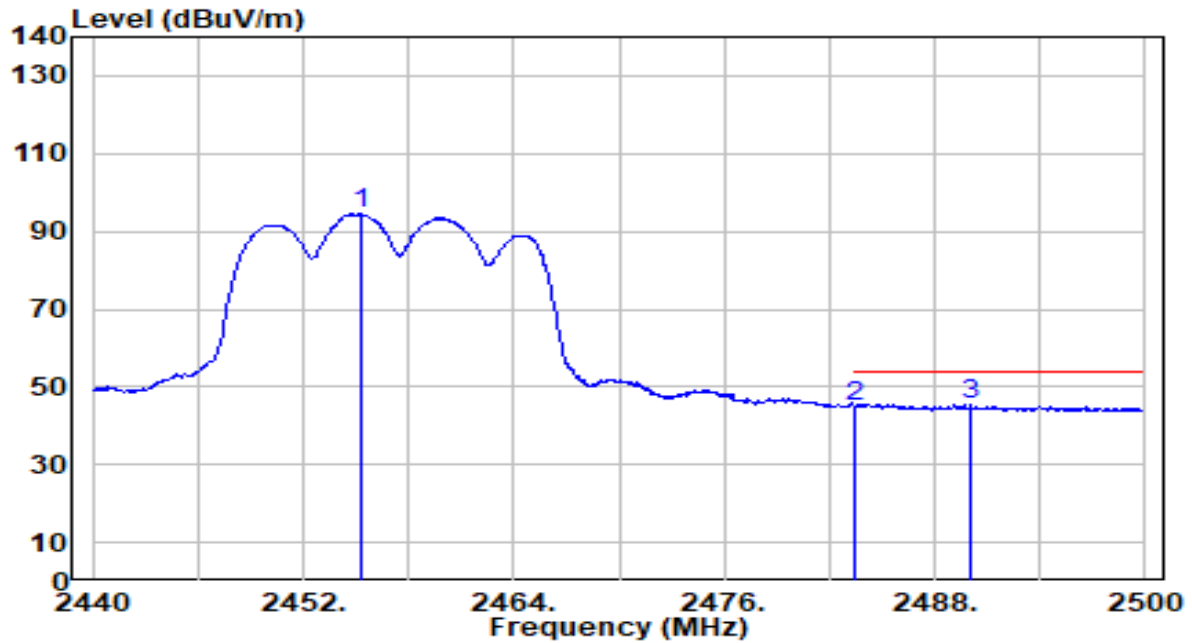


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2455.300        | 64.32          | 30.19      | 94.51                | N/A         | N/A            | 100         | 220         | Average           |
| 2  | 2483.500        | 14.85          | 30.29      | 45.14                | -8.86       | 54.00          | 100         | 220         | Average           |
| 3  | * 2490.040      | 15.25          | 30.31      | 45.56                | -8.44       | 54.00          | 100         | 220         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 10_ANT 0+1     | Test Voltage         | AC 120V/60Hz |

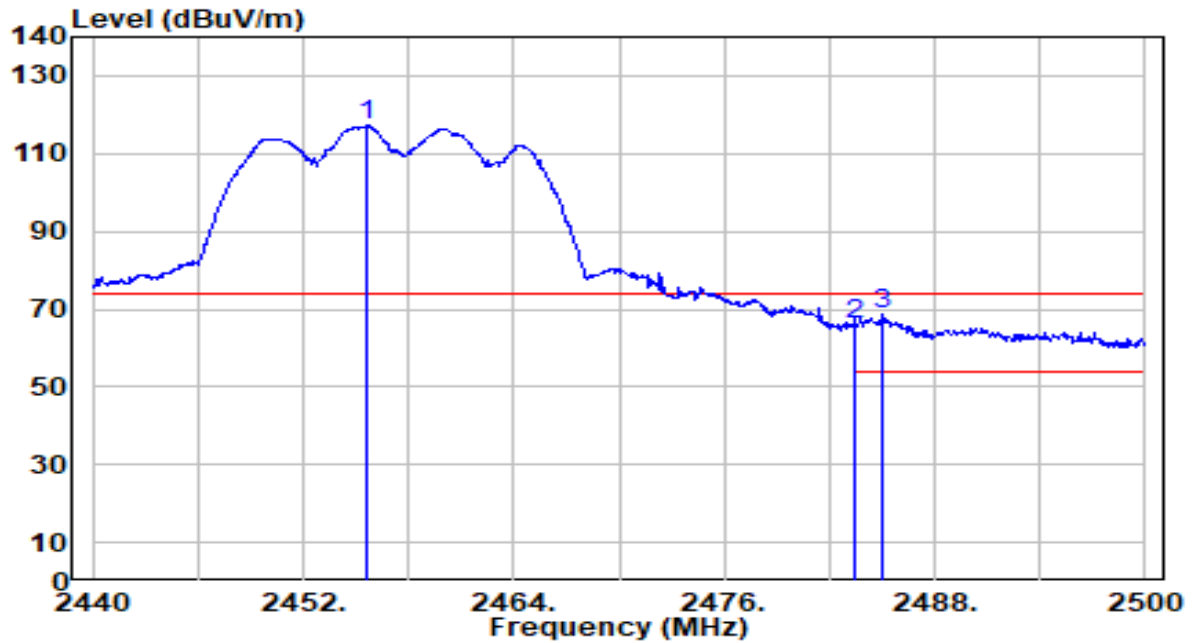


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2455.660        | 86.95          | 30.19      | 117.14               | N/A         | N/A            | 100         | 180         | Peak              |
| 2  | 2483.500        | 35.91          | 30.29      | 66.20                | -7.80       | 74.00          | 100         | 180         | Peak              |
| 3  | * 2485.060      | 38.59          | 30.29      | 68.88                | -5.12       | 74.00          | 100         | 180         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 10_ANT 0+1     | Test Voltage         | AC 120V/60Hz |

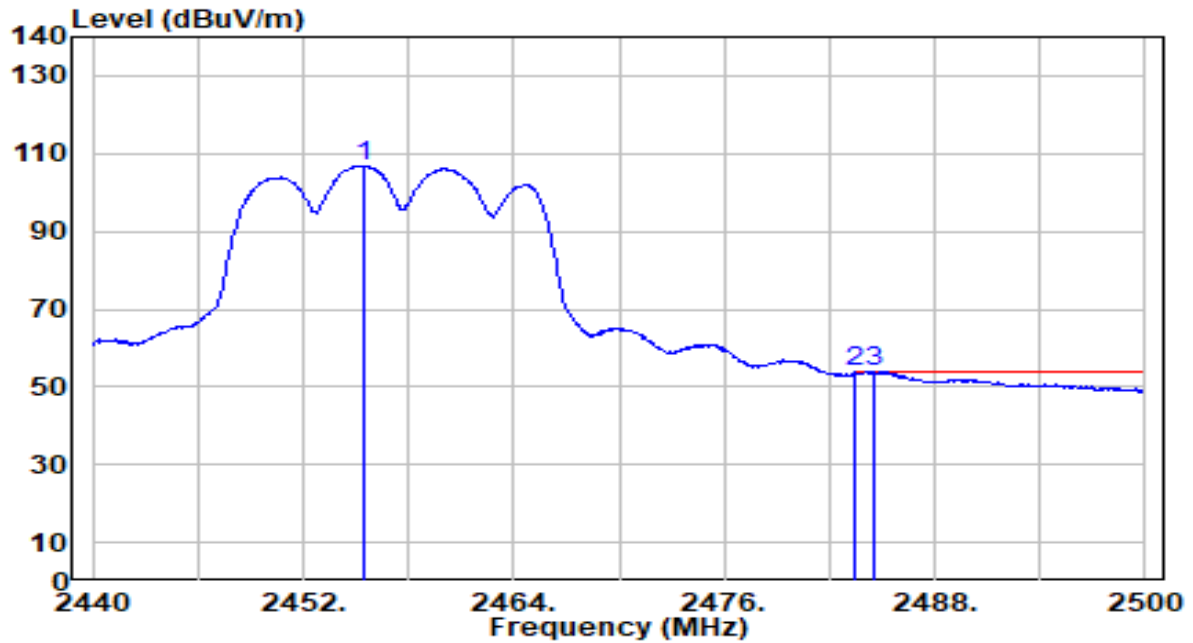


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2455.480        | 76.66          | 30.19      | 106.86               | N/A         | N/A            | 100         | 180         | Average           |
| 2  | 2483.500        | 23.54          | 30.29      | 53.82                | -0.18       | 54.00          | 100         | 180         | Average           |
| 3  | * 2484.520      | 23.60          | 30.29      | 53.89                | -0.11       | 54.00          | 100         | 180         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 11_ANT 0+1     | Test Voltage         | AC 120V/60Hz |

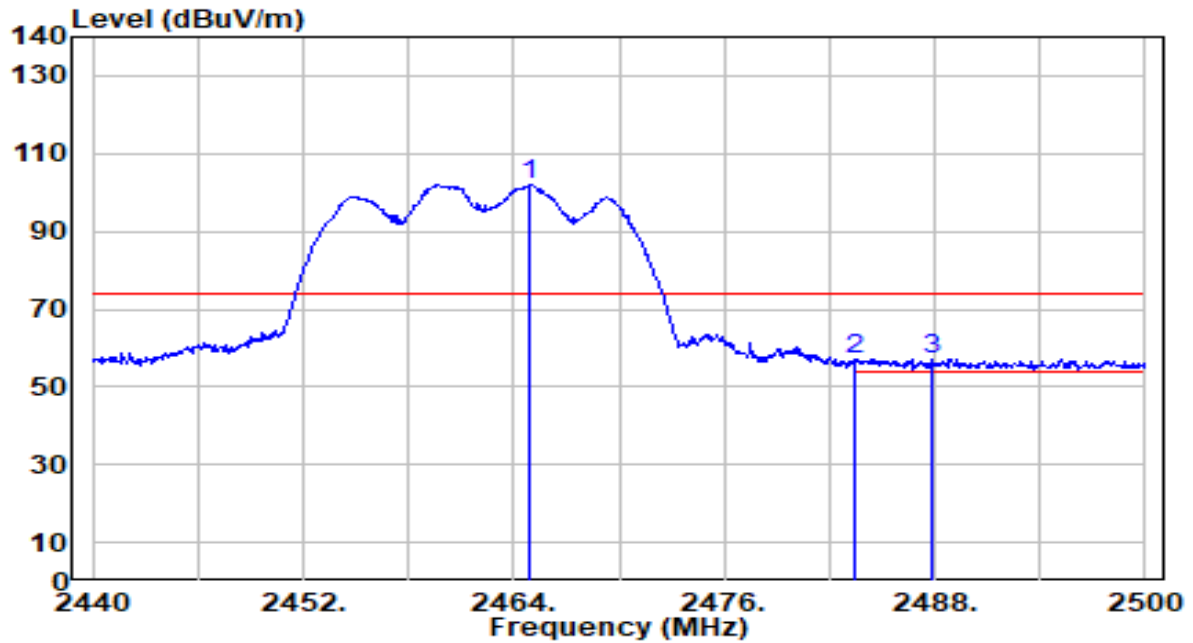


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2464.960        | 71.66          | 30.22      | 101.88               | N/A         | N/A            | 100         | 310         | Peak              |
| 2  | 2483.500        | 27.00          | 30.29      | 57.28                | -16.72      | 74.00          | 100         | 310         | Peak              |
| 3  | * 2487.820      | 27.00          | 30.30      | 57.30                | -16.70      | 74.00          | 100         | 310         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 11_ANT 0+1     | Test Voltage         | AC 120V/60Hz |

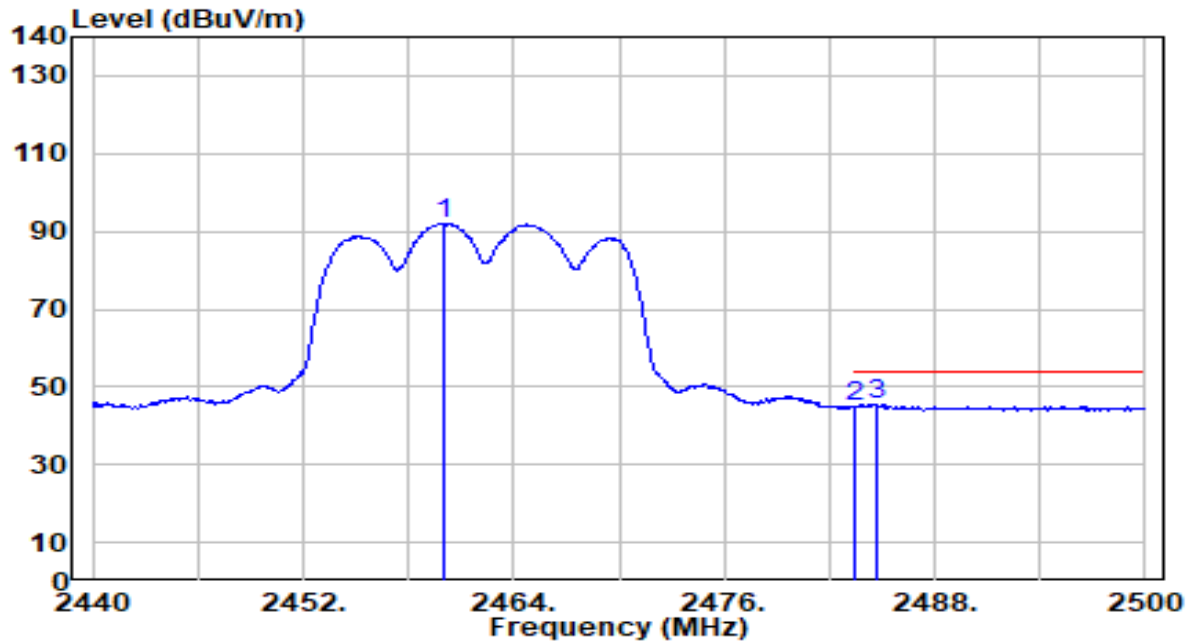


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2459.980        | 61.73          | 30.21      | 91.93                | N/A         | N/A            | 100         | 310         | Average           |
| 2  | 2483.500        | 14.67          | 30.29      | 44.95                | -9.05       | 54.00          | 100         | 310         | Average           |
| 3  | * 2484.760      | 15.03          | 30.29      | 45.32                | -8.68       | 54.00          | 100         | 310         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 11_ANT 0+1     | Test Voltage         | AC 120V/60Hz |

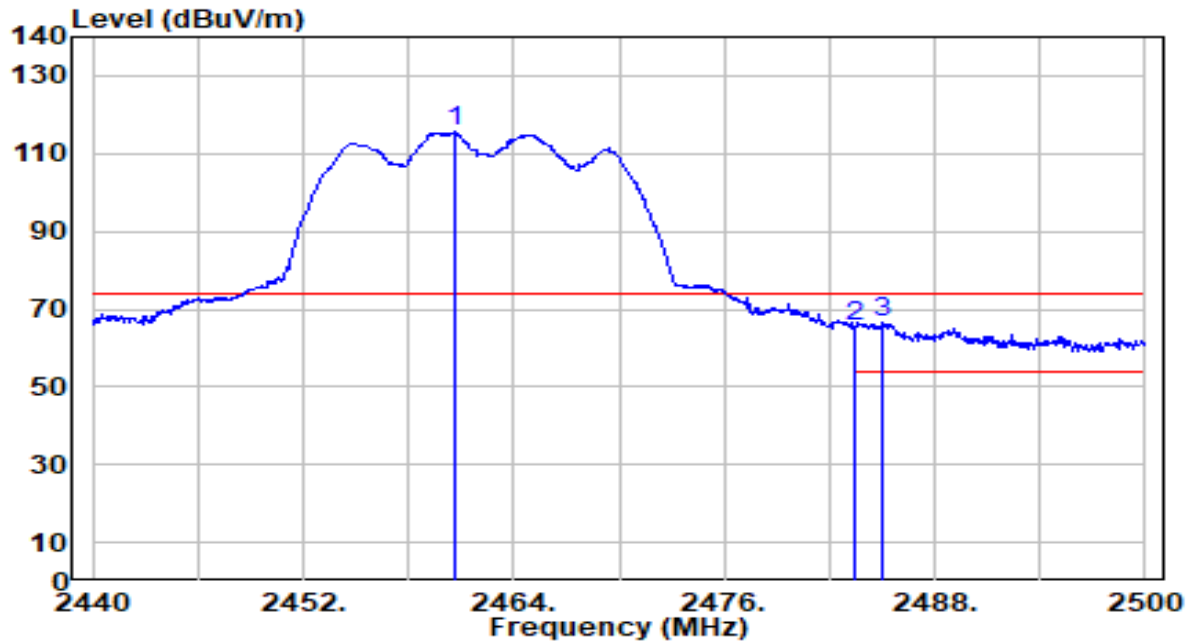


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2460.700        | 85.47          | 30.21      | 115.68               | N/A         | N/A            | 153         | 236         | Peak              |
| 2  | 2483.500        | 35.20          | 30.29      | 65.49                | -8.51       | 74.00          | 153         | 236         | Peak              |
| 3  | * 2485.000      | 36.21          | 30.29      | 66.50                | -7.50       | 74.00          | 153         | 236         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11g_TX_CH 11_ANT 0+1     | Test Voltage         | AC 120V/60Hz |

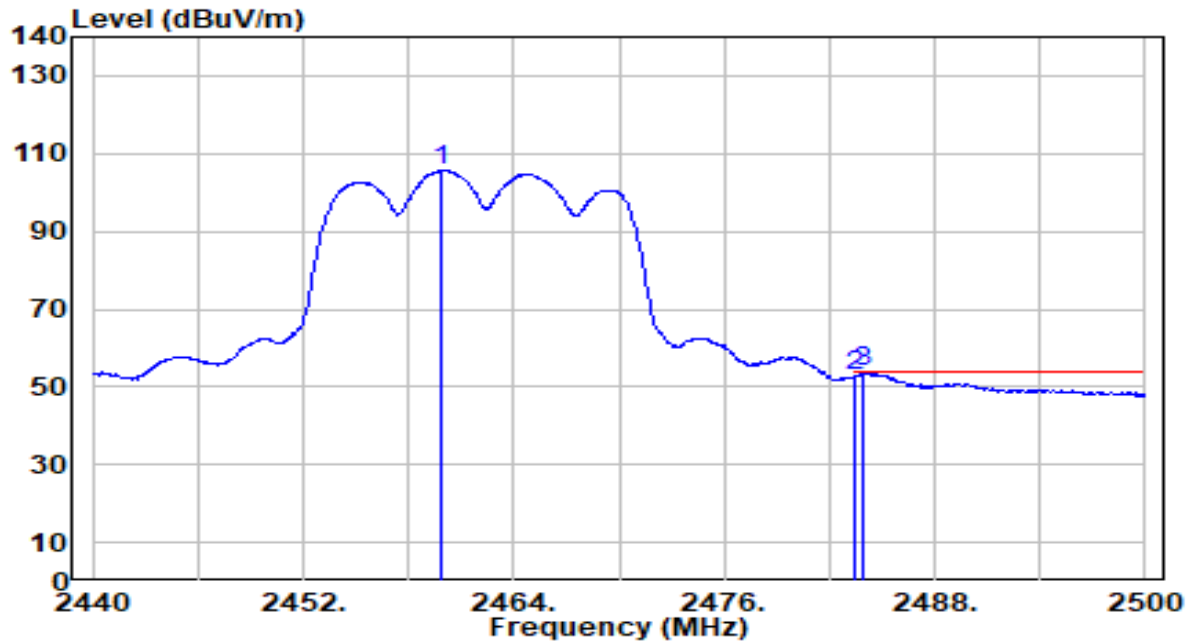


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2459.800        | 75.33          | 30.21      | 105.54               | N/A         | N/A            | 153         | 236         | Average           |
| 2  | 2483.500        | 22.30          | 30.29      | 52.58                | -1.42       | 54.00          | 153         | 236         | Average           |
| 3  | * 2483.980      | 23.53          | 30.29      | 53.82                | -0.18       | 54.00          | 153         | 236         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 1_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

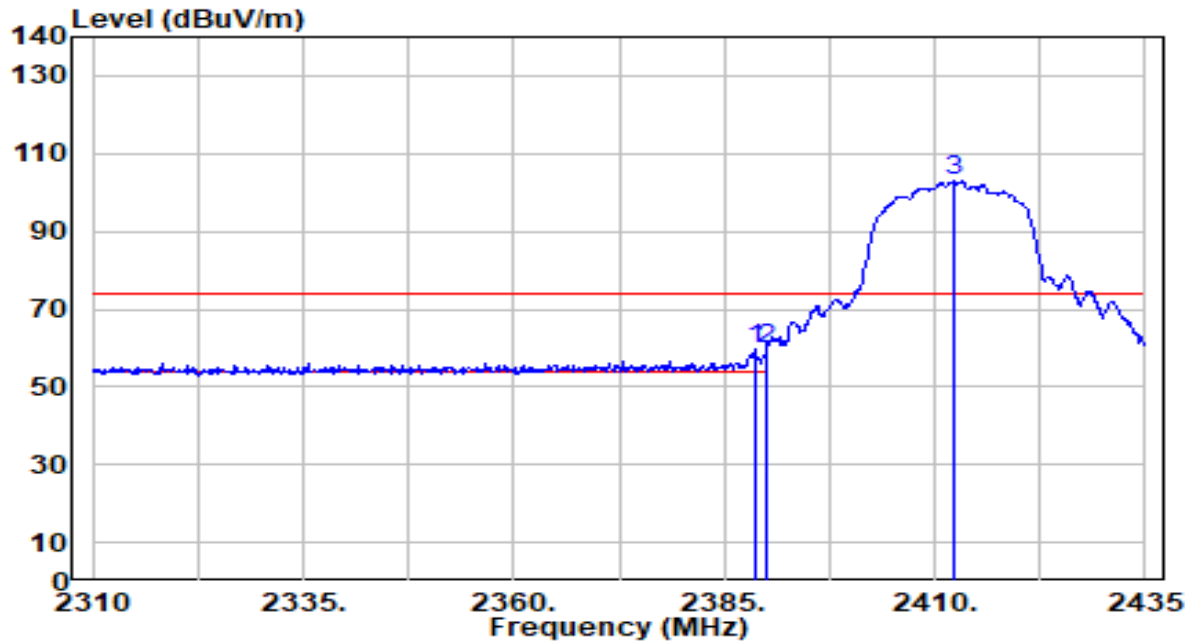


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2388.625        | 29.52          | 29.99      | 59.51                | -14.49      | 74.00          | 100         | 232         | Peak              |
| 2  | * | 2390.000        | 29.92          | 29.99      | 59.92                | -14.08      | 74.00          | 100         | 232         | Peak              |
| 3  |   | 2412.250        | 72.80          | 30.05      | 102.85               | N/A         | N/A            | 100         | 232         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 1_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

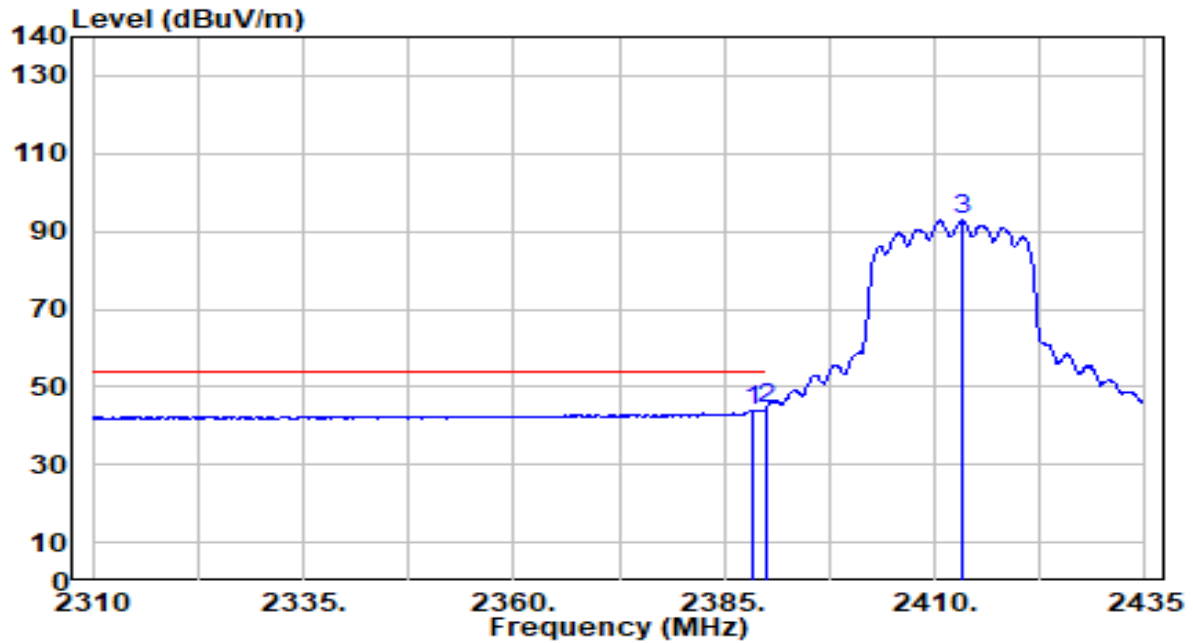


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2388.500        | 13.95          | 29.99      | 43.94                | -10.06      | 54.00          | 100         | 232         | Average           |
| 2  | * | 2390.000        | 14.51          | 29.99      | 44.51                | -9.49       | 54.00          | 100         | 232         | Average           |
| 3  |   | 2413.375        | 62.75          | 30.05      | 92.80                | N/A         | N/A            | 100         | 232         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 1_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

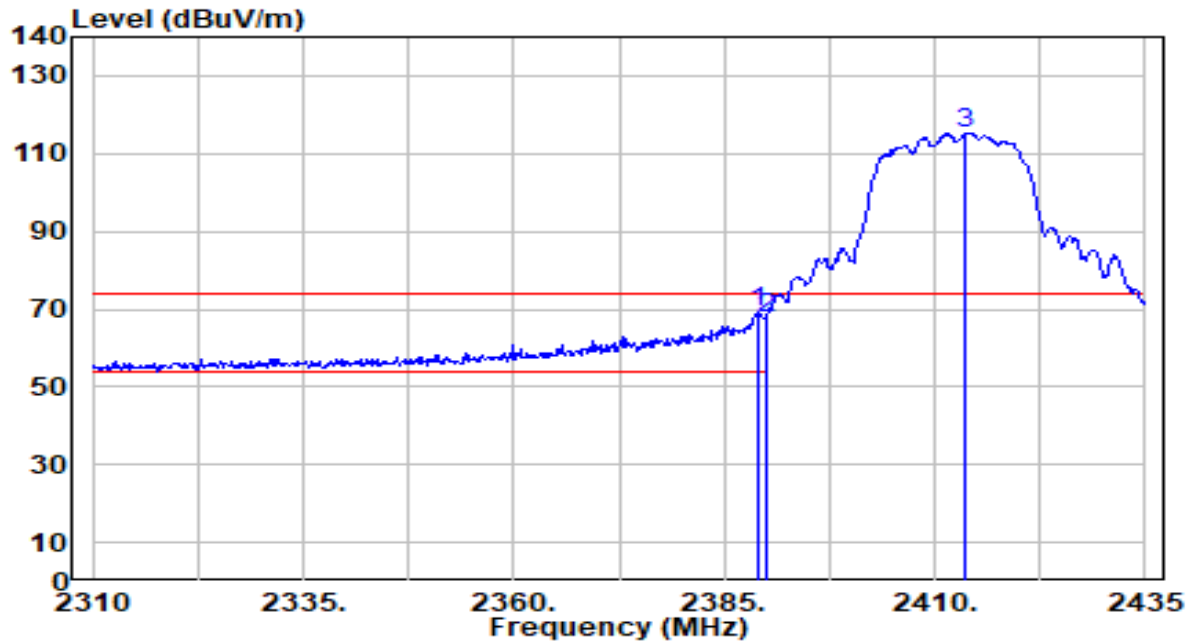


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2389.000        | 39.00          | 29.99      | 69.00                | -5.00       | 74.00          | 102         | 179         | Peak              |
| 2  |   | 2390.000        | 37.84          | 29.99      | 67.84                | -6.16       | 74.00          | 102         | 179         | Peak              |
| 3  |   | 2413.750        | 85.21          | 30.05      | 115.27               | N/A         | N/A            | 102         | 179         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 1_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

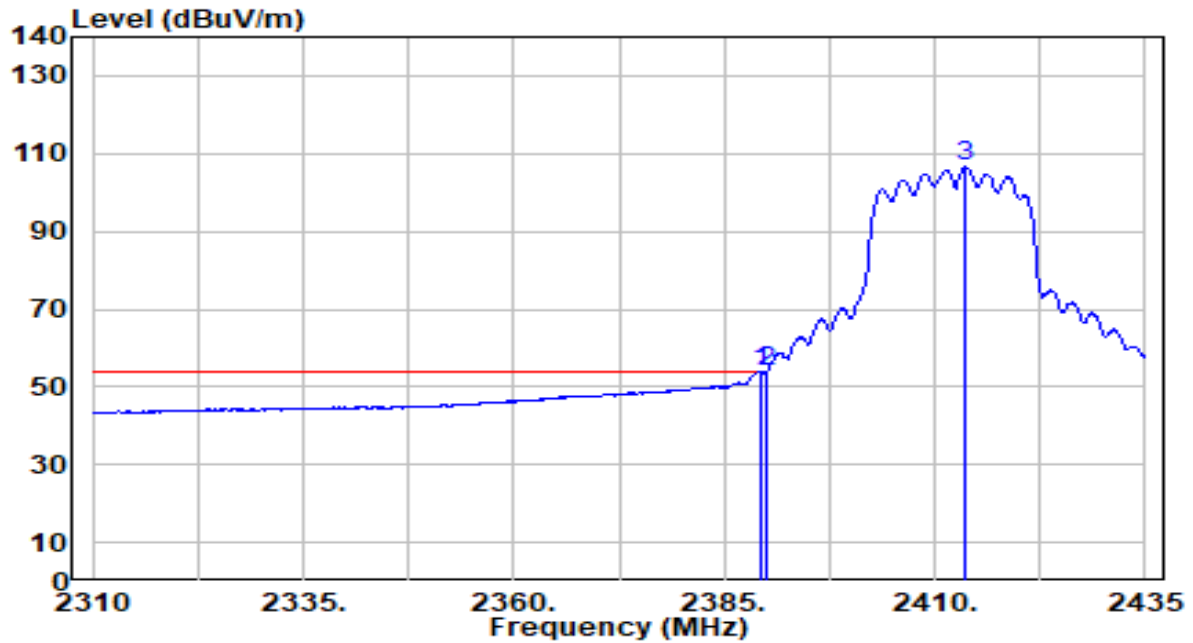


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2389.250        | 23.87          | 29.99      | 53.86                | -0.14       | 54.00          | 102         | 179         | Average           |
| 2  |   | 2390.000        | 23.67          | 29.99      | 53.66                | -0.34       | 54.00          | 102         | 179         | Average           |
| 3  |   | 2413.625        | 76.69          | 30.05      | 106.75               | N/A         | N/A            | 102         | 179         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 2_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

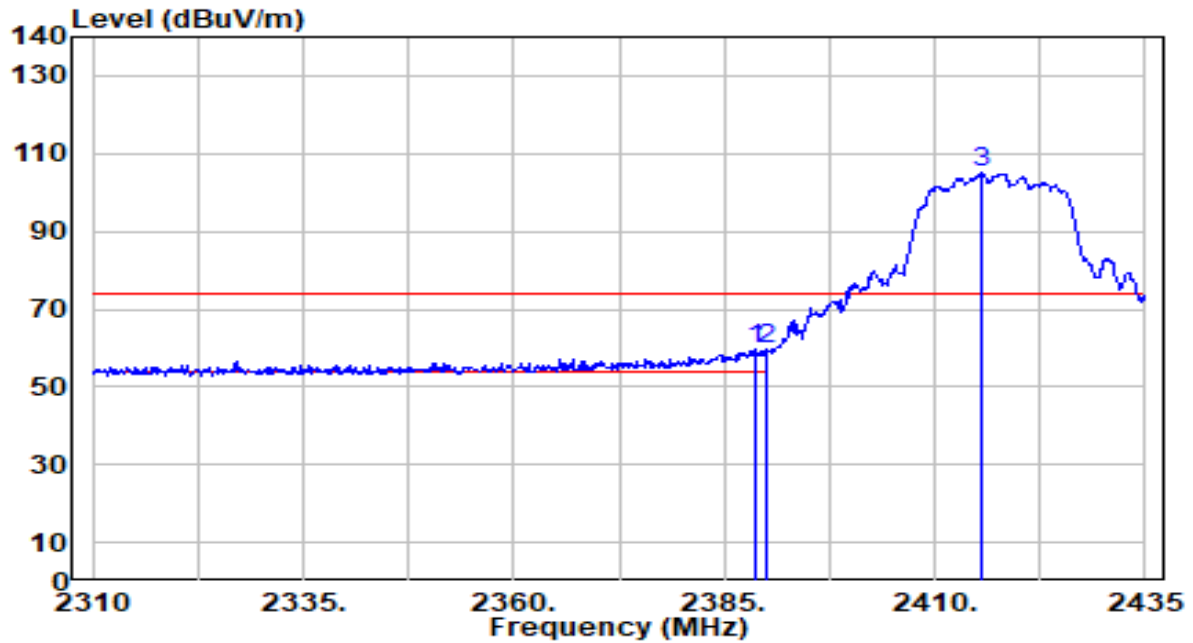


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2388.625        | 29.45          | 29.99      | 59.44                | -14.56      | 74.00          | 100         | 120         | Peak              |
| 2  | * | 2390.000        | 29.82          | 29.99      | 59.81                | -14.19      | 74.00          | 100         | 120         | Peak              |
| 3  |   | 2415.500        | 74.81          | 30.06      | 104.87               | N/A         | N/A            | 100         | 120         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 2_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

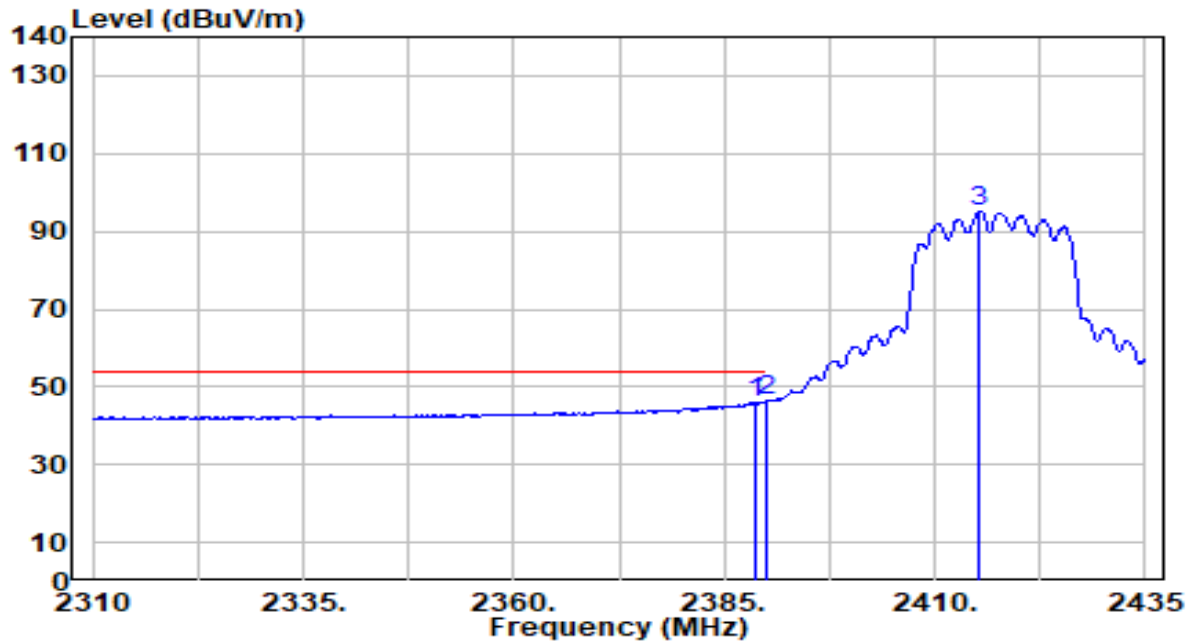


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2388.625        | 15.92          | 29.99      | 45.91                | -8.09       | 54.00          | 100         | 120         | Average           |
| 2  | * | 2390.000        | 16.31          | 29.99      | 46.31                | -7.69       | 54.00          | 100         | 120         | Average           |
| 3  |   | 2415.375        | 65.19          | 30.06      | 95.25                | N/A         | N/A            | 100         | 120         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 2_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

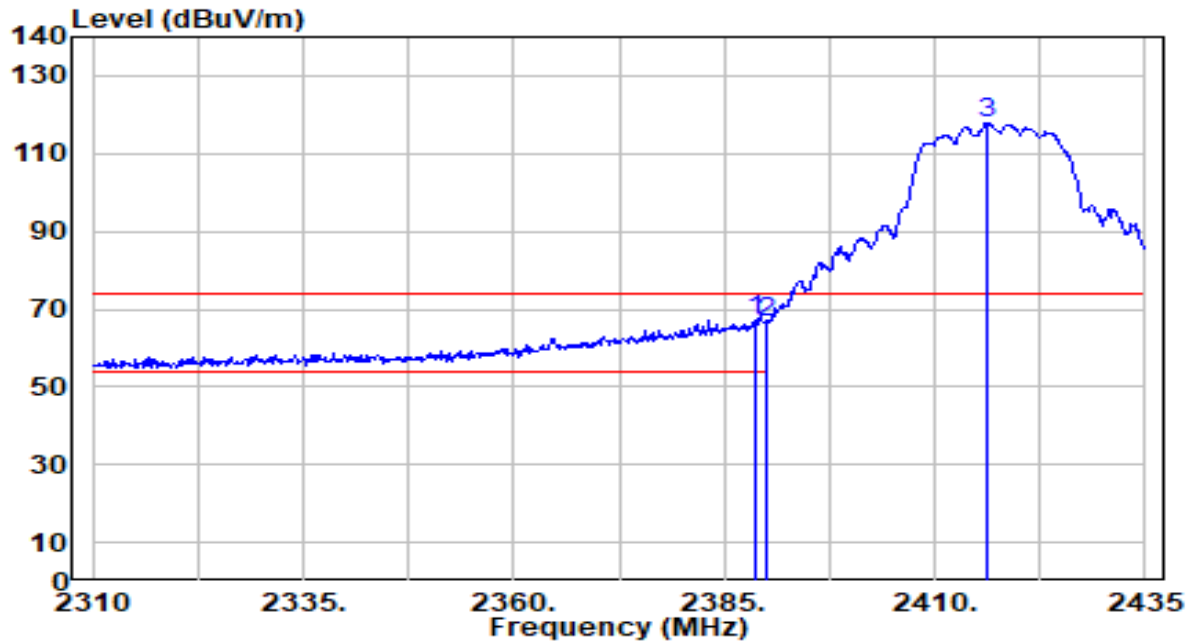


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2388.750        | 37.19          | 29.99      | 67.18                | -6.82       | 74.00          | 100         | 181         | Peak              |
| 2  |   | 2390.000        | 36.38          | 29.99      | 66.37                | -7.63       | 74.00          | 100         | 181         | Peak              |
| 3  |   | 2416.250        | 87.73          | 30.06      | 117.80               | N/A         | N/A            | 100         | 181         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 2_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

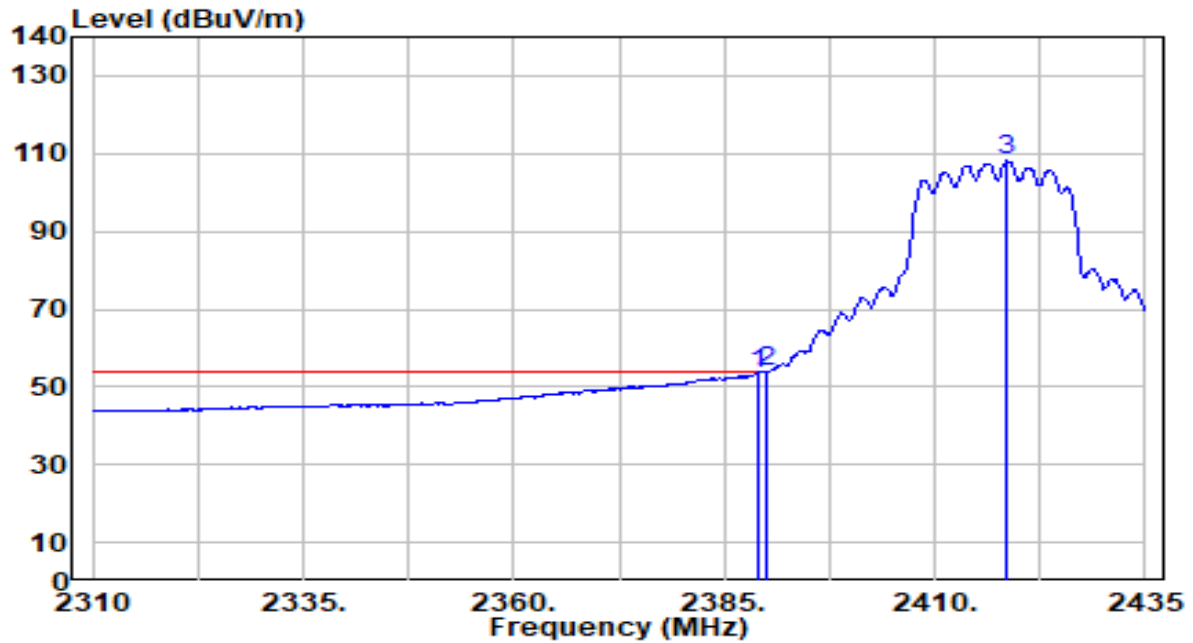


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2389.000        | 23.62          | 29.99      | 53.62                | -0.18       | 54.00          | 100         | 181         | Average           |
| 2  | * | 2390.000        | 23.65          | 29.99      | 53.65                | -0.15       | 54.00          | 100         | 181         | Average           |
| 3  |   | 2418.500        | 78.26          | 30.07      | 108.33               | N/A         | N/A            | 100         | 181         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

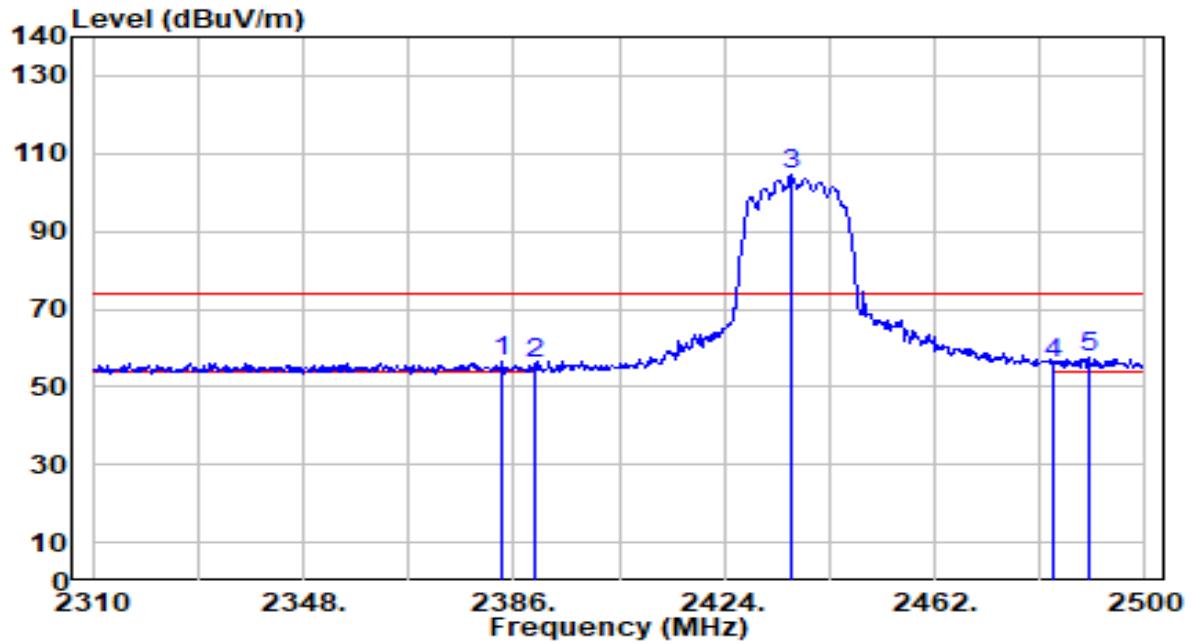


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2383.910        | 26.51          | 29.99      | 56.50                | -17.50      | 74.00          | 101         | 310         | Peak              |
| 2  | 2390.000        | 25.77          | 29.99      | 55.77                | -18.23      | 74.00          | 101         | 310         | Peak              |
| 3  | 2436.160        | 74.45          | 30.13      | 104.58               | N/A         | N/A            | 101         | 310         | Peak              |
| 4  | 2483.500        | 25.50          | 30.29      | 55.78                | -18.22      | 74.00          | 101         | 310         | Peak              |
| 5  | * 2489.740      | 27.37          | 30.31      | 57.67                | -16.33      | 74.00          | 101         | 310         | Peak              |

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

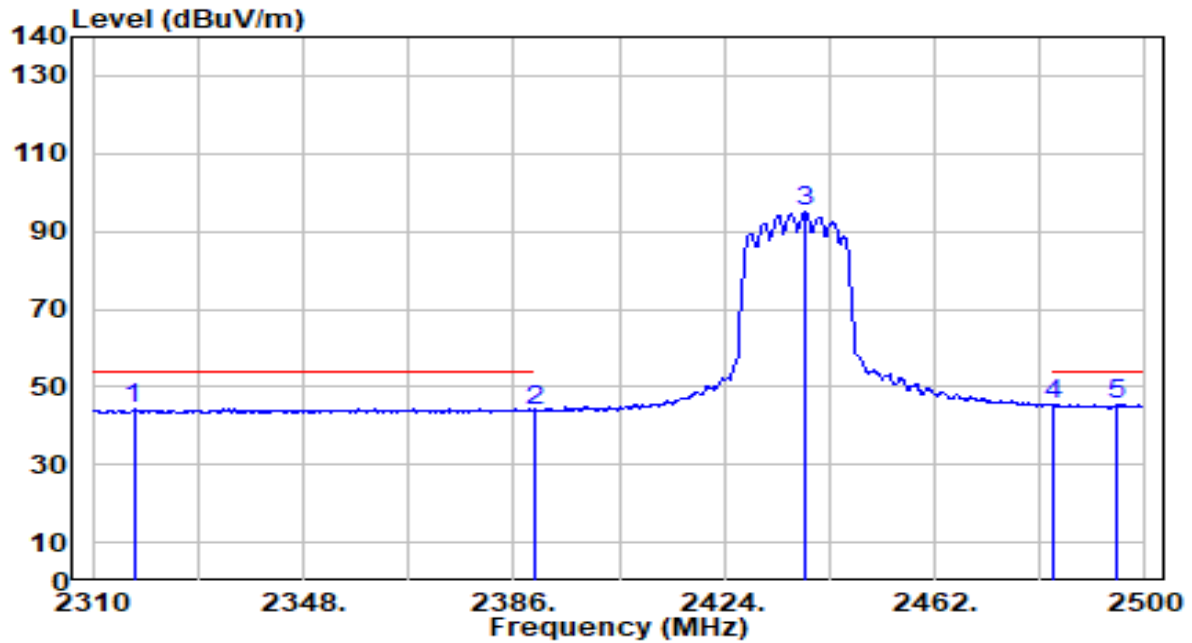


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2317.410        | 14.48          | 29.90      | 44.38                | -9.62       | 54.00          | 101         | 310         | Average           |
| 2  | 2390.000        | 13.81          | 29.99      | 43.81                | -10.19      | 54.00          | 101         | 310         | Average           |
| 3  | 2438.820        | 64.92          | 30.14      | 95.06                | N/A         | N/A            | 101         | 310         | Average           |
| 4  | 2483.500        | 15.12          | 30.29      | 45.41                | -8.59       | 54.00          | 101         | 310         | Average           |
| 5  | * 2494.680      | 15.34          | 30.32      | 45.66                | -8.34       | 54.00          | 101         | 310         | Average           |

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

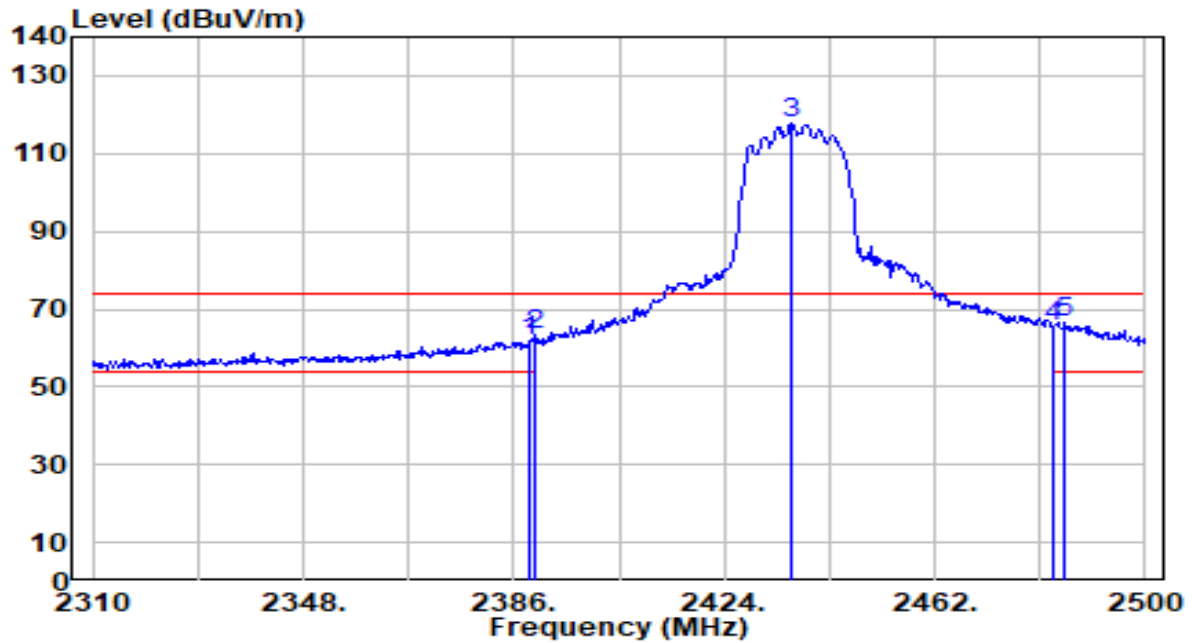


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2389.040        | 31.60          | 29.99      | 61.59                | -12.41      | 74.00          | 173         | 233         | Peak              |
| 2  | 2390.000        | 33.33          | 29.99      | 63.32                | -10.68      | 74.00          | 173         | 233         | Peak              |
| 3  | 2436.160        | 87.87          | 30.13      | 118.00               | N/A         | N/A            | 173         | 233         | Peak              |
| 4  | 2483.500        | 35.18          | 30.29      | 65.47                | -8.53       | 74.00          | 173         | 233         | Peak              |
| 5  | * 2485.560      | 36.37          | 30.29      | 66.67                | -7.33       | 74.00          | 173         | 233         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

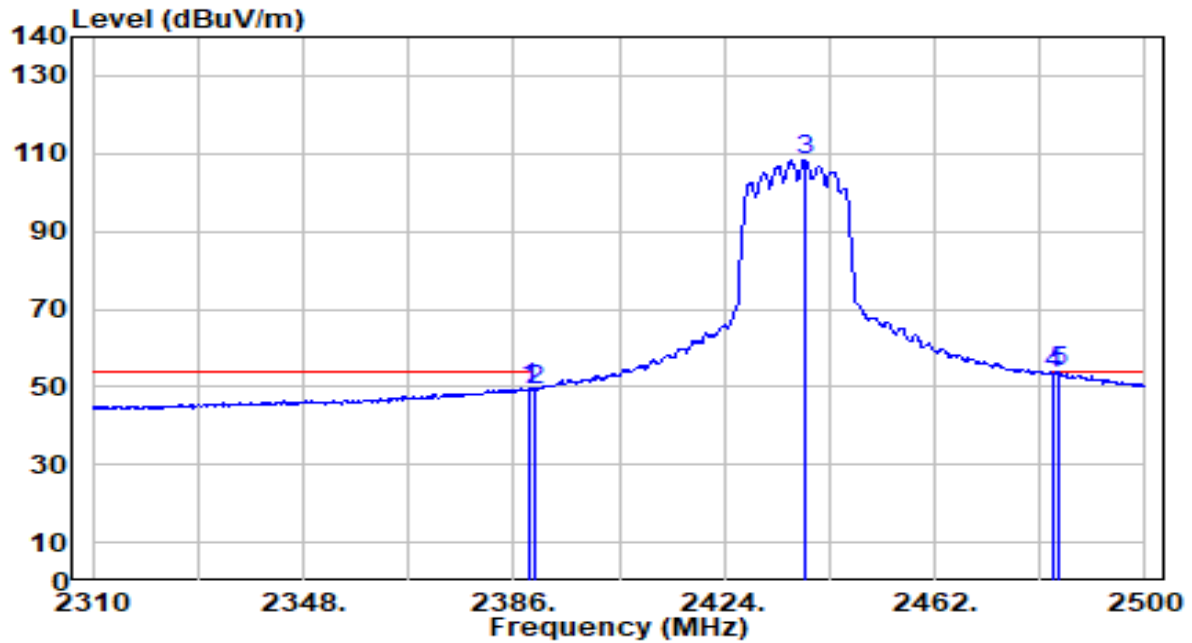


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2388.850        | 19.59          | 29.99      | 49.58                | -4.42       | 54.00          | 173         | 233         | Average           |
| 2  | 2390.000        | 19.38          | 29.99      | 49.38                | -4.62       | 54.00          | 173         | 233         | Average           |
| 3  | 2438.440        | 78.20          | 30.14      | 108.34               | N/A         | N/A            | 173         | 233         | Average           |
| 4  | 2483.500        | 23.05          | 30.29      | 53.34                | -0.66       | 54.00          | 173         | 233         | Average           |
| 5  | * 2484.610      | 23.55          | 30.29      | 53.83                | -0.17       | 54.00          | 173         | 233         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router   | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                        | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 10_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

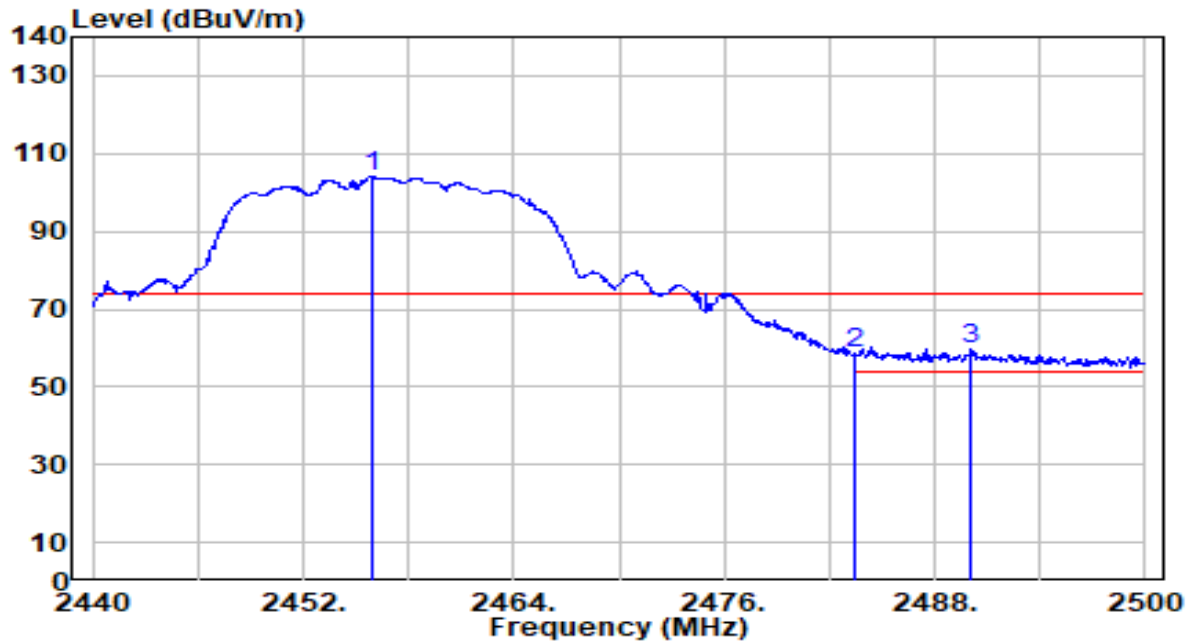


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2455.900        | 74.04          | 30.19      | 104.24               | N/A         | N/A            | 100         | 221         | Peak              |
| 2  | 2483.500        | 28.39          | 30.29      | 58.67                | -15.33      | 74.00          | 100         | 221         | Peak              |
| 3  | * 2490.040      | 29.62          | 30.31      | 59.93                | -14.07      | 74.00          | 100         | 221         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router   | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                        | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 10_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

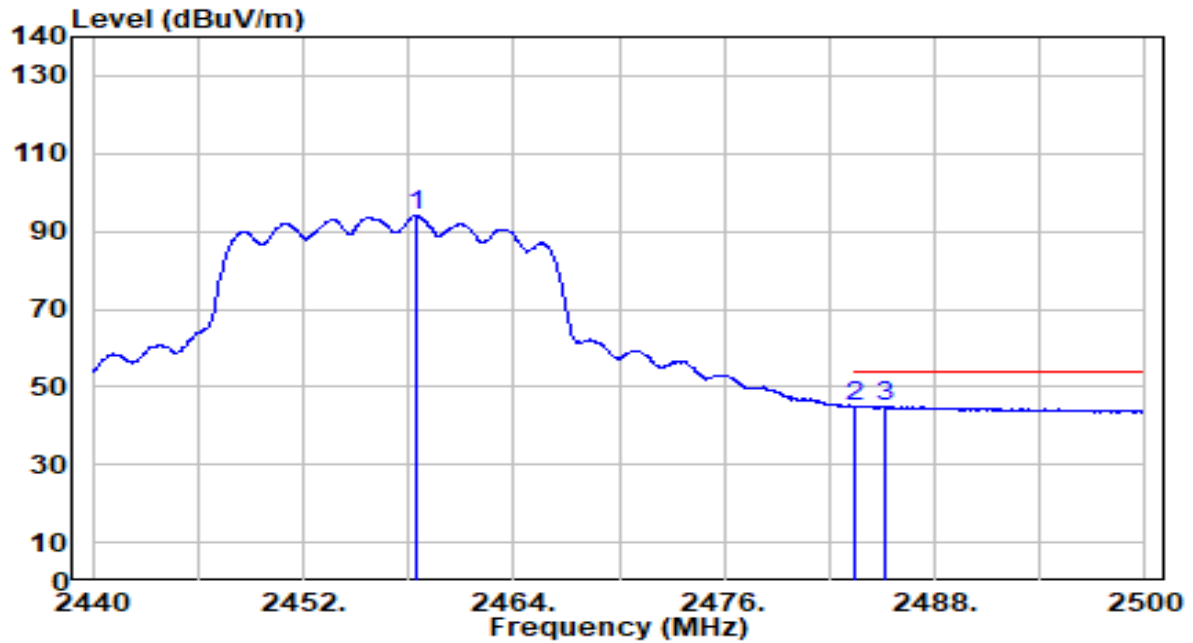


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2458.420        | 63.97          | 30.20      | 94.17                | N/A         | N/A            | 100         | 221         | Average           |
| 2  | * | 2483.500        | 14.72          | 30.29      | 45.00                | -9.00       | 54.00          | 100         | 221         | Average           |
| 3  |   | 2485.120        | 14.64          | 30.29      | 44.93                | -9.07       | 54.00          | 100         | 221         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router   | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                        | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                       | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 10_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

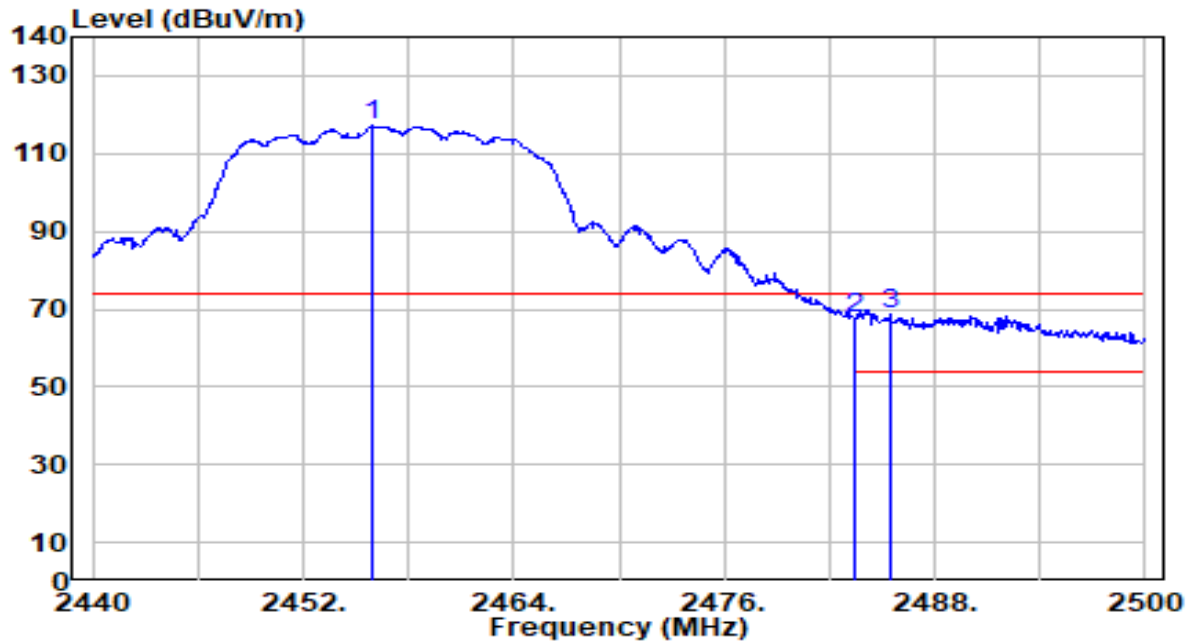


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2455.900        | 86.88          | 30.19      | 117.08               | N/A         | N/A            | 123         | 182         | Peak              |
| 2  | 2483.500        | 37.36          | 30.29      | 67.64                | -6.36       | 74.00          | 123         | 182         | Peak              |
| 3  | * 2485.420      | 38.29          | 30.29      | 68.58                | -5.42       | 74.00          | 123         | 182         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router   | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                        | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                       | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 10_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

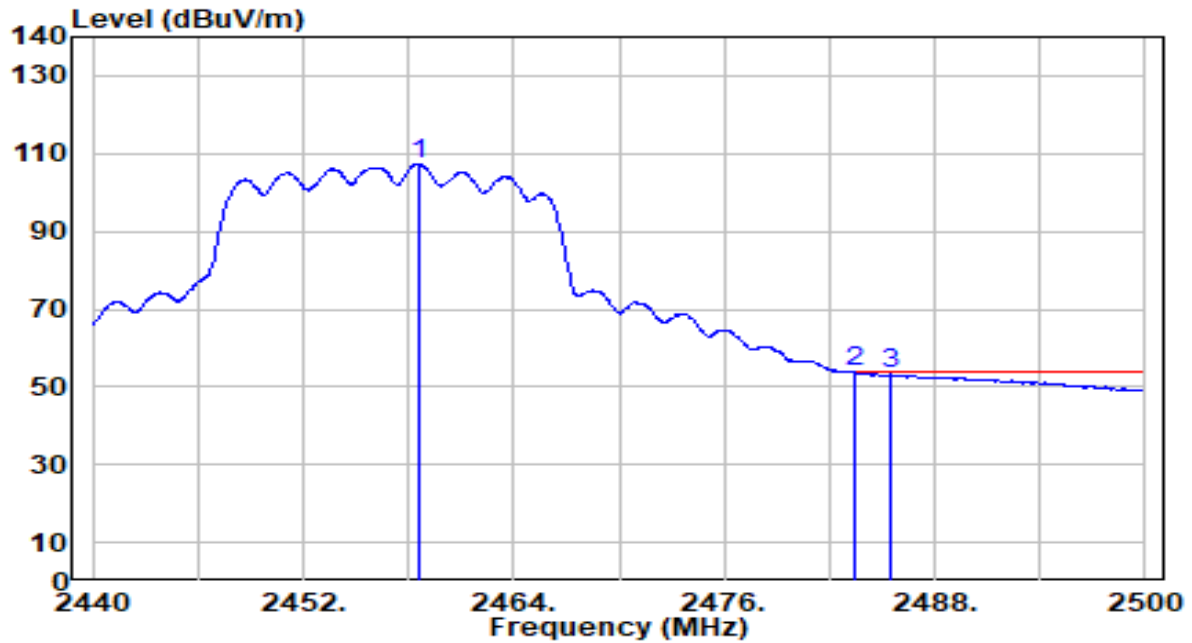


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2458.540        | 77.17          | 30.20      | 107.38               | N/A         | N/A            | 123         | 182         | Average           |
| 2  | * | 2483.500        | 23.56          | 30.29      | 53.84                | -0.16       | 54.00          | 123         | 182         | Average           |
| 3  |   | 2485.420        | 22.90          | 30.29      | 53.19                | -0.81       | 54.00          | 123         | 182         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router   | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                        | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 11_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

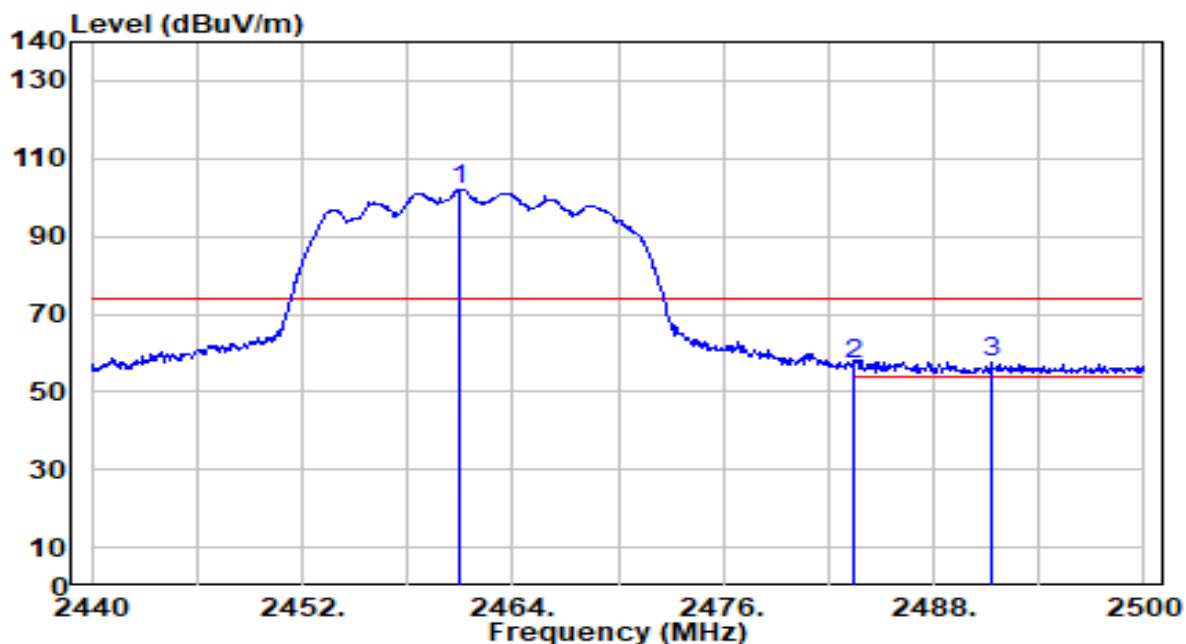


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2461.000        | 71.93          | 30.21      | 102.14               | N/A         | N/A            | 181         | 194         | Peak              |
| 2  | 2483.500        | 27.02          | 30.29      | 57.31                | -16.69      | 74.00          | 181         | 194         | Peak              |
| 3  | * 2491.300      | 27.46          | 30.31      | 57.77                | -16.23      | 74.00          | 181         | 194         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router   | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                        | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                     | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 11_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

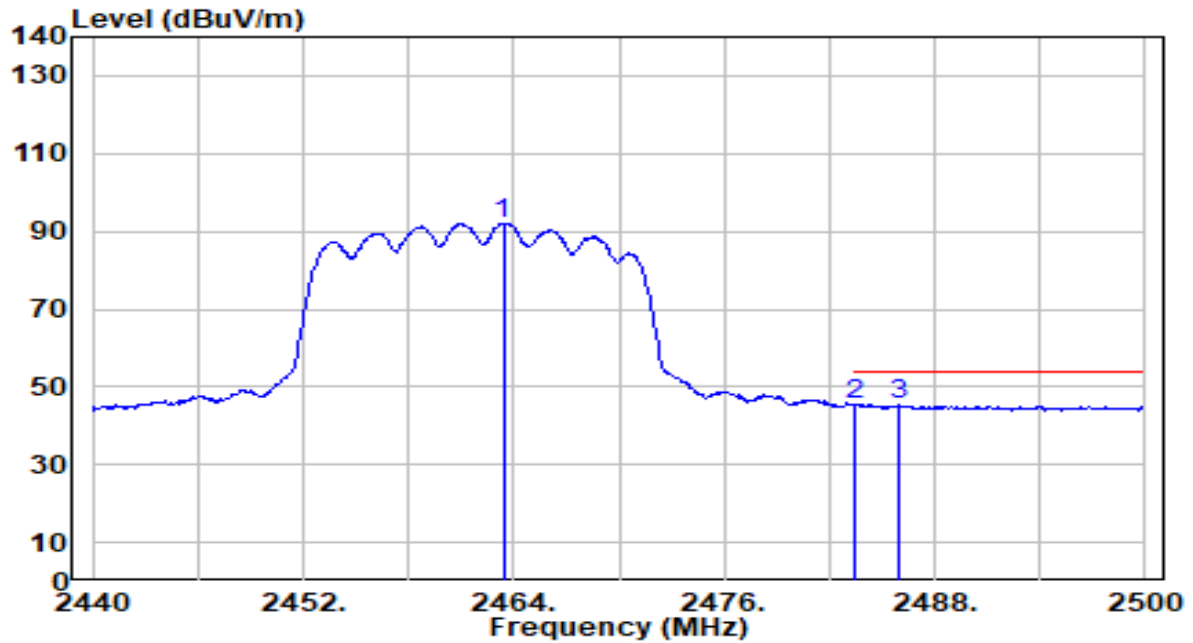


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2463.400        | 61.90          | 30.22      | 92.12                | N/A         | N/A            | 181         | 194         | Average           |
| 2  | * | 2483.500        | 15.06          | 30.29      | 45.35                | -8.65       | 54.00          | 181         | 194         | Average           |
| 3  |   | 2486.020        | 14.91          | 30.29      | 45.20                | -8.80       | 54.00          | 181         | 194         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router   | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                        | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                       | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 11_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

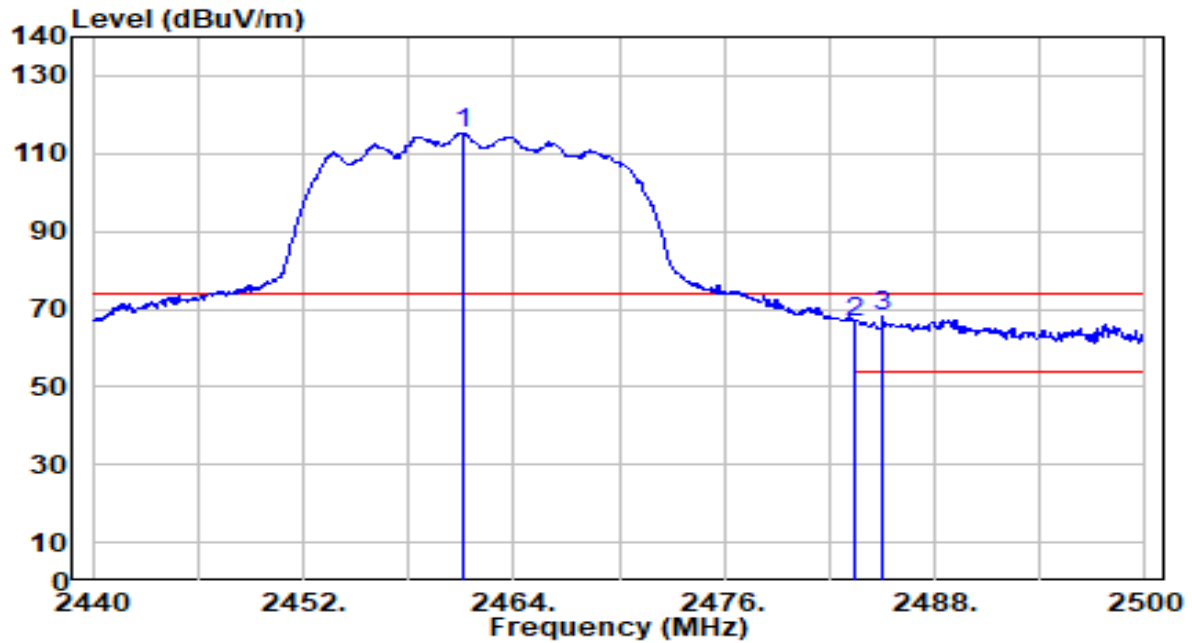


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2461.060        | 85.03          | 30.21      | 115.24               | N/A         | N/A            | 153         | 235         | Peak              |
| 2  | 2483.500        | 36.36          | 30.29      | 66.65                | -7.35       | 74.00          | 153         | 235         | Peak              |
| 3  | * 2485.060      | 37.68          | 30.29      | 67.97                | -6.03       | 74.00          | 153         | 235         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router   | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                        | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                       | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-20MHz_TX_CH 11_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

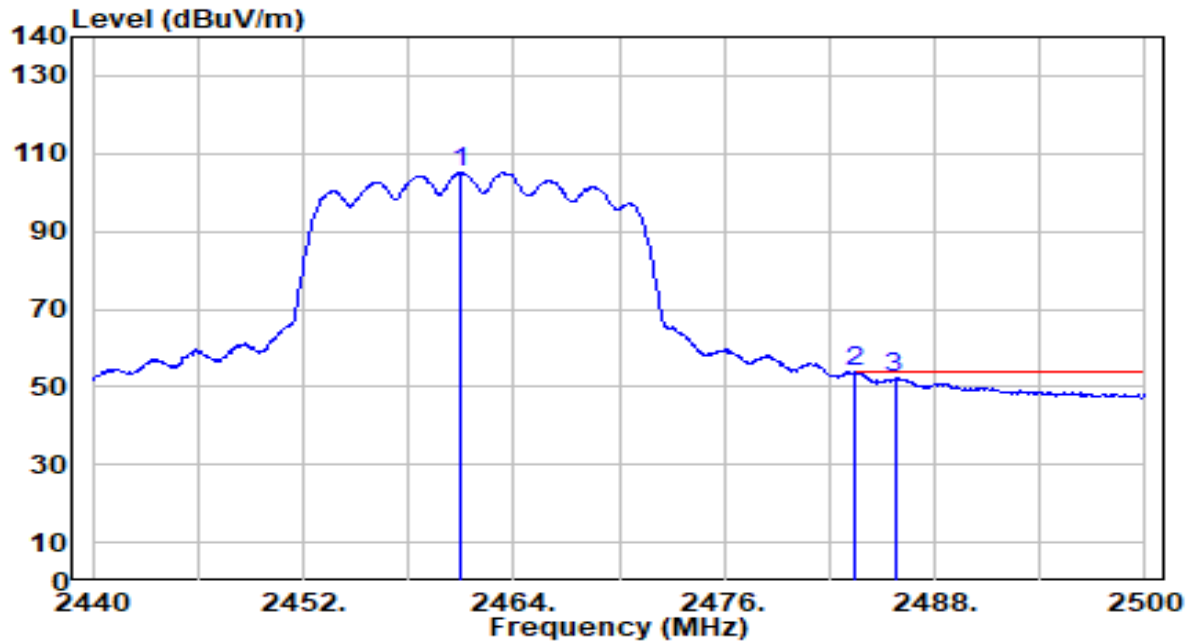


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2460.940        | 74.92          | 30.21      | 105.13               | N/A         | N/A            | 153         | 235         | Average           |
| 2  | * | 2483.500        | 23.59          | 30.29      | 53.88                | -0.12       | 54.00          | 153         | 235         | Average           |
| 3  |   | 2485.720        | 21.88          | 30.29      | 52.17                | -1.83       | 54.00          | 153         | 235         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-40MHz_TX_CH 3_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

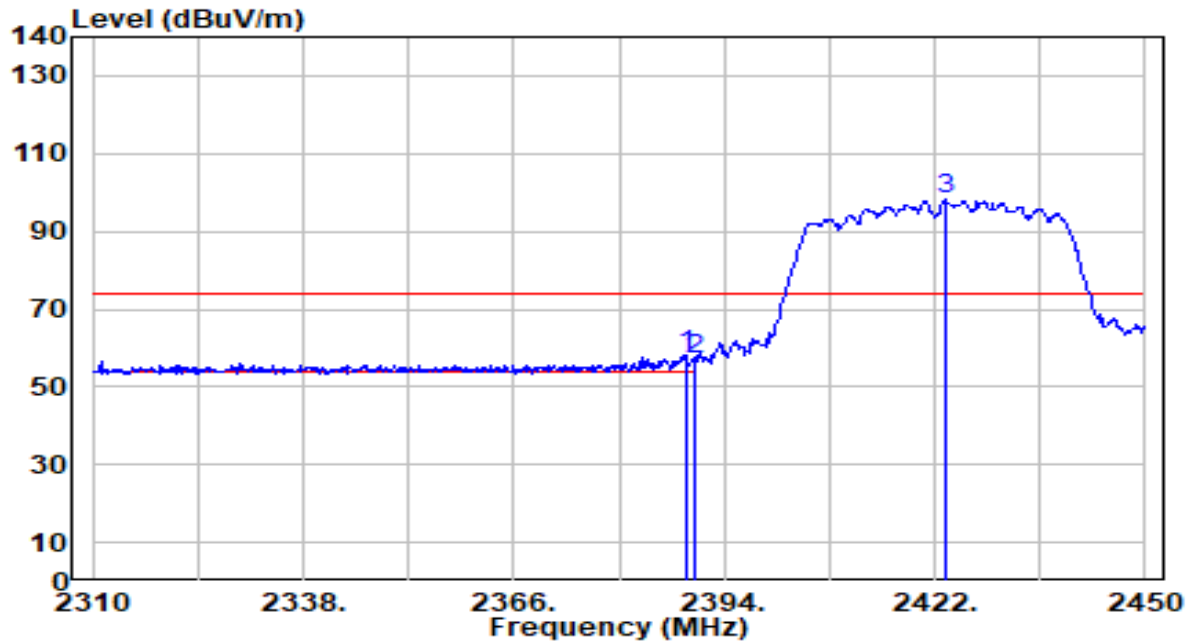


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2388.820        | 28.26          | 29.99      | 58.25                | -15.75      | 74.00          | 100         | 231         | Peak              |
| 2  |   | 2390.000        | 27.05          | 29.99      | 57.04                | -16.96      | 74.00          | 100         | 231         | Peak              |
| 3  |   | 2423.400        | 68.09          | 30.09      | 98.17                | N/A         | N/A            | 100         | 231         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-40MHz_TX_CH 3_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

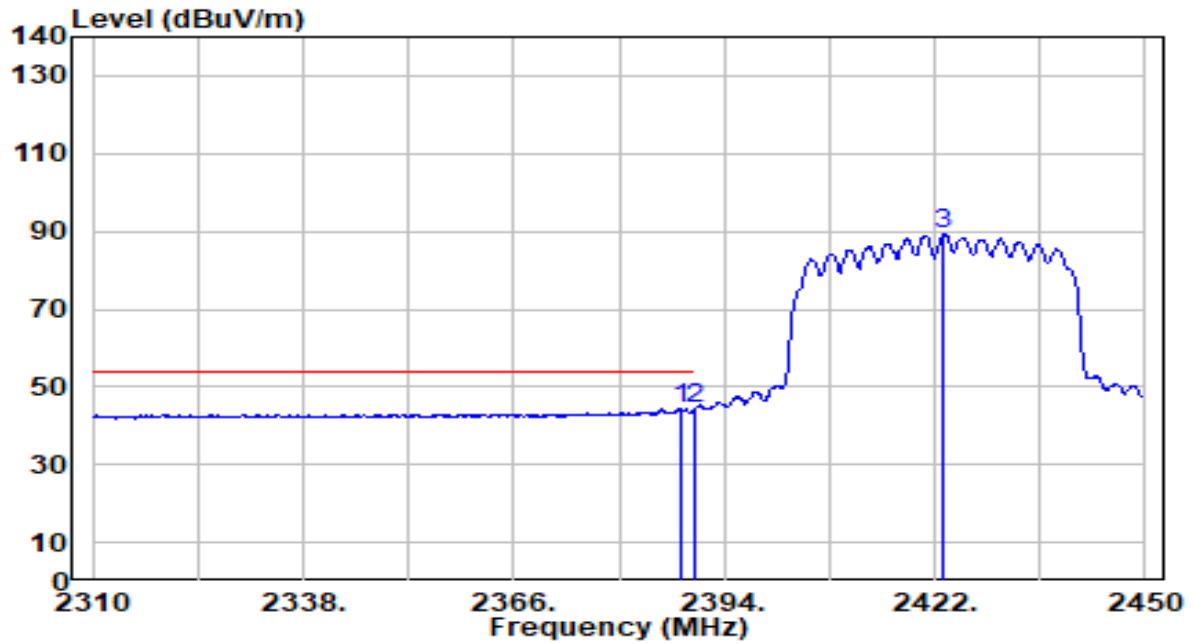


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2388.120        | 14.59          | 29.99      | 44.58                | -9.42       | 54.00          | 100         | 231         | Average           |
| 2  |   | 2390.000        | 14.15          | 29.99      | 44.14                | -9.86       | 54.00          | 100         | 231         | Average           |
| 3  |   | 2423.260        | 59.23          | 30.09      | 89.32                | N/A         | N/A            | 100         | 231         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-40MHz_TX_CH 3_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

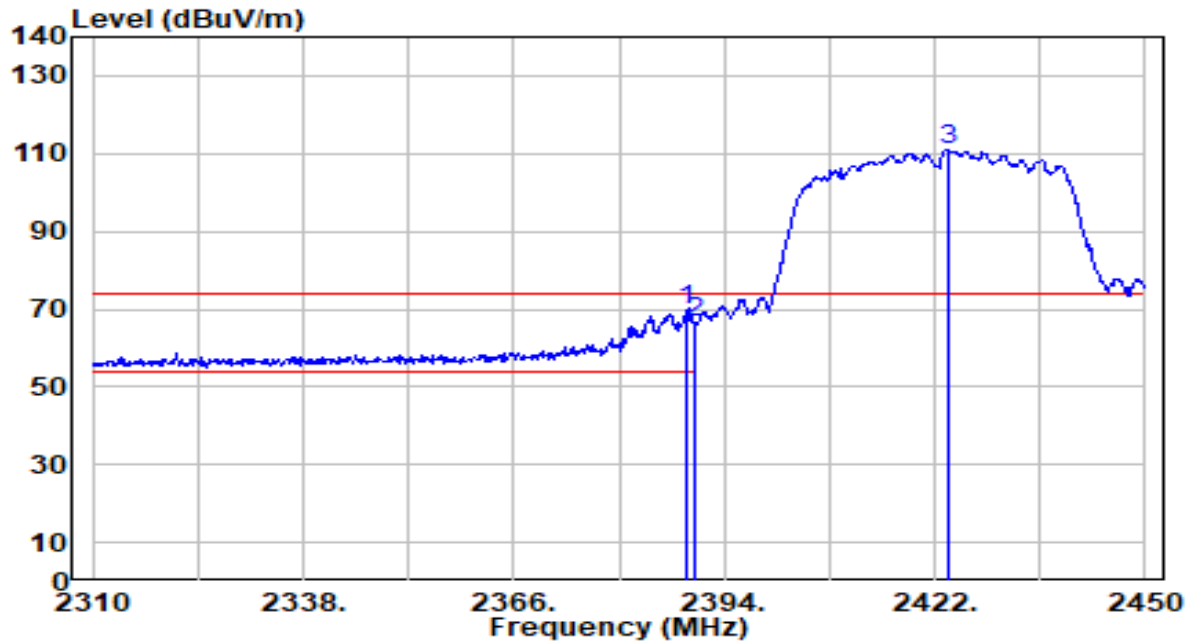


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2388.960        | 39.59          | 29.99      | 69.58                | -4.42       | 74.00          | 122         | 45          | Peak              |
| 2  |   | 2390.000        | 36.37          | 29.99      | 66.37                | -7.63       | 74.00          | 122         | 45          | Peak              |
| 3  |   | 2423.680        | 80.90          | 30.09      | 110.99               | N/A         | N/A            | 122         | 45          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-40MHz_TX_CH 3_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

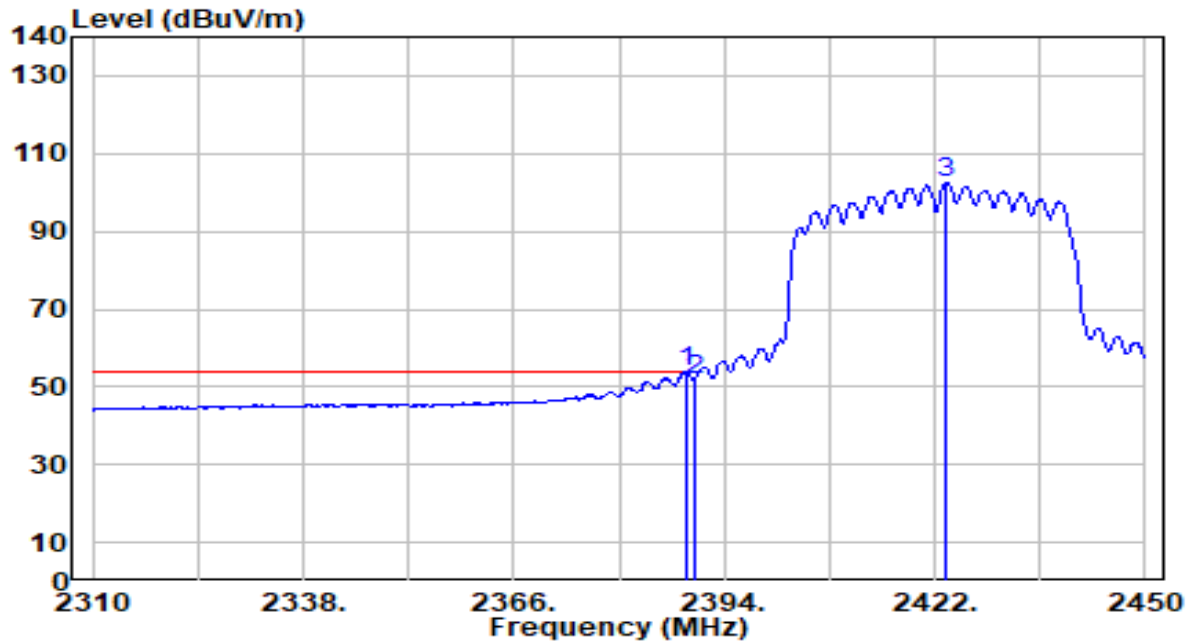


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2388.820        | 23.90          | 29.99      | 53.89                | -0.11       | 54.00          | 122         | 45          | Average           |
| 2  |   | 2390.000        | 21.64          | 29.99      | 51.63                | -2.37       | 54.00          | 122         | 45          | Average           |
| 3  |   | 2423.540        | 72.21          | 30.09      | 102.30               | N/A         | N/A            | 122         | 45          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-40MHz_TX_CH 6_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

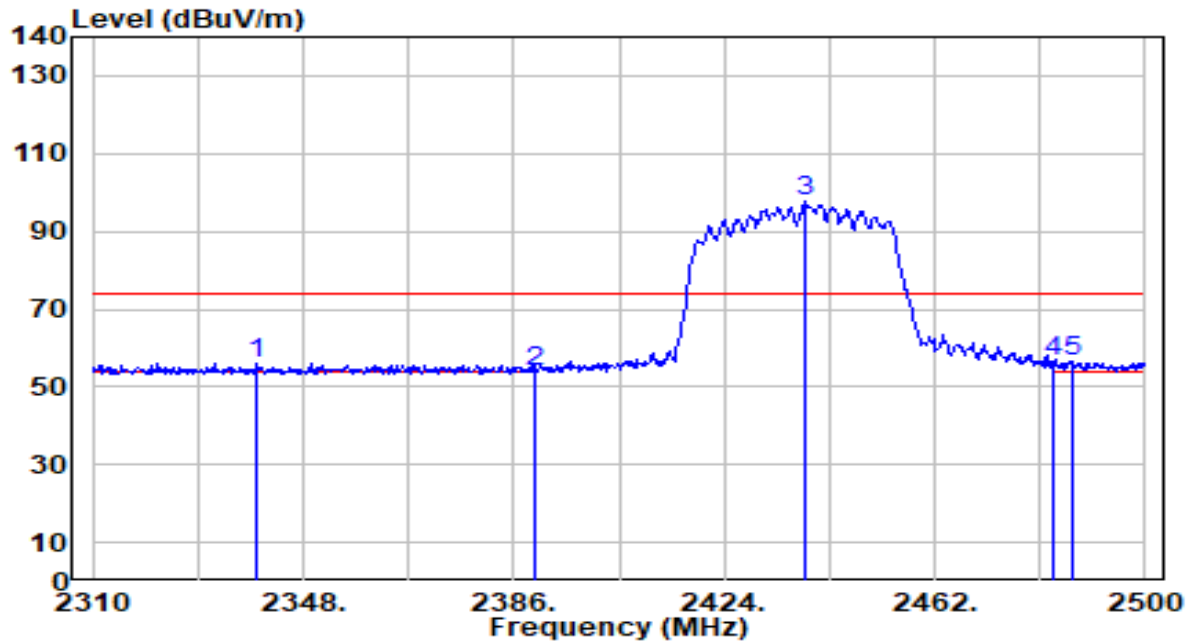


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2339.640        | 26.24          | 29.93      | 56.17                | -17.83      | 74.00          | 149         | 312         | Peak              |
| 2  | 2390.000        | 24.10          | 29.99      | 54.10                | -19.90      | 74.00          | 149         | 312         | Peak              |
| 3  | 2438.820        | 67.85          | 30.14      | 97.98                | N/A         | N/A            | 149         | 312         | Peak              |
| 4  | 2483.500        | 26.09          | 30.29      | 56.38                | -17.62      | 74.00          | 149         | 312         | Peak              |
| 5  | * 2487.080      | 26.11          | 30.30      | 56.41                | -17.59      | 74.00          | 149         | 312         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-40MHz_TX_CH 6_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

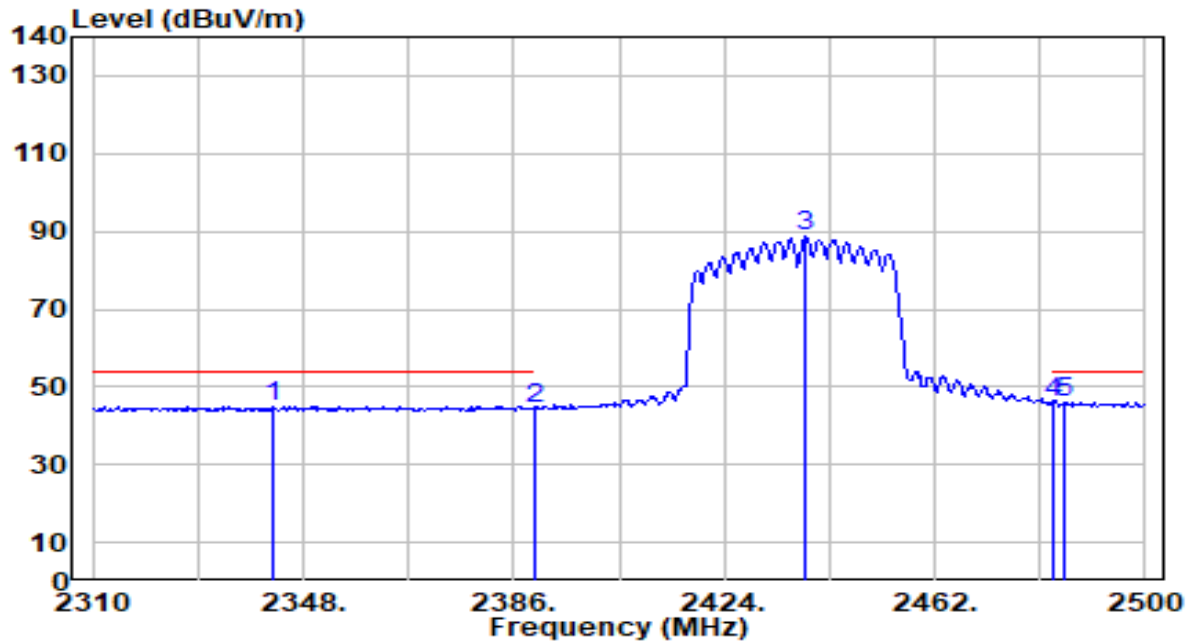


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2342.490        | 15.14          | 29.93      | 45.07                | -8.93       | 54.00          | 149         | 312         | Average           |
| 2  | 2390.000        | 14.25          | 29.99      | 44.24                | -9.76       | 54.00          | 149         | 312         | Average           |
| 3  | 2438.630        | 58.50          | 30.14      | 88.64                | N/A         | N/A            | 149         | 312         | Average           |
| 4  | 2483.500        | 15.65          | 30.29      | 45.93                | -8.07       | 54.00          | 149         | 312         | Average           |
| 5  | * 2485.180      | 15.81          | 30.29      | 46.10                | -7.90       | 54.00          | 149         | 312         | Average           |

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-40MHz_TX_CH 6_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

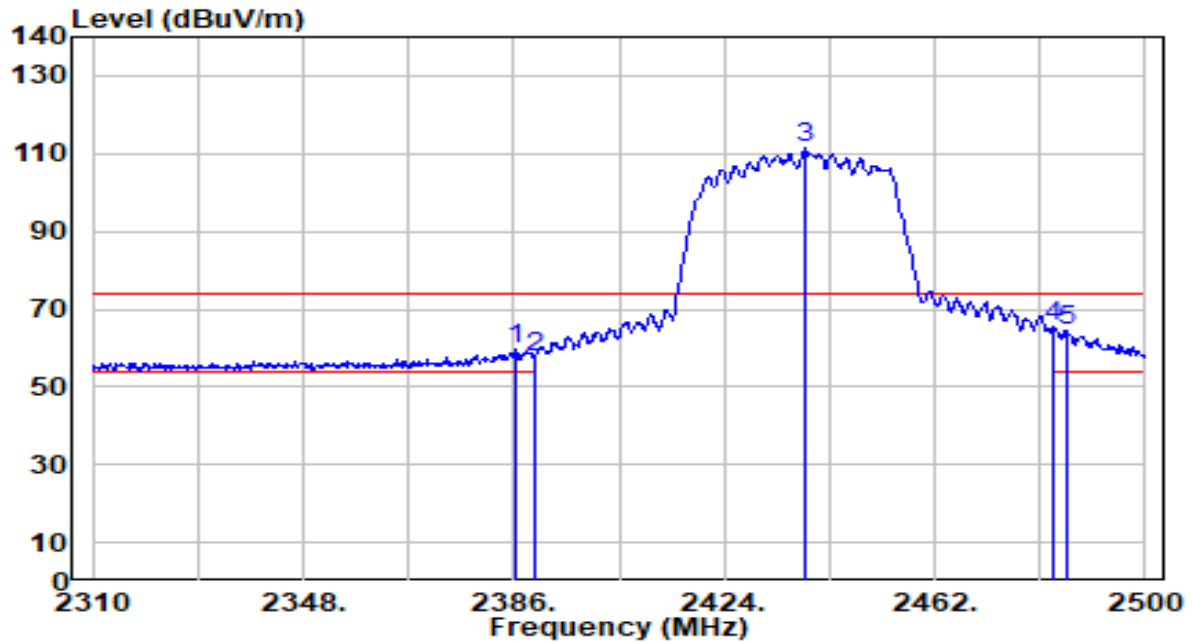


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2386.190        | 29.49          | 29.99      | 59.48                | -14.52      | 74.00          | 174         | 237         | Peak              |
| 2  | 2390.000        | 27.39          | 29.99      | 57.39                | -16.61      | 74.00          | 174         | 237         | Peak              |
| 3  | 2438.630        | 81.33          | 30.14      | 111.47               | N/A         | N/A            | 174         | 237         | Peak              |
| 4  | * 2483.500      | 35.07          | 30.29      | 65.36                | -8.64       | 74.00          | 174         | 237         | Peak              |
| 5  | 2485.940        | 34.42          | 30.29      | 64.72                | -9.28       | 74.00          | 174         | 237         | Peak              |

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-40MHz_TX_CH 6_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

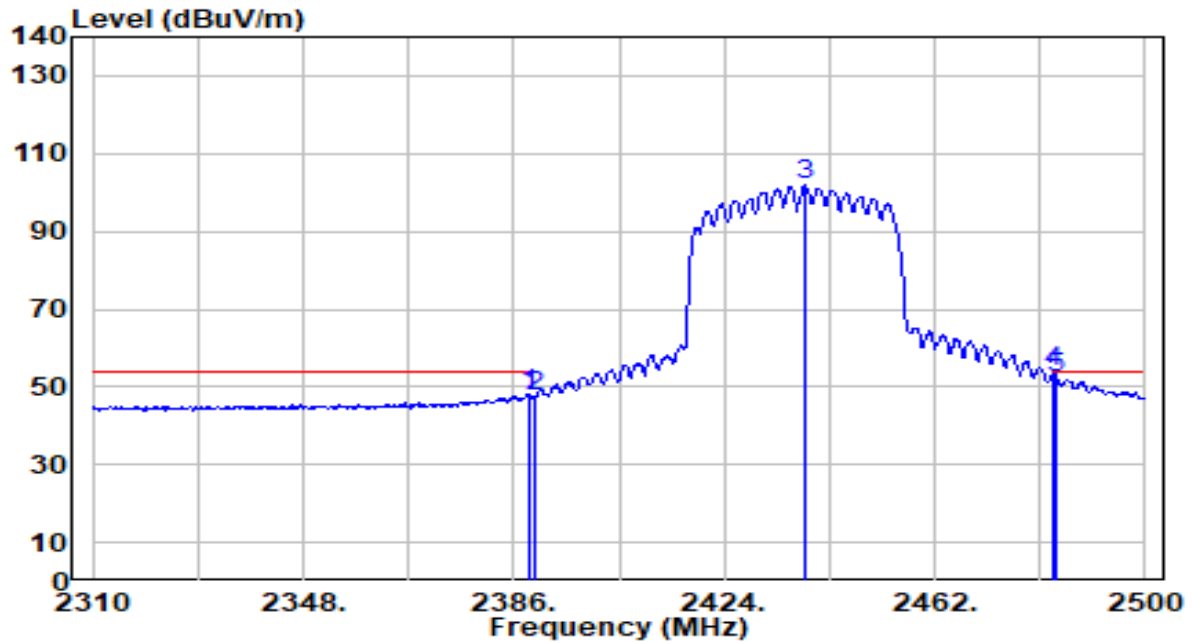


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2388.660        | 18.06          | 29.99      | 48.05                | -5.95       | 54.00          | 174         | 237         | Average           |
| 2  | 2390.000        | 17.34          | 29.99      | 47.34                | -6.66       | 54.00          | 174         | 237         | Average           |
| 3  | 2438.630        | 71.67          | 30.14      | 101.80               | N/A         | N/A            | 174         | 237         | Average           |
| 4  | * 2483.500      | 23.58          | 30.29      | 53.86                | -0.14       | 54.00          | 174         | 237         | Average           |
| 5  | 2484.040        | 22.08          | 30.29      | 52.37                | -1.63       | 54.00          | 174         | 237         | Average           |

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-40MHz_TX_CH 9_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

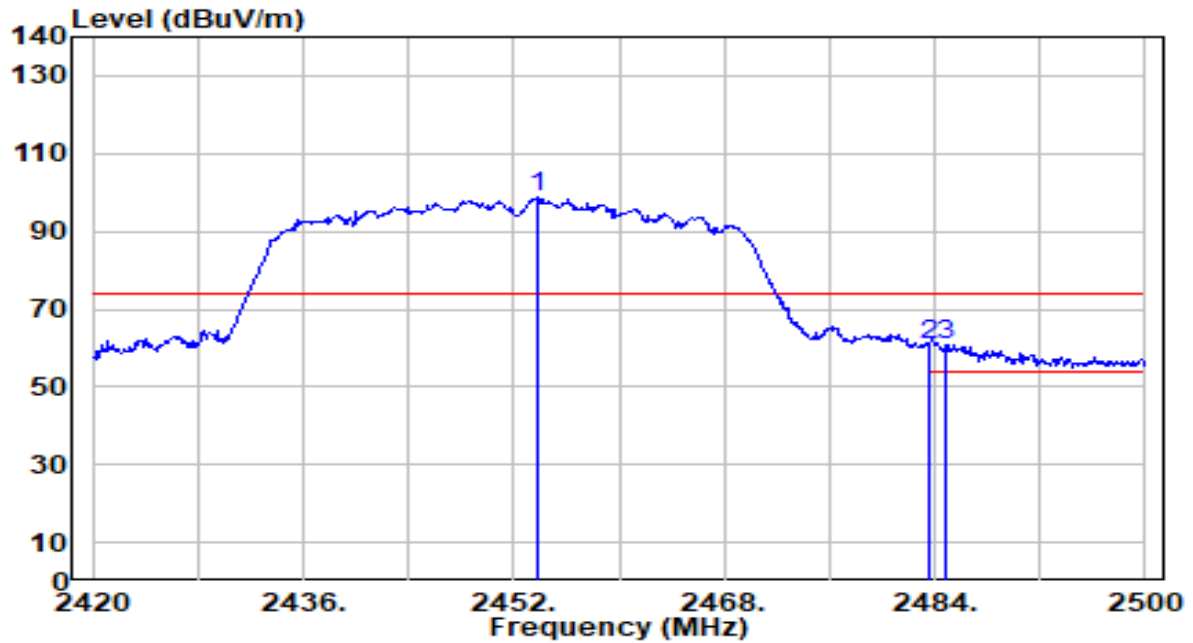


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2453.760        | 68.70          | 30.19      | 98.89                | N/A         | N/A            | 100         | 220         | Peak              |
| 2  | 2483.500        | 30.52          | 30.29      | 60.80                | -13.20      | 74.00          | 100         | 220         | Peak              |
| 3  | * 2484.800      | 30.61          | 30.29      | 60.90                | -13.10      | 74.00          | 100         | 220         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-40MHz_TX_CH 9_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

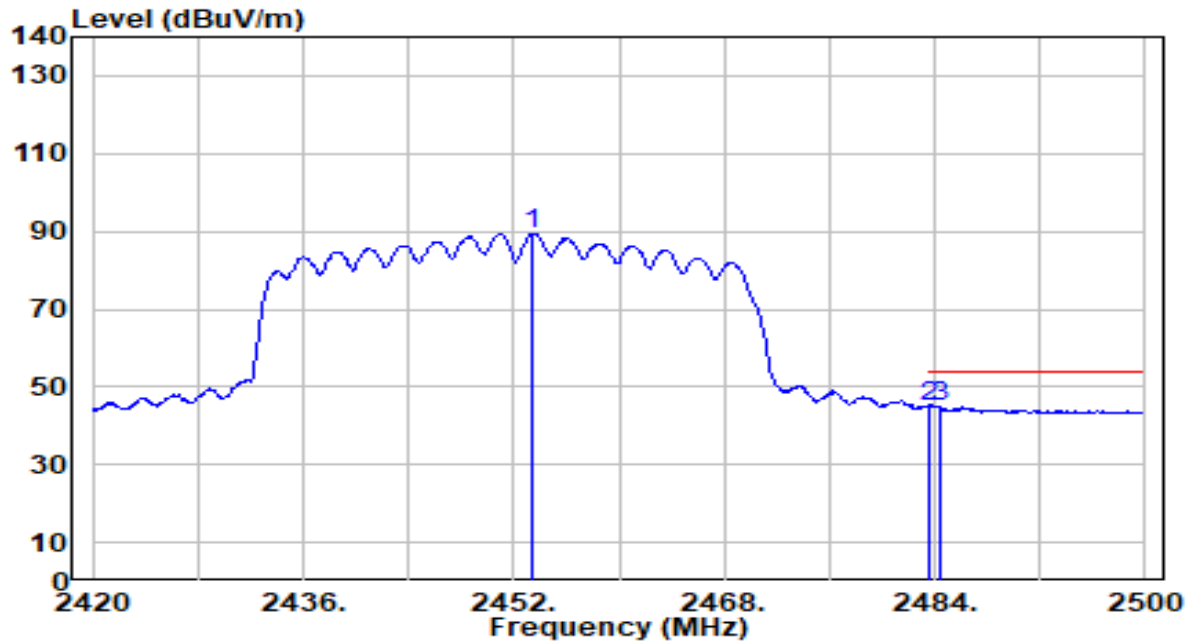


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2453.440        | 59.14          | 30.19      | 89.33                | N/A         | N/A            | 100         | 220         | Average           |
| 2  | * | 2483.500        | 14.78          | 30.29      | 45.06                | -8.94       | 54.00          | 100         | 220         | Average           |
| 3  |   | 2484.480        | 14.48          | 30.29      | 44.76                | -9.24       | 54.00          | 100         | 220         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-40MHz_TX_CH 9_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

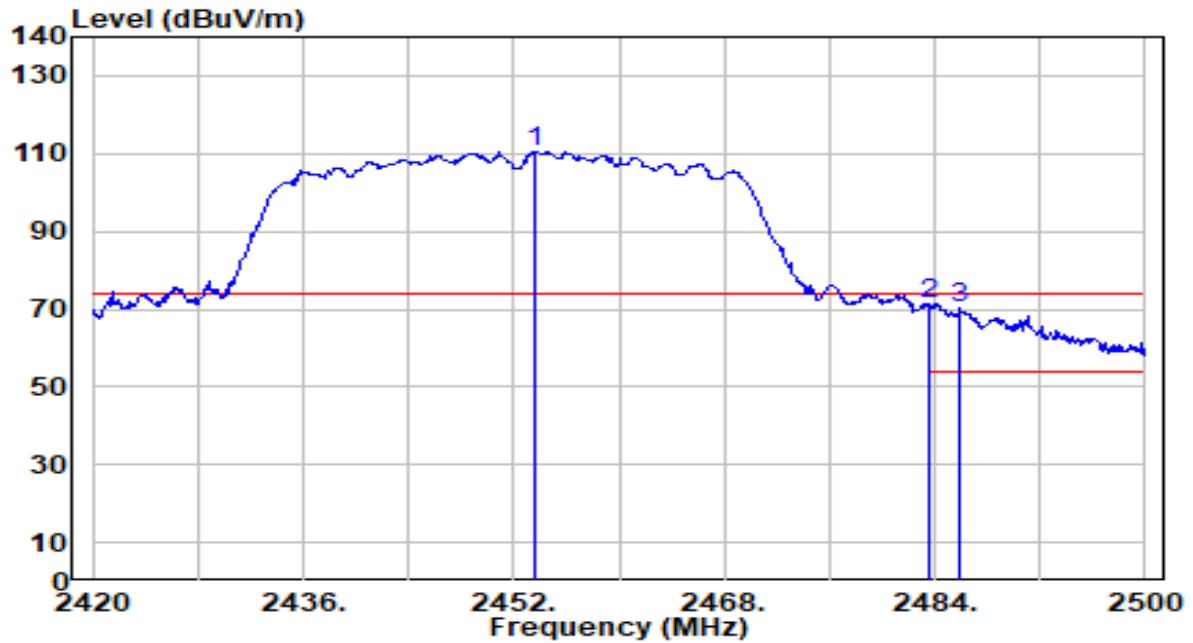


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2453.680        | 80.38          | 30.19      | 110.56               | N/A         | N/A            | 100         | 180         | Peak              |
| 2  | * | 2483.500        | 41.04          | 30.29      | 71.32                | -2.68       | 74.00          | 100         | 180         | Peak              |
| 3  |   | 2485.920        | 39.74          | 30.29      | 70.03                | -3.97       | 74.00          | 100         | 180         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-18   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 22°C /63%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11n-40MHz_TX_CH 9_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

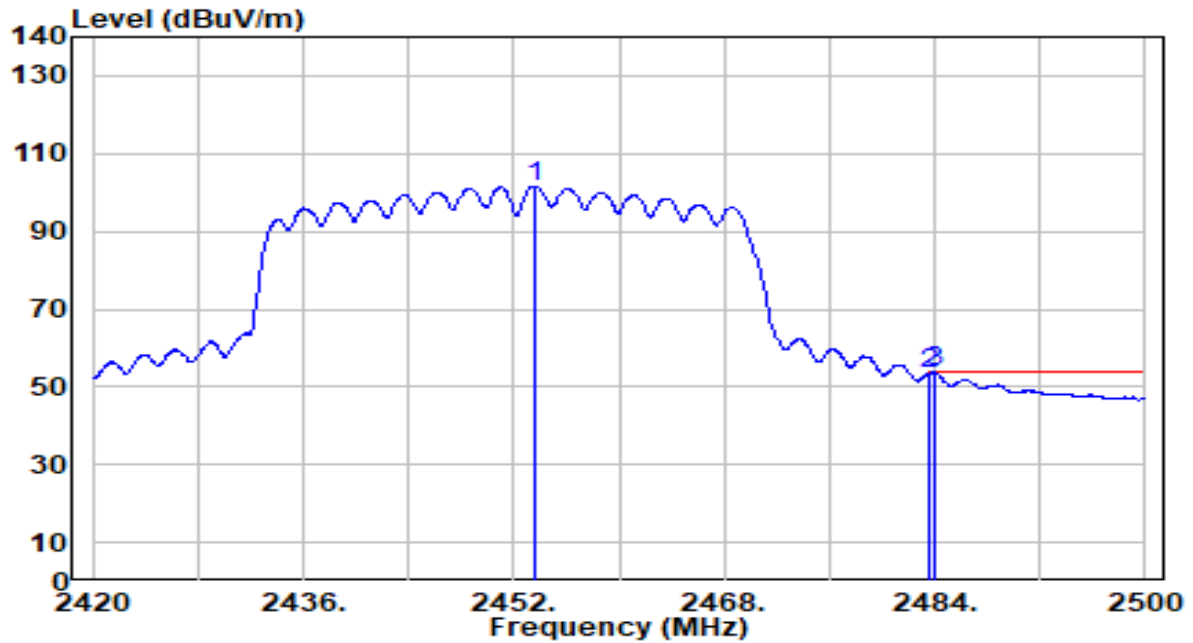

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2453.520        | 71.50          | 30.19      | 101.69               | N/A         | N/A            | 100         | 180         | Average           |
| 2  | 2483.500        | 23.08          | 30.29      | 53.36                | -0.64       | 54.00          | 100         | 180         | Average           |
| 3  | * 2483.920      | 23.56          | 30.29      | 53.85                | -0.15       | 54.00          | 100         | 180         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7.8. AC Conducted Emissions Measurement


### 7.8.1. Test Limit

| FCC Part 15 Subpart C Paragraph 15.207 Limits |           |           |
|-----------------------------------------------|-----------|-----------|
| Frequency (MHz)                               | QP (dBuV) | AV (dBuV) |
| 0.15 - 0.50                                   | 66 - 56   | 56 - 46   |
| 0.50 - 5.0                                    | 56        | 46        |
| 5.0 - 30                                      | 60        | 50        |

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.8.2. Test Setup

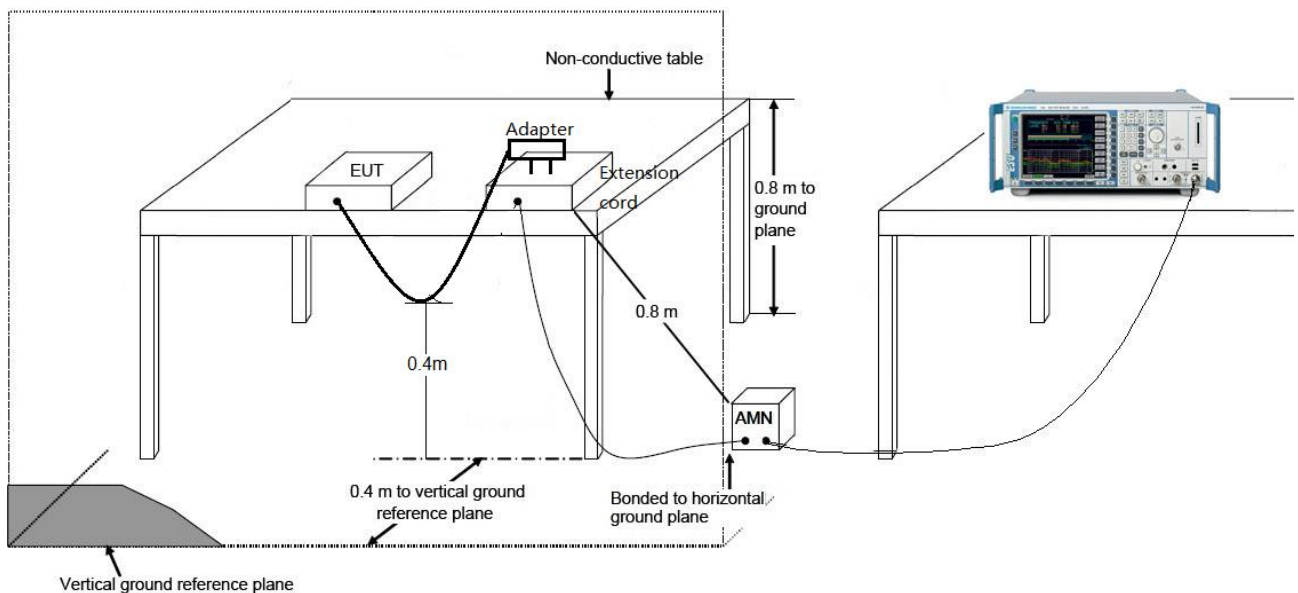

### 7.8.3. Test Result

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-24   |
| Factor    | CE_ENV216-L1 (Filter ON)      | Temp. / Humidity     | 23.4°C /56%  |
| Polarity  | Line1                         | Site / Test Engineer | SR2 / Tim    |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

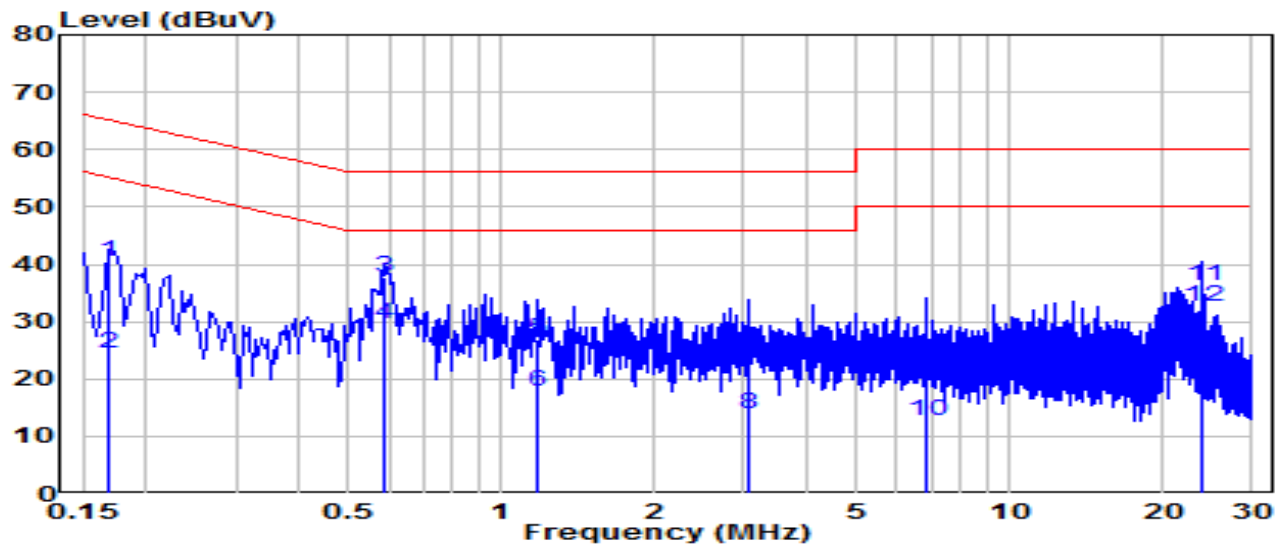


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | 0.168           | 30.95          | 9.62     | 40.57              | -24.49      | 65.06        | QP                |
| 2  | 0.168           | 14.94          | 9.62     | 24.56              | -30.50      | 55.06        | Average           |
| 3  | * 0.586         | 28.02          | 9.65     | 37.66              | -18.34      | 56.00        | QP                |
| 4  | * 0.586         | 19.82          | 9.65     | 29.47              | -16.53      | 46.00        | Average           |
| 5  | 1.180           | 17.08          | 9.67     | 26.75              | -29.25      | 56.00        | QP                |
| 6  | 1.180           | 8.23           | 9.67     | 17.91              | -28.09      | 46.00        | Average           |
| 7  | 3.079           | 13.04          | 9.71     | 22.76              | -33.24      | 56.00        | QP                |
| 8  | 3.079           | 4.21           | 9.71     | 13.93              | -32.07      | 46.00        | Average           |
| 9  | 6.863           | 10.91          | 9.79     | 20.69              | -39.31      | 60.00        | QP                |
| 10 | 6.863           | 2.78           | 9.79     | 12.57              | -37.43      | 50.00        | Average           |
| 11 | 23.998          | 26.40          | 9.91     | 36.31              | -23.69      | 60.00        | QP                |
| 12 | 23.998          | 22.78          | 9.91     | 32.69              | -17.31      | 50.00        | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-24   |
| Factor    | CE_ENV216-N (Filter ON)       | Temp. / Humidity     | 23.4°C /56%  |
| Polarity  | Neutral                       | Site / Test Engineer | SR2 / Tim    |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

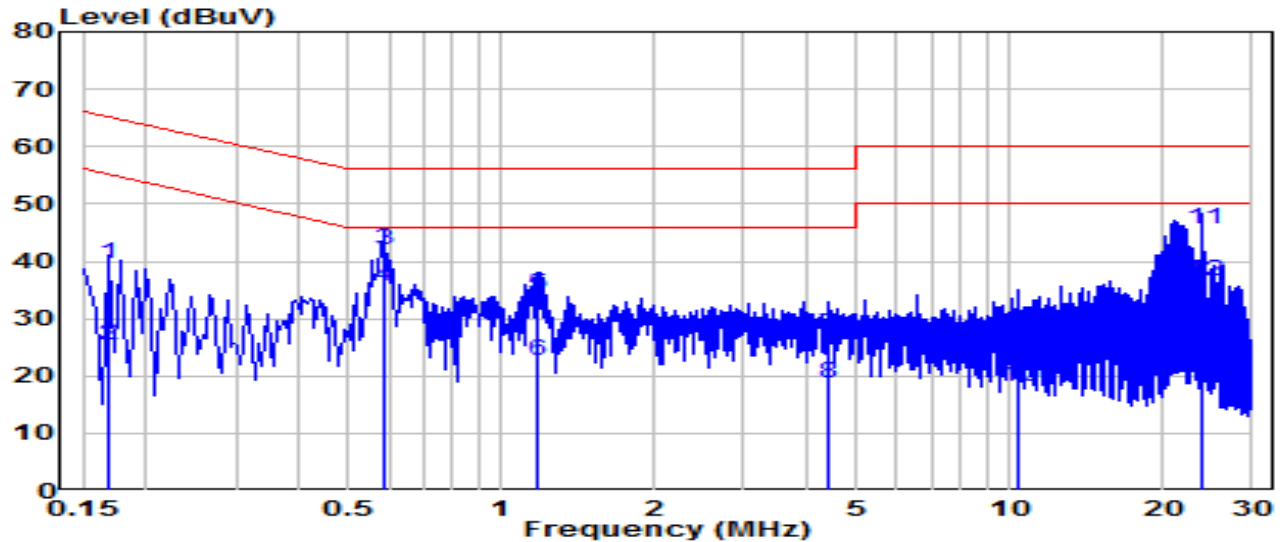


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | 0.168           | 29.96          | 9.62     | 39.58              | -25.48      | 65.06        | QP                |
| 2  | 0.168           | 15.64          | 9.62     | 25.26              | -29.80      | 55.06        | Average           |
| 3  | * 0.586         | 32.28          | 9.65     | 41.93              | -14.07      | 56.00        | QP                |
| 4  | * 0.586         | 25.92          | 9.65     | 35.57              | -10.43      | 46.00        | Average           |
| 5  | 1.176           | 24.45          | 9.67     | 34.13              | -21.87      | 56.00        | QP                |
| 6  | 1.176           | 13.10          | 9.67     | 22.77              | -23.23      | 46.00        | Average           |
| 7  | 4.416           | 17.28          | 9.74     | 27.02              | -28.98      | 56.00        | QP                |
| 8  | 4.416           | 8.88           | 9.74     | 18.62              | -27.38      | 46.00        | Average           |
| 9  | 10.418          | 17.87          | 9.88     | 27.75              | -32.25      | 60.00        | QP                |
| 10 | 10.418          | 8.24           | 9.88     | 18.12              | -31.88      | 50.00        | Average           |
| 11 | 23.998          | 35.66          | 10.01    | 45.67              | -14.33      | 60.00        | QP                |
| 12 | 23.998          | 26.39          | 10.01    | 36.41              | -13.59      | 50.00        | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-24   |
| Factor    | CE_ENV216-L1 (Filter ON)      | Temp. / Humidity     | 23.4°C /56%  |
| Polarity  | Line1                         | Site / Test Engineer | SR2 / Bob    |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1 | Test Voltage         | AC 240V/60Hz |

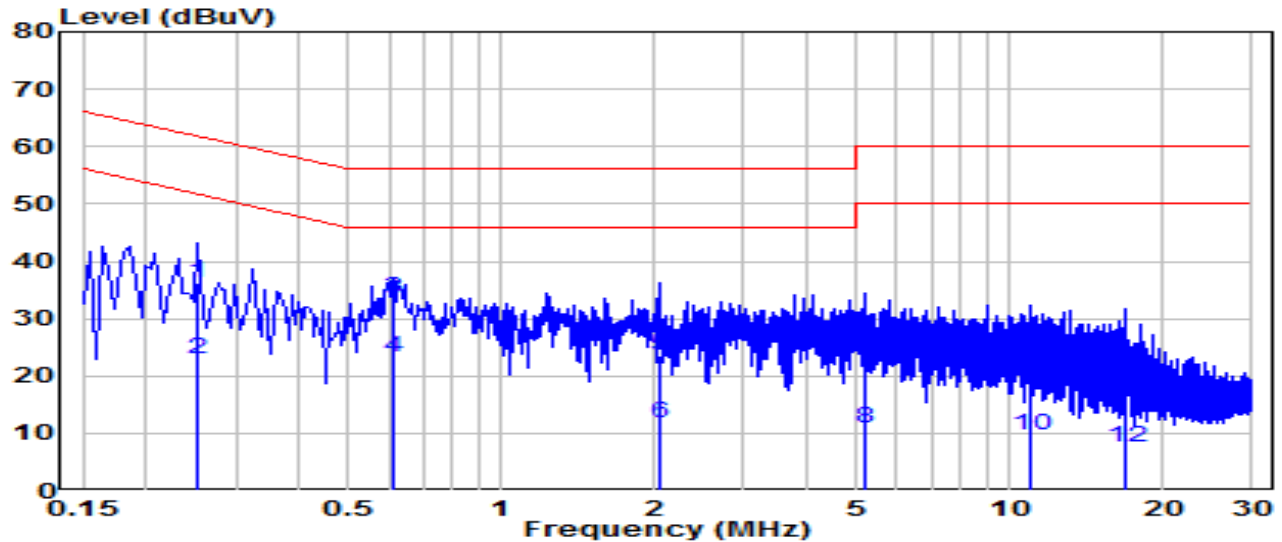


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | 0.253           | 26.55          | 9.63     | 36.18              | -25.46      | 61.64        | QP                |
| 2  | 0.253           | 13.34          | 9.63     | 22.97              | -28.67      | 51.64        | Average           |
| 3  | * 0.613         | 23.77          | 9.65     | 33.42              | -22.58      | 56.00        | QP                |
| 4  | * 0.613         | 13.46          | 9.65     | 23.10              | -22.90      | 46.00        | Average           |
| 5  | 2.040           | 14.00          | 9.69     | 23.69              | -32.31      | 56.00        | QP                |
| 6  | 2.040           | 2.01           | 9.69     | 11.71              | -34.29      | 46.00        | Average           |
| 7  | 5.221           | 12.90          | 9.75     | 22.65              | -37.35      | 60.00        | QP                |
| 8  | 5.221           | 0.97           | 9.75     | 10.72              | -39.28      | 50.00        | Average           |
| 9  | 11.057          | 11.91          | 9.87     | 21.78              | -38.22      | 60.00        | QP                |
| 10 | 11.057          | -0.24          | 9.87     | 9.63               | -40.37      | 50.00        | Average           |
| 11 | 16.933          | 8.26           | 9.91     | 18.17              | -41.83      | 60.00        | QP                |
| 12 | 16.933          | -2.30          | 9.91     | 7.60               | -42.40      | 50.00        | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).



|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | AC750 Dual Band Wi-Fi Router  | Date of Test         | 2023-04-24   |
| Factor    | CE_ENV216-N (Filter ON)       | Temp. / Humidity     | 23.4°C /56%  |
| Polarity  | Neutral                       | Site / Test Engineer | SR2 / Bob    |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1 | Test Voltage         | AC 240V/60Hz |

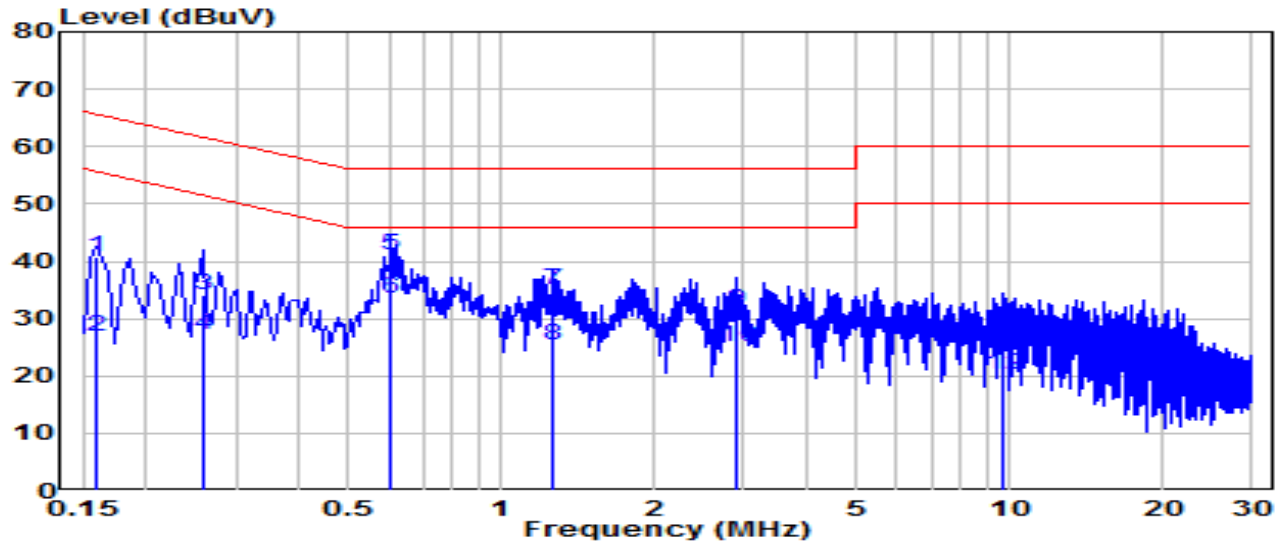

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | 0.159           | 31.07          | 9.62     | 40.69              | -24.82      | 65.52        | QP                |
| 2  | 0.159           | 17.33          | 9.62     | 26.95              | -28.57      | 55.52        | Average           |
| 3  | 0.258           | 24.49          | 9.63     | 34.11              | -27.38      | 61.50        | QP                |
| 4  | 0.258           | 17.51          | 9.63     | 27.13              | -24.36      | 51.50        | Average           |
| 5  | * 0.604         | 31.36          | 9.65     | 41.01              | -14.99      | 56.00        | QP                |
| 6  | * 0.604         | 23.82          | 9.65     | 33.46              | -12.54      | 46.00        | Average           |
| 7  | 1.261           | 25.37          | 9.68     | 35.04              | -20.96      | 56.00        | QP                |
| 8  | 1.261           | 15.69          | 9.68     | 25.36              | -20.64      | 46.00        | Average           |
| 9  | 2.890           | 21.69          | 9.71     | 31.40              | -24.60      | 56.00        | QP                |
| 10 | 2.890           | 15.30          | 9.71     | 25.01              | -20.99      | 46.00        | Average           |
| 11 | 9.694           | 18.21          | 9.86     | 28.08              | -31.92      | 60.00        | QP                |
| 12 | 9.694           | 10.43          | 9.86     | 20.29              | -29.71      | 50.00        | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

## **Appendix A : Test Setup Photograph**

Refer to “2304TW0106-UT” file.

## **Appendix B : External Photograph**

Refer to “2304TW0106-UE” file.

## **Appendix C : Internal Photograph**

Refer to “2304TW0106-UI” file.

\_\_\_\_\_ The End \_\_\_\_\_