



# TEST REPORT

Applicant Name : Ningbo Joinus Win Future Electronic Technology Co., Ltd.  
Address : No.9 Yongxing Road, West Area, Guan Haiwei Industrial Zone,  
Guan Haiwei, Cixi, Ningbo, Zhejiang, China 315315  
Report Number : SZNS1220427-17127E-RF-00  
FCC ID: 2A632-JHT02

## Test Standard (s)

FCC PART 15.231

## Sample Description

Product Type: Remote Control Transmitter  
Model No.: JHT2202  
Multiple Model(s) No.: URT2202 (Please refer to DOS for Model difference)  
Trade Mark: **SURAIELEC**  
Date Received: 2022/04/27  
Report Date: 2022/07/06

Test Result:	Pass*
--------------	-------

\* In the configuration tested, the EUT complied with the standards above.

## Prepared and Checked By:

Nick Fang  
EMC Engineer

## Approved By:

Robert Li  
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China  
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
TEST METHODOLOGY .....	3
MEASUREMENT UNCERTAINTY .....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
JUSTIFICATION .....	5
SPECIAL ACCESSORIES.....	5
EQUIPMENT MODIFICATIONS .....	5
SUPPORT EQUIPMENT LIST AND DETAILS .....	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP .....	6
<b>SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>TEST EQUIPMENT LIST AND DETAILS .....</b>	<b>8</b>
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>9</b>
APPLICABLE STANDARD .....	9
ANTENNA CONNECTOR CONSTRUCTION .....	9
<b>FCC §15.205, §15.209, §15.231 (B) - RADIATED EMISSIONS .....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
EUT SETUP .....	10
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE .....	11
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	12
TEST DATA .....	12
<b>FCC §15.231(A) (1) - DEACTIVATION TESTING.....</b>	<b>17</b>
APPLICABLE STANDARD .....	17
TEST PROCEDURE .....	17
TEST DATA .....	17
<b>FCC §15.231(C) – 20 DB EMISSION BANDWIDTH TESTING .....</b>	<b>18</b>
APPLICABLE STANDARD .....	18
TEST PROCEDURE .....	18
TEST DATA .....	18

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Frequency Range	433.92MHz
Modulation Technique	FSK
E-field strength	80.21dBuV/m@3m
Antenna Specification*	-1.0 dBi (provided by the applicant)
Voltage Range	DC 12V from battery
Sample number	SZNS1220427-17127E-RF-S1 (Assigned by ATC)
Sample/EUT Status	Good condition

### Objective

All the test measurements were performed according to the measurement procedure described in ANSI C63.10 - 2013.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.209, 15.35(c) and 15.231 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10 - 2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

## Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

## SYSTEM TEST CONFIGURATION

### Justification

The system was configured for testing by manufacturer.

Operating frequency: 433.92MHz

### Special Accessories

No special accessories was used

### Equipment Modifications

No modification was made to the EUT.

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

### External I/O Cable

Cable Description	Length (m)	From Port	To
/	/	/	/

**Block Diagram of Test Setup**

**For radiated emission**

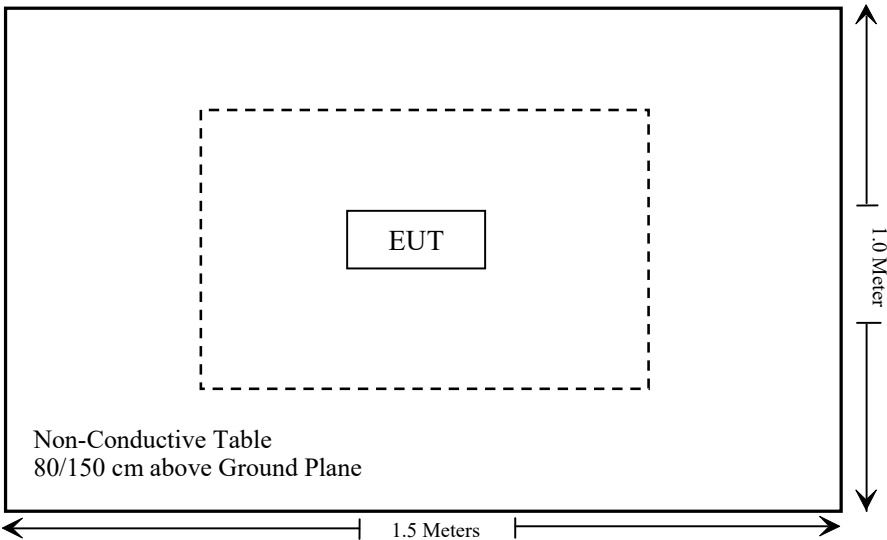

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207 (a)	Conducted Emissions	Not Applicable
§15.205, §15.209, §15.231(b)	Radiated Emissions	Compliant
§15.231 (c)	20dB Emission Bandwidth	Compliant
§15.231 (a) (1)	Deactivation	Compliant

Not Applicable: The EUT is powered by battery only.

**TEST EQUIPMENT LIST AND DETAILS**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13

\* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

---

## **FCC §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **Antenna Connector Construction**

The EUT has one internal antenna arrangement which was permanently attached. And the antenna gain is -1.0dBi; fulfill the requirement of this section. Please refer to EUT photos.

Result: Compliant.

## FCC §15.205, §15.209, §15.231 (b) - RADIATED EMISSIONS

### Applicable Standard

FCC §15.205, §15.209, §15.231 (b)

According to FCC §15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:


Fundamental frequency (MHz)	Field Strength of Fundamental (Microvolts /meter)	Field Strength of spurious emissions ((Microvolts /meter)
40.66-40.70	2250	225
70-130	1250	125
130-174	1250 to 3750**	125 to 375**
174-260	3750	375
260-470	3750 to 12500**	375 to 1250**
Above 470	12500	1250


\*Linear interpolations.

The above field strength limits are specified at a distance of 3-meters the tighter limits apply at the band edges.

### EUT Setup

Below 1 GHz:

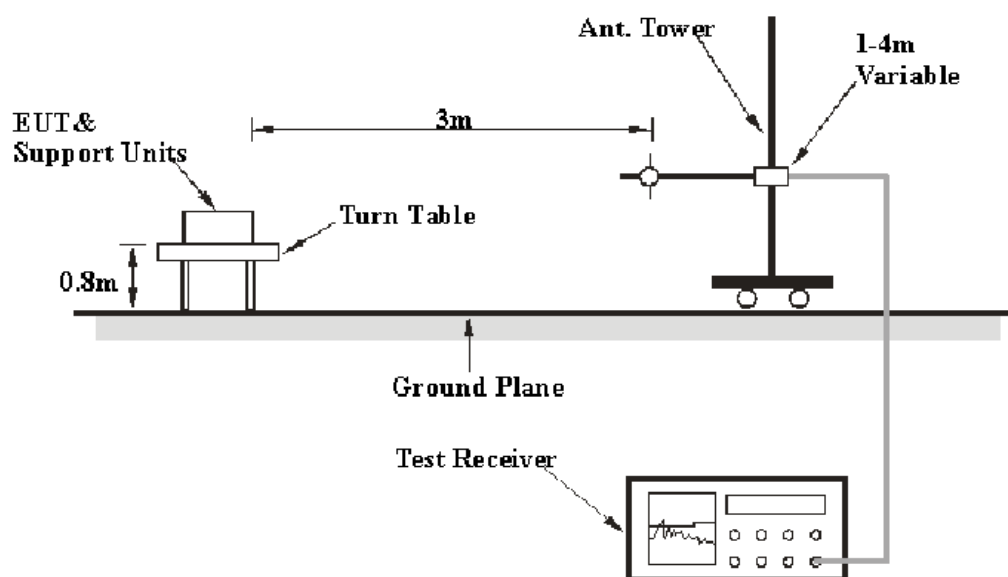

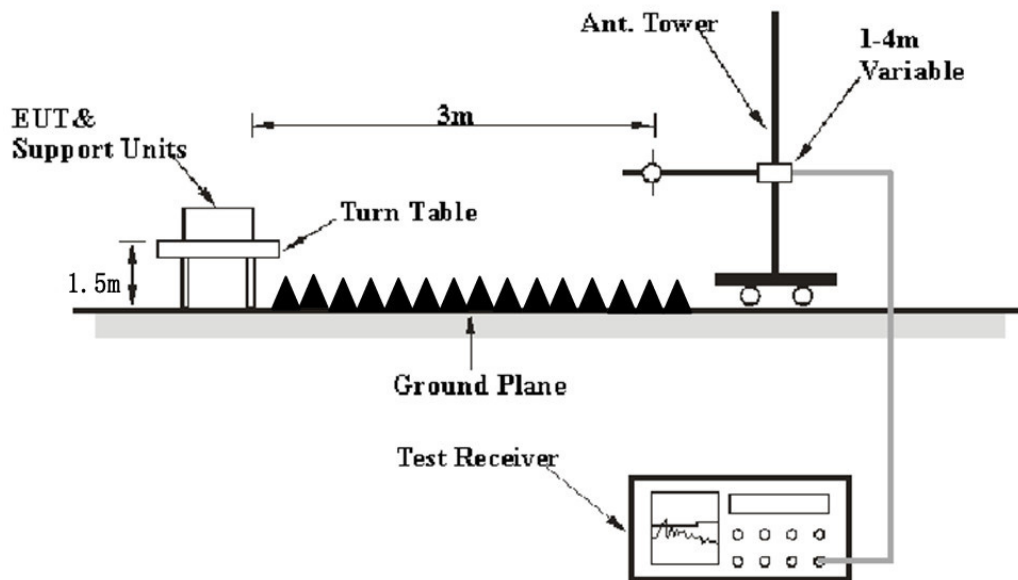**Above 1 GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10 - 2013. The specification used was the FCC 15 § 15.209, 15.205 and 15.231.

**EMI Test Receiver Setup**

The system was investigated from 30 MHz to 5 GHz.

During the radiated emission test, the test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	PK
Above 1 GHz	1 MHz	3 MHz	/	PK

**Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in the Quasi-peak detection mode from 30MHz to 1GHz, Peak and average detection mode above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\text{Over Limit/Margin} = \text{Level} / \text{Corrected Amplitude} - \text{Limit}$$

$$\text{Level} / \text{Corrected Amplitude} = \text{Read Level} + \text{Factor}$$

## Test Data

### Environmental Conditions


<b>Temperature:</b>	24~26.3 °C
<b>Relative Humidity:</b>	58~61 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Level Li and Nick Fang on 2022-06-30 for below 1GHz, on 2022-06-18 and 2022-06-30 for above 1GHz.*

*Test mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)*

**30MHz – 1 GHz:**


Note: When the test result of peak was less than the limit of QP more than 6dB, just the peak value was recorded.

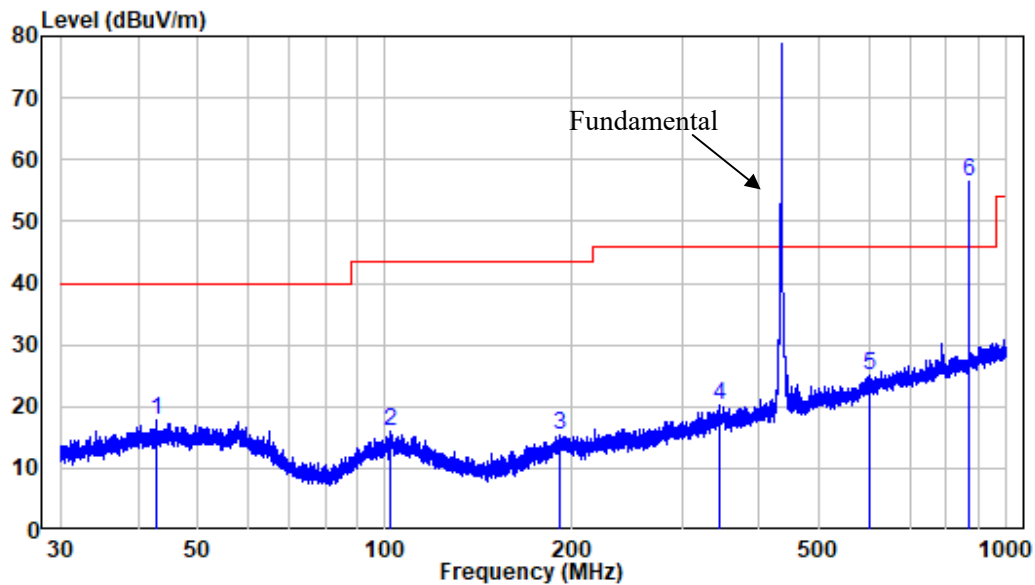**Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No. : SZNS1220427-17127E-RF  
Test Mode: Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	42.768	-9.97	27.83	17.86	40.00	-22.14	Peak
2	101.912	-11.58	27.45	15.87	43.50	-27.63	Peak
3	190.572	-11.48	27.00	15.52	43.50	-27.98	Peak
4	344.386	-7.24	27.60	20.36	46.00	-25.64	Peak
5	600.373	-2.43	27.37	24.94	46.00	-21.06	Peak
6	868.369	0.89	55.70	56.59	60.83	-4.24	Peak

## Vertical

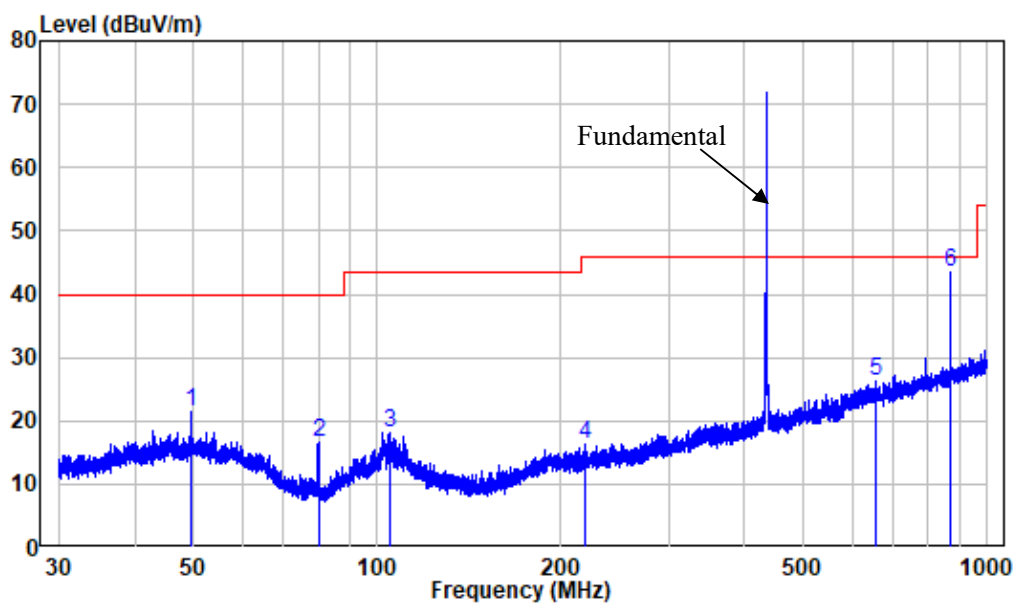

Site : chamber  
 Condition: 3m VERTICAL  
 Job No. : SZNS1220427-17127E-RF  
 Test Mode: Transmitting

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	49.424	-9.94	31.33	21.39	40.00	-18.61	Peak
2	80.010	-16.79	33.36	16.57	40.00	-23.43	Peak
3	104.720	-11.80	30.05	18.25	43.50	-25.25	Peak
4	219.556	-11.44	27.64	16.20	46.00	-29.80	Peak
5	655.380	-1.59	27.85	26.26	46.00	-19.74	Peak
6	868.369	0.89	42.44	43.33	60.83	-17.50	Peak

**Fundamental:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/AV		Height (m)	Polar (H/V)				
433.92MHz									
433.92	85.93	PK	234	1.3	H	-5.72	80.21	80.83	-0.62
433.92	80.25	PK	168	1.6	V	-5.72	74.53	80.83	-6.30

Note: the peak value can meet the limit of the QP value.

**1 GHz - 5 GHz:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/AV		Height (m)	Polar (H/V)				
433.92MHz									
1301.76	54.48	PK	83	1.3	H	-10.20	44.28	54	-9.72
1301.76	53.40	PK	184	1.3	V	-10.20	43.20	54	-10.80
1735.68	51.56	PK	87	1.3	H	-8.85	42.71	60.83	-18.12
1735.68	50.86	PK	72	2.4	V	-8.85	42.01	60.83	-18.82
2169.60	58.64	PK	230	1.3	H	-7.22	51.42	60.83	-9.41
2169.60	51.55	PK	37	2.4	V	-7.22	44.33	60.83	-16.5
2603.52	51.50	PK	76	1.6	H	-6.85	44.65	60.83	-16.18
2603.52	51.14	PK	53	1.1	V	-6.85	44.29	60.83	-16.54
3037.44	54.51	PK	193	1.5	H	-5.84	48.67	60.83	-12.16
3037.44	50.99	PK	311	1.1	V	-5.84	45.15	60.83	-15.68
3471.36	51.67	PK	80	1.0	H	-6.00	45.67	60.83	-15.16
3471.36	51.28	PK	325	1.7	V	-6.00	45.28	60.83	-15.55
3905.28	53.37	PK	14	2.1	H	-5.54	47.83	54	-6.17
3905.28	52.66	PK	356	1.0	V	-5.54	47.12	54	-6.88
4339.20	56.64	PK	158	2.3	H	-4.83	51.81	54	-2.19
4339.20	55.09	PK	257	1.4	V	-4.83	50.26	54	-3.74

**Note:**

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor = Antenna factor (Rx) + cable loss – amplifier factor


Margin = Corr. Amplitude - Limit

The test result of peak was less than the limit of QP/average, so just peak value was recorded.


The other spurious emission which is 20dB to the limit was not recorded.

1 GHz - 5 GHz:

Pre-scan-Horizontal

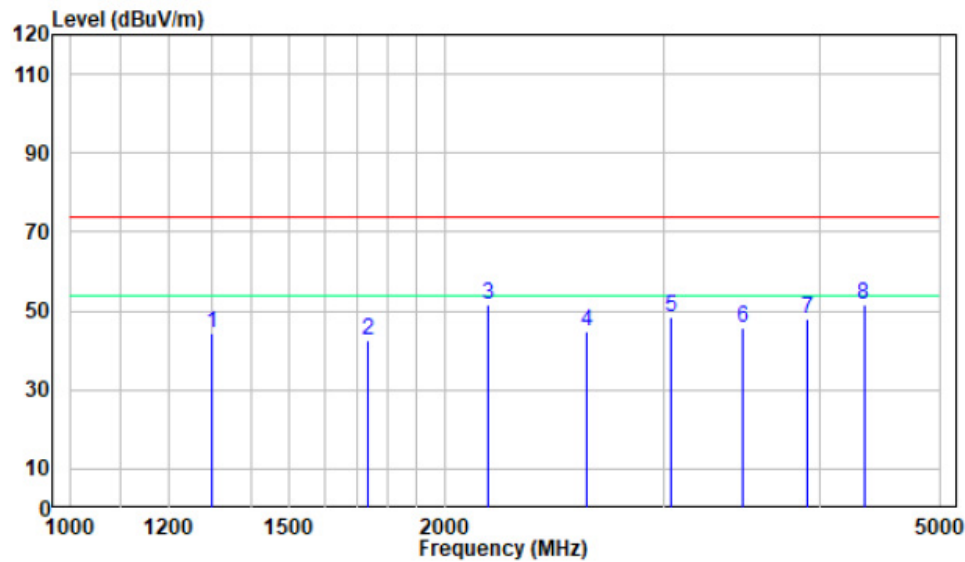

Pre-scan – Vertical

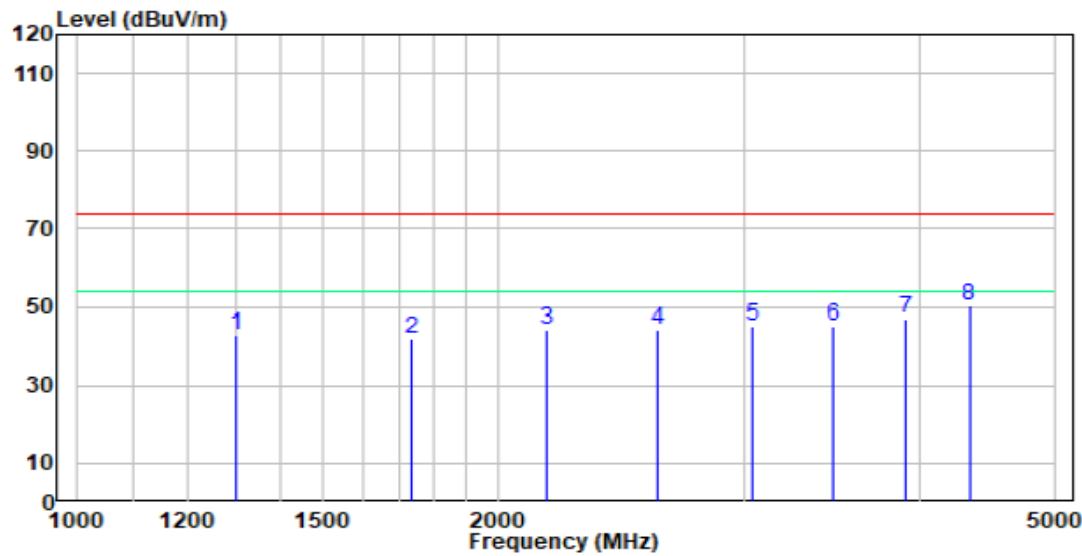

## FCC §15.231(a) (1) - DEACTIVATION TESTING

### Applicable Standard

Per FCC §15.231(a) (1), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer=operating frequency.
3. Set the spectrum analyzer as RBW=100kHz/ VBW=300kHz/ Span=0Hz.
4. Repeat above procedures until all frequency measured was complete.

### Test Data


#### Environmental Conditions

Temperature:	24 °C
Relative Humidity:	45 %
ATM Pressure:	101.0 kPa

The testing was performed by Roger Ling on 2022-07-06.

Test mode: Transmitting

**Test Result:** Compliant. This product will cease transmission within 5 seconds after activation. Please refer to following plots.

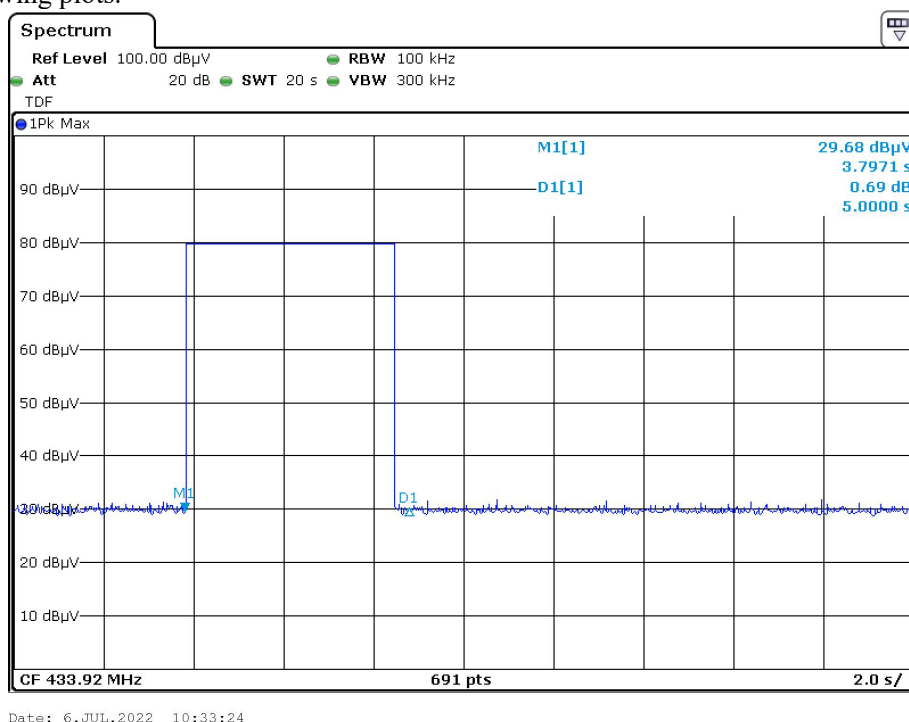

## **FCC §15.231(c) – 20 dB EMISSION BANDWIDTH TESTING**

### **Applicable Standard**

Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

### **Test Procedure**

The EUT is setting to the transmit mode, the waveform was received by the test antenna which was connected to the spectrum analyzer, plot the 20 dB bandwidth.

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	24 °C
<b>Relative Humidity:</b>	45 %
<b>ATM Pressure:</b>	101.0 kPa


*The testing was performed by Roger Ling on 2022-07-06.*

*Test Mode: Transmitting*

Please refer to following table and plots.

Channel Frequency (MHz)	20dB Emission Bandwidth (kHz)	Limit (kHz)
433.92	13.02	<1084.8

### 20 dB Emission Bandwidth

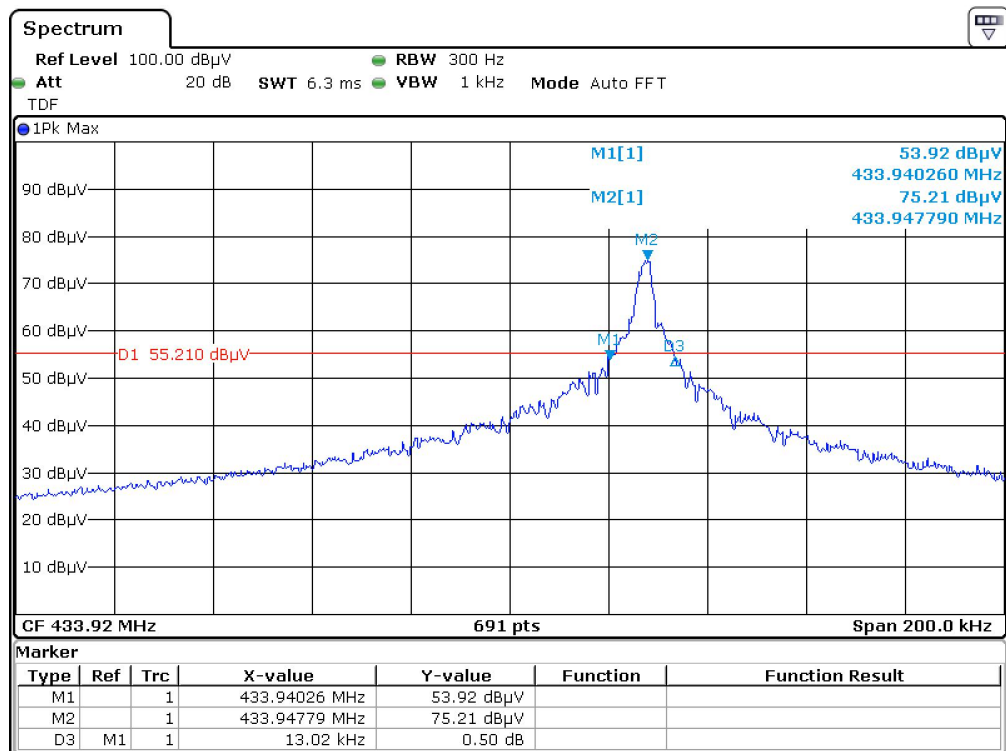

Date: 6.JUL.2022 10:20:08

\*\*\*\*\* END OF REPORT \*\*\*\*\*