

SAR TEST REPORT

No. I23Z70001-SEM01

For

Wingtech Group (Hong Kong) Limited

Flex Mirror

Model Name: ODP-R133

with

Hardware Version: REV1.0

Software Version: R133.001

FCC ID: 2APXWODPR133

Issued Date: 2023-3-24

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Issue Date	Description
I23Z70001-SEM01	Rev.0	2023-3-21	Initial creation of test report
I23Z70001-SEM01	Rev.1	2023-3-24	1. Revise frequency band for UNII band 2C on page8. 2. Add conductive power of channel 2/10 of WLAN 2.4GHz on page 21&22.

TABLE OF CONTENT

1	TEST LABORATORY	5
1.1	TESTING LOCATION	5
1.2	TESTING ENVIRONMENT	5
1.3	PROJECT DATA	5
1.4	SIGNATURE	5
2	STATEMENT OF COMPLIANCE	6
3	CLIENT INFORMATION	7
3.1	APPLICANT INFORMATION	7
3.2	MANUFACTURER INFORMATION	7
4	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
4.1	ABOUT EUT	8
4.2	INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	8
4.3	INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	8
5	TEST METHODOLOGY	9
5.1	APPLICABLE LIMIT REGULATIONS	9
5.2	APPLICABLE MEASUREMENT STANDARDS	9
6	SPECIFIC ABSORPTION RATE (SAR)	10
6.1	INTRODUCTION	10
6.2	SAR DEFINITION	10
7	TISSUE SIMULATING LIQUIDS	11
7.1	TARGETS FOR TISSUE SIMULATING LIQUID	11
7.2	DIELECTRIC PERFORMANCE	11
8	SYSTEM VERIFICATION	12
8.1	SYSTEM SETUP	12
8.2	SYSTEM VERIFICATION	13
9	MEASUREMENT PROCEDURES	14
9.1	TESTS TO BE PERFORMED	14
9.2	GENERAL MEASUREMENT PROCEDURE	16
9.3	WCDMA MEASUREMENT PROCEDURES FOR SAR	17
9.4	SAR MEASUREMENT FOR LTE	18
9.5	BLUETOOTH & WI-FI MEASUREMENT PROCEDURES FOR SAR	18
9.6	POWER DRIFT	19
10	AREA SCAN BASED 1-G SAR	20
10.1	REQUIREMENT OF KDB	20
10.2	FAST SAR ALGORITHMS	20

11	CONDUCTED OUTPUT POWER.....	21
11.1	WI-FI AND BT MEASUREMENT RESULT	21
12	SIMULTANEOUS TX SAR CONSIDERATIONS	48
12.1	INTRODUCTION.....	48
12.2	TRANSMIT ANTENNA SEPARATION DISTANCES	48
13	EVALUATION OF SIMULTANEOUS.....	49
14	SAR TEST RESULT	50
14.1	WLAN EVALUATION FOR 2.4G	51
14.2	WLAN EVALUATION FOR 5G	53
15	SAR MEASUREMENT VARIABILITY.....	55
16	MEASUREMENT UNCERTAINTY	56
16.1	MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (300MHz~3GHz)	56
16.2	MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (3~6GHz).....	57
16.3	MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (300MHz~3GHz)	58
16.4	MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (3~6GHz).....	59
17	MAIN TEST INSTRUMENTS.....	61
ANNEX A	GRAPH RESULTS.....	62
ANNEX B	SYSTEM VERIFICATION RESULTS	66
ANNEX C	SAR MEASUREMENT SETUP	71
ANNEX D	POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM	77
ANNEX E	EQUIVALENT MEDIA RECIPES	80
ANNEX F	SYSTEM VALIDATION	81
ANNEX G	PROBE CALIBRATION CERTIFICATE.....	82
ANNEX H	DIPOLE CALIBRATION CERTIFICATE	91
ANNEX I	SENSOR TRIGGERING DATA SUMMARY.....	110
ANNEX J	ACCREDITATION CERTIFICATE.....	115

1 Test Laboratory

1.1 Testing Location

Company Name:	CTTL
Address:	No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

1.2 Testing Environment

Temperature:	18°C~25 °C,
Relative humidity:	30%~ 70%
Ground system resistance:	< 0.5 Ω
Ambient noise & Reflection:	< 0.012 W/kg


1.3 Project Data

Project Leader:	Qi Dianyuan
Test Engineer:	Yao Juming
Testing Start Date:	March 2, 2023
Testing End Date:	March19, 2023


1.4 Signature



Yao Juming
(Prepared this test report)



Qi Dianyuan
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Wingtech Group (Hong Kong) Limited Flex Mirror ODP-R133 are as follows:

Table 2.1: Highest Reported SAR (1g)

Mode	ANT	Body 1g SAR(W/Kg)	Equipment Class	1g SAR Limits (W/kg)
WLAN 2.4GHz	0	0.37	DTS	1.6
WLAN 2.4GHz	1	0.25		
WLAN 5GHz	0	0.96	NII	
WLAN 5GHz	1	0.54		

The SAR values found for the Tablet are below the maximum recommended levels of 1.6 W/kg as averaged over any 1g tissue according to the ANSI C95.1-1992.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance from 0mm/13mm/15mm between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report.

The highest reported SAR value is obtained at the case of (**Table 2.1**), and the values are: **0.96 W/kg (1g)**.

Table 2.2: The sum of reported SAR values for WiFi2.4G MIMO

	Position	WiFi2.4G-ANT0	WiFi2.4G-ANT1	BT	Sum
Highest reported SAR value for Body	Rear 0mm	0.37	0.25	0.06 ^[1]	0.68

Table 2.3: The sum of reported SAR values for WiFi5G MIMO and BT

	Position	WiFi5G-ANT0	WiFi5G-ANT1	BT	Sum
Highest reported SAR value for Body	Rear 0mm	0.96	0.54	0.06 ^[1]	1.56

[1] - Estimated SAR for Bluetooth (see the table 13.3)

According to the above tables, the highest sum of reported SAR values is **1.56 W/kg (1g)**. The detail for simultaneous transmission consideration is described in chapter 13.

3 Client Information

3.1 Applicant Information

Company Name:	Wingtech Group (Hong Kong) Limited
Address/Post:	Flat/RM 1802 18/F, Podium Plaza, 5 Hanoi Road, TSIM SHA TSUI, KOWLOON, HONG KONG
Contact Person:	Li Zhonggang
Contact Email:	lizhonggang@wingtech.com
Telephone:	+86-18321929116

3.2 Manufacturer Information

Company Name:	Wingtech Group (Hong Kong) Limited
Address/Post:	Flat/RM 1802 18/F, Podium Plaza, 5 Hanoi Road, TSIM SHA TSUI, KOWLOON, HONG KONG
Contact Person:	Li Zhonggang
Contact Email:	lizhonggang@wingtech.com
Telephone:	+86-18321929116

4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1 About EUT

Description:	Flex Mirror
Model name:	ODP-R133
Operating mode(s):	BT, Wi-Fi(2.4G&5G)
Tested Tx Frequency:	2412 – 2462 MHz (Wi-Fi 2.4G)
	2402 – 2480 MHz (Bluetooth)
	5180-5240 MHz (U-NII-1)
	5260-5320 MHz (U-NII-2A)
	5500-5720 MHz (U-NII-2C)
	5745-5825 MHz (U-NII-3)
GPRS/EGPRS Multislot Class:	/
Device type:	Tablet
Antenna type:	Embedded
Hotspot mode:	/
Product dimension	Long 314.65mm ;Wide 186.6mm ; Height 6.65mm

4.2 Internal Identification of EUT used during the test

EUT ID*	IMEI/SN	HW Version	SW Version
EUT1	70001UT17a	REV1.0	R133.001
EUT2	70001UT07a	REV1.0	R133.001

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test SAR with the EUT1 and conducted power with the EUT2.

4.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	SCUD-WT-N19	/	SCUD (Fujian) Electronics CO.,LTD

*AE ID: is used to identify the test sample in the lab internally.

5 TEST METHODOLOGY

5.1 Applicable Limit Regulations

ANSI C95.1–1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

IEEE 1528–2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

KDB447498 D01 General RF Exposure Guidance v06: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB616217 D04 SAR for laptop and tablets v01r02 SAR Evaluation Considerations for Laptop, Notebook, Notebook and Tablet Computers.

KDB648474 D04 Handset SAR v01r03: SAR Evaluation Considerations for Wireless Handsets.

KDB248227 D01 802.11 Wi-Fi SAR v02r02: SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS

KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04: SAR Measurement Requirements for 100 MHz to 6 GHz.

KDB865664 D02 RF Exposure Reporting v01r02: RF Exposure Compliance Reporting and Documentation Considerations

6 Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 Tissue Simulating Liquids

7.1 Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid


Frequency(MHz)	Liquid Type	Conductivity(σ)	$\pm 5\%$ Range	Permittivity(ϵ)	$\pm 5\%$ Range
2450	Head	1.80	1.71~1.89	39.2	37.2~41.2
5250	Head	4.71	4.47~4.95	35.93	34.13~37.73
5600	Head	5.07	4.82~5.32	35.53	33.8~37.3
5750	Head	5.22	4.96~5.48	35.36	33.59~37.13

7.2 Dielectric Performance

Table 7.2: Dielectric Performance of Tissue Simulating Liquid

Measurement Date yyyy/mm/dd	Frequency	Type	Permittivity ϵ	Drift (%)	Conductivity σ (S/m)	Drift (%)
2023/3/2	2450MHz	Head	40.12	2.35	1.81	0.56
2023/3/16	5250MHz	Head	35.45	-1.34	4.721	0.23
2023/3/18	5600MHz	Head	35.23	-0.84	4.974	-1.89
2023/3/19	5750MHz	Head	34.78	-1.64	5.215	-0.10

Note: The liquid temperature is 22.0°C

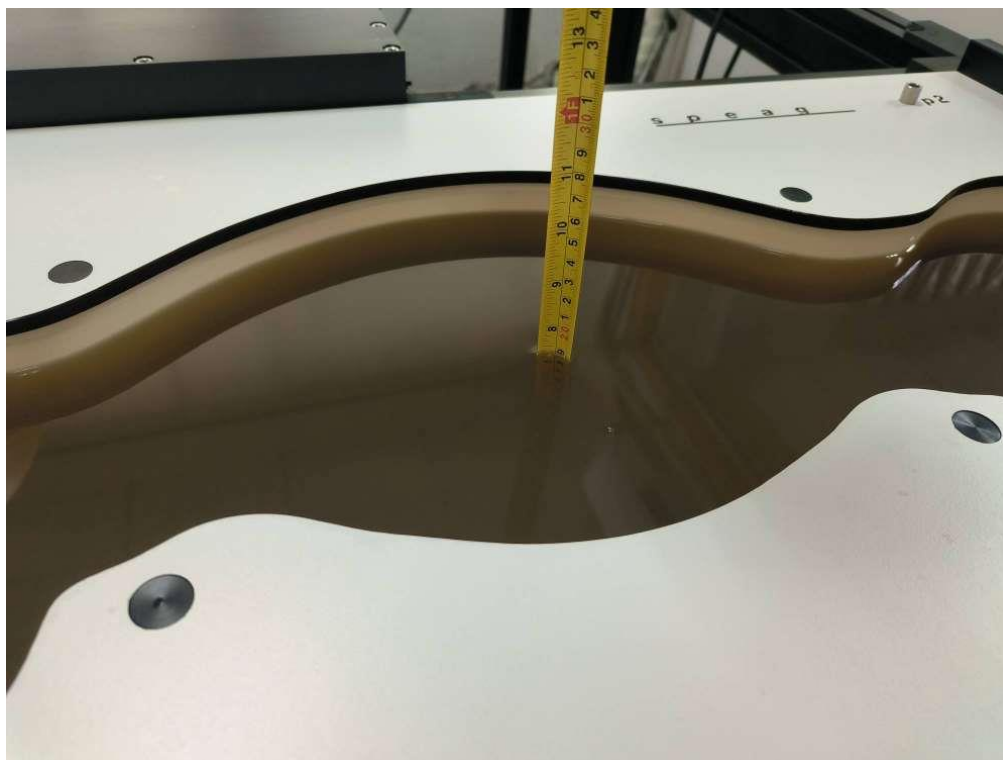


Picture 7-1 Liquid depth in the Flat Phantom

8 System verification

8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

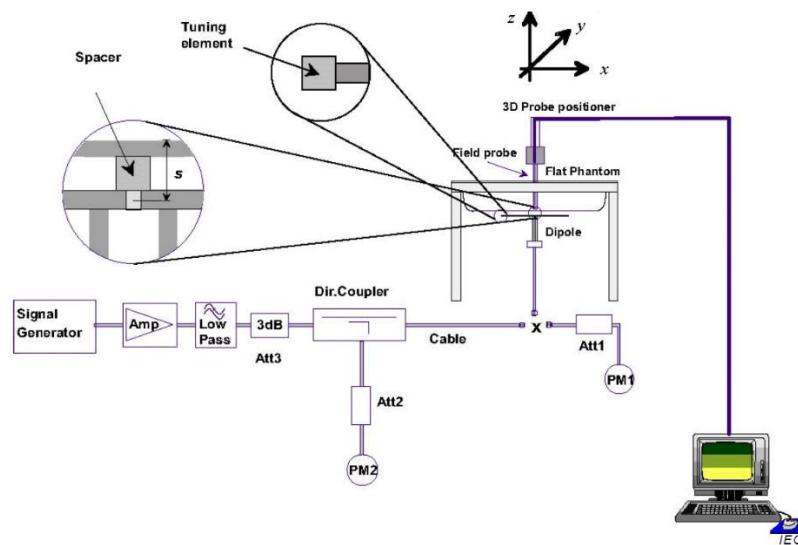

Picture 8.1 System Setup for System Evaluation



Picture 8.2 Photo of Dipole Setup

8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

Table 8.1: System Verification of Body

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2023/3/2	2450MHz	22.3	78.1	22.7	78.9	1.79%	1.02%
2023/3/16	5250MHz	23.7	83.2	24.5	84.9	3.38%	2.04%
2023/3/18	5600MHz	22.8	80.4	22.9	80.8	0.44%	0.50%
2023/3/19	5750MHz	22.3	78.1	22.7	78.9	1.79%	1.02%

9 Measurement Procedures

9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the center of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

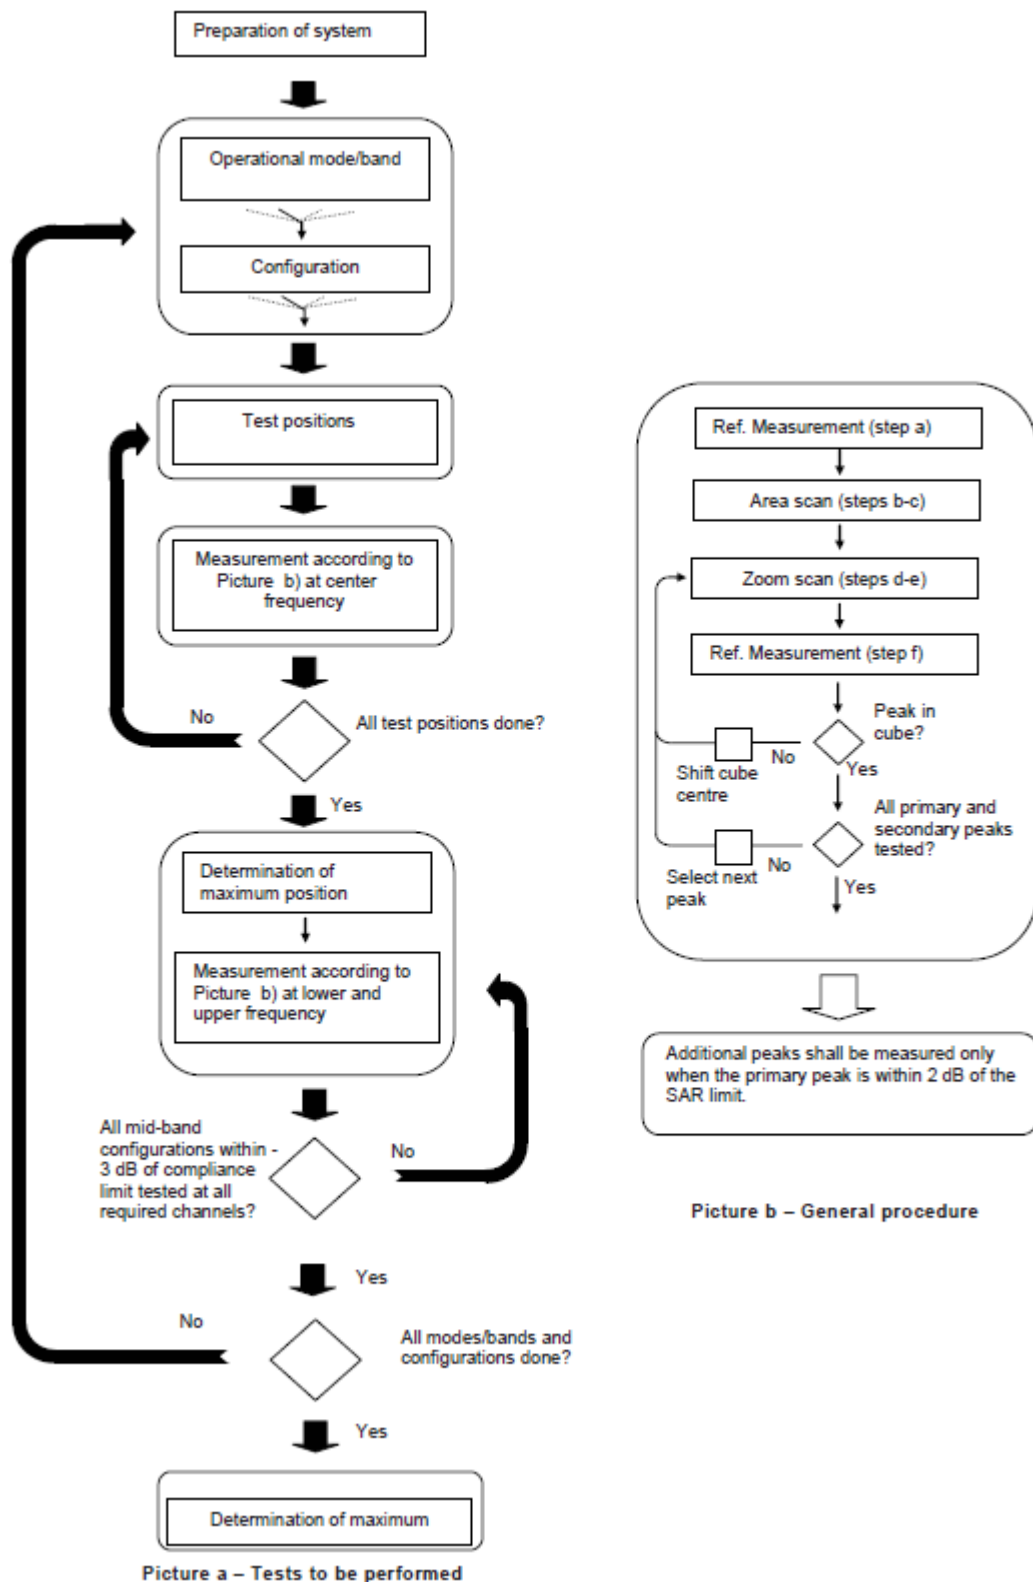

Picture 9.1 Block diagram of the tests to be performed

9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \delta \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH_n), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

For Release 5 HSDPA Data Devices:

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

For Release 6 HSPA Data Devices

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.5	1.5	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	1.5	1.5	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	1.5	1.5	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	1.5	1.5	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.5	1.5	21	81

Rel.8 DC-HSDPA (Cat 24)

SAR test exclusion for Rel.8 DC-HSDPA must satisfy the SAR test exclusion requirements of Rel.5 HSDPA. SAR test exclusion for DC-HSDPA devices is determined by power measurements according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to qualify for SAR test exclusion.

9.4 SAR Measurement for LTE

SAR tests for LTE are performed with a base station simulator, Rohde & Schwarz CMW500. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the CMW 500.

It is performed for conducted power and SAR based on the KDB941225 D05.

SAR is evaluated separately according to the following procedures for the different test positions in each exposure condition – head, body, body-worn accessories and other use conditions. The procedures in the following subsections are applied separately to test each LTE frequency band.

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

9.5 Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.6 Power Drift

To control the output power stability during the SAR test, DASY5 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in section 14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

10 Area Scan Based 1-g SAR

10.1 Requirement of KDB

According to the KDB447498 D01 v05, when the implementation is based the specific polynomial fit

algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-g SAR is ≤ 1.2 W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

11 Conducted Output Power

There are two sets of tune-up power, Normal power and Low power, for Wi-Fi2.4G and Wi-Fi5G by proximity sensor. The detail of proximity sensor is presented in annex I.

11.1 Wi-Fi and BT Measurement result

The maximum output power of BT is -1.49dBm.

The maximum tune up of BT is 1.5 dBm.

WiFi 2.4G ANT0-Normal power:

802.11b(dBm)					
Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps	Tune up
11(2462MHz)	12.37	/	/	/	13.5
6(2437(MHz)	12.53	/	/	/	13.5
1(2412MHz)	12.99	12.75	12.78	12.57	13.5

802.11g(dBm)									
Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	Tune up
11(2462MHz)	/	/	/	12.72	/	/	/	/	14.1
10(2457MHz)	/	/	/	14.25	/	/	/	/	15.6
6(2437(MHz)	17.47	17.36	17.42	17.50	16.17	15.88	15.45	13.95	19
2(2417(MHz)	/	/	/	14.23	/	/	/	/	15.6
1(2412MHz)	/	/	/	12.71	/	/	/	/	14.1

802.11n-20MHz(dBm)									
Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	Tune up
11(2462MHz)	12.60	/	/	/	/	/	/	/	14.1
10(2457MHz)	14.13	/	/	/	/	/	/	/	15.6
6(2437(MHz)	17.77	17.76	17.68	16.52	15.88	15.92	14.69	14.22	19
2(2417(MHz)	14.25	/	/	/	/	/	/	/	15.6
1(2412MHz)	12.73	/	/	/	/	/	/	/	14.1

WiFi 2.4G ANT0-Low power:

802.11b(dBm)					
Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps	Tune up
11(2462MHz)	8.41	/	/	/	10
6(2437(MHz)	8.35	/	/	/	10
1(2412MHz)	8.45	8.01	8.18	8.08	10

802.11g(dBm)									
Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	Tune up
11(2462MHz)	8.38	/	/	/	/	/	/	/	10
6(2437(MHz)	8.26	/	/	/	/	/	/	/	10
1(2412MHz)	8.47	8.33	8.25	7.82	7.77	7.46	7.13	7.40	10

802.11n-20MHz(dBm)									
Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	Tune up
11(2462MHz)	8.33	/	/	/	/	/	/	/	10
6(2437(MHz)	8.38	8.17	7.95	7.90	7.72	7.57	7.48	7.38	10
1(2412MHz)	8.18	/	/	/	/	/	/	/	10

WiFi 2.4G ANT1-Normal power:

802.11b(dBm)					
Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps	Tune up
11(2462MHz)	13.45	13.38	13.35	13.14	13.5
6(2437(MHz)	13.38	/	/	/	13.5
1(2412MHz)	13.24	/	/	/	13.5

802.11g(dBm)									
Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	Tune up
11(2462MHz)	12.16	/	/	/	/	/	/	/	14.1
10(2457MHz)	13.65	/	/	/	/	/	/	/	15.6
6(2437(MHz)	17.99	17.99	17.98	17.97	16.48	16.09	15.56	13.64	19
2(2417(MHz)	14.34	/	/	/	/	/	/	/	15.6
1(2412MHz)	12.72	/	/	/	/	/	/	/	14.1

802.11n-20MHz(dBm)									
Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	Tune up
11(2462MHz)	12.12	/	/	/	/	/	/	/	14.1
10(2457MHz)	13.73	/	/	/	/	/	/	/	15.6
6(2437(MHz)	17.80	17.76	17.76	16.25	15.69	15.69	14.66	14.41	19
2(2417(MHz)	13.72	/	/	/	/	/	/	/	15.6
1(2412MHz)	12.13	/	/	/	/	/	/	12.13	14.1

WiFi 2.4G ANT1-Low power:

802.11b(dBm)					
Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps	Tune up
11(2462MHz)	8.51	8.42	8.41	8.23	10
6(2437(MHz)	8.32	/	/	/	10
1(2412MHz)	8.37	/	/	/	10

802.11g(dBm)									
Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	Tune up
11(2462MHz)	8.71	/	/	/	/	/	/	/	10
6(2437(MHz)	8.78	8.20	7.92	7.72	7.97	7.85	7.45	7.78	10
1(2412MHz)	8.45	/	/	/	/	/	/	/	10

802.11n-20MHz(dBm)									
Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	Tune up
11(2462MHz)	8.35	/	/	/	/	/	/	/	10
6(2437(MHz)	8.44	/	/	/	/	/	/	/	10
1(2412MHz)	8.55	8.17	7.73	7.59	8.20	8.08	7.99	7.65	10

WiFi 5G - Tune up for normal power:

Mode	Rate	Channel	Freq.	Output Power Tolerance (dBm)						
			(MHz)	Setting Power			SISO	setting		MIMO
				Power	ANT 0 chain2	ANT1 chain1	Maximum	Nvram max		Maximum
11a	6Mbps	36-40	5180-5320	11	44	46	12.6	53	55	15.3
		44-48	5220-5240	16	62	64	17.6	67	69	19.1
		52-56	5260-5280	16	62	64	17.6	67	69	19.1
		60-64	5300-5320	11	44	46	12.6	53	55	15.1
		100-104	5500-5520	9	30	36	10.6	37	42	12.6
		108-132	5540-5660	16	58	64	17.6	61	66	18.6
		136-140	5680-5700	8.5	30	36	10.1	37	42	12.6
		144	5720	13.5	48	54	15.1	59	64	18.1
		149	5745	13.5	54	54	15.1	64	65	18.1
		153-161	5765-5725	16	64	64	17.6	66	67	18.6
		165	5745-5825	13.5	54	54	15.1	64	65	18.1
	9Mbps	36-40	5180-5320	11	44	46	12.5	53	55	15.2
		44-48	5220-5240	16	62	64	17.5	67	69	19
		52-56	5260-5280	16	62	64	17.5	67	69	19
		60-64	5300-5320	11	44	46	12.5	53	55	15
		100-104	5500-5520	9	30	36	10.5	37	42	12.5
		108-132	5540-5660	16	58	64	17.5	61	66	18.5
		136-140	5680-5700	8.5	30	36	10	37	42	12.5
		144	5720	13.5	48	54	15	59	64	18
		149	5745	13.5	54	54	15	64	65	18
		153-161	5765-5725	16	64	64	17.5	66	67	18.5
		165	5745-5825	13.5	54	54	15	64	65	18
	12Mbps	36-40	5180-5320	11	44	46	12.5	53	55	15.2
		44-48	5220-5240	16	62	64	17.5	67	69	19
		52-56	5260-5280	16	62	64	17.5	67	69	19
		60-64	5300-5320	11	46	48	12.5	53	55	15
		100-104	5500-5520	9	30	36	10.5	37	42	12.5
		108-132	5540-5660	16	58	64	17.5	61	66	18.5
		136-140	5680-5700	8.5	30	36	10	37	42	12.5
		144	5720	13.5	48	54	15	59	64	18
		149	5745	13.5	54	54	15	64	65	18
		153-161	5765-5725	16	64	64	17.5	66	67	18.5
		165	5745-5825	13.5	54	54	15	64	65	18
	18Mbps	36-40	5180-5320	11	44	46	12.5	53	55	15.2
		44-48	5220-5240	16	62	64	17.5	67	69	19

		52-56	5260-5280	16	62	64	17.5	67	69	19
		60-64	5300-5320	11	46	48	12.5	53	55	15
		100-104	5500-5520	9	30	36	10.5	37	42	12.5
		108-132	5540-5660	16	58	64	17.5	61	66	18.5
		136-140	5680-5700	8.5	30	36	10	37	42	12.5
		144	5720	13.5	48	54	15	59	64	18
		149	5745	13.5	54	54	15	64	65	18
		153-161	5765-5725	16	64	64	17.5	66	67	18.5
		165	5745-5825	13.5	54	54	15	64	65	18
	24Mbps	36-40	5180-5320	11	44	46	12.5	58	60	15
		44-48	5220-5240	15	58	60	16.5	70	72	18
		52-56	5260-5280	15	58	60	16.5	70	72	18
		60-64	5300-5320	11	46	48	12.5	58	60	15
		100-104	5500-5520	9	30	36	10.5	46	51	12.5
		108-132	5540-5660	15	54	60	16.5	66	71	18
		136-140	5680-5700	8.5	30	36	10	46	51	12.5
		144	5720	13.5	48	54	15	68	73	18
		149	5745	13.5	54	54	15	73	74	18
		153-161	5765-5725	15	60	60	16.5	73	74	18
		165	5745-5825	13.5	54	54	15	73	74	18
	36Mbps	36-40	5180-5320	11	44	46	12.5	60	62	15
		44-48	5220-5240	14.5	56	58	16	72	74	18
		52-56	5260-5280	14.5	56	58	16	72	74	18
		60-64	5300-5320	11	46	48	12.5	60	62	15
		100-104	5500-5520	9	30	36	10.5	48	53	12.5
		108-132	5540-5660	14.5	52	58	16	68	73	18
		136-140	5680-5700	8.5	30	36	10	48	53	12.5
		144	5720	13.5	48	54	15	70	75	18
		149	5745	13.5	54	54	15	75	76	18
		153-161	5765-5725	14.5	58	58	16	75	76	18
		165	5745-5825	13.5	54	54	15	75	76	18
	48Mbps	36-40	5180-5320	11	44	46	12.5	61	63	15
		44-48	5220-5240	14	54	56	15.5	73	75	18
		52-56	5260-5280	14	54	56	15.5	73	75	18
		60-64	5300-5320	11	46	48	12.5	61	63	15
		100-104	5500-5520	9	30	36	10.5	49	54	12.5
		108-132	5540-5660	14	50	56	15.5	69	74	18
		136-140	5680-5700	8.5	30	36	10	49	54	12.5
		144	5720	13.5	48	54	15	71	76	18
		149-165	5745-5825	13.5	54	54	15	74	75	17.5

11n20M	54Mbps	36-40	5180-5320	11	44	46	12.5	63	65	15
		44-48	5220-5240	13	50	52	14.5	73	75	17.5
		52-56	5260-5280	13	50	52	14.5	73	75	17.5
		60-64	5300-5320	11	46	48	12.5	63	65	15
		100-104	5500-5520	9	30	36	10.5	48	53	12.5
		108-132	5540-5660	13	46	52	14.5	69	74	17.5
		136-140	5680-5700	8.5	30	36	10	48	53	12.5
		144	5720	13	46	52	14.5	71	76	17.5
		149-165	5745-5825	13	52	52	14.5	72	73	17.2
	MCS0	36-40	5180-5320	11	42	44	12.6	53	55	15.3
		44-48	5220-5240	16	60	62	17.6	67	69	19.1
		52-56	5260-5280	16	62	64	17.6	67	69	19.1
		60-64	5300-5320	11	46	48	12.6	55	58	15.3
		100-104	5500-5520	9	30	36	10.6	37	42	12.6
		108-132	5540-5660	16	58	64	17.6	61	66	18.6
		136-140	5680-5700	8.5	30	36	10.1	37	42	12.6
		144	5720	13.5	48	54	15.1	59	64	18.1
		149	5745	13.5	54	54	15.1	64	65	18.1
		153-161	5765-5725	16	64	64	17.6	66	67	18.6
		165	5745-5825	13.5	54	54	15.1	64	65	18.1
	MCS1	36-40	5180-5320	11	42	44	12.5	53	55	15.2
		44-48	5220-5240	16	60	62	17.5	67	69	19
		52-56	5260-5280	16	62	64	17.5	67	69	19
		60-64	5300-5320	11	46	48	12.5	55	58	15.2
		100-104	5500-5520	9	30	36	10.5	37	42	12.5
		108-132	5540-5660	16	58	64	17.5	61	66	18.5
		136-140	5680-5700	8.5	30	36	10	37	42	12.5
		144	5720	13.5	48	54	15	59	64	18
		149	5745	13.5	54	54	15	64	65	18
		153-161	5765-5725	16	64	64	17.5	66	67	18.5
		165	5745-5825	13.5	54	54	15	64	65	18
	MCS2	36-40	5180-5320	11	42	44	12.5	53	55	15.2
		44-48	5220-5240	16	60	62	17.5	67	69	19
		52-56	5260-5280	16	62	64	17.5	67	69	19
		60-64	5300-5320	11	46	48	12.5	55	58	15.2
		100-104	5500-5520	9	30	36	10.5	37	42	12.5
		108-132	5540-5660	16	58	64	17.5	61	66	18.5
		136-140	5680-5700	8.5	30	36	10	37	42	12.5
		144	5720	13.5	48	54	15	59	64	18
		149	5745	13.5	54	54	15	64	65	18

	153-161	5765-5725	16	64	64	17.5	66	67	18.5
	165	5745-5825	13.5	54	54	15	64	65	18
MCS3	36-40	5180-5320	11	42	44	12.5	57	59	14.5
	44-48	5220-5240	15	57	61	16.5	71	73	18
	52-56	5260-5280	15	58	60	16.5	71	73	18
	60-64	5300-5320	11	46	48	12.5	59	61	14.5
	100-104	5500-5520	9	30	36	10.5	41	46	12.5
	108-132	5540-5660	15	54	60	16.5	65	70	18
	136-140	5680-5700	8.5	30	36	10	41	46	12.5
	144	5720	13.5	48	54	15	67	72	18
	149	5745	13.5	54	54	15	72	73	18
	153-161	5765-5725	15	60	60	16.5	72	73	18
	165	5745-5825	13.5	54	54	15	72	73	18
MCS4	36-40	5180-5320	11	42	44	12.5	59	61	14.5
	44-48	5220-5240	14	54	56	15.5	73	75	18
	52-56	5260-5280	14	54	56	15.5	73	75	18
	60-64	5300-5320	11	46	48	12.5	61	63	14.5
	100-104	5500-5520	9	30	36	10.5	45	50	12.5
	108-132	5540-5660	14	50	56	15.5	67	72	18
	136-140	5680-5700	8.5	30	36	10	45	50	12.5
	144	5720	13.5	48	54	15	69	74	18
	149	5745	13.5	54	54	15	74	75	18
	153-161	5765-5725	14	56	56	15.5	74	75	18
	165	5745-5825	13.5	54	54	15	74	75	18
MCS5	36-40	5180-5320	11	42	44	12.5	61	63	14.5
	44-48	5220-5240	14	54	56	15.5	75	77	18
	52-56	5260-5280	14	54	56	15.5	75	77	18
	60-64	5300-5320	11	46	48	12.5	63	65	14.5
	100-104	5500-5520	9	30	36	10.5	47	52	12.5
	108-132	5540-5660	14	50	56	15.5	69	74	18
	136-140	5680-5700	8.5	30	36	10	47	52	12.5
	144	5720	13.5	48	54	15	71	76	18
	149	5745	13.5	54	54	15	76	77	18
	153-161	5765-5725	14	56	56	15.5	76	77	18
	165	5745-5825	13.5	54	54	15	76	77	18
MCS6	36-40	5180-5320	11	42	44	12.6	63	65	14.5
	44-48	5220-5240	13.5	52	54	15	73	75	17.5
	52-56	5260-5280	13.5	52	54	15	73	75	17.5
	60-64	5300-5320	11	44	46	12.6	67	69	14.5
	100-104	5500-5520	9	30	36	10.5	49	54	12.5

11n40M		108-132	5540-5660	13.5	48	54	15	69	74	17.5
		136-140	5680-5700	8.5	30	36	10	49	54	12.5
		144	5720	13.5	48	54	15	69	74	17.5
		149-165	5745-5825	13.5	54	54	15	74	75	17.5
	MCS7	36-40	5180-5320	11	42	44	12.5	61	63	15
		44-48	5220-5240	13	50	52	14.5	75	77	17.5
		52-56	5260-5280	13	50	52	14.5	75	77	17.5
		60-64	5300-5320	11	46	48	12.5	65	67	15
		100-104	5500-5520	9	30	36	10.5	51	56	13
		108-132	5540-5660	13	46	52	14.5	69	74	17.5
		136-140	5680-5700	8.5	30	36	10	51	56	12.5
		144	5720	13	46	50	14.5	71	76	17
		149-165	5745-5825	13	52	52	14.5	74	75	17
	MCS0	38	5190	11	44	46	12.6	45	47	12.6
		46	5230	13.5	52	54	15.1	65	67	18.1
		54	5270	13.5	52	54	15.1	65	67	18.1
		62	5310	11	46	48	12.6	45	47	12.6
		102	5510	9	30	36	10.6	37	42	12.1
		110-126	5550-5630	13.5	48	52	15.1	59	64	18.1
		134	5670	8.5	30	36	10.1	41	46	12.1
		142	5720	13.5	48	52	15.1	59	64	18.1
		149-165	5745-5825	13.5	54	54	15.1	64	65	18.1
	MCS1	38	5190	11	44	46	12.5	45	47	12.5
		46	5230	13.5	52	54	15	65	67	18
		54	5270	13.5	52	54	15	65	67	18
		62	5310	11	46	48	12.5	45	47	12.5
		102	5510	9	30	36	10.5	37	42	12
		110-126	5550-5630	13.5	48	52	15	59	64	18
		134	5670	8.5	30	36	10	41	46	12
		142	5720	13.5	48	52	15	59	64	18
		149-165	5745-5825	13.5	54	54	15	64	65	18
	MCS2	38	5190	11	44	46	12.5	45	47	12.5
		46	5230	13.5	52	54	15	65	67	18
		54	5270	13.5	52	54	15	65	67	18
		62	5310	11	46	48	12.5	45	47	12.5
		102	5510	9	30	36	10.5	37	42	12
		110-126	5550-5630	13.5	48	52	15	59	64	18
		134	5670	8.5	30	36	10	41	46	12
		142	5720	13.5	48	52	15	59	64	18
		149-165	5745-5825	13.5	54	54	15	64	65	18

	MCS3	38	5190	11	44	46	12.5	51	53	12.5
		46	5230	13.5	52	54	15	71	73	18
		54	5270	13.5	52	54	15	71	73	18
		62	5310	11	46	48	12.5	51	53	12.5
		102	5510	9	30	36	10.5	43	48	12
		110-126	5550-5630	13.5	48	52	15	65	70	18
		134	5670	8.5	30	36	10	47	52	12
		142	5720	13.5	48	52	15	65	70	18
		149-165	5745-5825	13.5	54	54	15	70	71	18
	MCS4	38	5190	11	44	46	12.5	53	55	12.5
		46	5230	13.5	52	54	15	73	75	18
		54	5270	13.5	52	54	15	73	75	18
		62	5310	11	46	48	12.5	53	55	12.5
		102	5510	9	30	36	10.5	45	50	12
		110-126	5550-5630	13.5	48	52	15	67	72	18
		134	5670	8.5	30	36	10	47	52	12
		142	5720	13.5	48	52	15	67	72	18
		149-165	5745-5825	13.5	54	54	15	72	73	18
	MCS5	38	5190	11	44	46	12.5	53	55	12.5
		46	5230	13.5	52	54	15	73	75	18
		54	5270	13.5	52	54	15	73	75	18
		62	5310	11	46	48	12.5	53	55	12.5
		102	5510	9	30	36	10.5	45	50	12
		110-126	5550-5630	13.5	48	52	15	67	72	18
		134	5670	8.5	30	36	10	49	54	12
		142	5720	13.5	48	52	15	67	72	18
		149-165	5745-5825	13.5	54	54	15	72	73	18
	MCS6	38	5190	11	44	46	12.5	56	58	12.5
		46	5230	13	50	52	14.5	76	78	17.5
		54	5270	13	50	52	14.5	76	78	17.5
		62	5310	11	44	46	12.6	56	58	12.5
		102	5510	9	30	36	10.5	50	55	12
		110-126	5550-5630	13	46	52	14.5	70	75	17.5
		134	5670	8.5	30	36	10	54	59	12
		142	5720	13	46	52	14.5	70	75	17.5
		149-165	5745-5825	13	52	52	14.5	75	76	17.5
	MCS7	38	5190	11	44	46	12.5	58	60	12.5
		46	5230	13	50	52	14.5	78	80	17.5
		54	5270	13	50	52	14.5	78	80	17.5
		62	5310	11	44	46	12.6	58	60	12.5

11ac20M		102	5510	9	30	36	10.5	52	57	12
		110-126	5550-5630	13	46	52	14.5	72	77	17.5
		134	5670	8.5	30	36	10	54	59	12
		142	5720	13	46	52	14.5	72	77	17.5
		149-165	5745-5825	13	52	52	14.5	75	76	17.5
	MCS0	36-40	5180-5320	11	42	44	12.6	53	55	15.6
		44-48	5220-5240	16	60	62	17.6	67	69	19.1
		52-56	5260-5280	16	62	64	17.6	67	69	19.1
		60-64	5300-5320	11	46	48	12.6	53	55	15.1
		100-104	5500-5520	9	30	36	10.6	37	42	12.6
		108-132	5540-5660	16	58	64	17.6	61	66	18.6
		136-140	5680-5700	8.5	30	36	10.1	37	42	12.6
		144	5720	13.5	48	52	15.1	59	64	18.1
		149	5745	13.5	54	54	15.1	64	65	18.1
		153-161	5765-5725	16	64	64	17.6	66	67	18.6
		165	5745-5825	13.5	54	54	15.1	64	65	18.1
	MCS1	36-40	5180-5320	11	42	44	12.5	53	55	15.5
		44-48	5220-5240	16	60	62	17.5	67	69	19
		52-56	5260-5280	16	62	64	17.5	67	69	19
		60-64	5300-5320	11	46	48	12.5	53	55	15
		100-104	5500-5520	9	30	36	10.5	37	42	12.5
		108-132	5540-5660	16	58	64	17.5	61	66	18.5
		136-140	5680-5700	8.5	30	36	10	37	42	12.5
		144	5720	13.5	48	52	15	59	64	18
		149	5745	13.5	54	54	15	64	65	18
		153-161	5765-5725	16	64	64	17.5	66	67	18.5
		165	5745-5825	13.5	54	54	15	64	65	18
	MCS2	36-40	5180-5320	11	42	44	12.5	53	55	15.5
		44-48	5220-5240	16	60	62	17.5	67	69	19
		52-56	5260-5280	16	62	64	17.5	67	69	19
		60-64	5300-5320	11	46	48	12.5	53	55	15
		100-104	5500-5520	9	30	36	10.5	37	42	12.5
		108-132	5540-5660	16	58	64	17.5	61	66	18.5
		136-140	5680-5700	8.5	30	36	10	37	42	12.5
		144	5720	13.5	48	52	15	59	64	18
		149	5745	13.5	54	54	15	64	65	18
		153-161	5765-5725	16	64	64	17.5	66	67	18.5
		165	5745-5825	13.5	54	54	15	64	65	18
	MCS3	36-40	5180-5220	11	42	44	12.5	57	59	14.5
		44-48	5220-5240	15	58	60	16.5	71	73	18

		52-56	5260-5280	15	58	60	16.5	71	73	18
		60-64	5300-5320	11	46	48	12.5	57	59	14.5
		100-104	5500-5520	9	30	36	10.5	45	50	12.5
		108-132	5540-5660	15	54	60	16.5	65	70	18
		136-140	5680-5700	8.5	30	36	10	45	50	12.5
		144	5720	13.5	48	52	15	67	72	18
		149	5745	13.5	54	54	15	72	73	18
		153-161	5765-5725	15	60	60	16.5	72	73	18
		165	5745-5825	13.5	54	54	15	72	73	18
	MCS4	36-40	5180-5320	11	42	44	12.5	59	61	14.5
		44-48	5220-5240	14	54	56	15.5	73	75	18
		52-56	5260-5280	14	54	56	15.5	73	75	18
		60-64	5300-5320	11	46	48	12.5	59	61	14.5
		100-104	5500-5520	9	30	36	10.5	47	52	12.5
		108-132	5540-5660	14	50	56	15.5	67	72	18
		136-140	5680-5700	8.5	30	36	10	47	52	12.5
		144	5720	13.5	48	52	15	69	74	18
		149	5745	13.5	54	54	15	74	75	18
		153-161	5765-5725	14	56	56	15.5	74	75	18
		165	5745-5825	13.5	54	54	15	74	75	18
	MCS5	36-40	5180-5320	11	42	44	12.5	61	63	14.5
		44-48	5220-5240	14	54	56	15.5	75	77	18
		52-56	5260-5280	14	54	56	15.5	75	77	18
		60-64	5300-5320	11	46	48	12.5	61	63	14.5
		100-104	5500-5520	9	30	36	10.5	49	54	12.5
		108-132	5540-5660	14	50	56	15.5	69	74	18
		136-140	5680-5700	8.5	30	36	10	49	54	12.5
		144	5720	13.5	48	52	15	71	76	18
		149	5745	13.5	54	54	15	76	77	18
		153-161	5765-5725	14	56	56	15.5	76	77	18
		165	5745-5825	13.5	54	54	15	76	77	18
	MCS6	36-40	5180-5320	11	42	44	12.6	65	67	14.5
		44-48	5220-5240	13	54	56	15.5	75	77	17.5
		52-56	5260-5280	13	54	56	15.5	75	77	17.5
		60-64	5300-5320	11	44	46	12.6	65	67	14.5
		100-104	5500-5520	9	30	36	10.5	51	56	12.5
		108-132	5540-5660	13	50	56	15.5	69	74	17.5
		136-140	5680-5700	9	30	36	11.6	51	56	12.5
		144	5720	13	48	52	15.1	71	76	17.5
		149-165	5745-5825	13	54	54	15.1	74	75	17.5

11ac40M	MCS7	36-40	5180-5320	11	42	44	12.5	65	67	14.5
		44-48	5220-5240	12.5	48	50	14	73	75	17
		52-56	5260-5280	12.5	48	50	14	73	75	17
		60-64	5300-5320	11	46	48	12.5	65	67	14.5
		100-104	5500-5520	9	30	36	10.5	47	52	12.5
		108-132	5540-5660	12.5	44	50	14	67	72	17
		136-140	5680-5700	8.5	30	36	10	47	52	12.5
		144	5720	12.5	44	48	14	69	74	17
		149-165	5745-5825	12.5	50	50	14	74	75	17
	MCS8	36-40	5180-5320	11	42	44	12.5	65	67	14
		44-48	5220-5240	12	46	48	13.5	75	77	16.5
		52-56	5260-5280	12	46	48	13.5	75	77	16.5
		60-64	5300-5320	11	46	48	12.5	65	67	14
		100-104	5500-5520	9	30	36	10.5	45	50	12
		108-132	5540-5660	12	44	48	14.5	71	76	16.5
		136-140	5680-5700	8.5	30	36	10	45	50	12
		144	5720	12	44	48	13.5	70	75	16.5
		149-165	5745-5825	12	48	48	13.5	74	75	16.5
	MCS0	38	5190	11	42	44	12.6	45	47	12.6
		46	5230	13.5	52	54	15	65	67	18.1
		54	5270	13.5	52	54	15	65	67	18.1
		62	5310	11	46	48	12.6	45	47	12.6
		102	5510	9	30	36	10.6	37	42	12.1
		110-126	5550-5630	13.5	48	52	15.1	59	64	18.1
		134	5670	8.5	30	36	10.1	41	46	12.1
		142	5720	13.5	48	52	15.1	59	64	18.1
		149-165	5745-5825	13.5	54	54	15.1	64	65	18.1
	MCS1	38	5190	11	42	44	12.5	45	47	12.5
		46	5230	13.5	52	54	15	65	67	18
		54	5270	13.5	52	54	15	65	67	18
		62	5310	11	46	48	12.5	45	47	12.5
		102	5510	9	30	36	10.5	37	42	12
		110-126	5550-5630	13.5	48	52	15	59	64	18
		134	5670	8.5	30	36	10	41	46	12
		142	5720	13.5	48	52	15	59	64	18
		149-165	5745-5825	13.5	54	54	15	64	65	18
	MCS2	38	5190	11	42	44	12.5	45	47	12.5
		46	5230	13.5	52	54	15	65	67	18
		54	5270	13.5	52	54	15	65	67	18
		62	5310	11	46	48	12.5	45	47	12.5

		102	5510	9	30	36	10.5	37	42	12
		110-126	5550-5630	13.5	48	52	15	59	64	18
		134	5670	8.5	30	36	10	41	46	12
		142	5720	13.5	48	52	15	59	64	18
		149-165	5745-5825	13.5	54	54	15	64	65	18
MCS3		38	5190	11	42	44	12.5	50	52	12.5
		46	5230	13.5	52	54	15	69	71	18
		54	5270	13.5	52	54	15	69	71	18
		62	5310	11	46	48	12.5	50	52	12.5
		102	5510	9	30	36	10.5	41	46	12
		110-126	5550-5630	13.5	48	52	15	63	68	18
		134	5670	8.5	30	36	10	43	48	12
		142	5720	13.5	48	52	15	63	68	18
		149-165	5745-5825	13.5	54	54	15	68	69	18
MCS4		38	5190	11	42	44	12.5	52	54	12.5
		46	5230	13.5	52	54	15	72	74	18
		54	5270	13.5	52	54	15	72	74	18
		62	5310	11	46	48	12.5	52	54	12.5
		102	5510	9	30	36	10.5	44	49	12
		110-126	5550-5630	13.5	48	52	15	66	71	18
		134	5670	8.5	30	36	10	48	53	12
		142	5720	13.5	48	52	15	66	71	18
		149-165	5745-5825	13.5	54	54	15	71	72	18
MCS5		38	5190	11	42	44	12.5	52	54	12.5
		46	5230	13.5	52	54	15	72	74	18
		54	5270	13.5	52	54	15	72	74	18
		62	5310	11	46	48	12.5	52	54	12.5
		102	5510	9	30	36	10.5	42	47	12
		110-126	5550-5630	13.5	48	52	15	66	71	18
		134	5670	8.5	30	36	10	44	49	12
		142	5720	13.5	48	52	15	66	71	18
		149-165	5745-5825	13.5	54	54	15	71	72	18
MCS6		38	5190	11	42	44	12.5	55	57	12.5
		46	5230	13	50	52	14.5	75	77	17.5
		54	5270	13	50	52	14.5	75	77	17.5
		62	5310	11	44	46	12.5	55	57	12.5
		102	5510	9	30	36	10.5	49	54	12
		110-126	5550-5630	13	46	52	14.5	69	74	17.5
		134	5670	8.5	30	36	10	51	56	12
		142	5720	13	46	52	14.5	69	74	17.5

11ac80M		149-165	5745-5825	13	52	52	14.5	74	75	17.5
	MCS7	38	5190	11	42	44	12.5	59	61	12.5
		46	5230	13	50	52	14.5	77	79	17.5
		54	5270	13	50	52	14.5	77	79	17.5
		62	5310	11	44	46	12.6	59	61	12.5
		102	5510	9	30	36	10.5	51	56	12
		110-126	5550-5630	13	46	52	14.5	71	76	17.5
		134	5670	8.5	30	36	10	53	58	12
		142	5720	13	46	52	14.5	71	76	17.5
		149-165	5745-5825	13	52	52	14.5	76	77	17.5
	MCS8	38	5190	11	42	44	12.5	58	60	12.5
		46	5230	12	46	48	13.5	77	82	16.5
		54	5270	12	46	48	13.5	77	82	16.5
		62	5310	11	44	46	12.5	58	60	12.5
		102	5510	9	30	36	10.5	53	58	12
		110-126	5550-5630	12	44	48	13.5	71	76	16.5
		134	5670	8.5	30	36	10	55	60	12
		142	5720	12	44	48	13.5	71	76	16.5
		149-165	5745-5825	12	48	48	13.5	74	75	16.5
	MCS9	38-46	5190-5230	11	42	44	12.5	63	65	12.5
		54-62	5270-5310	11	44	46	12.5	63	65	12.5
		102	5510	9	30	36	10.5	55	60	12
		110-126	5550-5630	11	40	44	12.5	73	78	15.5
		134	5670	8.5	30	36	10	59	64	12
		142	5720	11	40	44	12.5	73	78	15.5
		149-165	5745-5825	11	44	44	12.5	74	75	14.5
	MCS0	42	5210	11	42	44	12.6	41	43	11.3
		58	5290	11	44	46	12.6	41	43	11.3
		106-138	5500-5720	8.5	30	36	10.1	37	42	11.6
		155	5745-5825	13.5	54	54	15.1	56	57	15.6
	MCS1	42	5210	11	44	46	12.5	41	43	11.2
		58	5290	11	42	44	12.5	41	43	11.2
		106-138	5500-5720	8.5	30	36	10	37	42	11.5
		155	5745-5825	13.5	54	54	15	56	57	15.5
	MCS2	42	5210	11	42	44	12.5	41	43	11.2
		58	5290	11	44	46	12.5	41	43	11.2
		106-138	5500-5720	8.5	30	36	10	37	42	11.5
		155	5745-5825	13.5	54	54	15	56	57	15.5
	MCS3	42	5210	11	42	44	12.5	44	46	11.2
		58	5290	11	44	46	12.5	44	46	11.2

		106-138	5500-5720	8.5	30	36	10	40	45	11.5
		155	5745-5825	13.5	54	54	15	59	60	15
MCS4		42	5210	11	42	44	12.5	48	50	11.2
		58	5290	11	44	46	12.5	48	50	11.2
		106-138	5500-5720	8.5	30	36	10	44	49	11.5
		155	5745-5825	13.5	54	54	15	63	64	15
MCS5		42	5210	11	42	44	12.5	48	50	11
		58	5290	11	44	46	12.5	48	50	11
		106-138	5500-5720	8.5	30	36	10	44	49	11.5
		155	5745-5825	13.5	54	54	15	63	64	15
mcs6		42	5210	11	42	44	12.5	52	54	11
		58	5290	11	44	46	12.5	52	54	11
		106-138	5500-5720	8.5	30	36	10	48	53	11.5
		155	5745-5825	13	52	52	14.5	68	59	15
mcs7		42	5210	11	42	44	12.5	52	54	11
		58	5290	11	44	46	12.5	52	54	11
		106-138	5500-5720	8.5	30	36	10	48	53	11.5
		155	5745-5825	13	52	52	14.5	64	65	14.5
MCS8		42	5210	11	42	44	12.5	56	58	11
		58	5290	11	44	46	12.5	56	58	11
		106-138	5500-5720	8.5	30	36	10	52	57	11.5
		155	5745-5825	12	48	48	13.5	70	71	14.5
MCS9		42	5210	10.5	40	42	12	64	66	11.2
		58	5290	10.5	42	44	12	64	66	11.2
		106-138	5500-5720	8.5	30	36	10	60	65	11.5
		155	5745-5825	10.5	42	42	12	76	77	14.5

WiFi 5G - Tune up for Low power:

Mode	Rate	Channel	Freq.	Reduced Power(dBm)				
			(MHz)	Setting Power			SISO	MIMO
				Power	ANT 0 chain2	ANT1 chain1	Maximum	Maximum
11a	6Mbps	36-40	5180-5320	6.5	25	26	8	11
		44-48	5220-5240	6.5	25	26	8	11
		52-56	5260-5280	6.5	25	29	8	11
		60-64	5300-5320	6.5	25	29	8	11
		100-104	5500-5520	6.5	20	27	8	11
		108-132	5540-5660	6.5	20	27	8	11
		136-140	5680-5700	6.5	20	27	8	11
		144	5720	6.5	20	27	8	11
		149	5745	6.5	24	22	8	11
		153-161	5765-5725	6.5	24	22	8	11
		165	5745-5825	6.5	24	22	8	11
	9Mbps	36-40	5180-5320	6.5	25	26	8	11
		44-48	5220-5240	6.5	25	26	8	11
		52-56	5260-5280	6.5	25	29	8	11
		60-64	5300-5320	6.5	25	29	8	11
		100-104	5500-5520	6.5	19	26	8	11
		108-132	5540-5660	6.5	19	26	8	11
		136-140	5680-5700	6.5	19	26	8	11
		144	5720	6.5	19	26	8	11
		149	5745	6.5	24	22	8	11
		153-161	5765-5725	6.5	24	22	8	11
		165	5745-5825	6.5	24	22	8	11
	12Mbps	36-40	5180-5320	6.5	25	26	8	11
		44-48	5220-5240	6.5	25	26	8	11
		52-56	5260-5280	6.5	25	29	8	11
		60-64	5300-5320	6.5	25	29	8	11
		100-104	5500-5520	6.5	19	26	8	11
		108-132	5540-5660	6.5	19	26	8	11
		136-140	5680-5700	6.5	19	26	8	11
		144	5720	6.5	19	26	8	11
		149	5745	6.5	24	22	8	11
		153-161	5765-5725	6.5	24	22	8	11
		165	5745-5825	6.5	24	22	8	11
	18Mbps	36-40	5180-5320	6.5	25	26	8	11
		44-48	5220-5240	6.5	25	26	8	11
		52-56	5260-5280	6.5	25	29	8	11
		60-64	5300-5320	6.5	25	29	8	11

		100-104	5500-5520	6.5	19	26	8	11
		108-132	5540-5660	6.5	19	26	8	11
		136-140	5680-5700	6.5	19	26	8	11
		144	5720	6.5	19	26	8	11
		149	5745	6.5	24	22	8	11
		153-161	5765-5725	6.5	24	22	8	11
		165	5745-5825	6.5	24	22	8	11
	24Mbps	36-40	5180-5320	6.5	23	24	8	11
		44-48	5220-5240	6.5	23	24	8	11
		52-56	5260-5280	6.5	23	27	8	11
		60-64	5300-5320	6.5	23	27	8	11
		100-104	5500-5520	6.5	19	26	8	11
		108-132	5540-5660	6.5	19	26	8	11
		136-140	5680-5700	6.5	19	26	8	11
		144	5720	6.5	19	26	8	11
		149	5745	6.5	22	20	8	11
		153-161	5765-5725	6.5	22	20	8	11
		165	5745-5825	6.5	22	20	8	11
	36Mbps	36-40	5180-5320	6.5	23	24	8	11
		44-48	5220-5240	6.5	23	24	8	11
		52-56	5260-5280	6.5	23	27	8	11
		60-64	5300-5320	6.5	23	27	8	11
		100-104	5500-5520	6.5	19	26	8	11
		108-132	5540-5660	6.5	19	26	8	11
		136-140	5680-5700	6.5	19	26	8	11
		144	5720	6.5	19	26	8	11
		149	5745	6.5	22	20	8	11
		153-161	5765-5725	6.5	22	20	8	11
		165	5745-5825	6.5	22	20	8	11
	48Mbps	36-40	5180-5320	6.5	23	24	8	11
		44-48	5220-5240	6.5	23	24	8	11
		52-56	5260-5280	6.5	23	27	8	11
		60-64	5300-5320	6.5	23	27	8	11
		100-104	5500-5520	6.5	19	26	8	11
		108-132	5540-5660	6.5	19	26	8	11
		136-140	5680-5700	6.5	19	26	8	11
		144	5720	6.5	19	26	8	11
		149-165	5745-5825	6.5	22	20	8	11
	54Mbps	36-40	5180-5320	6.5	23	24	8	11
		44-48	5220-5240	6.5	23	24	8	11
		52-56	5260-5280	6.5	23	27	8	11
		60-64	5300-5320	6.5	23	27	8	11

11n20M		100-104	5500-5520	6.5	19	26	8	11
		108-132	5540-5660	6.5	19	26	8	11
		136-140	5680-5700	6.5	19	26	8	11
		144	5720	6.5	19	26	8	11
		149-165	5745-5825	6.5	22	20	8	11
	MCS0	36-40	5180-5320	6.5	24	27	8	11
		44-48	5220-5240	6.5	24	27	8	11
		52-56	5260-5280	6.5	25	30	8	11
		60-64	5300-5320	6.5	25	30	8	11
		100-104	5500-5520	6.5	20	27	8	11
		108-132	5540-5660	6.5	20	27	8	11
		136-140	5680-5700	6.5	20	27	8	11
		144	5720	6.5	20	27	8	11
		149	5745	6.5	26	22	8	11
		153-161	5765-5725	6.5	26	22	8	11
		165	5745-5825	6.5	26	22	8	11
	MCS1	36-40	5180-5320	6.5	23	25	8	11
		44-48	5220-5240	6.5	23	25	8	11
		52-56	5260-5280	6.5	24	29	8	11
		60-64	5300-5320	6.5	24	29	8	11
		100-104	5500-5520	6.5	19	26	8	11
		108-132	5540-5660	6.5	19	26	8	11
		136-140	5680-5700	6.5	19	26	8	11
		144	5720	6.5	19	26	8	11
		149	5745	6.5	25	20	8	11
		153-161	5765-5725	6.5	24	20	8	11
		165	5745-5825	6.5	24	20	8	11
	MCS2	36-40	5180-5320	6.5	22	25	8	11
		44-48	5220-5240	6.5	22	25	8	11
		52-56	5260-5280	6.5	24	29	8	11
		60-64	5300-5320	6.5	24	29	8	11
		100-104	5500-5520	6.5	19	26	8	11
		108-132	5540-5660	6.5	19	26	8	11
		136-140	5680-5700	6.5	19	26	8	11
		144	5720	6.5	19	26	8	11
		149	5745	6.5	24	20	8	11
		153-161	5765-5725	6.5	24	20	8	11
		165	5745-5825	6.5	24	20	8	11
	MCS3	36-40	5180-5320	6.5	21	23	8	11
		44-48	5220-5240	6.5	21	23	8	11
		52-56	5260-5280	6.5	23	27	8	11
		60-64	5300-5320	6.5	23	27	8	11

		100-104	5500-5520	6.5	19	26	8	11
		108-132	5540-5660	6.5	19	26	8	11
		136-140	5680-5700	6.5	19	26	8	11
		144	5720	6.5	19	26	8	11
		149	5745	6.5	22	18	8	11
		153-161	5765-5725	6.5	22	18	8	11
		165	5745-5825	6.5	22	18	8	11
	MCS4	36-40	5180-5320	6.5	21	23	8	11
		44-48	5220-5240	6.5	21	23	8	11
		52-56	5260-5280	6.5	23	27	8	11
		60-64	5300-5320	6.5	23	27	8	11
		100-104	5500-5520	6.5	19	26	8	11
		108-132	5540-5660	6.5	19	26	8	11
		136-140	5680-5700	6.5	19	26	8	11
		144	5720	6.5	19	26	8	11
		149	5745	6.5	22	18	8	11
		153-161	5765-5725	6.5	22	18	8	11
		165	5745-5825	6.5	22	18	8	11
	MCS5	36-40	5180-5320	6.5	21	23	8	11
		44-48	5220-5240	6.5	21	23	8	11
		52-56	5260-5280	6.5	23	27	8	11
		60-64	5300-5320	6.5	23	27	8	11
		100-104	5500-5520	6.5	19	26	8	11
		108-132	5540-5660	6.5	19	26	8	11
		136-140	5680-5700	6.5	19	26	8	11
		144	5720	6.5	19	26	8	11
		149	5745	6.5	22	18	8	11
		153-161	5765-5725	6.5	22	18	8	11
		165	5745-5825	6.5	22	18	8	11
	MCS6	36-40	5180-5320	6.5	21	23	8	11
		44-48	5220-5240	6.5	21	23	8	11
		52-56	5260-5280	6.5	23	27	8	11
		60-64	5300-5320	6.5	23	27	8	11
		100-104	5500-5520	6.5	19	26	8	11
		108-132	5540-5660	6.5	19	26	8	11
		136-140	5680-5700	6.5	19	26	8	11
		144	5720	6.5	19	26	8	11
		149-165	5745-5825	6.5	20	18	8	11
	MCS7	36-40	5180-5320	6.5	21	23	8	11
		44-48	5220-5240	6.5	21	23	8	11
		52-56	5260-5280	6.5	23	27	8	11
		60-64	5300-5320	6.5	23	27	8	11

		100-104	5500-5520	6.5	19	26	8	11
		108-132	5540-5660	6.5	19	26	8	11
		136-140	5680-5700	6.5	19	26	8	11
		144	5720	6.5	19	26	8	11
		149-165	5745-5825	6.5	20	18	8	11
11n40M	MCS0	38	5190	6.5	25	27	8	11
		46	5230	6.5	25	27	8	11
		54	5270	6.5	30	32	8	11
		62	5310	6.5	30	32	8	11
		102	5510	6.5	22	30	8	11
		110-126	5550-5630	6.5	22	30	8	11
		134	5670	6.5	22	30	8	11
		142	5720	6.5	22	30	8	11
		149-165	5745-5825	6.5	27	26	8	11
	MCS1	38	5190	6.5	24	26	8	11
		46	5230	6.5	24	26	8	11
		54	5270	6.5	28	31	8	11
		62	5310	6.5	28	31	8	11
		102	5510	6.5	21	29	8	11
		110-126	5550-5630	6.5	21	29	8	11
		134	5670	6.5	21	29	8	11
		142	5720	6.5	21	29	8	11
		149-165	5745-5825	6.5	25	25	8	11
	MCS2	38	5190	6.5	24	26	8	11
		46	5230	6.5	24	26	8	11
		54	5270	6.5	28	31	8	11
		62	5310	6.5	28	31	8	11
		102	5510	6.5	21	29	8	11
		110-126	5550-5630	6.5	21	29	8	11
		134	5670	6.5	21	29	8	11
		142	5720	6.5	21	29	8	11
		149-165	5745-5825	6.5	25	25	8	11
	MCS3	38	5190	6.5	23	25	8	11
		46	5230	6.5	23	25	8	11
		54	5270	6.5	28	31	8	11
		62	5310	6.5	28	31	8	11
		102	5510	6.5	21	29	8	11
		110-126	5550-5630	6.5	21	29	8	11
		134	5670	6.5	21	29	8	11
		142	5720	6.5	21	29	8	11
		149-165	5745-5825	6.5	25	25	8	11
	MCS4	38	5190	6.5	23	25	8	11

		46	5230	6.5	23	25	8	11
		54	5270	6.5	28	31	8	11
		62	5310	6.5	28	31	8	11
		102	5510	6.5	21	29	8	11
		110-126	5550-5630	6.5	21	29	8	11
		134	5670	6.5	21	29	8	11
		142	5720	6.5	21	29	8	11
		149-165	5745-5825	6.5	25	25	8	11
	MCS5	38	5190	6.5	23	25	8	11
		46	5230	6.5	23	25	8	11
		54	5270	6.5	28	31	8	11
		62	5310	6.5	28	31	8	11
		102	5510	6.5	21	29	8	11
		110-126	5550-5630	6.5	21	29	8	11
		134	5670	6.5	21	29	8	11
		142	5720	6.5	21	29	8	11
		149-165	5745-5825	6.5	25	25	8	11
	MCS6	38	5190	6.5	23	25	8	11
		46	5230	6.5	23	25	8	11
		54	5270	6.5	28	31	8	11
		62	5310	6.5	28	31	8	11
		102	5510	6.5	21	29	8	11
		110-126	5550-5630	6.5	21	29	8	11
		134	5670	6.5	21	29	8	11
		142	5720	6.5	21	29	8	11
		149-165	5745-5825	6.5	25	25	8	11
	MCS7	38	5190	6.5	23	25	8	11
		46	5230	6.5	23	25	8	11
		54	5270	6.5	28	31	8	11
		62	5310	6.5	28	31	8	11
		102	5510	6.5	21	29	8	11
		110-126	5550-5630	6.5	21	29	8	11
		134	5670	6.5	21	29	8	11
		142	5720	6.5	21	29	8	11
		149-165	5745-5825	6.5	25	25	8	11
11ac20M	MCS0	36-40	5180-5320	6.5	23	25	8	11
		44-48	5220-5240	6.5	23	25	8	11
		52-56	5260-5280	6.5	23	28	8	11
		60-64	5300-5320	6.5	23	28	8	11
		100-104	5500-5520	6.5	20	27	8	11
		108-132	5540-5660	6.5	20	27	8	11
		136-140	5680-5700	6.5	20	27	8	11

		144	5720	6.5	20	27	8	11
		149	5745	6.5	23	22	8	11
		153-161	5765-5725	6.5	23	22	8	11
		165	5745-5825	6.5	23	22	8	11
MCS1		36-40	5180-5320	6.5	23	25	8	11
		44-48	5220-5240	6.5	23	25	8	11
		52-56	5260-5280	6.5	23	28	8	11
		60-64	5300-5320	6.5	23	28	8	11
		100-104	5500-5520	6.5	20	27	8	11
		108-132	5540-5660	6.5	20	27	8	11
		136-140	5680-5700	6.5	20	27	8	11
		144	5720	6.5	20	27	8	11
		149	5745	6.5	23	22	8	11
		153-161	5765-5725	6.5	23	22	8	11
		165	5745-5825	6.5	23	22	8	11
MCS2		36-40	5180-5320	6.5	23	25	8	11
		44-48	5220-5240	6.5	23	25	8	11
		52-56	5260-5280	6.5	23	28	8	11
		60-64	5300-5320	6.5	23	28	8	11
		100-104	5500-5520	6.5	20	27	8	11
		108-132	5540-5660	6.5	20	27	8	11
		136-140	5680-5700	6.5	20	27	8	11
		144	5720	6.5	20	27	8	11
		149	5745	6.5	23	22	8	11
		153-161	5765-5725	6.5	23	22	8	11
		165	5745-5825	6.5	23	22	8	11
MCS3		36-40	5180-5220	6.5	23	25	8	11
		44-48	5220-5240	6.5	23	25	8	11
		52-56	5260-5280	6.5	23	28	8	11
		60-64	5300-5320	6.5	23	28	8	11
		100-104	5500-5520	6.5	20	27	8	11
		108-132	5540-5660	6.5	20	27	8	11
		136-140	5680-5700	6.5	20	27	8	11
		144	5720	6.5	20	27	8	11
		149	5745	6.5	23	22	8	11
		153-161	5765-5725	6.5	23	22	8	11
		165	5745-5825	6.5	23	22	8	11
MCS4		36-40	5180-5320	6.5	23	25	8	11
		44-48	5220-5240	6.5	23	25	8	11
		52-56	5260-5280	6.5	23	28	8	11
		60-64	5300-5320	6.5	23	28	8	11
		100-104	5500-5520	6.5	20	27	8	11

		108-132	5540-5660	6.5	20	27	8	11
		136-140	5680-5700	6.5	20	27	8	11
		144	5720	6.5	20	27	8	11
		149	5745	6.5	23	22	8	11
		153-161	5765-5725	6.5	23	22	8	11
		165	5745-5825	6.5	23	22	8	11
	MCS5	36-40	5180-5320	6.5	23	25	8	11
		44-48	5220-5240	6.5	23	25	8	11
		52-56	5260-5280	6.5	23	28	8	11
		60-64	5300-5320	6.5	23	28	8	11
		100-104	5500-5520	6.5	20	27	8	11
		108-132	5540-5660	6.5	20	27	8	11
		136-140	5680-5700	6.5	20	27	8	11
		144	5720	6.5	20	27	8	11
		149	5745	6.5	23	22	8	11
		153-161	5765-5725	6.5	23	22	8	11
		165	5745-5825	6.5	23	22	8	11
	MCS6	36-40	5180-5320	6.5	23	25	8	11
		44-48	5220-5240	6.5	23	25	8	11
		52-56	5260-5280	6.5	23	28	8	11
		60-64	5300-5320	6.5	23	28	8	11
		100-104	5500-5520	6.5	20	27	8	11
		108-132	5540-5660	6.5	20	27	8	11
		136-140	5680-5700	6.5	20	27	8	11
		144	5720	6.5	20	27	8	11
		149-165	5745-5825	6.5	22	22	8	11
	MCS7	36-40	5180-5320	6.5	23	25	8	11
		44-48	5220-5240	6.5	23	25	8	11
		52-56	5260-5280	6.5	23	28	8	11
		60-64	5300-5320	6.5	23	28	8	11
		100-104	5500-5520	6.5	20	27	8	11
		108-132	5540-5660	6.5	20	27	8	11
		136-140	5680-5700	6.5	20	27	8	11
		144	5720	6.5	20	27	8	11
		149-165	5745-5825	6.5	22	22	8	11
	MCS8	36-40	5180-5320	6.5	23	25	8	11
		44-48	5220-5240	6.5	23	25	8	11
		52-56	5260-5280	6.5	23	28	8	11
		60-64	5300-5320	6.5	23	28	8	11
		100-104	5500-5520	6.5	20	27	8	11
		108-132	5540-5660	6.5	20	27	8	11
		136-140	5680-5700	6.5	20	27	8	11

11ac40M		144	5720	6.5	20	27	8	11
		149-165	5745-5825	6.5	22	22	8	11
	MCS0	38	5190	6.5	23	25	8	11
		46	5230	6.5	23	25	8	11
		54	5270	6.5	28	33	8	11
		62	5310	6.5	28	33	8	11
		102	5510	6.5	21	29	8	11
		110-126	5550-5630	6.5	21	29	8	11
		134	5670	6.5	21	29	8	11
		142	5720	6.5	21	29	8	11
		149-165	5745-5825	6.5	25	27	8	11
	MCS1	38	5190	6.5	23	25	8	11
		46	5230	6.5	23	25	8	11
		54	5270	6.5	28	33	8	11
		62	5310	6.5	28	33	8	11
		102	5510	6.5	21	29	8	11
		110-126	5550-5630	6.5	21	29	8	11
		134	5670	6.5	21	29	8	11
		142	5720	6.5	21	29	8	11
		149-165	5745-5825	6.5	25	27	8	11
	MCS2	38	5190	6.5	23	25	8	11
		46	5230	6.5	23	25	8	11
		54	5270	6.5	28	33	8	11
		62	5310	6.5	28	33	8	11
		102	5510	6.5	21	29	8	11
		110-126	5550-5630	6.5	21	29	8	11
		134	5670	6.5	21	29	8	11
		142	5720	6.5	21	29	8	11
		149-165	5745-5825	6.5	25	27	8	11
	MCS3	38	5190	6.5	23	25	8	11
		46	5230	6.5	23	25	8	11
		54	5270	6.5	28	33	8	11
		62	5310	6.5	28	33	8	11
		102	5510	6.5	21	29	8	11
		110-126	5550-5630	6.5	21	29	8	11
		134	5670	6.5	21	29	8	11
		142	5720	6.5	21	29	8	11
		149-165	5745-5825	6.5	25	27	8	11
	MCS4	38	5190	6.5	23	25	8	11
		46	5230	6.5	23	25	8	11
		54	5270	6.5	28	33	8	11
		62	5310	6.5	28	33	8	11

		102	5510	6.5	21	28	8	11
		110-126	5550-5630	6.5	21	28	8	11
		134	5670	6.5	21	28	8	11
		142	5720	6.5	21	28	8	11
		149-165	5745-5825	6.5	25	27	8	11
	MCS5	38	5190	6.5	23	25	8	11
		46	5230	6.5	23	25	8	11
		54	5270	6.5	27	33	8	11
		62	5310	6.5	27	33	8	11
		102	5510	6.5	21	28	8	11
		110-126	5550-5630	6.5	21	28	8	11
		134	5670	6.5	21	28	8	11
		142	5720	6.5	21	28	8	11
		149-165	5745-5825	6.5	25	27	8	11
	MCS6	38	5190	6.5	23	25	8	11
		46	5230	6.5	23	25	8	11
		54	5270	6.5	27	33	8	11
		62	5310	6.5	27	33	8	11
		102	5510	6.5	21	28	8	11
		110-126	5550-5630	6.5	21	28	8	11
		134	5670	6.5	21	28	8	11
		142	5720	6.5	21	28	8	11
		149-165	5745-5825	6.5	25	27	8	11
	MCS7	38	5190	6.5	23	25	8	11
		46	5230	6.5	23	25	8	11
		54	5270	6.5	27	33	8	11
		62	5310	6.5	27	33	8	11
		102	5510	6.5	21	28	8	11
		110-126	5550-5630	6.5	21	28	8	11
		134	5670	6.5	21	28	8	11
		142	5720	6.5	21	28	8	11
		149-165	5745-5825	6.5	25	27	8	11
	MCS8	38	5190	6.5	23	25	8	11
		46	5230	6.5	23	25	8	11
		54	5270	6.5	27	33	8	11
		62	5310	6.5	27	33	8	11
		102	5510	6.5	21	28	8	11
		110-126	5550-5630	6.5	21	28	8	11
		134	5670	6.5	21	28	8	11
		142	5720	6.5	21	28	8	11
		149-165	5745-5825	6.5	25	27	8	11
	MCS9	38-46	5190-5230	6.5	23	25	8	11

11ac80M		54-62	5270-5310	6.5	27	33	8	11
		102	5510	6.5	21	28	8	11
		110-126	5550-5630	6.5	21	28	8	11
		134	5670	6.5	21	28	8	11
		142	5720	6.5	21	28	8	11
		149-165	5745-5825	6.5	25	27	8	11
	MCS0	42	5210	6.5	26	27	8	11
		58	5290	6.5	29	34	8	11
		106-138	5500-5720	6.5	23	29	8	11
		155	5745-5825	6.5	26	26	8	11
	MCS1	42	5210	6.5	25	26	8	11
		58	5290	6.5	28	32	8	11
		106-138	5500-5720	6.5	22	27	8	11
		155	5745-5825	6.5	24	24	8	11
	MCS2	42	5210	6.5	25	26	8	11
		58	5290	6.5	28	32	8	11
		106-138	5500-5720	6.5	22	27	8	11
		155	5745-5825	6.5	24	24	8	11
	MCS3	42	5210	6.5	25	25	8	11
		58	5290	6.5	28	32	8	11
		106-138	5500-5720	6.5	22	27	8	11
		155	5745-5825	6.5	24	24	8	11
	MCS4	42	5210	6.5	25	25	8	11
		58	5290	6.5	28	32	8	11
		106-138	5500-5720	6.5	21	27	8	11
		155	5745-5825	6.5	24	24	8	11
	MCS5	42	5210	6.5	25	25	8	11
		58	5290	6.5	28	32	8	11
		106-138	5500-5720	6.5	21	27	8	11
		155	5745-5825	6.5	24	24	8	11
	mcs6	42	5210	6.5	25	25	8	11
		58	5290	6.5	27	32	8	11
		106-138	5500-5720	6.5	21	27	8	11
		155	5745-5825	6.5	24	24	8	11
	mcs7	42	5210	6.5	25	25	8	11
		58	5290	6.5	27	32	8	11
		106-138	5500-5720	6.5	21	27	8	11
		155	5745-5825	6.5	24	24	8	11
	MCS8	42	5210	6.5	25	25	8	11
		58	5290	6.5	27	32	8	11
		106-138	5500-5720	6.5	21	27	8	11
		155	5745-5825	6.5	24	24	8	11

	MCS9	42	5210	6.5	25	25	8	11
		58	5290	6.5	27	32	8	11
		106-138	5500-5720	6.5	21	27	8	11
		155	5745-5825	6.5	24	24	8	11

WiFi 5G ANT0- Normal power:

802.11a(dBm)									
Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	Tune up
36(5180 MHz)	10.66	/	/	/	/	/	/	/	12.60
40(5200 MHz)	10.69	/	/	/	/	/	/	/	12.60
44(5220 MHz)	16.34	/	/	/	/	/	/	/	17.60
48(5240 MHz)	16.46	/	/	/	/	/	/	/	17.60
52(5260 MHz)	15.98	/	/	/	/	/	/	/	17.60
56(5280 MHz)	15.65	/	/	/	/	/	/	/	17.60
60(5300 MHz)	11.01	/	/	/	/	/	/	/	12.60
64(5320 MHz)	10.93	/	/	/	/	/	/	/	12.60
100(5500 MHz)	8.65	/	/	/	/	/	/	/	10.60
104(5520 MHz)	8.62	/	/	/	/	/	/	/	10.60
108(5540 MHz)	16.08	/	/	/	/	/	/	/	17.60
112(5560 MHz)	16.08	/	/	/	/	/	/	/	17.60
116(5580 MHz)	16.27	/	/	/	/	/	/	/	17.60
120(5600 MHz)	16.74	/	/	/	/	/	/	/	17.60
124(5620 MHz)	16.72	/	/	/	/	/	/	/	17.60
128(5640 MHz)	16.68	/	/	/	/	/	/	/	17.60
132(5660 MHz)	16.64	/	/	/	/	/	/	/	17.60
136(5680 MHz)	8.28	/	/	/	/	/	/	/	10.10
140(5700 MHz)	8.69	/	/	/	/	/	/	/	10.10
144(5720 MHz)	13.87	/	/	/	/	/	/	/	15.10
149(5745 MHz)	14.32	/	/	/	/	/	/	/	15.10
153(5765 MHz)	16.98	/	/	/	/	/	/	/	17.60
157(5785 MHz)	17.13	17.12	17.11	17.06	16.14	15.70	15.29	14.32	17.60
161(5805 MHz)	17.07	/	/	/	/	/	/	/	17.60
165(5825 MHz)	13.24	/	/	/	/	/	/	/	15.10

WiFi 5G ANT0- Low power:

802.11ac(dBm)-80MHz											
Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	Tune up
42(5210 MHz)	6.25	/	/	/	/	/	/	/	/	/	8
58(5290 MHz)	7.85	7.33	7.12	6.72	6.34	6.01	5.85	5.90	5.67	5.63	8
106(5530 MHz)	6.80	/	/	/	/	/	/	/	/	/	8
122(5610 MHz)	6.83	/	/	/	/	/	/	/	/	/	8
138(5690 MHz)	6.40	/	/	/	/	/	/	/	/	/	8
155(5775 MHz)	6.28	/	/	/	/	/	/	/	/	/	8

WiFi 5G ANT1- Normal power:

802.11a(dBm)									
Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	Tune up
36(5180 MHz)	11.22	/	/	/	/	/	/	/	12.60
40(5200 MHz)	11.25	/	/	/	/	/	/	/	12.60
44(5220 MHz)	15.82	/	/	/	/	/	/	/	17.60
48(5240 MHz)	16.18	/	/	/	/	/	/	/	17.60
52(5260 MHz)	15.73	/	/	/	/	/	/	/	17.60
56(5280 MHz)	15.64	/	/	/	/	/	/	/	17.60
60(5300 MHz)	11.58	/	/	/	/	/	/	/	12.60
64(5320 MHz)	11.50	/	/	/	/	/	/	/	12.60
100(5500 MHz)	8.66	/	/	/	/	/	/	/	10.60
104(5520 MHz)	8.61	/	/	/	/	/	/	/	10.60
108(5540 MHz)	15.95	/	/	/	/	/	/	/	17.60
112(5560 MHz)	15.67	/	/	/	/	/	/	/	17.60
116(5580 MHz)	16.17	/	/	/	/	/	/	/	17.60
120(5600 MHz)	15.57	/	/	/	/	/	/	/	17.60
124(5620 MHz)	15.94	/	/	/	/	/	/	/	17.60
128(5640 MHz)	16.47	/	/	/	/	/	/	/	17.60
132(5660 MHz)	16.51	/	/	/	/	/	/	/	17.60
136(5680 MHz)	8.74	/	/	/	/	/	/	/	10.10
140(5700 MHz)	9.18	/	/	/	/	/	/	/	10.10
144(5720 MHz)	14.08	/	/	/	/	/	/	/	15.10
149(5745 MHz)	14.65	/	/	/	/	/	/	/	15.10
153(5765 MHz)	16.33	/	/	/	/	/	/	/	17.60
157(5785 MHz)	16.35	/	/	/	/	/	/	/	17.60
161(5805 MHz)	16.58	16.54	16.44	16.41	15.66	15.16	14.68	13.85	17.60
165(5825 MHz)	14.15	/	/	/	/	/	/	/	15.10

WiFi 5G ANT1- Low power:

802.11ac(dBm)-80MHz											
Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	Tune up
42(5210 MHz)	7.30	/	/	/	/	/	/	/	/	/	8
58(5290 MHz)	7.79	/	/	/	/	/	/	/	/	/	8
106(5530 MHz)	7.70	/	/	/	/	/	/	/	/	/	8
122(5610 MHz)	7.89	7.33	6.95	6.61	6.23	5.97	5.83	5.84	5.52	4.83	8
138(5690 MHz)	6.90	/	/	/	/	/	/	/	/	/	8
155(5775 MHz)	6.54	/	/	/	/	/	/	/	/	/	8



No.I23Z70001-SEM01

12 Simultaneous TX SAR Considerations

12.1 Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may transmit simultaneously with each other. For this device, the BT and WIFI2.4G/WIFI5G can transmit simultaneously.

12.2 Transmit Antenna Separation Distances

Please find the picture of antenna locations in the file < The Photos of SAR test - I23Z70001>.

13 Evaluation of Simultaneous

Table 13.1: The sum of reported SAR values for WiFi2.4G MIMO + BT

	Position	WiFi2.4G-ANT0	WiFi2.4G-ANT1	BT	Sum
Highest reported SAR value for Body	Rear 0mm	0.37	0.25	0.06 ^[1]	0.68

Table 13.2: The sum of reported SAR values for WiFi5G MIMO + BT

	Position	WiFi5G-ANT0	WiFi5G-ANT1	BT	Sum
Highest reported SAR value for Body	Rear 0mm	0.96	0.54	0.06 ^[1]	1.56

[1] - Estimated SAR for Bluetooth (see the table 13.3)

Table 13.3: Estimated SAR for Bluetooth

Mode/Band	F (GHz)	Position	Distance (mm)	Upper limit of power *		Estimated _{1g} (W/kg)
				dBm	mW	
Bluetooth	2.441	Body	5	1.5	1.41	0.06

* - Maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance,mm)]·[√f(GHz)/x] W/kg for test separation distances ≤ 50 mm;
where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Conclusion:

According to the above tables, the sum of reported SAR values is<1.6W/kg. So the simultaneous transmission SAR with volume scans is not required.

14 SAR Test Result

It is determined by user manual for the distance between the EUT and the phantom bottom.

It is performed for all SAR measurements with area scan based 1-g SAR estimation (Fast SAR). A zoom scan measurement is added when the estimated 1-g SAR is the highest measured SAR in each exposure configuration, wireless mode and frequency band combination or more than 1.2W/kg.

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \times 10^{(P_{\text{Target}} - P_{\text{Measured}})/10}$$

Where P_{Target} is the power of manufacturing upper limit;

P_{Measured} is the measured power in chapter 11.

14.1 WLAN Evaluation for 2.4G


Table 14.1-1: SAR Values WLAN2.4G-ANT0

ANT	Test Position	Phantom position L/R/F	Frequency Band	Channel Number	Frequency (MHz)	Test setup	Fig.No	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
WiFi 802.11b 1Mbps														
0	Body	F	WiFi2.4G	1	2412	Front 13mm	/	12.99	13.5	0.039	0.04	0.021	0.02	-0.11
0	Body	F	WiFi2.4G	1	2412	Rear 15mm	/	12.99	13.5	0.049	0.06	0.026	0.03	-0.18
0	Body	F	WiFi2.4G	1	2412	Top Edge 15mm	/	12.99	13.5	<0.01	<0.01	<0.01	<0.01	/
WiFi 802.11g 6Mbps														
0	Body	F	WiFi2.4G	6	2437	Front 13mm	/	17.47	19	0.162	0.23	0.088	0.13	0.12
0	Body	F	WiFi2.4G	6	2437	Rear 15mm	/	17.47	19	0.216	0.31	0.112	0.16	0.04
0	Body	F	WiFi2.4G	6	2437	Top Edge 15mm	/	17.47	19	0.122	0.17	0.066	0.09	0.13
WiFi 802.11b 1Mbps														
0	Body	F	WiFi2.4G	1	2412	Front 0mm	/	8.45	10	0.133	0.19	0.048	0.07	-0.15
0	Body	F	WiFi2.4G	1	2412	Rear 0mm	1	8.45	10	0.262	0.37	0.099	0.14	0.12
0	Body	F	WiFi2.4G	1	2412	Top Edge 0mm	/	8.45	10	0.057	0.08	0.021	0.03	-0.08
WiFi 802.11b 1Mbps														
1	Body	F	WiFi2.4G	11	2462	Front 13mm	/	13.45	13.5	<0.01	<0.01	<0.01	<0.01	/
1	Body	F	WiFi2.4G	11	2462	Rear 15mm	/	13.45	13.5	0.043	0.04	0.024	0.02	0.09
1	Body	F	WiFi2.4G	11	2462	Top Edge 15mm	/	13.45	13.5	<0.01	<0.01	<0.01	<0.01	/

Note: The distance between the EUT and the phantom bottom is 13mm/15mm because of sensor (See detail in annex I). The distance for other results is 0mm.

Table 14.1-2: SAR Values WLAN2.4G-ANT0 (Scaled Reported SAR)

Ambient Temperature: 22.9°C						Liquid Temperature: 22.5°C	
Frequency		Test Position	Actual duty factor	maximum duty factor	Reported SAR (1g)(W/kg)	Scaled reported SAR (1g)(W/kg)	
Ch.	MHz						
1	2412	Rear 0mm	98.8%	100%	0.37	0.37	

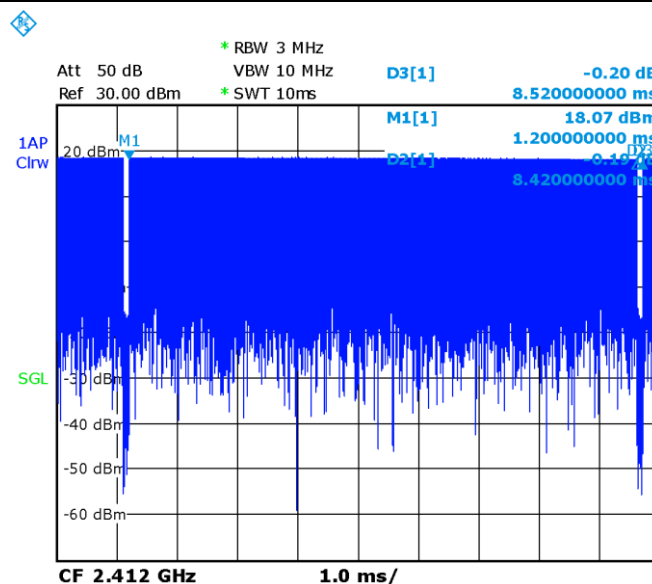

Picture 14.1-1 Duty factor plot


Table 14.1-3: SAR Values WLAN2.4G-ANT1

ANT	Test Position	Phantom position L/R/F	Frequency Band	Channel Number	Frequency (MHz)	Test setup	Fig.No	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
WiFi 802.11b 1Mbps														
1	Body	F	WiFi2.4G	11	2462	Front 13mm	/	13.45	13.5	<0.01	<0.01	<0.01	<0.01	/
1	Body	F	WiFi2.4G	11	2462	Rear 15mm	/	13.45	13.5	0.043	0.04	0.024	0.02	0.09
1	Body	F	WiFi2.4G	11	2462	Top Edge 15mm	/	13.45	13.5	<0.01	<0.01	<0.01	<0.01	/
WiFi 802.11g 6Mbps														
1	Body	F	WiFi2.4G	6	2437	Front 13mm	/	17.99	19	0.115	0.15	0.06	0.08	-0.04
1	Body	F	WiFi2.4G	6	2437	Rear 15mm	/	17.99	19	0.138	0.17	0.078	0.10	-0.04
1	Body	F	WiFi2.4G	6	2437	Top Edge 15mm	/	17.99	19	0.121	0.15	0.061	0.08	-0.16
WiFi 802.11b 1Mbps														
1	Body	F	WiFi2.4G	11	2462	Front 0mm	/	8.51	10	0.088	0.12	0.035	0.05	0.1
1	Body	F	WiFi2.4G	11	2462	Rear 0mm	2	8.51	10	0.175	0.25	0.069	0.10	0.04
1	Body	F	WiFi2.4G	11	2462	Top Edge 0mm	/	8.51	10	0.15	0.21	0.056	0.08	0.01

Note: The distance between the EUT and the phantom bottom is 13mm/15mm because of sensor (See detail in annex I). The distance for other results is 0mm.

Table 14.1-4: SAR Values WLAN2.4G-ANT1 (Scaled Reported SAR)

Frequency		Test Position	Actual duty factor	maximum duty factor	Reported SAR (1g)(W/kg)	Scaled reported SAR (1g)(W/kg)
Ch.	MHz					
11	2462	Rear 0mm	98.8%	100%	0.25	0.25

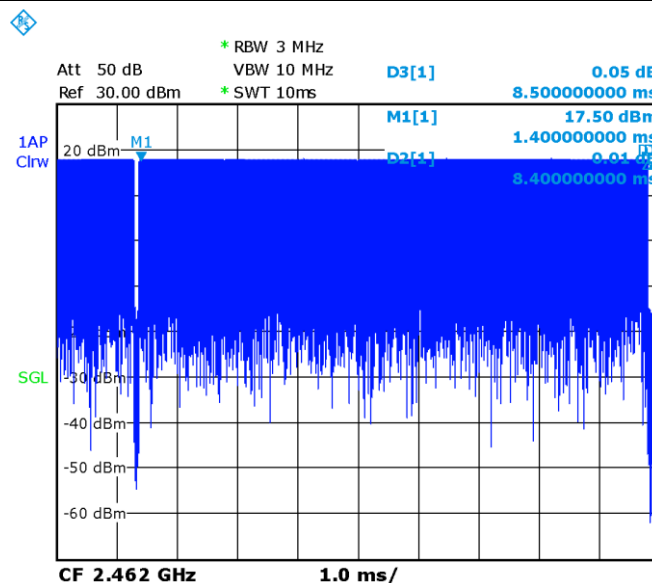
Picture 14.1-2 Duty factor plot

14.2 WLAN Evaluation For 5G


Table 14.2-1: SAR Values WLAN5G-ANT0

ANT	Test Position	Phantom position L/R/F	Frequency Band	Channel Number	Frequency (MHz)	Test setup	Fig.No	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
WIFI 802.11a 6Mbps														
0	Body	F	WIFI5G	52	5260	Front 13mm	/	15.98	17.6	0.088	0.13	0.031	0.05	-0.14
0	Body	F	WIFI5G	52	5260	Rear 15mm	/	15.98	17.6	0.154	0.22	0.054	0.08	0.08
0	Body	F	WIFI5G	52	5260	Top Edge 15mm	/	15.98	17.6	0.144	0.21	0.052	0.08	-0.06
WIFI 802.11a 6Mbps														
0	Body	F	WIFI5G	120	5600	Front 13mm	/	16.74	17.6	0.12	0.15	0.044	0.05	-0.06
0	Body	F	WIFI5G	120	5600	Rear 15mm	/	16.74	17.6	0.189	0.23	0.069	0.08	-0.13
0	Body	F	WIFI5G	120	5600	Top Edge 15mm	/	16.74	17.6	0.153	0.19	0.057	0.07	0.04
WIFI 802.11a 6Mbps														
0	Body	F	WIFI5G	157	5785	Front 13mm	/	17.13	17.6	0.141	0.16	0.048	0.05	-0.09
0	Body	F	WIFI5G	157	5785	Rear 15mm	/	17.13	17.6	0.3	0.33	0.102	0.11	-0.05
0	Body	F	WIFI5G	157	5785	Top Edge 15mm	/	17.13	17.6	0.19	0.21	0.072	0.08	0.06
WIFI 802.11ac-80M MCS0														
0	Body	F	WIFI5G	58	5290	Front 0mm	/	7.85	8	0.187	0.19	0.042	0.04	0.18
0	Body	F	WIFI5G	58	5290	Rear 0mm	3	7.85	8	0.903	0.93	0.152	0.16	0.16
0	Body	F	WIFI5G	58	5290	Top Edge 0mm	/	7.85	8	0.26	0.27	0.067	0.07	0.16
WIFI 802.11ac-80M MCS0														
0	Body	F	WIFI5G	122	5610	Front 0mm	/	6.83	8	0.136	0.18	0.036	0.05	0.08
0	Body	F	WIFI5G	122	5610	Rear 0mm	/	6.83	8	0.468	0.61	0.089	0.12	0.18
0	Body	F	WIFI5G	122	5610	Top Edge 0mm	/	6.83	8	0.325	0.43	0.063	0.08	0.11
WIFI 802.11ac-80M MCS0														
0	Body	F	WIFI5G	155	5775	Front 0mm	/	6.28	8	0.133	0.20	0.034	0.05	-0.08
0	Body	F	WIFI5G	155	5775	Rear 0mm	/	6.28	8	0.267	0.40	0.068	0.10	-0.02
0	Body	F	WIFI5G	155	5775	Top Edge 0mm	/	6.28	8	0.232	0.34	0.048	0.07	0.04

Note: The distance between the EUT and the phantom bottom is 13mm/15mm because of sensor (See detail in annex I). The distance for other results is 0mm.

Table 14.2-2: SAR Values WLAN5G-ANT0 (Scaled Reported SAR)

Frequency		Test		Actual duty		maximum		Reported SAR		Scaled reported SAR	
Ch.		Position		factor		duty factor		(1g)(W/kg)		(1g)(W/kg)	
MHz											
58	5290	Rear 0mm		97.3%		100%		0.93		0.96	

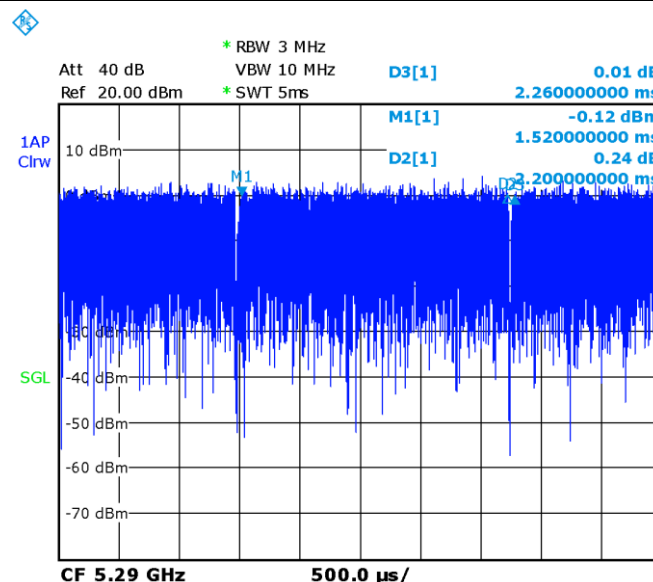

Picture 14.2-1 Duty factor plot


Table 14.2-3: SAR Values WLAN5G-ANT1

ANT	Test Position	Phantom position L/R/F	Frequency Band	Channel Number	Frequency (MHz)	Test setup	Fig.No	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
WIFI 802.11a 6Mbps														
1	Body	F	WIFI5G	52	5260	Front 13mm	/	15.73	17.6	0.1	0.15	0.037	0.06	0.09
1	Body	F	WIFI5G	52	5260	Rear 15mm	/	15.73	17.6	0.183	0.28	0.064	0.10	-0.14
1	Body	F	WIFI5G	52	5260	Top Edge 15mm	/	15.73	17.6	0.121	0.19	0.044	0.07	-0.07
WIFI 802.11a 6Mbps														
1	Body	F	WIFI5G	132	5660	Front 13mm	/	16.51	17.6	0.235	0.30	0.078	0.10	0.04
1	Body	F	WIFI5G	132	5660	Rear 15mm	/	16.51	17.6	0.36	0.46	0.119	0.15	0.13
1	Body	F	WIFI5G	132	5660	Top Edge 15mm	/	16.51	17.6	0.346	0.44	0.106	0.14	0.17
WIFI 802.11a 6Mbps														
1	Body	F	WIFI5G	161	5805	Front 13mm	/	16.58	17.6	0.198	0.25	0.065	0.08	-0.17
1	Body	F	WIFI5G	161	5805	Rear 15mm	/	16.58	17.6	0.374	0.47	0.121	0.15	-0.01
1	Body	F	WIFI5G	161	5805	Top Edge 15mm	/	16.58	17.6	0.331	0.42	0.106	0.13	0.12
WIFI 802.11ac-80M MCS0														
1	Body	F	WIFI5G	58	5290	Front 0mm	/	7.79	8	0.193	0.20	0.053	0.06	-0.02
1	Body	F	WIFI5G	58	5290	Rear 0mm	4	7.79	8	0.509	0.53	0.104	0.11	0.11
1	Body	F	WIFI5G	58	5290	Top Edge 0mm	/	7.79	8	0.465	0.49	0.087	0.09	0.16
WIFI 802.11ac-80M MCS0														
1	Body	F	WIFI5G	138	5690	Front 0mm	/	7.89	8	0.191	0.20	0.053	0.05	0.06
1	Body	F	WIFI5G	138	5690	Rear 0mm	/	7.89	8	0.232	0.24	0.057	0.06	0.09
1	Body	F	WIFI5G	138	5690	Top Edge 0mm	/	7.89	8	0.435	0.45	0.089	0.09	0.05
WIFI 802.11ac-80M MCS0														
1	Body	F	WIFI5G	155	5775	Front 0mm	/	6.54	8	0.203	0.28	0.048	0.07	0.11
1	Body	F	WIFI5G	155	5775	Rear 0mm	/	6.54	8	0.318	0.45	0.078	0.11	0.11
1	Body	F	WIFI5G	155	5775	Top Edge 0mm	/	6.54	8	0.318	0.45	0.085	0.12	-0.06

Note: The distance between the EUT and the phantom bottom is 13mm/15mm because of sensor (See detail in annex I). The distance for other results is 0mm.

Table 14.2-4: SAR Values WLAN5G-ANT1 (Scaled Reported SAR)

Frequency		Test Position	Actual duty factor	maximum duty factor	Reported SAR (1g)(W/kg)	Scaled reported SAR (1g)(W/kg)
Ch.	MHz					
58	5290	Rear 0mm	97.3%	100%	0.53	0.54

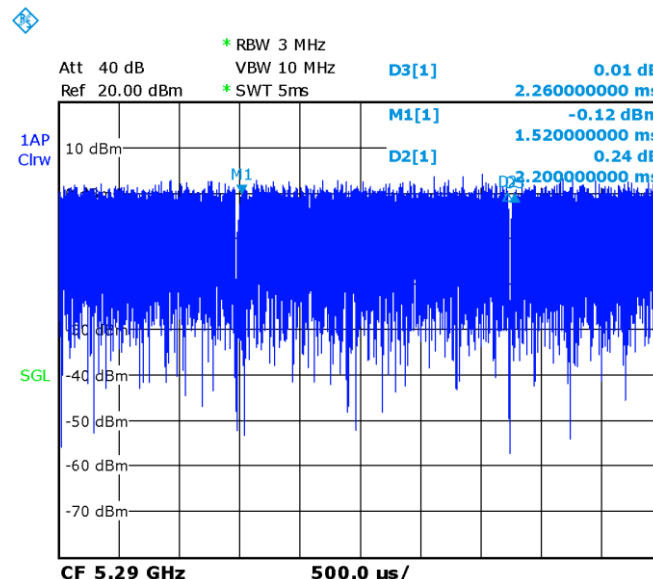
Picture 14.2-2 Duty factor plot

15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Mode	CH	Frequency	Test Position	Original SAR (W/kg)	First Repeated SAR(W/kg)	The Ratio
Wi-Fi 5G 802.11ac-80M	58	5290MHz	Rear 0mm	0.903	0.887	1.02

16 Measurement Uncertainty

16.1 Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	N	1	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521

Combined standard uncertainty	$u_c' = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					9.55	9.43	257
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$					19.1	18.9	

16.2 Measurement Uncertainty for Normal SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.55	N	1	1	1	6.55	6.55	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43

20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c' = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						10.7	10.6	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						21.4	21.1	

16.3 Measurement Uncertainty for Fast SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	B	7.0	R	$\sqrt{3}$	1	1	4.0	4.0	∞
Test sample related										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞

Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u'_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						10.4	10.3	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						20.8	20.6	

16.4 Measurement Uncertainty for Fast SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.55	N	1	1	1	6.55	6.55	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	B	14.0	R	$\sqrt{3}$	1	1	8.1	8.1	∞

Test sample related										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c' = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						13.5	13.4	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						27.0	26.8	

17 MAIN TEST INSTRUMENTS

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	E5071C	MY46110673	January 10, 2023	One year
02	Power sensor	NRP110T	101139	January 13, 2023	One year
03	Power sensor	NRP110T	101159	January 13, 2023	One year
04	Signal Generator	E4438C	MY49071430	January 19, 2023	One year
05	Amplifier	60S1G4	0331848	No Calibration Requested	
07	E-field Probe	SPEAG EX3DV4	7548	August 1, 2022	One year
08	DAE	SPEAG DAE4	1331	September 15, 2022	One year
09	Dipole Validation Kit	SPEAG D2450V2	853	July 20,2022	One year
10	Dipole Validation Kit	SPEAG D5GHzV2	1060	July 5,2022	One year

END OF REPORT BODY

ANNEX A Graph Results

WLAN2450-ANT0 Rear 0mm

Date: 3/2/2023

Electronics: DAE4 Sn1331

Medium: head 2450MHz

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.779$ S/m; $\epsilon_r = 40.197$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.2°C, Liquid Temperature: 22°C

Communication System: WLAN2450 2412MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7548 ConvF(7.32,7.32,7.32)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.505 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.47 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.801 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.554 W/kg

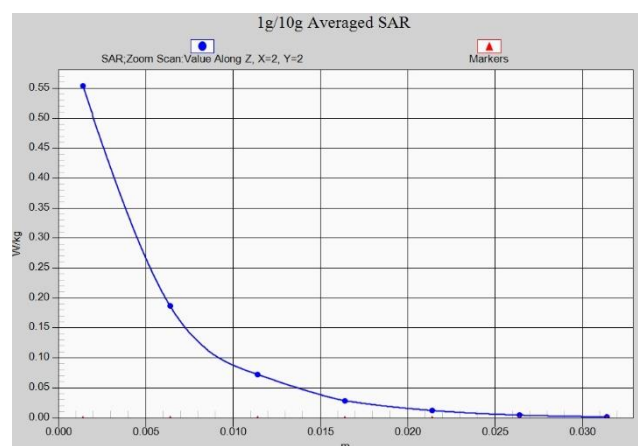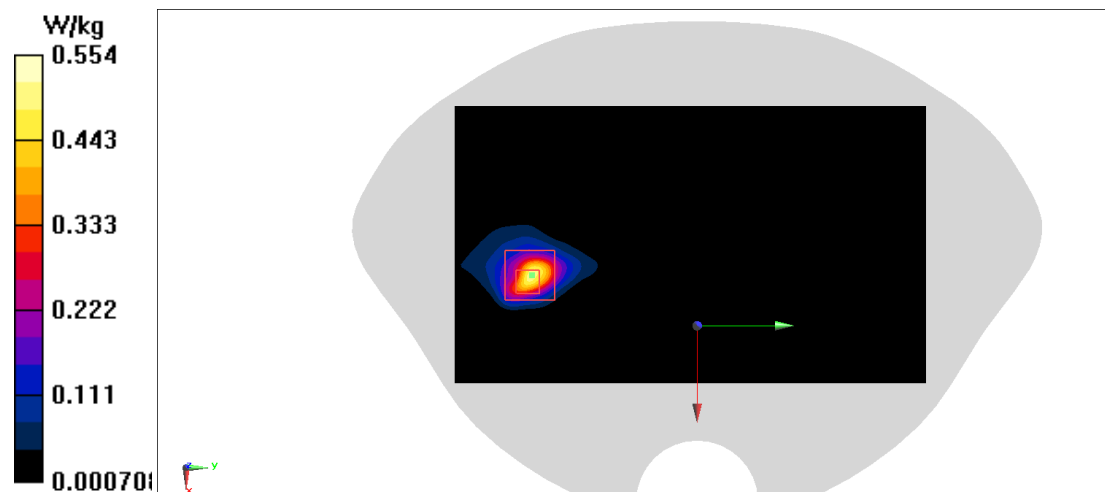

WLAN2450-ANT1 Rear 0mm

Date: 3/2/2023

Electronics: DAE4 Sn1331

Medium: head 2450MHz

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.815 \text{ S/m}$; $\epsilon_r = 40.11$; $\rho = 1000 \text{ kg/m}^3$



Ambient Temperature: 22.2°C, Liquid Temperature: 22°C

Communication System: WLAN2450 2462MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7548 ConvF(7.32,7.32,7.32)

Area Scan (101x171x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
Maximum value of SAR (interpolated) = 0.400 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 6.776 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.758 W/kg
SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.069 W/kg
Maximum value of SAR (measured) = 0.404 W/kg

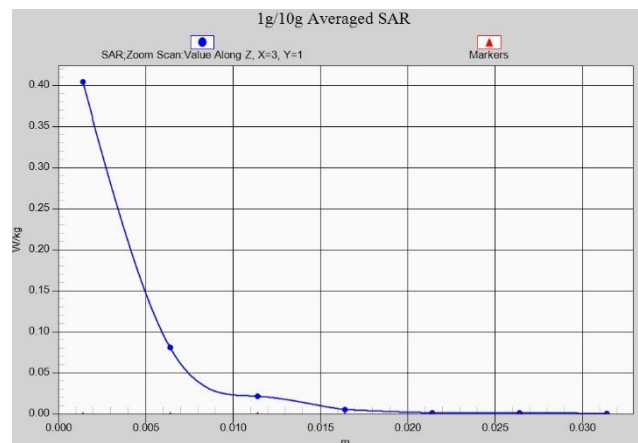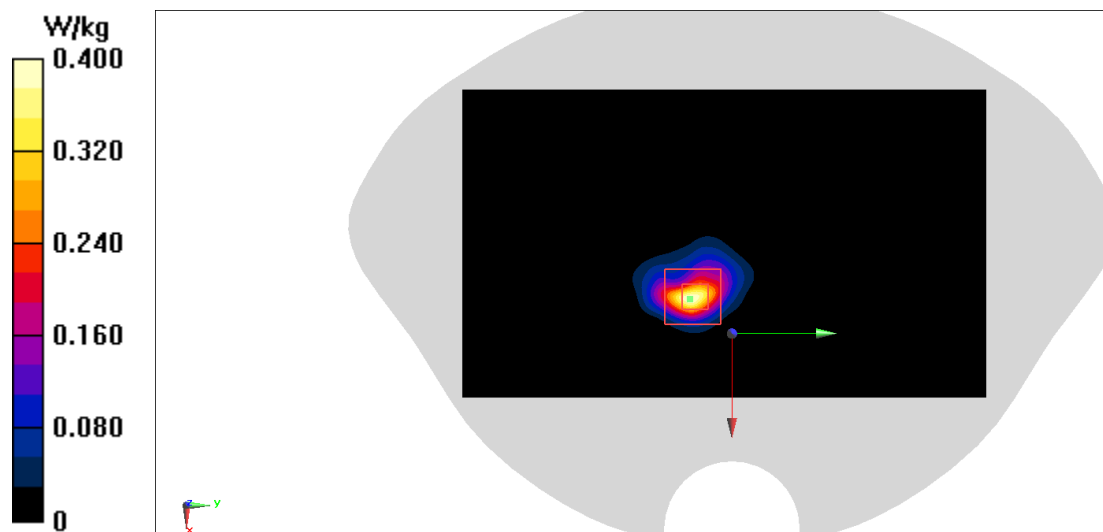

WLAN5G-ANT0 Rear 0mm

Date: 3/16/2023

Electronics: DAE4 Sn1331

Medium: head 5GHz

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.768$ S/m; $\epsilon_r = 35.436$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.2°C, Liquid Temperature: 22°C

Communication System: WLAN5G 5290 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7548 ConvF(4.98, 4.98, 4.98)

Area Scan (121x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.21 W/kg



Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.17 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 4.35 W/kg

SAR(1 g) = 0.619 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 2.03 W/kg

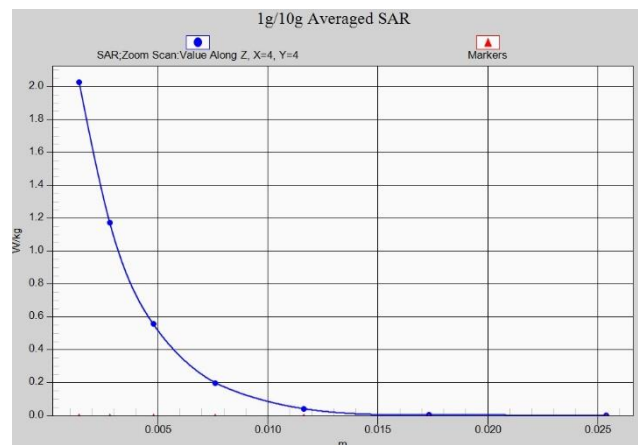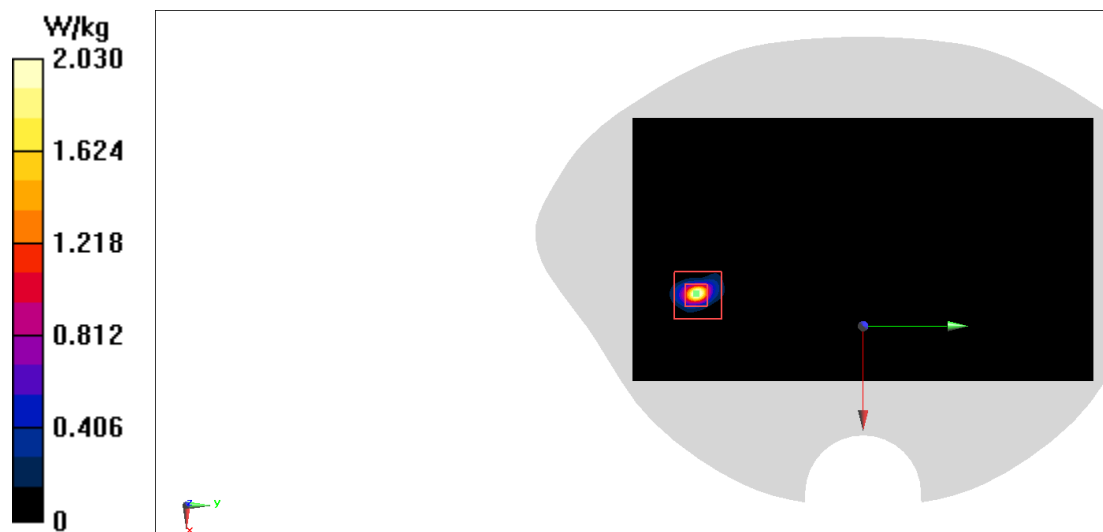

WLAN5G-ANT1 Rear 0mm

Date: 3/16/2023

Electronics: DAE4 Sn1331

Medium: head 5GHz

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.768$ S/m; $\epsilon_r = 35.436$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.2°C, Liquid Temperature: 22°C

Communication System: WLAN5G 5290 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7548 ConvF(4.98, 4.98, 4.98)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.11 W/kg



Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.575 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.50 W/kg

SAR(1 g) = 0.509 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

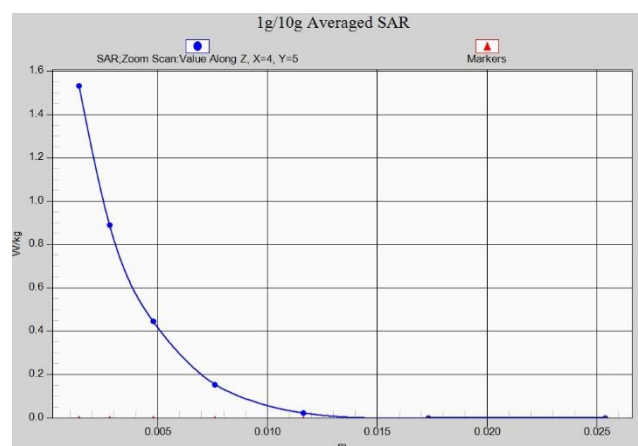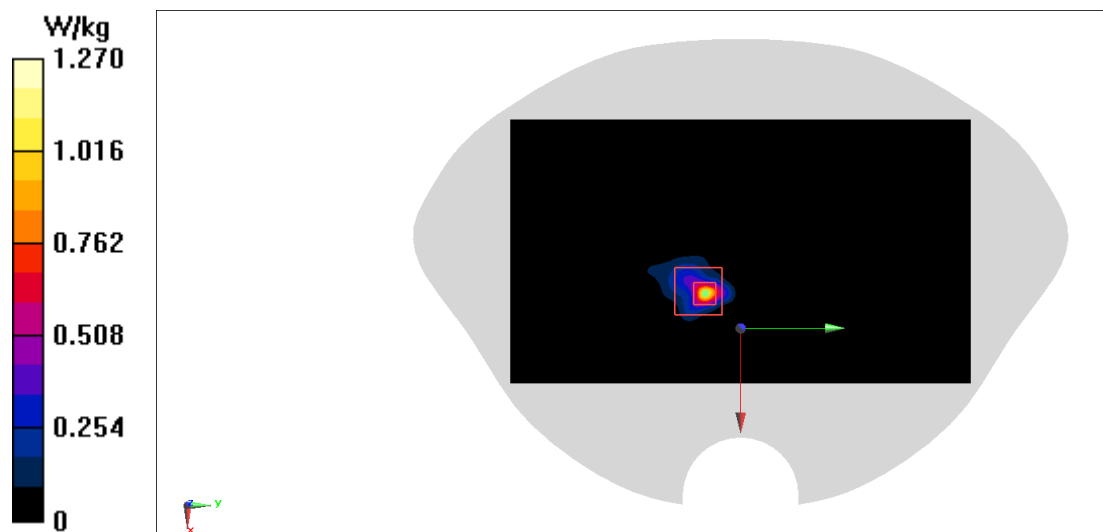

ANNEX B System Verification Results

2450MHz

Date: 3/2/2023

Electronics: DAE4 Sn1331

Medium: Head 2450MHz

Medium parameters used: $f = 2450\text{MHz}$; $\sigma = 1.81 \text{ mho/m}$; $\epsilon_r = 40.12$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.2°C Liquid Temperature: 22°C

Communication System: CW Frequency: 2450MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7548 ConvF(7.32,7.32,7.32)

System Validation /Area Scan (81x191x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Reference Value = 116.53 V/m ; Power Drift = 0.13

Fast SAR: SAR(1 g) = 13.42 W/kg ; SAR(10 g) = 6.28 W/kg

Maximum value of SAR (interpolated) = 21.52 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 116.53 V/m ; Power Drift = 0.13

Peak SAR (extrapolated) = 26.23 W/kg

SAR(1 g) = 13.47 W/kg ; SAR(10 g) = 6.27 W/kg

Maximum value of SAR (measured) = 21.53 W/kg

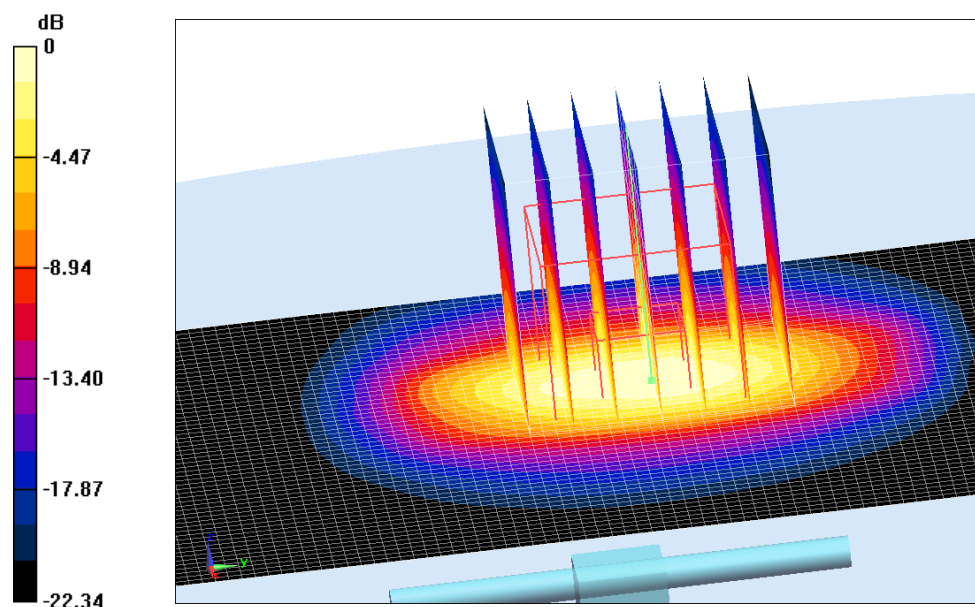

0 dB = 21.53 W/kg = 13.33 dB W/kg

Fig.B.1 validation 2450MHz 250mW

5250 MHz

Date: 3/16/2023

Electronics: DAE4 Sn1331

Medium: Head 5250 MHz

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.721$ mho/m; $\epsilon_r = 35.45$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.2°C Liquid Temperature: 22°C

Communication System: CW Frequency: 5250 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7548 ConvF(4.98,4.98,4.98)

System Validation /Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value =77.73 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 28.46 W/kg

SAR(1 g) = 7.89 W/kg; SAR(10 g) = 2.27 W/kg

Maximum value of SAR (measured) = 18.32 W/kg

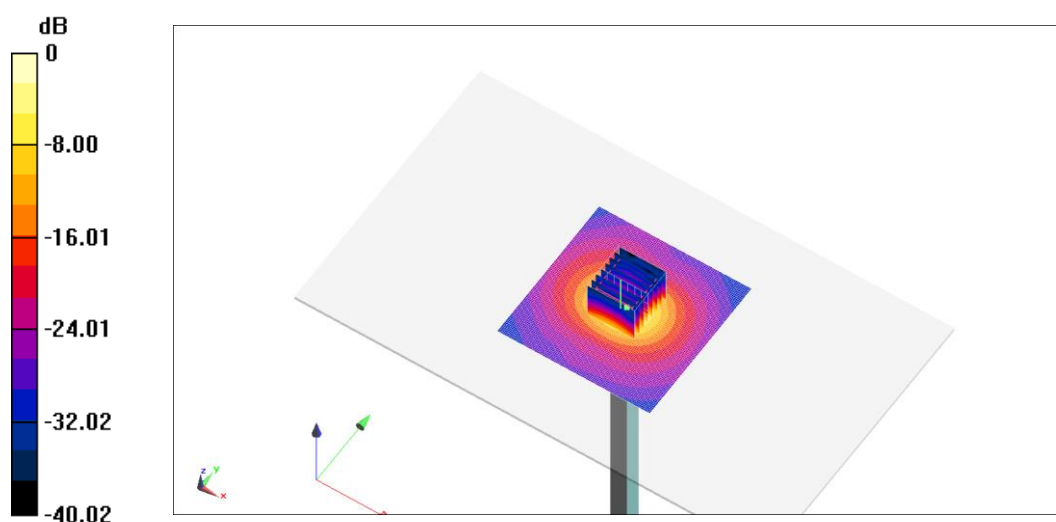

0 dB = 18.32 W/kg = 12.63 dB W/kg

Fig.B.2 validation 5250 MHz 100mW

5600 MHz

Date:3/18/2023

Electronics: DAE4 Sn1331

Medium: Head 5600 MHz

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.974$ mho/m; $\epsilon_r = 35.23$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.2°C Liquid Temperature: 22°C

Communication System: CW Frequency: 5600 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7548 ConvF(4.57,4.57,4.57)

System Validation /Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value =78.15 V/m; Power Drift =0.06 dB

Peak SAR (extrapolated) = 31.14 W/kg

SAR(1 g) = 8.49 W/kg; SAR(10 g) = 2.45 W/kg

Maximum value of SAR (measured) = 20.54 W/kg

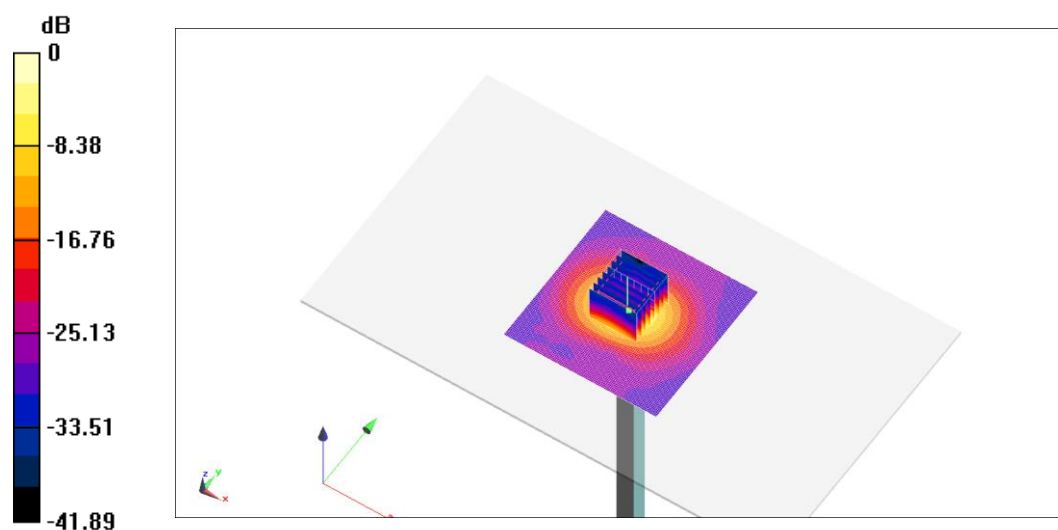

0 dB = 20.54 W/kg = 13.13 dB W/kg

Fig.B.3 validation 5600 MHz 100mW

5750 MHz

Date: 3/19/2023

Electronics: DAE4 Sn1331

Medium: Head 5750 MHz

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.215$ mho/m; $\epsilon_r = 34.78$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.2°C Liquid Temperature: 22°C

Communication System: CW Frequency: 5750 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7548 ConvF(4.64,4.64,4.64)

System Validation /Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value =76.63 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 32.25 W/kg

SAR(1 g) = 8.08 W/kg; SAR(10 g) = 2.29 W/kg

Maximum value of SAR (measured) = 20.15 W/kg

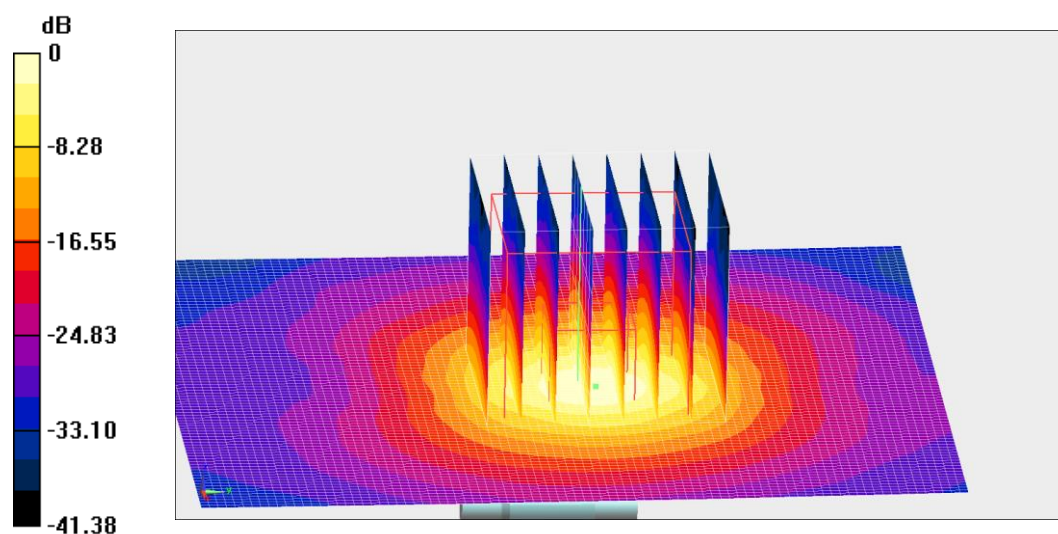

0 dB = 20.15 W/kg = 13.04 dB W/kg

Fig.B.4 validation 5750 MHz 100mW

The SAR system verification must be required that the area scan estimated 10-g SAR is within 3% of the zoom scan 10-g SAR.


Table B.1 Comparison between area scan and zoom scan for system verification

Date	Band	Position	Area scan (1g)	Zoom scan (1g)	Drift (%)
2023/3/2	2450MHz	Head	13.42	13.47	-0.37

ANNEX C SAR Measurement Setup

C.1 Measurement Set-up

The Dasy4 or DASY5 system for performing compliance tests is illustrated above graphically. This system consists of the following items:

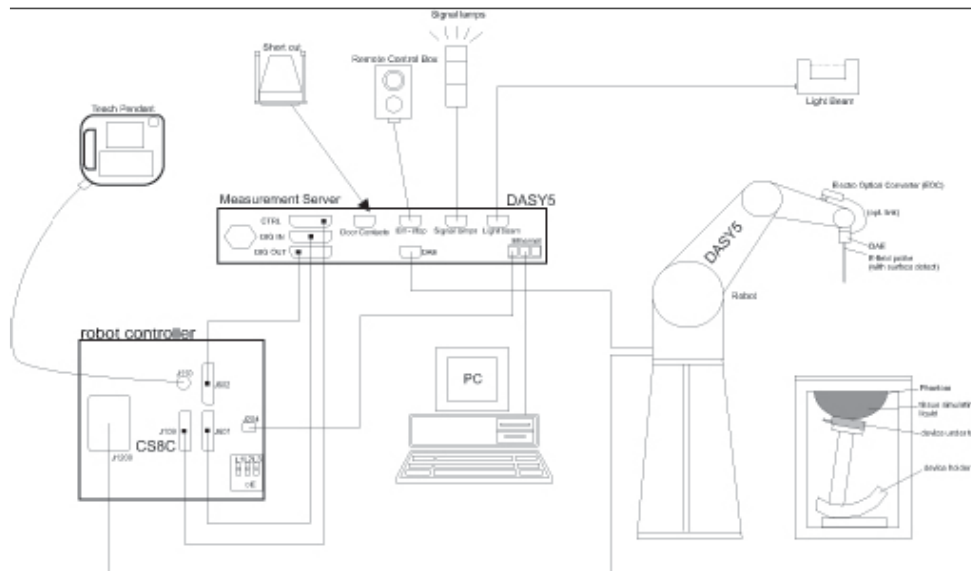

Picture C.1 SAR Lab Test Measurement Set-up

- A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY4 or DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as
- warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

C.2 Dasy4 or DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 or DASY5 software reads the reflection during a software approach and looks for the maximum using 2nd order curve fitting. The approach is stopped at reaching the maximum.

Probe Specifications:

Model:	ES3DV3, EX3DV4
Frequency	10MHz — 6.0GHz(EX3DV4)
Range:	10MHz — 4GHz(ES3DV3)
Calibration:	In head and body simulating tissue at Frequencies from 835 up to 5800MHz
Linearity:	± 0.2 dB(30 MHz to 6 GHz) for EX3DV4 ± 0.2 dB(30 MHz to 4 GHz) for ES3DV3
Dynamic Range:	10 mW/kg — 100W/kg
Probe Length:	330 mm
Probe Tip	
Length:	20 mm
Body Diameter:	12 mm
Tip Diameter:	2.5 mm (3.9 mm for ES3DV3)
Tip-Center:	1 mm (2.0mm for ES3DV3)
Application:	SAR Dosimetry Testing Compliance tests of mobile phones Dosimetry in strong gradient fields



Picture C.2 Near-field Probe



Picture C.3 E-field Probe

C.3 E-field Probe Calibration

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an RF Signal generator, TEM cell, and RF Power Meter.

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equate to 1 mW/ cm².

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).

C.4 Other Test Equipment

C.4.1 Data Acquisition Electronics(DAE)

The data acquisition electronics consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



PictureC.4: DAE

C.4.2 Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90XL; DASY5: RX160L) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchron motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



Picture C.5 DASY 4



Picture C.6 DASY 5

C.4.3 Measurement Server

The Measurement server is based on a PC/104 CPU board with CPU (dasy4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chipdisk (DASY4: 32 MB; DASY5: 128MB), RAM (DASY4: 64 MB, DASY5: 128MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and

disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.



Picture C.7 Server for DASY 4



Picture C.8 Server for DASY 5

C.4.4 Device Holder for Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss

POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss

tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.


<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin-SAM and ELI phantoms.



Picture C.9-1: Device Holder

©Copyright. All rights reserved by CTTL.

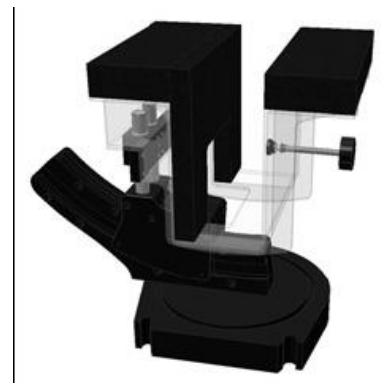

Picture C.9-2: Laptop Extension Kit

Page 75 of 115

C.4.5 Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a table. The shape of the shell is based on data from an anatomical study designed to

Represent the 90th percentile of the population. The phantom enables the dissymmetric evaluation of SAR for both left and right handed handset usage, as well as body-worn usage using the flat phantom region. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. The shell phantom has a 2mm shell thickness (except the ear region where shell thickness increases to 6 mm).

Shell Thickness: 2 ± 0.2 mm

Filling Volume: Approx. 25 liters

Dimensions: 810 x 1000 x 500 mm (H x L x W)

Available: Special




Picture C.10: SAM Twin Phantom

ANNEX D Position of the wireless device in relation to the phantom


D.1 General considerations

This standard specifies two handset test positions against the head phantom – the “cheek” position and the “tilt” position.

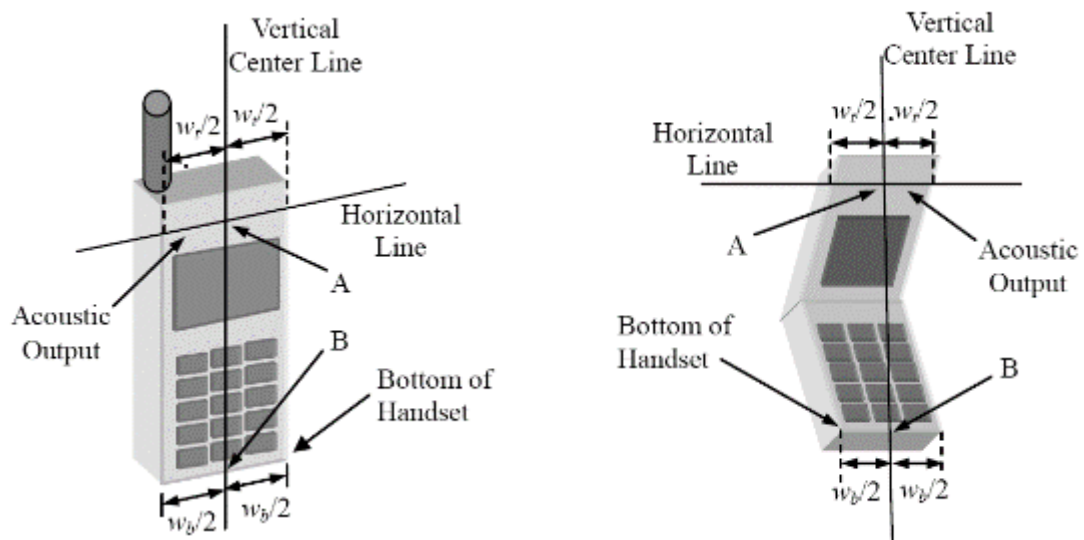


- w_t Width of the handset at the level of the acoustic
- w_b Width of the bottom of the handset
- A Midpoint of the width w_t of the handset at the level of the acoustic output
- B Midpoint of the width w_b of the bottom of the handset

Picture D.1-a Typical “fixed” case handset **Picture D.1-b Typical “clam-shell” case handset**

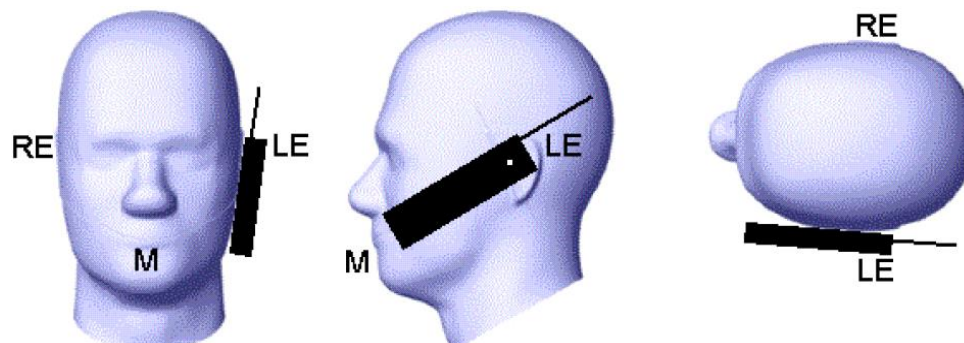


Picture D.2 Cheek position of the wireless device on the left side of SAM

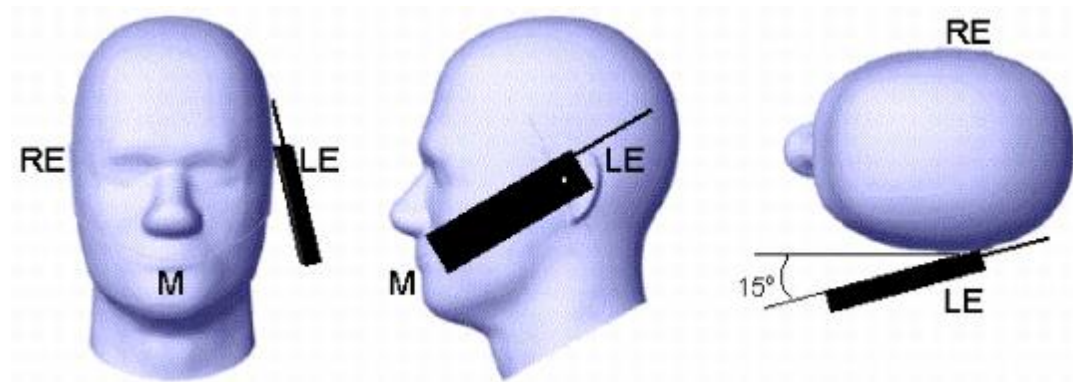

Picture D.3 Tilt position of the wireless device on the left side of SAM

D.2 Body-worn device

A typical example of a body-worn device is a mobile phone, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

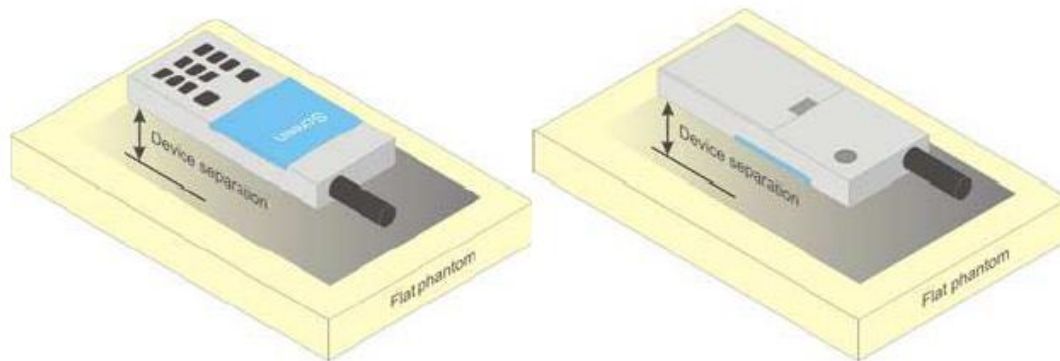


Picture D.4 Test positions for body-worn devices

D.3 Desktop device

A typical example of a desktop device is a wireless enabled desktop computer placed on a table or desk when used.

The DUT shall be positioned at the distance and in the orientation to the phantom that corresponds to the intended use as specified by the manufacturer in the user instructions. For devices that employ an external antenna with variable positions, tests shall be performed for all antenna positions specified. Picture 8.5 show positions for desktop device SAR tests. If the intended use is not specified, the device shall be tested directly against the flat phantom.

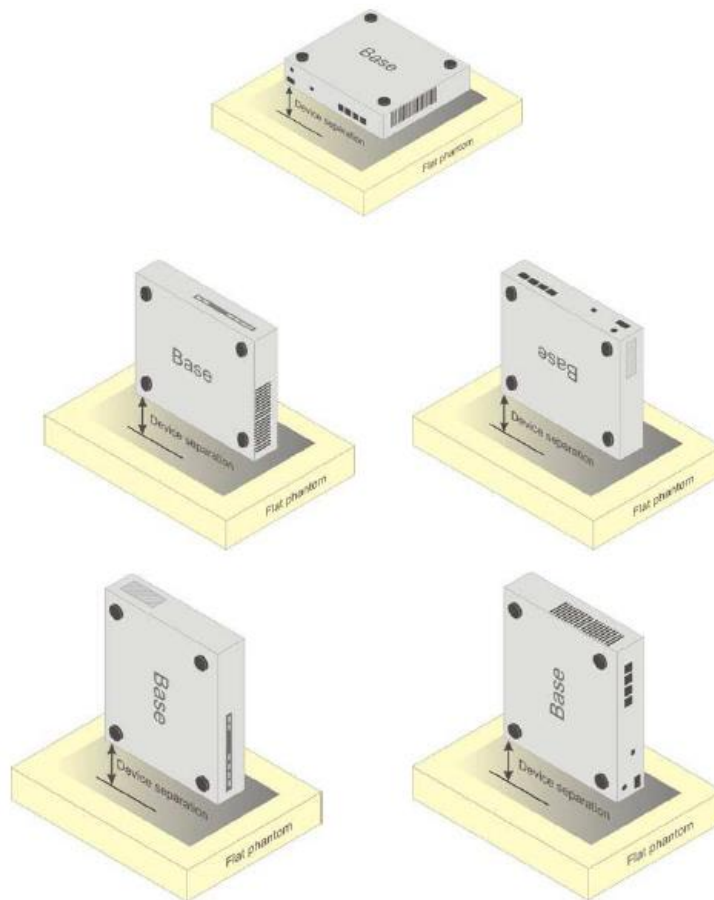

Picture D.5 Test positions for desktop devices

D.4 DUT Setup Photos



Picture D.6

ANNEX E Equivalent Media Recipes

The liquid used for the frequency range of 800-3000 MHz consisted of water, sugar, salt, preventol, glycol monobutyl and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table E.1 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528 and IEC 62209.

Table E.1: Composition of the Tissue Equivalent Matter

Frequency (MHz)	835 Head	835 Body	1900 Head	1900 Body	2450 Head	2450 Body	5800 Head	5800 Body
Ingredients (% by weight)								
Water	41.45	52.5	55.242	69.91	58.79	72.60	65.53	65.53
Sugar	56.0	45.0	\	\	\	\	\	\
Salt	1.45	1.4	0.306	0.13	0.06	0.18	\	\
Preventol	0.1	0.1	\	\	\	\	\	\
Cellulose	1.0	1.0	\	\	\	\	\	\
Glycol Monobutyl	\	\	44.452	29.96	41.15	27.22	\	\
Diethylenglycol monohexylether	\	\	\	\	\	\	17.24	17.24
Triton X-100	\	\	\	\	\	\	17.24	17.24
Dielectric Parameters Target Value	$\epsilon=41.5$ $\sigma=0.90$	$\epsilon=55.2$ $\sigma=0.97$	$\epsilon=40.0$ $\sigma=1.40$	$\epsilon=53.3$ $\sigma=1.52$	$\epsilon=39.2$ $\sigma=1.80$	$\epsilon=52.7$ $\sigma=1.95$	$\epsilon=35.3$ $\sigma=5.27$	$\epsilon=48.2$ $\sigma=6.00$

Note: There are a little adjustment respectively for 750, 1750, 2600, 5200, 5300 and 5600 based on the recipe of closest frequency in table E.1.

ANNEX F System Validation

The SAR system must be validated against its performance specifications before it is deployed. When SAR probes, system components or software are changed, upgraded or recalibrated, these must be validated with the SAR system(s) that operates with such components.

Table F.1: System Validation for 7548

Probe SN.	Liquid name	Validation date	Frequency point	Status (OK or Not)
7548	Head 750MHz	August.2,2022	750 MHz	OK
7548	Head 900MHz	August.2,2022	900 MHz	OK
7548	Head 1450MHz	August.2,2022	1450 MHz	OK
7548	Head 1750MHz	August.2,2022	1750 MHz	OK
7548	Head 1900MHz	August.2,2022	1900 MHz	OK
7548	Head 2000MHz	August.3,2022	2000 MHz	OK
7548	Head 2300MHz	August.3,2022	2300 MHz	OK
7548	Head 2450MHz	August.3,2022	2450 MHz	OK
7548	Head 2600MHz	August.3,2022	2600 MHz	OK
7548	Head 3300MHz	August.3,2022	3300 MHz	OK
7548	Head 3500MHz	August.3,2022	3500 MHz	OK
7548	Head 3700MHz	August.3,2022	3700 MHz	OK
7548	Head 5250MHz	August.4,2022	5250 MHz	OK
7548	Head 5600MHz	August.4,2022	5600 MHz	OK
7548	Head 5750MHz	August.4,2022	5750 MHz	OK



No.I23Z70001-SEM01

ANNEX G Probe Calibration Certificate

Probe 7548 Calibration Certificate



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2117
 E-mail: emf@caict.ac.cn http://www.caict.ac.cn



中国认可
 国际互认
 校准
 CALIBRATION
 CNAS L0570

Client **CTTL**Certificate No: **Z22-60260**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN : 7548**

Calibration Procedure(s) **FF-Z11-004-02**
Calibration Procedures for Dosimetric E-field Probes

Calibration date: **August 01, 2022**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	14-Jun-22(CTTL, No.J22X04181)	Jun-23
Power sensor NRP-Z91	101547	14-Jun-22(CTTL, No.J22X04181)	Jun-23
Power sensor NRP-Z91	101548	14-Jun-22(CTTL, No.J22X04181)	Jun-23
Reference 10dBAttenuator	18N50W-10dB	20-Jan-21(CTTL, No.J21X00486)	Jan-23
Reference 20dBAttenuator	18N50W-20dB	20-Jan-21(CTTL, No.J21X00485)	Jan-23
Reference Probe EX3DV4	SN 3846	20-May-22(SPEAG, No.EX3-3846_May22)	May-23
DAE4	SN 771	20-Jan-22(SPEAG, No.DAE4-771_Jan22)	Jan-23
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGenerator MG3700A	6201052605	14-Jun-22(CTTL, No.J22X04182)	Jun-23
Network Analyzer E5071C	MY46110673	14-Jan-22(CTTL, No.J22X00406)	Jan-23


	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: August 08, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z22-60260

Page 1 of 9



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization Φ	Φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), $\theta=0$ is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}: Assessed for E-field polarization $\theta=0$ ($f \leq 900\text{MHz}$ in TEM-cell; $f > 1800\text{MHz}$: waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}: A,B,C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800\text{MHz}$) and inside waveguide using analytical field distributions based on power measurements for $f > 800\text{MHz}$. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from $\pm 50\text{MHz}$ to $\pm 100\text{MHz}$.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2117
 E-mail: emf@caict.ac.cn http://www.caict.ac.cn

DASY/EASY – Parameters of Probe: EX3DV4 – SN:7548

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc ($k=2$)
Norm($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.62	0.70	0.63	$\pm 10.0\%$
DCP(mV) ^B	101.7	102.0	102.0	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\cdot\mu\text{V}$	C	D dB	VR mV	Unc ^E ($k=2$)
0	CW	X	0.0	0.0	1.0	0.00	193.2	$\pm 2.2\%$
		Y	0.0	0.0	1.0		208.5	
		Z	0.0	0.0	1.0		192.2	

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X, Y, Z do not affect the E²-field uncertainty inside TSL (see Page 4).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY – Parameters of Probe: EX3DV4 – SN:7548

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz] ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	41.9	0.89	10.30	10.30	10.30	0.16	1.29	± 12.1%
900	41.5	0.97	9.81	9.81	9.81	0.16	1.32	± 12.1%
1450	40.5	1.20	8.56	8.56	8.56	0.20	0.91	± 12.1%
1750	40.1	1.37	8.13	8.13	8.13	0.22	1.00	± 12.1%
1900	40.0	1.40	7.80	7.80	7.80	0.25	1.00	± 12.1%
2100	39.8	1.49	7.95	7.95	7.95	0.19	1.24	± 12.1%
2300	39.5	1.67	7.61	7.61	7.61	0.46	0.72	± 12.1%
2450	39.2	1.80	7.32	7.32	7.32	0.50	0.72	± 12.1%
2600	39.0	1.96	7.12	7.12	7.12	0.56	0.68	± 12.1%
3300	38.2	2.71	6.75	6.75	6.75	0.40	0.90	± 13.3%
3500	37.9	2.91	6.61	6.61	6.61	0.38	1.02	± 13.3%
3700	37.7	3.12	6.41	6.41	6.41	0.35	1.07	± 13.3%
3900	37.5	3.32	6.30	6.30	6.30	0.30	1.50	± 13.3%
4100	37.2	3.53	6.22	6.22	6.22	0.30	1.38	± 13.3%
4200	37.1	3.63	6.10	6.10	6.10	0.35	1.35	± 13.3%
4400	36.9	3.84	6.00	6.00	6.00	0.35	1.35	± 13.3%
4600	36.7	4.04	5.92	5.92	5.92	0.40	1.30	± 13.3%
4800	36.4	4.25	5.88	5.88	5.88	0.40	1.38	± 13.3%
4950	36.3	4.40	5.68	5.68	5.68	0.40	1.40	± 13.3%
5250	35.9	4.71	4.98	4.98	4.98	0.45	1.35	± 13.3%
5600	35.5	5.07	4.57	4.57	4.57	0.45	1.40	± 13.3%
5750	35.4	5.22	4.64	4.64	4.64	0.40	1.60	± 13.3%

^C Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^F At frequency below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Certificate No:Z22-60260

Page 4 of 9

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

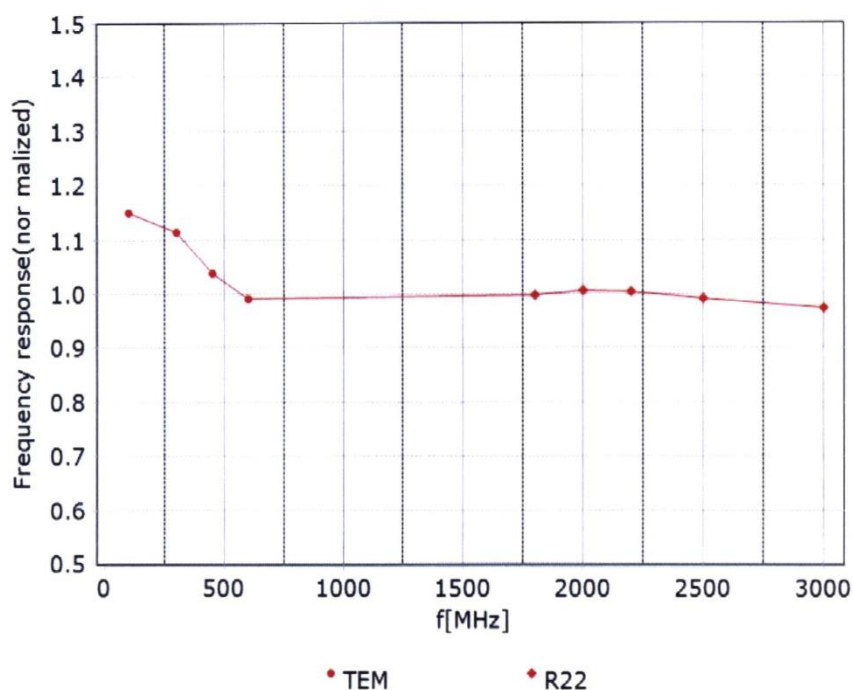


Uncertainty of Frequency Response of E-field: $\pm 7.4\%$ ($k=2$)



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

Receiving Pattern (Φ), $\theta=0^\circ$

f=600 MHz, TEM

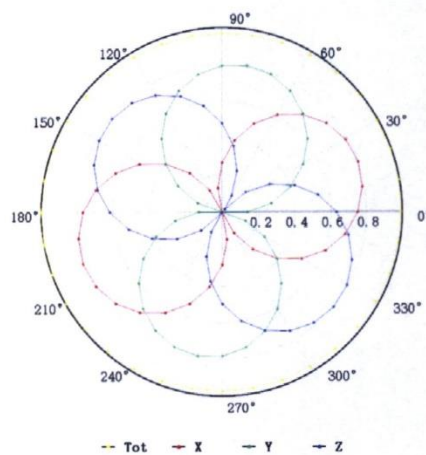



f=1800 MHz, R22

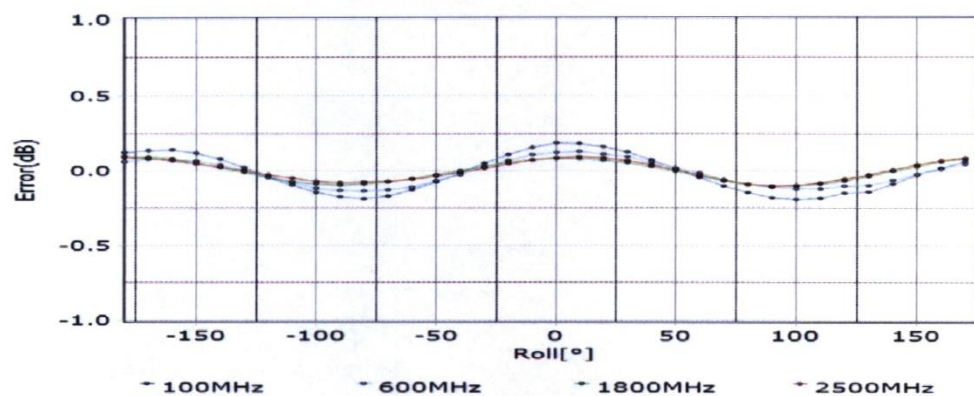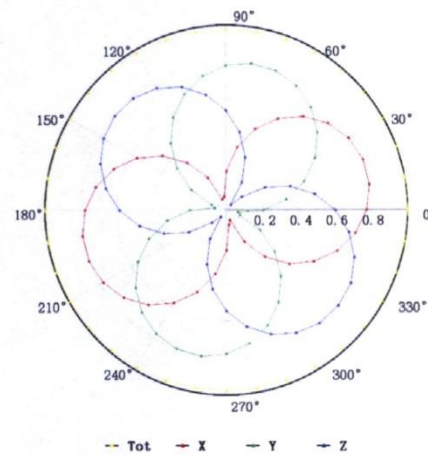

Uncertainty of Axial Isotropy Assessment: $\pm 1.2\%$ ($k=2$)

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

Dynamic Range f(SAR_{head}) (TEM cell, f = 900 MHz)

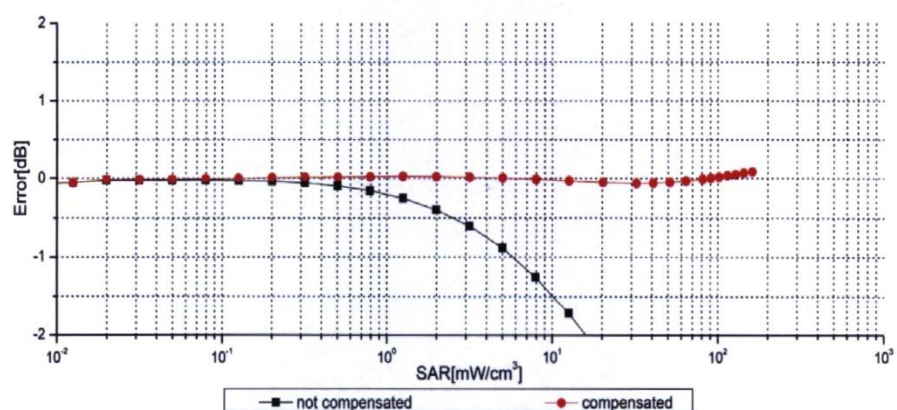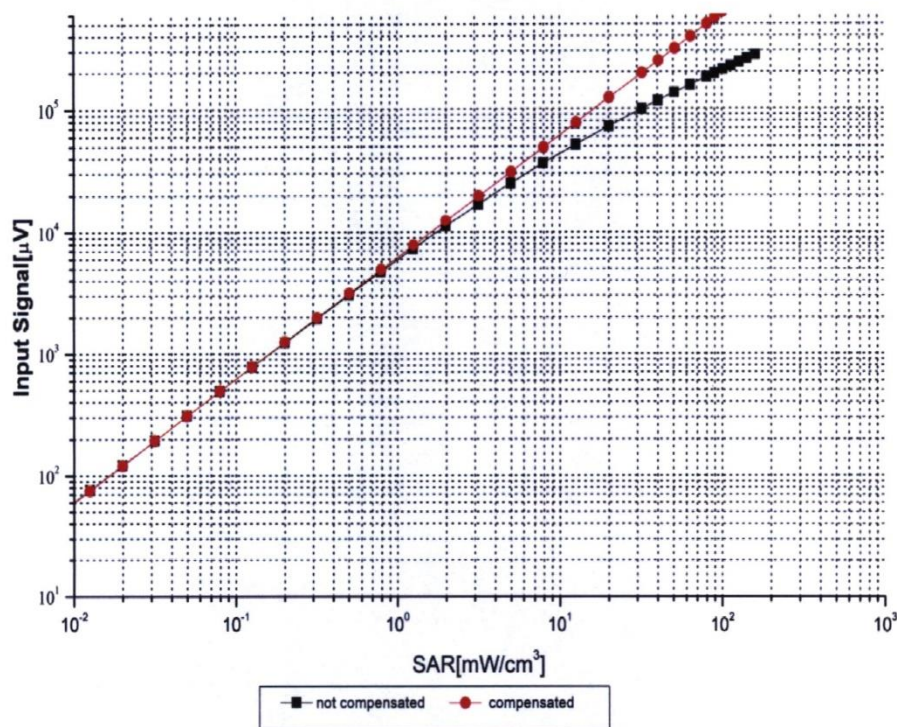



Uncertainty of Linearity Assessment: ±0.9% (k=2)

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>


Conversion Factor Assessment

$f=750\text{ MHz}$, WGLS R9(H_convF)

$f=1750\text{ MHz}$, WGLS R22(H_convF)

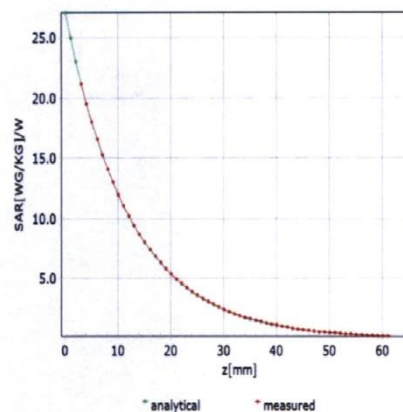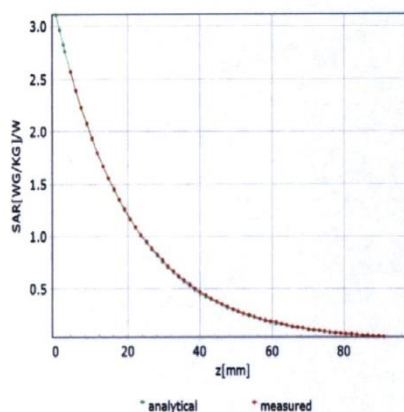


Deviation from Isotropy in Liquid

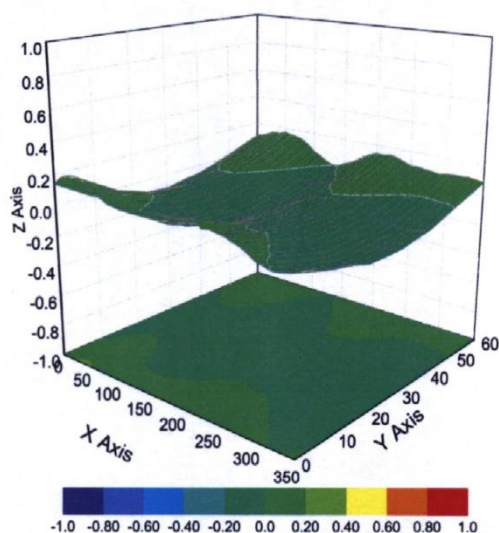

Uncertainty of Spherical Isotropy Assessment: $\pm 3.2\%$ ($k=2$)



No.I23Z70001-SEM01



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

DASY/EASY – Parameters of Probe: EX3DV4 – SN:7548

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	146.7
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	9mm
Tip Diameter	2.5mm
Probe Tip to Sensor X Calibration Point	1mm
Probe Tip to Sensor Y Calibration Point	1mm
Probe Tip to Sensor Z Calibration Point	1mm
Recommended Measurement Distance from Surface	1.4mm



No.I23Z70001-SEM01

ANNEX H Dipole Calibration Certificate**2450 MHz Dipole Calibration Certificate**

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**Client **CTTL (Auden)**Certificate No: **D2450V2-853_Jul22****CALIBRATION CERTIFICATE**Object **D2450V2 - SN:853**Calibration procedure(s) **QA CAL-05.v11
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**Calibration date: **July 20, 2022**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-22 (No. 217-03525/03524)	Apr-23
Power sensor NRP-Z91	SN: 103244	04-Apr-22 (No. 217-03524)	Apr-23
Power sensor NRP-Z91	SN: 103245	04-Apr-22 (No. 217-03525)	Apr-23
Reference 20 dB Attenuator	SN: BH9394 (20k)	04-Apr-22 (No. 217-03527)	Apr-23
Type-N mismatch combination	SN: 310982 / 06327	04-Apr-22 (No. 217-03528)	Apr-23
Reference Probe EX3DV4	SN: 7349	31-Dec-21 (No. EX3-7349_Dec21)	Dec-22
DAE4	SN: 601	02-May-22 (No. DAE4-601_May22)	May-23
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41093315	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-22

Calibrated by:	Name Aldonia Georgiadou	Function Laboratory Technician	Signature
Approved by:	Name Sven Kühn	Function Technical Manager	Signature

Issued: July 22, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D2450V2-853_Jul22

Page 1 of 6

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The source is mounted in a touch configuration below the center marking of the flat phantom.
- Return Loss:** This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.