

RF TEST REPORT

Applicant MeiG Smart Technology Co., Ltd

FCC ID 2APJ4-MT504

Product 4G Mobile WiFi


Brand MEIGLink

Model MT504;
MT5XX (XX can be 05-19, 61-64)

Report No. R2209A0873-R1V2

Issue Date February 21, 2023

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2022)/ FCC CFR 47 Part 22H (2022)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.



Prepared by: Xu Ying



Approved by: Xu Kai

TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1. Test Laboratory	5
1.1. Notes of the Test Report	5
1.2. Test Facility	5
1.3. Testing Location	5
2. General Description of Equipment Under Test	6
2.1. Applicant and Manufacturer Information	6
2.2. General Information	6
3. Applied Standards	8
4. Test Configuration	9
5. Test Case	11
5.1. RF Power Output and Effective Radiated Power	11
5.2. Occupied Bandwidth	12
5.3. Band Edge Compliance	13
5.4. Peak-to-Average Power Ratio (PAPR)	14
5.5. Frequency Stability	15
5.6. Spurious Emissions at Antenna Terminals	17
5.7. Radiated Spurious Emission	19
6. Test Result	23
6.1. RF Power Output and Effective Radiated Power	23
6.2. Occupied Bandwidth	29
6.3. Band Edge Compliance	36
6.4. Peak-to-Average Power Ratio (PAPR)	42
6.5. Frequency Stability	43
6.6. Spurious Emissions at Antenna Terminals	46
6.7. Radiated Spurious Emission	49
7. Main Test Instruments	51
ANNEX A: The EUT Appearance	52
ANNEX B: Test Setup Photos	53

Version	Revision description	Issue Date
Rev.0	Initial issue of report.	February 3, 2023
Rev.1	Update information.	February 9, 2023
Rev.2	Update data.	February 21, 2023
Note: This revised report (Report No.: R2209A0873-R1V2) supersedes and replaces the previously issued report (Report No.: R2209A0873-R1V1). Please discard or destroy the previously issued report and dispose of it accordingly.		

Summary of Measurement Results

No.	Test Case	Clause in FCC rules	Verdict
1	RF Power Output and Effective Radiated Power	2.1046 22.913(a)(5)	PASS
2	Occupied Bandwidth	2.1049	PASS
3	Band Edge Compliance	2.1051 / 22.917(a)	PASS
4	Peak-to-Average Power Ratio	22.913(d) KDB 971168 D01(5.7)	PASS
5	Frequency Stability	2.1055 / 22.355	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 / 22.917(a)	PASS
7	Radiated Spurious Emission	2.1053 / 22.917 (a)	PASS
Date of Testing: October 12, 2022 ~ December 4, 2022			
Date of Sample Received: October 10, 2022			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test Facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment Under Test

2.1. Applicant and Manufacturer Information

Applicant	MeiG Smart Technology Co., Ltd
Applicant address	2nd Floor,Office Building,No.5 Lingxia Road,Fenghuang,Fuyong Street,Bao'an District,Shenzhen, China.
Manufacturer	MeiG Smart Technology Co., Ltd
Manufacturer address	2nd Floor,Office Building,No.5 Lingxia Road,Fenghuang,Fuyong Street,Bao'an District,Shenzhen, China.

2.2. General Information

EUT Description			
Model	MT504; MT5XX (XX can be 05-19, 61-64)		
IMEI	864630067885086		
Hardware Version	MT562_MB_V1.00_B_PCB		
Software Version	MT562_EQ001_5F3270E_221129_T18		
Power Supply	AC Adapter/ Battery		
Antenna Type	PIFA Antenna		
Antenna Gain	Band	Gain	
	WCDMA Band V	-0.44 dBi	
	LTE Band 5	-0.44 dBi	
Test Mode(s)	WCDMA Band V; LTE Band 5;		
Test Modulation	(WCDMA) BPSK, QPSK; (LTE) QPSK, 16QAM;		
HSDPA UE Category	8		
HSUPA UE Category	8		
LTE Category	6		
Maximum E.R.P.	WCDMA Band V:	19.65 dBm	
	LTE Band 5:	21.61 dBm	
Rated Power Supply Voltage	3.8V		
Operating Voltage	Minimum: 3.5V Maximum: 4.2V		
Operating Temperature	Lowest: 0°C Highest: +45°C		
Testing Temperature	Lowest: -30°C Highest: +50°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	WCDMA Band V	824 ~ 849	869 ~ 894
	LTE Band 5	824 ~ 849	869 ~ 894
EUT Accessory			
Adapter	Manufacturer: Dongguan Sunun Power Co., Ltd		

	Model: SA68-050100U
Battery	Manufacturer: Shenzhen Aerospace Electronic Co.,Ltd. Model: /
USB Cable 1	Manufacturer: DONGGUAN GAOHANG ELECTRONIC CO.,LTD Model: USB A/M TO MICRO USB 5P/M Black PVC(Data+charging) 55cm Cable, Shielded
USB Cable 2	Manufacturer: DONGGUAN GAOHANG ELECTRONIC CO.,LTD Model: USB A/M TO MICRO USB 5P/M Black PVC(charging) 55cm Cable, Shielded
USB Cable 3	Manufacturer: DONGGUAN GAOHANG ELECTRONIC CO.,LTD Model: USB A/M TO MICRO USB 5P/M Black PVC(Date+charging) 20cm Cable, Shielded
USB Cable 4	Manufacturer: DONGGUAN GAOHANG ELECTRONIC CO.,LTD Model: USB A/M TO MICRO USB 5P/M Black PVC(charging) 20cm Cable, Shielded
USB Cable 5	Manufacturer: DONGGUAN GAOHANG ELECTRONIC CO.,LTD Model: USB Type C to Micro USB(connetct MIFI) (Date+charging,OTG) 55cm Cable, Shielded
USB Cable 6	Manufacturer: DONGGUAN GAOHANG ELECTRONIC CO.,LTD Model: USB Type C to Micro USB(connect MIFI) (Date+charging,OTG) 100cm Cable, Shielded
USB Cable 7	Manufacturer: DONGGUAN GAOHANG ELECTRONIC CO.,LTD Model: USB Type A to Micro USB(connect MIFI) (Date+charging) 100cm Cable, Shielded
USB Cable 8	Manufacturer: DONGGUAN GAOHANG ELECTRONIC CO.,LTD Model: USB Type C to Micro USB(connect MIFI) (Date+charging) 20cm Cable, Shielded
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant. 2. There is more than one USB cable, each one should be applied throughout the compliance test respectively, and however, only the worst case (USB cable 7) will be recorded in this report. 3. MT504 and MT5XX (XX can be 05-19, 61-64) differ only in model number and the other is the same. The internal name of the XX range will be changed differently due to the consideration of different customer needs later. MT504 were tested in this report.	

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR 47 Part 22H (2022)

FCC CFR47 Part 2 (2022)

Reference standard:

ANSI C63.26-2015

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Y axis, horizontal polarization for WCDMA Band; Z axis, vertical polarization for LTE Band) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in WCDMA/LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

Test items	Modes/Modulation
	WCDMA Band V
RF Power Output and Effective Radiated power	RMC HSDPA/HSUPA DC-HSDPA
Occupied Bandwidth	RMC
Band Edge Compliance	RMC
Peak-to-Average Power Ratio	RMC
Frequency Stability	RMC
Spurious Emissions at Antenna Terminals	RMC
Radiated Spurious Emission	RMC

Test modes are chosen as the worst case configuration below for LTE Band 5.

Test items	Bandwidth (MHz)				Modulation		RB			Test Channel		
	1.4	3	5	10	QPSK	16QAM	1	50%	100%	L	M	H
RF power output and Effective Radiated power	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	-	-	O	O	O	O
Band Edge Compliance	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	O	O	O	O	O	O	O	-	-	-	O	-
Spurious Emissions at Antenna Terminals	O	O	O	O	O	-	O	-	-	O	O	O
Radiated Spurious Emission	O	-	O	O	O	-	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.											

5. Test Case

5.1. RF Power Output and Effective Radiated Power

Ambient Condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to the Base Station Simulator with a known loss. The EUT is controlled by the Base Station Simulator test set to ensure max power transmission with proper modulation.


ERP can then be calculated as follows:

$EIRP \text{ (dBm)} = \text{Output Power (dBm)} + \text{Antenna Gain (dBi)}$

Where: dBd refers to gain relative to an ideal dipole.

$EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB)}$.

Test Setup

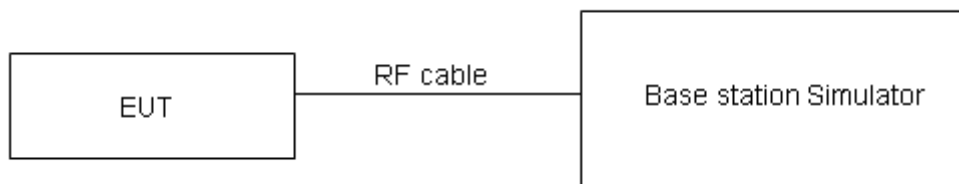

Limits

No specific RF power output requirements in part 2.1046.

Rule Part 22.913(a)(5) specifies that "Mobile/portable stations are limited to 7 watts ERP".

Limit	$\leq 7 \text{ W}$ (38.45 dBm)
-------	--------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4 \text{ dB}$ for RF power output, $k = 2$, $U = 1.19 \text{ dB}$ for ERP.

Test Results

Refer to the section 6.1 of this report for test data.

5.2. Occupied Bandwidth

Ambient Condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to $\geq 1\%$ EBW, VBW is set to 3x RBW.

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

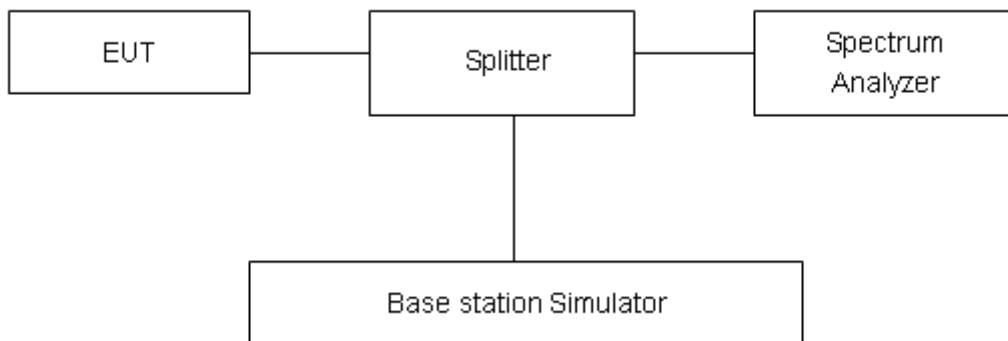

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.

Test Results

Refer to the section 6.2 of this report for test data.

5.3. Band Edge Compliance

Ambient Condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used. RBW is set to $\geq 1\%EBW$, VBW is set to 3x RBW.

Spectrum analyzer plots are included on the following pages.

Test Setup

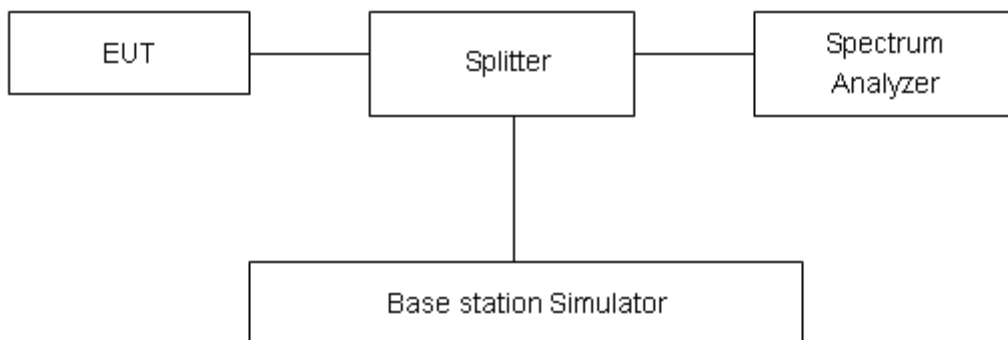

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684\text{dB}$.

Test Results

Refer to the section 6.3 of this report for test data.

5.4. Peak-to-Average Power Ratio (PAPR)

Ambient Condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as P_{Pk} . And measure the total average power and record as P_{Avg} . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

Test Setup

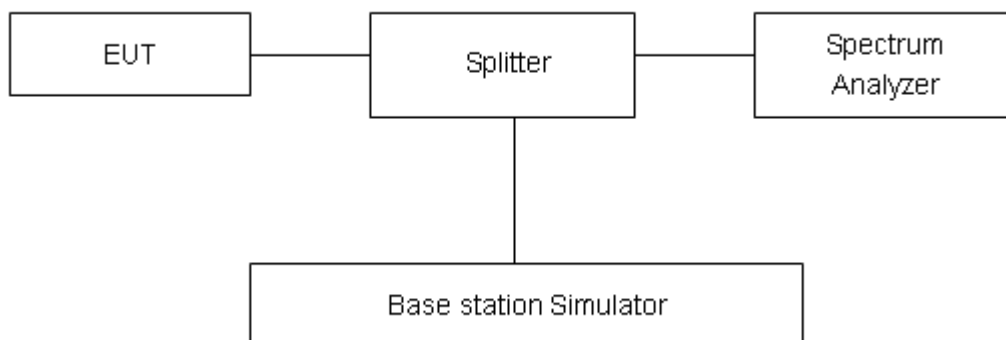

Limits

According to the Sec. 22.913(d), The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

Refer to the section 6.4 of this report for test data.

5.5. Frequency Stability

Ambient Condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +50°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.


Frequency Stability (Voltage Variation)

The frequency stability shall be measured with variation of primary supply voltage as follows:

Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.5 V and 4.2 V, with a nominal voltage of 3.8V.

Test Setup

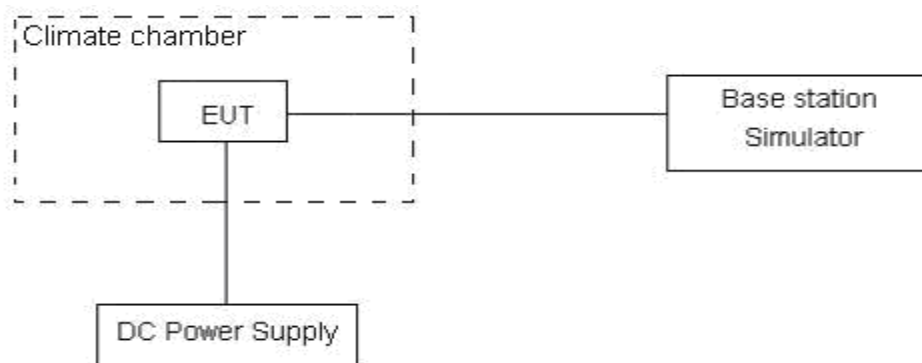

Limits

According to the Sec. 22.355, the frequency stability of the carrier shall be accurate to within 2.5 ppm of the received frequency for mobile stations.

Limits	≤ 2.5 ppm
--------	-----------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal

distribution is with the coverage factor $k = 3$, $U = 0.01\text{ppm}$.

Test Results

Refer to the section 6.5 of this report for test data.

5.6. Spurious Emissions at Antenna Terminals

Ambient Condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier.

The peak detector is used.

RBW is set to 1 kHz (0.009MHz~ 0.15 MHz),

RBW is set to 10 kHz (0.15 MHz~ 30 MHz)


RBW is set to 100 kHz (30MHz~1000 MHz)

RBW is set to 1000 kHz (above 1000MHz)

Sweep is set to ATUO.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test Setup

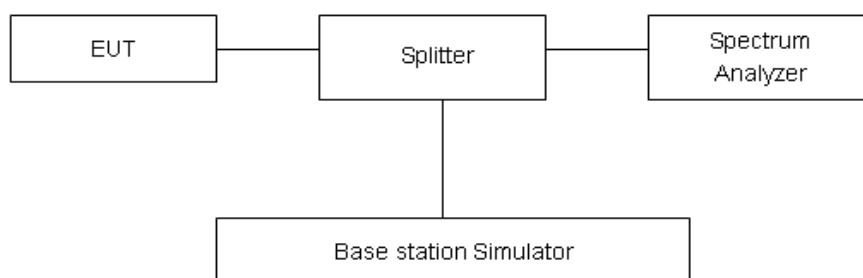

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-20GHz	1.407 dB

Test Results

Refer to the section 6.6 of this report for test data.

5.7. Radiated Spurious Emission

Ambient Condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26-2015.
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=100kHz, VBW=300kHz, and the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:

$$\text{Power (EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$

The measurement results are amend as described below:


$$\text{Power (EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP

= EIRP-2.15dB.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test Setup


9KHz~ 30MHz

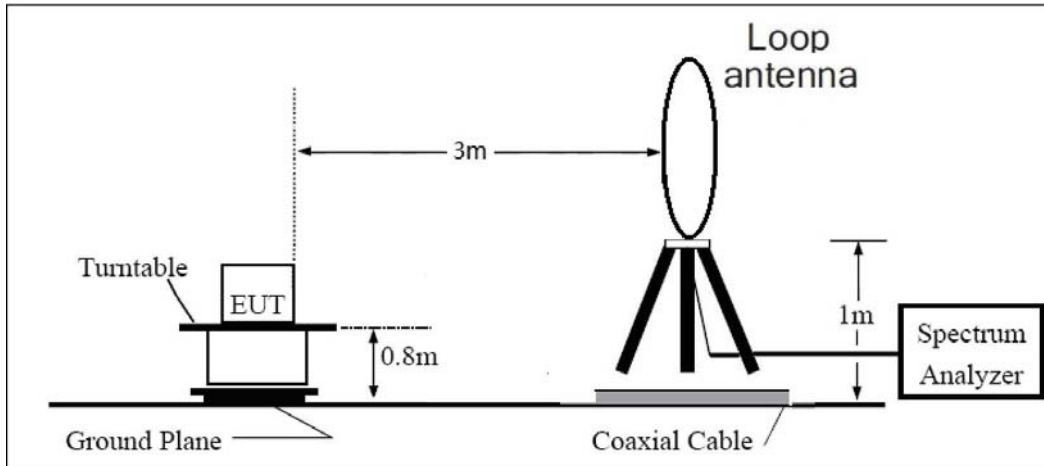

30MHz~ 1GHz

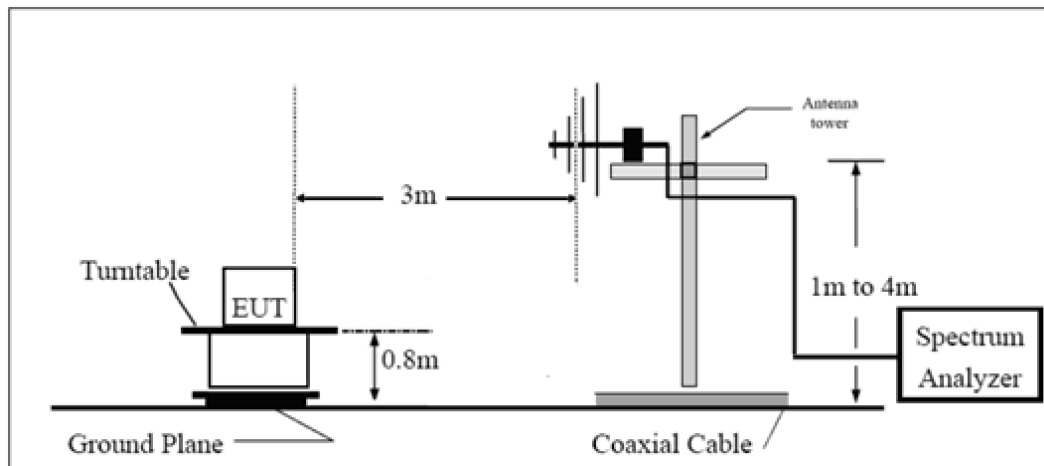

Above 1GHz

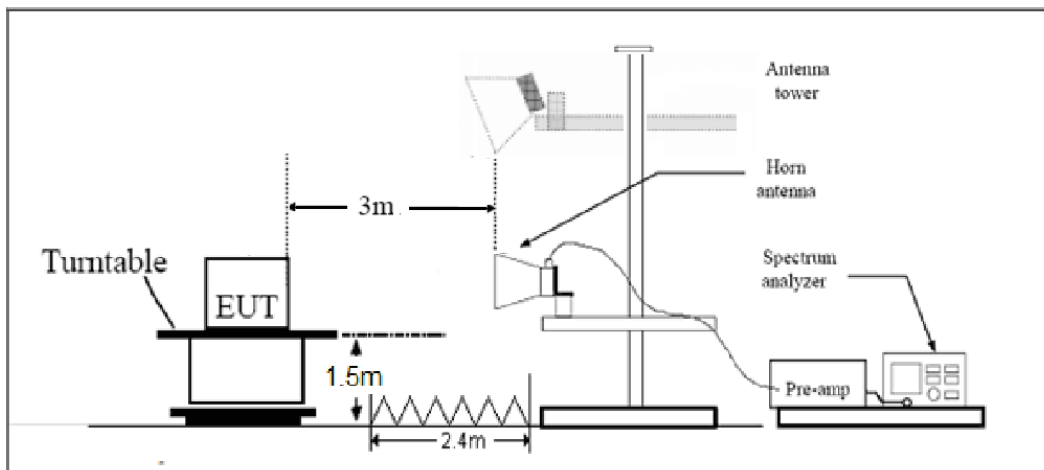

Note: Area side: 2.4mX3.6m

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ Db.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ Db.

Test Results

Refer to the section 6.7 of this report for test data.

6. Test Result

6.1. RF Power Output and Effective Radiated Power

WCDMA Band V		Maximum Output Power (dBm)			ERP (dBm)		
		Channel/ Frequency			Channel/ Frequency		
		4132/826.4	4183/836.6	4233/846.6	4132/826.4	4183/836.6	4233/846.6
RMC	12.2k	22.20	22.24	22.21	19.61	19.65	19.62
HSDPA	Subtest 1	21.62	21.66	21.63	19.03	19.07	19.04
	Subtest 2	21.61	21.65	21.62	19.02	19.06	19.03
	Subtest 3	21.10	21.14	21.11	18.51	18.55	18.52
	Subtest 4	21.09	21.13	21.10	18.50	18.54	18.51
HSUPA	Subtest 1	20.58	20.62	20.59	17.99	18.03	18.00
	Subtest 2	18.57	18.61	18.58	15.98	16.02	15.99
	Subtest 3	19.55	19.60	19.57	16.96	17.01	16.98
	Subtest 4	18.54	18.59	18.56	15.95	16.00	15.97
	Subtest 5	22.03	22.08	22.05	19.44	19.49	19.46
DC-HSDPA	Subtest 1	21.54	21.60	21.55	18.95	19.01	18.96
	Subtest 2	21.53	21.59	21.54	18.94	19.00	18.95
	Subtest 3	21.11	21.08	21.05	18.52	18.49	18.46
	Subtest 4	21.10	21.07	21.04	18.51	18.48	18.45

LTE Band 5						
Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Power (dBm)	ERP (dBm)
1.4	20407	1	#0	QPSK	24.12	21.53
1.4	20407	1	#Mid	QPSK	24.13	21.54
1.4	20407	1	#Max	QPSK	24.20	21.61
1.4	20407	3	#0	QPSK	24.10	21.51
1.4	20407	3	#Mid	QPSK	24.09	21.50
1.4	20407	3	#Max	QPSK	24.12	21.53
1.4	20407	6	#0	QPSK	22.98	20.39
1.4	20407	1	#0	16QAM	23.53	20.94
1.4	20407	1	#Mid	16QAM	23.53	20.94
1.4	20407	1	#Max	16QAM	23.64	21.05
1.4	20407	3	#0	16QAM	23.07	20.48
1.4	20407	3	#Mid	16QAM	23.07	20.48
1.4	20407	3	#Max	16QAM	23.10	20.51
1.4	20407	6	#0	16QAM	22.61	20.02
1.4	20525	1	#0	QPSK	23.91	21.32
1.4	20525	1	#Mid	QPSK	23.74	21.15
1.4	20525	1	#Max	QPSK	23.76	21.17
1.4	20525	3	#0	QPSK	24.00	21.41
1.4	20525	3	#Mid	QPSK	23.98	21.39
1.4	20525	3	#Max	QPSK	23.97	21.38
1.4	20525	6	#0	QPSK	22.85	20.26
1.4	20525	1	#0	16QAM	23.71	21.12
1.4	20525	1	#Mid	16QAM	23.59	21.00
1.4	20525	1	#Max	16QAM	23.58	20.99
1.4	20525	3	#0	16QAM	22.78	20.19
1.4	20525	3	#Mid	16QAM	22.81	20.22
1.4	20525	3	#Max	16QAM	22.87	20.28
1.4	20525	6	#0	16QAM	22.20	19.61
1.4	20643	1	#0	QPSK	23.79	21.20
1.4	20643	1	#Mid	QPSK	23.78	21.19
1.4	20643	1	#Max	QPSK	23.78	21.19
1.4	20643	3	#0	QPSK	23.74	21.15
1.4	20643	3	#Mid	QPSK	23.75	21.16
1.4	20643	3	#Max	QPSK	23.73	21.14
1.4	20643	6	#0	QPSK	22.64	20.05
1.4	20643	1	#0	16QAM	22.41	19.82
1.4	20643	1	#Mid	16QAM	22.38	19.79
1.4	20643	1	#Max	16QAM	22.40	19.81

1.4	20643	3	#0	16QAM	22.80	20.21
1.4	20643	3	#Mid	16QAM	22.88	20.29
1.4	20643	3	#Max	16QAM	22.87	20.28
1.4	20643	6	#0	16QAM	22.01	19.42
3	20415	1	#0	QPSK	23.91	21.32
3	20415	1	#Mid	QPSK	23.90	21.31
3	20415	1	#Max	QPSK	23.88	21.29
3	20415	8	#0	QPSK	22.92	20.33
3	20415	8	#Mid	QPSK	22.93	20.34
3	20415	8	#Max	QPSK	23.02	20.43
3	20415	15	#0	QPSK	23.00	20.41
3	20415	1	#0	16QAM	22.88	20.29
3	20415	1	#Mid	16QAM	22.85	20.26
3	20415	1	#Max	16QAM	22.81	20.22
3	20415	8	#0	16QAM	22.50	19.91
3	20415	8	#Mid	16QAM	22.51	19.92
3	20415	8	#Max	16QAM	22.12	19.53
3	20415	15	#0	16QAM	22.42	19.83
3	20525	1	#0	QPSK	23.86	21.27
3	20525	1	#Mid	QPSK	23.75	21.16
3	20525	1	#Max	QPSK	23.80	21.21
3	20525	8	#0	QPSK	22.96	20.37
3	20525	8	#Mid	QPSK	22.97	20.38
3	20525	8	#Max	QPSK	22.77	20.18
3	20525	15	#0	QPSK	22.80	20.21
3	20525	1	#0	16QAM	23.70	21.11
3	20525	1	#Mid	16QAM	23.59	21.00
3	20525	1	#Max	16QAM	23.62	21.03
3	20525	8	#0	16QAM	22.04	19.45
3	20525	8	#Mid	16QAM	22.06	19.47
3	20525	8	#Max	16QAM	22.31	19.72
3	20525	15	#0	16QAM	22.31	19.72
3	20635	1	#0	QPSK	23.80	21.21
3	20635	1	#Mid	QPSK	23.80	21.21
3	20635	1	#Max	QPSK	23.78	21.19
3	20635	8	#0	QPSK	22.64	20.05
3	20635	8	#Mid	QPSK	22.66	20.07
3	20635	8	#Max	QPSK	22.62	20.03
3	20635	15	#0	QPSK	22.75	20.16
3	20635	1	#0	16QAM	22.18	19.59
3	20635	1	#Mid	16QAM	22.23	19.64
3	20635	1	#Max	16QAM	22.24	19.65

3	20635	8	#0	16QAM	21.82	19.23
3	20635	8	#Mid	16QAM	21.84	19.25
3	20635	8	#Max	16QAM	21.82	19.23
3	20635	15	#0	16QAM	21.70	19.11
5	20425	1	#0	QPSK	23.92	21.33
5	20425	1	#Mid	QPSK	23.92	21.33
5	20425	1	#Max	QPSK	23.83	21.24
5	20425	12	#0	QPSK	22.93	20.34
5	20425	12	#Mid	QPSK	22.93	20.34
5	20425	12	#Max	QPSK	22.94	20.35
5	20425	25	#0	QPSK	23.00	20.41
5	20425	1	#0	16QAM	22.59	20.00
5	20425	1	#Mid	16QAM	22.62	20.03
5	20425	1	#Max	16QAM	22.56	19.97
5	20425	12	#0	16QAM	22.36	19.77
5	20425	12	#Mid	16QAM	22.36	19.77
5	20425	12	#Max	16QAM	21.94	19.35
5	20425	25	#0	16QAM	22.04	19.45
5	20525	1	#0	QPSK	23.95	21.36
5	20525	1	#Mid	QPSK	23.89	21.30
5	20525	1	#Max	QPSK	23.94	21.35
5	20525	12	#0	QPSK	22.97	20.38
5	20525	12	#Mid	QPSK	22.98	20.39
5	20525	12	#Max	QPSK	22.97	20.38
5	20525	25	#0	QPSK	22.94	20.35
5	20525	1	#0	16QAM	23.11	20.52
5	20525	1	#Mid	16QAM	23.00	20.41
5	20525	1	#Max	16QAM	23.00	20.41
5	20525	12	#0	16QAM	21.92	19.33
5	20525	12	#Mid	16QAM	21.94	19.35
5	20525	12	#Max	16QAM	22.24	19.65
5	20525	25	#0	16QAM	22.25	19.66
5	20625	1	#0	QPSK	23.63	21.04
5	20625	1	#Mid	QPSK	23.57	20.98
5	20625	1	#Max	QPSK	23.60	21.01
5	20625	12	#0	QPSK	22.82	20.23
5	20625	12	#Mid	QPSK	22.84	20.25
5	20625	12	#Max	QPSK	22.76	20.17
5	20625	25	#0	QPSK	22.68	20.09
5	20625	1	#0	16QAM	22.65	20.06
5	20625	1	#Mid	16QAM	22.64	20.05
5	20625	1	#Max	16QAM	22.70	20.11

5	20625	12	#0	16QAM	21.75	19.16
5	20625	12	#Mid	16QAM	21.78	19.19
5	20625	12	#Max	16QAM	21.70	19.11
5	20625	25	#0	16QAM	21.55	18.96
10	20450	1	#0	QPSK	23.97	21.38
10	20450	1	#Mid	QPSK	23.99	21.40
10	20450	1	#Max	QPSK	23.91	21.32
10	20450	25	#0	QPSK	22.90	20.31
10	20450	25	#Mid	QPSK	22.98	20.39
10	20450	25	#Max	QPSK	23.05	20.46
10	20450	50	#0	QPSK	22.96	20.37
10	20450	1	#0	16QAM	22.98	20.39
10	20450	1	#Mid	16QAM	22.93	20.34
10	20450	1	#Max	16QAM	23.03	20.44
10	20450	25	#0	16QAM	22.04	19.45
10	20450	25	#Mid	16QAM	22.04	19.45
10	20450	25	#Max	16QAM	22.10	19.51
10	20450	50	#0	16QAM	22.11	19.52
10	20525	1	#0	QPSK	23.97	21.38
10	20525	1	#Mid	QPSK	23.98	21.39
10	20525	1	#Max	QPSK	23.95	21.36
10	20525	25	#0	QPSK	22.95	20.36
10	20525	25	#Mid	QPSK	22.95	20.36
10	20525	25	#Max	QPSK	22.83	20.24
10	20525	50	#0	QPSK	22.78	20.19
10	20525	1	#0	16QAM	23.17	20.58
10	20525	1	#Mid	16QAM	22.96	20.37
10	20525	1	#Max	16QAM	22.97	20.38
10	20525	25	#0	16QAM	22.10	19.51
10	20525	25	#Mid	16QAM	22.12	19.53
10	20525	25	#Max	16QAM	22.05	19.46
10	20525	50	#0	16QAM	22.27	19.68
10	20600	1	#0	QPSK	23.83	21.24
10	20600	1	#Mid	QPSK	23.87	21.28
10	20600	1	#Max	QPSK	23.74	21.15
10	20600	25	#0	QPSK	22.79	20.20
10	20600	25	#Mid	QPSK	22.80	20.21
10	20600	25	#Max	QPSK	22.61	20.02
10	20600	50	#0	QPSK	22.67	20.08
10	20600	1	#0	16QAM	22.22	19.63
10	20600	1	#Mid	16QAM	22.18	19.59
10	20600	1	#Max	16QAM	22.10	19.51

10	20600	25	#0	16QAM	21.90	19.31
10	20600	25	#Mid	16QAM	21.89	19.30
10	20600	25	#Max	16QAM	21.79	19.20
10	20600	50	#0	16QAM	21.82	19.23

6.2. Occupied Bandwidth

Mode	Channel	Frequency (MHz)	99% Power Bandwidth (MHz)	-26dBc Bandwidth(MHz)
WCDMA Band V (RMC)	4132	826.4	4.162	4.658
	4183	836.6	4.142	4.635
	4233	846.6	4.145	4.644

LTE Band 5						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	20407	824.7	1.096	1.247
			20525	836.5	1.095	1.249
			20643	848.3	1.097	1.248
		3	20415	825.5	2.714	3.034
			20525	836.5	2.709	3.025
			20635	847.5	2.708	3.030
		5	20425	826.5	4.523	4.999
			20525	836.5	4.519	5.000
			20625	846.5	4.504	4.986
		10	20450	829	9.009	9.908
			20525	836.5	8.974	9.783
			20600	844	9.017	9.833
	16QAM	1.4	20407	824.7	1.097	1.249
			20525	836.5	1.093	1.234
			20643	848.3	1.098	1.246
		3	20415	825.5	2.713	3.014
			20525	836.5	2.703	3.031
			20635	847.5	2.710	3.033
		5	20425	826.5	4.505	4.928
			20525	836.5	4.539	5.008
			20625	846.5	4.512	4.970
		10	20450	829	8.978	9.877
			20525	836.5	8.970	9.829

			20600	844	8.994	9.860
--	--	--	-------	-----	-------	-------

WCDMA Band V CH-Low




WCDMA Band V CH-Middle




WCDMA Band V CH-High




LTE Band 5 QPSK 1.4MHz CH-Low

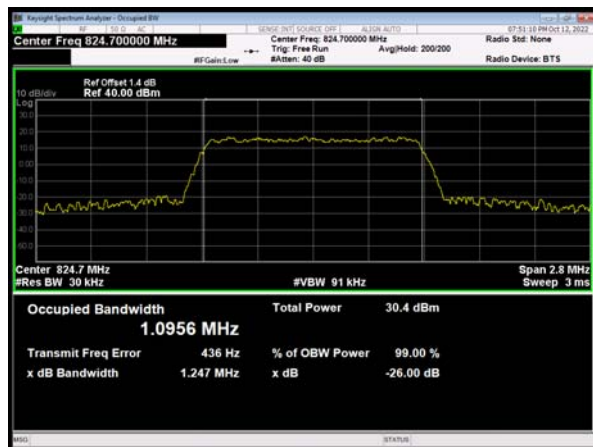

LTE Band 5 QPSK 3MHz CH-Low

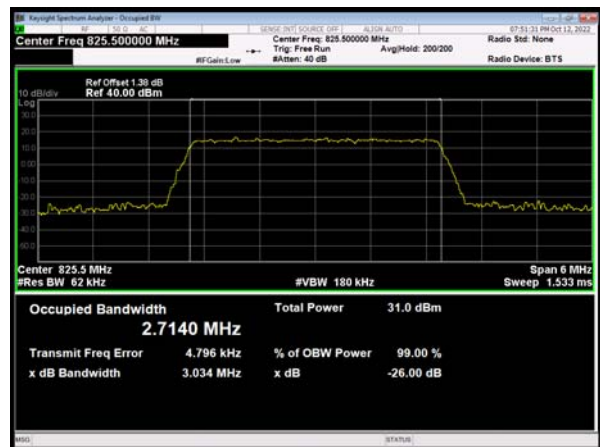


LTE Band 5 QPSK 1.4MHz CH-Middle

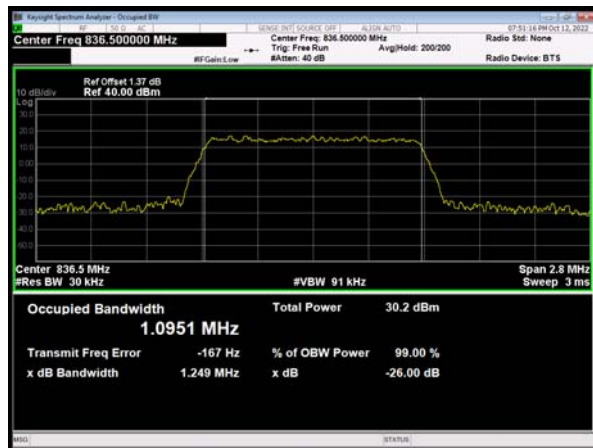


LTE Band 5 QPSK 3MHz CH-Middle




LTE Band 5 QPSK 1.4MHz CH-High

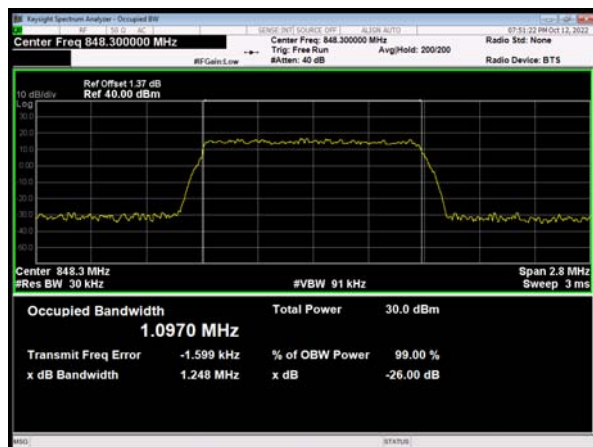


LTE Band 5 QPSK 3MHz CH-High

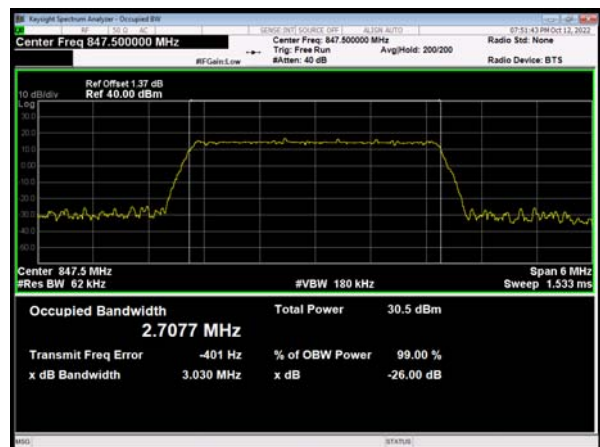

LTE Band 5 QPSK 5MHz CH-Low

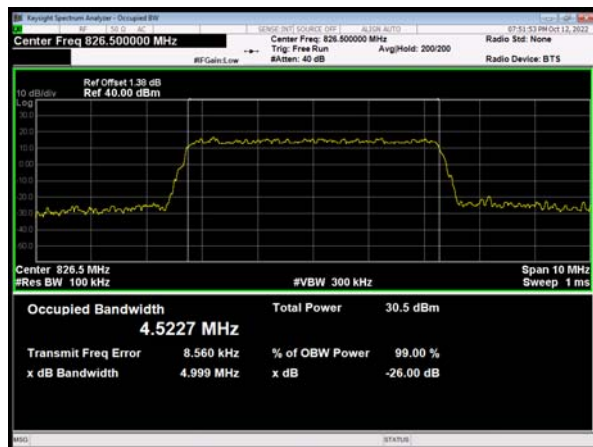

LTE Band 5 QPSK 10MHz CH-Low

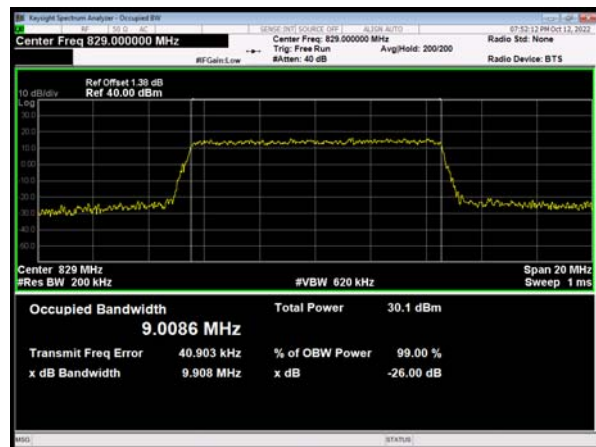


LTE Band 5 QPSK 5MHz CH-Middle




LTE Band 5 QPSK 10MHz CH-Middle




LTE Band 5 QPSK 5MHz CH-High

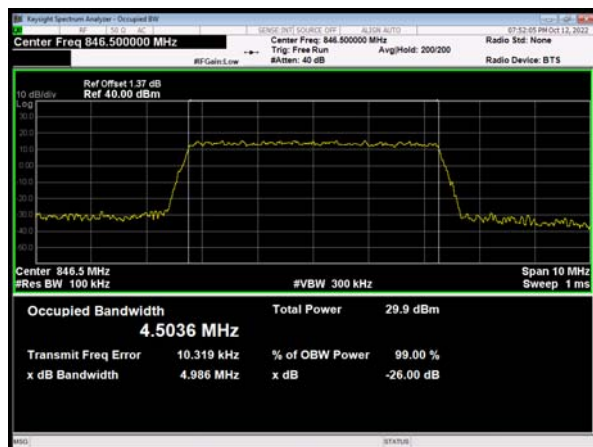


LTE Band 5 QPSK 10MHz CH-High

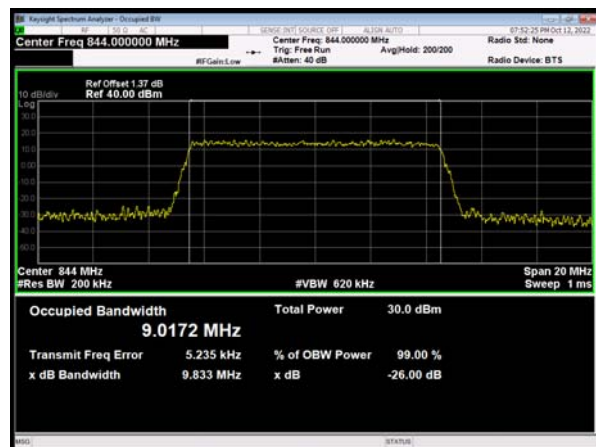


LTE Band 5 16QAM 1.4MHz CH-Low

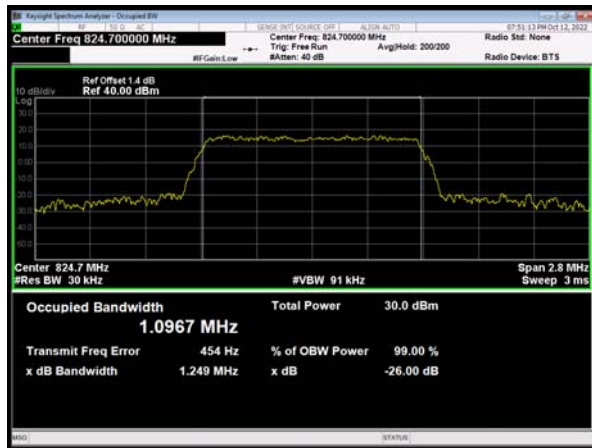


LTE Band 5 16QAM 3MHz CH-Low

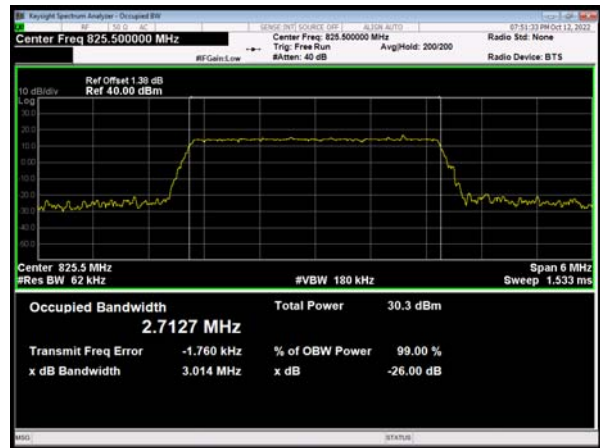


LTE Band 5 16QAM 1.4MHz CH-Middle

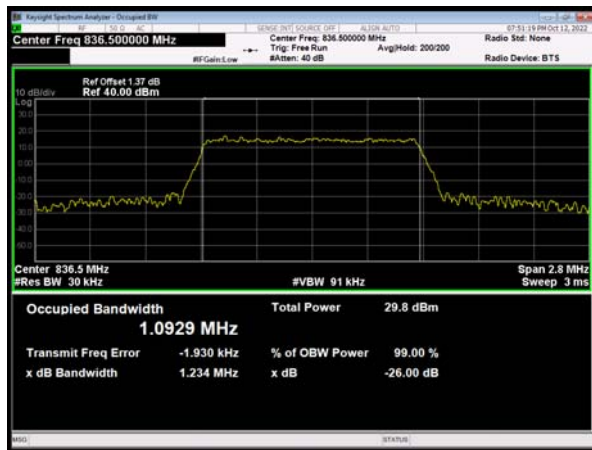

LTE Band 5 16QAM 3MHz CH-Middle

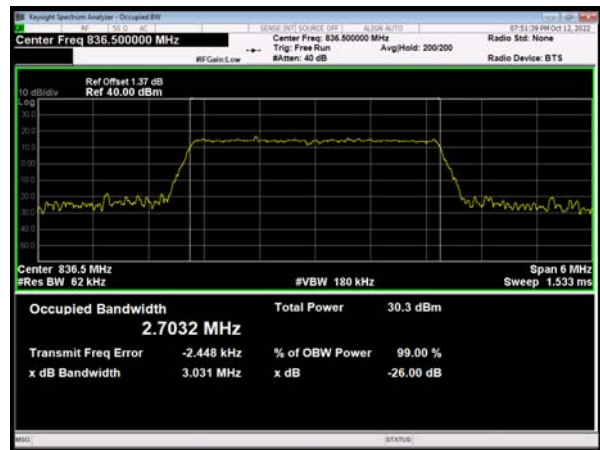


LTE Band 5 16QAM 1.4MHz CH-High

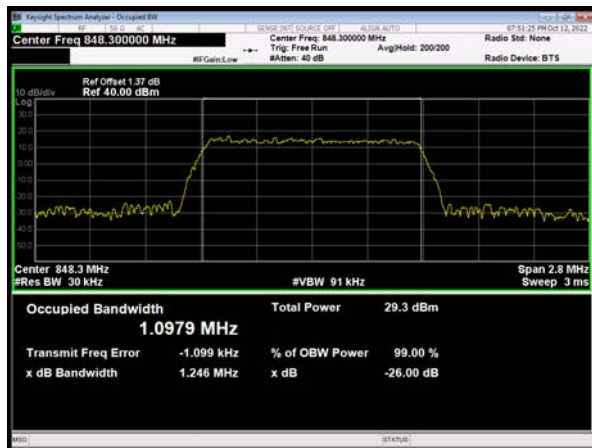

LTE Band 5 16QAM 3MHz CH-High




LTE Band 5 16QAM 5MHz CH-Low

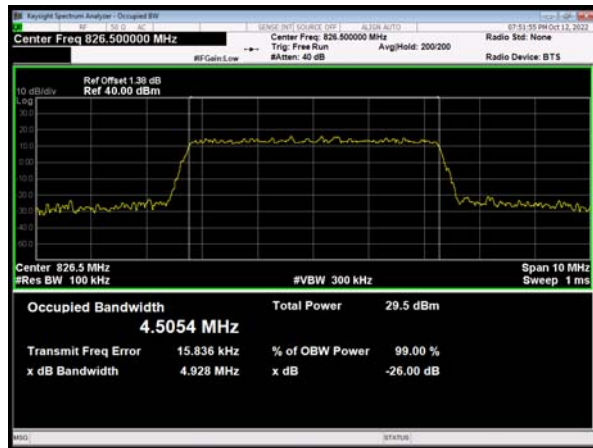


LTE Band 5 16QAM 10MHz CH-Low




LTE Band 5 16QAM 5MHz CH-Middle

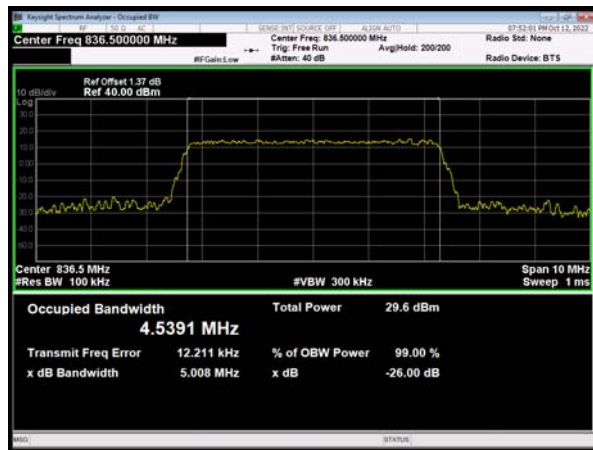


LTE Band 5 16QAM 10MHz CH-Middle

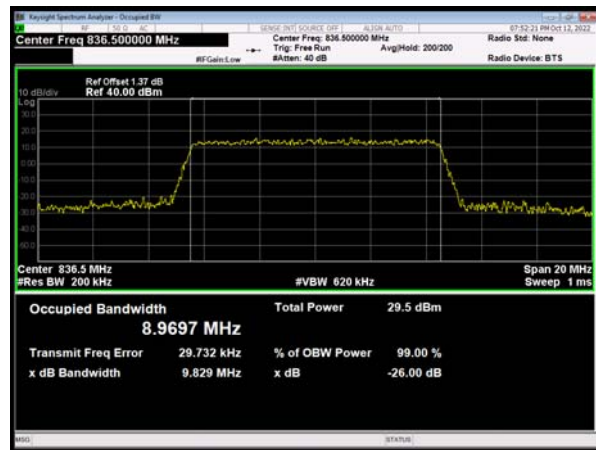

LTE Band 5 16QAM 5MHz CH-High

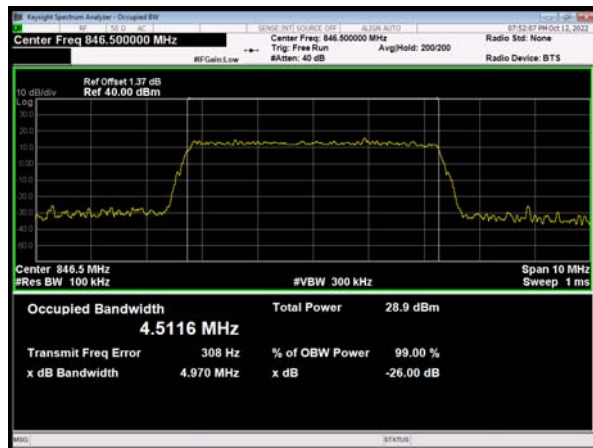

LTE Band 5 16QAM 10MHz CH-High

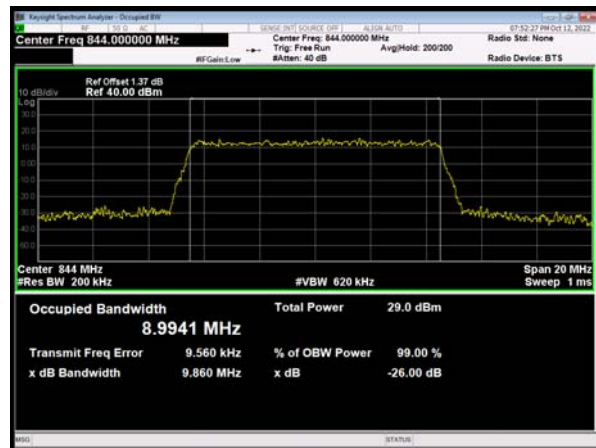

6.3. Band Edge Compliance


WCDMA Band V CH-Low




WCDMA Band V CH-High




LTE Band 5 QPSK 1.4MHz CH-Low 1RB

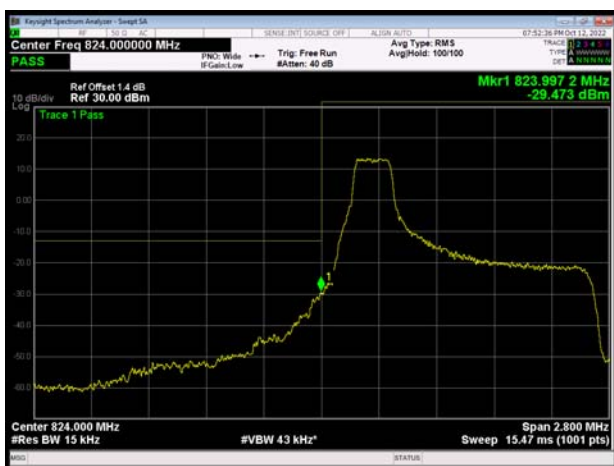

LTE Band 5 QPSK 1.4MHz CH-High 1RB

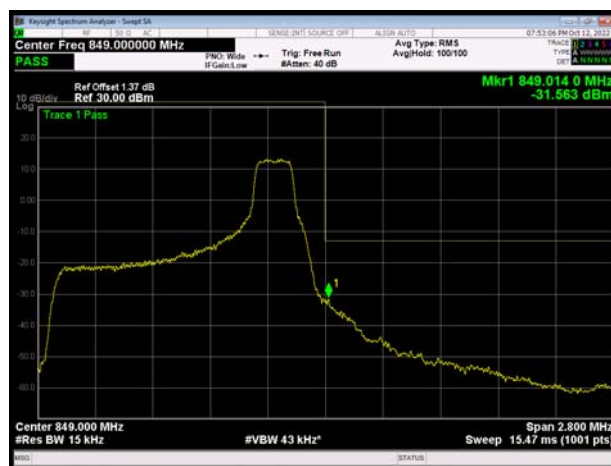


LTE Band 5 QPSK 1.4MHz CH-Low 100%RB

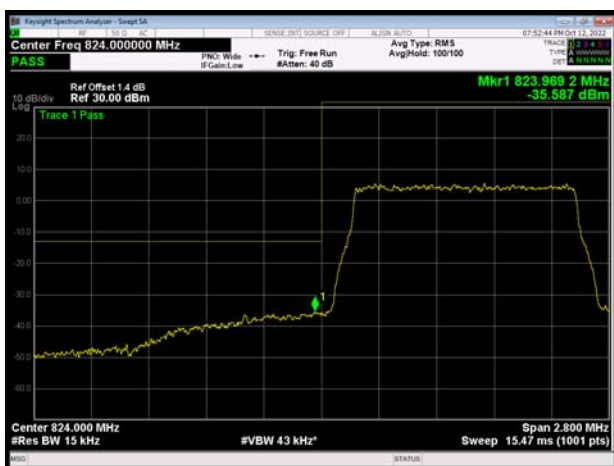


LTE Band 5 QPSK 1.4MHz CH-High 100%RB




LTE Band 5 QPSK 3MHz CH-Low 1RB

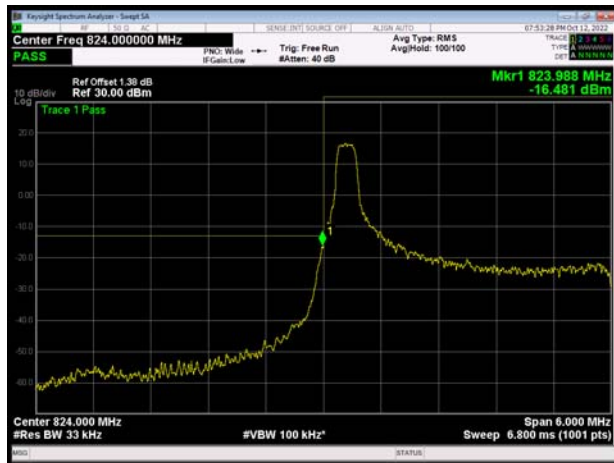

LTE Band 5 QPSK 3MHz CH-High 1RB

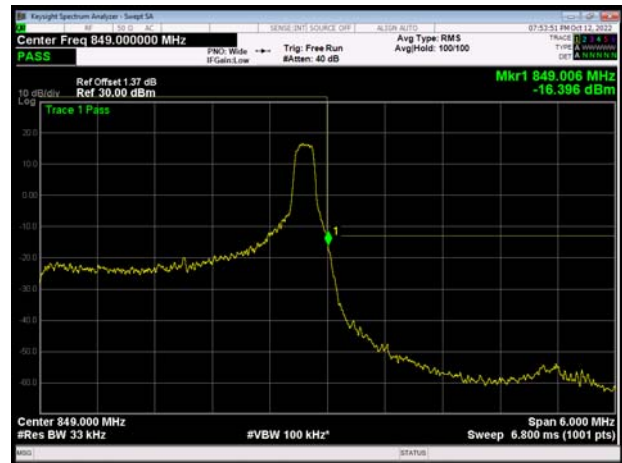


LTE Band 5 QPSK 3MHz CH-Low 100%RB

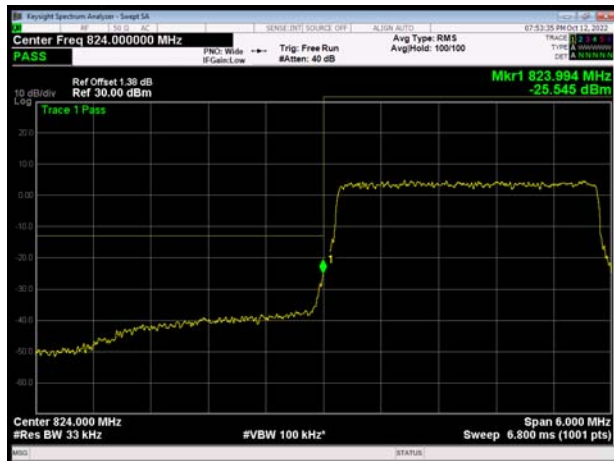


LTE Band 5 QPSK 3MHz CH-High 100%RB




LTE Band 5 QPSK 5MHz CH-Low 1RB

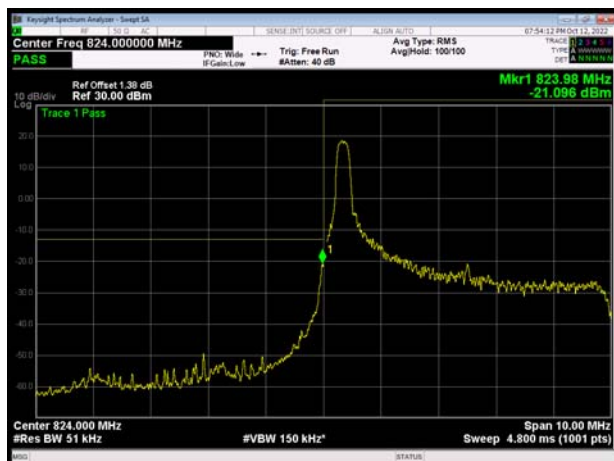


LTE Band 5 QPSK 5MHz CH-High 1RB

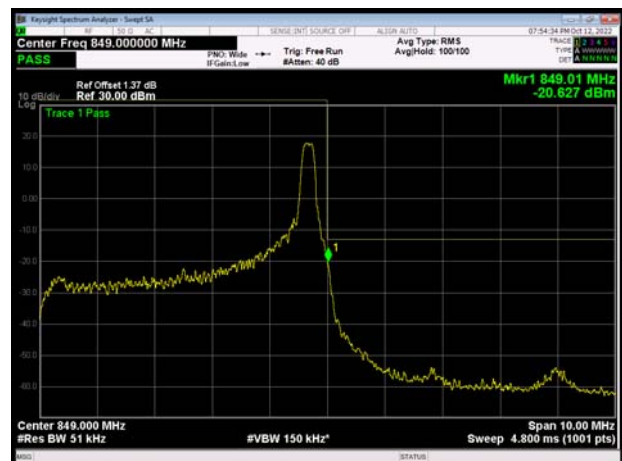


LTE Band 5 QPSK 5MHz CH-Low 100%RB

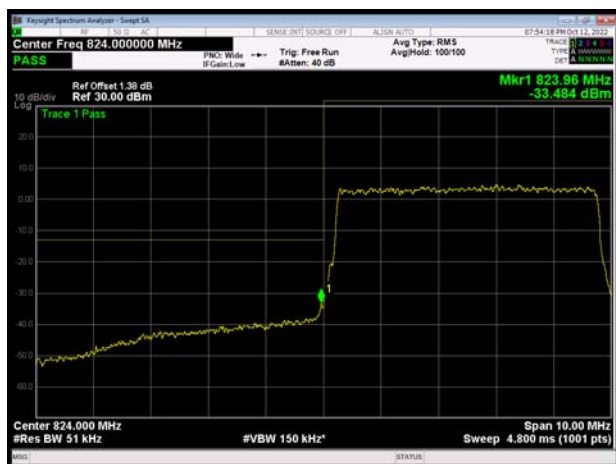


LTE Band 5 QPSK 5MHz CH-High 100%RB

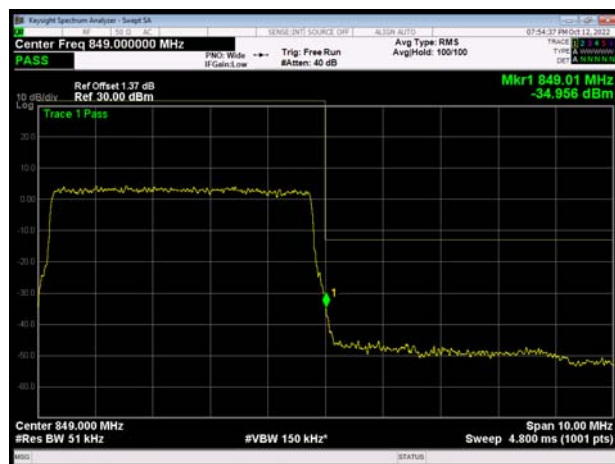


LTE Band 5 QPSK 10MHz CH-Low 1RB

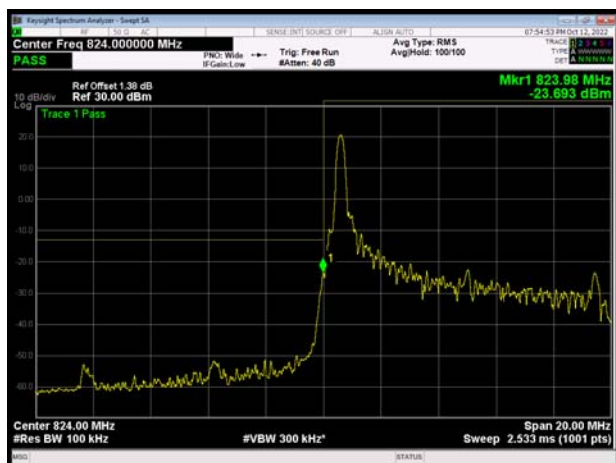


LTE Band 5 QPSK 10MHz CH-High 1RB

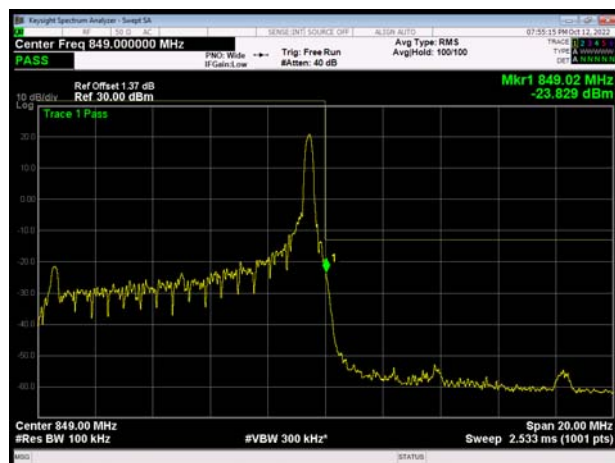


LTE Band 5 QPSK 10MHz CH-Low 100%RB

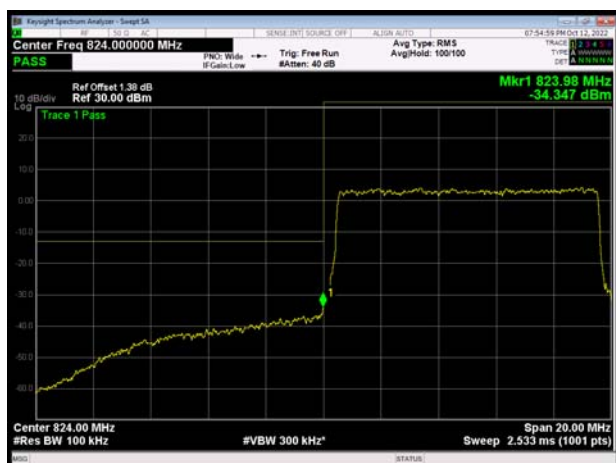


LTE Band 5 QPSK 10MHz CH-High 100%RB

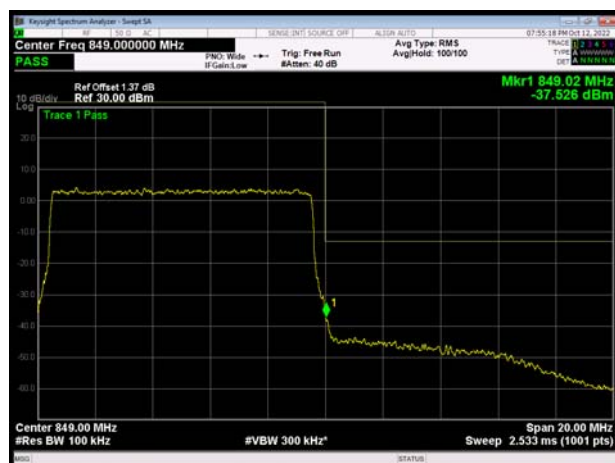


LTE Band 5 16QAM 1.4MHz CH-Low 1RB

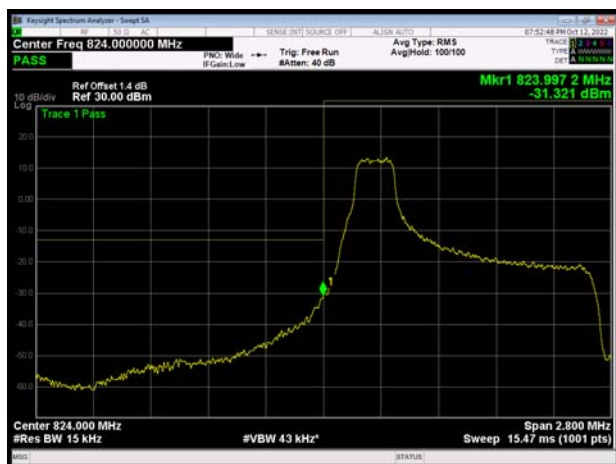


LTE Band 5 16QAM 1.4MHz CH-High 1RB

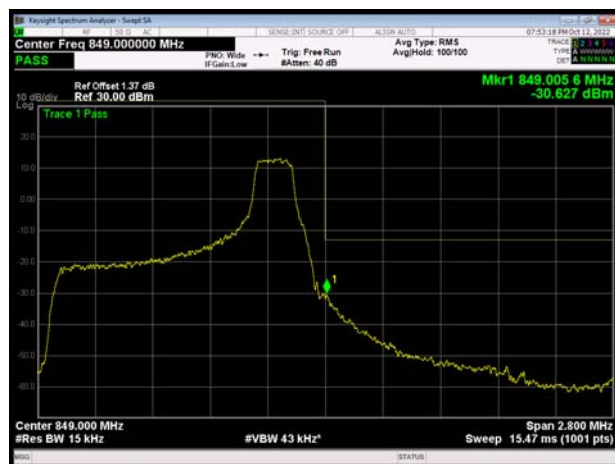


LTE Band 5 16QAM 1.4MHz CH-Low 100%RB

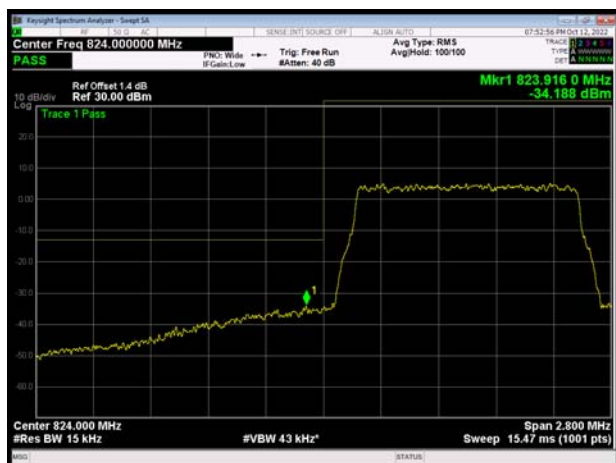


LTE Band 5 16QAM 1.4MHz CH-High 100%RB

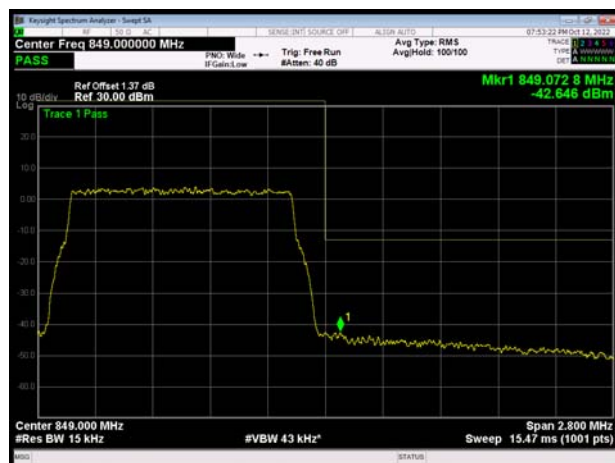


LTE Band 5 16QAM 3MHz CH-Low 1RB

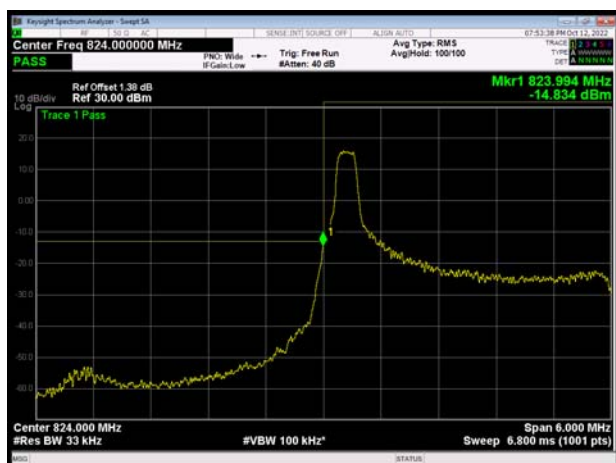


LTE Band 5 16QAM 3MHz CH-High 1RB

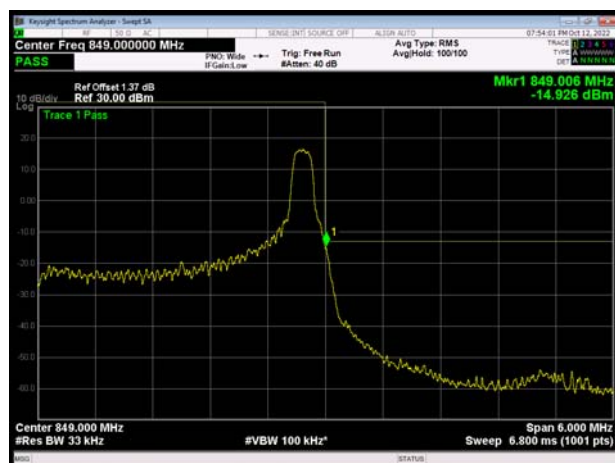


LTE Band 5 16QAM 3MHz CH-Low 100%RB

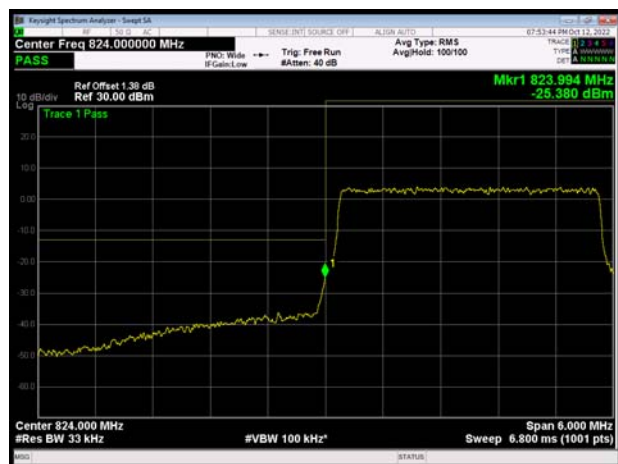


LTE Band 5 16QAM 3MHz CH-High 100%RB

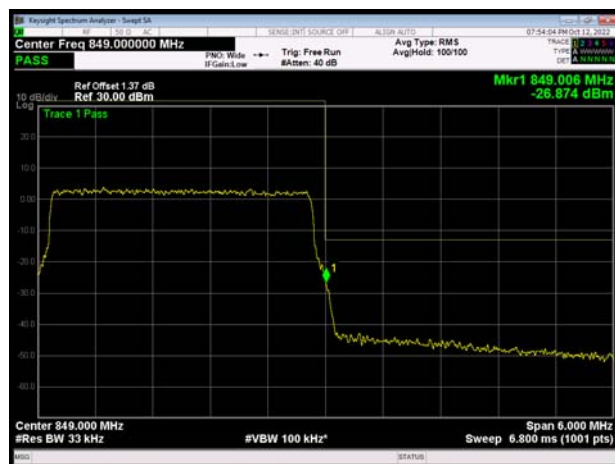


LTE Band 5 16QAM 5MHz CH-Low 1RB

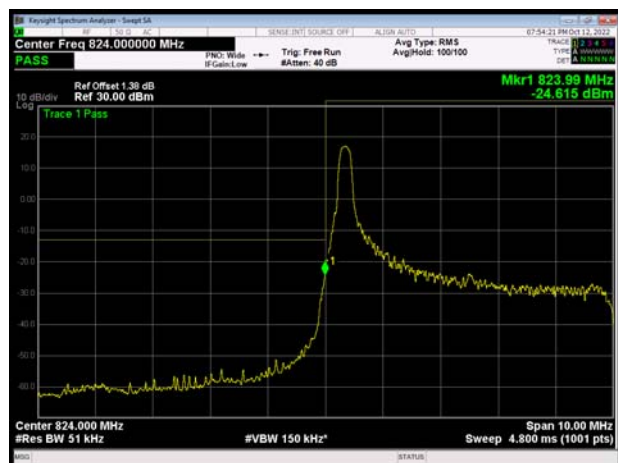


LTE Band 5 16QAM 5MHz CH-High 1RB

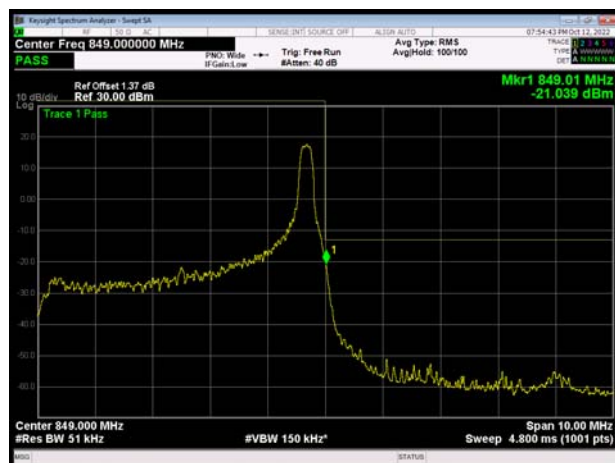


LTE Band 5 16QAM 5MHz CH-Low 100%RB

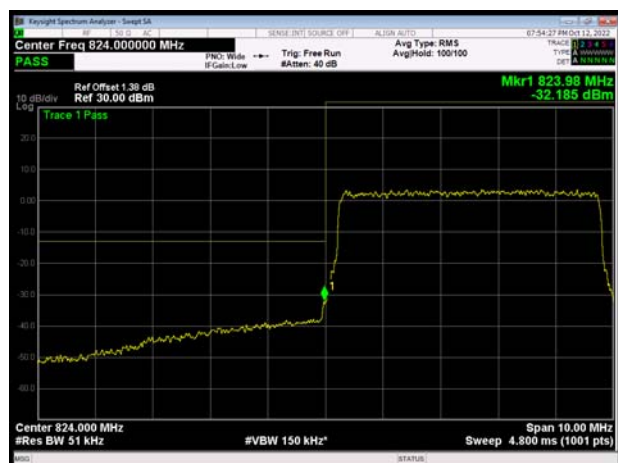


LTE Band 5 16QAM 5MHz CH-High 100%RB

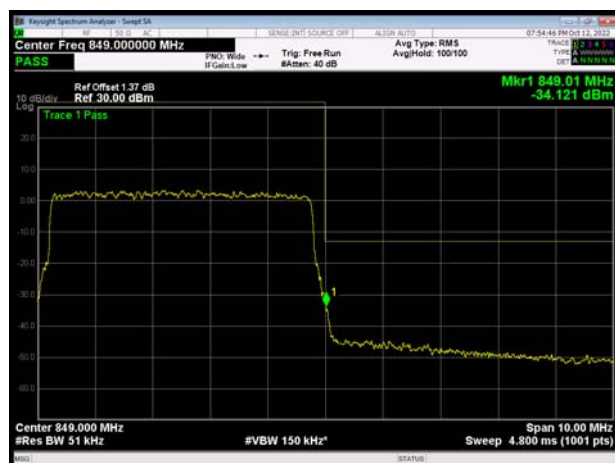


LTE Band 5 16QAM 10MHz CH-Low 1RB

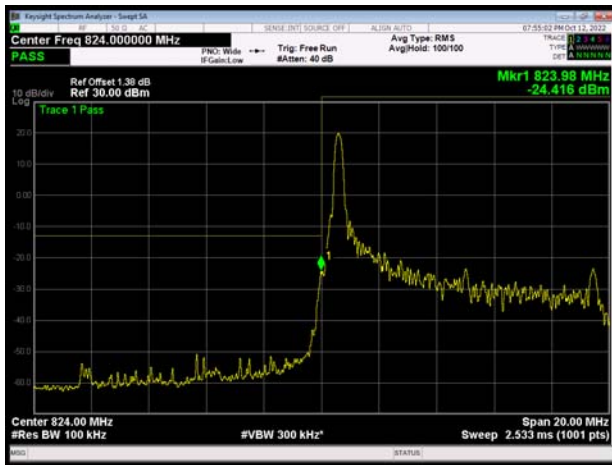


LTE Band 5 16QAM 10MHz CH-High 1RB

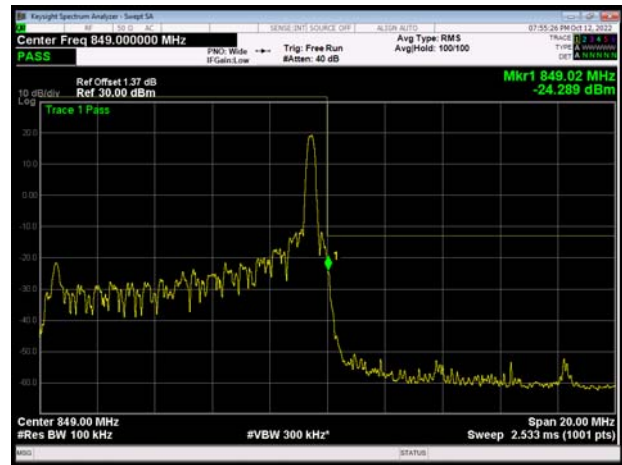

LTE Band 5 16QAM 10MHz CH-Low 100%RB

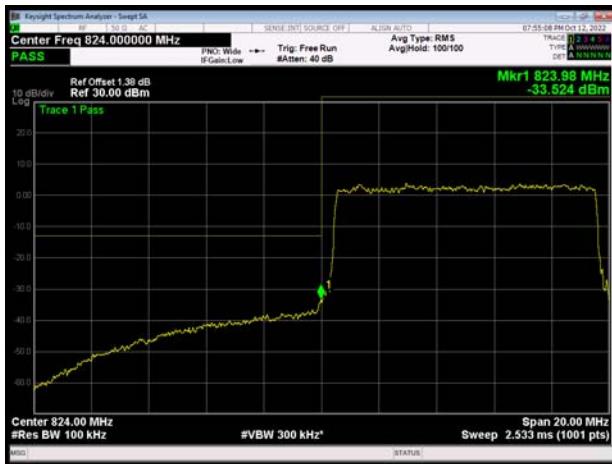

LTE Band 5 16QAM 10MHz CH-High 100%RB

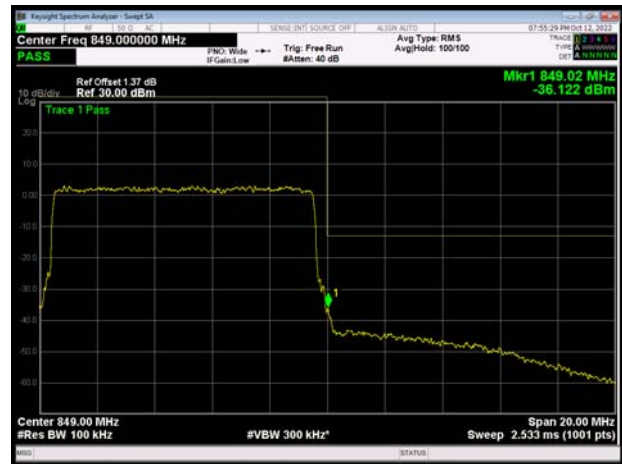

6.4. Peak-to-Average Power Ratio (PAPR)

Mode	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
WCDMA Band V (RMC)	4132	826.4	25.91	22.90	3.01	≤13	PASS
	4183	836.6	24.97	21.92	3.05	≤13	PASS
	4233	846.6	25.09	22.00	3.09	≤13	PASS

LTE Band 5								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	20407	824.7	27.63	22.39	5.24	≤13	PASS
		20525	836.5	27.43	22.23	5.20	≤13	PASS
		20643	848.3	27.47	22.01	5.46	≤13	PASS
	3	20415	825.5	27.66	22.29	5.37	≤13	PASS
		20525	836.5	27.49	22.27	5.22	≤13	PASS
		20635	847.5	27.45	22.02	5.43	≤13	PASS
	5	20425	826.5	27.55	22.25	5.30	≤13	PASS
		20525	836.5	27.44	22.10	5.34	≤13	PASS
		20625	846.5	27.40	21.97	5.43	≤13	PASS
	10	20450	829	27.53	22.35	5.18	≤13	PASS
		20525	836.5	27.46	22.10	5.36	≤13	PASS
		20600	844	27.52	21.99	5.53	≤13	PASS
16QAM	1.4	20407	824.7	27.70	21.86	5.84	≤13	PASS
		20525	836.5	27.65	21.80	5.85	≤13	PASS
		20643	848.3	27.39	21.15	6.24	≤13	PASS
	3	20415	825.5	27.68	21.80	5.88	≤13	PASS
		20525	836.5	27.62	21.71	5.91	≤13	PASS
		20635	847.5	27.26	21.03	6.23	≤13	PASS
	5	20425	826.5	27.45	21.45	6.00	≤13	PASS
		20525	836.5	27.55	21.60	5.95	≤13	PASS
		20625	846.5	27.23	20.97	6.26	≤13	PASS
	10	20450	829	27.33	21.39	5.94	≤13	PASS
		20525	836.5	27.63	21.66	5.97	≤13	PASS
		20600	844	27.44	21.20	6.24	≤13	PASS

6.5. Frequency Stability

WCDMA Band V						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	BPSK	QPSK	BPSK	QPSK	
Normal (25℃)	Normal	16.92	7.05	0.02023	0.00842	PASS
Extreme (50℃)		13.71	3.13	0.01639	0.00374	PASS
Extreme (40℃)		5.63	15.01	0.00673	0.01794	PASS
Extreme (30℃)		2.82	11.13	0.00337	0.01331	PASS
Extreme (20℃)		16.71	7.49	0.01998	0.00896	PASS
Extreme (10℃)		16.02	6.71	0.01915	0.00802	PASS
Extreme (0℃)		10.83	4.85	0.01294	0.00580	PASS
Extreme (-10℃)		15.87	8.96	0.01896	0.01071	PASS
Extreme (-20℃)		5.97	17.45	0.00713	0.02086	PASS
Extreme (-30℃)		13.73	15.07	0.01641	0.01802	PASS
25℃	LV	12.41	4.40	0.01484	0.00526	PASS
	HV	7.53	14.45	0.00900	0.01727	PASS

LTE Band 5						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	1.4MHz					
Temperature	Voltage					
Normal (25℃)	Normal	16QAM	QPSK	16QAM	QPSK	PASS
Extreme (50℃)		9.71	14.60	0.01160	0.01745	PASS
Extreme (40℃)		3.92	3.00	0.00469	0.00358	PASS
Extreme (30℃)		6.79	1.26	0.00812	0.00151	PASS
Extreme (20℃)		4.77	2.94	0.00571	0.00351	PASS
Extreme (10℃)		9.79	1.77	0.01170	0.00212	PASS
Extreme (0℃)		16.14	4.54	0.01929	0.00542	PASS
Extreme (-10℃)		4.78	13.07	0.00572	0.01562	PASS
Extreme (-20℃)		2.42	16.38	0.00289	0.01958	PASS
Extreme (-30℃)		16.41	9.71	0.01961	0.01161	PASS
25℃	11.28	1.12	0.01349	0.00134	PASS	
	LV	13.31	4.31	0.01591	0.00515	PASS
	HV	5.40	4.72	0.00645	0.00564	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	3MHz					
Temperature	Voltage					
		16QAM	QPSK	16QAM	QPSK	


Normal (25℃)	Normal	12.33	2.47	0.01473	0.00295	PASS
Extreme (50℃)		14.75	6.03	0.01763	0.00721	PASS
Extreme (40℃)		14.58	10.41	0.01743	0.01244	PASS
Extreme (30℃)		7.60	4.27	0.00909	0.00511	PASS
Extreme (20℃)		8.45	9.21	0.01010	0.01101	PASS
Extreme (10℃)		11.61	8.18	0.01387	0.00978	PASS
Extreme (0℃)		13.06	16.44	0.01561	0.01965	PASS
Extreme (-10℃)		6.85	4.07	0.00819	0.00487	PASS
Extreme (-20℃)		12.18	14.85	0.01456	0.01775	PASS
Extreme (-30℃)		2.31	14.97	0.00276	0.01790	PASS
25℃	LV	4.67	14.44	0.00559	0.01726	PASS
	HV	8.36	7.07	0.01000	0.00845	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	5MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	14.05	15.17	0.01680	0.01813	PASS
Extreme (50℃)		1.85	3.28	0.00221	0.00392	PASS
Extreme (40℃)		16.25	11.38	0.01943	0.01360	PASS
Extreme (30℃)		9.59	2.37	0.01146	0.00283	PASS
Extreme (20℃)		10.52	4.21	0.01257	0.00504	PASS
Extreme (10℃)		2.52	10.90	0.00301	0.01302	PASS
Extreme (0℃)		15.21	5.79	0.01818	0.00692	PASS
Extreme (-10℃)		6.52	13.92	0.00779	0.01663	PASS
Extreme (-20℃)		3.00	4.69	0.00358	0.00560	PASS
Extreme (-30℃)		17.60	5.99	0.02104	0.00716	PASS
25℃	LV	5.23	7.40	0.00626	0.00884	PASS
	HV	10.07	5.00	0.01204	0.00598	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	9.40	17.43	0.01124	0.02084	PASS
Extreme (50℃)		7.36	3.12	0.00880	0.00373	PASS
Extreme (40℃)		11.23	4.91	0.01342	0.00586	PASS
Extreme (30℃)		8.39	1.33	0.01003	0.00159	PASS
Extreme (20℃)		12.12	4.18	0.01449	0.00499	PASS
Extreme (10℃)		8.54	3.61	0.01021	0.00431	PASS
Extreme (0℃)		11.04	14.91	0.01319	0.01782	PASS
Extreme (-10℃)		9.41	16.35	0.01125	0.01954	PASS
Extreme (-20℃)		2.11	7.72	0.00252	0.00923	PASS

Extreme (-30℃)		11.93	2.55	0.01426	0.00304	PASS
25℃	LV	6.68	5.49	0.00798	0.00656	PASS
	HV	5.26	4.22	0.00629	0.00505	PASS


6.6. Spurious Emissions at Antenna Terminals

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.


The signal beyond the limit is carrier.

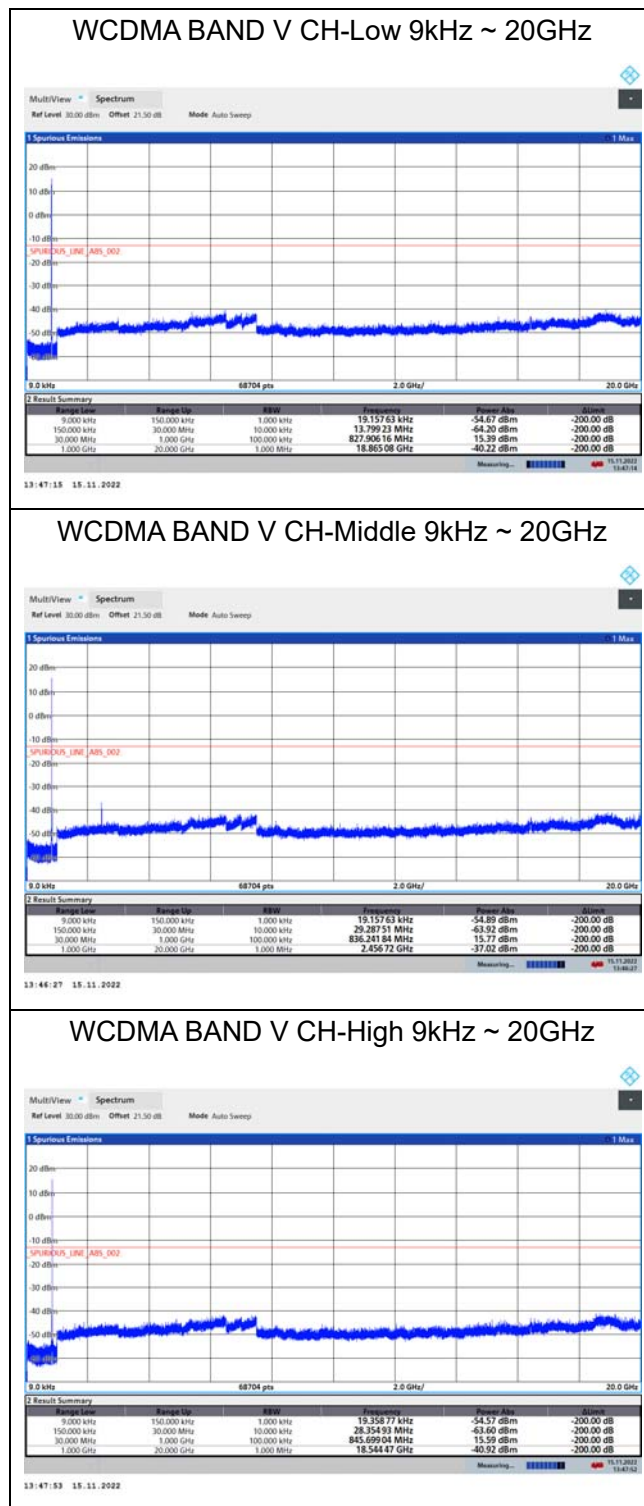


LTE Band 5 1.4MHz CH-Low 9kHz~10GHz

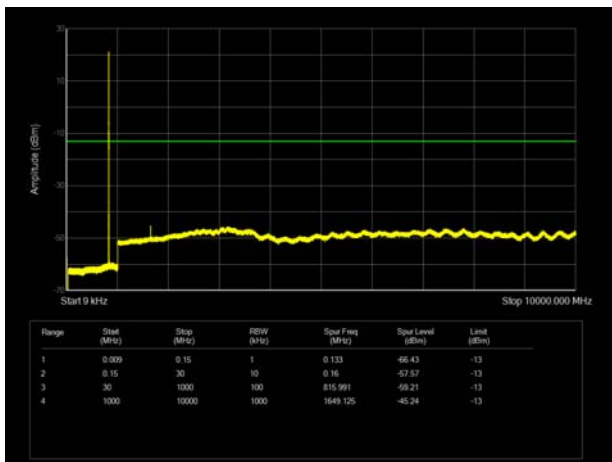


LTE Band 5 3MHz CH-Low 9kHz~10GHz

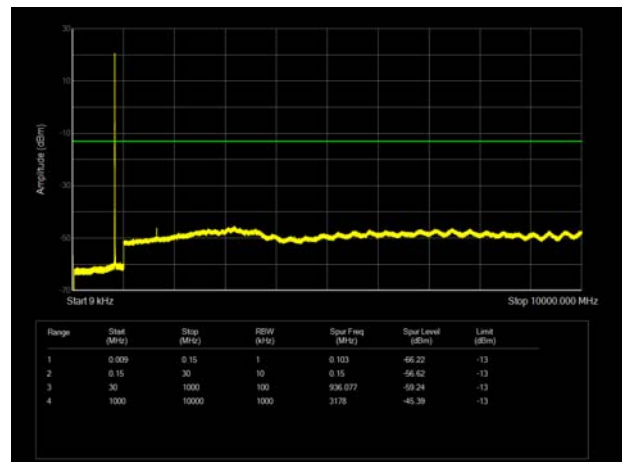


LTE Band 5 1.4MHz CH-Middle 9kHz~10GHz

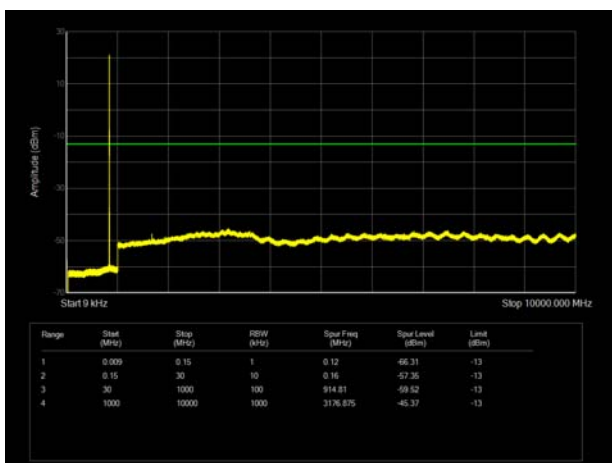


LTE Band 5 3MHz CH-Middle 9kHz~10GHz

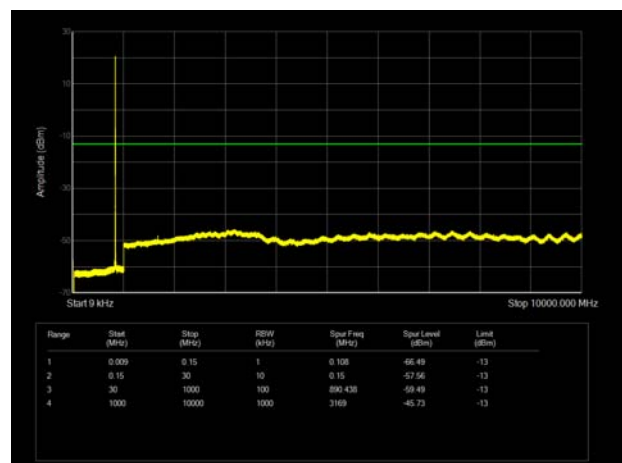


LTE Band 5 1.4MHz CH-High 9kHz~10GHz

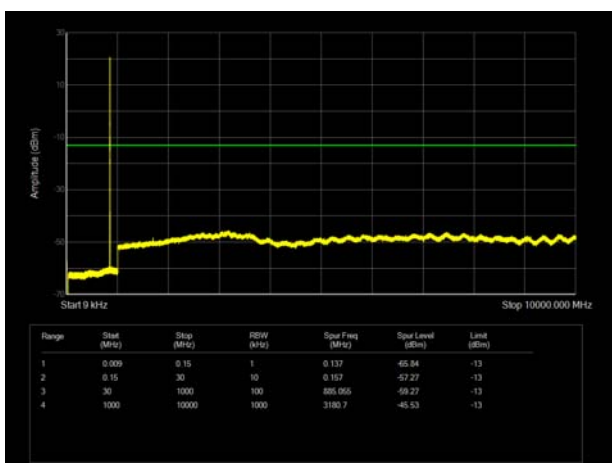


LTE Band 5 3MHz CH-High 9kHz~10GHz

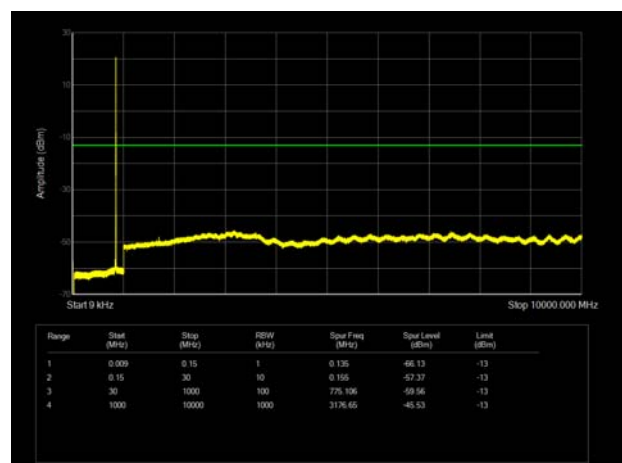


LTE Band 5 5MHz CH-Low 9kHz~10GHz

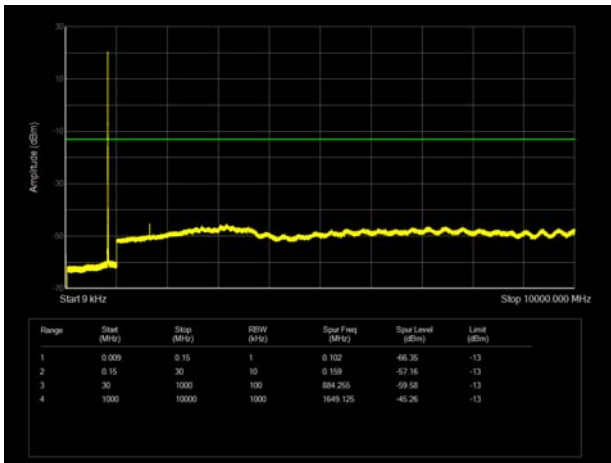


LTE Band 5 10MHz CH-Low 9kHz~10GHz

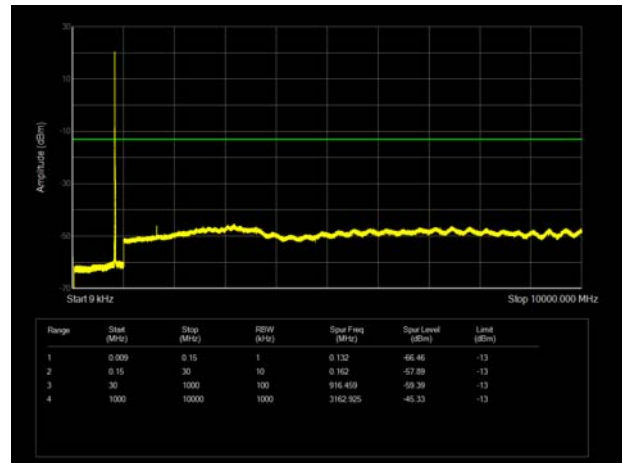


LTE Band 5 5MHz CH-Middle 9kHz~10GHz

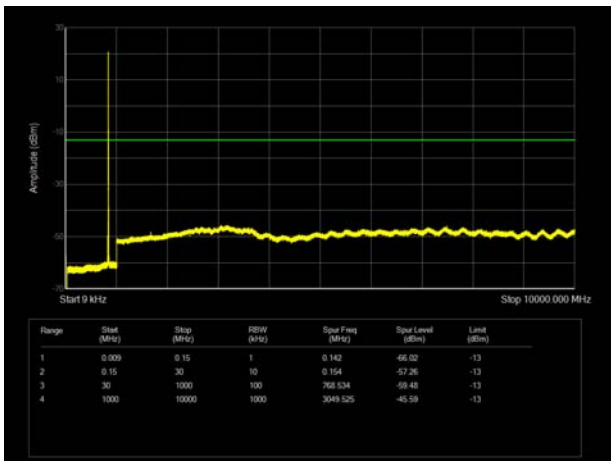


LTE Band 5 10MHz CH-Middle 9kHz~10GHz

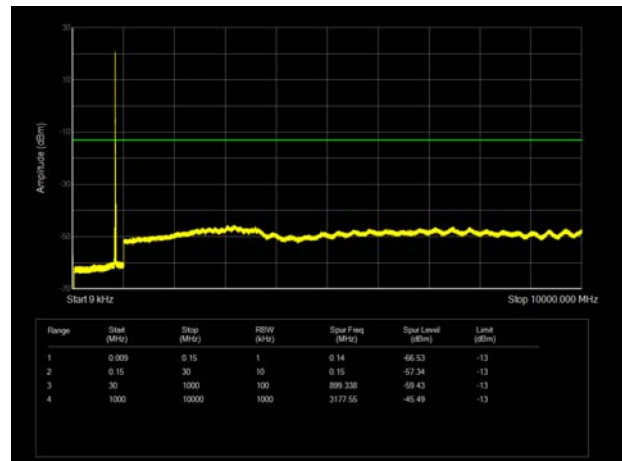

LTE Band 5 5MHz CH-High 9kHz~10GHz

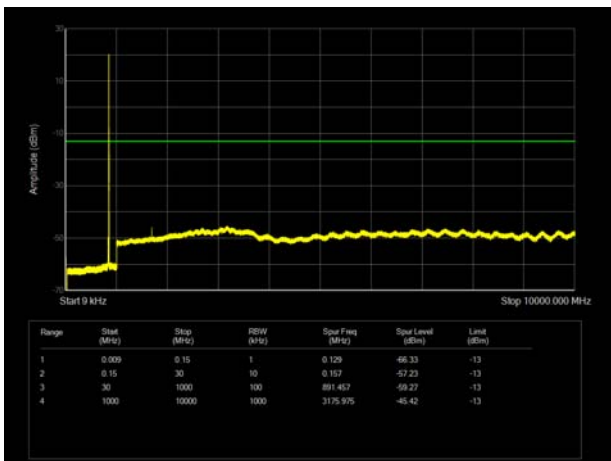

LTE Band 5 10MHz CH-High 9kHz~10GHz

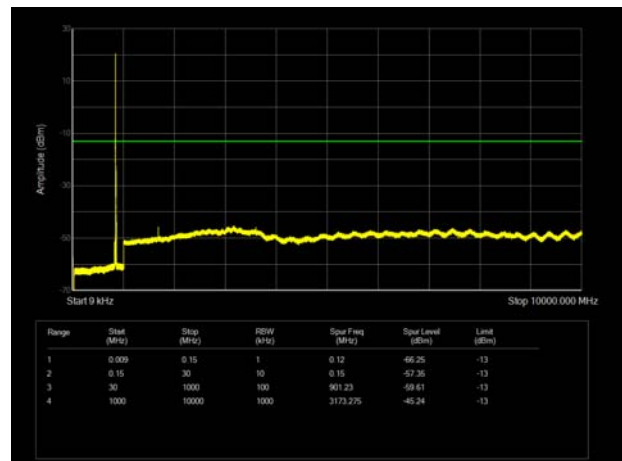

6.7. Radiated Spurious Emission

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

WCDMA Band V CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1671.20	-53.33	1.70	8.70	Horizontal	-48.48	-13.00	35.48	273
3	2510.40	-58.36	2.30	12.00	Horizontal	-50.81	-13.00	37.81	51
4	3346.40	-52.01	2.70	12.70	Horizontal	-44.16	-13.00	31.16	131
5	4183.00	-56.83	3.00	12.50	Horizontal	-49.48	-13.00	36.48	206
6	5019.60	-54.26	3.40	12.50	Horizontal	-47.31	-13.00	34.31	61
7	5856.20	-61.01	3.40	12.80	Horizontal	-53.76	-13.00	40.76	108
8	6692.80	-60.13	4.10	11.50	Horizontal	-54.88	-13.00	41.88	283
9	7529.40	-54.95	4.20	12.20	Horizontal	-49.10	-13.00	36.10	143
10	8366.00	-51.35	4.30	12.50	Horizontal	-45.30	-13.00	32.30	301

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 5 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1671.60	-48.04	1.70	8.70	Vertical	-43.19	-13.00	30.19	0
3	2507.40	-55.38	2.30	12.00	Vertical	-47.83	-13.00	34.83	30
4	3343.20	-48.75	2.70	12.70	Vertical	-40.90	-13.00	27.90	1
5	4179.00	-50.78	3.00	12.50	Vertical	-43.43	-13.00	30.43	40
6	5014.80	-53.71	3.40	12.50	Vertical	-46.76	-13.00	33.76	107
7	5850.60	-52.15	3.40	12.80	Vertical	-44.90	-13.00	31.90	13
8	6686.40	-60.23	4.10	11.50	Vertical	-54.98	-13.00	41.98	33
9	7522.20	-52.25	4.20	12.20	Vertical	-46.40	-13.00	33.40	79
10	8358.00	-39.55	4.30	12.50	Vertical	-33.50	-13.00	20.50	39

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Vertical position.

LTE Band 5 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1668.00	-48.49	1.70	8.70	Vertical	-43.64	-13.00	30.64	246
3	2502.00	-54.04	2.30	12.00	Vertical	-46.49	-13.00	33.49	0
4	3336.00	-48.75	2.70	12.70	Vertical	-40.90	-13.00	27.90	13
5	4170.00	-48.65	3.00	12.50	Vertical	-41.30	-13.00	28.30	213
6	5004.00	-51.46	3.40	12.50	Vertical	-44.51	-13.00	31.51	167
7	5838.00	-50.55	3.40	12.80	Vertical	-43.30	-13.00	30.30	22
8	6672.00	-60.23	4.10	11.50	Vertical	-54.98	-13.00	41.98	19
9	7506.00	-48.15	4.20	12.20	Vertical	-42.30	-13.00	29.30	313
10	8340.00	-38.25	4.30	12.50	Vertical	-32.20	-13.00	19.20	190

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Vertical position.

LTE Band 5 10MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1663.00	-45.67	1.70	8.70	Vertical	-40.82	-13.00	27.82	117
3	2494.50	-53.47	2.30	12.00	Vertical	-45.92	-13.00	32.92	0
4	3326.00	-47.19	2.70	12.70	Vertical	-39.34	-13.00	26.34	22
5	4157.50	-49.37	3.00	12.50	Vertical	-42.02	-13.00	29.02	209
6	4989.00	-52.49	3.40	12.50	Vertical	-45.54	-13.00	32.54	48
7	5820.50	-51.65	3.40	12.80	Vertical	-44.40	-13.00	31.40	13
8	6652.00	-58.44	4.10	11.50	Vertical	-53.19	-13.00	40.19	151
9	7483.50	-48.75	4.20	12.20	Vertical	-42.90	-13.00	29.90	77
10	8315.00	-40.65	4.30	12.50	Vertical	-34.60	-13.00	21.60	77

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Vertical position.

7. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	150415	2022-05-14	2023-05-13
Spectrum Analyzer	Key sight	N9020A	MY50510203	2021-12-12	2022-12-11
Universal Radio Communication Tester	Key sight	E5515C	GB44400275	2021-12-12	2022-12-11
Signal Analyzer	R&S	FSV3030	101411	2021-12-12	2022-12-11
Climatic Chamber	ESPEC	SU-242	93000506	2021-12-12	2022-12-11
Signal Analyzer	R&S	FSV30	104028	2021-12-12	2022-12-11
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	1023	2020-05-05	2023-05-04
Horn Antenna	Schwarzbeck	BBHA 9120D	1594	2020-12-17	2023-12-16
Software	R&S	EMC32	10.35.10	--	--

*****END OF REPORT *****

ANNEX A: The EUT Appearance

The EUT Appearance is submitted separately.

ANNEX B: Test Setup Photos

The Test Setup Photos is submitted separately.