



**CFR 47 FCC PART 15 SUBPART C  
ISED RSS-247 ISSUE 2**

**CERTIFICATION TEST REPORT**

*For*

**Television**

**MODEL NUMBER: V755-J04**

**FCC ID: 2AYT5-V755J04**

**IC: 26954-V755J04**

**REPORT NUMBER: 4789898886.1-2**

**ISSUE DATE: May 6, 2021**

*Prepared for*

**Hefei BOE Vision-electronic Technology Co.,Ltd.  
NO.2177 Dongfang RD, Xinzhan General Pilot Zone HeFei, Anhui, 230012,  
P.R.China**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch  
Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-  
Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881**

**Fax: +86 769 33244054**

**Website: [www.ul.com](http://www.ul.com)**

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	05/06/2021	Initial Issue	

Note: The host product television installed the module SKI.WB7638U.1\_MT7638BUB which had already applied for the limited single module and the FCC ID is 2AYT5-SKIWB7638U2 (IC: 26954-SKIWB7638U2). Since the installation of the module in the host does not change those parameters, full radiated testing was conducted and the original conducted data from the module is being leveraged. The conducted data contained within is taken directly from the module reports. The module reports were listed as followed. For other data, please refer to the original module reports.

## Module Reports Details:

Equipment Class	Application Type	Test Report Number	Exhibit Type	FCC / ISED
DTS	Limited Single Module	SEFI2001042	Test Report	FCC
	Limited Single Module	SEDL2001042	Test Report	ISED
	Limited Single Module	4789787344.1-3	Test Report	FCC / ISED
NII	Limited Single Module	SEDL2001042	Test Report	FCC
	Limited Single Module	SEDM2001042	Test Report	ISED
	Limited Single Module	4789787344.1-4	Test Report	FCC / ISED
BLE	Limited Single Module	4789787344.1-1	Test Report	FCC / ISED
BT	Limited Single Module	4789787344.1-2	Test Report	FCC / ISED



Summary of Test Results			
Clause	Test Items	FCC/ISED Rules	Test Results
1	Conducted Output Power Spot Check	FCC 15.247 (b) (1) RSS-247 Clause 5.1 (b)	Pass
2	Conducted Bandedge and Spurious Emission Spot Check	FCC 15.247 (d) RSS-247 Clause 5.5	Pass
3	Radiated Bandedge and Spurious	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9 RSS-GEN Clause 8.10	Pass
4	Conducted Emission Test for AC Power Port	FCC 15.207 RSS-GEN Clause 8.8	Pass
5	Antenna Requirement	FCC 15.203 RSS-GEN Clause 6.8	Pass
<p>Note:</p> <p>1.This test report is only published to and used by the applicant, and it is not for evidence purpose in China.</p> <p>2. The measurement result for the sample received is &lt;Pass&gt; according to &lt; CFR 47 FCC PART 15 SUBPART C &gt;&lt; ISED RSS-247 &gt; when &lt;Accuracy Method&gt; decision rule is applied.</p>			



## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>6</b>
<b>2. TEST METHODOLOGY .....</b>	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION.....</b>	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>8</b>
4.1. MEASURING INSTRUMENT CALIBRATION .....	8
4.2. MEASUREMENT UNCERTAINTY .....	8
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>9</b>
5.1. DESCRIPTION OF EUT .....	9
5.2. PACKET TYPE CONFIGURATION.....	9
5.3. CHANNEL LIST.....	10
5.4. TEST CHANNEL CONFIGURATION .....	10
5.5. WORST-CASE CONFIGURATIONS.....	10
5.6. DESCRIPTION OF AVAILABLE ANTENNAS .....	11
5.7. DESCRIPTION OF TEST SETUP .....	12
<b>6. MEASURING INSTRUMENT AND SOFTWARE USED .....</b>	<b>14</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>16</b>
7.1. ON TIME AND DUTY CYCLE .....	16
7.2. CONDUCTED OUTPUT POWER .....	18
7.3. CONDUCTED BANDEDGE AND SPURIOUS EMISSION.....	20
<b>8. RADIATED TEST RESULTS .....</b>	<b>23</b>
8.1. RESTRICTED BANDEDGE .....	29
8.1.1. GFSK MODE .....	29
8.1.2. 8DPSK MODE .....	31
8.2. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz) .....	33
8.2.1. GFSK MODE .....	33
8.3. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz) .....	39
8.3.1. GFSK MODE .....	39
8.3.2. 8DPSK MODE .....	45
8.4. SPURIOUS EMISSIONS (18 GHz ~ 26 GHz) .....	51
8.4.1. 8DPSK MODE .....	51
8.5. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz).....	53
8.5.1. 8DPSK MODE .....	53
8.6. SPURIOUS EMISSIONS BELOW 30 MHz .....	55
8.6.1. 8DPSK MODE .....	55



---

<b>9. AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>58</b>
9.1.1. 8DPSK MODE .....	59
<b>10. ANTENNA REQUIREMENTS.....</b>	<b>61</b>



## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: Hefei BOE Vision-electronic Technology Co.,Ltd.  
Address: NO.2177 Dongfang RD, Xinzhan General Pilot Zone HeFei, Anhui, 230012, P.R.China

### Manufacturer Information

Company Name: Hefei BOE Vision-electronic Technology Co.,Ltd.  
Address: NO.2177 Dongfang RD, Xinzhan General Pilot Zone HeFei, Anhui, 230012, P.R.China

### EUT Information

EUT Name: Television  
Model: V755-J04  
Brand: VIZIO  
Sample Received Date: February 25, 2021  
Sample Status: Normal  
Date of Tested: March 1, 2021 ~ April 29, 2021

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS
ISED RSS-247 Issue 2	PASS
ISED RSS-GEN Issue 5	PASS

Prepared By:

Denny Huang  
Project Engineer  
Approved By:

Stephen Guo

Laboratory Manager

Checked By:

Shawn Wen  
Laboratory Leader



## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, KDB 484596 D01 Referencing Test Data v01, ISED RSS-247 Issue 2 and ISED RSS-GEN Issue 5.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction Emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Maximum Conducted Output Power	±0.766 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	Television		
Model	V755-J04		
Technology	Bluetooth – BR & EDR		
Transmit Frequency Range	2402 MHz ~ 2480 MHz		
Mode	Basic Rate	Enhanced Data Rate	
Modulation	GFSK	π/4-DQPSK	8DPSK
Packet Type (Maximum Payload):	DH5	2DH5	3DH5
Data Rate	1 Mbps	2 Mbps	3 Mbps
Ratings	AC 120 V, 60 Hz		

### 5.2. PACKET TYPE CONFIGURATION

Test Mode	Packet Type	Setting (Packet Length)
GFSK	DH1	27
	DH3	183
	DH5	339
π/4-DQPSK	2-DH1	54
	2-DH3	367
	2-DH5	679
8DPSK	3-DH1	83
	3-DH3	552
	3-DH5	1021

### 5.3. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	/	/

### 5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
GFSK	CH 0(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
8DPSK	CH 0(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
GFSK	Hopping	2402 MHz ~ 2480 MHz
8DPSK	Hopping	2402 MHz ~ 2480 MHz

### 5.5. WORST-CASE CONFIGURATIONS

Test Mode	Modulation Technology	Modulation Type	Data Rate	Packet Type
BR	FHSS	GFSK	1Mbit/s	DH5
EDR	FHSS	8DPSK	3Mbit/s	3-DH5

Note: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates. Only GFSK and 8DPSK test data were report in this report.

**5.6. DESCRIPTION OF AVAILABLE ANTENNAS**

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
0	2402 ~ 2480	PIFA	1.5

Test Mode	Transmit and Receive Mode	Description
GFSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
8DPSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

Note: The value of the antenna gain was declared by customer.



## 5.7. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Dell	Vostro 3902	/
2	USB Disk	/	/	/
3	DVD	/	DV-410V-K	/
4	Laptop	Lenovo	E42-80	/
5	Laptop	Lenovo	E42-80	/
6	Speaker	/	MS20	/
7	50 $\Omega$ Load	/	MS20	/
8	Test fixture	/	/	/
9	Switching Adapter	FLYPOWER	PS65IBCAY5000H	Input: AC 100-240 V, 50/60 Hz, 1.5A Output: DC 12.0 V, 5000 mA

### I/O CABLES

Cable No	Port	Cable Type	Cable Length(m)	Remarks
1	USB	Unshielded	1	/
2	HDMI 1	Shielded	1.5	/
3	HDMI 2	Shielded	1.5	/
4	HDMI 3	Shielded	1.5	/
5	OPTICAL	Unshielded	1	/
6	COMPOSITE INPUT	Unshielded	2	/
7	AUDIO OUT	Unshielded	2	/
8	ANTENNA	Unshielded	1	/
9	ETHERNET	Unshielded	1	/

### ACCESSORIES


Item	Accessory	Brand Name	Model Name	Description
1	Remote Controller	/	/	/

## **TEST SETUP**


The EUT can work in engineering mode with a software through a Laptop.

### **SETUP DIAGRAM FOR TESTS**

For Conducted Test:

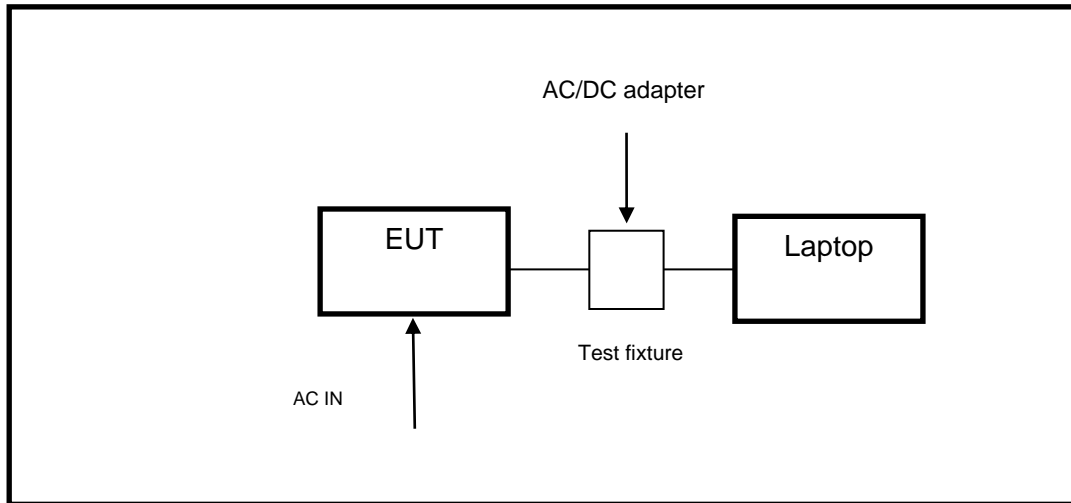

For Radiated Test:

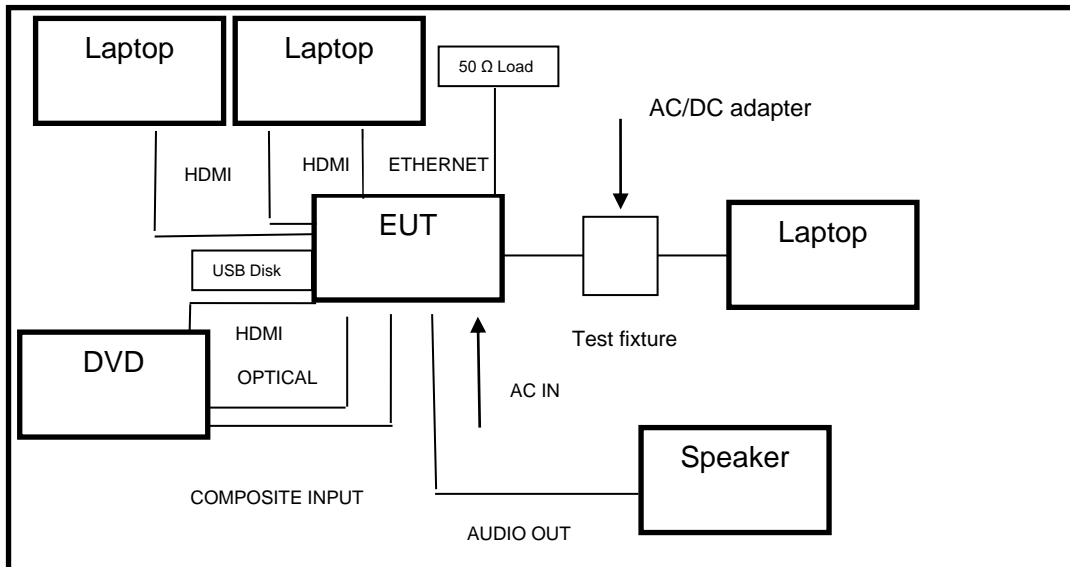



## 6. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Nov. 12, 2020	Nov. 11, 2021
Two-Line V-Network	R&S	ENV216	101983	Nov. 12, 2020	Nov. 11, 2021
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1
Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Nov. 12, 2020	Nov. 11, 2021
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Aug. 11, 2018	Aug. 10, 2021
Preamplifier	HP	8447D	2944A09099	Nov. 12, 2020	Nov. 11, 2021
EMI Measurement Receiver	R&S	ESR26	101377	Nov. 12, 2020	Nov. 11, 2021
Horn Antenna	TDK	HRN-0118	130939	Sept. 17, 2018	Sept. 17, 2021
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Nov. 20, 2020	Nov. 19, 2021
Horn Antenna	Schwarzbeck	BBHA9170	#691	Aug. 11, 2018	Aug. 11, 2021
Preamplifier	TDK	PA-02-2	TRS-307-00003	Nov. 12, 2020	Nov. 11, 2021
Loop antenna	Schwarzbeck	1519B	00008	Jan.17, 2019	Jan.17,2022
Preamplifier	Mini-Circuits	ZX60-83LN-S+	SUP01201941	Nov. 20, 2020	Nov. 19, 2021
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Nov. 12, 2020	Nov. 11, 2021
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Nov. 12, 2020	Nov. 11, 2021
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1



Other instruments						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030A	MY55410512	Nov. 20, 2020	Nov. 19, 2021
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9020A	MY49100060	Nov. 20, 2020	Nov. 19, 2021
<input checked="" type="checkbox"/>	Power Meter	Keysight	N1911A	MY55416024	Nov. 20, 2020	Nov. 19, 2021
<input checked="" type="checkbox"/>	Power Sensor	Keysight	U2021XA	MY5100022	Nov. 20, 2020	Nov. 19, 2021



## 7. ANTENNA PORT TEST RESULTS

### 7.1. ON TIME AND DUTY CYCLE


#### LIMITS

None; for reporting purposes only.

#### PROCEDURE

Refer to ANSI C63.10-2013 Zero – Span Spectrum Analyzer method.

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	23.4 °C	Relative Humidity	65.2 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V

#### RESULTS

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
GFSK	2.880	5.01	0.575	57.49	2.40	0.35	1
8DPSK	2.865	4.98	0.575	57.53	2.40	0.35	1



Note:

Duty Cycle Correction Factor=10log (1/x).

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

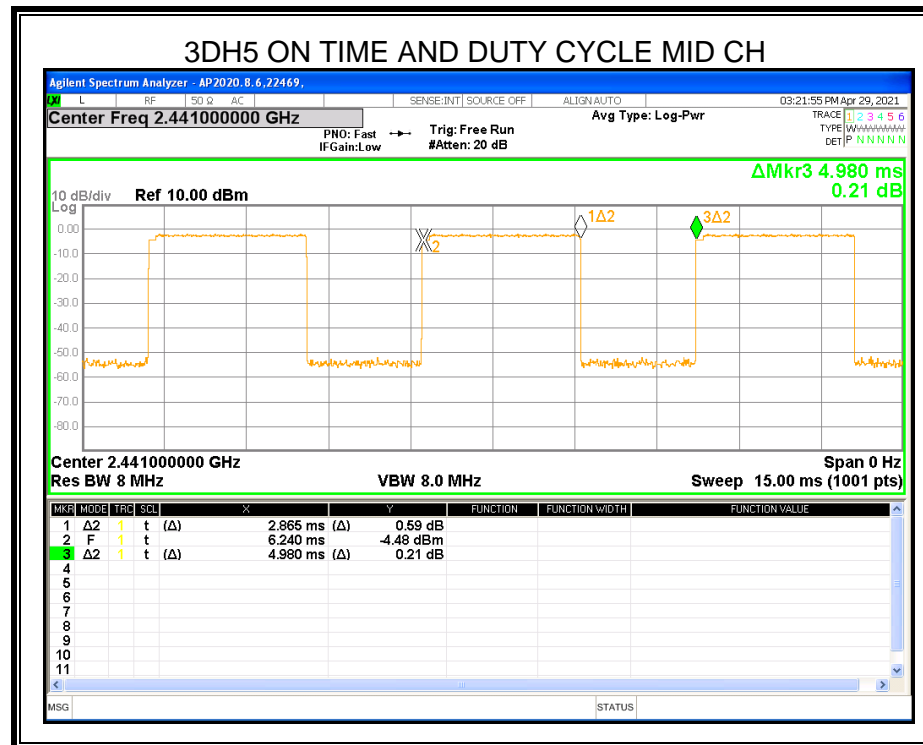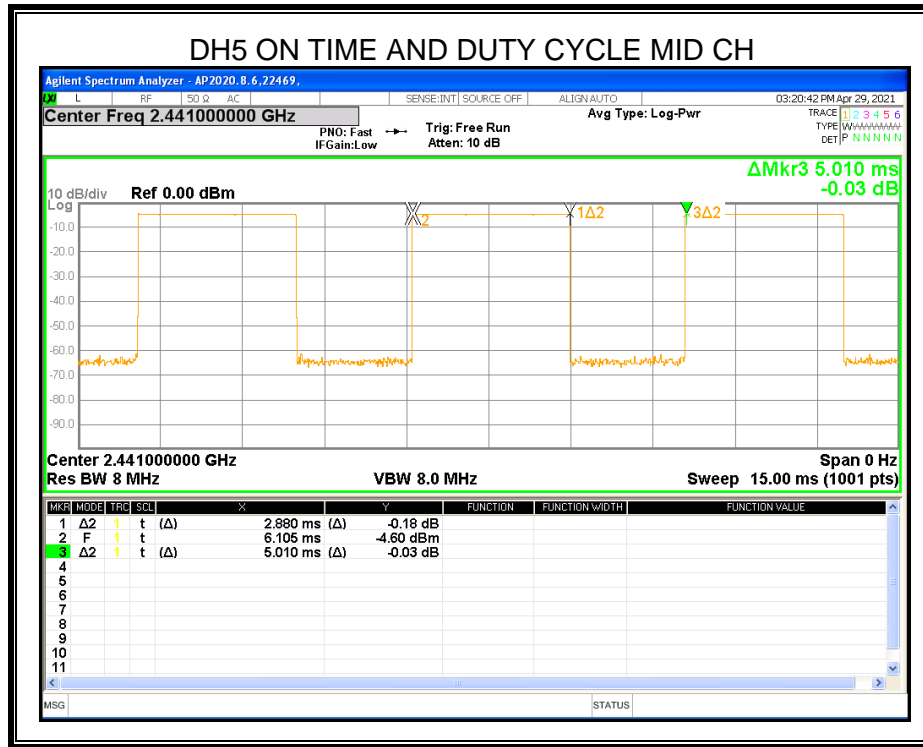



## 7.2. CONDUCTED OUTPUT POWER

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (b) (1) ISED RSS-247 Clause 5.4 (b)	Peak Conducted Output Power	Hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel: 1 watt or 30 dBm; Hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel: 125 mW or 21 dBm	2400-2483.5


### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.5.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

### TEST SETUP



### TEST ENVIRONMENT

Temperature	23.6 °C	Relative Humidity	67.2 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V

### RESULTS



## Spot Check Verification Result:

Test Item	Test Mode	Frequency	Worst Case Test Result	
			Original Model	Spot Check Model
			dBm	dBm
Conducted Peak Power	GFSK	2402 MHz	9.86	9.77
		2441 MHz	9.64	9.73
		2480 MHz	8.33	8.42
	8DPSK	2402 MHz	10.72	10.66
		2441 MHz	10.91	10.89
		2480 MHz	10.09	10.05

## Conclusion:

The spot check test result show that the new devices still comply with the standard and the new test result was close to the original test result, so it can demonstrate that the original test data remains valid for the new device.



### 7.3. CONDUCTED BANDEDGE AND SPURIOUS EMISSION

#### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

#### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.6 and 7.8.8.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements.

**TEST SETUP****TEST ENVIRONMENT**

Temperature	23.6 °C	Relative Humidity	67.2 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V

**RESULTS**


## Spot Check Verification Summary

Test Item	Test Mode	Test Channel	Worst Case Test Result	
			Original Model	Spot Check Model
		MHz	dBm	
Conducted Bandedge	8DPSK	2402	-29.17	-33.48
Spurious Emission	8DPSK	2402	-55.42	-48.29


## Conclusion:

The spot check test result show that the new devices still comply with the standard and the new test result was close to the original test result, so it can demonstrate that the original test data remains valid for the new device.

### LOW CH BANDEDGE

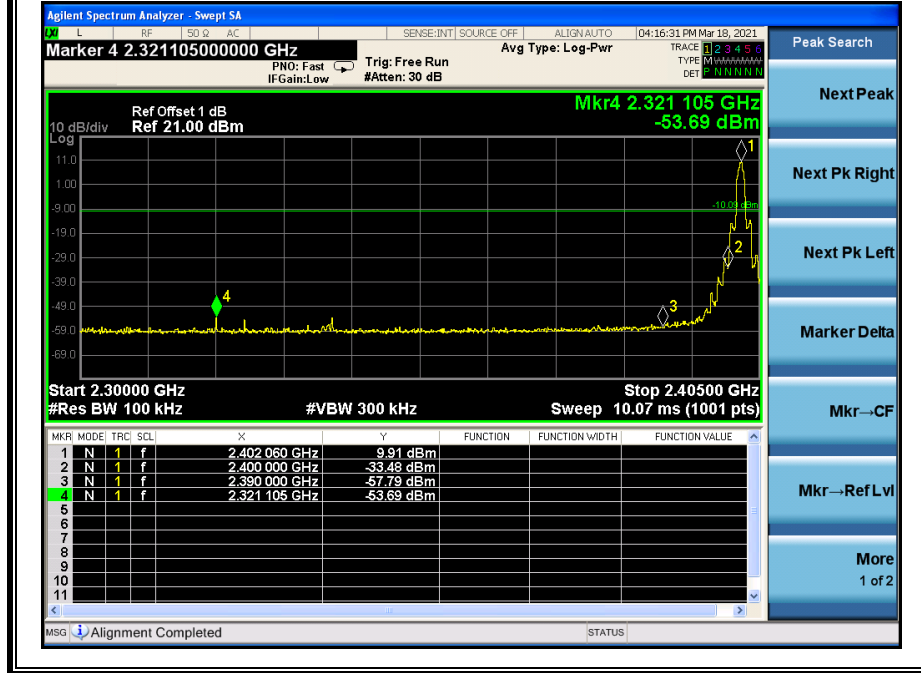

### LOW CH SPURIOUS EMISSIONS 30 MHz-26 GHz

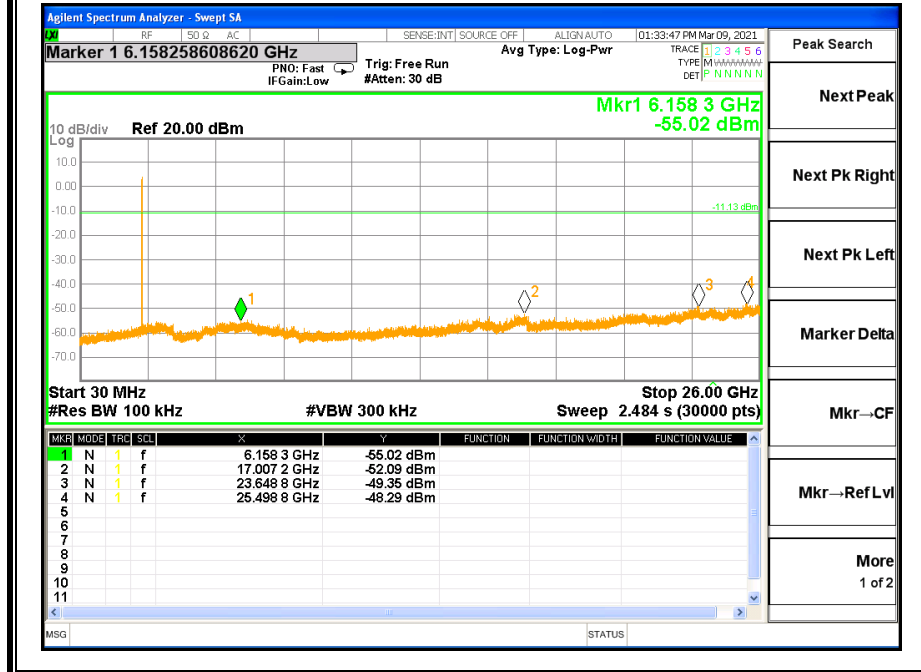



## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISSED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (9 kHz-1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement distance (m)
9 - 490 kHz <sup>Note 1</sup>	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.



ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands <sup>Note 1</sup>		
MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

**Note 1:** Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

## TEST SETUP AND PROCEDURE

Below 30 MHz

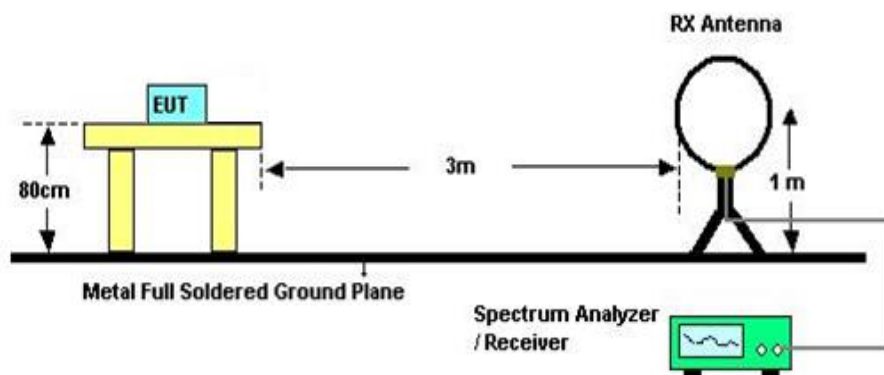


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz) / 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz) / 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1 GHz and above 30 MHz

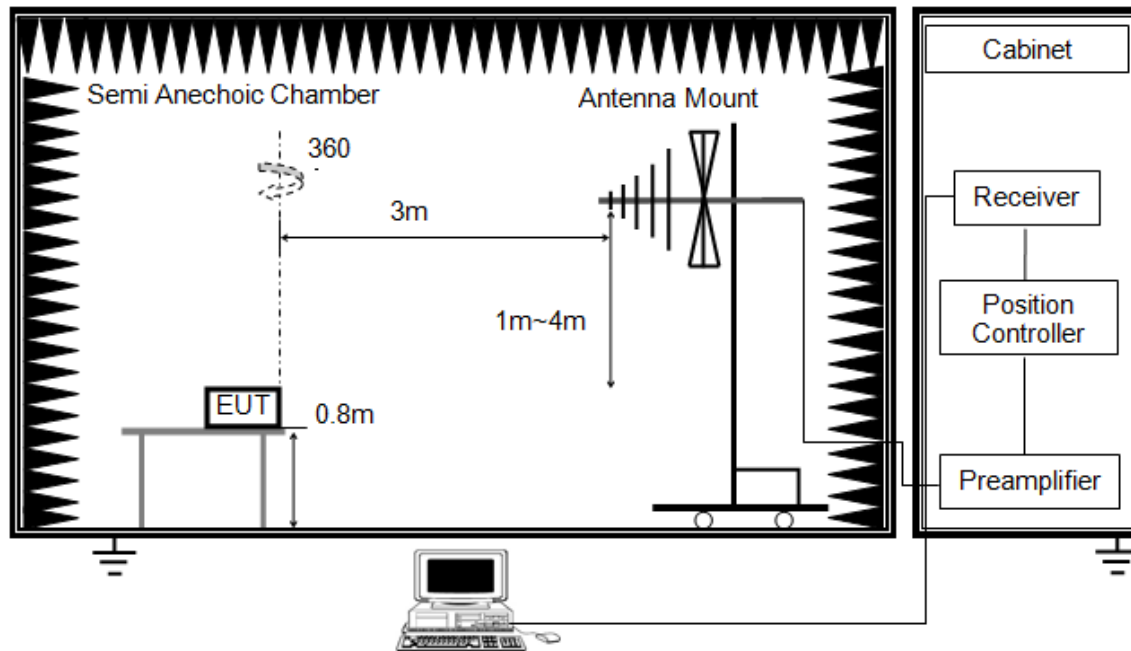


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

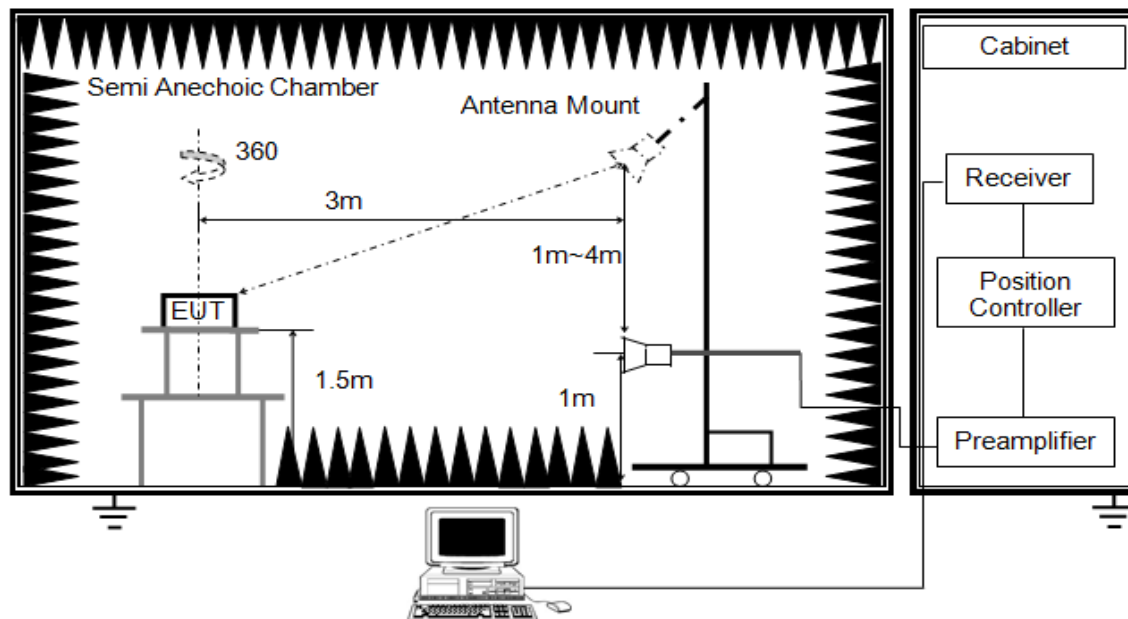

The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (1.5 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.



Note: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

#### **TEST ENVIRONMENT**


Temperature	22.6 °C	Relative Humidity	64.4 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V

#### **RESULTS**

## 8.1. RESTRICTED BANDEDGE

### 8.1.1. GFSK MODE


#### RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

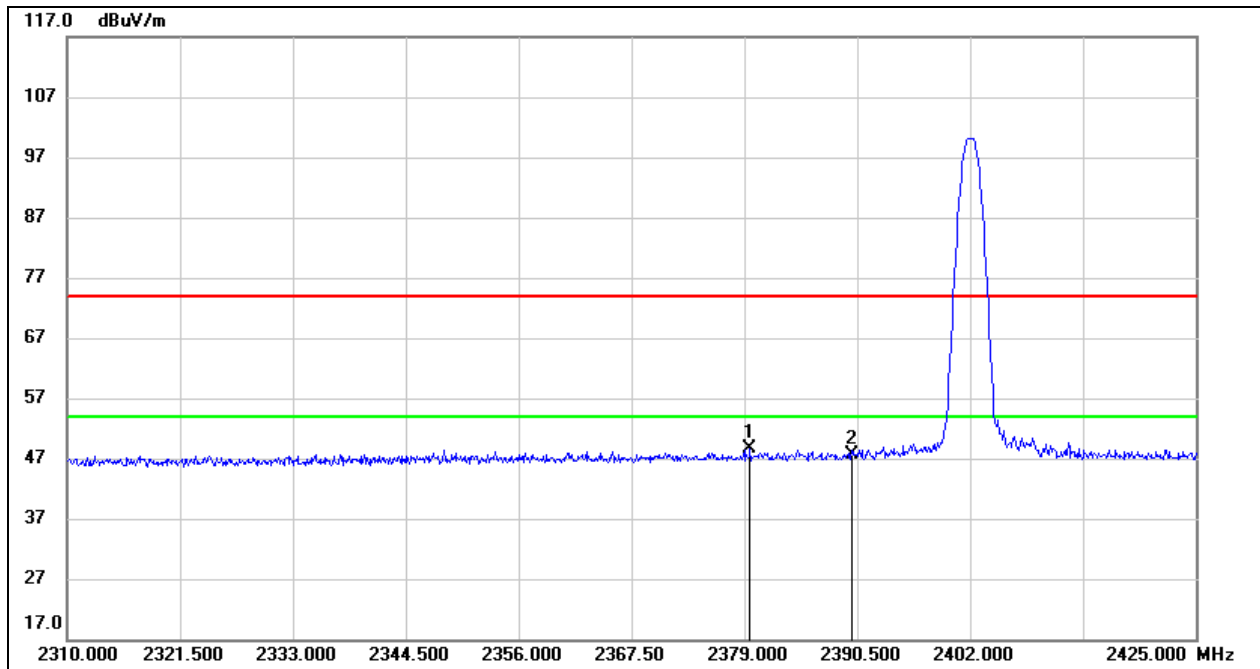

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2379.575	15.44	33.27	48.71	74.00	-25.29	peak
2	2390.000	14.17	33.35	47.52	74.00	-26.48	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.  
5. For the transmitting duration, please refer to clause 7.1.  
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

### RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

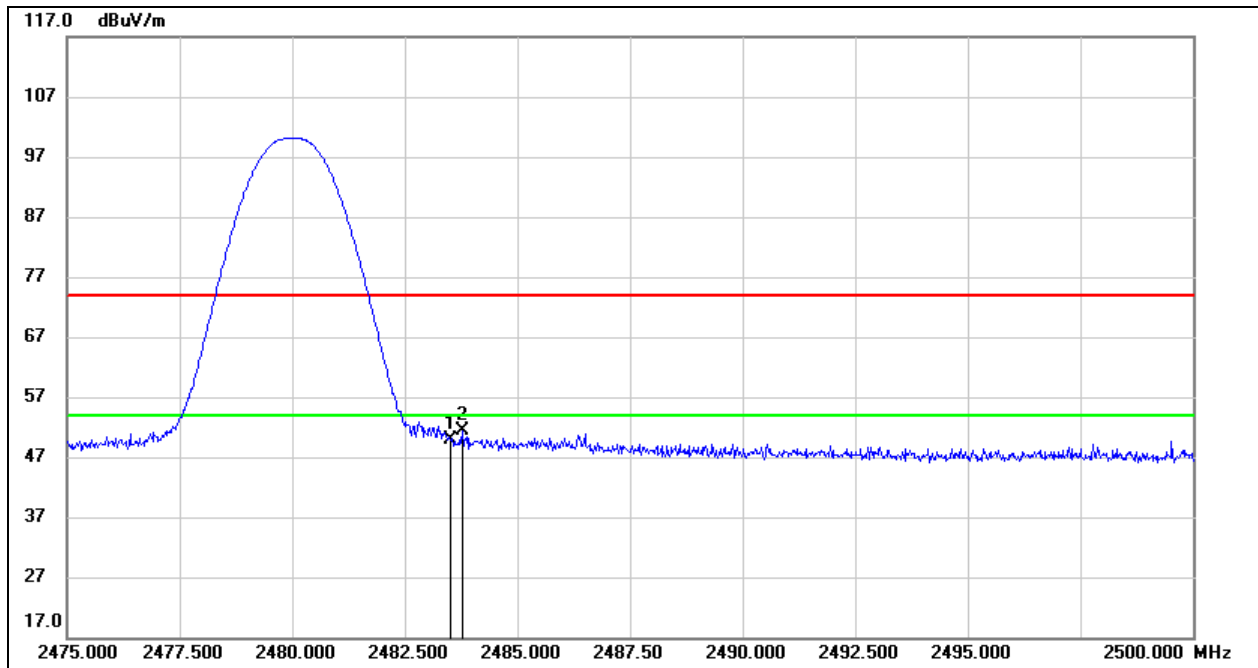

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	16.19	33.71	49.90	74.00	-24.10	peak
2	2483.775	17.55	33.71	51.26	74.00	-22.74	peak


Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
5. For the transmitting duration, please refer to clause 7.1.  
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: Both the horizontal and vertical polarities had been tested, only the worst data was recorded in the report.



### 8.1.2. 8DPSK MODE


#### RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

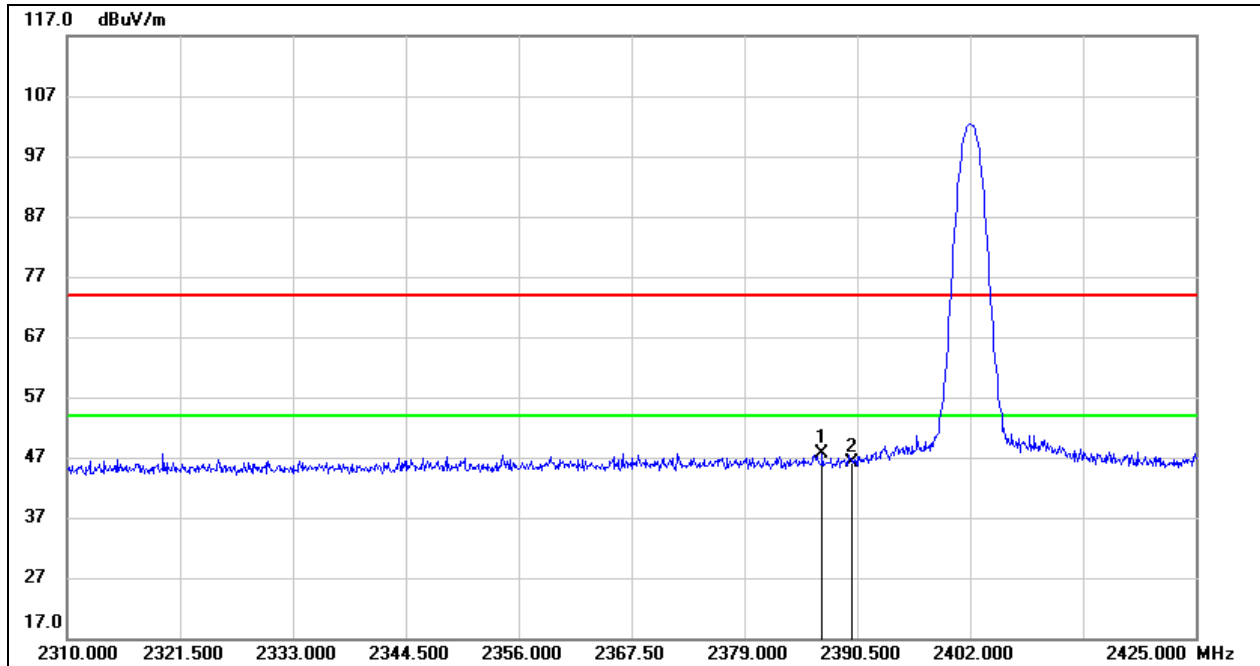

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.935	14.30	33.33	47.63	74.00	-26.37	peak
2	2390.000	12.88	33.35	46.23	74.00	-27.77	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
5. For the transmitting duration, please refer to clause 7.1.  
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

### RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

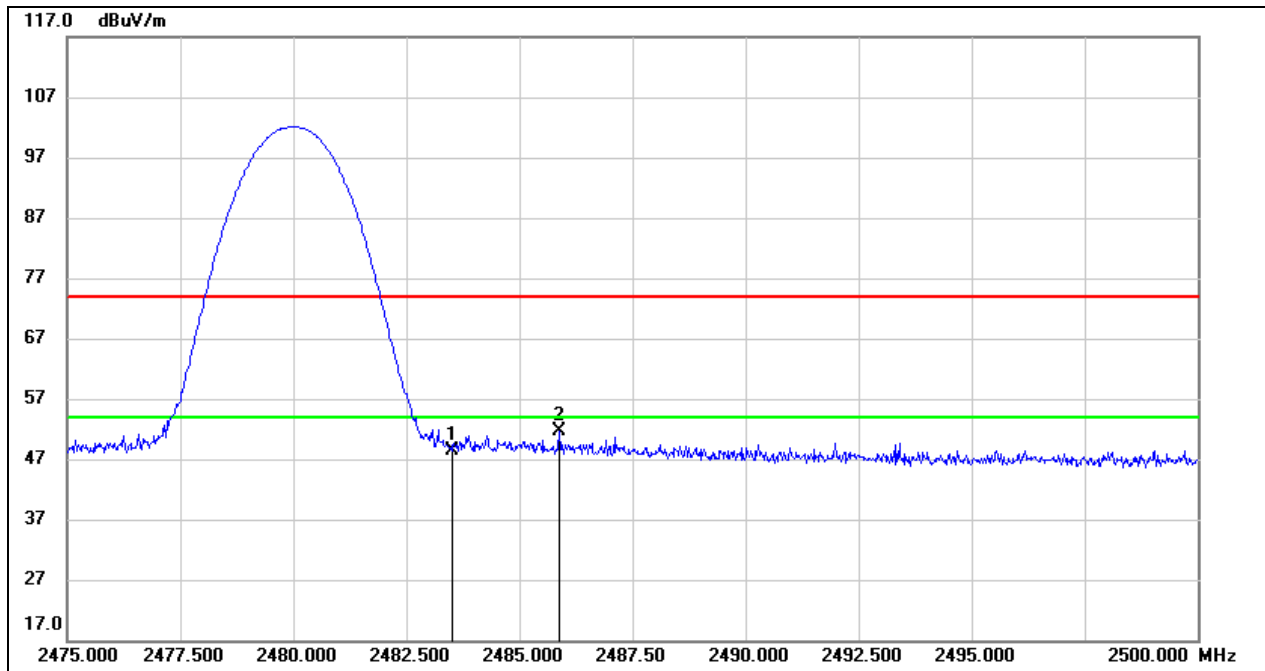

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	14.75	33.71	48.46	74.00	-25.54	peak
2	2485.875	17.84	33.71	51.55	74.00	-22.45	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.

5. For the transmitting duration, please refer to clause 7.1.

6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Note: Both the horizontal and vertical polarities had been tested, only the worst data was recorded in the report.

Note: All the modes have been tested, only the worst data was recorded in the report.

## 8.2. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)

### 8.2.1. GFSK MODE


#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

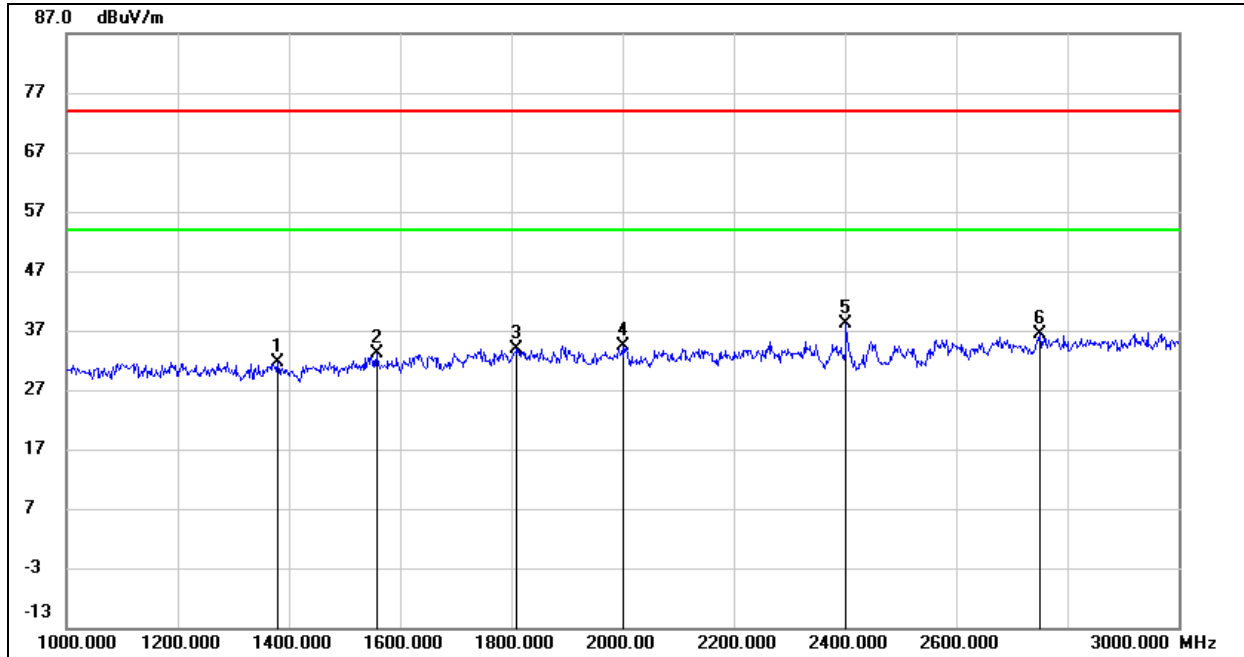

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1380.000	44.36	-12.74	31.62	74.00	-42.38	peak
2	1558.000	44.96	-11.84	33.12	74.00	-40.88	peak
3	1810.000	43.90	-10.05	33.85	74.00	-40.15	peak
4	2000.000	44.46	-10.19	34.27	74.00	-39.73	peak
5	2402.000	46.61	-8.39	38.22	/	/	fundamental
6	2750.000	43.24	-6.88	36.36	74.00	-37.64	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

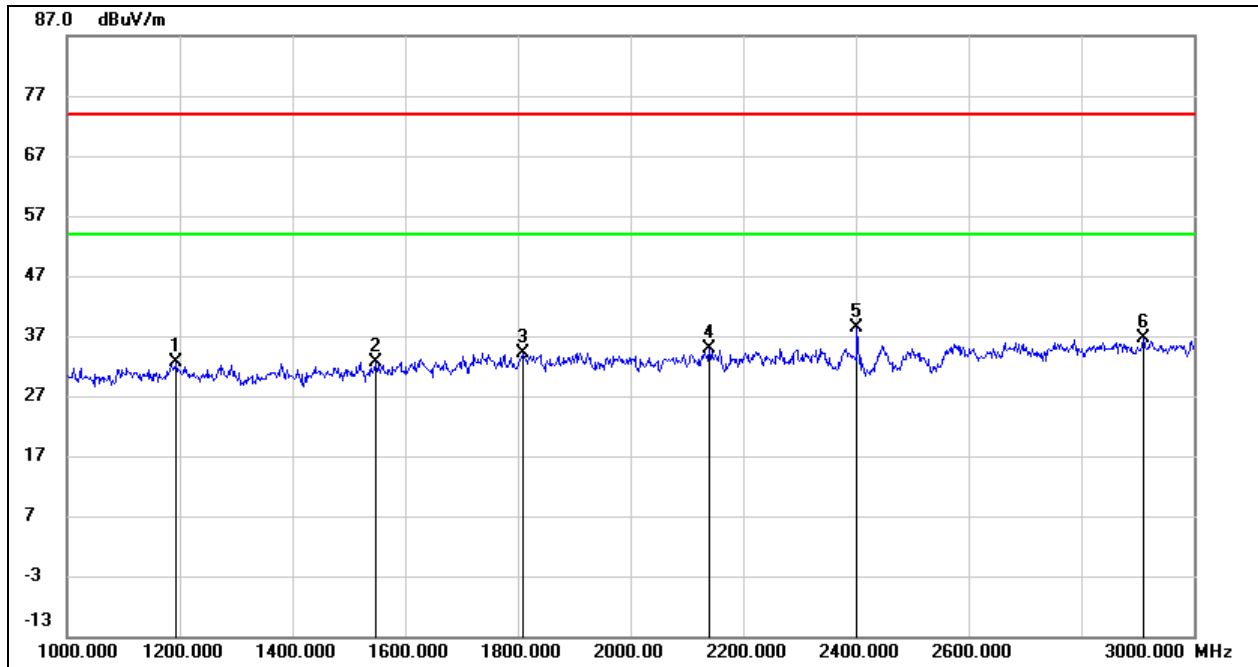

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1194.000	45.57	-13.02	32.55	74.00	-41.45	peak
2	1548.000	44.56	-11.91	32.65	74.00	-41.35	peak
3	1810.000	44.13	-10.05	34.08	74.00	-39.92	peak
4	2140.000	44.33	-9.40	34.93	74.00	-39.07	peak
5	2402.000	46.88	-8.39	38.49	/	/	fundamental
6	2910.000	42.56	-6.02	36.54	74.00	-37.46	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


### HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

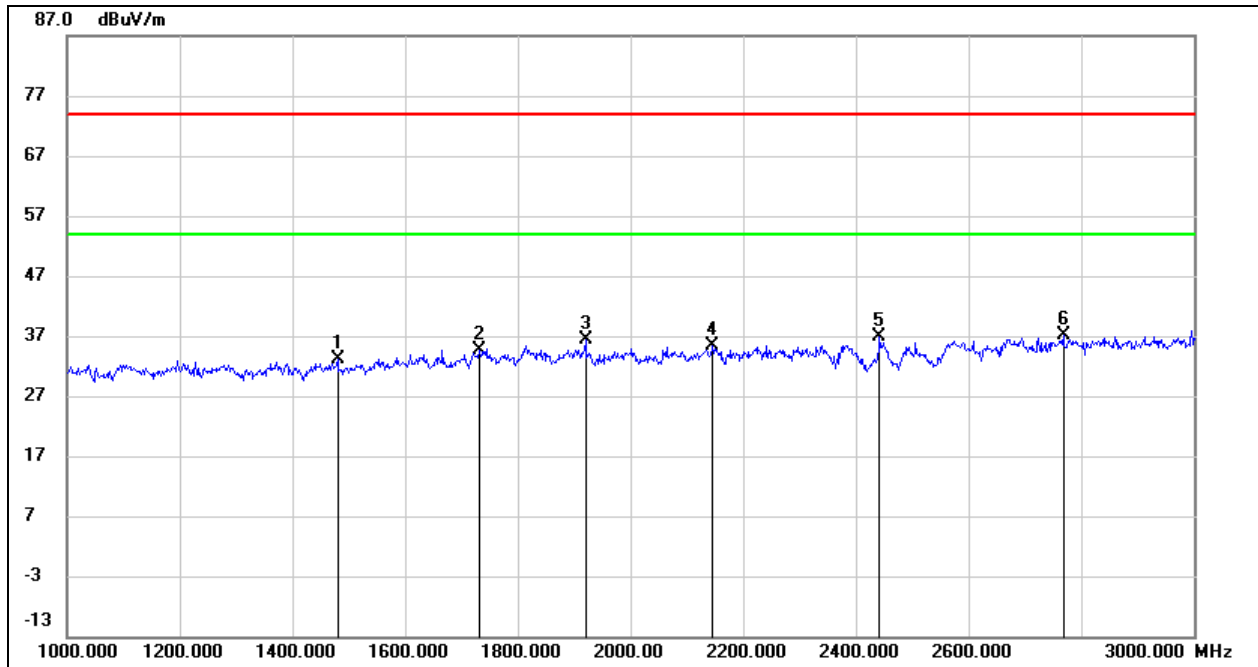

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1480.000	45.53	-12.33	33.20	74.00	-40.80	peak
2	1732.000	45.24	-10.56	34.68	74.00	-39.32	peak
3	1920.000	46.44	-10.13	36.31	74.00	-37.69	peak
4	2146.000	44.70	-9.36	35.34	74.00	-38.66	peak
5	2441.000	45.10	-8.33	36.77	/	/	fundamental
6	2768.000	43.84	-6.76	37.08	74.00	-36.92	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


### HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

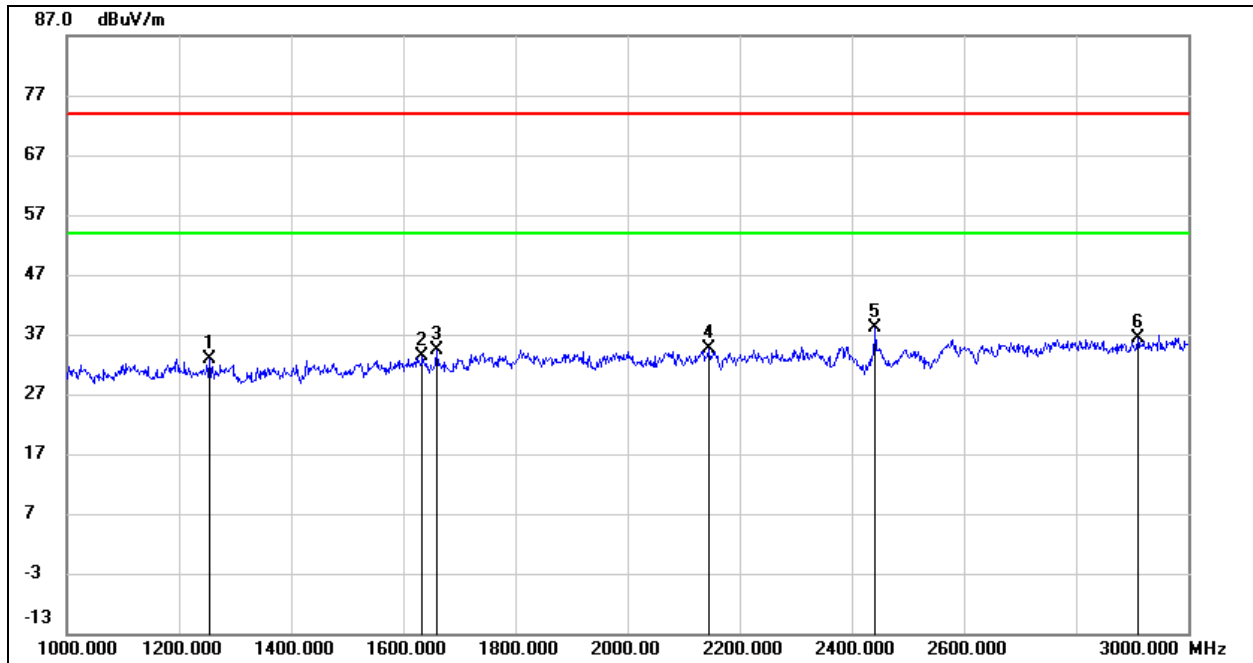

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1254.000	45.72	-12.91	32.81	74.00	-41.19	peak
2	1634.000	44.63	-11.30	33.33	74.00	-40.67	peak
3	1660.000	45.46	-11.10	34.36	74.00	-39.64	peak
4	2144.000	44.10	-9.37	34.73	74.00	-39.27	peak
5	2441.000	46.56	-8.33	38.23	/	/	fundamental
6	2910.000	42.42	-6.02	36.40	74.00	-37.60	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

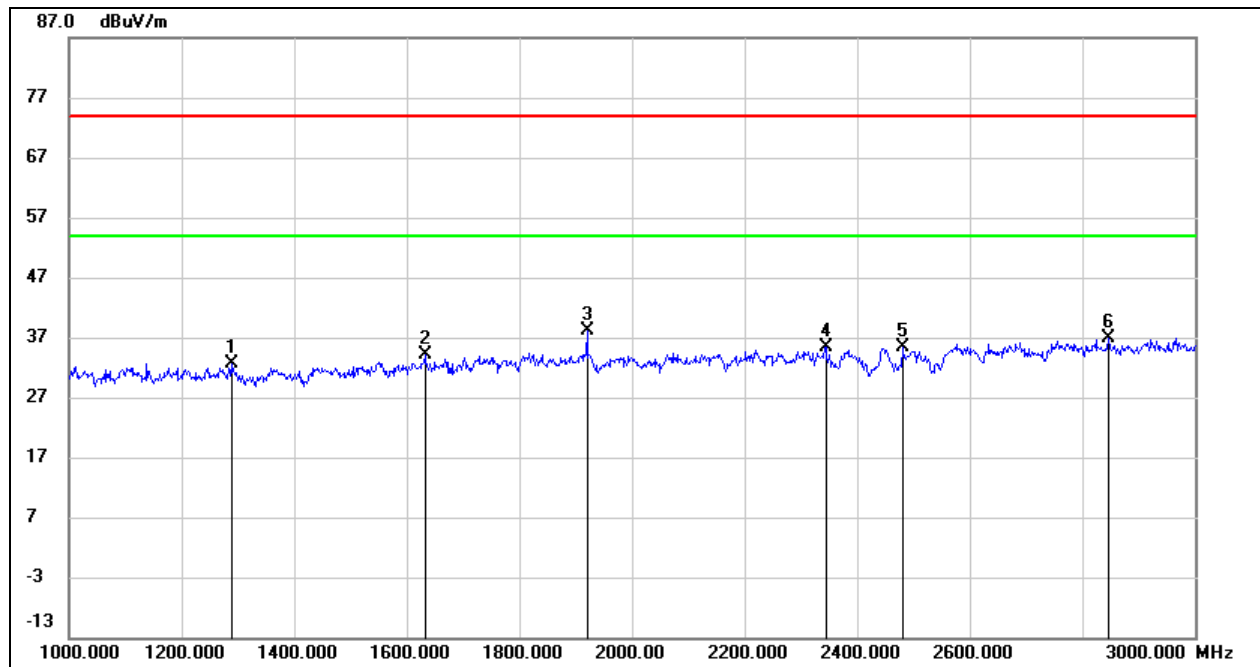

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1288.000	45.38	-12.86	32.52	74.00	-41.48	peak
2	1632.000	45.48	-11.31	34.17	74.00	-39.83	peak
3	1920.000	48.25	-10.13	38.12	74.00	-35.88	peak
4	2344.000	43.96	-8.58	35.38	74.00	-38.62	peak
5	2480.000	43.68	-8.26	35.42	/	/	fundamental
6	2846.000	43.11	-6.33	36.78	74.00	-37.22	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

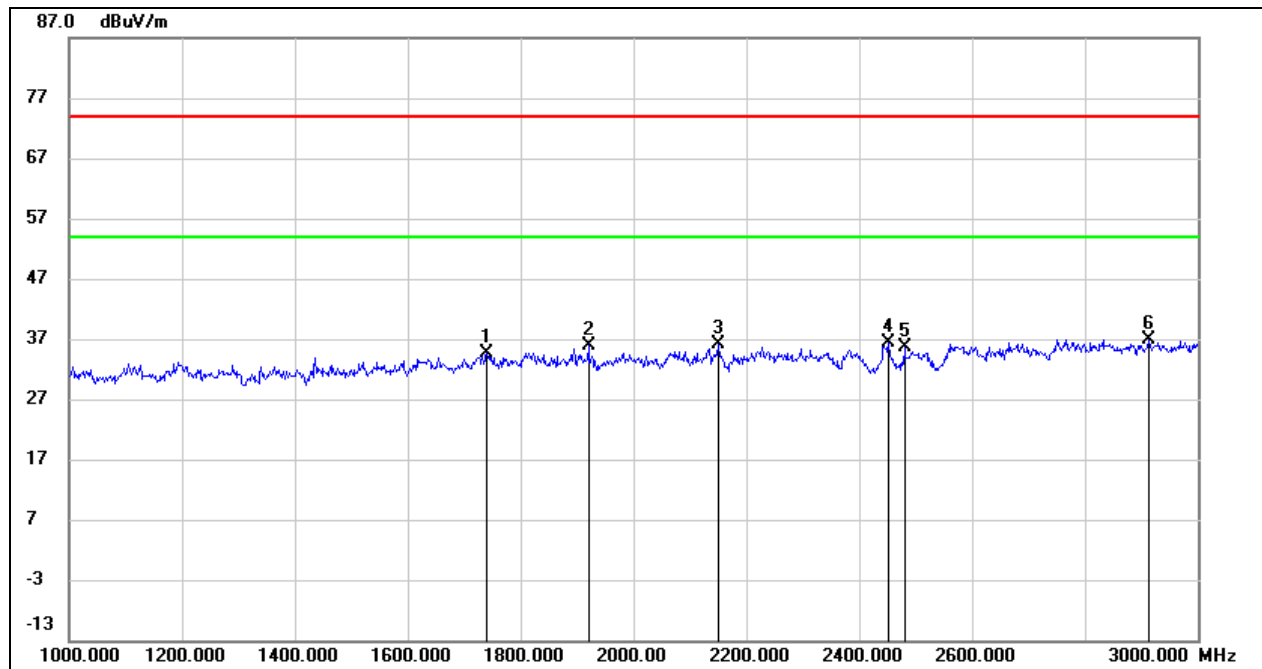**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1740.000	45.25	-10.51	34.74	74.00	-39.26	peak
2	1920.000	46.08	-10.13	35.95	74.00	-38.05	peak
3	2150.000	45.52	-9.34	36.18	74.00	-37.82	peak
4	2452.000	44.67	-8.31	36.36	74.00	-37.64	peak
5	2480.000	43.88	-8.26	35.62	/	/	fundamental
6	2912.000	42.99	-6.01	36.98	74.00	-37.02	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: All the modes have been tested, only the worst data was recorded in the report.

### 8.3. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)

#### 8.3.1. GFSK MODE

##### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

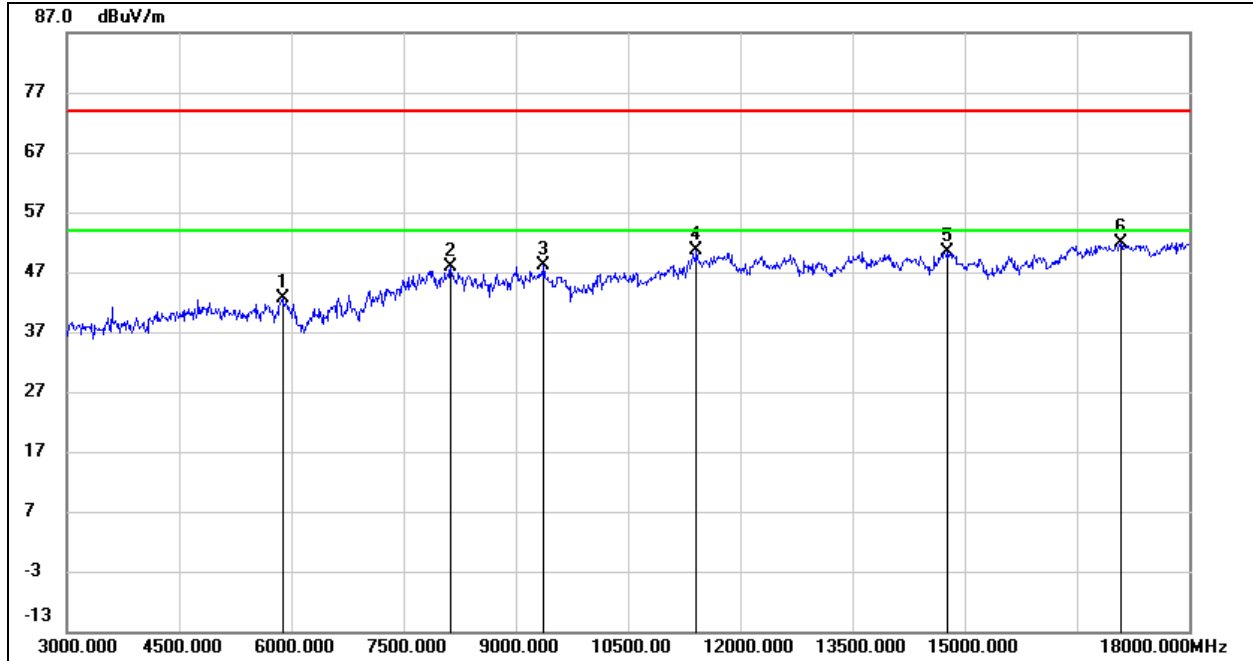

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	38.43	4.31	42.74	74.00	-31.26	peak
2	8130.000	37.72	10.06	47.78	74.00	-26.22	peak
3	9375.000	37.18	10.83	48.01	74.00	-25.99	peak
4	11415.000	35.85	14.74	50.59	74.00	-23.41	peak
5	14775.000	32.47	17.95	50.42	74.00	-23.58	peak
6	17085.000	29.96	21.80	51.76	74.00	-22.24	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

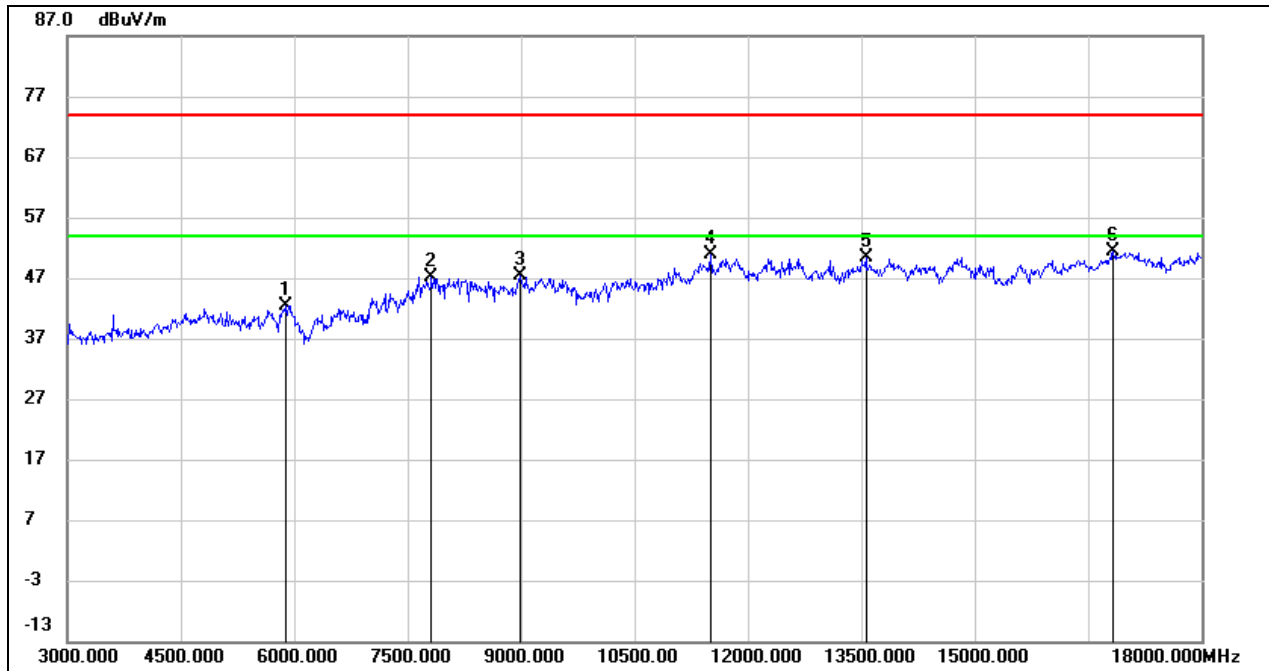

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	38.05	4.31	42.36	74.00	-31.64	peak
2	7815.000	37.86	9.28	47.14	74.00	-26.86	peak
3	8985.000	36.46	10.99	47.45	74.00	-26.55	peak
4	11505.000	36.33	14.66	50.99	74.00	-23.01	peak
5	13560.000	33.22	17.15	50.37	74.00	-23.63	peak
6	16830.000	30.47	20.97	51.44	74.00	-22.56	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.


5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

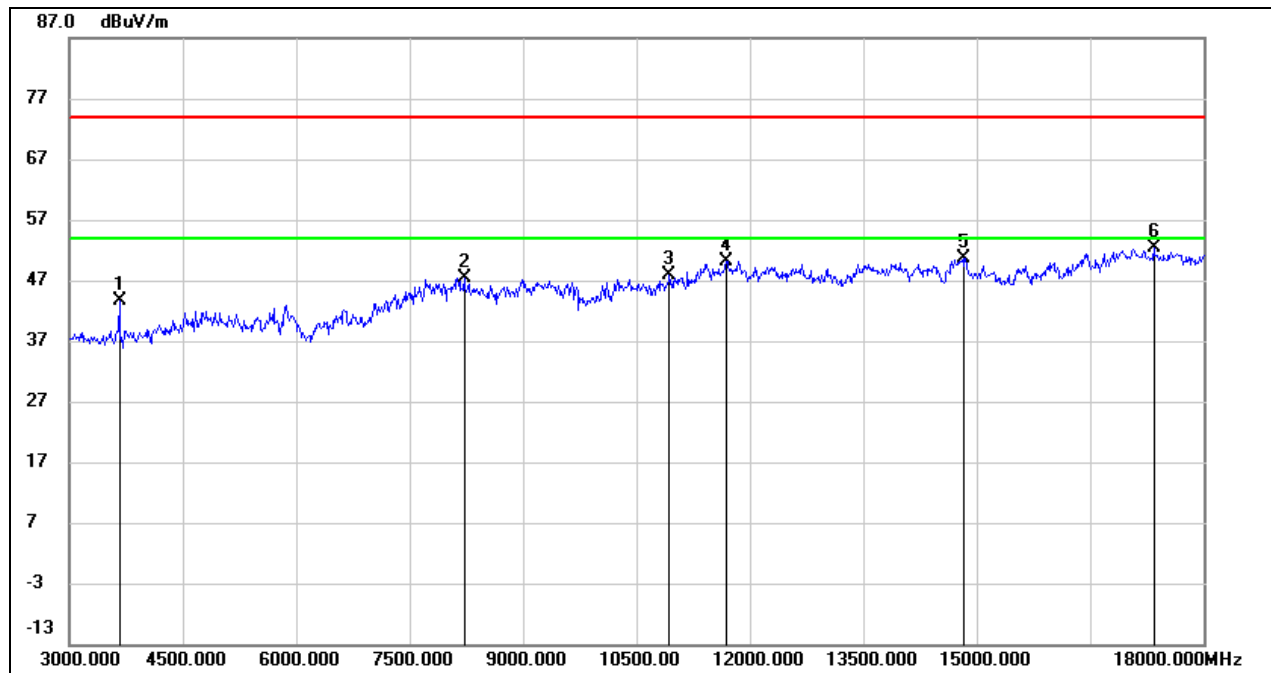**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3660.000	46.72	-3.02	43.70	74.00	-30.30	peak
2	8220.000	37.50	9.79	47.29	74.00	-26.71	peak
3	10935.000	34.46	13.34	47.80	74.00	-26.20	peak
4	11685.000	34.96	15.26	50.22	74.00	-23.78	peak
5	14820.000	32.70	17.91	50.61	74.00	-23.39	peak
6	17340.000	30.01	22.31	52.32	74.00	-21.68	peak

Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

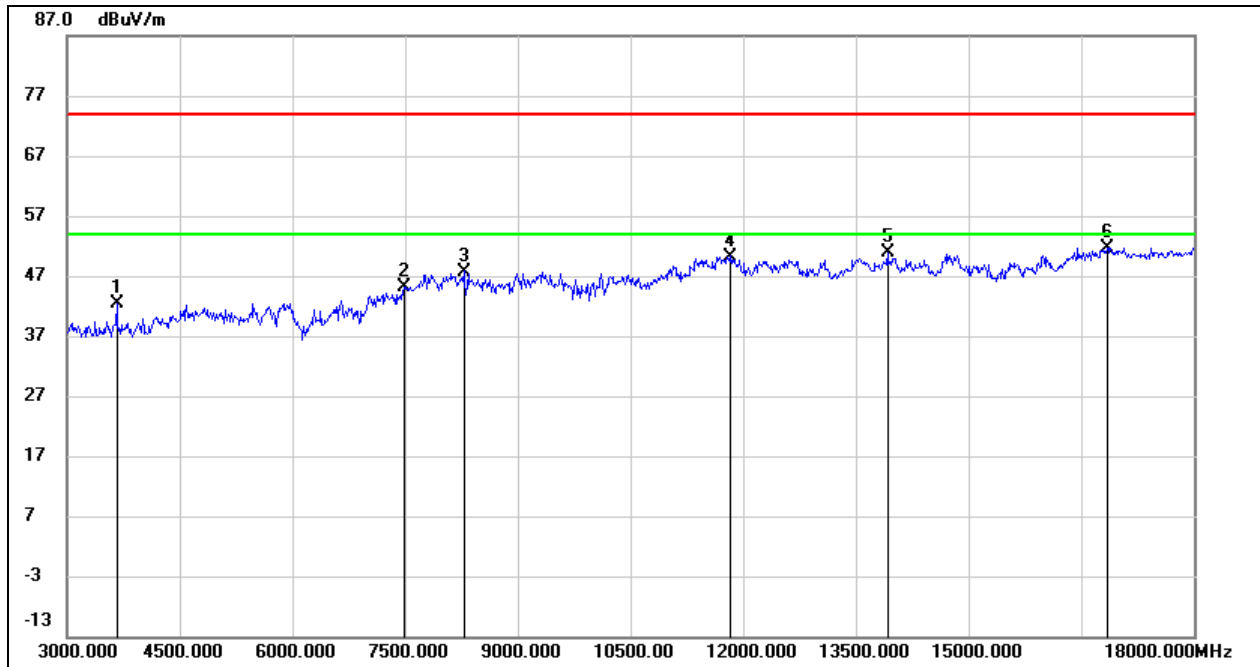

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3660.000	45.49	-3.02	42.47	74.00	-31.53	peak
2	7485.000	36.90	8.32	45.22	74.00	-28.78	peak
3	8280.000	38.04	9.71	47.75	74.00	-26.25	peak
4	11835.000	34.91	15.34	50.25	74.00	-23.75	peak
5	13920.000	33.35	17.55	50.90	74.00	-23.10	peak
6	16845.000	30.59	21.10	51.69	74.00	-22.31	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

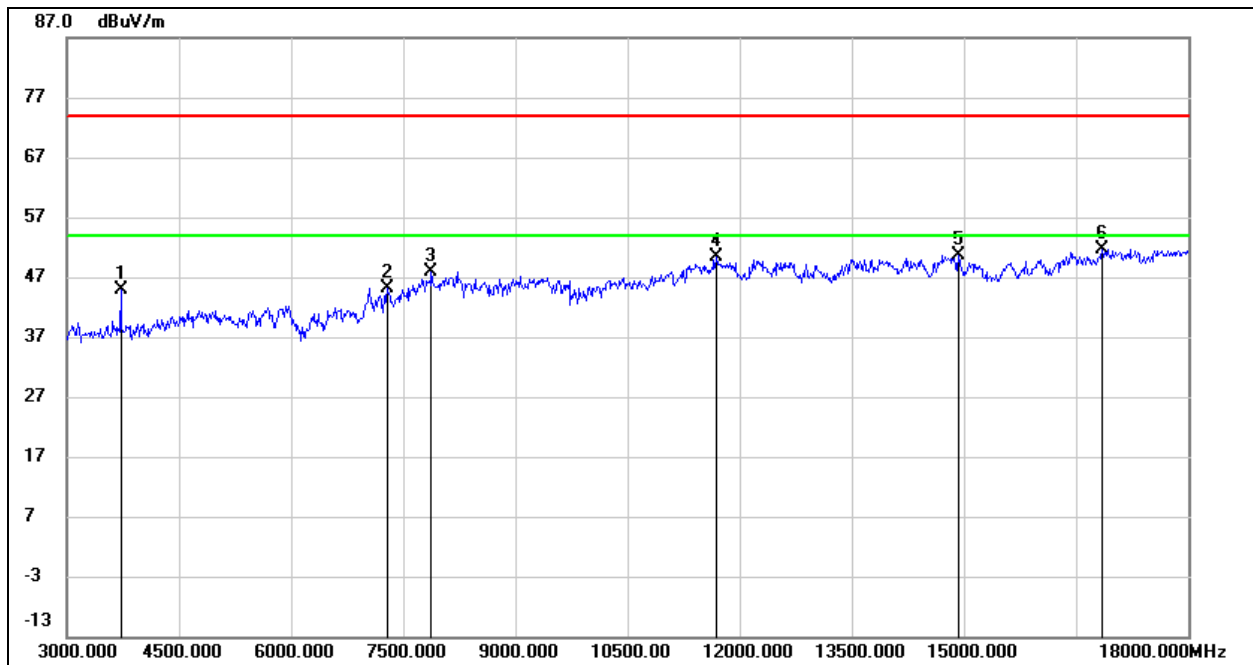

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3720.000	47.78	-2.84	44.94	74.00	-29.06	peak
2	7290.000	37.97	7.12	45.09	74.00	-28.91	peak
3	7875.000	38.82	8.98	47.80	74.00	-26.20	peak
4	11685.000	35.22	15.26	50.48	74.00	-23.52	peak
5	14925.000	33.23	17.45	50.68	74.00	-23.32	peak
6	16845.000	30.65	21.10	51.75	74.00	-22.25	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

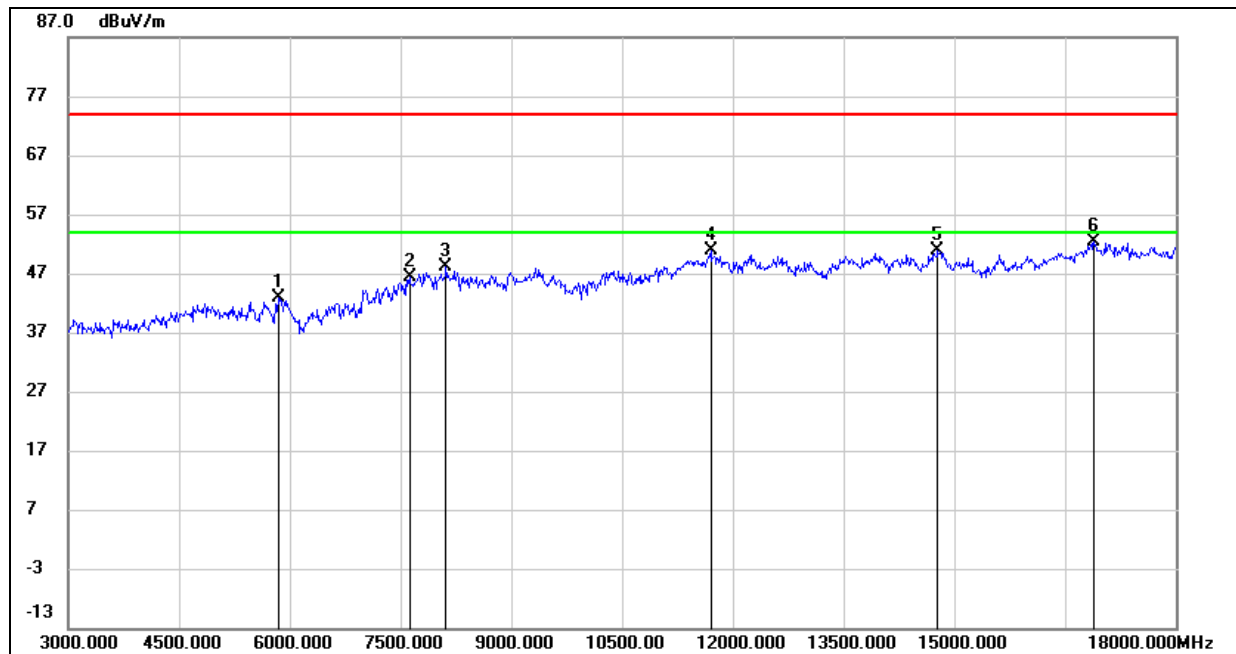
**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	38.84	4.00	42.84	74.00	-31.16	peak
2	7620.000	38.40	8.06	46.46	74.00	-27.54	peak
3	8115.000	38.03	10.13	48.16	74.00	-25.84	peak
4	11700.000	35.42	15.35	50.77	74.00	-23.23	peak
5	14775.000	32.84	17.95	50.79	74.00	-23.21	peak
6	16890.000	30.85	21.49	52.34	74.00	-21.66	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### 8.3.2. 8DPSK MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

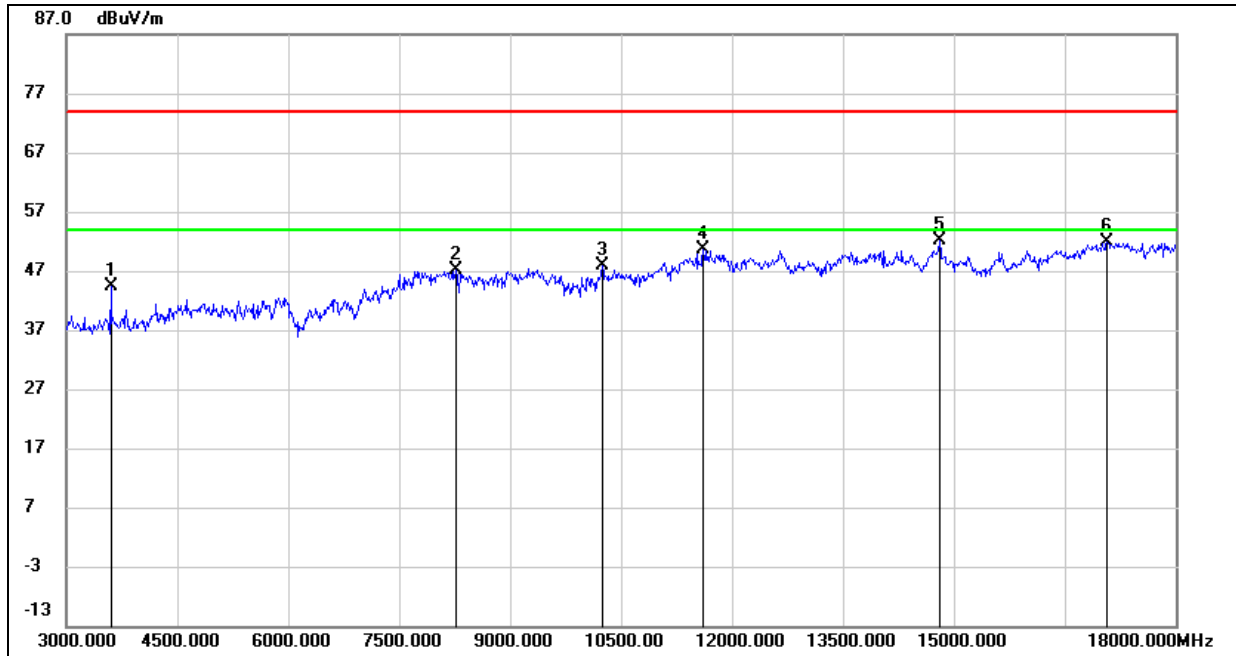

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3600.000	47.59	-3.17	44.42	74.00	-29.58	peak
2	8265.000	37.39	9.73	47.12	74.00	-26.88	peak
3	10245.000	36.14	11.63	47.77	74.00	-26.23	peak
4	11610.000	35.74	14.79	50.53	74.00	-23.47	peak
5	14805.000	34.13	18.00	52.13	74.00	-21.87	peak
6	17070.000	30.08	21.71	51.79	74.00	-22.21	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

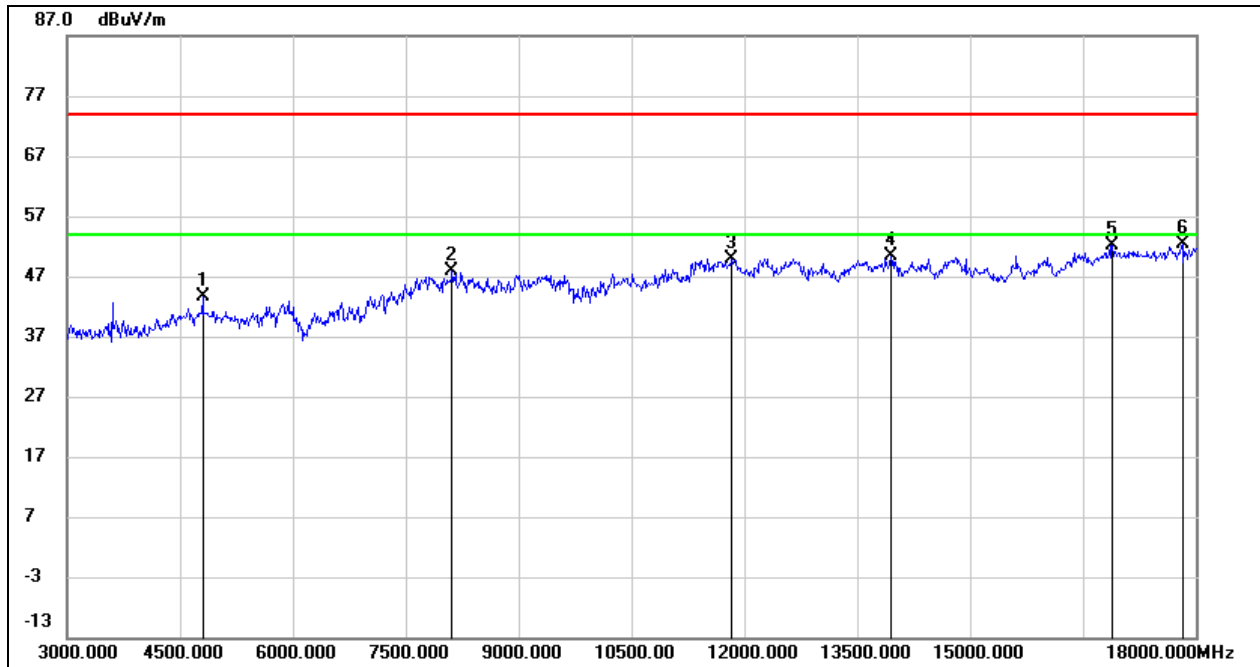

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	42.17	1.40	43.57	74.00	-30.43	peak
2	8115.000	37.77	10.13	47.90	74.00	-26.10	peak
3	11835.000	34.64	15.34	49.98	74.00	-24.02	peak
4	13950.000	32.69	17.60	50.29	74.00	-23.71	peak
5	16890.000	30.75	21.49	52.24	74.00	-21.76	peak
6	17820.000	28.26	24.01	52.27	74.00	-21.73	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

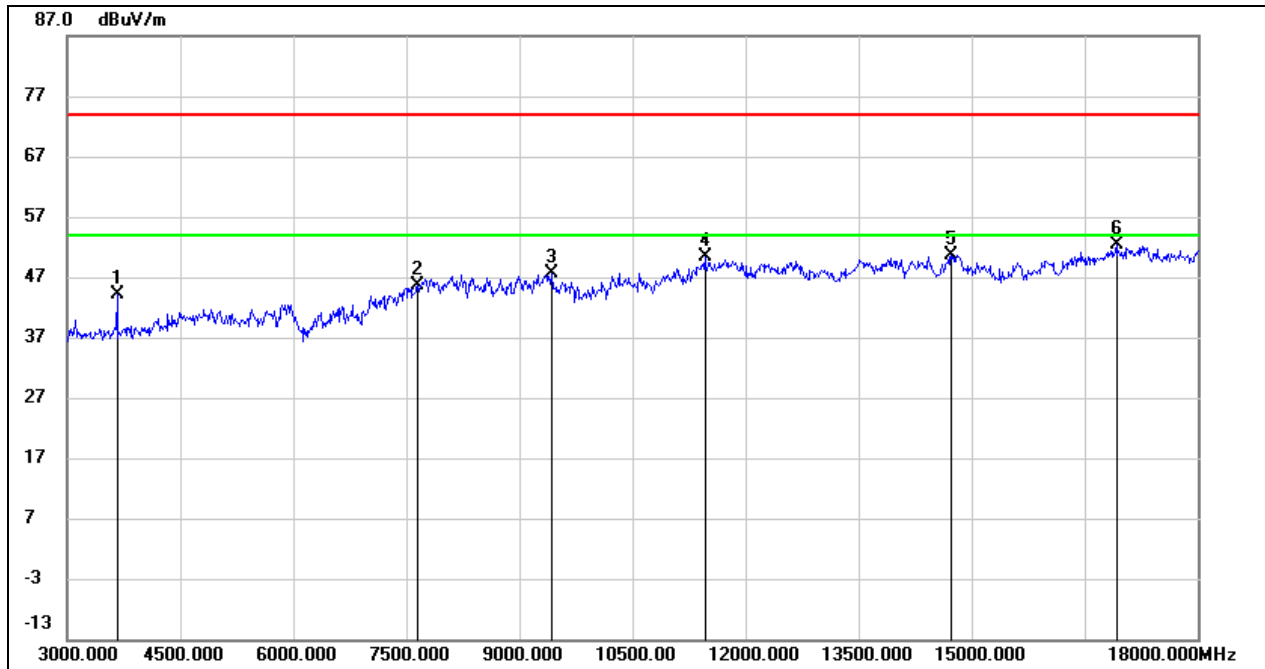

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3660.000	47.20	-3.02	44.18	74.00	-29.82	peak
2	7650.000	37.38	8.20	45.58	74.00	-28.42	peak
3	9420.000	36.79	10.88	47.67	74.00	-26.33	peak
4	11460.000	35.69	14.69	50.38	74.00	-23.62	peak
5	14730.000	32.87	17.79	50.66	74.00	-23.34	peak
6	16920.000	30.89	21.51	52.40	74.00	-21.60	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


### HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

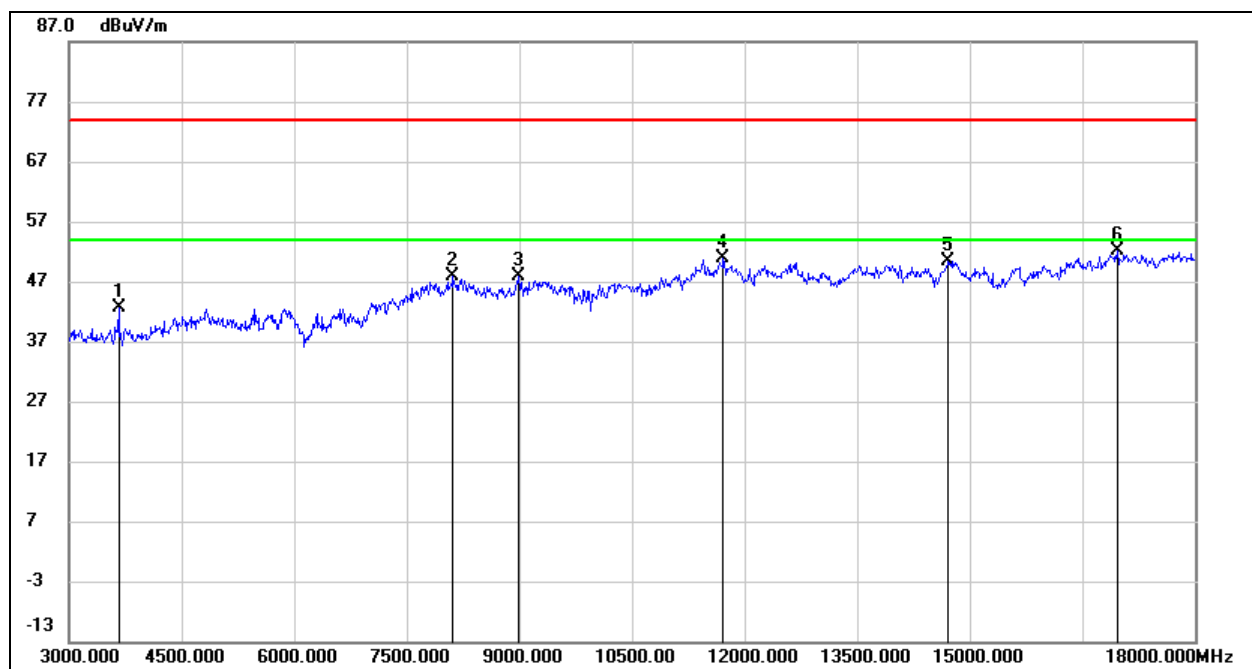

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3660.000	45.66	-3.02	42.64	74.00	-31.36	peak
2	8115.000	37.64	10.13	47.77	74.00	-26.23	peak
3	8985.000	36.88	10.99	47.87	74.00	-26.13	peak
4	11715.000	35.54	15.34	50.88	74.00	-23.12	peak
5	14715.000	32.58	17.74	50.32	74.00	-23.68	peak
6	16965.000	30.74	21.36	52.10	74.00	-21.90	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

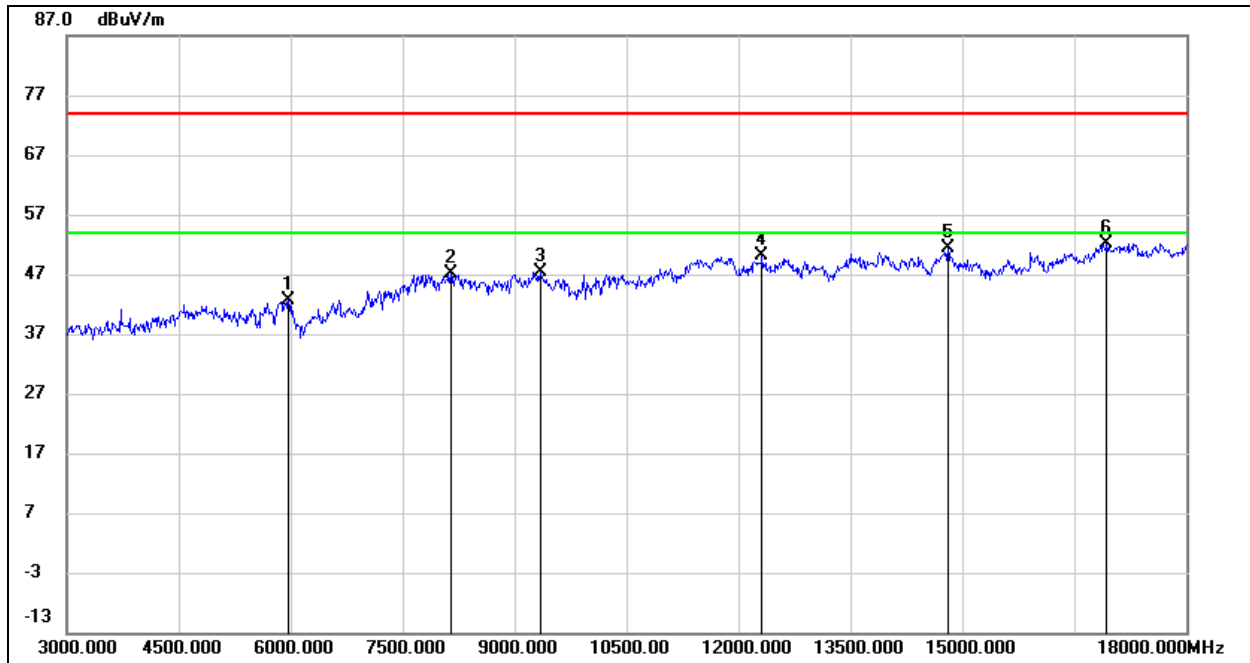

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5970.000	38.56	4.15	42.71	74.00	-31.29	peak
2	8145.000	37.07	10.01	47.08	74.00	-26.92	peak
3	9345.000	36.63	10.66	47.29	74.00	-26.71	peak
4	12315.000	34.07	16.06	50.13	74.00	-23.87	peak
5	14805.000	33.38	18.00	51.38	74.00	-22.62	peak
6	16935.000	30.77	21.45	52.22	74.00	-21.78	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

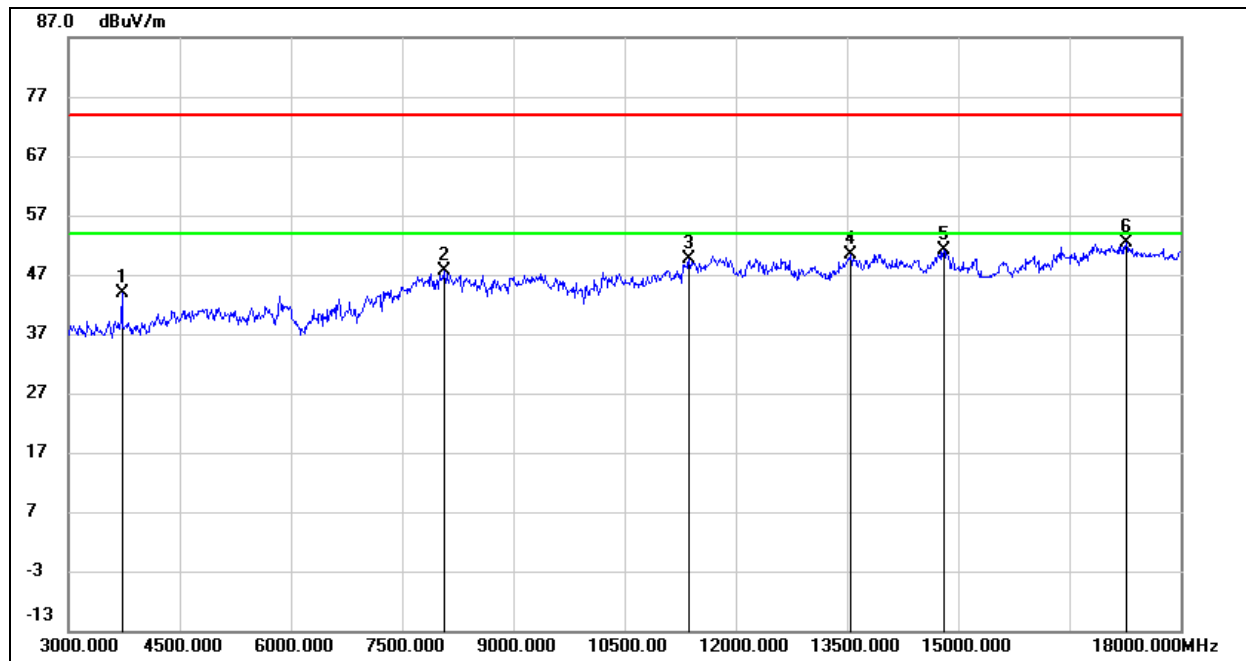

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3720.000	46.80	-2.84	43.96	74.00	-30.04	peak
2	8070.000	37.86	9.72	47.58	74.00	-26.42	peak
3	11370.000	35.19	14.49	49.68	74.00	-24.32	peak
4	13545.000	33.11	17.16	50.27	74.00	-23.73	peak
5	14805.000	33.07	18.00	51.07	74.00	-22.93	peak
6	17265.000	30.07	22.39	52.46	74.00	-21.54	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: All the modes have been tested, only the worst data was recorded in the report.

## 8.4. SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)

### 8.4.1. 8DPSK MODE

#### SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

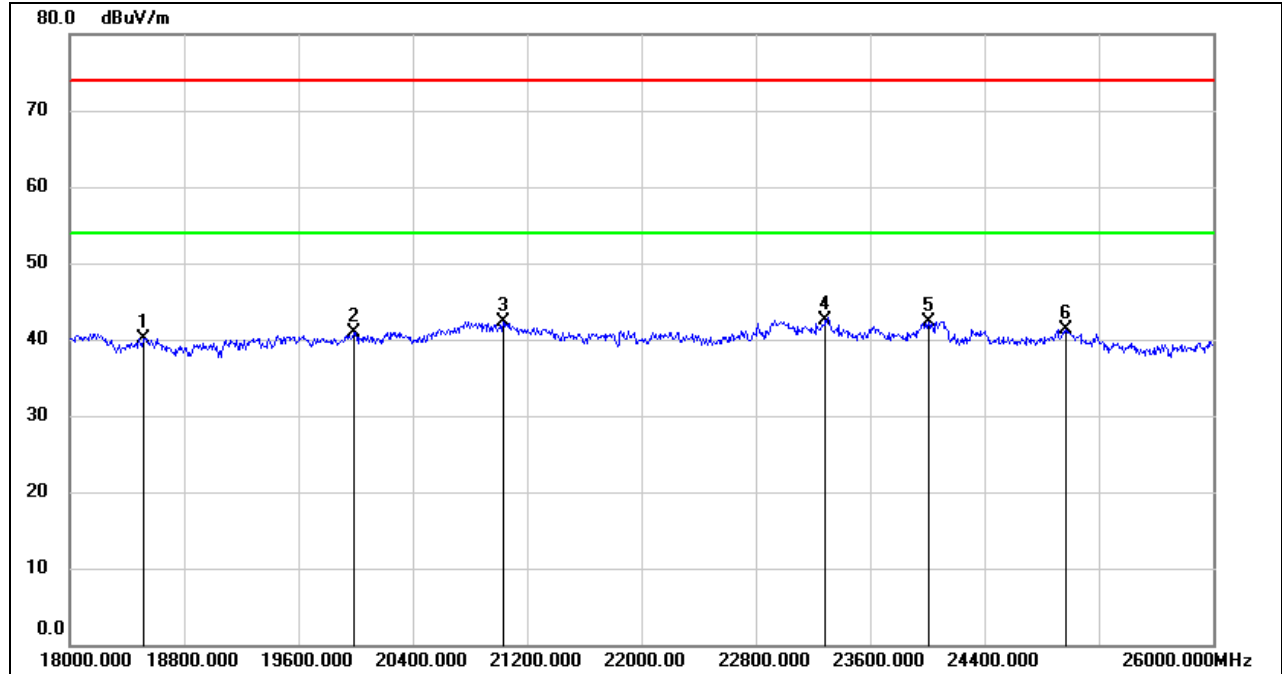

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18512.000	45.43	-5.26	40.17	74.00	-33.83	peak
2	19984.000	46.38	-5.44	40.94	74.00	-33.06	peak
3	21032.000	47.15	-4.87	42.28	74.00	-31.72	peak
4	23288.000	45.93	-3.33	42.60	74.00	-31.40	peak
5	24008.000	45.14	-2.75	42.39	74.00	-31.61	peak
6	24968.000	43.49	-2.14	41.35	74.00	-32.65	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. The preamplifier only effect to the above 18GHz signal and no filter added to the measurement chain.

### SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

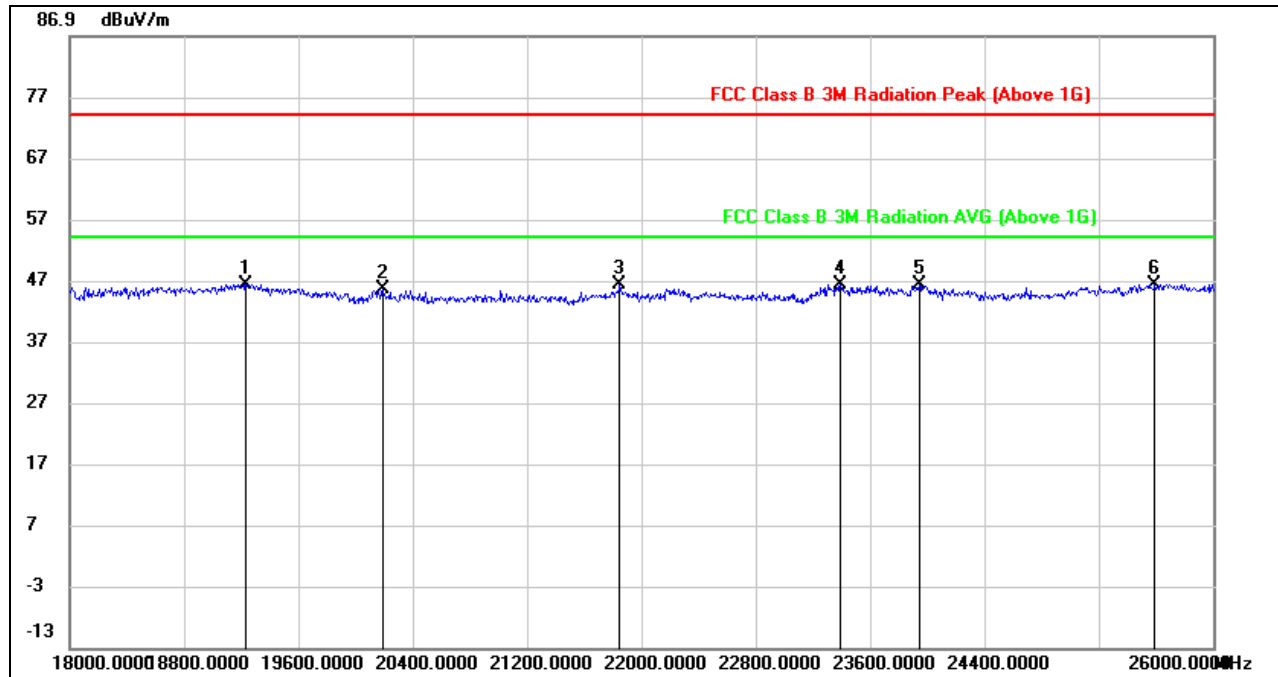

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	19232.000	51.39	-5.03	46.36	74.00	-27.64	peak
2	20192.000	50.37	-4.76	45.61	74.00	-28.39	peak
3	21848.000	52.26	-5.95	46.31	74.00	-27.69	peak
4	23392.000	51.28	-4.98	46.30	74.00	-27.70	peak
5	23944.000	50.45	-4.14	46.31	74.00	-27.69	peak
6	25592.000	48.01	-1.64	46.37	74.00	-27.63	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. The preamplifier only effect to the above 18GHz signal and no filter added to the measurement chain.

Note: All the modes have been tested, only the worst data was recorded in the report.

## 8.5. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)


### 8.5.1. 8DPSK MODE

#### SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

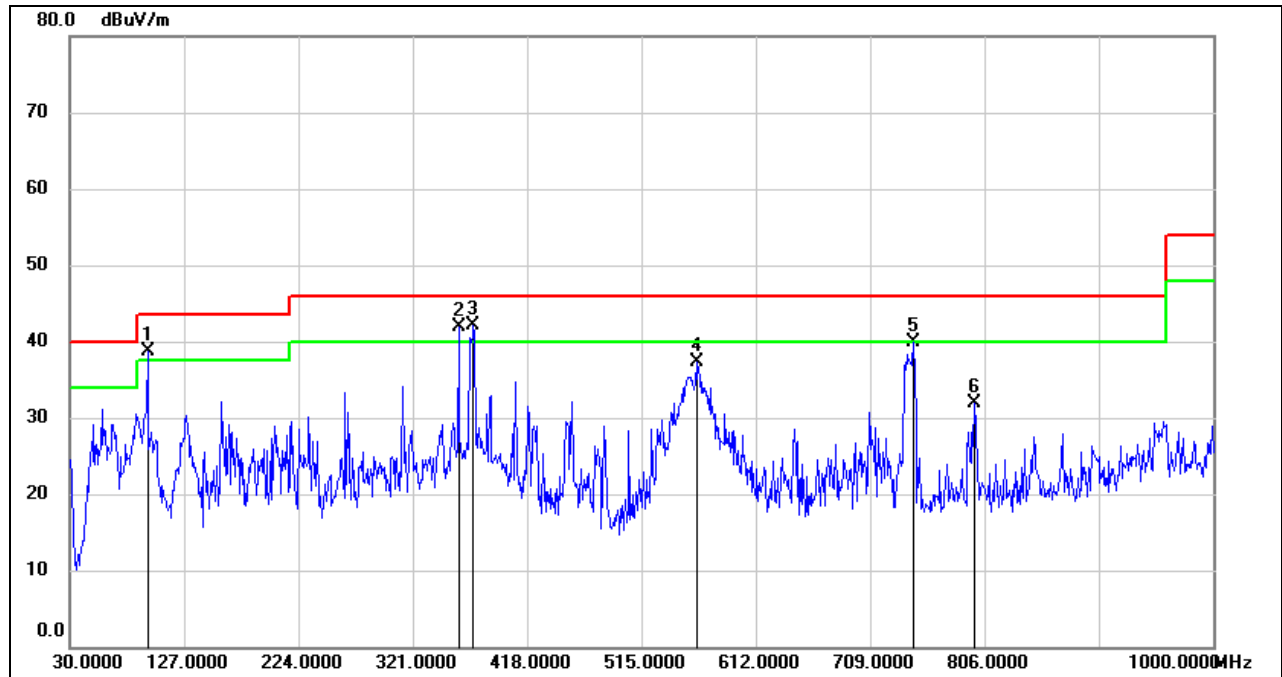

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	95.9600	60.12	-21.44	38.68	43.50	-4.82	QP
2	359.8000	55.92	-14.10	41.82	46.00	-4.18	QP
3	372.4100	56.01	-13.87	42.14	46.00	-3.86	QP
4	561.5600	47.52	-10.28	37.24	46.00	-8.76	QP
5	745.8600	47.73	-7.92	39.81	46.00	-6.19	QP
6	797.2700	39.27	-7.35	31.92	46.00	-14.08	QP

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

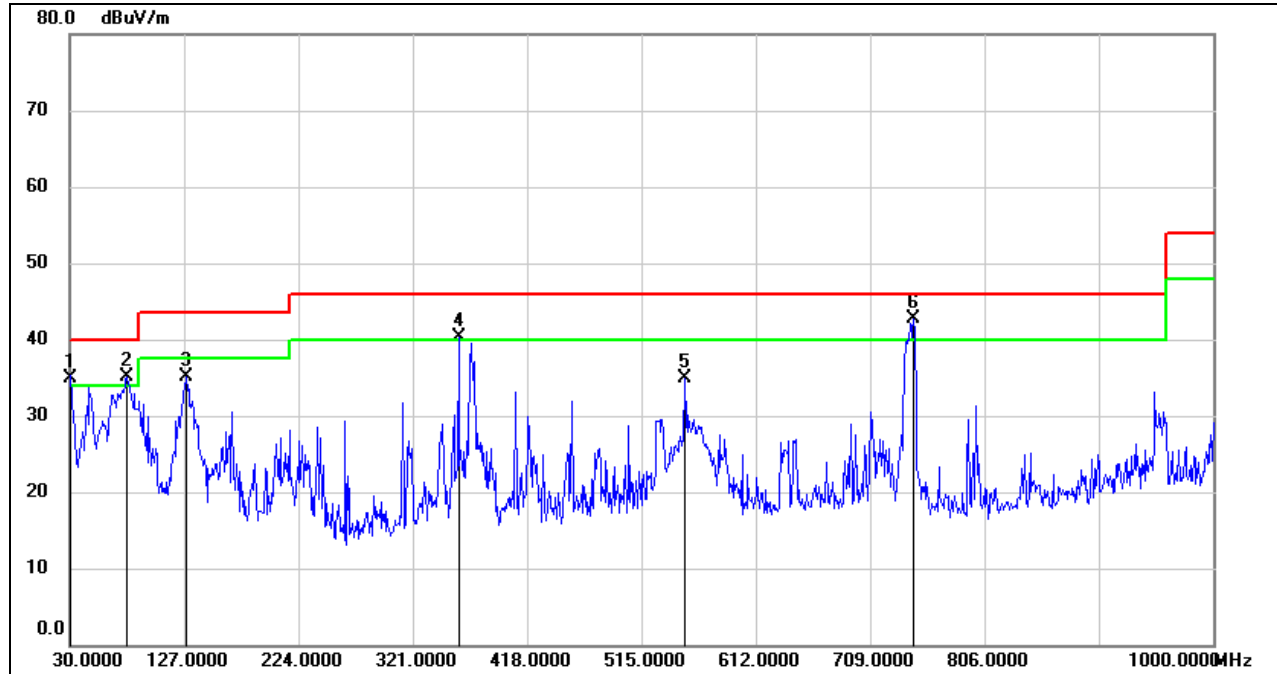**SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	53.75	-18.94	34.81	40.00	-5.19	QP
2	78.5000	56.31	-21.23	35.08	40.00	-4.92	QP
3	128.9400	54.49	-19.41	35.08	43.50	-8.42	QP
4	359.8000	54.34	-14.10	40.24	46.00	-5.76	QP
5	551.8600	45.33	-10.46	34.87	46.00	-11.13	QP
6	745.8600	50.54	-7.92	42.62	46.00	-3.38	QP

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto


Note: All the modes have been tested, only the worst data was recorded in the report.

## 8.6. SPURIOUS EMISSIONS BELOW 30 MHz

### 8.6.1. 8DPSK MODE

(MID CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9 kHz~ 150 kHz

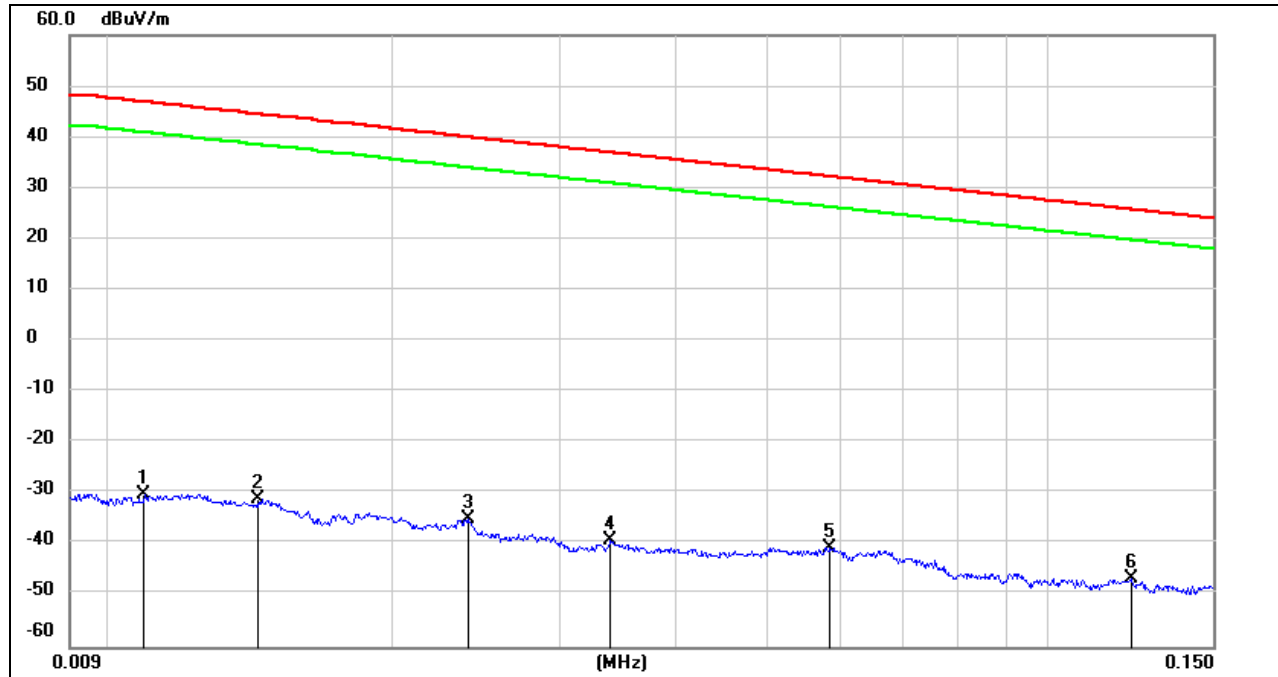


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0108	71.28	-101.39	-30.11	46.93	-81.61	-4.57	-77.04	peak
2	0.0143	70.37	-101.38	-31.01	44.49	-82.51	-7.01	-75.50	peak
3	0.0240	66.32	-101.36	-35.04	40	-86.54	-11.50	-75.04	peak
4	0.0340	62.25	-101.41	-39.16	36.97	-90.66	-14.53	-76.13	peak
5	0.0585	61.01	-101.52	-40.51	32.26	-92.01	-19.24	-72.77	peak
6	0.1226	55.10	-101.73	-46.63	25.83	-98.13	-25.67	-72.46	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

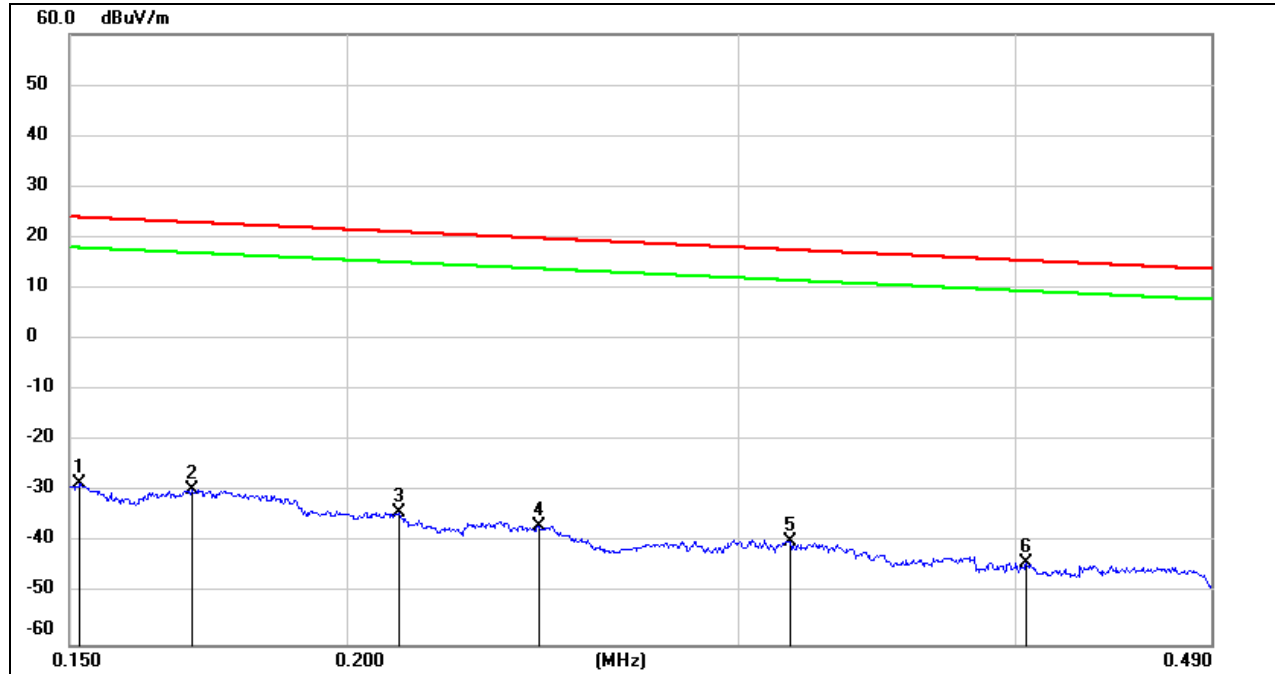150 kHz ~ 490 kHz


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1517	73.25	-101.63	-28.38	23.98	-79.88	-27.52	-52.36	peak
2	0.1703	72.12	-101.67	-29.55	22.98	-81.05	-28.52	-52.53	peak
3	0.2111	67.55	-101.73	-34.18	21.11	-85.68	-30.39	-55.29	peak
4	0.2442	65.03	-101.79	-36.76	19.85	-88.26	-31.65	-56.61	peak
5	0.3169	62.25	-101.87	-39.62	17.58	-91.12	-33.92	-57.20	peak
6	0.4047	57.91	-101.96	-44.05	15.46	-95.55	-36.04	-59.51	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

### 490 kHz ~ 30 MHz

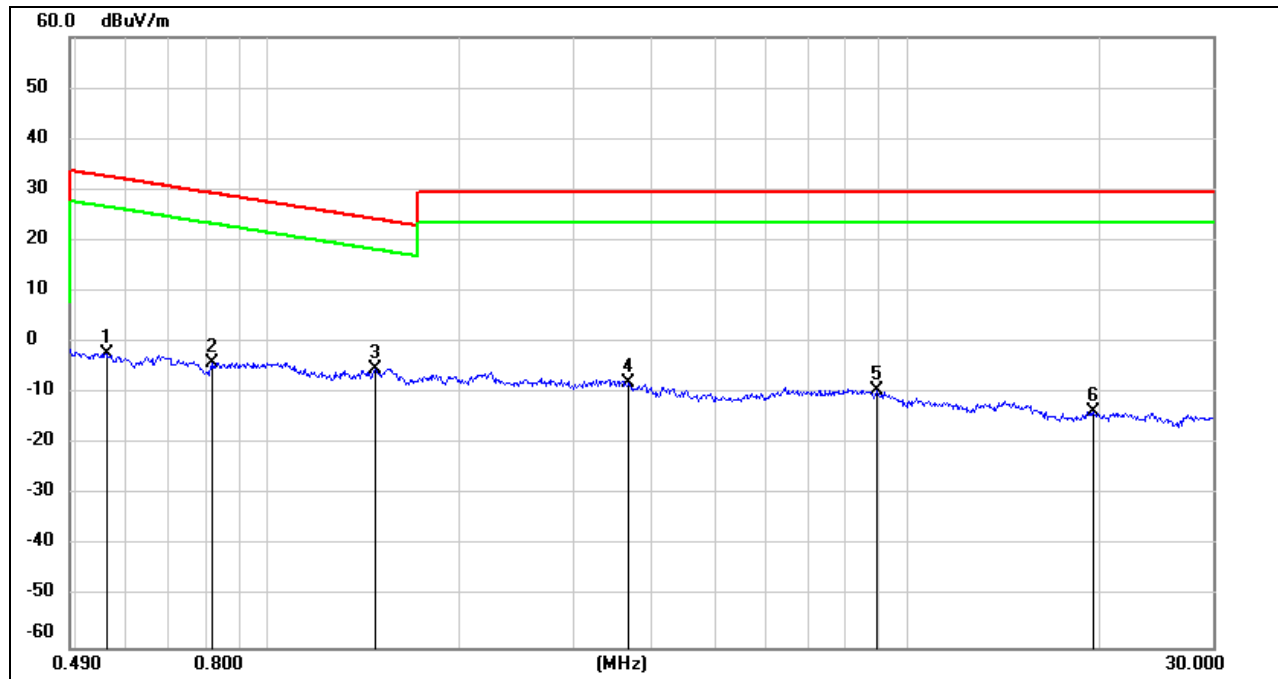

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.5590	59.87	-62.09	-2.22	32.66	-53.72	-18.84	-34.88	peak
2	0.8195	58.16	-62.16	-4	29.33	-55.50	-22.17	-33.33	peak
3	1.4700	56.89	-62.05	-5.16	24.26	-56.66	-27.24	-29.42	peak
4	3.6770	53.54	-61.41	-7.87	29.54	-59.37	-21.96	-37.41	peak
5	8.9594	51.42	-60.94	-9.52	29.54	-61.02	-21.96	-39.06	peak
6	19.4939	47.11	-60.85	-13.74	29.54	-65.24	-21.96	-43.28	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the modes have been tested, only the worst data was recorded in the report.

## 9. AC POWER LINE CONDUCTED EMISSIONS


### LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

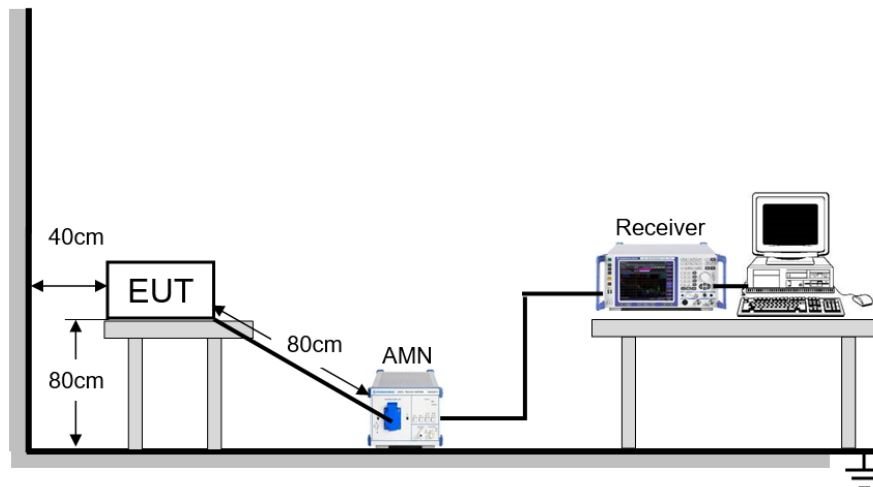


The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### TEST ENVIRONMENT

Temperature	22.6 °C	Relative Humidity	64.4 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V

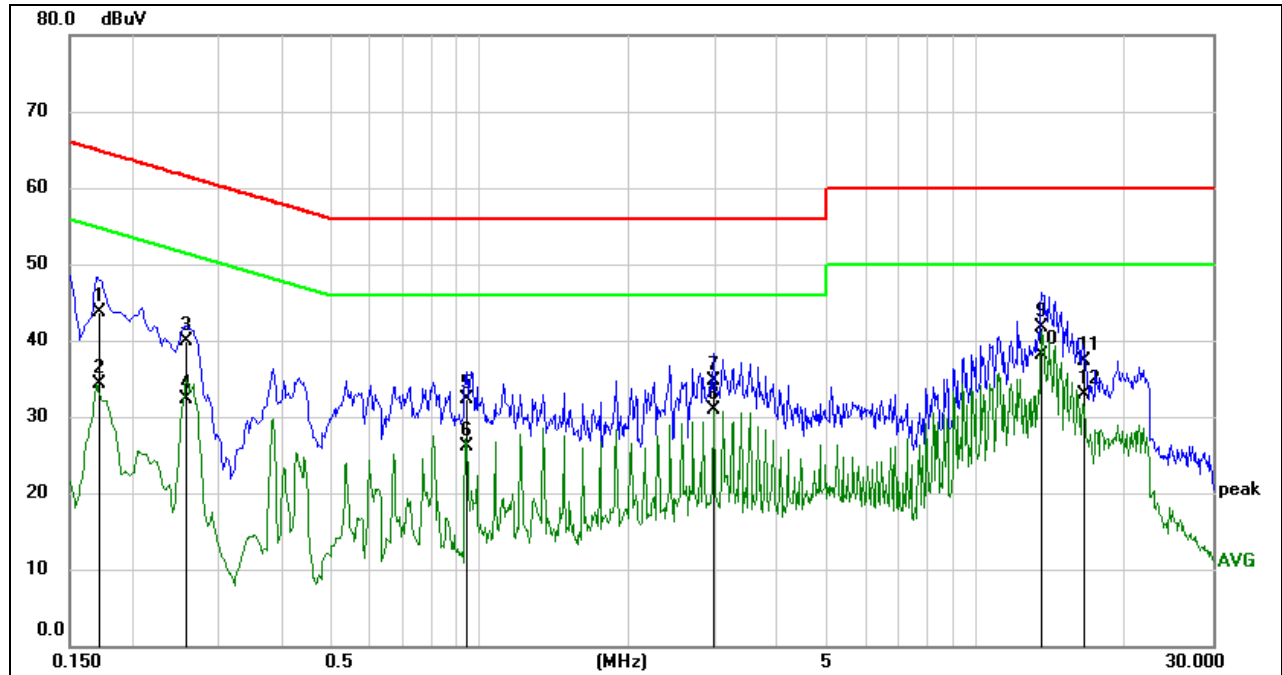**TEST RESULTS****9.1.1. 8DPSK MODE****LINE L RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1723	34.09	9.59	43.68	64.85	-21.17	QP
2	0.1723	24.79	9.59	34.38	54.85	-20.47	AVG
3	0.2568	30.36	9.59	39.95	61.53	-21.58	QP
4	0.2568	22.79	9.59	32.38	51.53	-19.15	AVG
5	0.9463	22.68	9.61	32.29	56.00	-23.71	QP
6	0.9463	16.47	9.61	26.08	46.00	-19.92	AVG
7	2.9701	24.99	9.62	34.61	56.00	-21.39	QP
8	2.9701	21.21	9.62	30.83	46.00	-15.17	AVG
9	13.6348	31.96	9.66	41.62	60.00	-18.38	QP
10	13.6348	28.46	9.66	38.12	50.00	-11.88	AVG
11	16.4900	27.61	9.69	37.30	60.00	-22.70	QP
12	16.4900	23.31	9.69	33.00	50.00	-17.00	AVG


Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

### LINE N RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)

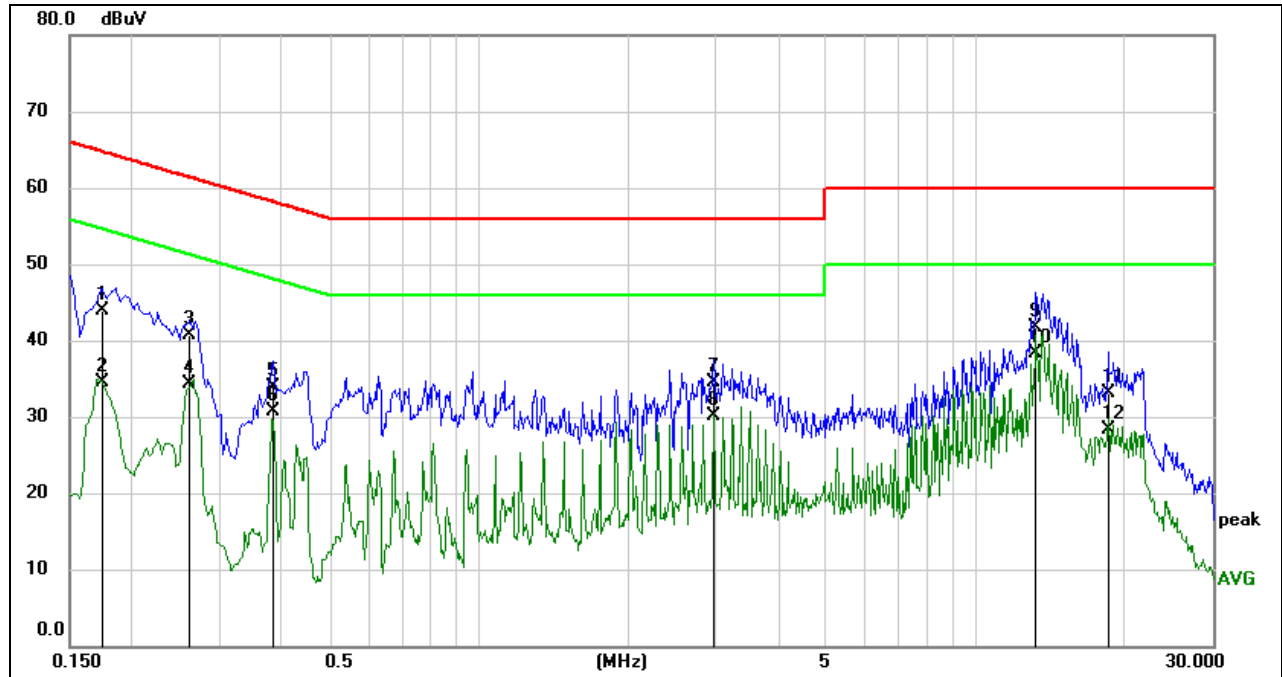

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1743	34.38	9.59	43.97	64.75	-20.78	QP
2	0.1743	24.89	9.59	34.48	54.75	-20.27	AVG
3	0.2590	31.19	9.59	40.78	61.46	-20.68	QP
4	0.2590	24.63	9.59	34.22	51.46	-17.24	AVG
5	0.3837	24.33	9.59	33.92	58.20	-24.28	QP
6	0.3837	21.13	9.59	30.72	48.20	-17.48	AVG
7	2.9713	24.86	9.62	34.48	56.00	-21.52	QP
8	2.9713	20.48	9.62	30.10	46.00	-15.90	AVG
9	13.2298	31.97	9.66	41.63	60.00	-18.37	QP
10	13.2298	28.71	9.66	38.37	50.00	-11.63	AVG
11	18.4739	23.48	9.71	33.19	60.00	-26.81	QP
12	18.4739	18.54	9.71	28.25	50.00	-21.75	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.



## 10. ANTENNA REQUIREMENTS

### APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### RESULTS

Complies

---

**END OF REPORT**