



Part 15C

TEST REPORT

Product Name	HSDPA/HSUPA/HSPA+/UMTS Quad bands / GSM Quad bands/LTE 5 bands mobile phone
Model Name	Rio-4G LATAM
Marketing Name	5050A
FCC ID	RAD488
Applicant	TCT Mobile Limited
Manufacturer	TCT Mobile Limited
Date of issue	May 21, 2014

TA Technology (Shanghai) Co., Ltd.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 2 of 97

GENERAL SUMMARY

Reference Standard(s)	FCC CFR47 Part 15C (2013) Radio Frequency Devices 15.205 Restricted bands of operation; 15.207 Conducted limits; 15.209 Radiated emission limits; general requirements; 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850MHz. ANSI C63.4 Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 KHz to 40GHz. (2009) KDB 558074 D01 DTS Meas Guidance v03r01 Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
Conclusion	This portable wireless equipment has been measured in all cases requested by the relevant standards. Test results in Chapter 2 of this test report are below limits specified in the relevant standards. General Judgment: Pass
Comment	The test result only responds to the measured sample.

Approved by Weizhong Yang
Weizhong Yang
Director

Revised by Lingling Kang
Lingling Kang
RF Manager

Performed by Yiqi Chen
Yiqi Chen
RF Engineer

TABLE OF CONTENT

1. General Information	4
1.1. Notes of the test report	4
1.2. Testing laboratory	5
1.3. Applicant Information	5
1.4. Manufacturer Information	5
1.5. Information of EUT	6
1.6. Test Date	7
2. Test Information	8
2.1. Test Mode	8
2.2. Summary of test results	9
2.3. Peak Power Output –Conducted	10
2.4. Occupied Bandwidth (6dB)	12
2.5. Band Edge Compliance	18
2.6. Spurious Radiated Emissions in the restricted band	22
2.7. Power Spectral Density	31
2.8. Spurious RF Conducted Emissions	37
2.9. Radiates Emission	48
2.10. Conducted Emissions	87
2. Main Test Instruments	94
ANNEX A: EUT Appearance and Test Setup	95
A.1 EUT Appearance	95
A.2 Test Setup	96

1. General Information

1.1. Notes of the test report

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L2264.

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 428261.

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 8510A.

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. The sample under test was selected by the Client. This report only refers to the item that has undergone the test.

This report alone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

If the electronic report is inconsistent with the printed one, it should be subject to the latter.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 5 of 97

1.2. Testing laboratory

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Yang Weizhong
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: yangweizhong@ta-shanghai.com

1.3. Applicant Information

Company: TCT Mobile Limited
Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai
P.R. China
201203

1.4. Manufacturer Information

Company: TCT Mobile Limited
Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai
P.R. China
201203

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 6 of 97

1.5. Information of EUT

General information

IMEI:	014035000002295
Hardware Version:	PIO
Software Version:	9G1B
Antenna Type:	Internal Antenna
Device Operating Configurations:	
Network Standards:	802.11b, 802.11g, 802.11n HT20
Test Modulation:	(802.11b)DSSS; (802.11g)OFDM; (802.11n HT20)OFDM
Power Supply:	Battery or Adapter
Max. Conducted Power	18.54 dBm
Operating Frequency Range(s)	2412MHz~ 2462MHz
Tested Frequency Range(s)	2400MHz~ 2483.5 MHz

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 7 of 97

Auxiliary Equipment Details

Name	Model	Manufacturer	S/N
Battery 1	TLi020A1	BYD	B2000016C11001RB
Battery 2	TLp020A2	SCUD	C2000003C3Y008WQ
Earphone 1	CCB3000A12C2	Juwei	/
Earphone 2	CCB3000A12C1	Shunda	/
Charger	CBA3000AG0C1	Tenpao	/

1.6. Test Date

The test is performed from May 18, 2014 to May 20, 2014.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 8 of 97

2. Test Information

2.1. Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate declared in basic standard IEEE802.11. Preliminary tests has been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Results of test modes, data rates and test channels are shown as following table.

	Test items	Modes	Data Rate	Test channel
Conducted Test cases	Peak Power Output –Conducted	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n	MCS0 Mbps	1/6/11
	Minimum 6dB bandwidth	802.11b	1Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n	MCS0 Mbps	1/6/11
	Band Edges compliance	802.11b	1Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n	MCS0 Mbps	1/11
	Power spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n	MCS0 Mbps	1/6/11
	Conducted Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n	MCS0 Mbps	1/6/11
	Conducted Emissions	802.11b	1 Mbps	6
		802.11g	6 Mbps	6
		802.11n	MCS0 Mbps	6
Radiated Test cases	Spurious Radiated Emissions in the restricted band	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n	MCS0 Mbps	1/11
	Radiates Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n	MCS0 Mbps	1/6/11

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 9 of 97

2.2. Summary of test results

Number	Summary of measurements of results	Clause in FCC rules	Verdict
1	Peak Power Output –Conducted	15.247(b)(3)	PASS
2	Minimum 6dB bandwidth	15.247(a)(2)	PASS
3	Band Edges compliance	15.247(d)	PASS
4	Spurious Radiated Emissions in the restricted band	15.247(d),15.205,15.209	PASS
5	Power spectral Density	15.247(e)	PASS
6	Conducted Spurious Emission	15.247	PASS
7	Radiates Emission	15.247(d),15.205,15.209	PASS
8	Conducted Emissions	15.207,15.107	PASS

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 10 of 97

2.3. Peak Power Output –Conducted


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~ 25°C	45% ~ 50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to the peak power meter through an external attenuator and a known loss cable. The EUT is max power transmission with proper modulation. We use 5.2.1 Maximum Peak Conducted Output Power Level Method in KDB 558074 D01 for this test.

Test Setup



Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt."

Peak Output Power	$\leq 1\text{W}$ (30dBm)
-------------------	--------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 11 of 97

Test Results:

Network Standards	Carrier frequency (MHz)	Peak Output Power (dBm)	Conclusion
802.11b	2412	18.26	PASS
	2437	18.54	PASS
	2462	18.07	PASS
802.11g	2412	13.95	PASS
	2437	14.27	PASS
	2462	13.73	PASS
802.11n HT20	2412	12.13	PASS
	2437	12.25	PASS
	2462	11.95	PASS

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 12 of 97

2.4. Occupied Bandwidth (6dB)


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz, VBW is set to 300 kHz on spectrum analyzer.

Test Setup



Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

minimum 6 dB bandwidth	≥ 500 kHz
------------------------	-----------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

TA Technology (Shanghai) Co., Ltd.

Test Report


Report No.: RXA1404-0104RF03

Page 13 of 97

Test Results:

Network Standards	Carrier frequency (MHz)	Minimum 6 dB bandwidth (MHz)	Conclusion
802.11b	2412	7.388	PASS
	2437	7.468	PASS
	2462	7.873	PASS
802.11g	2412	16.53	PASS
	2437	16.53	PASS
	2462	16.52	PASS
802.11n HT20	2412	17.58	PASS
	2437	17.62	PASS
	2462	17.61	PASS

802.11b

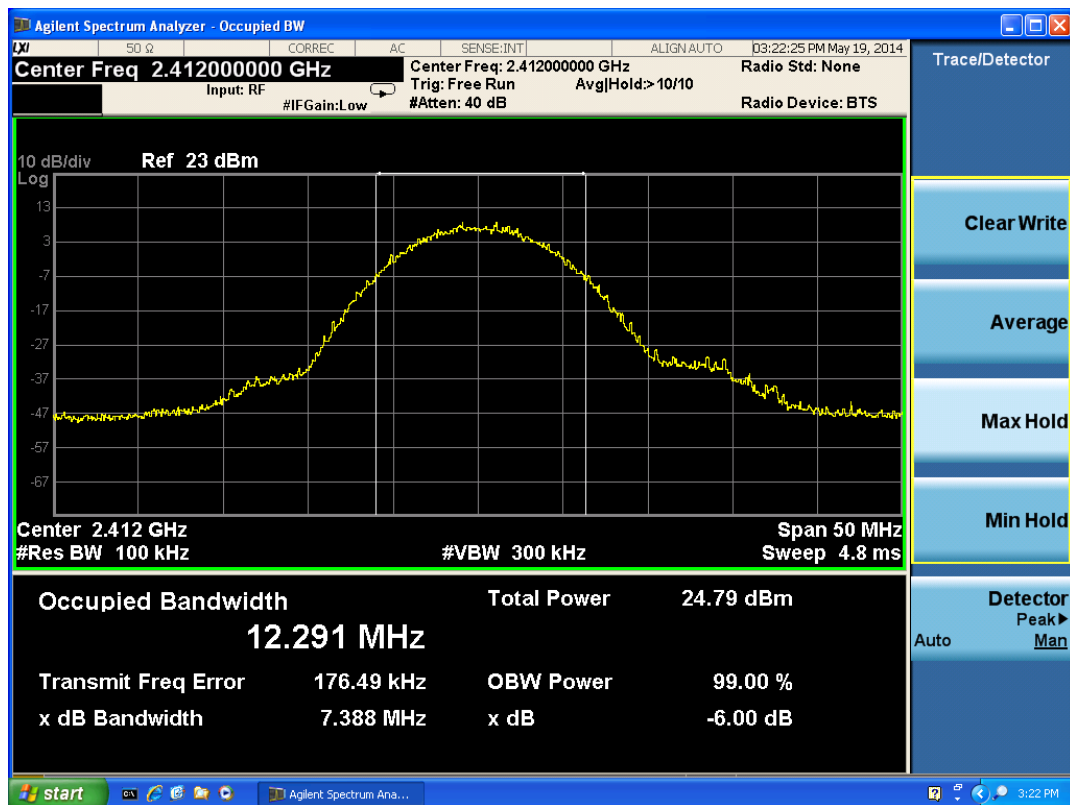


802.11b, Carrier frequency (MHz): 2412

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RXA1404-0104RF03

Page 14 of 97

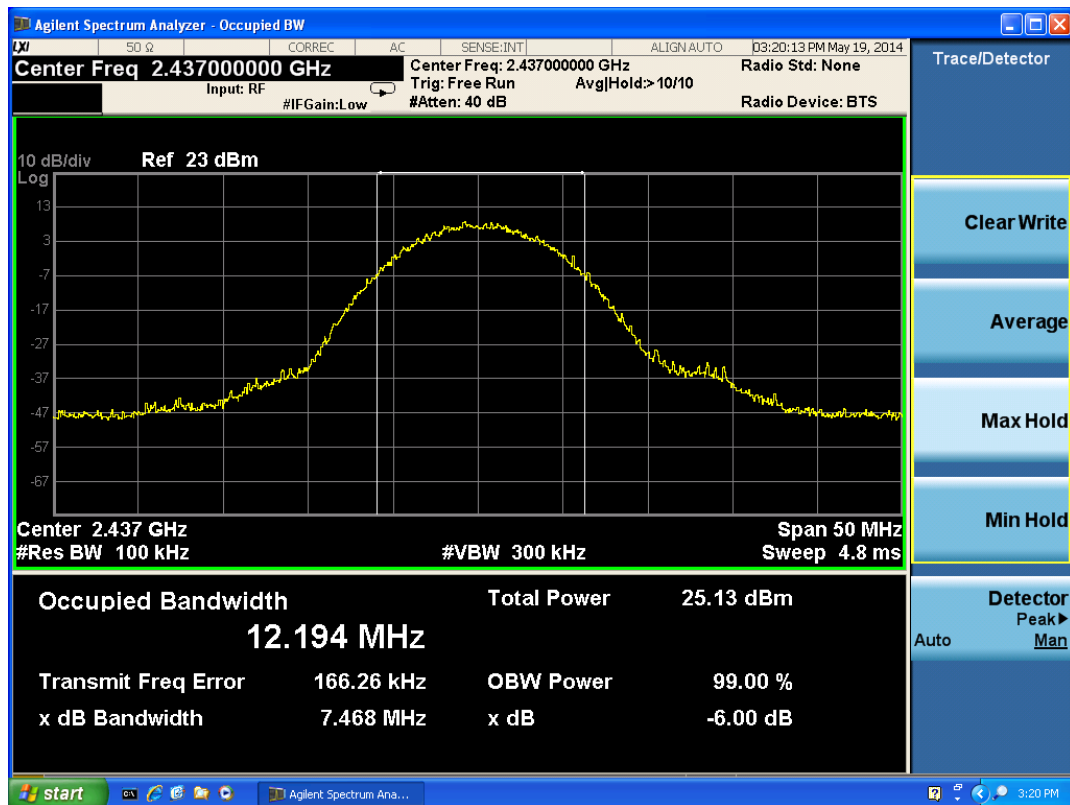

802.11b, Carrier frequency (MHz): 2437

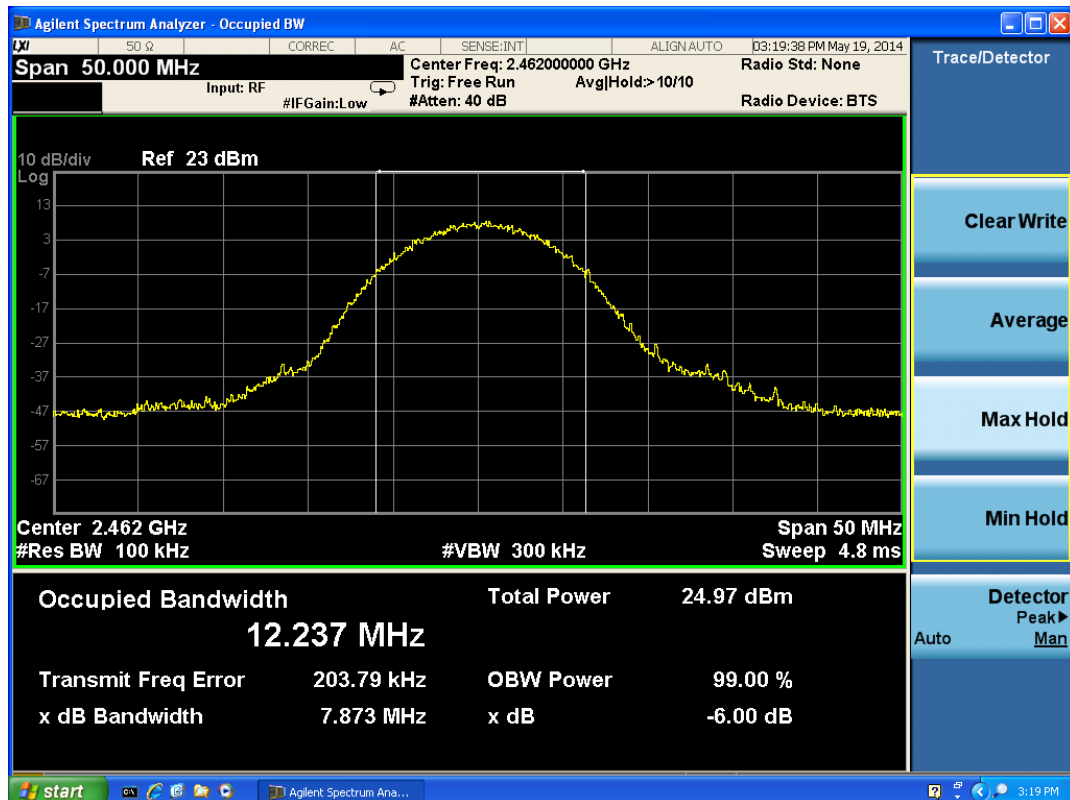

802.11b, Carrier frequency (MHz): 2462


TA Technology (Shanghai) Co., Ltd.

Test Report


Report No.: RXA1404-0104RF03

Page 15 of 97

802.11g

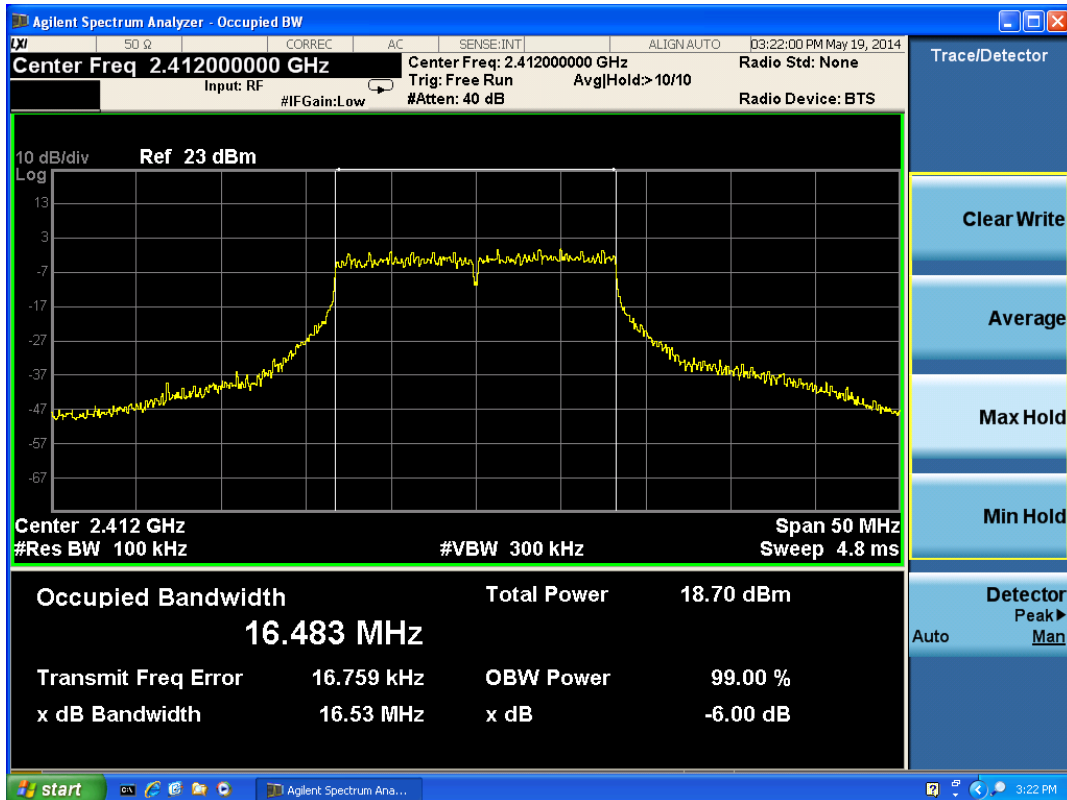

802.11g, Carrier frequency (MHz): 2412

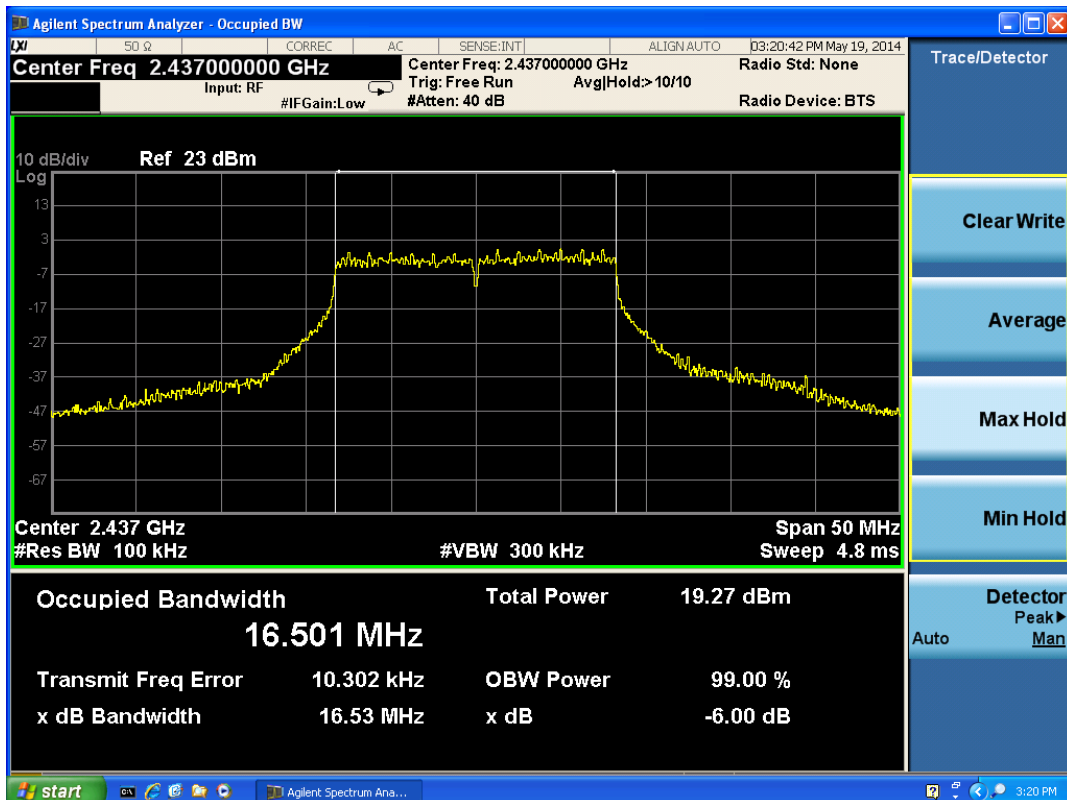


802.11g, Carrier frequency (MHz): 2437

TA Technology (Shanghai) Co., Ltd.

Test Report


Report No.: RXA1404-0104RF03

Page 16 of 97

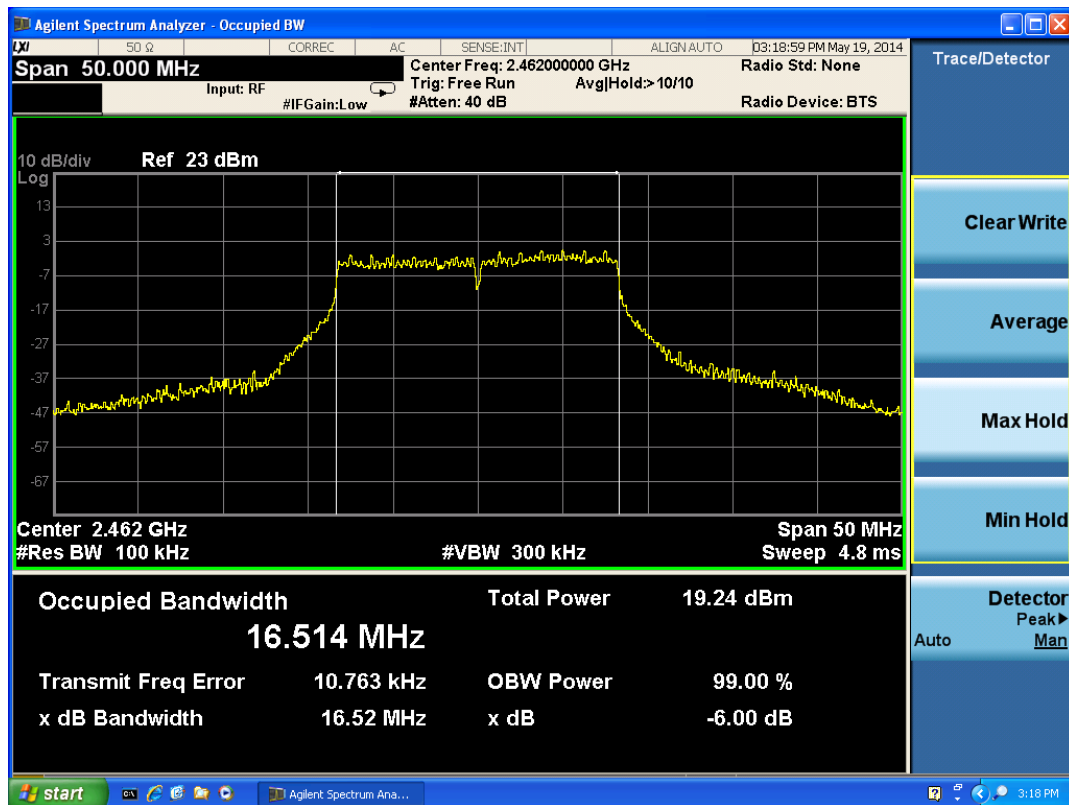

802.11g, Carrier frequency (MHz):2462

802.11n(HT20)

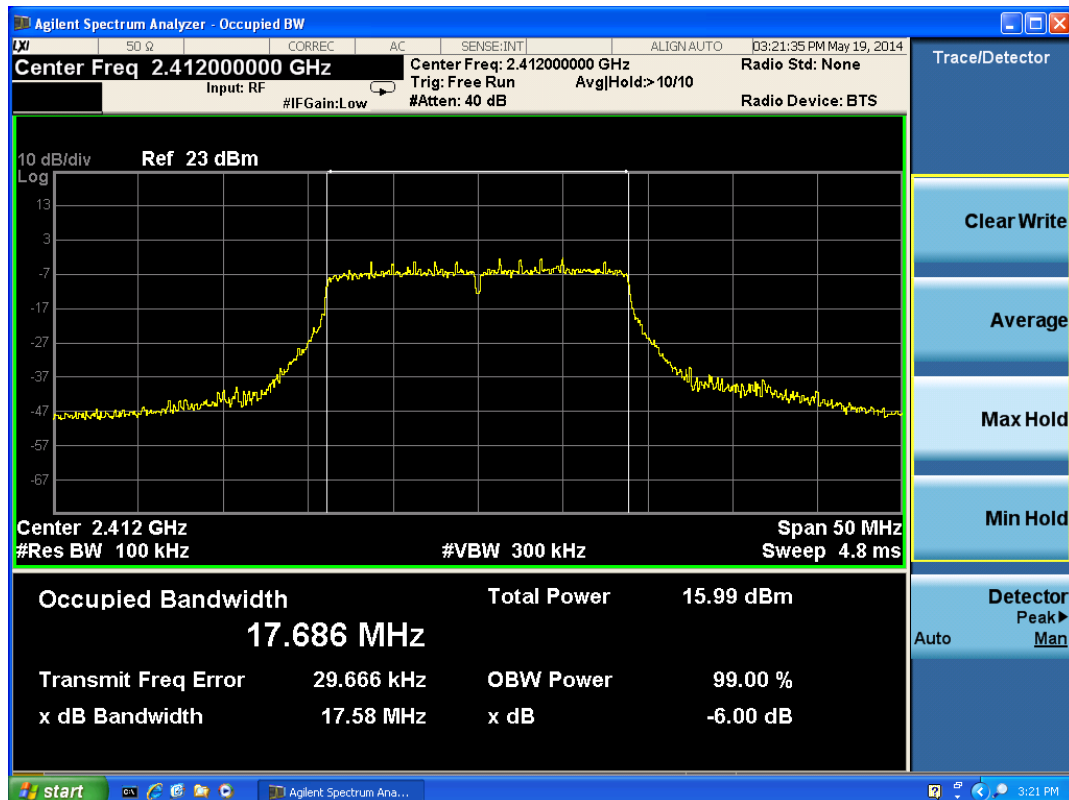


802.11n, Carrier frequency (MHz): 2412

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RXA1404-0104RF03

Page 17 of 97

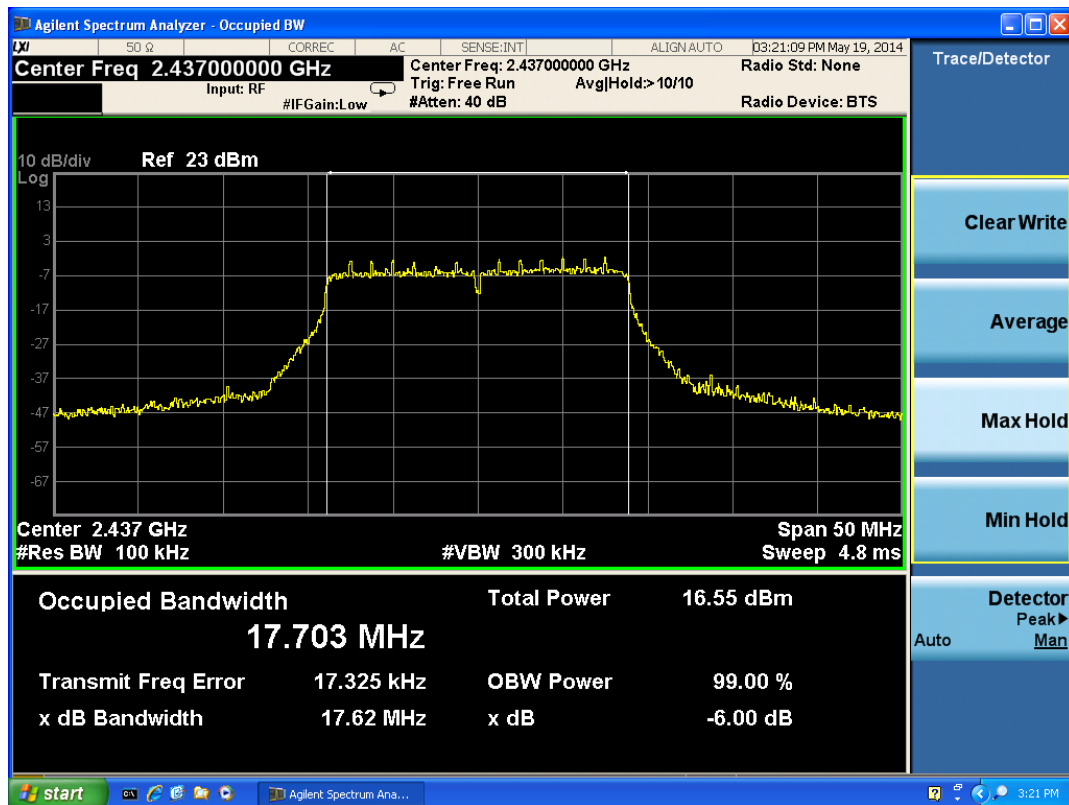

802.11n, Carrier frequency (MHz): 2437

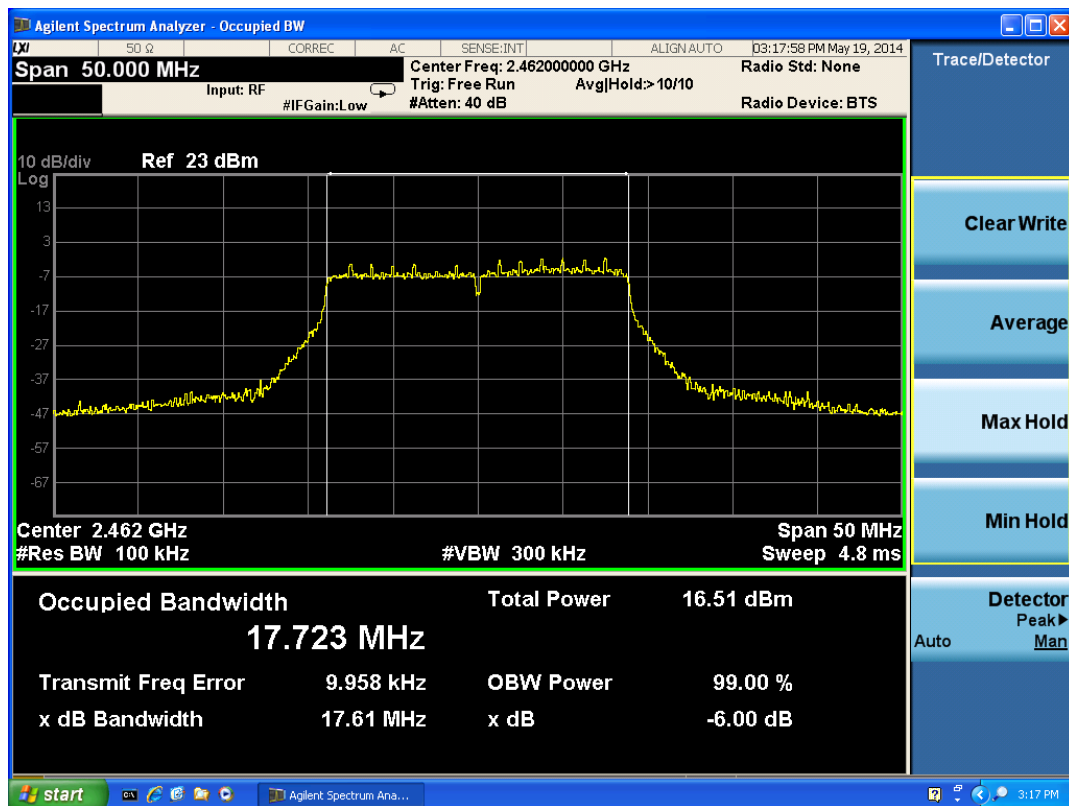

802.11n, Carrier frequency (MHz): 2462

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 18 of 97

2.5. Band Edge Compliance


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100kHz and VBW is set to 300kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

Test Setup



Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.”

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
2GHz-3GHz	1.407 dB


TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1404-0104RF03


Page 19 of 97

Test Results: PASS

802.11b

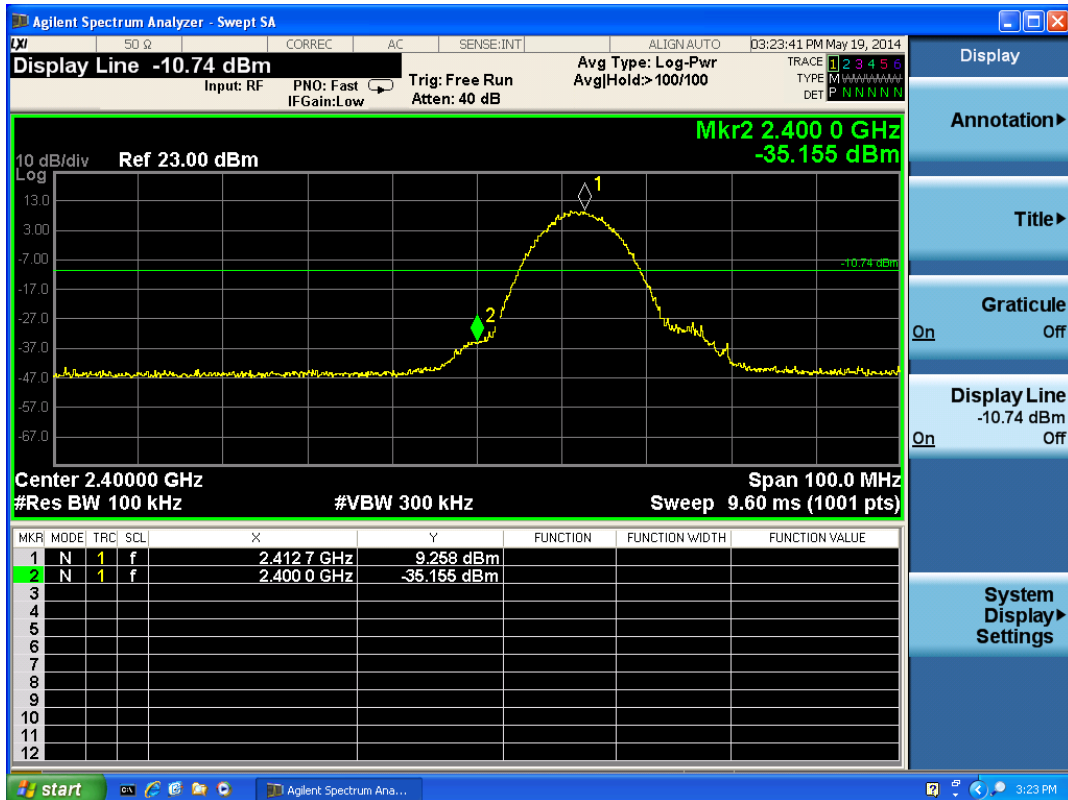

802.11b, Channel No.: 1

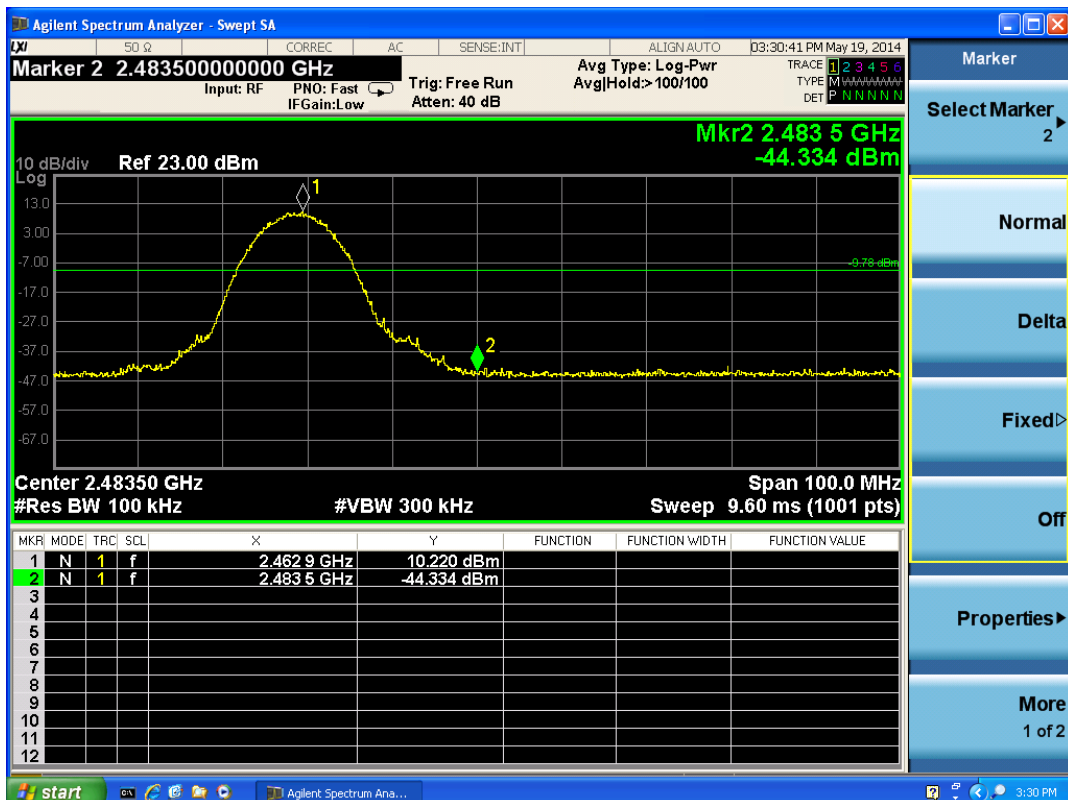


802.11b, Channel No.: 11

TA Technology (Shanghai) Co., Ltd. Test Report


Report No.: RXA1404-0104RF03

Page 20 of 97

802.11g

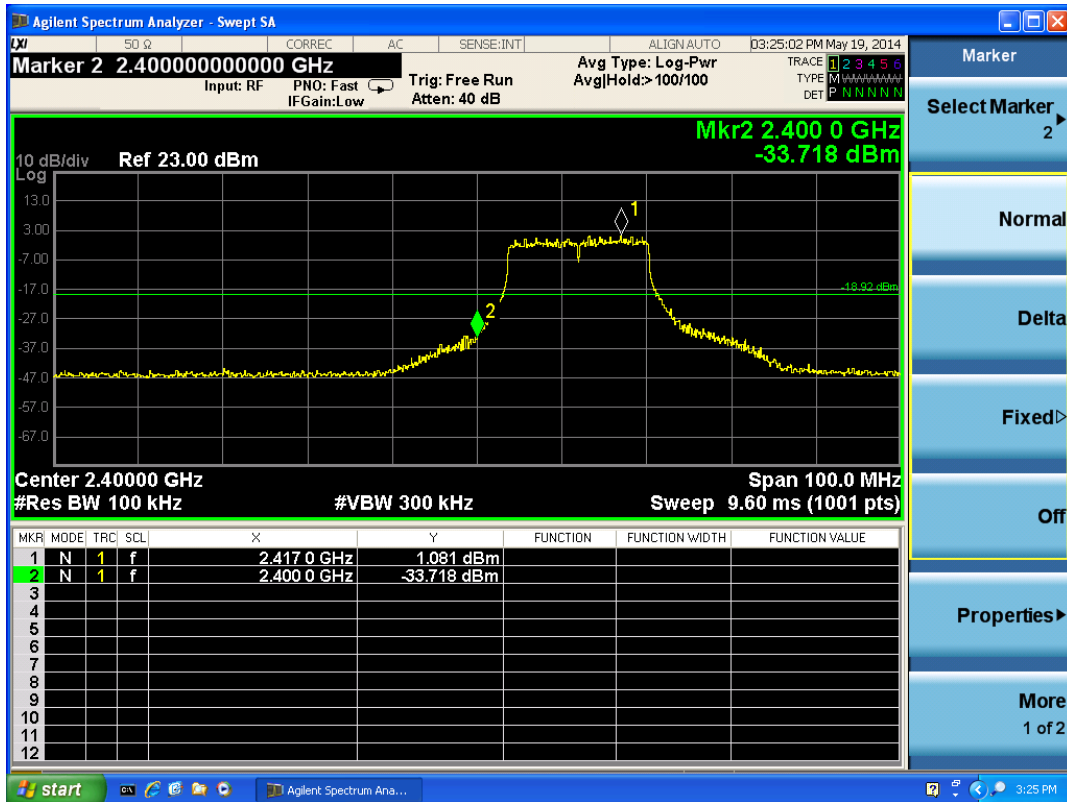

802.11g, Channel No.: 1

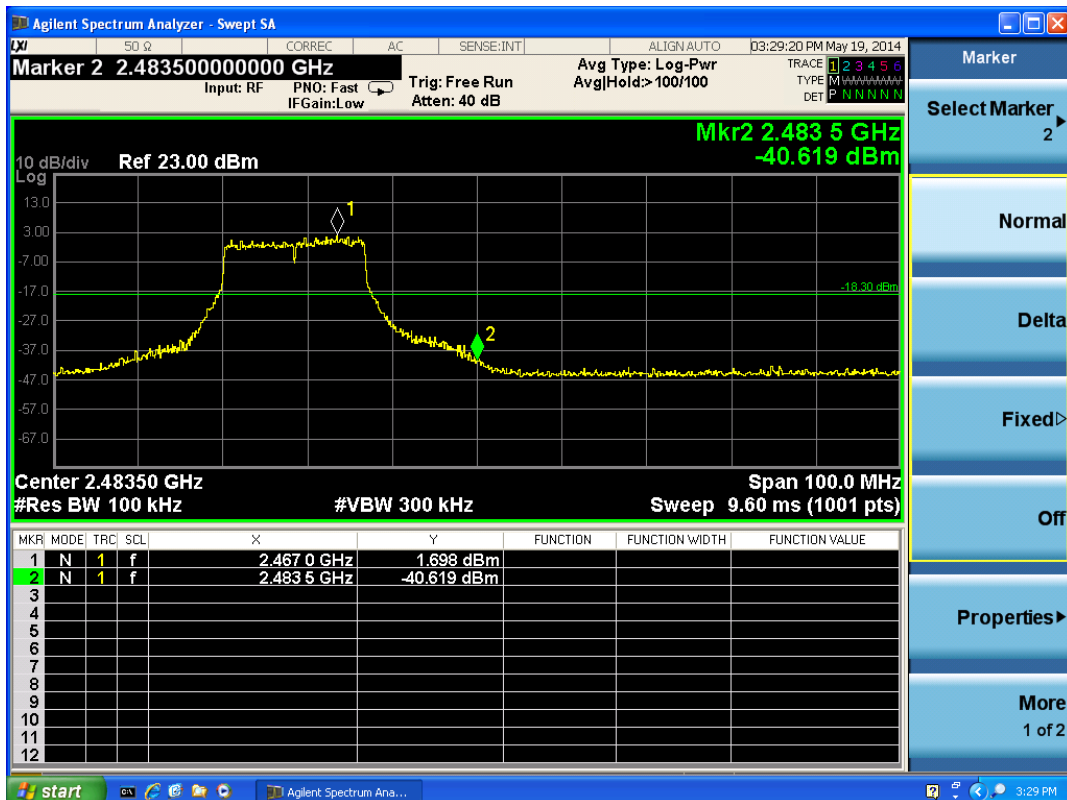

802.11g, Channel No.: 11


TA Technology (Shanghai) Co., Ltd.

Test Report


Report No.: RXA1404-0104RF03

Page 21 of 97

802.11n(HT20)

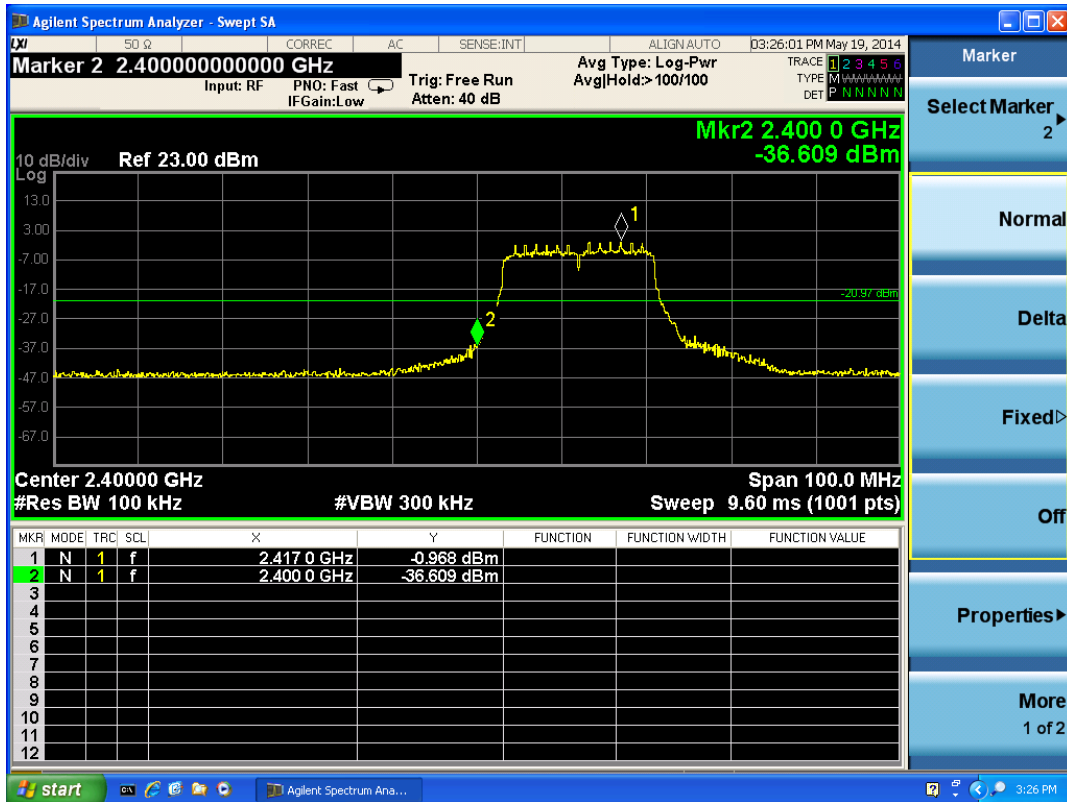

802.11n, Channel No.: 1

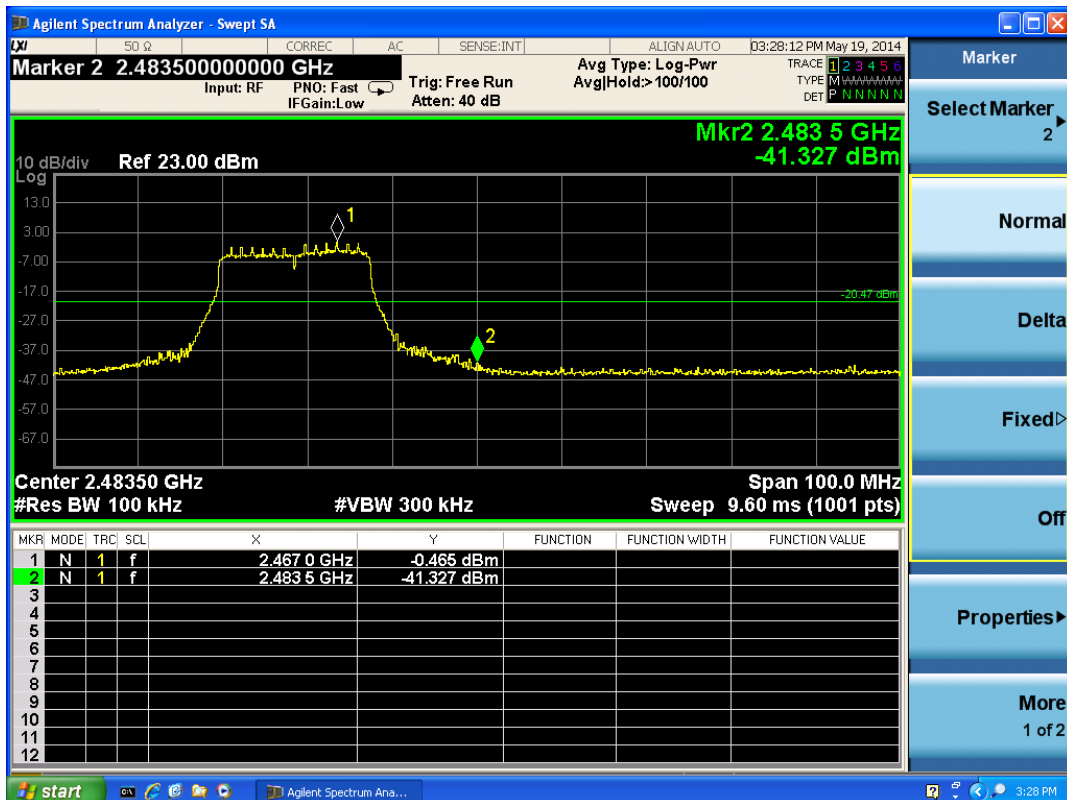

802.11n, Channel No.: 11

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 22 of 97

2.6. Spurious Radiated Emissions in the restricted band

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. RBW is set to 100kHz. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

Set the spectrum analyzer in the following:

- (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

This setting method can refer to **KDB 558074**.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the antenna is vertical.

The test is in transmitting mode.


TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 23 of 97

Test setup

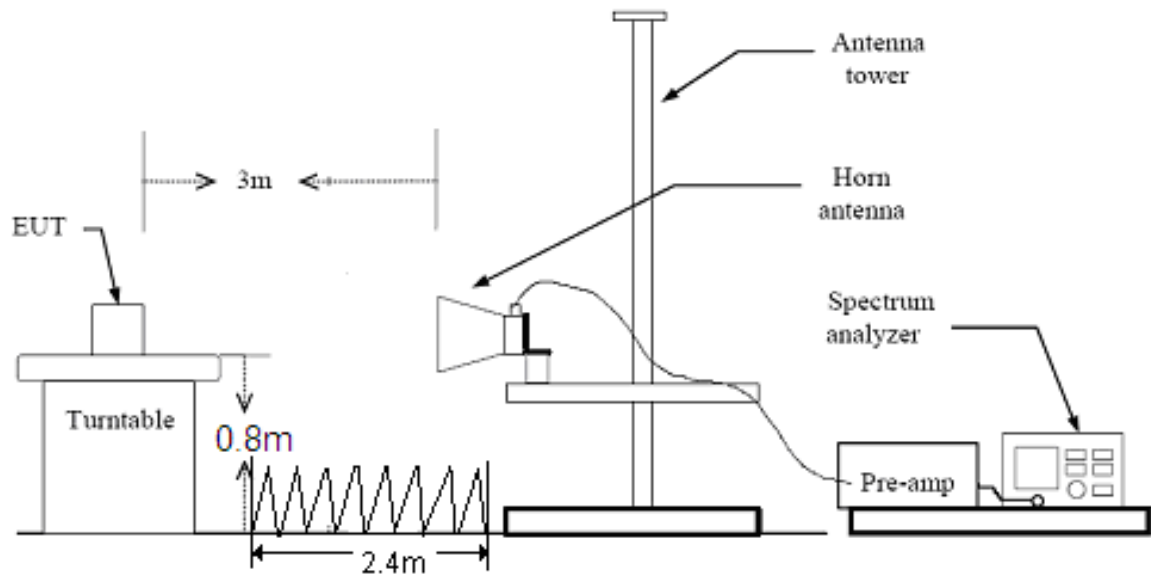

Note: Area side: 2.4mX3.6m

Limits

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 24 of 97

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

TA Technology (Shanghai) Co., Ltd.

Test Report


Report No.: RXA1404-0104RF03

Page 25 of 97

Test Results: PASS

802.11b-Channel 1:


Peak

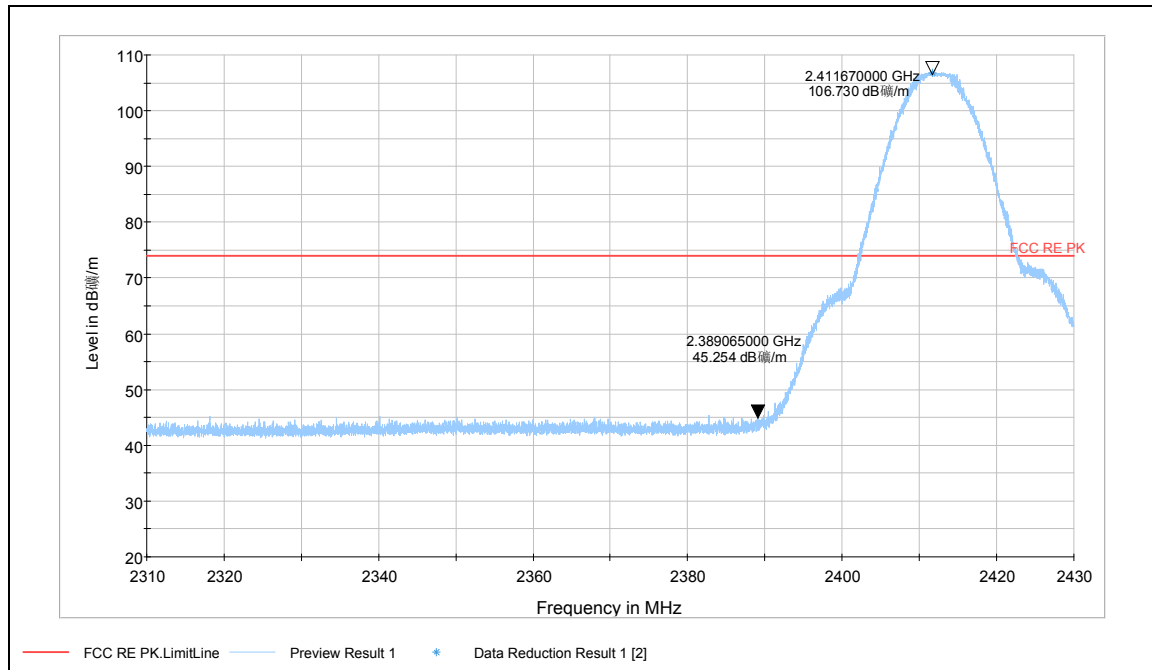

Note: The signal beyond the limit is carrier

Channel 1

Average

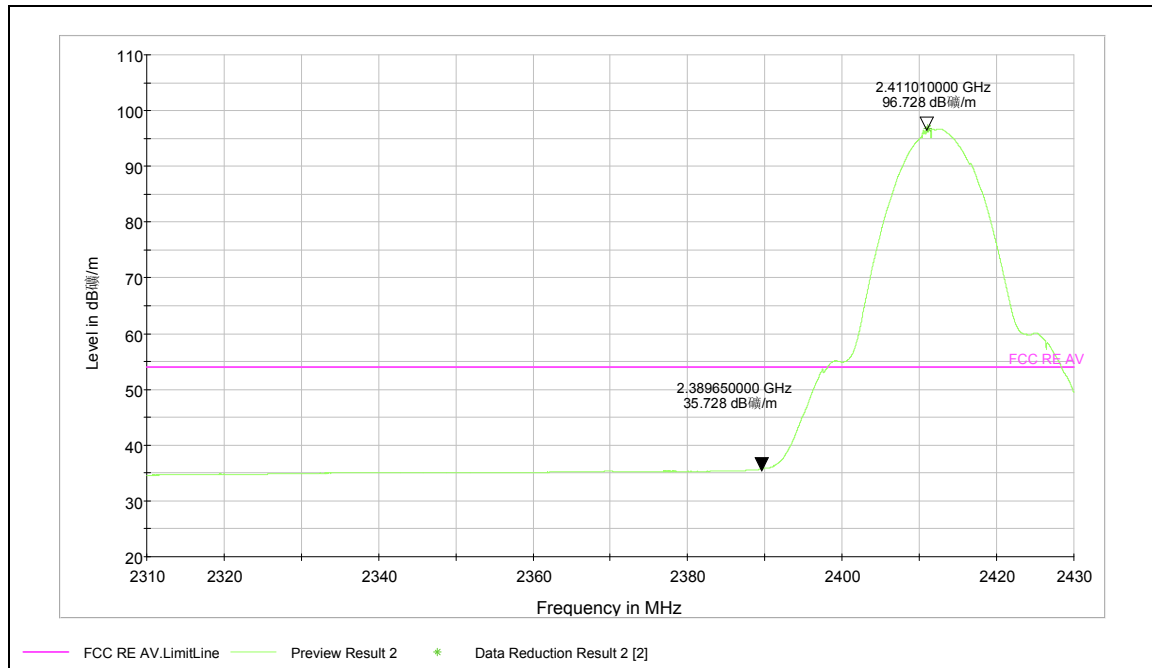

Note: The signal beyond the limit is carrier

Channel 1

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RXA1404-0104RF03

Page 26 of 97

802.11b-Channel 11:


Peak

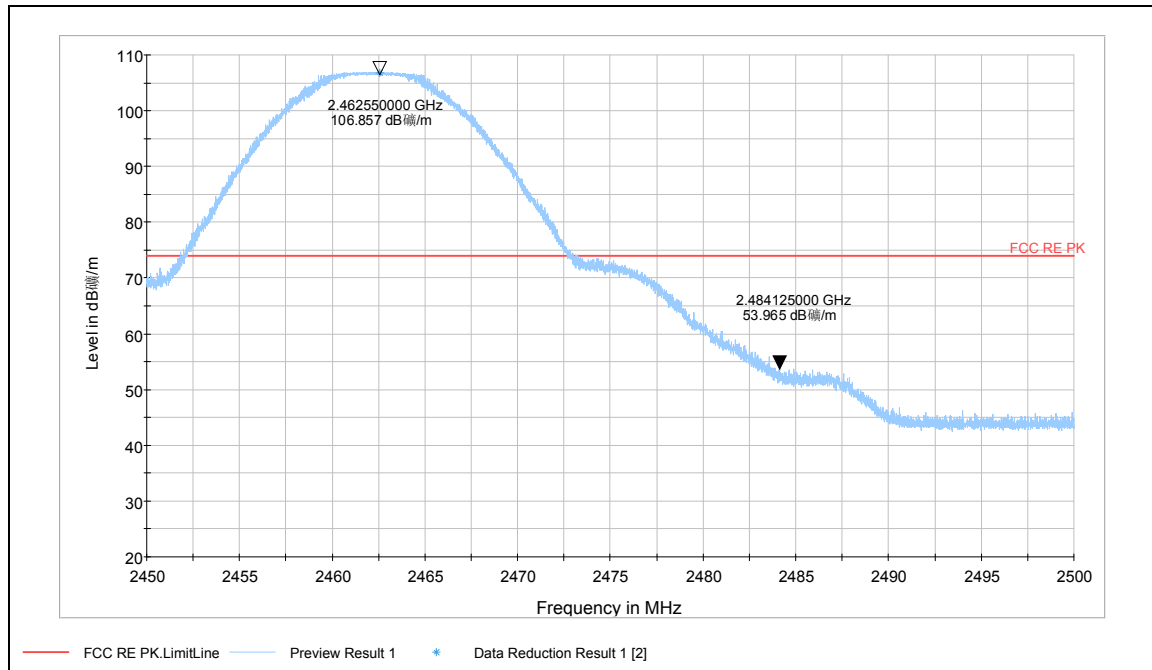

Note: The signal beyond the limit is carrier

Channel 11

Average

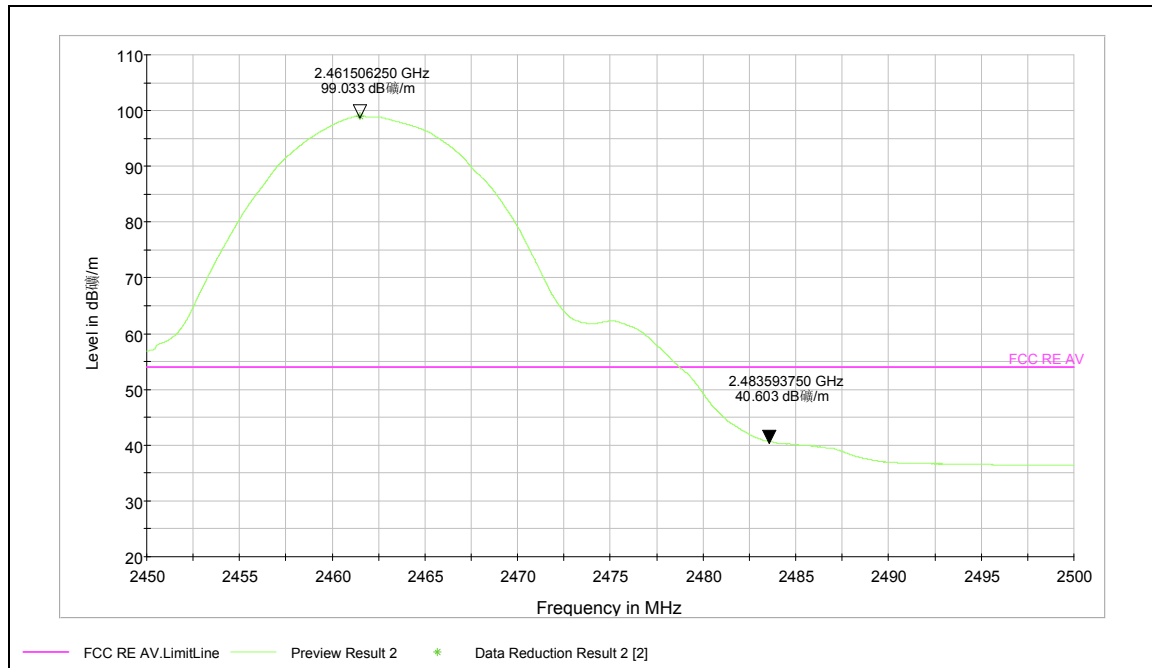

Note: The signal beyond the limit is carrier

Channel 11

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RXA1404-0104RF03

Page 27 of 97


802.11g-Channel 1:

Peak

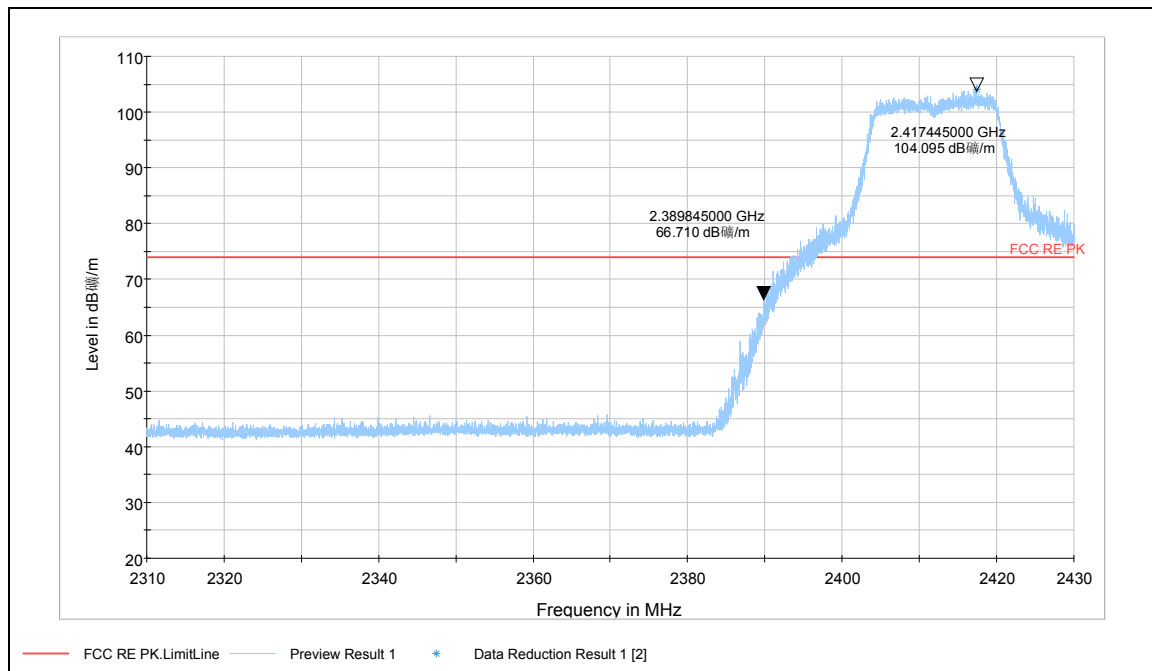

Note: The signal beyond the limit is carrier
Channel 1

Average

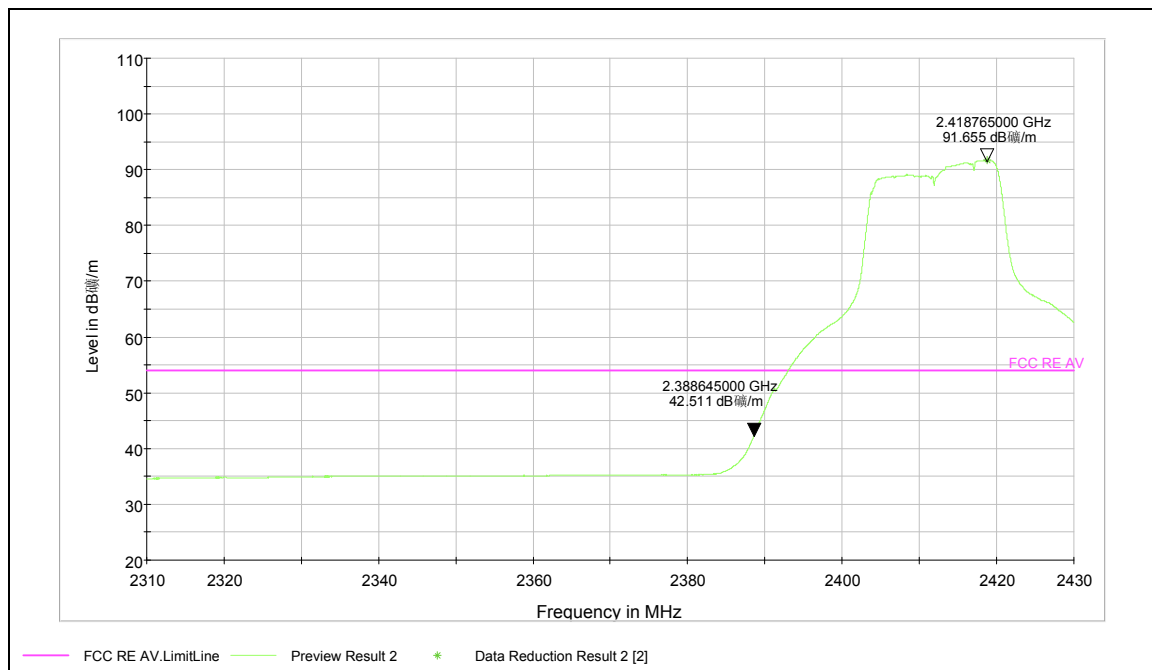

Note: The signal beyond the limit is carrier
Channel 1

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RXA1404-0104RF03

Page 28 of 97


802.11g-Channel 11:

Peak

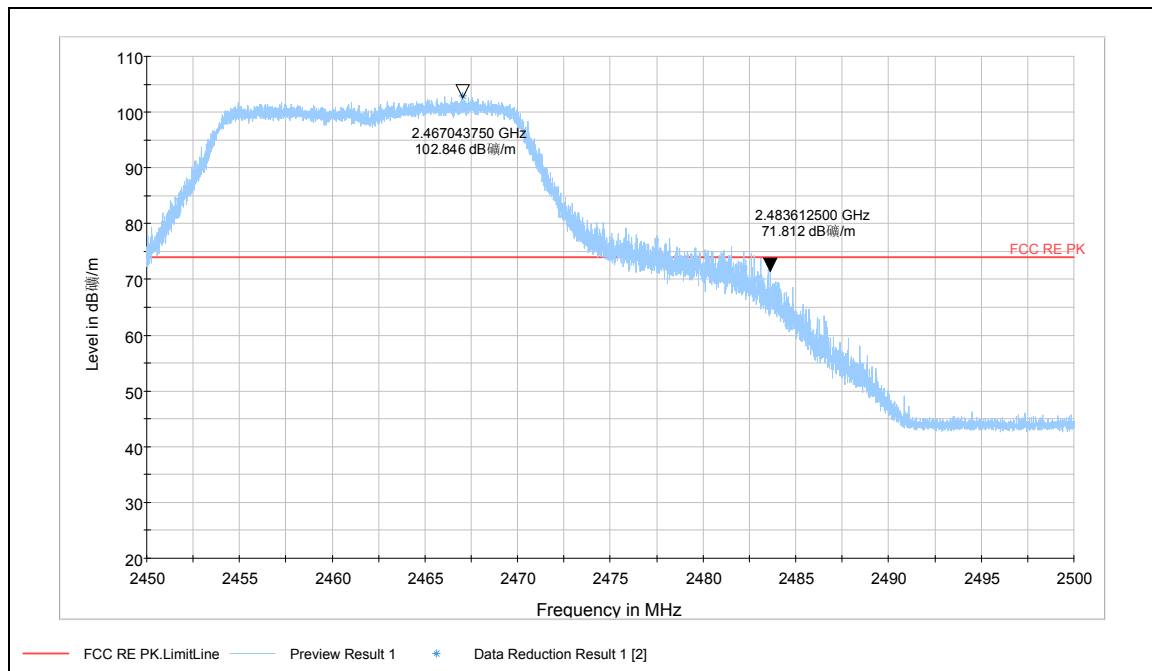

Note: The signal beyond the limit is carrier
Channel 11

Average

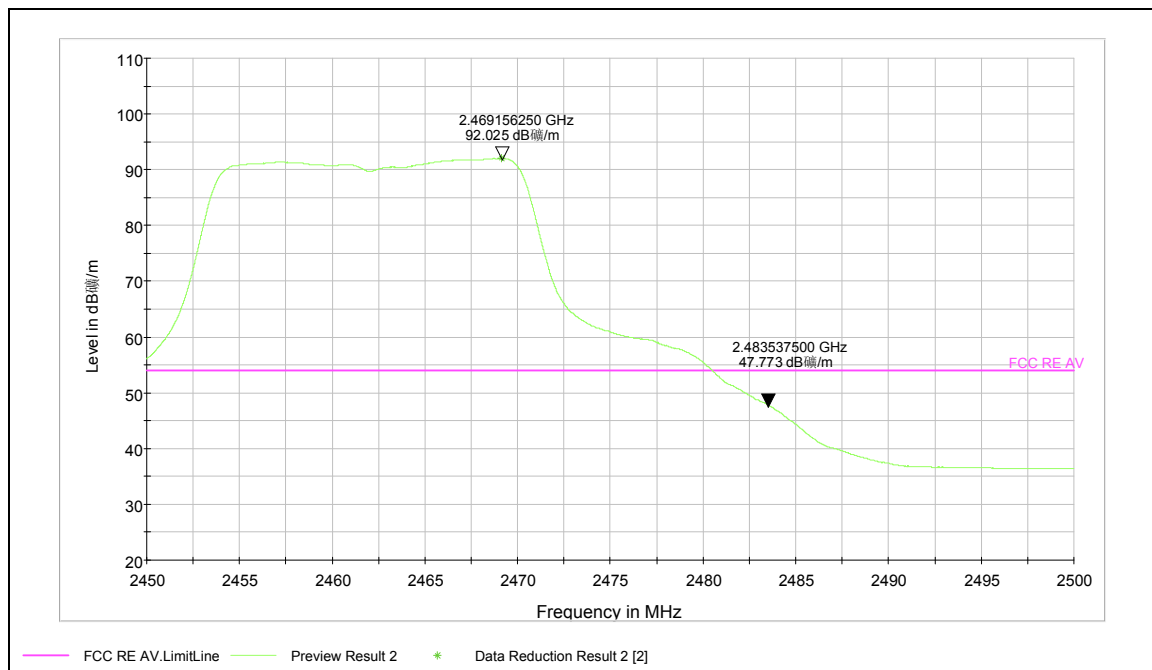

Note: The signal beyond the limit is carrier
Channel 11

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RXA1404-0104RF03

Page 29 of 97


802.11n-Channel 1(HT20):

Peak

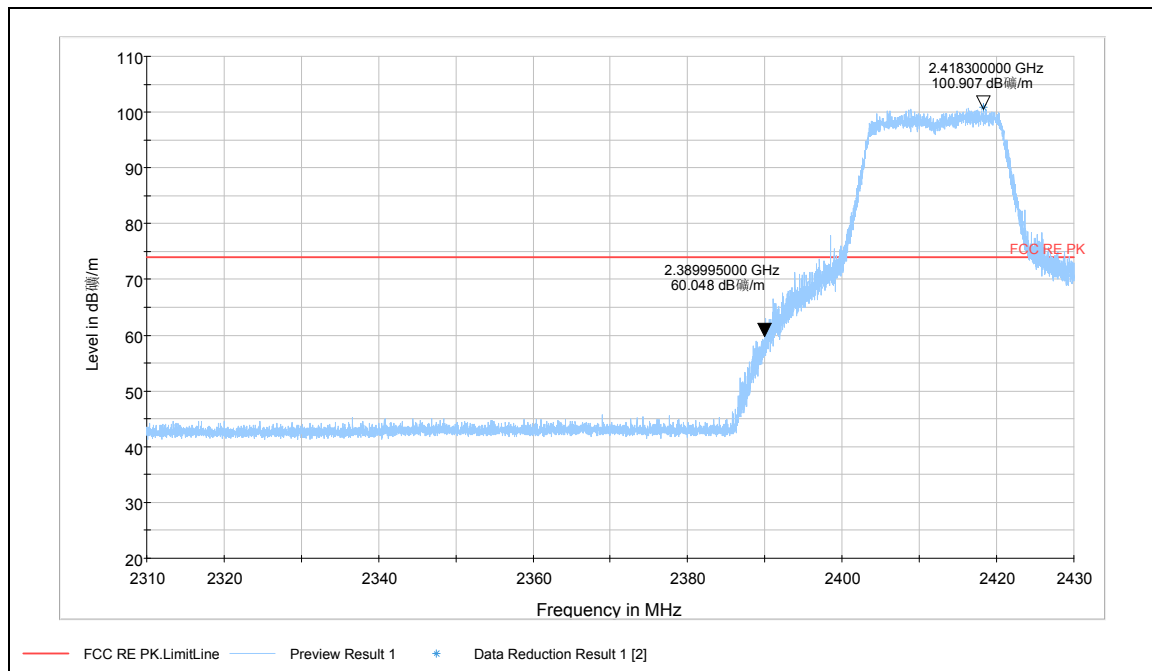

Note: The signal beyond the limit is carrier
Channel 1

Average

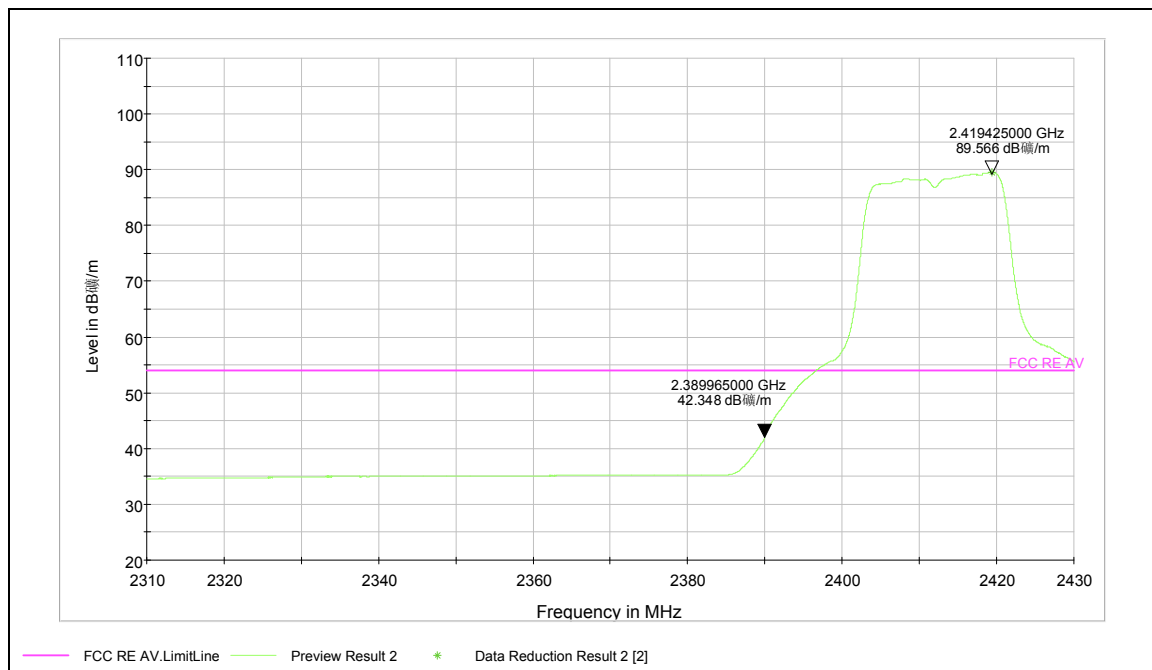

Note: The signal beyond the limit is carrier
Channel 1

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RXA1404-0104RF03

Page 30 of 97


802.11n-Channel 11(HT20):

Peak

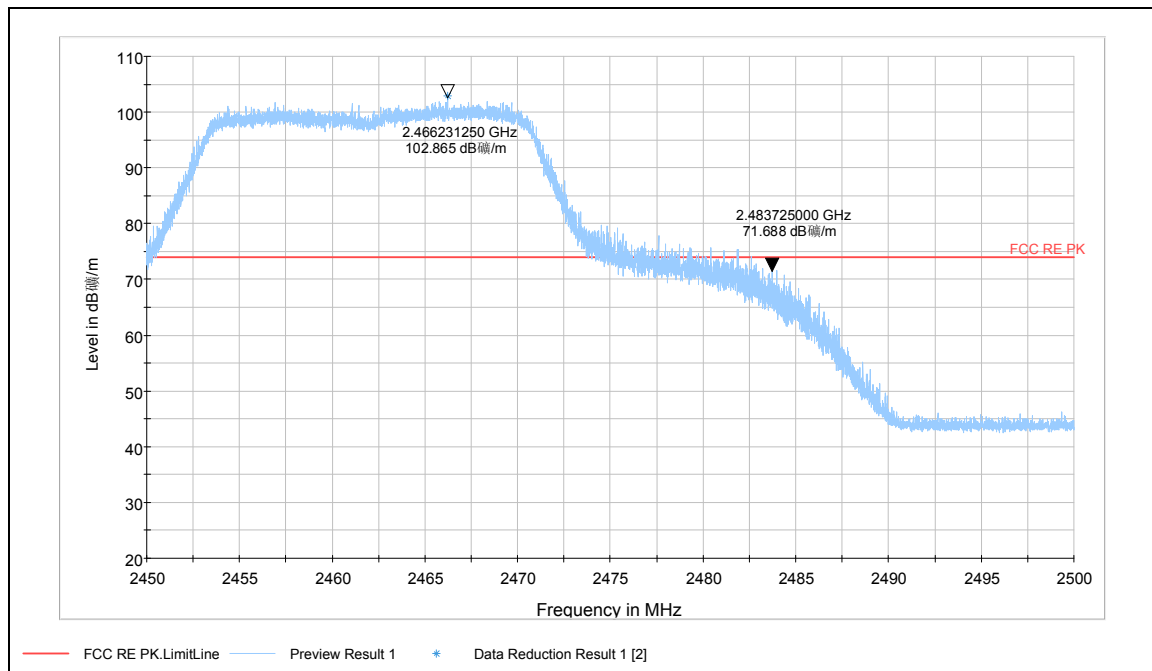

Note: The signal beyond the limit is carrier
Channel 11

Average

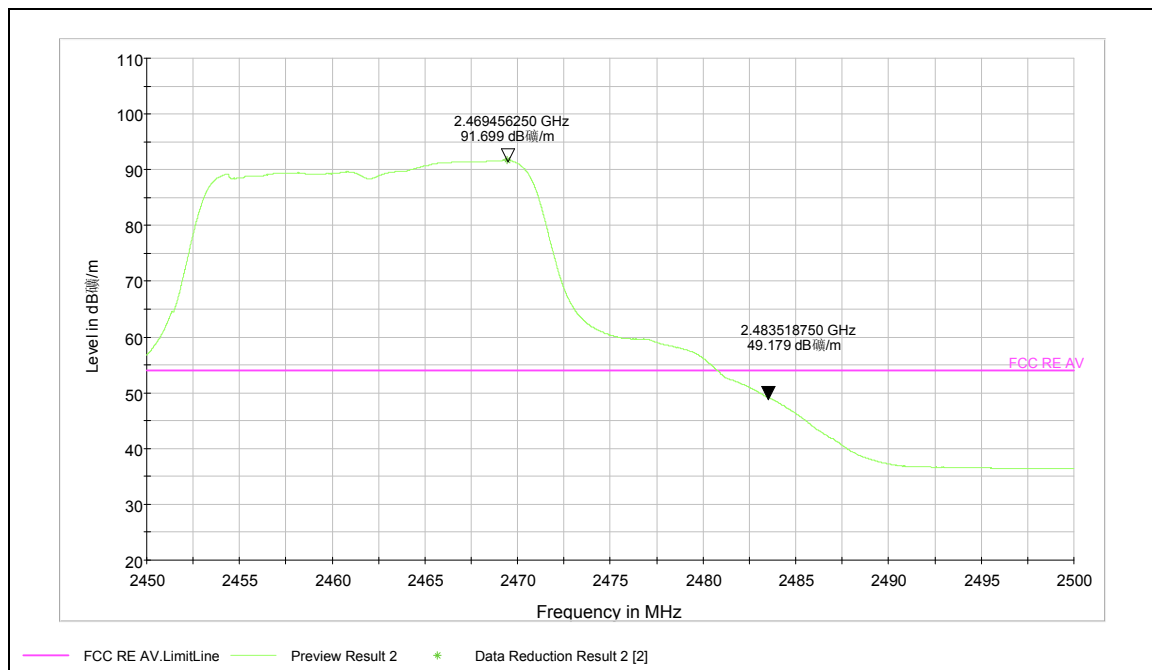

Note: The signal beyond the limit is carrier
Channel 11

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 31 of 97

2.7. Power Spectral Density


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 3 kHz and VBW is set to 10 kHz on spectrum analyzer. Set the span to at least 1.5 times the DTS channel bandwidth. Sweep time = auto couple. Trace mode = max hold. The peak power spectral density is recorded.

Test setup



Limits

Rule Part 15.247(e) specifies that "For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. "

Limits	$\leq 8 \text{ dBm} / 3\text{kHz}$
--------	------------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.

TA Technology (Shanghai) Co., Ltd.

Test Report


Report No.: RXA1404-0104RF03

Page 32 of 97

Test Results:

Network Standards	Channel Number	Power Spectral Density dBm / 3kHz	Conclusion
802.11b	1	-6.046	PASS
	6	-4.467	PASS
	11	-5.420	PASS
802.11g	1	-12.952	PASS
	6	-12.515	PASS
	11	-12.187	PASS
802.11n HT20	1	-15.816	PASS
	6	-14.879	PASS
	11	-15.124	PASS

802.11b

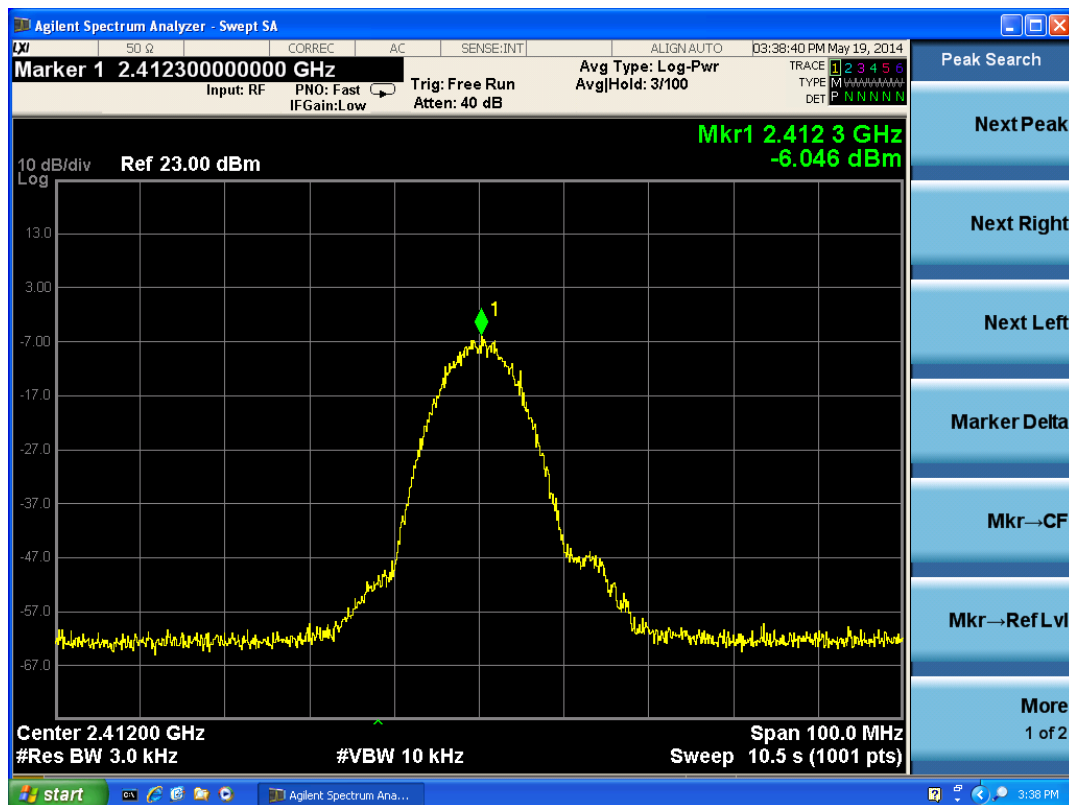


802.11b, Channel No.: 1


TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 33 of 97

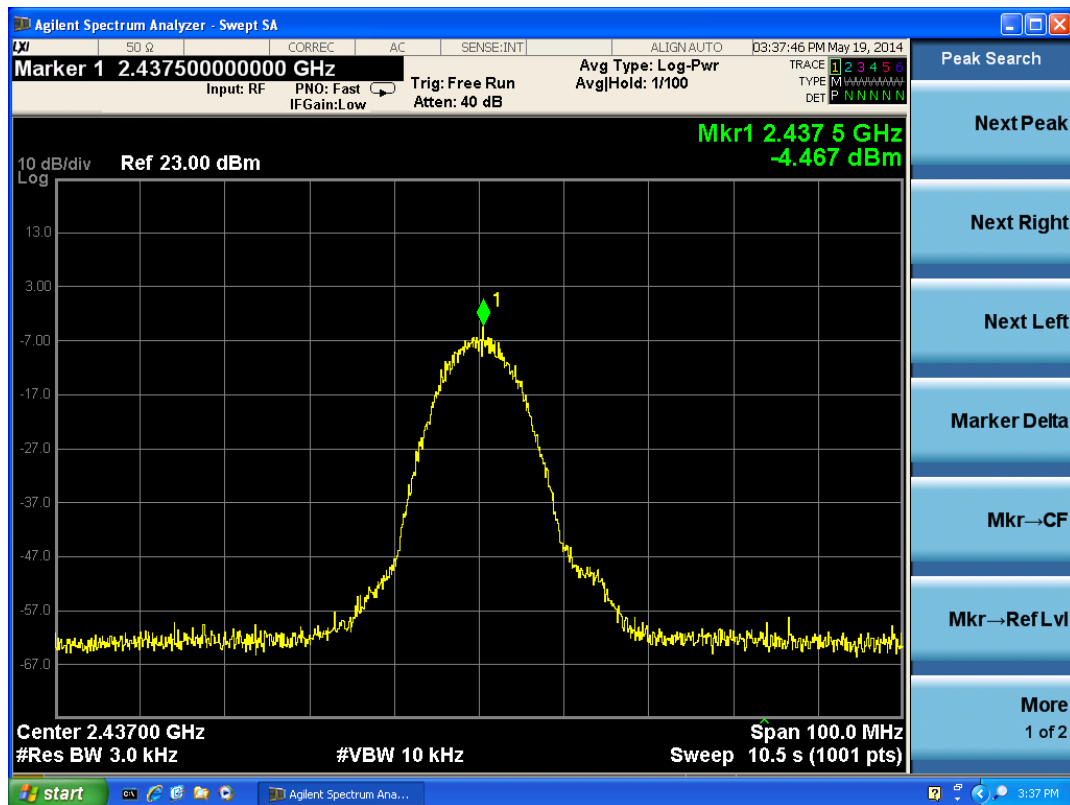

802.11b, Channel No.: 6

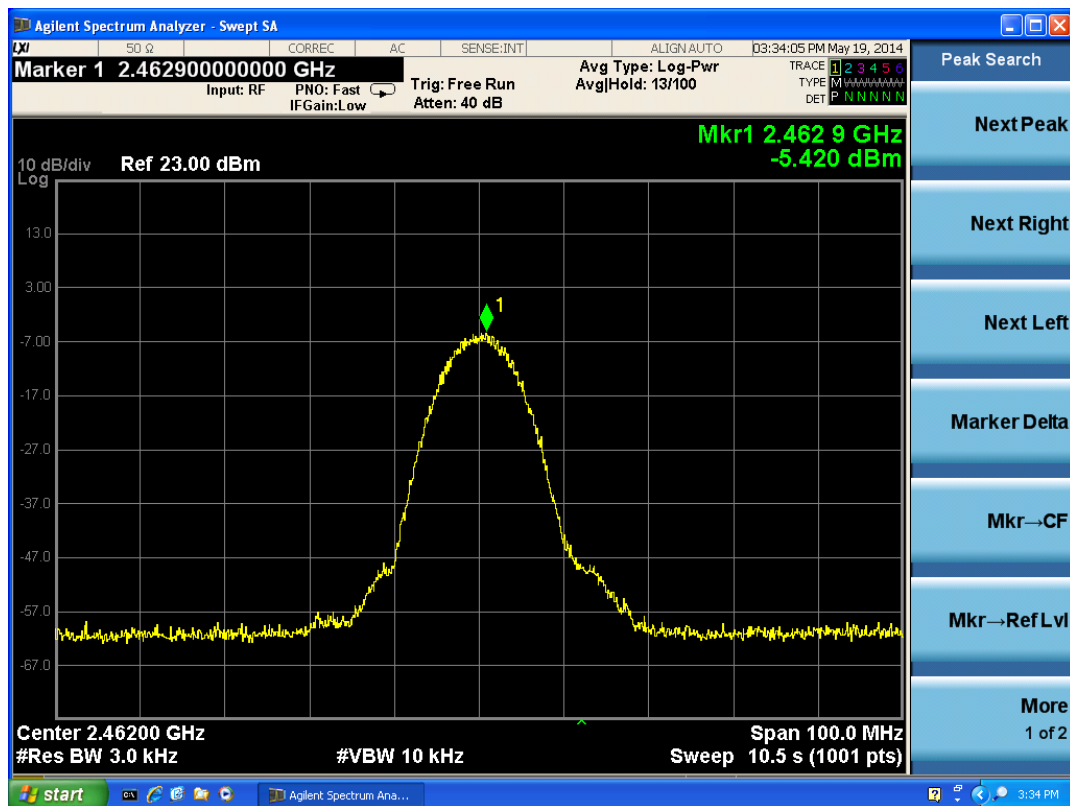


802.11b, Channel No.: 11

TA Technology (Shanghai) Co., Ltd.
Test Report


Report No.: RXA1404-0104RF03

Page 34 of 97

802.11g

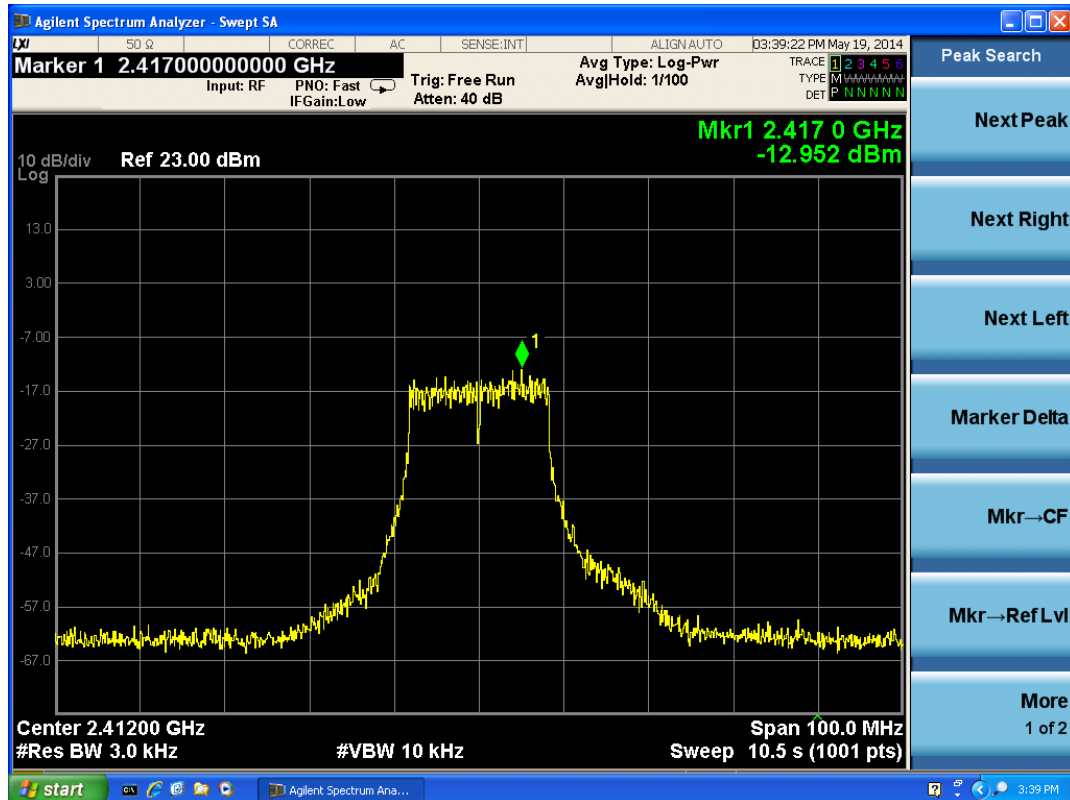

802.11g, Channel No.: 1

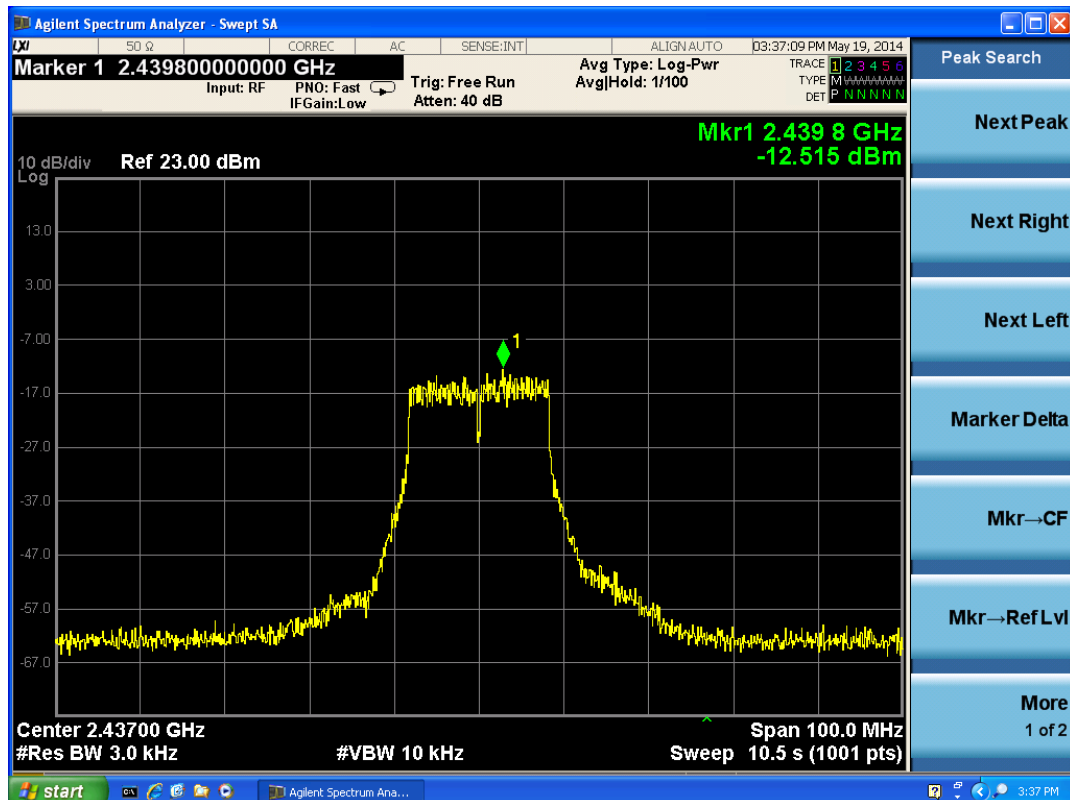


802.11g, Channel No.: 6

TA Technology (Shanghai) Co., Ltd.

Test Report


Report No.: RXA1404-0104RF03

Page 35 of 97

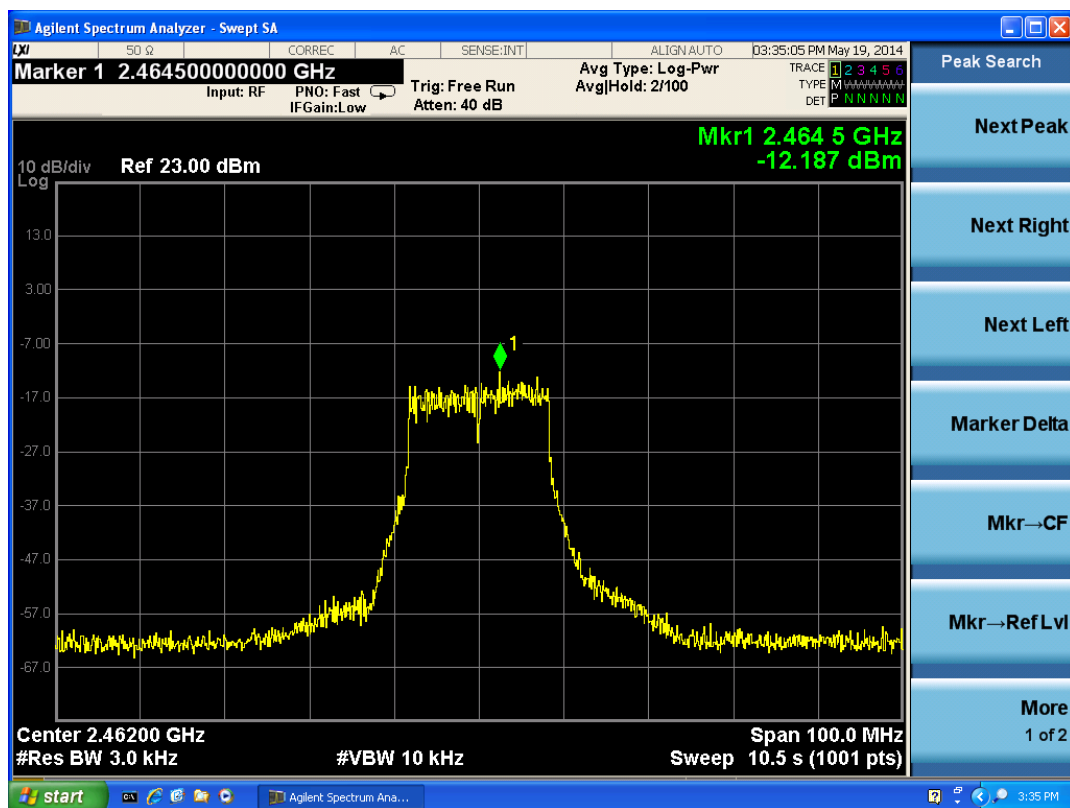

802.11g, Channel No.: 11

802.11n(HT20)

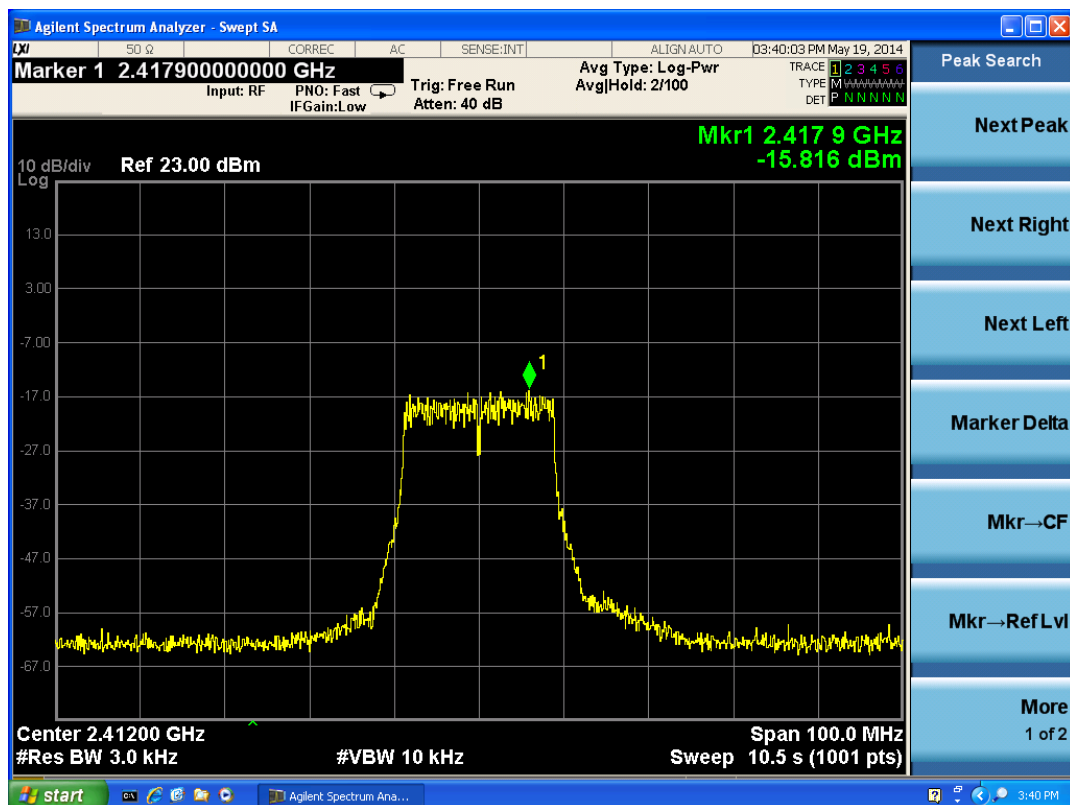


802.11n, Channel No.: 1

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RXA1404-0104RF03

Page 36 of 97

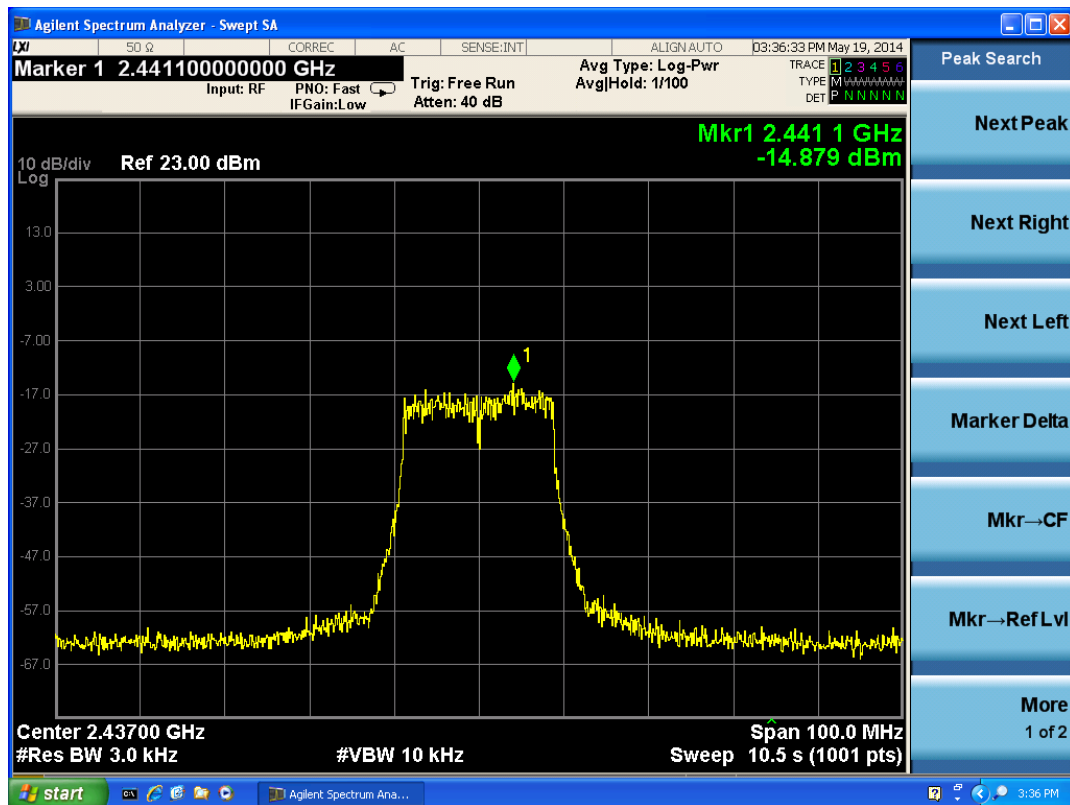

802.11n, Channel No.: 6

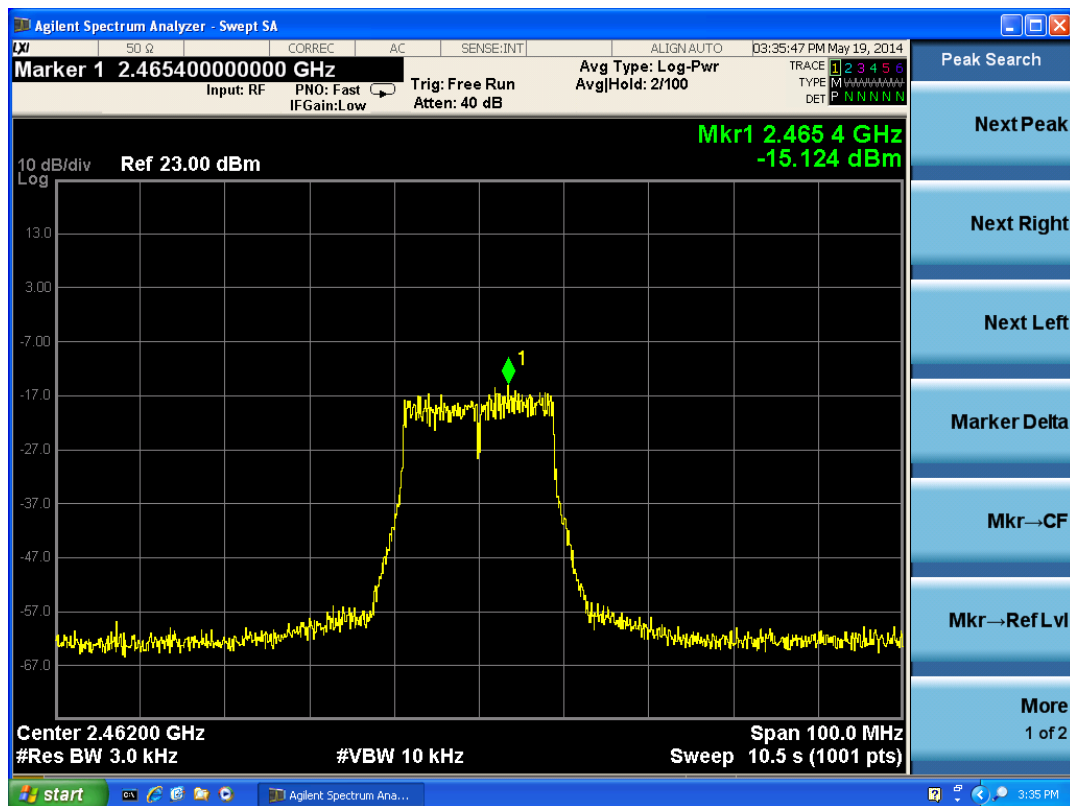

802.11n, Channel No.: 11

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 37 of 97

2.8. Spurious RF Conducted Emissions

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer and WIFI test set via a power splitter with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. RBW and VBW are set to 100 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

Test setup



Limits

Rule Part 15.247(d) specifies that "In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power."

Network Standards	Carrier frequency (MHz)	Reference value (dBm)	Limit
802.11b	2412	18.56	≤ -1.44
	2437	18.77	≤ -1.23
	2462	18.27	≤ -1.73
802.11g	2412	13.92	≤ -6.08
	2437	14.27	≤ -5.73
	2462	13.83	≤ -6.17
802.11n HT20	2412	11.74	≤ -8.26
	2437	12.00	≤ -8.00
	2462	11.75	≤ -8.25

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 38 of 97

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26.5GHz	1.407 dB

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RXA1404-0104RF03

Page 39 of 97


Test Results:

802.11b CH1

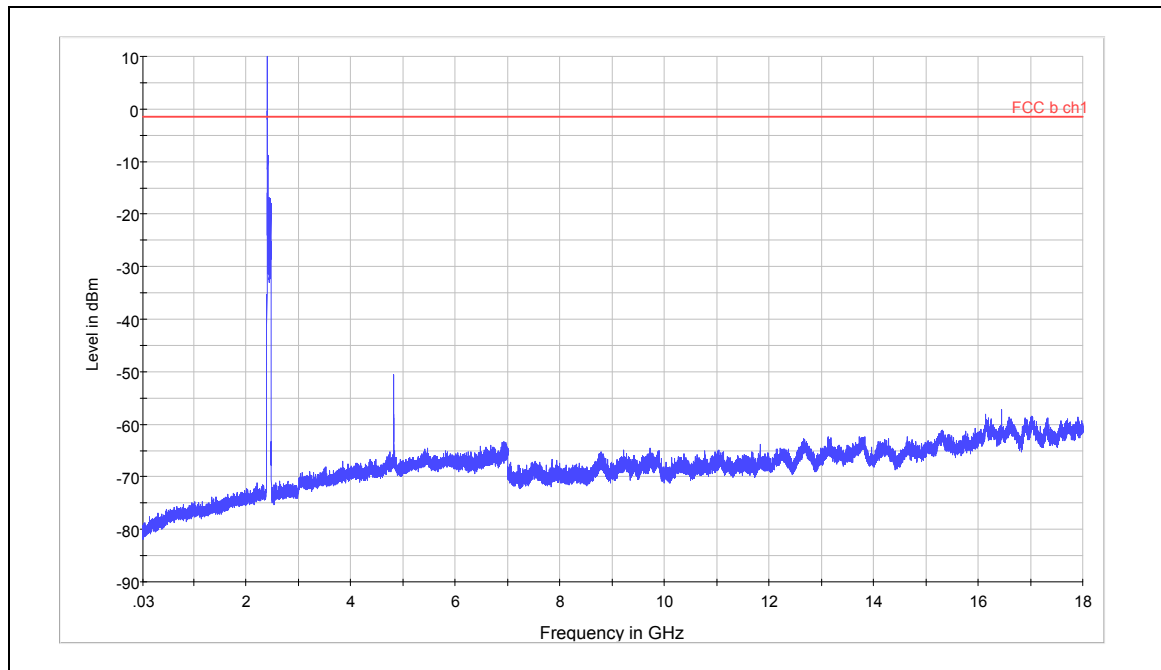

Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

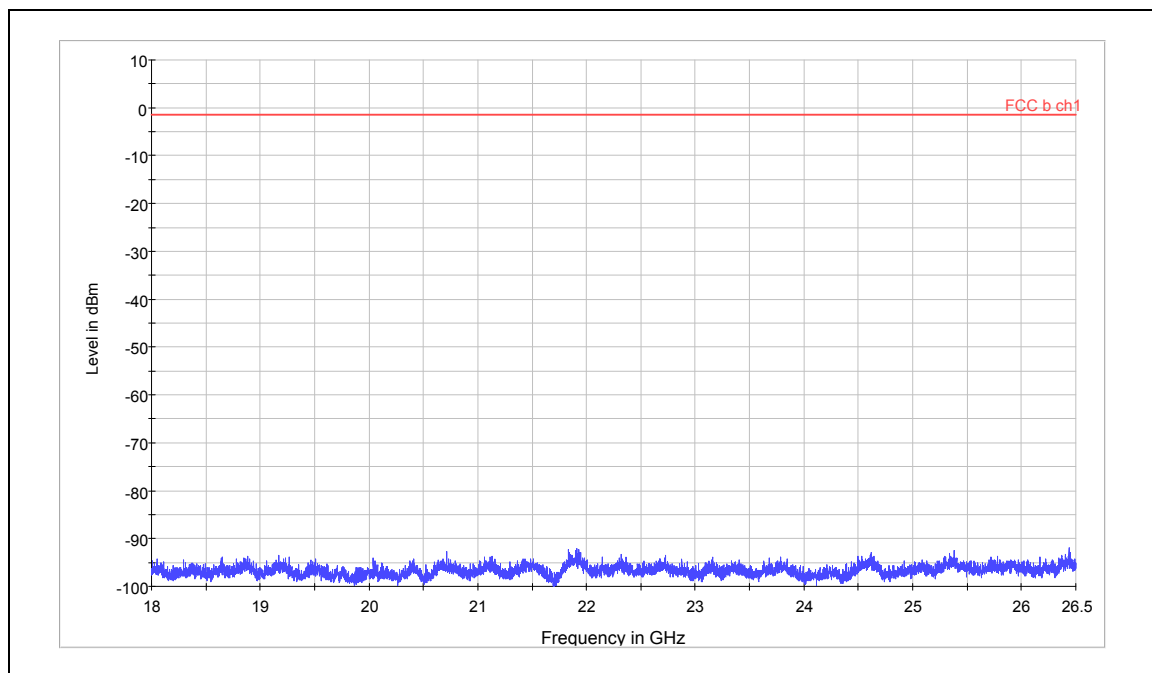

Spurious RF conducted emissions from 18GHz to 26.5GHz


TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03


Page 40 of 97

802.11b CH6

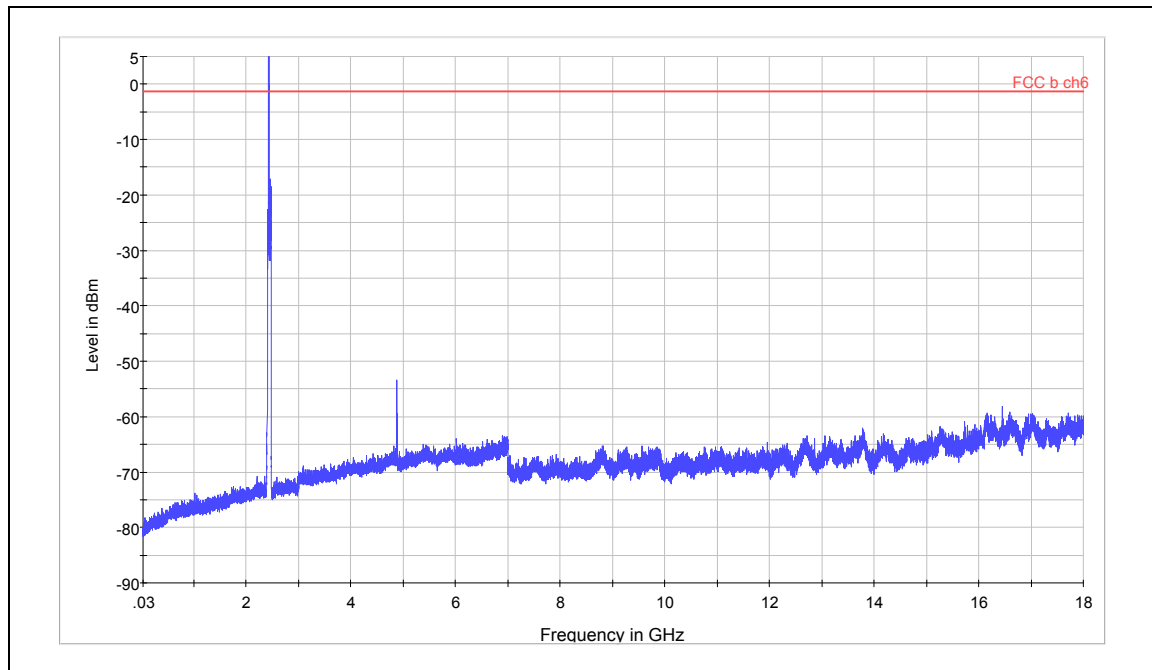

Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

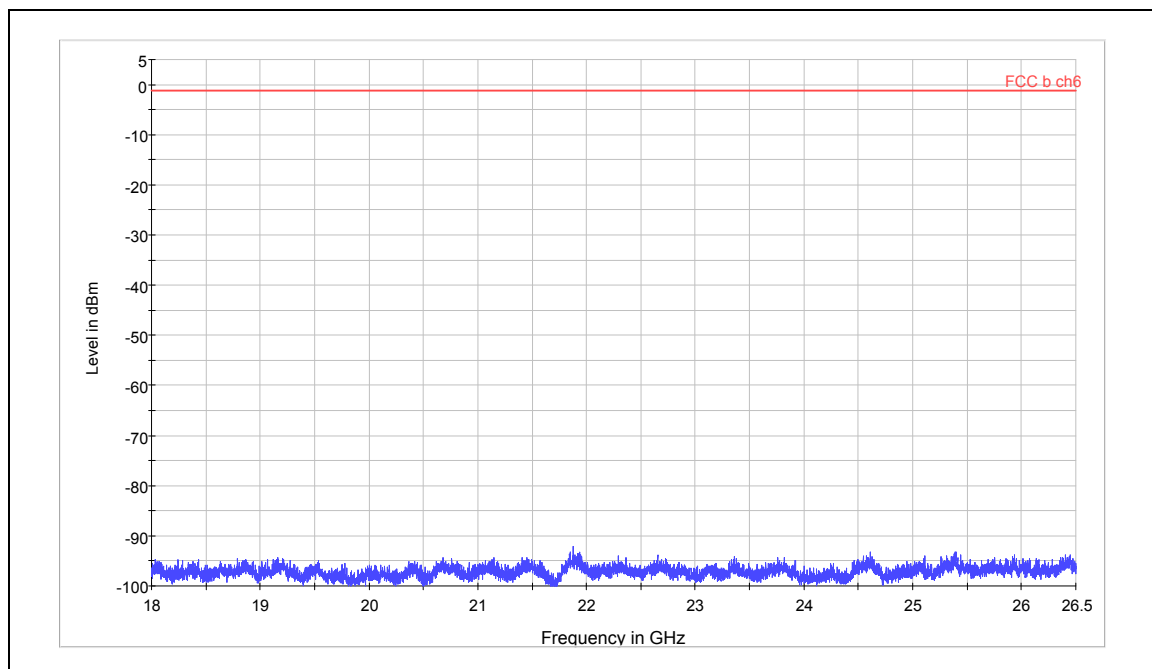


Spurious RF conducted emissions from 18GHz to 26.5GHz

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03


Page 41 of 97

802.11b CH11

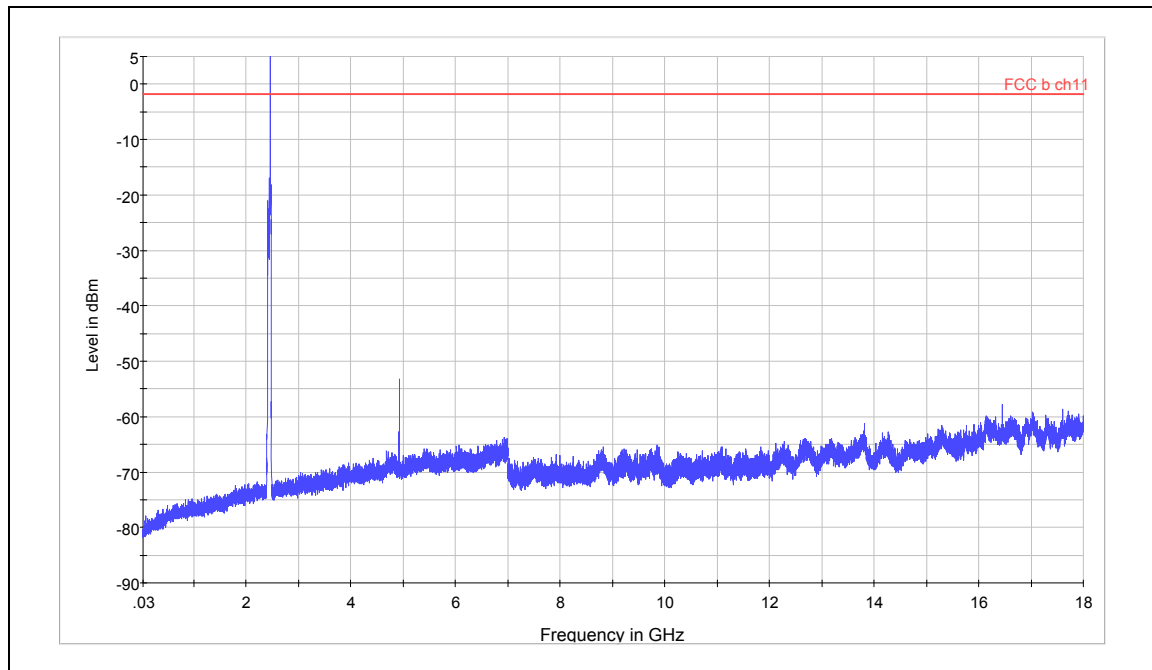

Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

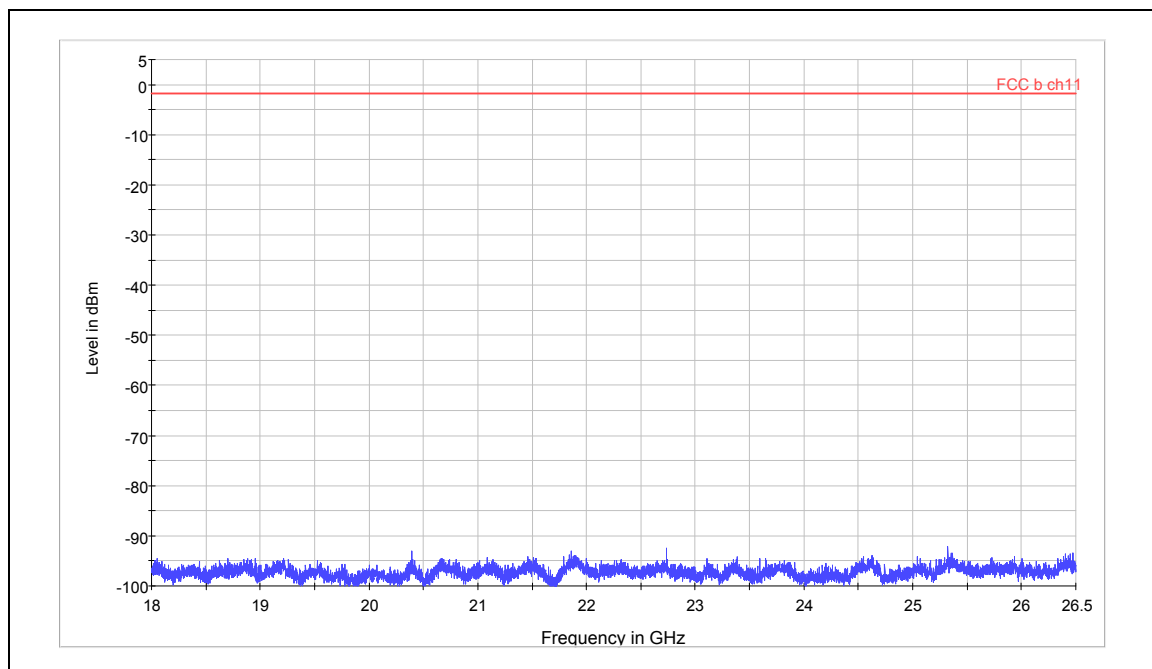

Spurious RF conducted emissions from 18GHz to 26.5GHz


TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03


Page 42 of 97

802.11g CH1

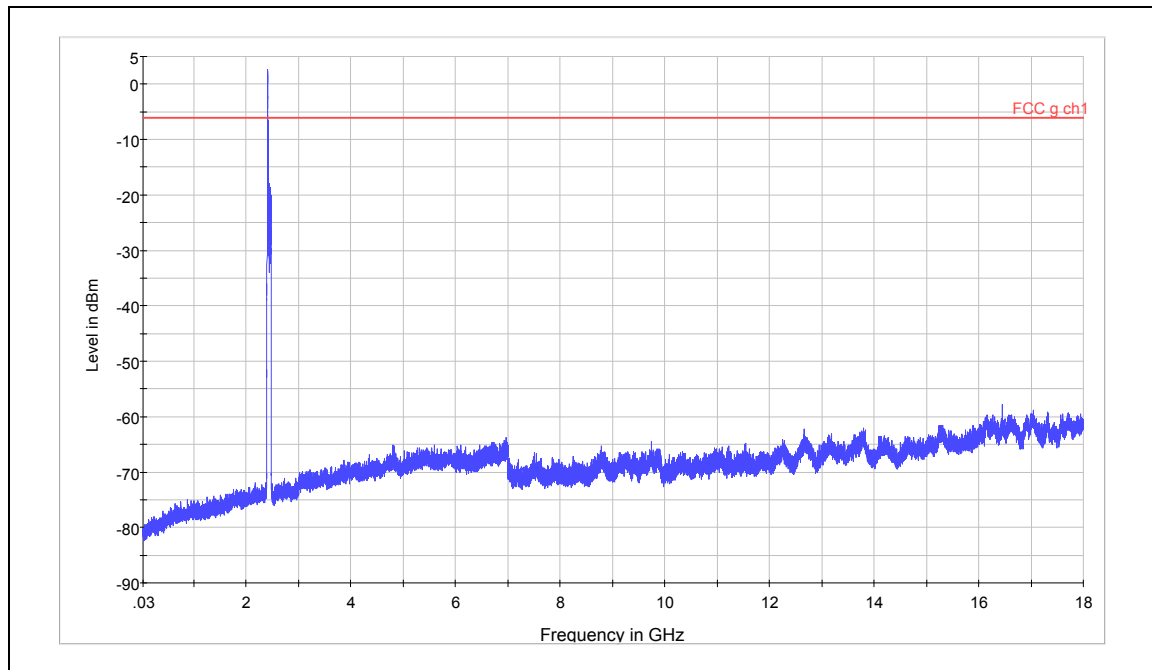

Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

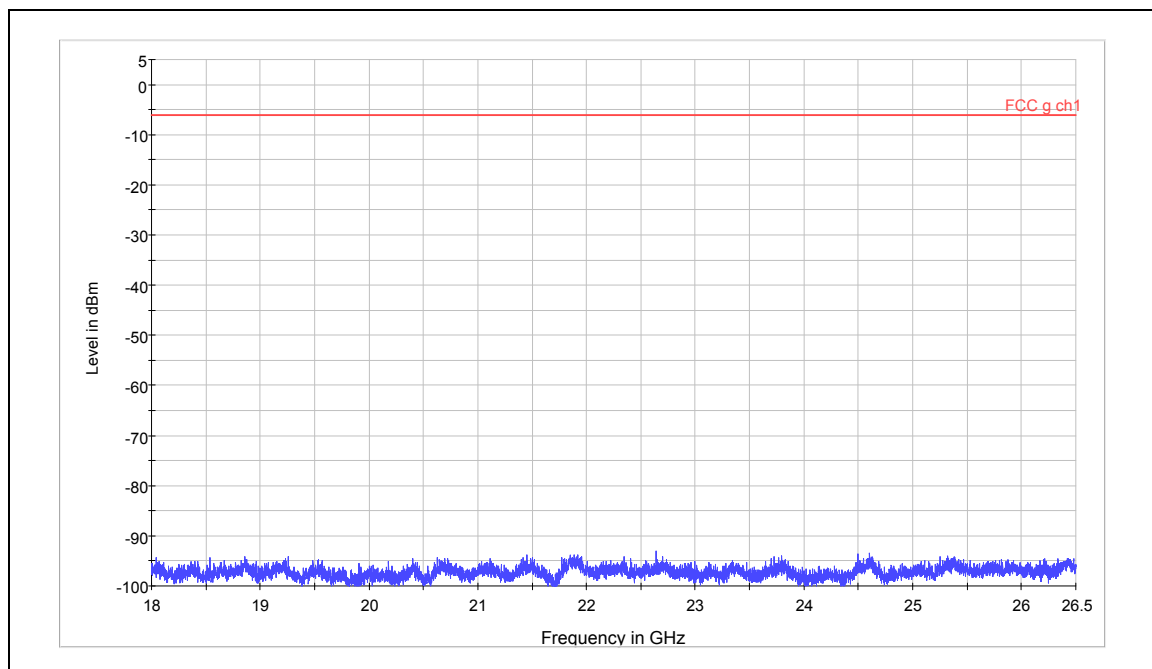

Spurious RF conducted emissions from 18GHz to 26.5GHz


TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03


Page 43 of 97

802.11g CH6

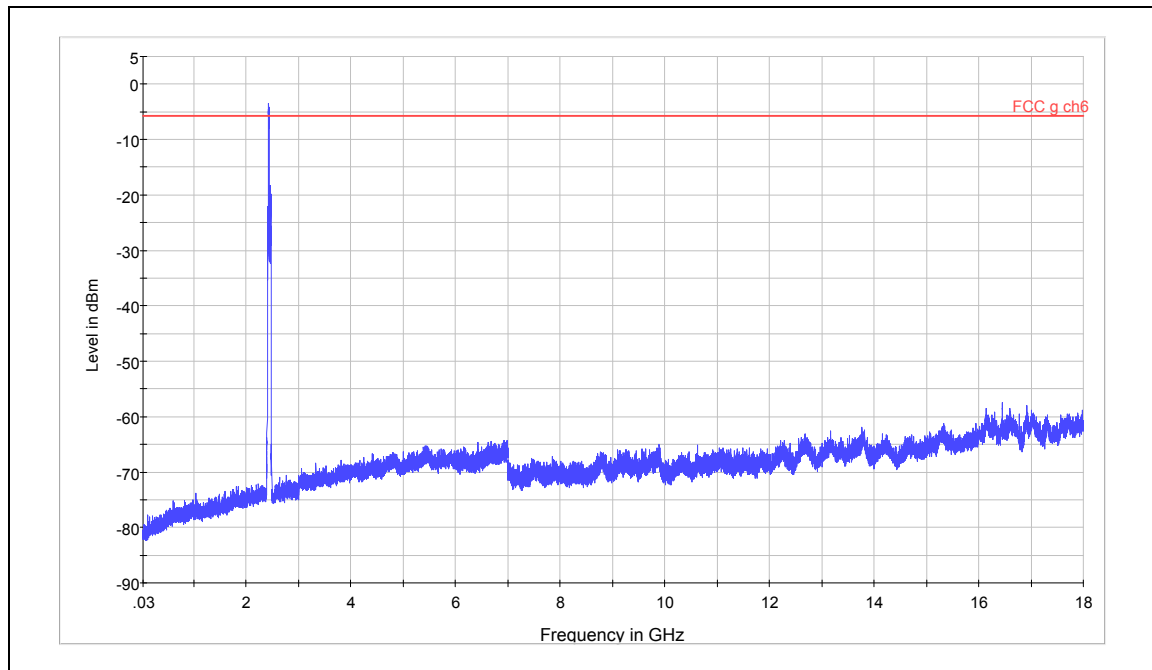

Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

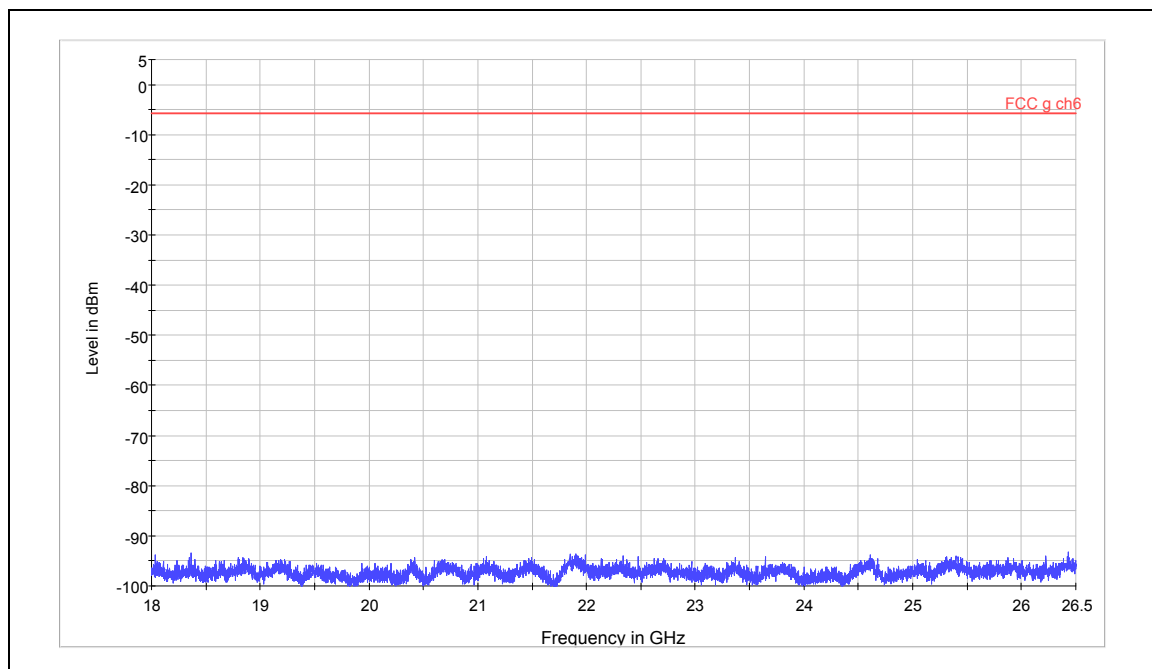

Spurious RF conducted emissions from 18GHz to 26.5GHz


TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03


Page 44 of 97

802.11g CH11

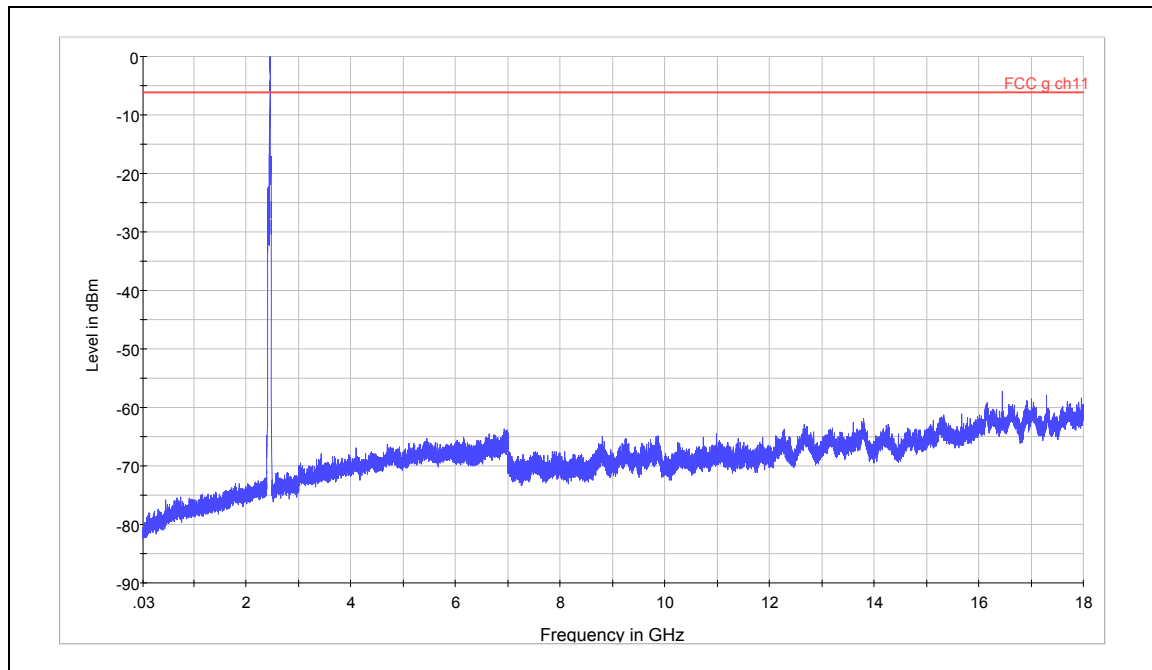

Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

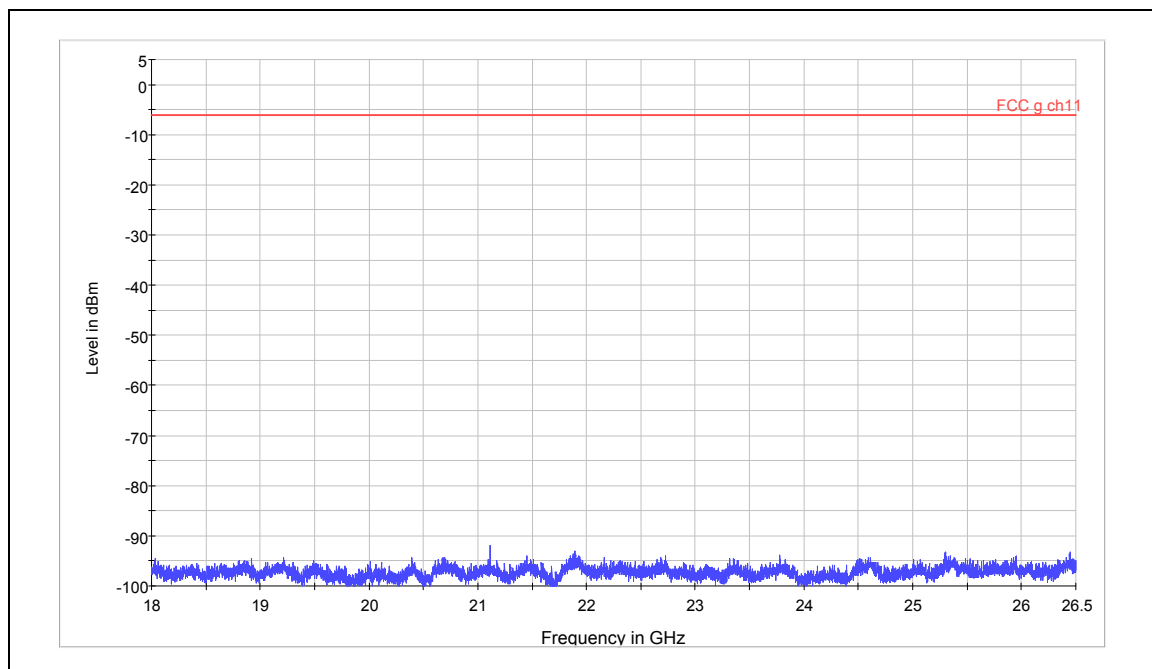

Spurious RF conducted emissions from 18GHz to 26.5GHz


TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03


Page 45 of 97

802.11n(HT20) CH1

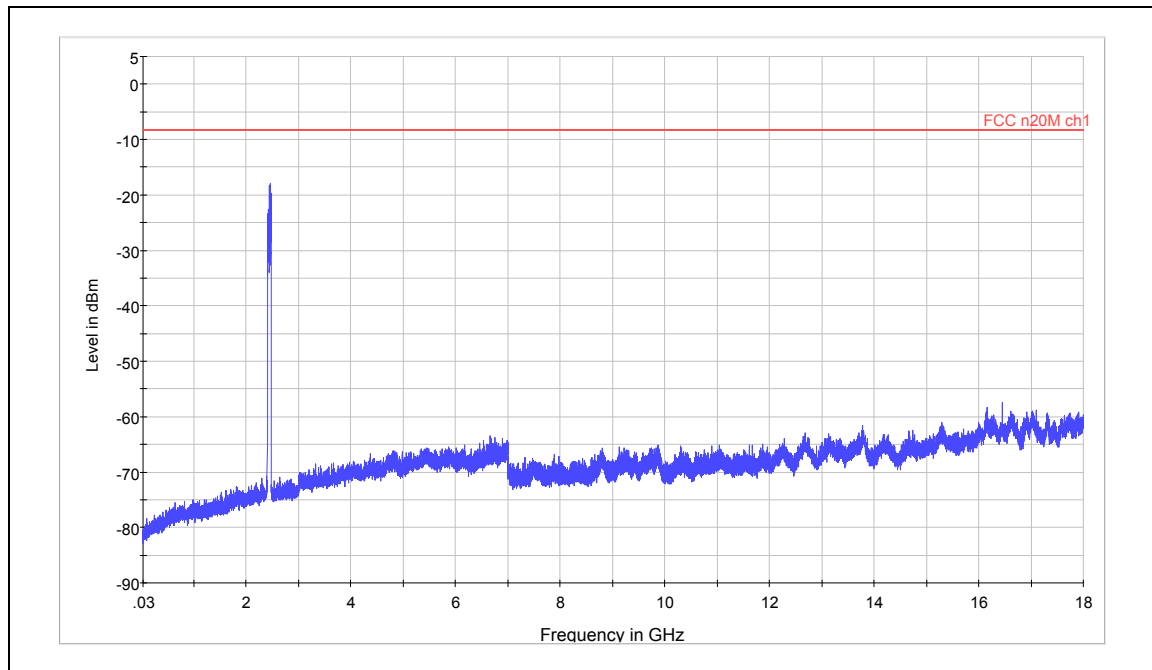

Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

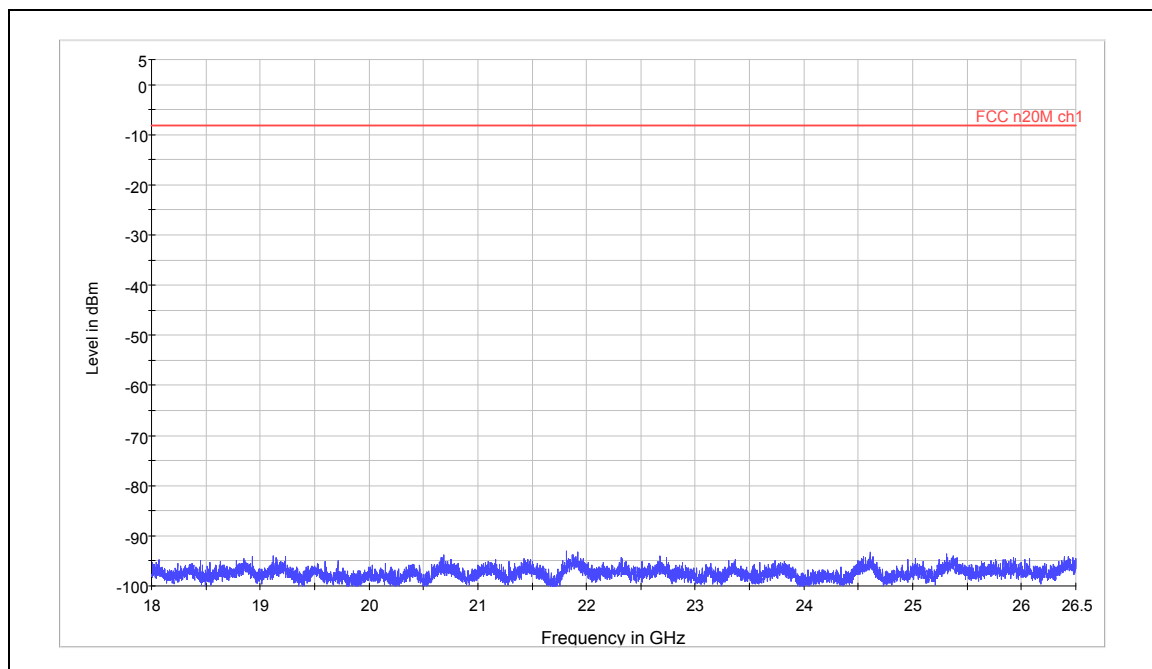

Spurious RF conducted emissions from 18GHz to 26.5GHz


TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03


Page 46 of 97

802.11n(HT20) CH6

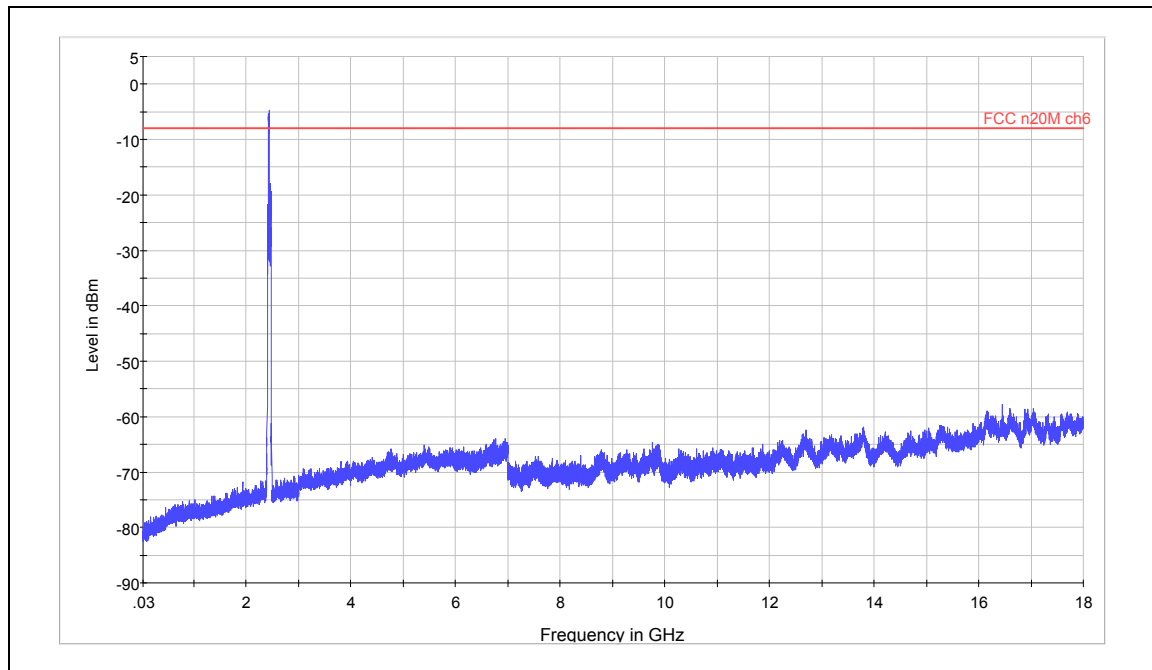

Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

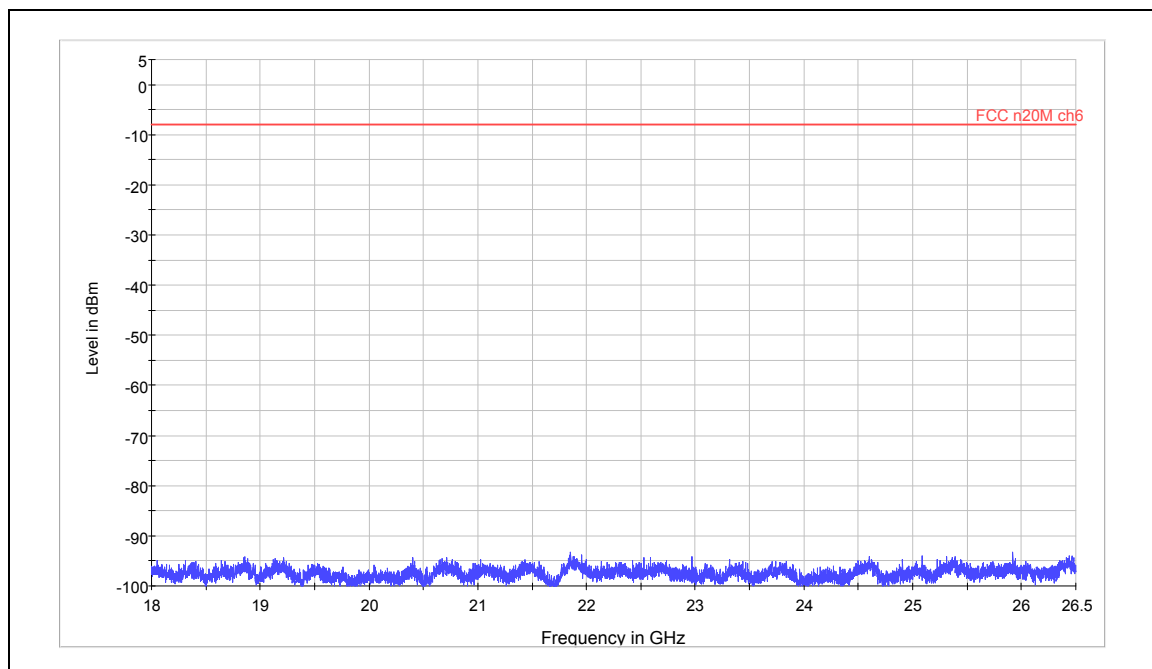


Spurious RF conducted emissions from 18GHz to 26.5GHz

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03


Page 47 of 97

802.11n(HT20) CH11

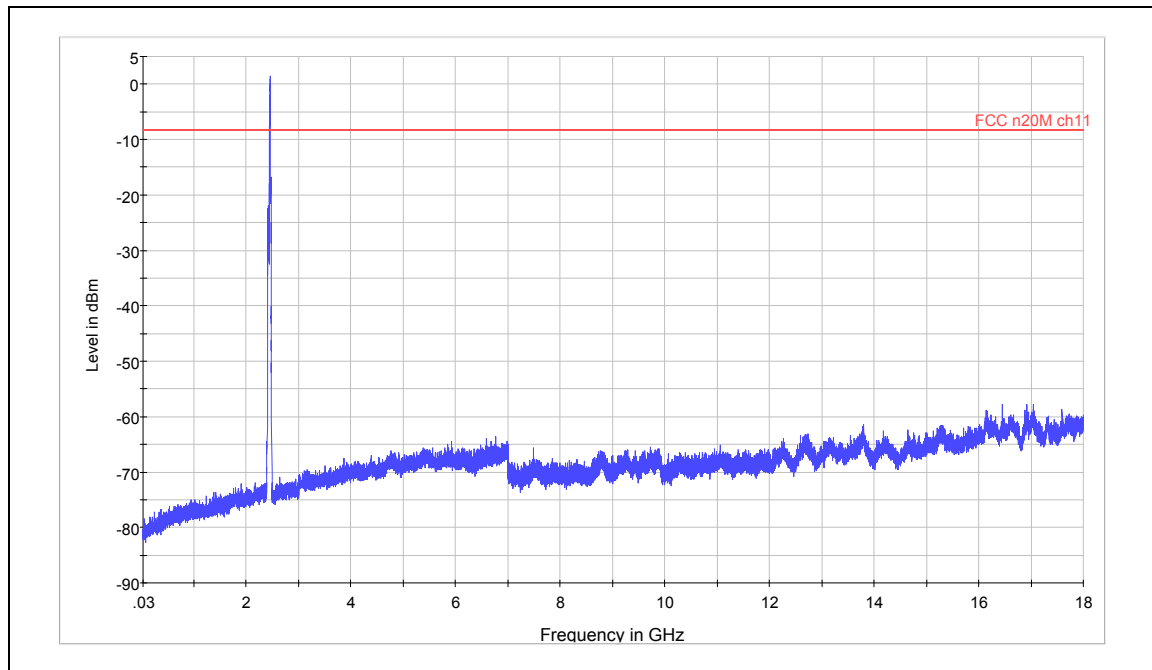

Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

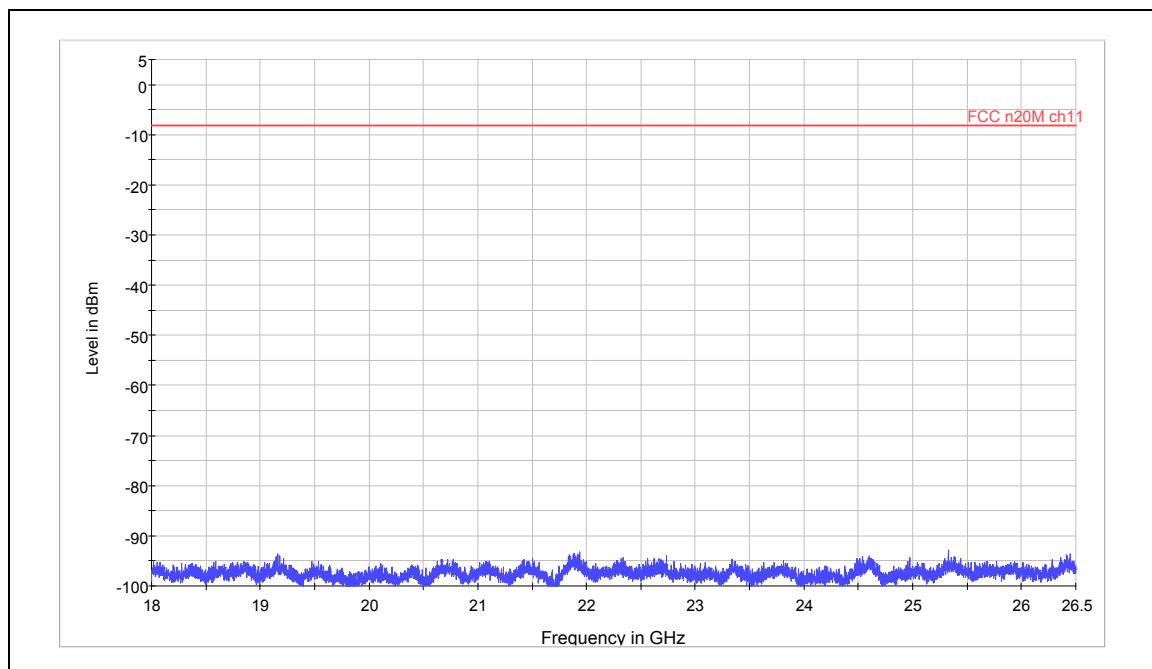

Spurious RF conducted emissions from 18GHz to 26.5GHz

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 48 of 97

2.9. Radiates Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.4-2009. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration. Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz(detector: Peak):

(a) PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

The test is in transmitting mode.


TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03


Page 49 of 97

Test setup


9KHz~~~ 30MHz

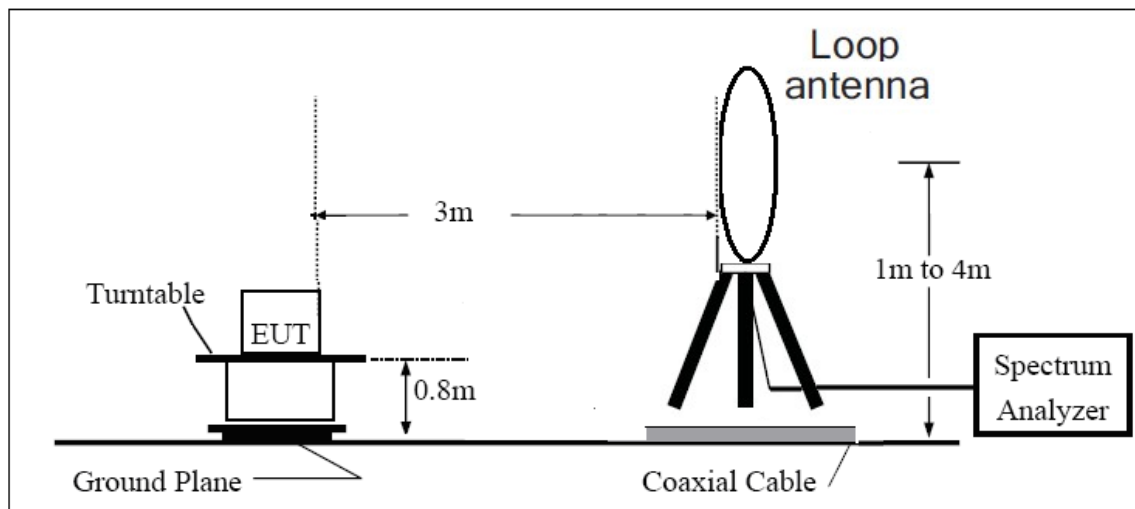

30MHz~~~ 1GHz

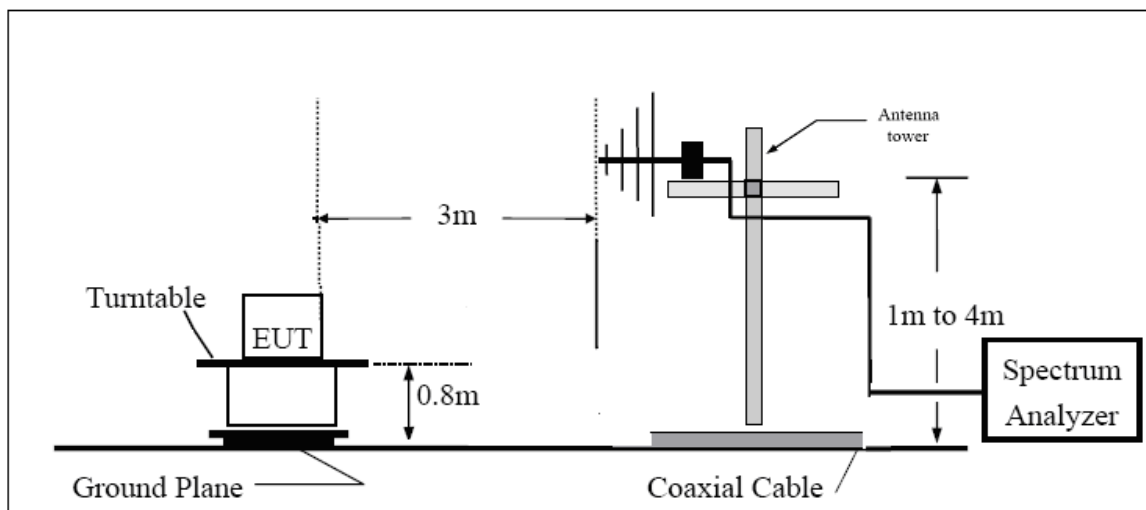

Above 1GHz

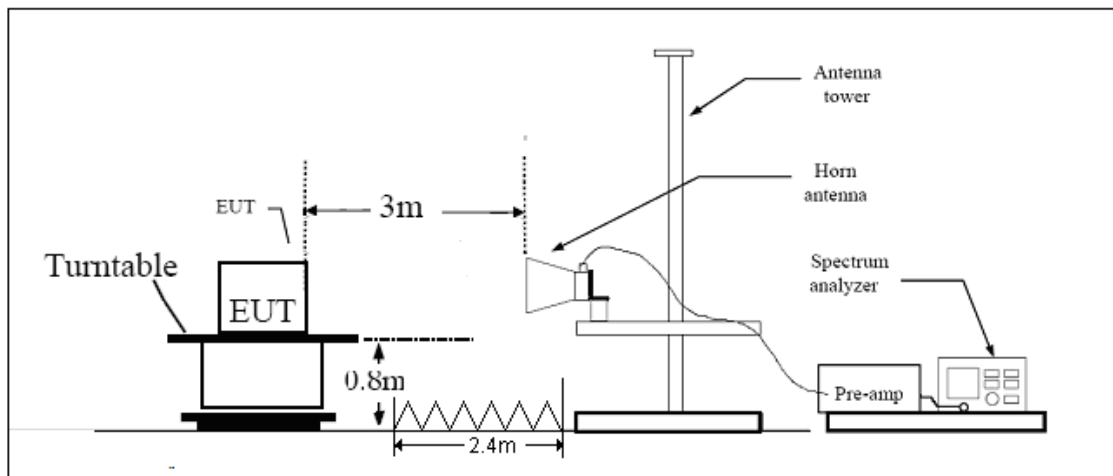

Note: Area side: 2.4mX3.6m

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 50 of 97

Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.19 dB
200MHz-1GHz	3.63 dB
Above 1GHz	3.68 dB

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RXA1404-0104RF03

Page 51 of 97

Test result

802.11b CH1

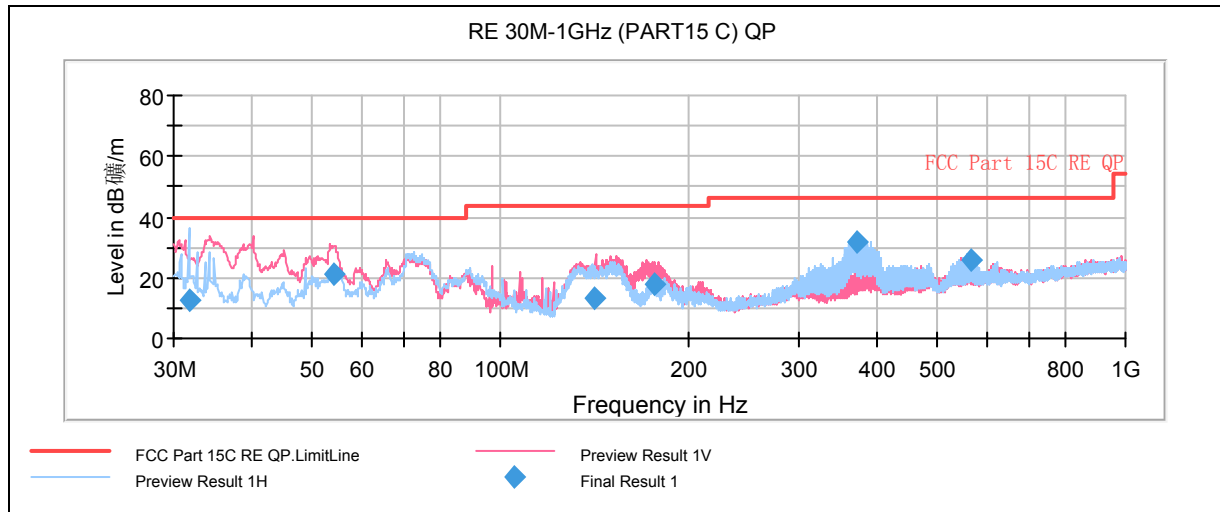

Note: a font (Level in dBμV/m) in the test plot =(level in dBμV/m)

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBμV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBμV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBμV/m)
31.758750	12.7	208.0	H	128.0	30.5	-17.8	27.3	40.0
54.268750	21.2	100.0	V	151.0	43.7	-22.5	18.8	40.0
141.253750	13.5	100.0	V	285.0	42.7	-29.2	30.0	43.5
176.335000	18.2	100.0	V	101.0	45.8	-27.6	25.3	43.5
371.217500	31.4	100.0	H	259.0	52.7	-21.3	14.6	46.0
566.390000	25.6	196.0	H	0.0	42.5	-16.9	20.4	46.0

Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)


3. Margin = Limit – Quasi-Peak

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 52 of 97

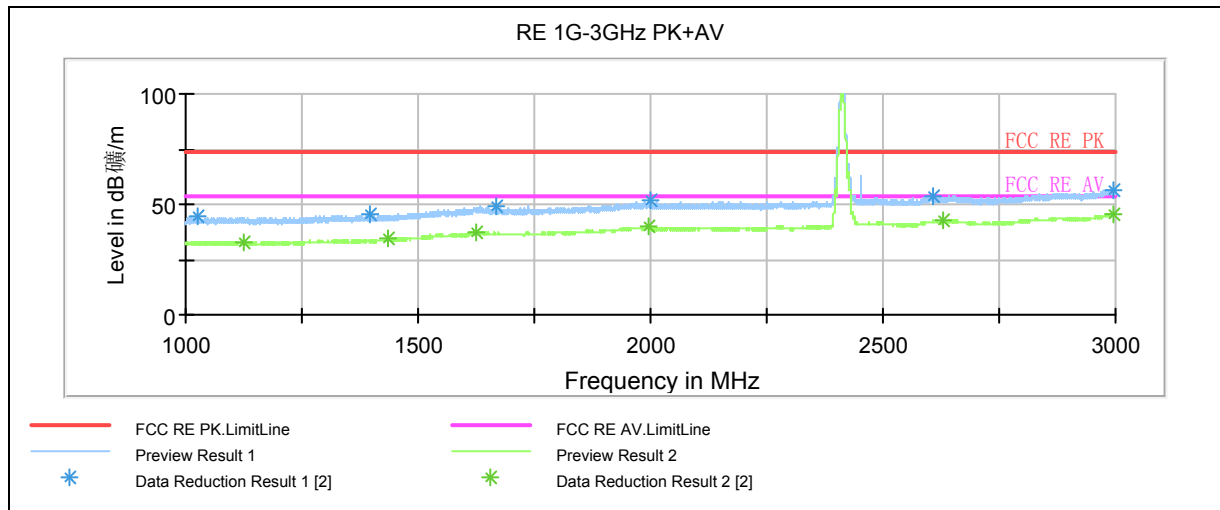

Note: a font (Level in dB 磁/m) in the test plot =(level in dBuV/m)

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1024.500000	44.6	100.0	V	185.0	54.6	-10.0	29.4	74
1395.250000	45.3	100.0	V	155.0	53.7	-8.4	28.7	74
1666.750000	49.2	100.0	V	0.0	54.9	-5.7	24.8	74
1998.250000	51.5	100.0	V	0.0	54.5	-3.0	22.5	74
2607.250000	53.5	100.0	V	0.0	53.8	-0.3	20.5	74
2996.750000	56.4	100.0	H	183.0	55	1.4	17.6	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1123.250000	33.0	100.0	H	138.0	42.7	-9.7	21	54
1435.250000	34.2	100.0	H	0.0	42.2	-8.0	19.8	54
1624.750000	37.4	100.0	V	341.0	42.5	-5.1	16.6	54
1995.000000	39.9	100.0	H	56.0	42.8	-2.9	14.1	54
2630.500000	42.3	100.0	H	190.0	42.8	-0.5	11.7	54
2995.250000	45.8	100.0	V	0.0	44.4	1.4	8.2	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 53 of 97

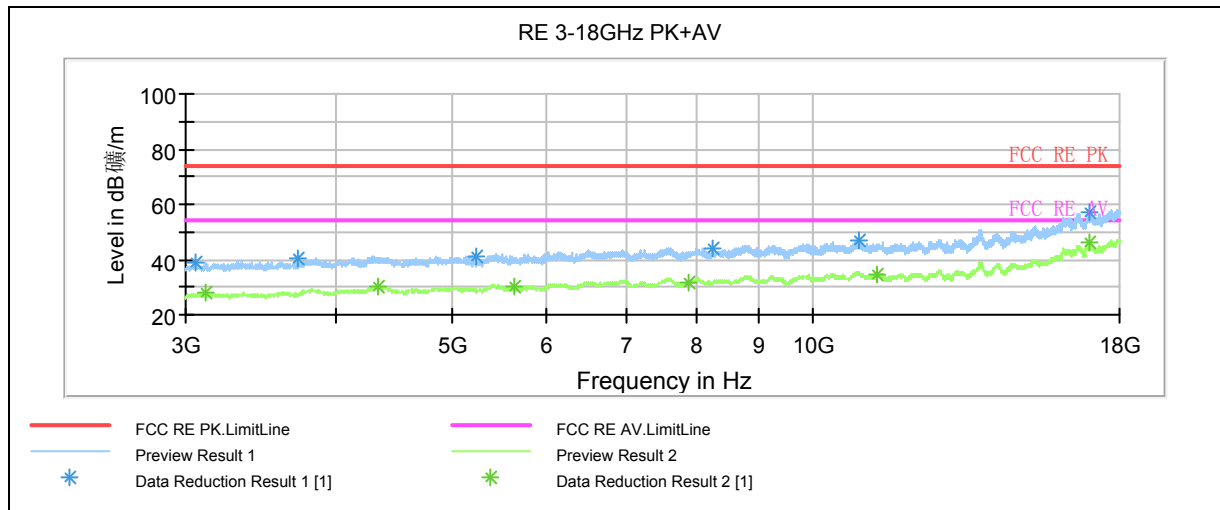

Note: a font (Level in dB 磁/m) in the test plot =(level in dBuV/m)

Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3056.250000	39.0	100.0	H	0.0	40.2	-1.2	35	74
3718.125000	40.0	100.0	V	0.0	38.4	1.6	34	74
5236.875000	41.4	100.0	H	114.0	34.1	7.3	32.6	74
8255.625000	43.7	100.0	V	0.0	32.4	11.3	30.3	74
10901.250000	46.8	100.0	H	0.0	24.9	21.9	27.2	74
17008.125000	57.0	100.0	H	206.0	58.2	-1.2	17	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3116.250000	27.8	100.0	H	252.0	30.3	-2.5	26.2	54
4342.500000	30.3	100.0	V	157.0	28.8	1.5	23.7	54
5641.875000	30.3	100.0	H	206.0	27.7	2.6	23.7	54
7871.250000	31.7	100.0	H	280.0	25.3	6.4	22.3	54
11317.500000	34.5	100.0	H	60.0	24	10.5	19.5	54
17011.875000	46.0	100.0	H	0.0	24.1	21.9	8	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 54of 97

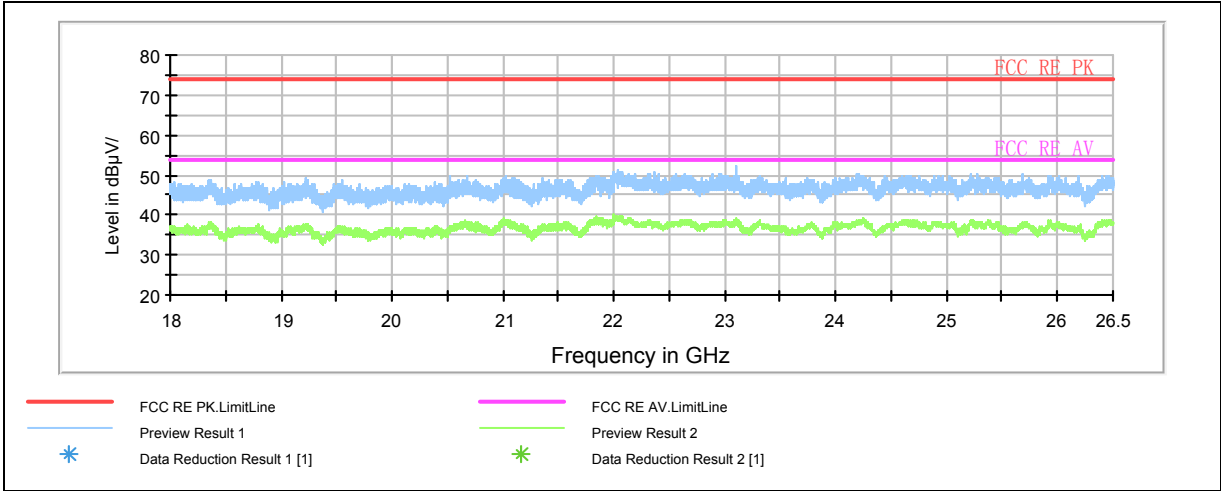

Note: a font (Level in dBuV/m)in the test plot =(level in dBuV/m)
Radiates Emission from 18GHz to 26.5GHz


TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 55 of 97

802.11b CH6

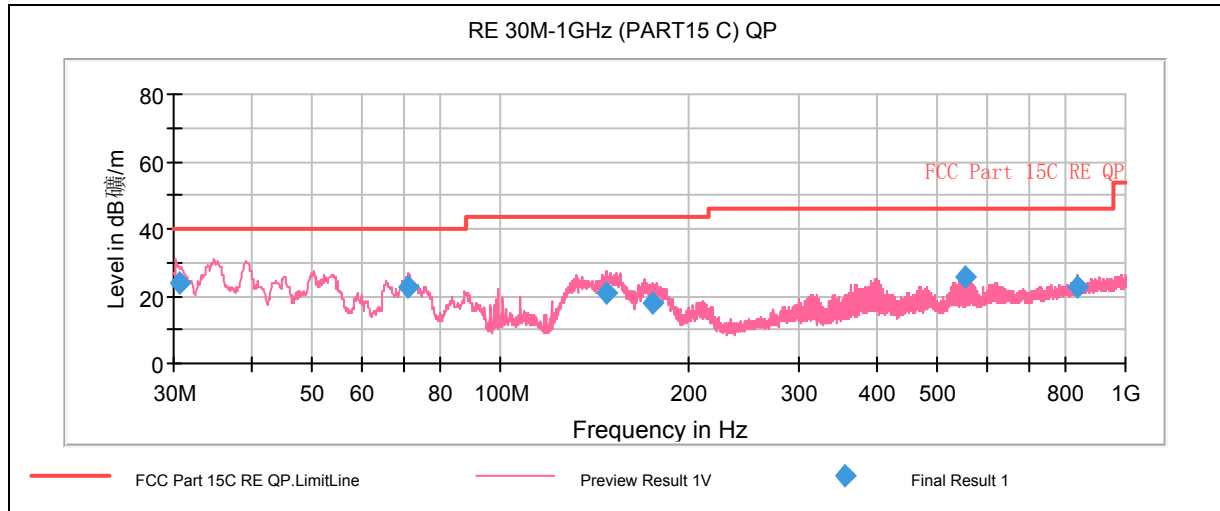

Note: a font (Level in dB μ V/m) in the test plot =(level in dB μ V/m)

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dB μ V/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dB μ V/m)	Correct Factor (dB)	Margin (dB)	Limit (dB μ V/m)
30.780000	24.1	174.0	V	246.0	41.5	-17.4	15.9	40.0
71.165000	22.5	222.0	V	0.0	50.3	-27.8	17.5	40.0
148.313750	21.1	100.0	V	80.0	50.3	-29.2	22.4	43.5
175.436250	17.9	100.0	V	111.0	45.6	-27.7	25.6	43.5
552.001250	26.0	100.0	V	41.0	43	-17.0	20.0	46.0
838.596250	22.8	100.0	V	211.0	35.6	-12.8	23.2	46.0

Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)


3. Margin = Limit – Quasi-Peak

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 56 of 97

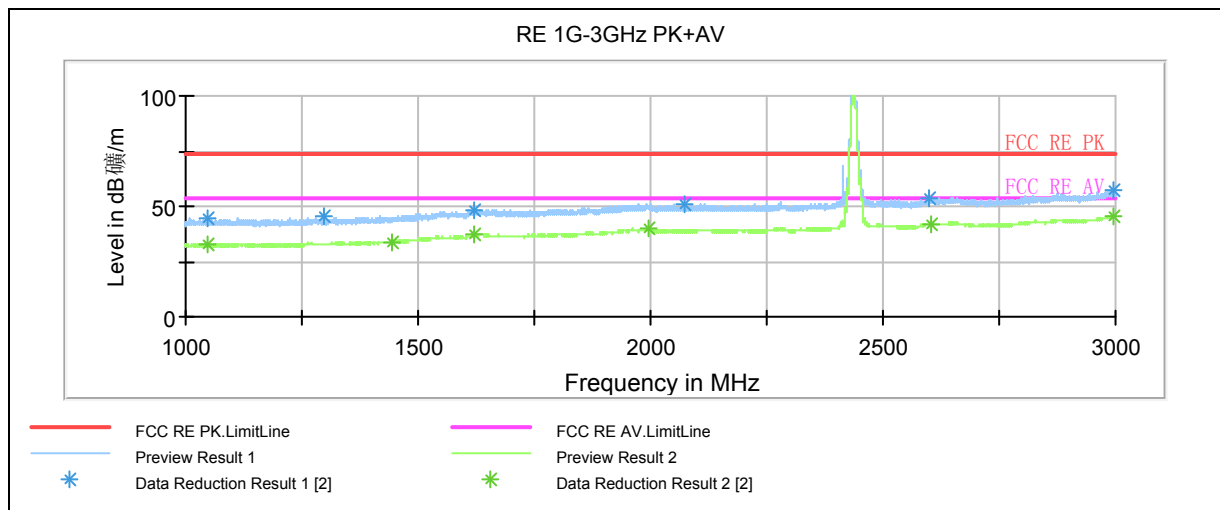

Note: a font (Level in dB 磁/m) in the test plot =(level in dBuV/m)

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1046.750000	44.6	100.0	V	167.0	54.5	-9.9	29.4	74
1299.000000	45.1	100.0	H	183.0	54.4	-9.3	28.9	74
1621.250000	48.5	100.0	V	294.0	53.6	-5.1	25.5	74
2074.000000	50.9	100.0	V	144.0	53.9	-3.0	23.1	74
2597.500000	53.4	100.0	V	199.0	53.6	-0.2	20.6	74
2994.250000	57.2	100.0	H	107.0	55.8	1.4	16.8	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1049.000000	32.9	100.0	V	309.0	42.8	-9.9	21.1	54
1442.000000	34.0	100.0	H	15.0	41.9	-7.9	20	54
1620.000000	37.5	100.0	V	266.0	42.7	-5.2	16.5	54
1996.000000	39.8	100.0	V	251.0	42.7	-2.9	14.2	54
2604.500000	42.2	100.0	H	85.0	42.4	-0.2	11.8	54
2997.500000	45.6	100.0	H	63.0	44.2	1.4	8.4	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 57 of 97

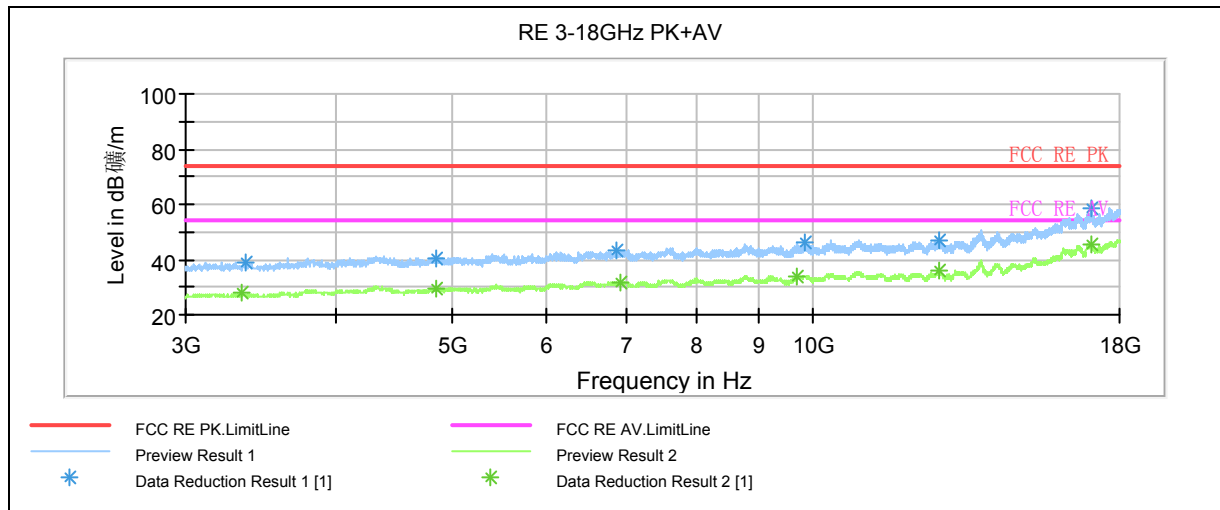

Note: a font (Level in dB 磁/m) in the test plot =(level in dBuV/m)
Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3363.750000	39.1	100.0	V	260.0	41.1	-2.0	34.9	74
4850.625000	40.6	100.0	H	205.0	38.6	2.0	33.4	74
6849.375000	43.1	100.0	H	15.0	38.6	4.5	30.9	74
9841.875000	46.5	100.0	H	15.0	36.7	9.8	27.5	74
12750.000000	47.1	100.0	V	260.0	34.5	12.6	26.9	74
17040.000000	58.2	100.0	V	323.0	36.6	21.6	15.8	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3339.375000	27.7	100.0	V	224.0	29.9	-2.2	26.3	54
4850.625000	29.6	100.0	H	205.0	27.6	2.0	24.4	54
6898.125000	31.9	100.0	V	151.0	27.3	4.6	22.1	54
9678.750000	33.8	100.0	H	0.0	25	8.8	20.2	54
12748.125000	35.7	100.0	H	0.0	23.1	12.6	18.3	54
17038.125000	45.8	100.0	H	6.0	24.2	21.6	8.2	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 58of 97

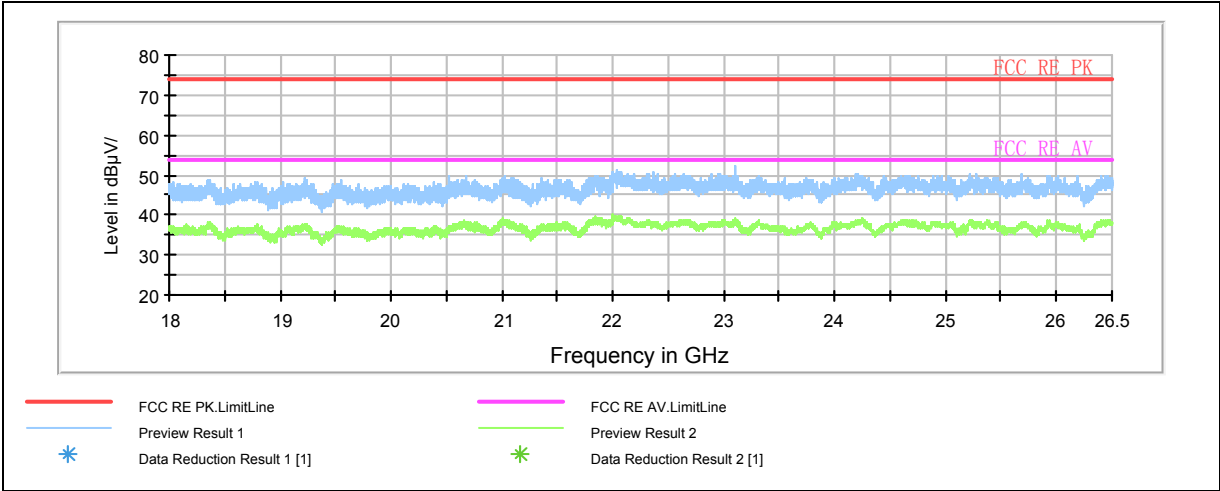

Note: a font (Level in dBμV/m)in the test plot =(level in dBuv/m)
Radiates Emission from 18GHz to 26.5GHz


TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 59 of 97

802.11b CH11

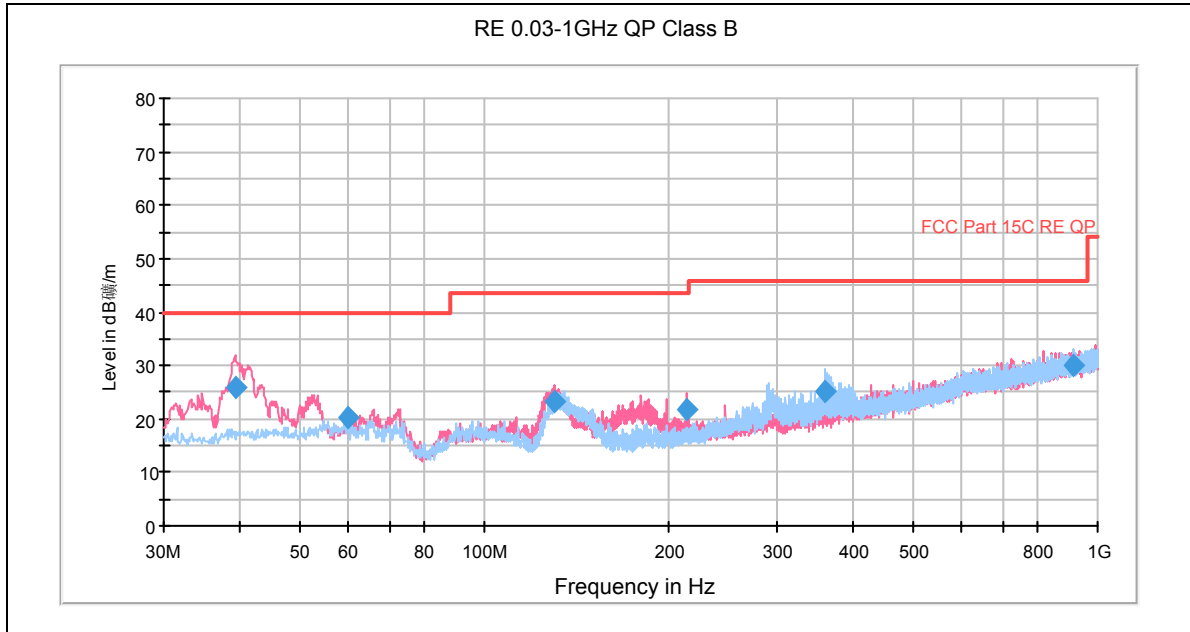

Note: a font (Level in dB μ V/m) in the test plot =(level in dB μ V/m)
Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dB μ V/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dB μ V/m)	Correct Factor (dB)	Margin (dB)	Limit (dB μ V/m)
39.215000	25.8	100.0	V	281.0	12.8	13.0	14.2	40.0
59.827500	20.3	100.0	H	43.0	7.8	12.5	19.7	40.0
130.152500	23.3	100.0	V	353.0	14	9.3	20.2	43.5
214.421250	21.7	100.0	V	0.0	9.1	12.6	21.8	43.5
358.345000	25.3	100.0	H	72.0	8.5	16.8	20.7	46.0
911.851250	30.2	100.0	H	122.0	4.5	25.7	15.8	46.0

Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)


3. Margin = Limit – Quasi-Peak

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 60 of 97

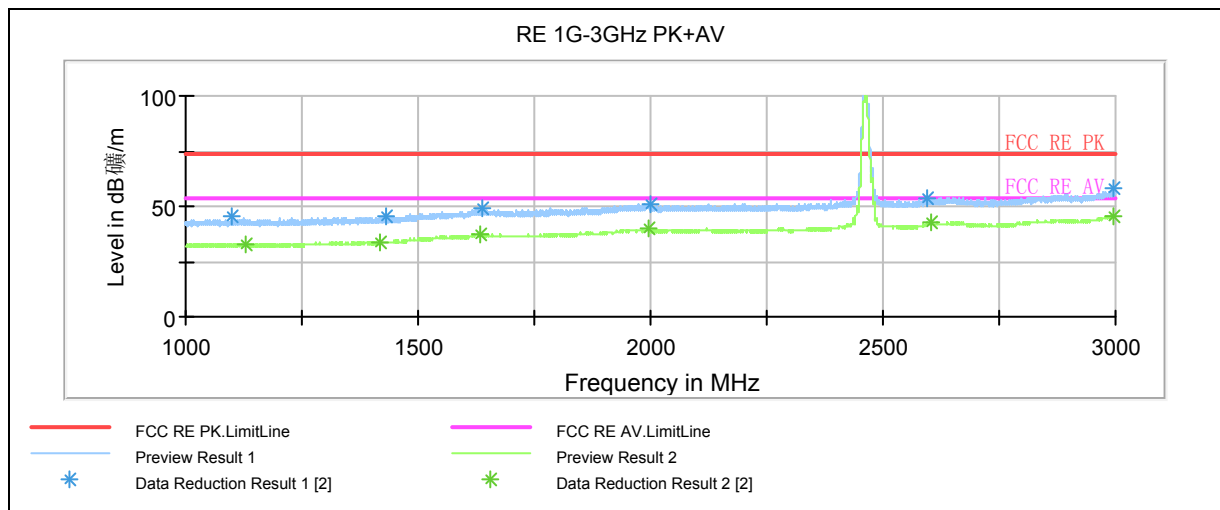

Note: a font (Level in dB 磁/m) in the test plot =(level in dBuV/m)

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1097.500000	45.1	100.0	V	313.0	55.1	-10.0	28.9	74
1432.250000	45.1	100.0	H	36.0	53.2	-8.1	28.9	74
1636.000000	49.2	100.0	H	80.0	54.3	-5.1	24.8	74
1998.250000	51.1	100.0	H	5.0	54.1	-3.0	22.9	74
2596.000000	53.8	100.0	H	5.0	54.1	-0.3	20.2	74
2994.750000	57.8	100.0	H	12.0	56.4	1.4	16.2	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1127.250000	33.1	100.0	H	51.0	42.7	-9.6	20.9	54
1419.500000	34.0	100.0	H	43.0	42.1	-8.1	20	54
1632.000000	37.5	100.0	V	179.0	42.6	-5.1	16.5	54
1996.000000	39.7	100.0	V	216.0	42.6	-2.9	14.3	54
2603.750000	42.3	100.0	H	0.0	42.5	-0.2	11.7	54
2996.500000	45.7	100.0	H	5.0	44.3	1.4	8.3	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 61 of 97

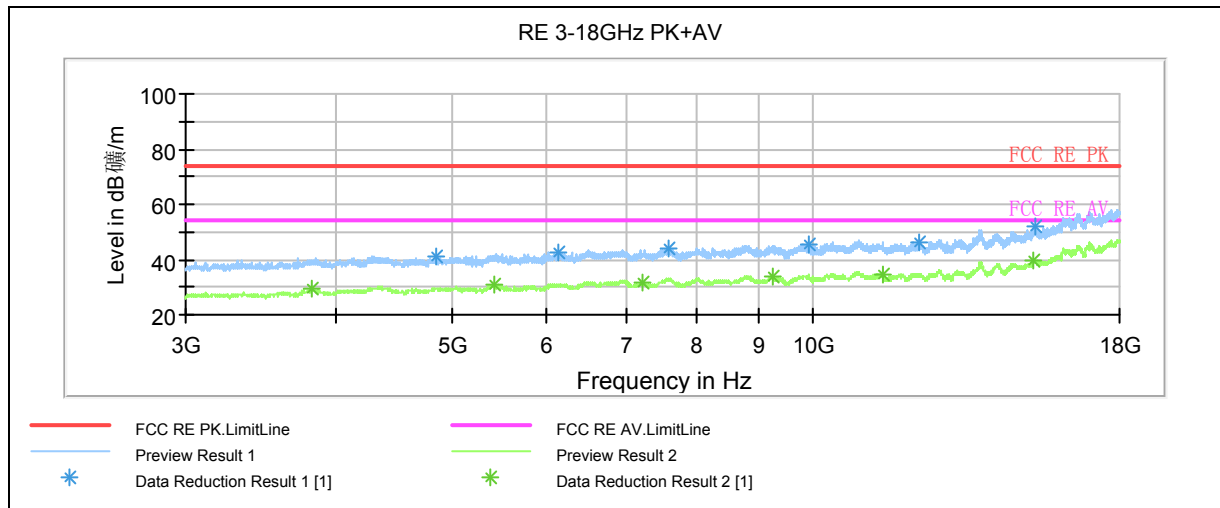

Note: a font (Level in dB 磁/m) in the test plot =(level in dBuV/m)
Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4843.125000	40.9	100.0	H	160.0	38.9	2.0	33.1	74
6133.125000	42.8	100.0	H	242.0	39	3.8	31.2	74
7573.125000	43.8	100.0	H	0.0	37	6.8	30.2	74
9900.000000	45.5	100.0	V	281.0	35.7	9.8	28.5	74
12258.750000	46.0	100.0	V	175.0	34.8	11.2	28	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3823.125000	29.3	100.0	H	351.0	29.4	-0.1	24.7	54
5428.125000	30.6	100.0	V	317.0	27.8	2.8	23.4	54
7211.250000	31.9	100.0	V	193.0	26	5.9	22.1	54
9245.625000	34.0	100.0	V	281.0	25.2	8.8	20	54
11415.000000	34.8	100.0	V	281.0	24.9	9.9	19.2	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 62of 97

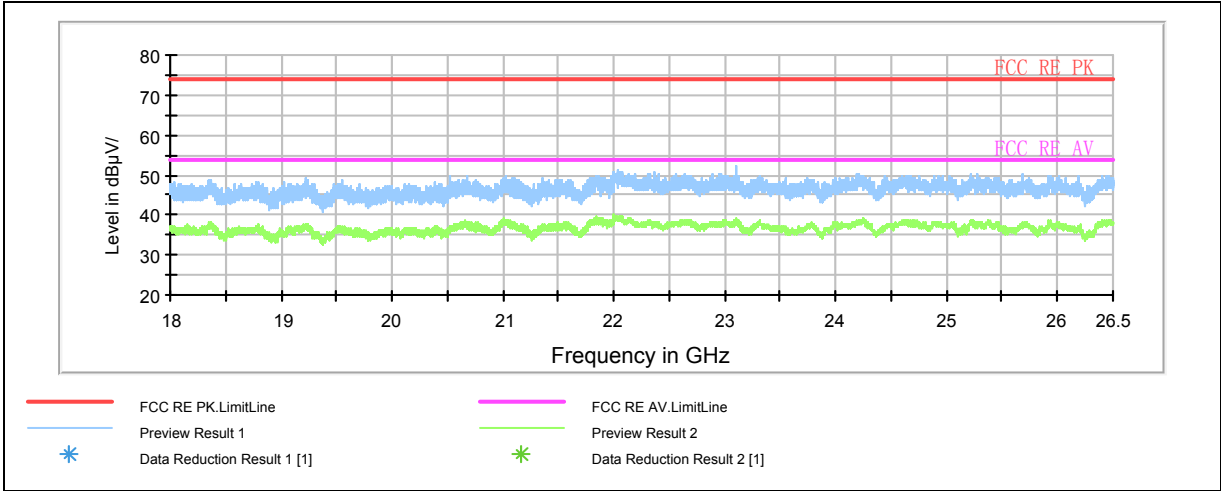

Note: a font (Level in dBμV/m)in the test plot =(level in dBμV/m)
Radiates Emission from 18GHz to 26.5GHz


TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 63 of 97

802.11g CH1

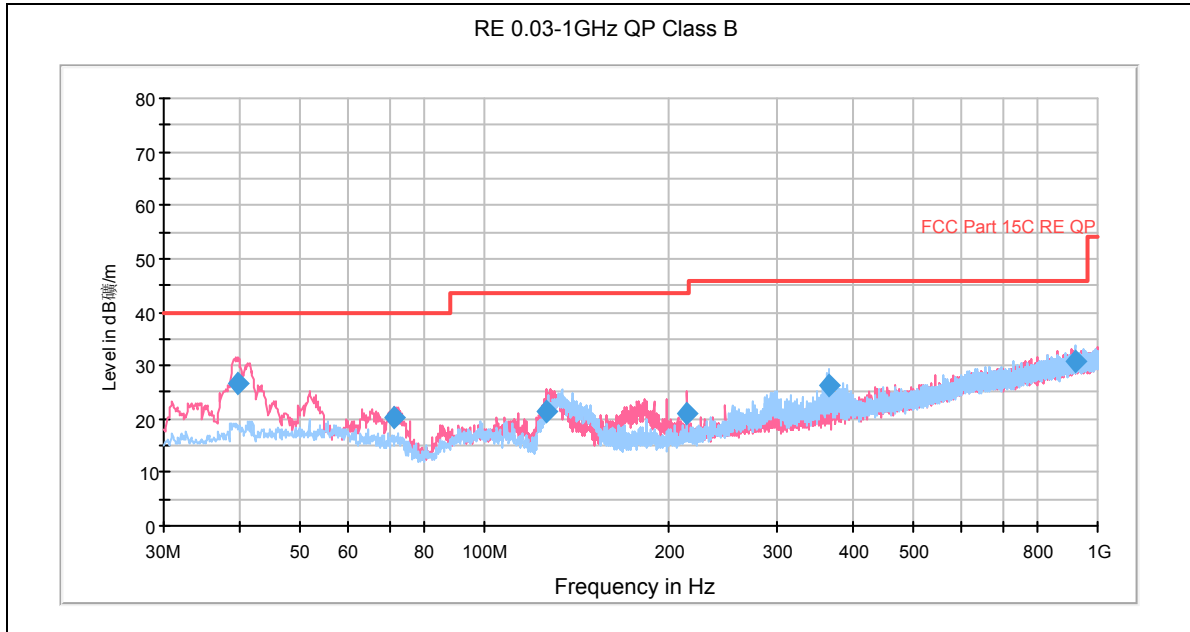

Note: a font (Level in dB μ V/m) in the test plot =(level in dB μ V/m)
Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dB μ V/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dB μ V/m)	Correct Factor (dB)	Margin (dB)	Limit (dB μ V/m)
39.700000	26.7	100.0	V	223.0	13.6	13.1	13.3	40.0
71.346250	20.2	100.0	V	65.0	11.6	8.6	19.8	40.0
126.515000	21.6	100.0	V	345.0	11.8	9.8	21.9	43.5
214.421250	21.2	100.0	V	353.0	8.6	12.6	22.3	43.5
363.680000	26.2	100.0	H	275.0	9.2	17.0	19.8	46.0
917.307500	30.8	100.0	H	29.0	5	25.8	15.2	46.0

Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)


3. Margin = Limit – Quasi-Peak

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 64 of 97

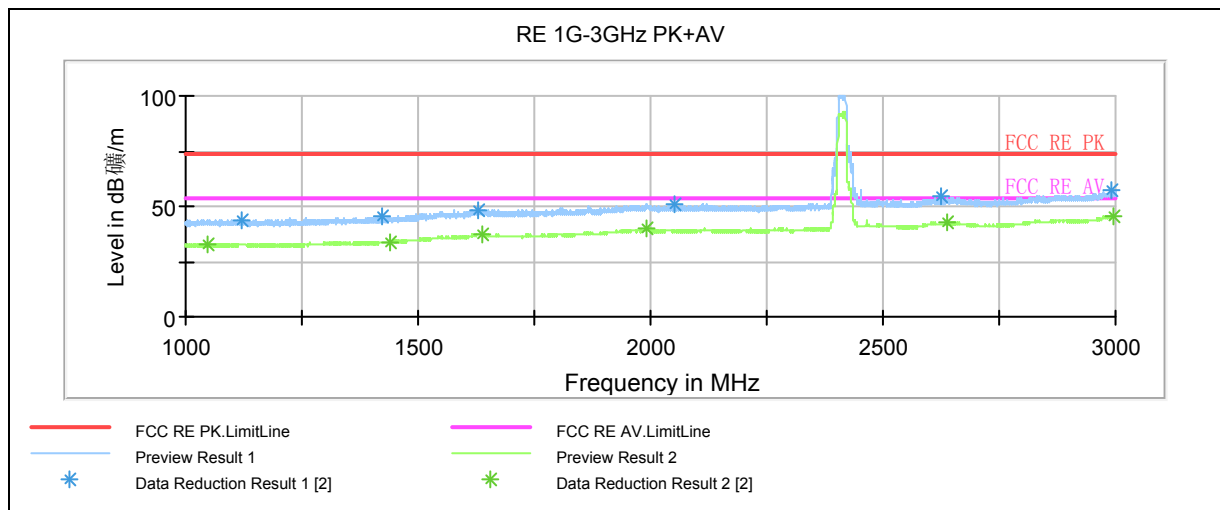

Note: a font (Level in dB 磁/m) in the test plot =(level in dBuV/m)

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1121.000000	43.9	100.0	H	0.0	53.6	-9.7	30.1	74
1424.500000	45.2	100.0	H	18.0	53.3	-8.1	28.8	74
1630.750000	48.3	100.0	V	359.0	53.4	-5.1	25.7	74
2053.500000	51.2	100.0	V	214.0	54.2	-3.0	22.8	74
2626.000000	54.9	100.0	V	237.0	55.6	-0.7	19.1	74
2990.250000	56.9	100.0	H	223.0	55.5	1.4	17.1	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1048.750000	32.9	100.0	H	0.0	42.8	-9.9	21.1	54
1438.250000	34.1	100.0	H	9.0	42.1	-8.0	19.9	54
1639.500000	37.5	100.0	V	237.0	42.6	-5.1	16.5	54
1991.000000	39.8	100.0	H	0.0	42.8	-3.0	14.2	54
2636.500000	42.8	100.0	V	87.0	43.2	-0.4	11.2	54
2994.750000	45.9	100.0	H	273.0	44.5	1.4	8.1	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 65 of 97

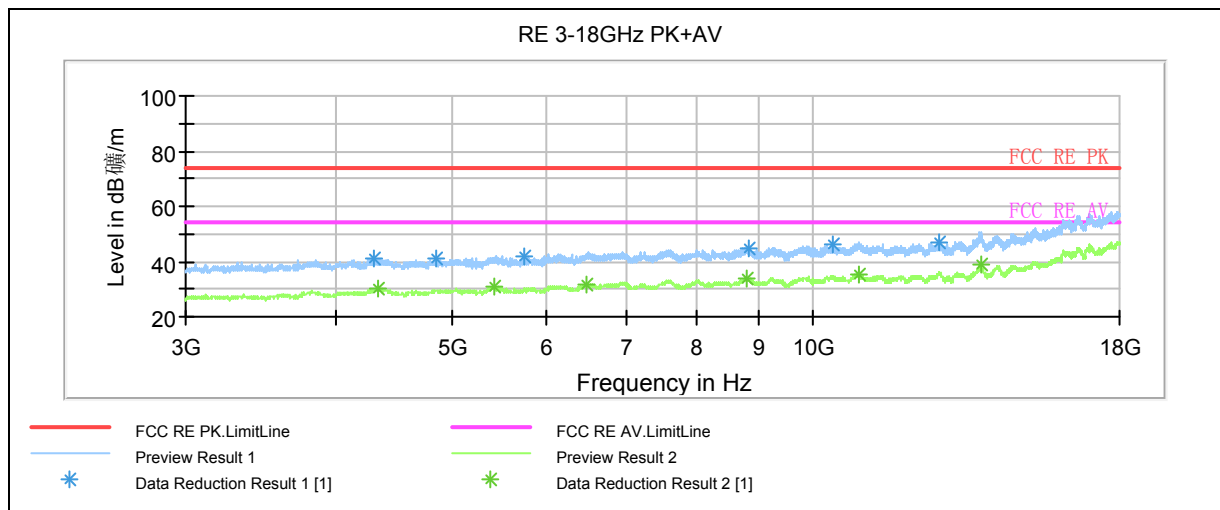

Note: a font (Level in dB 磁/m) in the test plot =(level in dBuV/m)

Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4314.375000	41.4	100.0	H	142.0	39.9	1.5	32.6	74
4843.125000	40.9	100.0	H	160.0	38.9	2.0	33.1	74
5756.250000	42.1	100.0	V	166.0	39.6	2.5	31.9	74
8842.500000	44.7	100.0	V	290.0	36.6	8.1	29.3	74
10400.625000	45.9	100.0	V	54.0	35.9	10.0	28.1	74
12738.750000	46.7	100.0	V	166.0	34.1	12.6	27.3	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4342.500000	30.3	100.0	V	157.0	28.8	1.5	23.7	54
5428.125000	30.6	100.0	V	317.0	27.8	2.8	23.4	54
6470.625000	32.0	100.0	H	169.0	27.3	4.7	22	54
8806.875000	33.9	100.0	H	24.0	25.8	8.1	20.1	54
10914.375000	35.3	100.0	H	42.0	24.2	11.1	18.7	54
13794.375000	39.1	100.0	V	335.0	24.3	14.8	14.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 66of 97

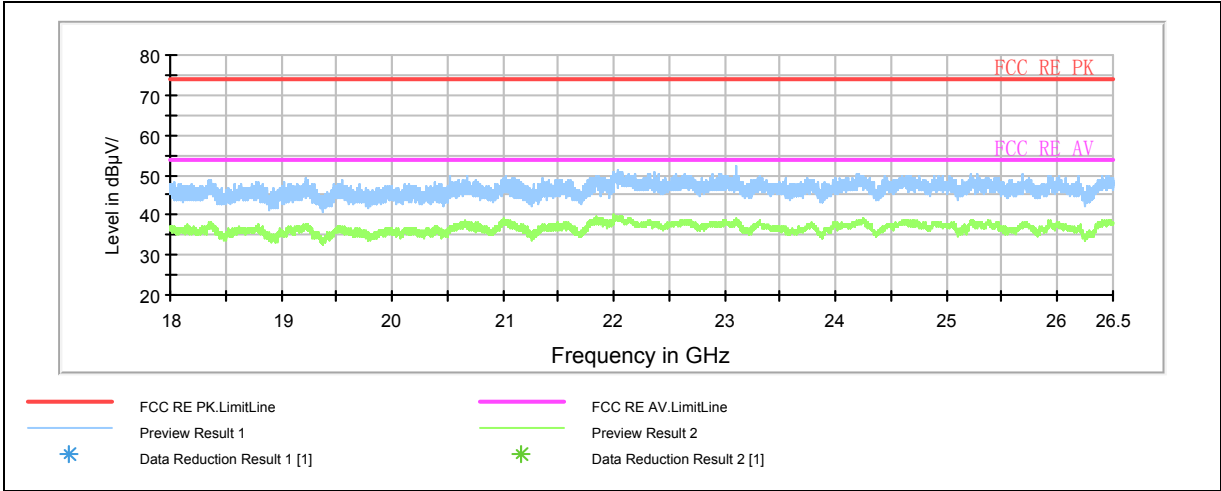

Note: a font (Level in dBμV/m)in the test plot =(level in dBμV/m)
Radiates Emission from 18GHz to 26.5GHz


TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 67 of 97

802.11g CH6

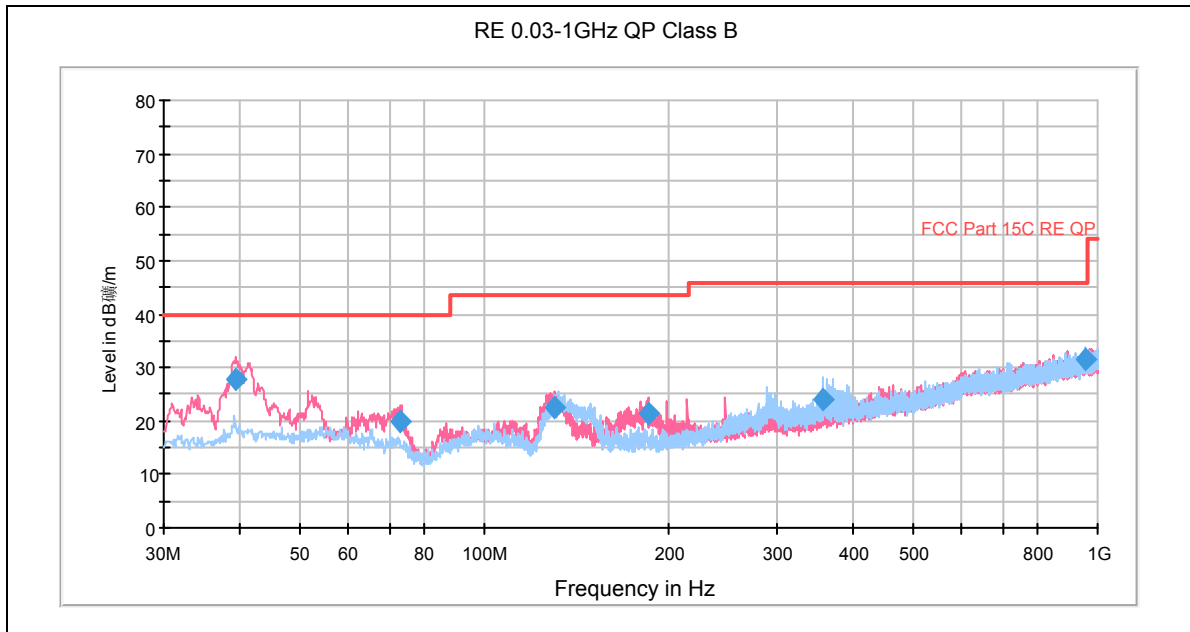

Note: a font (Level in dBμV/m) in the test plot =(level in dBuV/m)
Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
39.336250	27.8	100.0	V	207.0	14.8	13.0	12.2	40.0
73.165000	20.0	100.0	V	114.0	11.5	8.5	20.0	40.0
130.516250	22.5	100.0	V	357.0	13.2	9.3	21.0	43.5
184.715000	21.3	100.0	V	24.0	10.2	11.1	22.2	43.5
357.253750	24.0	100.0	H	63.0	7.2	16.8	22.0	46.0
959.381250	31.7	100.0	H	346.0	5.6	26.1	14.3	46.0

Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)


3. Margin = Limit – Quasi-Peak

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 68 of 97

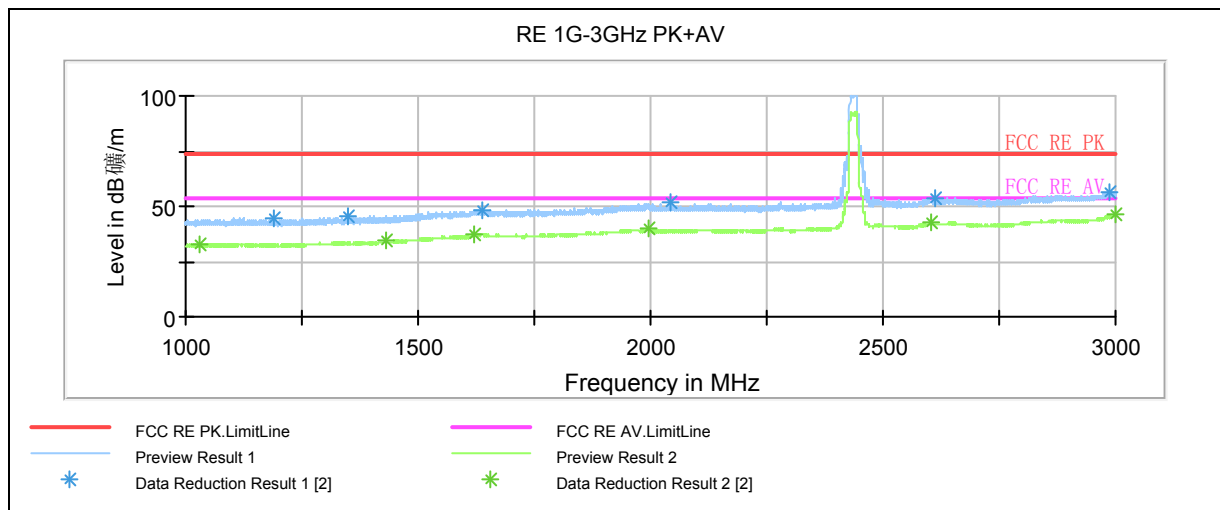

Note: a font (Level in dB 磁/m) in the test plot =(level in dBuV/m)

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1189.500000	44.7	100.0	V	203.0	54.3	-9.6	29.3	74
1347.000000	45.6	100.0	H	143.0	54.5	-8.9	28.4	74
1640.000000	48.5	100.0	H	174.0	53.6	-5.1	25.5	74
2044.250000	51.8	100.0	H	128.0	54.8	-3.0	22.2	74
2612.250000	53.2	100.0	V	262.0	53.6	-0.4	20.8	74
2987.250000	56.7	100.0	V	277.0	55.4	1.3	17.3	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1028.750000	33.0	100.0	V	0.0	43	-10.0	21	54
1429.000000	34.1	100.0	V	0.0	42.2	-8.1	19.9	54
1621.000000	37.4	100.0	V	203.0	42.5	-5.1	16.6	54
1994.750000	39.8	100.0	H	291.0	42.7	-2.9	14.2	54
2603.500000	42.5	100.0	H	143.0	42.7	-0.2	11.5	54
2999.250000	46.0	100.0	V	270.0	44.6	1.4	8	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 69 of 97

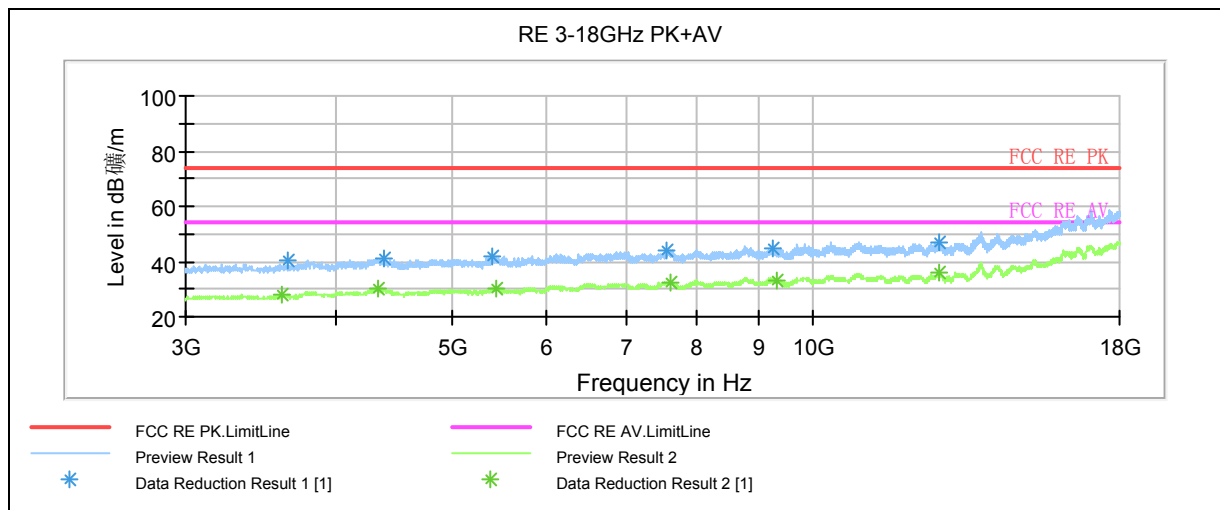

Note: a font (Level in dB 磁/m) in the test plot =(level in dBuV/m)

Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3645.000000	40.2	100.0	V	206.0	41.6	-1.4	33.8	74
4387.500000	41.2	100.0	H	0.0	39.9	1.3	32.8	74
5401.875000	41.8	100.0	H	15.0	39.3	2.5	32.2	74
7561.875000	43.7	100.0	V	0.0	37	6.7	30.3	74
9243.750000	45.0	100.0	V	132.0	36.2	8.8	29	74
12750.000000	47.1	100.0	V	260.0	34.5	12.6	26.9	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3603.750000	28.1	100.0	H	33.0	29.7	-1.6	25.9	54
4331.250000	30.2	100.0	H	259.0	28.6	1.6	23.8	54
5435.625000	30.4	100.0	V	358.0	27.6	2.8	23.6	54
7614.375000	32.7	100.0	H	176.0	26	6.7	21.3	54
9320.625000	33.1	100.0	H	259.0	24.4	8.7	20.9	54
12748.125000	35.7	100.0	H	0.0	23.1	12.6	18.3	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 70of 97

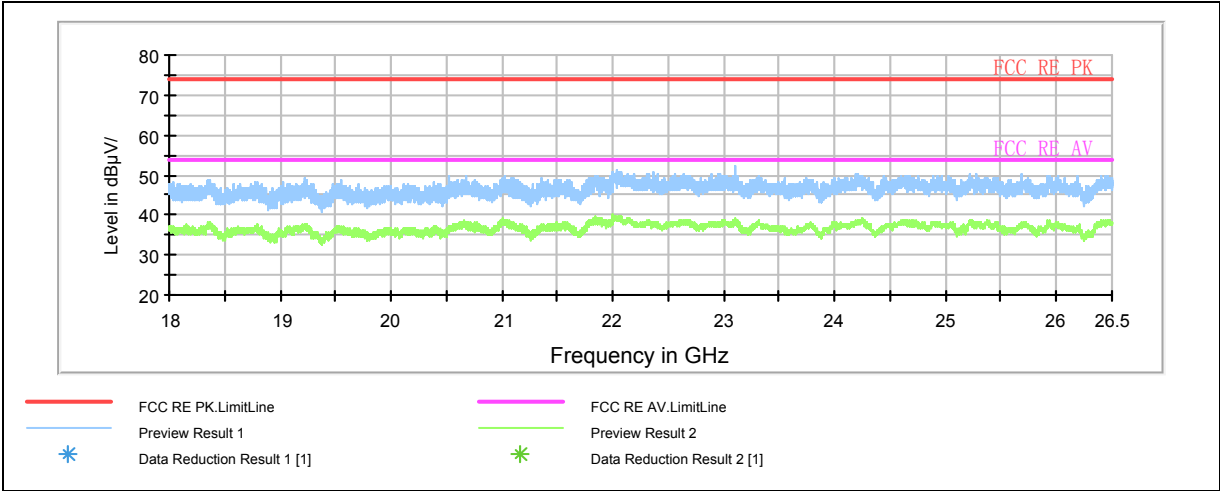

Note: a font (Level in dBuV/m)in the test plot =(level in dBuV/m)
Radiates Emission from 18GHz to 26.5GHz


TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 71 of 97

802.11g CH11

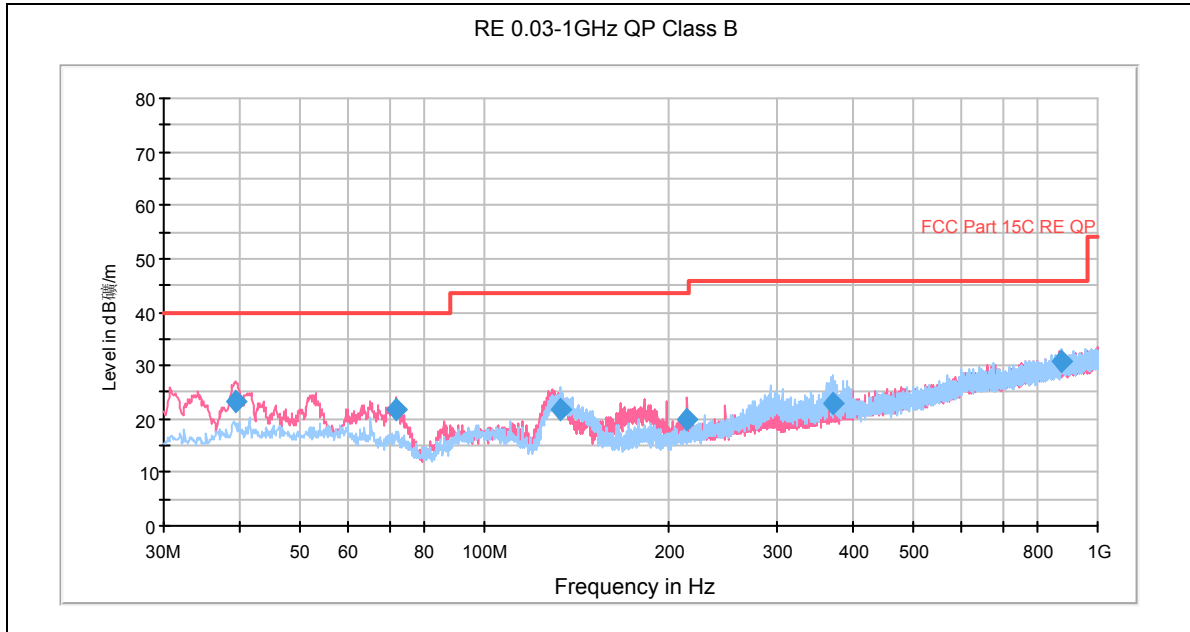

Note: a font (Level in dB μ V/m) in the test plot =(level in dB μ V/m)
Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dB μ V/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dB μ V/m)	Correct Factor (dB)	Margin (dB)	Limit (dB μ V/m)
39.215000	23.2	100.0	V	198.0	10.2	13.0	16.8	40.0
71.952500	22.0	100.0	V	99.0	13.4	8.6	18.0	40.0
133.183750	21.8	100.0	H	265.0	12.6	9.2	21.7	43.5
214.542500	20.1	100.0	V	351.0	7.5	12.6	23.4	43.5
370.227500	23.0	100.0	H	86.0	5.8	17.2	23.0	46.0
870.505000	30.9	100.0	H	235.0	5.7	25.2	15.1	46.0

Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)


3. Margin = Limit – Quasi-Peak

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 72 of 97

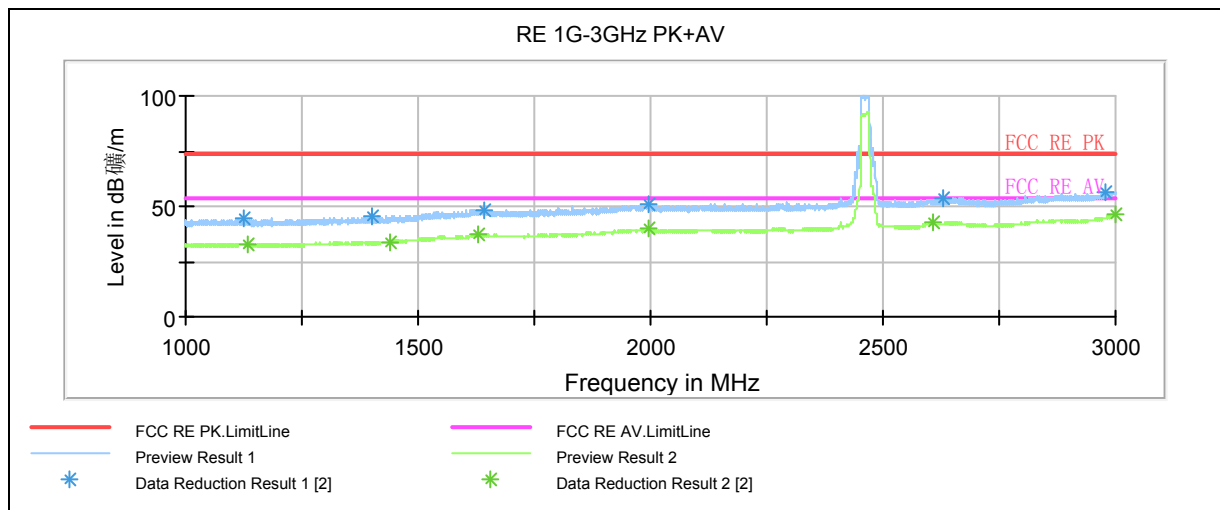

Note: a font (Level in dB 磁/m) in the test plot =(level in dBuV/m)

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1124.750000	44.4	100.0	V	0.0	54.1	-9.7	29.6	74
1399.000000	45.5	100.0	V	0.0	53.9	-8.4	28.5	74
1640.250000	48.4	100.0	H	229.0	53.5	-5.1	25.6	74
1994.000000	51.4	100.0	V	160.0	54.3	-2.9	22.6	74
2627.500000	53.4	100.0	V	0.0	54	-0.6	20.6	74
2980.000000	56.4	100.0	H	236.0	55.1	1.3	17.6	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1131.750000	32.9	100.0	H	253.0	42.5	-9.6	21.1	54
1437.750000	34.1	100.0	V	287.0	42.1	-8.0	19.9	54
1630.000000	37.4	100.0	H	113.0	42.5	-5.1	16.6	54
1995.750000	39.7	100.0	H	188.0	42.6	-2.9	14.3	54
2608.750000	42.3	100.0	V	199.0	42.6	-0.3	11.7	54
2998.750000	46.2	100.0	H	0.0	44.8	1.4	7.8	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 73 of 97

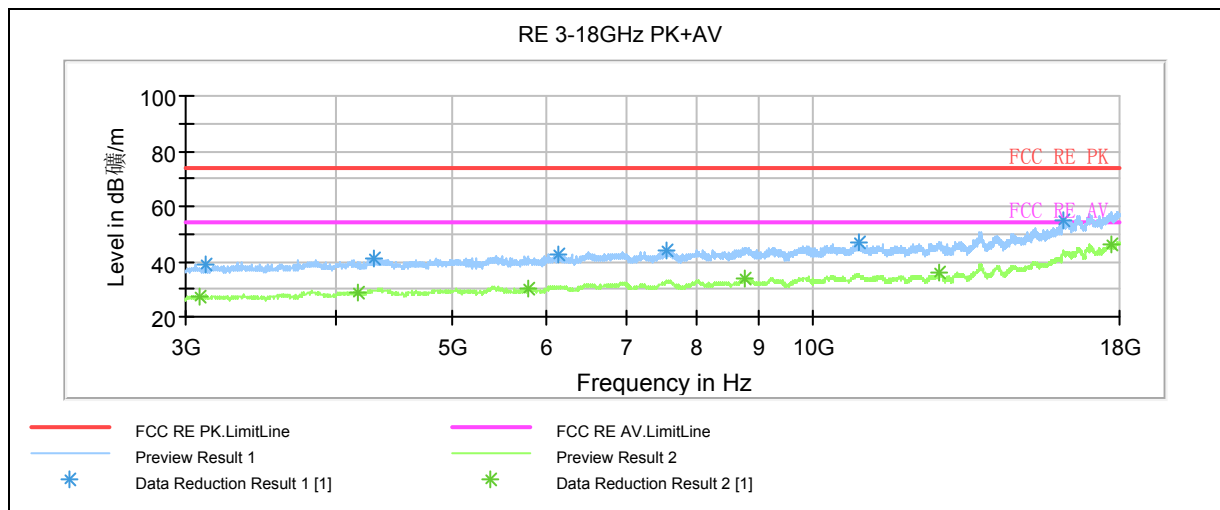

Note: a font (Level in dB 磁/m) in the test plot =(level in dBuV/m)

Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3112.500000	38.8	100.0	V	101.0	41.2	-2.4	35.2	74
4314.375000	41.4	100.0	H	142.0	39.9	1.5	32.6	74
6133.125000	42.8	100.0	H	242.0	39	3.8	31.2	74
7561.875000	43.8	100.0	H	0.0	37.1	6.7	30.2	74
10901.250000	46.8	100.0	H	0.0	35.5	11.3	27.2	74
16158.750000	55.0	100.0	V	0.0	35.4	19.6	19	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3080.625000	27.3	100.0	H	242.0	29.7	-2.4	26.7	54
4168.125000	29.0	100.0	V	157.0	28.7	0.3	25	54
5797.500000	29.9	100.0	V	325.0	27.3	2.6	24.1	54
8782.500000	34.0	100.0	H	42.0	25.9	8.1	20	54
12733.125000	35.8	100.0	V	184.0	23.2	12.6	18.2	54
17711.250000	46.5	100.0	H	70.0	23.9	22.6	7.5	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 74of 97

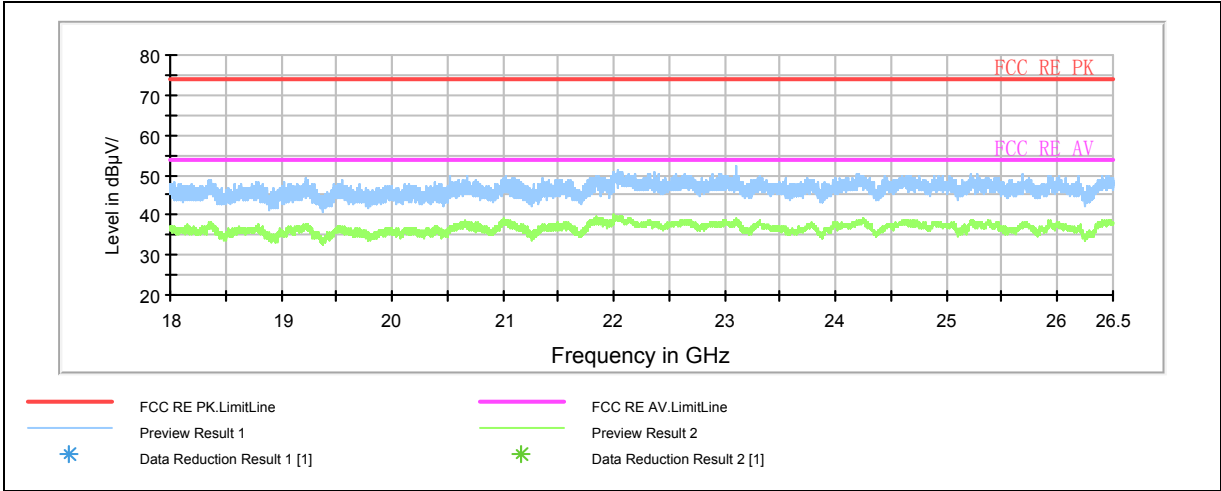

Note: a font (Level in dBμV/m)in the test plot =(level in dBμV/m)
Radiates Emission from 18GHz to 26.5GHz


TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 75 of 97

802.11n(HT20) CH1

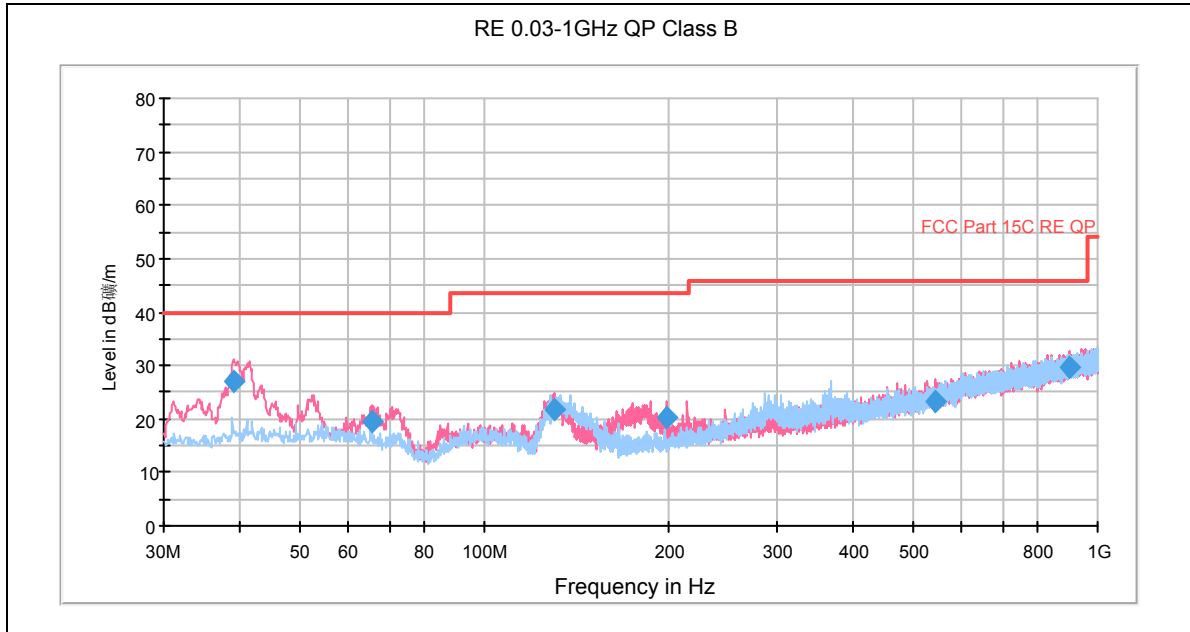

Note: a font (Level in dBμV/m) in the test plot =(level in dBuV/m)
Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
38.972500	27.2	100.0	V	180.0	14.3	12.9	12.8	40.0
65.405000	19.5	100.0	V	34.0	9.1	10.4	20.5	40.0
130.273750	21.8	100.0	V	6.0	12.5	9.3	21.7	43.5
197.931250	20.4	100.0	V	175.0	8.5	11.9	23.1	43.5
544.827500	23.3	100.0	V	0.0	2.4	20.9	22.7	46.0
897.422500	29.8	100.0	V	55.0	4.3	25.5	16.2	46.0

Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)


3. Margin = Limit – Quasi-Peak

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 76 of 97

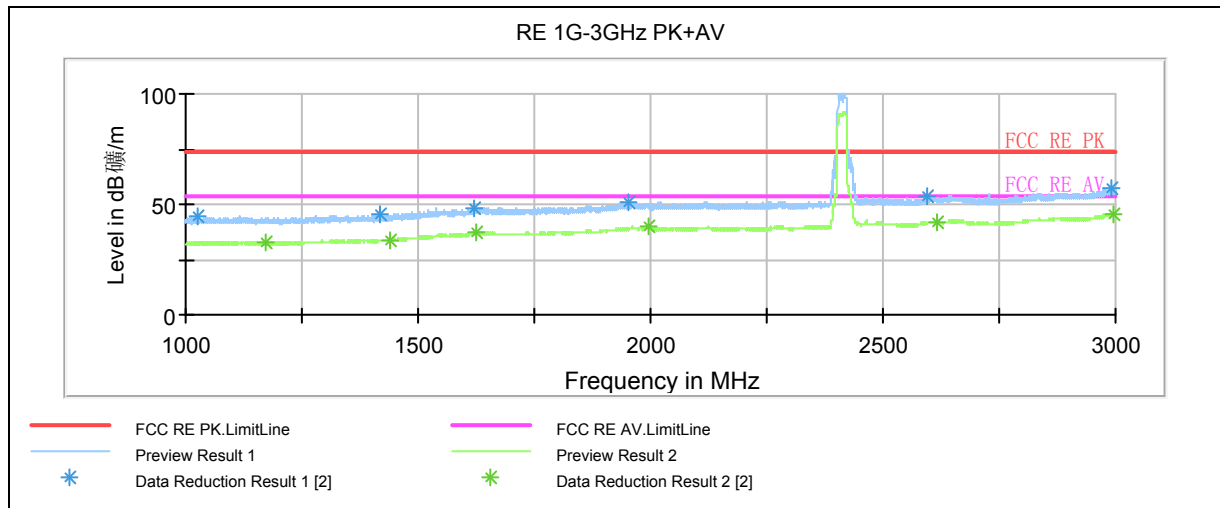

Note: a font (Level in dB 磁/m) in the test plot =(level in dBuV/m)

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1025.000000	44.3	100.0	V	270.0	54.3	-10.0	29.7	74
1416.750000	45.0	100.0	H	51.0	53.2	-8.2	29	74
1619.750000	48.6	100.0	V	110.0	53.8	-5.2	25.4	74
1954.250000	51.0	100.0	V	0.0	54.5	-3.5	23	74
2594.000000	53.7	100.0	H	229.0	54.1	-0.4	20.3	74
2990.500000	57.1	100.0	H	89.0	55.7	1.4	16.9	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1171.250000	33.1	100.0	H	112.0	42.6	-9.5	20.9	54
1441.000000	34.0	100.0	H	112.0	42	-8.0	20	54
1625.000000	37.4	100.0	H	0.0	42.5	-5.1	16.6	54
1996.750000	39.7	100.0	V	0.0	42.7	-3.0	14.3	54
2616.000000	42.3	100.0	V	231.0	42.8	-0.5	11.7	54
2997.500000	45.8	100.0	H	35.0	44.4	1.4	8.2	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 77 of 97

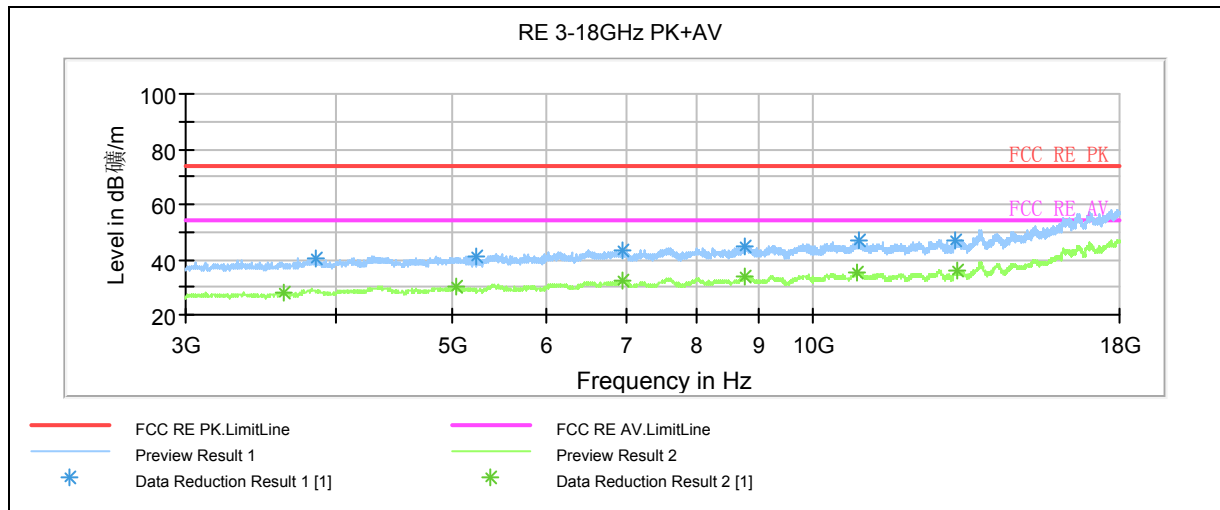

Note: a font (Level in dB 磁/m) in the test plot =(level in dBuV/m)

Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3853.125000	40.1	100.0	H	123.0	40.4	-0.3	33.9	74
5236.875000	41.4	100.0	H	114.0	39.8	1.6	32.6	74
6930.000000	43.4	100.0	H	0.0	38.6	4.8	30.6	74
8767.500000	44.7	100.0	V	0.0	36.6	8.1	29.3	74
10901.250000	46.8	100.0	H	0.0	35.5	11.3	27.2	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3622.500000	28.3	100.0	H	142.0	29.8	-1.5	25.7	54
5041.875000	30.0	100.0	V	237.0	28.1	1.9	24	54
6928.125000	32.2	100.0	H	169.0	27.4	4.8	21.8	54
8782.500000	34.0	100.0	H	42.0	25.9	8.1	20	54
10895.625000	35.3	100.0	V	300.0	23.9	11.4	18.7	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 78of 97

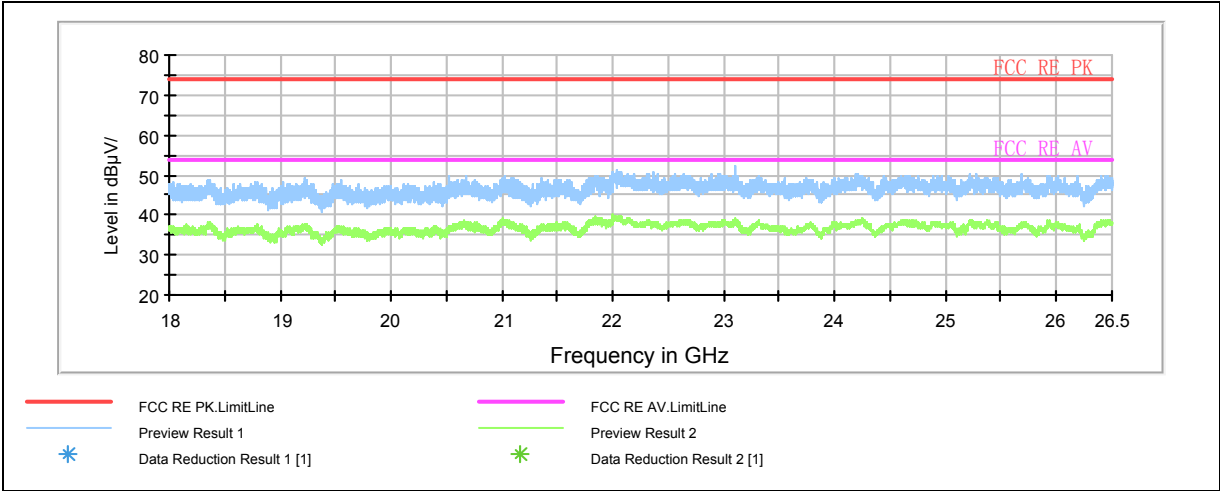

Note: a font (Level in dBμV/m)in the test plot =(level in dBμV/m)
Radiates Emission from 18GHz to 26.5GHz


TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 79 of 97

802.11n(HT20) CH6

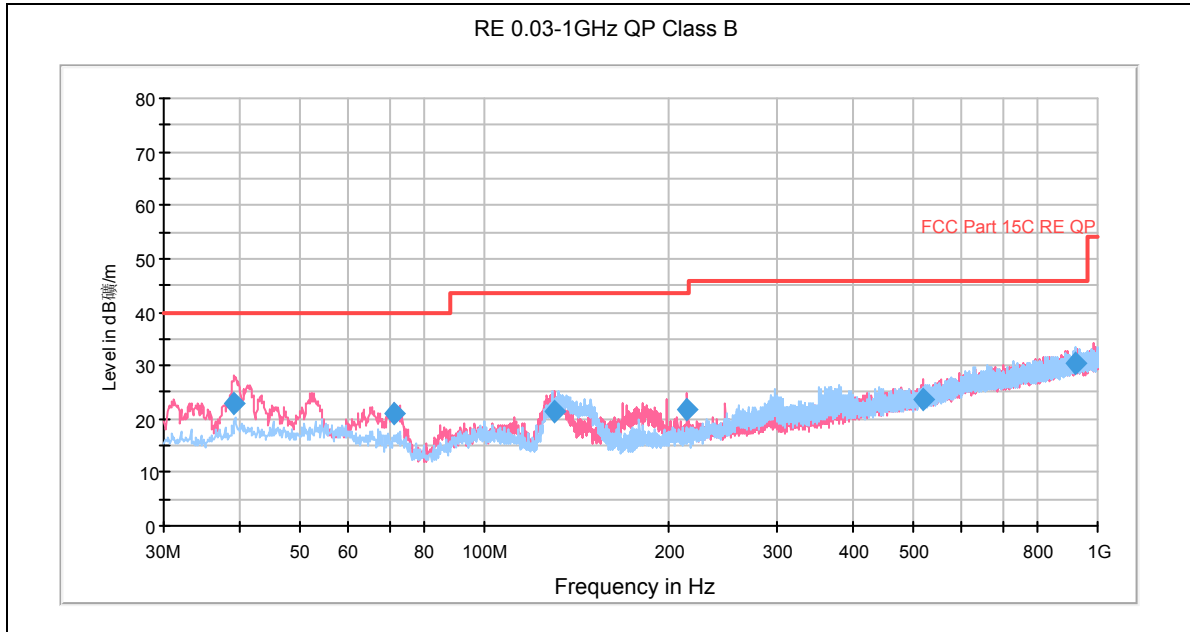

Note: a font (Level in dBμV/m) in the test plot =(level in dBuV/m)
Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
39.093750	23.1	100.0	V	95.0	10.1	13.0	16.9	40.0
71.346250	21.0	100.0	V	105.0	12.4	8.6	19.0	40.0
130.031250	21.3	100.0	V	351.0	12	9.3	22.2	43.5
214.421250	21.7	100.0	V	341.0	9.1	12.6	21.8	43.5
520.456250	23.6	100.0	V	34.0	3.3	20.3	22.4	46.0
922.400000	30.4	100.0	H	305.0	4.6	25.8	14.6	46.0

Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)


3. Margin = Limit – Quasi-Peak

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 80 of 97

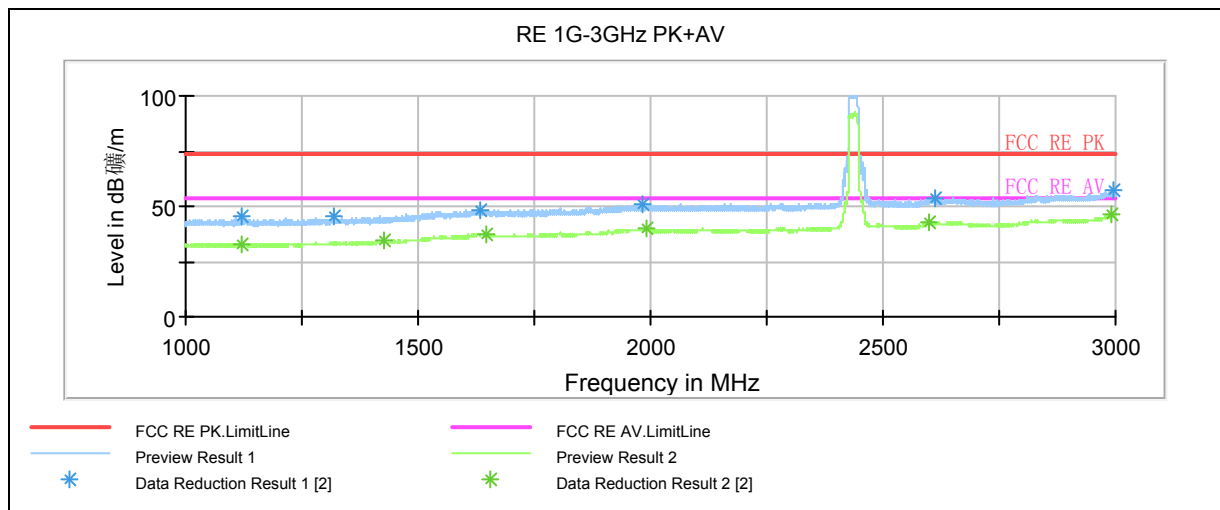

Note: a font (Level in dB 磁/m) in the test plot =(level in dBuV/m)

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1120.500000	45.1	100.0	H	0.0	54.8	-9.7	28.9	74
1318.000000	45.0	100.0	H	111.0	53.8	-8.8	29	74
1633.000000	48.4	100.0	V	325.0	53.5	-5.1	25.6	74
1983.750000	51.2	100.0	V	0.0	54.7	-3.5	22.8	74
2612.000000	53.7	100.0	V	163.0	54.1	-0.4	20.3	74
2997.000000	57.7	100.0	V	163.0	56.3	1.4	16.3	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1120.500000	33.0	100.0	V	274.0	42.7	-9.7	21	54
1426.000000	34.3	100.0	V	64.0	42.4	-8.1	19.7	54
1645.750000	37.6	100.0	V	0.0	42.9	-5.3	16.4	54
1992.500000	40.1	100.0	V	250.0	43.1	-3.0	13.9	54
2598.250000	42.4	100.0	V	259.0	42.6	-0.2	11.6	54
2993.250000	46.0	100.0	H	81.0	44.6	1.4	8	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 81 of 97

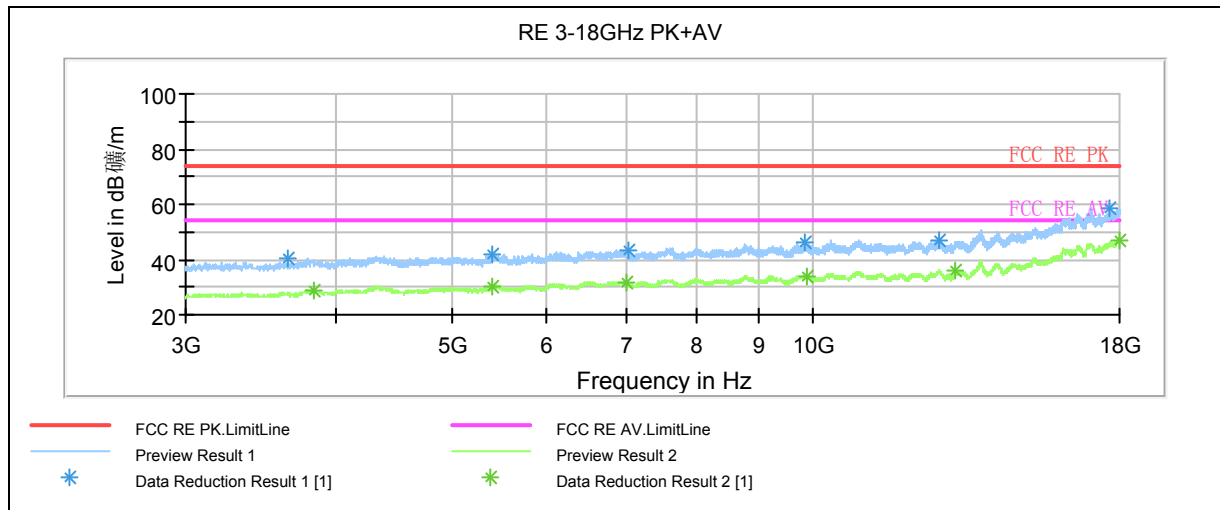

Note: a font (Level in dB μ V/m) in the test plot =(level in dB μ V/m)

Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dB μ V/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dB μ V/m)	Correct Factor (dB)	Margin (dB)	Limit (dB μ V/m)
3645.000000	40.2	100.0	V	206.0	41.6	-1.4	33.8	74
5401.875000	41.8	100.0	H	15.0	39.3	2.5	32.2	74
7012.500000	43.2	100.0	H	0.0	38.2	5.0	30.8	74
9841.875000	46.5	100.0	H	15.0	36.7	9.8	27.5	74
12750.000000	47.1	100.0	V	260.0	34.5	12.6	26.9	74
17685.000000	58.8	100.0	H	158.0	36	22.8	15.2	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dB μ V/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dB μ V/m)	Correct Factor (dB)	Margin (dB)	Limit (dB μ V/m)
3830.625000	29.1	100.0	V	90.0	29.2	-0.1	24.9	54
5409.375000	30.4	100.0	H	0.0	27.8	2.6	23.6	54
6993.750000	32.0	100.0	H	297.0	27	5.0	22	54
9866.250000	34.1	100.0	V	169.0	24.2	9.9	19.9	54
13138.125000	36.0	100.0	H	0.0	23.2	12.8	18	54
17992.500000	46.8	100.0	H	95.0	23.3	23.5	7.2	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 82of 97

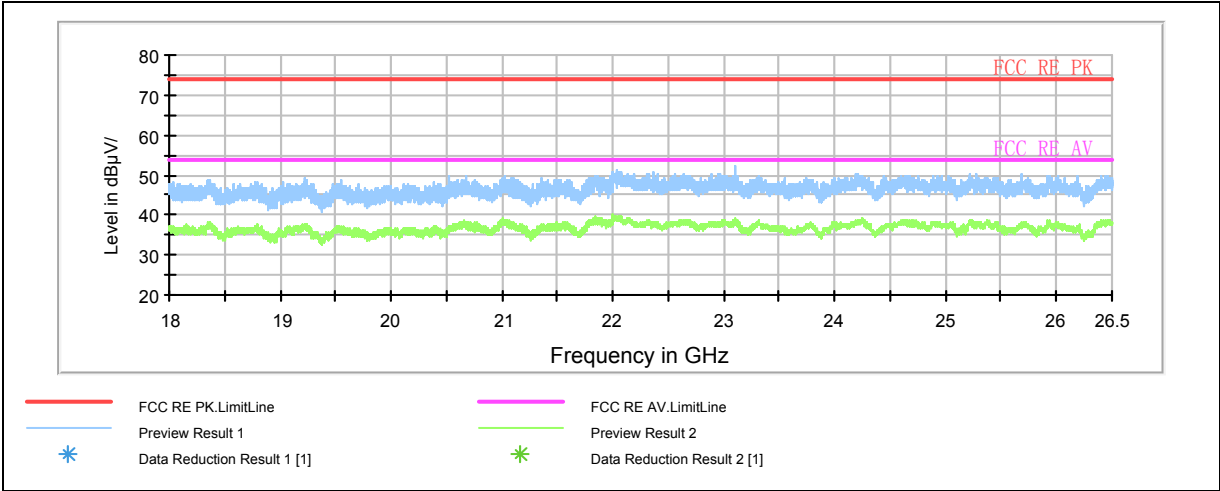

Note: a font (Level in dBμV/m)in the test plot =(level in dBμV/m)
Radiates Emission from 18GHz to 26.5GHz


TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 83 of 97

802.11n(HT20) CH11

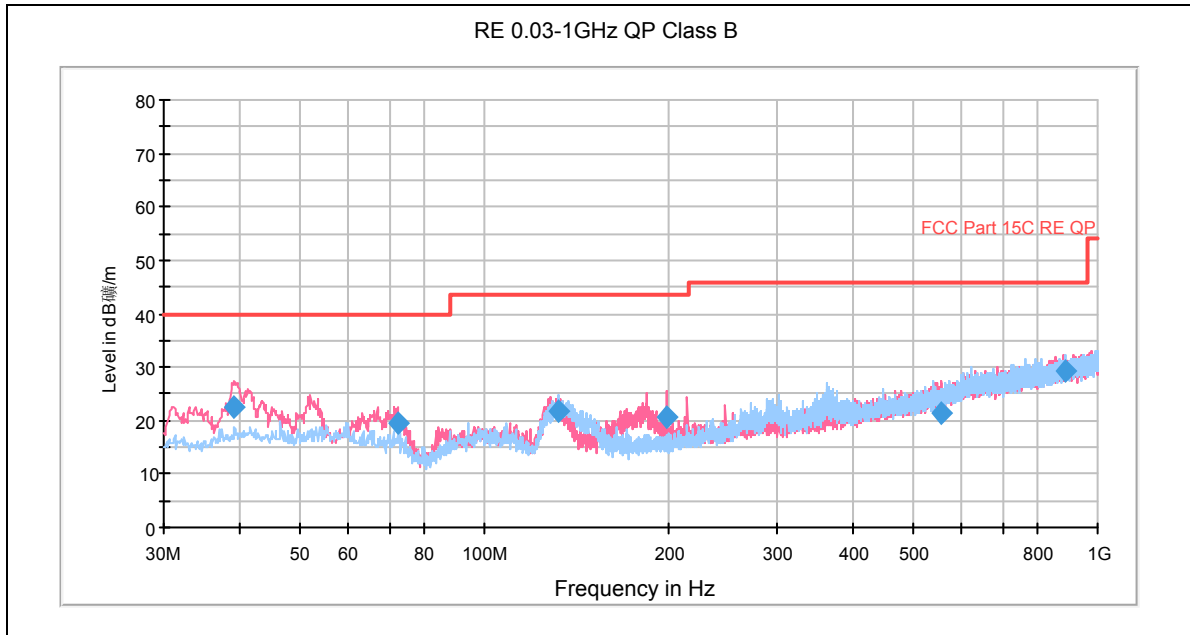

Note: a font (Level in dBμV/m) in the test plot =(level in dBuV/m)

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
39.093750	22.4	100.0	V	179.0	9.4	13.0	17.6	40.0
72.195000	19.6	100.0	V	115.0	11.1	8.5	20.4	40.0
132.335000	21.6	100.0	H	84.0	12.3	9.3	21.9	43.5
197.931250	20.6	100.0	V	134.0	8.7	11.9	22.9	43.5
555.740000	21.5	100.0	V	153.0	0.3	21.2	24.5	46.0
884.085000	29.4	100.0	H	0.0	4	25.4	16.6	46.0

Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)


3. Margin = Limit – Quasi-Peak

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 84 of 97

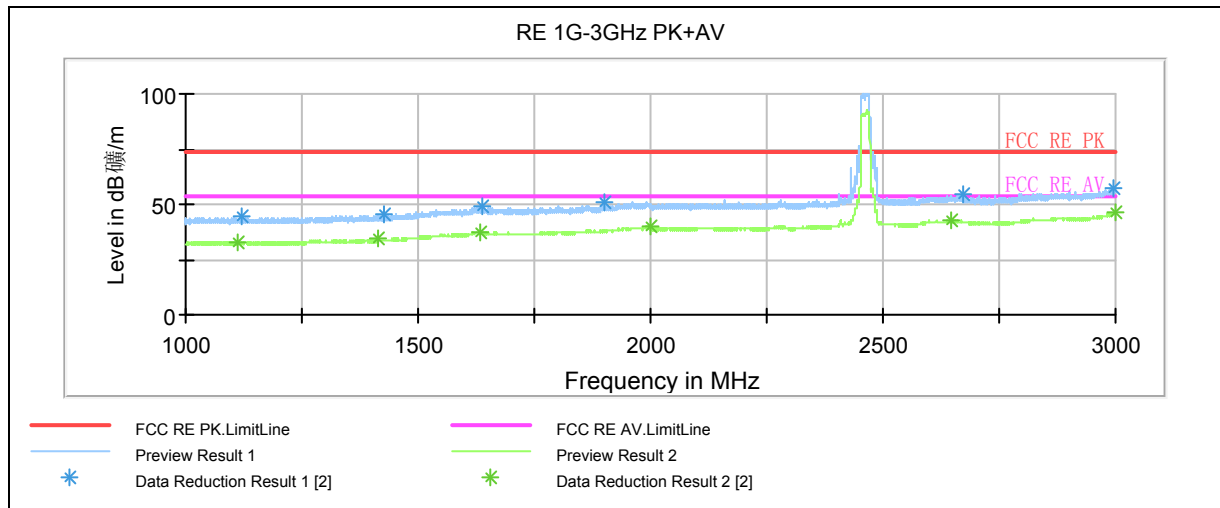

Note: a font (Level in dB 磁/m) in the test plot =(level in dBuV/m)

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1121.500000	44.6	100.0	H	135.0	54.3	-9.7	29.4	74
1425.000000	45.2	100.0	V	0.0	53.3	-8.1	28.8	74
1636.750000	48.7	100.0	V	319.0	53.8	-5.1	25.3	74
1899.250000	50.9	100.0	H	121.0	55.1	-4.2	23.1	74
2673.500000	55.0	100.0	H	0.0	55.4	-0.4	19	74
2994.250000	57.1	100.0	V	351.0	55.7	1.4	16.9	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1113.000000	33.1	100.0	H	0.0	42.9	-9.8	20.9	54
1414.500000	34.1	100.0	H	128.0	42.4	-8.3	19.9	54
1633.750000	37.4	100.0	V	230.0	42.5	-5.1	16.6	54
1998.500000	40.1	100.0	H	68.0	43.1	-3.0	13.9	54
2648.250000	42.4	100.0	V	0.0	42.5	-0.1	11.6	54
2999.750000	46.1	100.0	H	151.0	44.7	1.4	7.9	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 85 of 97

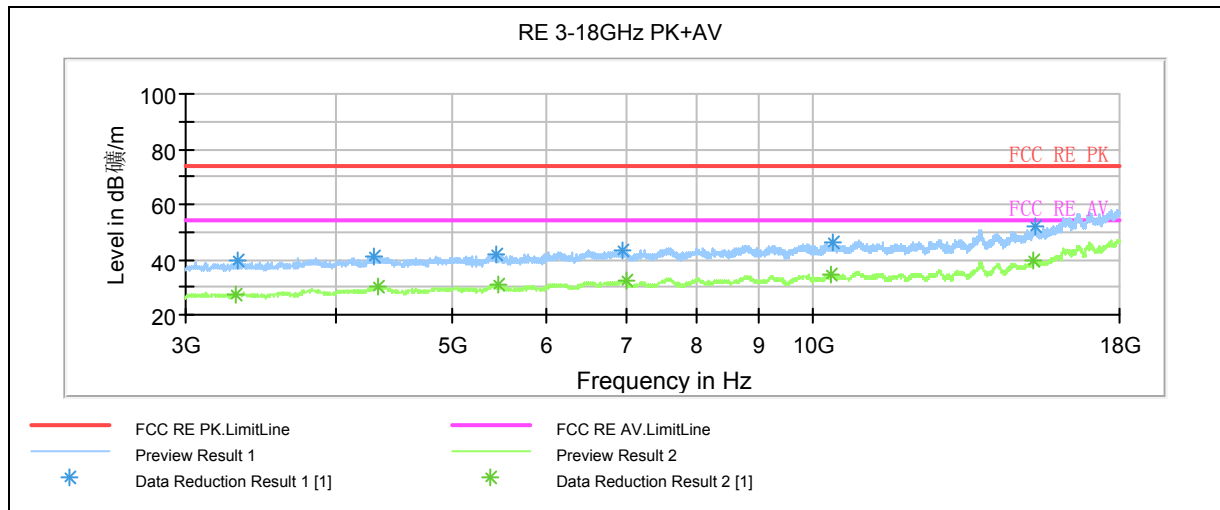

Note: a font (Level in dB 磁/m) in the test plot =(level in dBuV/m)

Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3309.375000	39.5	100.0	H	42.0	41.7	-2.2	34.5	74
4314.375000	41.4	100.0	H	142.0	39.9	1.5	32.6	74
5435.625000	41.9	100.0	V	317.0	39.1	2.8	32.1	74
6930.000000	43.4	100.0	H	0.0	38.6	4.8	30.6	74
10400.625000	45.9	100.0	V	54.0	35.9	10.0	28.1	74
15300.000000	51.7	100.0	H	290.0	34.9	16.8	22.3	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3298.125000	27.6	100.0	H	261.0	29.8	-2.2	26.4	54
4342.500000	30.3	100.0	V	157.0	28.8	1.5	23.7	54
5467.500000	30.6	100.0	H	79.0	28	2.6	23.4	54
6988.125000	32.2	100.0	V	300.0	27.2	5.0	21.8	54
10348.125000	34.5	100.0	H	160.0	24.4	10.1	19.5	54
15273.750000	39.9	100.0	H	52.0	23.2	16.7	14.1	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 86of 97

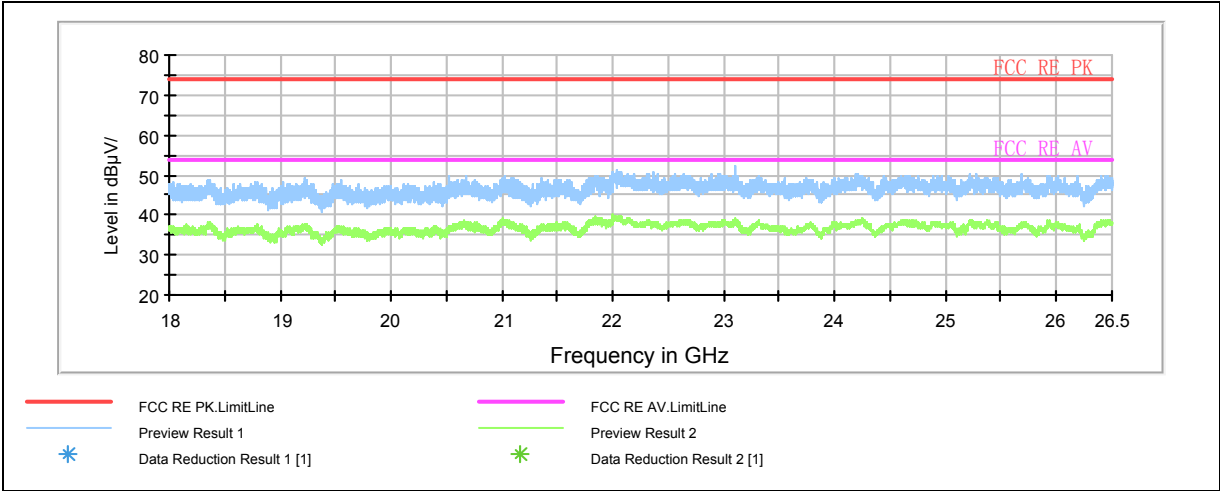

Note: a font (Level in dBμV/m)in the test plot =(level in dBμV/m)
Radiates Emission from 18GHz to 26.5GHz

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 87 of 97

2.10. Conducted Emissions


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT IS placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSIC63.4-2009. Connect the AC power line of the EUT to the LISN Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9kHz, VBW is set to 30kHz. The measurement result should include both L line and N line. The test is in transmitting mode.

Test setup

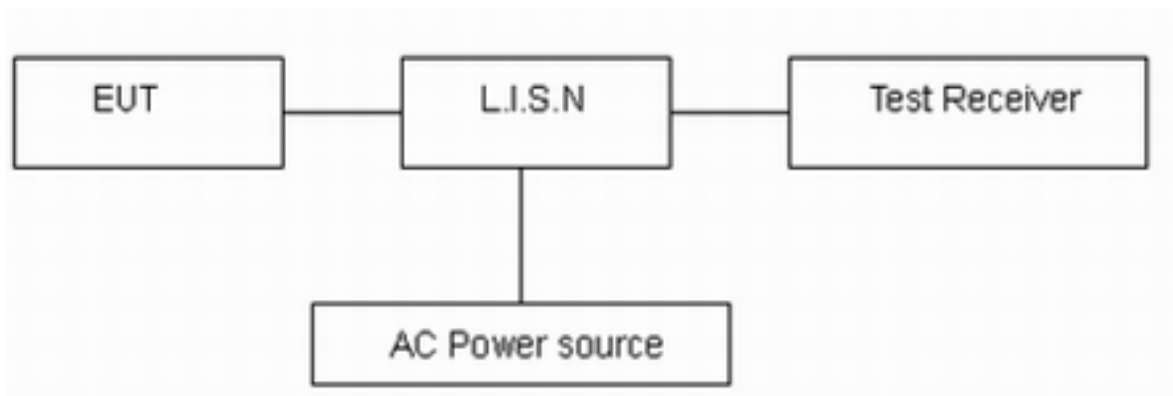

Note: AC Power source is used to change the voltage from 220V/50Hz to 110V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RXA1404-0104RF03

Page 88of 97

Test Results:

802.11b CH6

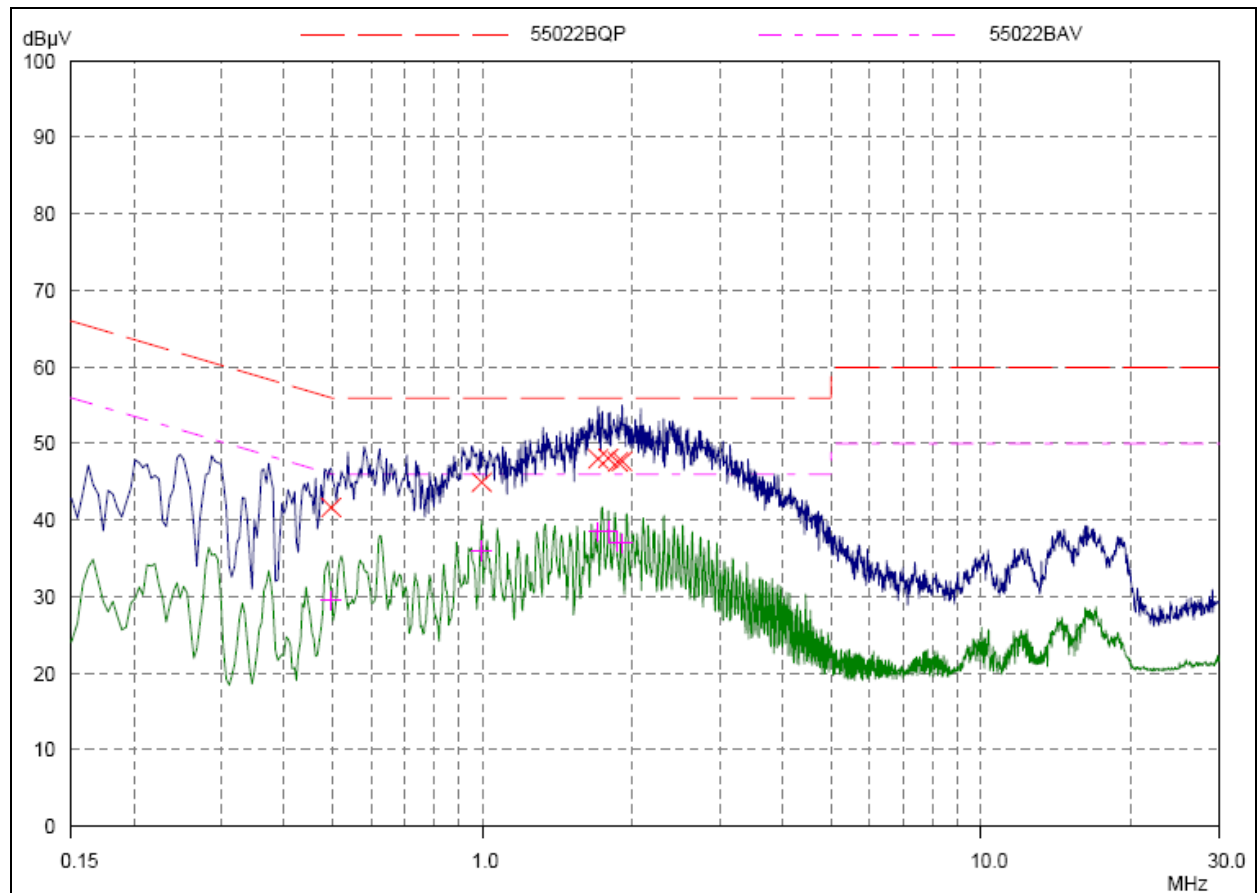

L Line


Final Measurement Results				
Frequency MHz	QP Level dBμV	QP Limit dBμV	QP Delta dB	Phase -
0.49765	41.67	56.04	14.37	L1
0.99765	44.95	56.00	11.05	L1
1.70468	48.01	56.00	7.99	L1
1.78671	48.10	56.00	7.90	L1
1.86875	47.58	56.00	8.42	L1
1.90781	47.69	56.00	8.31	L1
Frequency MHz	AV Level dBμV	AV Limit dBμV	AV Delta dB	Phase -
0.49765	29.49	46.04	16.55	L1
0.99765	36.00	46.00	10.00	L1
1.70468	38.49	46.00	7.51	L1
1.78671	38.57	46.00	7.43	L1
1.86875	37.17	46.00	8.83	L1
1.90781	36.96	46.00	9.04	L1

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 89 of 97

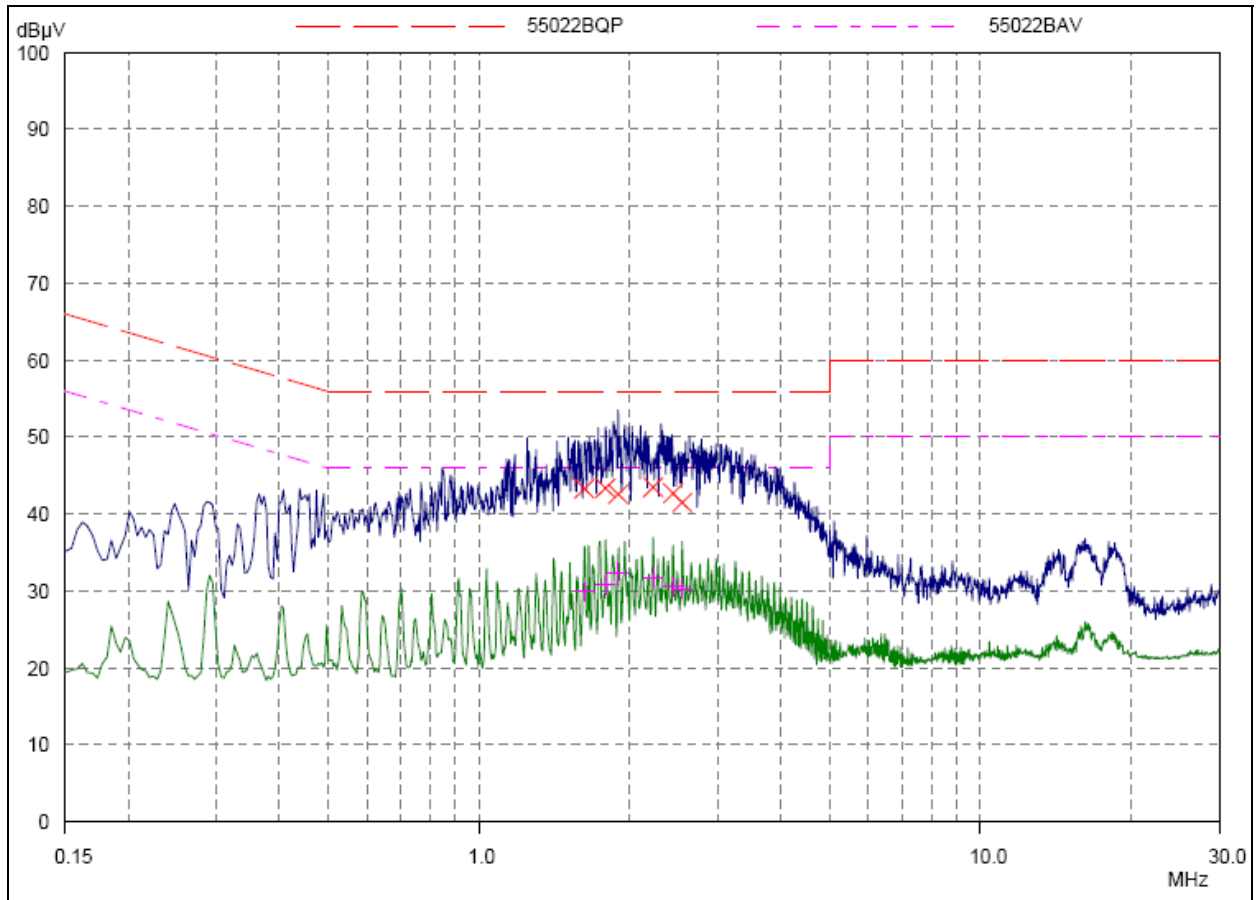

N Line

Final Measurement Results				
Frequency MHz	QP Level dBμV	QP Limit dBμV	QP Delta dB	Phase -
1.62265	43.32	56.00	12.68	N
1.79062	43.39	56.00	12.61	N
1.89609	42.58	56.00	13.42	N
2.22421	43.50	56.00	12.50	N
2.43906	42.72	56.00	13.28	N
2.54453	41.50	56.00	14.50	N
Frequency MHz	AV Level dBμV	AV Limit dBμV	AV Delta dB	Phase -
1.62265	29.91	46.00	16.09	N
1.79062	30.83	46.00	15.17	N
1.89609	32.27	46.00	13.73	N
2.22421	31.79	46.00	14.21	N
2.43906	30.58	46.00	15.42	N
2.54453	30.31	46.00	15.69	N


TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 90 of 97

802.11g CH6

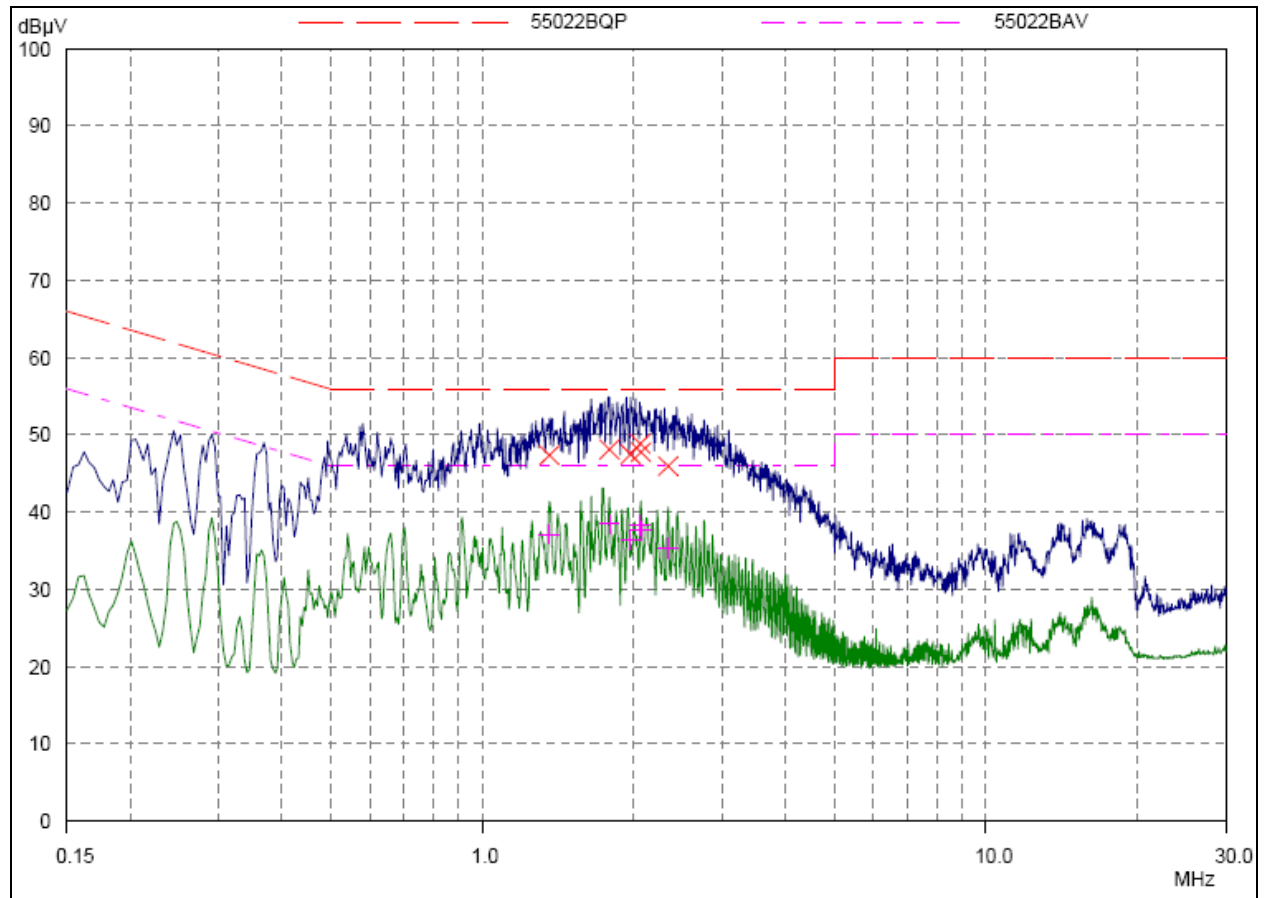

L Line


Final Measurement Results				
Frequency MHz	QP Level dBμV	QP Limit dBμV	QP Delta dB	Phase -
1.36093	47.37	56.00	8.63	L1
1.78671	48.12	56.00	7.88	L1
1.97031	47.48	56.00	8.52	L1
2.06015	48.85	56.00	7.15	L1
2.06795	47.79	56.00	8.21	L1
2.3375	45.96	56.00	10.04	L1
Frequency MHz	AV Level dBμV	AV Limit dBμV	AV Delta dB	Phase -
1.36093	37.16	46.00	8.84	L1
1.78671	38.50	46.00	7.50	L1
1.97031	36.42	46.00	9.58	L1
2.06015	38.32	46.00	7.68	L1
2.06795	37.62	46.00	8.38	L1
2.3375	35.33	46.00	10.67	L1

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 91 of 97

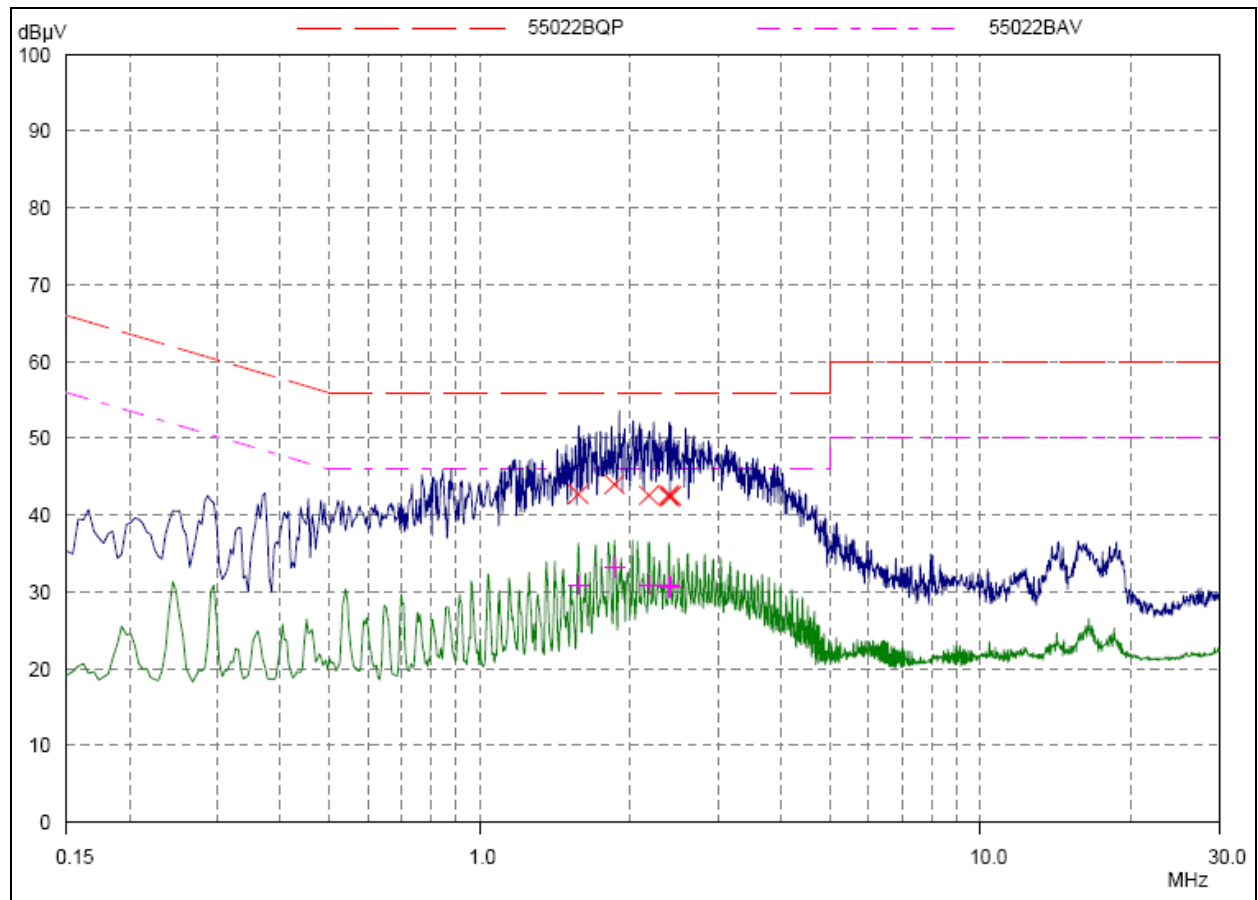

N Line

Final Measurement Results

Frequency MHz	QP Level dBμV	QP Limit dBμV	QP Delta dB	Phase -
1.57578	42.75	56.00	13.25	N
1.86093	44.02	56.00	11.98	N
2.17734	42.59	56.00	13.41	N
2.38828	42.63	56.00	13.37	N
2.39218	42.37	56.00	13.63	N
2.41171	42.51	56.00	13.49	N

Frequency MHz	AV Level dBμV	AV Limit dBμV	AV Delta dB	Phase -
1.57578	30.88	46.00	15.12	N
1.86093	33.20	46.00	12.80	N
2.17734	30.98	46.00	15.02	N
2.38828	30.80	46.00	15.20	N
2.39218	30.57	46.00	15.43	N
2.41171	30.66	46.00	15.34	N


TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1404-0104RF03

Page 92 of 97

802.11n(HT20) CH6

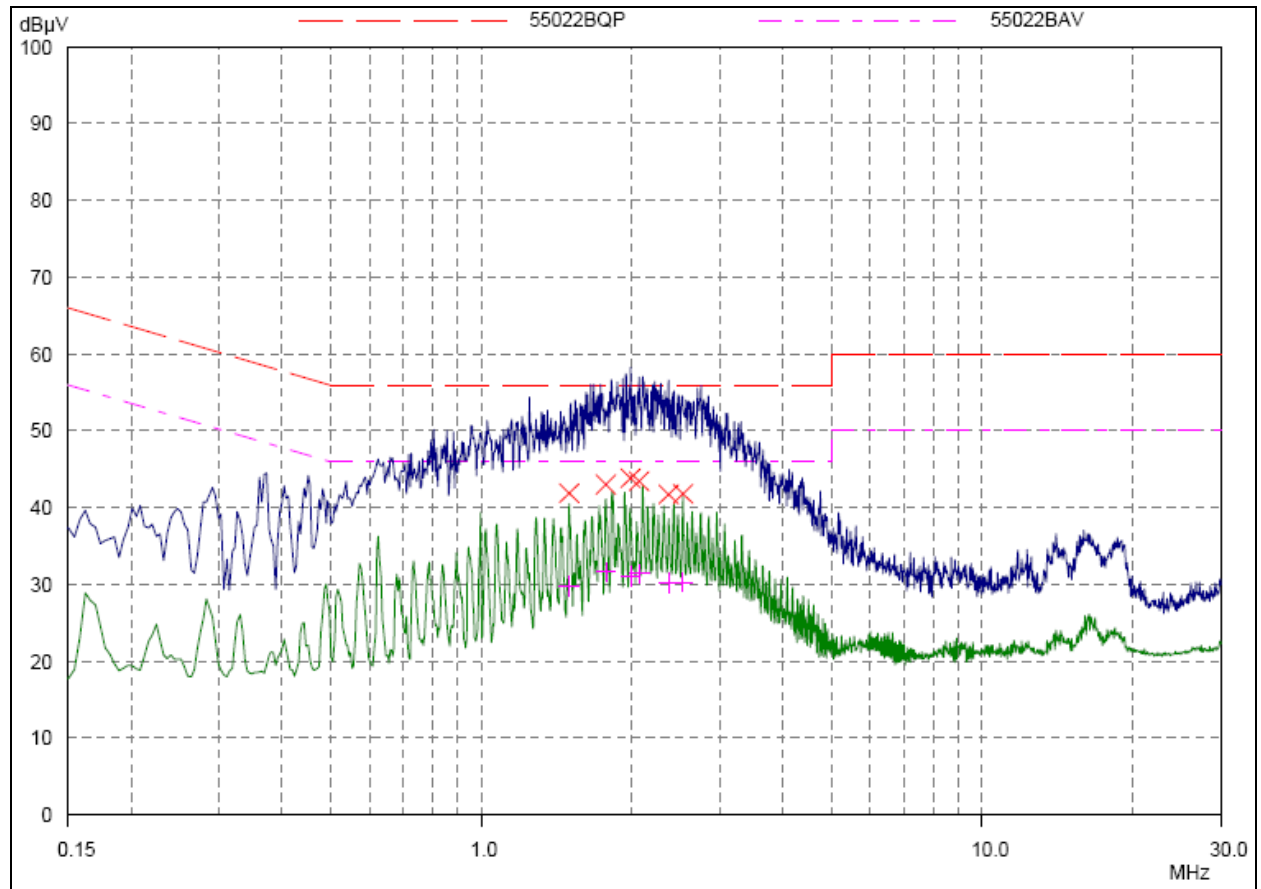


L Line

Final Measurement Results				
Frequency MHz	QP Level dBμV	QP Limit dBμV	QP Delta dB	Phase -
1.49765	41.89	56.00	14.11	L1
1.775	43.02	56.00	12.98	L1
1.98984	43.84	56.00	12.16	L1
2.06406	43.45	56.00	12.55	L1
2.36875	41.73	56.00	14.27	L1
2.5289	41.81	56.00	14.19	L1
Frequency MHz	AV Level dBμV	AV Limit dBμV	AV Delta dB	Phase -
1.49765	29.78	46.00	16.22	L1
1.775	31.63	46.00	14.37	L1
1.98984	31.08	46.00	14.92	L1
2.06406	31.43	46.00	14.57	L1
2.36875	30.24	46.00	15.76	L1
2.5289	30.35	46.00	15.65	L1

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 93 of 97

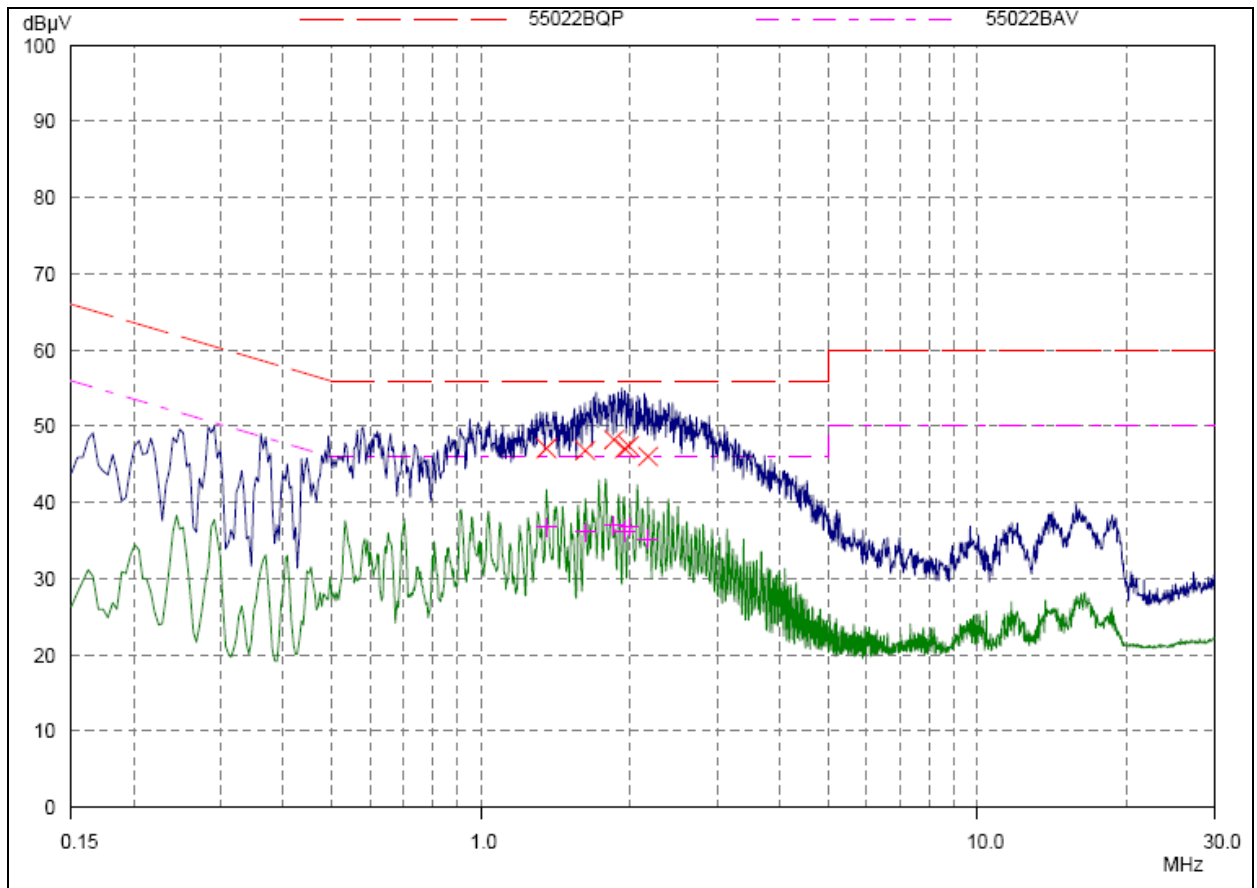

N Line

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 94 of 97

2. Main Test Instruments

No.	Name	Type	Manufacturer	Serial Number	Calibration Date	Valid Period
01	EMI Test Receiver	ESCI	R&S	100948	2013-06-29	One year
02	Loop Antenna	FMZB1516	SCHWARZBECK	237	2012-06-30	Two years
03	TRILOG Broadband Antenna	VULB 9163	Schwarzbeck	9163-201	2013-06-19	Three years
04	Double Ridged Waveguide Horn Antenna	HF907	R&S	100126	2012-07-02	Three years
05	Standard Gain Horn	3160-09	ETS-Lindgren	00102644	2012-05-20	Three years
06	EMI Test Receiver	ESCS30	R&S	100138	2014-01-14	One year
07	LISN	ENV216	R&S	101171	2014-04-12	One year
08	Spectrum Analyzer	E4445A	Agilent	MY46181146	2013-06-29	One year
09	MOB COMMS DC SUPPLY	66319D	Agilent	MY43004105	2013-06-29	One year
10	Peak Power Meter	8990B	Agilent	51000109	2013-05-31	One year
11	Wideband Power Sensors	N1923A	Agilent	MY51220004	2013-05-31	One year
12	Spectrum Analyzer	FSV30	R&S	100815	2013-06-29	One year

*****END OF REPORT BODY*****

ANNEX A: EUT Appearance and Test Setup


A.1 EUT Appearance




a: EUT

Picture 1 Constituents of EUT

A.2 Test Setup

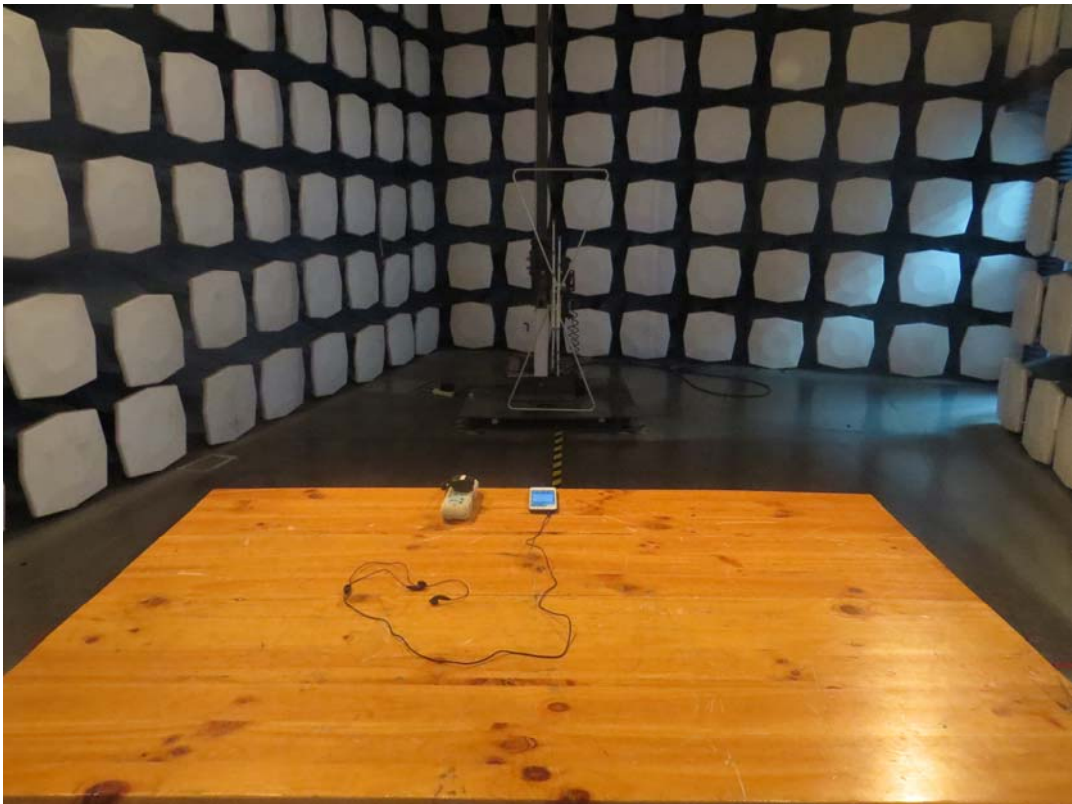

30M Hz-1GHz

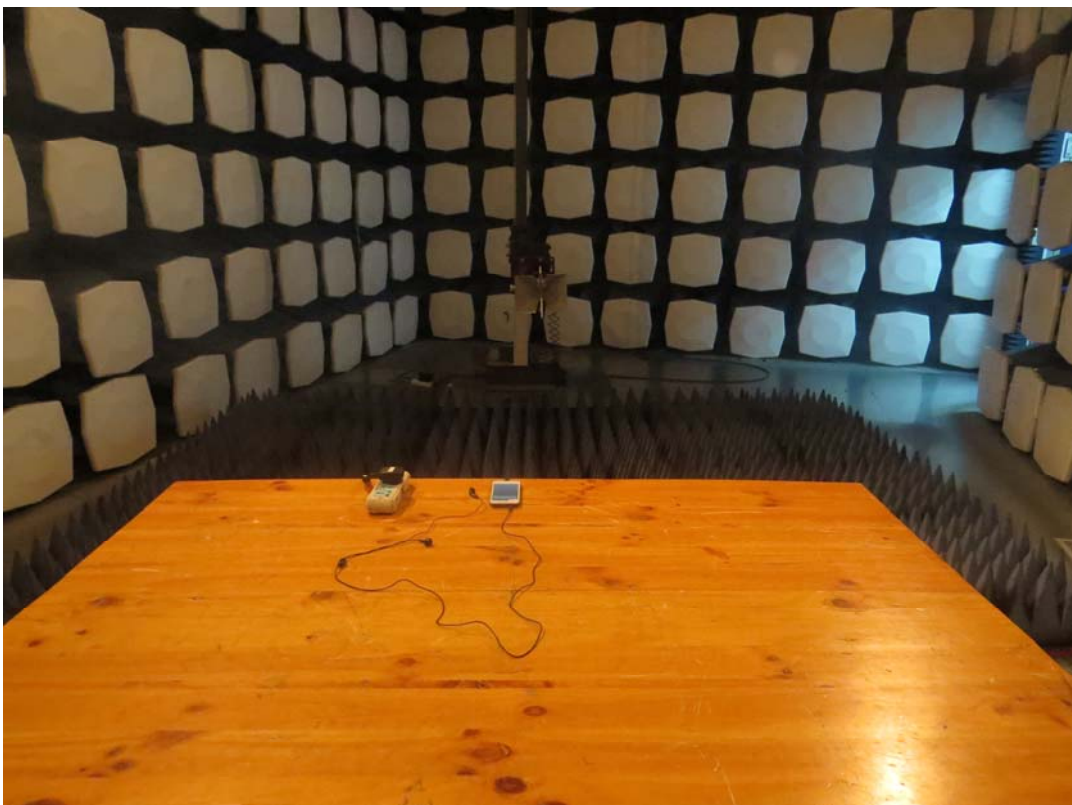

Above 1GHz

Picture 2 Radiated Emission Test Setup

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1404-0104RF03

Page 97 of 97



Picture 3 Conducted Emission Test Setup