

# TEST REPORT

|                             |                                                                                            |
|-----------------------------|--------------------------------------------------------------------------------------------|
| <b>Equipment Under Test</b> | : OfficeConnect Wireless 11g USB Adapter                                                   |
| <b>Model No.</b>            | : 3CRWE254G72                                                                              |
| <b>FCC ID</b>               | : RAXWN4501CARC                                                                            |
| <b>Applicant</b>            | : Arcadyan Technology Corporation                                                          |
| <b>Address of Applicant</b> | : 4F, No. 9, Park Avenue II, Science-based Industrial Park,<br>Hsinchu 300, Taiwan, R.O.C. |
| <b>Date of Receipt</b>      | : 2003.10.03                                                                               |
| <b>Date of Test(s)</b>      | : 2003.10.09 & 2003.10.13                                                                  |
| <b>Date of Issue</b>        | : 2003.12.09                                                                               |

Standards:

**FCC OET Bulletin 65 supplement C,  
ANSI / IEEE C95.1 , C95.3**

In the configuration tested, the EUT complied with the standards specified above.

**Remarks:**

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan E&E Services or testing done by SGS Taiwan E&E Services in connection with distribution or use of the product described in this report must be approved by SGS Taiwan E&E Services in writing.

|                    |                       |             |                     |
|--------------------|-----------------------|-------------|---------------------|
| <b>Tested by</b>   | : <u>Dikin Yang</u>   | <b>Date</b> | : <u>2003.10.15</u> |
| <b>Approved by</b> | : <u>Robert Chang</u> | <b>Date</b> | : <u>2003.12.09</u> |

# **Contents**

## **1. General Information**

|                                                                      |    |
|----------------------------------------------------------------------|----|
| 1.1 Testing Laboratory.....                                          | 4  |
| 1.2 Details of Applicant.....                                        | 4  |
| 1.3 Description of EUT(s).....                                       | 4  |
| 1.4 Test Environment.....                                            | 5  |
| 1.5 Operation Configuration.....                                     | 5  |
| 1.6 The SAR Measurement System.....                                  | 5  |
| 1.7 System Components.....                                           | 7  |
| 1.8 SAR System Verification.....                                     | 8  |
| 1.9 Tissue Simulant Fluid for the Frequency Band 2.4 to 2.5 GHz..... | 9  |
| 1.10 Operation Procedure.....                                        | 10 |
| 1.11 Test Standards and Limits.....                                  | 11 |

## **2. Summary of Results**..... 13

## **3. Instruments List**..... 15

## **4. Measurements**..... 16

### **4.1 802.11 b mode**

(the antenna is in horizontal direction)

|                                              |    |
|----------------------------------------------|----|
| 4.1.1 Edge-on position, lowest channel.....  | 16 |
| 4.1.2 Edge-on position, middle channel.....  | 17 |
| 4.1.3 Edge-on position, highest channel..... | 18 |

(the antenna tip upward)

|                                              |    |
|----------------------------------------------|----|
| 4.1.4 Edge-on position, lowest channel.....  | 19 |
| 4.1.5 Edge-on position, middle channel.....  | 20 |
| 4.1.6 Edge-on position, highest channel..... | 21 |

(the antenna tip downward)

|                                             |    |
|---------------------------------------------|----|
| 4.1.7 End-on position, lowest channel.....  | 22 |
| 4.1.8 End-on position, middle channel.....  | 23 |
| 4.1.9 End-on position, highest channel..... | 24 |

(the antenna is in horizontal direction)

|                                              |    |
|----------------------------------------------|----|
| 4.1.10 End-on position, lowest channel.....  | 25 |
| 4.1.11 End-on position, middle channel.....  | 26 |
| 4.1.12 End-on position, highest channel..... | 27 |

### **4.2 802.11 g mode**

(the antenna is in horizontal direction)

|                                              |    |
|----------------------------------------------|----|
| 4.2.1 Edge-on position, lowest channel.....  | 28 |
| 4.2.2 Edge-on position, middle channel.....  | 29 |
| 4.2.3 Edge-on position, highest channel..... | 30 |

|                                              |    |
|----------------------------------------------|----|
| (the antenna tip upward)                     |    |
| 4.2.4 Edge-on position, lowest channel.....  | 31 |
| 4.2.5 Edge-on position, middle channel.....  | 32 |
| 4.2.6 Edge-on position, highest channel..... | 33 |
| (the antenna tip downward)                   |    |
| 4.2.7 End-on position, lowest channel.....   | 34 |
| 4.2.8 End-on position, middle channel.....   | 35 |
| 4.2.9 End-on position, highest channel.....  | 36 |
| (the antenna is in horizontal direction)     |    |
| 4.2.10 End-on position, lowest channel.....  | 37 |
| 4.2.11 End-on position, middle channel.....  | 38 |
| 4.2.12 End-on position, highest channel..... | 39 |
| 4.3 System Performance Validation .....      | 40 |

## APPENDIX

|                                                            |    |
|------------------------------------------------------------|----|
| 1. Photographs of Test Setup.....                          | 41 |
| 2. Photographs of EUT.....                                 | 46 |
| 3. Probe Calibration certificate.....                      | 49 |
| 4. Uncertainty Analysis.....                               | 53 |
| 5. Phantom description.....                                | 54 |
| 6. System Validation from Original equipment supplier..... | 55 |

# 1. General Information

## 1.1 Testing Laboratory

SGS Taiwan Ltd. ( FCC Registration number: 573967 )

1F, No. 134, Wukung Road, Wuku industrial zone

Taipei county , Taiwan , R.O.C.

Telephone : +886-2-2299-3279

Fax : +886-2-2298-2698

Internet : <http://www.sgs.com.tw>

## 1.2 Details of Applicant

Applicant : Arcadyan Technology Corporation

Address : 4F, No. 9, Park Avenue II, Science-based  
Industrial Park, Hsinchu 300, Taiwan, R.O.C.

Product Name : OfficeConnect Wireless 11g USB Adapter

Model Name : 3CRWE254G72

## 1.3 Description of EUT(s)

|                           |                                        |              |
|---------------------------|----------------------------------------|--------------|
| Equipment Type            | OfficeConnect Wireless 11g USB Adapter |              |
| Test Procedure            | FCC OET Bulletin 65, Supplement C      |              |
| TX Frequency range        | 2412-2462 MHz                          |              |
| FCC ID                    | RAXWN4501CARC                          |              |
| Model(s)                  | 3CRWE254G72                            |              |
| RF Conducted Output Power | 802.11b Mode                           | 802.11g Mode |

|                          |                                    |                     |
|--------------------------|------------------------------------|---------------------|
|                          | 19.13 dBm(2412MHz)                 | 18.16 dBm (2412MHz) |
|                          | 19.10 dBm(2437MHz)                 | 18.14 dBm (2437MHz) |
|                          | 19.04 dBm(2462MHz)                 | 18.07 dBm (2462MHz) |
| Serial No.               | Pre-Production                     |                     |
| Antenna Type             | CHIP Antenna                       |                     |
| Max. SAR Measured        | 0.0696 W/kg                        |                     |
| Battery Type(s)          | From USB Host Laptop PC            |                     |
| Host Laptop PC(s) Tested | IBM ThinkPad T30<br>(S/N: 99AMZM5) |                     |

#### 1.4 Test Environment

Ambient temperature : 22.6° C

Tissue Simulating Liquid : 22° C

Relative Humidity : 62 %

#### 1.5 Operation Configuration

Configuration 1: "Edge-on" placement ; edge of the PC at 90° and at a distance of 1.5 cm from the base of the phantom and the antenna is in horizontal direction.(Fig.2 & Fig.3)

Configuration 2: "Edge-on" placement ; edge of the PC at 90° and at a distance of 1.5 cm from the base of the phantom, and the antenna tip upward.(Fig.4 & Fig.5)

Configuration 3: "End-on" placement; Bottom of the Pc is paralleled and at a distance of 0.0 cm from the base of the phantom, but 0.6 cm Spacing between EUT & Planar Phantom and the EUT antenna is in horizontal direction. (Fig.6 & Fig.7)

Configuration 4: "End-on" placement; Bottom of the Pc is paralleled and at a distance of 0.0 cm from the base of the phantom, but 0.6 cm Spacing between EUT & Planar Phantom and the EUT antenna tip downward. (Fig.8 & Fig.9)

#### 1.6 The SAR Measurement System

A photograph of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system ( Speag Dasy 4 professional system ). A Model ET3DV6 1759 E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation  $SAR = \sigma (|E_i|^2) / \rho$  where  $\sigma$  and  $\rho$  are the conductivity and mass density of the tissue-simulant.

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

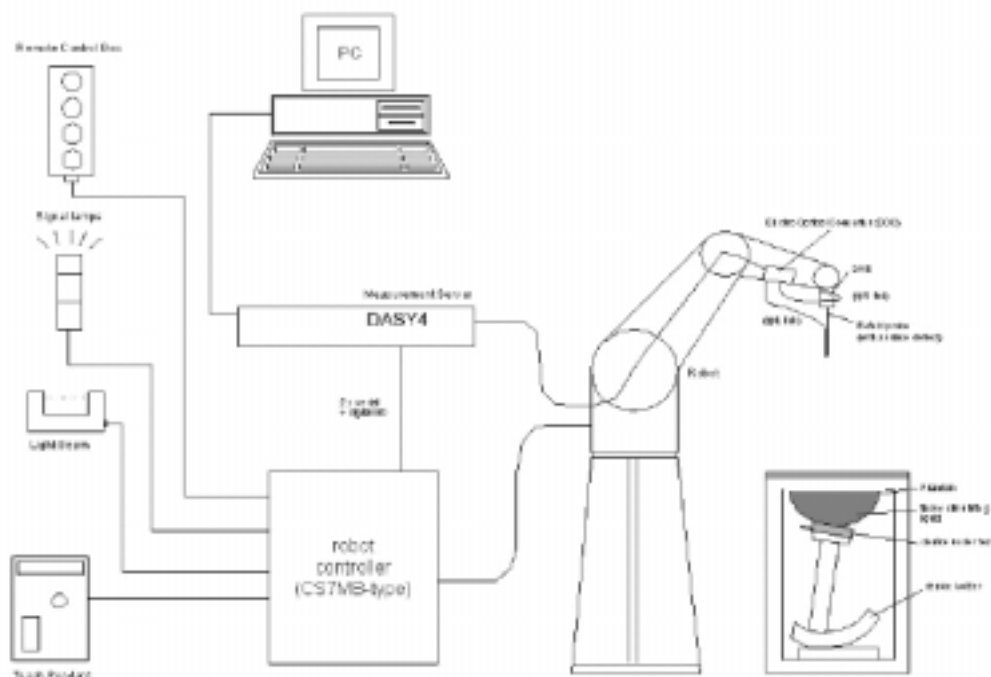


Fig.a The microwave circuit arrangement used for SAR system verification

- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog


signal from the optical surface detection. The EOC is connected to the measurement server.

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.

## 1.7 System Components

### ET3DV6 E-Field Probe

|                |                                                                                                                                                                 |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction:  | Symmetrical design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material<br>(resistant to organic solvents, e.g. glycol) |
| Calibration:   | In air from 10 MHz to 2.5 GHz<br>In brain simulating tissue at<br>frequencies of 900 MHz<br>and 1.8 GHz (accuracy $\pm 8\%$ )                                   |
| Frequency:     | 10 MHz to >6 GHz; Linearity: $\pm 0.2$ dB<br>(30 MHz to 3 GHz)                                                                                                  |
| Directivity:   | $\pm 0.2$ dB in brain tissue (rotation around probe axis)<br>$\pm 0.4$ dB in brain tissue (rotation normal to probe axis)                                       |
| Dynamic Range: | 5 $\mu$ W/g to >100 mW/g; Linearity: $\pm 0.2$ dB                                                                                                               |
| Srfce. Detect: | $\pm 0.2$ mm repeatability in air and clear liquids over<br>diffuse reflecting surfaces                                                                         |
| Dimensions:    | Overall length: 330 mm<br>Tip length: 16 mm<br>Body diameter: 12 mm                                                                                             |

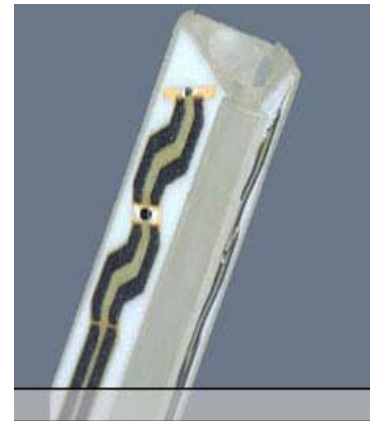

**ET3DV6 E-Field Probe**

Tip diameter: 6.8 mm

Distance from probe tip to dipole centers: 2.7 mm

Application: General dosimetry up to 3 GHz  
Compliance tests of mobile phone

### **SAM PHANTOM V4.0C**

Construction: The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness:  $2 \pm 0.2$  mm

Filling Volume: Approx. 25 liters

Dimensions: Height: 810 mm;  
Length: 1000 mm;  
Width: 500 mm



### **DEVICE HOLDER**

Construction In combination with the Twin SAM Phantom V4.0/V4.0C or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Device Holder

## **1.8 SAR System Verification**

The microwave circuit arrangement for system verification is sketched in Fig.b. The Measured SAR distribution for the peak 1-g SAR is 13.7 m W/g and 10-g SAR is 6.12 m W/g. The measured 1-g SAR is 13.6 m W/g and 10-g SAR is 6.05 m W/g for this dipole. In comparison, it shows that the measured SAR plot is quite close to the original one.(see **APPENDIX** System Validation from Original equipment supplier SPEAG by Schmid & Partner)


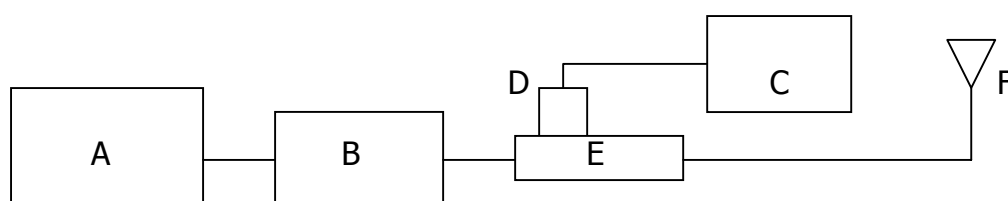


Fig.b The microwave circuit arrangement used for SAR system verification

- A. Agilent Model 8648D Signal Generator
- B. Mini circuits Model ZHL-42 Amplifier
- C. Agilent Model E4416A Power Meter
- D. Agilent Model 8482H Power Sensor
- E. Agilent Model 777D Dual directional coupling
- F. Reference dipole antenna

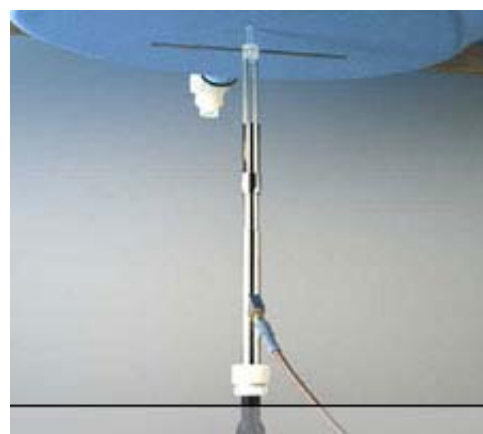

Photograph of the 2450MHz System Check

| Validation Kit      | Frequency | Target SAR 1g (250mW) | Target SAR 10g (250mW) | Measured SAR 1g | Measured SAR 10g | Measured date |
|---------------------|-----------|-----------------------|------------------------|-----------------|------------------|---------------|
| DT3DV6<br>S/N :1759 | 2450 MHz  | 13.7 m W/g            | 6.02 m W/g             | 13.6 m W/g      | 6.12 m W/g       | 2003-10-07    |

Table 1. Results system validation

### 1.9 Tissue Simulant Fluid for the Frequency Band 2.4 to 2.5 GHz

The dielectric properties for this body-simulant fluid were measured by using the HP Model 85070D Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with HP 8714ET Network Analyzer(300 KHz-3000 MHz ) by using a procedure detailed in Section V. The Measured dielectric parameters of the body-simulant fluid at 2400 MHz are  $\rho = 52.5 \pm 5\%$ ,  $\sigma = 2.00 \pm 10\%$  S/m. The measured properties are

close to the values of  $\rho = 51.66$  and  $\sigma = 1.943$  S/m. The Conductivity ( $\sigma$ ) and Permittivity ( $\rho$ ) are listed in Table 1. For the SAR measurement given in this report. We obtain the desired dielectric properties to simulate the body tissue at the midband frequency of 2437MHz to be  $\rho = 51.62$  and  $\sigma = 1.991$  S/m. (Table 2). A photograph of the Tissue Simulant Fluid liquid depth 15cm is given in Fig .10 .

| Channel | Frequency (MHz) | Conductivity ( $\sigma$ ) | Permittivity ( $\rho$ ) |
|---------|-----------------|---------------------------|-------------------------|
| 01      | 2412            | 1.958                     | 51.71                   |
| 06      | 2437            | 1.991                     | 51.62                   |
| 11      | 2462            | 2.018                     | 51.45                   |

Table 2. Dielectric parameters for the Frequency Band 2.4 to 2.5 GHz

### 1.10 Operation Procedure

By using the program subordinated in the computer, and change into the written channel, and then set in highest power. Finally, we will test it by dividing into 4 ways.

Configuration 1: " Edge-on" placement ; edge of the PC at 90° and at a distance of 1.5 cm from the base of the phantom and the antenna is in horizontal direction.(Fig.2 & Fig.3)

Configuration 2: " Edge-on" placement ; edge of the PC at 90° and at a distance of 1.5 cm from the base of the phantom, and the antenna tip upward.(Fig.4 & Fig.5)

Configuration 3: "End-on" placement; Bottom of the Pc is paralleled and at a distance of 0.0 cm from the base of the phantom, but 0.6 cm Spacing between EUT & Planar Phantom and the EUT antenna is in horizontal direction. (Fig.6 & Fig.7)

Configuration 4: "End-on" placement; Bottom of the Pc is paralleled and at a distance of 0.0 cm from the base of the phantom, but 0.6 cm Spacing between EUT & Planar Phantom and the EUT antenna tip downward. (Fig.8 & Fig.9)

The way by using the holder makes EUT 1.5cm close to the flat phantom then aims the center, and start to make the measurement. In doing so, we can measure data . All of the measured 1-g SAR are less then the FCC 96-326 guideline of 1.6 W/kg .The lowest channel supported by the EUT is channel 0, and highest channel can be measured is

channel 11. So the channels above are used as the lowest and highest channel in the testing, and the middle channel is set as channel 06.

### **1.11 Test Standards and Limits**

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1–1992, Copyright 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

(1) Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube). Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

(2) Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1

gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.(Table .4)

| <b>Human Exposure</b>                               | <b>Uncontrolled Environment<br/>General Population</b> | <b>Controlled Environment<br/>Occupational</b> |
|-----------------------------------------------------|--------------------------------------------------------|------------------------------------------------|
| <b>Spatial Peak SAR</b><br>(Brain)                  | <b>1.60 m W/g</b>                                      | 8.00 m W/g                                     |
| <b>Spatial Average SAR</b><br>(Whole Body)          | 0.08 m W/g                                             | 0.40 m W/g                                     |
| <b>Spatial Peak SAR</b><br>(Hands/Feet/Ankle/Wrist) | 4.00 m W/g                                             | 20.00 m W/g                                    |

Table .4 RF exposure limits

## Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

## 2.Summary of Results

### 802.11 b Mode

#### SAR MEASUREMENT

Crest factor : 1 (Duty cycle: 100%)

Laptop PC : IBM ThinkPad T30 , S/N: 99AMZM5

Depth of Liquid : 15.0 cm

#### EUT Configuration 1

| EUT Set-up conditions |                      | Frequency |      | Conducted Power [dBm] (Peak) | Liquid Temp[°C] | SAR (W/kg) | Limit (W/kg) |
|-----------------------|----------------------|-----------|------|------------------------------|-----------------|------------|--------------|
| Sep. [cm]             | Antenna              | Channel   | MHz  |                              |                 |            |              |
| 1.5                   | horizontal direction | 1         | 2412 | 19.13 dBm (2412MHz)          | 22.1            | 0.0224     | 1.6          |
|                       |                      | 6         | 2437 | 19.10 dBm (2437MHz)          | 22.1            | 0.0213     |              |
|                       |                      | 11        | 2462 | 19.04 dBm (2462MHz)          | 22.1            | 0.0179     |              |

#### EUT Configuration 2

| EUT Set-up conditions |            | Frequency |      | Conducted Power [dBm] (Peak) | Liquid Temp[°C] | SAR (W/kg) | Limit (W/kg) |
|-----------------------|------------|-----------|------|------------------------------|-----------------|------------|--------------|
| Sep. [cm]             | Antenna    | Channel   | MHz  |                              |                 |            |              |
| 1.5                   | tip upward | 1         | 2412 | 19.13 dBm (2412MHz)          | 22.1            | 0.0159     | 1.6          |
|                       |            | 6         | 2437 | 19.10 dBm (2437MHz)          | 22.1            | 0.0151     |              |
|                       |            | 11        | 2462 | 19.04 dBm (2462MHz)          | 22.1            | 0.0155     |              |

#### EUT Configuration 3

| EUT Set-up conditions |                      | Frequency |      | Conducted Power [dBm] (Peak) | Liquid Temp[°C] | SAR (W/kg) | Limit (W/kg) |
|-----------------------|----------------------|-----------|------|------------------------------|-----------------|------------|--------------|
| Sep. [cm]             | Antenna              | Channel   | MHz  |                              |                 |            |              |
| 0.6                   | horizontal direction | 1         | 2412 | 19.13 dBm (2412MHz)          | 22.1            | 0.0664     | 1.6          |
|                       |                      | 6         | 2437 | 19.10 dBm (2437MHz)          | 22.1            | 0.0611     |              |
|                       |                      | 11        | 2462 | 19.04 dBm (2462MHz)          | 22.1            | 0.0545     |              |

#### EUT Configuration 4

| EUT Set-up conditions |              | Frequency |      | Conducted Power [dBm] (Peak) | Liquid Temp[°C] | SAR (W/kg) | Limit (W/kg) |
|-----------------------|--------------|-----------|------|------------------------------|-----------------|------------|--------------|
| Sep. [cm]             | Antenna      | Channel   | MHz  |                              |                 |            |              |
| 0.6                   | tip downward | 1         | 2412 | 19.13 dBm (2412MHz)          | 22.1            | 0.0367     | 1.6          |
|                       |              | 6         | 2437 | 19.10 dBm (2437MHz)          | 22.1            | 0.0366     |              |
|                       |              | 11        | 2462 | 19.04 dBm (2462MHz)          | 22.1            | 0.0369     |              |

|                       |        |                   |      |
|-----------------------|--------|-------------------|------|
| Measured Mixture Type | Body   | Relative Humidity | 62%  |
| Ambient Temperature   | 22.6°C | Fluid Temperature | 22°C |

**802.11 g Mode****SAR MEASUREMENT**

Crest factor : 1 (Duty cycle: 100%)

Laptop PC : IBM ThinkPad T30 , S/N: 99AMZM5

Depth of Liquid : 15.0 cm

**EUT Configuration 1**

| EUT Set-up conditions |                         | Frequency |      | Conducted Power<br>[dBm] (Peak) | Liquid<br>Temp[°C] | SAR<br>(W/kg) | Limit<br>(W/kg) |
|-----------------------|-------------------------|-----------|------|---------------------------------|--------------------|---------------|-----------------|
| Sep. [cm]             | Antenna                 | Channel   | MHz  |                                 |                    |               |                 |
| 1.5                   | horizontal<br>direction | 1         | 2412 | 18.16 dBm (2412MHz)             | 22.1               | 0.0246        | 1.6             |
|                       |                         | 6         | 2437 | 18.14 dBm (2437MHz)             | 22.1               | 0.0227        |                 |
|                       |                         | 11        | 2462 | 18.07 dBm (2462MHz)             | 22.1               | 0.0253        |                 |

**EUT Configuration 2**

| EUT Set-up conditions |            | Frequency |      | Conducted Power<br>[dBm] (Peak) | Liquid<br>Temp[°C] | SAR<br>(W/kg) | Limit<br>(W/kg) |
|-----------------------|------------|-----------|------|---------------------------------|--------------------|---------------|-----------------|
| Sep. [cm]             | Antenna    | Channel   | MHz  |                                 |                    |               |                 |
| 1.5                   | tip upward | 1         | 2412 | 18.16 dBm (2412MHz)             | 22.1               | 0.0159        | 1.6             |
|                       |            | 6         | 2437 | 18.14 dBm (2437MHz)             | 22.1               | 0.0165        |                 |
|                       |            | 11        | 2462 | 18.07 dBm (2462MHz)             | 22.1               | 0.0178        |                 |

**EUT Configuration 3**

| EUT Set-up conditions |                         | Frequency |      | Conducted Power<br>[dBm] (Peak) | Liquid<br>Temp[°C] | SAR<br>(W/kg) | Limit<br>(W/kg) |
|-----------------------|-------------------------|-----------|------|---------------------------------|--------------------|---------------|-----------------|
| Sep. [cm]             | Antenna                 | Channel   | MHz  |                                 |                    |               |                 |
| 0.6                   | horizontal<br>direction | 1         | 2412 | 18.16 dBm (2412MHz)             | 22.1               | 0.0696        | 1.6             |
|                       |                         | 6         | 2437 | 18.14 dBm (2437MHz)             | 22.1               | 0.0629        |                 |
|                       |                         | 11        | 2462 | 18.07 dBm (2462MHz)             | 22.1               | 0.0665        |                 |

**EUT Configuration 4**

| EUT Set-up conditions |                 | Frequency |      | Conducted Power<br>[dBm] (Peak) | Liquid<br>Temp[°C] | SAR<br>(W/kg) | Limit<br>(W/kg) |
|-----------------------|-----------------|-----------|------|---------------------------------|--------------------|---------------|-----------------|
| Sep. [cm]             | Antenna         | Channel   | MHz  |                                 |                    |               |                 |
| 0.6                   | tip<br>downward | 1         | 2412 | 18.16 dBm (2412MHz)             | 22.1               | 0.033         | 1.6             |
|                       |                 | 6         | 2437 | 18.14 dBm (2437MHz)             | 22.1               | 0.0402        |                 |
|                       |                 | 11        | 2462 | 18.07 dBm (2462MHz)             | 22.1               | 0.0456        |                 |

|                       |        |                   |      |
|-----------------------|--------|-------------------|------|
| Measured Mixture Type | Body   | Relative Humidity | 62%  |
| Ambient Temperature   | 22.6°C | Fluid Temperature | 22°C |

### 3. Instruments List

| Manufacturer                    | Device                            | Type                  | Serial number | Date of last calibration    |
|---------------------------------|-----------------------------------|-----------------------|---------------|-----------------------------|
| Schmid & Partner Engineering AG | Dosimetric E-Field Probe          | ET3DV6                | 1759          | Mar.07.2003                 |
| Schmid & Partner Engineering AG | 2450 MHz System Validation Dipole | D2450V2               | 727           | Mar.05. 2003                |
| Schmid & Partner Engineering AG | Data acquisition Electronics      | DAE3                  | 547           | Jan.30.2003                 |
| Schmid & Partner Engineering AG | Software                          | DASY 4 V4.1c Build 47 | ---           | Calibration isn't necessary |
| Schmid & Partner Engineering AG | Phantom                           | SAM                   | ---           | Calibration isn't necessary |
| Agilent                         | Network Analyser                  | 8714ET                | US41442815    | Jan.16.2003                 |
| Agilent                         | Dielectric Probe Kit              | 85070D                | US01440168    | Jan.20.2003                 |

## 4. Measurements

**(802.11 b & the antenna is in horizontal direction)**

**Edge-on position, lowest channel**

Date/Time: 10/13/03 14:31:54

**DUT: USB Stick; Type: WN-250gi;**

**Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: M2450 ( $\sigma = 1.95826$  mho/m,  $\epsilon_r = 51.7097$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Horizontal /Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 1.98 V/m

Power Drift = 0.1 dB

Maximum value of SAR = 0.023 mW/g

**Horizontal /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.0504 W/kg

SAR(1 g) = 0.0224 mW/g; SAR(10 g) = 0.0115 mW/g

Reference Value = 1.98 V/m

Power Drift = 0.1 dB

Maximum value of SAR = 0.0227 mW/g

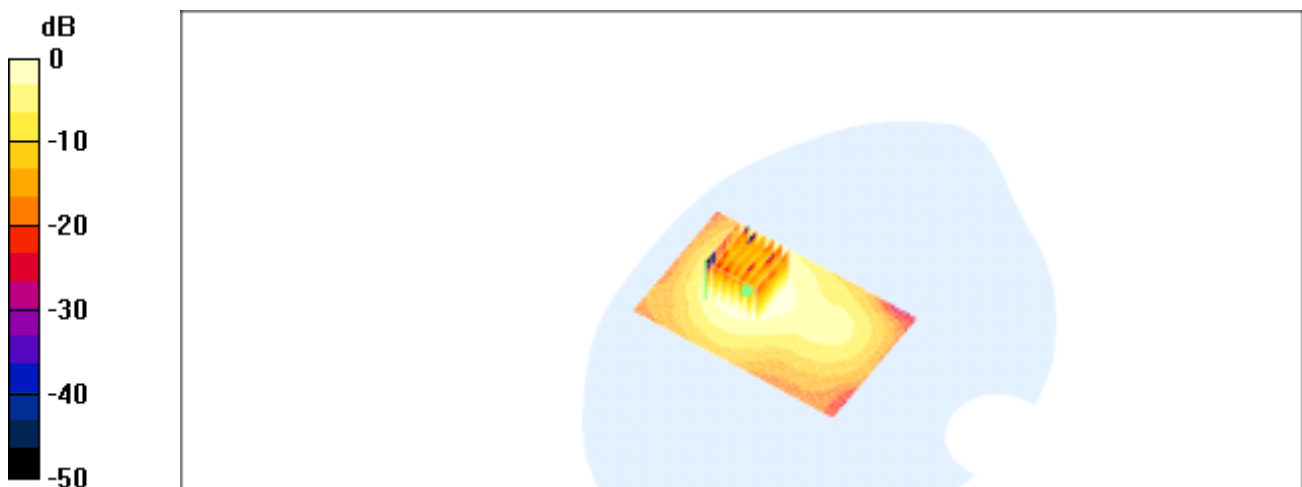

0 dB = 0.0227mW/g

**(802.11 b & the antenna is in horizontal direction)**

**Edge-on position, middle channel**

Date/Time: 10/13/03 16:34:29

**DUT: USB Stick; Type: WN-250gi;  
Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: M2450 ( $\sigma = 1.99146$  mho/m,  $\epsilon_r = 51.6172$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Horizontal /Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 1.84 V/m

Power Drift = 0.3 dB

Maximum value of SAR = 0.0222 mW/g

**Horizontal /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.0478 W/kg

SAR(1 g) = 0.0213 mW/g; SAR(10 g) = 0.011 mW/g

Reference Value = 1.84 V/m

Power Drift = 0.3 dB

Maximum value of SAR = 0.0215 mW/g

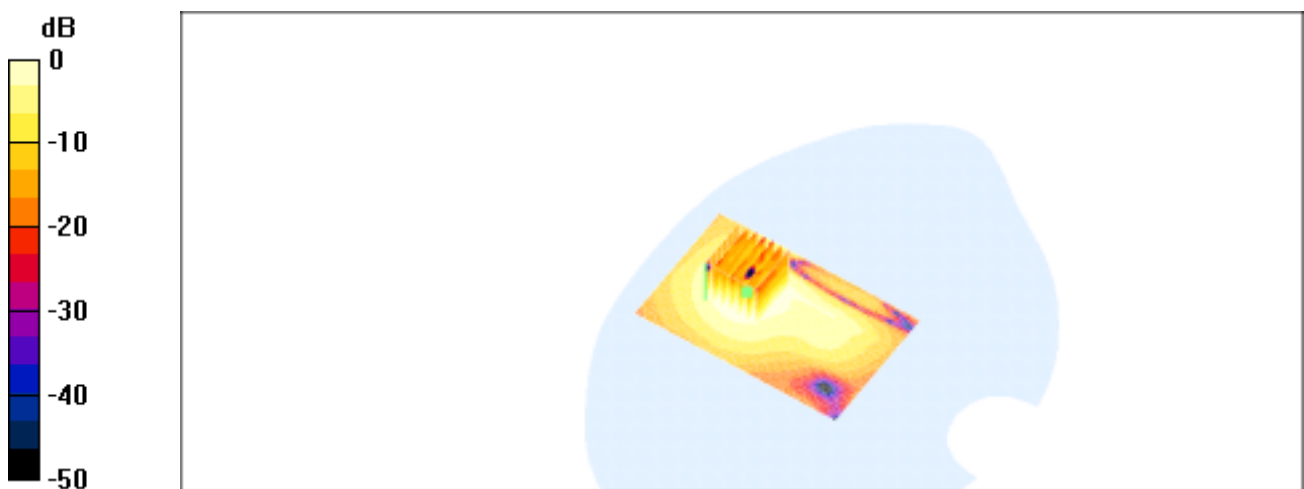

0 dB = 0.0215mW/g

**(802.11 b & the antenna is in horizontal direction)**

**Edge-on position, highest channel**

Date/Time: 10/13/03 15:59:46

**DUT: USB Stick; Type: WN-250gi;  
Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 ( $\sigma = 2.01798$  mho/m,  $\epsilon_r = 51.4499$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Horizontal /Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 1.83 V/m

Power Drift = 0.4 dB

Maximum value of SAR = 0.0188 mW/g

**Horizontal /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.0379 W/kg

SAR(1 g) = 0.0179 mW/g; SAR(10 g) = 0.00933 mW/g

Reference Value = 1.83 V/m

Power Drift = 0.4 dB

Maximum value of SAR = 0.0184 mW/g

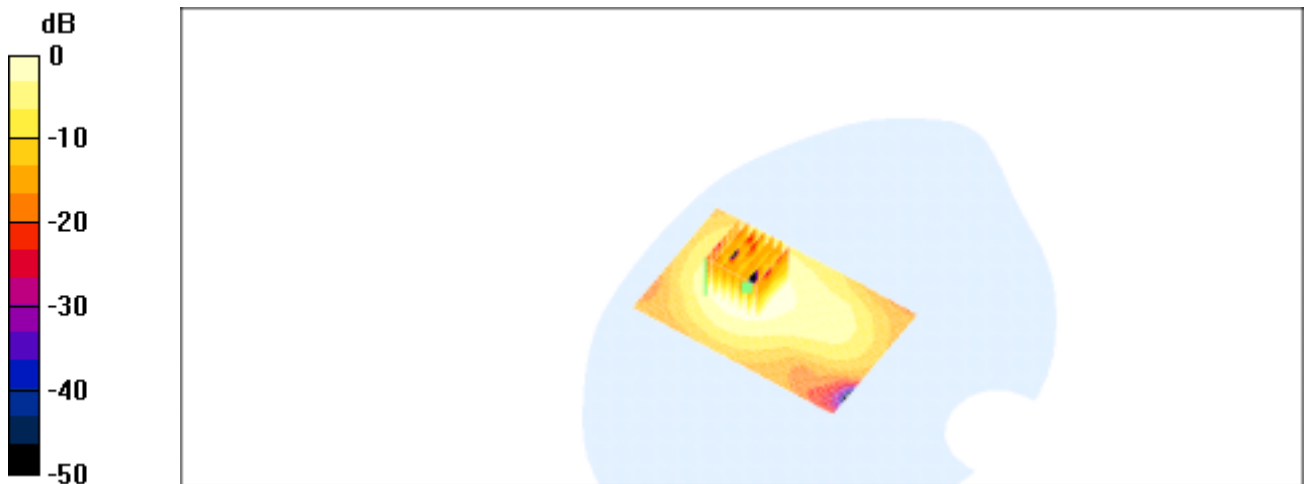

0 dB = 0.0184mW/g

**(802.11 b & the antenna tip upward)**  
**Edge-on position, lowest channel**

Date/Time: 10/13/03 13:30:47

**DUT: USB Stick; Type: WN-250gi;**  
**Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1  
 Medium: M2450 ( $\sigma = 1.95826$  mho/m,  $\epsilon_r = 51.7097$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Vertical/Area Scan (51x51x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 3.08 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.0182 mW/g

**Vertical/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.0367 W/kg

SAR(1 g) = 0.0159 mW/g; SAR(10 g) = 0.00693 mW/g

Reference Value = 3.08 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.0172 mW/g

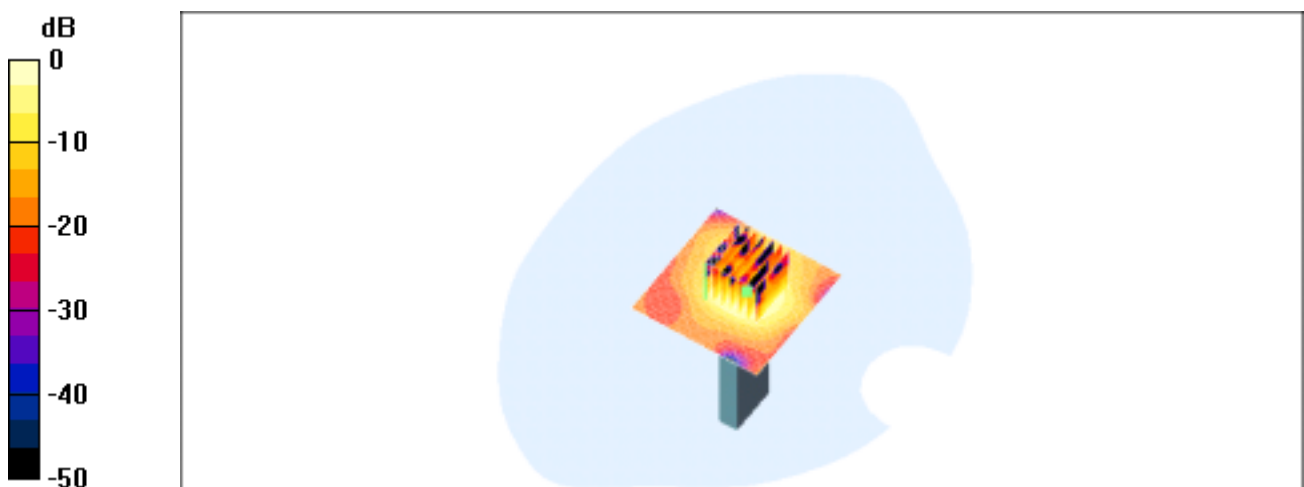

0 dB = 0.0172mW/g

**(802.11 b & the antenna tip upward)**  
**Edge-on position, middle channel**

Date/Time: 10/13/03 13:05:29

**DUT: USB Stick; Type: WN-250gi;**  
**Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: M2450 ( $\sigma = 1.99146$  mho/m,  $\epsilon_r = 51.6172$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Vertical/Area Scan (51x51x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 3.04 V/m

Power Drift = -0.05 dB

Maximum value of SAR = 0.0174 mW/g

**Vertical/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.033 W/kg

SAR(1 g) = 0.0151 mW/g; SAR(10 g) = 0.00667 mW/g

Reference Value = 3.04 V/m

Power Drift = -0.05 dB

Maximum value of SAR = 0.0164 mW/g



0 dB = 0.0164mW/g

**(802.11 b & the antenna tip upward)**

**Edge-on position, highest channel**

Date/Time: 10/13/03 12:30:34

**DUT: USB Stick; Type: WN-250gi;  
Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 ( $\sigma = 2.01798$  mho/m,  $\epsilon_r = 51.4499$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Vertical/Area Scan (51x51x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 3.05 V/m

Power Drift = -0.2 dB

Maximum value of SAR = 0.0173 mW/g

**Vertical/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.0345 W/kg

SAR(1 g) = 0.0155 mW/g; SAR(10 g) = 0.00682 mW/g

Reference Value = 3.05 V/m

Power Drift = -0.2 dB

Maximum value of SAR = 0.0167 mW/g

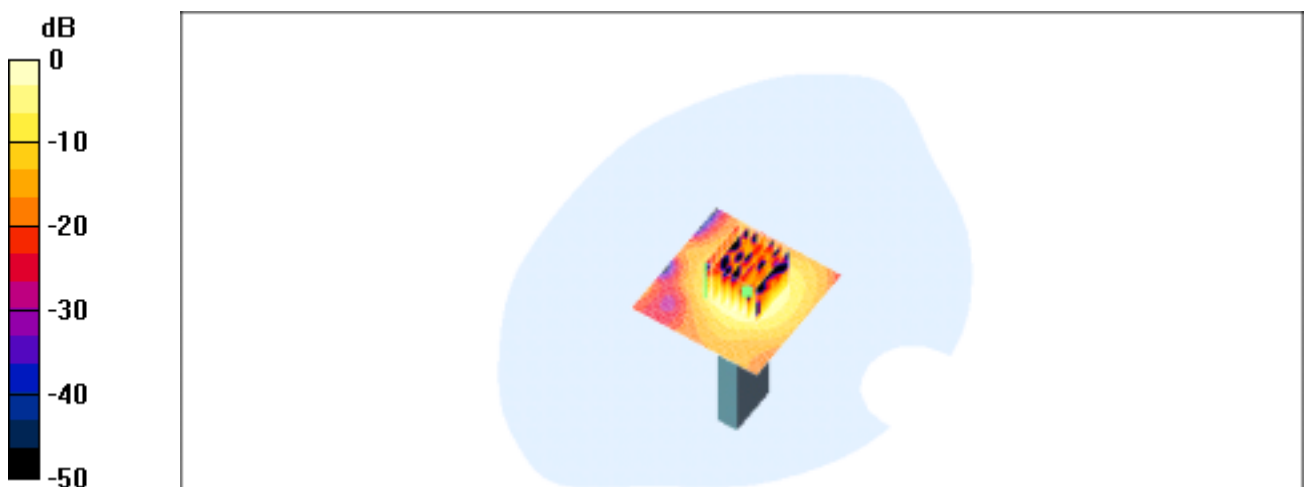

0 dB = 0.0167mW/g

**(802.11b & the antenna is in horizontal direction)**

**End-on position, lowest channel**

Date/Time: 10/09/03 11:13:49

**DUT: USB Stick; Type: WN-250gi;  
Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: M2450 ( $\sigma = 1.95826$  mho/m,  $\epsilon_r = 51.7097$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Horizontal/Area Scan (31x81x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 4.88 V/m

Power Drift = -0.2 dB

Maximum value of SAR = 0.0778 mW/g

**Horizontal/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.134 W/kg

SAR(1 g) = 0.0664 mW/g; SAR(10 g) = 0.0334 mW/g

Reference Value = 4.88 V/m

Power Drift = -0.2 dB

Maximum value of SAR = 0.071 mW/g



0 dB = 0.071mW/g

**(802.11b & the antenna is in horizontal direction)**

**End-on position, middle channel**

Date/Time: 10/09/03 11:38:59

**DUT: USB Stick; Type: WN-250gi;  
Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium: M2450 ( $\sigma = 1.99146$  mho/m,  $\epsilon_r = 51.6172$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Horizontal/Area Scan (31x81x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 4.87 V/m

Power Drift = -0.03 dB

Maximum value of SAR = 0.0707 mW/g

**Horizontal/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.0611 mW/g; SAR(10 g) = 0.0302 mW/g

Reference Value = 4.87 V/m

Power Drift = -0.03 dB

Maximum value of SAR = 0.0645 mW/g

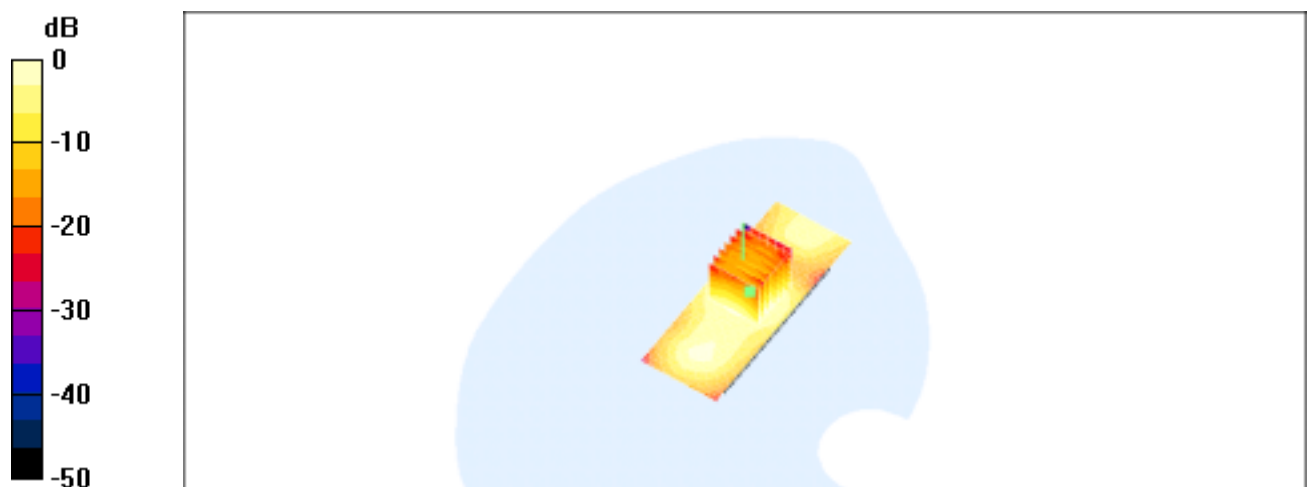

0 dB = 0.0645mW/g

**(802.11b & the antenna is in horizontal direction)**

**End-on position, highest channel**

Date/Time: 10/09/03 14:28:48

**DUT: USB Stick; Type: WN-250gi;  
Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1  
Medium: M2450 ( $\sigma = 2.01798$  mho/m,  $\epsilon_r = 51.4499$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Horizontal/Area Scan (31x81x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 4.72 V/m

Power Drift = 0.1 dB

Maximum value of SAR = 0.0645 mW/g

**Horizontal/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.0545 mW/g; SAR(10 g) = 0.0266 mW/g

Reference Value = 4.72 V/m

Power Drift = 0.1 dB

Maximum value of SAR = 0.058 mW/g

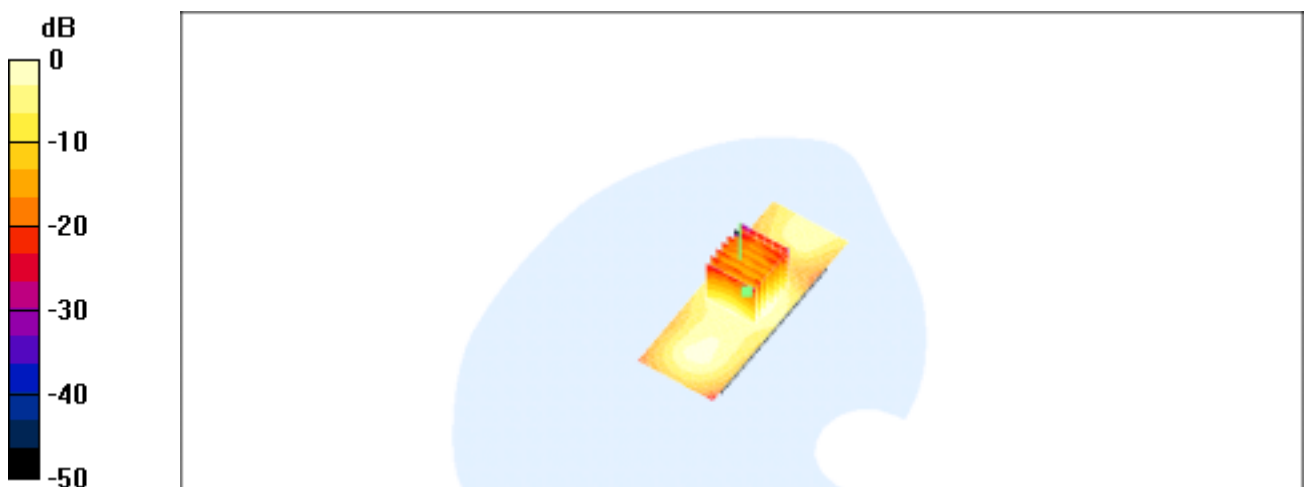

0 dB = 0.058mW/g

**(802.11 b & the antenna tip downward)**

**End-on position, lowest channel**

Date/Time: 10/09/03 16:15:12

**DUT: USB Stick; Type: WN-250gi;  
Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: M2450 ( $\sigma = 1.95826$  mho/m,  $\epsilon_r = 51.7097$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Vertical/Area Scan (41x51x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 1.25 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.0408 mW/g

**Vertical/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.0787 W/kg

SAR(1 g) = 0.0367 mW/g; SAR(10 g) = 0.0168 mW/g

Reference Value = 1.25 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.0402 mW/g



0 dB = 0.0402mW/g

**(802.11b & the antenna tip downward)**

**End-on position, middle channel**

Date/Time: 10/09/03 16:38:03

**DUT: USB Stick; Type: WN-250gi;  
Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: M2450 ( $\sigma = 1.99146$  mho/m,  $\epsilon_r = 51.6172$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Vertical/Area Scan (41x51x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 1.1 V/m

Power Drift = -0.2 dB

Maximum value of SAR = 0.0411 mW/g

**Vertical/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.0822 W/kg

SAR(1 g) = 0.0366 mW/g; SAR(10 g) = 0.0165 mW/g

Reference Value = 1.1 V/m

Power Drift = -0.2 dB

Maximum value of SAR = 0.0404 mW/g

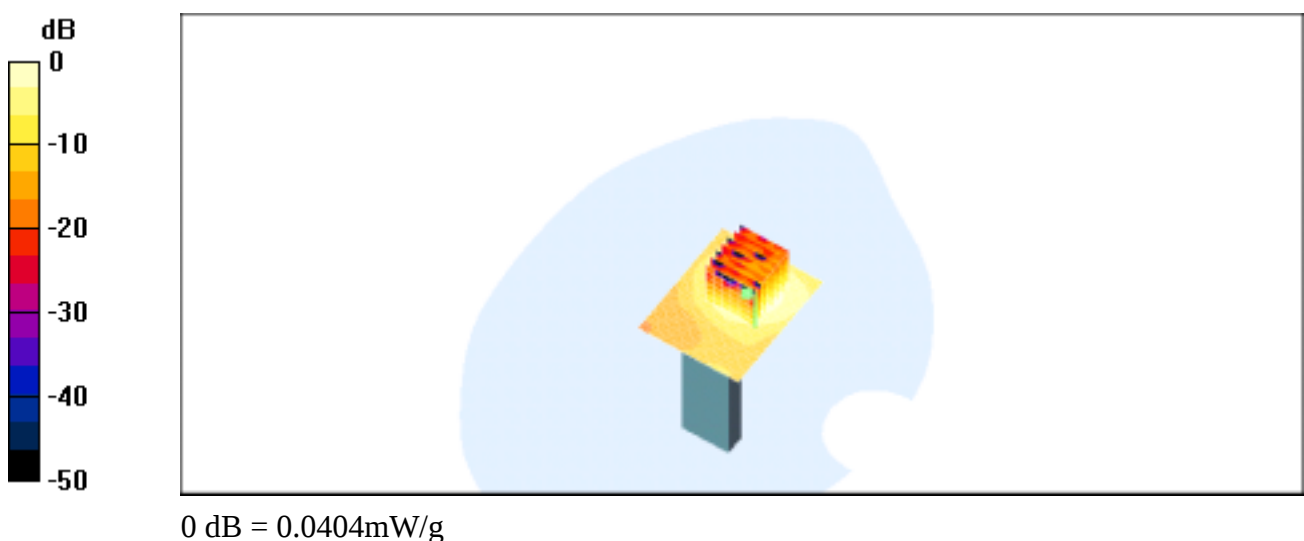

**(802.11 b & the antenna tip downward)**

**Edge-on position, highest channel**

Date/Time: 10/09/03 17:04:26

**DUT: USB Stick; Type: WN-250gi;  
Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1  
Medium: M2450 ( $\sigma = 2.01798$  mho/m,  $\epsilon_r = 51.4499$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Vertical/Area Scan (41x51x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 1.08 V/m

Power Drift = -0.003 dB

Maximum value of SAR = 0.0408 mW/g

**Vertical/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.0804 W/kg

SAR(1 g) = 0.0369 mW/g; SAR(10 g) = 0.0167 mW/g

Reference Value = 1.08 V/m

Power Drift = -0.003 dB

Maximum value of SAR = 0.0407 mW/g



0 dB = 0.0407mW/g

**(802.11 g & the antenna is in horizontal direction)****Edge-on position, lowest channel**

Date/Time: 10/13/03 18:16:37

**DUT: USB Stick; Type: WN-250gi;**  
**Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: M2450 ( $\sigma = 1.95826$  mho/m,  $\epsilon_r = 51.7097$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Horizontal/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 1.82 V/m

Power Drift = 0.09 dB

Maximum value of SAR = 0.0256 mW/g

**Horizontal/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.0535 W/kg

SAR(1 g) = 0.0246 mW/g; SAR(10 g) = 0.0127 mW/g

Reference Value = 1.82 V/m

Power Drift = 0.09 dB

Maximum value of SAR = 0.0255 mW/g

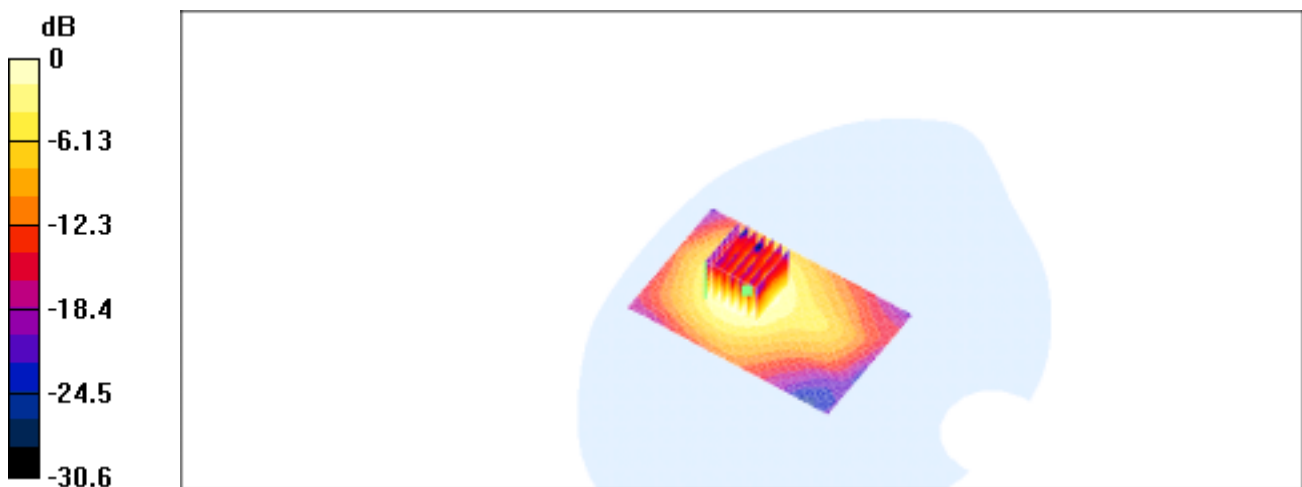

0 dB = 0.0255mW/g

**(802.11 g & the antenna is in horizontal direction)****Edge-on position, middle channel**

Date/Time: 10/13/03 18:43:31

**DUT: USB Stick; Type: WN-250gi;**  
**Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: M2450 ( $\sigma = 1.99146$  mho/m,  $\epsilon_r = 51.6172$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

## DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Horizontal/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 2.03 V/m

Power Drift = 0.1 dB

Maximum value of SAR = 0.0232 mW/g

**Horizontal/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.0484 W/kg

SAR(1 g) = 0.0227 mW/g; SAR(10 g) = 0.0117 mW/g

Reference Value = 2.03 V/m

Power Drift = 0.1 dB

Maximum value of SAR = 0.0237 mW/g

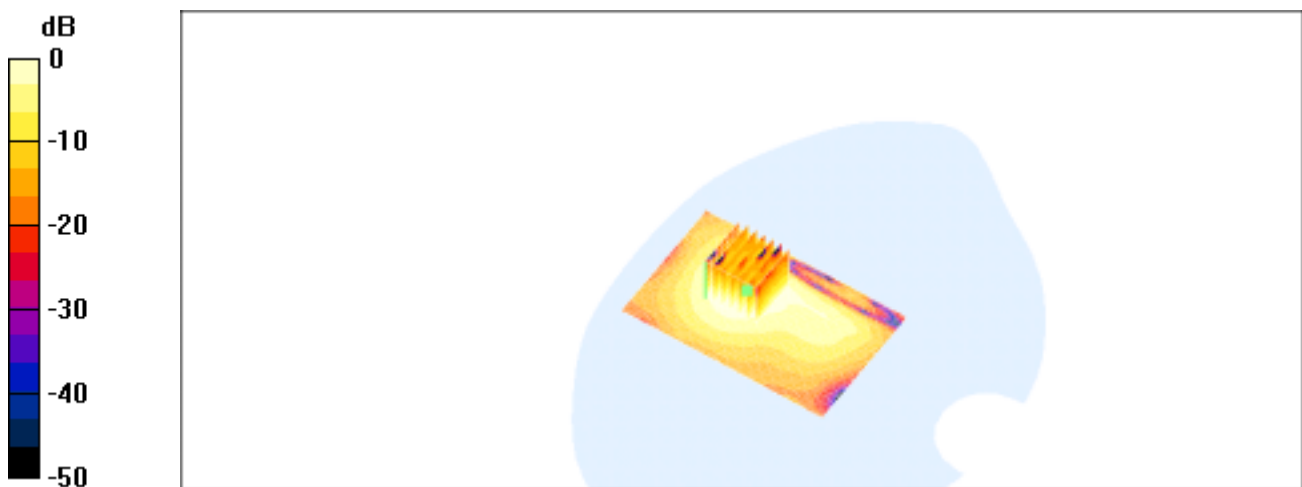

0 dB = 0.0237mW/g

**(802.11 g & the antenna is in horizontal direction)**

**Edge-on position, highest channel**

Date/Time: 10/13/03 19:20:40

**DUT: USB Stick; Type: WN-250gi;  
Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 ( $\sigma = 2.01798$  mho/m,  $\epsilon_r = 51.4499$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Horizontal/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 2.12 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.0247 mW/g

**Horizontal/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 5.39 W/kg

SAR(1 g) = 0.0656 mW/g; SAR(10 g) = 0.0165 mW/g

Reference Value = 2.12 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.0253 mW/g

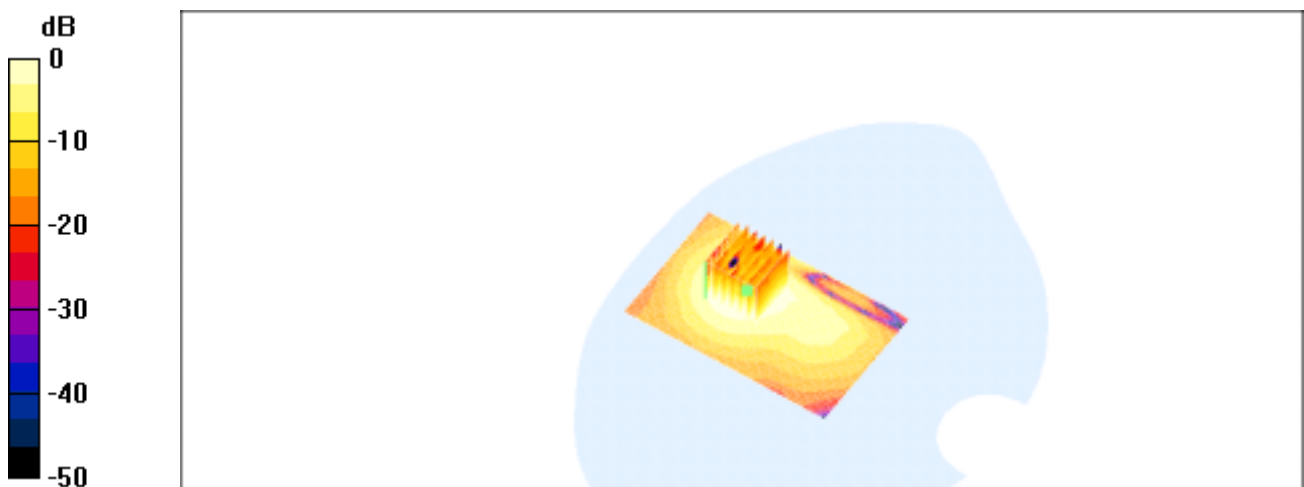

0 dB = 0.0253mW/g

**(802.11 g & the antenna tip upward)**  
**Edge-on position, lowest channel**

Date/Time: 10/13/03 10:47:58

**DUT: USB Stick; Type: WN-250gi;**  
**Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1  
 Medium: M2450 ( $\sigma = 1.95826$  mho/m,  $\epsilon_r = 51.7097$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Vertical/Area Scan (51x51x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 3.13 V/m

Power Drift = -0.08 dB

Maximum value of SAR = 0.0184 mW/g

**Vertical/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.0379 W/kg

SAR(1 g) = 0.0159 mW/g; SAR(10 g) = 0.00698 mW/g

Reference Value = 3.13 V/m

Power Drift = -0.08 dB

Maximum value of SAR = 0.0175 mW/g



0 dB = 0.0175mW/g

**(802.11 g & the antenna tip upward)**  
**Edge-on position, middle channel**

Date/Time: 10/13/03 11:11:29

**DUT: USB Stick; Type: WN-250gi;**  
**Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: M2450 ( $\sigma = 1.99146$  mho/m,  $\epsilon_r = 51.6172$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Vertical/Area Scan (51x51x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 3.24 V/m

Power Drift = -0.06 dB

Maximum value of SAR = 0.0204 mW/g

**Vertical/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.0357 W/kg

SAR(1 g) = 0.0165 mW/g; SAR(10 g) = 0.00738 mW/g

Reference Value = 3.24 V/m

Power Drift = -0.06 dB

Maximum value of SAR = 0.0177 mW/g

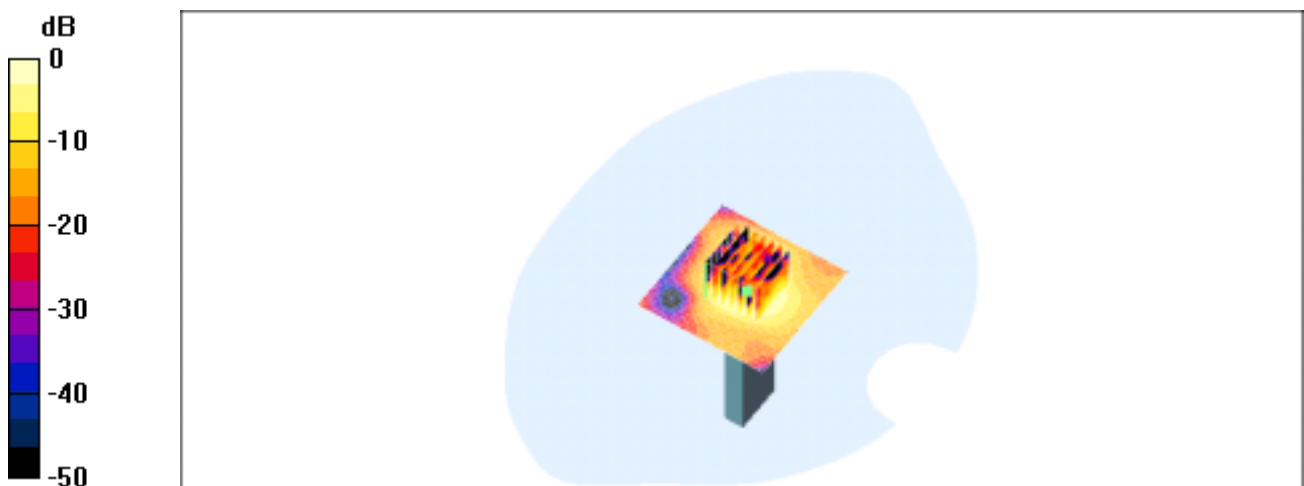

0 dB = 0.0177mW/g

**(802.11 g & the antenna tip upward)**  
**Edge-on position, highest channel**

Date/Time: 10/13/03 11:42:54

**DUT: USB Stick; Type: WN-250gi;**  
**Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1  
 Medium: M2450 ( $\sigma = 2.01798$  mho/m,  $\epsilon_r = 51.4499$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Vertical/Area Scan (51x51x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 3.24 V/m

Power Drift = -0.01 dB

Maximum value of SAR = 0.0206 mW/g

**Vertical/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.0387 W/kg

SAR(1 g) = 0.0178 mW/g; SAR(10 g) = 0.00796 mW/g

Reference Value = 3.24 V/m

Power Drift = -0.01 dB

Maximum value of SAR = 0.0192 mW/g

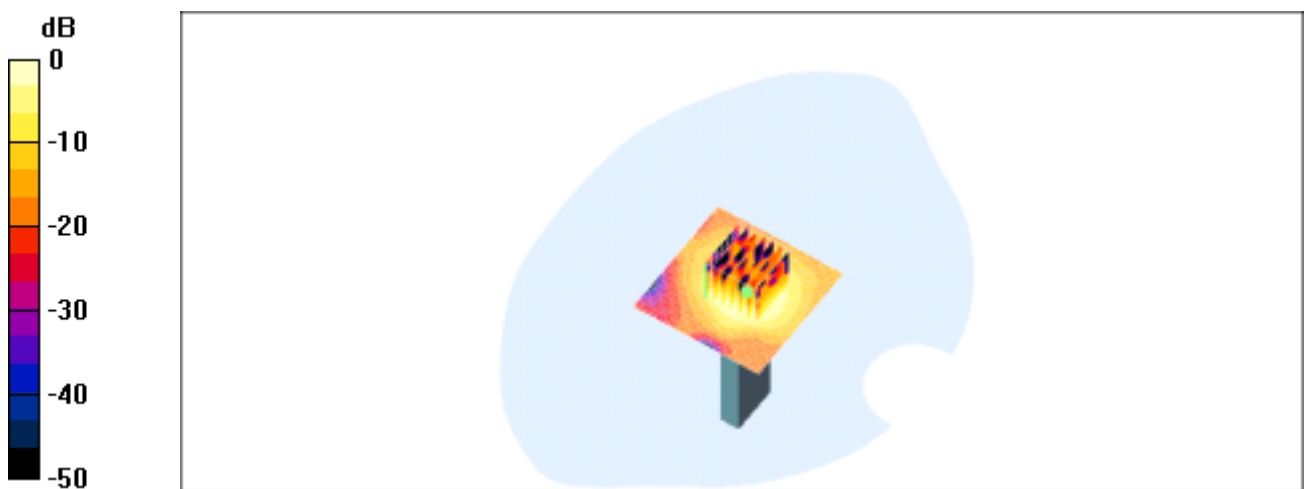

0 dB = 0.0192mW/g

**(802.11g & the antenna is in horizontal direction)**

**End-on position, lowest channel**

Date/Time: 10/09/03 13:07:11

**DUT: USB Stick; Type: WN-250gi;  
Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: M2450 ( $\sigma = 1.95826$  mho/m,  $\epsilon_r = 51.7097$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Horizontal/Area Scan (31x81x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 5.21 V/m

Power Drift = 0.01 dB

Maximum value of SAR = 0.0817 mW/g

**Horizontal/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.14 W/kg

SAR(1 g) = 0.0696 mW/g; SAR(10 g) = 0.0349 mW/g

Reference Value = 5.21 V/m

Power Drift = 0.01 dB

Maximum value of SAR = 0.0739 mW/g

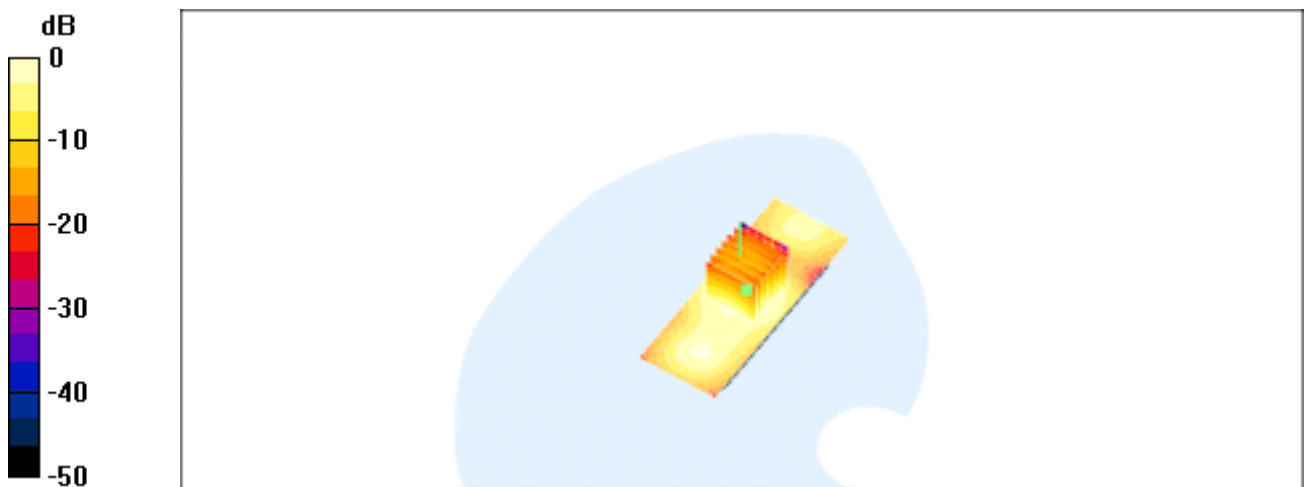

0 dB = 0.0739mW/g

**(802.11g & the antenna is in horizontal direction)**

**End-on position, middle channel**

Date/Time: 10/09/03 13:35:42

**DUT: USB Stick; Type: WN-250gi;  
Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium: M2450 ( $\sigma = 1.99146$  mho/m,  $\epsilon_r = 51.6172$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Horizontal/Area Scan (31x81x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 4.96 V/m

Power Drift = -0.05 dB

Maximum value of SAR = 0.0743 mW/g

**Horizontal/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.0629 mW/g; SAR(10 g) = 0.0309 mW/g

Reference Value = 4.96 V/m

Power Drift = -0.05 dB

Maximum value of SAR = 0.0665 mW/g

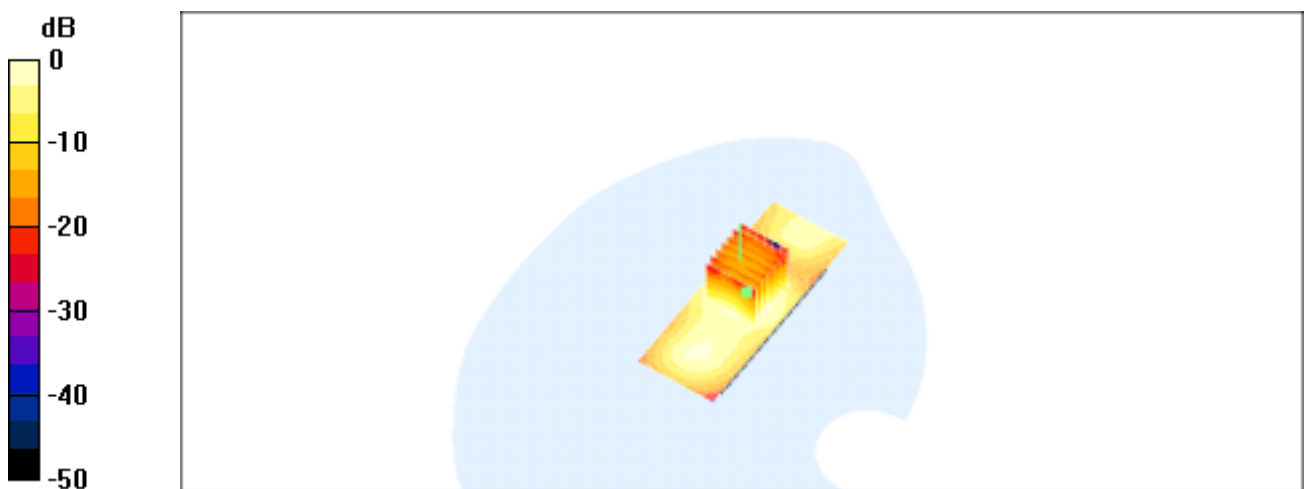

0 dB = 0.0665mW/g

**(802.11g & the antenna is in horizontal direction)**

**End-on position, highest channel**

Date/Time: 10/09/03 13:59:12

**DUT: USB Stick; Type: WN-250gi;  
Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1  
Medium: M2450 ( $\sigma = 2.01798$  mho/m,  $\epsilon_r = 51.4499$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Horizontal/Area Scan (31x81x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 5.37 V/m

Power Drift = -0.06 dB

Maximum value of SAR = 0.08 mW/g

**Horizontal/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.139 W/kg

SAR(1 g) = 0.0665 mW/g; SAR(10 g) = 0.0327 mW/g

Reference Value = 5.37 V/m

Power Drift = -0.06 dB

Maximum value of SAR = 0.0697 mW/g

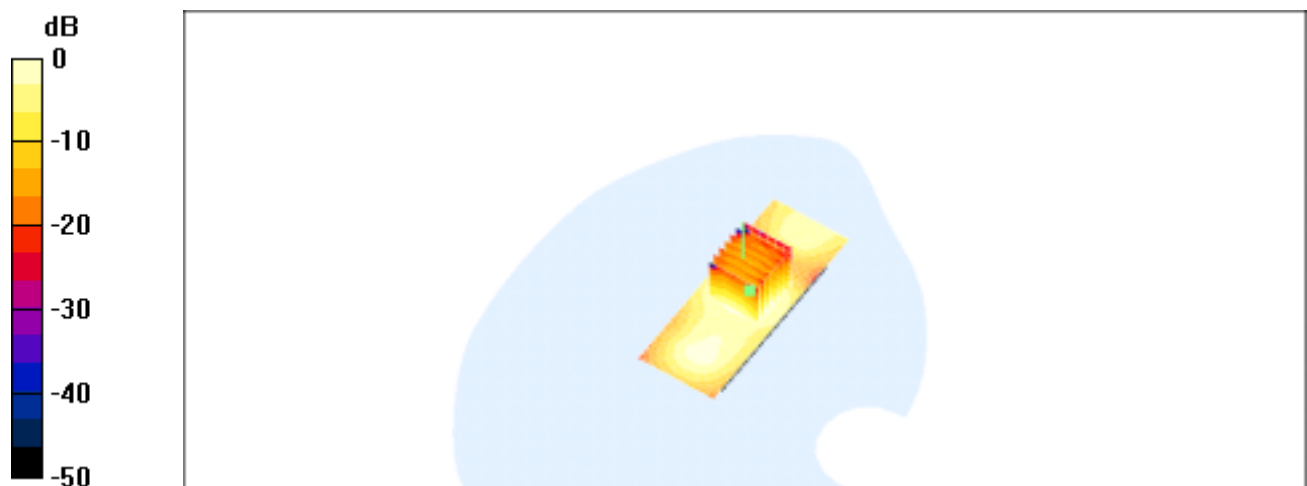

0 dB = 0.0697mW/g

**(802.11g & the antenna is in tip downward)**

**End-on position, lowest channel**

Date/Time: 10/13/03 10:11:05

**DUT: USB Stick; Type: WN-250gi;  
Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1  
Medium: M2450 ( $\sigma = 1.95826$  mho/m,  $\epsilon_r = 51.7097$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Vertical/Area Scan (41x51x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 1.05 V/m

Power Drift = 2 dB

Maximum value of SAR = 0.0369 mW/g

**Vertical/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.0695 W/kg

SAR(1 g) = 0.033 mW/g; SAR(10 g) = 0.0157 mW/g

Reference Value = 1.05 V/m

Power Drift = 2 dB

Maximum value of SAR = 0.0353 mW/g



0 dB = 0.0353mW/g

**(802.11g & the antenna is in tip downward)**

**End-on position, middle channel**

Date/Time: 10/13/03 09:29:27

**DUT: USB Stick; Type: WN-250gi;  
Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium: M2450 ( $\sigma = 1.99146$  mho/m,  $\epsilon_r = 51.6172$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Vertical/Area Scan (41x51x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 0.904 V/m

Power Drift = 1 dB

Maximum value of SAR = 0.0451 mW/g

**Vertical/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.087 W/kg

SAR(1 g) = 0.0402 mW/g; SAR(10 g) = 0.0191 mW/g

Reference Value = 0.904 V/m

Power Drift = 1 dB

Maximum value of SAR = 0.0436 mW/g

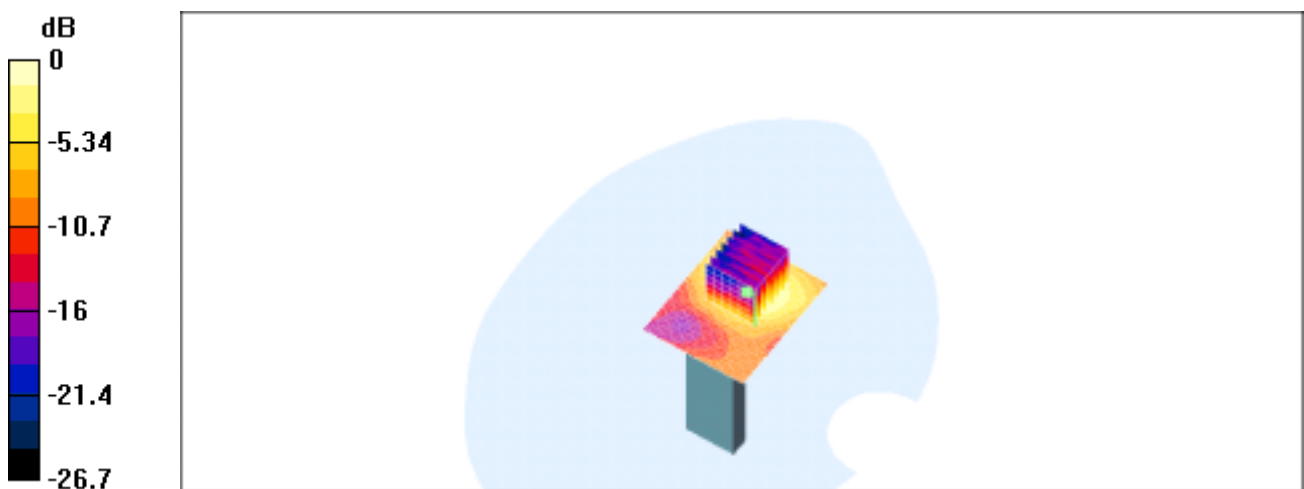

0 dB = 0.0436mW/g

**(802.11g & the antenna is in tip downward)**

## End-on position, highest channel

Date/Time: 10/09/03 17:36:34

**DUT: USB Stick; Type: WN-250gi;  
Program: 802.11g/b WLAN USB Stick**

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1  
Medium: M2450 ( $\sigma = 2.01798$  mho/m,  $\epsilon_r = 51.4499$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Vertical/Area Scan (41x51x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 1.08 V/m

Power Drift = -0.4 dB

Maximum value of SAR = 0.0505 mW/g

**Vertical/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.101 W/kg

SAR(1 g) = 0.0456 mW/g; SAR(10 g) = 0.021 mW/g

Reference Value = 1.08 V/m

Power Drift = -0.4 dB

Maximum value of SAR = 0.0496 mW/g

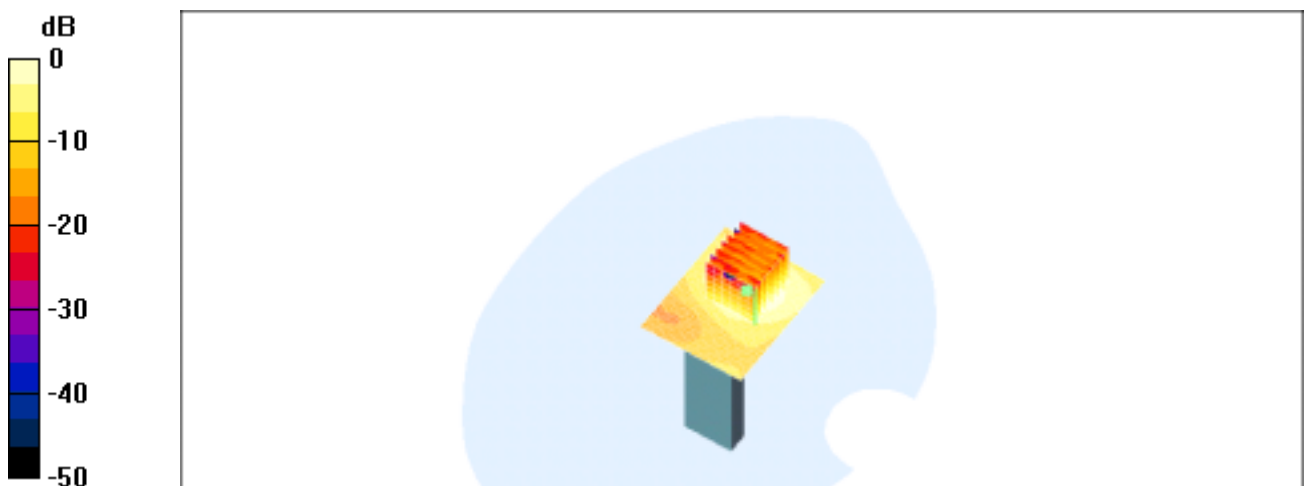

0 dB = 0.0496mW/g

## SAR System Performance Verification

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:727**

**Program: 2003-10-07**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: M2450 ( $\sigma = 1.93224$  mho/m,  $\epsilon_r = 51.5674$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**System Test/Area Scan (101x101x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 91.8 V/m

Power Drift = -0.009 dB

Maximum value of SAR = 15.1 mW/g

**System Test/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 29.7 W/kg

SAR(1 g) = 13.6 mW/g; SAR(10 g) = 6.12 mW/g

Reference Value = 91.8 V/m

Power Drift = -0.009 dB

Maximum value of SAR = 15.2 mW/g

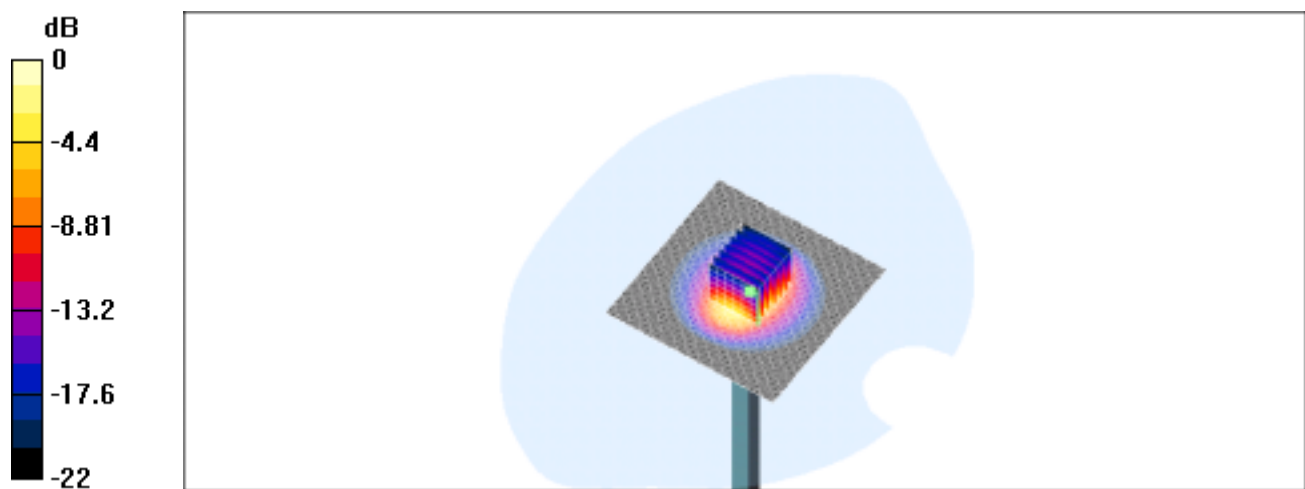

0 dB = 15.2mW/g

## Appendix

### Photographs of Test Setup



Fig.1 Photograph of the SAR measurement System



Fig.2 Photograph of the edge of the PC at 90° and at a distance of 1.5 cm from the base of the phantom and the antenna is in horizontal direction.

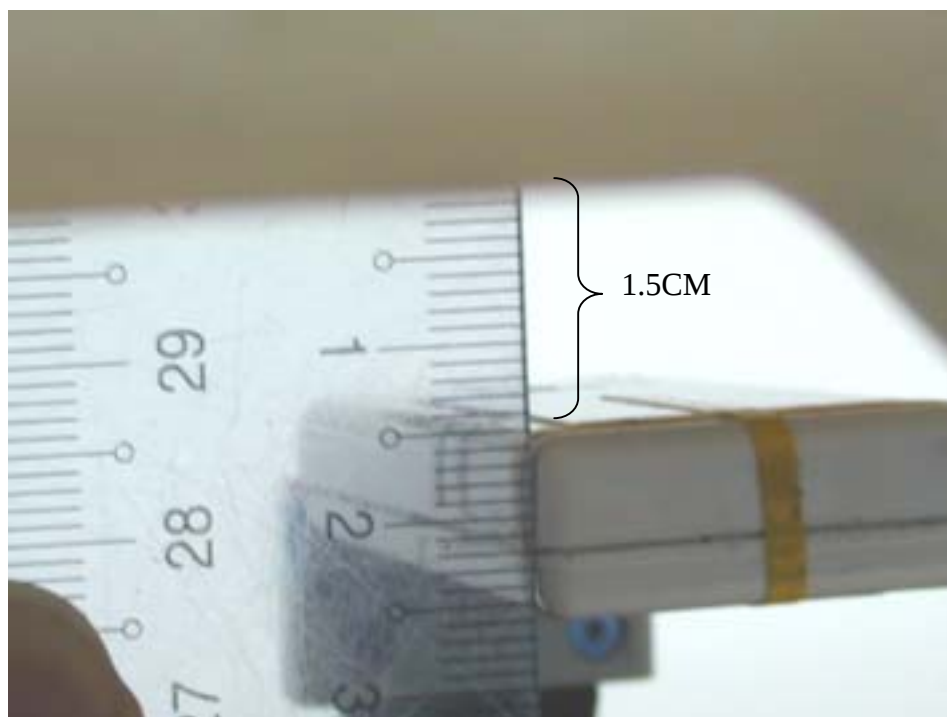


Fig.3 Photograph of the edge of the PC at 90° and at a distance of 1.5 cm from the base of the phantom and the antenna is in horizontal direction.



Fig.4 Photograph of the edge of the PC at 90° and at a distance of 1.5 cm from the base of the phantom and the antenna tip upward.

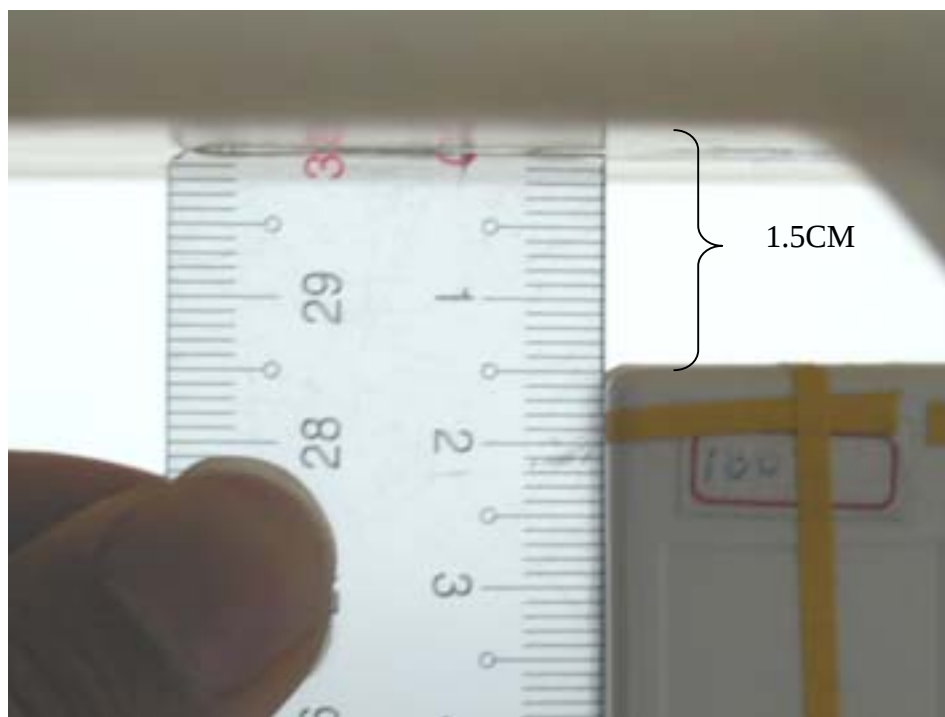


Fig.5 Photograph of the edge of the PC at 90° and at a distance of 1.5 cm from the base of the phantom and the antenna tip upward.

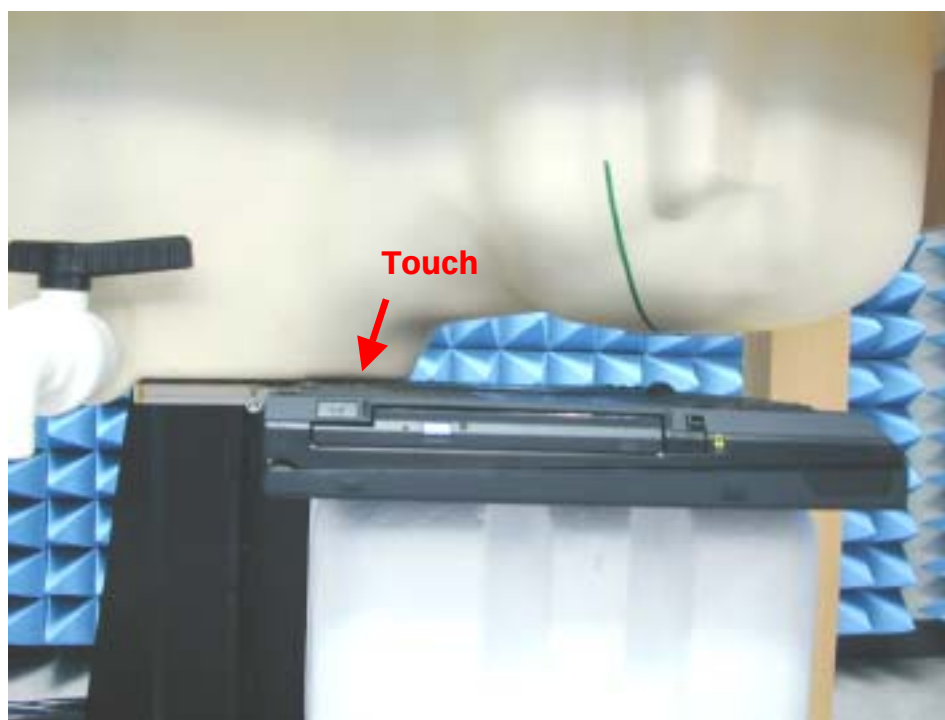


Fig.6 Photograph of the Bottom of the Pc is paralleled and at a distance of 0.0 cm from the base of the phantom, but 0.6 cm Spacing between

EUT & Planar Phantom, and the EUT antenna is in horizontal direction.

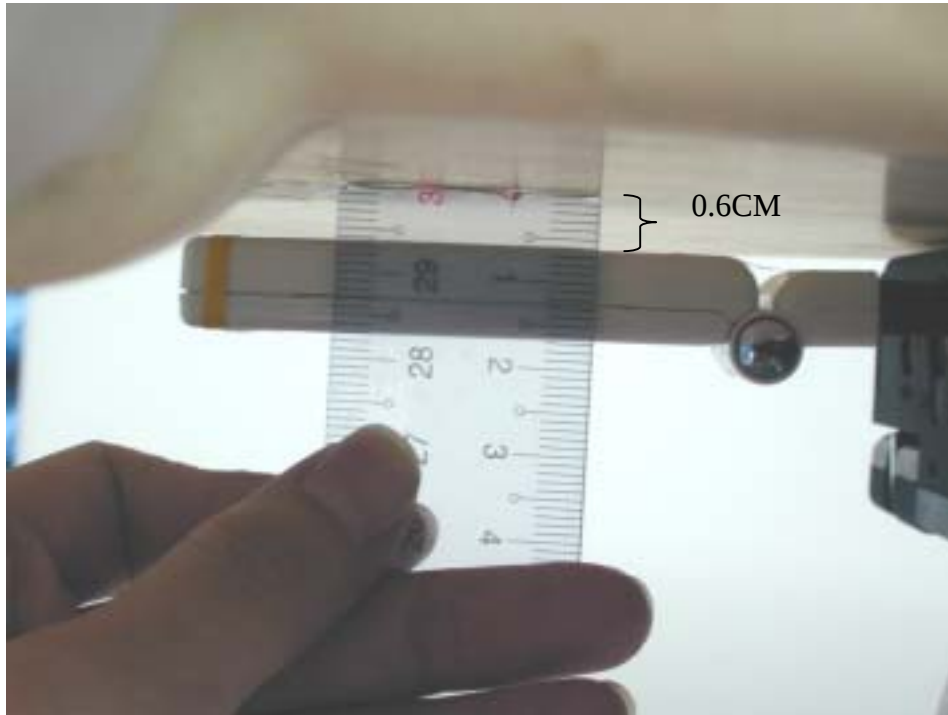


Fig.7 Photograph of the Bottom of the Pc is paralleled and at a distance of 0.0 cm from the base of the phantom, but 0.6 cm Spacing between EUT & Planar Phantom, and the EUT antenna is in horizontal direction.



Fig.8 Photograph of the Bottom of the Pc is paralleled and at a distance of 0.0 cm from the base of the phantom, but 0.6 cm Spacing between

EUT & Planar Phantom, and the EUT antenna tip downward.

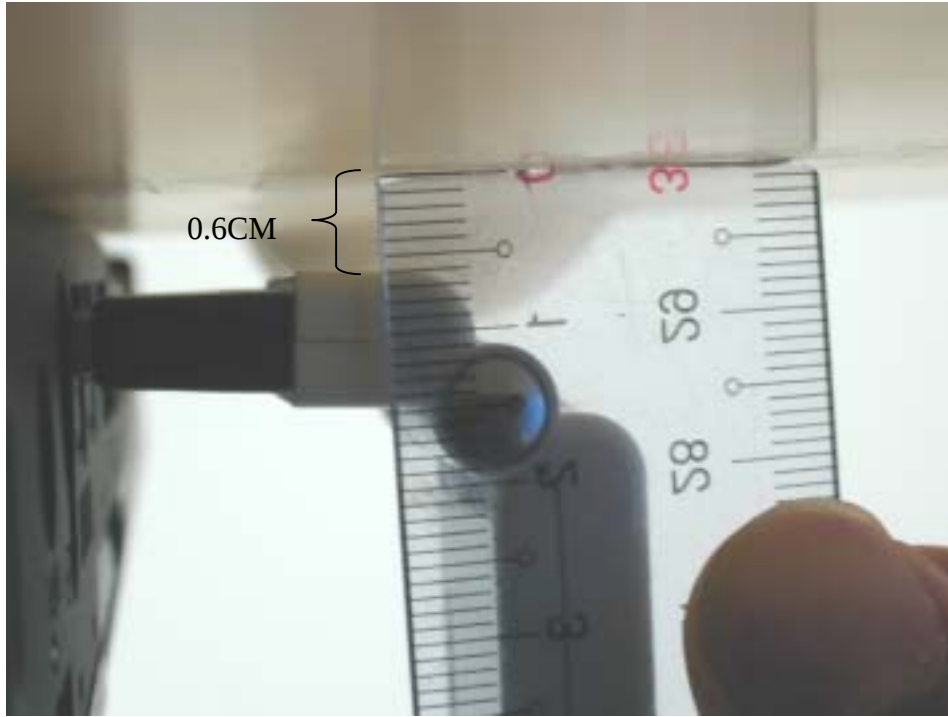


Fig.9 Photograph of the Bottom of the Pc is paralleled and at a distance of 0.0 cm from the base of the phantom, but 0.6 cm Spacing between EUT & Planar Phantom, and the EUT antenna tip downward.

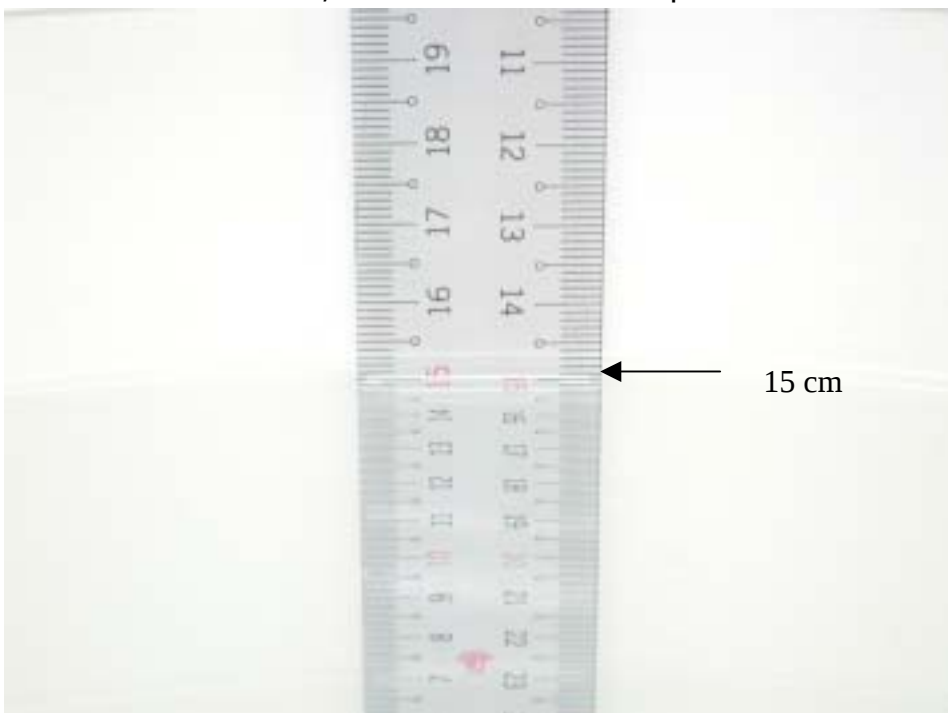


Fig.10 Photograph of the Tissue Simulant Fluid liquid depth 15cm

## Photographs of the EUT

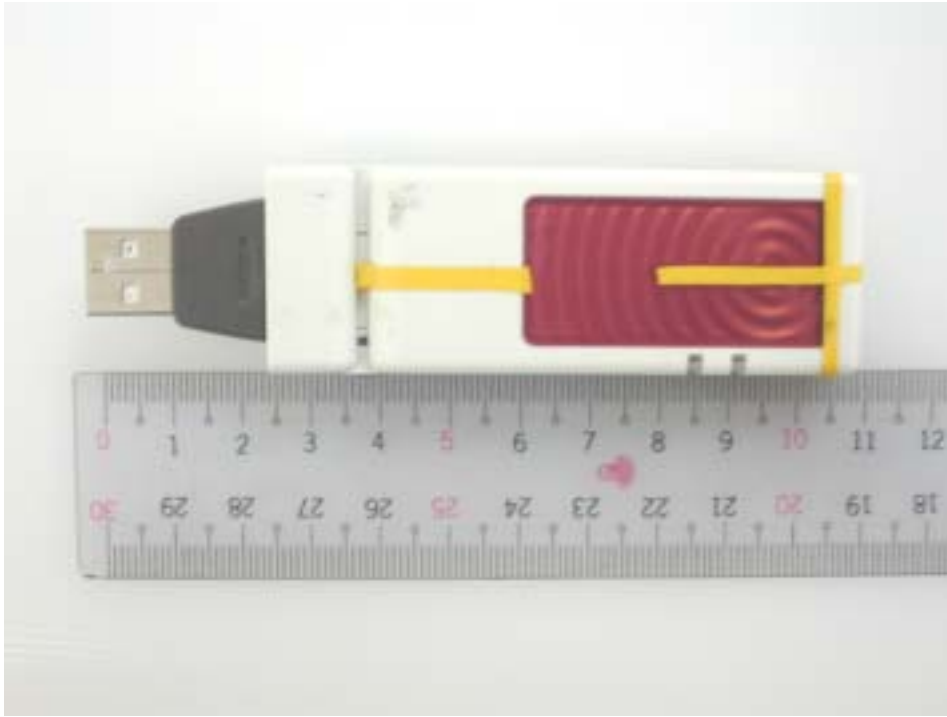


Fig.11 Front view of device



Fig.12 Back view of device



Fig.13 edge of the EUT at 90°



Fig.14 edge of the EUT at 90°



Fig.15 With IBM ThinkPad T30 Host Laptop PC



Fig.16 With IBM ThinkPad T30 Host Laptop PC

**Probe Calibration certificate**

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland

Client **SGS (Auden)**

**CALIBRATION CERTIFICATE**

Object(s) **ET3DV6 - SN:1759**

Calibration procedure(s) **QA CAL-01.v2  
Calibration procedure for dosimetric E-field probes**

Calibration date: **March 7, 2003**

Condition of the calibrated item **In Tolerance (according to the specific calibration document)**

This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.


All calibrations have been conducted in the closed laboratory facility: environment temperature  $22 \pm 2$  degrees Celsius and humidity  $< 75\%$ .

Calibration Equipment used (M&TE critical for calibration)


| Model Type                       | ID #         | Cal Date                         | Scheduled Calibration  |
|----------------------------------|--------------|----------------------------------|------------------------|
| RF generator HP 8684C            | US3642U01700 | 4-Aug-99 (in house check Aug-02) | in house check: Aug-05 |
| Power sensor E4412A              | MY41495277   | 8-Mar-02                         | Mar-03                 |
| Power sensor HP 8481A            | MY41092160   | 18-Sep-02                        | Sep-03                 |
| Power meter EPM E4419B           | GB41293874   | 13-Sep-02                        | Sep-03                 |
| Network Analyzer HP 8753E        | US36432426   | 3-May-00                         | in house check: May 03 |
| Fuke Process Calibrator Type 702 | SN: 6295803  | 3-Sep-01                         | Sep-03                 |

Calibrated by: **Nico Vertert** **Technician**

Signature



Approved by: **Katja Pokovic** **Laboratory Director**



Date issued: March 7, 2003

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

Schmid & Partner Engineering AG

**s p e a g**

Zeughausstrasse 43, 8004 Zurich, Switzerland  
Phone +41 1 245 9700, Fax +41 1 245 9778  
info@speag.com, <http://www.speag.com>

# Probe ET3DV6

SN:1759


|                   |                   |
|-------------------|-------------------|
| Manufactured:     | November 12, 2002 |
| Last calibration: | March 7, 2003     |

Calibrated for DASY Systems


(Note: non-compatible with DASY2 system!)

ET3DV6 SN:1759

March 7, 2003

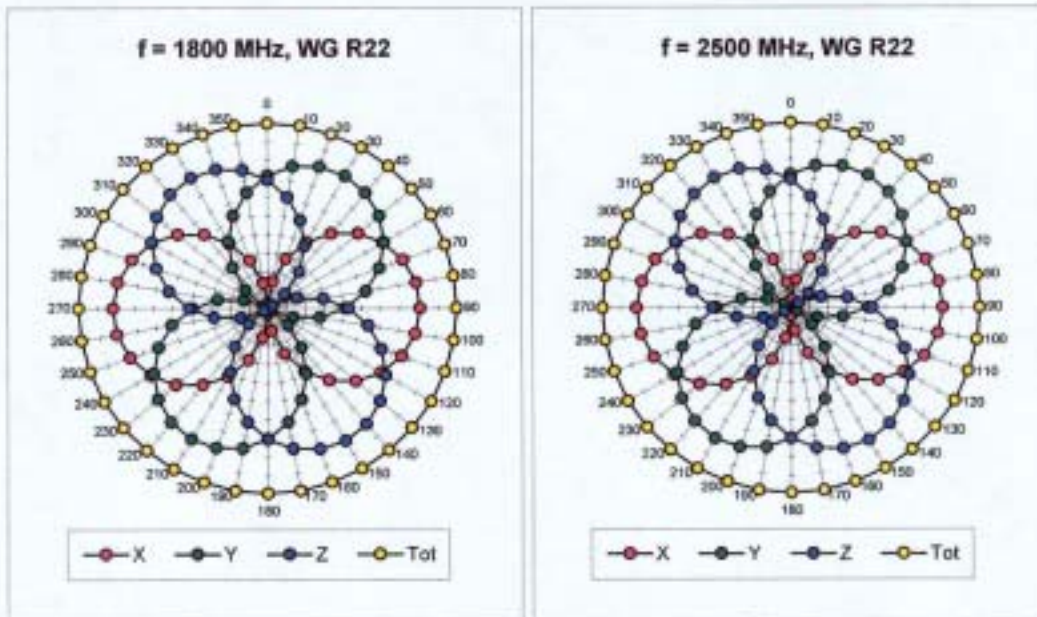


### Isotropy Error ( $\phi$ ), $\theta = 0^\circ$

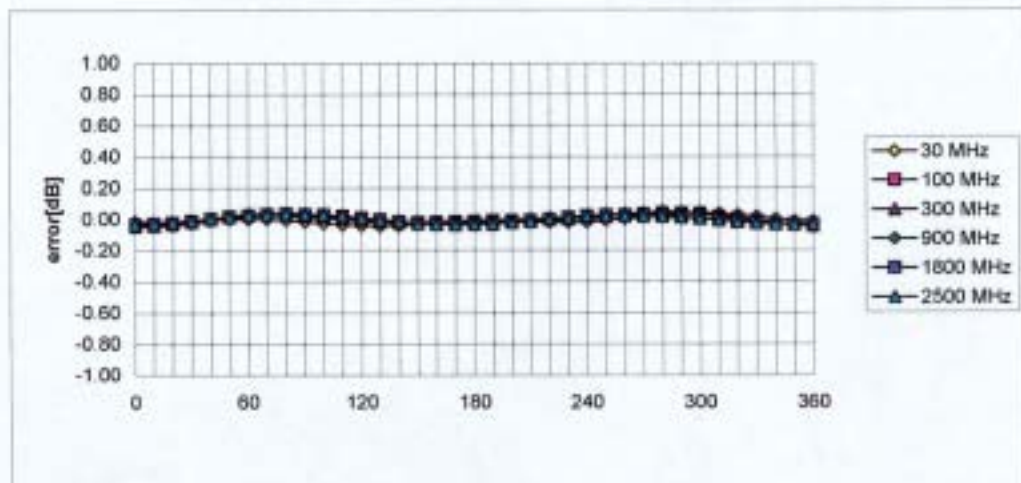

ET3DV6 SN:1759

March 7, 2003

## Conversion Factor Assessment

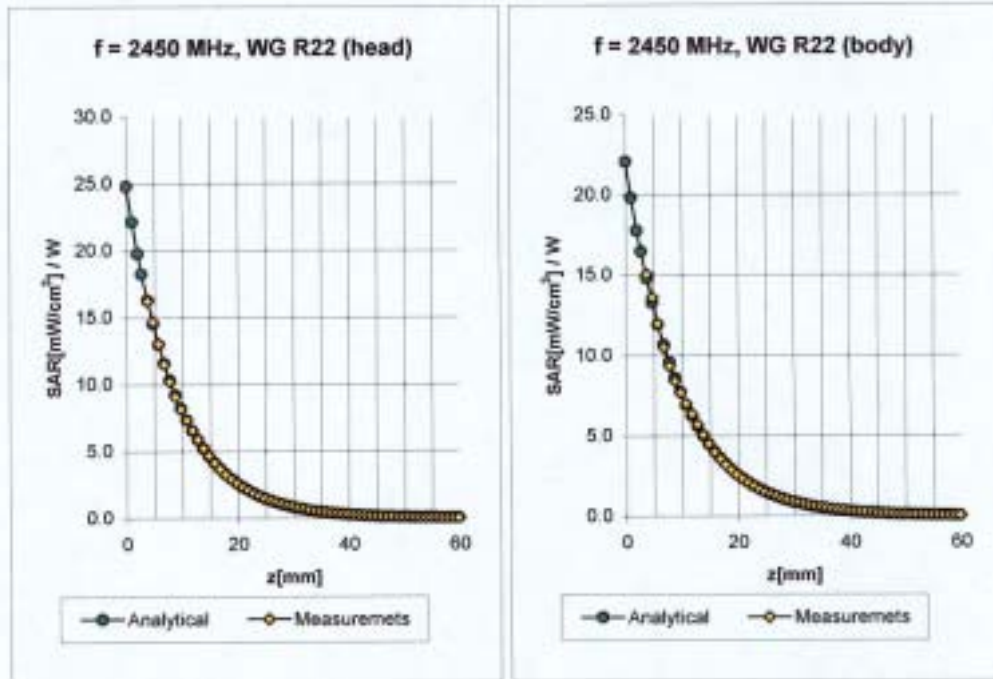

|      |         |                      |                             |                                       |
|------|---------|----------------------|-----------------------------|---------------------------------------|
| 2450 | Head    | MHz                  | $\epsilon_r = 39.2 \pm 5\%$ | $\sigma = 1.80 \pm 5\% \text{ mho/m}$ |
|      | ConvF X | 5.0 $\pm$ 8.9% (k=2) | Boundary effect:            |                                       |
|      | ConvF Y | 5.0 $\pm$ 8.9% (k=2) | Alpha                       | 0.98                                  |
|      | ConvF Z | 5.0 $\pm$ 8.9% (k=2) | Depth                       | 1.95                                  |
| 2450 | Body    | MHz                  | $\epsilon_r = 52.7 \pm 5\%$ | $\sigma = 1.95 \pm 5\% \text{ mho/m}$ |
|      | ConvF X | 4.5 $\pm$ 8.9% (k=2) | Boundary effect:            |                                       |
|      | ConvF Y | 4.5 $\pm$ 8.9% (k=2) | Alpha                       | 1.01                                  |
|      | ConvF Z | 4.5 $\pm$ 8.9% (k=2) | Depth                       | 1.80                                  |

## Uncertainty Analysis

| <b>DASY4 Uncertainty Budget</b><br><b>According to IEEE P1528 [1]</b> |                   |             |      |              |               |                |                 |                     |
|-----------------------------------------------------------------------|-------------------|-------------|------|--------------|---------------|----------------|-----------------|---------------------|
| Error Description                                                     | Uncertainty value | Prob. Dist. | Div. | ( $c_i$ ) 1g | ( $c_i$ ) 10g | Std. Unc. (1g) | Std. Unc. (10g) | ( $v_i$ ) $v_{eff}$ |
| <b>Measurement System</b>                                             |                   |             |      |              |               |                |                 |                     |
| Probe Calibration                                                     | ±4.8 %            | N           | 1    | 1            | 1             | ±4.8 %         | ±4.8 %          | ∞                   |
| Axial Isotropy                                                        | ±4.7 %            | R           | √3   | 0.7          | 0.7           | ±1.9 %         | ±1.9 %          | ∞                   |
| Hemispherical Isotropy                                                | ±9.6 %            | R           | √3   | 0.7          | 0.7           | ±3.9 %         | ±3.9 %          | ∞                   |
| Boundary Effects                                                      | ±1.0 %            | R           | √3   | 1            | 1             | ±0.6 %         | ±0.6 %          | ∞                   |
| Linearity                                                             | ±4.7 %            | R           | √3   | 1            | 1             | ±2.7 %         | ±2.7 %          | ∞                   |
| System Detection Limits                                               | ±1.0 %            | R           | √3   | 1            | 1             | ±0.6 %         | ±0.6 %          | ∞                   |
| Readout Electronics                                                   | ±1.0 %            | N           | 1    | 1            | 1             | ±1.0 %         | ±1.0 %          | ∞                   |
| Response Time                                                         | ±0.8 %            | R           | √3   | 1            | 1             | ±0.5 %         | ±0.5 %          | ∞                   |
| Integration Time                                                      | ±2.6 %            | R           | √3   | 1            | 1             | ±1.5 %         | ±1.5 %          | ∞                   |
| RF Ambient Conditions                                                 | ±3.0 %            | R           | √3   | 1            | 1             | ±1.7 %         | ±1.7 %          | ∞                   |
| Probe Positioner                                                      | ±0.4 %            | R           | √3   | 1            | 1             | ±0.2 %         | ±0.2 %          | ∞                   |
| Probe Positioning                                                     | ±2.9 %            | R           | √3   | 1            | 1             | ±1.7 %         | ±1.7 %          | ∞                   |
| Max. SAR Eval.                                                        | ±1.0 %            | R           | √3   | 1            | 1             | ±0.6 %         | ±0.6 %          | ∞                   |
| <b>Test Sample Related</b>                                            |                   |             |      |              |               |                |                 |                     |
| Device Positioning                                                    | ±2.9 %            | N           | 1    | 1            | 1             | ±2.9 %         | ±2.9 %          | 875                 |
| Device Holder                                                         | ±3.6 %            | N           | 1    | 1            | 1             | ±3.6 %         | ±3.6 %          | 5                   |
| Power Drift                                                           | ±5.0 %            | R           | √3   | 1            | 1             | ±2.9 %         | ±2.9 %          | ∞                   |
| <b>Phantom and Setup</b>                                              |                   |             |      |              |               |                |                 |                     |
| Phantom Uncertainty                                                   | ±4.0 %            | R           | √3   | 1            | 1             | ±2.3 %         | ±2.3 %          | ∞                   |
| Liquid Conductivity (target)                                          | ±5.0 %            | R           | √3   | 0.64         | 0.43          | ±1.8 %         | ±1.2 %          | ∞                   |
| Liquid Conductivity (meas.)                                           | ±2.5 %            | N           | 1    | 0.64         | 0.43          | ±1.6 %         | ±1.1 %          | ∞                   |
| Liquid Permittivity (target)                                          | ±5.0 %            | R           | √3   | 0.6          | 0.49          | ±1.7 %         | ±1.4 %          | ∞                   |
| Liquid Permittivity (meas.)                                           | ±2.5 %            | N           | 1    | 0.6          | 0.49          | ±1.5 %         | ±1.2 %          | ∞                   |
| Combined Std. Uncertainty                                             |                   |             |      |              |               | ±10.3 %        | ±10.0 %         | 331                 |
| <b>Expanded STD Uncertainty</b>                                       |                   |             |      |              |               | <b>±20.6 %</b> | <b>±20.1 %</b>  |                     |

## Phantom description

# Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

## Certificate of conformity / First Article Inspection

|                       |                                                                          |
|-----------------------|--------------------------------------------------------------------------|
| Item                  | SAM Twin Phantom V4.0                                                    |
| Type No               | QD 000 P40 CA                                                            |
| Series No             | TP-1150 and higher                                                       |
| Manufacturer / Origin | Untersee Composites<br>Hauptstr. 69<br>CH-8559 Fruthwilen<br>Switzerland |

### Tests

The series production process used allows the limitation to test of first articles. Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

| Test                 | Requirement                                                                             | Details                                                              | Units tested              |
|----------------------|-----------------------------------------------------------------------------------------|----------------------------------------------------------------------|---------------------------|
| Shape                | Compliance with the geometry according to the CAD model.                                | IT1S CAD File (*)                                                    | First article, Samples    |
| Material thickness   | Compliant with the requirements according to the standards                              | 2mm +/- 0.2mm in specific areas                                      | First article, Samples    |
| Material parameters  | Dielectric parameters for required frequencies                                          | 200 MHz - 3 GHz<br>Relative permittivity < 5<br>Loss tangent < 0.05. | Material sample TP 104-5  |
| Material resistivity | The material has been tested to be compatible with the liquids defined in the standards | Liquid type HSL 1800 and others according to the standard.           | Pre-series, First article |

### Standards

- [1] CENELEC EN 50361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9

(\*) The IT1S CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

### Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date


28.02.2002

Signature / Stamp



**Schmid & Partner  
Engineering AG**

Zeughausstrasse 43, CH-8004 Zurich  
Tel. +41 1 245 97 00, Fax +41 1 245 97 79



## System Validation from Original equipment supplier SPEAG Schmid & Partner

Date/Time: 03/05/03 16:17:40

Test Laboratory: SPEAG, Zurich, Switzerland  
File Name: SN727\_SN3013\_M2450\_050303.da4

**DUT: Dipole 2450 MHz; Serial: D2450V2 - SN727**  
**Program: Dipole Calibration**

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium: Muscle 2450 MHz; ( $\sigma = 2.05$  mho/m,  $\epsilon_r = 51.05$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV2 - SN3013; ConvF(4.2, 4.2, 4.2); Calibrated: 1/19/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 25; Postprocessing SW: SEMCAD, V1.6 Build 105

**Pin = 250 mW; d = 10 mm/Area Scan (81x81x1):** Measurement grid: dx=15mm, dy=15mm

**Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.7 V/m

Peak SAR = 27.6 W/kg

SAR(1 g) = 13.7 mW/g; SAR(10 g) = 6.16 mW/g

Power Drift = 0.007 dB

