

# **Test Report**

**Report No.:** MTi240710012-04E2

**Date of issue:** 2024-08-09

**Applicant:** Guangdong Pisen Electronics Co., Ltd.

**Product name:** Pisen 15W Wireless Auto Clamping Car Mount Charger

Model(s): TP-C69

FCC ID: 2BCVO-TP-C69

Shenzhen Microtest Co., Ltd. http://www.mtitest.cn





# Instructions

- 1. This test report shall not be partially reproduced without the written consent of the laboratory.
- 2. The test results in this test report are only responsible for the samples submitted
- 3. This test report is invalid without the seal and signature of the laboratory.
- 4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
- 5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.



# **Contents**

1	General Description	
	Description of the EUT      Description of test modes      Description of support units	5 6
	1.3 Description of support units	7
2	Measurement uncertainty	7
3	Test facilities and accreditations	8
	3.1 Test laboratory	8
4	List of test equipment	9
5	Test result	10
	5.2 Test setup	11
	5.3 Test Procedures	11
	5.4 Information of test equipment	12
	5.5 Test results	13
Ρ	Photographs of the Test Setup	14
Р	Photographs of the EUT	14



Test Result Certification				
Applicant:	Guangdong Pisen Electronics Co., Ltd.			
Address:	Building 5, 1st Floor, No. 9, Qinfu 1st Street, Liuyue Nan Community, Henggang Town, Longgang District, Shenzhen City, Guangdong Province, China			
Manufacturer:	Guangdong Pisen Electronics Co., Ltd.			
Address:	Building 5, 1st Floor, No. 9, Qinfu 1st Street, Liuyue Nan Community, Henggang Town, Longgang District, Shenzhen City, Guangdong Province, China			
Factory:	DongGuan ChuangJie Electronics Co., Ltd.			
Address:	No.8, Jinxing Road, Jinfenghuang Industrial District, Fenggang Town, Dongguan City			
Product description				
Product name:	Pisen 15W Wireless Auto Clamping Car Mount Charger			
Trademark:	PISEN			
Model name:	TP-C69			
Series Model:	N/A			
Standards:	FCC CFR 47 PART 1, § 1.1310			
Test method:	KDB 680106 D01 Wireless Power Transfer v04			
Date of Test				
Date of test:	2024-07-26 to 2024-07-30			
Test result: Pass				

Test Engineer :	: James Qin	
	(James Qin)	
Reviewed By :	David. Cee	
	(David Lee)	
Approved By :	leor chen	
	(Leon Chen)	



# 1 General Description

## 1.1 Description of the EUT

	<del>,</del>
Product name: Pisen 15W Wireless Auto Clamping Car Mount Charger	
Model name:	TP-C69
Series Model:	N/A
Model difference:	N/A
Electrical rating:	Intput: 5V/ 2A,9V/ 2A,12V/ 2A Output: 15W(Max)
Accessories: N/A	
Hardware version:	V1.0
Software version:	V1.3
Test sample(s) number:	MTi240819019-02S1001
RF specification:	
Operation frequency:	115-205kHz
Modulation type:	ASK
Antenna type:	Coil



#### 1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes	
Mode1	Wireless Output(5W)	
Mode2	Mode2 Wireless Output(7.5W)	
Mode3 Wireless Output(10W)		
Mode4	Wireless Output(15W)	
Mode5	Stand by	



#### 1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list					
Description	Model	Serial No.	Manufacturer		
Moible Phone Find X3		/	OPPO		
HUAWEI QUICK CHARGE(65W)	HW-200200ZP1	HW-200200ZP1 JN67LSN7N03451			
Support cable list					
Description	Length (m)	From	То		
/	/	/	/		

## 2 Measurement uncertainty

Parameter	Expanded Uncertainty
Magnetic field measurements(3kHz~10MHz)	±14.8%
Electric field measurements(3kHz~10MHz)	±17.5%

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Address: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China. Tel: (86-755)88850135 Fax: (86-755) 88850136 Web: www.mtitest.cn E-mail: mti@51mti.com



## 3 Test facilities and accreditations

### 3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone: (86-755)88850135	
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573



# 4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTI-E143	Near-field Electric and Magnetic Field Sensor System	Speag	MAGPy-8H3D +ED3 V2	3101	2024/3/12	2027/3/11

No.	Equipment	Manufacturer	Model	Software version:	Cal. date	Cal. Due
MTI-E016S	MPE test software	SPEAG	MAGPY 2.4	2.4.1	/	/



#### 5 Test result

#### 5.1.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm²)	Averaging time (minutes)			
	(i) Limits for Occupational/Controlled Exposure						
0.3-3.0	614	1.63	*(100)	<b>≤</b> 6			
3.0-30	1842/f	4.89/f	*(900/f²)	<6			
30-300	61.4	0.163	1.0	<6			
300-1500			f/300	<6			
1500-100000			5	<6			
	(ii) Limits for Genera	l Population/Uncontrolled E	Exposure				
0.3-1.34	614	1.63	*(100)	<30			
1.34-30	824/f	2.19/f	*(180/f²)	<30			
30-300	27.5	0.073	0.2	<30			
300-1500			f/1500	<30			
1500-100000			1.0	<30			

f = frequency in MHz


**Note 1:** Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

**Note 2:** General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

<sup>\* =</sup> Plane-wave equivalent power density



#### 5.2 Test setup

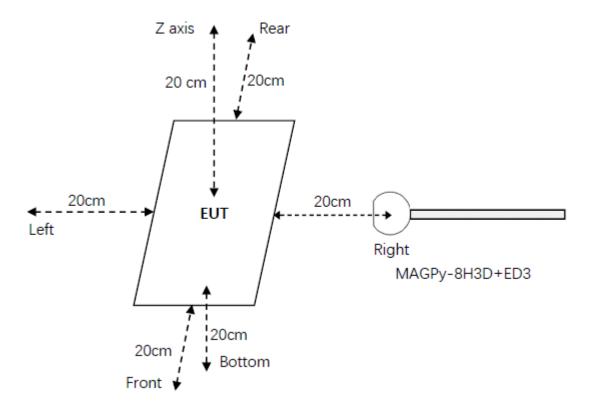

#### **5.3 Test Procedures**

- a. The RF exposure test was performed in anechoic chamber.
- b. E and H-field measurements should be made with these devices considered to meet the § 2.1091-Mobile conditions ("generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the RF source's radiating structure(s) and [the nearest person]").
- c. The highest emission level was recorded and compared with limit.
- d. The EUT was measured according to the dictates of KDB 680106 D01 Wireless Power Transfer v04.



#### 5.4 Information of test equipment

Test equipment: MAGPy-8H3D+ED3	
Diameter	60mm
8 isotropic H-field sensors  Concentric loops of 1cm <sup>2</sup> arranged at the corr cube of 22mm side length	
1 isotropic E-field sensor Orthogonal dipole/monopple(arm length:50mm)	
Measurement center	18.5mm from the probe tip
Dimensions	110*635*35mm (MAGPy-8H3D+E3D V2 & MAGPy-DAS V2)



Test probe, without the casing

Page 13 of 14 Report No.: MTi240710012-04E2

#### 5.5 Test results

#### Test condition 1: Mode 4 operating mode with client device (1 % battery status of client device)

Probe Position		E –field (V/m)			H-field (A/m)	
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	2.15	614	0.35%	0.03	1.63	1.84%
Left	2.11			0.02		
Right	1.92			0.02		
Front	1.98			0.01		
Rear	1.42			0.02		
Bottom	1.33			0.01		

#### Test condition 2: Mode 4 operating mode with client device (50 % battery status of client device)

Probe Position	E –field (V/m)			H-field (A/m)		
	Measurement	Limit	Max. Percentage (%)	Measurement	Limit	Max. Percentage (%)
Z axis	2.15	614	0.35%	0.04	1.63	2.42%
Left	2.12			0.01		
Right	1.93			0.02		
Front	1.97			0.00		
Rear	1.44			0.03		
Bottom	1.34			0.01		

#### Test condition 3: Mode 4 operating mode with client device (99 % battery status of client device)

Probe Position	E –field (V/m)			H–field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	2.13	614	0.35%	0.03	1.63	1.60%
Left	2.09			0.01		
Right	1.90			0.01		
Front	1.96			0.01		
Rear	1.41			0.01		
bottom	1.33			0.01		



## **Photographs of the Test Setup**

See the Appendix - Test Setup Photos.

# Photographs of the EUT

See the Appendix - EUT Photos.

----End of Report----