



**CFR 47 FCC PART 15 SUBPART C
ISED RSS-247 ISSUE 2**

CERTIFICATION TEST REPORT

For

WIFI+BT Module

MODEL NUMBER: WXT2AM2101

FCC ID: 2AC23-WXT2A

IC: 12290A-WXT2A

REPORT NUMBER: 4790194584-3

ISSUE DATE: February 14, 2022

Prepared for

**Hui Zhou Gaoshengda Technology Co.,LTD
No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou
City,Guangdong,China**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com



Revision History

Rev.	Issue Date	Revisions	Revised By
V0	2/14/2022	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC/ISED Rules	Test Results
1	6dB Bandwidth and 99% Occupied Bandwidth	FCC Part 15.247 (a) (2) RSS-247 Clause 5.2 (a) ISED RSS-Gen Clause 6.7	Pass
2	Conducted Output Power	FCC Part 15.247 (b) (3) RSS-247 Clause 5.4 (d)	Pass
3	Power Spectral Density	FCC Part 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d) RSS-247 Clause 5.5	Pass
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
6	Conducted Emission Test for AC Power Port	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
7	Antenna Requirement	FCC Part 15.203 RSS-GEN Clause 6.8	Pass
<p>Note:</p> <p>1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China.</p> <p>2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C >< ISED RSS-247 > when <Accuracy Method> decision rule is applied.</p>			



TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. MEASUREMENT UNCERTAINTY	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. CHANNEL LIST	9
5.3. MAXIMUM OUTPUT POWER	10
5.4. TEST CHANNEL CONFIGURATION	10
5.5. THE WORSE CASE POWER SETTING PARAMETER	10
5.6. THE WORSE CASE CONFIGURATIONS	11
5.7. DESCRIPTION OF AVAILABLE ANTENNAS	12
5.8. DESCRIPTION OF TEST SETUP	14
6. MEASURING INSTRUMENT AND SOFTWARE USED	15
7. ANTENNA PORT TEST RESULTS	17
7.1. ON TIME AND DUTY CYCLE	17
7.2. 6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH	18
7.3. CONDUCTED OUTPUT POWER	20
7.4. POWER SPECTRAL DENSITY	21
7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS	23
8. RADIATED TEST RESULTS	25
8.1. RESTRICTED BANDEDGE	31
8.1.1. 802.11b SISO MODE	31
8.1.2. 802.11g SISO MODE	33
8.1.3. 802.11n HT20 MIMO MODE	37
8.1.4. 802.11n HT40 MIMO MODE	41
8.1.5. 802.11ax HE20 MIMO MODE	45
8.1.6. 802.11ax HE40 MIMO MODE	49
8.2. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)	53
8.2.1. 802.11ax HE40 MIMO MODE	53
8.3. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)	59
8.3.1. 802.11b SISO MODE	59
8.3.2. 802.11g SISO MODE	65



8.3.3.	802.11n HT20 MIMO MODE	71
8.3.4.	802.11n HT40 MIMO MODE	77
8.3.5.	802.11ax HE20 MIMO MODE	83
8.3.6.	802.11ax HE40 MIMO MODE	89
8.5.	SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)	95
8.5.1.	802.11ax HE40 MIMO MODE	95
8.6.	SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)	97
8.6.1.	802.11ax HE40 MIMO MODE	97
8.7.	SPURIOUS EMISSIONS BELOW 30 MHz	99
8.7.1.	802.11ax HE40 MIMO MODE	99
9.	AC POWER LINE CONDUCTED EMISSIONS	102
9.1.1.	802.11ax HE40 MIMO MODE	103
10.	ANTENNA REQUIREMENTS	105
11.	Appendix	106
11.1.	Appendix A: DTS Bandwidth	106
11.1.1.	Test Result	106
11.1.2.	Test Graphs	107
11.2.	Appendix B: Occupied Channel Bandwidth	119
11.2.1.	Test Result	119
11.2.2.	Test Graphs	120
11.3.	Appendix C: Maximum Average Conducted Output Power	132
11.3.1.	Test Result	132
11.4.	Appendix D: Maximum Power Spectral Density	133
11.4.1.	Test Result	133
11.4.2.	Test Graphs	134
11.5.	Appendix E: Band Edge Measurements	144
11.5.1.	Test Result	144
11.5.2.	Test Graphs	145
11.6.	Appendix F: Conducted Spurious Emission	152
11.6.1.	Test Result	152
11.6.2.	Test Graphs	154
11.7.	Appendix G: Duty Cycle	184
11.7.1.	Test Result	184
11.7.2.	Test Graphs	185



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD
Address: No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou City,Guangdong,China

Manufacturer Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD
Address: No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou City,Guangdong,China

EUT Information

EUT Name: WIFI+BT Module
Model: WXT2AM2101
Sample Received Date: November 22, 2021
Sample Status: Normal
Sample ID: 4425311
Date of Tested: November 22, 2021 ~ February 11, 2022

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS
ISED RSS-247 Issue 2	PASS
ISED RSS-GEN Issue 5	PASS

Prepared By:

Denny Huang
Project Engineer
Approved By:

Stephen Guo
Laboratory Manager

Checked By:

Shawn Wen
Laboratory Leader



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, ISED RSS-247 Issue 2 and ISED RSS-GEN Issue 5.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.



4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	WIFI+BT Module
Model	WXT2AM2101
Radio Technology	WLAN (IEEE 802.11b/g/n HT20/n HT40)
Operation frequency	IEEE 802.11b: 2412 MHz ~ 2462 MHz IEEE 802.11g: 2412 MHz ~ 2462 MHz IEEE 802.11n HT20: 2412 MHz ~ 2462 MHz IEEE 802.11n HT40: 2422 MHz ~ 2452 MHz IEEE 802.11ax HE20: 2412MHz ~ 2462MHz IEEE 802.11ax HE40: 2422MHz ~ 2452MHz
Modulation	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax HE20: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax HE40: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Power Supply	DC 3.3 V

5.2. CHANNEL LIST

Channel List for 802.11b/g/n/ax (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List for 802.11n/ax (40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447	/	/

5.3. MAXIMUM OUTPUT POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)
b	2412 ~ 2462	1-11[11]	14.76
g	2412 ~ 2462	1-11[11]	14.86
n HT20	2412 ~ 2462	1-11[11]	18.00
n HT40	2422 ~ 2452	3-9[7]	18.10
ax HE20	2412 ~ 2462	1-11[11]	16.30
ax HE40	2422 ~ 2452	3-9[7]	18.30

5.4. TEST CHANNEL CONFIGURATION

IEEE Std. 802.11	Test Channel	Frequency
b	CH 1, CH 6, CH 11/ Low, Middle, High	2412MHz, 2437MHz, 2462MHz
g	CH 1, CH 6, CH 11/ Low, Middle, High	2412MHz, 2437MHz, 2462MHz
n HT20	CH 1, CH 6, CH 11/ Low, Middle, High	2412MHz, 2437MHz, 2462MHz
n HT40	CH 3, CH 6, CH 9/ Low, Middle, High	2422MHz, 2437MHz, 2452MHz
ax HE20	CH 1, CH 6, CH 11/ Low, Middle, High	2412MHz, 2437MHz, 2462MHz
ax HE40	CH 3, CH 6, CH 9/ Low, Middle, High	2422MHz, 2437MHz, 2452MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		QA Tool					
IEEE Std. 802.11	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
b	1	17.5	17.5	17.5	/		
	2	17.5	17.5	17.5			
g	1	17.5	17.5	16.5			
	2	17.5	17.5	16.5			
n HT20	1	15	15	15			
	2	15	15	15			
n HT40	1	/			15	15	14
	2	/			15	15	15
ax HE20	1	13	13	13	/		
	2	13	13	13			
ax HE40	1	/			13	13	13
	2	/			13	13	13

5.6. THE WORSE CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20 mode: MCS0

802.11n HT40 mode: MCS0

802.11ax HE20 mode: MCS0

802.11ax HE40 mode: MCS0

SISO mode and MIMO mode have the same power setting, so only the worst case power mode (MIMO) will be record in the report.

The EUT has 2 separate antennas which correspond to 2 separate antenna ports. Core 1 and Core 2 correspond to antenna 1 and antenna 2 respectively.

Antenna 1 and Antenna 2 have the same power setting, but the power test data are different. (Declared by customer.)

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

The EUT support Cyclic Shift Diversity (CDD), Space Time Coding (STBC), Spatial Division Multiplexing (SDM) modes. They use the same conducted power per chain in any given mode, CDD mode have the maximum power setting, so we only chose the worst case mode CDD for final testing.

5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2412-2462	PIFA	2
2	2412-2462	PIFA	2

The EUT support Cyclic Shift Diversity (CDD) mode.

MIMO output power port and MIMO PSD port summing was performed in accordance with KDB 662911 D01. For the CDD mode results the Directional Gain was calculated in accordance with the following method.

For output power measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 2 \text{ dBi}$

G_{ANT} : equal to the gain of the antenna having the highest gain

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$

For power spectral density (PSD) measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 5 \text{ dBi}$

Array Gain = $10 \log (N_{ANT}/N_{SS}) \text{ dB}$.

N_{ANT} : number of transmit antennas

N_{SS} : number of spatial streams, the worst case directional gain will occur when $N_{SS} = 1$

The EUT support Space Time Block Codes (STBC) mode/ Spatial Division Multiplexing (SDM) modes.

MIMO output power port and MIMO PSD port summing was performed in accordance with KDB 662911 D01. For the STBC/SDM mode results the Directional Gain was calculated in accordance with the following method.

For output power measurements:

Directional gain= $G_{ANT} \text{ dBi} = 2 \text{ dBi}$

G_{ANT} : equal to the gain of the antenna having the highest gain

For power spectral density (PSD) measurements:

Directional gain= $G_{ANT} \text{ dBi} = 2 \text{ dBi}$

G_{ANT} : equal to the gain of the antenna having the highest gain



IEEE Std. 802.11	Transmit and Receive Mode	Description
b	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
g	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
n HT20	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
n HT40	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
ax HE20	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
ax HE40	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.

Note: The value of the antenna gain was declared by customer.

5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	XIAOXIN 5000	/
2	AC Adapter	Lenovo	42T4434	Input: AC 100 ~ 240 V, 1.5 A, 50-60 Hz Output: DC 20 V, 4.5 A

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	0.3	/

ACCESSORIES


Item	Accessory	Brand Name	Model Name	Description
1	/	/	/	/

Note: The cable is provided by customer.

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

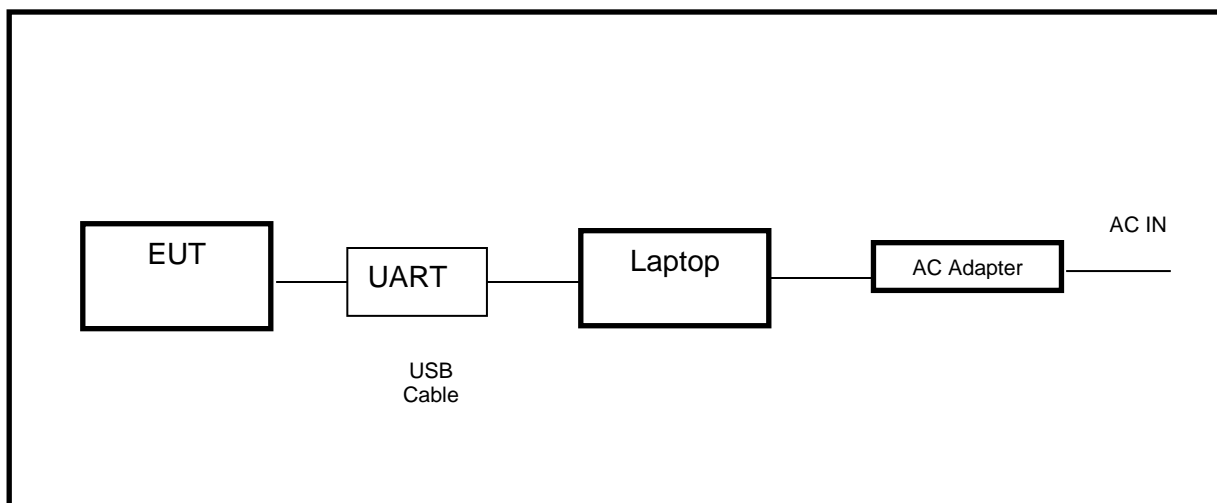



6. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.30, 2021	Oct.29, 2022
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.30, 2021	Oct.29, 2022
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.30, 2021	Oct.29, 2022
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.30, 2021	Oct.29, 2022
EMI Measurement Receiver	R&S	ESR26	101377	Oct.30, 2021	Oct.29, 2022
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.30, 2021	Oct.29, 2022
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.31, 2021	Oct.30, 2022
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.31, 2021	Oct.30, 2022
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.31, 2021	Oct.30, 2022
Preamplifier	Mini-Circuits	ZX60-83LN-S+	SUP01201941	Oct.31, 2021	Oct.30, 2022
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Oct.31, 2021	Oct.30, 2022
Highpass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	Oct.31, 2021	Oct.30, 2022
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Oct.31, 2021	Oct.30, 2022
Software					



Description	Manufacturer	Name	Version
Test Software for Radiated Emissions	Farad	EZ-EMC	Ver. UL-3A1

Other instruments					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer	R&S	FSV40	101117	Oct.31, 2021	Oct.30, 2022
Dual Channel Power Meter	Keysight	N1912A	MY55416024	Oct.30, 2021	Oct.29, 2022
Power Sensor	Keysight	USB Wideband Power Sensor	MY5100022	Oct.30, 2021	Oct.29, 2022



7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP

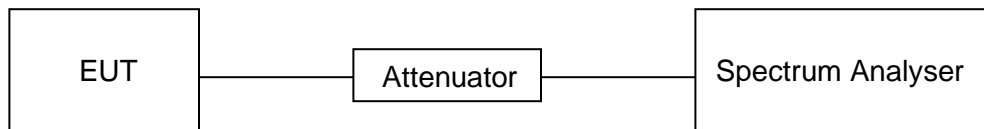

TEST ENVIRONMENT

Temperature	23.4 °C	Relative Humidity	52.4 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

RESULTS

Please refer to appendix G.



7.2. 6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

TEST PROCEDURE


Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

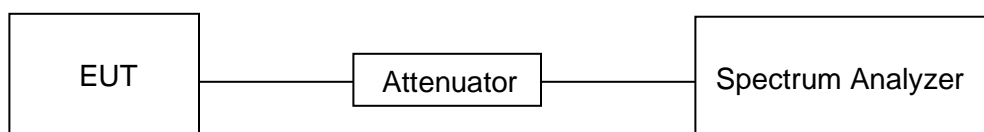



TEST ENVIRONMENT

Temperature	23.4 °C	Relative Humidity	52.4 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

RESULTS

Please refer to appendix A & B.



7.3. CONDUCTED OUTPUT POWER

LIMITS


CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 5.4 (d)	AVG Output Power	1 watt or 30 dBm	2400-2483.5

TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

TEST SETUP



TEST ENVIRONMENT

Temperature	23.4 °C	Relative Humidity	52.4 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

RESULTS

Please refer to appendix C.



7.4. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 5.2 (b)	Power Spectral Density	8 dBm/3 kHz	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.


Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	PEAK
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP



TEST ENVIRONMENT

Temperature	23.4 °C	Relative Humidity	52.4 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V



RESULTS

Please refer to appendix D.



7.5. CONDUCTED BANDEGE AND SPURIOUS EMISSIONS

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Bandedge and Spurious Emissions	at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.


Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.



TEST SETUP

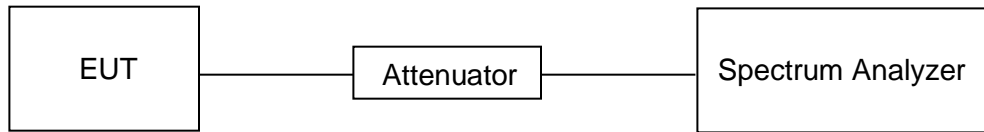

TEST ENVIRONMENT

Temperature	23.4 °C	Relative Humidity	52.4 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

RESULTS

Please refer to appendix E & F.



8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISSED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30 MHz

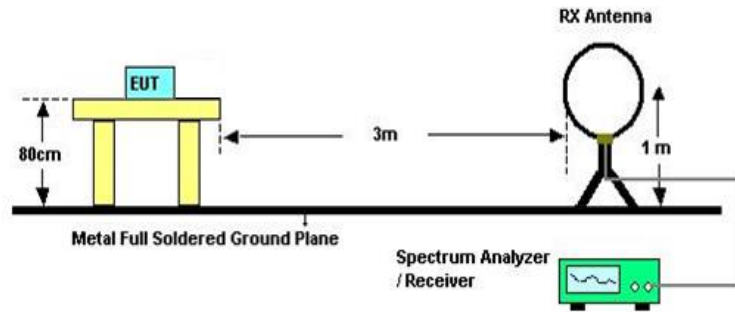


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

- The testing follows the guidelines in ANSI C63.10-2013 clause 11.11 and 11.12.
- The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
- The EUT was placed on a turntable with 80 cm above ground.
- The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
- The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
- For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
- Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
- The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω ; For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

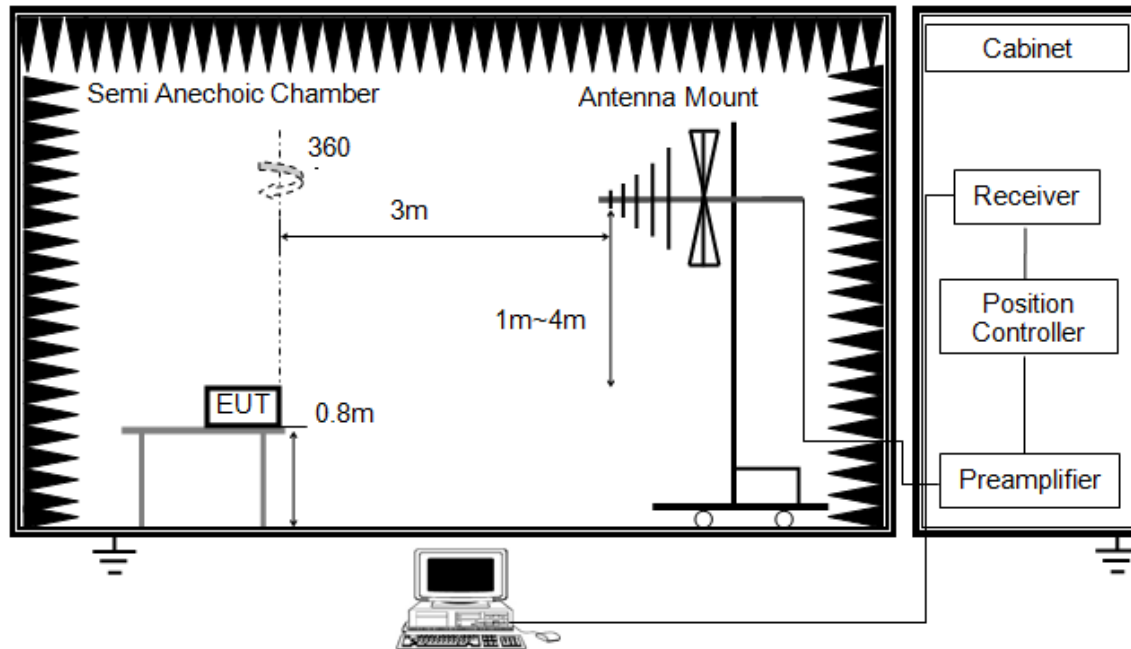


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

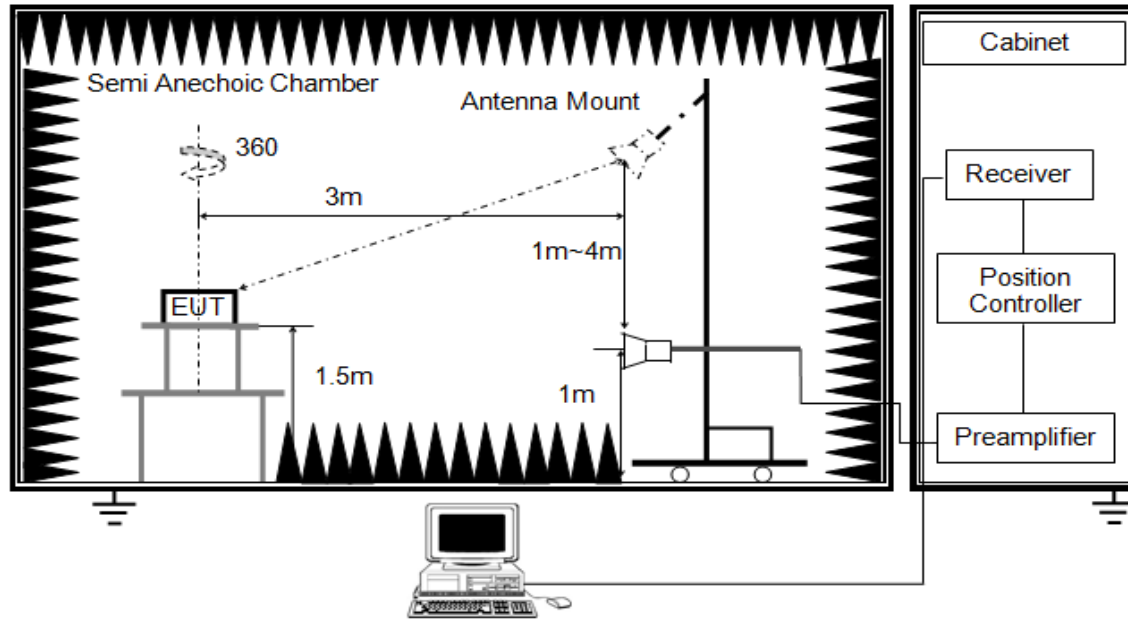


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

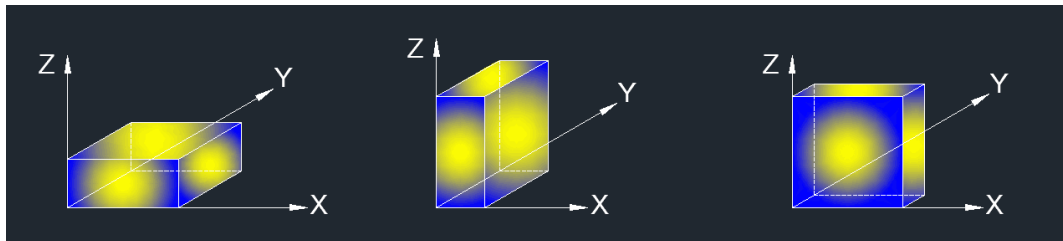

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

TEST ENVIRONMENT

Temperature	23.7 °C	Relative Humidity	51.5 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

RESULTS


8.1. RESTRICTED BANDEDGE

8.1.1. 802.11b SISO MODE

ANTENNA 2 TEST RESULTS (WORST CASE)

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

PEAK

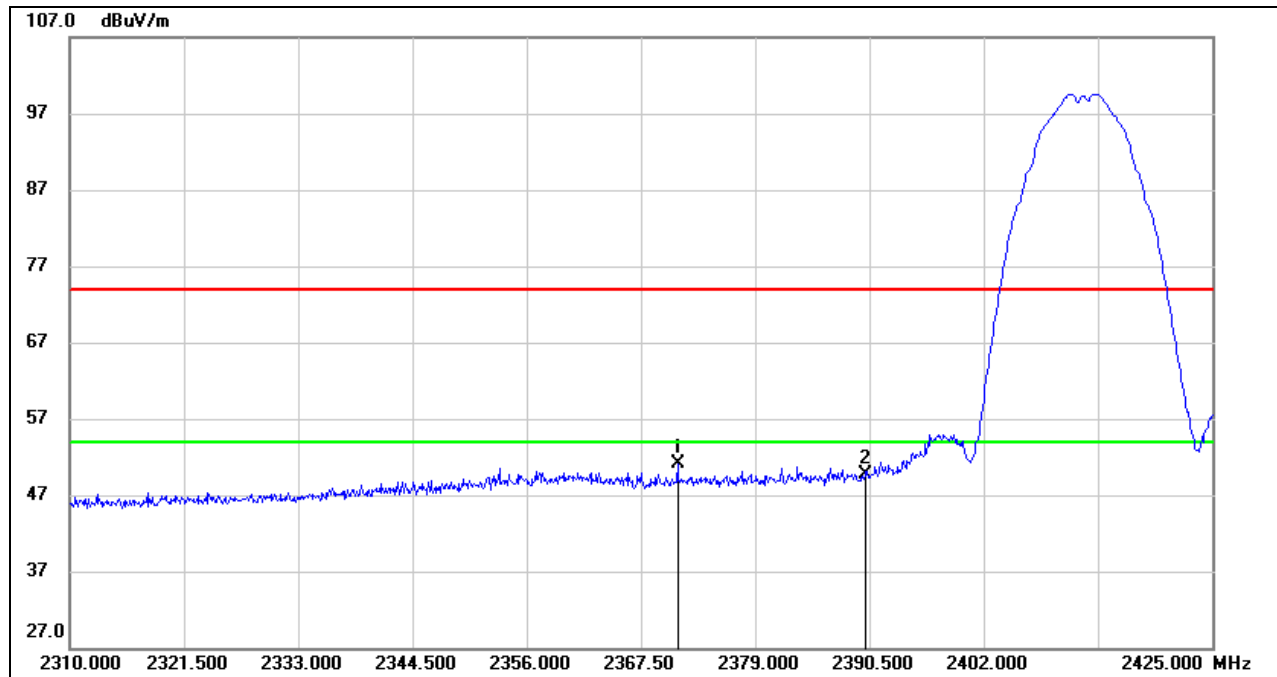

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2371.180	18.64	32.51	51.15	74.00	-22.85	peak
2	2390.000	17.05	32.66	49.71	74.00	-24.29	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

PEAK

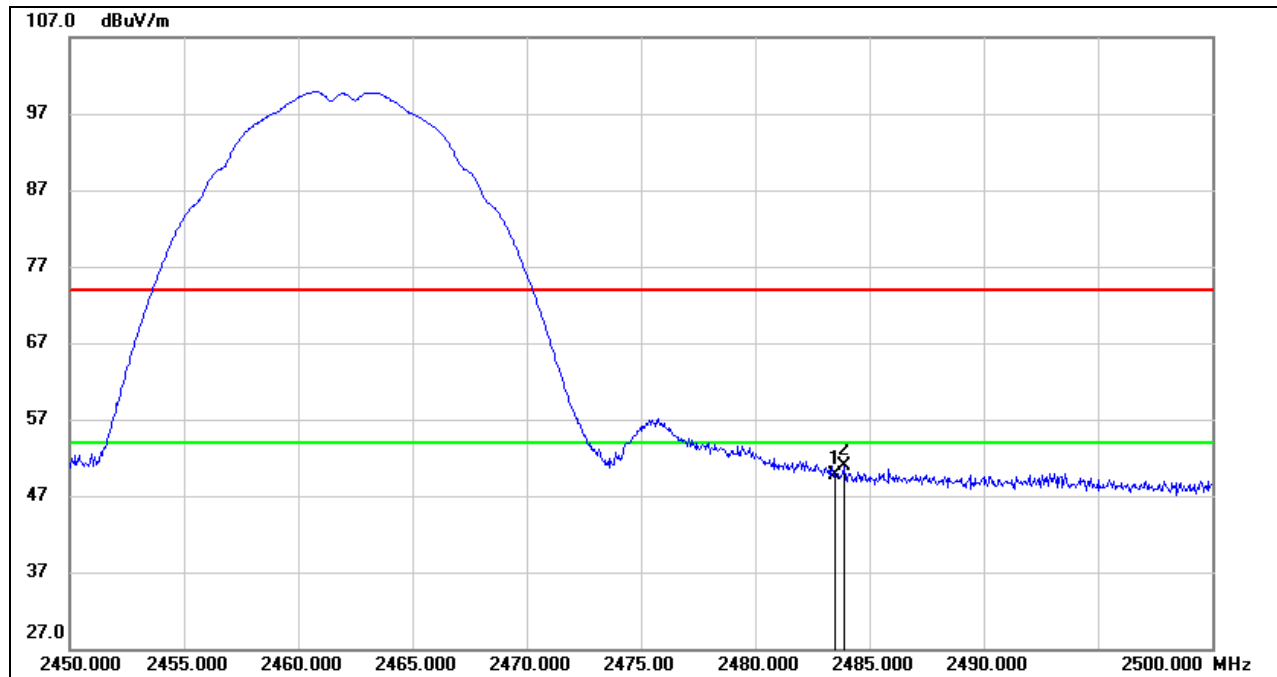

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	16.58	33.10	49.68	74.00	-24.32	peak
2	2483.900	17.77	33.10	50.87	74.00	-23.13	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) and antennas had been tested, only the worst data was recorded in the report.


Note: Both antennas have been tested, only the worst data was recorded in the report.

8.1.2. 802.11g SISO MODE

ANTENNA 2 TEST RESULTS (WORST CASE)

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

PEAK

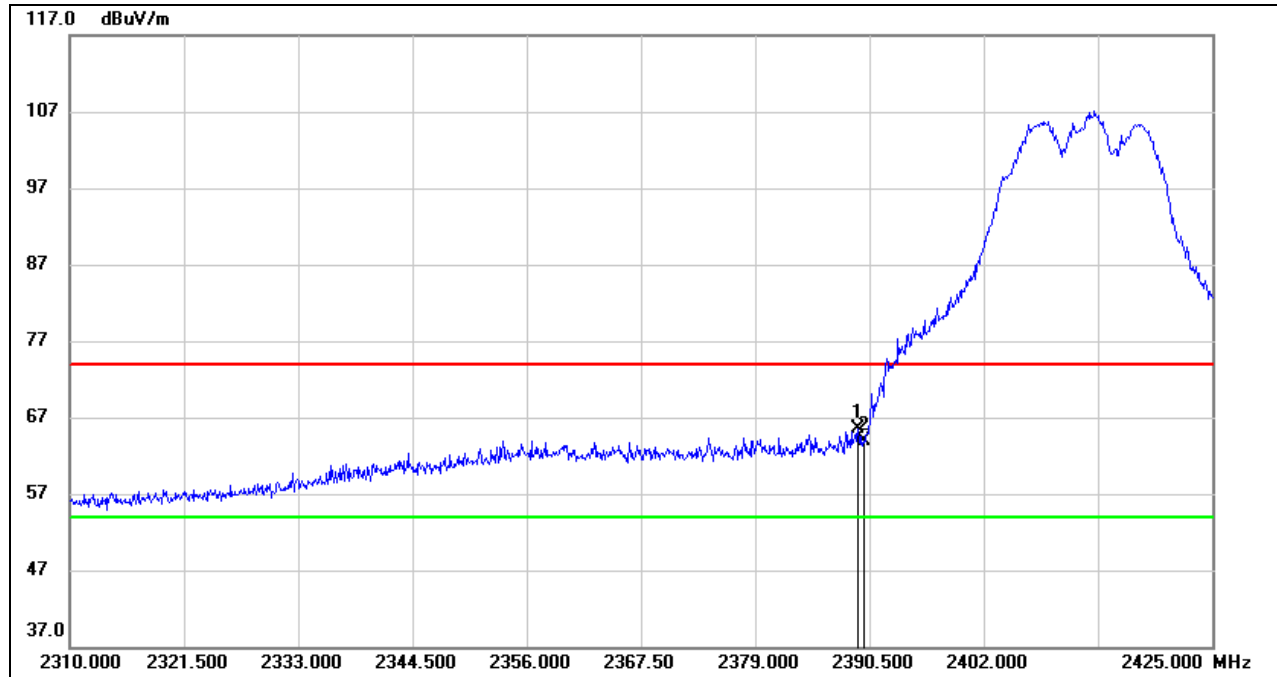


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.350	32.90	32.66	65.56	74.00	-8.44	peak
2	2390.000	31.17	32.66	63.83	74.00	-10.17	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

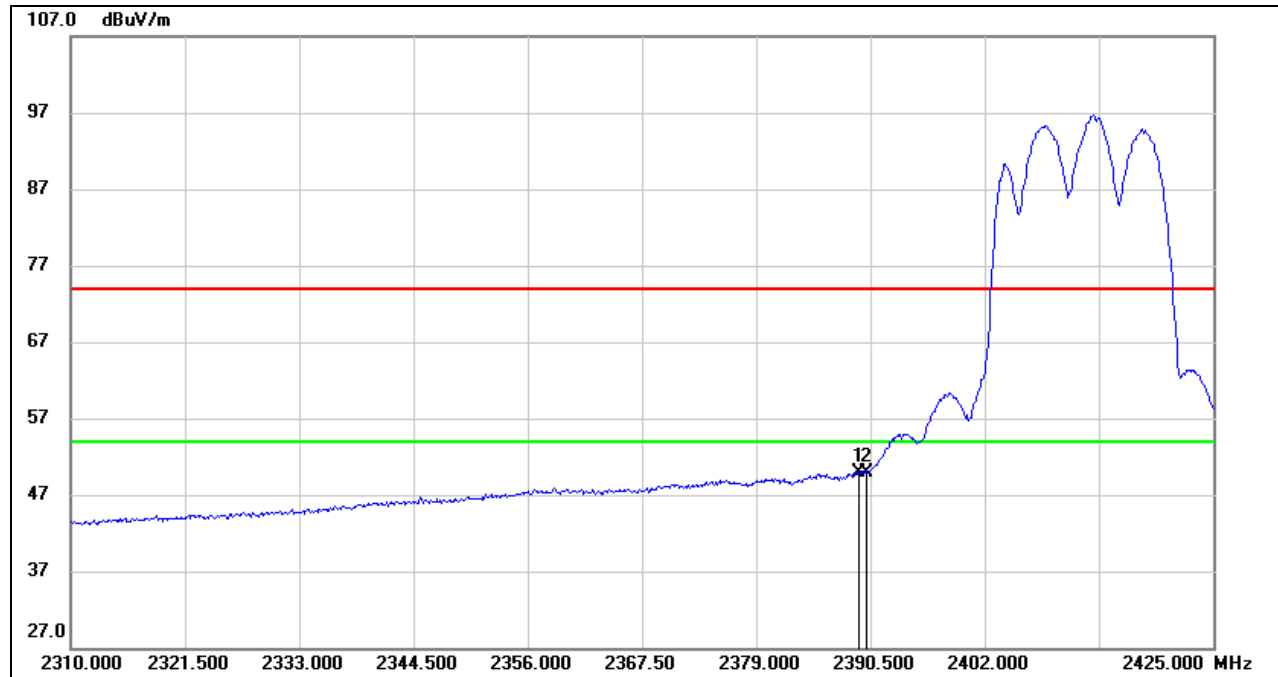


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.350	17.34	32.66	50.00	54.00	-4.00	AVG
2	2390.000	17.33	32.66	49.99	54.00	-4.01	AVG

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

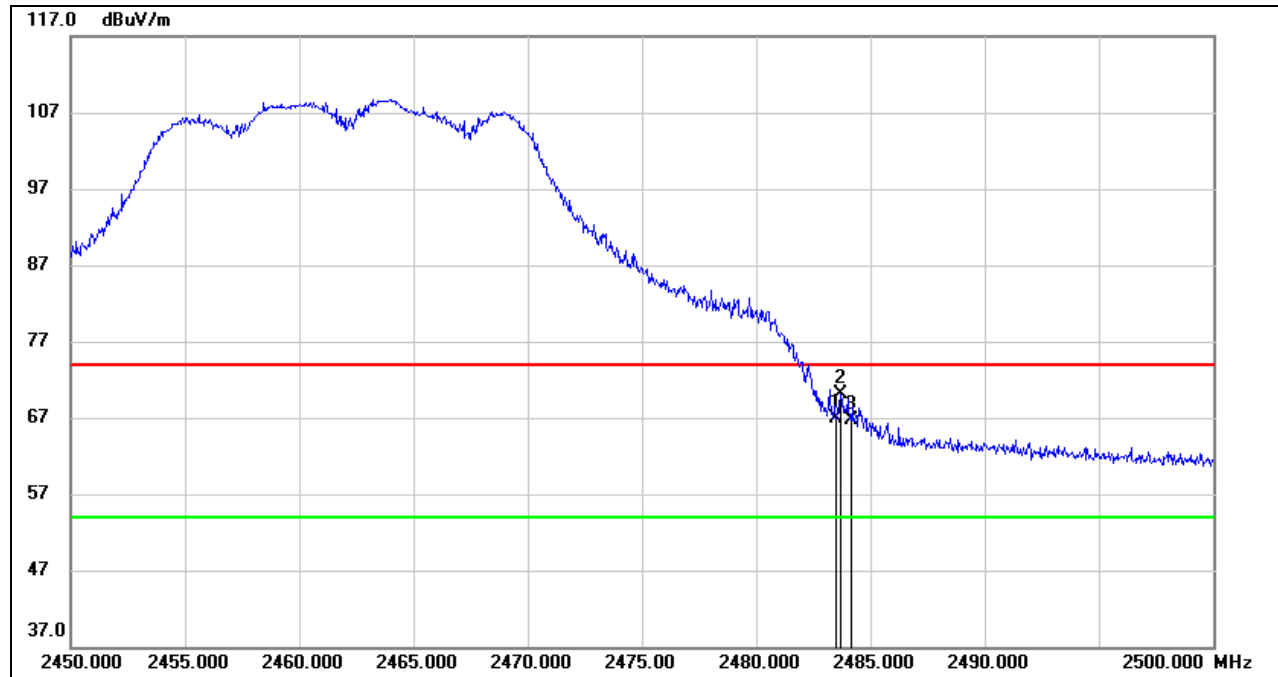**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)****PEAK**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	33.83	33.10	66.93	74.00	-7.07	peak
2	2483.700	36.94	33.10	70.04	74.00	-3.96	peak
3	2484.150	33.62	33.10	66.72	74.00	-7.28	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

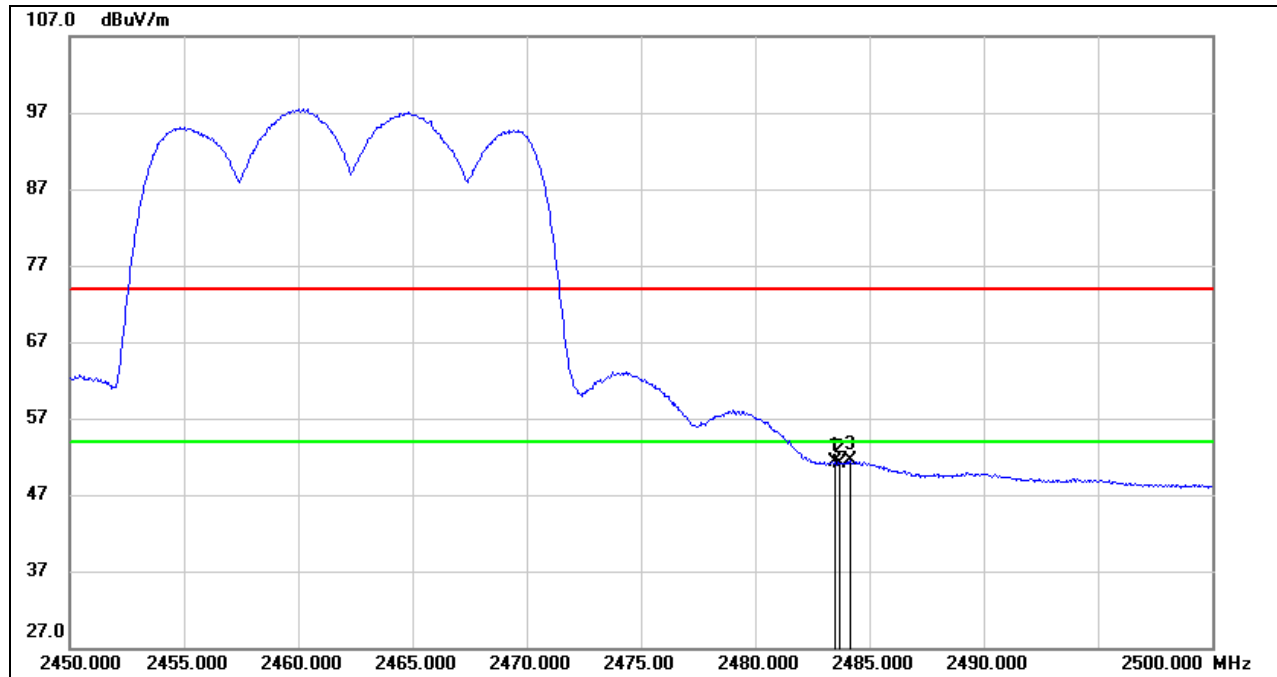

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.12	33.10	51.22	54.00	-2.78	AVG
2	2483.700	18.09	33.10	51.19	54.00	-2.81	AVG
3	2484.150	18.40	33.10	51.50	54.00	-2.50	AVG

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Note: All the polarities (Vertical & Horizontal) and antennas had been tested, only the worst data was recorded in the report.

Note: Both antennas have been tested, only the worst data was recorded in the report.

8.1.3. 802.11n HT20 MIMO MODE

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

PEAK

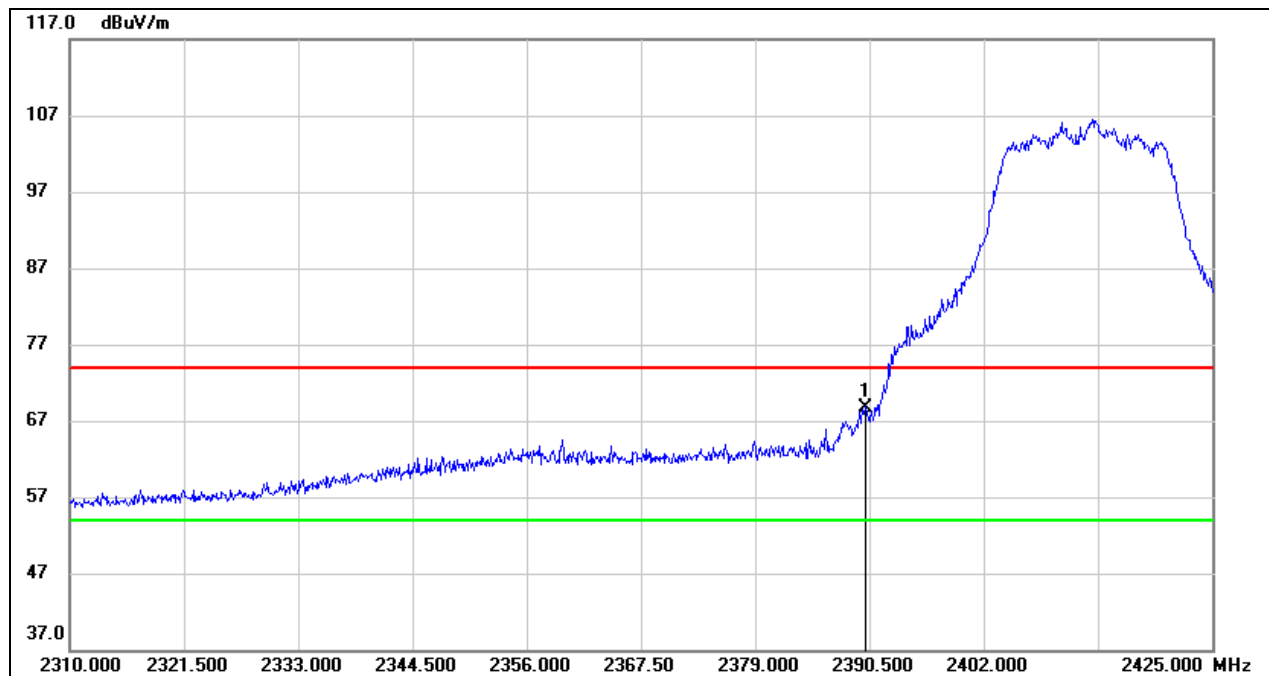


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	36.04	32.66	68.70	74.00	-5.30	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.


3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

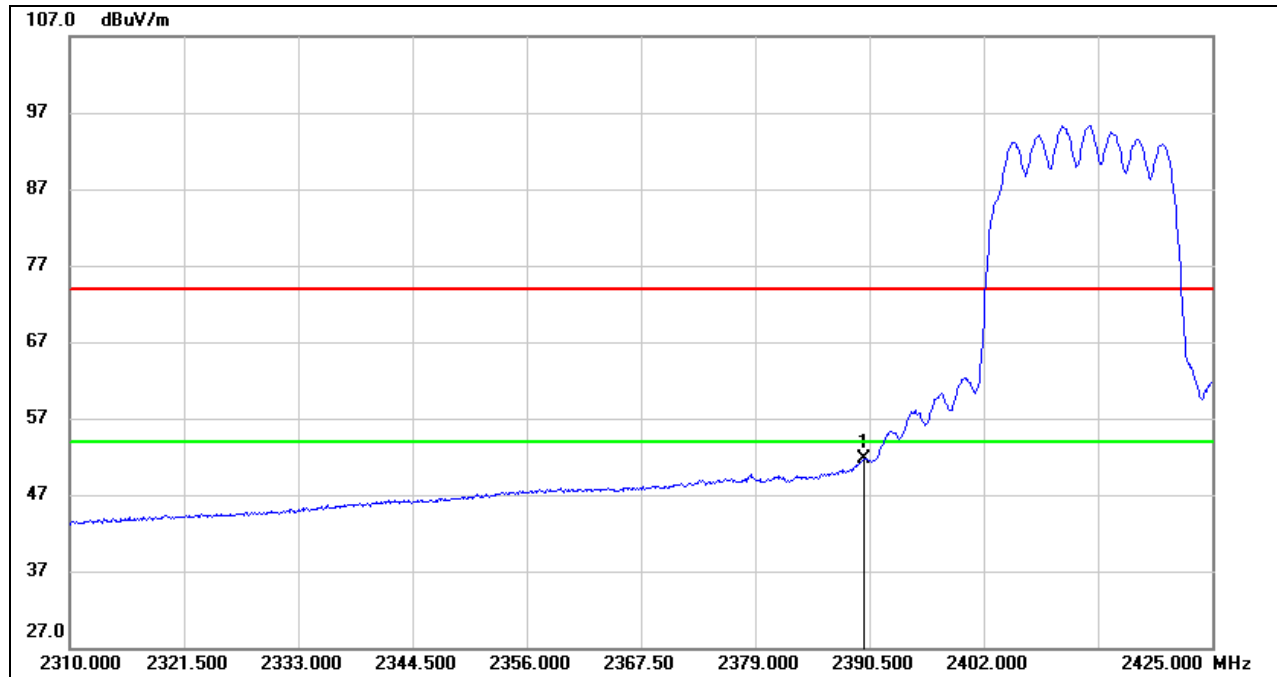

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	18.96	32.66	51.62	54.00	-2.38	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
3. For the transmitting duration, please refer to clause 7.1.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

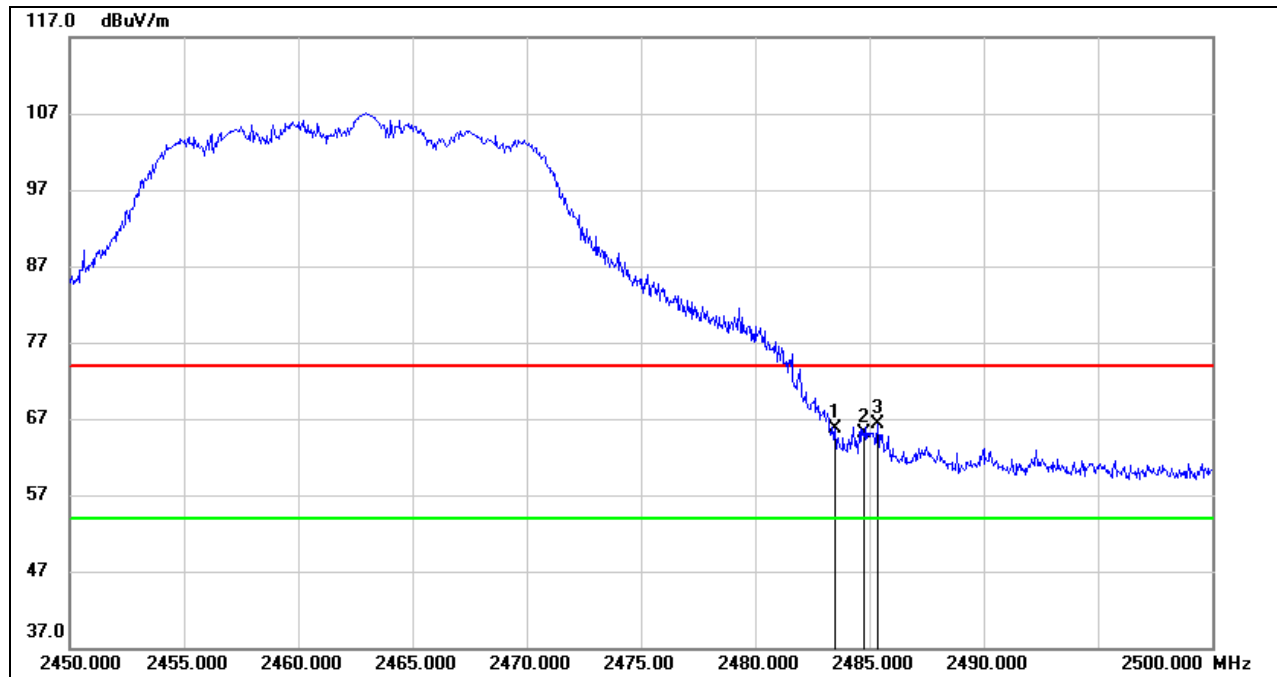**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)****PEAK**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	32.60	33.10	65.70	74.00	-8.30	peak
2	2484.750	31.94	33.10	65.04	74.00	-8.96	peak
3	2485.350	33.29	33.10	66.39	74.00	-7.61	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

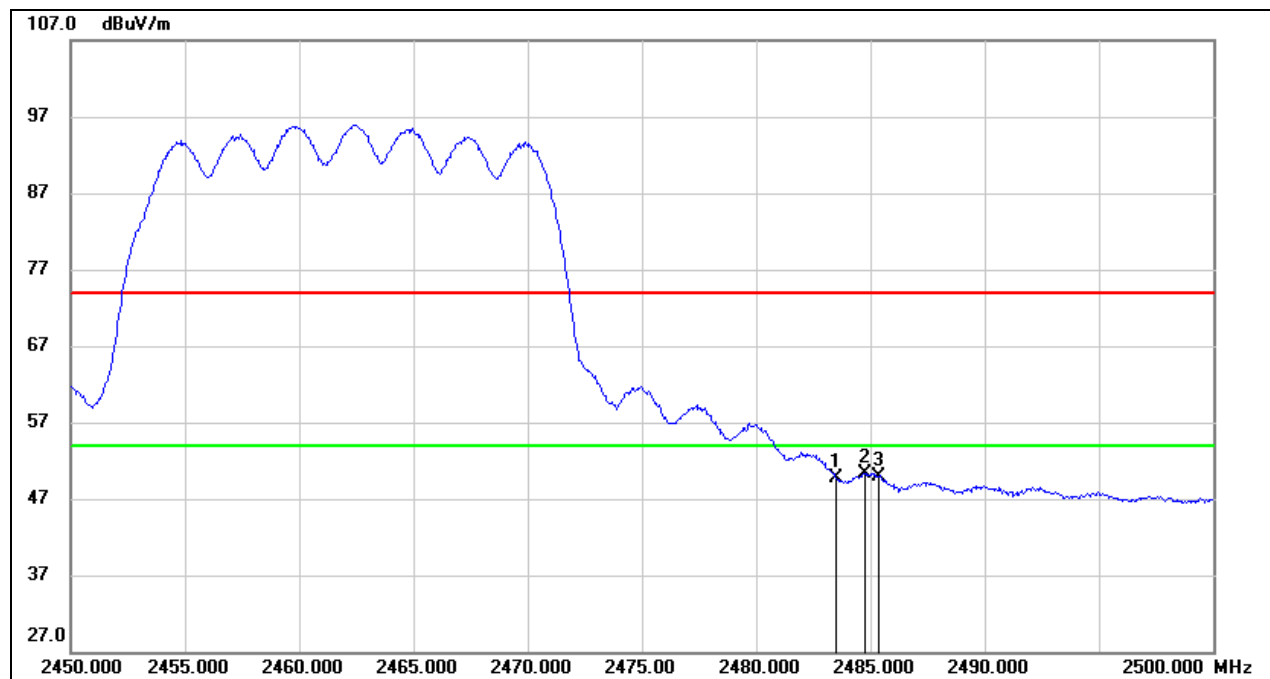

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	16.61	33.10	49.71	54.00	-4.29	AVG
2	2484.750	17.22	33.10	50.32	54.00	-3.68	AVG
3	2485.350	16.80	33.10	49.90	54.00	-4.10	AVG

Note: 1. Measurement = Reading Level + Correct Factor.

2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.

3. For the transmitting duration, please refer to clause 7.1.


4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.

8.1.4. 802.11n HT40 MIMO MODE

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

PEAK

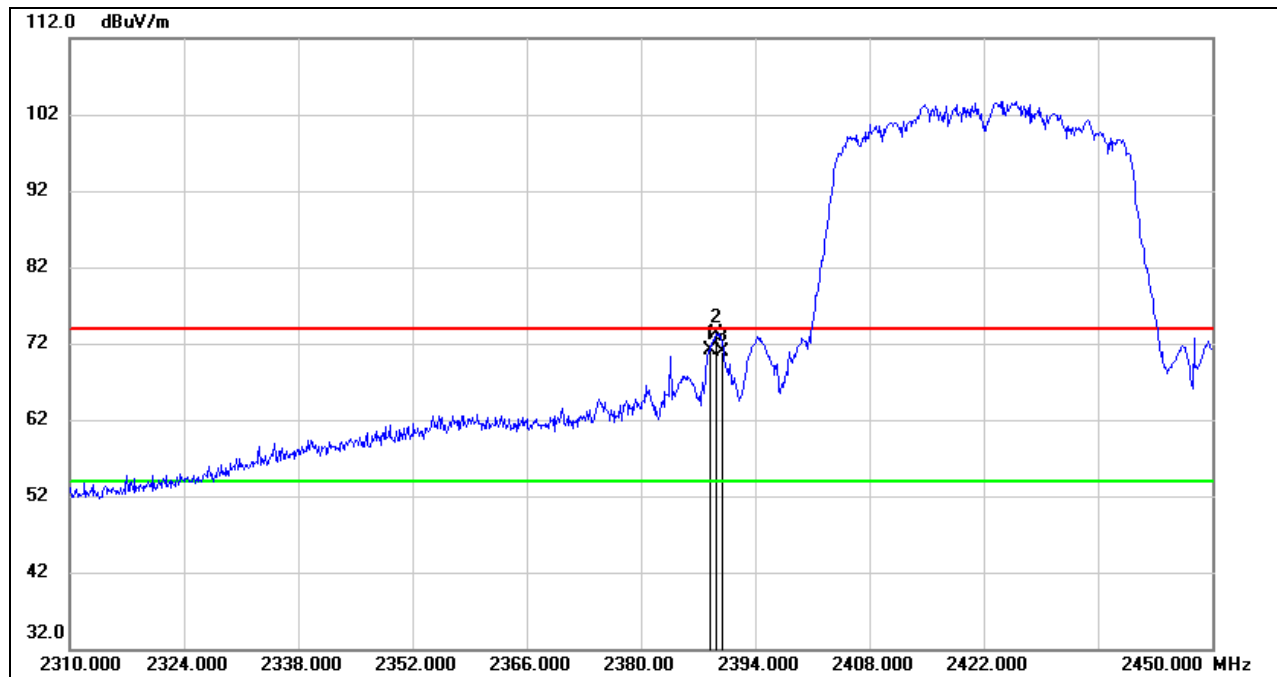


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.400	38.39	32.65	71.04	74.00	-2.96	peak
2	2389.240	40.71	32.66	73.37	74.00	-0.63	peak
3	2390.000	38.23	32.66	70.89	74.00	-3.11	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

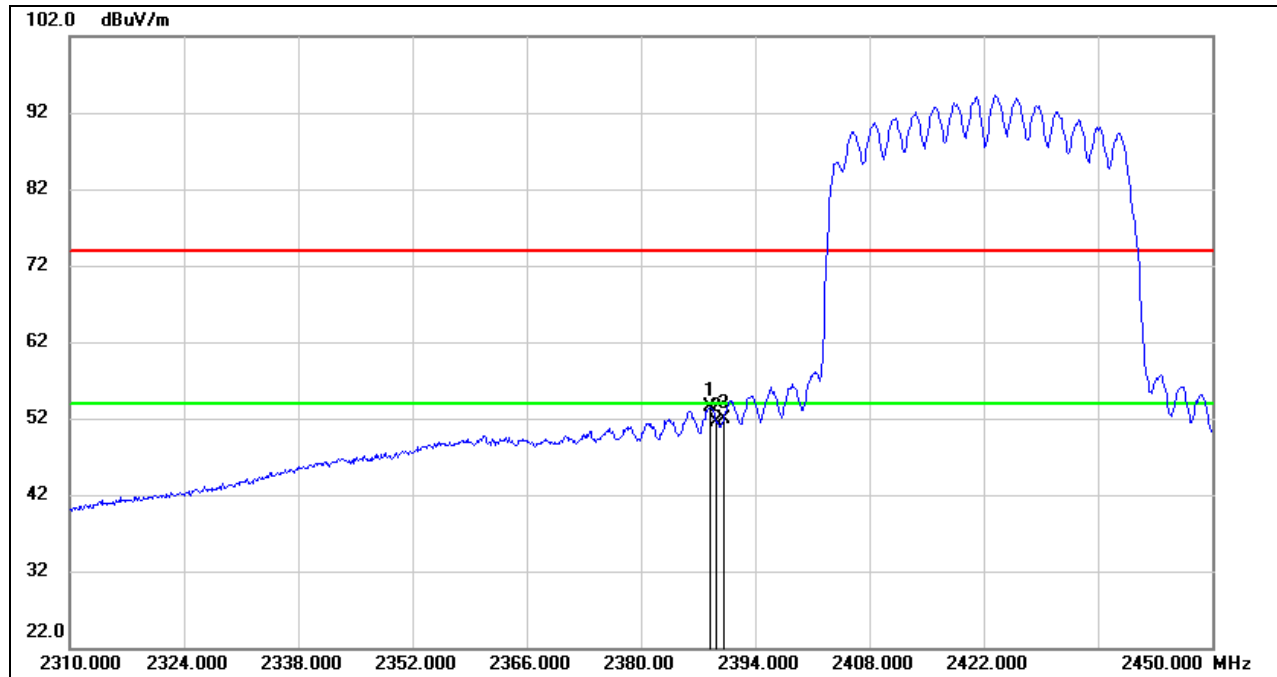


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.400	20.85	32.65	53.50	54.00	-0.50	AVG
2	2389.240	18.86	32.66	51.52	54.00	-2.48	AVG
3	2390.000	19.32	32.66	51.98	54.00	-2.02	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.
2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
3. For the transmitting duration, please refer to clause 7.1.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

PEAK

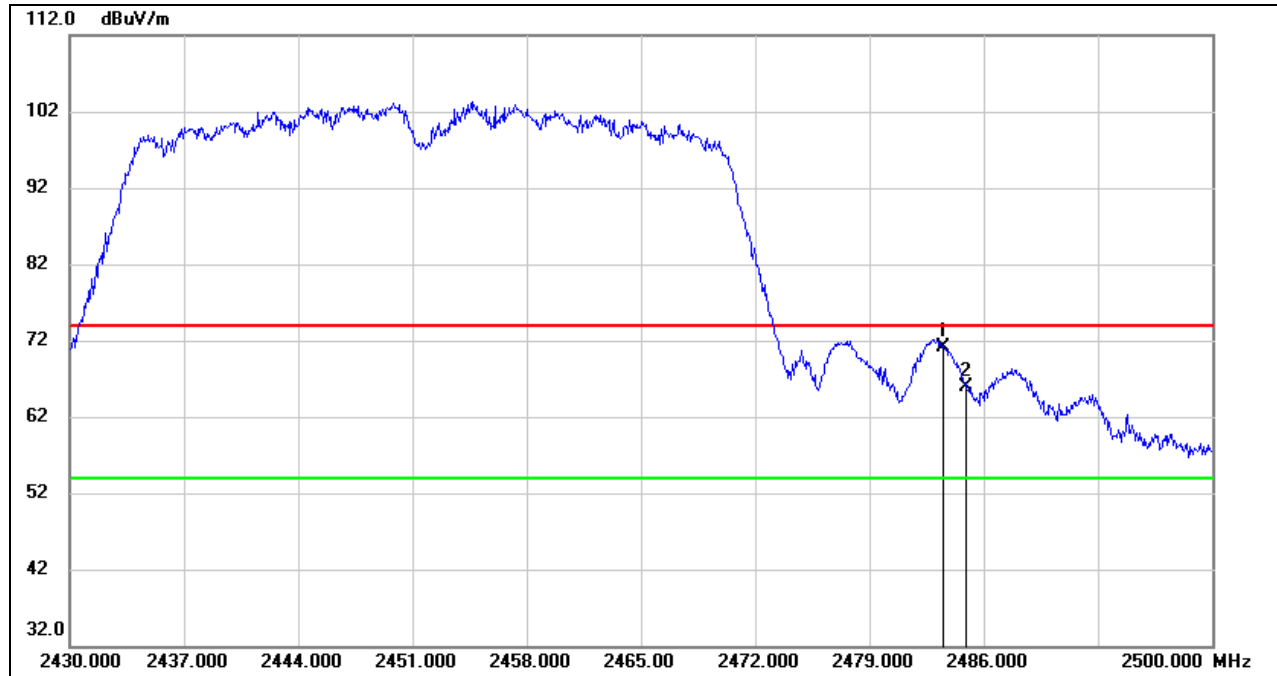


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	38.05	33.10	71.15	74.00	-2.85	peak
2	2484.950	32.87	33.10	65.97	74.00	-8.03	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

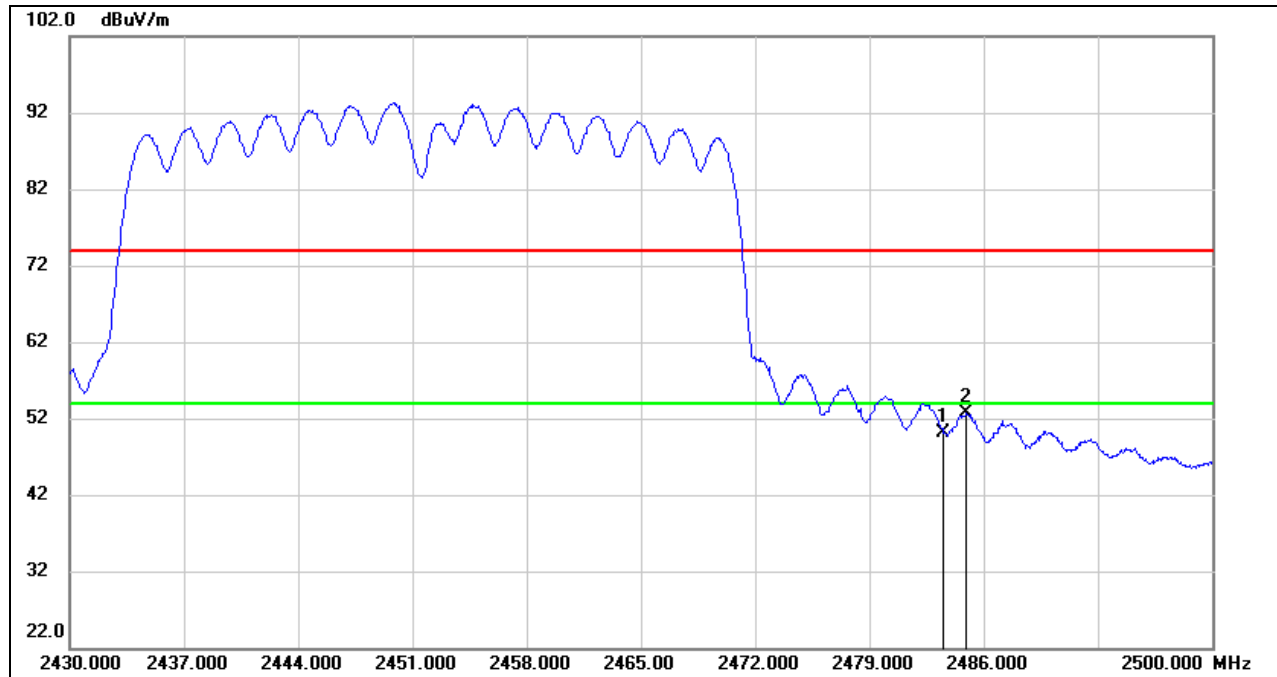

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	16.98	33.10	50.08	54.00	-3.92	AVG
2	2484.950	19.62	33.10	52.72	54.00	-1.28	AVG


- Note: 1. Measurement = Reading Level + Correct Factor.
2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
3. For the transmitting duration, please refer to clause 7.1.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.

8.1.5. 802.11ax HE20 MIMO MODE

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

PEAK

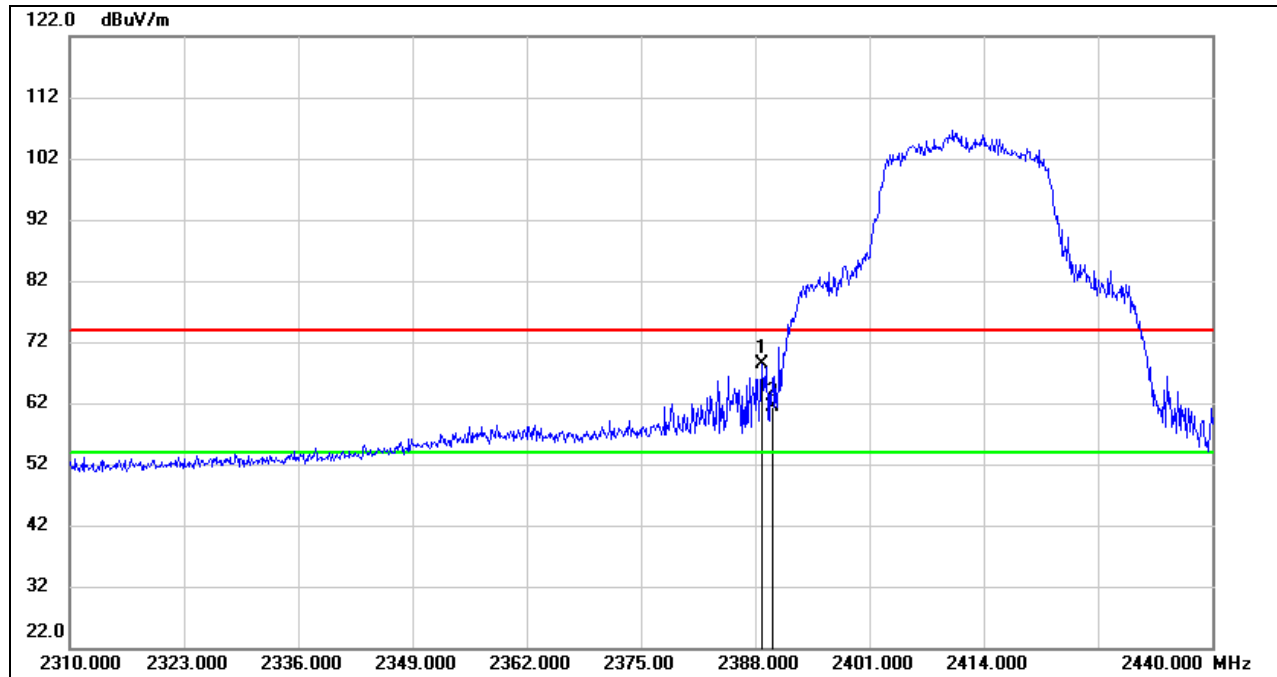


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.780	35.72	32.65	68.37	74.00	-5.63	peak
2	2390.000	28.80	32.66	61.46	74.00	-12.54	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

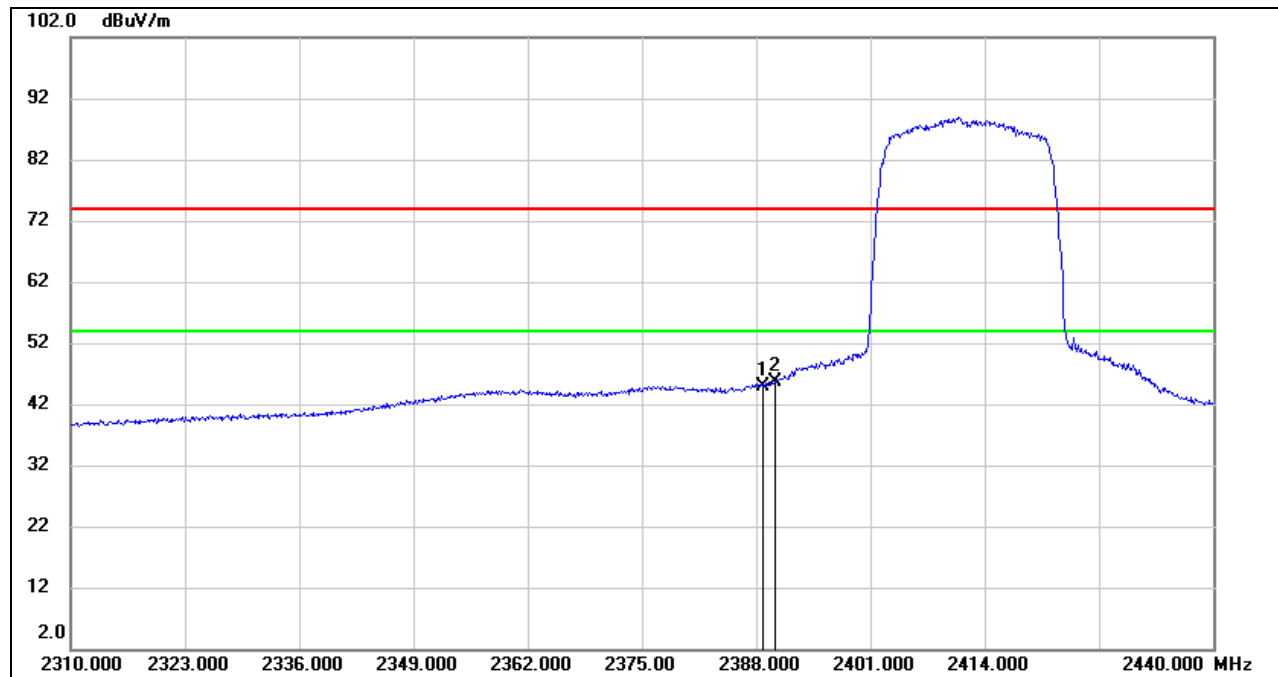
**AVG**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.780	12.27	32.65	44.92	54.00	-9.08	AVG
2	2390.000	12.96	32.66	45.62	54.00	-8.38	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.
2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
3. For the transmitting duration, please refer to clause 7.1.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

PEAK

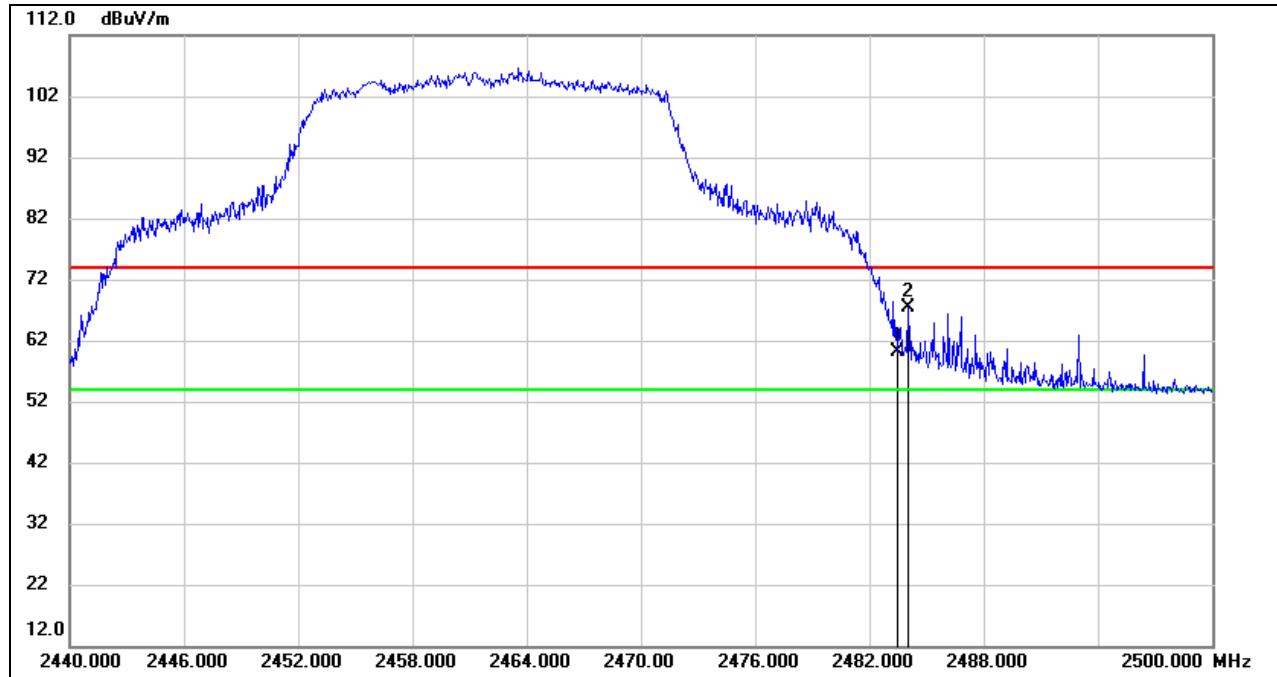


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	26.93	33.10	60.03	74.00	-13.97	peak
2	2484.040	34.34	33.10	67.44	74.00	-6.56	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

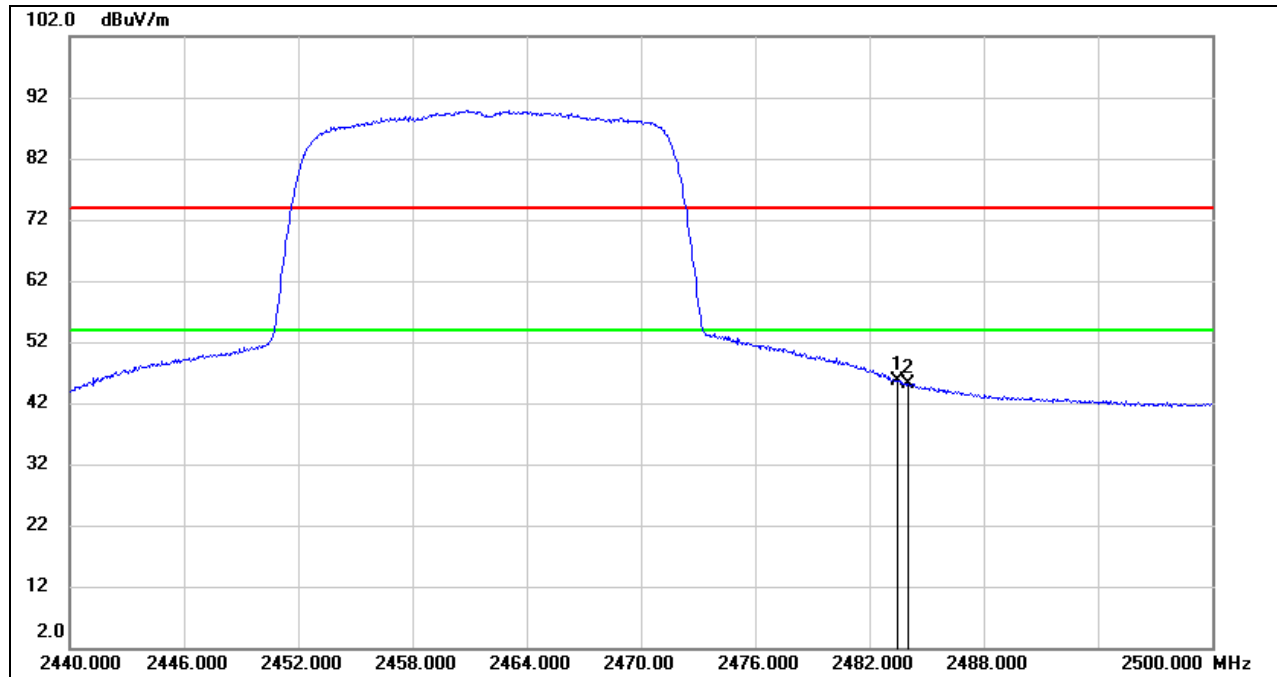

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	12.44	33.10	45.54	54.00	-8.46	AVG
2	2484.040	11.96	33.10	45.06	54.00	-8.94	AVG


- Note: 1. Measurement = Reading Level + Correct Factor.
2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
3. For the transmitting duration, please refer to clause 7.1.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.

8.1.6. 802.11ax HE40 MIMO MODE

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

PEAK

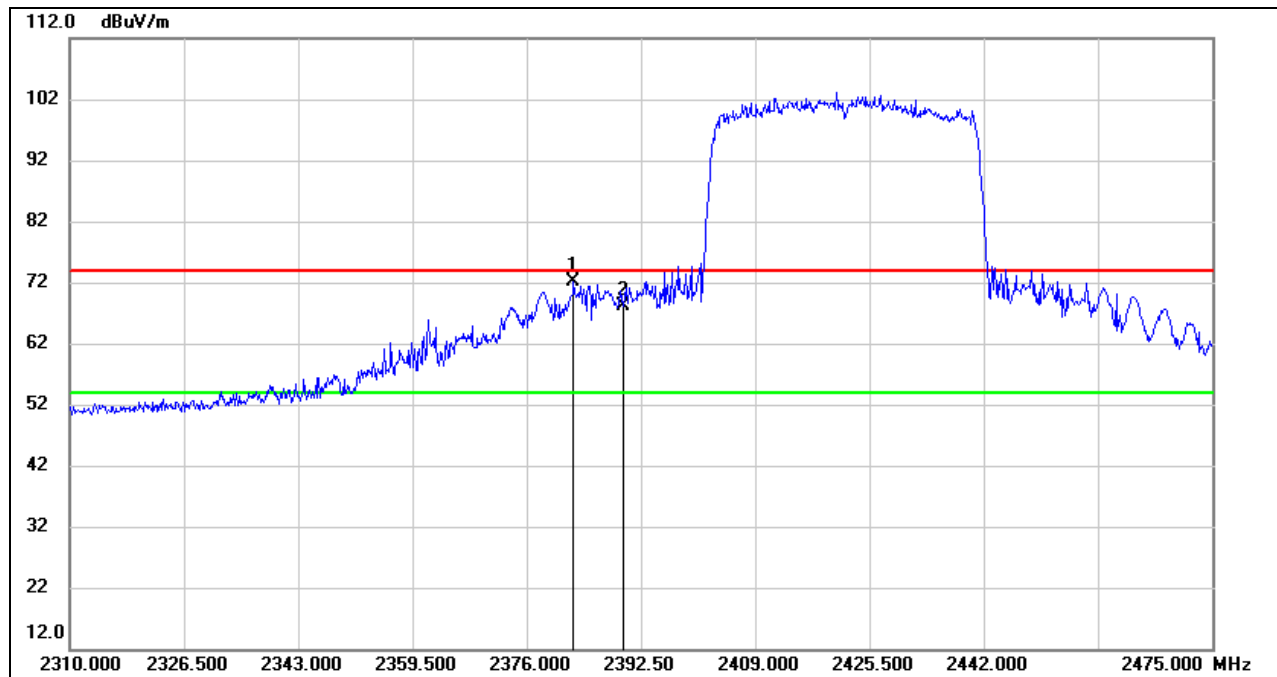


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2382.765	39.40	32.61	72.01	74.00	-1.99	peak
2	2390.000	35.56	32.66	68.22	74.00	-5.78	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

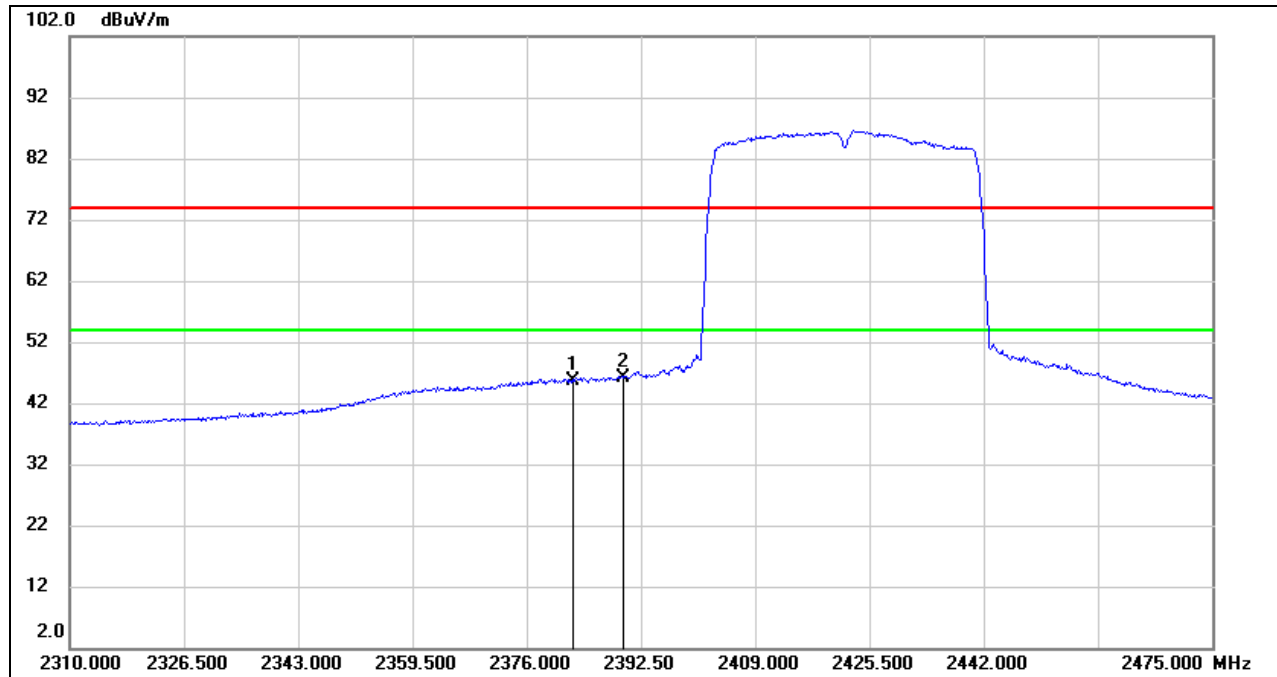


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2382.765	12.98	32.61	45.59	54.00	-8.41	AVG
2	2390.000	13.44	32.66	46.10	54.00	-7.90	AVG

Note: 1. Measurement = Reading Level + Correct Factor.

2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.

3. For the transmitting duration, please refer to clause 7.1.

4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

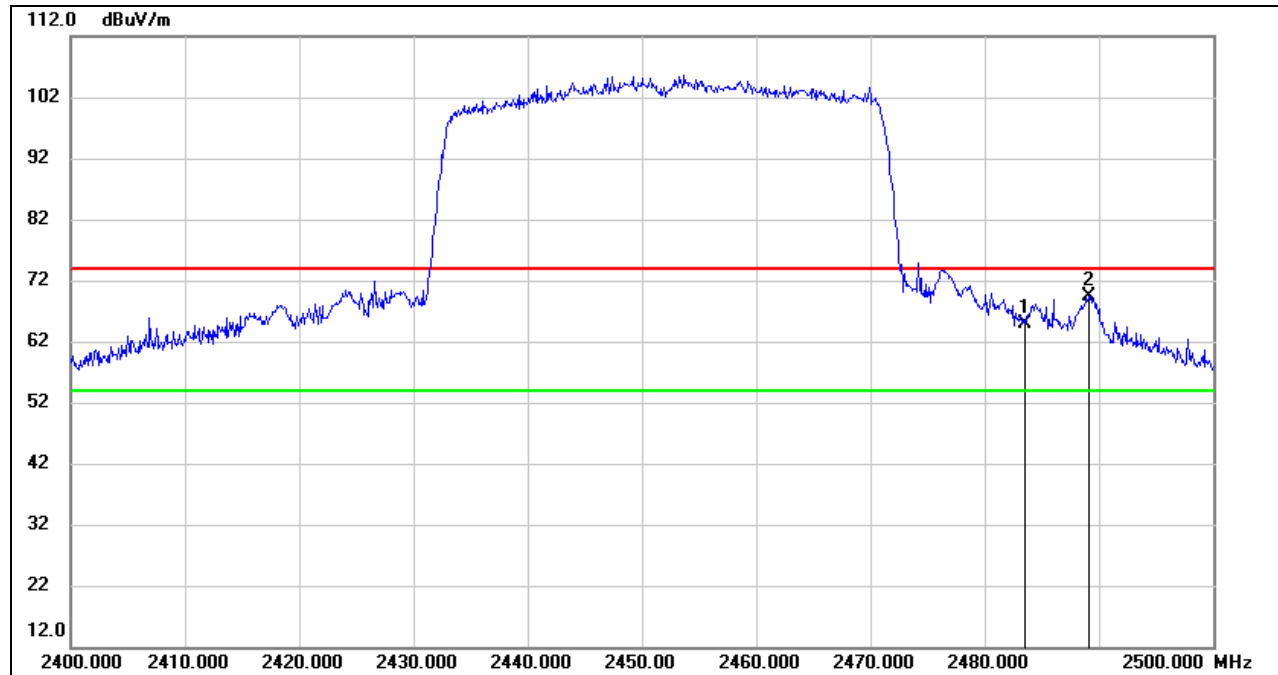**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)****PEAK**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	31.83	33.10	64.93	74.00	-9.07	peak
2	2489.100	36.37	33.11	69.48	74.00	-4.52	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

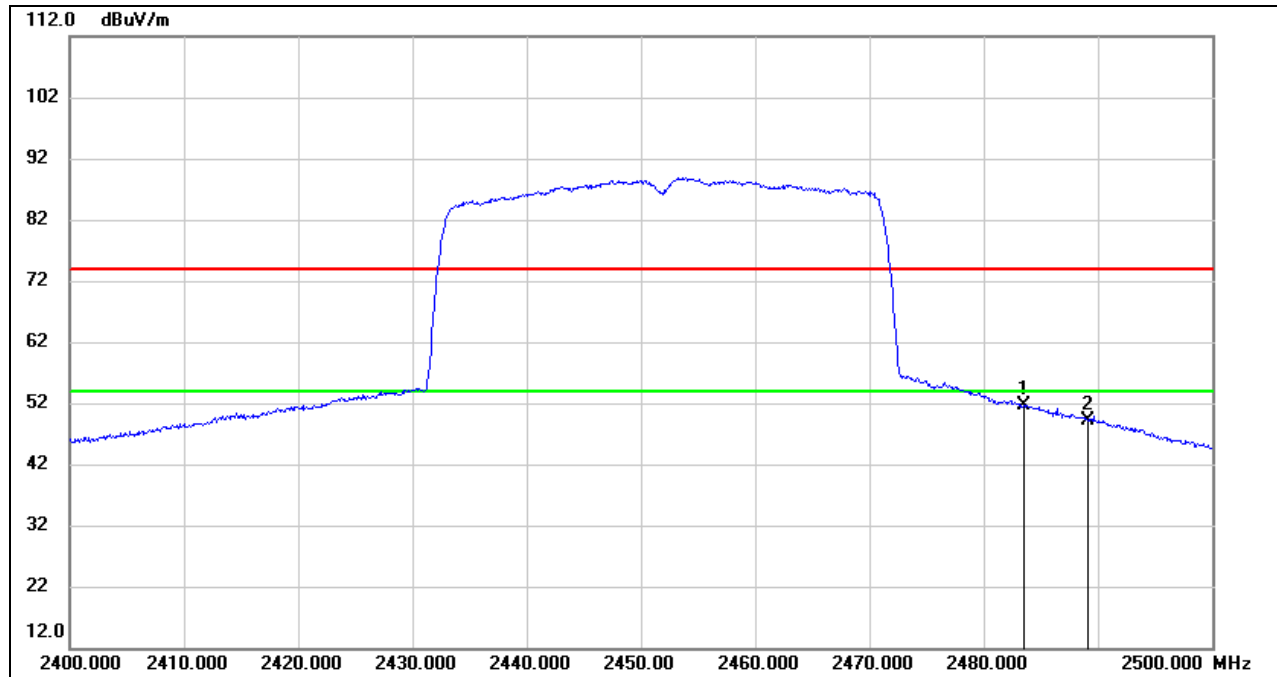

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.49	33.10	51.59	54.00	-2.41	AVG
2	2489.100	16.05	33.11	49.16	54.00	-4.84	AVG


Note: 1. Measurement = Reading Level + Correct Factor.
2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
3. For the transmitting duration, please refer to clause 7.1.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.

8.2. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)

8.2.1. 802.11ax HE40 MIMO MODE


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

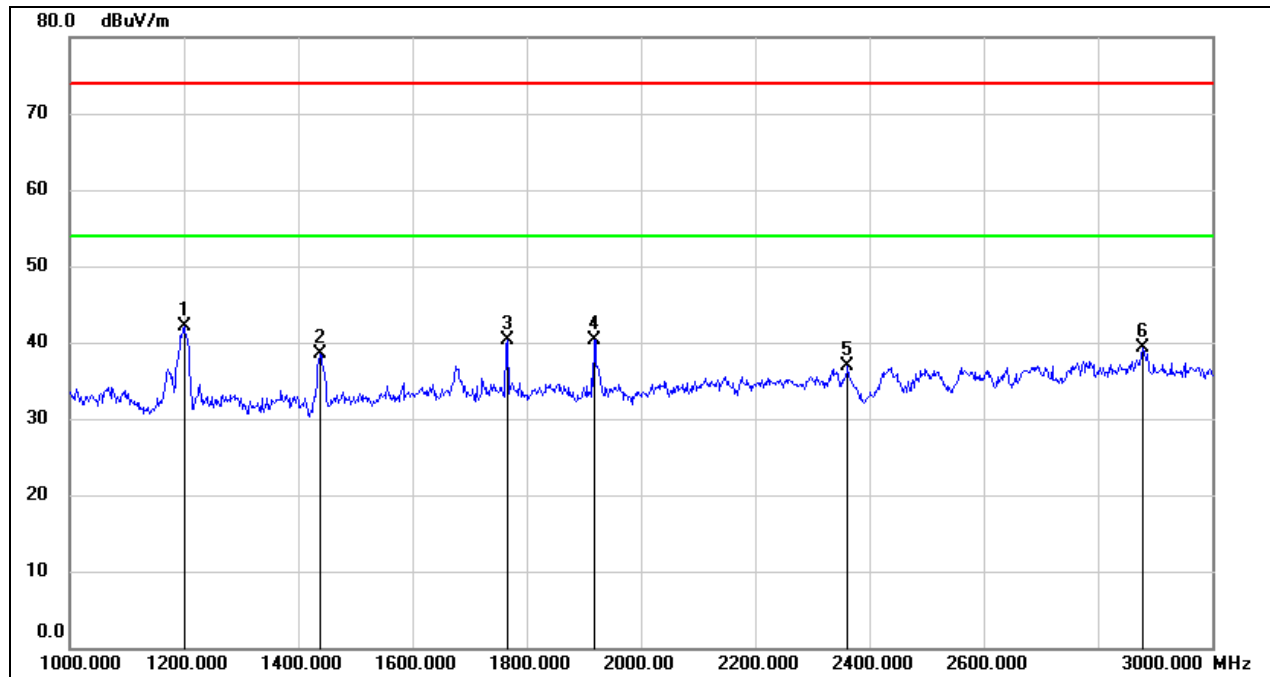

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1201.050	55.45	-13.38	42.07	74.00	-31.93	peak
2	1439.110	51.12	-12.65	38.47	74.00	-35.53	peak
3	1766.192	51.09	-10.86	40.23	74.00	-33.77	peak
4	1919.730	51.10	-10.76	40.34	74.00	-33.66	peak
5	2363.841	45.35	-8.48	36.87	74.00	-37.13	peak
6	2878.470	45.76	-6.50	39.26	74.00	-34.74	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

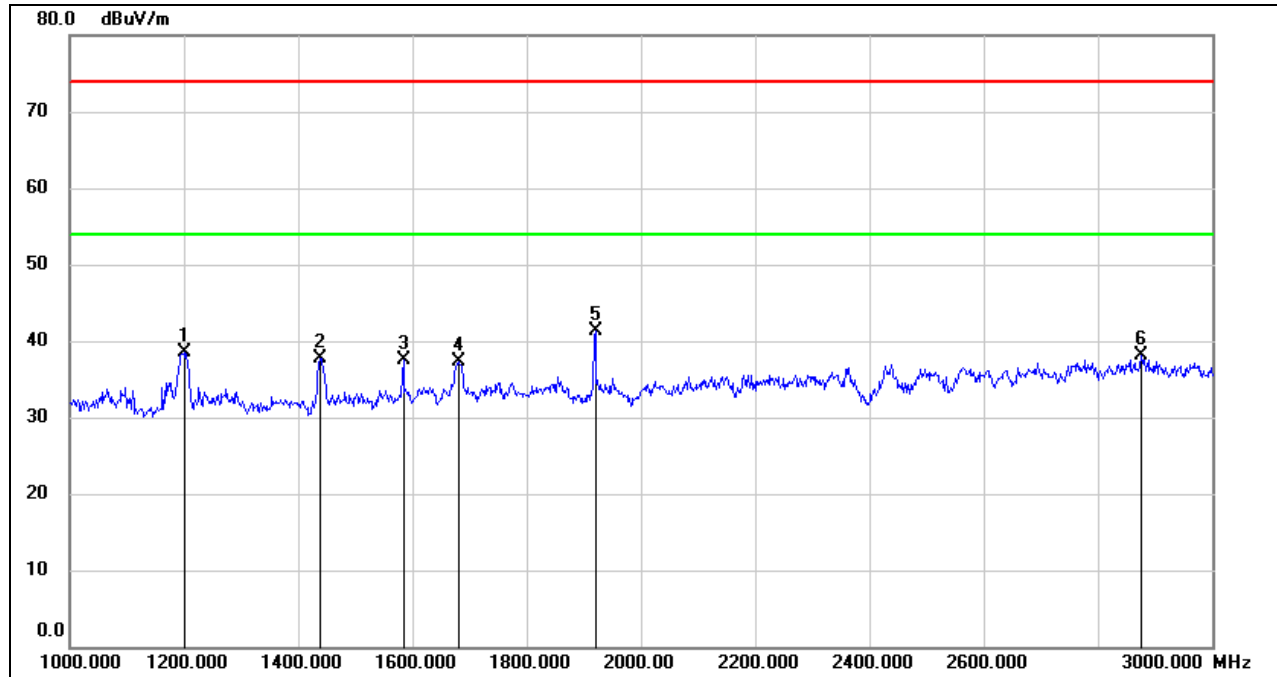

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1201.050	51.91	-13.38	38.53	74.00	-35.47	peak
2	1439.110	50.41	-12.65	37.76	74.00	-36.24	peak
3	1584.646	49.44	-11.88	37.56	74.00	-36.44	peak
4	1680.170	48.84	-11.50	37.34	74.00	-36.66	peak
5	1920.230	52.01	-10.76	41.25	74.00	-32.75	peak
6	2876.969	44.58	-6.50	38.08	74.00	-35.92	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

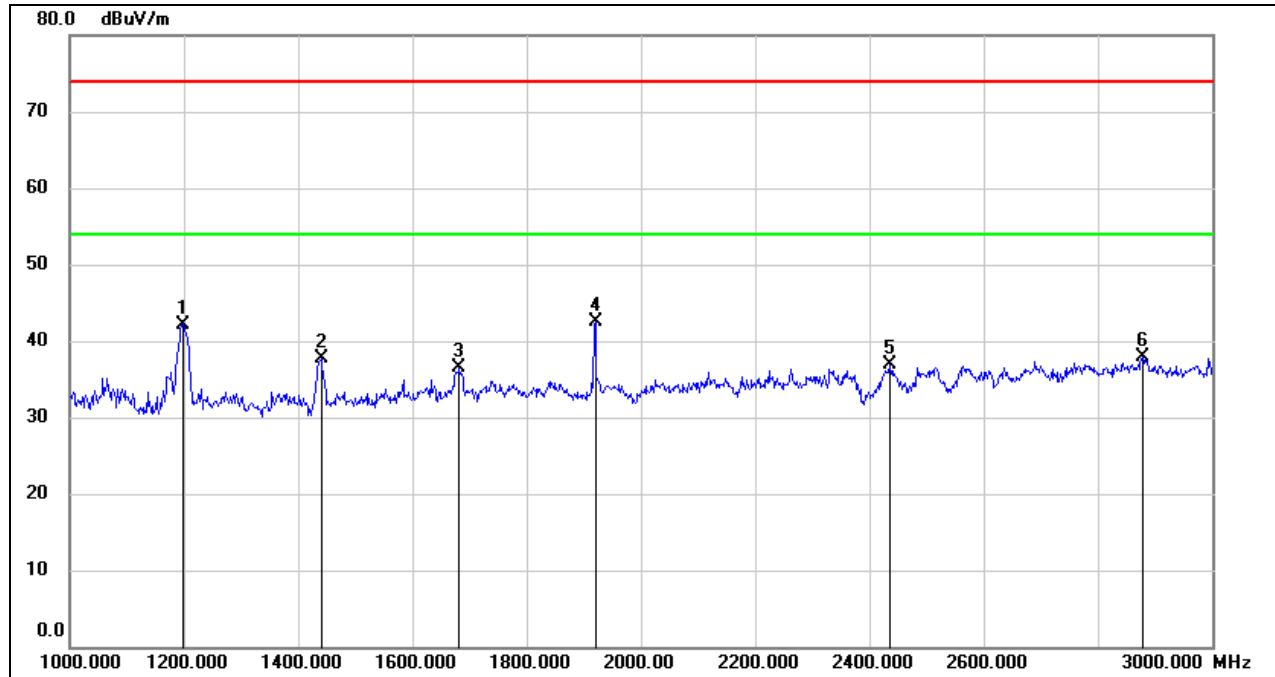

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1198.550	55.59	-13.39	42.20	74.00	-31.80	peak
2	1440.610	50.26	-12.64	37.62	74.00	-36.38	peak
3	1682.171	47.92	-11.48	36.44	74.00	-37.56	peak
4	1920.230	53.30	-10.76	42.54	74.00	-31.46	peak
5	2437.000	44.95	-8.01	36.94	/	/	Fundamental
6	2878.970	44.31	-6.50	37.81	74.00	-36.19	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

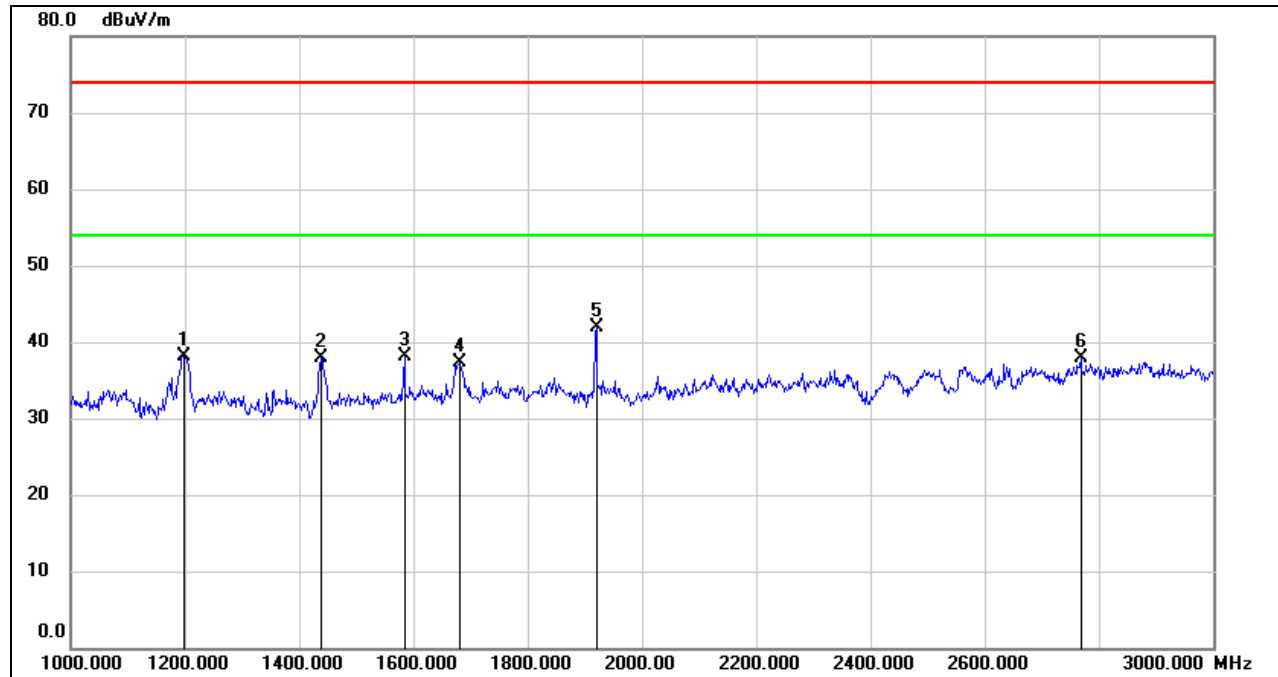

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1198.550	51.51	-13.39	38.12	74.00	-35.88	peak
2	1439.110	50.60	-12.65	37.95	74.00	-36.05	peak
3	1584.146	49.90	-11.88	38.02	74.00	-35.98	peak
4	1682.671	48.74	-11.48	37.26	74.00	-36.74	peak
5	1920.230	52.67	-10.76	41.91	74.00	-32.09	peak
6	2768.442	45.02	-7.10	37.92	74.00	-36.08	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

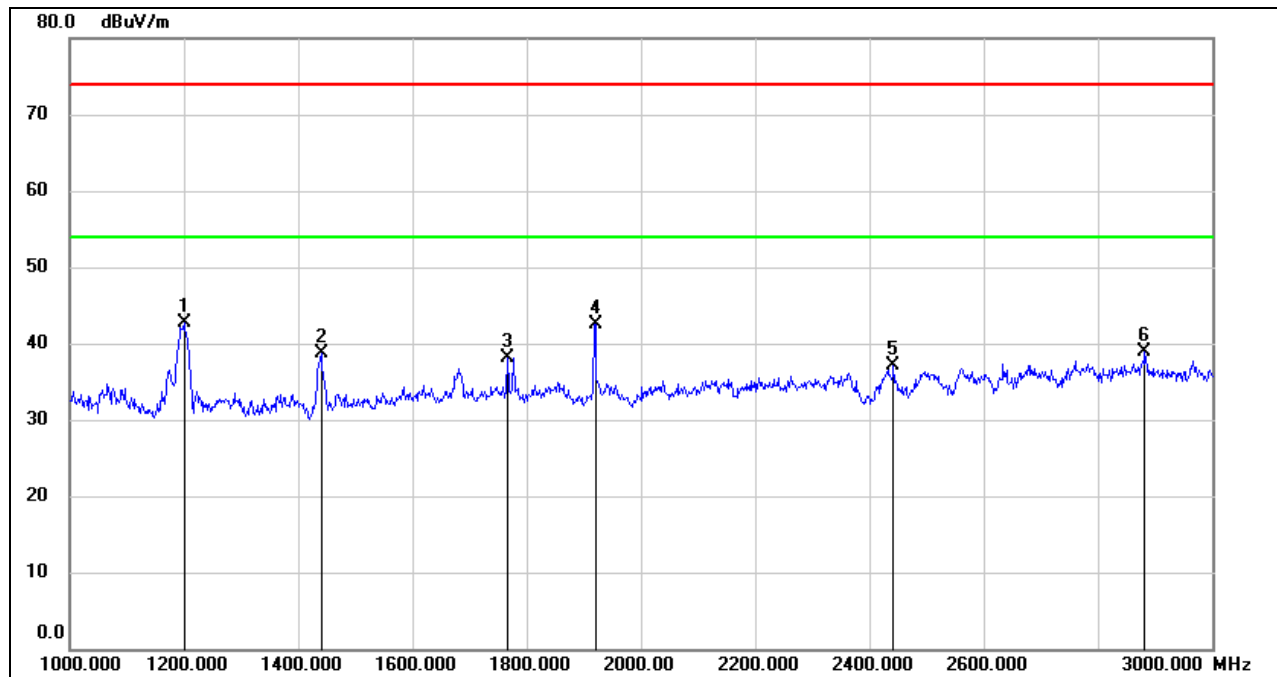

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1200.050	55.99	-13.38	42.61	74.00	-31.39	peak
2	1441.110	51.27	-12.64	38.63	74.00	-35.37	peak
3	1766.692	49.06	-10.86	38.20	74.00	-35.80	peak
4	1920.230	53.36	-10.76	42.60	74.00	-31.40	peak
5	2442.861	45.03	-7.96	37.07	74.00	-36.93	peak
6	2883.471	45.42	-6.47	38.95	74.00	-35.05	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

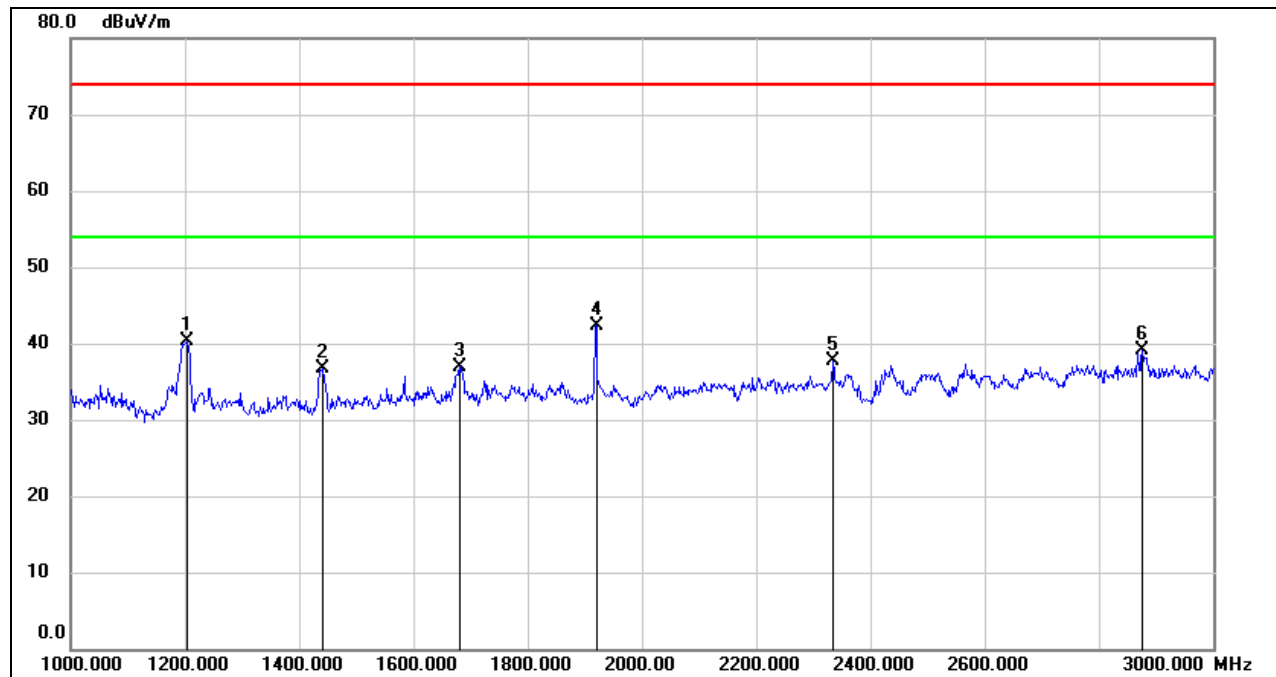

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1204.051	53.57	-13.36	40.21	74.00	-33.79	peak
2	1441.610	49.34	-12.64	36.70	74.00	-37.30	peak
3	1680.670	48.50	-11.50	37.00	74.00	-37.00	peak
4	1920.230	53.12	-10.76	42.36	74.00	-31.64	peak
5	2335.834	46.31	-8.61	37.70	74.00	-36.30	peak
6	2877.969	45.63	-6.50	39.13	74.00	-34.87	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


Note: All modes and channels have been tested, only the worst data was recorded in the report.

8.3. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)

8.3.1. 802.11b SISO MODE

ANTENNA 2 TEST RESULTS (WORST CASE)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

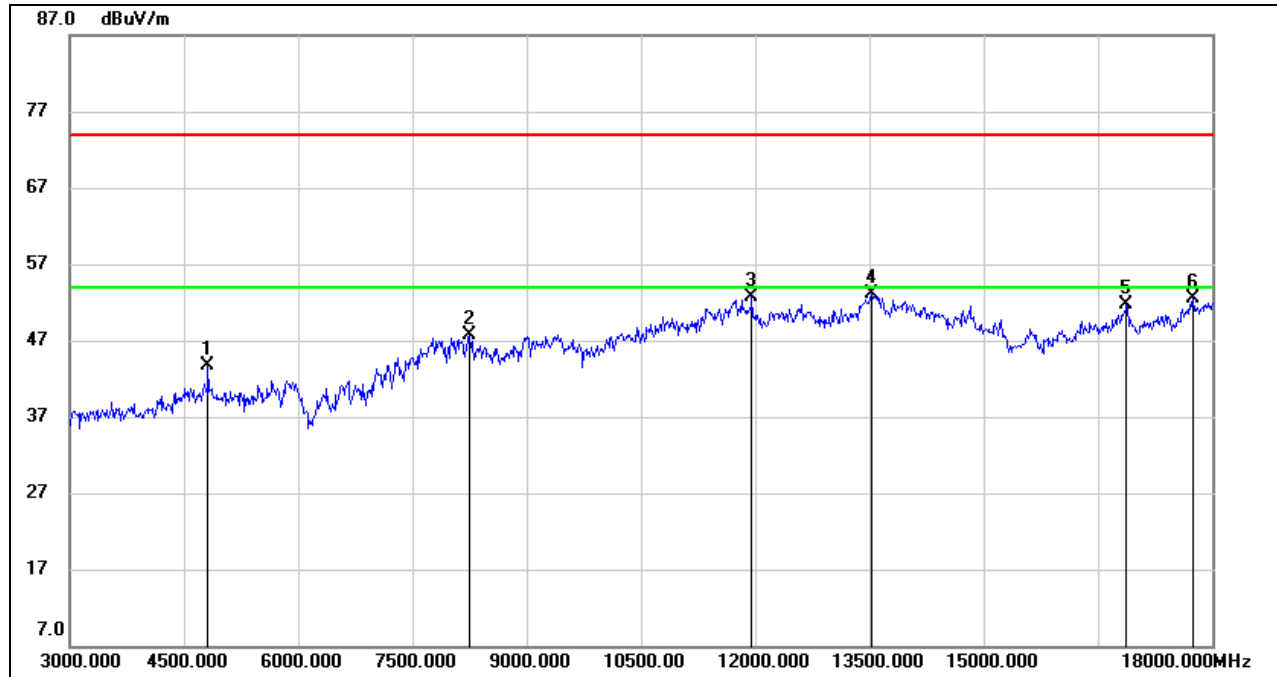

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	43.53	0.13	43.66	74.00	-30.34	peak
2	8250.000	38.63	9.10	47.73	74.00	-26.27	peak
3	11955.000	35.42	17.25	52.67	74.00	-21.33	peak
4	13530.000	33.85	19.17	53.02	74.00	-20.98	peak
5	16875.000	32.27	19.48	51.75	74.00	-22.25	peak
6	17745.000	28.85	23.71	52.56	74.00	-21.44	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

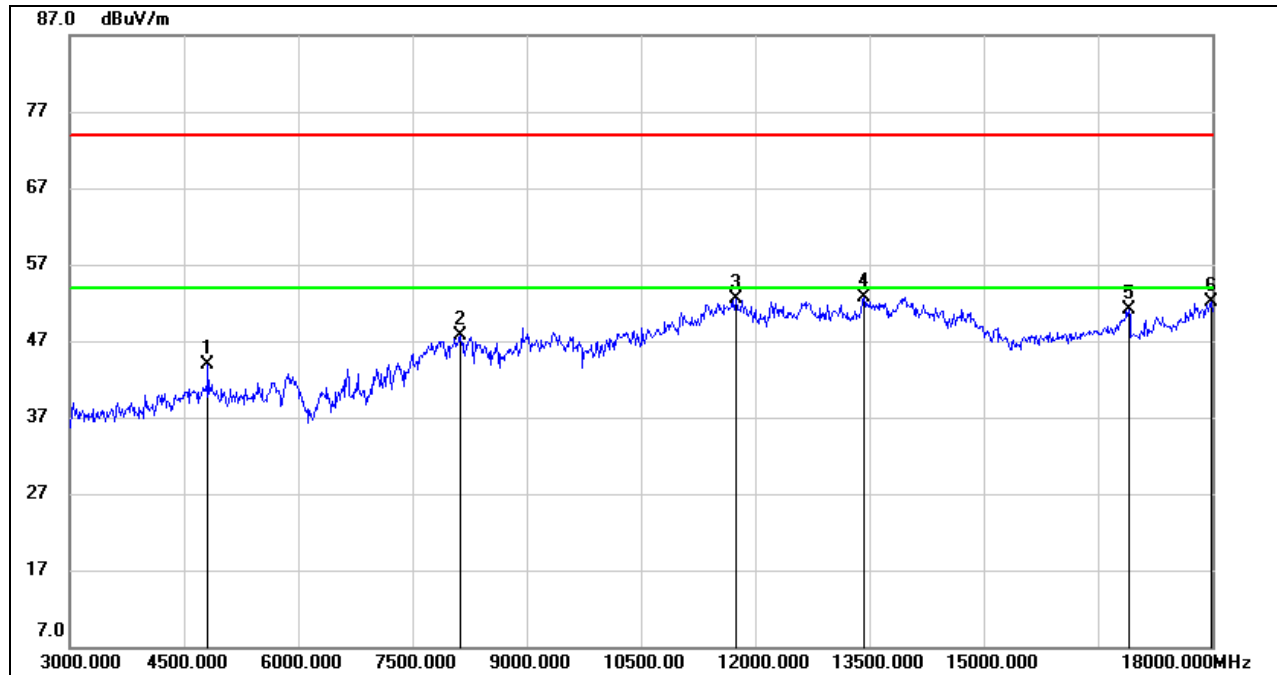

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	43.85	0.13	43.98	74.00	-30.02	peak
2	8130.000	38.29	9.44	47.73	74.00	-26.27	peak
3	11745.000	35.53	17.06	52.59	74.00	-21.41	peak
4	13425.000	33.79	19.00	52.79	74.00	-21.21	peak
5	16905.000	31.33	19.72	51.05	74.00	-22.95	peak
6	17985.000	27.24	24.87	52.11	74.00	-21.89	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

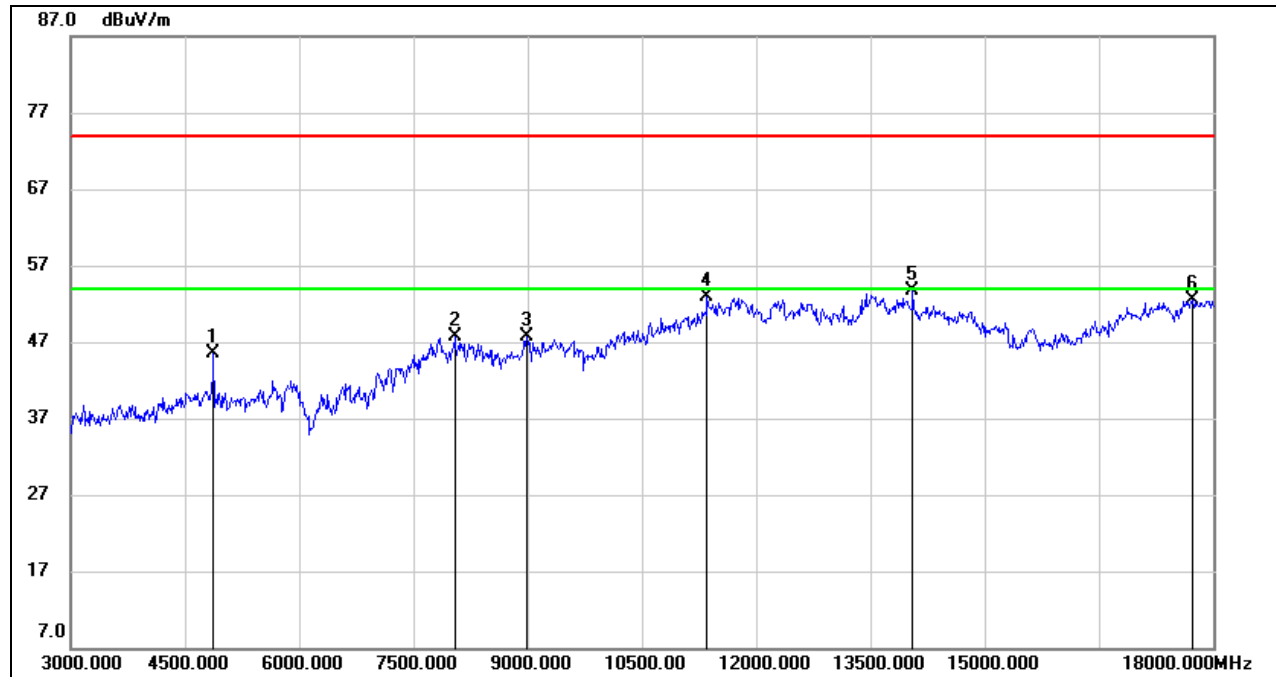**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	45.49	0.02	45.51	74.00	-28.49	peak
2	8040.000	39.06	8.64	47.70	74.00	-26.30	peak
3	8985.000	37.29	10.48	47.77	74.00	-26.23	peak
4	11355.000	37.01	15.88	52.89	74.00	-21.11	peak
5	14055.000	34.63	19.10	53.73	74.00	-20.27	peak
6	17730.000	28.92	23.58	52.50	74.00	-21.50	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

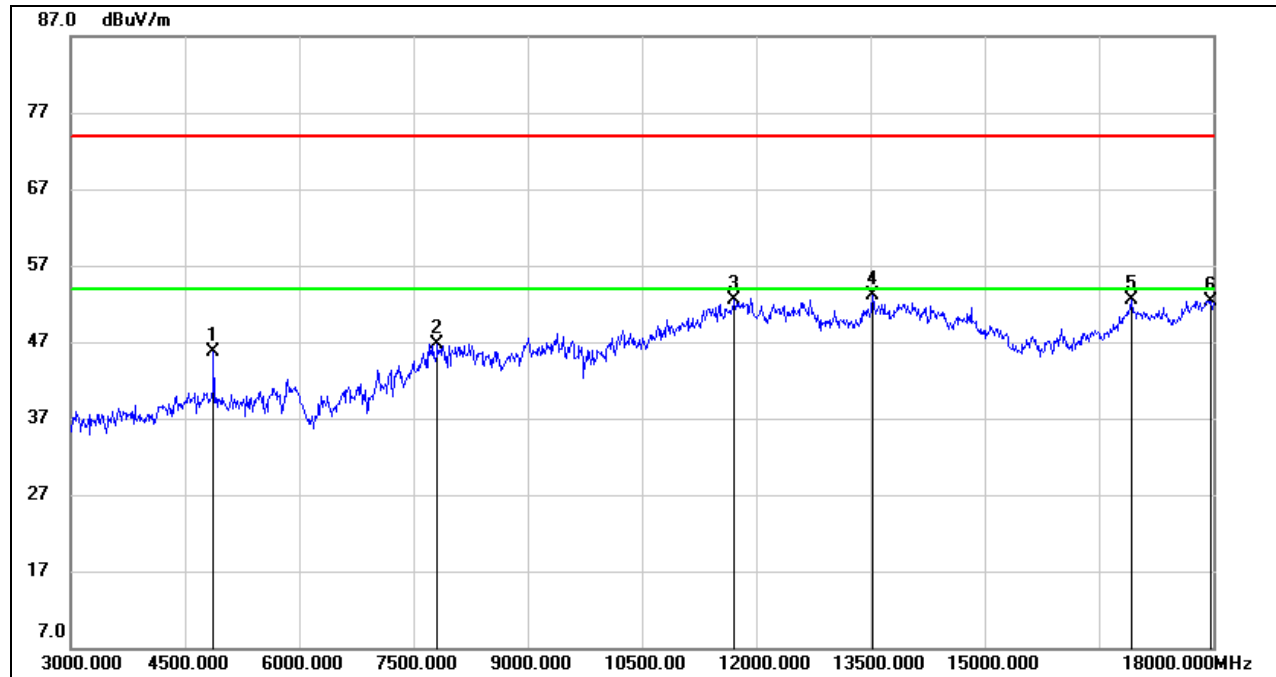**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	45.63	0.02	45.65	74.00	-28.35	peak
2	7815.000	38.11	8.64	46.75	74.00	-27.25	peak
3	11715.000	35.43	17.09	52.52	74.00	-21.48	peak
4	13530.000	33.93	19.17	53.10	74.00	-20.90	peak
5	16920.000	32.73	19.70	52.43	74.00	-21.57	peak
6	17970.000	27.60	24.77	52.37	74.00	-21.63	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

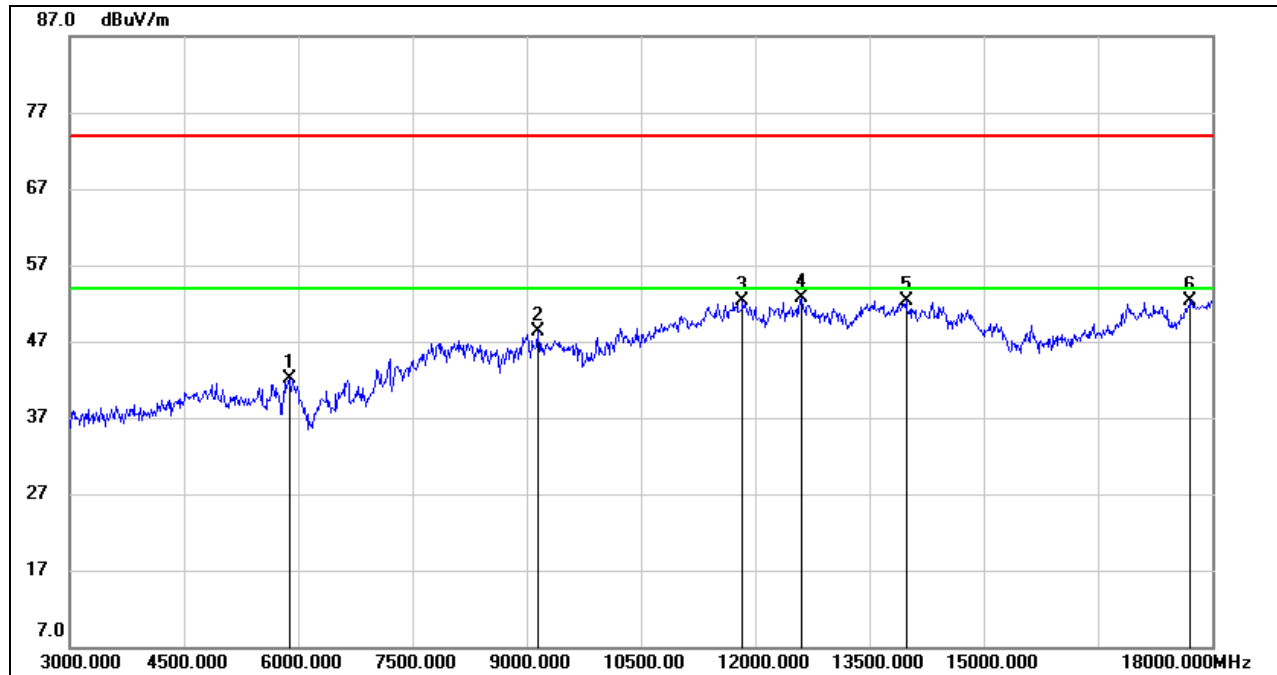**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	38.79	3.23	42.02	74.00	-31.98	peak
2	9150.000	38.62	9.64	48.26	74.00	-25.74	peak
3	11835.000	35.16	17.07	52.23	74.00	-21.77	peak
4	12600.000	35.50	17.12	52.62	74.00	-21.38	peak
5	13980.000	32.96	19.35	52.31	74.00	-21.69	peak
6	17715.000	28.92	23.46	52.38	74.00	-21.62	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

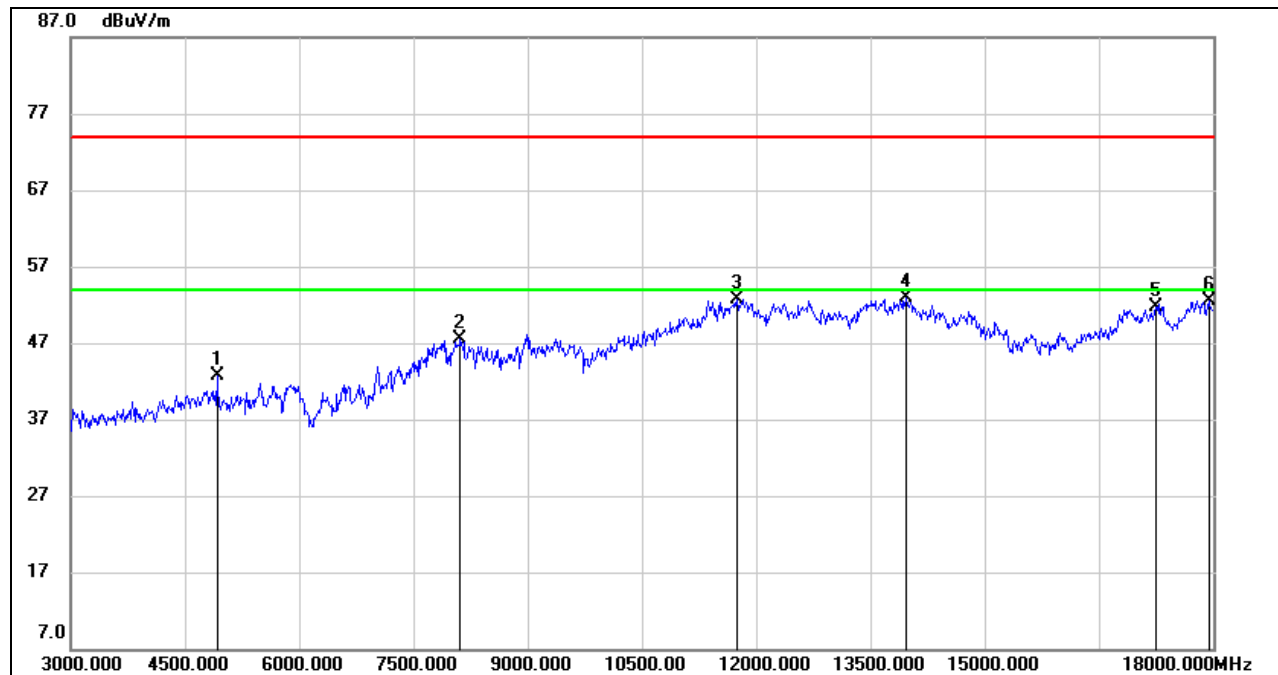

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	42.67	0.12	42.79	74.00	-31.21	peak
2	8115.000	37.93	9.50	47.43	74.00	-26.57	peak
3	11745.000	35.67	17.06	52.73	74.00	-21.27	peak
4	13965.000	33.64	19.34	52.98	74.00	-21.02	peak
5	17250.000	30.57	21.10	51.67	74.00	-22.33	peak
6	17940.000	27.96	24.57	52.53	74.00	-21.47	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


Note: All modes and channels have been tested, only the worst data was recorded in the report.

Note: Both antennas have been tested, only the worst data was recorded in the report.

8.3.2. 802.11g SISO MODE

ANTENNA 2 TEST RESULTS (WORST CASE)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

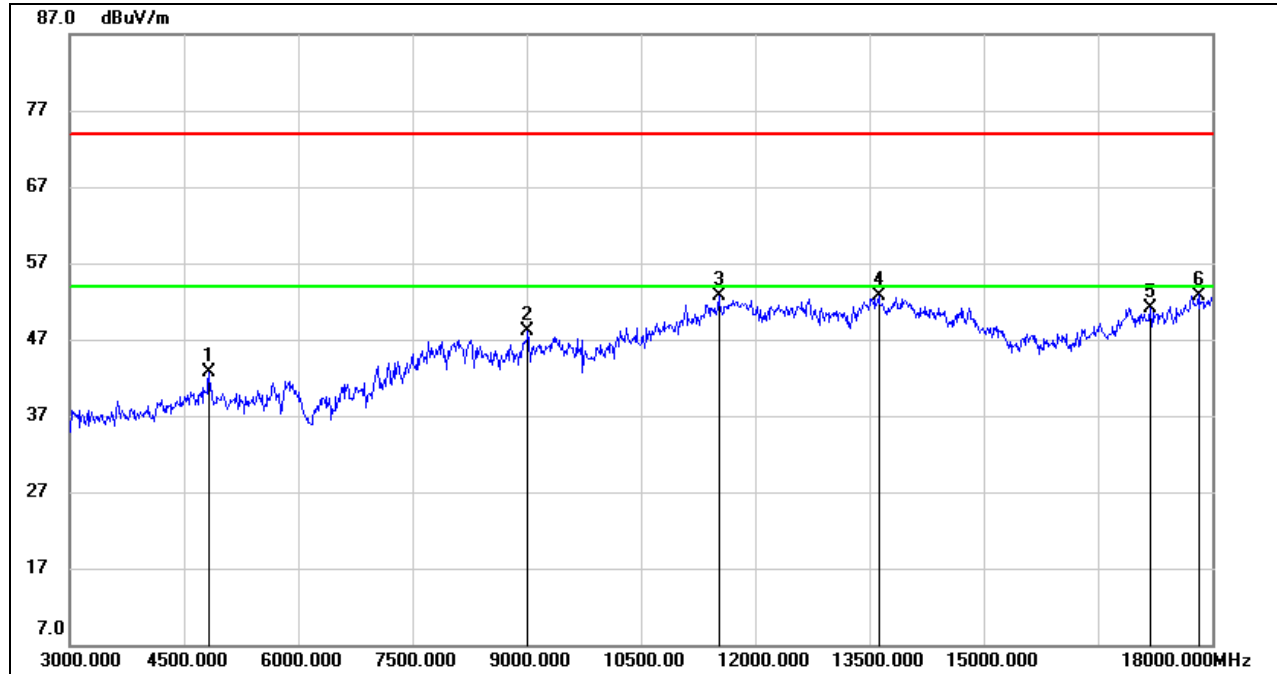

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	42.69	0.10	42.79	74.00	-31.21	peak
2	9015.000	37.53	10.61	48.14	74.00	-25.86	peak
3	11520.000	36.20	16.46	52.66	74.00	-21.34	peak
4	13620.000	33.49	19.12	52.61	74.00	-21.39	peak
5	17190.000	30.41	20.66	51.07	74.00	-22.93	peak
6	17820.000	28.59	24.21	52.80	74.00	-21.20	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

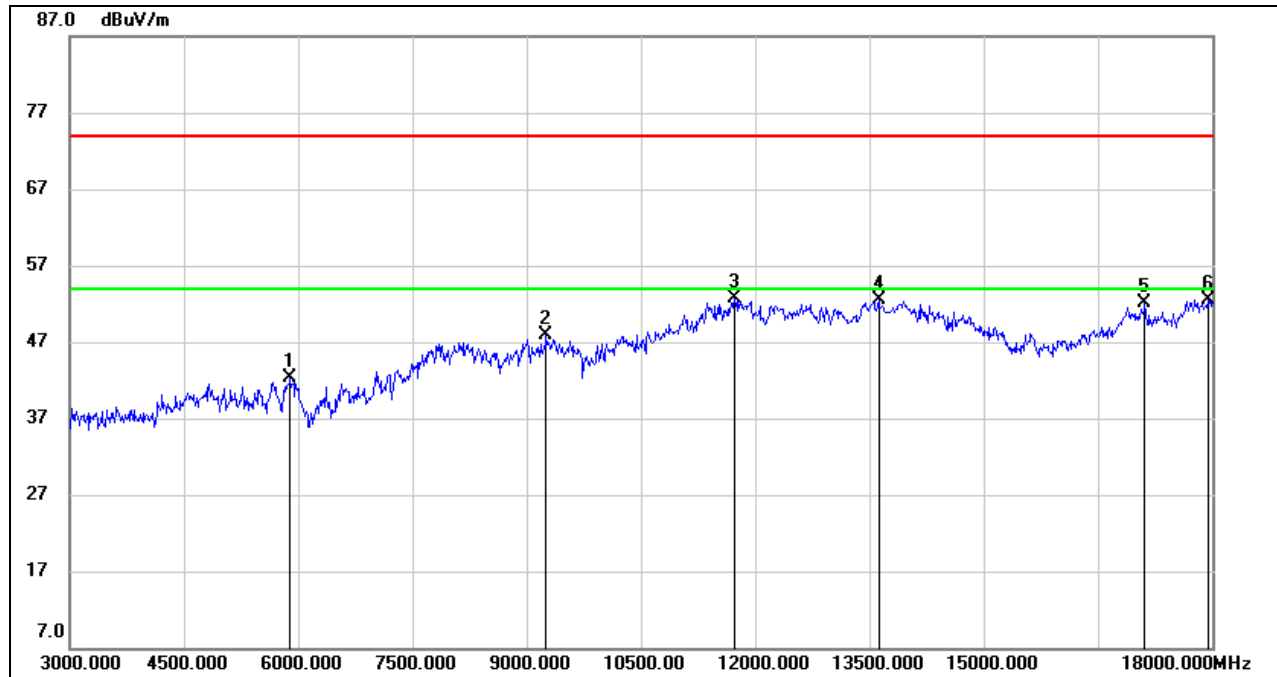**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5895.000	38.90	3.39	42.29	74.00	-31.71	peak
2	9255.000	37.94	9.88	47.82	74.00	-26.18	peak
3	11730.000	35.68	17.07	52.75	74.00	-21.25	peak
4	13620.000	33.29	19.12	52.41	74.00	-21.59	peak
5	17115.000	31.76	20.44	52.20	74.00	-21.80	peak
6	17940.000	27.95	24.57	52.52	74.00	-21.48	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.


5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

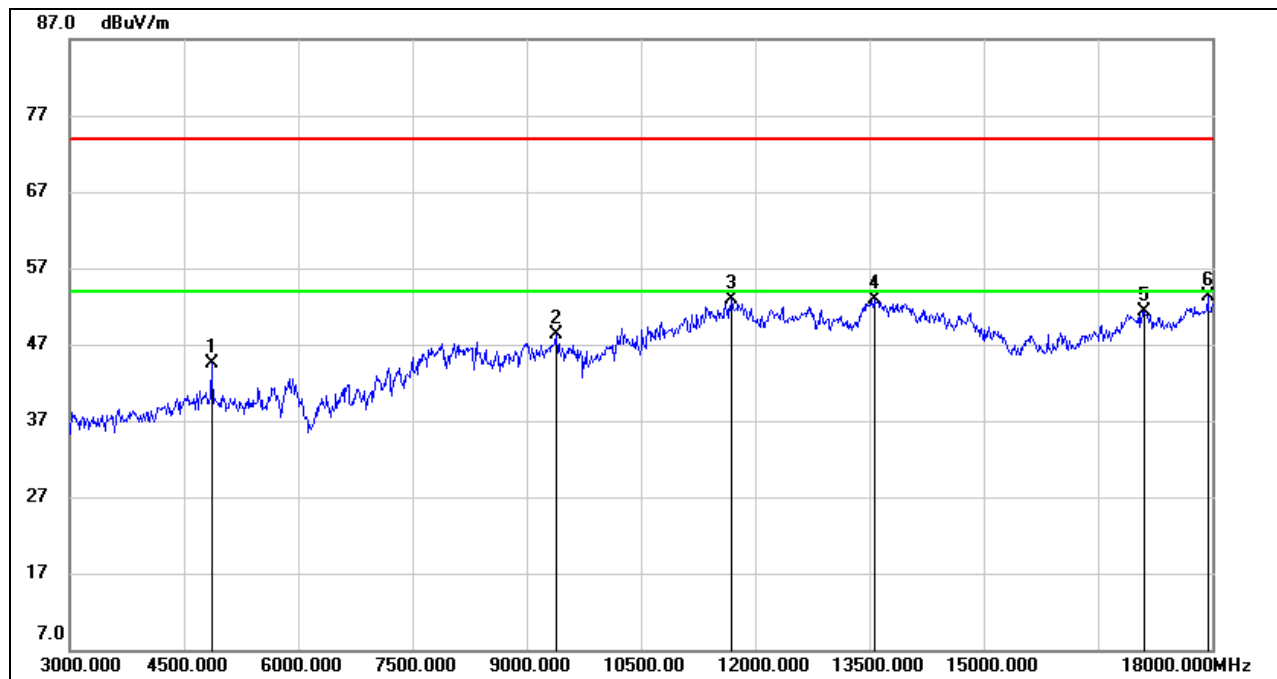

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	44.44	0.04	44.48	74.00	-29.52	peak
2	9390.000	37.56	10.73	48.29	74.00	-25.71	peak
3	11685.000	35.88	17.02	52.90	74.00	-21.10	peak
4	13560.000	33.78	19.12	52.90	74.00	-21.10	peak
5	17115.000	30.80	20.44	51.24	74.00	-22.76	peak
6	17940.000	28.81	24.57	53.38	74.00	-20.62	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

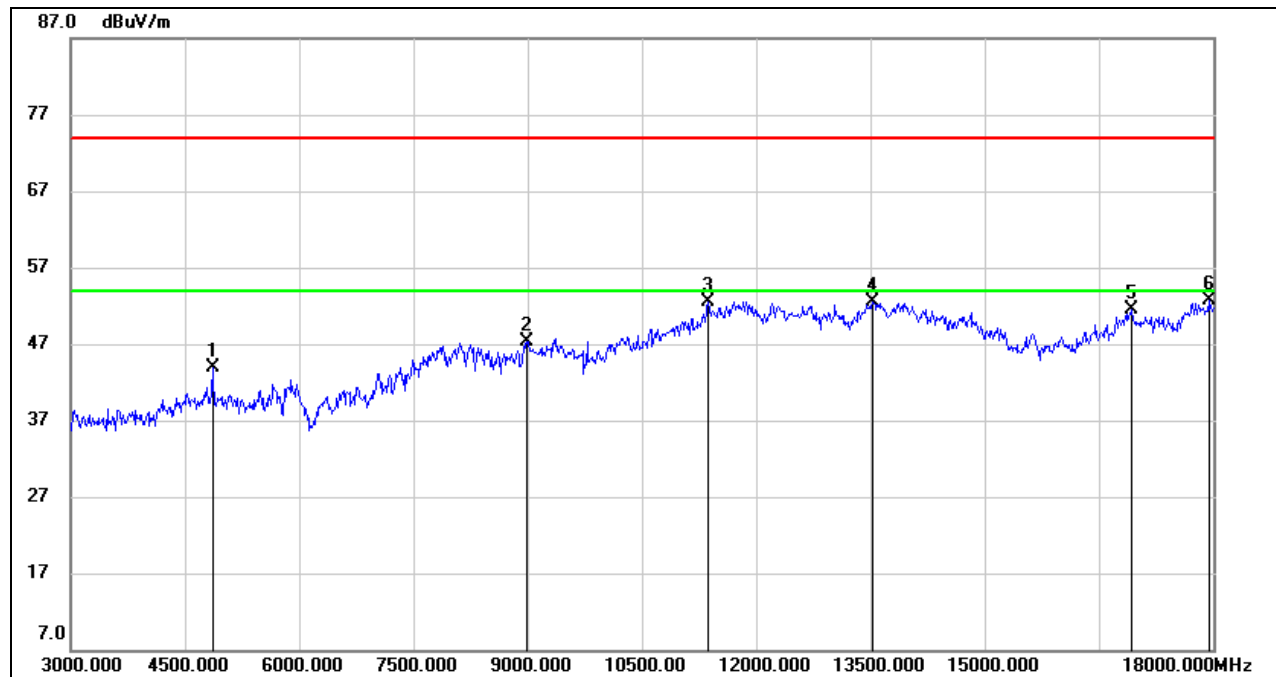**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	43.91	0.04	43.95	74.00	-30.05	peak
2	8985.000	36.81	10.48	47.29	74.00	-26.71	peak
3	11370.000	36.39	16.05	52.44	74.00	-21.56	peak
4	13530.000	33.39	19.17	52.56	74.00	-21.44	peak
5	16935.000	31.83	19.66	51.49	74.00	-22.51	peak
6	17940.000	28.10	24.57	52.67	74.00	-21.33	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

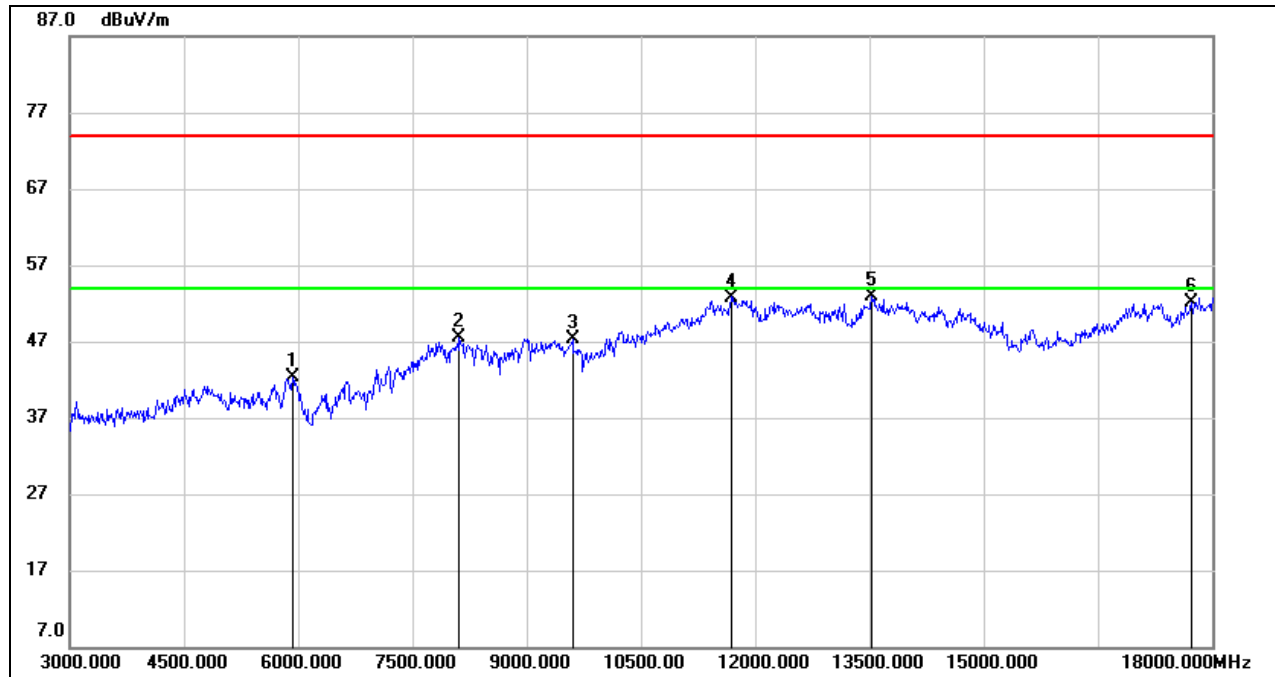**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5925.000	39.07	3.30	42.37	74.00	-31.63	peak
2	8115.000	38.09	9.50	47.59	74.00	-26.41	peak
3	9600.000	36.14	11.07	47.21	74.00	-26.79	peak
4	11685.000	35.78	17.02	52.80	74.00	-21.20	peak
5	13530.000	33.70	19.17	52.87	74.00	-21.13	peak
6	17730.000	28.52	23.58	52.10	74.00	-21.90	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

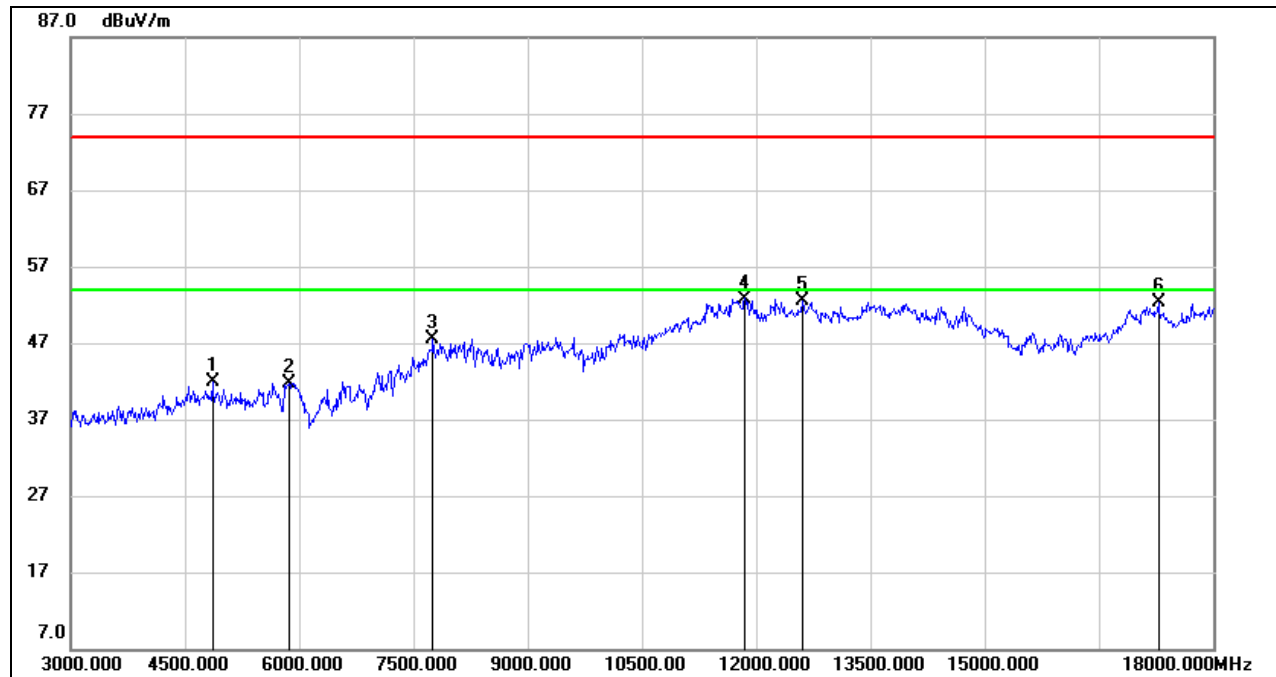

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	41.79	0.04	41.83	74.00	-32.17	peak
2	5865.000	38.60	3.09	41.69	74.00	-32.31	peak
3	7755.000	39.27	8.29	47.56	74.00	-26.44	peak
4	11850.000	35.69	17.11	52.80	74.00	-21.20	peak
5	12600.000	35.37	17.12	52.49	74.00	-21.51	peak
6	17280.000	30.91	21.34	52.25	74.00	-21.75	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: All modes and channels have been tested, only the worst data was recorded in the report.

Note: Both antennas have been tested, only the worst data was recorded in the report.

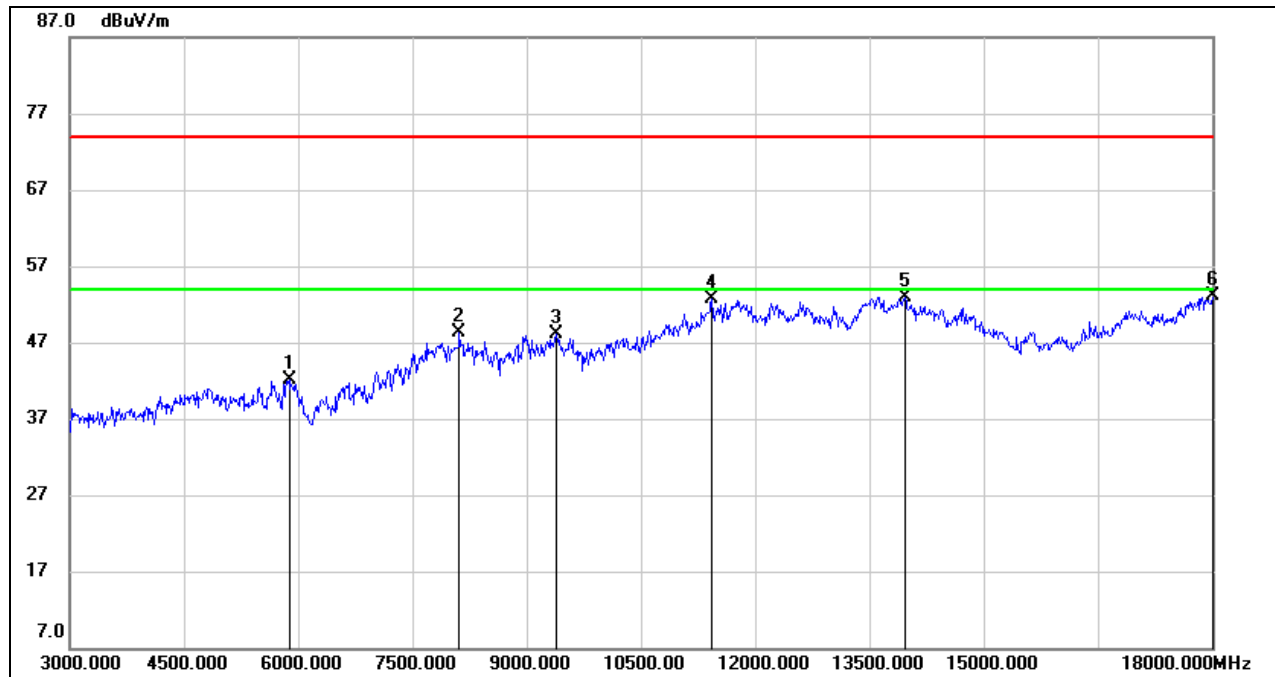**8.3.3. 802.11n HT20 MIMO MODE****HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	38.89	3.23	42.12	74.00	-31.88	peak
2	8115.000	38.76	9.50	48.26	74.00	-25.74	peak
3	9390.000	37.35	10.73	48.08	74.00	-25.92	peak
4	11430.000	36.34	16.40	52.74	74.00	-21.26	peak
5	13965.000	33.61	19.34	52.95	74.00	-21.05	peak
6	18000.000	28.12	24.97	53.09	74.00	-20.91	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

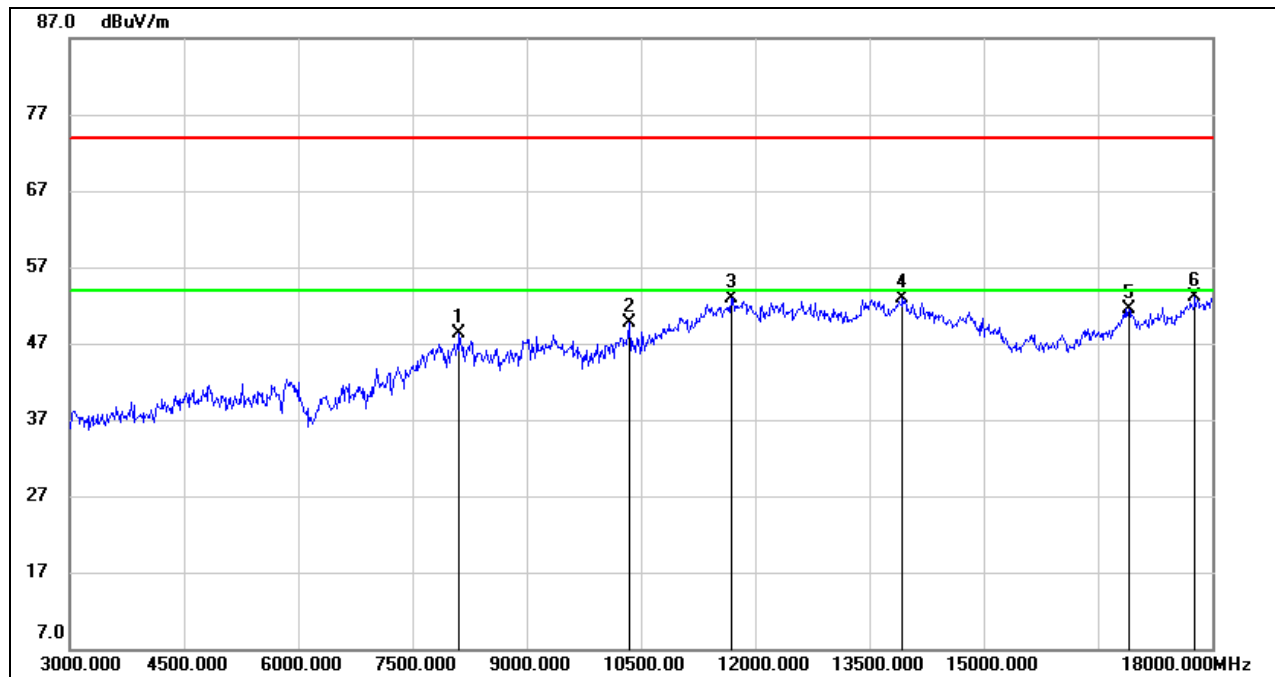**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8115.000	38.85	9.50	48.35	74.00	-25.65	peak
2	10350.000	37.20	12.55	49.75	74.00	-24.25	peak
3	11685.000	35.92	17.02	52.94	74.00	-21.06	peak
4	13935.000	33.62	19.32	52.94	74.00	-21.06	peak
5	16905.000	31.78	19.72	51.50	74.00	-22.50	peak
6	17775.000	29.18	23.98	53.16	74.00	-20.84	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

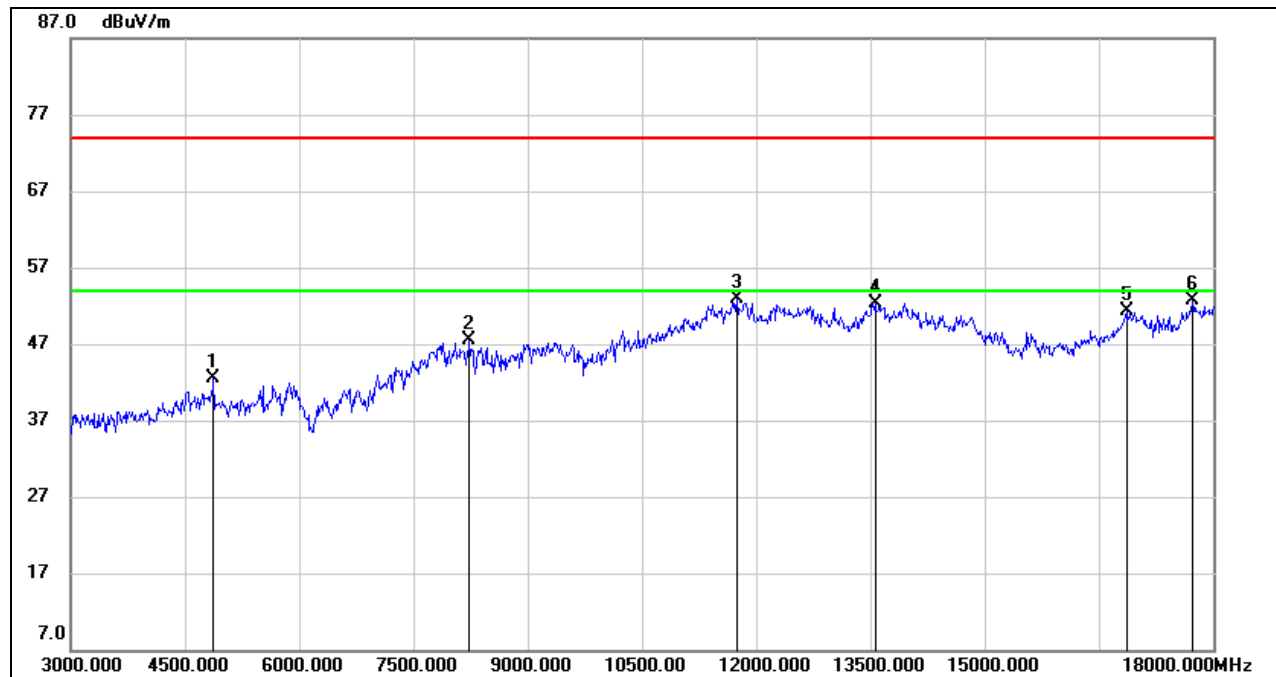**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	42.40	0.02	42.42	74.00	-31.58	peak
2	8235.000	38.35	9.12	47.47	74.00	-26.53	peak
3	11745.000	35.76	17.06	52.82	74.00	-21.18	peak
4	13560.000	33.24	19.12	52.36	74.00	-21.64	peak
5	16860.000	31.95	19.33	51.28	74.00	-22.72	peak
6	17730.000	29.05	23.58	52.63	74.00	-21.37	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

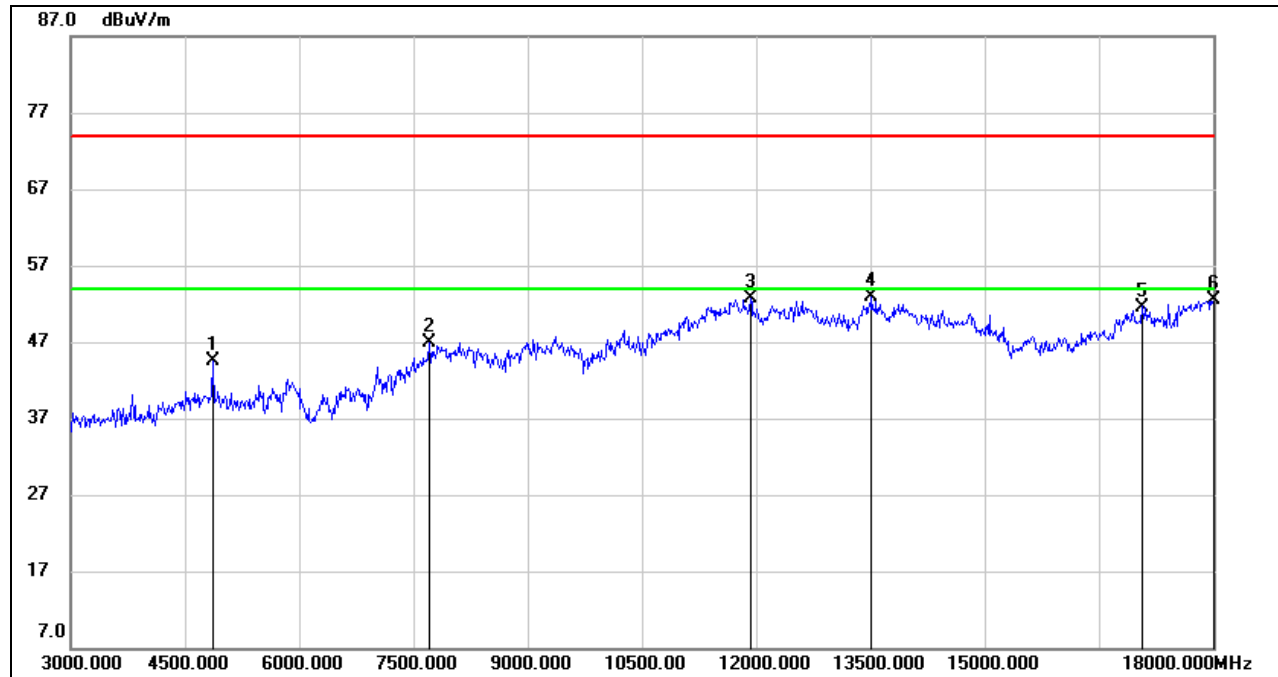

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4871.718	44.44	0.02	44.46	74.00	-29.54	peak
2	7714.929	38.96	7.93	46.89	74.00	-27.11	peak
3	11927.232	35.45	17.24	52.69	74.00	-21.31	peak
4	13525.131	33.75	19.18	52.93	74.00	-21.07	peak
5	17073.518	31.42	20.18	51.60	74.00	-22.40	peak
6	18000.000	27.57	24.97	52.54	74.00	-21.46	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

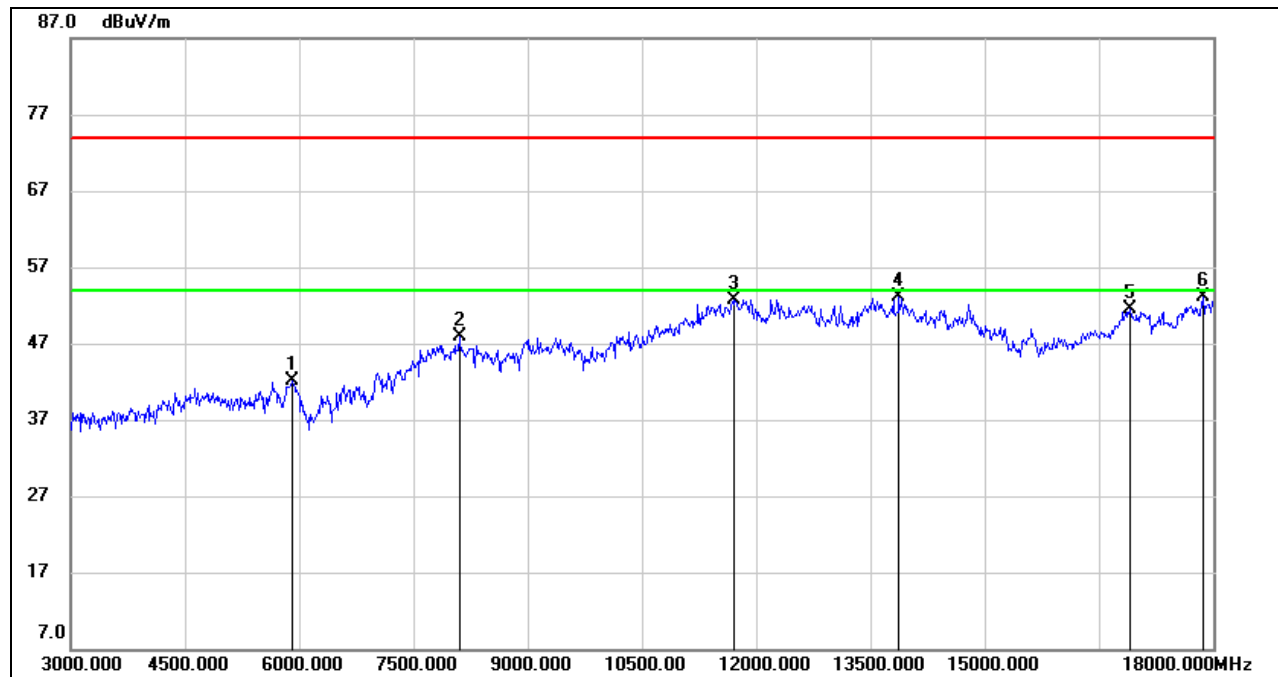**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5921.980	38.82	3.31	42.13	74.00	-31.87	peak
2	8112.528	38.34	9.51	47.85	74.00	-26.15	peak
3	11702.176	35.61	17.10	52.71	74.00	-21.29	peak
4	13888.972	33.86	19.29	53.15	74.00	-20.85	peak
5	16915.979	31.88	19.70	51.58	74.00	-22.42	peak
6	17876.219	28.85	24.28	53.13	74.00	-20.87	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

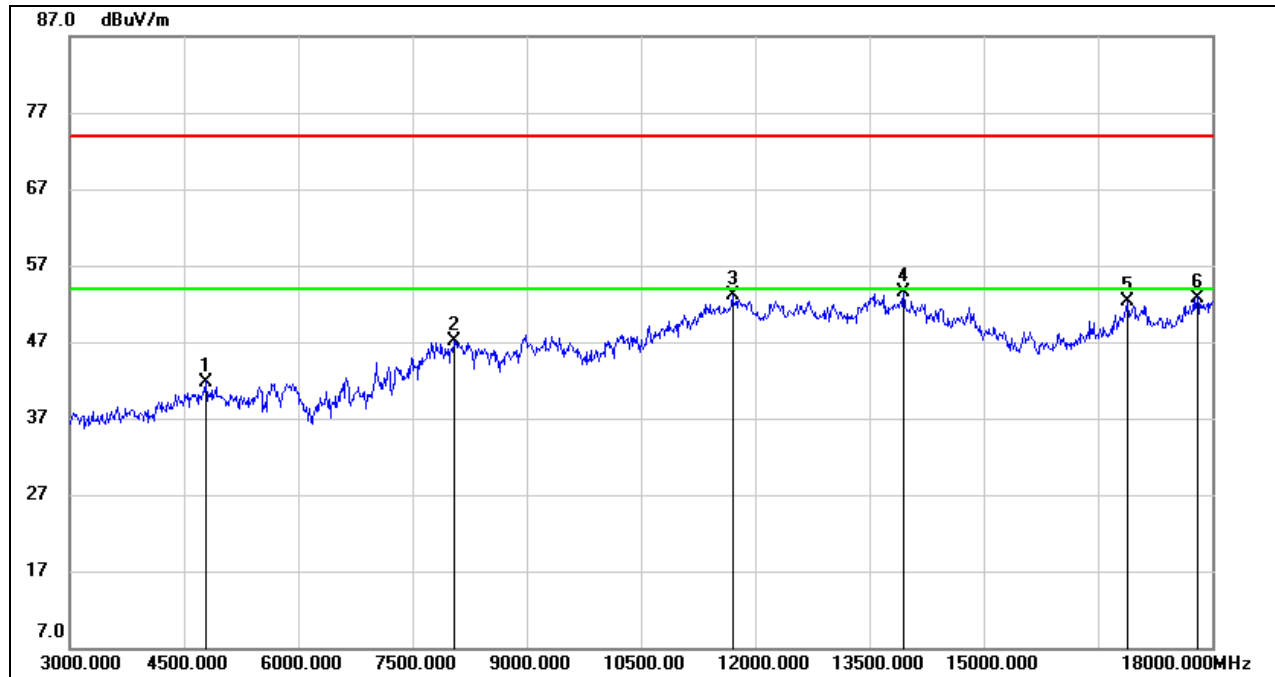**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4789.197	41.76	0.04	41.80	74.00	-32.20	peak
2	8045.011	38.39	8.72	47.11	74.00	-26.89	peak
3	11705.926	36.09	17.09	53.18	74.00	-20.82	peak
4	13956.489	34.20	19.34	53.54	74.00	-20.46	peak
5	16904.726	32.64	19.72	52.36	74.00	-21.64	peak
6	17808.702	28.60	24.20	52.80	74.00	-21.20	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

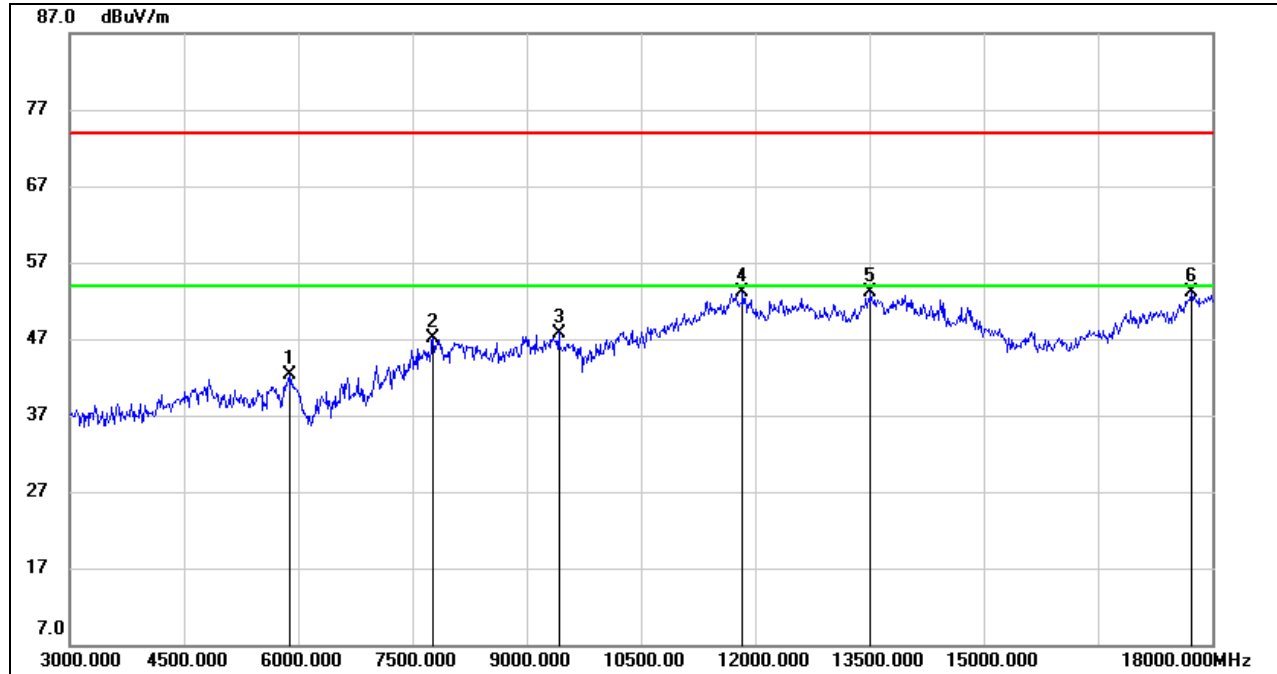**8.3.4. 802.11n HT40 MIMO MODE****HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5884.471	39.03	3.27	42.30	74.00	-31.70	peak
2	7774.944	38.61	8.47	47.08	74.00	-26.92	peak
3	9425.356	37.10	10.70	47.80	74.00	-26.20	peak
4	11840.960	36.04	17.09	53.13	74.00	-20.87	peak
5	13525.131	33.91	19.18	53.09	74.00	-20.91	peak
6	17744.936	29.34	23.71	53.05	74.00	-20.95	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

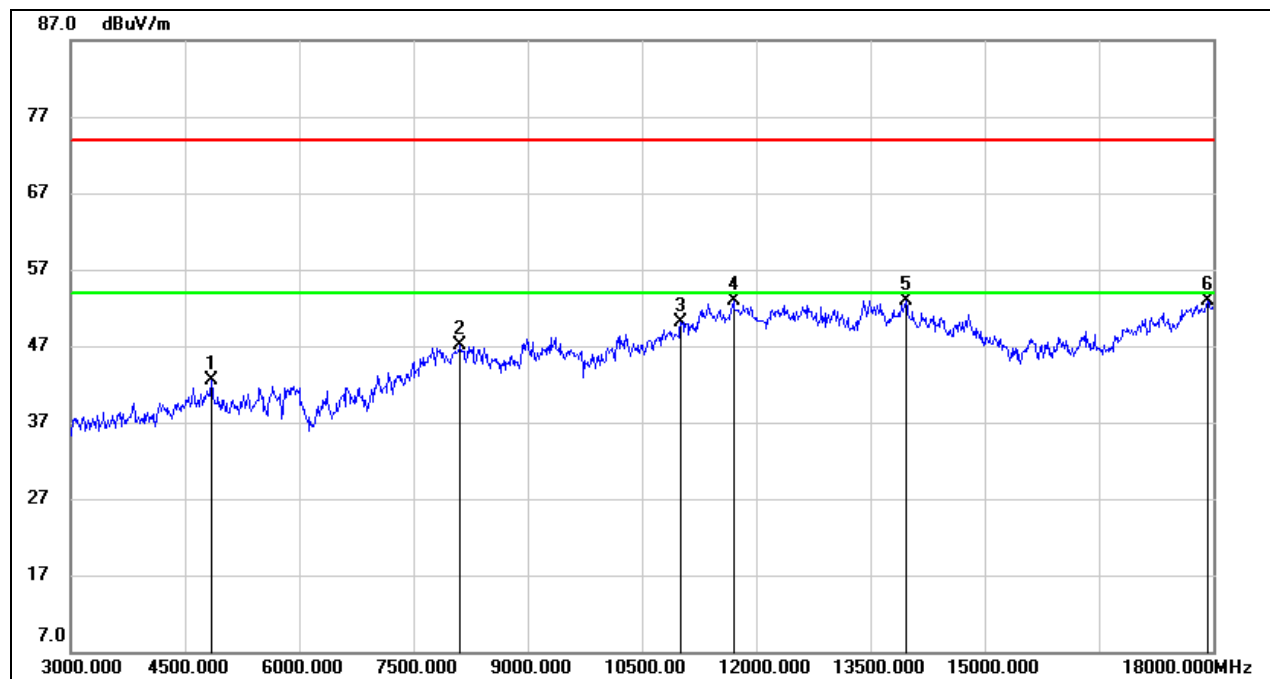**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4845.461	42.44	0.07	42.51	74.00	-31.49	peak
2	8123.781	37.58	9.47	47.05	74.00	-26.95	peak
3	11019.505	35.83	14.34	50.17	74.00	-23.83	peak
4	11709.677	35.86	17.09	52.95	74.00	-21.05	peak
5	13971.493	33.55	19.34	52.89	74.00	-21.11	peak
6	17936.234	28.38	24.55	52.93	74.00	-21.07	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

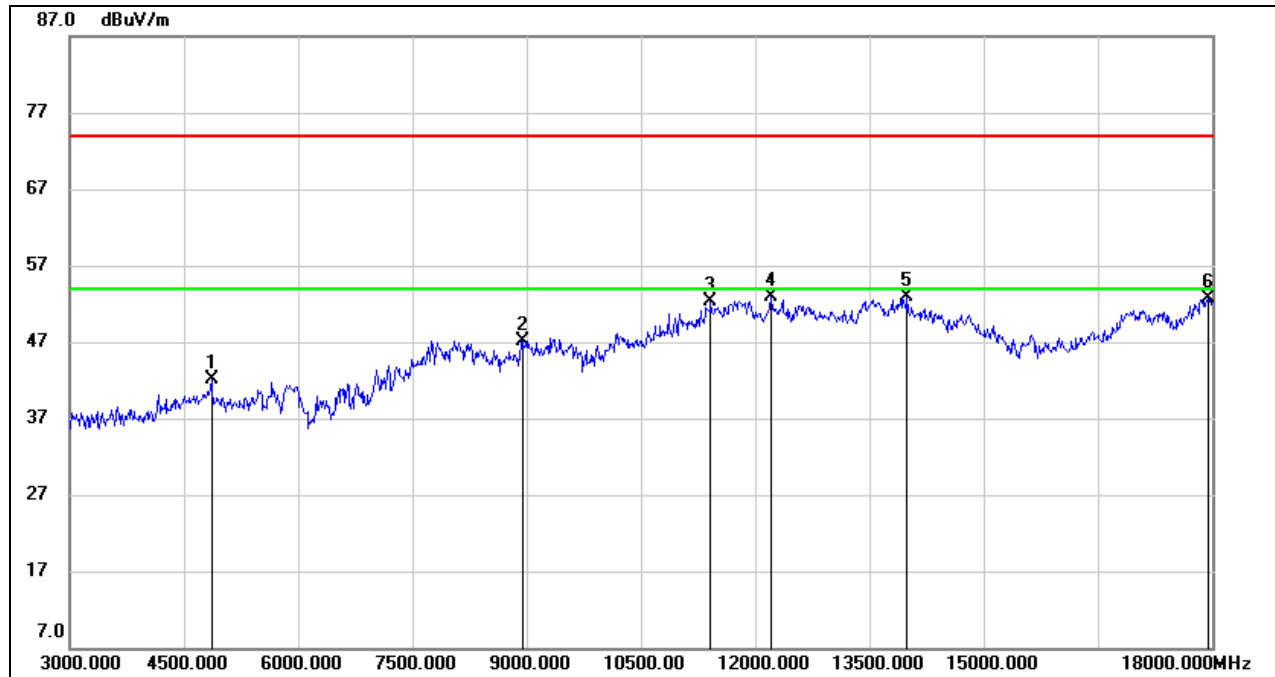**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4864.216	42.16	0.04	42.20	74.00	-31.80	peak
2	8941.485	37.55	9.63	47.18	74.00	-26.82	peak
3	11424.606	35.82	16.39	52.21	74.00	-21.79	peak
4	12212.303	35.34	17.50	52.84	74.00	-21.16	peak
5	14005.251	33.51	19.34	52.85	74.00	-21.15	peak
6	17943.736	28.12	24.60	52.72	74.00	-21.28	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

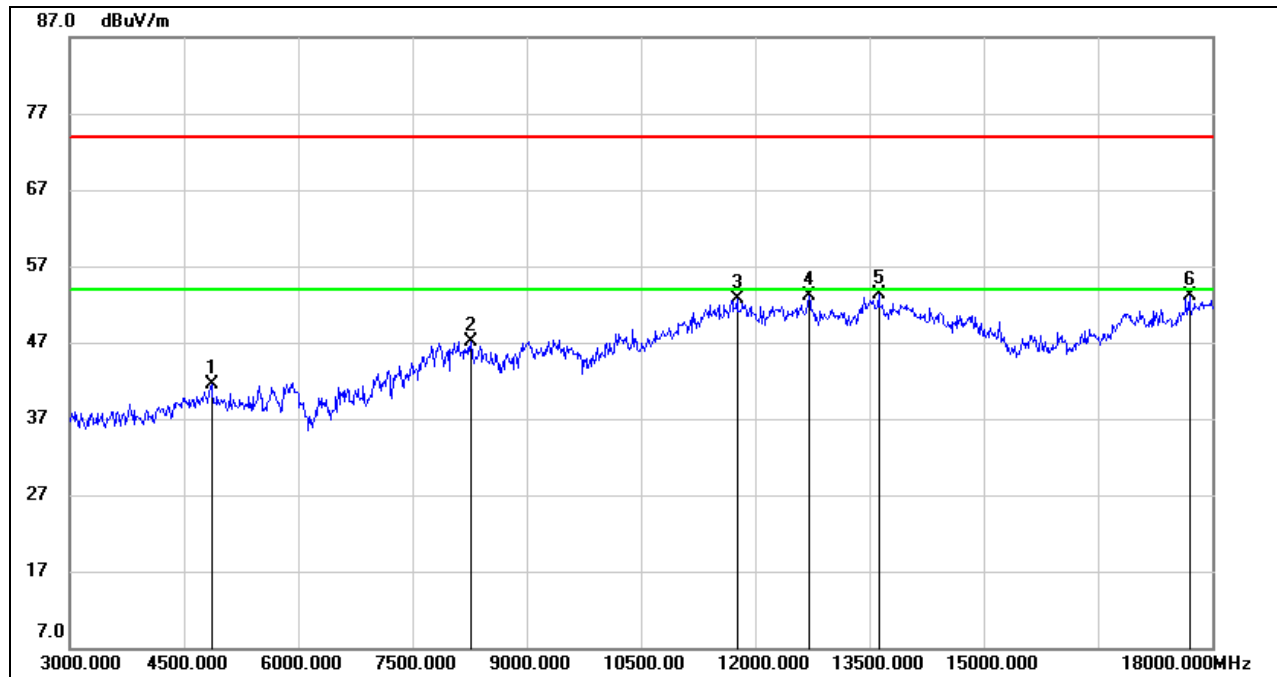

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.465	41.38	0.04	41.42	74.00	-32.58	peak
2	8277.569	38.11	9.06	47.17	74.00	-26.83	peak
3	11765.941	35.61	17.02	52.63	74.00	-21.37	peak
4	12707.427	36.11	17.04	53.15	74.00	-20.85	peak
5	13626.407	34.24	19.15	53.39	74.00	-20.61	peak
6	17714.929	29.56	23.46	53.02	74.00	-20.98	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

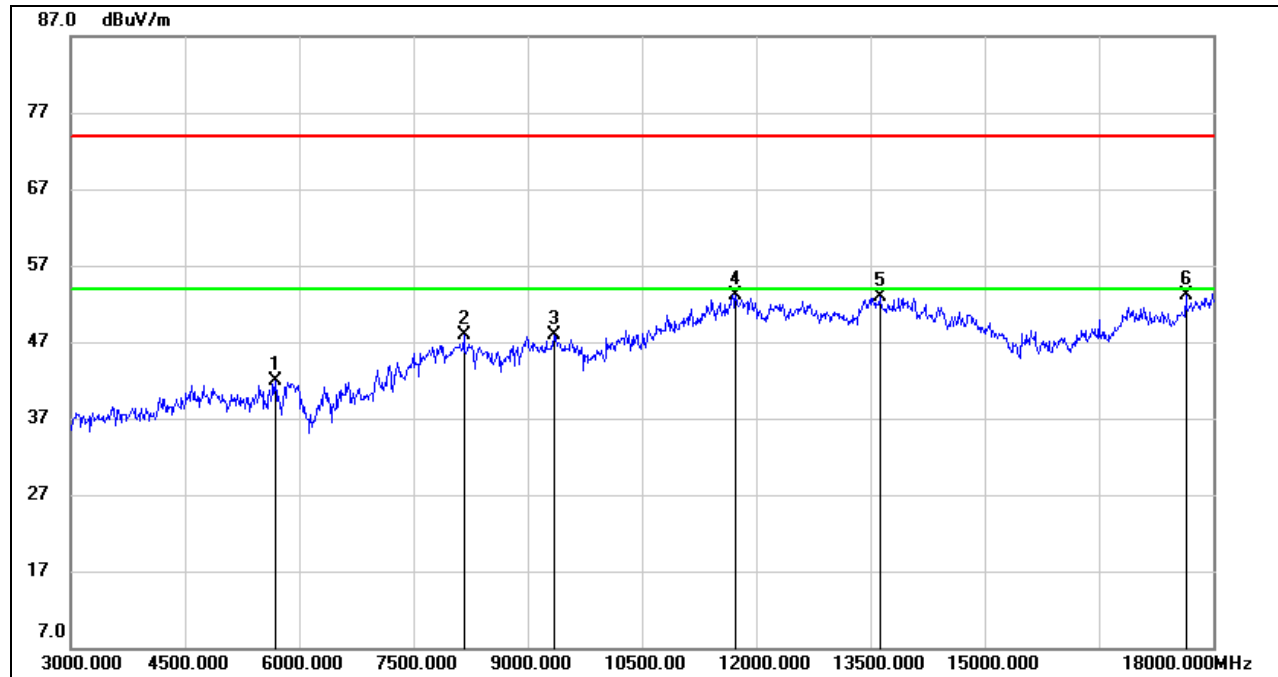

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5685.671	39.79	2.04	41.83	74.00	-32.17	peak
2	8165.041	38.66	9.30	47.96	74.00	-26.04	peak
3	9350.338	37.53	10.47	48.00	74.00	-26.00	peak
4	11739.685	36.04	17.05	53.09	74.00	-20.91	peak
5	13633.908	33.80	19.19	52.99	74.00	-21.01	peak
6	17654.914	30.22	22.87	53.09	74.00	-20.91	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

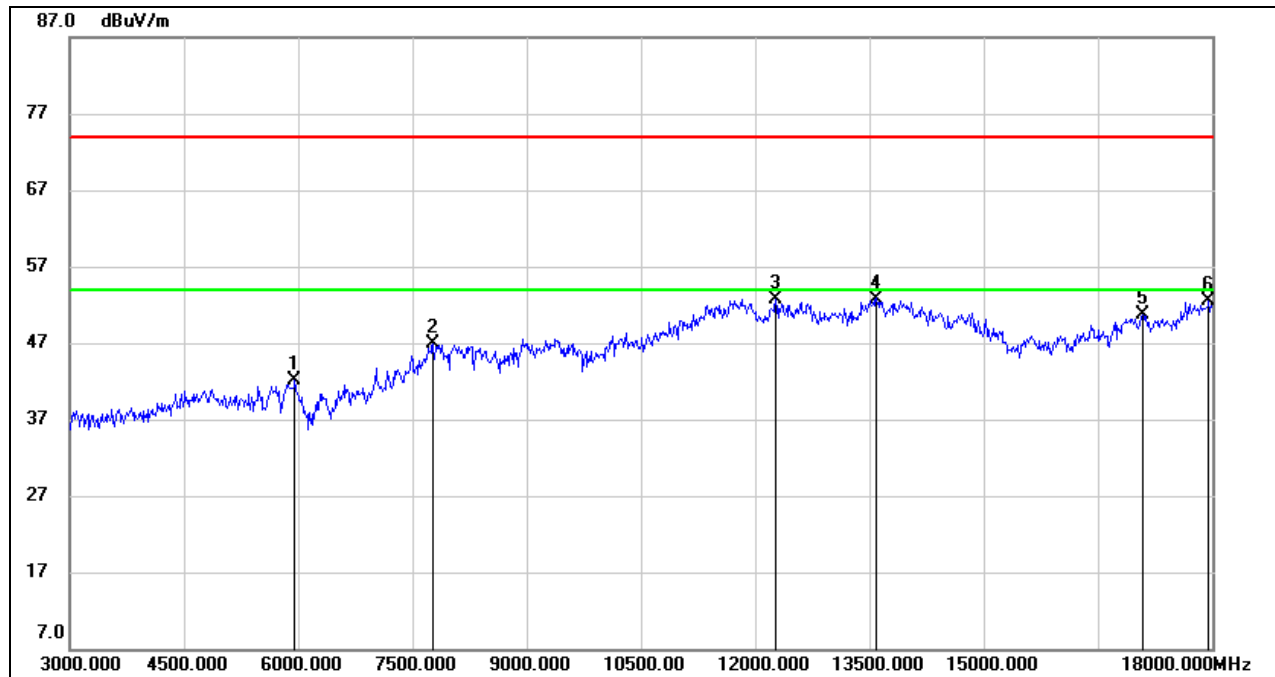**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5966.992	39.10	3.08	42.18	74.00	-31.82	peak
2	7771.193	38.42	8.45	46.87	74.00	-27.13	peak
3	12279.820	35.11	17.54	52.65	74.00	-21.35	peak
4	13603.901	33.74	19.06	52.80	74.00	-21.20	peak
5	17096.024	30.37	20.37	50.74	74.00	-23.26	peak
6	17958.740	27.72	24.70	52.42	74.00	-21.58	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

8.3.5. 802.11ax HE20 MIMO MODE


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

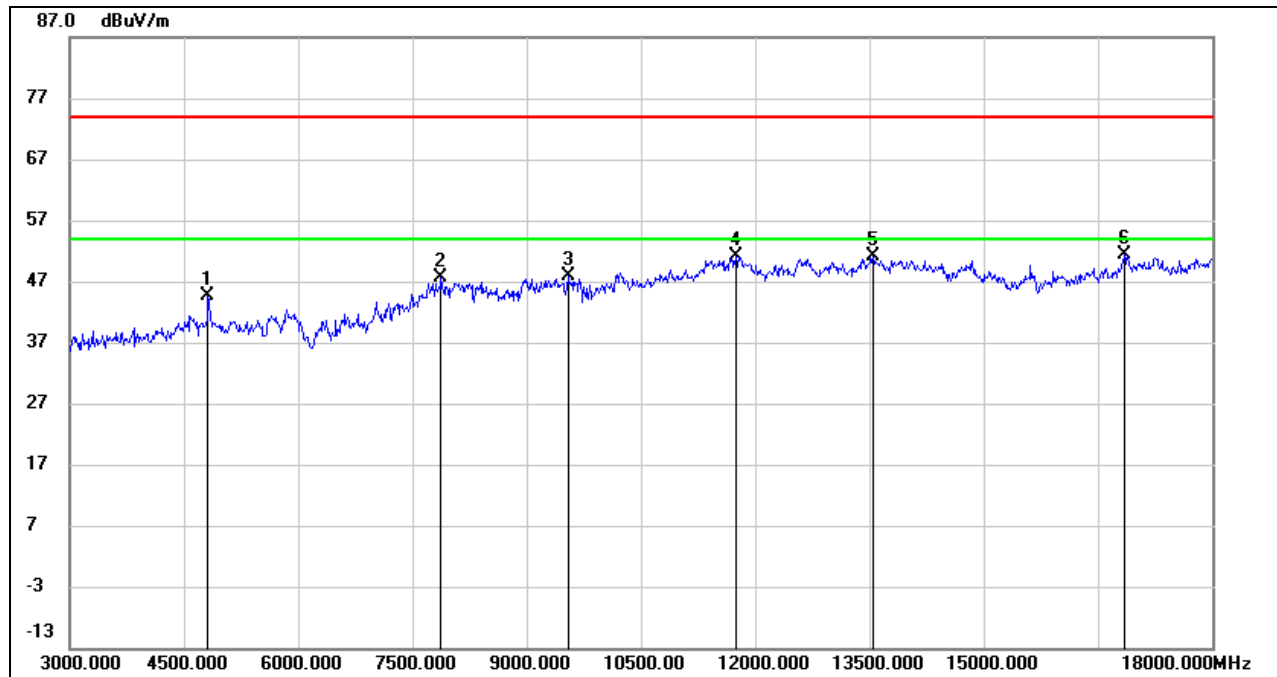

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4822.500	44.56	0.11	44.67	74.00	-29.33	peak
2	7876.875	39.25	8.35	47.60	74.00	-26.40	peak
3	9549.375	37.12	10.75	47.87	74.00	-26.13	peak
4	11758.125	34.09	17.04	51.13	74.00	-22.87	peak
5	13550.625	32.04	19.12	51.16	74.00	-22.84	peak
6	16850.625	32.05	19.23	51.28	74.00	-22.72	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

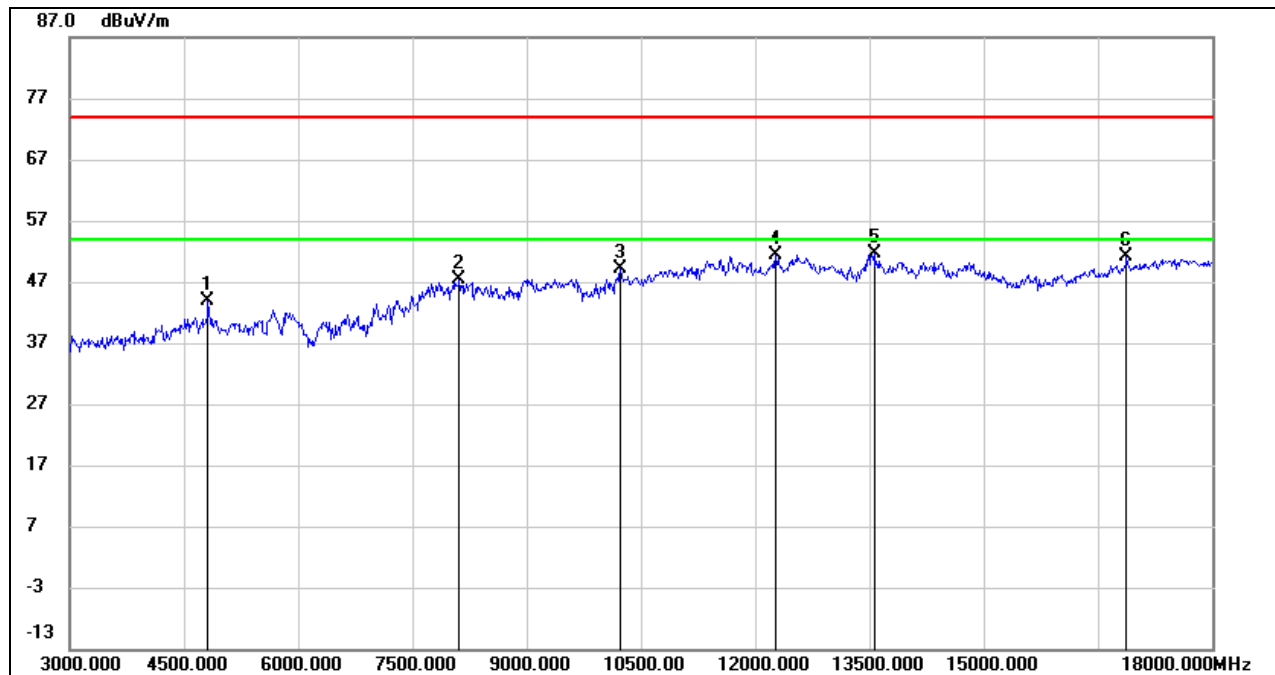

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4828.125	43.71	0.11	43.82	74.00	-30.18	peak
2	8115.000	37.87	9.50	47.37	74.00	-26.63	peak
3	10239.375	36.93	12.17	49.10	74.00	-24.90	peak
4	12277.500	33.91	17.53	51.44	74.00	-22.56	peak
5	13563.750	32.47	19.10	51.57	74.00	-22.43	peak
6	16888.125	31.63	19.61	51.24	74.00	-22.76	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

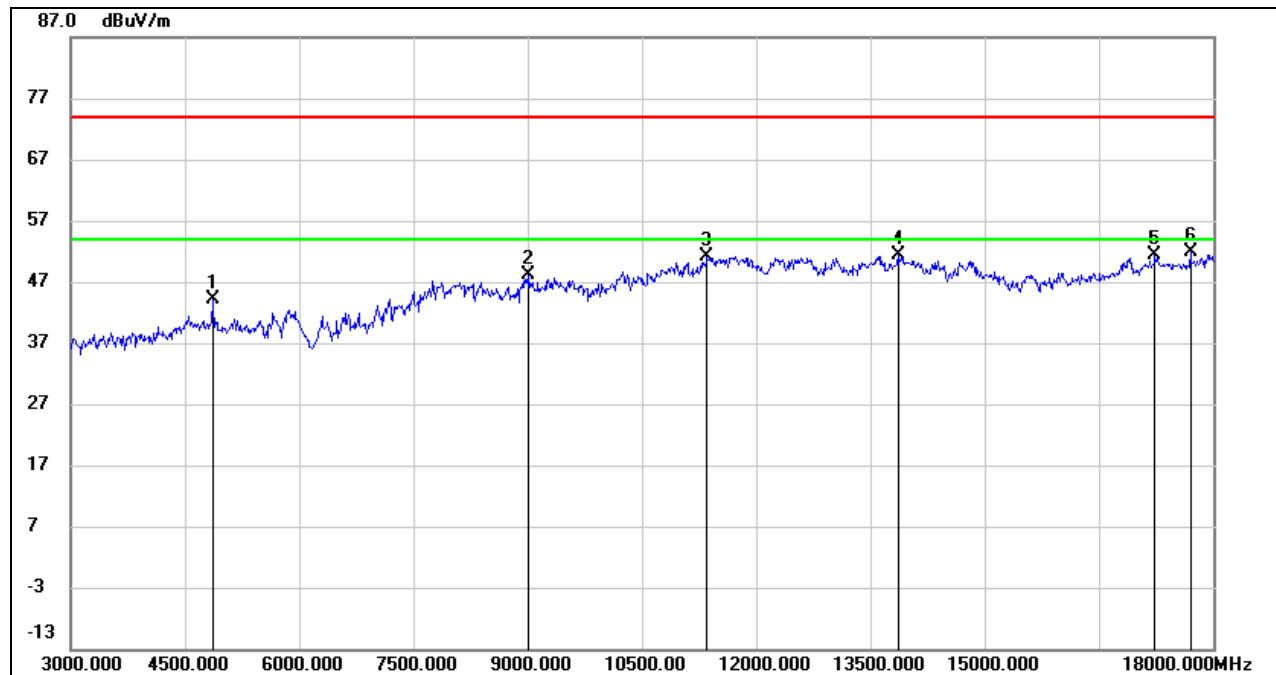**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4869.375	44.22	0.02	44.24	74.00	-29.76	peak
2	9026.250	37.61	10.50	48.11	74.00	-25.89	peak
3	11364.375	35.12	15.99	51.11	74.00	-22.89	peak
4	13863.750	31.94	19.33	51.27	74.00	-22.73	peak
5	17235.000	30.46	20.98	51.44	74.00	-22.56	peak
6	17713.125	28.42	23.44	51.86	74.00	-22.14	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

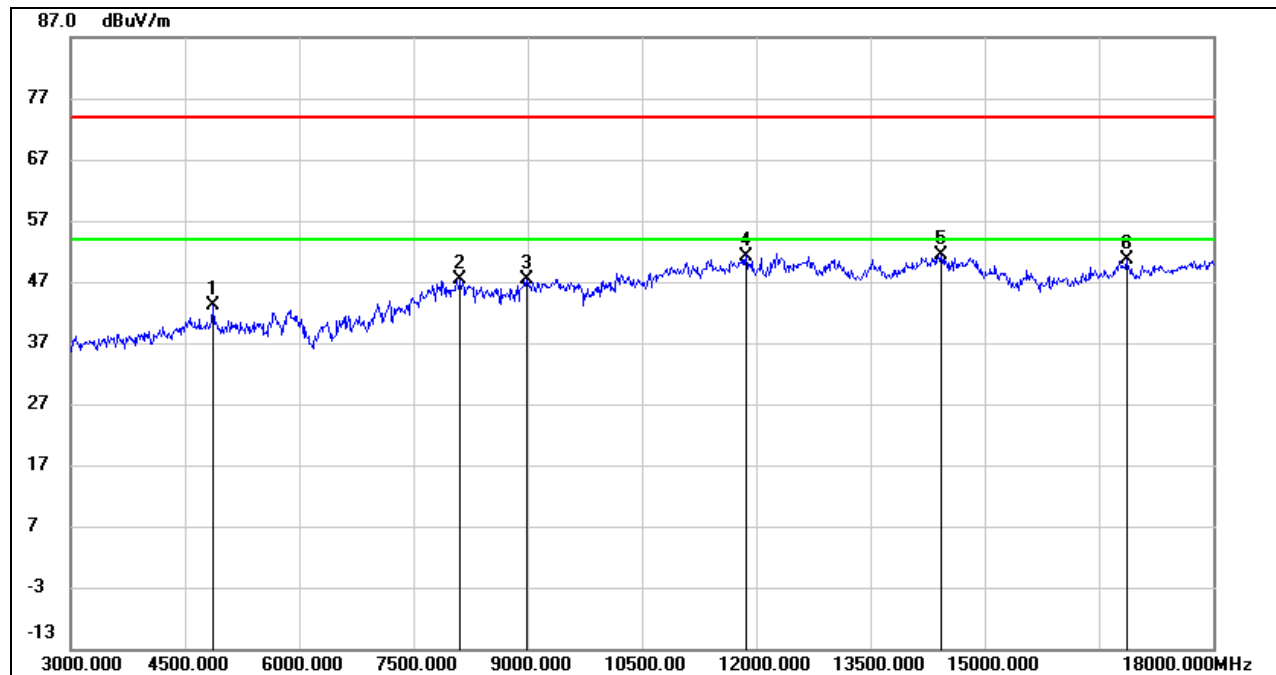**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.625	43.20	0.00	43.20	74.00	-30.80	peak
2	8118.750	37.84	9.48	47.32	74.00	-26.68	peak
3	8985.000	37.01	10.48	47.49	74.00	-26.51	peak
4	11872.500	34.08	17.17	51.25	74.00	-22.75	peak
5	14431.875	33.59	17.82	51.41	74.00	-22.59	peak
6	16860.000	31.36	19.33	50.69	74.00	-23.31	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

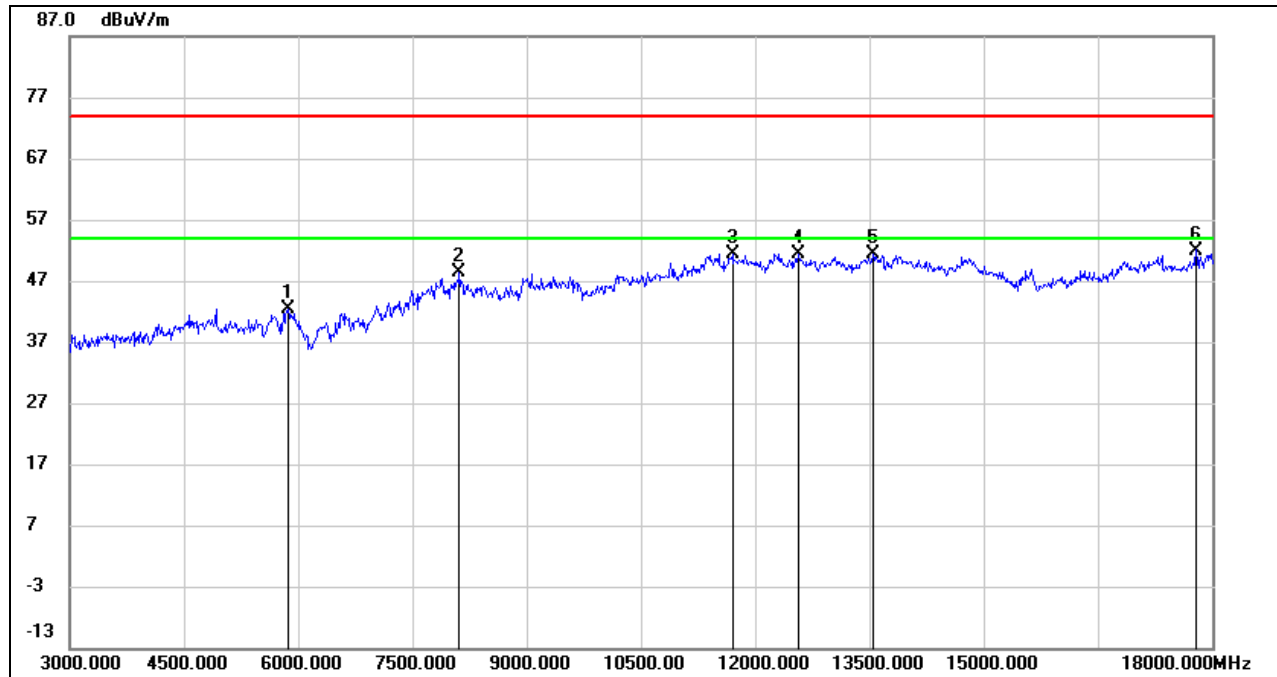

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5866.875	39.28	3.11	42.39	74.00	-31.61	peak
2	8116.875	38.89	9.49	48.38	74.00	-25.62	peak
3	11711.250	34.25	17.10	51.35	74.00	-22.65	peak
4	12579.375	34.33	17.10	51.43	74.00	-22.57	peak
5	13558.125	32.23	19.12	51.35	74.00	-22.65	peak
6	17793.750	27.87	24.13	52.00	74.00	-22.00	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

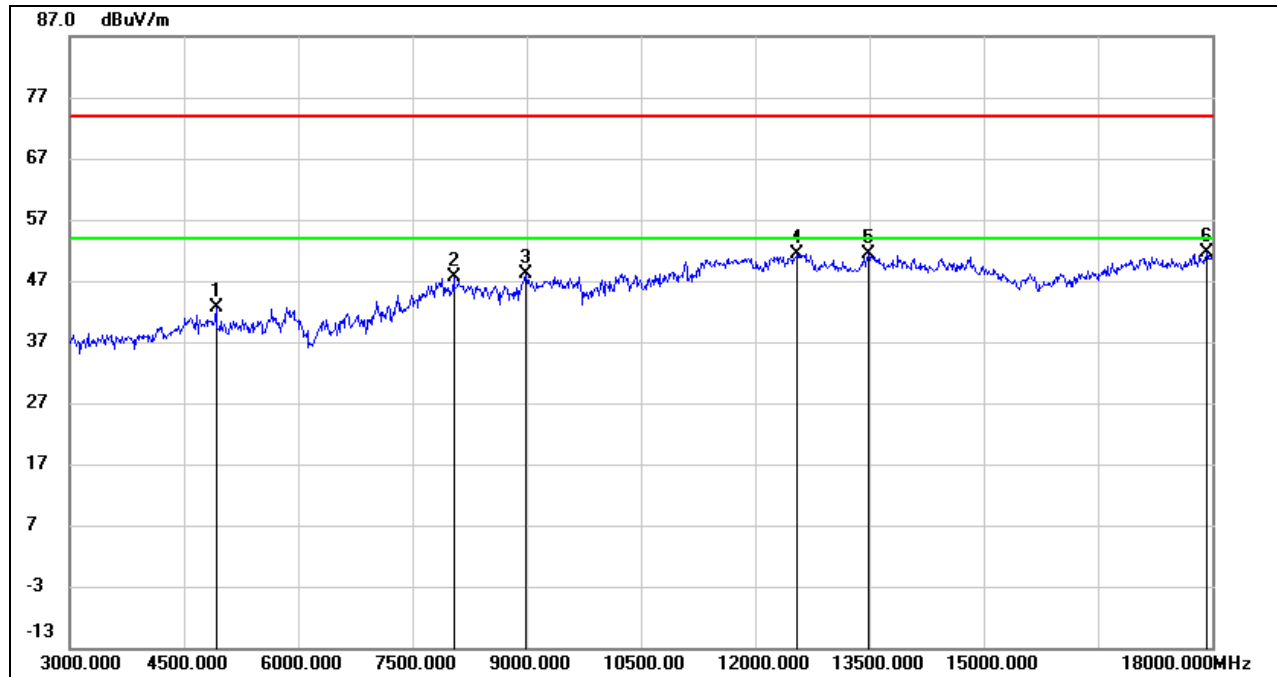

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4929.375	42.36	0.19	42.55	74.00	-31.45	peak
2	8049.375	38.87	8.79	47.66	74.00	-26.34	peak
3	8986.875	37.54	10.51	48.05	74.00	-25.95	peak
4	12566.250	34.41	17.07	51.48	74.00	-22.52	peak
5	13488.750	32.10	19.19	51.29	74.00	-22.71	peak
6	17936.250	27.08	24.55	51.63	74.00	-22.37	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.

5. For the transmitting duration, please refer to clause 7.1.


6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

7. Proper operation of the transmitter prior to adding the filter to the measurement chain.



8.3.6. 802.11ax HE40 MIMO MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

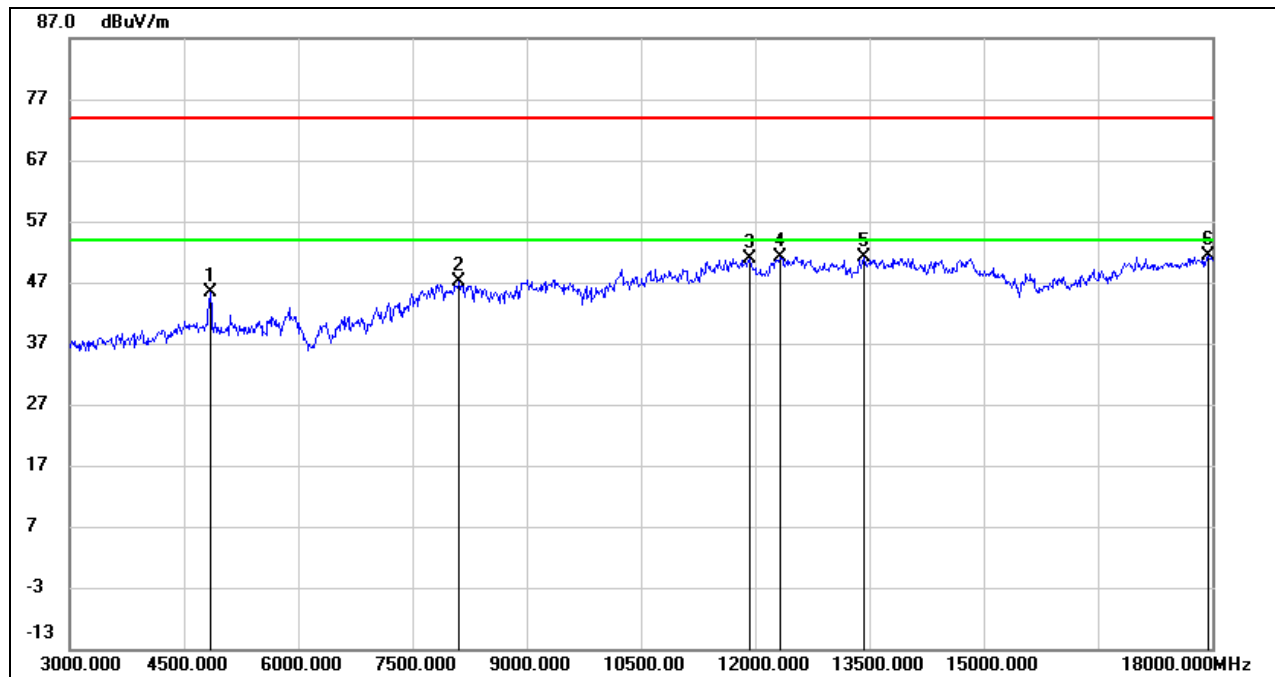

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4845.000	45.42	0.07	45.49	74.00	-28.51	peak
2	8122.500	37.70	9.47	47.17	74.00	-26.83	peak
3	11928.750	33.74	17.24	50.98	74.00	-23.02	peak
4	12331.875	33.57	17.47	51.04	74.00	-22.96	peak
5	13438.125	32.02	19.03	51.05	74.00	-22.95	peak
6	17956.875	26.80	24.68	51.48	74.00	-22.52	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

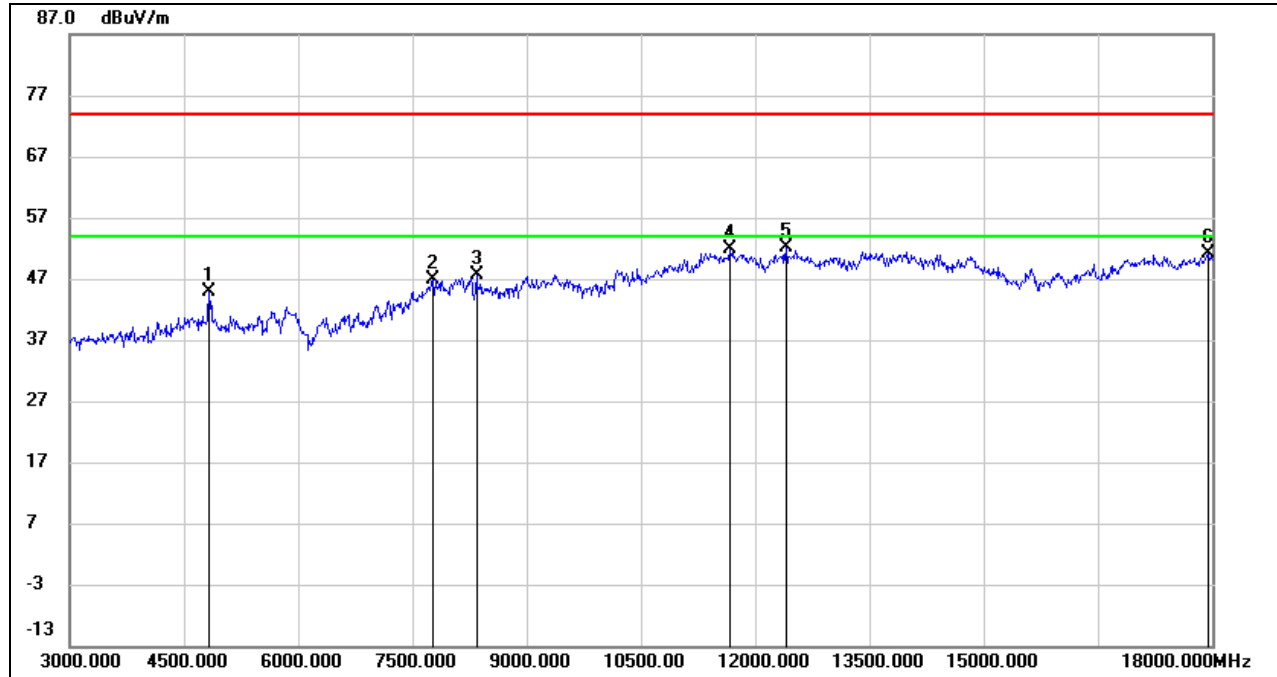

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4839.375	44.70	0.08	44.78	74.00	-29.22	peak
2	7770.000	38.46	8.44	46.90	74.00	-27.10	peak
3	8353.125	38.74	8.83	47.57	74.00	-26.43	peak
4	11683.125	34.96	17.01	51.97	74.00	-22.03	peak
5	12406.875	34.75	17.31	52.06	74.00	-21.94	peak
6	17960.625	26.53	24.71	51.24	74.00	-22.76	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

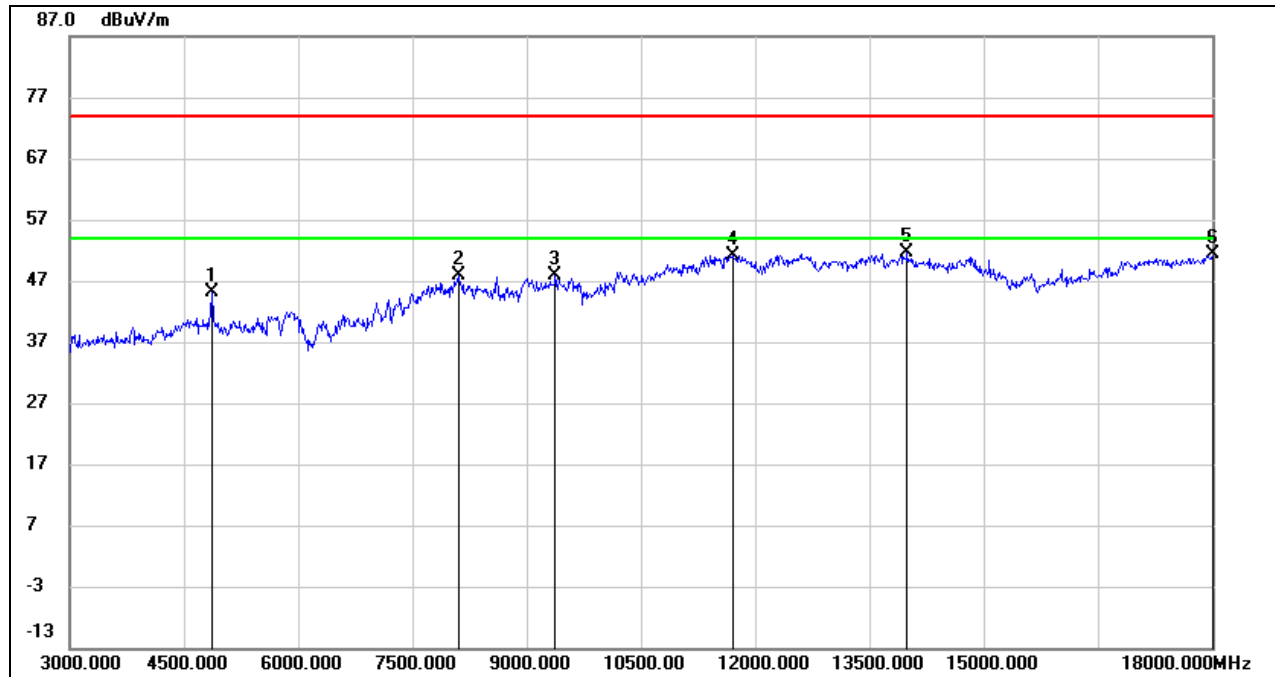**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	44.99	0.02	45.01	74.00	-28.99	peak
2	8109.375	38.31	9.53	47.84	74.00	-26.16	peak
3	9380.625	37.30	10.67	47.97	74.00	-26.03	peak
4	11713.125	34.10	17.09	51.19	74.00	-22.81	peak
5	13995.000	32.39	19.36	51.75	74.00	-22.25	peak
6	18000.000	26.45	24.97	51.42	74.00	-22.58	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

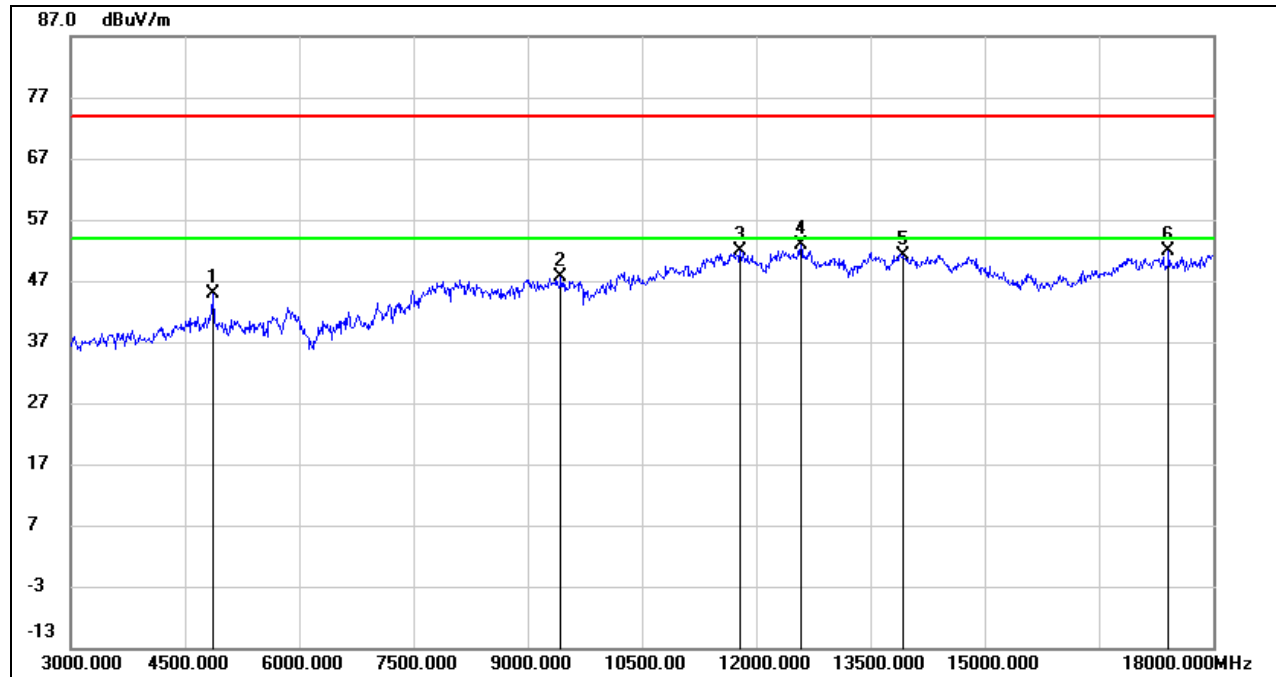

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4878.750	44.84	0.01	44.85	74.00	-29.15	peak
2	9436.875	36.95	10.66	47.61	74.00	-26.39	peak
3	11791.875	34.95	16.99	51.94	74.00	-22.06	peak
4	12594.375	35.78	17.11	52.89	74.00	-21.11	peak
5	13935.000	31.91	19.32	51.23	74.00	-22.77	peak
6	17428.125	30.74	21.08	51.82	74.00	-22.18	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

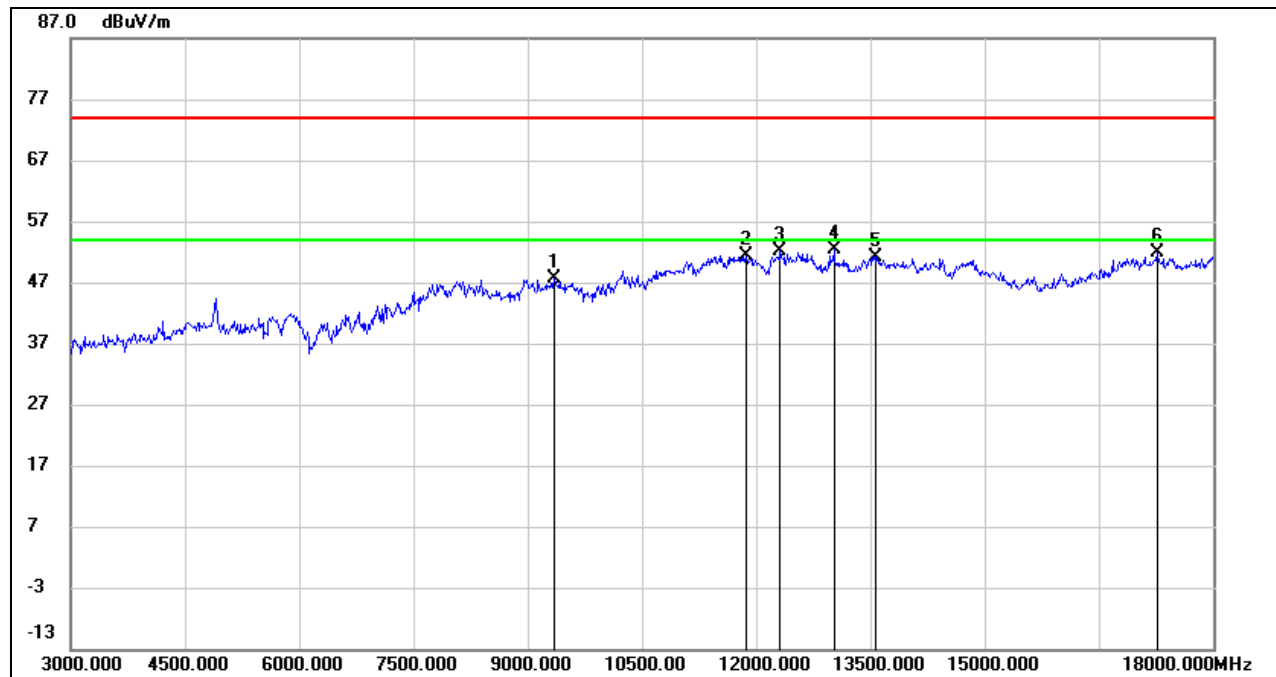**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9352.500	37.06	10.48	47.54	74.00	-26.46	peak
2	11874.375	34.22	17.17	51.39	74.00	-22.61	peak
3	12326.250	34.57	17.49	52.06	74.00	-21.94	peak
4	13020.000	34.95	17.54	52.49	74.00	-21.51	peak
5	13588.125	32.13	19.05	51.18	74.00	-22.82	peak
6	17272.500	30.52	21.28	51.80	74.00	-22.20	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

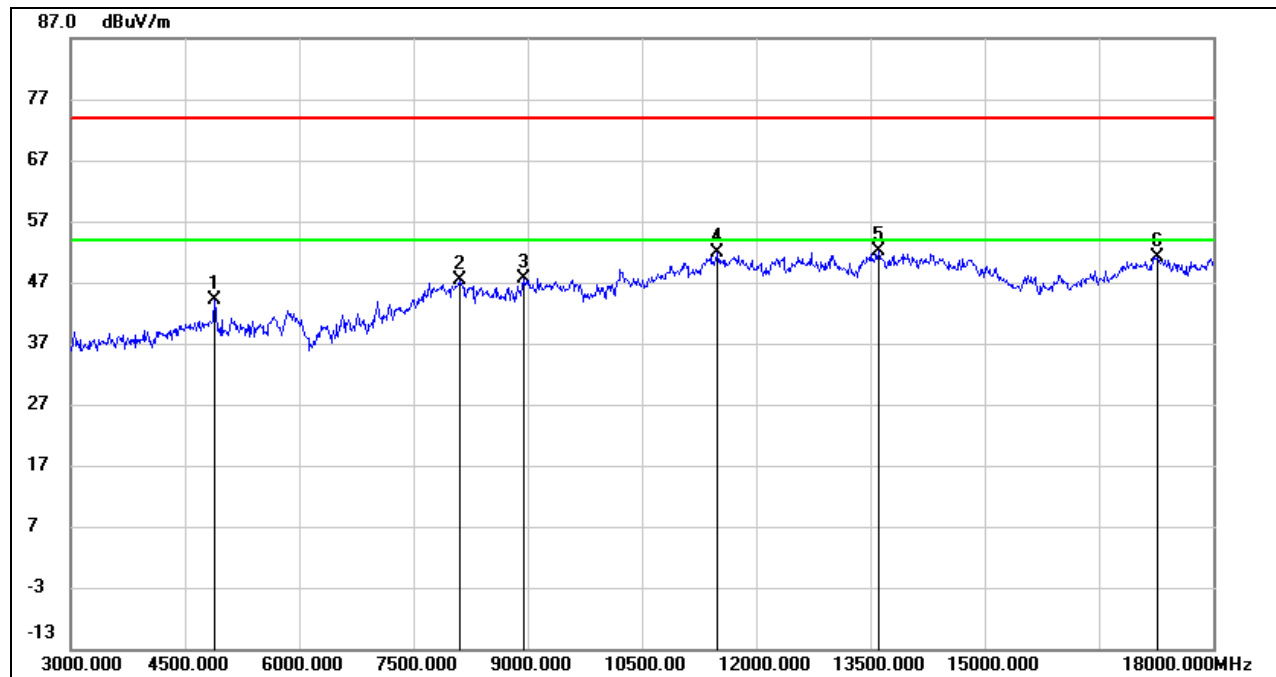

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4899.375	44.14	-0.04	44.10	74.00	-29.90	peak
2	8113.125	37.96	9.50	47.46	74.00	-26.54	peak
3	8941.875	37.89	9.64	47.53	74.00	-26.47	peak
4	11501.250	35.35	16.45	51.80	74.00	-22.20	peak
5	13608.750	32.98	19.08	52.06	74.00	-21.94	peak
6	17265.000	30.01	21.22	51.23	74.00	-22.77	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

8.5. SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)

8.5.1. 802.11ax HE40 MIMO MODE

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

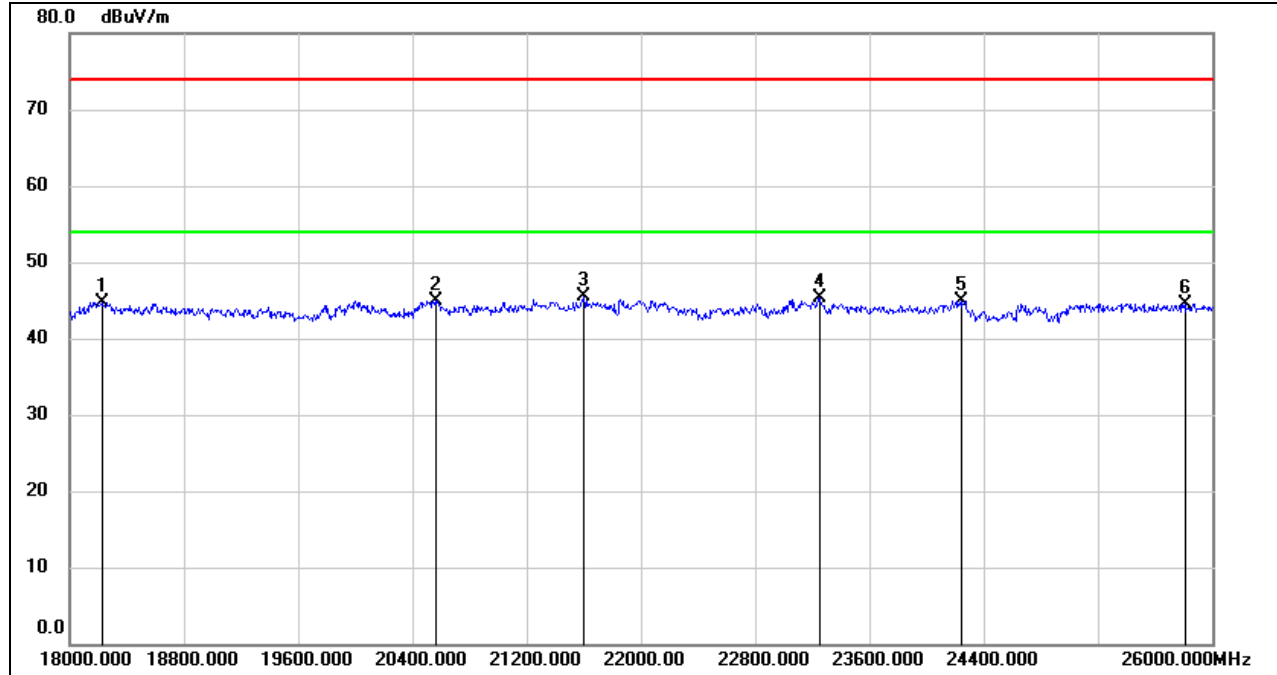


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18232.000	50.25	-5.54	44.71	74.00	-29.29	peak
2	20560.000	50.23	-5.30	44.93	74.00	-29.07	peak
3	21600.000	50.02	-4.54	45.48	74.00	-28.52	peak
4	23256.000	48.72	-3.35	45.37	74.00	-28.63	peak
5	24248.000	47.82	-2.83	44.99	74.00	-29.01	peak
6	25808.000	45.21	-0.71	44.50	74.00	-29.50	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

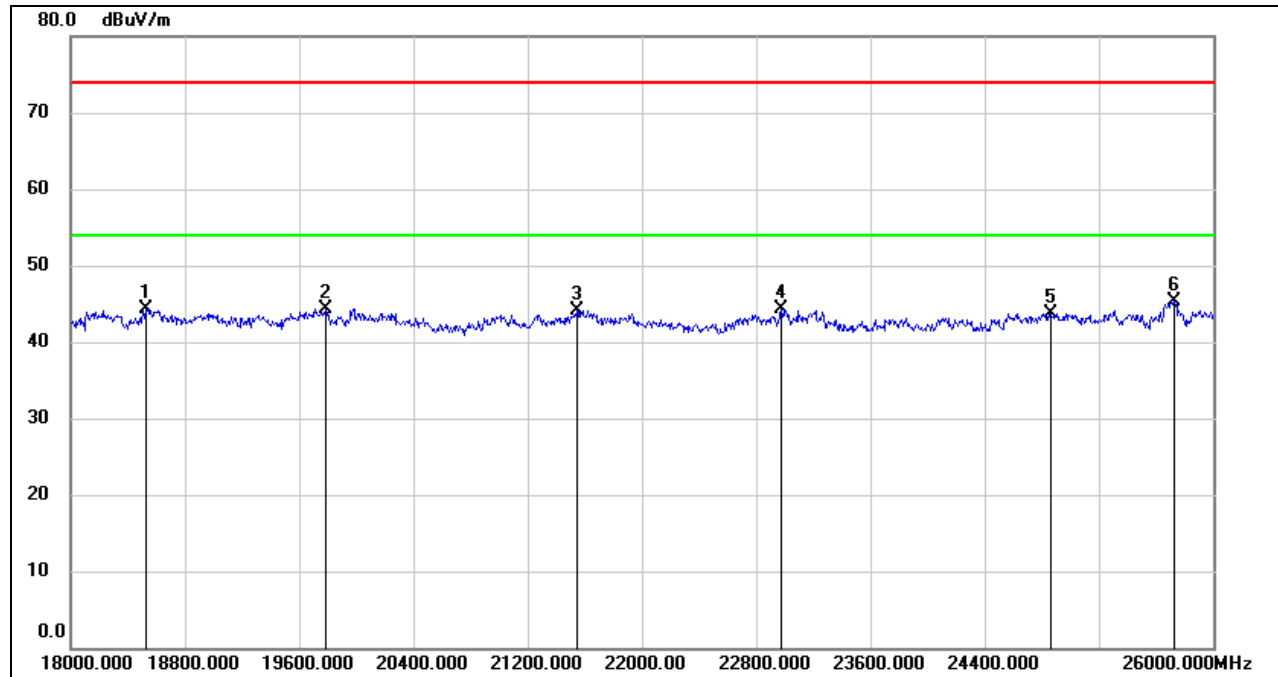

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18528.000	49.61	-5.26	44.35	74.00	-29.65	peak
2	19784.000	49.57	-5.28	44.29	74.00	-29.71	peak
3	21544.000	48.76	-4.63	44.13	74.00	-29.87	peak
4	22976.000	47.76	-3.46	44.30	74.00	-29.70	peak
5	24864.000	46.03	-2.23	43.80	74.00	-30.20	peak
6	25728.000	46.11	-0.72	45.39	74.00	-28.61	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

Note: All the modes had been tested, but only the worst data was recorded in the report.

8.6. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)

8.6.1. 802.11ax HE40 MIMO MODE

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

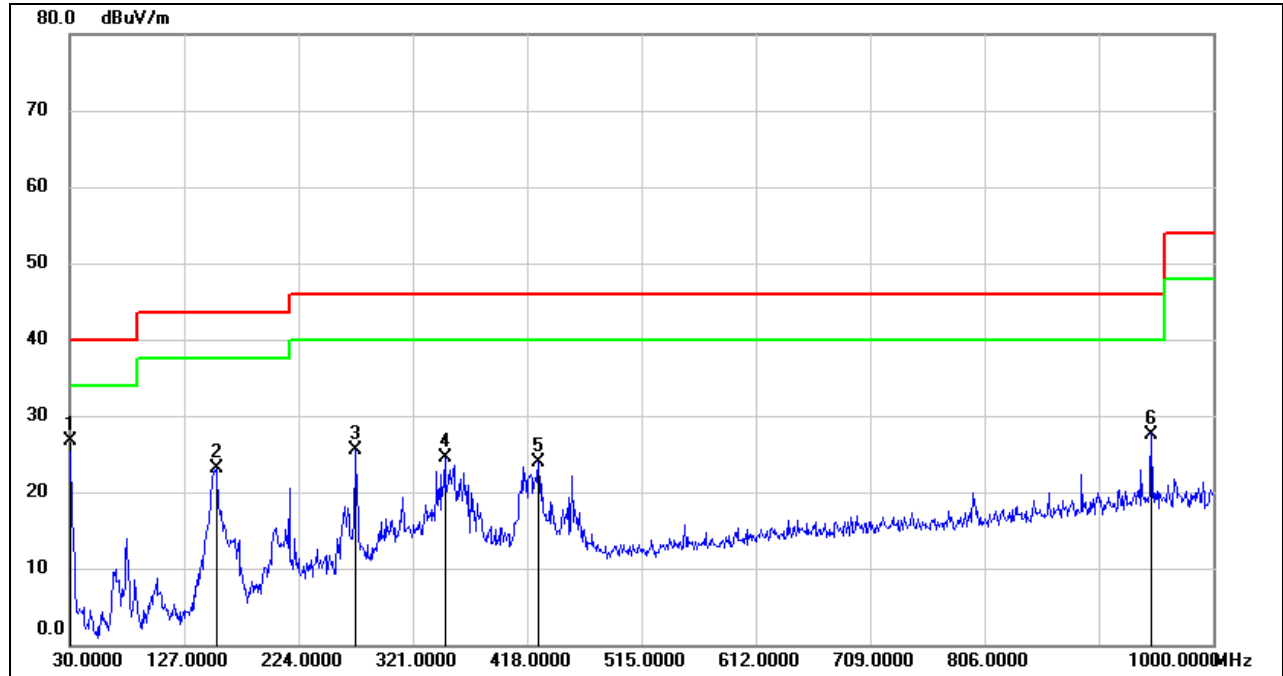


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	45.63	-18.94	26.69	40.00	-13.31	QP
2	154.1600	41.22	-18.06	23.16	43.50	-20.34	QP
3	272.5000	42.89	-17.48	25.41	46.00	-20.59	QP
4	348.1600	38.79	-14.34	24.45	46.00	-21.55	QP
5	427.7000	36.67	-12.78	23.89	46.00	-22.11	QP
6	947.6200	32.03	-4.43	27.60	46.00	-18.40	QP

Note: 1. Result Level = Read Level + Correct Factor.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

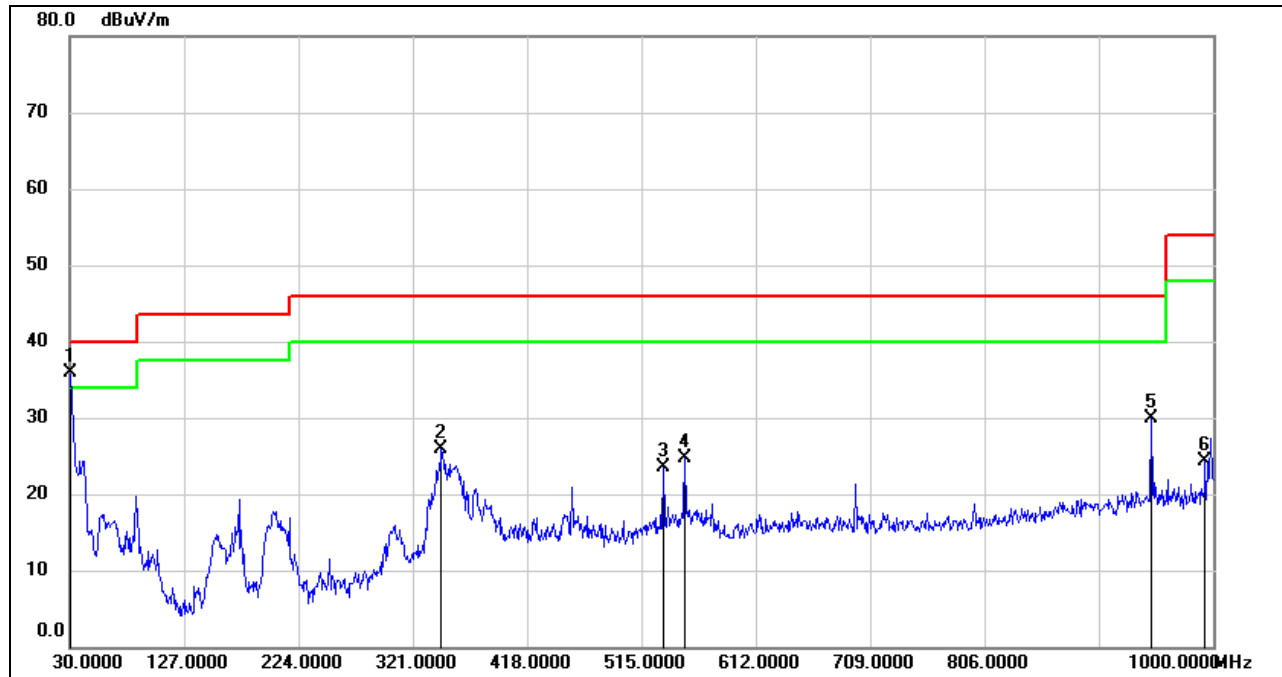

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	54.93	-18.94	35.99	40.00	-4.01	QP
2	345.2500	40.28	-14.38	25.90	46.00	-20.10	QP
3	533.4300	34.15	-10.70	23.45	46.00	-22.55	QP
4	551.8600	35.10	-10.46	24.64	46.00	-21.36	QP
5	947.6200	34.38	-4.43	29.95	46.00	-16.05	QP
6	993.2100	28.45	-4.23	24.22	54.00	-29.78	QP

Note: 1. Result Level = Read Level + Correct Factor.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto


Note: All the modes and channels had been tested, but only the worst data was recorded in the report.

8.7. SPURIOUS EMISSIONS BELOW 30 MHz

8.7.1. 802.11ax HE40 MIMO MODE

SPURIOUS EMISSIONS (MID CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9 kHz ~ 150 kHz

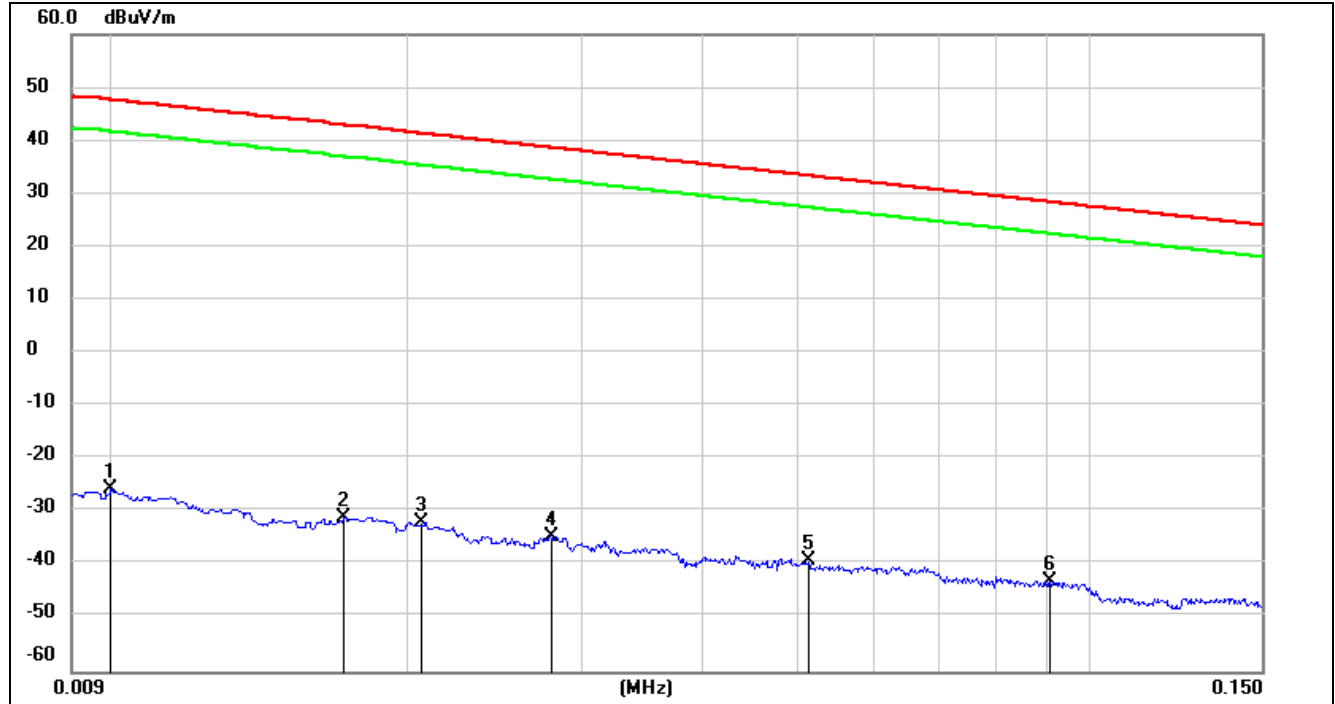


No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.0100	75.72	-101.40	-25.68	47.6	-77.18	-3.90	-73.28	peak
2	0.0171	70.38	-101.36	-30.98	42.94	-82.48	-8.56	-73.92	peak
3	0.0206	69.42	-101.35	-31.93	41.32	-83.43	-10.18	-73.25	peak
4	0.0280	66.79	-101.38	-34.59	38.66	-86.09	-12.84	-73.25	peak
5	0.0514	62.18	-101.48	-39.3	33.38	-90.80	-18.12	-72.68	peak
6	0.0911	58.61	-101.72	-43.11	28.41	-94.61	-23.09	-71.52	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

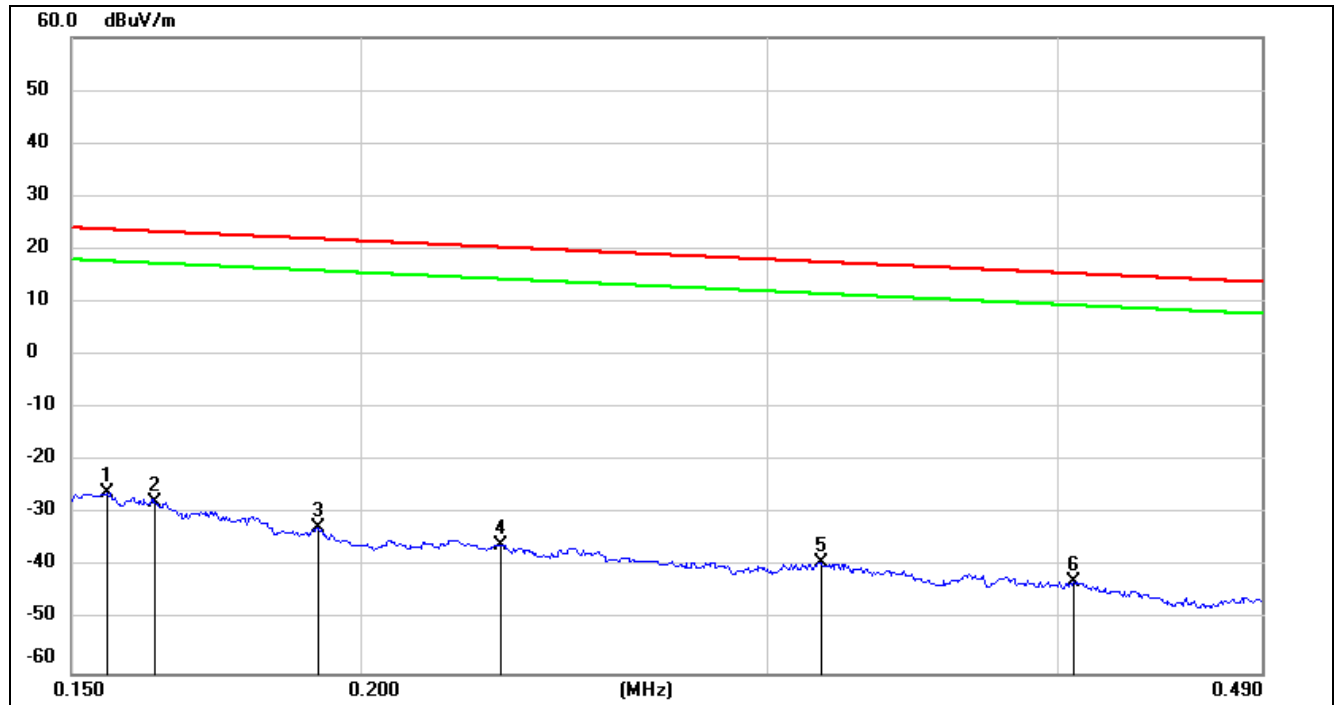150 kHz ~ 490 kHz


No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.1554	75.77	-101.65	-25.88	23.77	-77.38	-27.73	-49.65	peak
2	0.1630	73.99	-101.65	-27.66	23.36	-79.16	-28.14	-51.02	peak
3	0.1917	69.04	-101.70	-32.66	21.95	-84.16	-29.55	-54.61	peak
4	0.2298	66.05	-101.77	-35.72	20.37	-87.22	-31.13	-56.09	peak
5	0.3163	62.70	-101.87	-39.17	17.6	-90.67	-33.90	-56.77	peak
6	0.4062	59.14	-101.96	-42.82	15.43	-94.32	-36.07	-58.25	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120 π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

490 kHz ~ 30 MHz

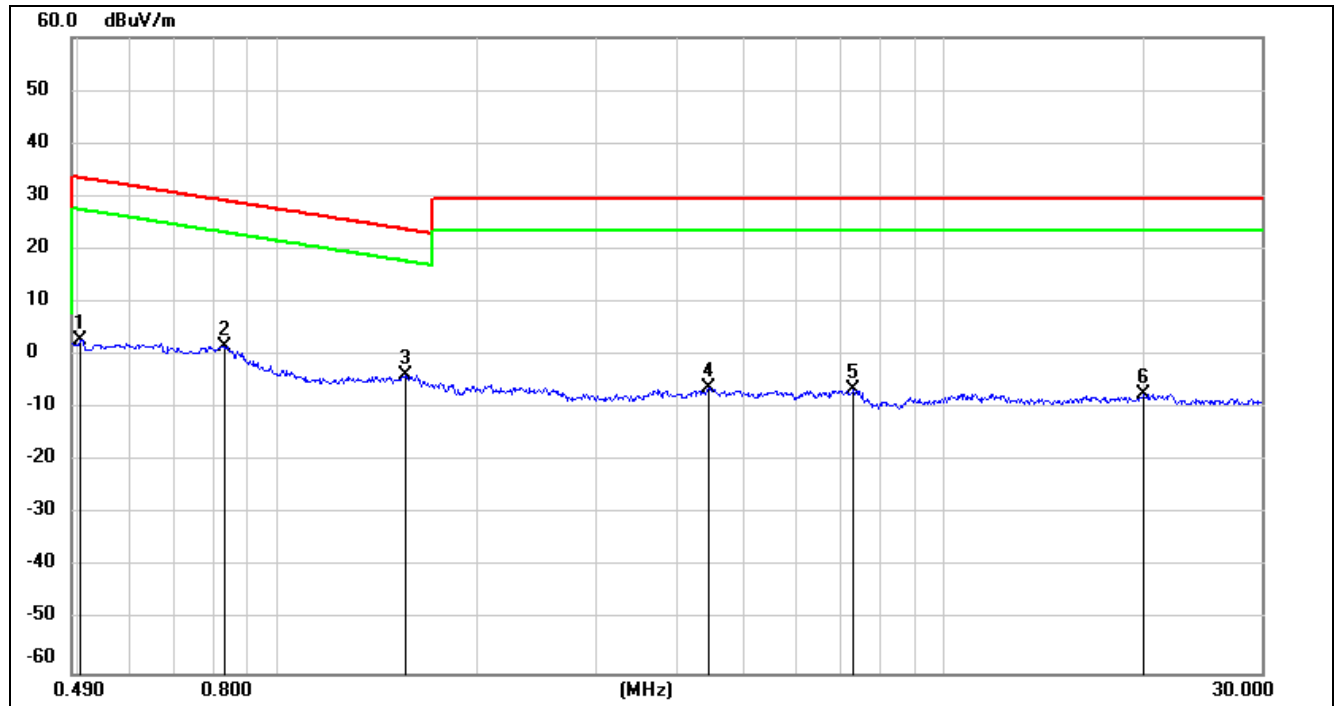

No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.5039	64.94	-62.07	2.87	33.56	-48.63	-17.94	-30.69	peak
2	0.8296	63.94	-62.17	1.77	29.23	-49.73	-22.27	-27.46	peak
3	1.5564	58.18	-62.02	-3.84	23.76	-55.34	-27.74	-27.60	peak
4	4.4443	55.29	-61.40	-6.11	29.54	-57.61	-21.96	-35.65	peak
5	7.3361	54.58	-61.17	-6.59	29.54	-58.09	-21.96	-36.13	peak
6	19.9954	53.44	-60.83	-7.39	29.54	-58.89	-21.96	-36.93	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120 π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the modes and channels had been tested, but only the worst data was recorded in the report.

9. AC POWER LINE CONDUCTED EMISSIONS


LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

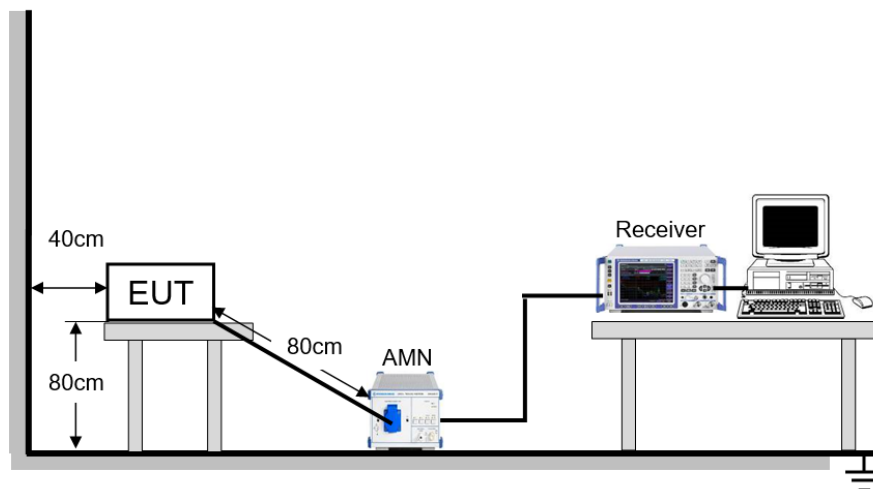


The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST ENVIRONMENT

Temperature	20.5 °C	Relative Humidity	51.7 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

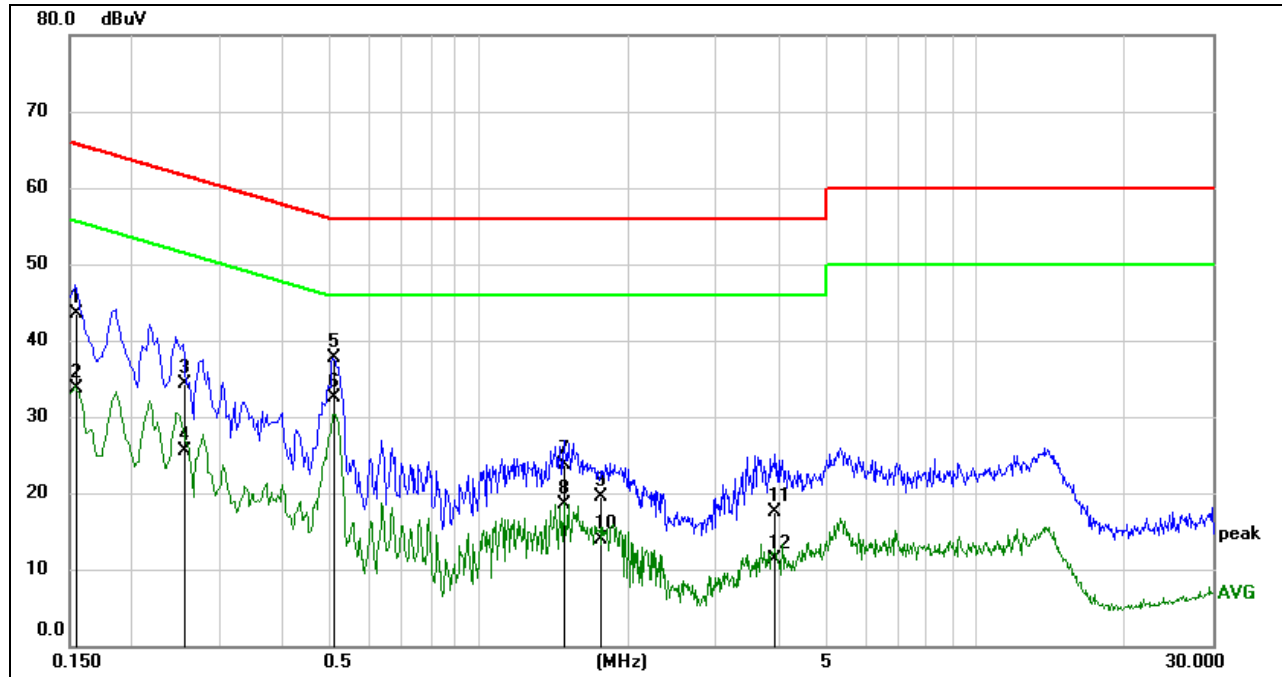**RESULTS****9.1.1. 802.11ax HE40 MIMO MODE****LINE L RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1547	33.85	9.59	43.44	65.74	-22.30	QP
2	0.1547	24.13	9.59	33.72	55.74	-22.02	AVG
3	0.2548	24.73	9.54	34.27	61.60	-27.33	QP
4	0.2548	15.99	9.54	25.53	51.60	-26.07	AVG
5	0.5109	28.35	9.32	37.67	56.00	-18.33	QP
6	0.5109	23.28	9.32	32.60	46.00	-13.40	AVG
7	1.4859	14.00	9.62	23.62	56.00	-32.38	QP
8	1.4859	8.82	9.62	18.44	46.00	-27.56	AVG
9	1.7680	9.88	9.62	19.50	56.00	-36.50	QP
10	1.7680	4.25	9.62	13.87	46.00	-32.13	AVG
11	3.9604	7.85	9.60	17.45	56.00	-38.55	QP
12	3.9604	1.79	9.60	11.39	46.00	-34.61	AVG


Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

LINE N RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)

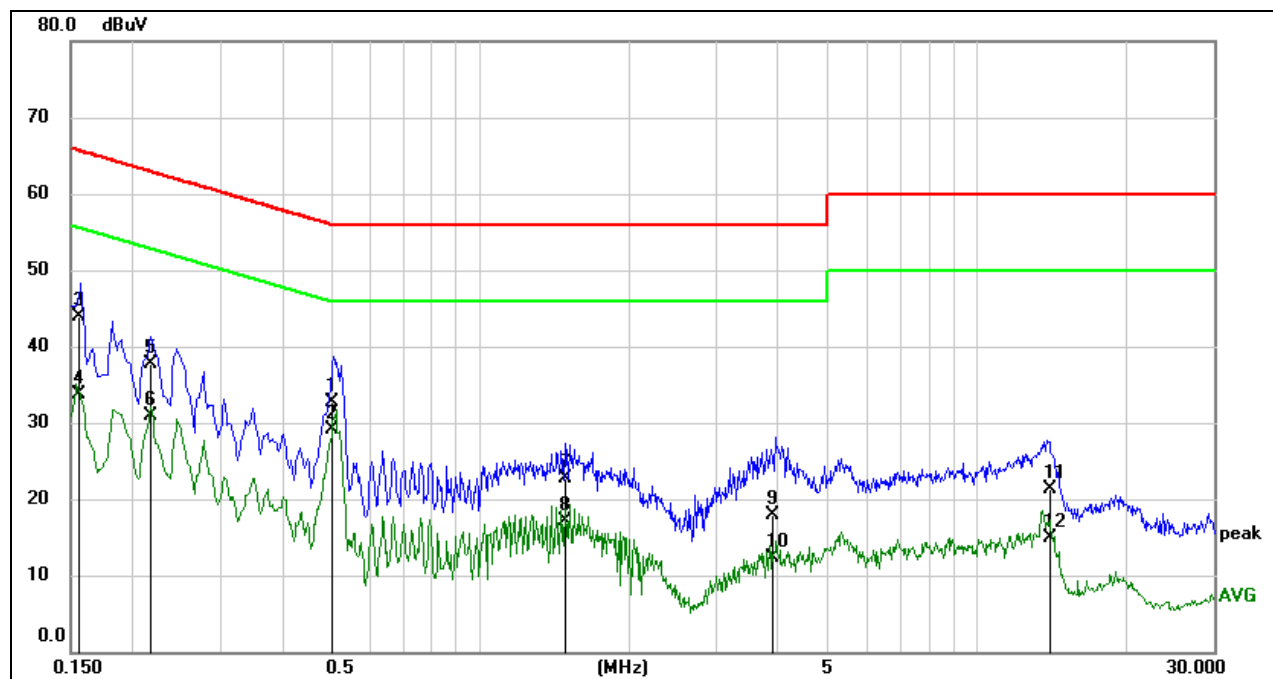

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.5054	23.46	9.31	32.77	56.00	-23.23	QP
2	0.5054	19.78	9.31	29.09	46.00	-16.91	AVG
3	0.1553	34.23	9.59	43.82	65.71	-21.89	QP
4	0.1553	24.20	9.59	33.79	55.71	-21.92	AVG
5	0.2166	28.13	9.57	37.70	62.95	-25.25	QP
6	0.2166	21.26	9.57	30.83	52.95	-22.12	AVG
7	1.4955	13.02	9.62	22.64	56.00	-33.36	QP
8	1.4955	7.56	9.62	17.18	46.00	-28.82	AVG
9	3.8923	8.35	9.60	17.95	56.00	-38.05	QP
10	3.8923	2.61	9.60	12.21	46.00	-33.79	AVG
11	13.9721	11.50	9.76	21.26	60.00	-38.74	QP
12	13.9721	5.10	9.76	14.86	50.00	-35.14	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes and channels had been tested, but only the worst data was recorded in the report.

10. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies




11. Appendix

11.1. Appendix A: DTS Bandwidth


11.1.1. Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.360	2407.440	2415.800	0.5	PASS
	Ant2	2412	7.160	2408.400	2415.560	0.5	PASS
	Ant1	2437	7.160	2433.400	2440.560	0.5	PASS
	Ant2	2437	7.160	2433.400	2440.560	0.5	PASS
	Ant1	2462	7.160	2458.400	2465.560	0.5	PASS
	Ant2	2462	7.160	2458.400	2465.560	0.5	PASS
11G	Ant1	2412	15.200	2404.400	2419.600	0.5	PASS
	Ant2	2412	15.400	2404.400	2419.800	0.5	PASS
	Ant1	2437	16.000	2429.160	2445.160	0.5	PASS
	Ant2	2437	15.640	2429.160	2444.800	0.5	PASS
	Ant1	2462	15.560	2454.040	2469.600	0.5	PASS
	Ant2	2462	16.360	2453.800	2470.160	0.5	PASS
11N20MIMO	Ant1	2412	17.640	2403.160	2420.800	0.5	PASS
	Ant2	2412	17.040	2403.760	2420.800	0.5	PASS
	Ant1	2437	16.000	2428.800	2444.800	0.5	PASS
	Ant2	2437	17.640	2428.160	2445.800	0.5	PASS
	Ant1	2462	17.760	2453.120	2470.880	0.5	PASS
	Ant2	2462	17.600	2453.160	2470.760	0.5	PASS
11N40MIMO	Ant1	2422	35.280	2404.400	2439.680	0.5	PASS
	Ant2	2422	35.200	2404.400	2439.600	0.5	PASS
	Ant1	2437	35.280	2419.400	2454.680	0.5	PASS
	Ant2	2437	35.200	2419.400	2454.600	0.5	PASS
	Ant1	2452	35.280	2434.400	2469.680	0.5	PASS
	Ant2	2452	35.280	2434.400	2469.680	0.5	PASS
11AX20MIMO	Ant1	2412	17.880	2403.000	2420.880	0.5	PASS
	Ant2	2412	17.640	2403.200	2420.840	0.5	PASS
	Ant1	2437	18.400	2428.040	2446.440	0.5	PASS
	Ant2	2437	18.040	2427.800	2445.840	0.5	PASS
	Ant1	2462	18.400	2452.680	2471.080	0.5	PASS
	Ant2	2462	18.800	2452.520	2471.320	0.5	PASS
11AX40MIMO	Ant1	2422	37.600	2403.120	2440.720	0.5	PASS
	Ant2	2422	36.480	2403.200	2439.680	0.5	PASS
	Ant1	2437	37.440	2418.120	2455.560	0.5	PASS
	Ant2	2437	37.600	2418.280	2455.880	0.5	PASS
	Ant1	2452	37.760	2433.120	2470.880	0.5	PASS
	Ant2	2452	35.920	2433.760	2469.680	0.5	PASS

11.1.2. Test Graphs

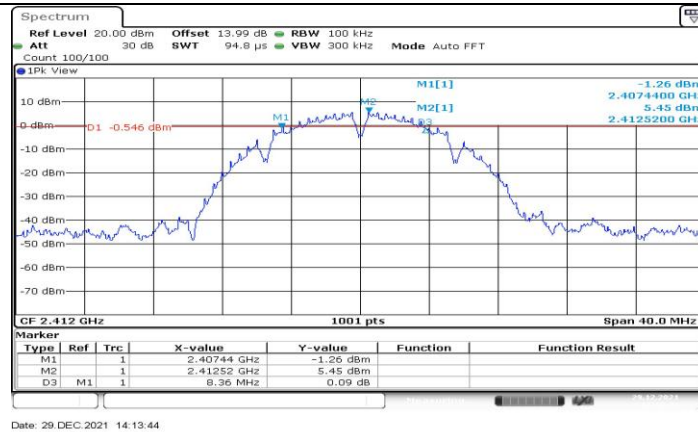


11B_Ant1_2412

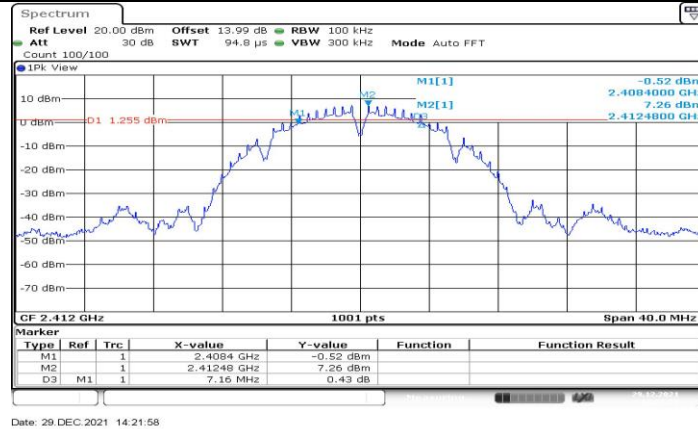


11B_Ant2_2412



11B_Ant1_2437

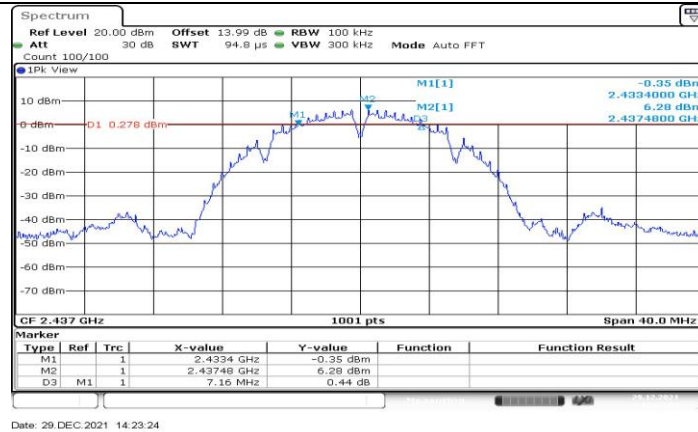


11B_Ant2_2437

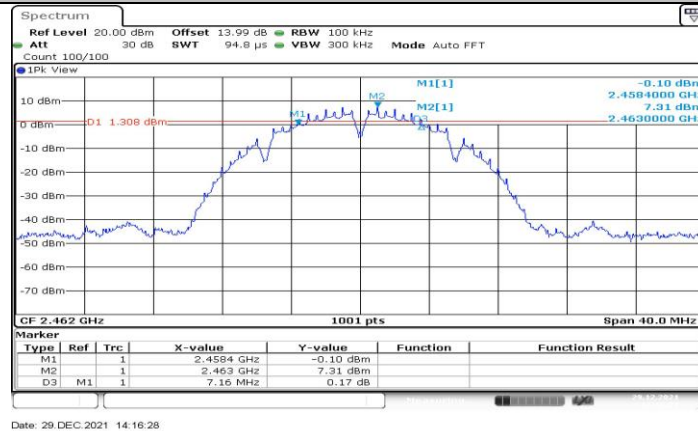


11B_Ant1_2462




11B_Ant2_2462

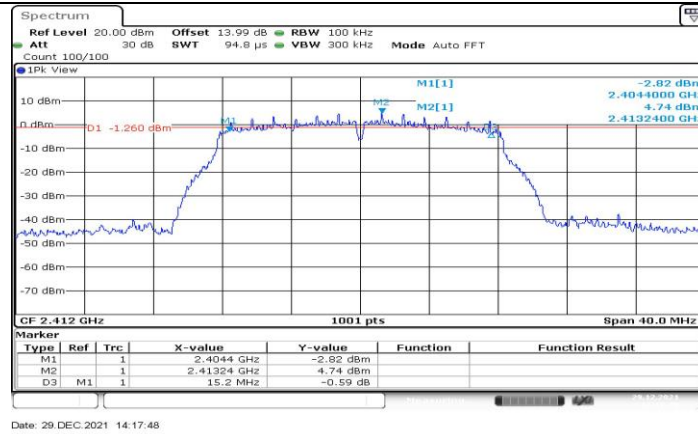


11G_Ant1_2412

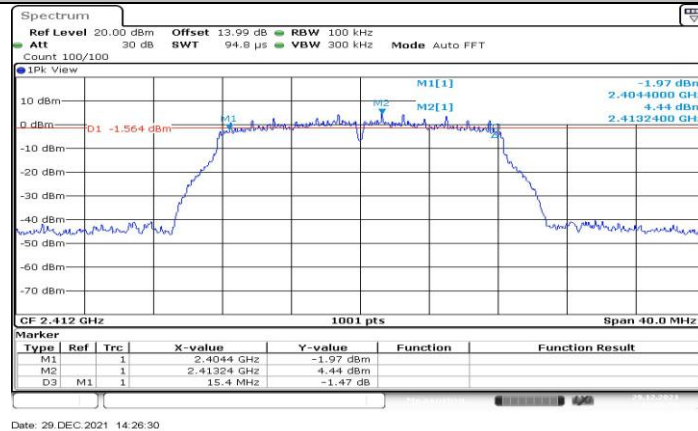


11G_Ant2_2412

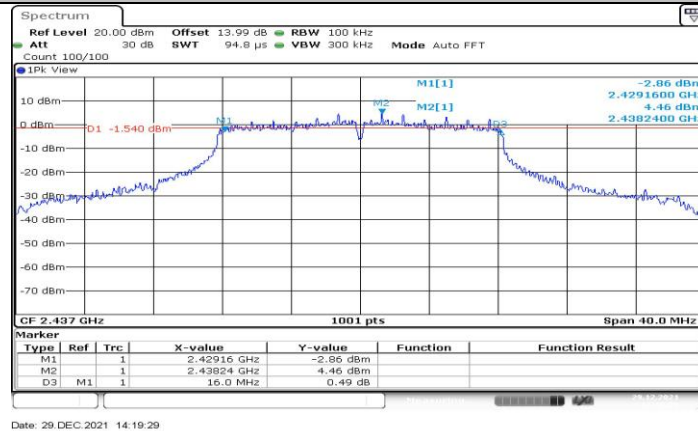


11G_Ant1_2437

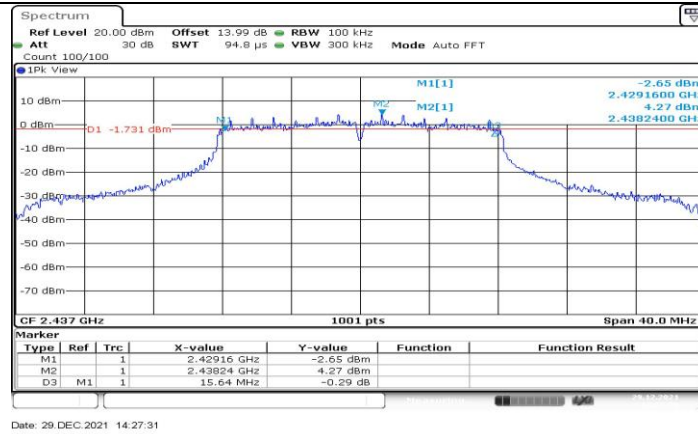


11G_Ant2_2437

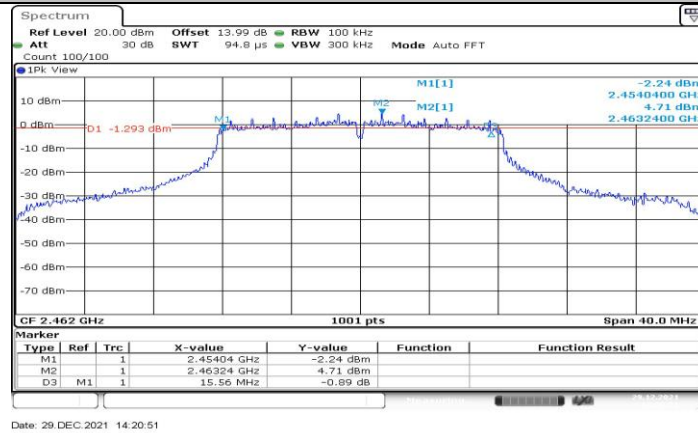


11G_Ant1_2462

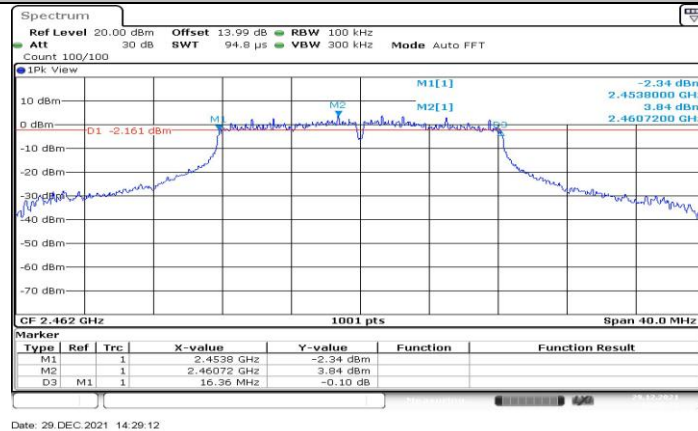


11G_Ant2_2462

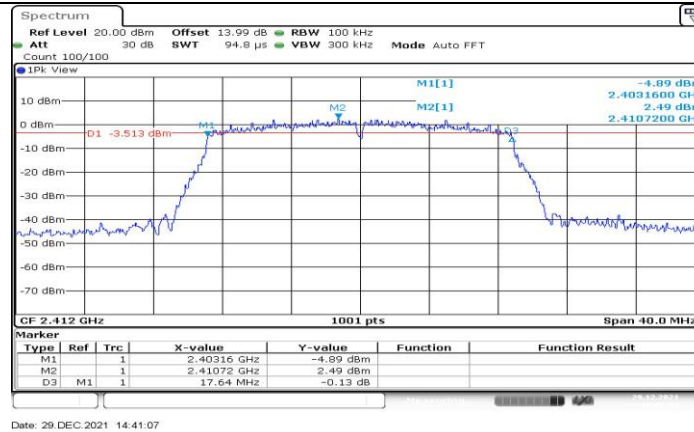


11N20MIMO_Ant1_2412

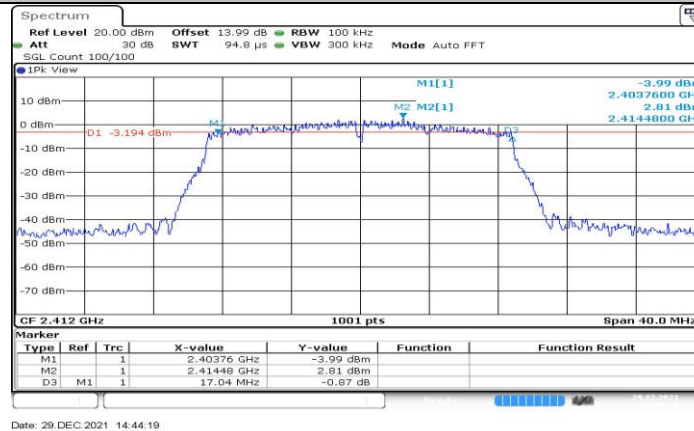


11N20MIMO_Ant2_2412

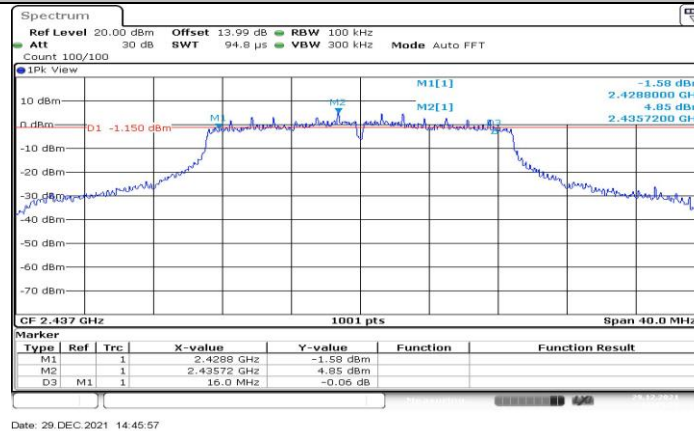


11N20MIMO_Ant1_2437

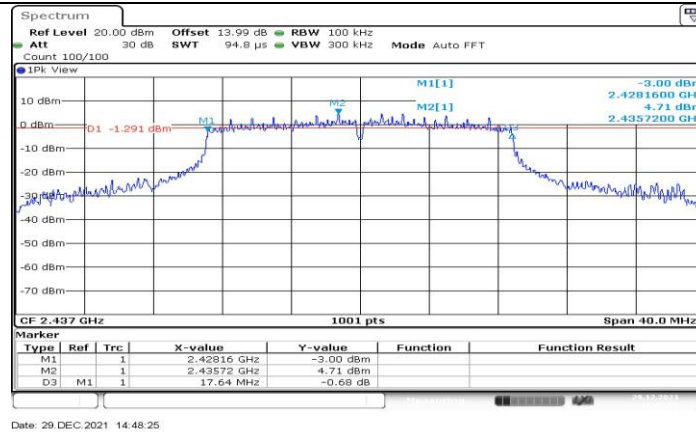


11N20MIMO_Ant2_2437

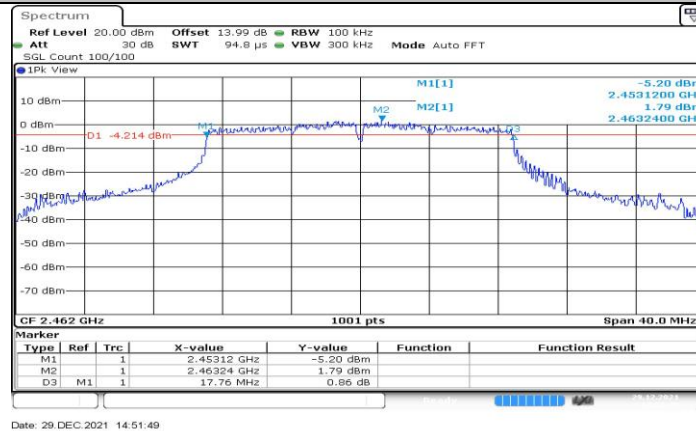


11N20MIMO_Ant1_2462

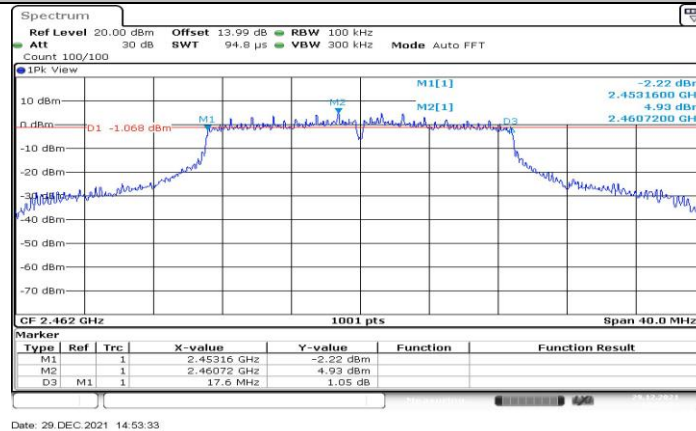


11N20MIMO_Ant2_2462

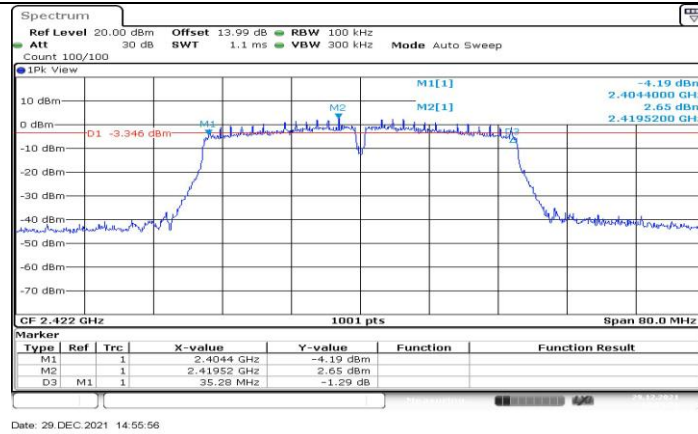


11N40MIMO_Ant1_2422

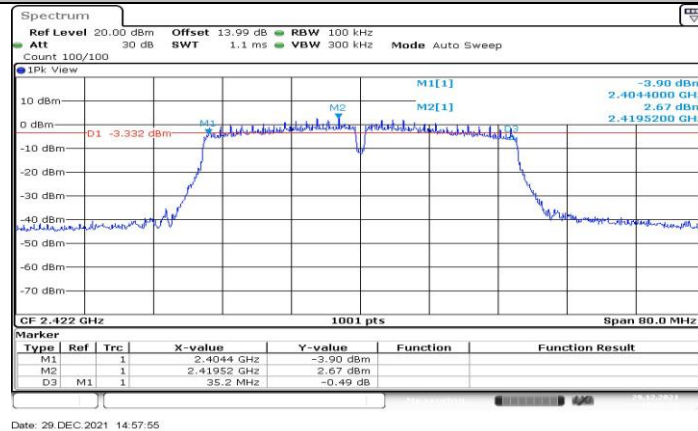


11N40MIMO_Ant2_2422

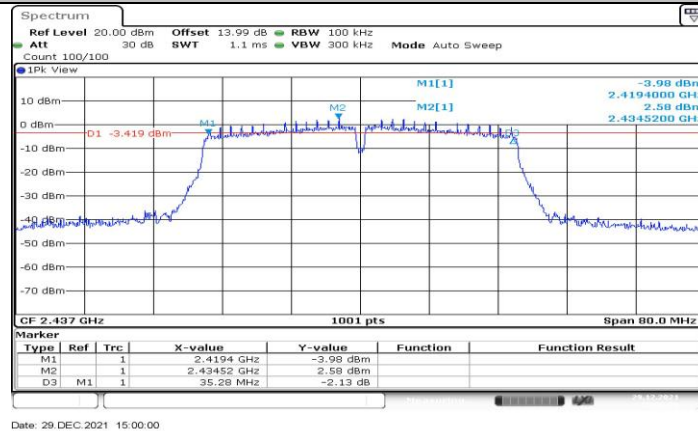


11N40MIMO_Ant1_2437

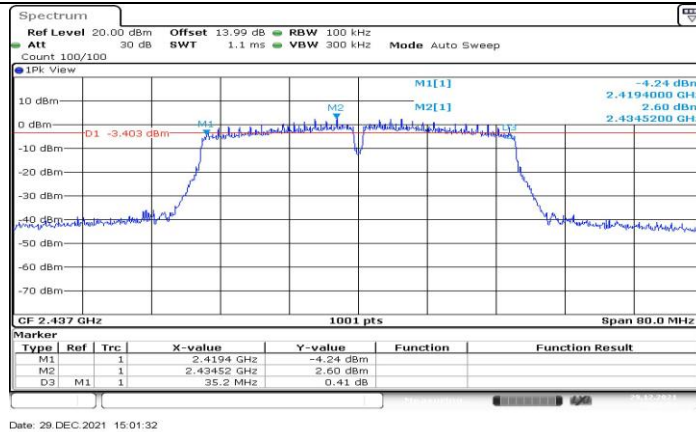

11N40MIMO_Ant2_2437

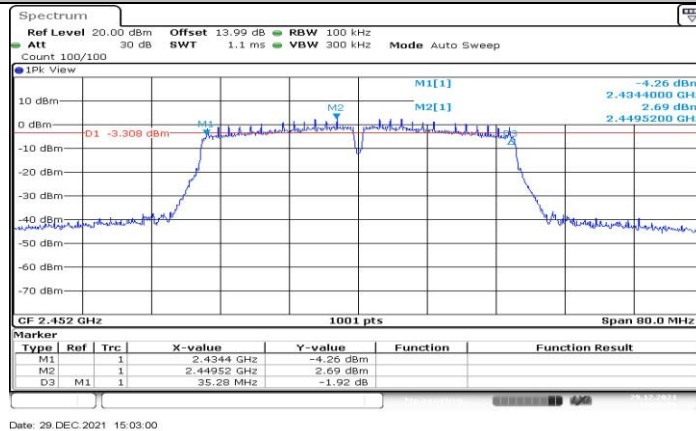

11N40MIMO_Ant1_2452

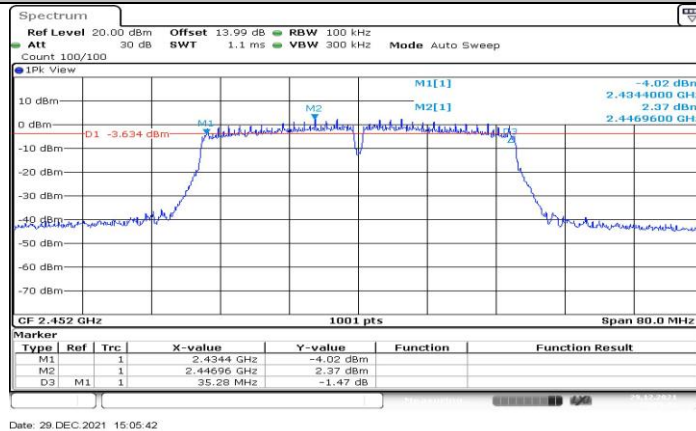

11N40MIMO_Ant2_2452