



Antenna Test Report

**Heyuan Xunwei Communication Technology
Co., Ltd**

RF: Chenchuanming

Date: 2023.08.09

Office address: Zone M, 8/F, Building 1, Baisha Xinxing Industrial Park, No. 3011,
Shahe West Road, Nanshan District, Shenzhen

Contents:

Test equipment

Modal information

Matching circuit

Active performance
test data

Test equipment

Wireless communications test set: CMW500

Network Analyzer: Agilent 5071B

Anechoic Chamber : SATIMO SG24




Antenna information

Customer	Boat of wealth
Antenna model	FPC
Antenna type	PIFA
Antenna band	GSM900/1800/850/1900 WCDMA-B2/B4/B5 LTE-B2/B4/B5/B12/B17/B25/ B26/B66/B71/B41




frequency range (MHz)	603–960	1710–2170	2500–2700
VSWR	<3.5	<3.5	<3.5

Matching circuit (No modification)

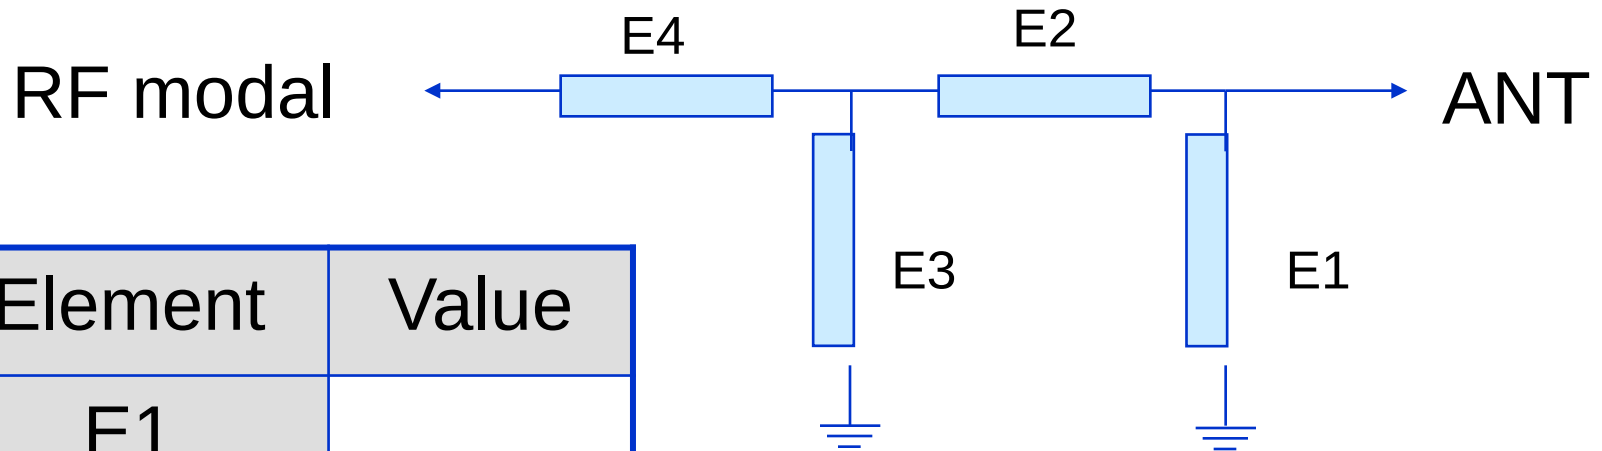


Element	Value
E1	
E2	
E3	
E4	

Antenna dimension drawing

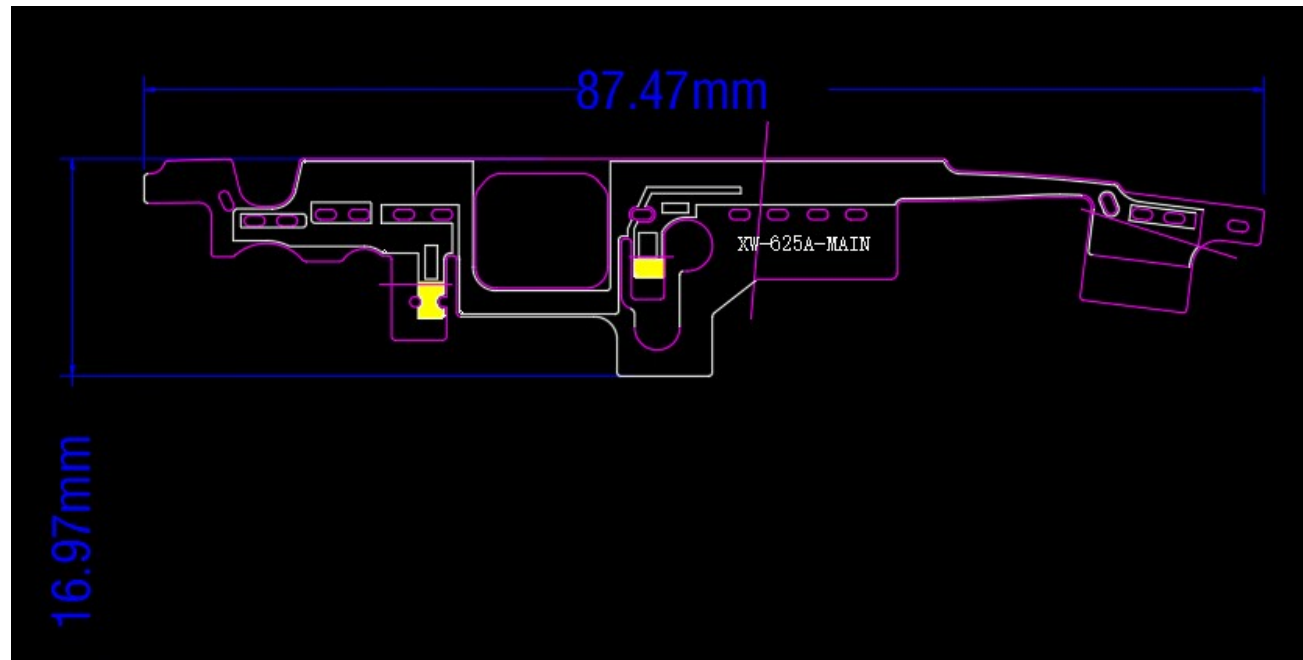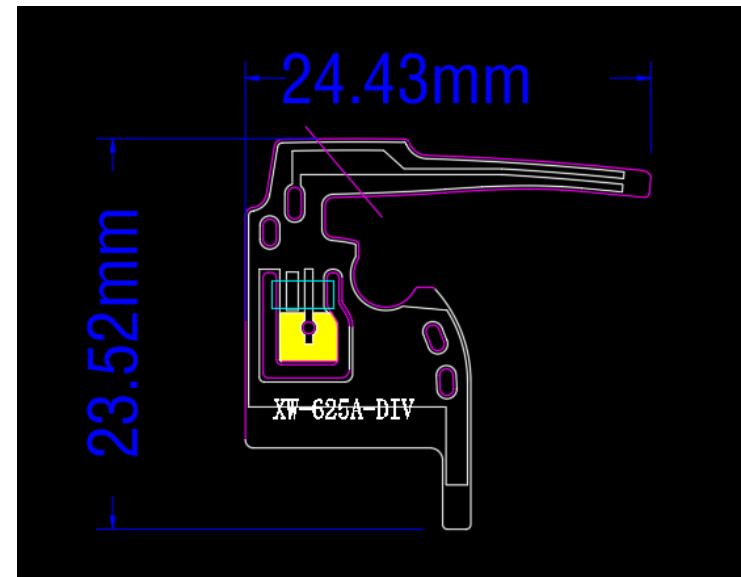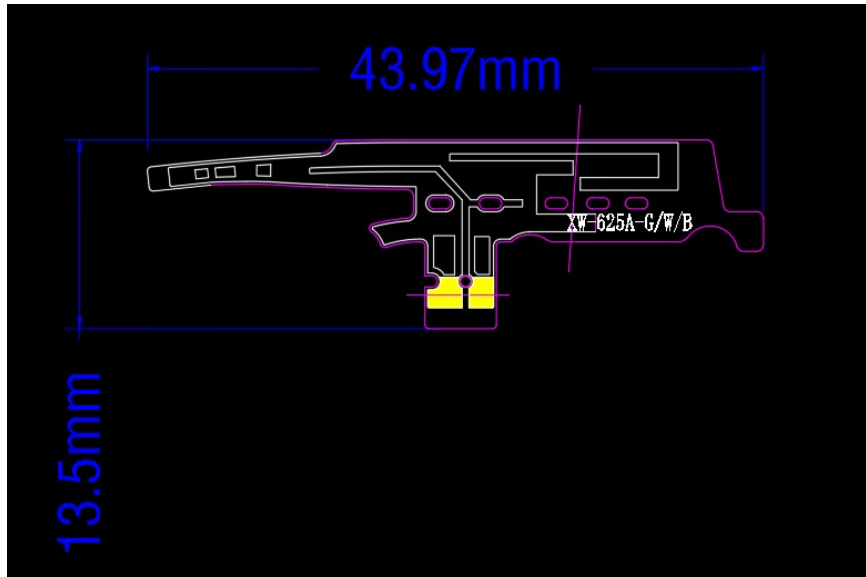

TOP

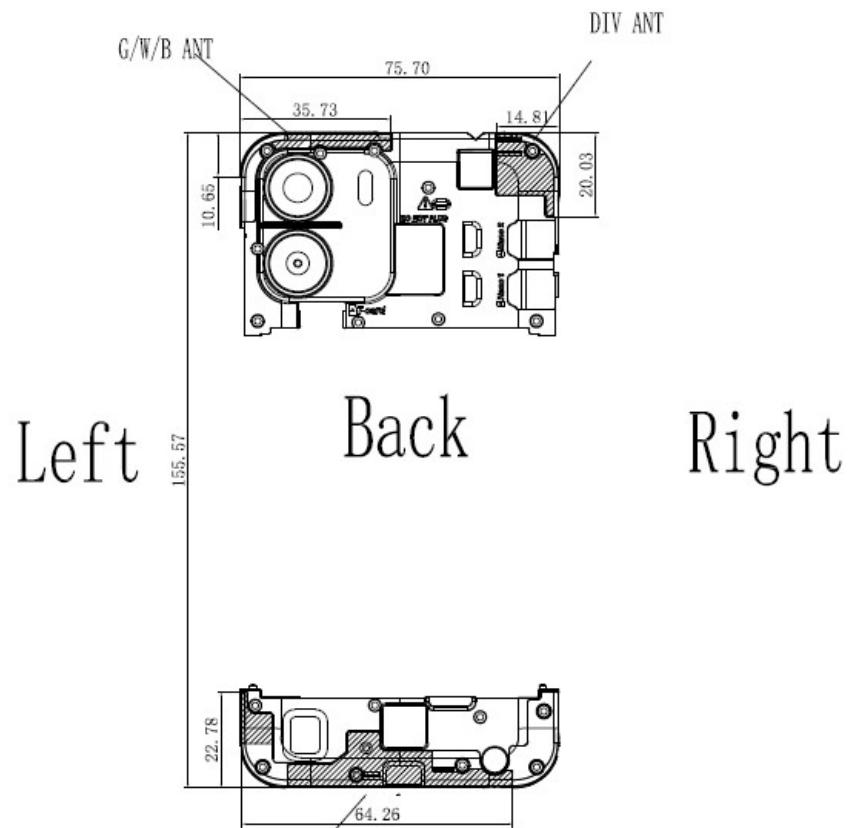

WWAN Main ANT

WWAN Main ANT: G850/900+W-B5+LTE-B5/B12/B17/B26/LTE-B41/B71, Tx/Rx


DIV ANT: G1800/1900+W-B2/4+LTE-B2/B4/B25/B66, Tx/Rx

Bottom


LTE Antenna gain

All of Implementation antenna
Main antenna(Antenna Label:A):
LTE B5/B12/B17/B26/B41/B71 RX&TX
WCDMA B5 RX&TX
GSM B5/B8 RX&TX
DIV antenna(Antenna Label:B):
LTE B2/B4/B25/B66 RX&TX
WCDMA B2/B4 RX&TX
GSM B2/B3 RX&TX
WiFi/BT 2.4-2.5G/5.1-5.85G
GPS: 1575.42 MHz
Antenna Max. Peak Gain:
GSM850:-2.35dBi
PCS1900:-1.65dBi
W2:-1.65dBi
W4:0.13dBi
W5:-2.35dBi
LTE-B2:-1.65dBi
LTE-B4:0.13dBi
LTE-B5:-2.35dBi
LTE-B12:-2.31dBi
LTE-B17:-4.54dBi
LTE-B25:-1.65dBi
LTE-B26:-2.35dBi
LTE-B66:0.13dBi
LTE-B71:-2.31dBi
LTE-B41:-2.00dBi
WIFI (5G) : 1.98dBi
WIFI (2.4G) : 1.05dBi
BT: 1.05dBi
GPS:-1.64dBi


2.3 Main antenna Peak Gain(603~700M)

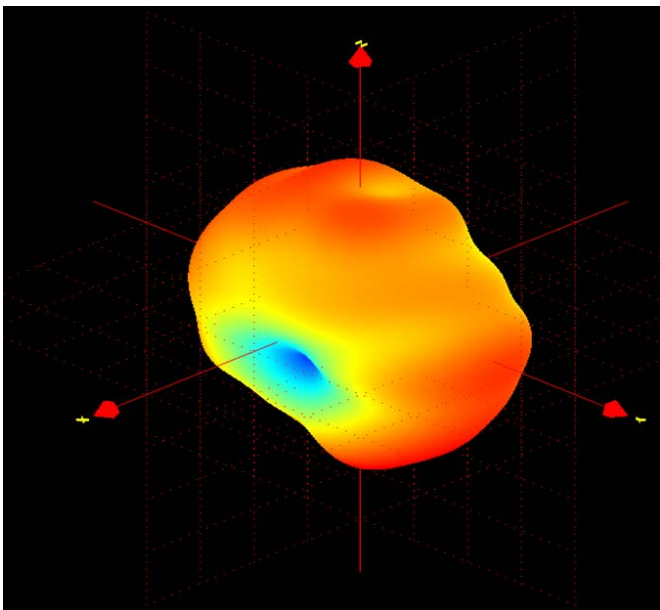


Freq.(MHz)	Peak .Gain (dBi)	Effi.(%)
600	-2.31	24

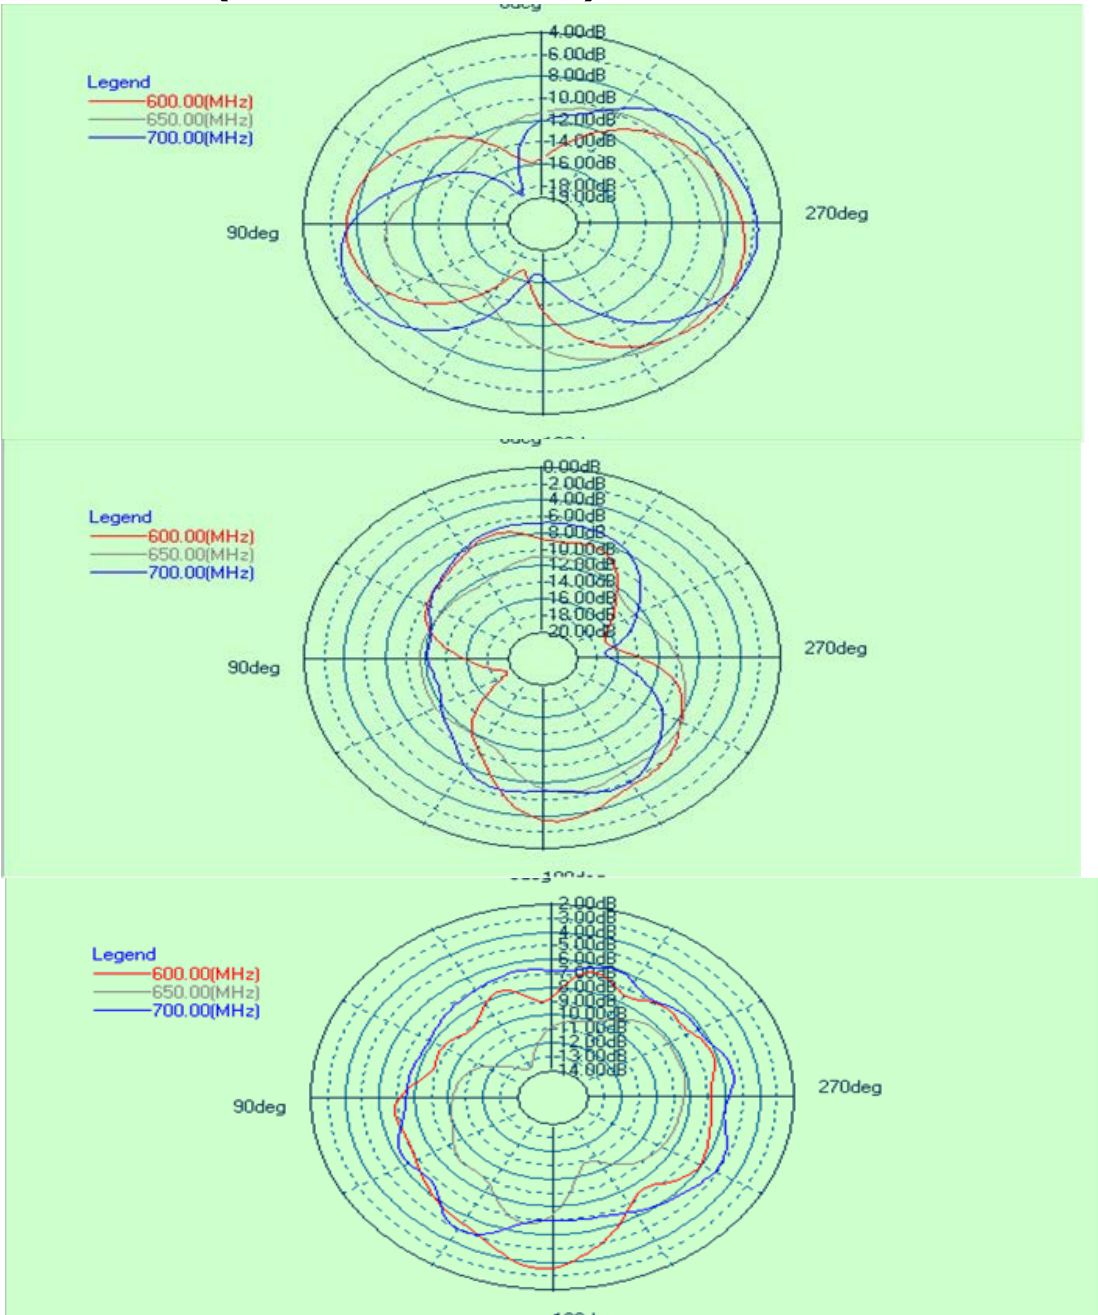


2.3 Main antenna Peak Gain(700~800M)

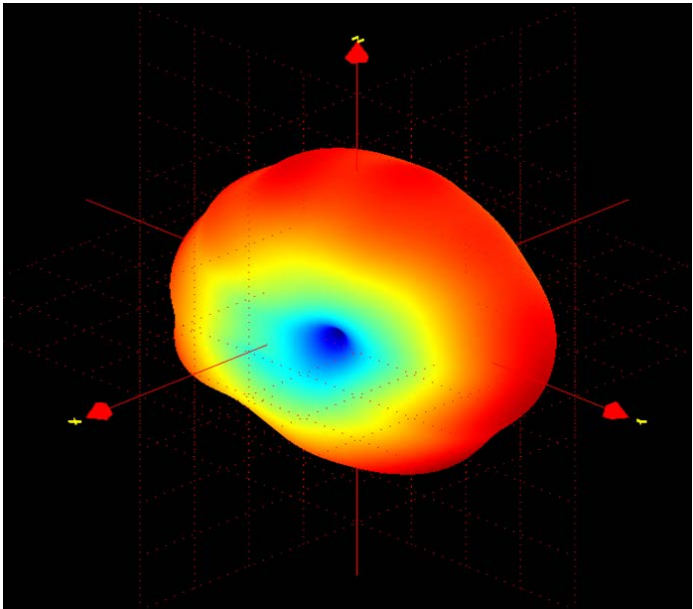


Freq.(MHz)	Peak .Gain (dBi)	Effi.(%)
700	-4.54	23

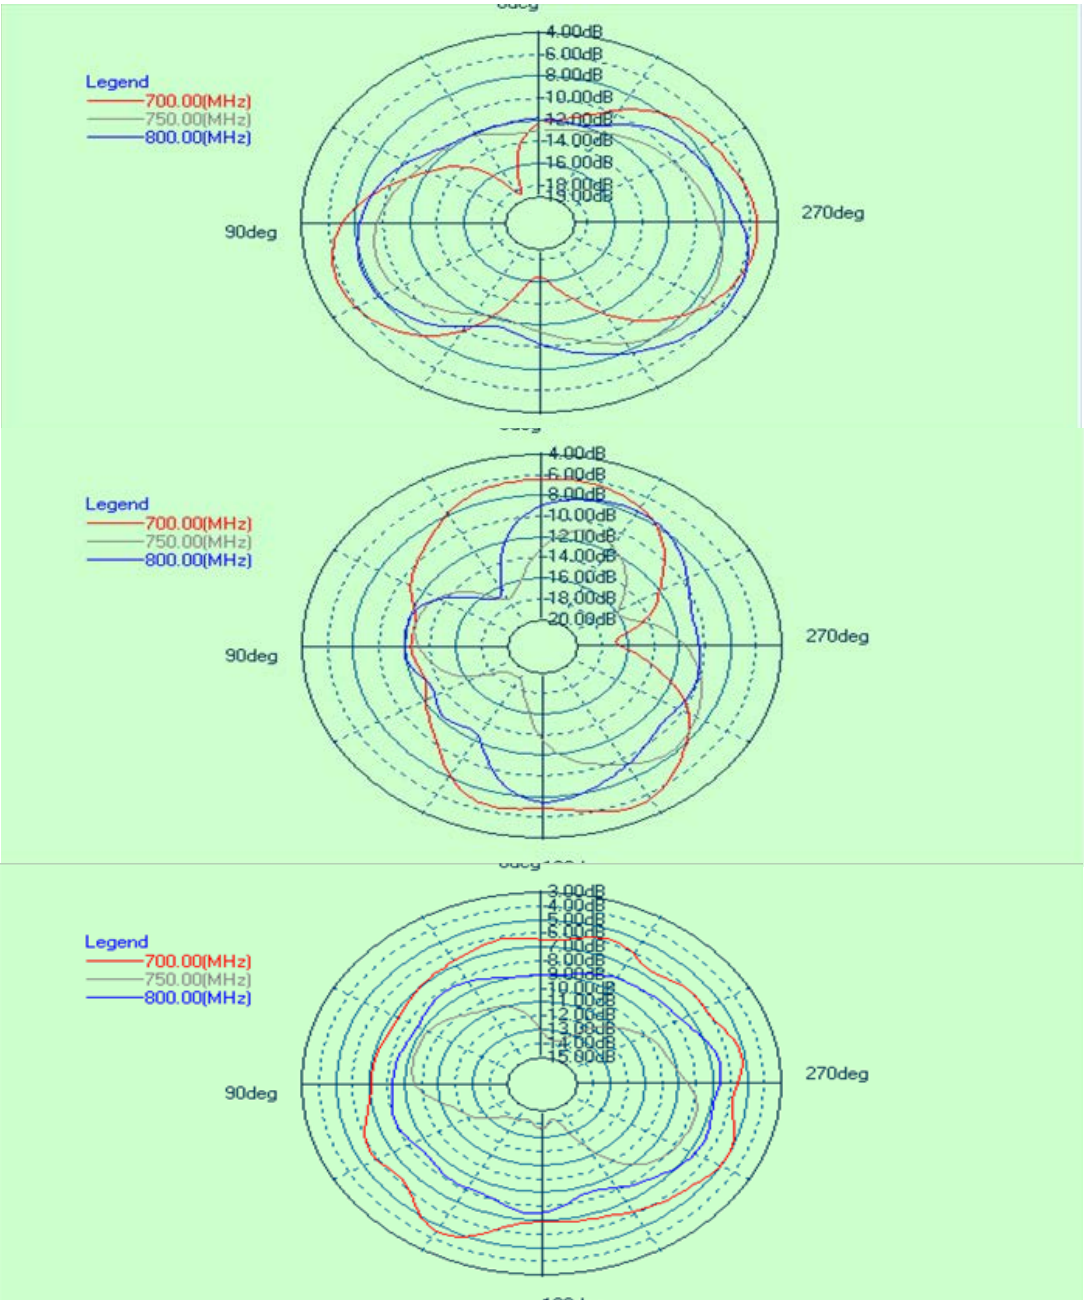


2.3 Main antenna Peak Gain(880~960M)

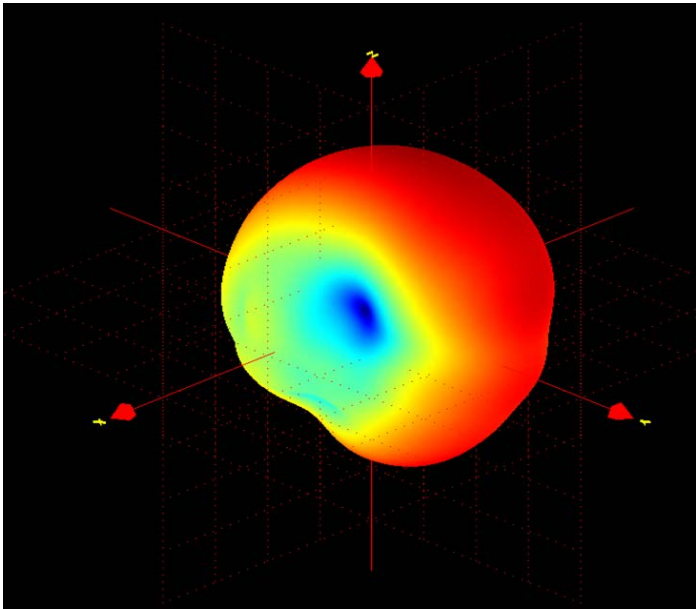


Freq.(MHz)	Peak .Gain (dBi)	Effi.(%)
920	-2.35	25

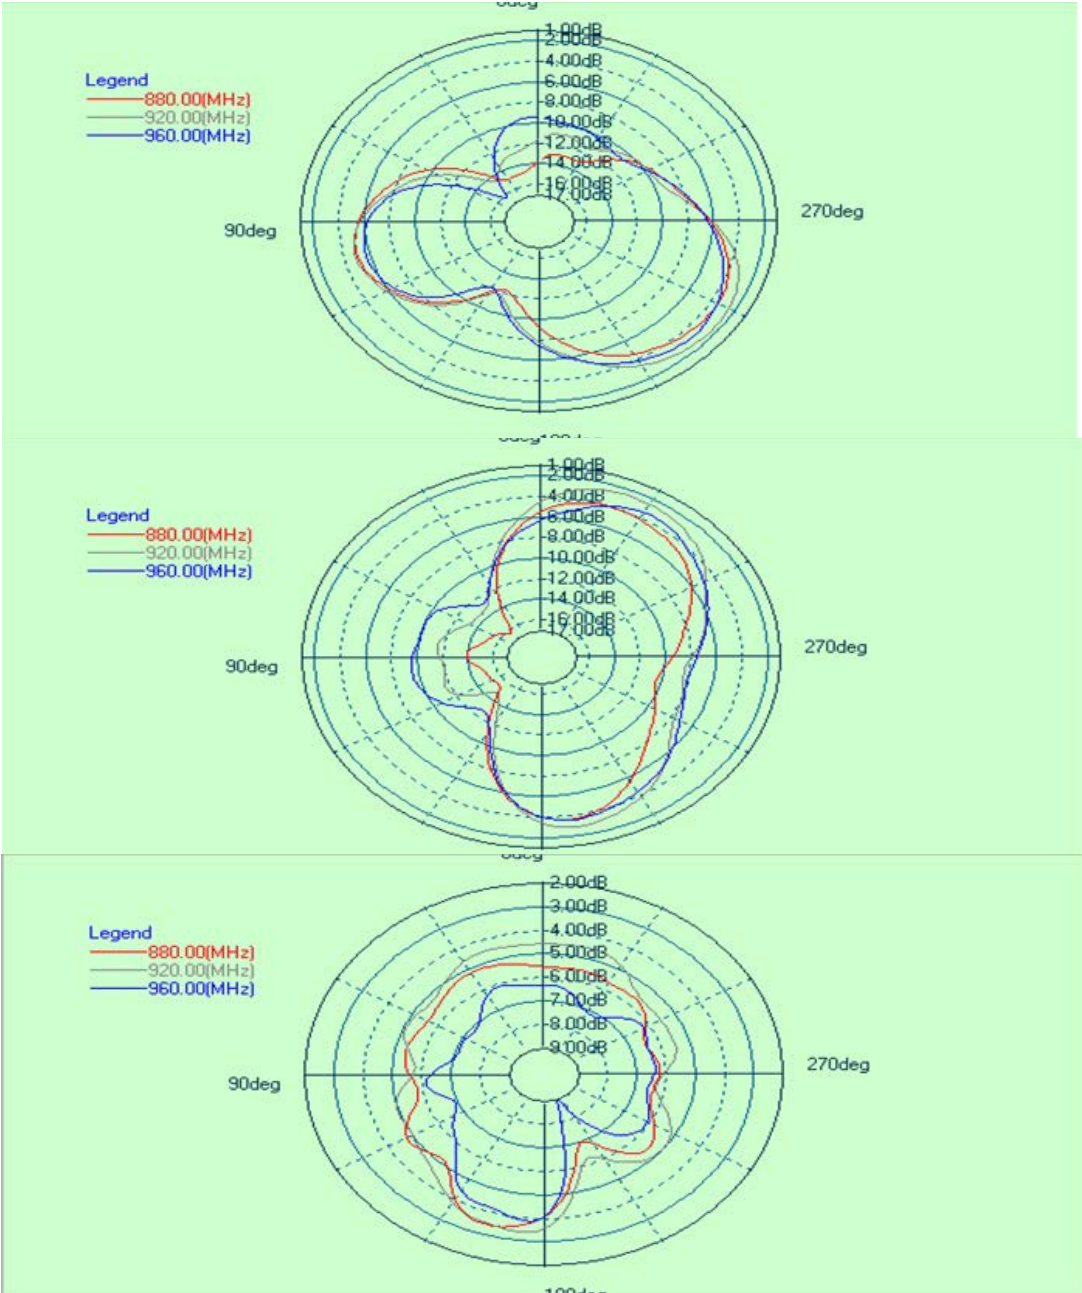


2.3 Main antenna Peak Gain(2500~2700M)

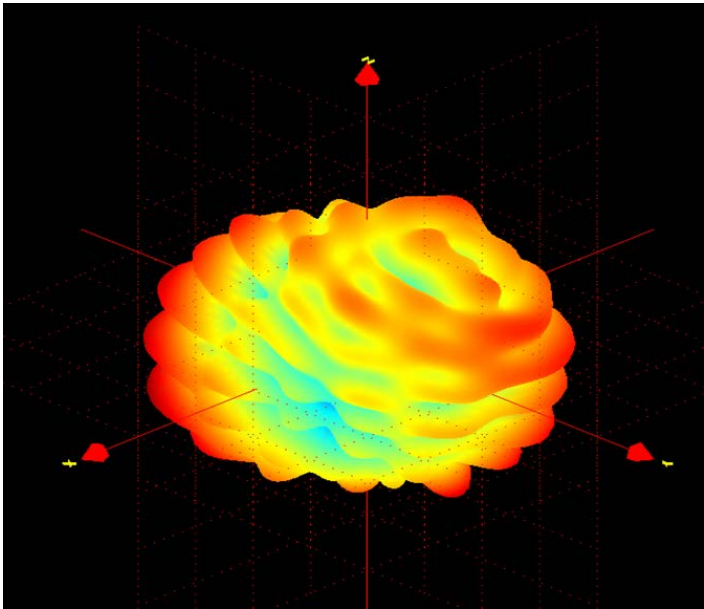


Freq.(MHz)	Peak .Gain (dBi)	Effi.(%)
2600	-2.00	23

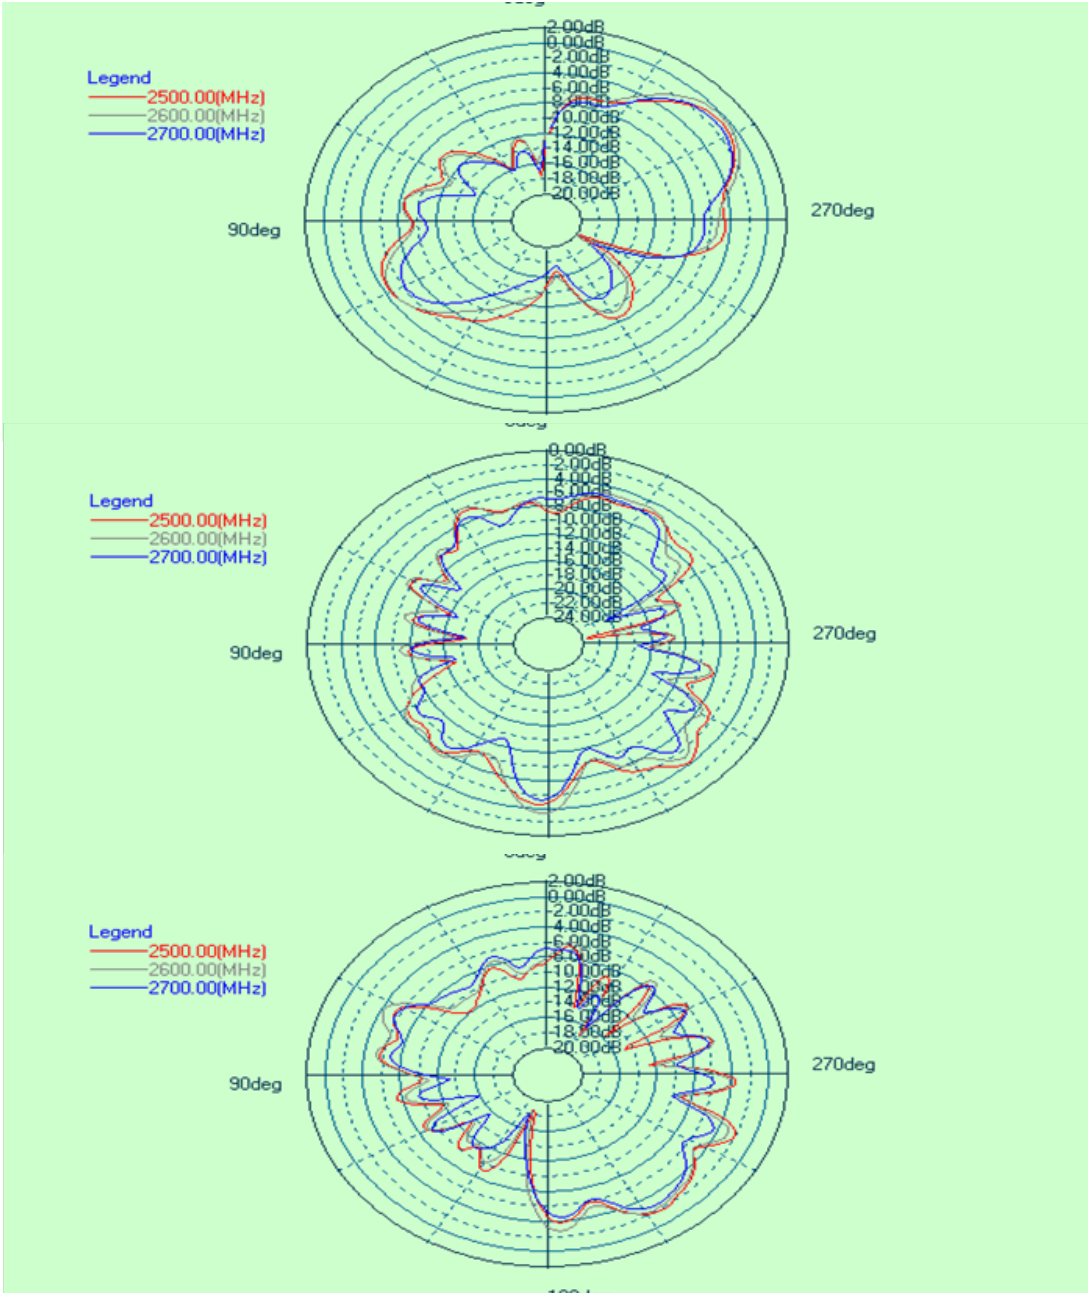


2.3 DIY antenna Peak Gain(1710~2170M)

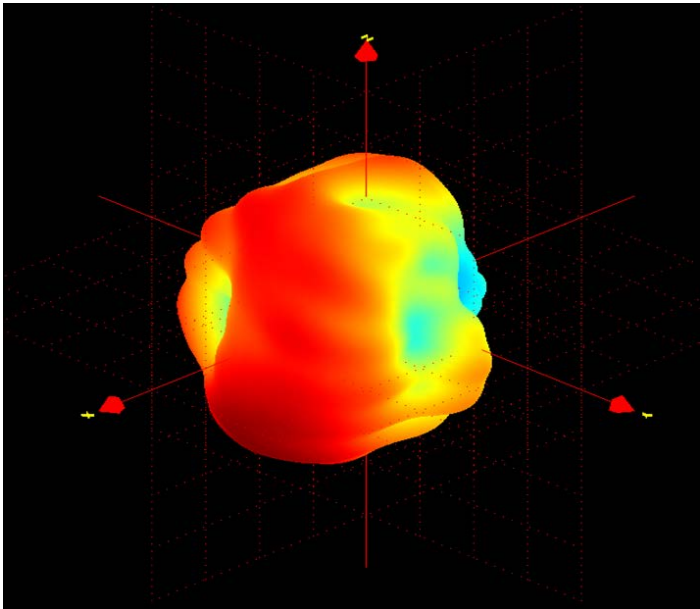


Freq.(MHz)	Peak .Gain (dBi)	Effi.(%)
1710	0.13	29

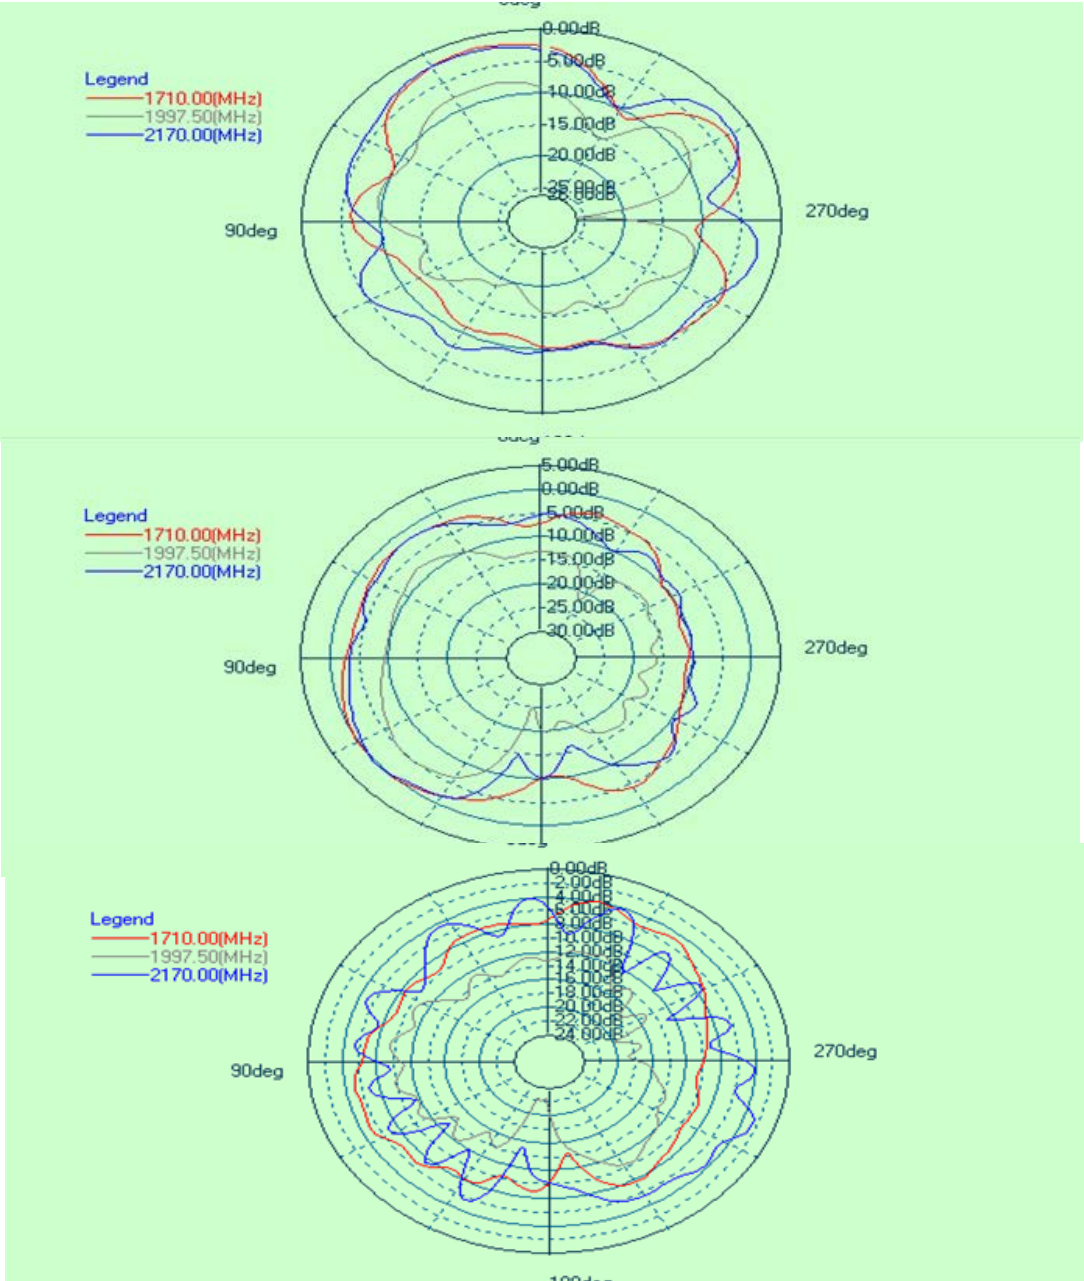


2.3 G/W/B antenna Peak Gain(1575M)

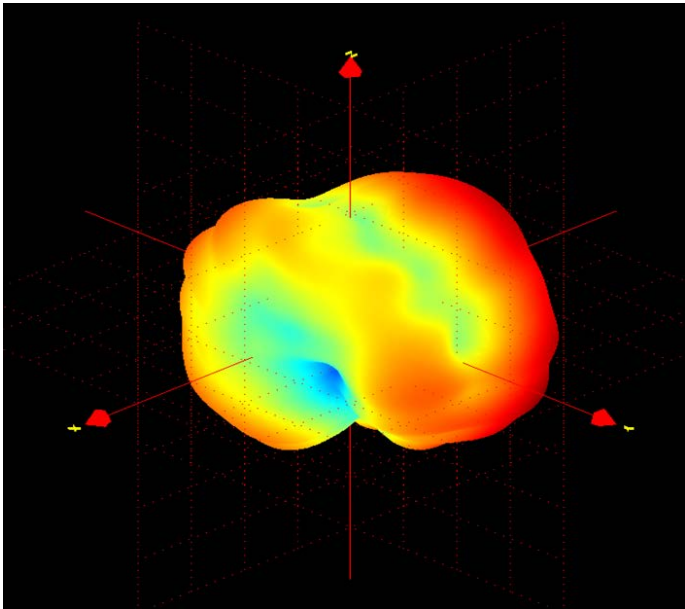


Freq.(MHz)	Peak .Gain (dBi)	Effi.(%)
1575	-1.64	31

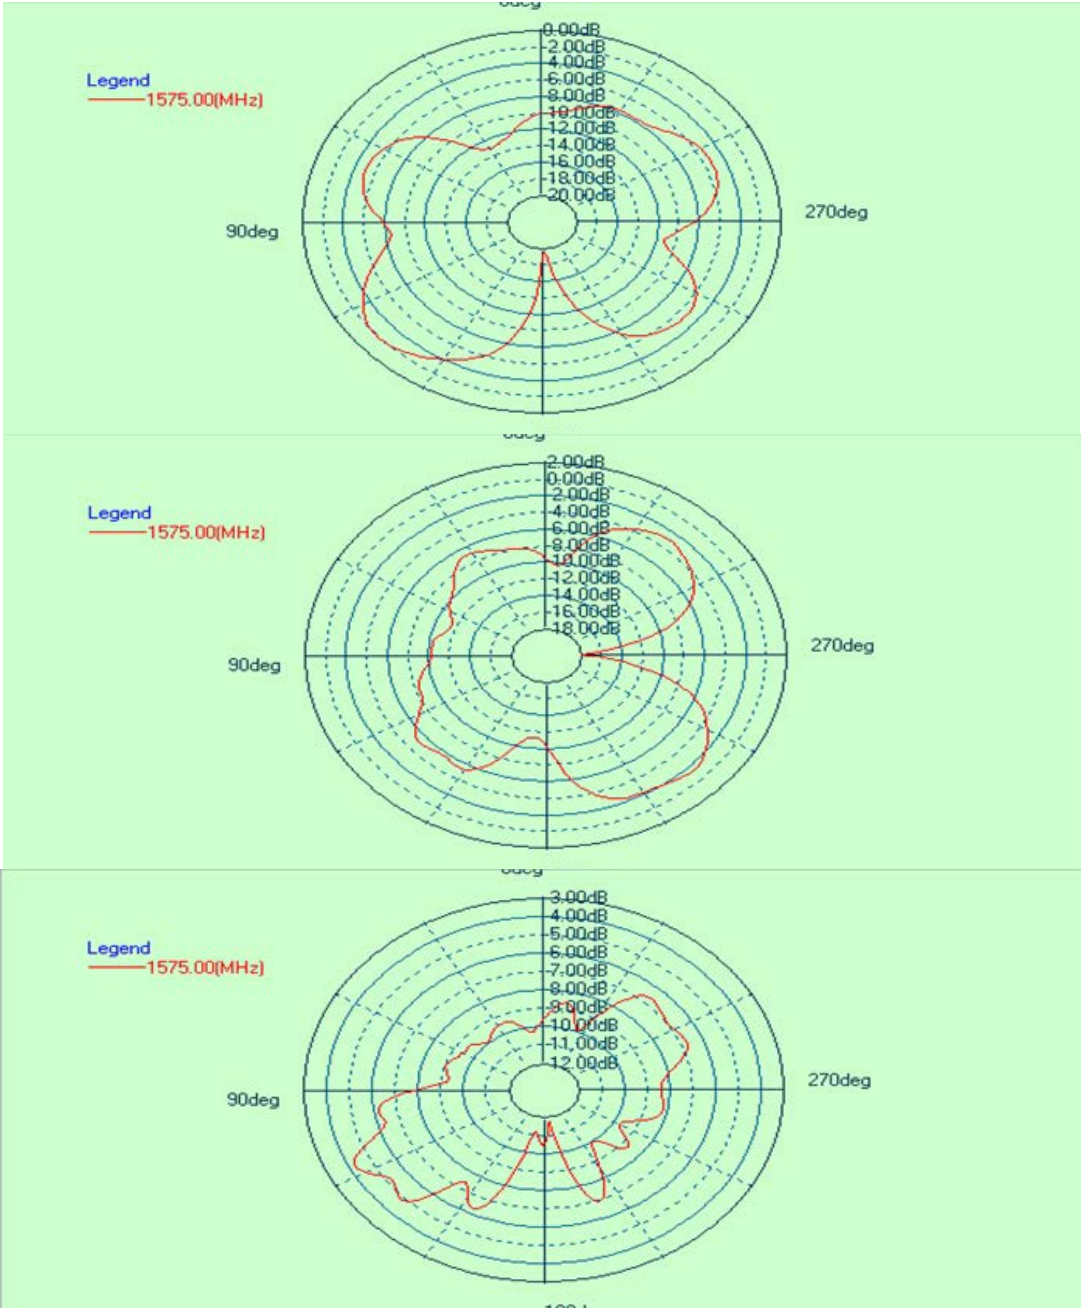


2.3 G/W/B antenna Peak Gain(2400-2500M)

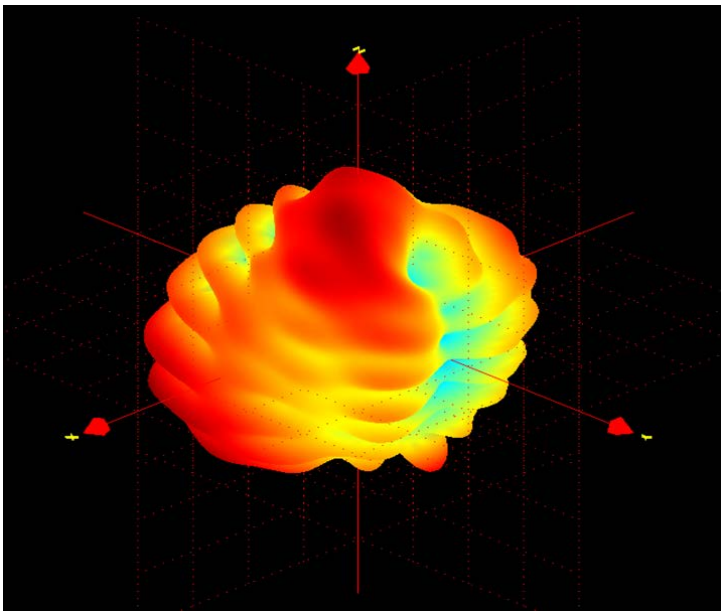

Freq.(MHz)	Peak .Gain (dBi)	Effi.(%)
2450	1.05	33

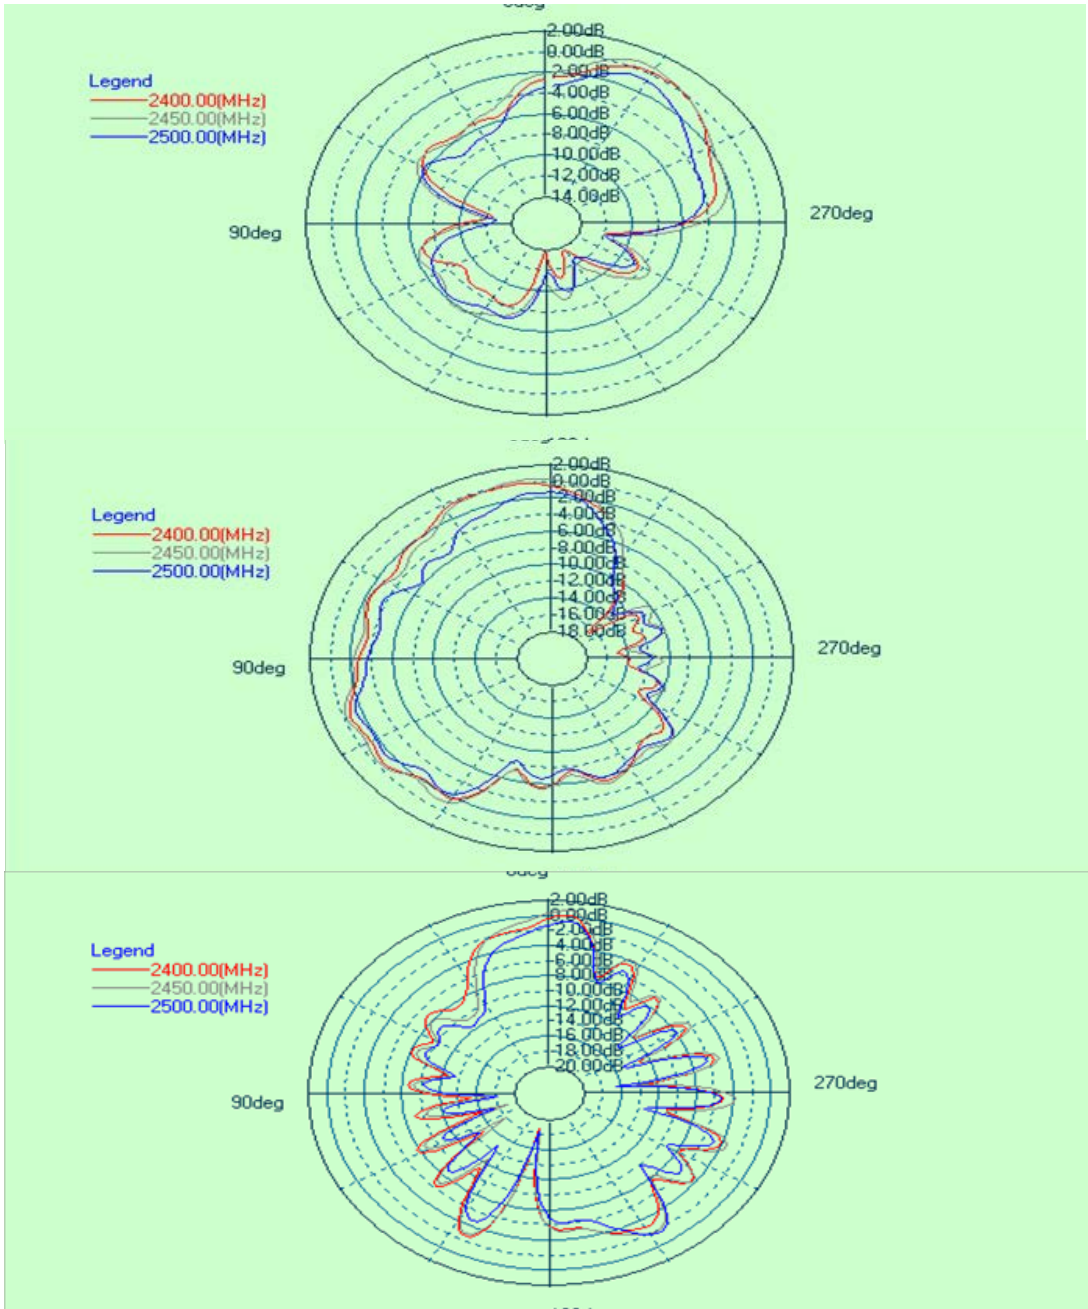

2.3 G/W/B antenna Peak Gain(5100-5800M)

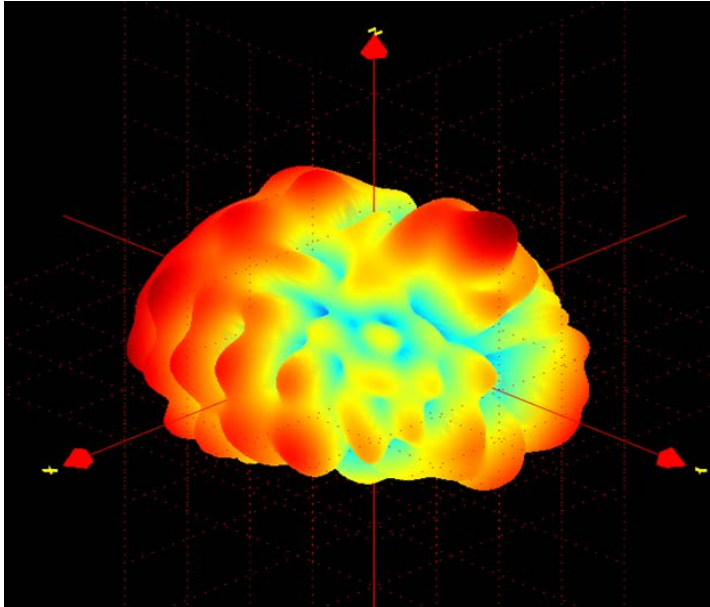

Freq.(MHz)	Peak .Gain (dBi)	Effi.(%)
5180	1.98	26

