

## TEST REPORT

Test report no.: 1-7444-24-01-02\_TR1-R03



Deutsche  
Akkreditierungsstelle  
D-PL-12047-01-00

### Testing laboratory

**cetecom advanced GmbH**

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <https://cetecomadvanced.com>

e-mail: [mail@cetecomadvanced.com](mailto:mail@cetecomadvanced.com)

**Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS).

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number:

D-PL-12047-01-00.

ISED Testing Laboratory Recognized Listing Number: DE0001

FCC designation number: DE0002

### Applicant

**Thrane & Thrane A/S**

Lundtoftegaardsvej 93D

2800 Kgs Lyngby / DENMARK

Phone: +45 3955 8800

Contact: Torben Amtoft

e-mail: [torben.amtoft@cobhamsatcom.com](mailto:torben.amtoft@cobhamsatcom.com)

### Manufacturer

**Thrane & Thrane A/S**

Lundtoftegaardsvej 93D

2800 Kgs Lyngby / DENMARK

Phone: +45 3955 8800

### Test standard/s

FCC - Title 47 CFR Part 15      FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

For further applied test standards please refer to section 3 of this test report.

### Test Item

**Kind of test item:**

Satellite IP router

**Model name:**

8033A Yahsat Commander NEO Terminal (T333)

8026A Thuraya Orion NEO Terminal (T260)

8030A Thuraya Voyager NEO Terminal (T333C)

**FCC ID:**

ROJ-8033A

**Frequency:**

2400 MHz to 2483.5 MHz

**Technology tested:**

WLAN

**Antenna:**

Two integrated patch antennas

**Power supply:**

19.0 V DC by AC/DC switching adapter

**Temperature range:**

-20°C to +55°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorized:



Marco Bertolino  
Supervisor Radio Services  
Radio Labs

### Test performed:



René Oelmann  
Lab Manager  
Radio Labs

## 1 Table of contents

1	Table of contents.....	2
2	General information.....	3
2.1	Notes and disclaimer .....	3
2.2	Application details .....	3
2.3	Test laboratories sub-contracted .....	3
3	Test standard/s, references and accreditations.....	4
4	Reporting statements of conformity – decision rule .....	5
5	Test environment .....	6
6	Test item .....	6
6.1	General description .....	6
6.2	Additional information .....	6
7	Description of the test setup.....	7
7.1	Shielded semi anechoic chamber .....	8
7.2	Shielded fully anechoic chamber.....	9
7.3	Radiated measurements > 18 GHz .....	10
7.4	Conducted measurements system .....	11
7.5	AC conducted.....	12
8	Sequence of testing.....	13
8.1	Sequence of testing radiated spurious 9 kHz to 30 MHz .....	13
8.2	Sequence of testing radiated spurious 30 MHz to 1 GHz.....	14
8.3	Sequence of testing radiated spurious 1 GHz to 18 GHz .....	15
8.4	Sequence of testing radiated spurious above 18 GHz.....	16
9	Measurement uncertainty .....	17
10	Summary of measurement results .....	18
11	Additional information and comments .....	19
12	Additional EUT parameter .....	20
13	Measurement results .....	21
13.1	Antenna gain .....	21
13.2	Identify worst case data rate.....	22
13.3	Maximum output power .....	23
13.4	Duty cycle .....	25
13.5	Peak power spectral density .....	26
13.6	6 dB DTS bandwidth .....	28
13.7	Occupied bandwidth – 99% emission bandwidth.....	29
13.8	Occupied bandwidth – 20 dB bandwidth .....	30
13.9	Band edge compliance radiated.....	31
13.10	Spurious emissions conducted .....	39
13.11	Spurious emissions radiated below 30 MHz .....	40
13.12	Spurious emissions radiated 30 MHz to 1 GHz .....	47
13.13	Spurious emissions radiated above 1 GHz .....	51
13.14	Spurious emissions conducted below 30 MHz (AC conducted).....	65
14	Observations .....	68
15	Glossary .....	69
16	Document history .....	70

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. cetecom advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of cetecom advanced GmbH.

The testing service provided by cetecom advanced GmbH has been rendered under the current "General Terms and Conditions for cetecom advanced GmbH".

cetecom advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the cetecom advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the cetecom advanced GmbH test report include or imply any product or service warranties from cetecom advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by cetecom advanced GmbH.

All rights and remedies regarding vendor's products and services for which cetecom advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by cetecom advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

**This test report replaces the test report with the number 1-7444/24-01-02\_TR1-R02 and dated 2024-08-07.**

### 2.2 Application details

Date of receipt of order:	2024-04-19
Date of receipt of test item:	2024-05-27
Start of test:*	2024-05-27
End of test:*	2024-06-21
Person(s) present during the test:	-/-

\*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

### 2.3 Test laboratories sub-contracted

None

### 3 Test standard/s, references and accreditations

Test standard	Date	Description
FCC - Title 47 CFR Part 15	-/-	FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices


Guidance	Version	Description
KDB 558074 D01	v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
ANSI C63.4-2014	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 662911 D01	v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band

#### 4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict

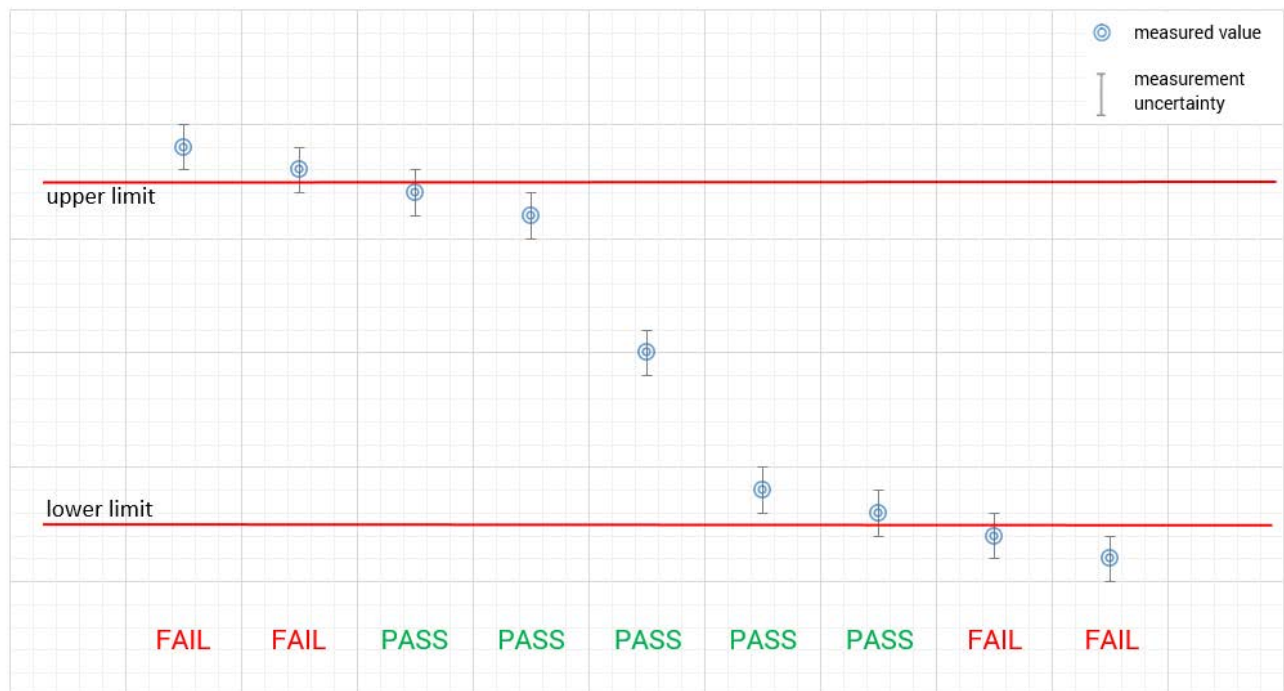

## 5 Test environment

Temperature	:	$T_{nom}$ $T_{max}$ $T_{min}$	+22 °C during room temperature tests No tests under extreme environmental conditions required. No tests under extreme environmental conditions required.
Relative humidity content	:		55 %
Barometric pressure	:		1018 hpa
Power supply	:	$V_{nom}$ $V_{max}$ $V_{min}$	19.0 V DC by AC/DC switching adapter No tests under extreme environmental conditions required. No tests under extreme environmental conditions required.

## 6 Test item

### 6.1 General description

Kind of test item	:	Satellite IP router
Model name	:	8033A Yahsat Commander NEO Terminal (T333) 8026A Thuraya Orion NEO Terminal (T260) 8030A Thuraya Voyager NEO Terminal (T333C)
S/N serial number	:	Rad. T333: 3; T260: 1 Cond. T333: 4
Hardware status	:	HW hardware status for T260 terminal: 408026A-NEO released HW hardware status for T333 terminal: 408033A-YGS released
Software status	:	SW software status for T260 terminal: 84-408026-1000000 SW software status for T333 terminal: 84-408033-1000000
Firmware status	:	NA
Frequency band	:	2400 MHz to 2483.5 MHz
Type of radio transmission	:	DSSS, OFDM
Use of frequency spectrum	:	
Type of modulation	:	(D)BPSK, (D)QPSK, 16 – QAM, 64 – QAM
Number of channels	:	11 (20 MHz), 7 (40 MHz)
Antenna	:	Two integrated patch antennas
Power supply	:	19.0 V DC by AC/DC switching adapter
Temperature range	:	-20°C to +55°C

### 6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

1-7444-24-01-01\_TR1-A101-R01  
1-7444-24-01-01\_TR1-A102-R01  
1-7444-24-01-01\_TR1-A103-R01

## 7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).


Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.

### Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

## 7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

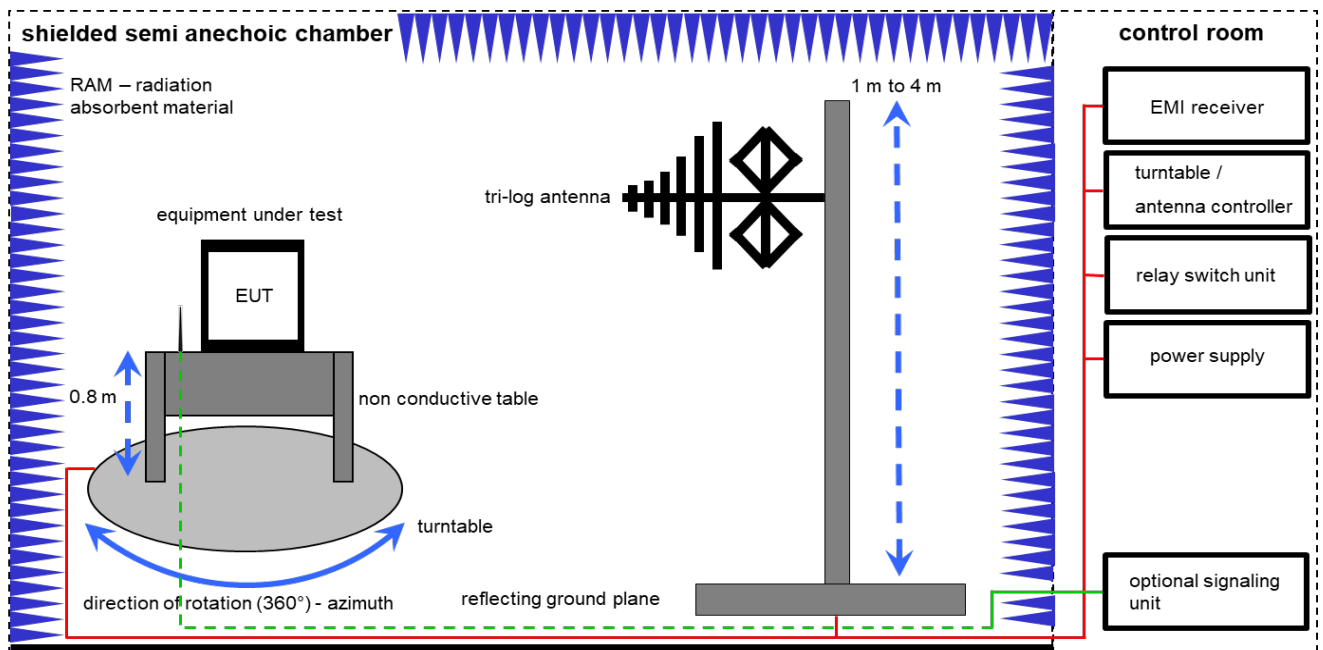

Measurement distance: tri-log antenna 10 meter; EMC32 software version: 10.59.00

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)

Example calculation:


$$FS \text{ [dB}\mu\text{V/m]} = 12.35 \text{ [dB}\mu\text{V/m]} + 1.90 \text{ [dB]} + 16.80 \text{ [dB/m]} = 31.05 \text{ [dB}\mu\text{V/m]} \text{ (35.69 } \mu\text{V/m)}$$

### Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	Semi anechoic chamber	3000023	MWB AG	-/-	300000551	ne	-/-	-/-
3	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
4	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
5	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
6	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess - Elektronik	216	300003288	vKI!	31.08.2023	31.08.2025
7	A	Turntable	2089-4.0	EMCO	-/-	300004394	ne	-/-	-/-
8	A	PC	Tecline	F+W	-/-	300004388	ne	-/-	-/-
9	A	EMI Test Receiver	ESR3	Rohde & Schwarz	102587	300005771	k	06.12.2023	31.12.2024



## 7.2 Shielded fully anechoic chamber

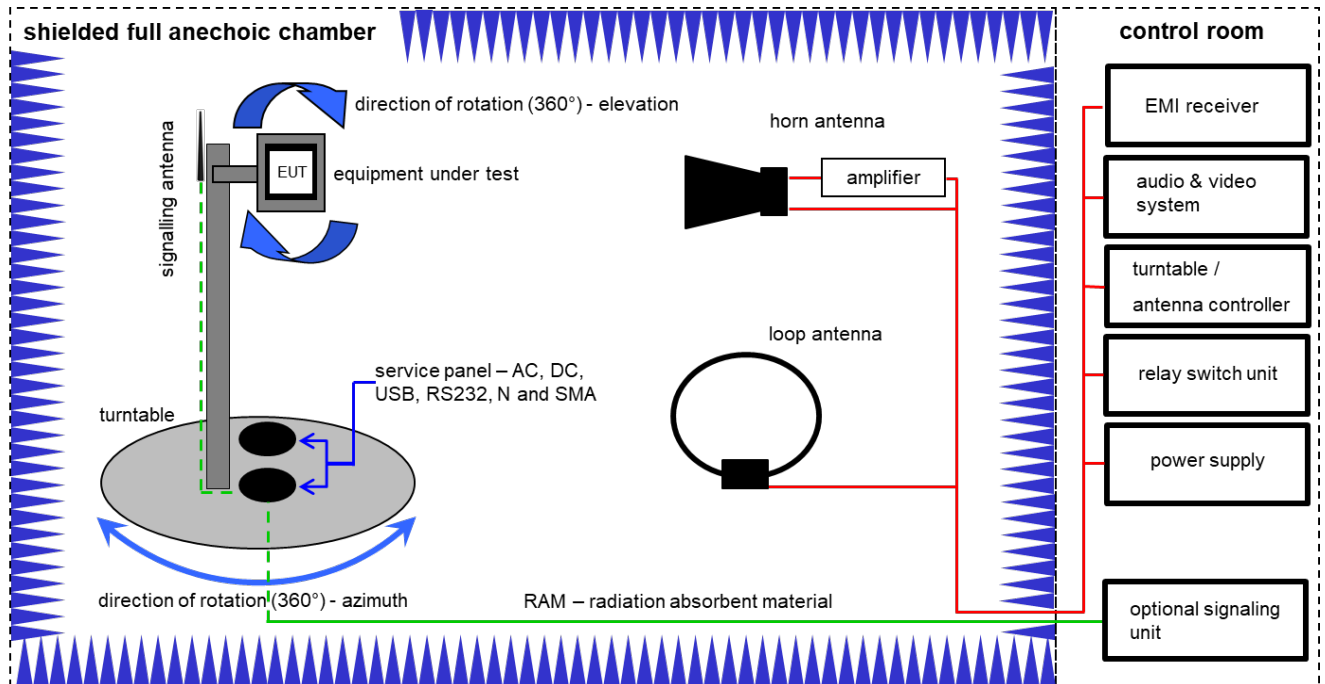

Measurement distance: horn antenna 3 meter; loop antenna 3 meter / 1 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)


### Example calculation:

$$FS \text{ [dB}\mu\text{V/m]} = 40.0 \text{ [dB}\mu\text{V/m]} + (-35.8) \text{ [dB]} + 32.9 \text{ [dB/m]} = 37.1 \text{ [dB}\mu\text{V/m]} \text{ (71.61 } \mu\text{V/m)}$$

### Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A, B, C	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	9107-3696	300001604	vKI!	20.03.2023	19.03.2025
2	C	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	vKI!	02.08.2023	31.08.2025
3	B	Highpass Filter	WHK1.1/15G-10SS	Wainwright	37	400000148	ne	-/-	-/-
4	B	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne	-/-	-/-
5	B	Band Reject Filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	26	300003792	ne	-/-	-/-
6	A, B, C	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22051	300004483	ev	-/-	-/-
7	A, B, C	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000032	300004510	ne	-/-	-/-
8	A, B, C	Computer	Intel Core i3 3220/3,3 GHz, Prozessor	-/-	2V2403033A54 21	300004591	ne	-/-	-/-
9	A, B, C	NEXIO EMV-Software	BAT EMC V2022.0.22.0	Nexio	-/-	300004682	ne	-/-	-/-
10	A, B, C	Anechoic chamber	-/-	TDK	-/-	300003726	ne	-/-	-/-
11	A, B, C	EMI Test Receiver 20Hz – 26,5GHz	ESU26	R&S	100037	300003555	k	11.12.2023	31.12.2024
12	B	RF-Amplifier	AMF-6F06001800-30-10P-R	NARDA-MITEQ Inc	2011571	300005240	ev	-/-	-/-

### 7.3 Radiated measurements > 18 GHz

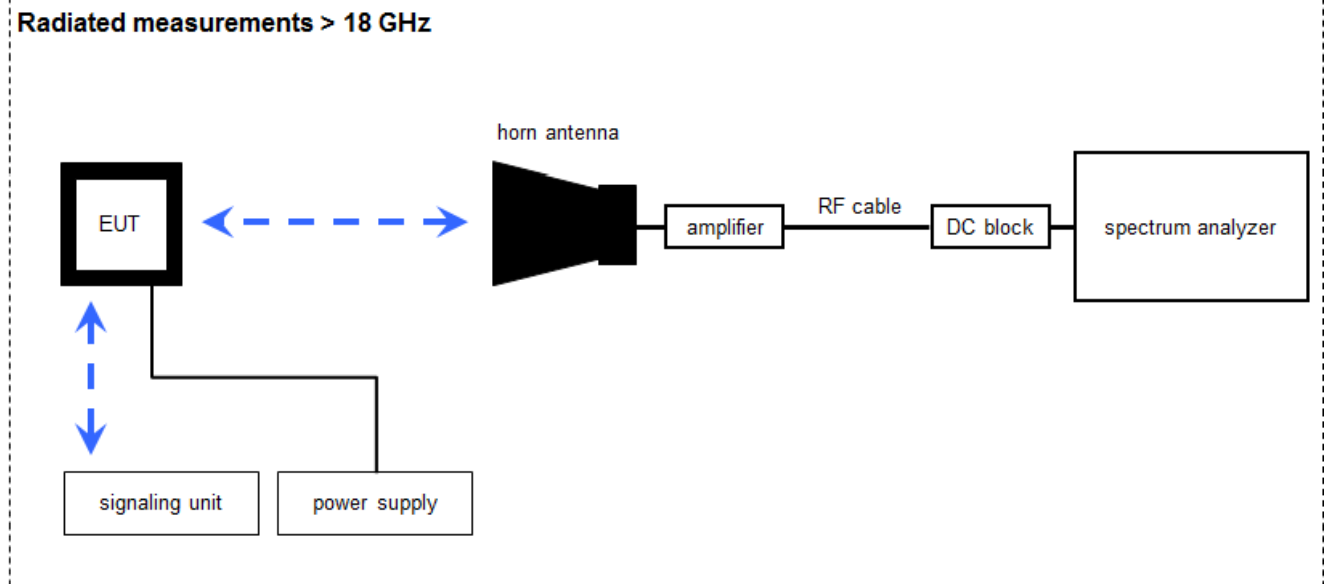

Measurement distance: horn antenna 50 cm

FS = UR + CA + AF

(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)


Example calculation:

FS [dBμV/m] = 40.0 [dBμV/m] + (-60.1) [dB] + 36.74 [dB/m] = 16.64 [dBμV/m] (6.79 μV/m)

#### Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP	00419	300002268	ev	-/-	-/-
2	A	Std. Gain Horn Antenna 18.0-26.5 GHz	638	Narda	8205	300002442	k	24.01.2024	23.01.2026
3	A	Signal analyzer	FSV40	Rohde&Schwarz	101042	300004517	k	06.12.2023	31.12.2024
4	A	RF-Cable	ST18/SMAM/SMAM/48	Huber & Suhner	Batch no. 600918	400001182	ev	-/-	-/-
5	A	DC-Blocker 0.1-40 GHz	8141A	Inmet	-/-	400001185	ev	-/-	-/-

## 7.4 Conducted measurements system

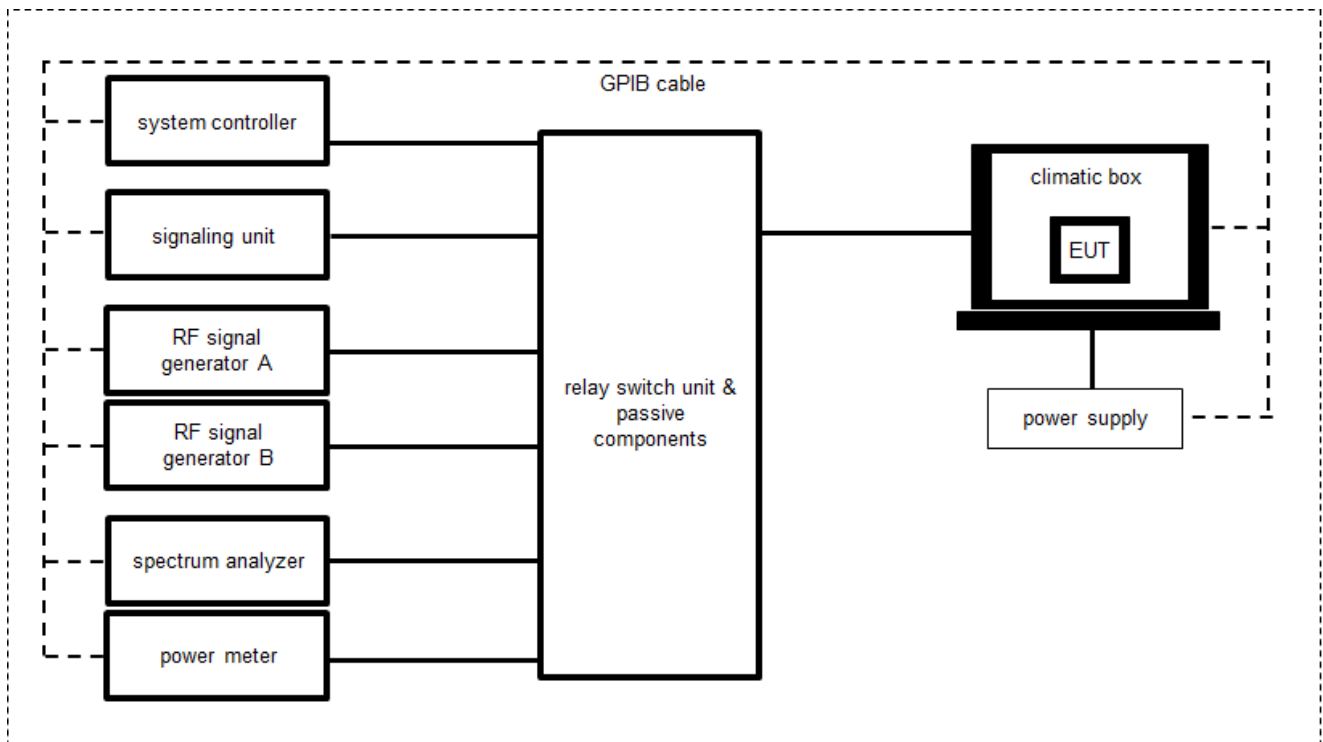

OP = AV + CA  
(OP-output power; AV-analyzer value; CA-loss signal path)


### Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

### Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch / Control Unit (including DC-Block, Splitter)	3488A	HP	-/-	300000929	ne	-/-	-/-
2	A	Hygro-Thermometer	-/-, 5-45C, 20-100rF	Thies Clima	-/-	400000080	ev	15.09.2022	14.09.2024
3	A	Signal analyzer	FSV30	Rohde&Schwarz	1321.3008K30/103170	300004855	vKI!	09.12.2022	31.12.2024
4	A	USB-GPIB-Interface	82357B	Agilent Technologies	MY54323070	300004852	ne	-/-	-/-
5	A	Tester Software C.BER	Version 5.0	cetecom advanced GmbH	0001	400001379	ne	-/-	-/-
6	A	Switch matrix	RSM 1.1	cetecom advanced GmbH	31534892	400001456	ev	20.09.2023	19.09.2024

## 7.5 AC conducted

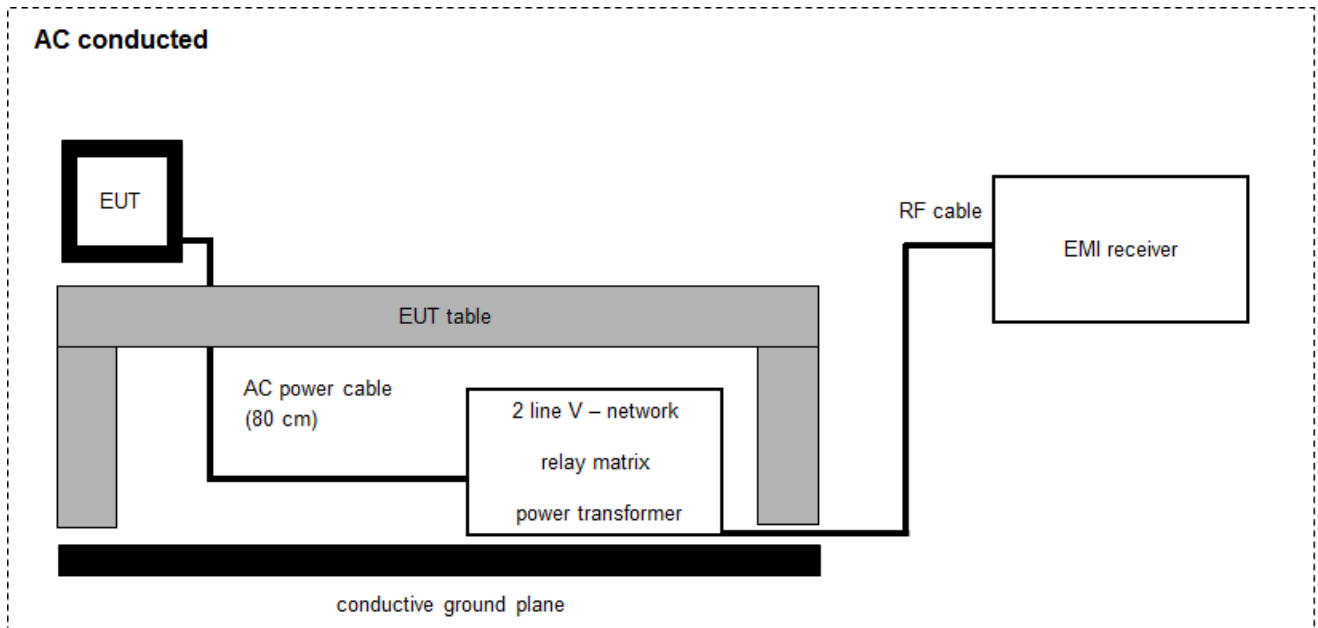

$$FS = UR + CF + VC$$

(FS-field strength; UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)

Example calculation:

$$FS \text{ [dB}\mu\text{V/m]} = 37.62 \text{ [dB}\mu\text{V/m]} + 9.90 \text{ [dB]} + 0.23 \text{ [dB]} = 47.75 \text{ [dB}\mu\text{V/m]} \text{ (244.06 } \mu\text{V/m)}$$

### Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Two-line V-Network (LISN) 9 kHz to 30 MHz	ESH3-Z5	Rohde & Schwarz	892475/017	300002209	vKI!	12.12.2023	31.12.2025
2	A	RF-Filter-section	85420E	HP	3427A00162	300002214	NK!	-/-	-/-
3	A	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	NK!	-/-	-/-
4	A	Hochpass 150 kHz	EZ-25	R&S	100010	300003798	ev	-/-	-/-
5	A	PC	TecLine	F+W	-/-	300003532	ne	-/-	-/-
6	A	Netzsimulation 1600/2000 A	ACS-1600-PS	-/-	2002-001247-0	300006074	ev	-/-	-/-
7	A	EMI Test Receiver 3.6 GHz	ESR3	Rohde & Schwarz	102981	300006318	k	08.12.2023	31.12.2024

## 8 Sequence of testing

### 8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement\*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

#### Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

\*)Note: The sequence will be repeated three times with different EUT orientations.

## 8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position  $\pm 45^\circ$  and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

### 8.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

#### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

## 8.4 Sequence of testing radiated spurious above 18 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

### Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

### Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.



## 9 Measurement uncertainty

Measurement uncertainty		
Test case	Uncertainty	
Antenna gain	$\pm 3$ dB	
Power spectral density	$\pm 1.56$ dB	
DTS bandwidth	$\pm 100$ kHz (depends on the used RBW)	
Occupied bandwidth	$\pm 100$ kHz (depends on the used RBW)	
Maximum output power conducted	$\pm 1.56$ dB	
Detailed spurious emissions @ the band edge - conducted	$\pm 1.56$ dB	
Band edge compliance radiated	$\pm 3$ dB	
Spurious emissions conducted	> 3.6 GHz	$\pm 1.56$ dB
	> 7 GHz	$\pm 1.56$ dB
	> 18 GHz	$\pm 2.31$ dB
	$\geq 40$ GHz	$\pm 2.97$ dB
Spurious emissions radiated below 30 MHz	$\pm 3$ dB	
Spurious emissions radiated 30 MHz to 1 GHz	$\pm 3$ dB	
Spurious emissions radiated 1 GHz to 12.75 GHz	$\pm 3.7$ dB	
Spurious emissions radiated above 12.75 GHz	$\pm 4.5$ dB	
Spurious emissions conducted below 30 MHz (AC conducted)	$\pm 2.6$ dB	

## 10 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS - 247, Issue 3	See table!	2024-08-20	-/-

Test specification clause	Test case	Guideline	Temperature & voltage conditions	C	NC	NA	NP	Remark
§15.247(b)(4) RSS - 247 / 5.4 (f)(ii)	Antenna gain	-/-	Nominal	-/-				-/-
§15.35	Duty cycle	-/-	Nominal	-/-				-/-
§15.247(e) RSS - 247 / 5.2 (b)	Power spectral density	KDB 558074 DTS clause: 8.4	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(a)(2) RSS - 247 / 5.2 (a)	DTS bandwidth	KDB 558074 DTS clause: 8.2	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
RSS Gen clause 4.6.1	Occupied bandwidth	-/-	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(b)(3) RSS - 247 / 5.4 (d)	Maximum output power	KDB 558074 DTS clause: 8.3.1.3	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5	Detailed spurious emissions @ the band edge – cond.	-/-	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.205 RSS - 247 / 5.5 RSS - Gen	Band edge compliance cond. or rad.	KDB 558074 DTS clause: 8.7.3	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5	TX spurious emissions cond.	KDB 558074 DTS clause: 8.5	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.209(a) RSS-Gen	TX spurious emissions rad. below 30 MHz	-/-	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions rad. 30 MHz to 1 GHz	-/-	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions rad. above 1 GHz	-/-	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.107(a) §15.207	Conducted emissions < 30 MHz	-/-	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-

### Notes:

<b>C</b>	Compliant	<b>NC</b>	Not compliant	<b>NA</b>	Not applicable	<b>NP</b>	Not performed
----------	-----------	-----------	---------------	-----------	----------------	-----------	---------------

## 11 Additional information and comments

Reference documents: Antenna data sheet Kyocera Part No. 1000424, On Ground BT / Wi-Fi Dual Band Stamped Metal Antenna

Co-applicable documents: 1-7444\_21-01-02\_log1\_conducted.pdf

Special test descriptions: Power settings:

Channel	1 / 6 / 11
DSSS / b – mode	18 / 20 / 18
OFDM / g – mode	14 / 20 / 14
OFDM / n HT20 – mode	13 / 20 / 14
OFDM / n HT40 – mode	11 / 20 / 11

Configuration descriptions: All tests were done with both ports/antennas transmitting simultaneously.

EUT selection:

☒ Only one device available

☐ Devices selected by the customer

☐ Devices selected by the laboratory (Randomly)

Provided channels:

Channels with 20 MHz channel bandwidth:

channel number & center frequency													
channel	1	2	3	4	5	6	7	8	9	10	11	12	13
f <sub>c</sub> / MHz	<b>2412</b>	2417	2422	2427	2432	<b>2437</b>	2442	2447	2452	2457	<b>2462</b>	2467	2472

Channels with 40 MHz channel bandwidth:

channel number & center frequency													
channel	-/-	-/-	<b>3</b>	4	5	<b>6</b>	7	8	<b>9</b>	10	11	-/-	-/-
f <sub>c</sub> / MHz	-/-	-/-	<b>2422</b>	2427	2432	<b>2437</b>	2442	2447	<b>2452</b>	2457	2462	-/-	-/-

Note: The channels used for the tests are marked in bold in the list.

## 12 Additional EUT parameter

- Test mode:
- ☐ No test mode available  
Iperf was used to ping another device with the largest support packet size
  - ☒ Test mode available  
Special software is used.  
EUT is transmitting pseudo random data by itself
- Modulation types:
- ☒ Wide Band Modulation (None Hopping – e.g. DSSS, OFDM)
  - ☐ Frequency Hopping Spread Spectrum (FHSS)
- Antennas and transmit operating modes:
- ☐ Operating mode 1 (single antenna)
    - Equipment with 1 antenna,
    - Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,
    - Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)
  - ☐ Operating mode 2 (multiple antennas, no beamforming)
    - Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.
  - ☒ Operating mode 3 (multiple antennas, with beamforming)
    - Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming.  
In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.

### 13 Measurement results

#### 13.1 Antenna gain

##### Description:

The antenna gain of the complete system is calculated by the difference of radiated power (@ 3 MHz) in EIRP and the conducted power (@ 3 MHz) of the module.

##### Limits:

FCC	ISED
6 dBi / > 6 dBi output power and power density reduction required	

##### Results: Extracted from antenna datasheet

antenna 1	lowest channel	middle channel	highest channel
Gain [dBi] / Declared	0.6		

##### Results: Extracted from antenna datasheet

antenna 2	lowest channel	middle channel	highest channel
Gain [dBi] / Declared	0.6		

##### Results: Declared by applicant

antenna 1+2	lowest channel	middle channel	highest channel
Beamforming gain [dBi] / Declared	3.0		

## 13.2 Identify worst case data rate

### **Description:**

All modes of the module will be measured with an average power meter or spectrum analyzer to identify the maximum transmission power.

In further tests only the identified worst case modulation scheme or bandwidth will be measured and this mode is used as representative mode for all other modulation schemes.

### **Measurement:**

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace mode	Max hold
Test setup	See chapter 7.4 setup A
Measurement uncertainty	See chapter 9

### **Results:**

Modulation scheme / bandwidth	
DSSS / b – mode	1 Mbit/s
OFDM / g – mode	6 Mbit/s
OFDM / n HT20 – mode	MCS0
OFDM / n HT40 – mode	MCS0

### 13.3 Maximum output power

**Description:**

Measurement of the maximum conducted peak output power. The measurements are performed using the data rate identified in the previous chapter.

**Measurement:**

Measurement parameter	
According to DTS clause: 8.3.1.3	
Peak power meter	
External result file(s)	1-7444_21-01-02_log1_conducted.pdf
Test setup	See chapter 7.4 setup B
Measurement uncertainty	See chapter 9

**Limits:**

FCC	ISED
Conducted 1.0 W / 30 dBm with an antenna gain of max. 6 dBi	

**Results:**

antenna port 1	maximum output power / dBm		
	lowest channel	middle channel	highest channel
Output power conducted DSSS / b – mode	19.3	21.3	19.1
Output power conducted OFDM / g – mode	23.0	24.8	23.0
Output power conducted OFDM / n HT20 – mode	21.7	24.7	22.6
Output power conducted OFDM / n HT40 – mode	22.3	24.6	19.9

antenna port 2	maximum output power / dBm		
	lowest channel	middle channel	highest channel
Output power conducted DSSS / b – mode	18.9	20.9	18.9
Output power conducted OFDM / g – mode	22.4	24.8	22.5
Output power conducted OFDM / n HT20 – mode	20.8	24.7	22.4
Output power conducted OFDM / n HT40 – mode	19.6	24.6	19.4

antenna port 1 + 2 calculated	maximum output power / dBm		
	lowest channel	middle channel	highest channel
Output power conducted DSSS / b – mode	22.1	24.1	22.0
Output power conducted OFDM / g – mode	25.7	27.8	25.8
Output power conducted OFDM / n HT20 – mode	24.3	27.7	25.5
Output power conducted OFDM / n HT40 – mode	24.2	27.6	22.7



## 13.4 Duty cycle

### Description:

Measurement of the timing behavior.

### Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Depends on the signal see plot
Resolution bandwidth	10 MHz
Video bandwidth	10 MHz
Trace mode	Max hold
External result file(s)	1-7444_21-01-02_log1_conducted.pdf
Test setup	See chapter 7.4 setup A
Measurement uncertainty	See chapter 9

### Limits:

FCC	ISED
No limitation!	

### Results:

T <sub>nom</sub>	V <sub>nom</sub>	lowest channel	middle channel	highest channel
DSSS / b – mode		100 % / 0.0 dB	100 % / 0.0 dB	100 % / 0.0 dB
OFDM / g – mode		100 % / 0.0 dB	100 % / 0.0 dB	100 % / 0.0 dB
OFDM / n HT20 – mode		100 % / 0.0 dB	100 % / 0.0 dB	100 % / 0.0 dB
OFDM / n HT40 – mode		100 % / 0.0 dB	100 % / 0.0 dB	100 % / 0.0 dB

### 13.5 Peak power spectral density

#### Description:

Measurement of the peak power spectral density of a digital modulated system. The PSD shows the strength of the variations as a function of the frequency.

#### Measurement:

Measurement parameter	
According to DTS clause: 8.4	
Detector	Positive Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Span	30 MHz
Trace mode	Max. hold (allow trace to fully stabilize)
External result file(s)	1-7444_21-01-02_log1_conducted.pdf
Test setup	See chapter 7.4 setup A
Measurement uncertainty	See chapter 9

#### Limits:

FCC	ISED
8 dBm / 3 kHz (conducted)	

**Results:** antenna port 1

measured	peak power spectral density / dBm @ 3 kHz		
	Lowest channel	Middle channel	Highest channel
DSSS / b – mode	-6.2	-3.7	-6.8
OFDM / g – mode	-13.3	-7.4	-13.5
OFDM / n HT20 – mode	-14.4	-7.8	-13.7
OFDM / n HT40 – mode	-16.4	-10.4	-19.5

**Results:** antenna port 2

measured	peak power spectral density / dBm @ 3 kHz		
	Lowest channel	Middle channel	Highest channel
DSSS / b – mode	-5.8	-3.9	-6.3
OFDM / g – mode	-13.4	-7.9	-13.2
OFDM / n HT20 – mode	-14.2	-7.5	-13.3
OFDM / n HT40 – mode	-19.7	-10.8	-20.0

**Results:** antenna port 1 + 2

calculated	peak power spectral density / dBm @ 3 kHz		
	Lowest channel	Middle channel	Highest channel
DSSS / b – mode	-3.0	-0.8	-3.5
OFDM / g – mode	-10.3	-4.6	-10.3
OFDM / n HT20 – mode	-11.3	-4.6	-10.5
OFDM / n HT40 – mode	-14.7	-7.6	-16.7

### 13.6 6 dB DTS bandwidth

#### Description:

Measurement of the 6 dB bandwidth of the modulated signal.

#### Measurement:

Measurement parameter	
According to DTS clause: 8.2	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	30 MHz / 50 MHz
Trace mode	Single count with 200 counts
External result file(s)	1-7444_21-01-02_log1_conducted.pdf
Test setup	See chapter 7.4 setup A
Measurement uncertainty	See chapter 9

#### Limits:

FCC	ISED
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	

#### Results:

antenna port 1	6 dB DTS bandwidth / kHz		
	lowest channel	middle channel	highest channel
DSSS / b – mode	10064	10060	10064
OFDM / g – mode	16564	16552	16564
OFDM / n HT20 – mode	17712	17732	17736
OFDM / n HT40 – mode	36456	36416	36432

antenna port 2	6 dB DTS bandwidth / kHz		
	lowest channel	middle channel	highest channel
DSSS / b – mode	10052	10064	10056
OFDM / g – mode	16540	16532	16516
OFDM / n HT20 – mode	17728	17744	17736
OFDM / n HT40 – mode	36432	36440	36472

### 13.7 Occupied bandwidth – 99% emission bandwidth

#### Description:

Measurement of the 99% bandwidth of the modulated signal acc. RSS-GEN.

#### Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	300 kHz
Video bandwidth	1 MHz
Span	30 MHz / 50 MHz
Measurement procedure	Measurement of the 99% bandwidth using the integration function of the analyzer
Trace mode	Single count with 200 counts
External result file(s)	1-7444_21-01-02_log1_conducted.pdf
Test setup	See chapter 7.4 setup A
Measurement uncertainty	See chapter 9

#### Usage:

-/-	ISED
OBW is necessary for Emission Designator	

#### Results:

antenna port 1	99% emission bandwidth / kHz		
	lowest channel	middle channel	highest channel
DSSS / b – mode	13423	13375	13411
OFDM / g – mode	17082	17358	17086
OFDM / n HT20 – mode	17926	18074	17934
OFDM / n HT40 – mode	36556	36948	36540

antenna port 2	99% emission bandwidth / kHz		
	lowest channel	middle channel	highest channel
DSSS / b – mode	13439	13411	13399
OFDM / g – mode	16978	17166	16966
OFDM / n HT20 – mode	17958	18046	17938
OFDM / n HT40 – mode	36604	36924	36604

### 13.8 Occupied bandwidth – 20 dB bandwidth

#### Description:

Measurement of the 20 dB bandwidth of the modulated carrier.

#### Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	30 MHz / 50 MHz
Trace mode	Single count with min. 200 counts
External result file(s)	1-7444_21-01-02_log1_conducted.pdf
Test setup	See chapter 7.4 setup A
Measurement uncertainty	See chapter 9

#### Usage:

-/-	ISED
The complete bandwidth has to be within the frequency range of the band.	

#### Results:

antenna port 1	20 dB bandwidth / kHz		
	lowest channel	middle channel	highest channel
DSSS / b – mode	15552	15440	15520
OFDM / g – mode	19256	19260	19236
OFDM / n HT20 – mode	19820	19840	19832
OFDM / n HT40 – mode	39664	39768	39696

antenna port 2	20 dB bandwidth / kHz		
	lowest channel	middle channel	highest channel
DSSS / b – mode	15556	15524	15488
OFDM / g – mode	19040	19032	18968
OFDM / n HT20 – mode	19660	19664	19616
OFDM / n HT40 – mode	39912	39872	39792

### 13.9 Band edge compliance radiated

#### Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to the lowest channel for the lower restricted band and to the highest channel for the upper restricted band. Measurement distance is 3 meter.

#### Measurement:

	Measurement parameter for peak measurements	Measurement parameter for average measurements
		According to DTS clause: 8.7.3
Detector	Peak	RMS
Sweep time	Auto	Auto
Resolution bandwidth	1 MHz	100 kHz
Video bandwidth	3 MHz	300 kHz
Span	See plot	2 MHz
Trace mode	Max. hold	RMS Average over 101 sweeps
Analyzer function	-/-	Band power function (Compute the power by integrating the spectrum over 1 MHz)
Test setup	See chapter 7.2 setup B	
Measurement uncertainty	See chapter 9	

#### Limits:

FCC	ISED
74 dB $\mu$ V/m @ 3 m (Peak) 54 dB $\mu$ V/m @ 3 m (AVG)	


**Results T333:**

band edge compliance radiated / (dB $\mu$ V / m) @ 3 m			
	DSSS / b – mode	OFDM / g – mode	OFDM / n HT20 – mode
Lower band edge	53.1 (Peak) 44.5 (AVG)	68.4 (Peak) 52.9 (AVG)	67.7 (Peak) 52.7 (AVG)
Upper band edge	52.1 (Peak) 42.7 (AVG)	67.8 (Peak) 50.6 (AVG)	71.8 (Peak) 53.0 (AVG)
	OFDM / n HT40 – mode	-/-	-/-
Lower band edge	67.5 (Peak) 52.9 (AVG)	-/-	-/-
Upper band edge	58.9 (Peak) 47.5 (AVG)	-/-	-/-




**Plots:** DSSS - peak / average

**Plot 1:** TX mode, lower band edge, vertical & horizontal polarization

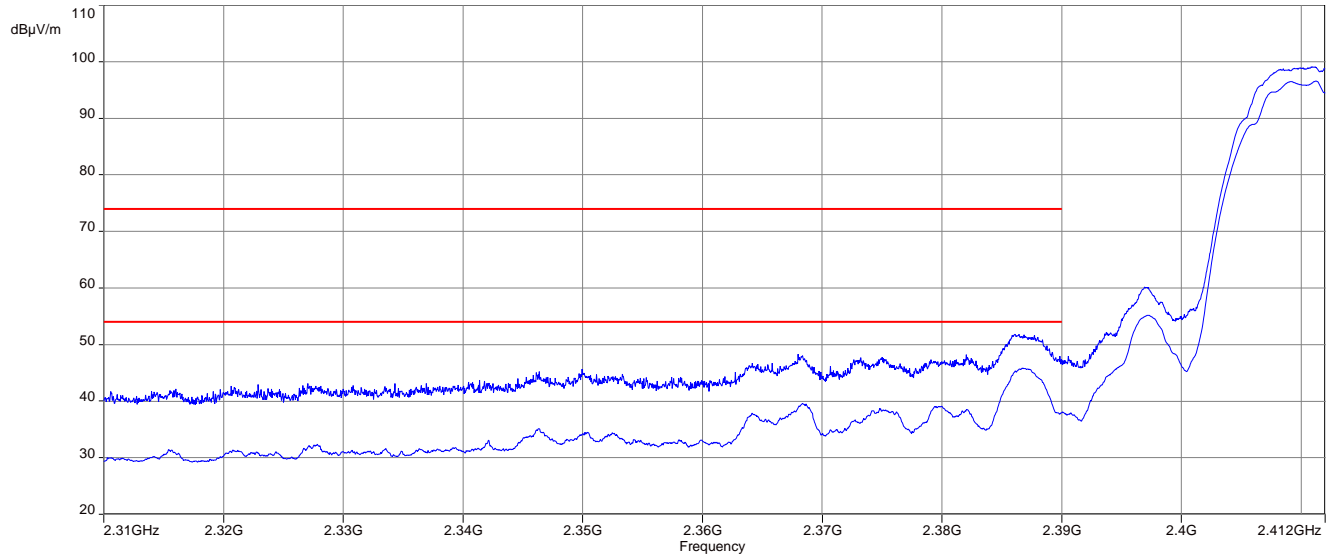


**Plot 2:** TX mode, upper band edge, vertical & horizontal polarization

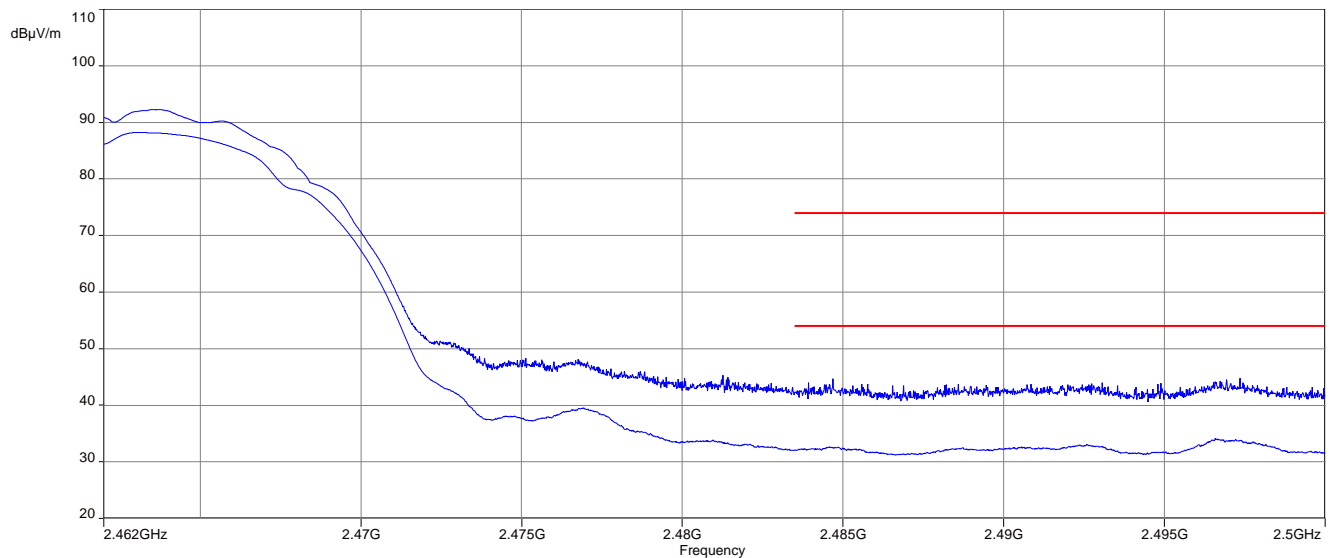


**Plots:** OFDM / g – mode - peak / average

**Plot 1:** TX mode, lower band edge, vertical & horizontal polarization

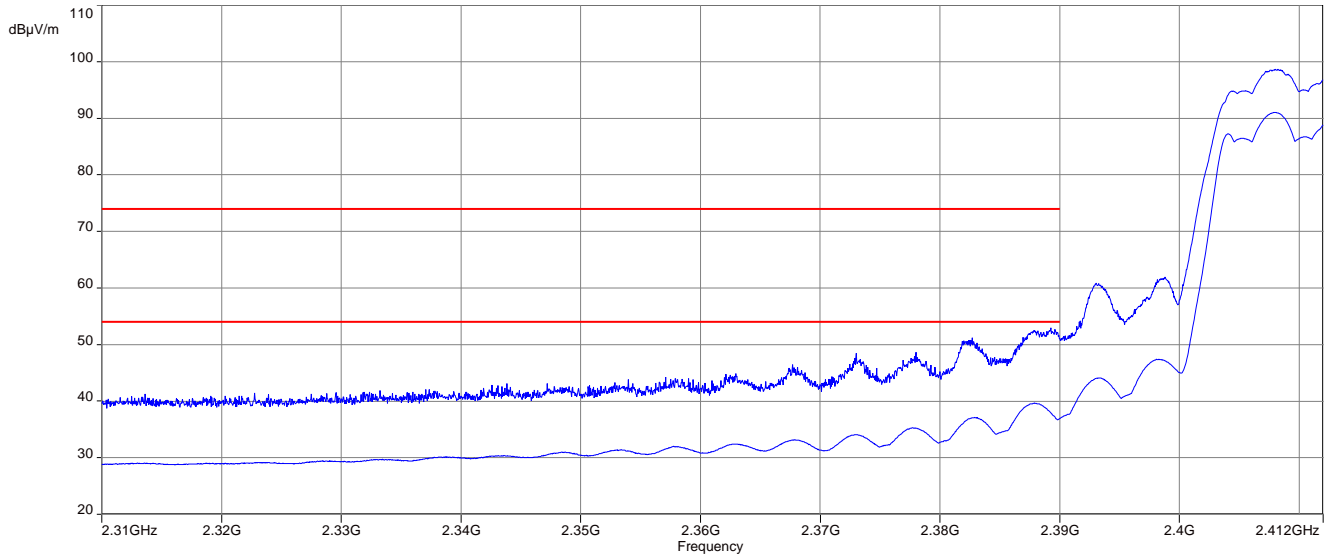


**Plot 2:** TX mode, upper band edge, vertical & horizontal polarization

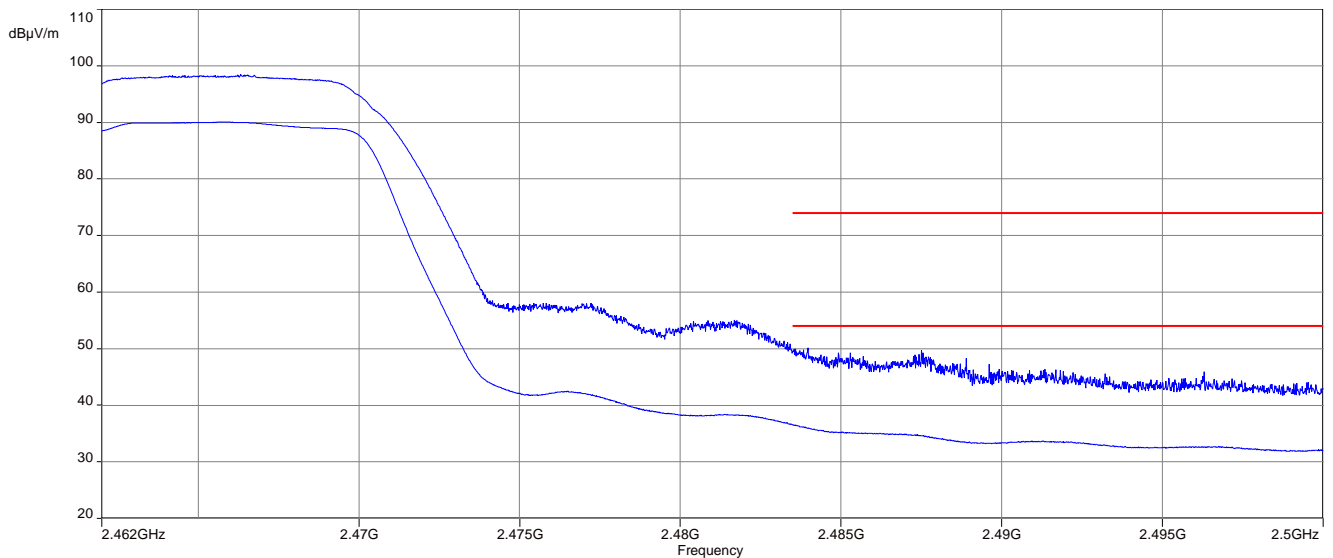


**Plots:** OFDM / n HT20 – mode - peak / average

**Plot 1:** TX mode, lower band edge, vertical & horizontal polarization

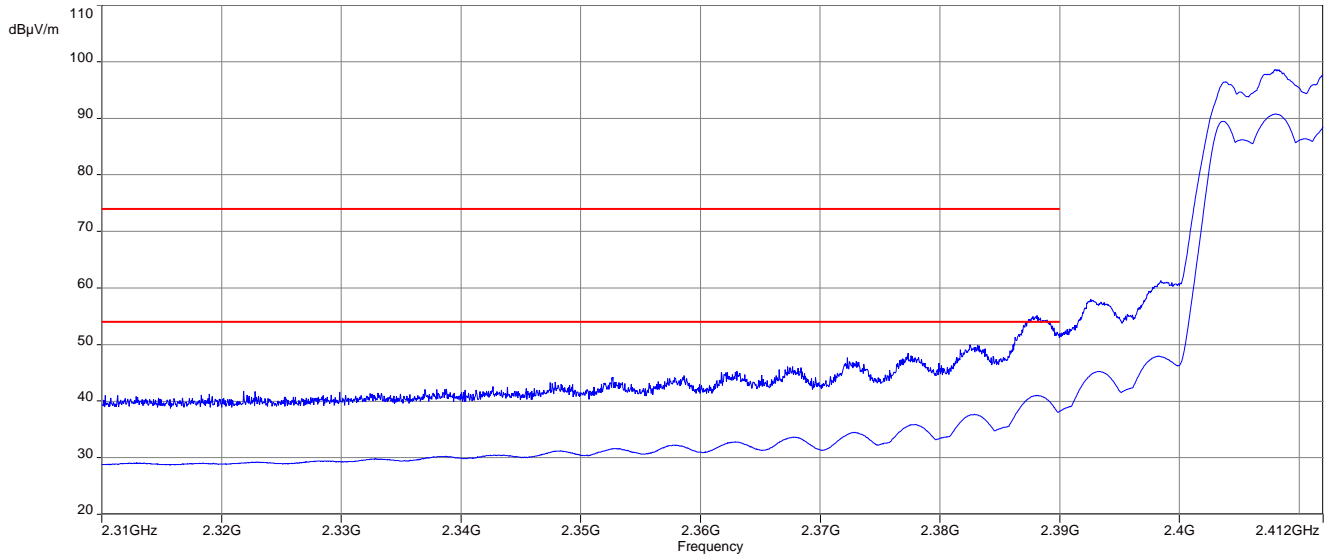


**Plot 2:** TX mode, upper band edge, vertical & horizontal polarization

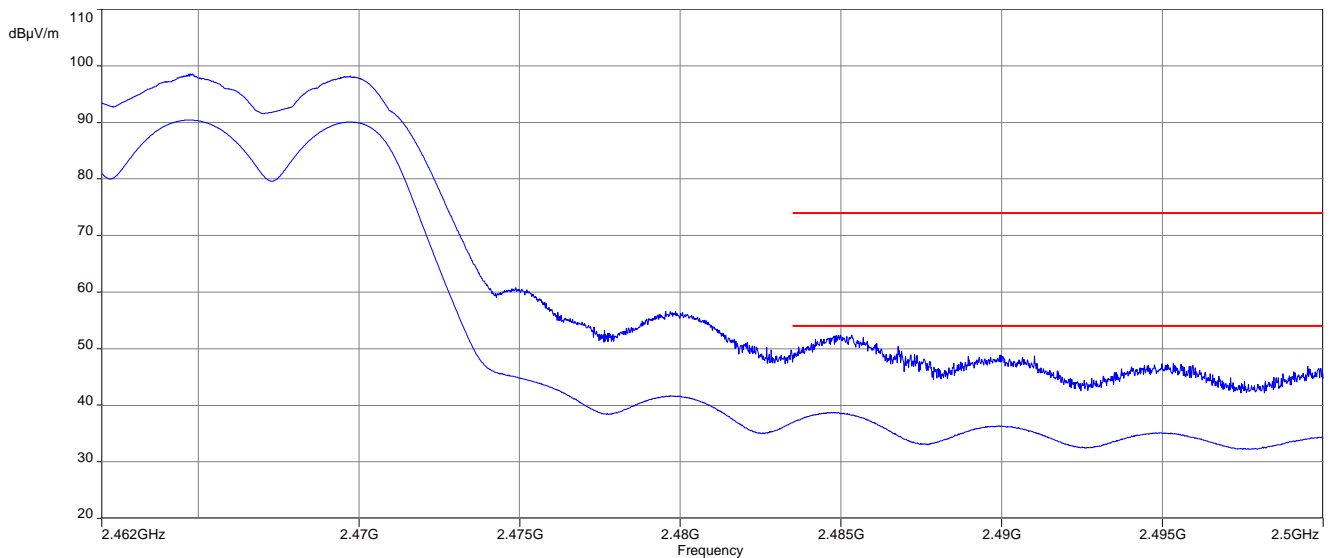


**Plots:** OFDM / n HT40 – mode - peak / average

**Plot 1:** TX mode, lower band edge, vertical & horizontal polarization

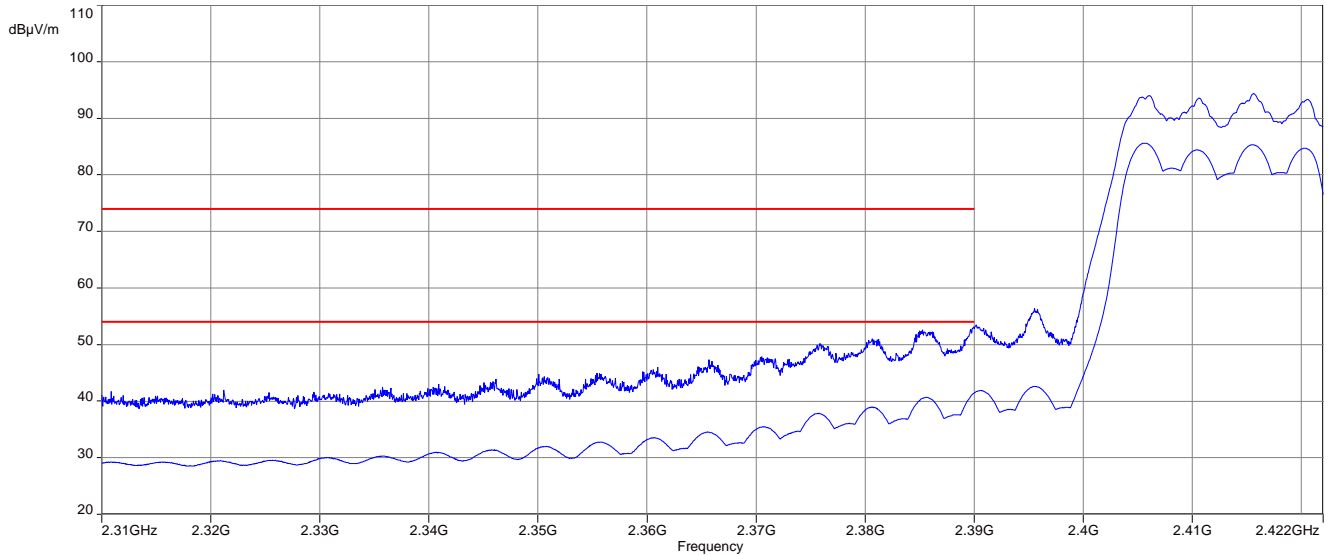

**Plot 2:** TX mode, upper band edge, vertical & horizontal polarization

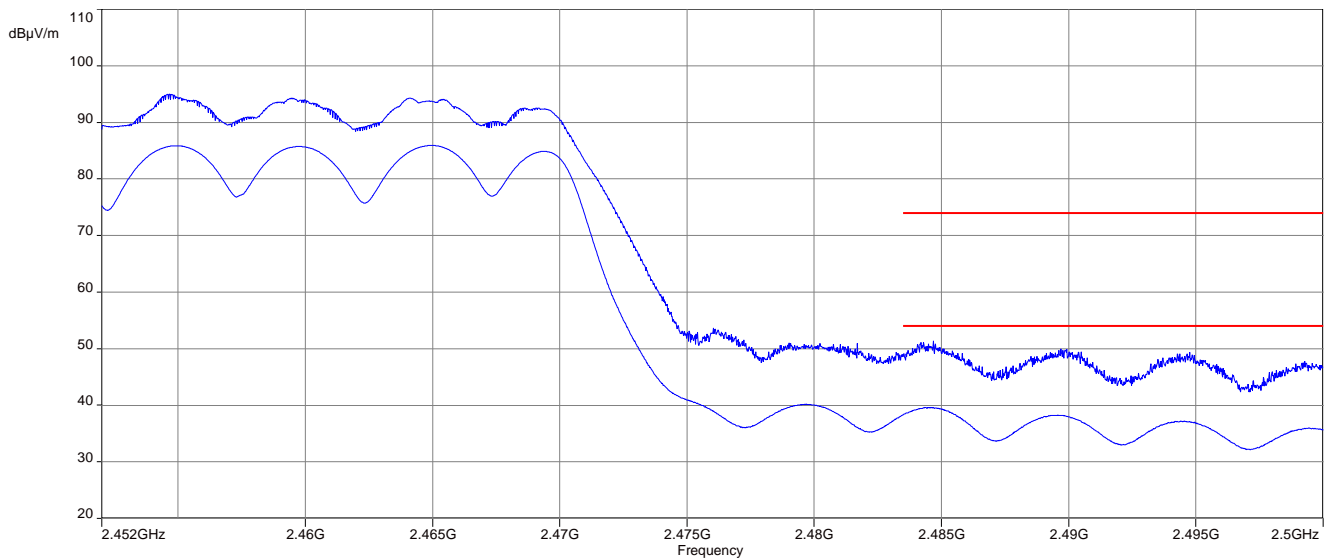


**Results T260:**


band edge compliance radiated / (dB $\mu$ V / m) @ 3 m			
	DSSS / b – mode	OFDM / g – mode	OFDM / n HT20 – mode
Lower band edge	-/-	-/-	-/-
Upper band edge	-/-	-/-	-/-
	OFDM / n HT40 – mode	-/-	-/-
Lower band edge	62.5 (Peak) 50.8 (AVG)	-/-	-/-
Upper band edge	61.9 (Peak) 48.6 (AVG)	-/-	-/-

**Plots:** OFDM / n HT40 – mode - peak / average

**Plot 1:** TX mode, lower band edge, vertical & horizontal polarization

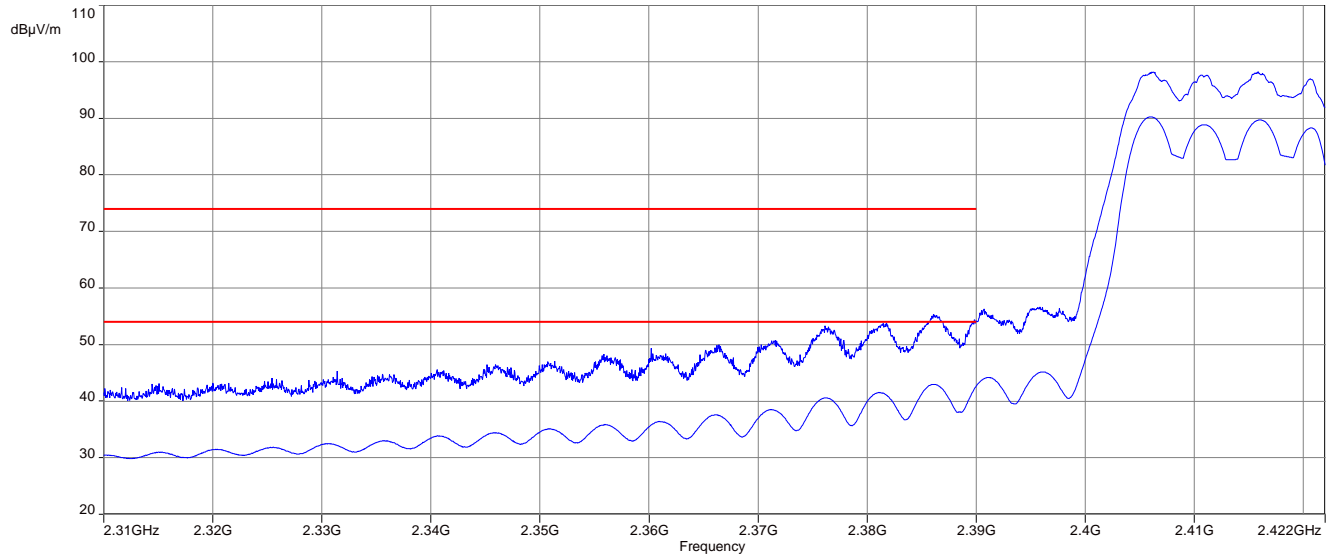

**Plot 2:** TX mode, upper band edge, vertical & horizontal polarization

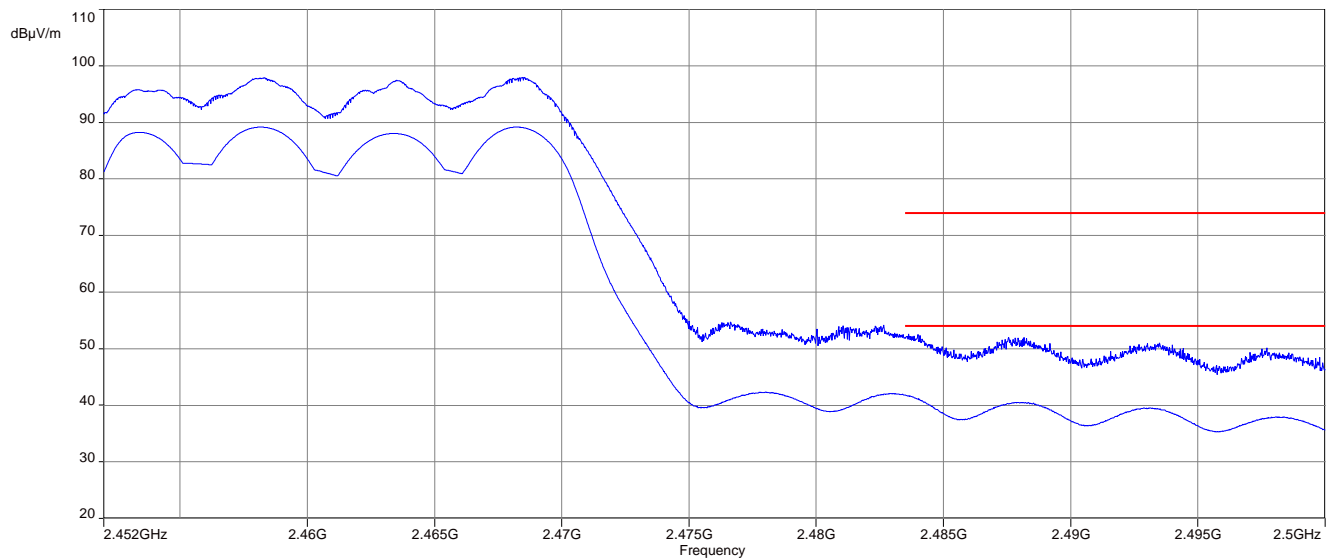

### 13.10 Spurious emissions conducted

#### **Description:**

Measurement of the conducted spurious emissions in transmit mode. The measurement is performed at the lowest; the middle and the highest channel.

#### **Measurement:**

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	9 kHz to 25 GHz
Trace mode	Max Hold
External result file(s)	1-7444_21-01-02_log1_conducted.pdf
Test setup	See chapter 7.4 setup A
Measurement uncertainty	See chapter 9

#### **Limits:**

FCC	ISED
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required	

**Results: Compliant (See log file)**

### 13.11 Spurious emissions radiated below 30 MHz

#### Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

#### Measurement:

Measurement parameter	
Detector	Peak / Quasi Peak
Sweep time	Auto
Resolution bandwidth	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span	9 kHz to 30 MHz
Trace mode	Max Hold
Measured modulation	<input checked="" type="checkbox"/> DSSS b – mode <input checked="" type="checkbox"/> OFDM g – mode <input type="checkbox"/> OFDM n HT20 – mode <input checked="" type="checkbox"/> OFDM n HT40 – mode
Test setup	See chapter 7.2 setup A
Measurement uncertainty	See chapter 9

#### Limits:

FCC		ISED
Frequency / MHz	Field Strength / (μV / m)	Measurement distance / m
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30


#### Results:

TX spurious emissions radiated < 30 MHz / (dBμV / m) @ 3 m		
Frequency / MHz	Detector	Level / (dBμV / m)
All detected peaks are more than 20 dB below the limit.		




**Plots:** DSSS


**Plot 1:** 9 kHz to 30 MHz, lowest channel

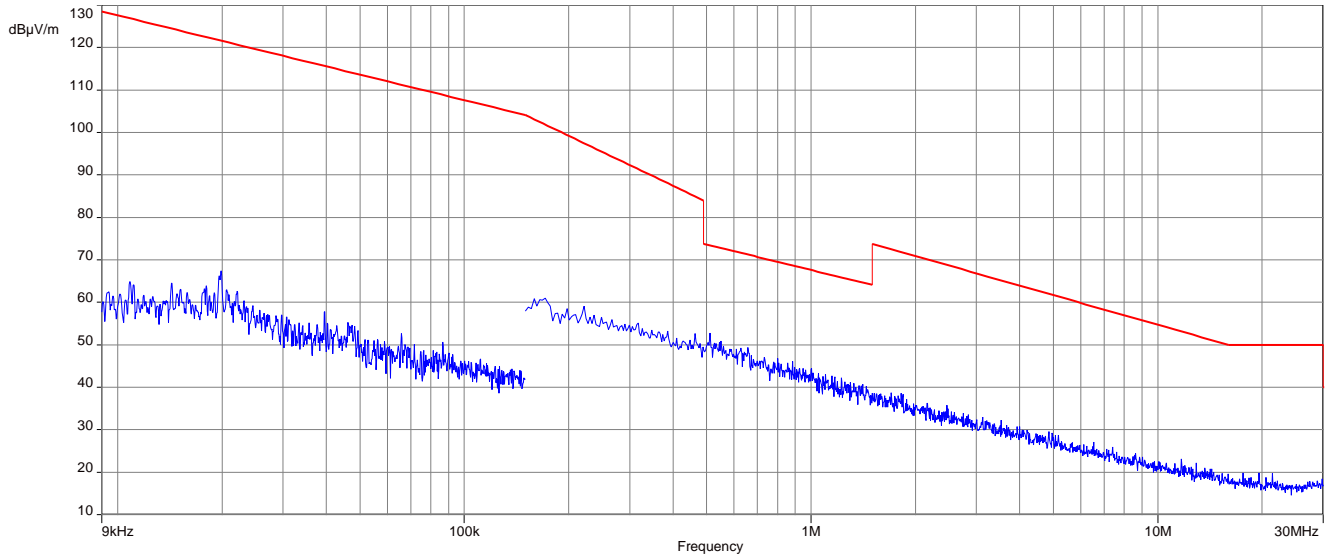

**Plot 2:** 9 kHz to 30 MHz, middle channel

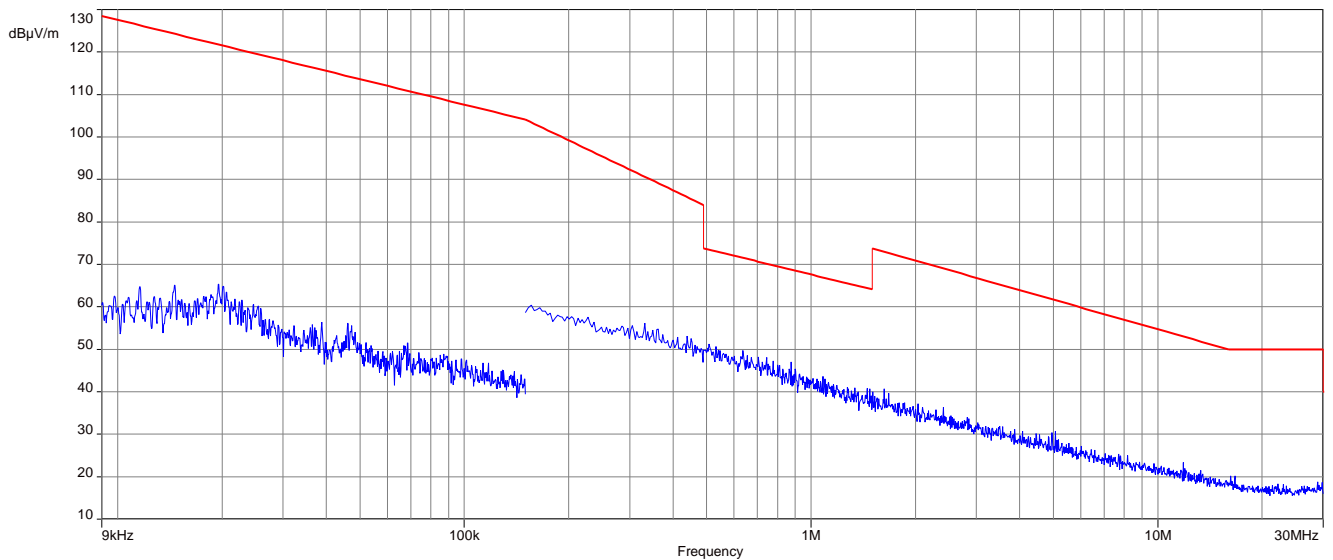


**Plot 3:** 9 kHz to 30 MHz, highest channel

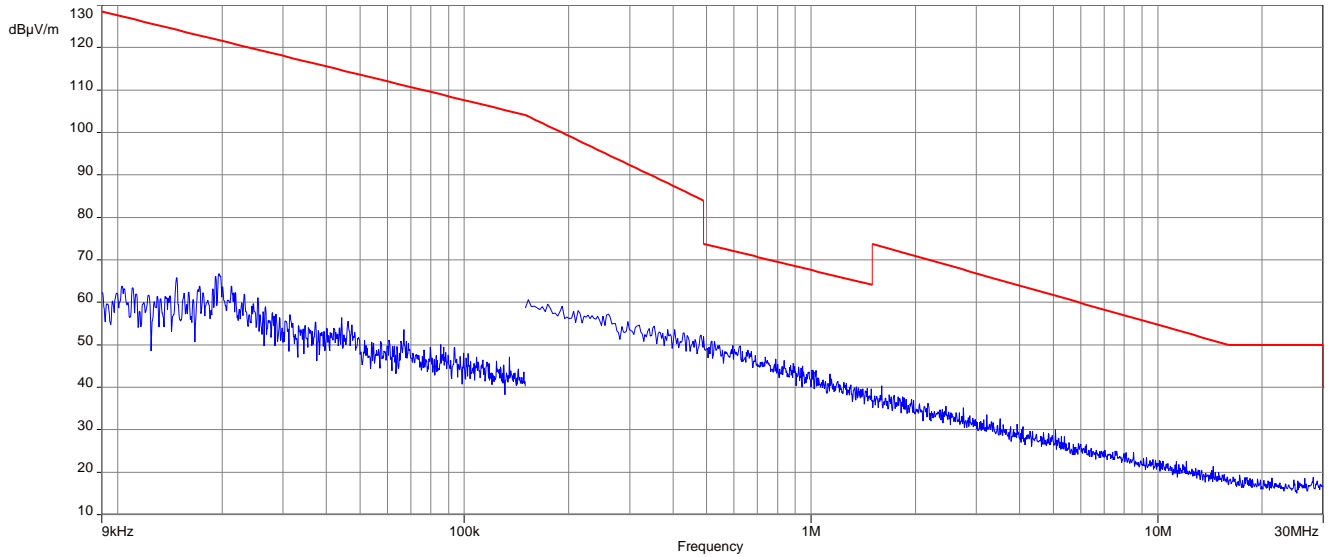


**Plots:** OFDM (20 MHz nominal channel bandwidth)


**Plot 1:** 9 kHz to 30 MHz, lowest channel

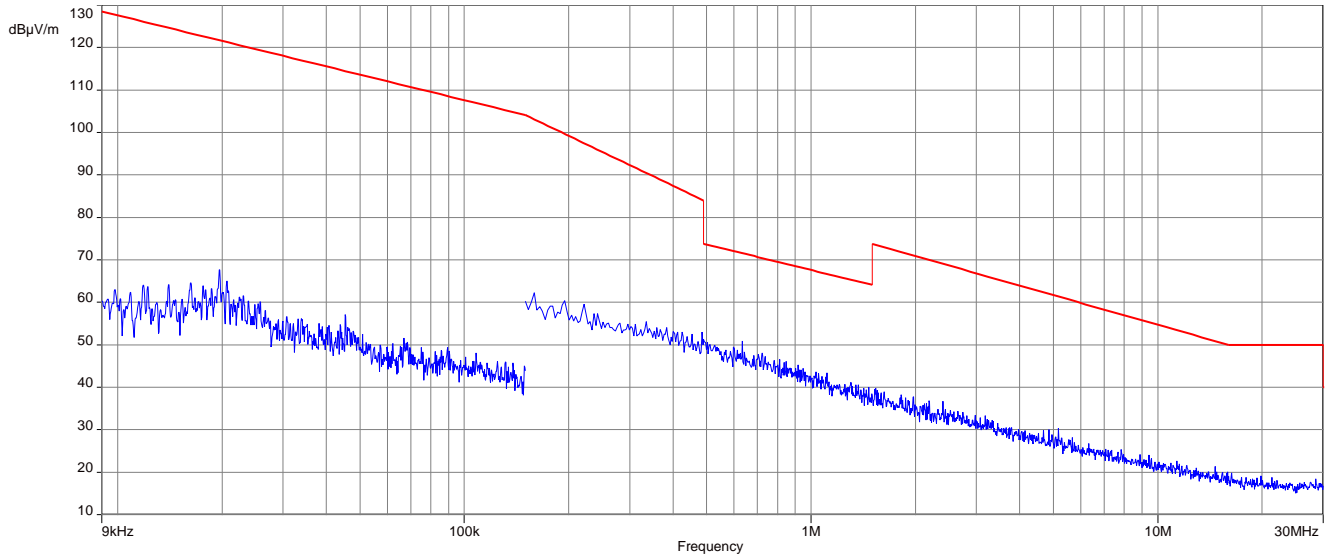

**Plot 2:** 9 kHz to 30 MHz, middle channel

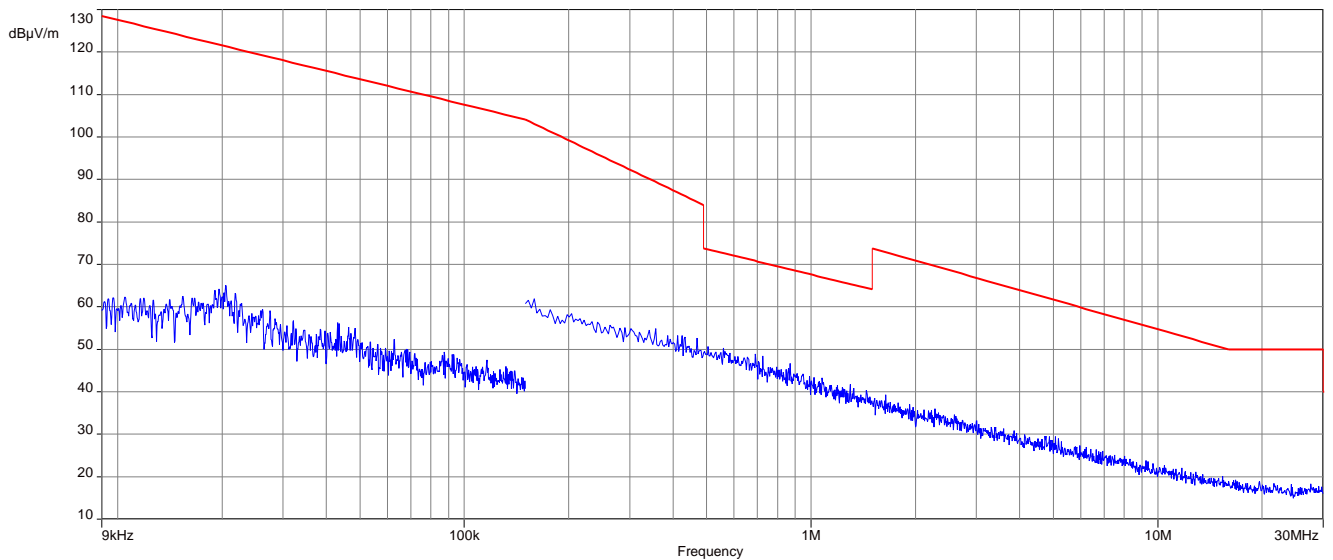


**Plot 3:** 9 kHz to 30 MHz, highest channel

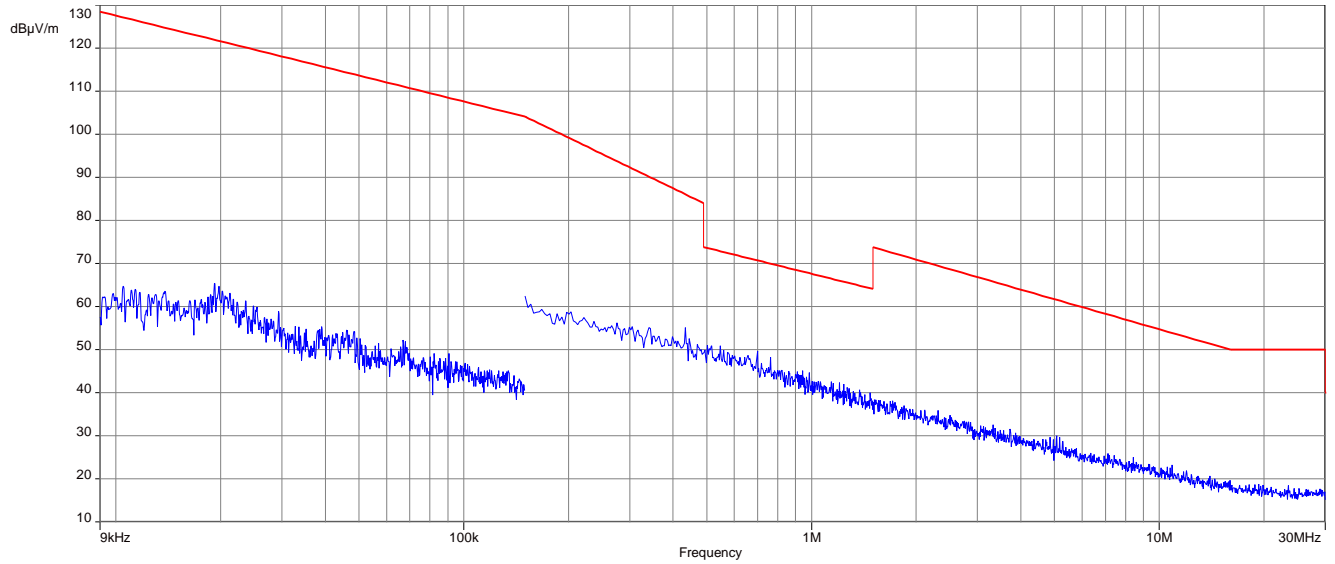


**Plots:** OFDM (40 MHz nominal channel bandwidth)


**Plot 1:** 9 kHz to 30 MHz, lowest channel

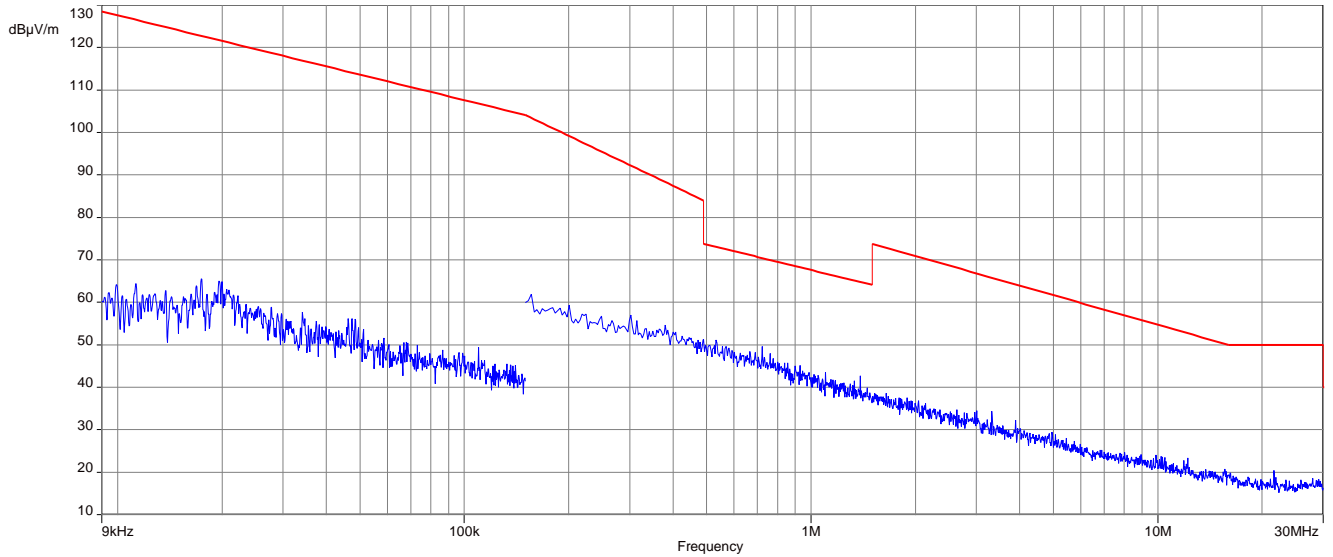

**Plot 2:** 9 kHz to 30 MHz, middle channel

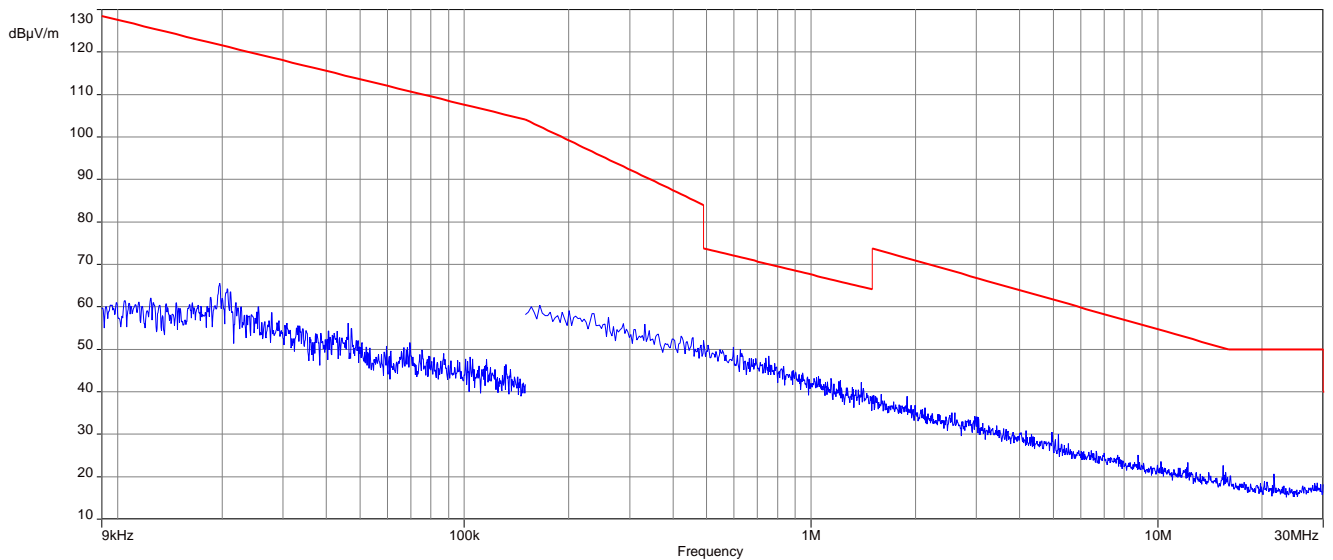

**Plot 3: 9 kHz to 30 MHz, highest channel**

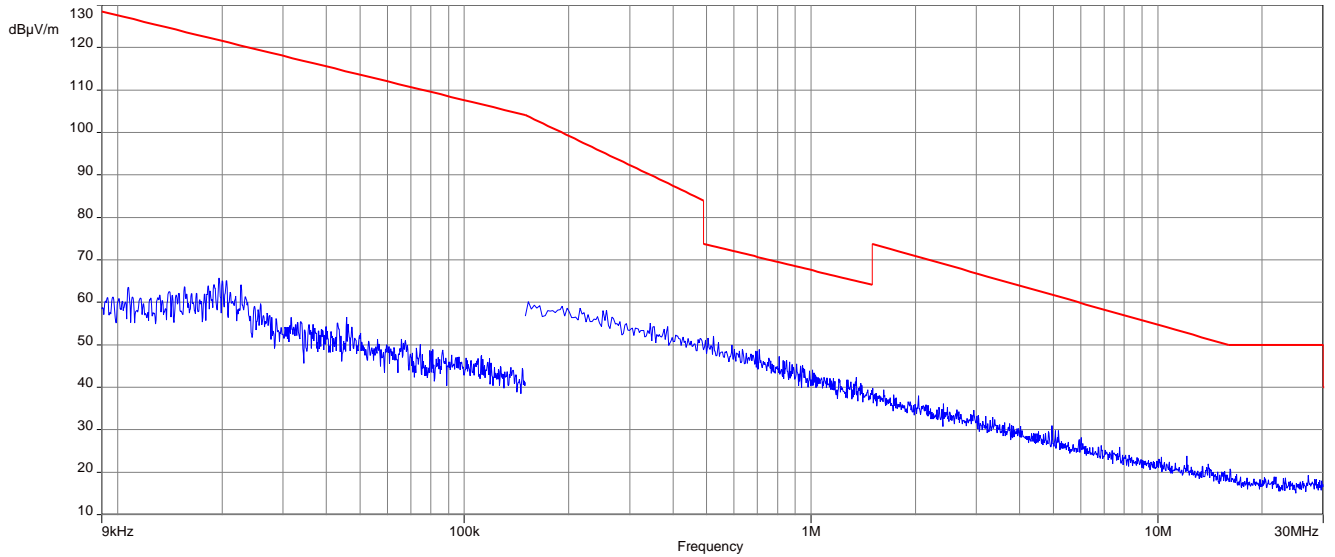

### 13.12 Spurious emissions radiated 30 MHz to 1 GHz

#### Description:

Measurement of the radiated spurious emissions and cabinet radiations below 1 GHz.

#### Measurement:


Measurement parameter	
Detector	Peak / Quasi Peak
Sweep time	Auto
Resolution bandwidth	120 kHz
Video bandwidth	3 x RBW
Span	30 MHz to 1 GHz
Trace mode	Max Hold
Measured modulation	<input checked="" type="checkbox"/> DSSS b – mode <input checked="" type="checkbox"/> OFDM g – mode <input type="checkbox"/> OFDM n HT20 – mode <input checked="" type="checkbox"/> OFDM n HT40 – mode
Test setup	See chapter 7.1 setup A
Measurement uncertainty	See chapter 9

#### Limits:

FCC		ISED
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency / MHz	Field Strength / (dBµV / m)	Measurement distance / m
30 – 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10

**Plot:** DSSS

**Plot 1:** 30 MHz to 1 GHz, vertical & horizontal polarization, valid for all channels

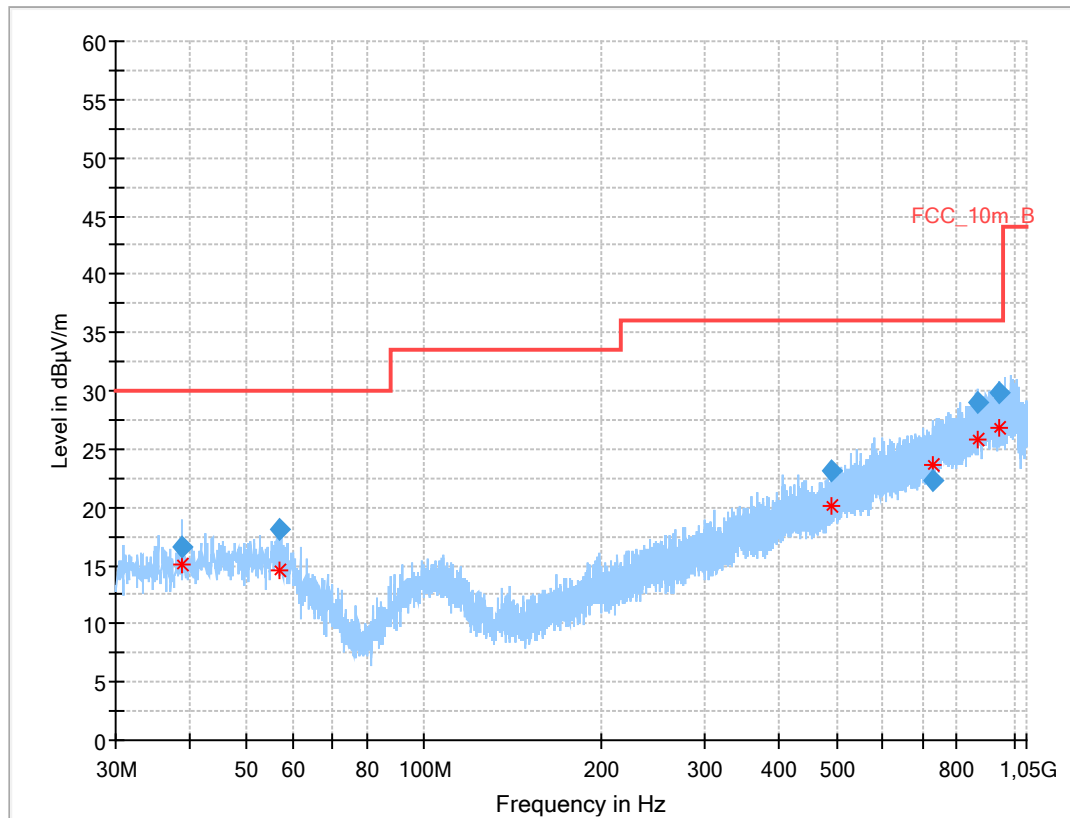


**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
38.875	16.67	30.0	13.3	1000	120.0	195.0	V	75	14
56.741	18.16	30.0	11.8	1000	120.0	174.0	H	294	16
492.162	23.16	36.0	12.8	1000	120.0	129.0	H	205	19
726.740	22.35	36.0	13.7	1000	120.0	182.0	H	52	23
865.267	29.02	36.0	7.0	1000	120.0	102.0	V	5	25
946.201	29.79	36.0	6.2	1000	120.0	195.0	H	142	25



**Plot:** OFDM (20 MHz nominal channel bandwidth)

**Plot 1:** 30 MHz to 1 GHz, vertical & horizontal polarization, valid for all channels

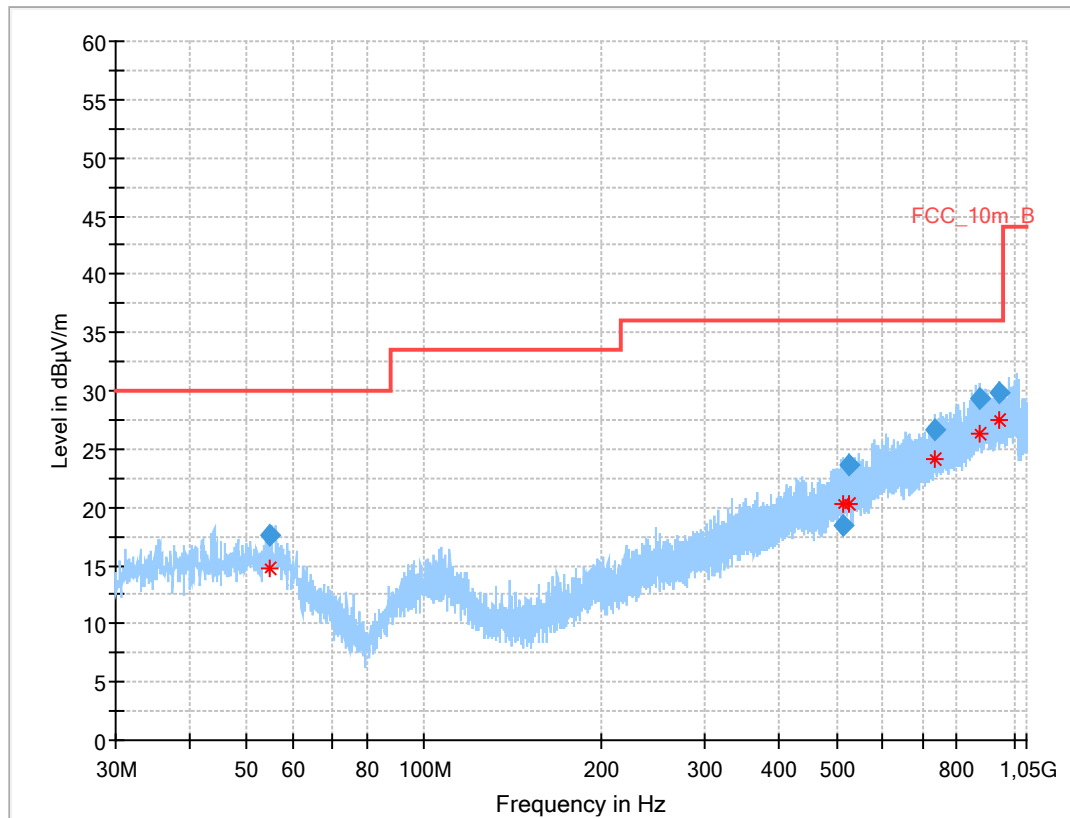


#### Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
54.790	17.59	30.0	12.4	1000	120.0	195.0	H	52	15
512.890	18.49	36.0	17.5	1000	120.0	102.0	V	142	20
524.056	23.58	36.0	12.4	1000	120.0	195.0	H	142	20
733.762	26.71	36.0	9.3	1000	120.0	195.0	V	142	23
876.030	29.31	36.0	6.7	1000	120.0	109.0	V	37	25
942.215	29.87	36.0	6.1	1000	120.0	137.0	H	142	25

**Plot:** OFDM (40 MHz nominal channel bandwidth)

**Plot 1:** 30 MHz to 1 GHz, vertical & horizontal polarization, valid for all channels

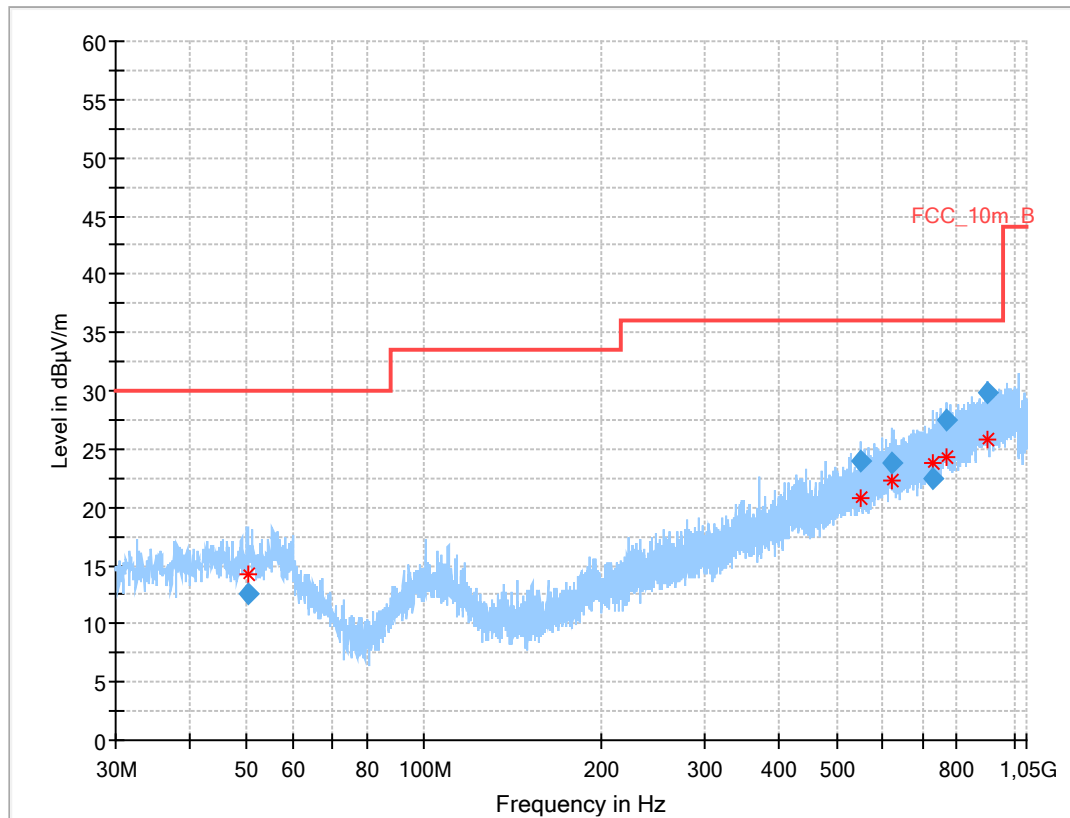

#### Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
50.199	12.54	30.0	17.5	1000	120.0	102.0	V	37	15
551.123	23.94	36.0	12.1	1000	120.0	195.0	V	232	20
621.865	23.82	36.0	12.2	1000	120.0	138.0	V	52	22
728.253	22.43	36.0	13.6	1000	120.0	118.0	V	142	23
770.226	27.41	36.0	8.6	1000	120.0	195.0	V	52	24
901.806	29.85	36.0	6.2	1000	120.0	124.0	H	-21	25

### 13.13 Spurious emissions radiated above 1 GHz

#### Description:

Measurement of the radiated spurious emissions above 1 GHz in transmit mode and receiver / idle mode.

#### Measurement:

Measurement parameter	
Detector	Peak / RMS
Sweep time	Auto
Resolution bandwidth	1 MHz
Video bandwidth	3 x RBW
Span	1 GHz to 26 GHz
Trace mode	Max Hold
Measured modulation	<input checked="" type="checkbox"/> DSSS b – mode <input checked="" type="checkbox"/> OFDM g – mode <input type="checkbox"/> OFDM n HT20 – mode <input checked="" type="checkbox"/> OFDM n HT40 – mode
Test setup	See chapter 7.2 setup B & 7.3 setup A
Measurement uncertainty	See chapter 9

#### Limits:

FCC		ISED
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency / MHz	Field Strength / (dB $\mu$ V / m)	Measurement distance / m
Above 960	54.0 (AVG)	3
	74.0 (peak)	

**Results T333:** DSSS


TX spurious emissions radiated / dB $\mu$ V/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dB $\mu$ V/m	f / MHz	Detector	Level / dB $\mu$ V/m	f / MHz	Detector	Level / dB $\mu$ V/m
All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.		
	Peak			Peak			Peak	
	AVG			AVG			AVG	
	Peak			Peak			Peak	
	AVG			AVG			AVG	

**Results T333:** OFDM (20 MHz nominal channel bandwidth)


TX spurious emissions radiated / dB $\mu$ V/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dB $\mu$ V/m	f / MHz	Detector	Level / dB $\mu$ V/m	f / MHz	Detector	Level / dB $\mu$ V/m
All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.		
	Peak			Peak			Peak	
	AVG			AVG			AVG	
	Peak			Peak			Peak	
	AVG			AVG			AVG	


**Results T333:** OFDM (40 MHz nominal channel bandwidth)

TX spurious emissions radiated / dB $\mu$ V/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dB $\mu$ V/m	f / MHz	Detector	Level / dB $\mu$ V/m	f / MHz	Detector	Level / dB $\mu$ V/m
All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.		
	Peak			Peak			Peak	
	AVG			AVG			AVG	
	Peak			Peak			Peak	
	AVG			AVG			AVG	

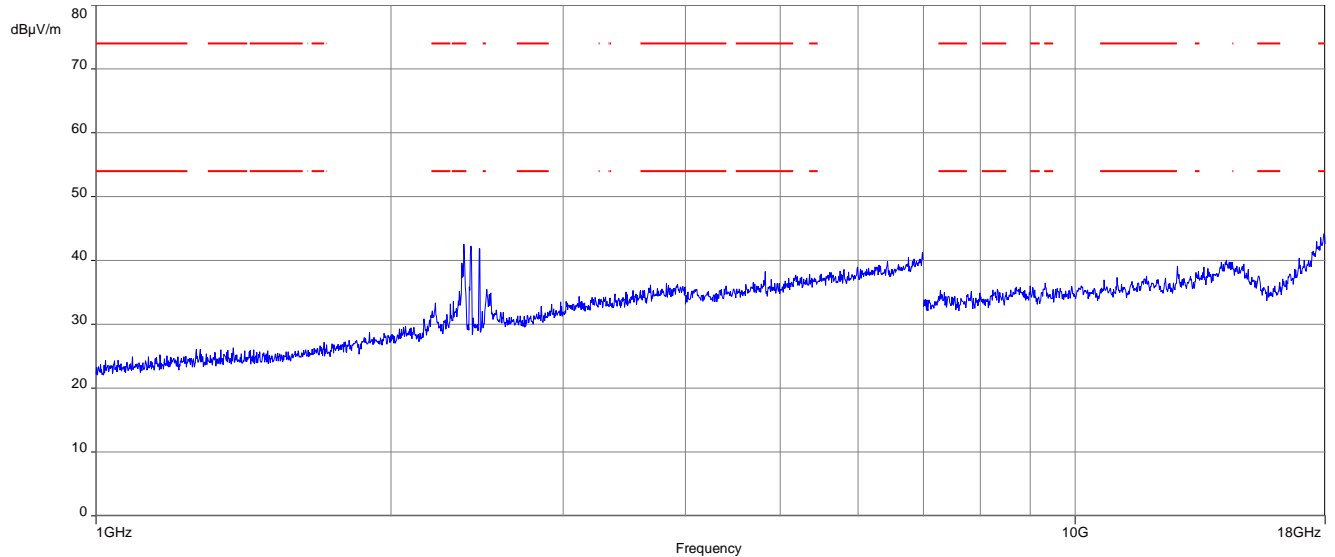
**Plots:** DSSS**Plot 1:** Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization


The carrier signal is notched with a 2.4 GHz band rejection filter.

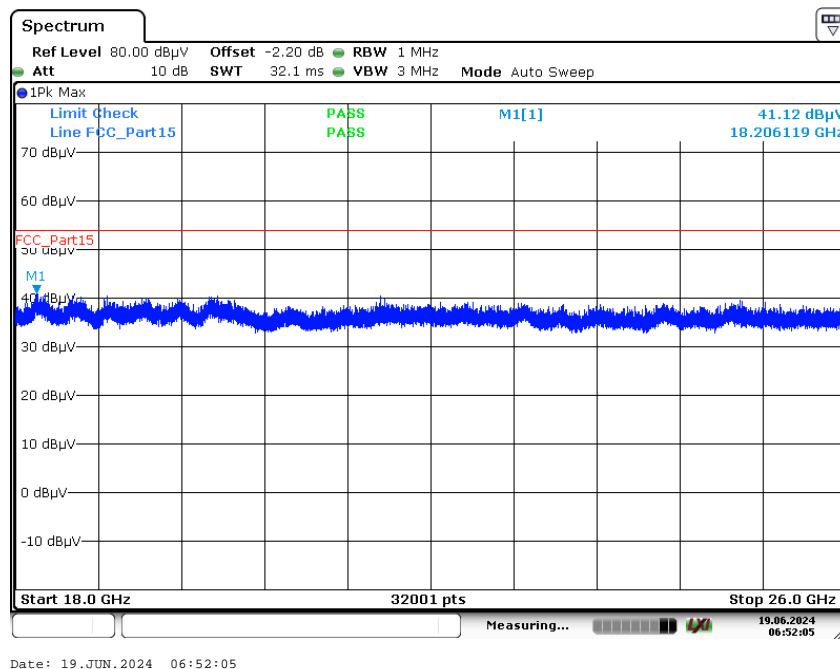**Plot 2:** Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

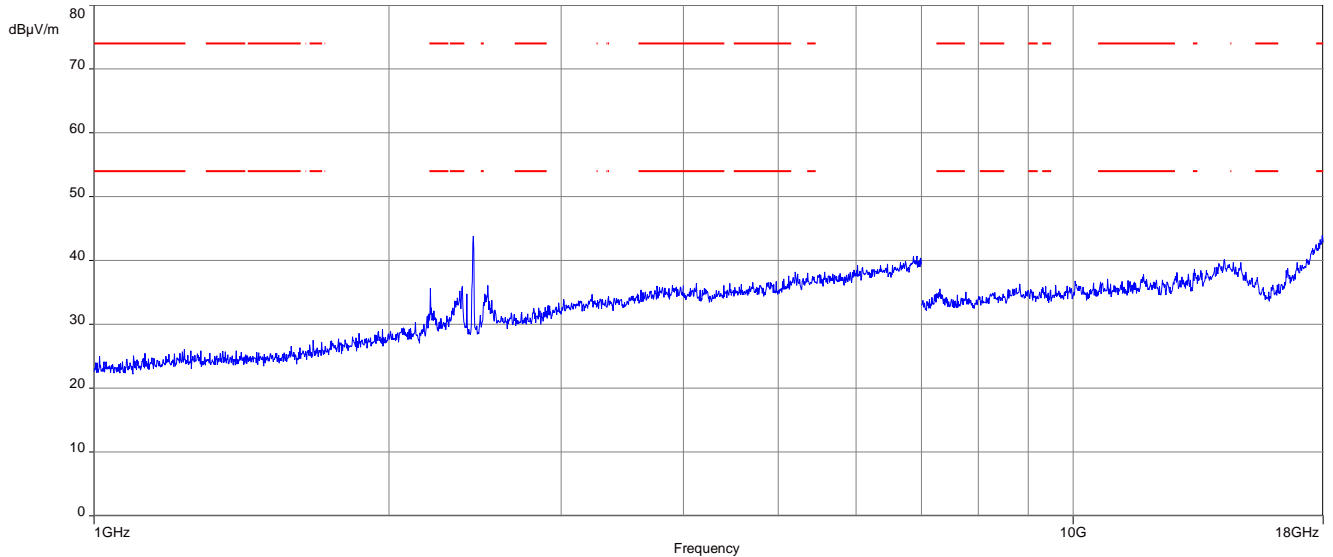
**Plot 3:** Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization


The carrier signal is notched with a 2.4 GHz band rejection filter.

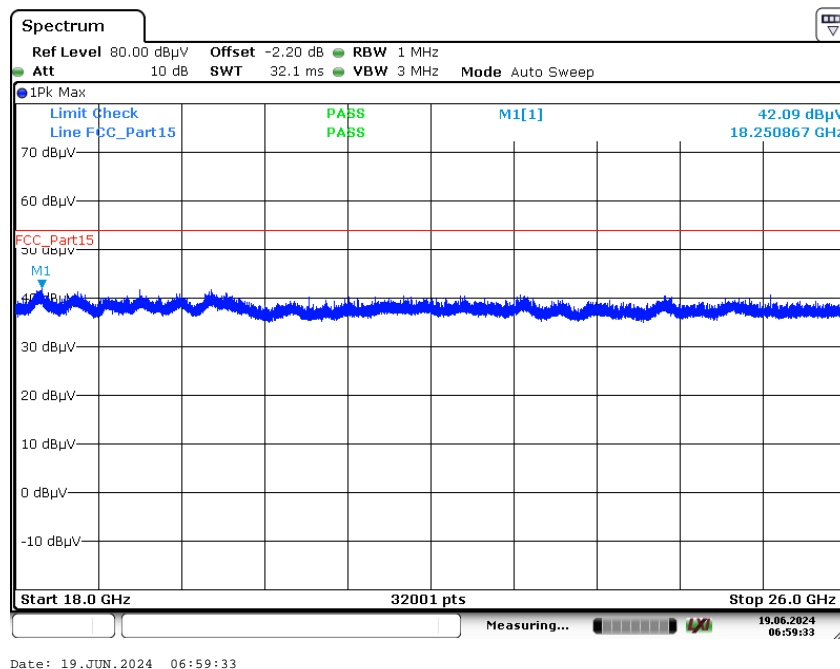**Plot 4:** Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

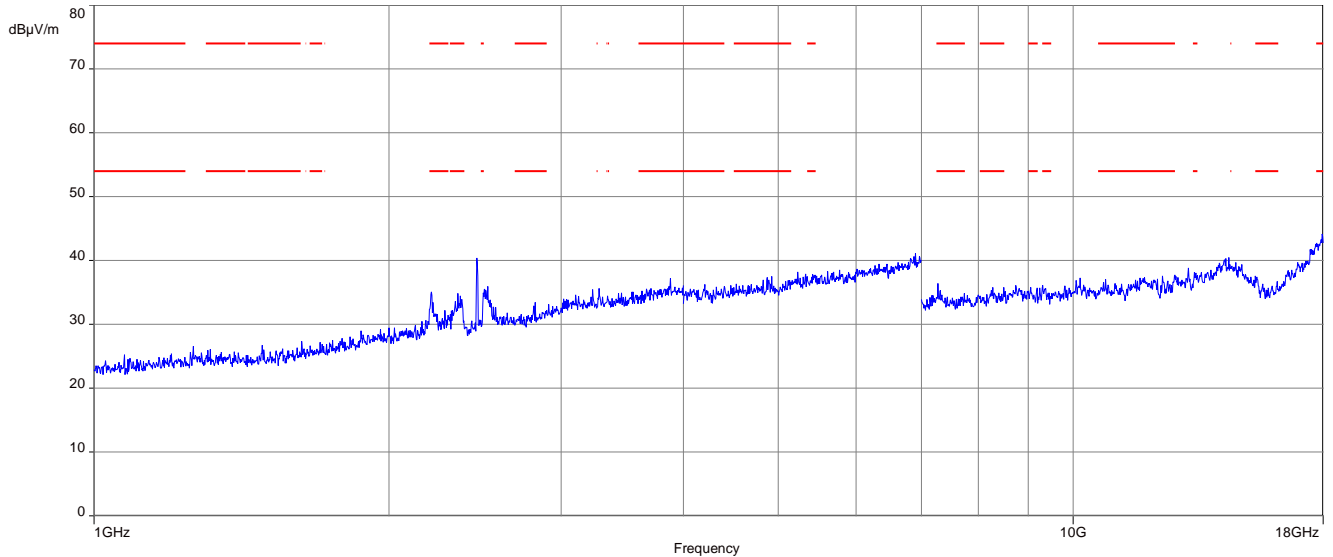
**Plot 5:** Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

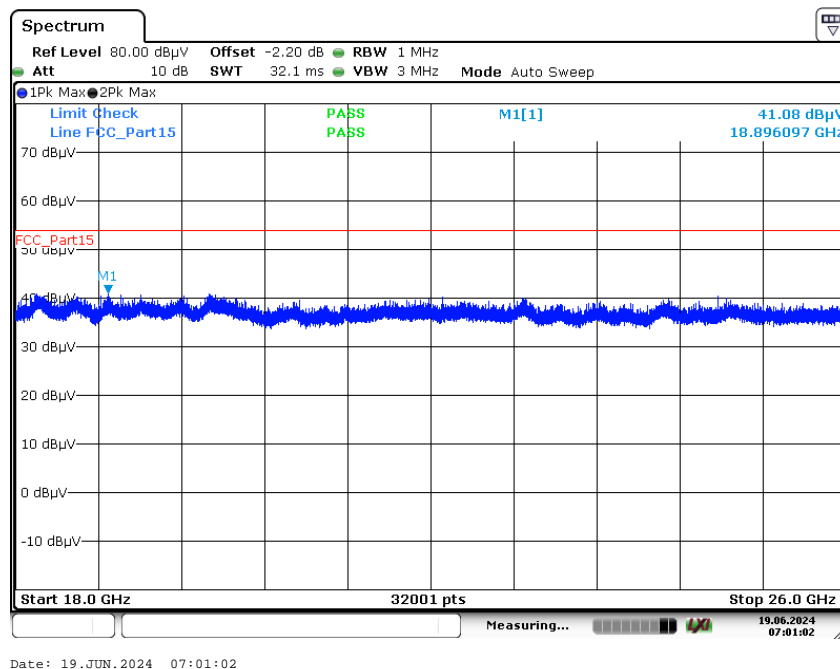
**Plot 6:** Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

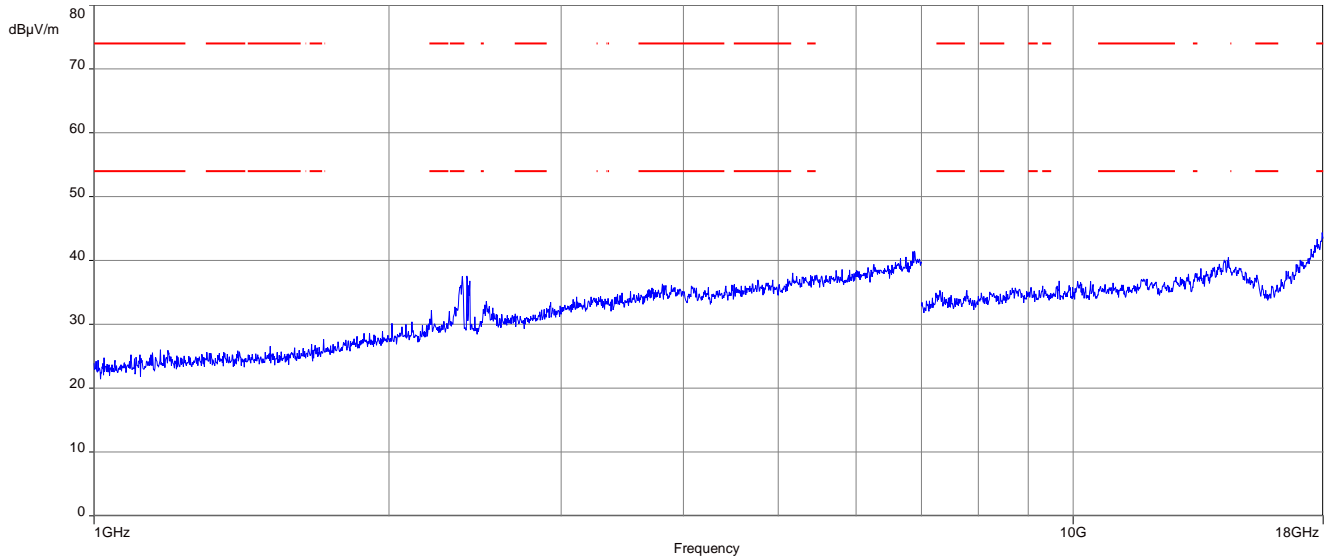**Plots:** OFDM (20 MHz bandwidth)**Plot 1:** Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization


The carrier signal is notched with a 2.4 GHz band rejection filter.

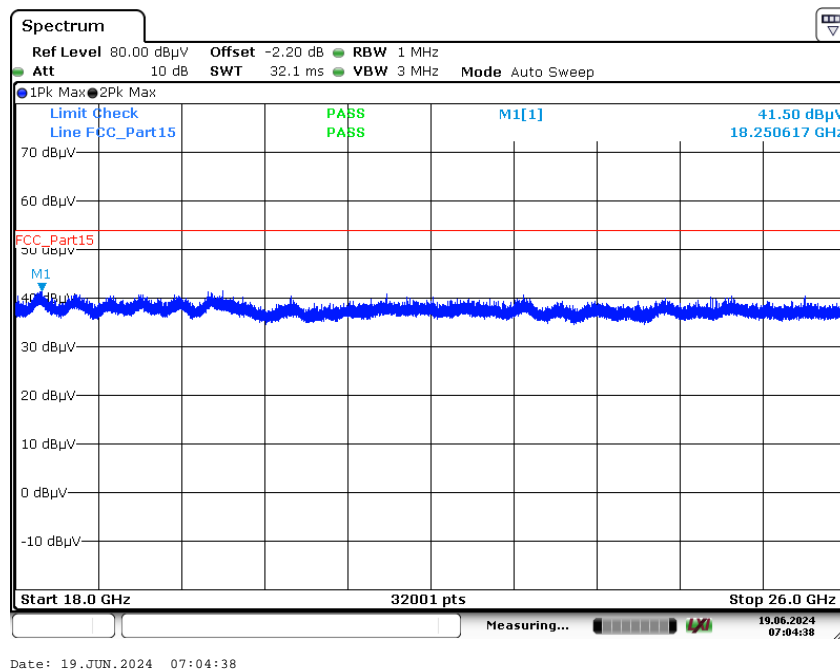
**Plot 2:** Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

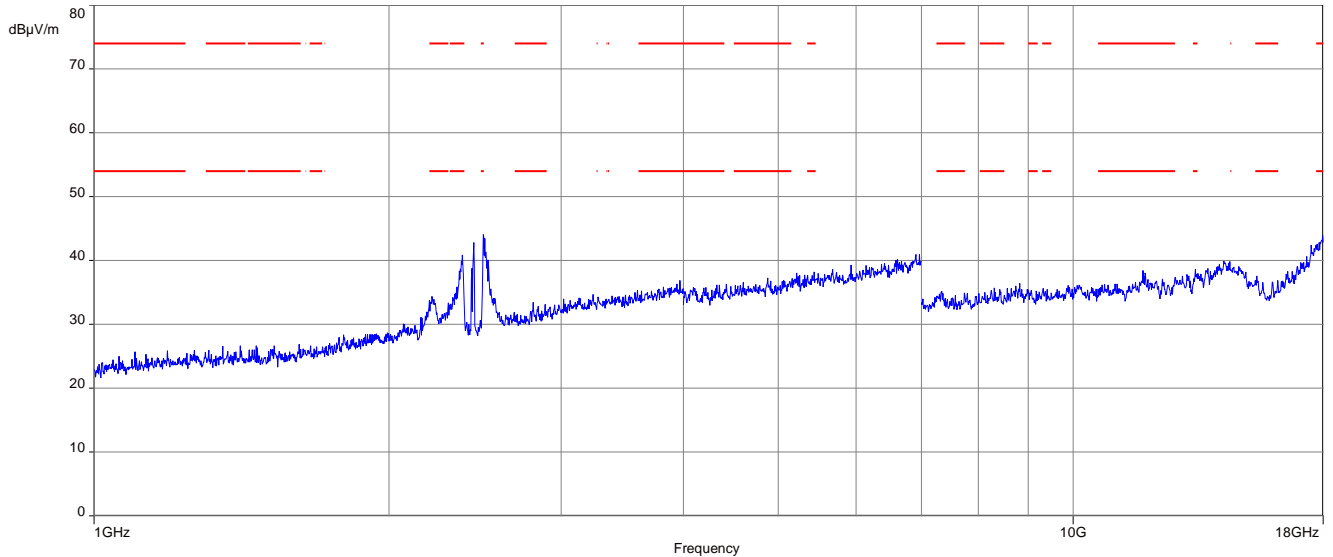


**Plot 3:** Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization


The carrier signal is notched with a 2.4 GHz band rejection filter.

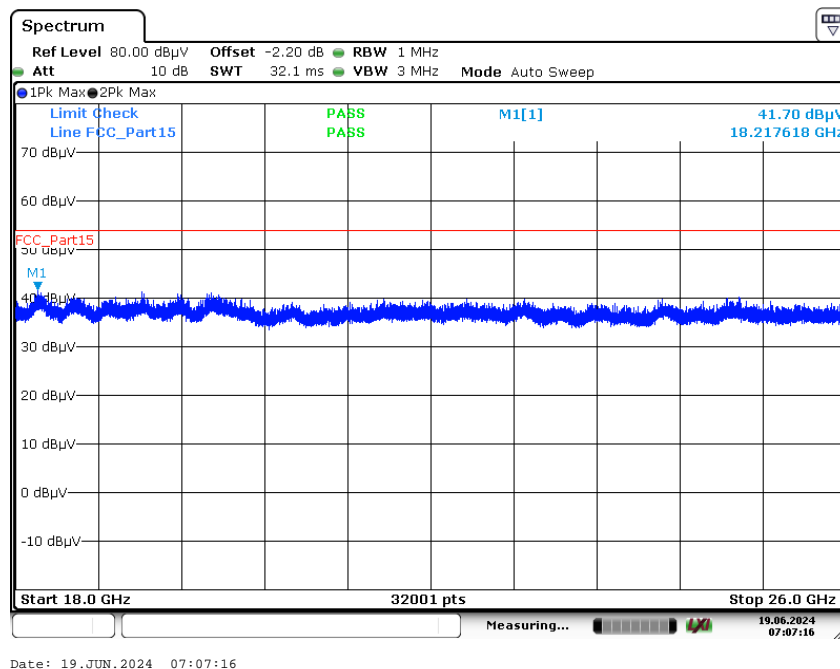**Plot 4:** Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

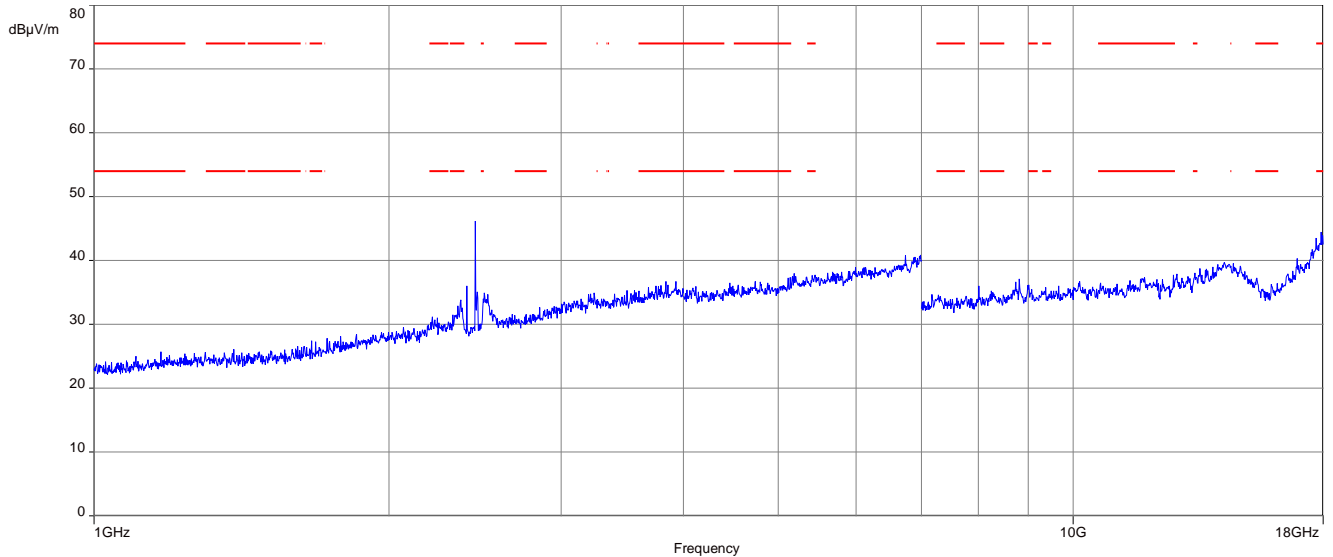
**Plot 5:** Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization


The carrier signal is notched with a 2.4 GHz band rejection filter.

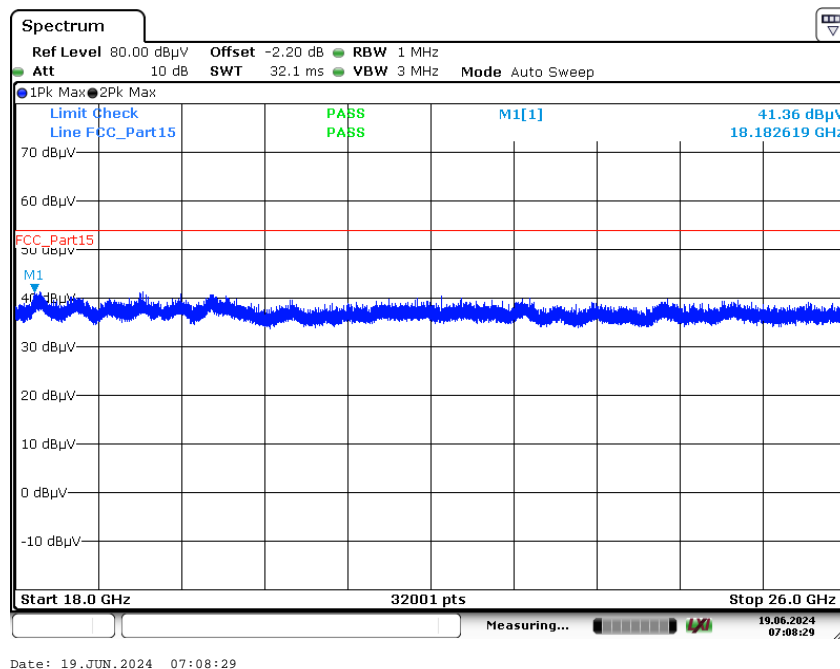**Plot 6:** Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

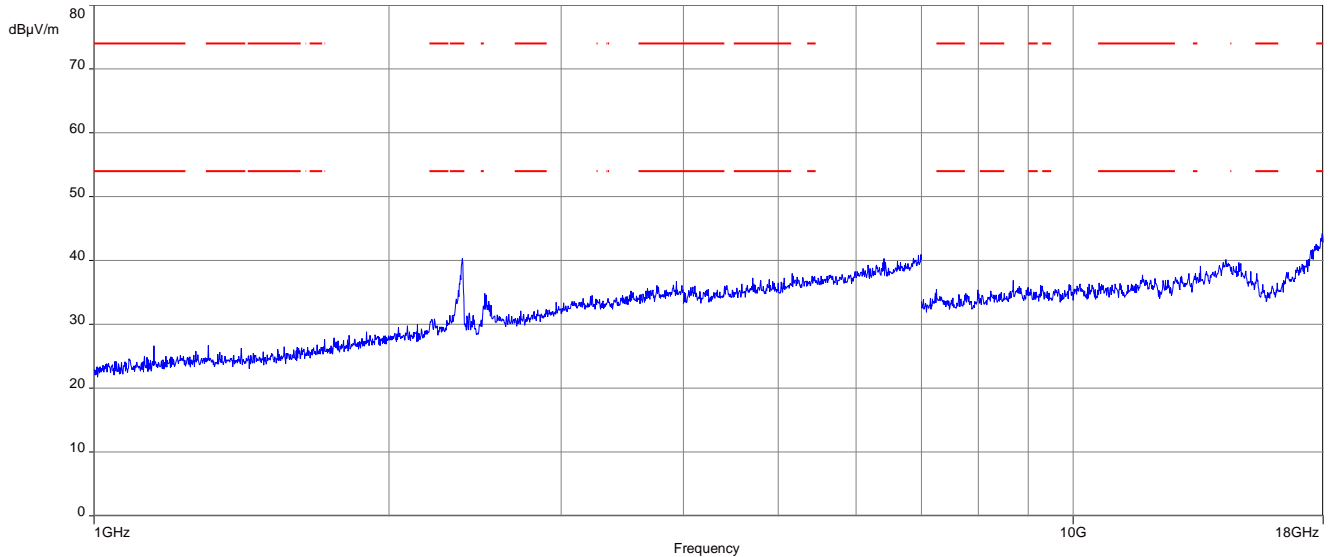
**Plots:** OFDM (40 MHz bandwidth)**Plot 1:** Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization


The carrier signal is notched with a 2.4 GHz band rejection filter.

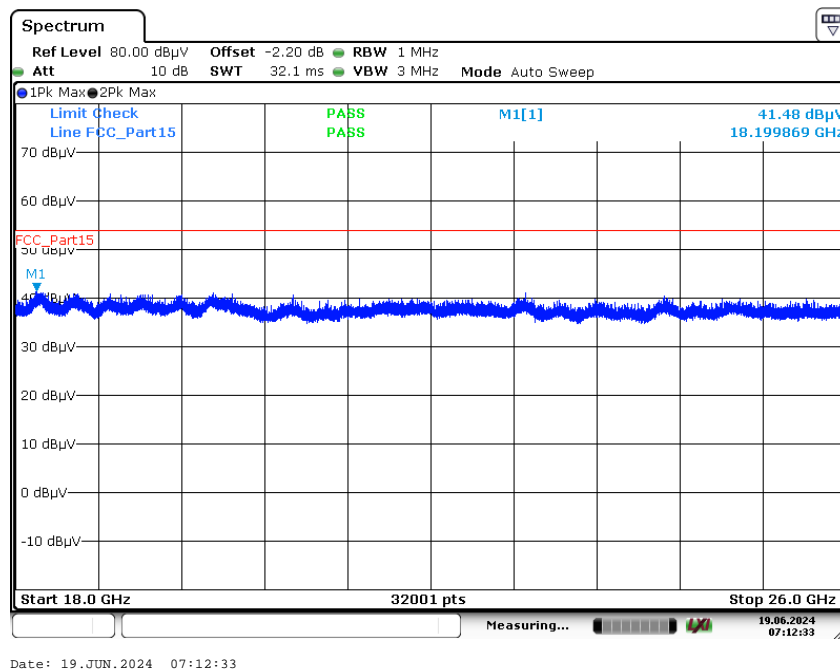**Plot 2:** Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

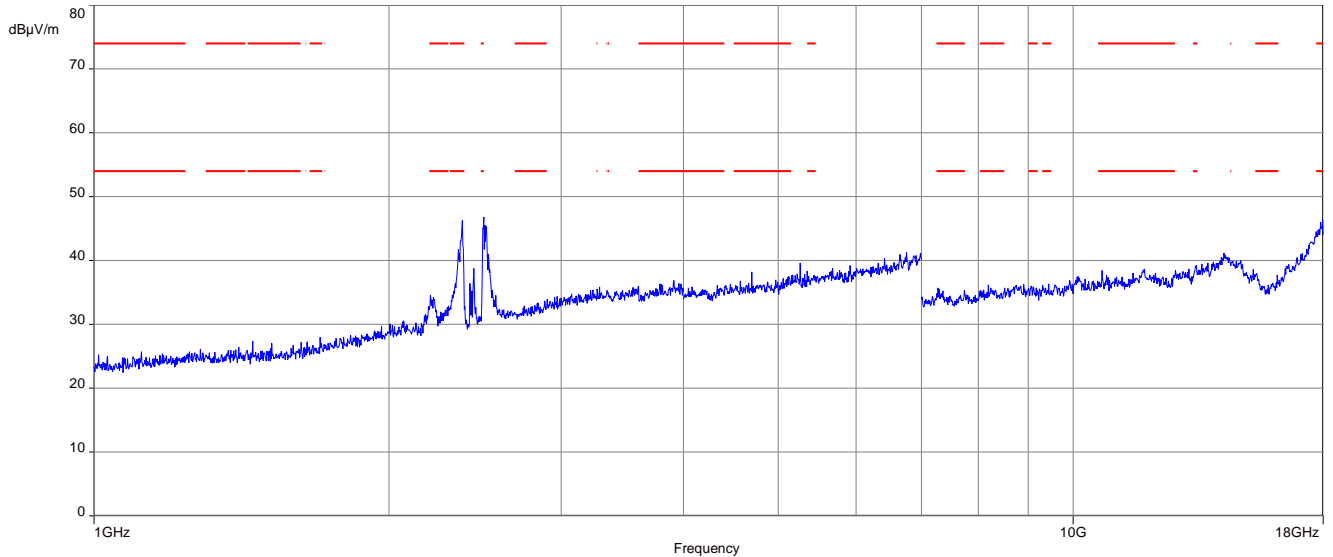
**Plot 3:** Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

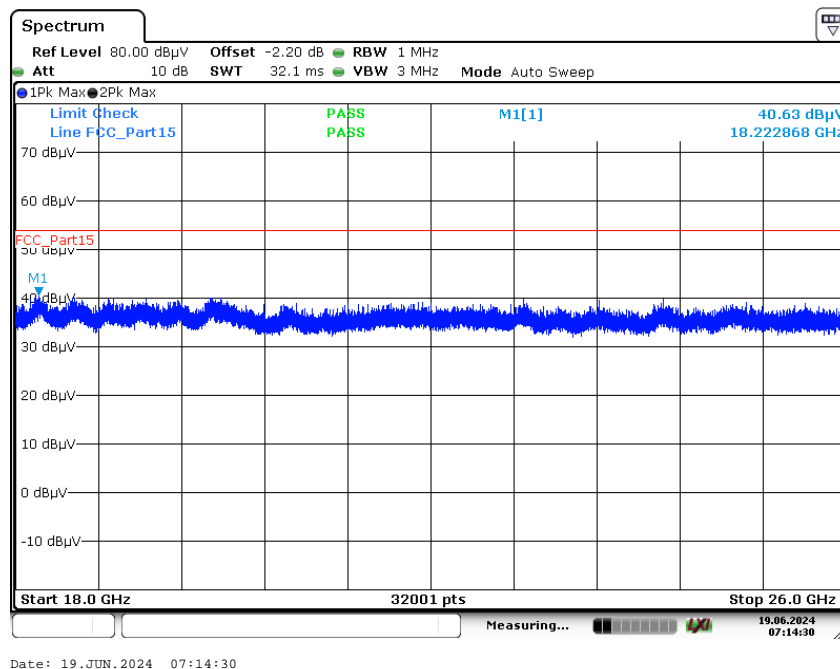**Plot 4:** Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

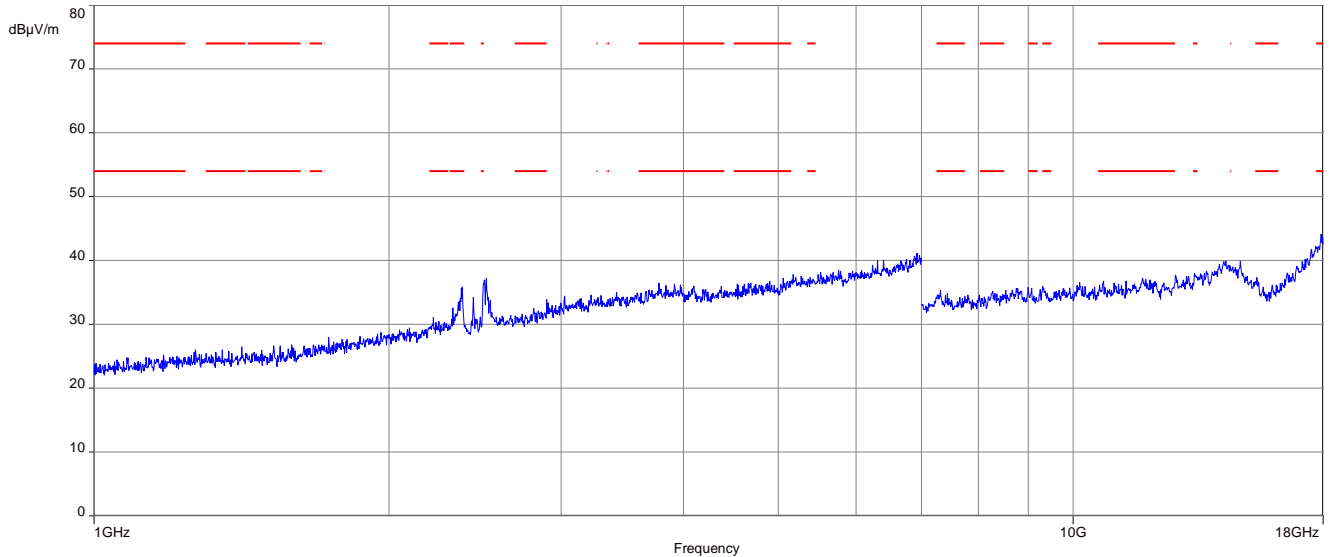**Plot 5:** Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

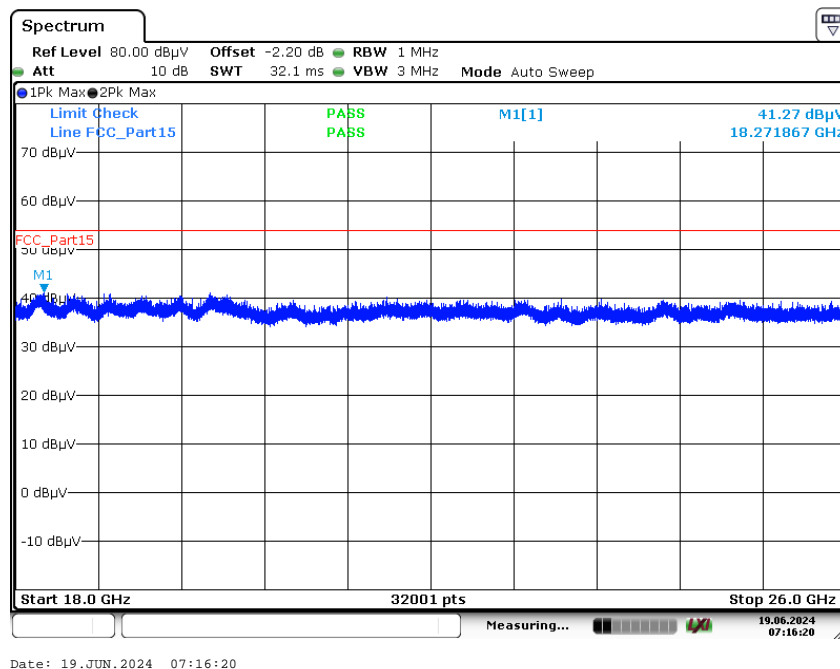**Plot 6:** Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

Date: 19.JUN.2024 07:16:20

**Results T260:** DSSS


TX spurious emissions radiated / dB $\mu$ V/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dB $\mu$ V/m	f / MHz	Detector	Level / dB $\mu$ V/m	f / MHz	Detector	Level / dB $\mu$ V/m
All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.		
	Peak			Peak			Peak	
	AVG			AVG			AVG	
	Peak			Peak			Peak	
	AVG			AVG			AVG	

**Results T260:** OFDM (20 MHz nominal channel bandwidth)


TX spurious emissions radiated / dB $\mu$ V/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dB $\mu$ V/m	f / MHz	Detector	Level / dB $\mu$ V/m	f / MHz	Detector	Level / dB $\mu$ V/m
All detected emissions are more than 20 dB below the limit.						All detected emissions are more than 20 dB below the limit.		
	Peak		4874	Peak	48.9		Peak	
	AVG			AVG	42.6		AVG	
	Peak			Peak			Peak	
	AVG			AVG			AVG	

**Results T260:** OFDM (40 MHz nominal channel bandwidth)

TX spurious emissions radiated / dB $\mu$ V/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dB $\mu$ V/m	f / MHz	Detector	Level / dB $\mu$ V/m	f / MHz	Detector	Level / dB $\mu$ V/m
All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.		
	Peak			Peak			Peak	
	AVG			AVG			AVG	
	Peak			Peak			Peak	
	AVG			AVG			AVG	

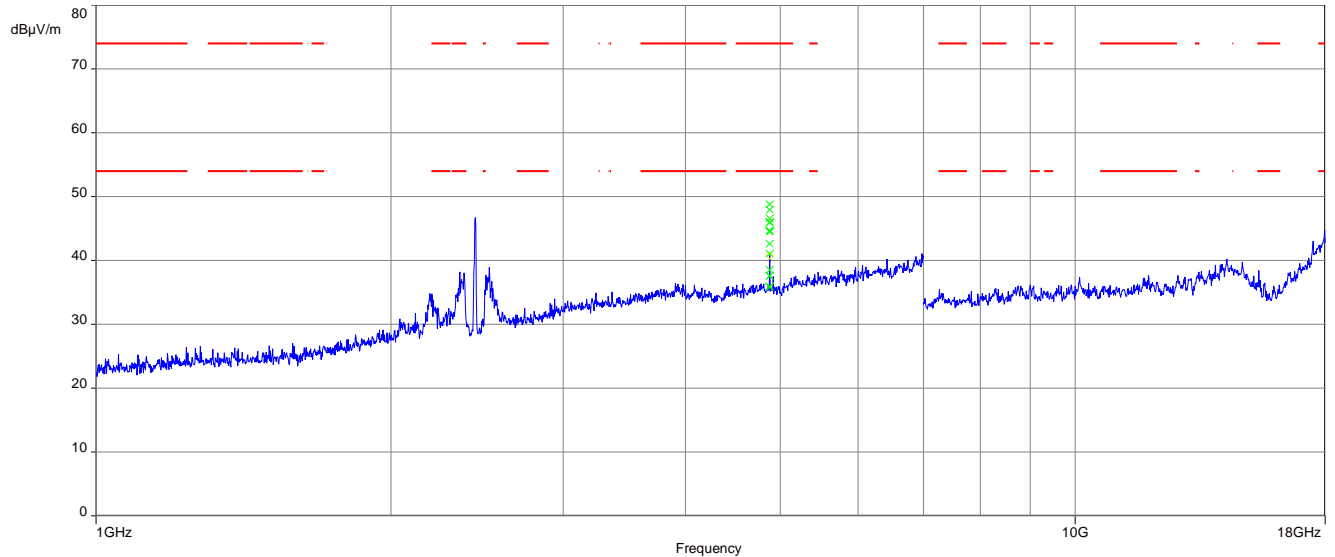**Plots:** DSSS**Plot 1:** Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization


The carrier signal is notched with a 2.4 GHz band rejection filter.

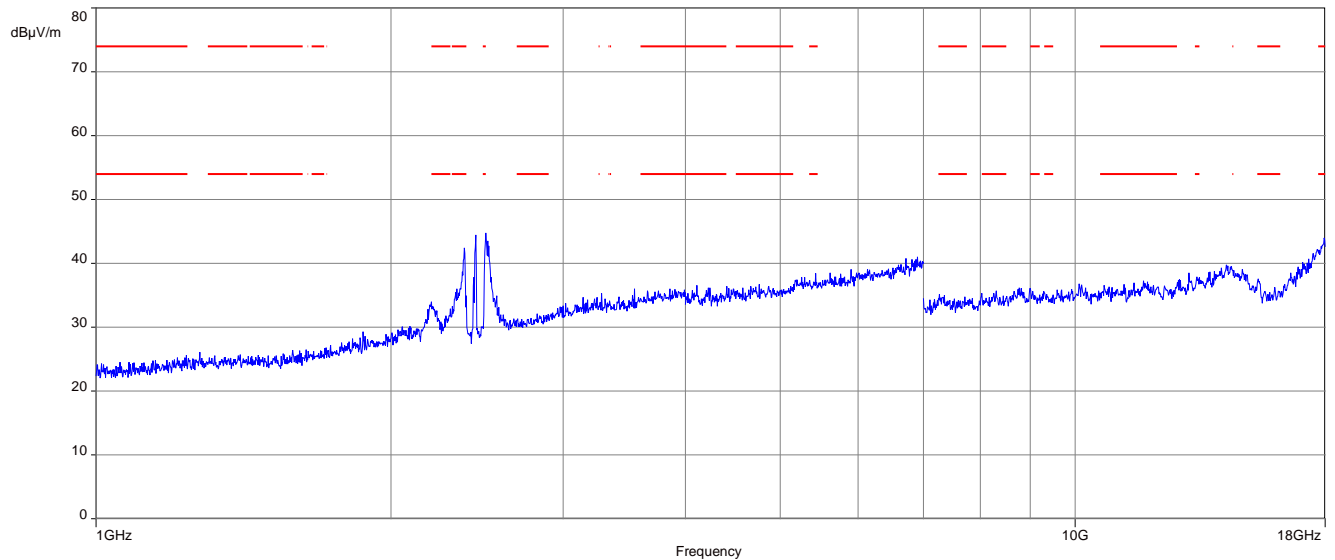**Plots:** OFDM (20 MHz bandwidth)**Plot 1:** Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

**Plots:** OFDM (40 MHz bandwidth)

**Plot 1:** Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization

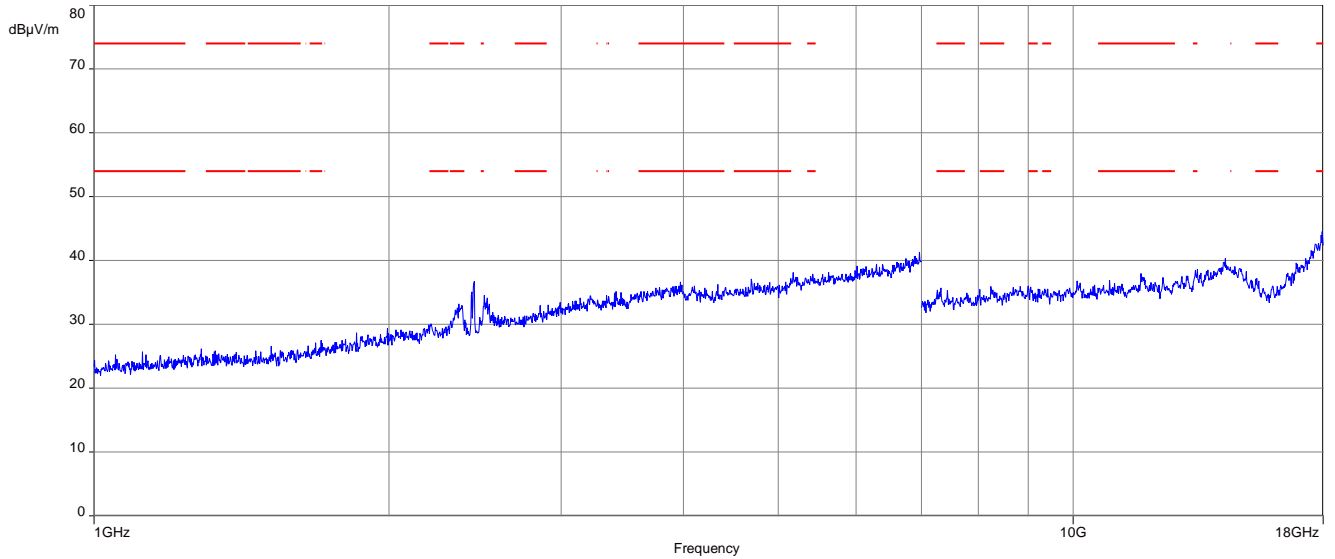

The carrier signal is notched with a 2.4 GHz band rejection filter.



### 13.14 Spurious emissions conducted below 30 MHz (AC conducted)

#### Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. Both power lines, phase and neutral line, are measured. Found peaks are re-measured with average and quasi peak detection to show compliance to the limits.


#### Measurement:

Measurement parameter	
Detector	Peak - Quasi Peak / Average
Sweep time	Auto
Resolution bandwidth	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span	9 kHz to 30 MHz
Trace mode	Max. hold
Test setup	See chapter 7.5 setup A
Measurement uncertainty	See chapter 9


#### Limits:

FCC		ISED
Frequency / MHz	Quasi-Peak / (dB $\mu$ V / m)	Average / (dB $\mu$ V / m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50

\*Decreases with the logarithm of the frequency

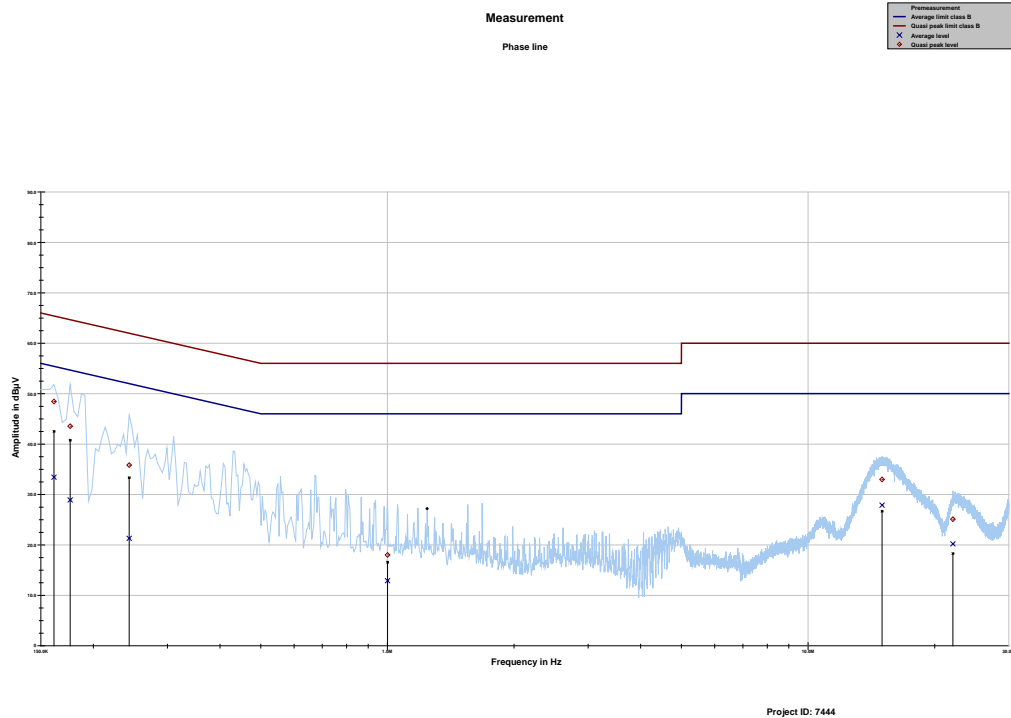**Plots:****Plot 1:** 150 kHz to 30 MHz, phase line

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.161194	48.44	16.96	65.402	33.42	22.26	55.680
0.176119	43.54	21.13	64.667	28.92	26.34	55.254
0.243281	35.83	26.15	61.983	21.29	32.05	53.335
1.000725	18.00	38.00	56.000	12.90	33.10	46.000
14.996644	32.98	27.02	60.000	27.88	22.12	50.000
22.089750	25.10	34.90	60.000	20.21	29.79	50.000

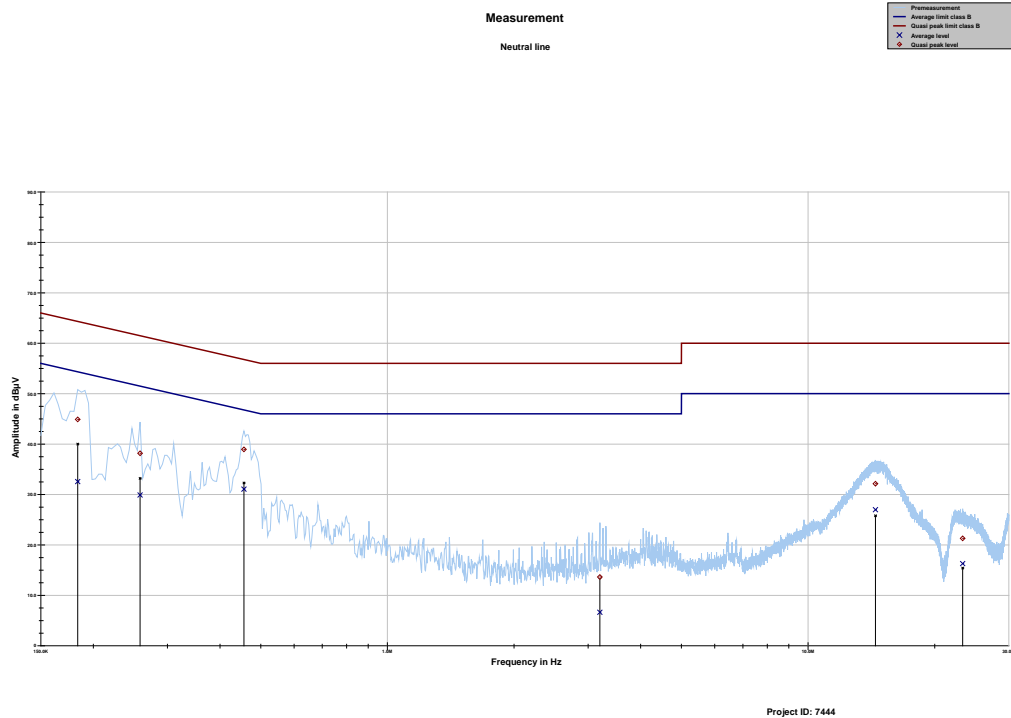**Plot 2:** 150 kHz to 30 MHz, neutral line

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin Average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.183581	44.89	19.43	64.322	32.55	22.49	55.041
0.258206	38.18	23.31	61.489	29.90	23.01	52.908
0.455962	38.95	17.82	56.766	31.06	16.20	47.258
3.198431	13.63	42.37	56.000	6.64	39.36	46.000
14.463075	32.13	27.87	60.000	26.99	23.01	50.000
23.309869	21.29	38.71	60.000	16.30	33.70	50.000

## 14 Observations

No observations except those reported with the single test cases have been made.

## 15 Glossary

<b>AVG</b>	Average
<b>C</b>	Compliant
<b>C/N<sub>0</sub></b>	Carrier to noise-density ratio, expressed in dB-Hz
<b>CAC</b>	Channel availability check
<b>CW</b>	Clean wave
<b>DC</b>	Duty cycle
<b>DFS</b>	Dynamic frequency selection
<b>DSSS</b>	Dynamic sequence spread spectrum
<b>DUT</b>	Device under test
<b>EN</b>	European Standard
<b>ETSI</b>	European Telecommunications Standards Institute
<b>EMC</b>	Electromagnetic Compatibility
<b>EUT</b>	Equipment under test
<b>FCC</b>	Federal Communications Commission
<b>FCC ID</b>	Company Identifier at FCC
<b>FHSS</b>	Frequency hopping spread spectrum
<b>FVIN</b>	Firmware version identification number
<b>GNSS</b>	Global Navigation Satellite System
<b>GUE</b>	GNSS User Equipment
<b>HMN</b>	Host marketing name
<b>HVIN</b>	Hardware version identification number
<b>HW</b>	Hardware
<b>IC</b>	Industry Canada
<b>Inv. No.</b>	Inventory number
<b>MC</b>	Modulated carrier
<b>NA</b>	Not applicable
<b>NC</b>	Not compliant
<b>NOP</b>	Non occupancy period
<b>NP</b>	Not performed
<b>OBW</b>	Occupied bandwidth
<b>OC</b>	Operating channel
<b>OCW</b>	Operating channel bandwidth
<b>OFDM</b>	Orthogonal frequency division multiplexing
<b>OOB</b>	Out of band
<b>OP</b>	Occupancy period
<b>PER</b>	Packet error rate
<b>PMN</b>	Product marketing name
<b>PP</b>	Positive peak
<b>QP</b>	Quasi peak
<b>RLAN</b>	Radio local area network
<b>S/N or SN</b>	Serial number
<b>SW</b>	Software
<b>UUT</b>	Unit under test
<b>WLAN</b>	Wireless local area network

16 Document history

Version	Applied changes	Date of release
R03	Editorial changes	2024-08-20

##### END OF TEST REPORT #####