



Test Report

AIR-CAP3702y-A-K9 AIR-SAP3702y-A-K9

Cisco Aironet 802.11ac Dual Band Access Points

**FCC ID: LDK102087
IC: 2461B-102087**

Also covers:

AIR-CAP3702y-D-K9, AIR-SAP3702y-D-K9

AIR-CAP3702y-N-K9, AIR-SAP3702y-N-K9

AIR-CAP3702y-T-K9, AIR-SAP3702y-T-K9

AIR-CAP3702y-Z-K9, AIR-SAP3702y-Z-K9

y = E (External Antenna) or I (Internal Antenna)

2400-2483.5 MHz

Against the following Specifications:

CFR47 Part 15.247

RSS210

Cisco Systems

170 West Tasman Drive

San Jose, CA 95134



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

SECTION 1: OVERVIEW	3
1.1 TEST SUMMARY	3
SECTION 2: ASSESSMENT INFORMATION	4
2.1 GENERAL	4
2.2 DATE OF TESTING	5
2.3 REPORT ISSUE DATE	5
2.4 TESTING FACILITIES	5
2.5 EQUIPMENT ASSESSED (EUT)	5
2.6 EUT DESCRIPTION	6
SECTION 4: SAMPLE DETAILS.....	7
APPENDIX A: EMISSION TEST RESULTS.....	8
TARGET MAXIMUM CHANNEL POWER	8
6dB BANDWIDTH	9
99% AND 26dB BANDWIDTH.....	16
PEAK OUTPUT POWER	23
POWER SPECTRAL DENSITY	119
CONDUCTED SPURIOUS EMISSIONS	126
CONDUCTED BANDEDGE	133
APPENDIX B: EMISSION TEST RESULTS.....	261
RADIATED SPURIOUS EMISSIONS	261
RADIATED EMISSIONS	270
MAXIMUM PERMISSIBLE EXPOSURE (MPE) CALCULATIONS.....	272
APPENDIX C: TEST EQUIPMENT/SOFTWARE USED TO PERFORM THE TEST	274

Section 1: Overview

1.1 Test Summary

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Emission	Immunity
CFR47 Part 15.247 RSS210	N/A

The specifications listed above represent actual tests performed to demonstrate compliance against the specifications and basic standards listed on the front cover of this report. This list is not a one to one match to the front cover for one or more of the following reasons.

1. Basic standards call up many different test phenomena specifications such as the 61000-4-X series. The basic standards define which elements and levels shall be applied from these specifications and as such it is not appropriate to list the individual specifications on the front cover.
2. A Standard listed on the front cover may be required in a particular country but is not appropriate for the particular technologies included in the equipment under test. E.g. You cannot test a DC product to the mains Harmonics requirements in EN61000-3-2. See section 3.2.
3. Test results against a particular standard or specification may be included in a different test report. See section 3.2 for an EDCS reference of this data.
4. Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
5. Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.
6. Testing may have been performed to an equivalent test that satisfies the requirements of the standards and specifications listed on the front cover of the report. See section 3.2.
7. Where radiated emissions testing has been performed to EN55022/CISPR22 the additional requirements of VCCI: V- 3/2006.04, EN55022: 1994 +A1/2 and CAN/CSA- CISPR 22-02 have also been evaluated unless otherwise stated.
8. Testing to the requirements of CFR47 Part 15 was performed against the CISPR22 limits. The results are therefore deemed satisfactory evidence of compliance with Industry Canada Interference Causing Equipment Standard ICES-003.
9. Where assessment has been performed to CISPR24, all the applicable test requirements may have not been covered. Refer to the results section for the tests performed.

Notes:

- 1) Where a specification listed on the front cover of this report has deviations from the basic standards listed above, the additional technical requirements of the specification were also assessed.
- 2) Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
- 3) Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.



Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%

*[Where applicable] For ESD testing the humidity limits used were 30% to 60% and for EFT/B tests the humidity limits used were 25% to 75%.
- e) All AC testing was performed at one or more of the following supply voltages:

110V 60 Hz (+/-20%)
220V 50 Hz (+/-20%)

This report must not be reproduced except in full, without written approval of Cisco Systems.



2.2 Date of testing

18-February-2013 – 08-March-2013

2.3 Report Issue Date

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled

2.4 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.,	Cisco Systems, Inc.
4125 Highlander Parkway	170 West Tasman Drive
Richfield, OH 44286	San Jose, CA 95134
USA	USA

Test Engineers

James Nicholson

2.5 Equipment Assessed (EUT)

AIR-SAP3702E-A-K9 Cisco Aironet 802.11ac Dual Band Access Point



2.6 EUT Description

The 3700 Series Cisco Aironet 802.11ac Dual Band Access Points support the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

Non HT-20, One Antenna, 6 to 54 Mbps
 Non HT-20, Two Antennas, 6 to 54 Mbps
 Non HT-20, Three Antennas, 6 to 54 Mbps
 Non HT-20, Four Antennas, 6 to 54 Mbps

Non HT-20 Beam Forming, Two Antennas, 6 to 54 Mbps
 Non HT-20 Beam Forming, Three Antennas, 6 to 54 Mbps
 Non HT-20 Beam Forming, Four Antennas, 6 to 54 Mbps

HT-20, One Antenna, M0 to M7
 HT-20, Two Antennas, M0 to M15
 HT-20, Three Antennas, M0 to M23
 HT-20, Four Antennas, M0 to M23

HT-20 STBC, Two Antennas, M0 to M7
 HT-20 STBC, Three Antennas, M0 to M7
 HT-20 STBC, Four Antennas, M0 to M7

HT-20 Beam Forming, Two Antennas, M0 to M15
 HT-20 Beam Forming, Three Antennas, M0 to M23
 HT-20 Beam Forming, Four Antennas, M0 to M23

The following antennas are supported by this product series.

The data included in this report represent the worst case data for all antennas.

Frequency	Part Number	Antenna Type	Antenna Gain (dBi)
2.4 / 5 GHz	AIR-ANT2524DB-R	Dual-resonant black dipole	2 / 4
	AIR-ANT2524DW-R	Dual-resonant white dipole	2 / 4
	AIR-ANT2524DG-R	Dual-resonant gray dipole	2 / 4
	AIR-ANT2524V4C-R	Dual-resonant ceiling mount omni (4-pack)	2 / 4
	AIR-ANT2535SDW-R	Dual-resonant "stubby" monopole	3 / 5
	Internal	Omni	4 / 4
	AIR-ANT2544V4M-R	Dual-resonant omni (4-pack)	4 / 4
	AIR-ANT2566P4W-R	Dual-resonant "directional" antenna (4-pack)	6 / 6



Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing. Please also refer to the "Justification for worst Case test Configuration" section of this report for further details on the selection of EUT samples.

4.1 Sample Details (Photographs of the test samples, where appropriate can be found in appendix H)

Sample No.	Equipment Details	Part Number	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-SAP3702E-A-K9		Cisco Systems	NA	NA	NA	
S02	AIR-PWR-B	341-0306-01	Cisco Systems	NA	NA	NA	

4.2 System Details

System #	Description	Samples
1	EUT	S01, S02

4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting

All tests in this report were performed as described in FCC KDB 662911 D01

**Appendix A: Emission Test Results**

Testing Laboratory: Cisco Systems, Inc., 4125 Highlander Parkway, Richfield, OH, USA

Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

Operating Mode	Maximum Channel Power (dBm)		
	Frequency (MHz)		
	2412	2437	2462
Legacy CCK, 1 to 11 Mbps	21	21	21
Non HT-20, 6 to 54 Mbps	21	21	21
Non HT-20 Beam Forming, 6 to 54 Mbps	20	21	19
HT-20, M0 to M23	21	21	20
HT-20 STBC, M0 to M7	21	21	20
HT-20 Beam Forming, M0 to M23	20	21	20



6dB Bandwidth

15.247 / RSS-210 A8.2: Systems using digital modulation techniques may operate in the 2400-2483.5MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.

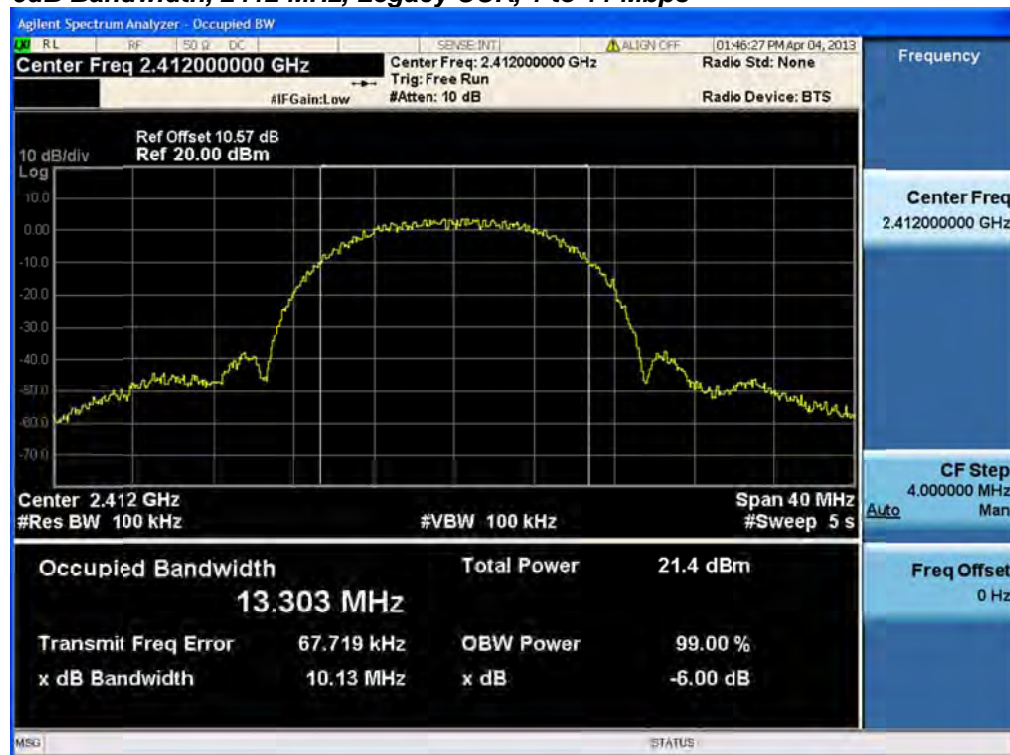
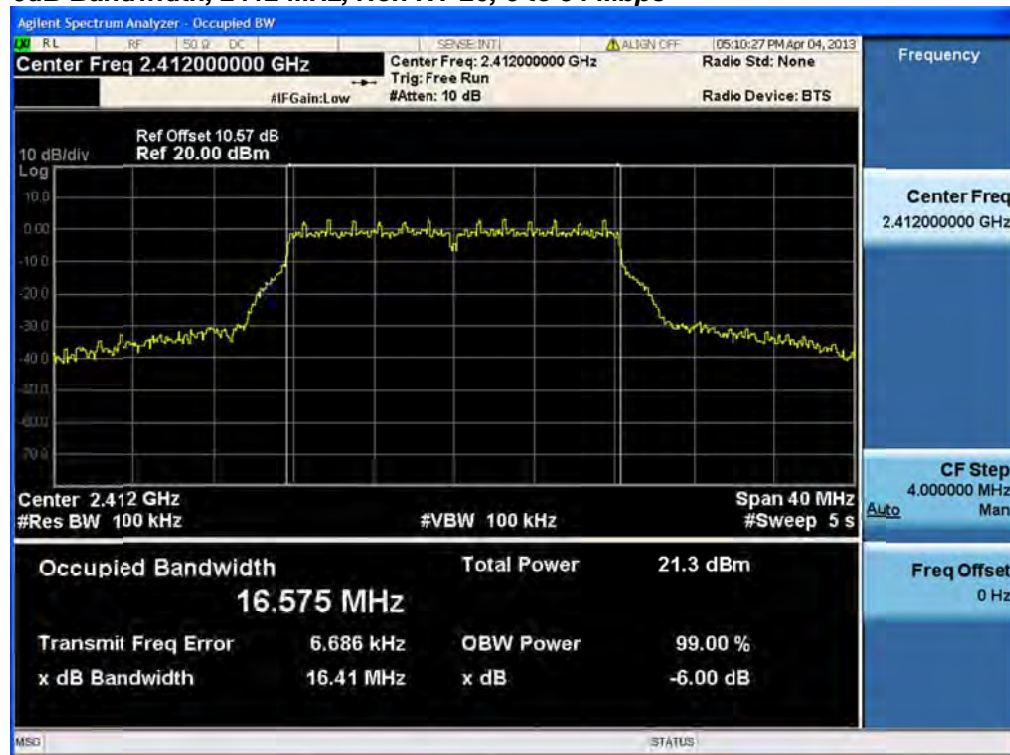
Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

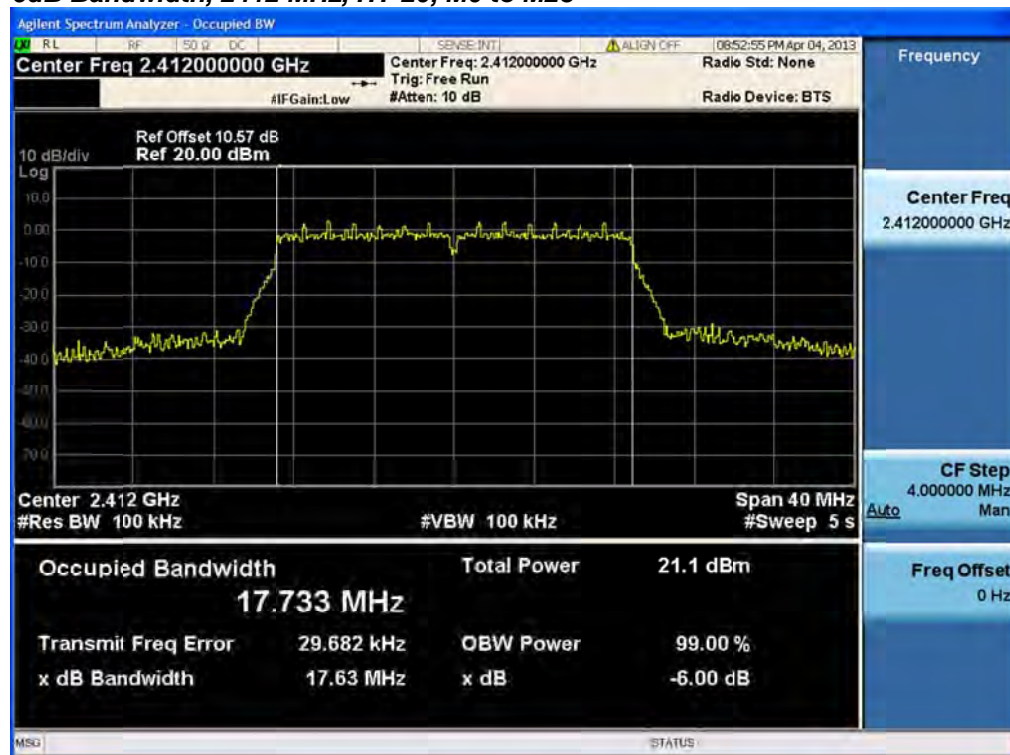
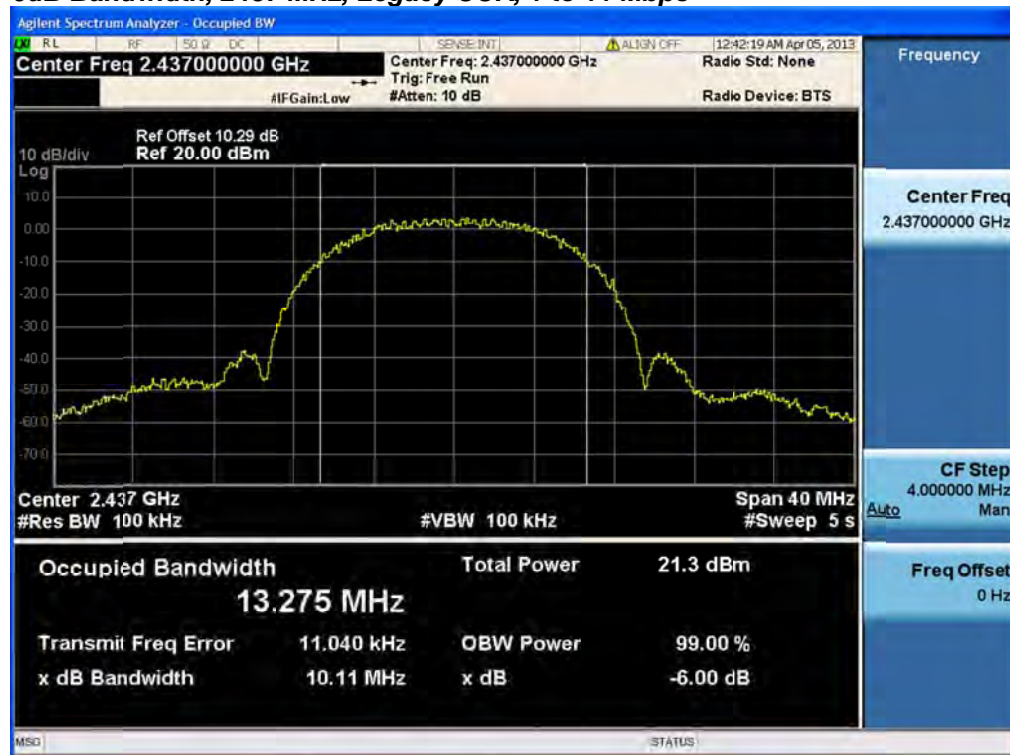
Center Frequency:	Frequency from table below
Span:	2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel)
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5 s
Resolution Bandwidth:	100 kHz
Video Bandwidth:	100 kHz
X dB Bandwidth:	6 dB
Detector:	Peak
Trace:	Single

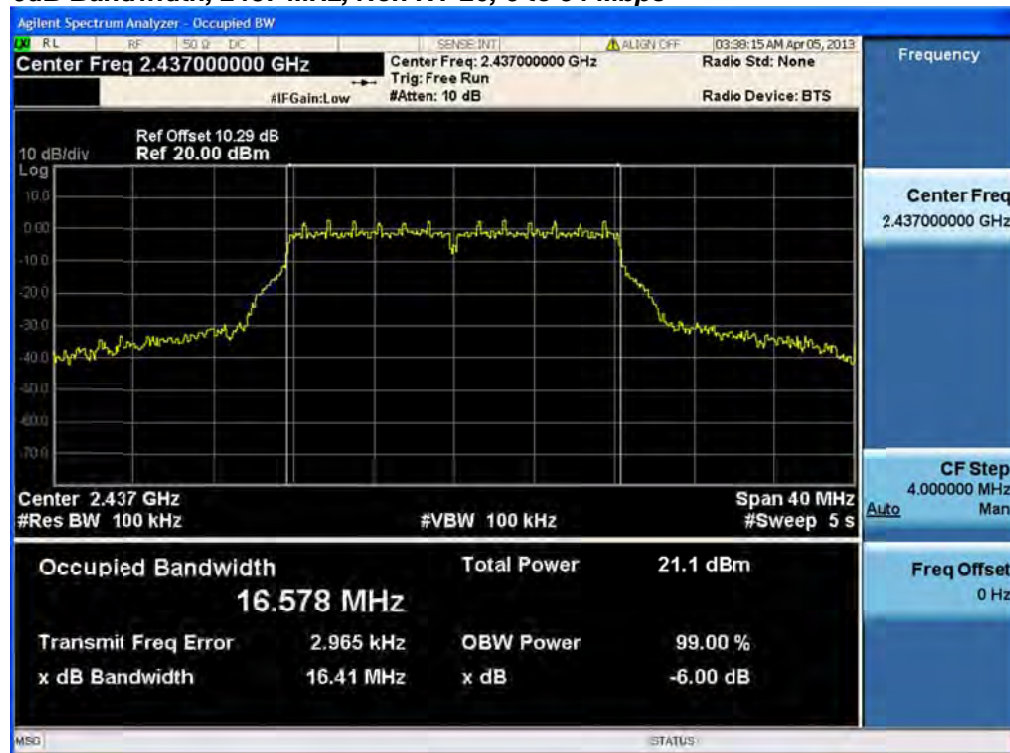
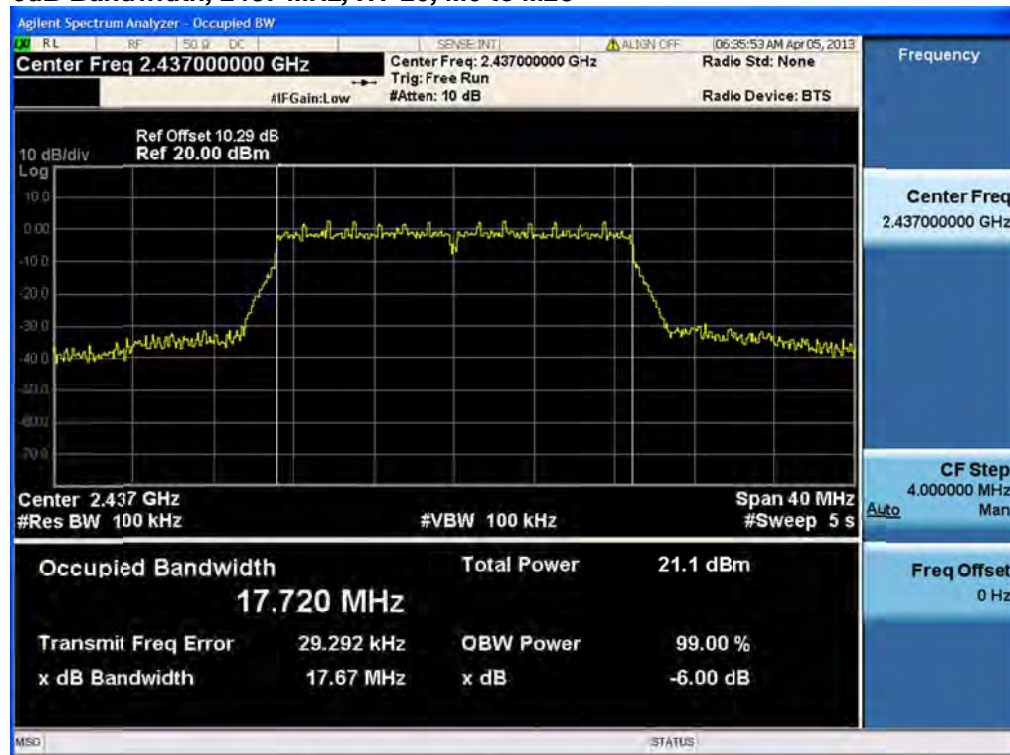
Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:



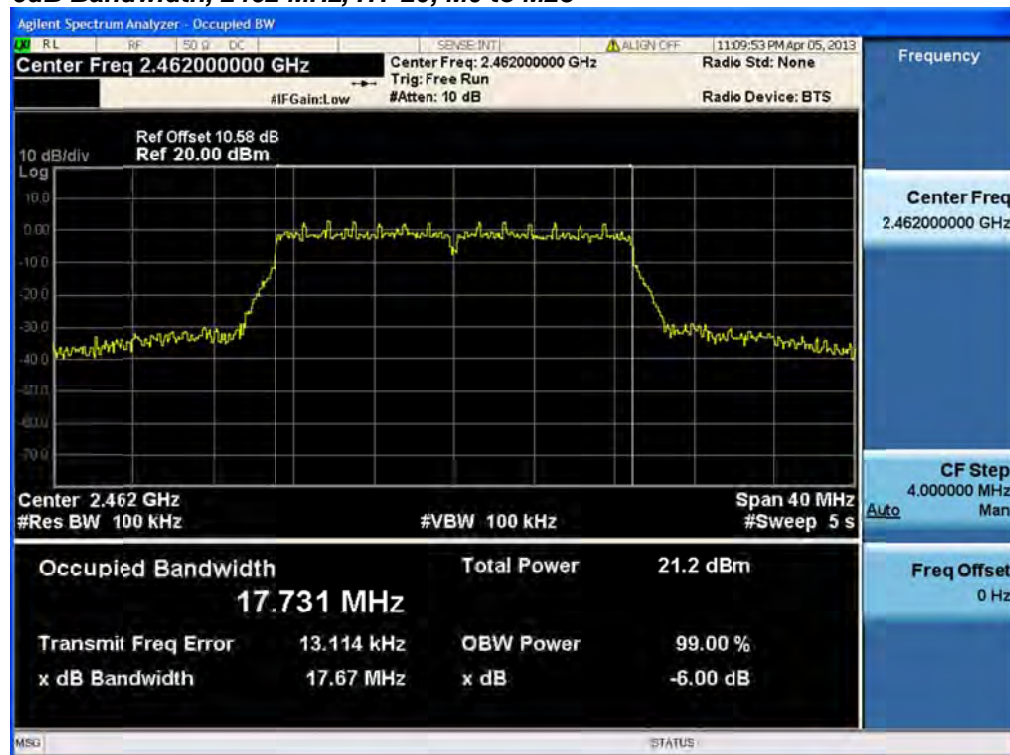
Frequency (MHz)	Mode	Data Rate (Mbps)	6dB BW (MHz)	Limit (kHz)	Margin (MHz)
2412	Legacy CCK, 1 to 11 Mbps	11	<u>10.13</u>	>500	12.8
	Non HT-20, 6 to 54 Mbps	6	<u>16.41</u>	>500	16.1
	HT-20, M0 to M23	m0	<u>17.63</u>	>500	17.2
2437	Legacy CCK, 1 to 11 Mbps	11	<u>10.11</u>	>500	12.8
	Non HT-20, 6 to 54 Mbps	6	<u>16.41</u>	>500	16.1
	HT-20, M0 to M23	m0	<u>17.67</u>	>500	17.2
2462	Legacy CCK, 1 to 11 Mbps	11	<u>8.29</u>	>500	12.7
	Non HT-20, 6 to 54 Mbps	6	<u>16.41</u>	>500	16.1
	HT-20, M0 to M23	m0	<u>17.67</u>	>500	17.2

6dB Bandwidth, 2412 MHz, Legacy CCK, 1 to 11 Mbps**6dB Bandwidth, 2412 MHz, Non HT-20, 6 to 54 Mbps**

6dB Bandwidth, 2412 MHz, HT-20, M0 to M23**6dB Bandwidth, 2437 MHz, Legacy CCK, 1 to 11 Mbps**

6dB Bandwidth, 2437 MHz, Non HT-20, 6 to 54 Mbps**6dB Bandwidth, 2437 MHz, HT-20, M0 to M23**

6dB Bandwidth, 2462 MHz, Legacy CCK, 1 to 11 Mbps**6dB Bandwidth, 2462 MHz, Non HT-20, 6 to 54 Mbps**

6dB Bandwidth, 2462 MHz, HT-20, M0 to M23



99% and 26dB Bandwidth

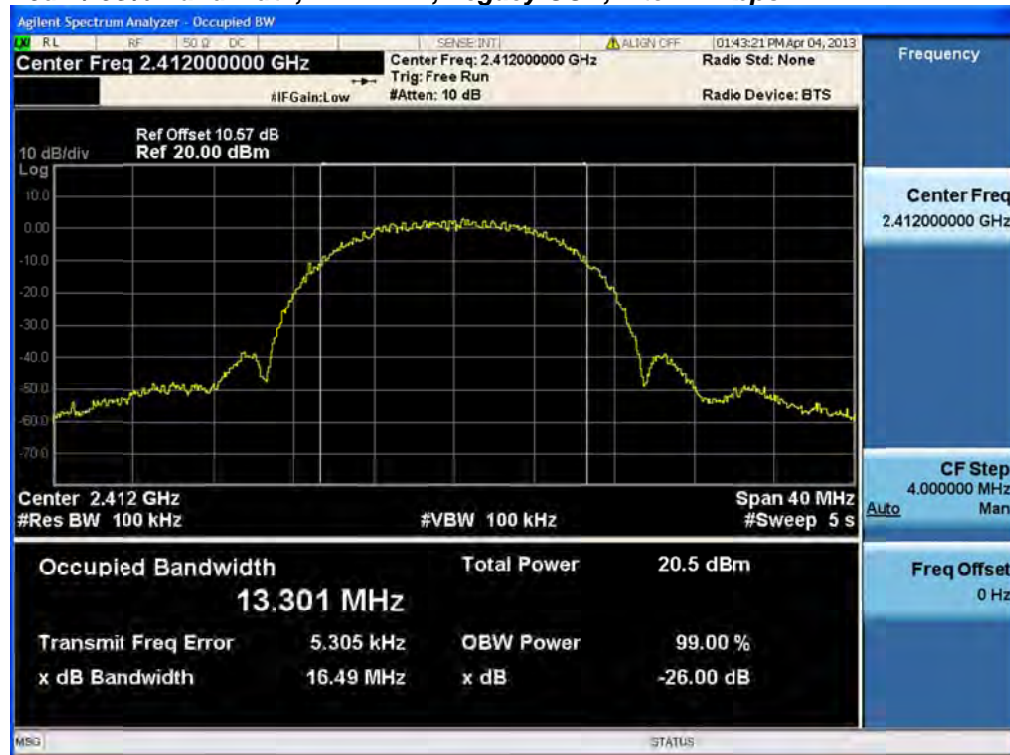
Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

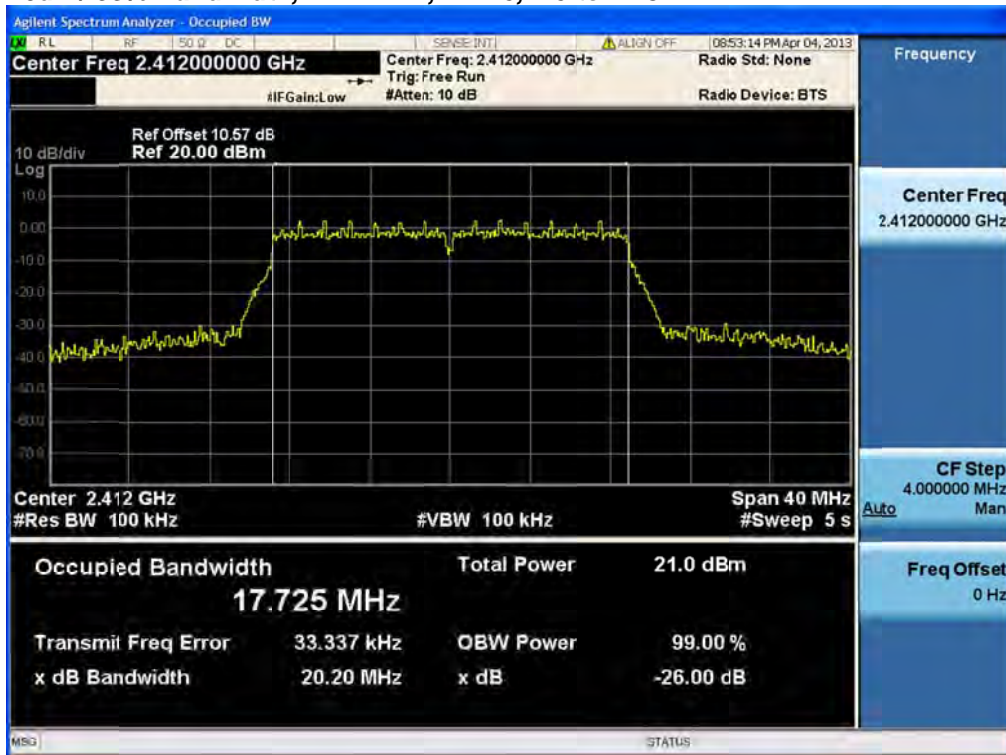
Center Frequency:	Frequency from table below
Span:	2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel)
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5 s
Resolution Bandwidth:	1%-3% of 26 dB Bandwidth
Video Bandwidth:	≥Resolution Bandwidth
X dB Bandwidth:	26 dB
Detector:	Peak
Trace:	Single

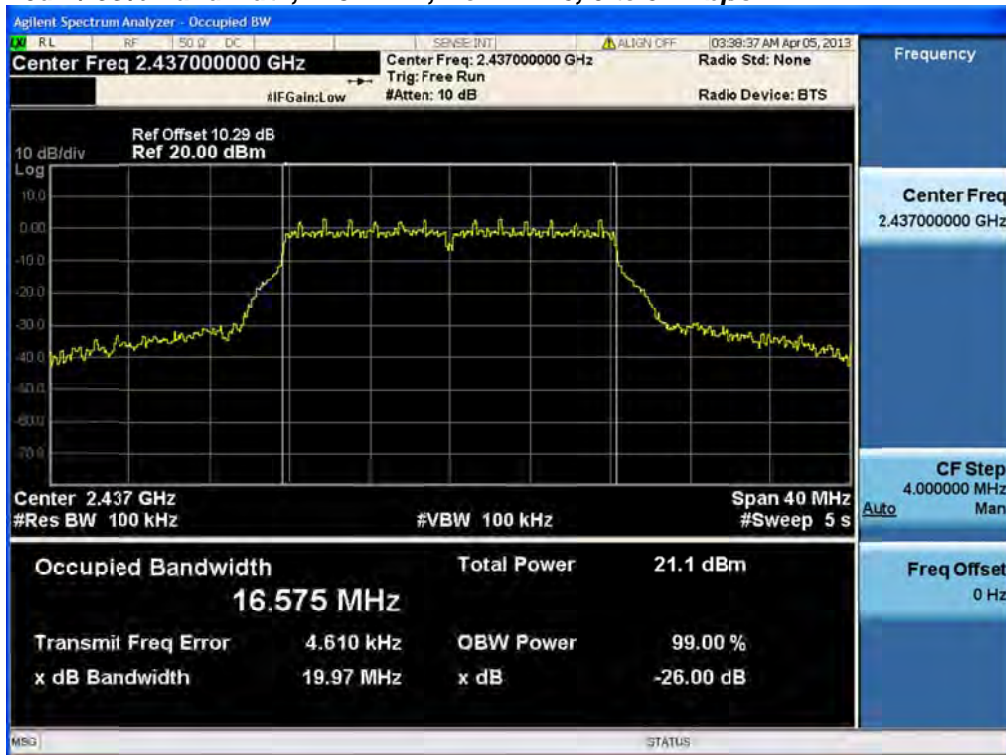
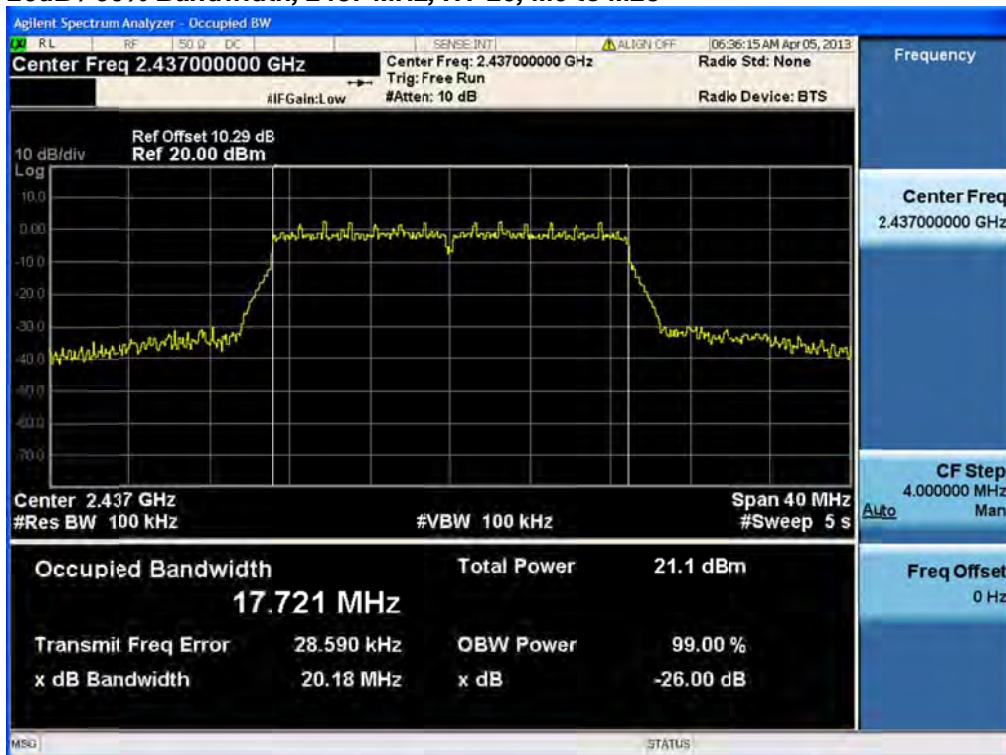
Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:

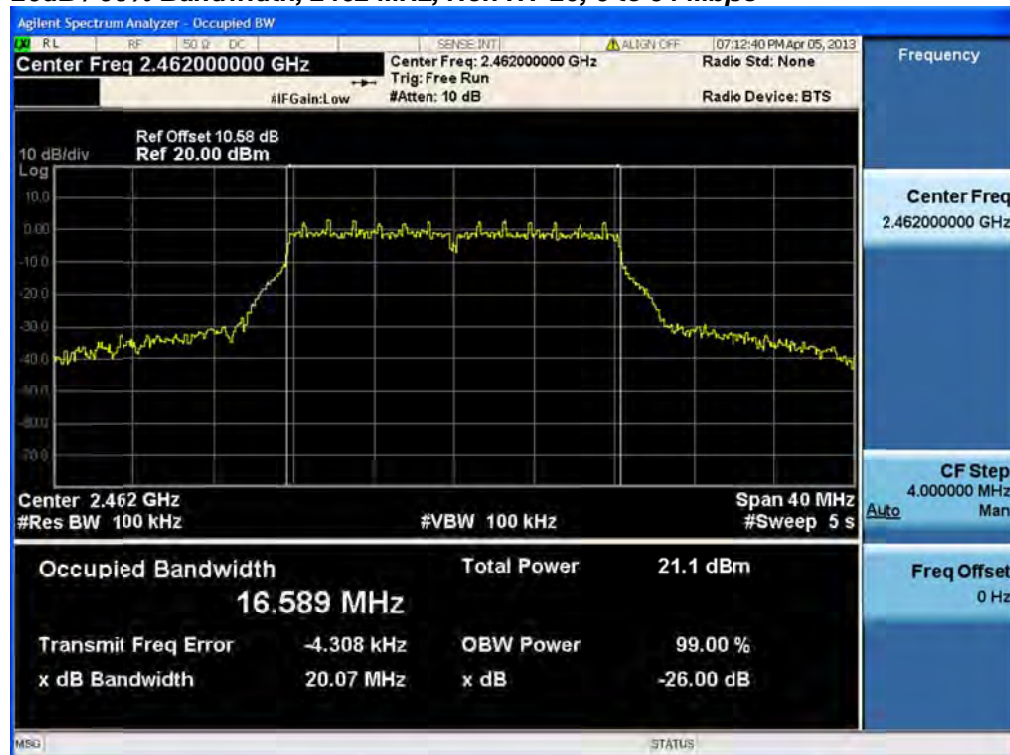


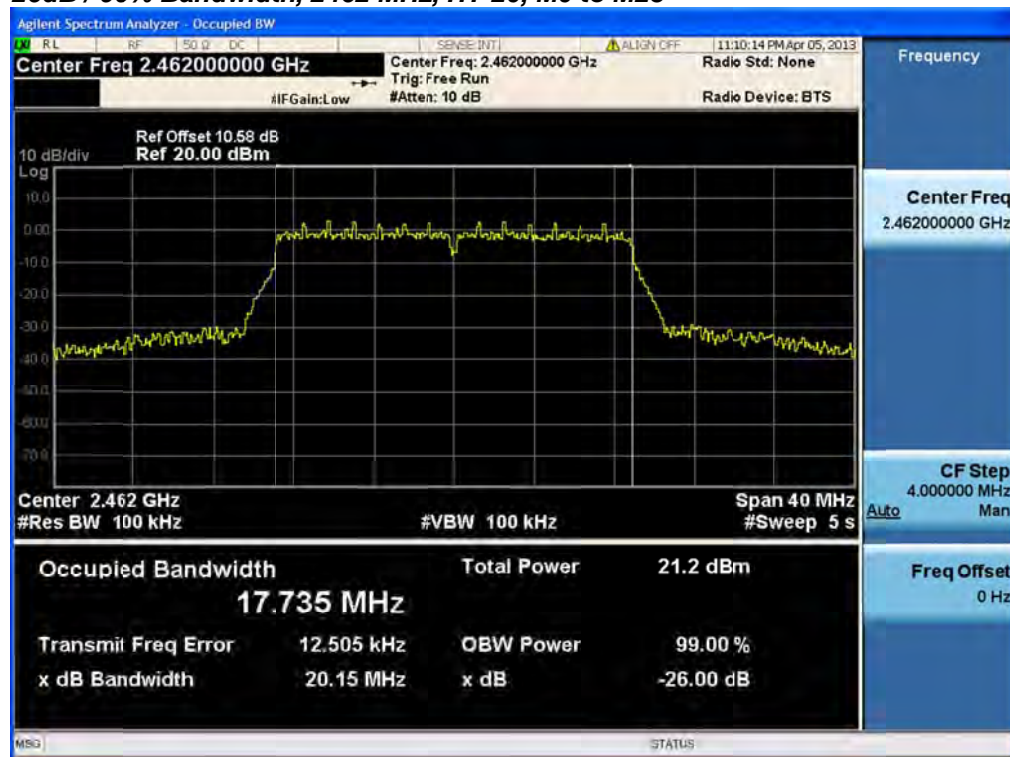
Frequency (MHz)	Mode	Data Rate (Mbps)	99% BW (MHz)	26dB BW (MHz)
2412	Legacy CCK, 1 to 11 Mbps	11	<u>13.3</u>	<u>16.2</u>
	Non HT-20, 6 to 54 Mbps	6	<u>16.6</u>	<u>19.9</u>
	HT-20, M0 to M23	m0	<u>17.7</u>	20.2
2437	Legacy CCK, 1 to 11 Mbps	11	<u>13.3</u>	16.5
	Non HT-20, 6 to 54 Mbps	6	<u>16.6</u>	20
	HT-20, M0 to M23	m0	<u>17.7</u>	20.2
2462	Legacy CCK, 1 to 11 Mbps	11	<u>13.3</u>	16.4
	Non HT-20, 6 to 54 Mbps	6	<u>16.6</u>	<u>19.9</u>
	HT-20, M0 to M23	m0	<u>17.7</u>	20.2

26dB / 99% Bandwidth, 2412 MHz, Legacy CCK, 1 to 11 Mbps**26dB / 99% Bandwidth, 2412 MHz, Non HT-20, 6 to 54 Mbps**

26dB / 99% Bandwidth, 2412 MHz, HT-20, M0 to M23**26dB / 99% Bandwidth, 2437 MHz, Legacy CCK, 1 to 11 Mbps**

26dB / 99% Bandwidth, 2437 MHz, Non HT-20, 6 to 54 Mbps**26dB / 99% Bandwidth, 2437 MHz, HT-20, M0 to M23**

26dB / 99% Bandwidth, 2462 MHz, Legacy CCK, 1 to 11 Mbps**26dB / 99% Bandwidth, 2462 MHz, Non HT-20, 6 to 54 Mbps**

26dB / 99% Bandwidth, 2462 MHz, HT-20, M0 to M23



Peak Output Power

15.247 / RSS-210 A8.4: The maximum conducted output power of the intentional radiator for systems using digital modulation in the 2400-2483.5 MHz band shall not exceed 1 Watt (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum supported antenna gain is 6dBi. The peak correlated gain for each mode is listed in the table below.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.

Enable "Channel Power" function of analyzer	
Center Frequency:	Frequency from table below
Span:	20 MHz (must be greater than 26dB bandwidth, adjust as necessary)
Ref Level Offset:	Correct for attenuator and cable loss.
Reference Level:	20 dBm
Attenuation:	20 dB
Sweep Time:	100ms, Single sweep
Resolution Bandwidth:	1 MHz
Video Bandwidth:	3 MHz
Detector:	Sample
Trace:	Trace Average 100 traces in Power Averaging Mode
Integration BW:	=26 dB BW from 26 dB Bandwidth Data

After averaging 100 traces of the transmitter waveform on the spectrum analyzer, record the spectrum analyzer Channel Power.

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units.



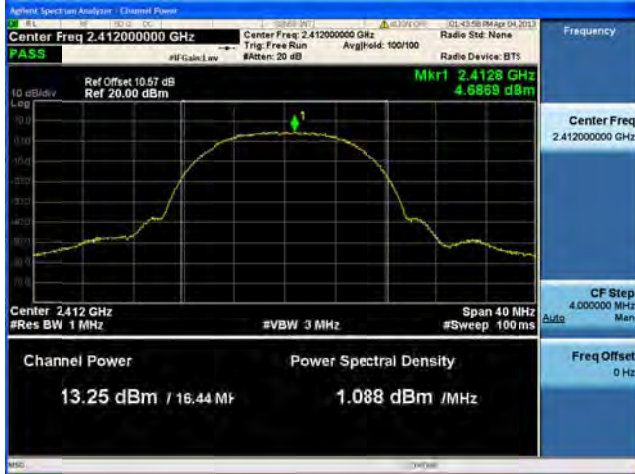
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Peak Power (dBm)	Tx 2 Peak Power (dBm)	Tx 3 Peak Power (dBm)	Tx 4 Peak Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
2412	Legacy CCK, 1 to 11 Mbps	1	6	<u>13.2</u>				13.20	30	16.80
	Legacy CCK, 1 to 11 Mbps	2	6	<u>14.3</u>	<u>15.7</u>	<u>14.8</u>		19.74	30	10.26
	Legacy CCK, 1 to 11 Mbps	4	6	<u>14.3</u>	<u>15.7</u>	<u>14.8</u>	<u>15.6</u>	21.16	30	8.84
	Non HT-20, 6 to 54 Mbps	1	6	<u>14.7</u>				14.70	30	15.30
	Non HT-20, 6 to 54 Mbps	2	6	<u>14.7</u>	<u>15.5</u>			18.13	30	11.87
	Non HT-20, 6 to 54 Mbps	3	6	<u>14.7</u>	<u>15.5</u>	<u>14.8</u>		19.79	30	10.21
	Non HT-20, 6 to 54 Mbps	4	6	<u>14.7</u>	<u>15.5</u>	<u>14.8</u>	<u>15.4</u>	21.13	30	8.87
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	9	<u>14.7</u>	<u>15.5</u>			18.13	27	8.87
	Non HT-20 Beam Forming, 6 to 54 Mbps	3	11	<u>13.6</u>	<u>14.2</u>	<u>13.8</u>		18.65	25.2	6.55
	Non HT-20 Beam Forming, 6 to 54 Mbps	4	12	<u>13.6</u>	<u>14.2</u>	<u>13.8</u>	<u>14.3</u>	20.00	24	4.00
	HT-20, M0 to M7	1	6	<u>14.1</u>				14.10	30	15.90
	HT-20, M0 to M7	2	6	<u>14.1</u>	<u>15.4</u>			17.81	30	12.19
	HT-20, M8 to M15	2	6	<u>14.1</u>	<u>15.4</u>			17.81	30	12.19
	HT-20, M0 to M7	3	6	<u>14.1</u>	<u>15.4</u>	<u>14.6</u>		19.50	30	10.50
	HT-20, M8 to M15	3	6	<u>14.1</u>	<u>15.4</u>	<u>14.6</u>		19.50	30	10.50
	HT-20, M16 to M23	3	6	<u>14.1</u>	<u>15.4</u>	<u>14.6</u>		19.50	30	10.50
	HT-20, M0 to M7	4	6	<u>14.1</u>	<u>15.4</u>	<u>14.6</u>	<u>15.1</u>	20.85	30	9.15
	HT-20, M8 to M15	4	6	<u>14.1</u>	<u>15.4</u>	<u>14.6</u>	<u>15.1</u>	20.85	30	9.15
	HT-20, M16 to M23	4	6	<u>14.1</u>	<u>15.4</u>	<u>14.6</u>	<u>15.1</u>	20.85	30	9.15
	HT-20 Beam Forming, M0 to M7	2	9	<u>14.1</u>	<u>15.4</u>			17.81	27	9.19
	HT-20 Beam Forming, M8 to M15	2	6	<u>14.1</u>	<u>15.4</u>			17.81	30	12.19
	HT-20 Beam Forming, M0 to M7	3	11	<u>13.1</u>	<u>14.1</u>	<u>13.6</u>		18.39	25.2	6.81
	HT-20 Beam Forming, M8 to M15	3	8	<u>14.1</u>	<u>15.4</u>	<u>14.6</u>		19.50	28.2	8.70
	HT-20 Beam Forming, M16 to M23	3	6	<u>14.1</u>	<u>15.4</u>	<u>14.6</u>		19.50	30	10.50
	HT-20 Beam Forming, M0 to M7	4	12	<u>12.1</u>	<u>13.1</u>	<u>12.2</u>	<u>13.0</u>	18.64	24	5.36
	HT-20 Beam Forming, M8 to M15	4	9	<u>13.1</u>	<u>14.1</u>	<u>13.6</u>	<u>14.2</u>	19.79	27	7.21
	HT-20 Beam Forming, M16 to M23	4	7	<u>13.1</u>	<u>14.1</u>	<u>13.6</u>	<u>14.2</u>	19.79	28.8	9.01
	HT-20 STBC, M0 to M7	2	6	<u>14.1</u>	<u>15.4</u>			17.81	30	12.19
	HT-20 STBC, M0 to M7	3	6	<u>14.1</u>	<u>15.4</u>	<u>14.6</u>		19.50	30	10.50
	HT-20 STBC, M0 to M7	4	6	<u>14.1</u>	<u>15.4</u>	<u>14.6</u>	<u>15.1</u>	20.85	30	9.15

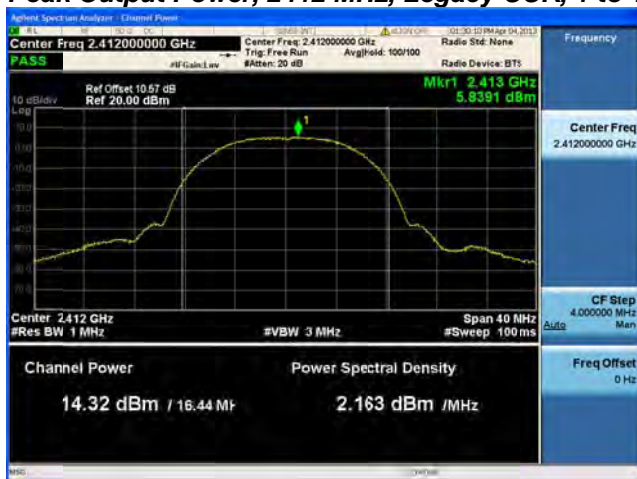


2437	Legacy CCK, 1 to 11 Mbps	1	6	<u>14.2</u>				14.20	30	15.80
	Legacy CCK, 1 to 11 Mbps	2	6	<u>14.2</u>	<u>15.5</u>			17.91	30	12.09
	Legacy CCK, 1 to 11 Mbps	3	6	<u>14.2</u>	<u>15.5</u>	<u>14.8</u>		19.64	30	10.36
	Legacy CCK, 1 to 11 Mbps	4	6	<u>14.2</u>	<u>15.5</u>	<u>14.8</u>	<u>15.6</u>	21.08	30	8.92
	Non HT-20, 6 to 54 Mbps	1	6	<u>14.4</u>				14.40	30	15.60
	Non HT-20, 6 to 54 Mbps	2	6	<u>14.4</u>	<u>15.6</u>			18.05	30	11.95
	Non HT-20, 6 to 54 Mbps	3	6	<u>14.4</u>	<u>15.6</u>	<u>14.6</u>		19.67	30	10.33
	Non HT-20, 6 to 54 Mbps	4	6	<u>14.4</u>	<u>15.6</u>	<u>14.6</u>	<u>15.5</u>	21.08	30	8.92
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	9	<u>14.4</u>	<u>15.6</u>			18.05	27	8.95
	Non HT-20 Beam Forming, 6 to 54 Mbps	3	11	<u>14.4</u>	<u>15.6</u>	<u>14.6</u>		19.67	25.2	5.53
	Non HT-20 Beam Forming, 6 to 54 Mbps	4	12	<u>14.4</u>	<u>15.6</u>	<u>14.6</u>	<u>15.5</u>	21.08	24	2.92
	HT-20, M0 to M7	1	6	<u>14.2</u>				14.20	30	15.80
	HT-20, M0 to M7	2	6	<u>14.2</u>	<u>15.4</u>			17.85	30	12.15
	HT-20, M8 to M15	2	6	<u>14.2</u>	<u>15.4</u>			17.85	30	12.15
	HT-20, M0 to M7	3	6	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>		19.57	30	10.43
	HT-20, M8 to M15	3	6	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>		19.57	30	10.43
	HT-20, M16 to M23	3	6	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>		19.57	30	10.43
	HT-20, M0 to M7	4	6	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>	<u>15.2</u>	20.92	30	9.08
	HT-20, M8 to M15	4	6	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>	<u>15.2</u>	20.92	30	9.08
	HT-20, M16 to M23	4	6	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>	<u>15.2</u>	20.92	30	9.08
	HT-20 Beam Forming, M0 to M7	2	9	<u>14.2</u>	<u>15.4</u>			17.85	27	9.15
	HT-20 Beam Forming, M8 to M15	2	6	<u>14.2</u>	<u>15.4</u>			17.85	30	12.15
	HT-20 Beam Forming, M0 to M7	3	11	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>		19.57	25.2	5.63
	HT-20 Beam Forming, M8 to M15	3	8	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>		19.57	28.2	8.63
	HT-20 Beam Forming, M16 to M23	3	6	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>		19.57	30	10.43
	HT-20 Beam Forming, M0 to M7	4	12	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>	<u>15.2</u>	20.92	24	3.08
	HT-20 Beam Forming, M8 to M15	4	9	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>	<u>15.2</u>	20.92	27	6.08
	HT-20 Beam Forming, M16 to M23	4	7	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>	<u>15.2</u>	20.92	28.8	7.88
	HT-20 STBC, M0 to M7	2	6	<u>14.2</u>	<u>15.4</u>			17.85	30	12.15
	HT-20 STBC, M0 to M7	3	6	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>		19.57	30	10.43
	HT-20 STBC, M0 to M7	4	6	<u>14.2</u>	<u>15.4</u>	<u>14.7</u>	<u>15.2</u>	20.92	30	9.08



2462	Legacy CCK, 1 to 11 Mbps	1	6	<u>13.6</u>				13.60	30	16.40
	Legacy CCK, 1 to 11 Mbps	2	6	<u>14.6</u>	<u>15.6</u>			18.14	30	11.86
	Legacy CCK, 1 to 11 Mbps	3	6	<u>14.6</u>	<u>15.6</u>	<u>15.0</u>		19.86	30	10.14
	Legacy CCK, 1 to 11 Mbps	4	6	<u>14.6</u>	<u>15.6</u>	<u>15.0</u>	<u>15.3</u>	21.16	30	8.84
	Non HT-20, 6 to 54 Mbps	1	6	<u>14.5</u>				14.50	30	15.50
	Non HT-20, 6 to 54 Mbps	2	6	<u>14.5</u>	<u>15.5</u>			18.04	30	11.96
	Non HT-20, 6 to 54 Mbps	3	6	<u>14.5</u>	<u>15.5</u>	<u>14.9</u>		19.76	30	10.24
	Non HT-20, 6 to 54 Mbps	4	6	<u>14.5</u>	<u>15.5</u>	<u>14.9</u>	<u>15.2</u>	21.06	30	8.94
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	9	<u>14.5</u>	<u>15.5</u>			18.04	27	8.96
	Non HT-20 Beam Forming, 6 to 54 Mbps	3	11	<u>13.5</u>	<u>14.1</u>	<u>14.0</u>		18.65	25.2	6.55
	Non HT-20 Beam Forming, 6 to 54 Mbps	4	12	<u>12.5</u>	<u>13.1</u>	<u>12.6</u>	<u>12.9</u>	18.80	24	5.20
	HT-20, M0 to M7	1	6	<u>14.3</u>				14.30	30	15.70
	HT-20, M0 to M7	2	6	<u>14.3</u>	<u>15.3</u>			17.84	30	12.16
	HT-20, M8 to M15	2	6	<u>14.3</u>	<u>15.3</u>			17.84	30	12.16
	HT-20, M0 to M7	3	6	<u>14.3</u>	<u>15.3</u>	<u>14.7</u>		19.56	30	10.44
	HT-20, M8 to M15	3	6	<u>14.3</u>	<u>15.3</u>	<u>14.7</u>		19.56	30	10.44
	HT-20, M16 to M23	3	6	<u>14.3</u>	<u>15.3</u>	<u>14.7</u>		19.56	30	10.44
	HT-20, M0 to M7	4	6	<u>13.3</u>	<u>13.9</u>	<u>13.5</u>	<u>14.0</u>	19.70	30	10.30
	HT-20, M8 to M15	4	6	<u>13.3</u>	<u>13.9</u>	<u>13.5</u>	<u>14.0</u>	19.70	30	10.30
	HT-20, M16 to M23	4	6	<u>13.3</u>	<u>13.9</u>	<u>13.5</u>	<u>14.0</u>	19.70	30	10.30
	HT-20 Beam Forming, M0 to M7	2	9	<u>13.3</u>	<u>13.9</u>			16.62	27	10.38
	HT-20 Beam Forming, M8 to M15	2	6	<u>14.3</u>	<u>15.3</u>			17.84	30	12.16
	HT-20 Beam Forming, M0 to M7	3	11	<u>12.4</u>	<u>12.9</u>	<u>12.4</u>		17.34	25.2	7.86
	HT-20 Beam Forming, M8 to M15	3	8	<u>13.3</u>	<u>13.9</u>	<u>13.5</u>		18.35	28.2	9.85
	HT-20 Beam Forming, M16 to M23	3	6	<u>14.3</u>	<u>15.3</u>	<u>14.7</u>		19.56	30	10.44
	HT-20 Beam Forming, M0 to M7	4	12	<u>12.4</u>	<u>12.9</u>	<u>12.4</u>	<u>12.7</u>	18.63	24	5.37
	HT-20 Beam Forming, M8 to M15	4	9	<u>12.4</u>	<u>12.9</u>	<u>12.4</u>	<u>12.7</u>	18.63	27	8.37
	HT-20 Beam Forming, M16 to M23	4	7	<u>12.4</u>	<u>12.9</u>	<u>12.4</u>	<u>12.7</u>	18.63	28.8	10.17
	HT-20 STBC, M0 to M7	2	6	<u>14.3</u>	<u>15.3</u>			17.84	30	12.16
	HT-20 STBC, M0 to M7	3	6	<u>14.3</u>	<u>15.3</u>	<u>14.7</u>		19.56	30	10.44
	HT-20 STBC, M0 to M7	4	6	<u>13.3</u>	<u>13.9</u>	<u>13.5</u>	<u>14.0</u>	19.70	30	10.30

Peak Output Power, 2412 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A**

Peak Output Power, 2412 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B**

Peak Output Power, 2412 MHz, Legacy CCK, 1 to 11 Mbps



Antenna A



Antenna B

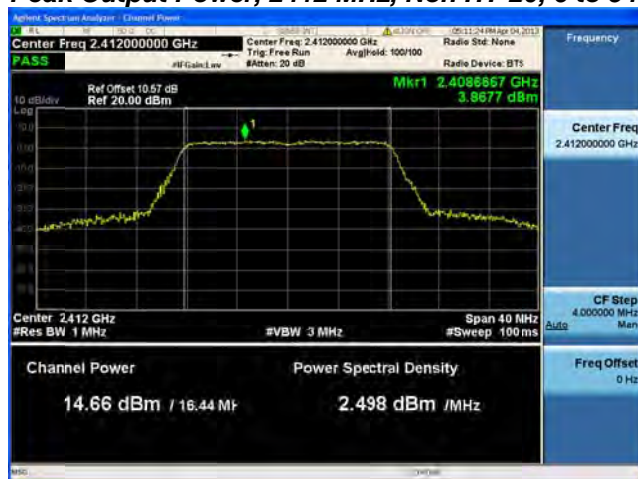


Antenna C



Antenna D

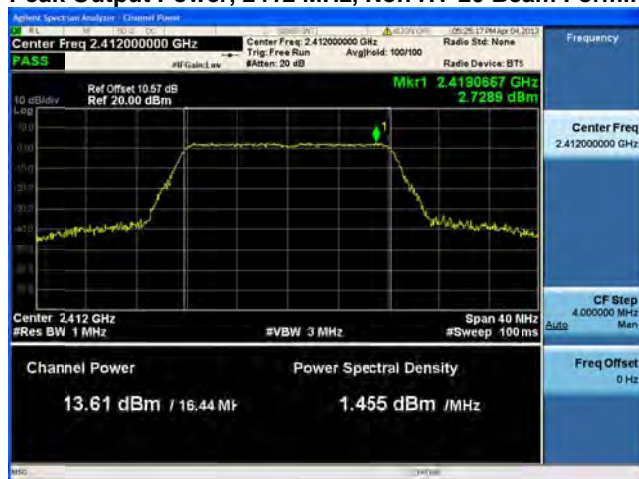
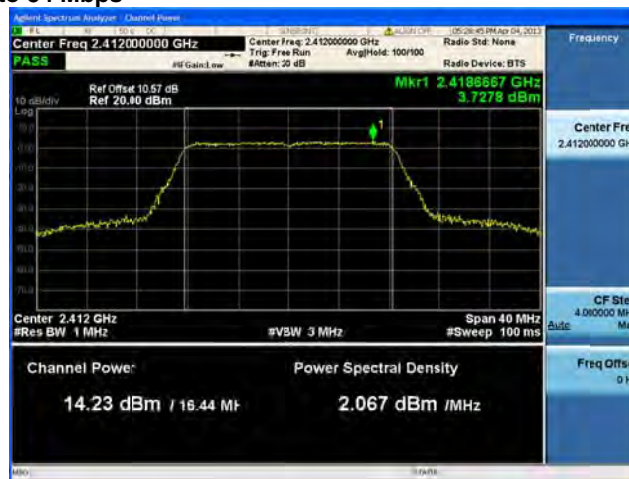
Peak Output Power, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A**

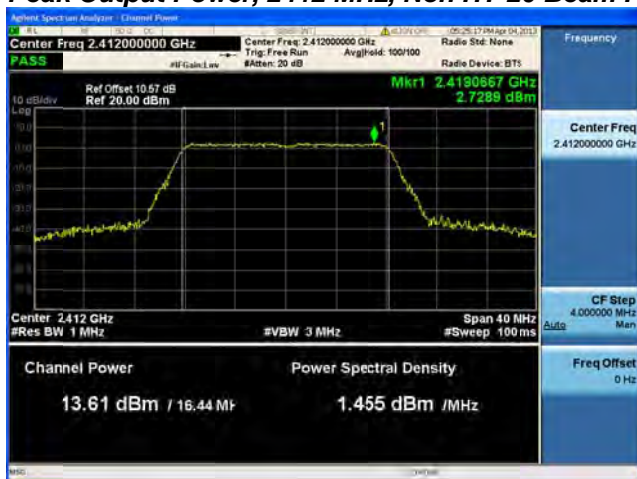
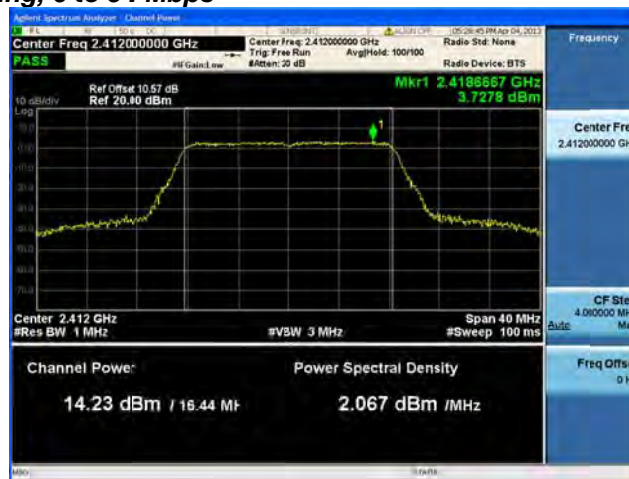
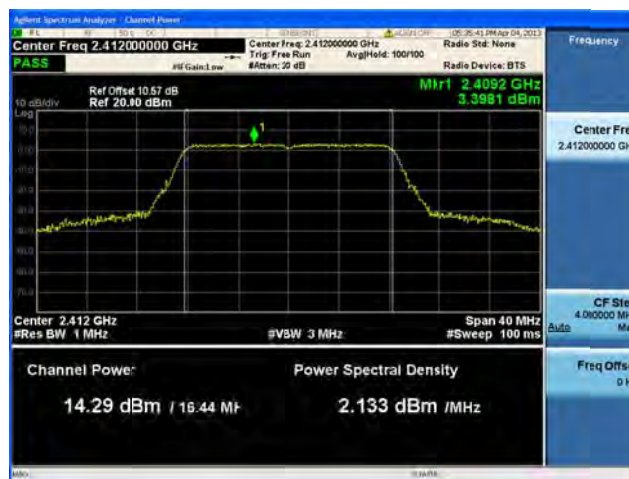
Peak Output Power, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B**

Peak Output Power, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2412 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B**

Peak Output Power, 2412 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2412 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2412 MHz, HT-20, M0 to M7**Antenna A**

Peak Output Power, 2412 MHz, HT-20, M0 to M7**Antenna A****Antenna B**

Peak Output Power, 2412 MHz, HT-20, M8 to M15**Antenna A****Antenna B**

Peak Output Power, 2412 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Antenna C**

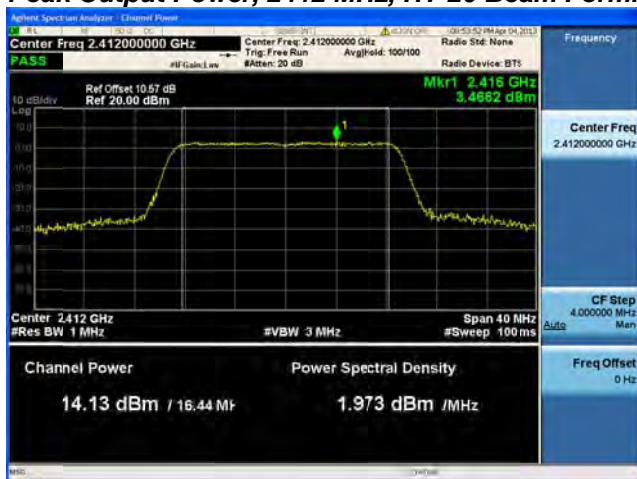
Peak Output Power, 2412 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2412 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2412 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

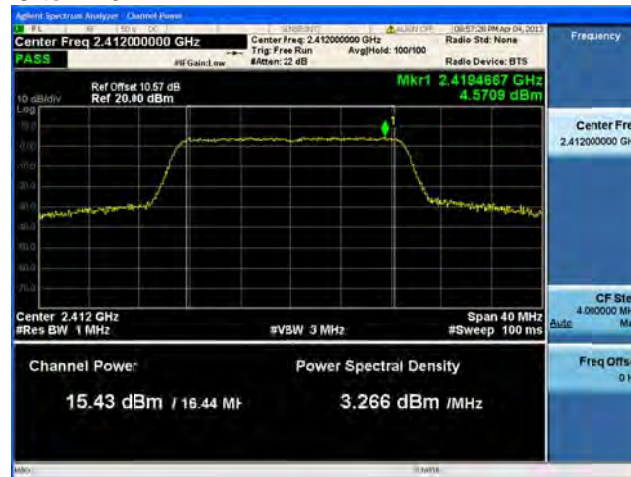
Peak Output Power, 2412 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2412 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2412 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B**

Peak Output Power, 2412 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B**

Peak Output Power, 2412 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2412 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2412 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C**

Agilent Spectrum Analyzer - Channel Power

Center Freq 2.412000000 GHz
 Ref Offset 10.57 dB
 Ref 20.00 dBm

Center Freq 2.412000000 GHz
 Trig: Free Run
 AvgHold: 100/100
 Radio Sts: None
 Radio Device: BT5

Frequency

Center Freq 2.412000000 GHz

CF Step 4.000000 MHz

Auto Man

Freq Offset 0 Hz

Channel Power 12.12 dBm / 16.44 MHz

Power Spectral Density -0.04311 dBm / MHz

Agilent Spectrum Analyzer - Channel Power

Center Freq 2.41200000 GHz

Ref Offset 10.57 dB

Ref 20.40 dBm

Center Freq: 2.412000000 GHz

Trig: Freq Run

Avg/Hold: 100/100

Radio Std: None

Radio Device: B75

Wkr1 2.418 GHz

2.5434 dBm

Center Freq: 2.41200000 GHz

CF Step: 4.000000 MHz

Span 40 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms

Channel Power: 13.08 dBm / 16.44 MHz

Power Spectral Density: 0.9225 dBm / MHz

Ref Offset 10.57 dB
Ref 20.00 dBm

Center Freq 2.41200000 GHz
Trig: Free Run
#Att: 20 dB

Radio St: None
AvgHold: 100/100
Radio Device: BT3

Frequency

Center Freq 2.41200000 GHz

CF Step 4.000000 MHz

Span 40 MHz
#Sweep 100 ms

Channel Power 12.25 dBm / 16.44 MHz

Power Spectral Density 0.08914 dBm / MHz

Frequency 2.4168 GHz 1.6774 dBm

[illegible]

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Default Search on Analyze - Channel Power
 Center Freq 2.412000000 GHz
 Center Freq: 2.412000000 GHz
 Trig: Free Run
 AvgHold: 100/100
 Radio Sts: None
 Radio Device: BTS
 Frequency
 Center Freq: 2.412000000 GHz
 CF Step: 4.000000 MHz
 Span 40 MHz
 #Res BW 1 MHz
 #VBW 3 MHz
 #Sweep 100 ms
 Channel Power
 13.14 dBm / 16.44 MHz
 Power Spectral Density
 0.9801 dBm / MHz
 Freq Offset: 0 Hz

Agilent Spectrum Analyzer - Channel 0001

100.1132 Hz Apr 04, 2013

Center Freq 2.412000000 GHz

Ref Offset 10.57 dB Ref 20.40 dBm

Center Freq: 2.412000000 GHz

Trig: Free Run

Avg/Hold: 100/100

Radio Std: None

Radio Device: BTS

Mkr1 2.4109667 GHz 3.3659 dBm

Channel Power: 14.06 dBm / 16.44 MHz

Power Spectral Density: 1.903 dBm / MHz

Frequency

Center Freq: 2.412000000 GHz

CF Step: 4.000000 MHz

Freq Offset: 0 Hz

Ref Offset 10.57 dB
Ref 20.00 dBm

Center Freq 2.41200000 GHz
Trig: Free Run
AvgHold: 100/100
Radio Std: None
Radio Device: BT3

Mkr1 2.4158957 GHz
2.9637 dBm

Center 2.412 GHz
#Res BW 1 MHz
#VBW 3 MHz
Span 40 MHz
#Sweep 100 ms

Channel Power
13.61 dBm / 16.44 MHz

Power Spectral Density
1.451 dBm / MHz

Frequency
Center Freq 2.41200000 GHz

CF Step 4.000000 MHz

Freq Offset 0 Hz

Channel Power: 14.18 dBm / 16.44 MHz

Power Spectral Density: 2.020 dBm / MHz

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Default Search on Analyze - Channel Power
 Center Freq 2.412000000 GHz
 PASS
 #F Grids: 100
 Center Freq: 2.412000000 GHz
 Trig: Free Run
 AvgHold: 100/100
 Radio Sts: None
 Radio Device: BTS
 Frequency
 Center Freq: 2.412000000 GHz
 CF Step: 4.000000 MHz
 Span 40 MHz
 #Res BW 1 MHz
 #VBW 3 MHz
 #Sweep 100 ms
 Channel Power
 13.14 dBm / 16.44 MHz
 Power Spectral Density
 0.9801 dBm / MHz
 Freq Offset: 0 Hz

Agilent Spectrum Analyzer - Channel View

Center Freq 2.412000000 GHz
 Ref Offset 10.57 dB
 Ref 20.40 dBm
 Mkr1 2.4109667 GHz 3.3659 dBm

Channel Power: 14.06 dBm / 16.44 MHz
 Power Spectral Density: 1.903 dBm / MHz

Frequency: 2.41200000 GHz
 CF Step: 4.000000 MHz
 Span 40 MHz
 Sweep 100 ms
 Res BW 1 MHz

[illegible]

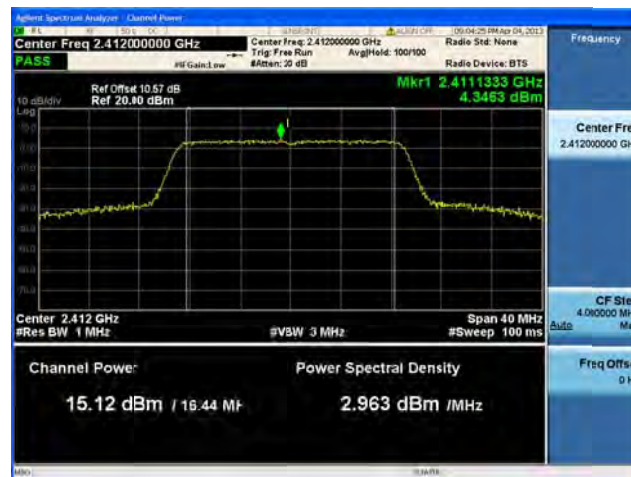
Channel Power: 14.18 dBm / 16.44 MHz

Power Spectral Density: 2.020 dBm / MHz

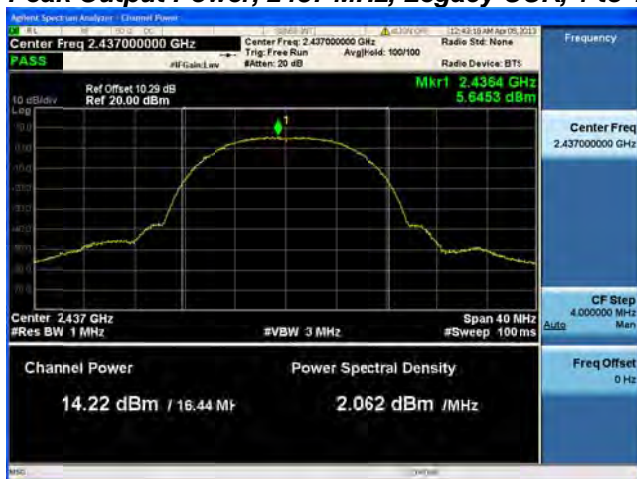
This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Peak Output Power, 2412 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B**

**Peak Output Power, 2412 MHz, HT-20 STBC, M0 to M7****Antenna A****Antenna B****Antenna C**

Peak Output Power, 2412 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2437 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A**

Peak Output Power, 2437 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B**

Peak Output Power, 2437 MHz, Legacy CCK, 1 to 11 Mbps



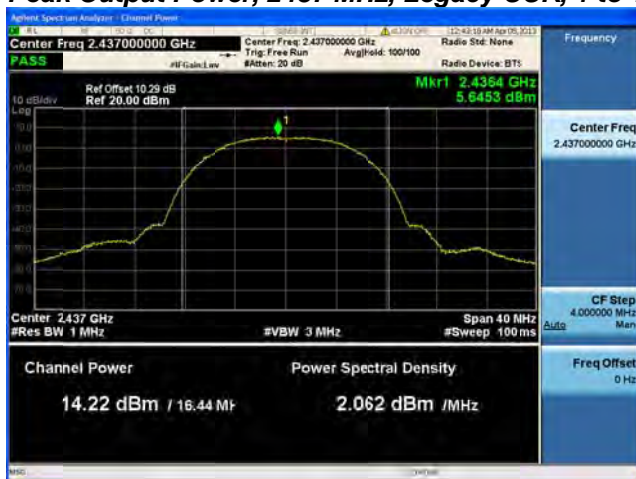
Antenna A



Antenna B

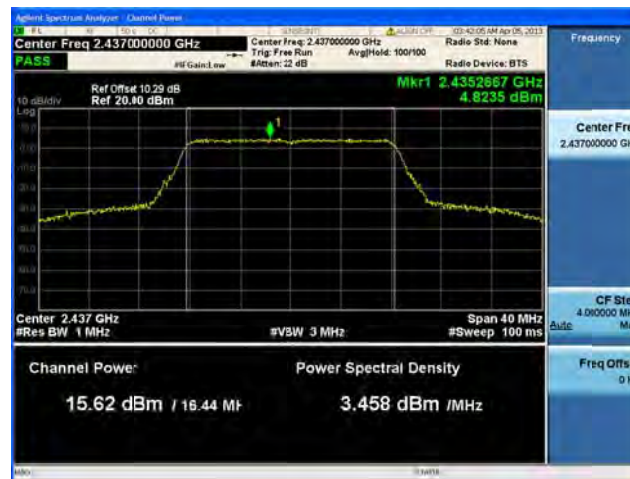


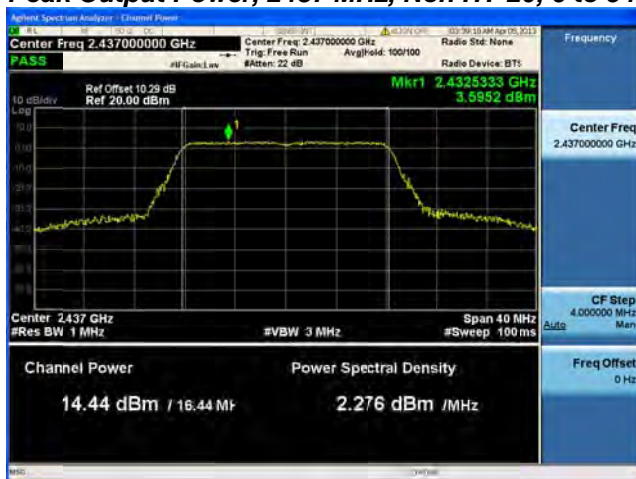
Antenna C

Peak Output Power, 2437 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

**Peak Output Power, 2437 MHz, Non HT-20, 6 to 54 Mbps****Antenna A**

Peak Output Power, 2437 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B**

Peak Output Power, 2437 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2437 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2437 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B**

Peak Output Power, 2437 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2437 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2437 MHz, HT-20, M0 to M7**Antenna A**

Peak Output Power, 2437 MHz, HT-20, M0 to M7**Antenna A****Antenna B**

Peak Output Power, 2437 MHz, HT-20, M8 to M15**Antenna A****Antenna B**

Peak Output Power, 2437 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2437 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2437 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C**

Ref Offset: 10.29 dB
Ref: 20.00 dBm

Center Freq: 2.43700000 GHz
Trig: Free Run
#Attenu: 20 dB

Radio Std: None
Avg/hold: 100/100
Radio Device: BT1

Mkr1: 2.437333 GHz
3.6005 dBm

Center: 2.437 GHz
#Res BW: 1 MHz
#VBW: 3 MHz
Span: 40 MHz
#Sweep: 100 ms

Channel Power: 14.22 dBm / 16.44 MHz
Power Spectral Density: 2.058 dBm / MHz

Channel Power: 15.41 dBm / 16.44 MHz

Power Spectral Density: 3.247 dBm / MHz

Ref Offset 10.29 dB
Ref 20.00 dBm

Center Freq: 2.437000000 GHz
Span: 40 MHz
Res BW: 1 MHz
Sweep: 100 ms

Power Spectral Density

14.70 dBm / 16.44 MHz

2.537 dBm / MHz

Mkr1 2.438 GHz
4.1984 dBm

[illegible]

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Channel Power: 14.22 dBm / 16.44 MHz

Power Spectral Density: 2.058 dBm / MHz

Center Freq: 2.437000000 GHz

Span: 40 MHz

Res BW: 1 MHz

Frequency: 2.437333 GHz

Power: 3.6005 dBm

Client Spectrum Analyzer - Channel Power
 #1 2.43700000 GHz
 Center Freq: 2.437000000 GHz
 Trig: Free Run
 Avg/Hold: 100/100
 Radio Std: None
 Radio Device: B75
 #1 Gain: 1.00
 #1 Gain: 22 dB
 Ref Off: 10.29 dB
 Ref: 20.40 dBm
 Mkr1: 2.4412667 GHz
 4.5230 dBm
 10.0 dBm
 9.0
 8.0
 7.0
 6.0
 5.0
 4.0
 3.0
 2.0
 1.0
 0.0
 -1.0
 -2.0
 -3.0
 -4.0
 -5.0
 -6.0
 -7.0
 -8.0
 -9.0
 -10.0
 -11.0
 -12.0
 -13.0
 -14.0
 -15.0
 -16.0
 -17.0
 -18.0
 -19.0
 -20.0
 -21.0
 -22.0
 -23.0
 -24.0
 -25.0
 -26.0
 -27.0
 -28.0
 -29.0
 -30.0
 -31.0
 -32.0
 -33.0
 -34.0
 -35.0
 -36.0
 -37.0
 -38.0
 -39.0
 -40.0
 -41.0
 -42.0
 -43.0
 -44.0
 -45.0
 -46.0
 -47.0
 -48.0
 -49.0
 -50.0
 -51.0
 -52.0
 -53.0
 -54.0
 -55.0
 -56.0
 -57.0
 -58.0
 -59.0
 -60.0
 -61.0
 -62.0
 -63.0
 -64.0
 -65.0
 -66.0
 -67.0
 -68.0
 -69.0
 -70.0
 -71.0
 -72.0
 -73.0
 -74.0
 -75.0
 -76.0
 -77.0
 -78.0
 -79.0
 -80.0
 -81.0
 -82.0
 -83.0
 -84.0
 -85.0
 -86.0
 -87.0
 -88.0
 -89.0
 -90.0
 -91.0
 -92.0
 -93.0
 -94.0
 -95.0
 -96.0
 -97.0
 -98.0
 -99.0
 -100.0
 -101.0
 -102.0
 -103.0
 -104.0
 -105.0
 -106.0
 -107.0
 -108.0
 -109.0
 -110.0
 -111.0
 -112.0
 -113.0
 -114.0
 -115.0
 -116.0
 -117.0
 -118.0
 -119.0
 -120.0
 -121.0
 -122.0
 -123.0
 -124.0
 -125.0
 -126.0
 -127.0
 -128.0
 -129.0
 -130.0
 -131.0
 -132.0
 -133.0
 -134.0
 -135.0
 -136.0
 -137.0
 -138.0
 -139.0
 -140.0
 -141.0
 -142.0
 -143.0
 -144.0
 -145.0
 -146.0
 -147.0
 -148.0
 -149.0
 -150.0
 -151.0
 -152.0
 -153.0
 -154.0
 -155.0
 -156.0
 -157.0
 -158.0
 -159.0
 -160.0
 -161.0
 -162.0
 -163.0
 -164.0
 -165.0
 -166.0
 -167.0
 -168.0
 -169.0
 -170.0
 -171.0
 -172.0
 -173.0
 -174.0
 -175.0
 -176.0
 -177.0
 -178.0
 -179.0
 -180.0
 -181.0
 -182.0
 -183.0
 -184.0
 -185.0
 -186.0
 -187.0
 -188.0
 -189.0
 -190.0
 -191.0
 -192.0
 -193.0
 -194.0
 -195.0
 -196.0
 -197.0
 -198.0
 -199.0
 -200.0
 -201.0
 -202.0
 -203.0
 -204.0
 -205.0
 -206.0
 -207.0
 -208.0
 -209.0
 -210.0
 -211.0
 -212.0
 -213.0
 -214.0
 -215.0
 -216.0
 -217.0
 -218.0
 -219.0
 -220.0
 -221.0
 -222.0
 -223.0
 -224.0
 -225.0
 -226.0
 -227.0
 -228.0
 -229.0
 -230.0
 -231.0
 -232.0
 -233.0
 -234.0
 -235.0
 -236.0
 -237.0
 -238.0
 -239.0
 -240.0
 -241.0
 -242.0
 -243.0
 -244.0
 -245.0
 -246.0
 -247.0
 -248.0
 -249.0
 -250.0
 -251.0
 -252.0
 -253.0
 -254.0
 -255.0
 -256.0
 -257.0
 -258.0
 -259.0
 -260.0
 -261.0
 -262.0
 -263.0
 -264.0
 -265.0
 -266.0
 -267.0
 -268.0
 -269.0
 -270.0
 -271.0
 -272.0
 -273.0
 -274.0
 -275.0
 -276.0
 -277.0
 -278.0
 -279.0
 -280.0
 -281.0
 -282.0
 -283.0
 -284.0
 -285.0
 -286.0
 -287.0
 -288.0
 -289.0
 -290.0
 -291.0
 -292.0
 -293.0
 -294.0
 -295.0
 -296.0
 -297.0
 -298.0
 -299.0
 -300.0
 -301.0
 -302.0
 -303.0
 -304.0
 -305.0
 -306.0
 -307.0
 -308.0
 -309.0
 -310.0
 -311.0
 -312.0
 -313.0
 -314.0
 -315.0
 -316.0
 -317.0
 -318.0
 -319.0
 -320.0
 -321.0
 -322.0
 -323.0
 -324.0
 -325.0
 -326.0
 -327.0
 -328.0
 -329.0
 -330.0
 -331.0
 -332.0
 -333.0
 -334.0
 -335.0
 -336.0
 -337.0
 -338.0
 -339.0
 -340.0
 -341.0
 -342.0
 -343.0
 -344.0
 -345.0
 -346.0
 -347.0
 -348.0
 -349.0
 -350.0
 -351.0
 -352.0
 -353.0
 -354.0
 -355.0
 -356.0
 -357.0
 -358.0
 -359.0
 -360.0
 -361.0
 -362.0
 -363.0
 -364.0
 -365.0
 -366.0
 -367.0
 -368.0
 -369.0
 -370.0
 -371.0
 -372.0
 -373.0
 -374.0
 -375.0
 -376.0
 -377.0
 -378.0
 -379.0
 -380.0
 -381.0
 -382.0
 -383.0
 -384.0
 -385.0

Ref Offset 10.29 dB
Ref 20.00 dBm

Center Freq 2.437000000 GHz
Radio Sts: None
Trig: Free Run
AvgHold: 100/100
Radio Device: BT1
dB Gain/Low

Mkr1 2.436 GHz
4.1984 dBm

10 dB/div

Center 2.437 GHz
Res BW 1 MHz
Span 40 MHz
Sweep 100 ms
VBW 3 MHz
CF Step 4.000000 MHz
Autos

Channel Power
14.70 dBm / 16.44 MHz

Power Spectral Density
2.537 dBm / MHz

Adjunct Spectrum Analyzers - Channel Power

Center Freq 2.437000000 GHz

PASS

Ref Offset to 29 dB

Ref 20.80 dBm

Center Freq: 2.437000000 GHz

Trig: Free Run

Avg/Hold: 100/100

Radio Std: None

Radio Device: BTS

#F Gain: Low

#Atten: 20 dB

1

15.23 dBm / 16.44 MHz

3.066 dBm / MHz

Center Freq 2.437000000 GHz

CF Step 4.000000 MHz

Auto

Span 40 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms

Channel Power

Power Spectral Density

Freq Offset 0 MHz

650000 C9 Input Overload ADC over range

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Channel Power
14.22 dBm / 16.44 MHz

Power Spectral Density
2.058 dBm / MHz

Frequency
2.43700000 GHz

CF Step
4.000000 MHz

Freq Offset
0 Hz

Vector Signal Analyzer - Channel Power
 Center Freq 2.437000000 GHz
 #dB Gain: Low
 #dBm: 22 dB
 Avg/Hold: 100/100
 Radio Std: None
 Radio Device: BTS
 Mkr1 2.4412667 GHz 4.5230 dBm
 Center Freq 2.43700000 GHz
 CF Ste 4.000000 MHz
 #Res BW 1 MHz
 #VSW 3 MHz
 Span 40 MHz
 #Sweep 100 ms
 Channel Power: 15.41 dBm / 16.44 MHz
 Power Spectral Density: 3.247 dBm / MHz
 Freq Offs: 0 Hz

Agilent Spectrum Analyzer - Channel Power

Center Freq 2.437000000 GHz
 Ref Offset 10.29 dB
 Ref 20.00 dBm

Power Spectral Density
 14.70 dBm / 16.44 MHz

Channel Power
 2.537 dBm / MHz

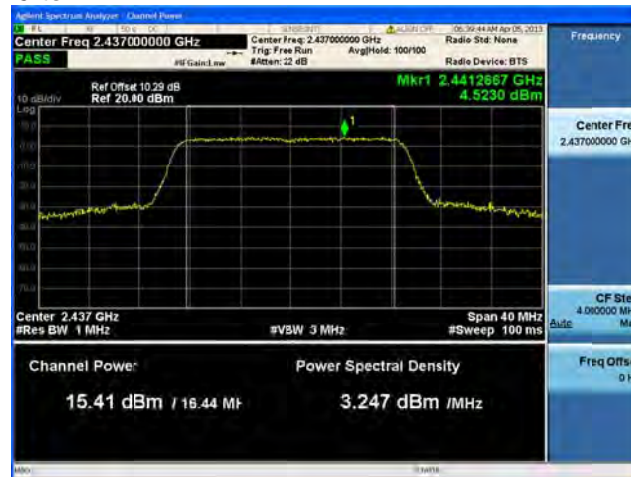
Frequency
 Center Freq 2.437000000 GHz

CF Step
 4.000000 MHz

Freq Offset
 0 Hz

Rohde & Schwarz FSWP Spectrum Analyzer - Channel Power
 Date: 05-11-2011 10:44 AM
 Center Freq 2.437000000 GHz
 Span 40 MHz
 Res BW 1 MHz
 Trig: Free Run
 Avg Hold: 100/100
 Radio Std: None
 Radio Device: BTS
 #Gain Low
 #atten: 20 dB
 Ref Offset 10.29 dB
 Ref 20.0 dBm
 M1r 2.4398 GHz
 4.5912 dBm
 Log
 10 dBm
 0 dBm
 -10 dBm
 -20 dBm
 -30 dBm
 -40 dBm
 -50 dBm
 -60 dBm
 -70 dBm
 -80 dBm
 -90 dBm
 2.435 2.437 2.439 MHz
 Center 2.437 GHz
 #Res BW 1 MHz
 #VSW 3 MHz
 Span 40 MHz
 #Sweep 100 ms
 Channel Power:
 15.23 dBm / 15.44 MHz
 Power Spectral Density
 3.066 dBm / MHz
 CF Ste
 4.000000 MHz
 Auto
 Freq Offs
 0 Hz
 Input Overloaded: ADC over range

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Peak Output Power, 2437 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B**

Peak Output Power, 2437 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B**

Peak Output Power, 2437 MHz, HT-20 Beam Forming, M0 to M7



Antenna A



Antenna B



Antenna C

Peak Output Power, 2437 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2437 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C**

The screenshot displays the Keysight N9000A Spectrum Analyzer interface. The main plot shows a signal trace with a peak labeled 'Mkr1' at 2.437333 GHz and 3.6005 dBm. The center frequency is set to 2.43700000 GHz, and the resolution bandwidth (RBW) is 1 MHz. The channel power is measured as 14.22 dBm / 16.44 MHz, and the power spectral density (PSD) is 2.058 dBm / MHz. The interface includes various control panels for frequency, span, and measurement settings.

Parameter	Value
Center Freq	2.43700000 GHz
Ref Offset	10.29 dB
Ref	20.00 dBm
Mkr1 Frequency	2.437333 GHz
Mkr1 Power	3.6005 dBm
Channel Power	14.22 dBm / 16.44 MHz
Power Spectral Density	2.058 dBm / MHz

Ref Offset 10.28 dB
 Ref 20.40 dBm
 10 dB/div
 Center Freq 2.437 GHz
 #Res BW 1 MHz
 #VBW 3 MHz
 Span 40 MHz
 #Sweep 100 ms
 Channel Power: 15.41 dBm / 16.44 MHz
 Power Spectral Density: 3.247 dBm / MHz
 Mkr1 2.4412667 GHz 4.5230 dBm
 #F Gain Low
 #F Gain 12 dB
 #F Gain 100 dB
 Radio Std: None
 Radio Device: BTS
 Frequency: 2.43700000 GHz
 CF Step: 4.000000 MHz
 Freq Offset: 0 Hz

Software: Spectrum Analyzer - Channel Power

Center Freq 2.437000000 GHz

Center Freq: 2.437000000 GHz

Radio Std: None

Trig: Free Run

Avg/old: 100/100

Radio Device: BT3

Frequency

Center Freq 2.437000000 GHz

CF Step 4.000000 MHz

Span 40 MHz

#Res BW 1 MHz

#Sweep 100 ms

Channel Power

Power Spectral Density

14.70 dBm / 16.44 MHz

2.537 dBm / MHz

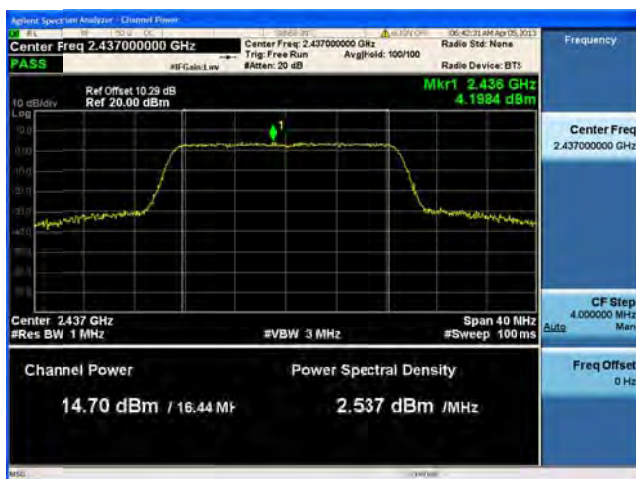
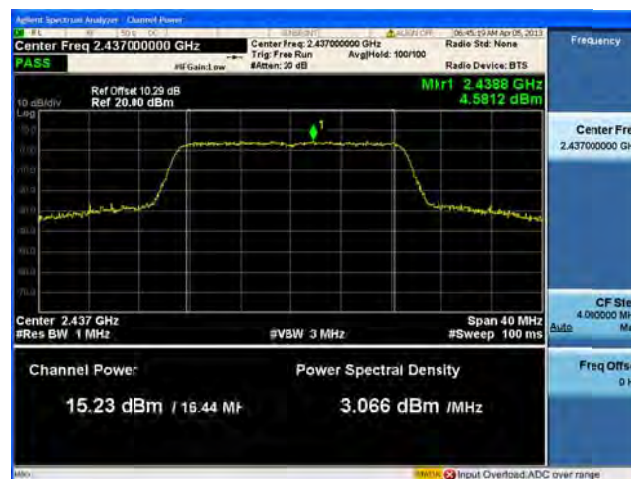
Freq Offset 0 Hz

The screenshot displays the Rohde & Schwarz Spectrum Analyzer interface. The main plot shows a signal at 2.437 GHz with a peak level of 15.23 dBm. The power spectral density is 3.066 dBm/MHz. The interface includes various settings and status indicators:

- Center Freq:** 2.43700000 GHz
- Span:** 40 MHz
- Res BW:** 1 MHz
- Sweep:** 100 ms
- Channel Power:** 15.23 dBm / 16.44 MHz
- Power Spectral Density:** 3.066 dBm / MHz
- Frequency:** 2.43700000 GHz
- CF Step:** 4.000000 MHz
- Freq Offset:** 0 Hz

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Peak Output Power, 2437 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2437 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2437 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B**

Peak Output Power, 2437 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C**

Software: Spectrum Analyzer - Channel Power
 Center Freq 2.43700000 GHz
 Center Freq: 2.43700000 GHz
 Trig: Free Run
 AvgHold: 100/100
 Radio Std: None
 Radio Device: BT
 #F Grids: 10
 #atten: 20 dB
 Ref Offset 10.29 dB
 Ref 20.00 dBm
 Mkr1 2.437333 GHz
 3.6005 dBm
 10 dB/div
 100 MHz
 0.00 dBm
 10.00 dBm
 20.00 dBm
 30.00 dBm
 40.00 dBm
 50.00 dBm
 60.00 dBm
 70.00 dBm
 80.00 dBm
 90.00 dBm
 100.00 dBm
 Center 2.437 GHz
 #Res BW 1 MHz
 #VBW 3 MHz
 Span 40 MHz
 #Sweep 100 ms
 Channel Power
 14.22 dBm / 16.44 MHz
 Power Spectral Density
 2.058 dBm / MHz
 Frequency
 Center Freq
 2.43700000 GHz
 CF Step
 4.000000 MHz
 Freq Offset
 0 Hz

Advent Spectrum Analyzer - Channel View

REF 10.00 0.00 1.00 2.00 3.00 4.00 5.00 6.00 7.00 8.00 9.00 10.00

Center Freq 2.437000000 GHz

Trig Free Run

Avg/Hold: 100/100

Radio Std: None

Radio Device: BTS

PASS

Ref Gain Low

Ref Offst 10.28 dB

Ref 20.40 dBm

Mkr1 2.4412667 GHz

4.5230 dBm

10 dB/div

Center Freq 2.437 GHz

#Res BW 1 MHz

#VBW 3 MHz

Span 40 MHz

#Sweep 100 ms

Channel Power: 15.41 dBm / 16.44 MHz

Power Spectral Density 3.247 dBm / MHz

Frequency

Center Freq 2.43700000 GHz

CF Step 4.000000 MHz

Auto

Freq Offset 0 Hz

Software: Rohde & Schwarz Spectrum Analyzer - Channel Power

Center Freq: 2.437000000 GHz

Ref Offset: 10.29 dB

Ref: 20.00 dBm

Center Freq: 2.437000000 GHz

Trig: Free Run

Avg/old: 100/100

Radio Std: None

Radio Device: BT3

Frequency: 2.437000000 GHz

Center Freq: 2.437000000 GHz

CF Step: 4.000000 MHz

Span: 40 MHz

Res BW: 1 MHz

#BW: 3 MHz

Sweep: 100 ms

Channel Power: 14.70 dBm / 16.44 MHz

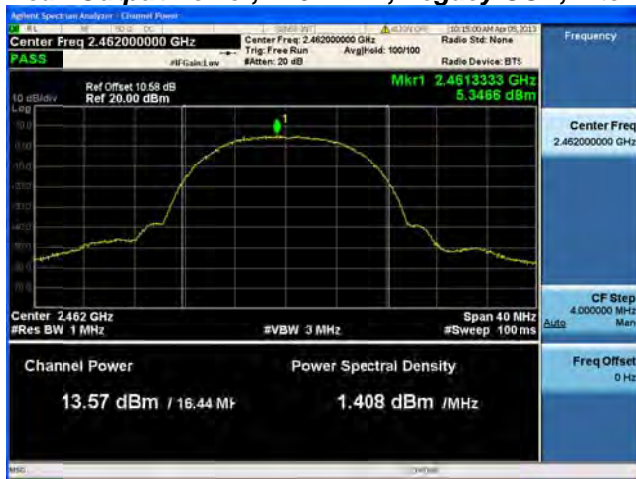
Power Spectral Density: 2.537 dBm / MHz

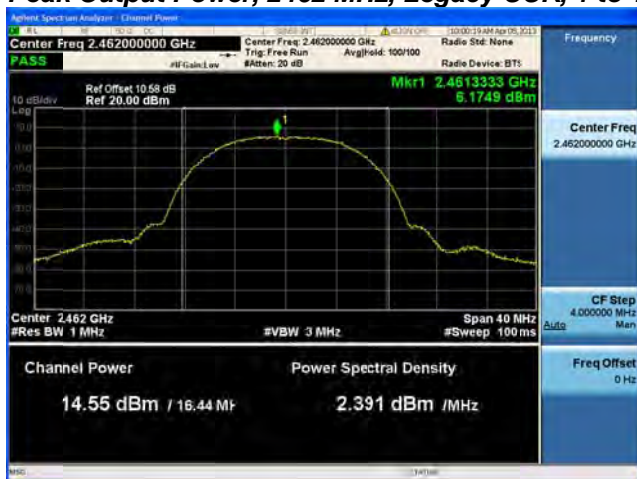
Freq Offset: 0 Hz

Center Freq 2.437000000 GHz
Radio Std: None
Trig: Free Run
Avg/Hold: 100/100
#Res BW: 1 MHz
#Sweep: 100 ms
Span: 40 MHz
#VBW: 3 MHz
#Filt: 20 dB
#IF Gain: Low
#Mixer: 20 dB

Channel Power: 15.23 dBm / 16.44 MHz
Power Spectral Density: 3.066 dBm / MHz

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Peak Output Power, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A**

Peak Output Power, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B**

Peak Output Power, 2462 MHz, Legacy CCK, 1 to 11 Mbps



Antenna A



Antenna B

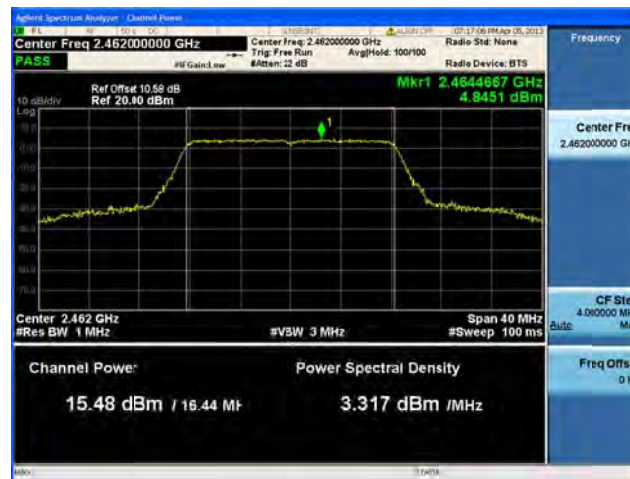


Antenna C

Peak Output Power, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

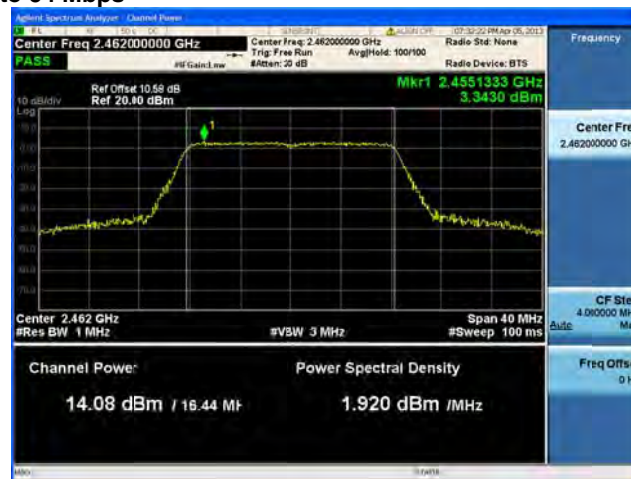
Peak Output Power, 2462 MHz, Non HT-20, 6 to 54 Mbps**Antenna A**

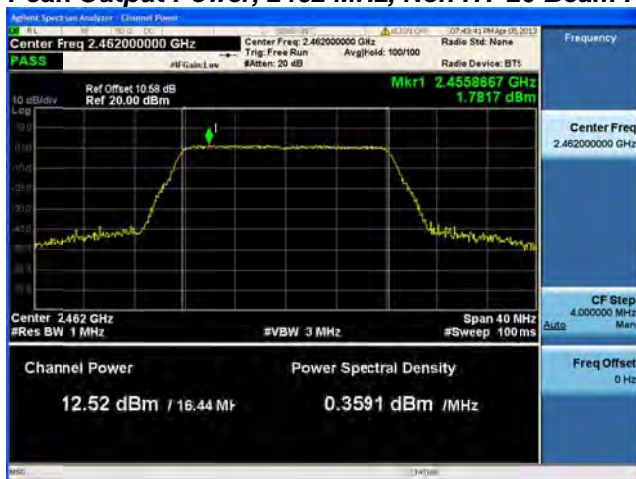
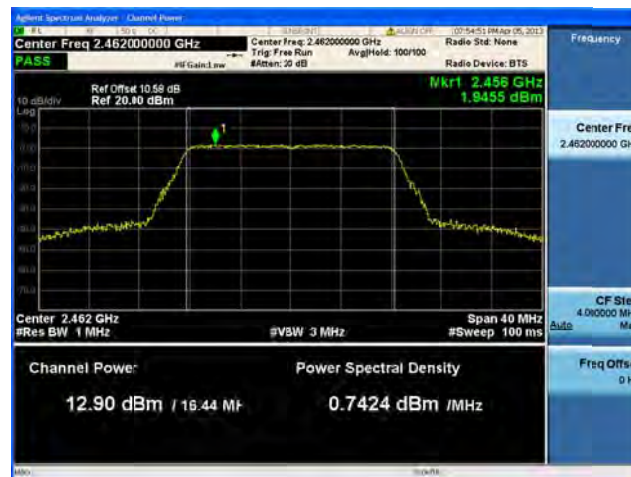
Peak Output Power, 2462 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B**

Peak Output Power, 2462 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2462 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2462 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B**

Peak Output Power, 2462 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2462 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2462 MHz, HT-20, M0 to M7**Antenna A**

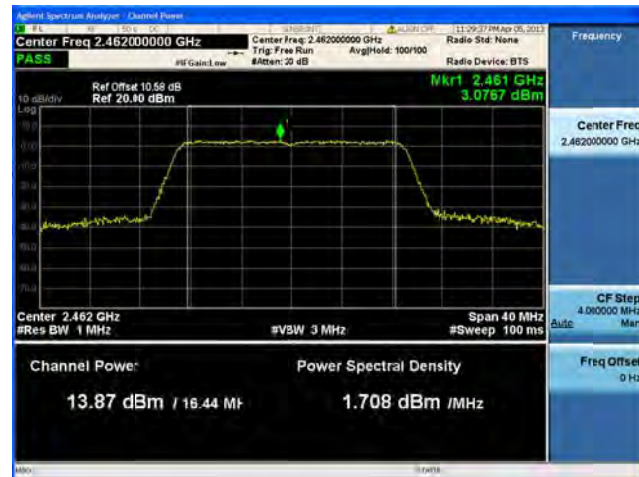
Peak Output Power, 2462 MHz, HT-20, M0 to M7**Antenna A****Antenna B**

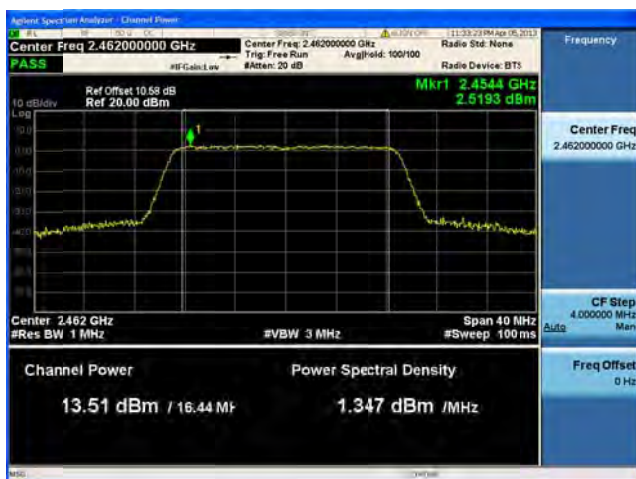
Peak Output Power, 2462 MHz, HT-20, M8 to M15**Antenna A****Antenna B**

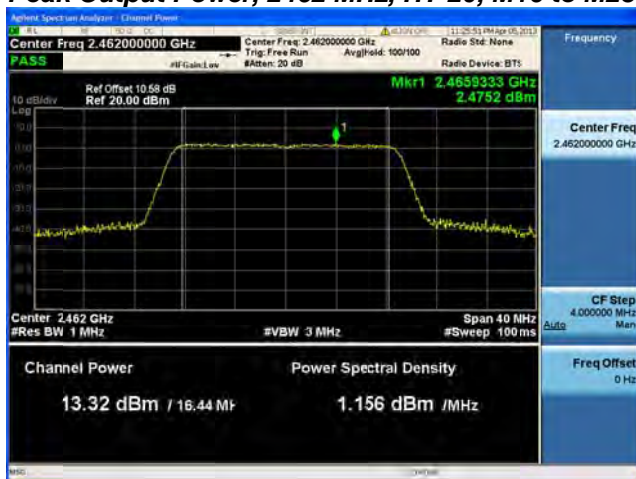
Peak Output Power, 2462 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2462 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2462 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2462 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2462 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2462 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2462 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B**

Peak Output Power, 2462 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B**

The screenshot displays a Spectrum Analyzer interface with the following components:

- Top Bar:**
 - Left: "Spectrum Analyzer - Channel Power"
 - Center: "SMA100" and "4.375 GHz"
 - Right: "11:40:58 AM Sep 05, 2013"
- Measurement Area (Top):**
 - Center Freq: 2.462000000 GHz
 - Trig: Free Run
 - AvgHold: 100/100
 - Radio Sts: None
 - Radio Device: BT5
 - Bottom: 20 dB
- Left Panel:**
 - Vertical scale: 10 dB/div
 - Horizontal scale: 1 MHz
 - Reference: Ref Offset 10.58 dB, Ref 20.00 dBm
 - Marker: Mkr1 2.4547333 GHz, 1.7508 dBm
- Plot Area:** A graph showing a signal trace with a peak at approximately 2.4547 GHz. The trace is yellow with a green marker at the peak.
- Right Panel:**
 - Frequency: 2.462000000 GHz
 - CF Step: 4.000000 MHz
 - Auto: [button]
 - Man: [button]
 - Freq Offset: 0 Hz
- Bottom Panel:**
 - Channel Power: 12.37 dBm / 16.44 MHz
 - Power Spectral Density: 0.2056 dBm / MHz
- Footer:**
 - Left: "MSO"
 - Right: "C:\MSO100"

[illegible]

Active Spectrum Analyzer - Channel Power

Center Freq 2.462000000 GHz

PASS

Ref Offset 10.58 dB

Ref 20.00 dBm

Center Freq: 2.462000000 GHz

Trig: Free Run

Avg: Hold: 100/100

Radio Std: None

Radio Device: BT5

Frequency

Center Freq 2.462000000 GHz

CF Step 4.000000 MHz

Span 40 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms

Channel Power

Power Spectral Density

12.42 dBm / 16.44 MHz

0.2583 dBm / MHz

Freq Offset 0 Hz

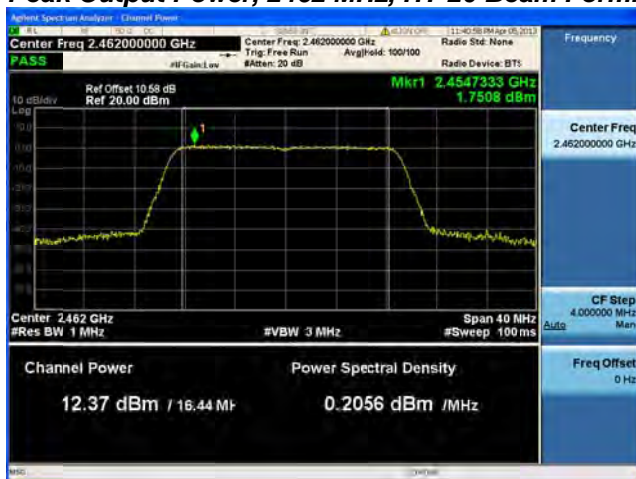
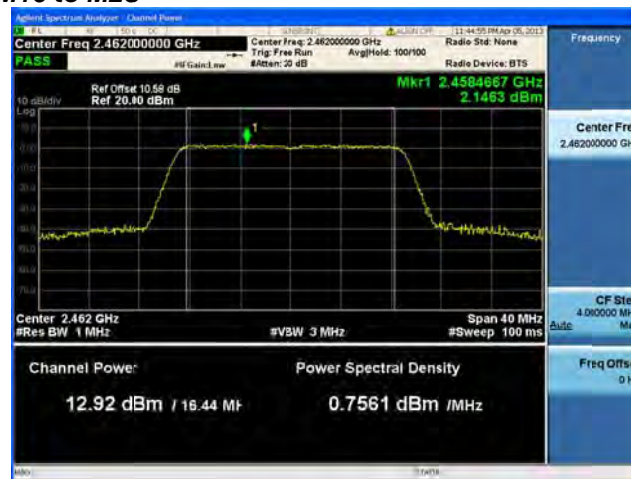
This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Peak Output Power, 2462 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2462 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2462 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2462 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2462 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

Peak Output Power, 2462 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B**

Peak Output Power, 2462 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C**

Peak Output Power, 2462 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**



Power Spectral Density

15.247 / RSS-210 A8.2: For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.

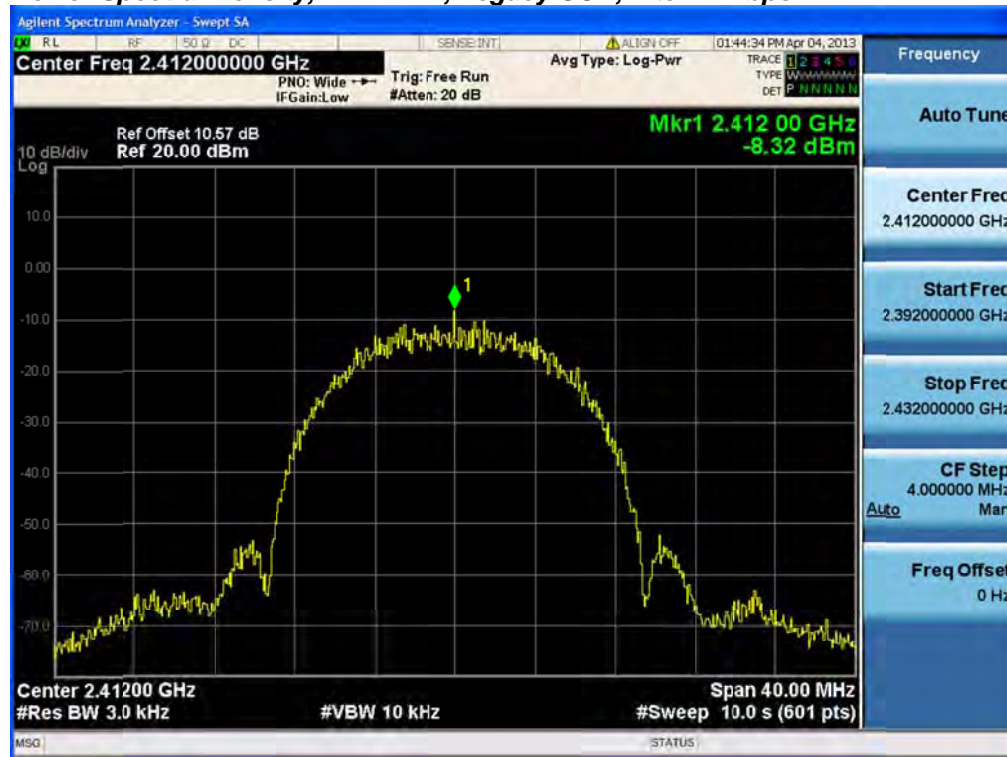
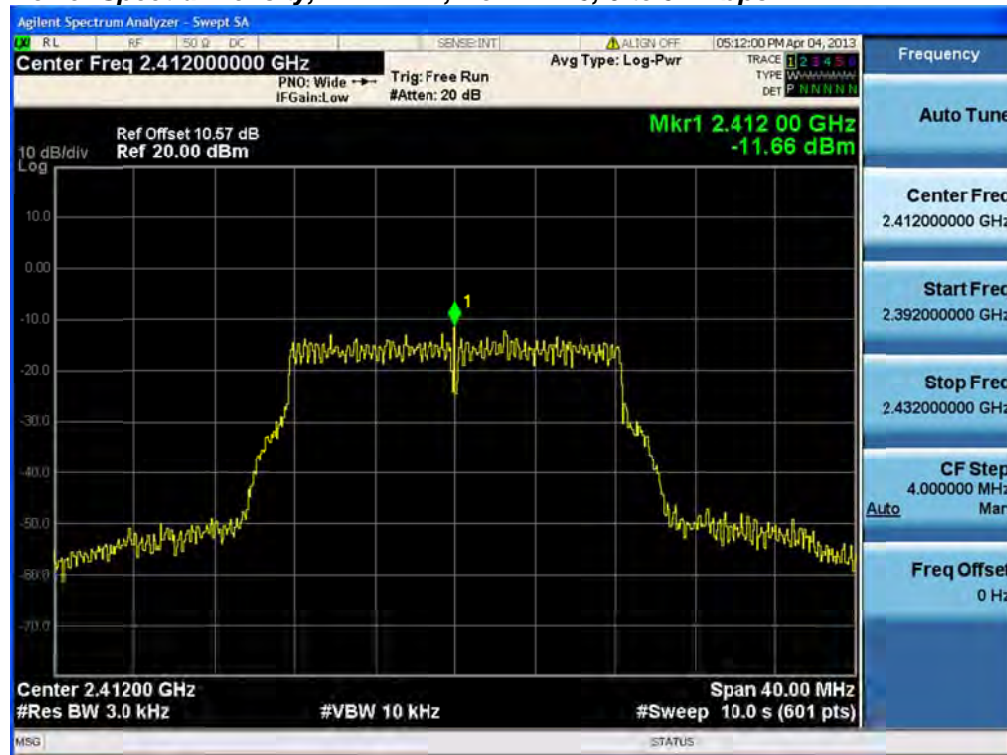
Center Frequency:	Frequency from table below
Span:	20 MHz
Ref Level Offset:	Correct for attenuator and cable loss.
Reference Level:	20 dBm
Attenuation:	20 dB
Sweep Time:	10s
Resolution Bandwidth:	3 kHz
Video Bandwidth:	10 kHz
Detector:	Peak
Trace:	Single
Marker:	Peak Search

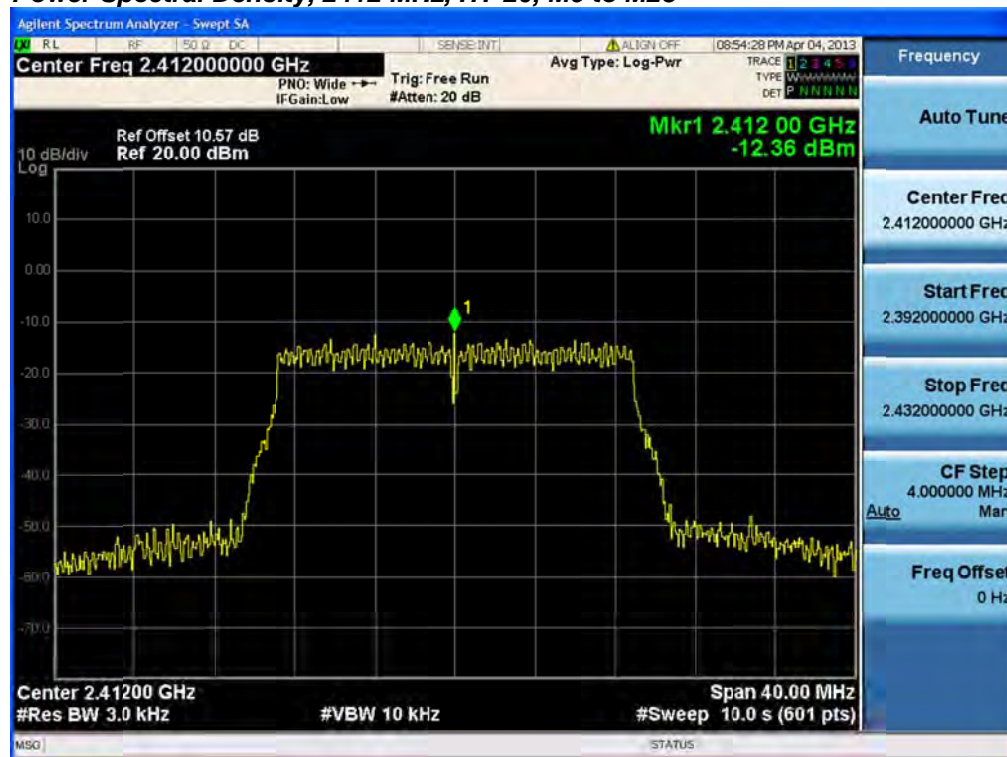
Record the Marker value.

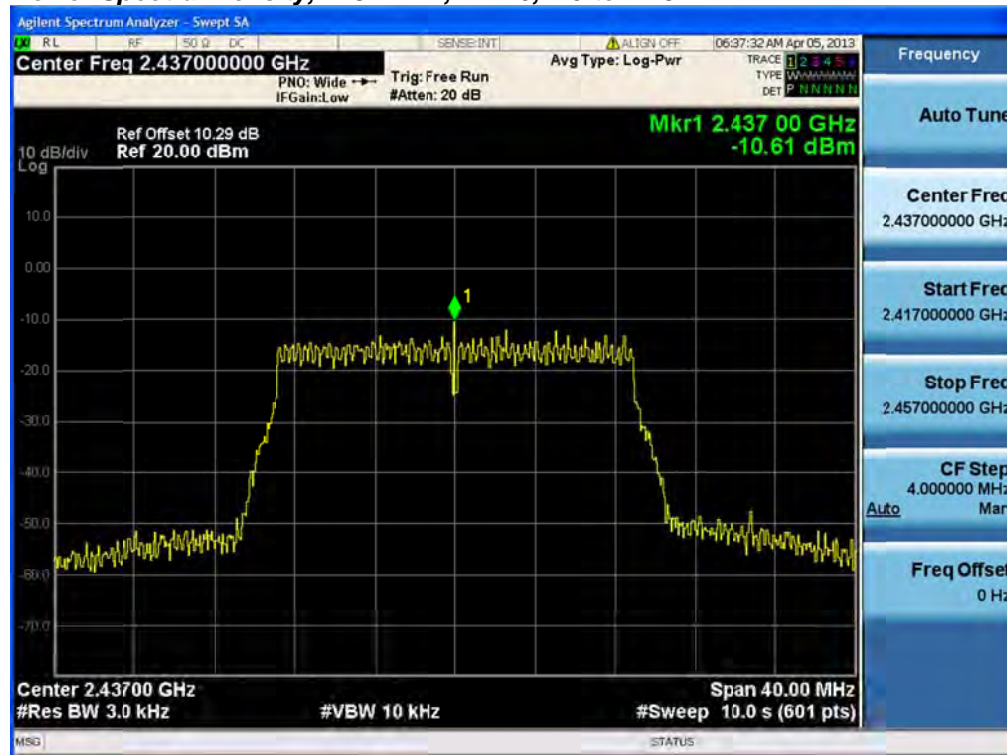
The “Measure and add $10 \log(N)$ dB technique”, where N is the number of outputs, is used for measuring in-band Power Spectral Density. With this technique, spectrum measurements are performed at each output of the device, and the quantity $10 \log(4)$ (or 6dB) is added to the worst case spectrum value before comparing to the emission limit.



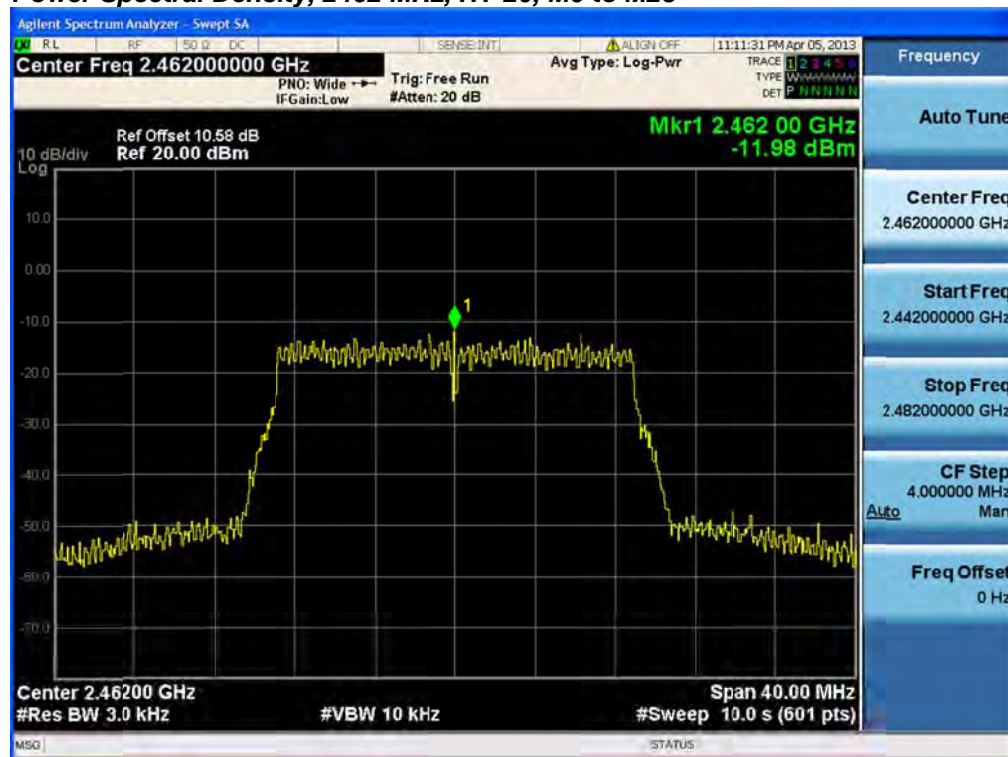
Frequency (MHz)	Mode	Data Rate (Mbps)	PSD / Antenna (dBm/3kHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
2412	Legacy CCK, 1 to 11 Mbps	11	<u>-8.3</u>	-2.28	8.00	10.28
	Non HT-20, 6 to 54 Mbps	6	<u>-11.7</u>	-5.68	8.00	13.68
	HT-20, M0 to M23	m0	<u>-12.4</u>	-6.38	8.00	14.38
2437	Legacy CCK, 1 to 11 Mbps	11	<u>-7.4</u>	-1.38	8.00	9.38
	Non HT-20, 6 to 54 Mbps	6	<u>-12.9</u>	-6.88	8.00	14.88
	HT-20, M0 to M23	m0	<u>-10.6</u>	-4.58	8.00	12.58
2462	Legacy CCK, 1 to 11 Mbps	11	<u>-8.9</u>	-2.88	8.00	10.88
	Non HT-20, 6 to 54 Mbps	6	<u>-11.9</u>	-5.88	8.00	13.88
	HT-20, M0 to M23	m0	<u>-12</u>	-5.98	8.00	13.98

Power Spectral Density, 2412 MHz, Legacy CCK, 1 to 11 Mbps**Power Spectral Density, 2412 MHz, Non HT-20, 6 to 54 Mbps**

Power Spectral Density, 2412 MHz, HT-20, M0 to M23**Power Spectral Density, 2437 MHz, Legacy CCK, 1 to 11 Mbps**

Power Spectral Density, 2437 MHz, Non HT-20, 6 to 54 Mbps**Power Spectral Density, 2437 MHz, HT-20, M0 to M23**

Power Spectral Density, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Power Spectral Density, 2462 MHz, Non HT-20, 6 to 54 Mbps**

Power Spectral Density, 2462 MHz, HT-20, M0 to M23



Conducted Spurious Emissions

15.247 / RSS-210 A8.5: In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer).

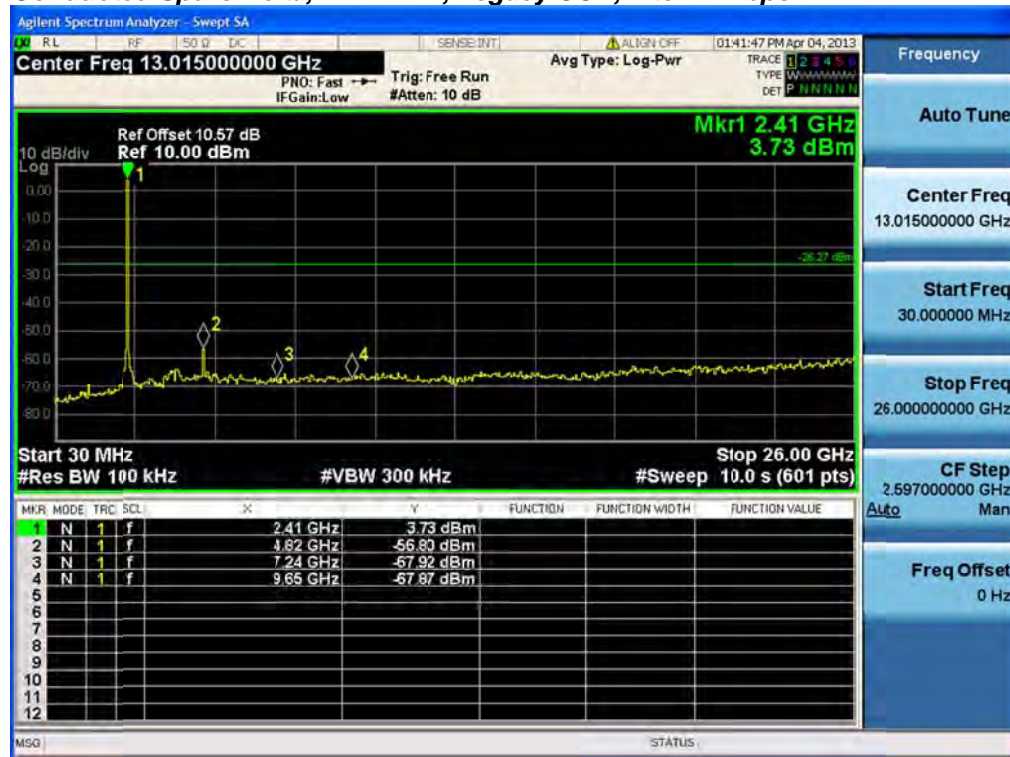
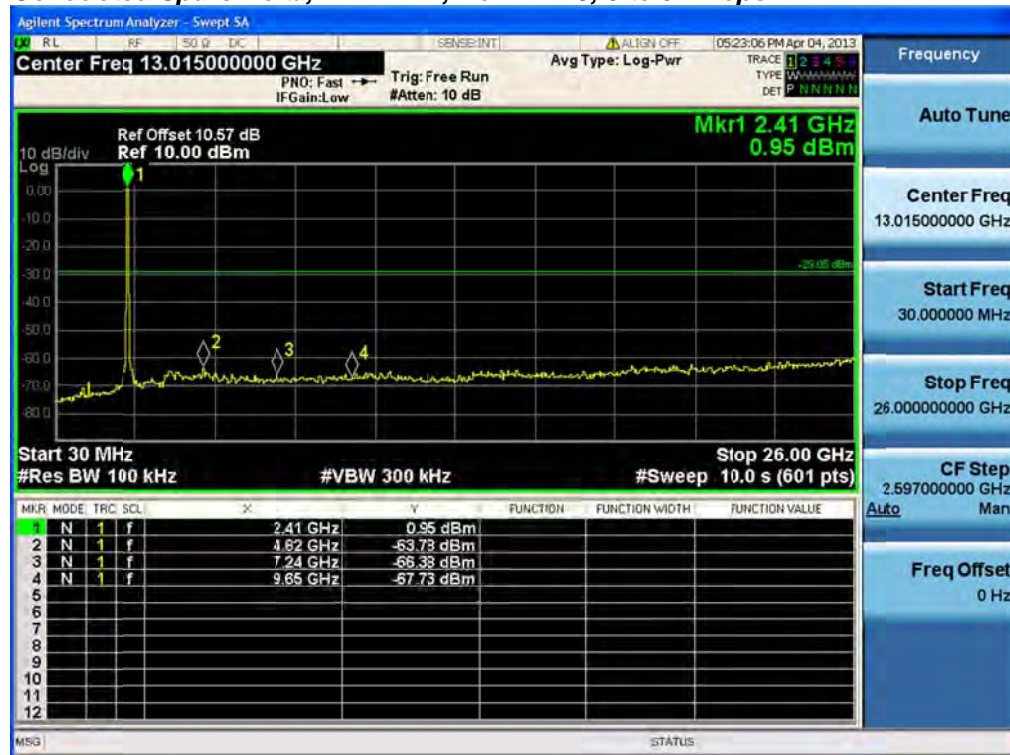
Span:	30 MHz-26 GHz
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5s
Resolution Bandwidth:	100 kHz
Video Bandwidth:	300 kHz
Detector:	Peak
Trace:	Single
Marker:	Peak

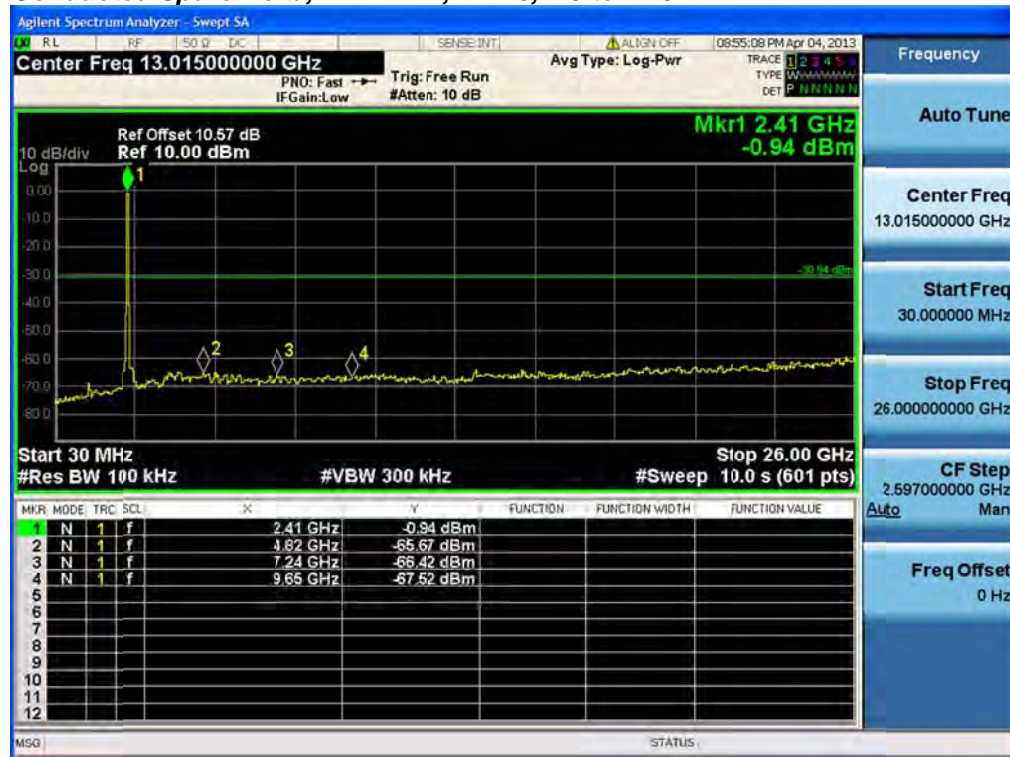
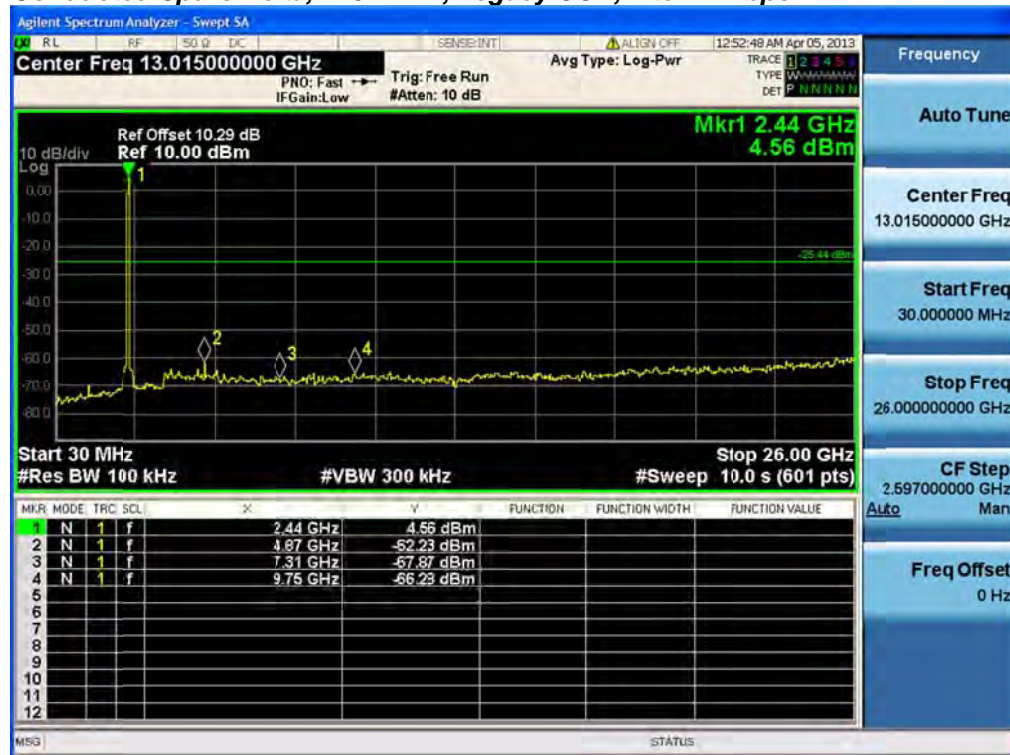
Record the marker waveform peak to spur difference

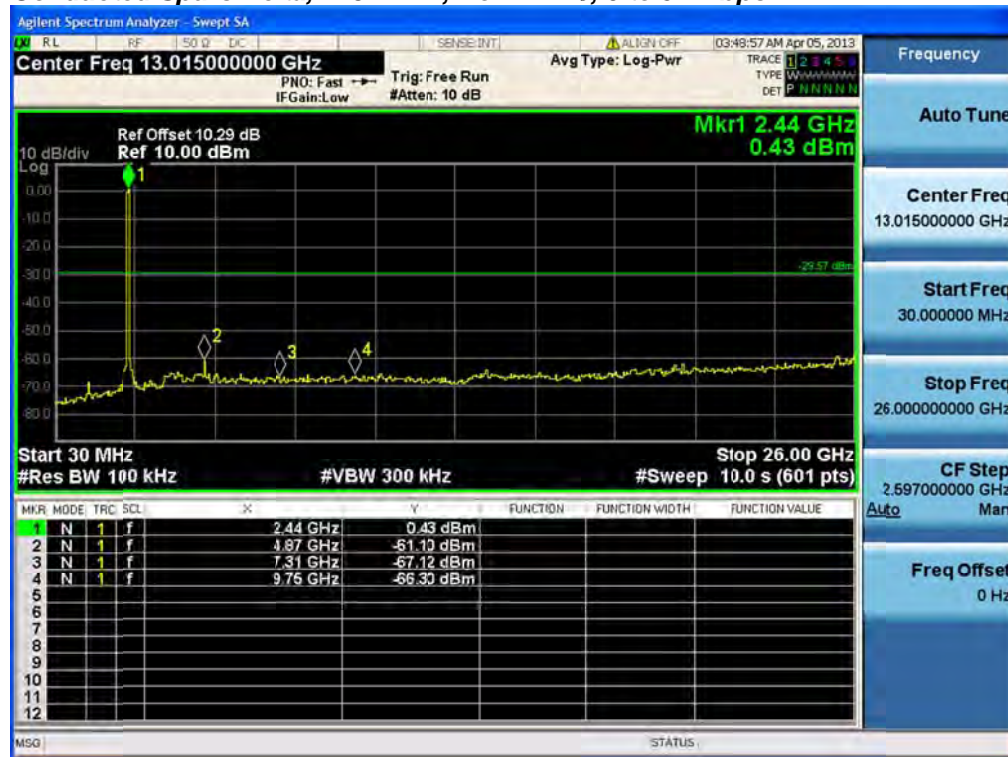
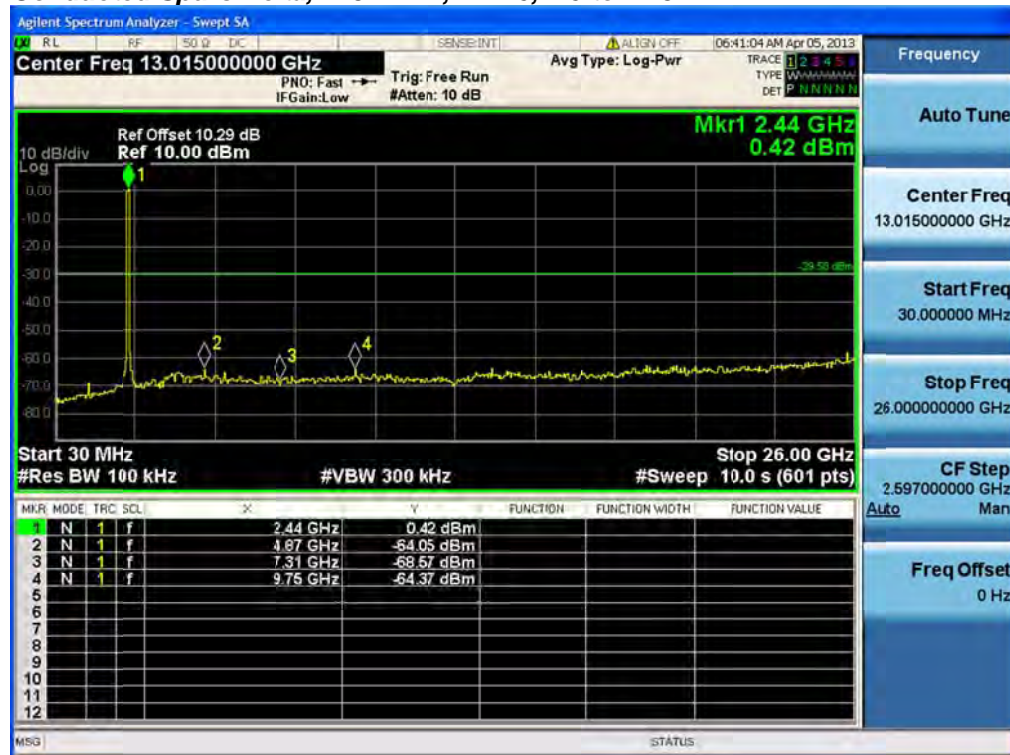
Out-of-band and spurious emissions tests are performed on each output individually without summing or adding $10 \log(N)$ since the measurements are made relative to the in-band emissions on the individual outputs. The worst case output is recorded.

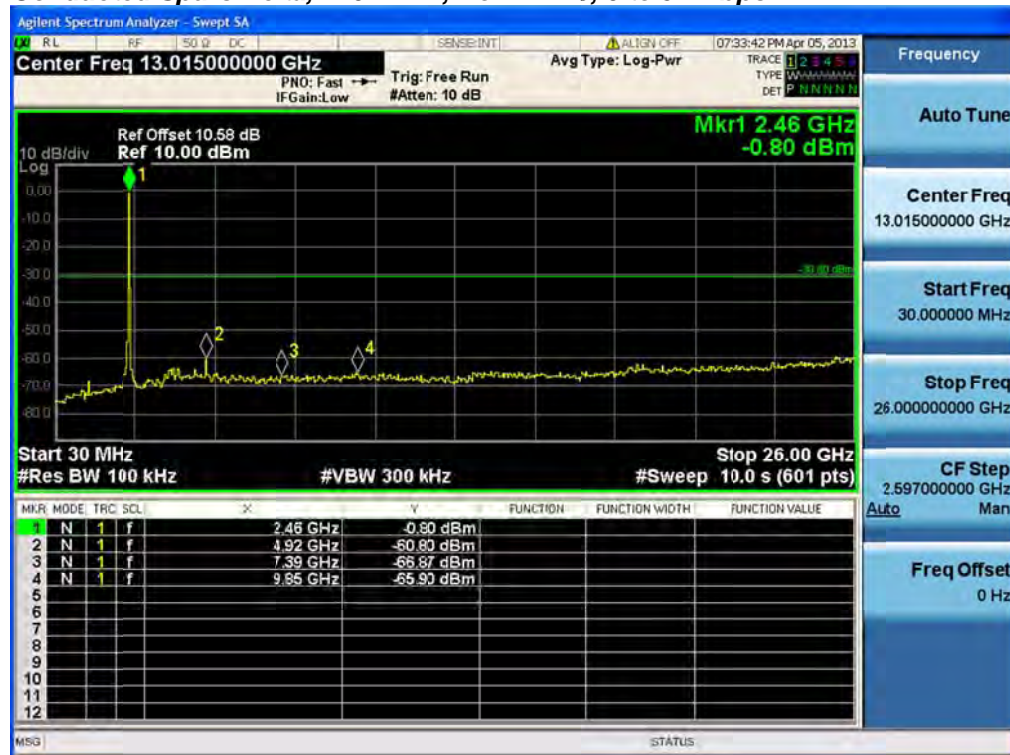


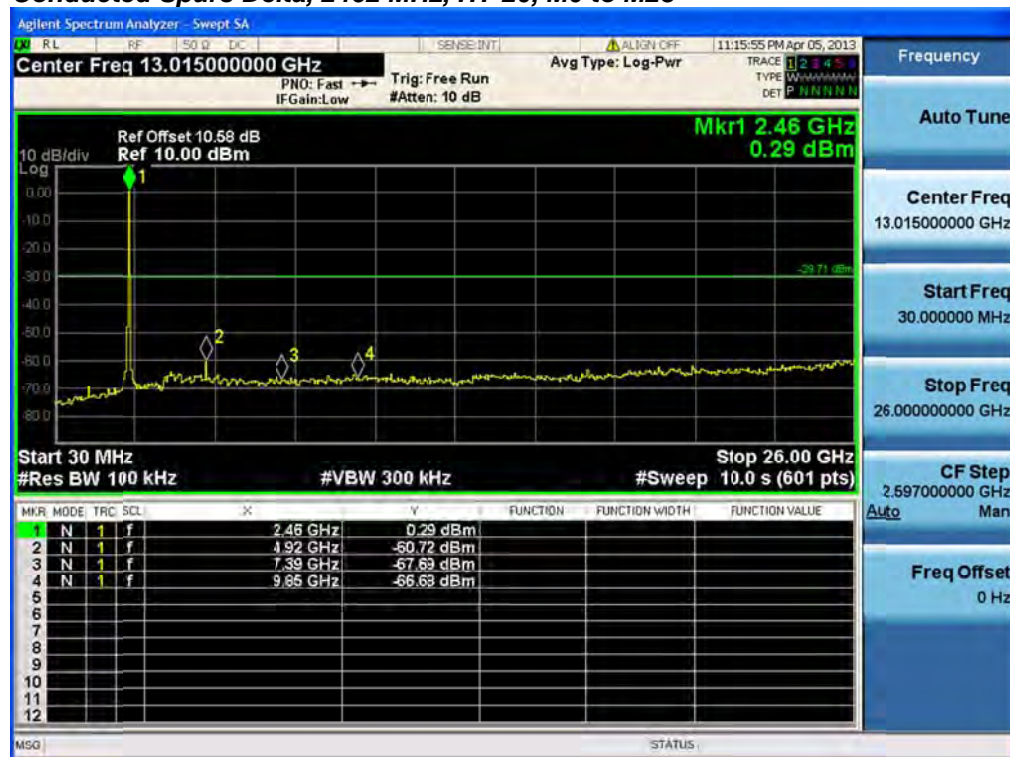
Frequency (MHz)	Mode	Data Rate (Mbps)	Conducted Spur Delta (dB)	Limit (dB c)	Margin (dB)
2412	Legacy CCK, 1 to 11 Mbps	11	<u>60.5</u>	30	30.5
	Non HT-20, 6 to 54 Mbps	6	<u>64.7</u>	30	34.7
	HT-20, M0 to M23	m0	<u>64.7</u>	30	34.7
2437	Legacy CCK, 1 to 11 Mbps	11	<u>66.8</u>	30	36.8
	Non HT-20, 6 to 54 Mbps	6	<u>61.5</u>	30	31.5
	HT-20, M0 to M23	m0	<u>64.5</u>	30	34.5
2462	Legacy CCK, 1 to 11 Mbps	11	<u>66.1</u>	30	36.1
	Non HT-20, 6 to 54 Mbps	6	<u>60</u>	30	30
	HT-20, M0 to M23	m0	<u>61</u>	30	31

Conducted Spurs Delta, 2412 MHz, Legacy CCK, 1 to 11 Mbps**Conducted Spurs Delta, 2412 MHz, Non HT-20, 6 to 54 Mbps**

Conducted Spurs Delta, 2412 MHz, HT-20, M0 to M23**Conducted Spurs Delta, 2437 MHz, Legacy CCK, 1 to 11 Mbps**

Conducted Spurs Delta, 2437 MHz, Non HT-20, 6 to 54 Mbps**Conducted Spurs Delta, 2437 MHz, HT-20, M0 to M23**

Conducted Spurs Delta, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Conducted Spurs Delta, 2462 MHz, Non HT-20, 6 to 54 Mbps**

Conducted Spurs Delta, 2462 MHz, HT-20, M0 to M23



Conducted Bandedge

15.205 / RSS-210 2.7: Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Use the procedures in 718828 D01 DTS Meas Guidance v01 to substitute conducted measurements in place of radiated measurements.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Be sure to enter all losses between the transmitter output and the spectrum analyzer.

Reference Level:	10 dBm
Attenuation:	4 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz
Video Bandwidth:	1 MHz for peak, 100 Hz for average
Detector:	Peak

Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= -41.25 dBm eirp (54dBuV/m @3m)
 2) Peak plot (Vertical and Horizontal), Limit = -21.25 dBm eirp (74dBuV/m @3m)

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands.

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units.

This report represents the worst case data for all supported operating modes and antennas.

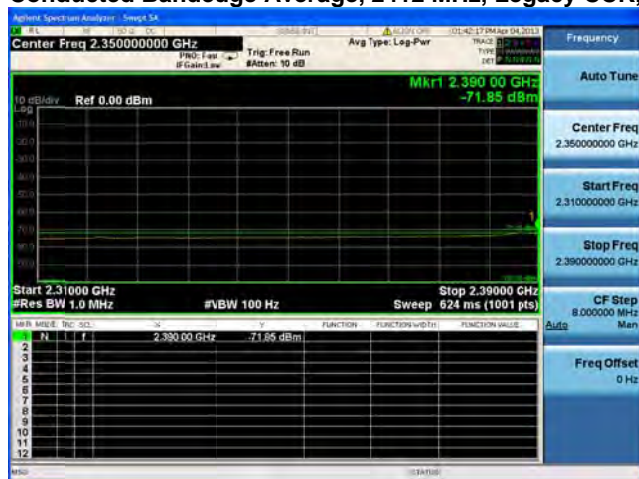


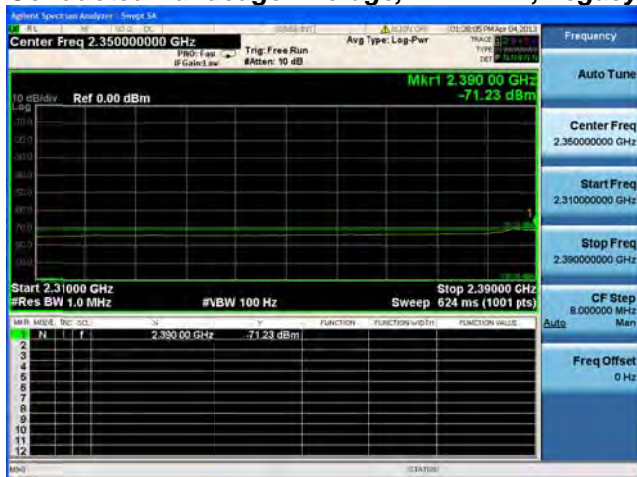
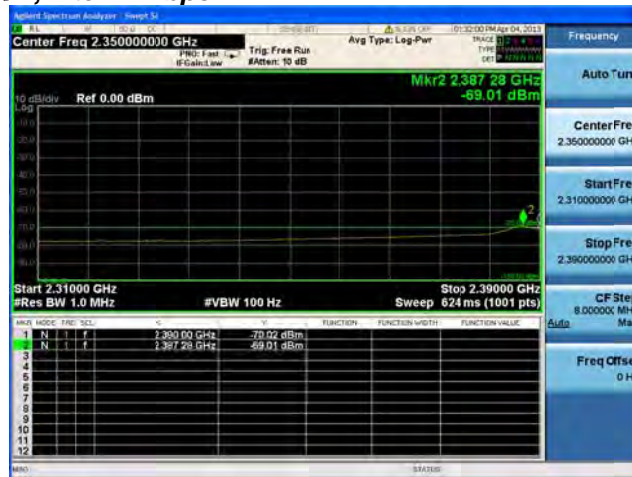
Average Bandedge Data

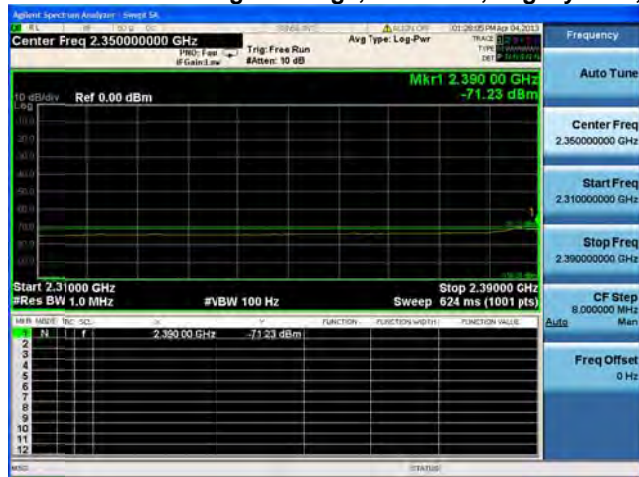
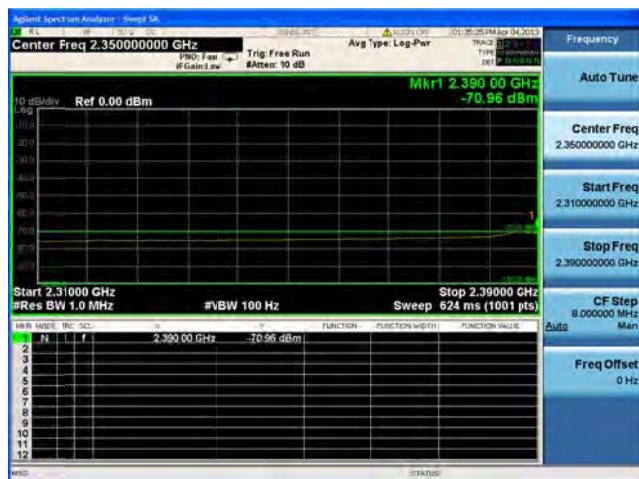
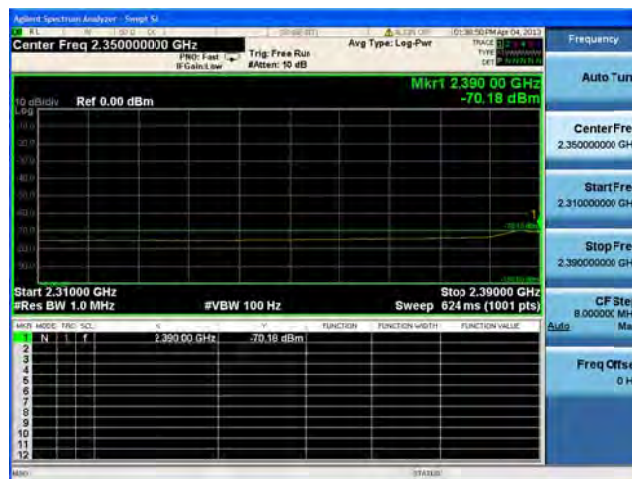
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
2412	Legacy CCK, 1 to 11 Mbps	1	6	-71.80				-65.80	-41.25	24.55
	Legacy CCK, 1 to 11 Mbps	2	6	-71.20	-69.00	-71.00		-60.95	-41.25	19.70
	Legacy CCK, 1 to 11 Mbps	4	6	-71.20	-69.00	-71.00	-70.20	-58.24	-41.25	16.99
	Non HT-20, 6 to 54 Mbps	1	6	-57.60				-51.60	-41.25	10.35
	Non HT-20, 6 to 54 Mbps	2	6	-57.60	-54.40			-46.70	-41.25	5.45
	Non HT-20, 6 to 54 Mbps	3	6	-57.60	-54.40	-57.10		-45.36	-41.25	4.11
	Non HT-20, 6 to 54 Mbps	4	6	-57.60	-54.40	-57.10	-54.40	-43.61	-41.25	2.36
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	9	-57.60	-54.40			-43.70	-41.25	2.45
	Non HT-20 Beam Forming, 6 to 54 Mbps	3	11	-61.70	-59.00	-60.70		-44.75	-41.25	3.50
	Non HT-20 Beam Forming, 6 to 54 Mbps	4	12	-61.70	-59.00	-60.70	-58.70	-41.84	-41.25	0.59
	HT-20, M0 to M7	1	6	-58.10				-52.10	-41.25	10.85
	HT-20, M0 to M7	2	6	-58.10	-52.40			-45.36	-41.25	4.11
	HT-20, M8 to M15	2	6	-58.10	-52.40			-45.36	-41.25	4.11
	HT-20, M0 to M7	3	6	-58.10	-52.40	-54.30		-43.58	-41.25	2.33
	HT-20, M8 to M15	3	6	-58.10	-52.40	-54.30		-43.58	-40.25	3.33
	HT-20, M16 to M23	3	6	-58.10	-52.40	-54.30		-43.58	-41.25	2.33
	HT-20, M0 to M7	4	6	-58.10	-52.40	-54.30	-52.50	-41.79	-41.25	0.54
	HT-20, M8 to M15	4	6	-58.10	-52.40	-54.30	-52.50	-41.79	-41.25	0.54
	HT-20, M16 to M23	4	6	-58.10	-52.40	-54.30	-52.50	-41.79	-41.25	0.54
	HT-20 Beam Forming, M0 to M7	2	9	-58.10	-52.40			-42.36	-41.25	1.11
	HT-20 Beam Forming, M8 to M15	2	6	-58.10	-52.40			-45.36	-41.25	4.11
	HT-20 Beam Forming, M0 to M7	3	11	-61.70	-57.80	-57.70		-43.14	-41.25	1.89
	HT-20 Beam Forming, M8 to M15	3	8	-58.10	-52.40	-54.30		-41.78	-41.25	0.53
	HT-20 Beam Forming, M16 to M23	3	6	-58.10	-52.40	-54.30		-43.58	-41.25	2.33
	HT-20 Beam Forming, M0 to M7	4	12	-64.40	-61.10	-61.40	-61.70	-43.95	-41.25	2.70
	HT-20 Beam Forming, M8 to M15	4	9	-61.70	-57.80	-57.70	-56.40	-42.99	-41.25	1.74
	HT-20 Beam Forming, M16 to M23	4	7	-61.70	-57.80	-57.70	-56.40	-44.79	-41.25	3.54
	HT-20 STBC, M0 to M7	2	6	-58.10	-52.40			-45.36	-41.25	4.11
	HT-20 STBC, M0 to M7	3	6	-58.10	-52.40	-54.30		-43.58	-41.25	2.33

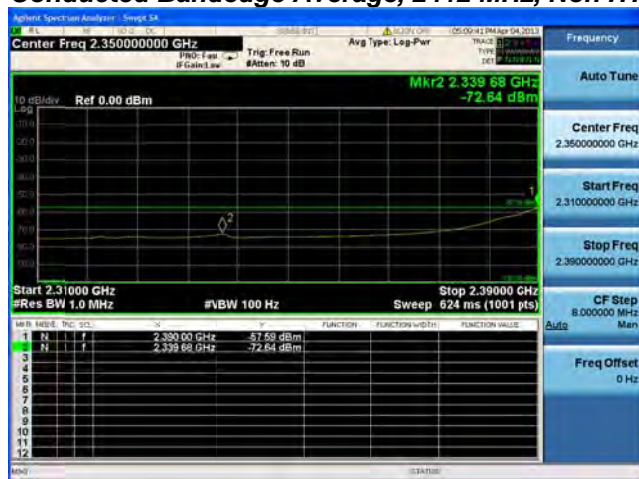


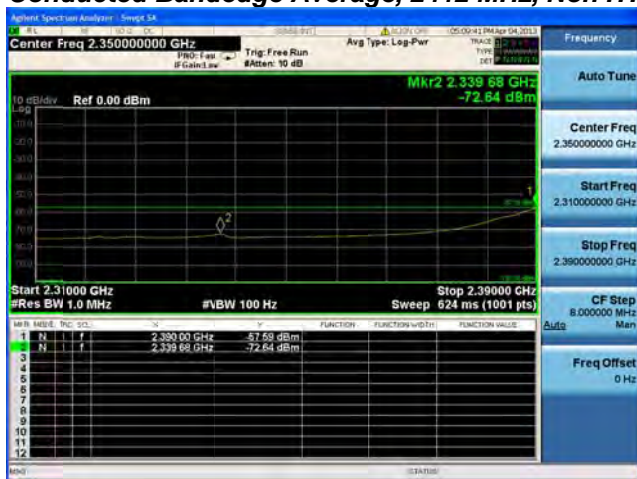
	HT-20 STBC, M0 to M7	4	6	<u>-58.10</u>	<u>-52.40</u>	<u>-54.30</u>	<u>-52.50</u>	-41.79	-41.25	0.54
2462	Legacy CCK, 1 to 11 Mbps	1	6	<u>-72.60</u>				-66.60	-41.25	25.35
	Legacy CCK, 1 to 11 Mbps	2	6	<u>-71.80</u>	<u>-70.10</u>			-61.86	-41.25	20.61
	Legacy CCK, 1 to 11 Mbps	3	6	<u>-71.80</u>	<u>-70.10</u>	<u>-71.20</u>		-60.20	-41.25	18.95
	Legacy CCK, 1 to 11 Mbps	4	6	<u>-71.80</u>	<u>-70.10</u>	<u>-71.20</u>	<u>-71.10</u>	-58.99	-41.25	17.74
	Non HT-20, 6 to 54 Mbps	1	6	<u>-58.20</u>				-52.20	-41.25	10.95
	Non HT-20, 6 to 54 Mbps	2	6	<u>-58.20</u>	<u>-53.50</u>			-46.23	-41.25	4.98
	Non HT-20, 6 to 54 Mbps	3	6	<u>-58.20</u>	<u>-53.50</u>	<u>-56.20</u>		-44.77	-41.25	3.52
	Non HT-20, 6 to 54 Mbps	4	6	<u>-58.20</u>	<u>-53.50</u>	<u>-56.20</u>	<u>-52.50</u>	-42.54	-41.25	1.29
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	9	<u>-58.20</u>	<u>-53.50</u>			-43.23	-41.25	1.98
	Non HT-20 Beam Forming, 6 to 54 Mbps	3	11	<u>-62.20</u>	<u>-58.90</u>	<u>-59.60</u>		-44.45	-41.25	3.20
	Non HT-20 Beam Forming, 6 to 54 Mbps	4	12	<u>-66.10</u>	<u>-63.40</u>	<u>-64.50</u>	<u>-62.70</u>	-45.97	-41.25	4.72
	HT-20, M0 to M7	1	6	<u>-55.80</u>				-49.80	-41.25	8.55
	HT-20, M0 to M7	2	6	<u>-55.80</u>	<u>-50.90</u>			-43.68	-41.25	2.43
	HT-20, M8 to M15	2	6	<u>-55.80</u>	<u>-50.90</u>			-43.68	-41.25	2.43
	HT-20, M0 to M7	3	6	<u>-55.80</u>	<u>-50.90</u>	<u>-53.20</u>		-42.08	-41.25	0.83
	HT-20, M8 to M15	3	6	<u>-55.80</u>	<u>-50.90</u>	<u>-53.20</u>		-42.08	-41.25	0.83
	HT-20, M16 to M23	3	6	<u>-55.80</u>	<u>-50.90</u>	<u>-53.20</u>		-42.08	-41.25	0.83
	HT-20, M0 to M7	4	6	<u>-60.10</u>	<u>-57.20</u>	<u>-57.70</u>	<u>-54.20</u>	-44.77	-41.25	3.52
	HT-20, M8 to M15	4	6	<u>-60.10</u>	<u>-57.20</u>	<u>-57.70</u>	<u>-54.20</u>	-44.77	-41.25	3.52
	HT-20, M16 to M23	4	6	<u>-60.10</u>	<u>-57.20</u>	<u>-57.70</u>	<u>-54.20</u>	-44.77	-41.25	3.52
	HT-20 Beam Forming, M0 to M7	2	9	<u>-60.10</u>	<u>-57.20</u>			-46.40	-41.25	5.15
	HT-20 Beam Forming, M8 to M15	2	6	<u>-55.80</u>	<u>-50.90</u>			-43.68	-41.25	2.43
	HT-20 Beam Forming, M0 to M7	3	11	<u>-64.10</u>	<u>-61.50</u>	<u>-62.10</u>		-46.86	-41.25	5.61
	HT-20 Beam Forming, M8 to M15	3	8	<u>-60.10</u>	<u>-57.20</u>	<u>-57.70</u>		-45.59	-41.25	4.34
	HT-20 Beam Forming, M16 to M23	3	6	<u>-55.80</u>	<u>-50.90</u>	<u>-53.20</u>		-42.08	-41.25	0.83
	HT-20 Beam Forming, M0 to M7	4	12	<u>-64.10</u>	<u>-61.50</u>	<u>-62.10</u>	<u>-59.40</u>	-43.43	-41.25	2.18
	HT-20 Beam Forming, M8 to M15	4	9	<u>-64.10</u>	<u>-61.50</u>	<u>-62.10</u>	<u>-59.40</u>	-46.43	-41.25	5.18
	HT-20 Beam Forming, M16 to M23	4	7	<u>-64.10</u>	<u>-61.50</u>	<u>-62.10</u>	<u>-59.40</u>	-48.23	-41.25	6.98
	HT-20 STBC, M0 to M7	2	6	<u>-55.80</u>	<u>-50.90</u>			-43.68	-41.25	2.43
	HT-20 STBC, M0 to M7	3	6	<u>-55.80</u>	<u>-50.90</u>	<u>-53.20</u>		-42.08	-41.25	0.83
	HT-20 STBC, M0 to M7	4	6	<u>-60.10</u>	<u>-57.20</u>	<u>-57.70</u>	<u>-54.20</u>	-44.77	-41.25	3.52

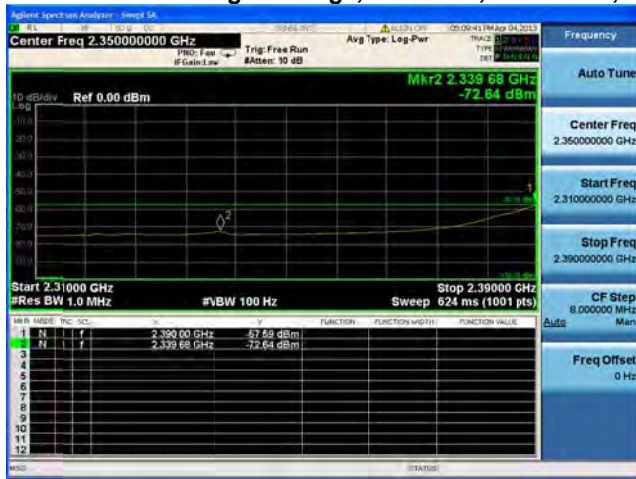
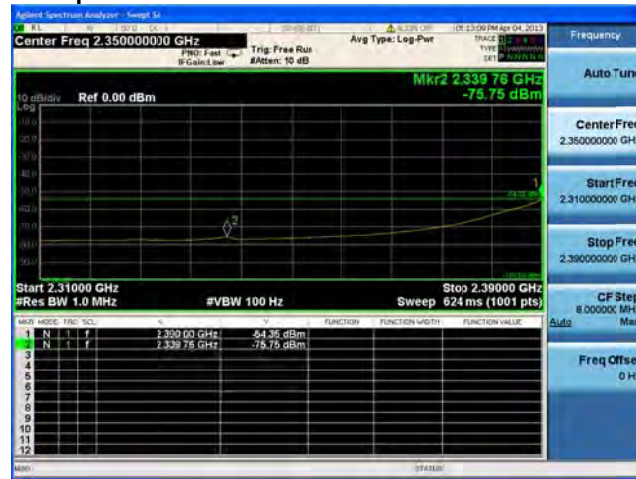
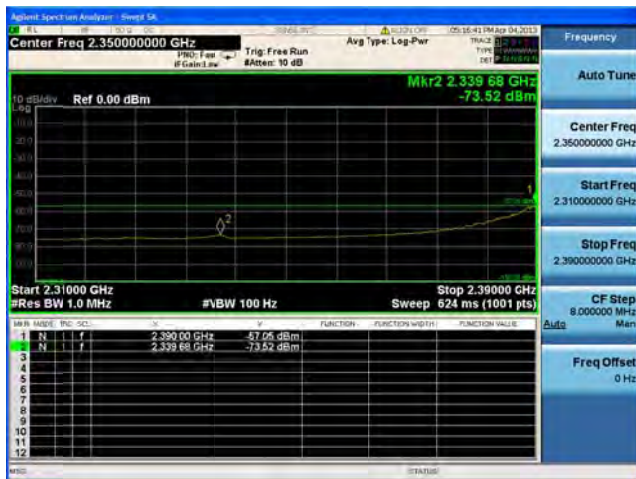
Conducted Bandedge Average, 2412 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A**

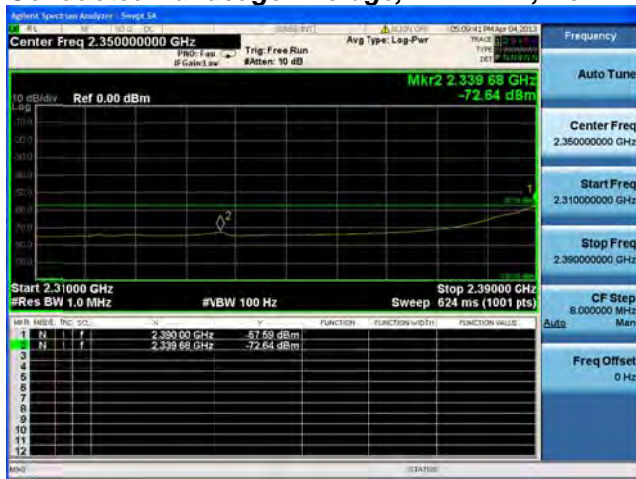
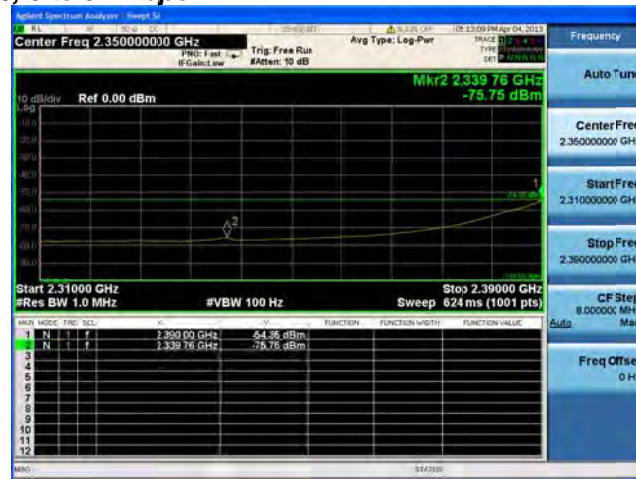
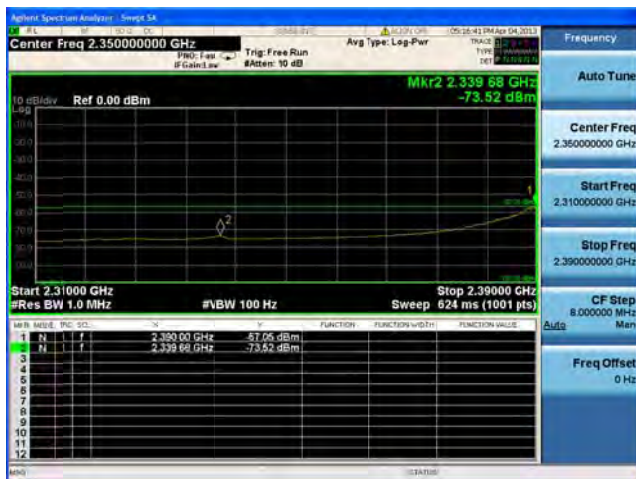
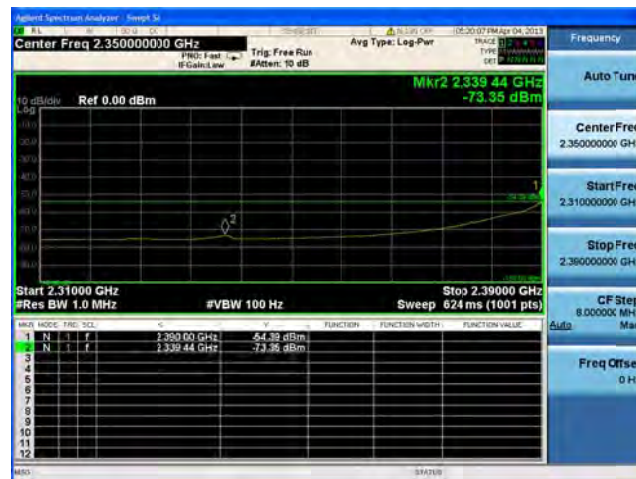
Conducted Bandedge Average, 2412 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B**

Conducted Bandedge Average, 2412 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

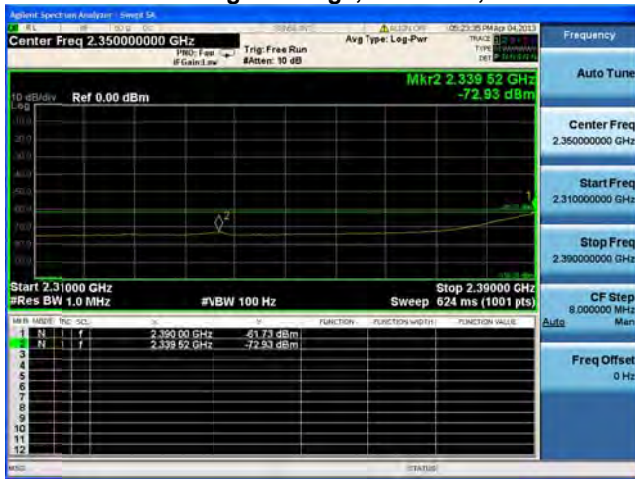
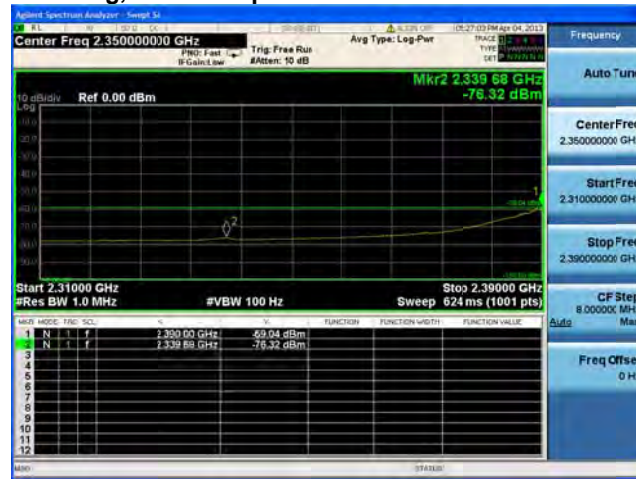
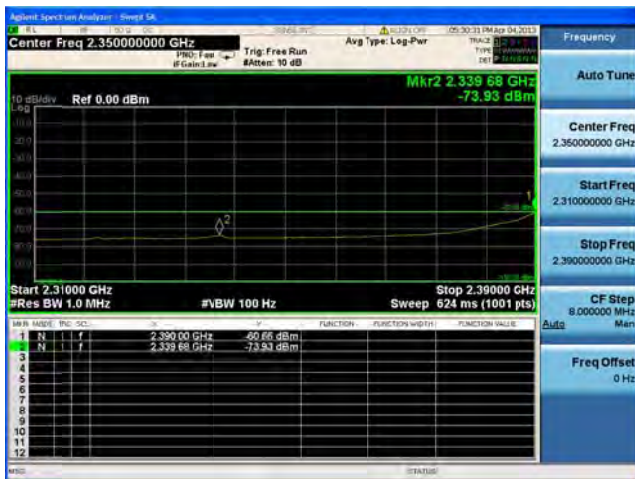
Conducted Bandedge Average, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A**

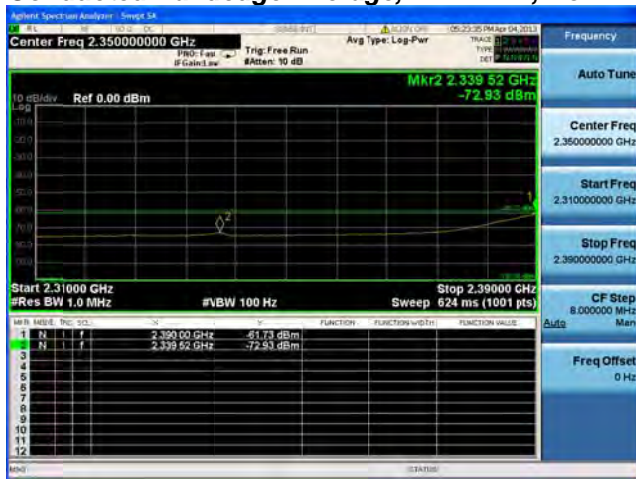
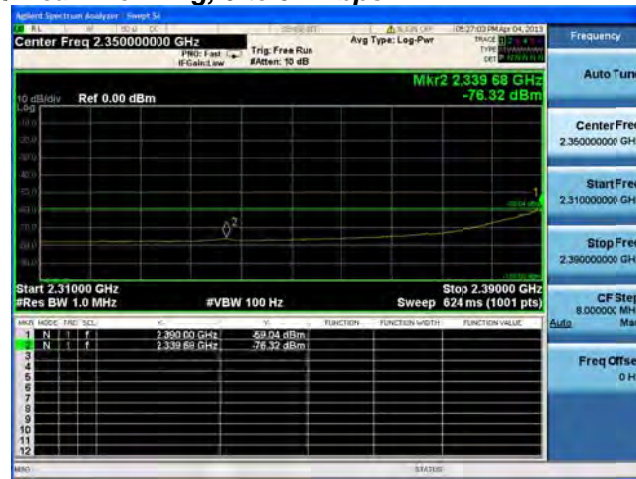
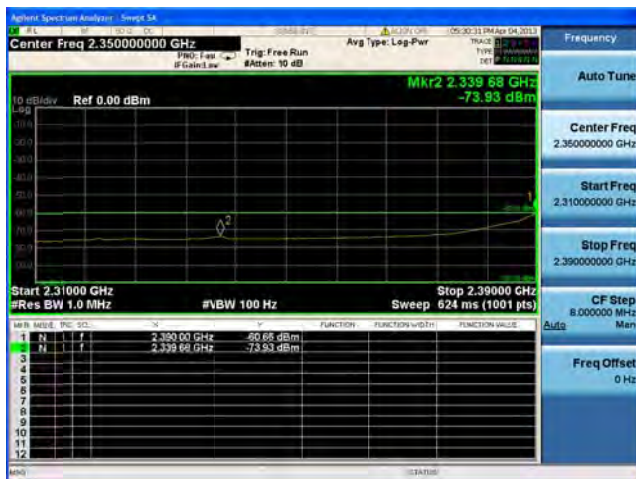
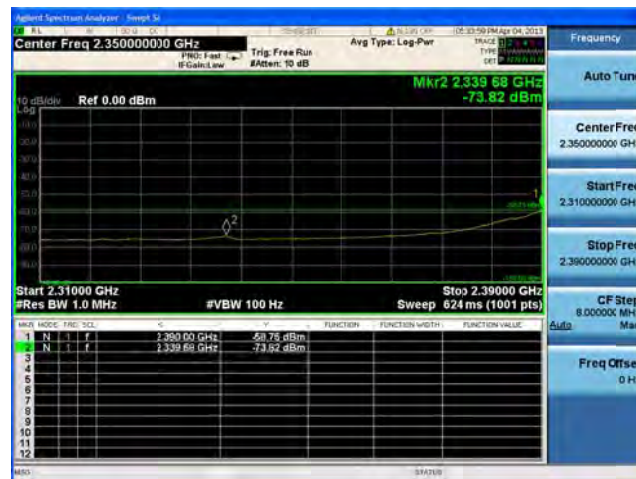
Conducted Bandedge Average, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B**

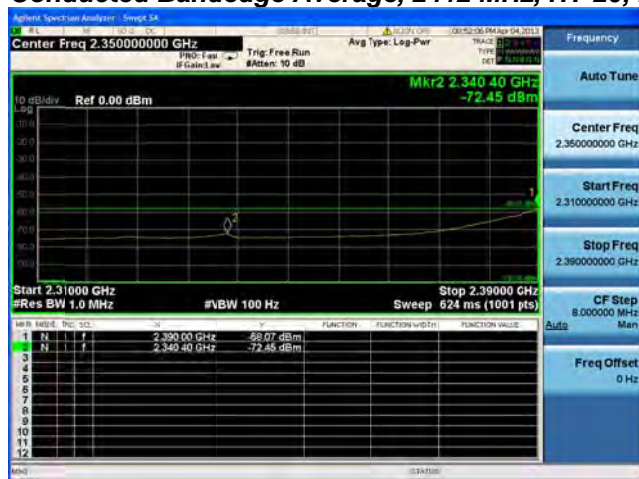
Conducted Bandedge Average, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

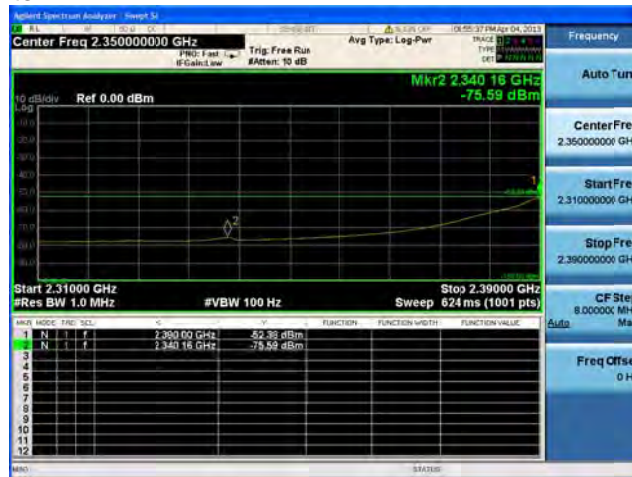
Conducted Bandedge Average, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Average, 2412 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B**

Conducted Bandedge Average, 2412 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

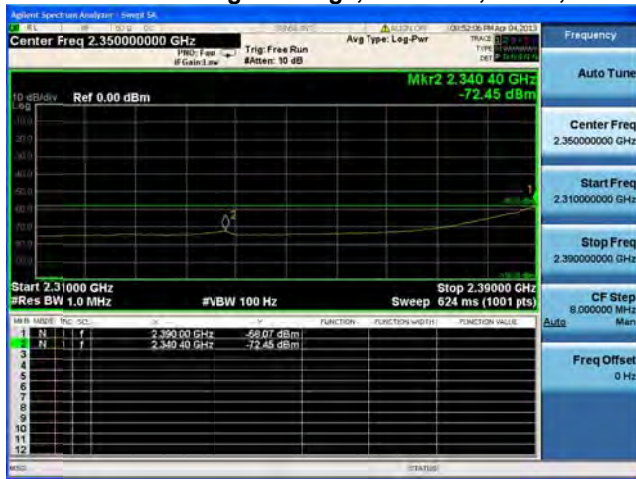
Conducted Bandedge Average, 2412 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Average, 2412 MHz, HT-20, M0 to M7**Antenna A**

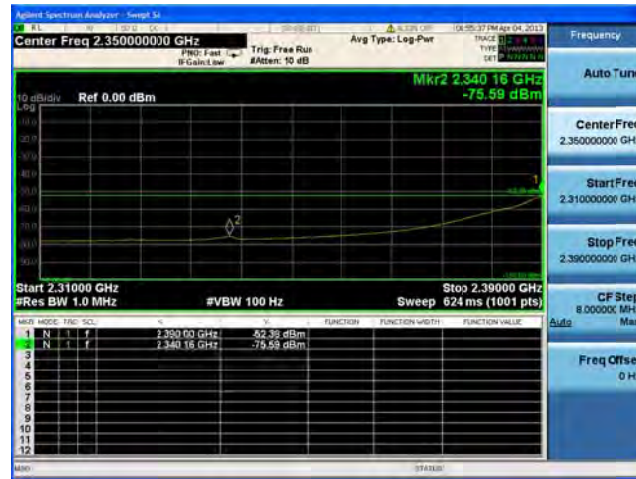
Conducted Bandedge Average, 2412 MHz, HT-20, M0 to M7**Antenna A****Antenna B**



Conducted Bandedge Average, 2412 MHz, HT-20, M8 to M15

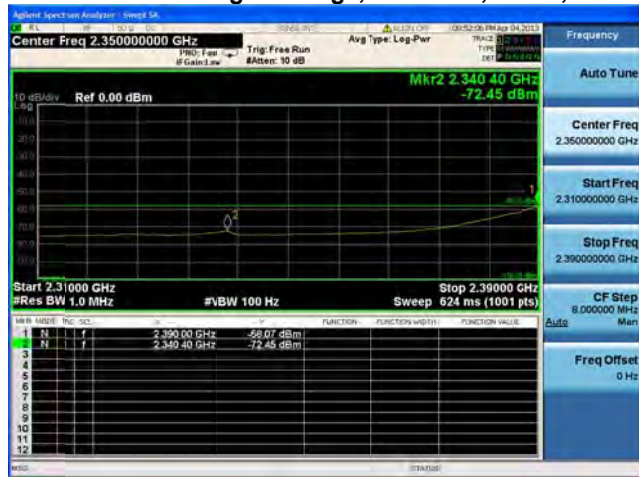


Antenna A

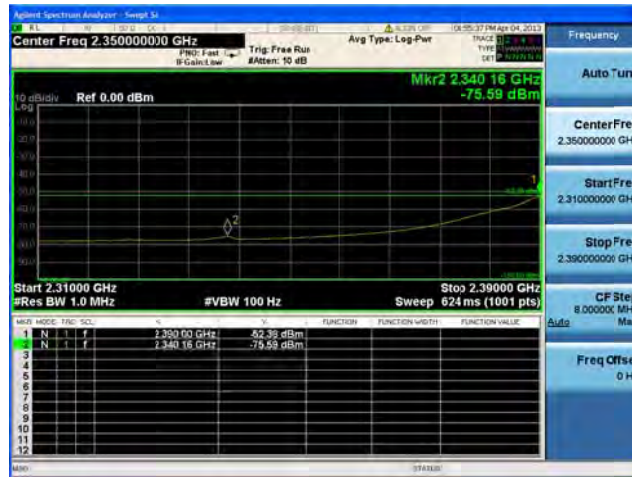


Antenna B

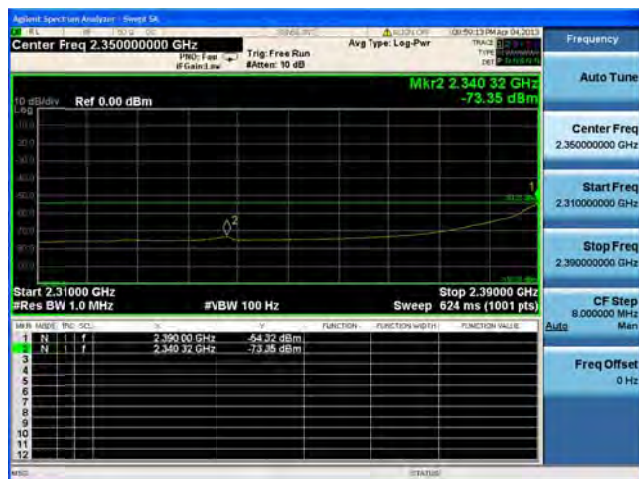
Conducted Bandedge Average, 2412 MHz, HT-20, M0 to M7



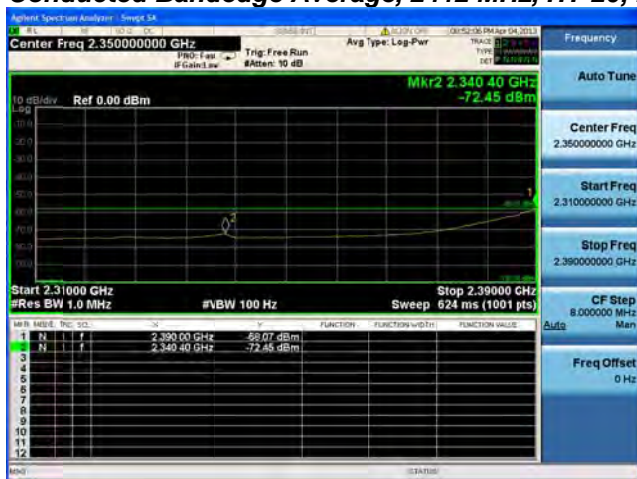
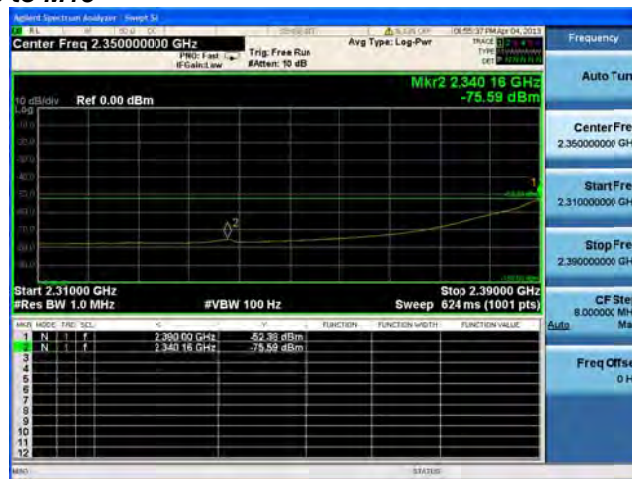
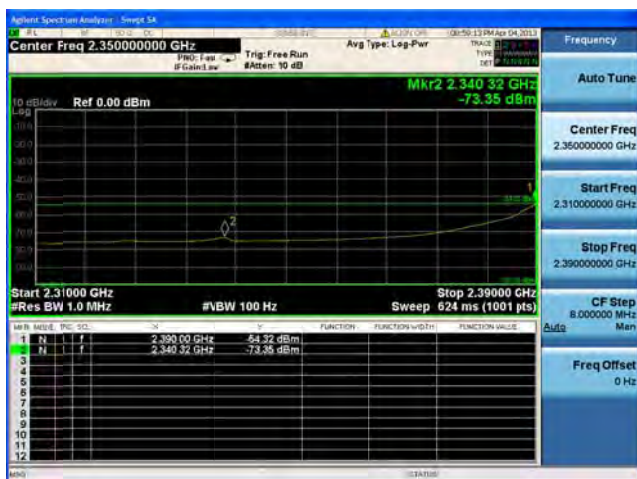
Antenna A

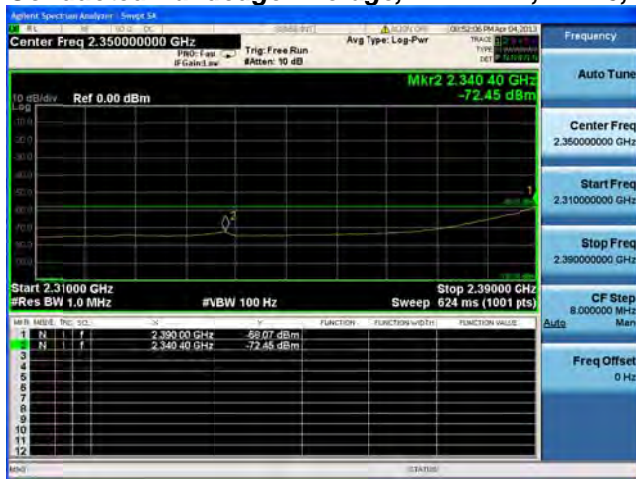
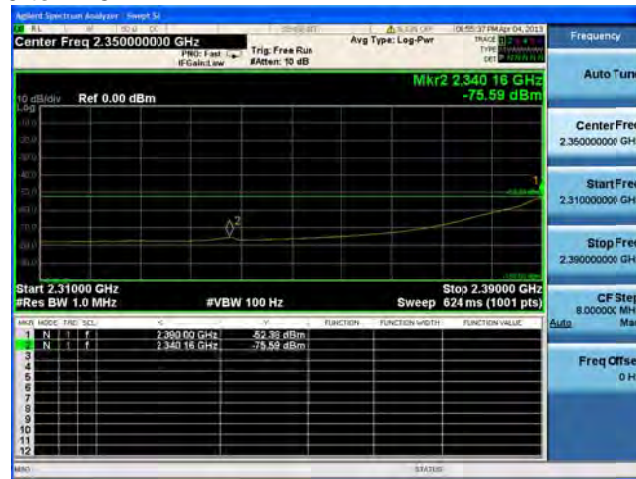
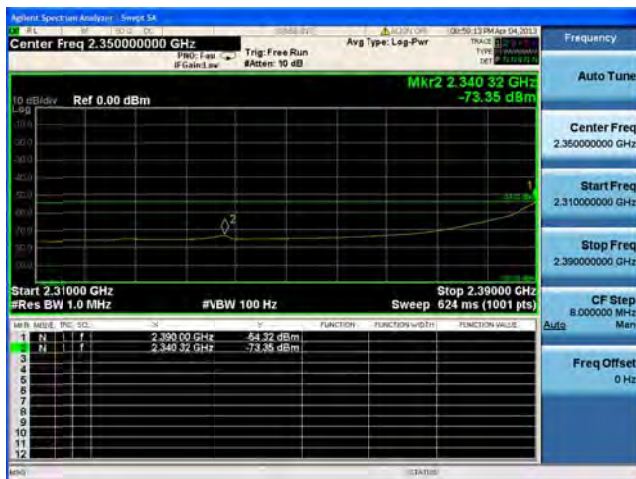


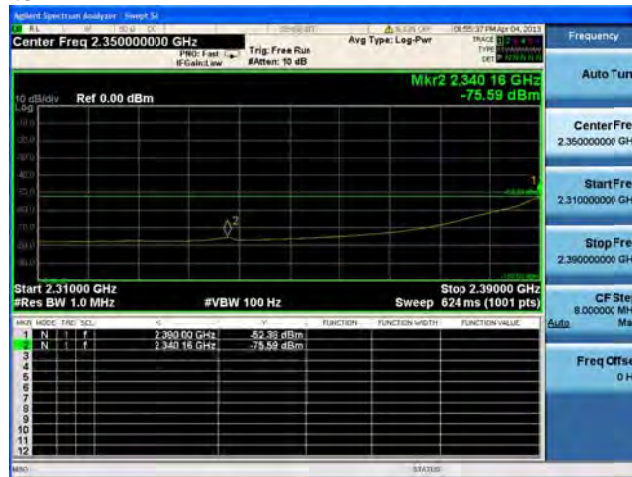
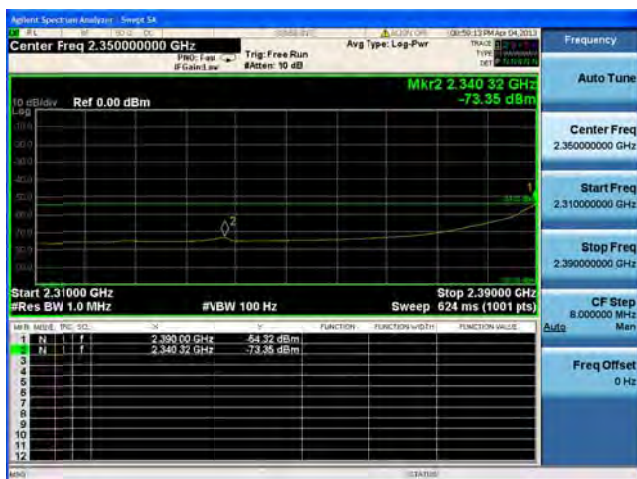
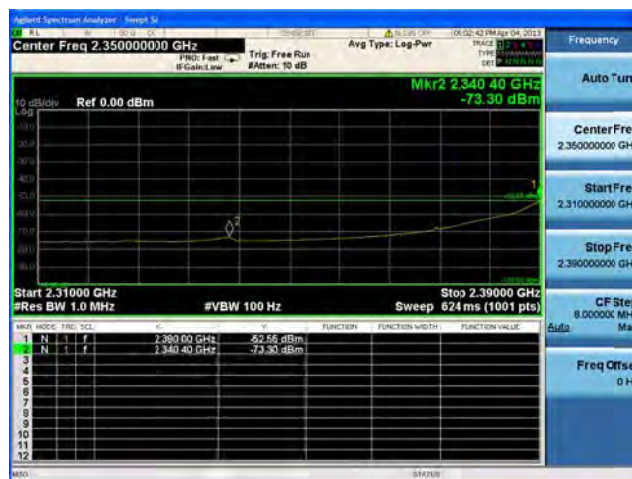
Antenna B

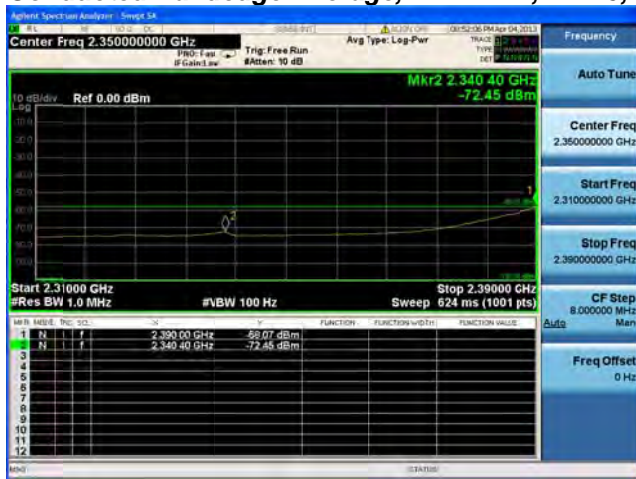
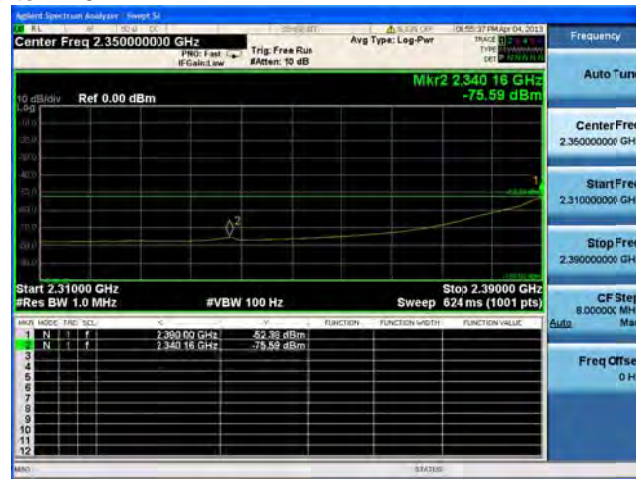
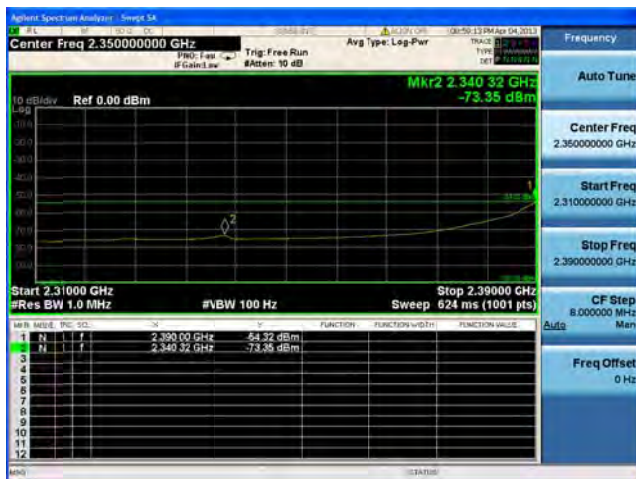
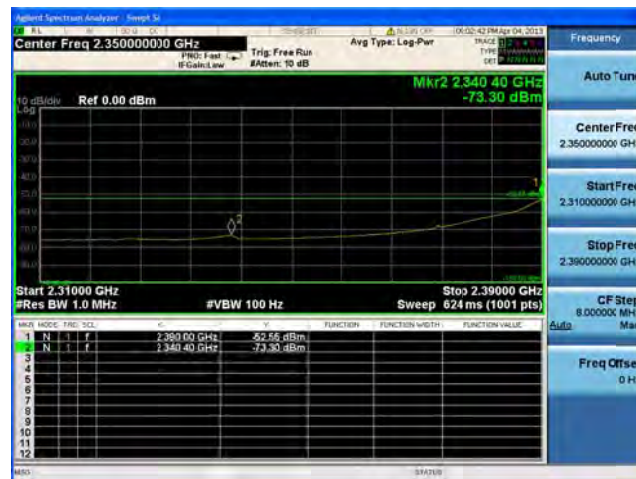


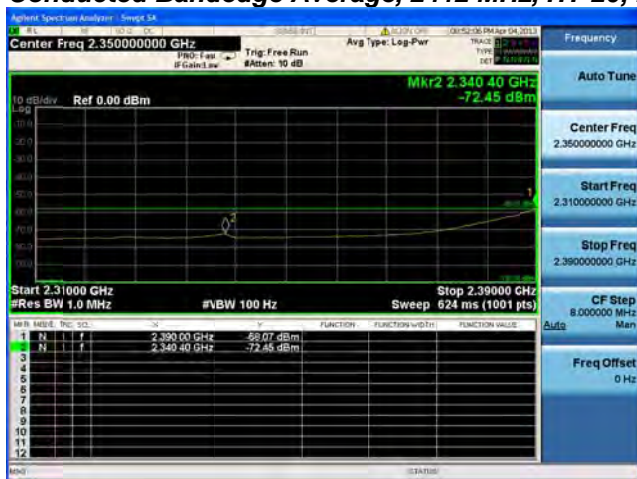
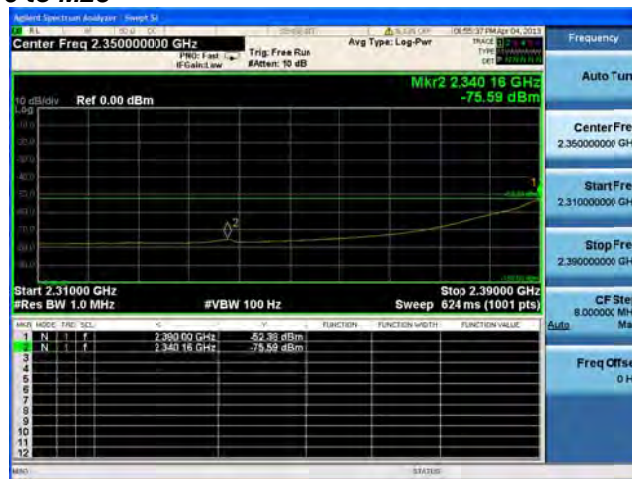
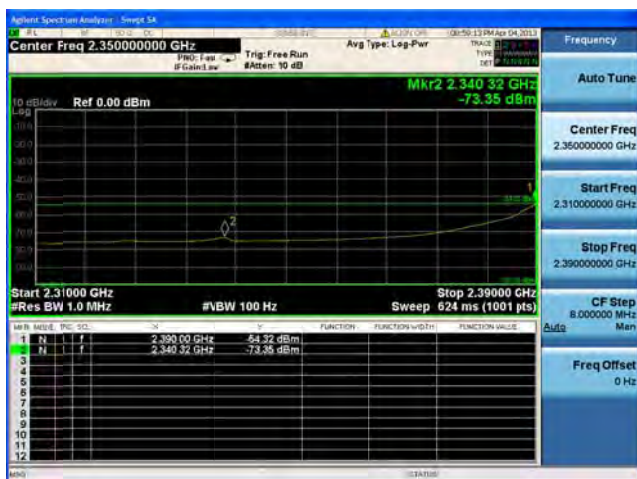
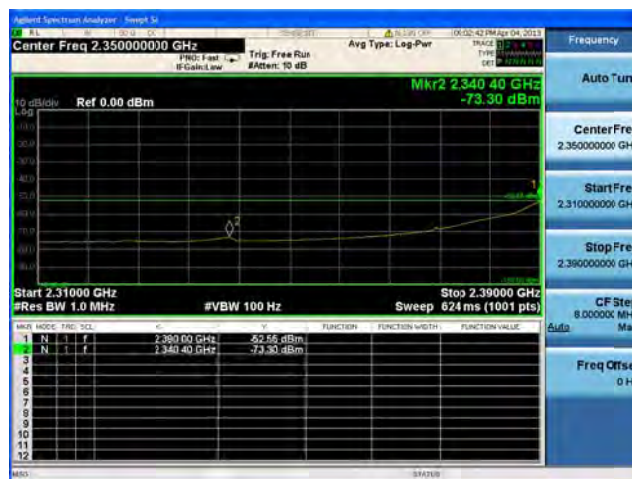
Antenna C

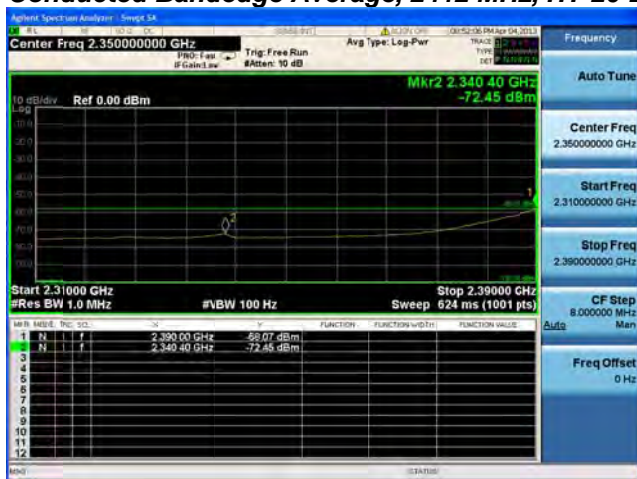
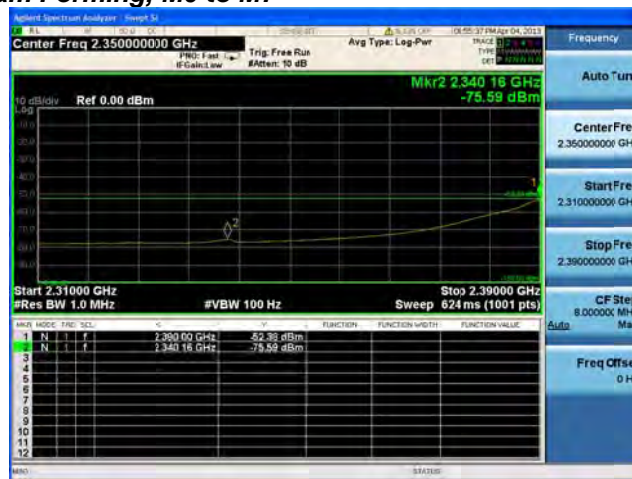
Conducted Bandedge Average, 2412 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Average, 2412 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C**

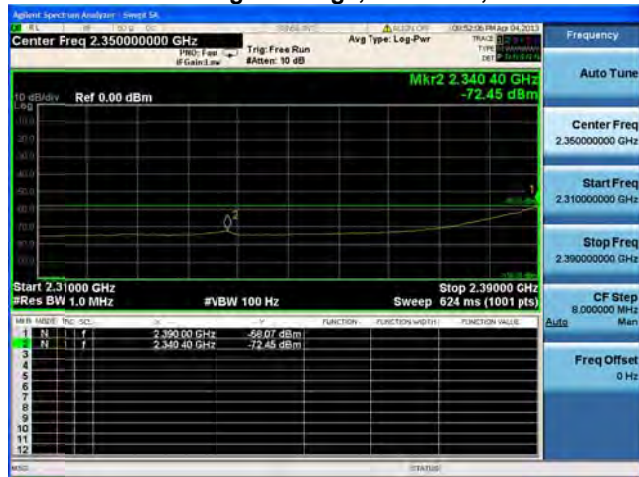
Conducted Bandedge Average, 2412 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Average, 2412 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

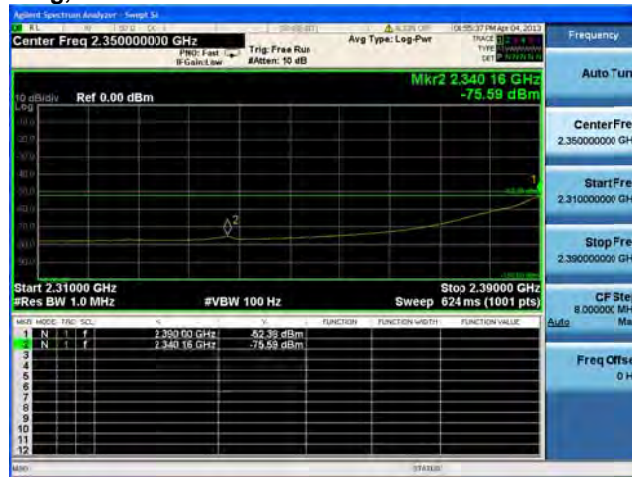
Conducted Bandedge Average, 2412 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Average, 2412 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B**

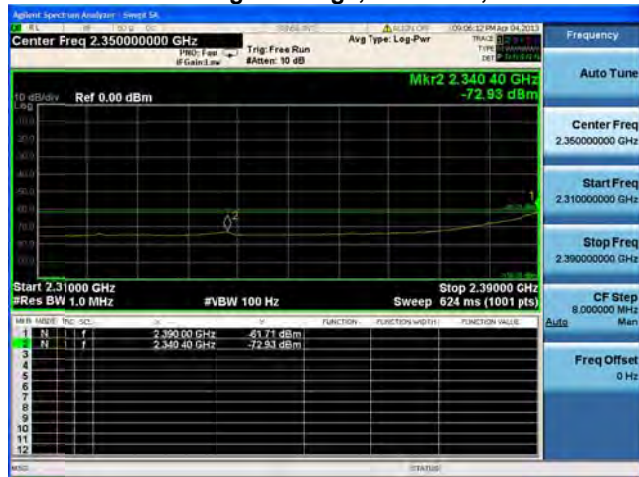
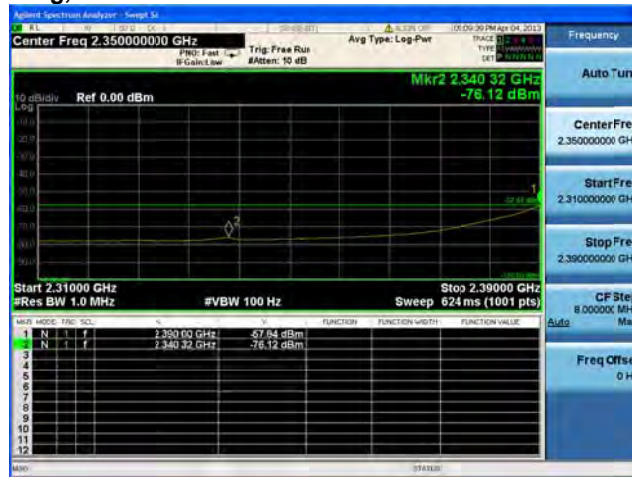
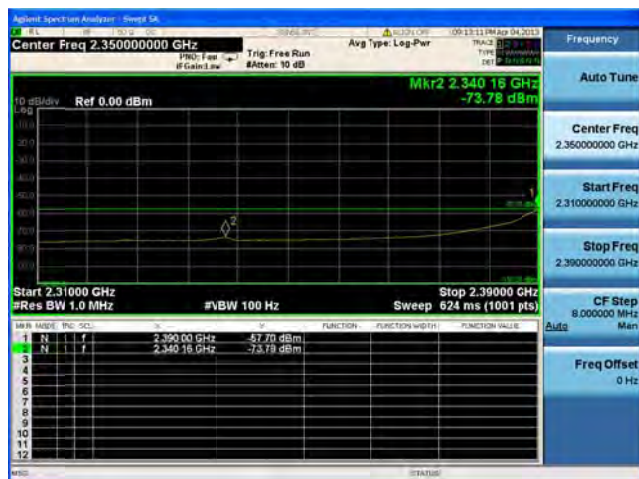
Conducted Bandedge Average, 2412 MHz, HT-20 Beam Forming, M8 to M15

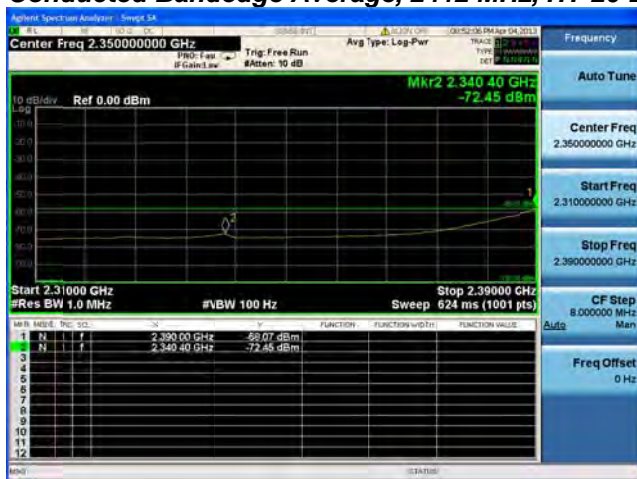
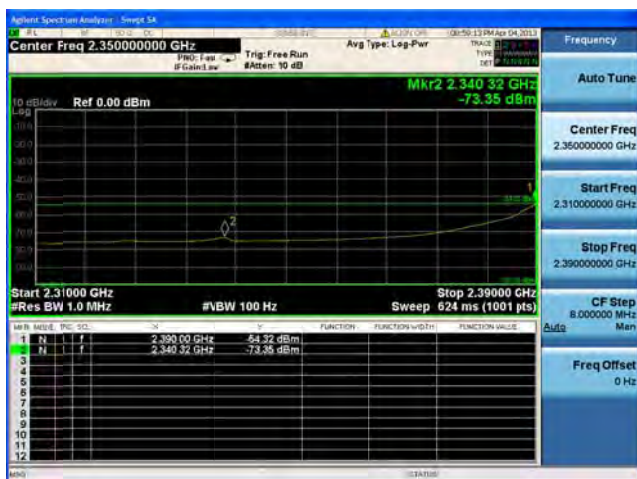


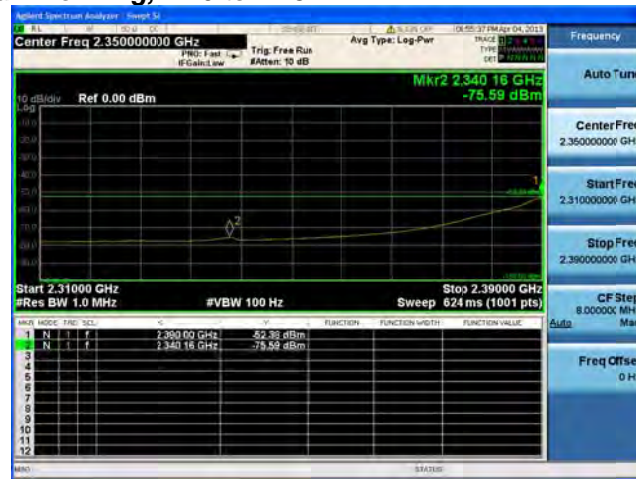
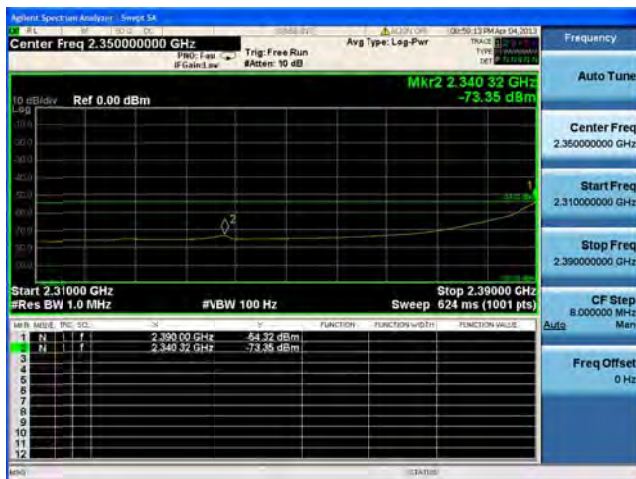
Antenna A

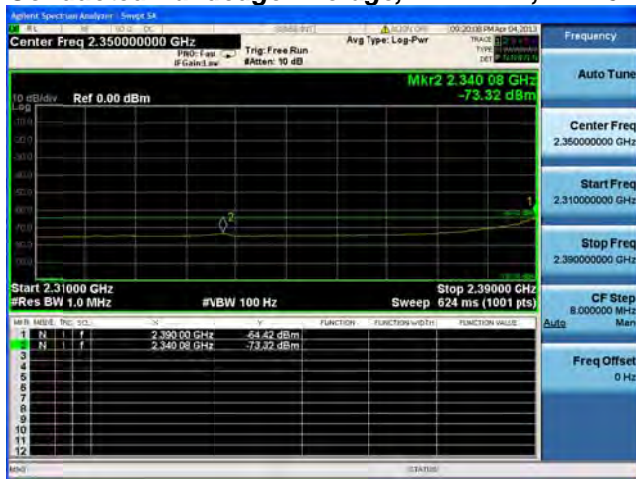
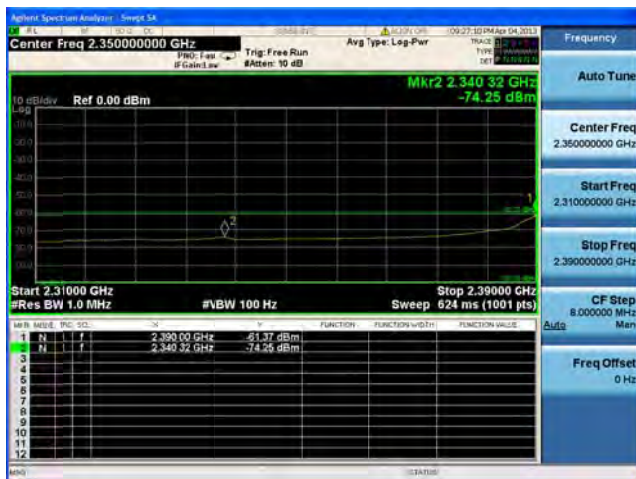
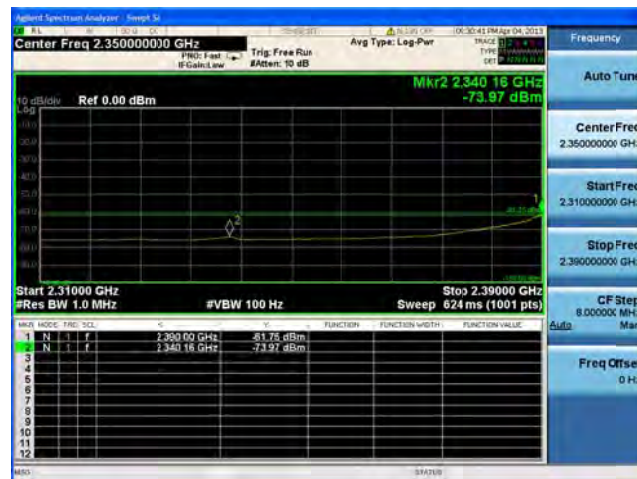


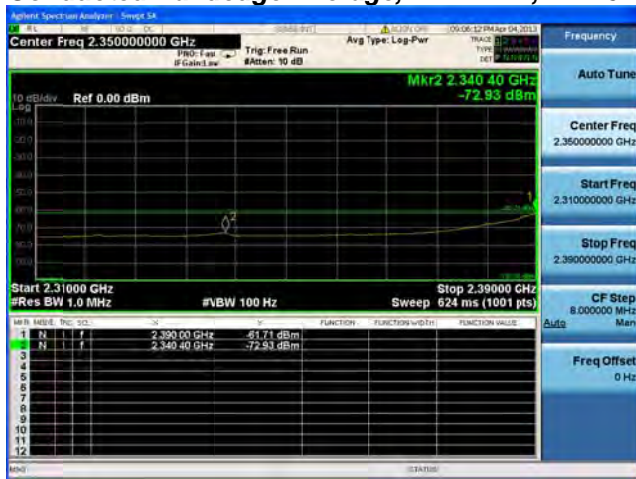
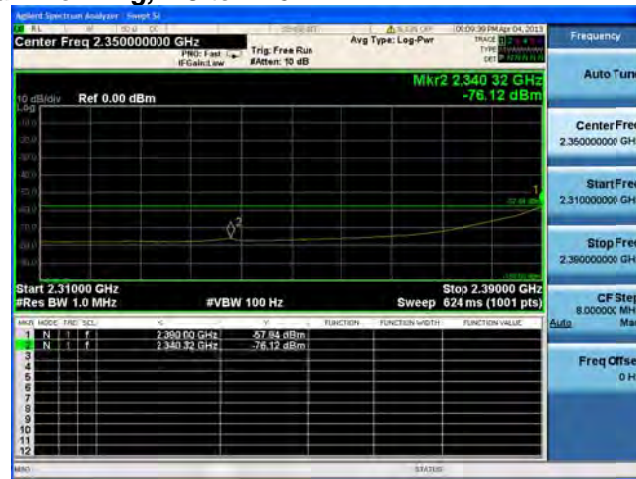
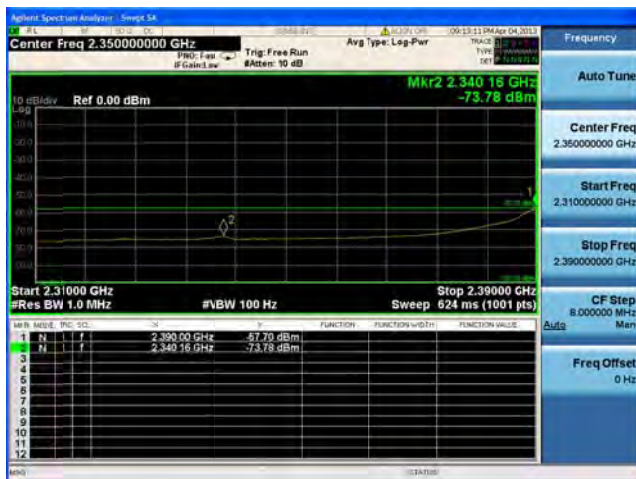
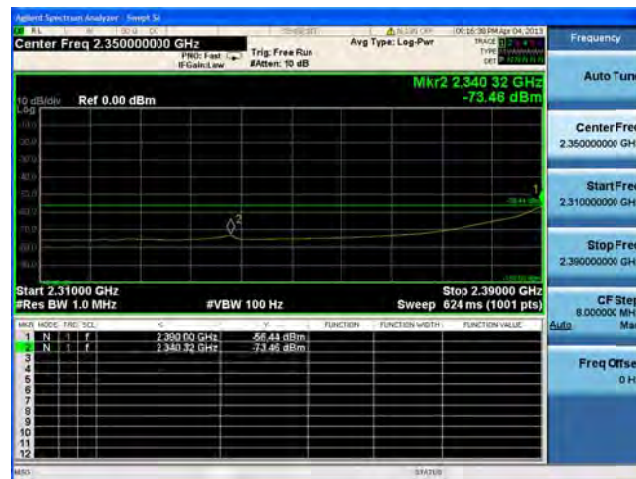
Antenna B

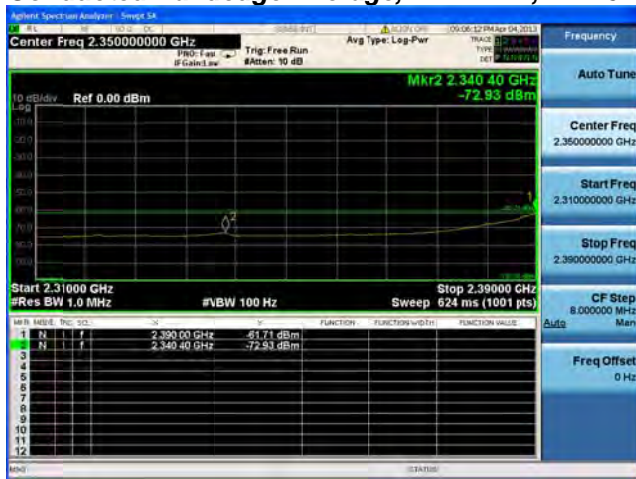
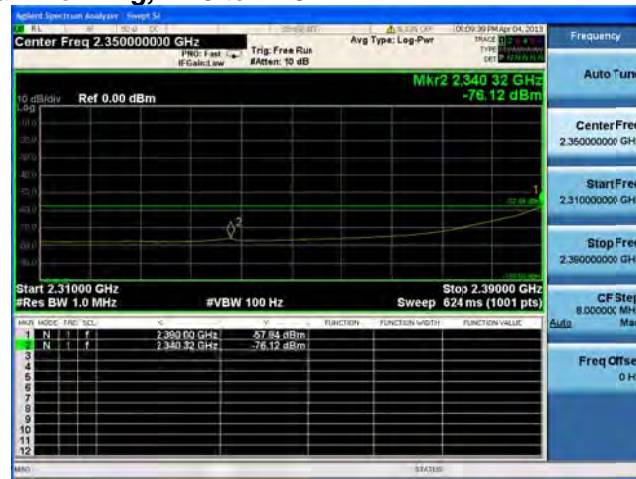
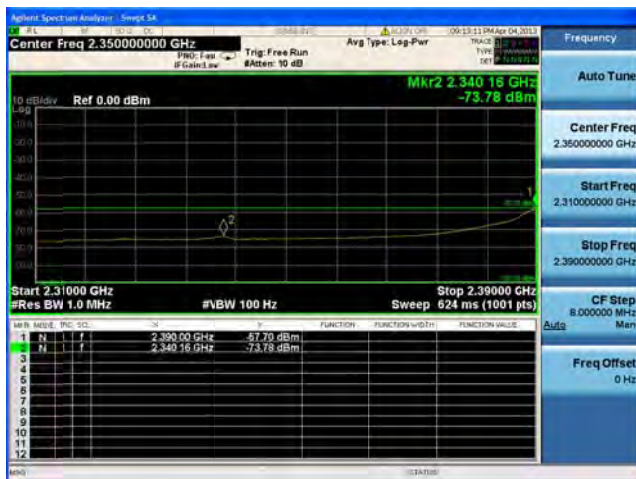
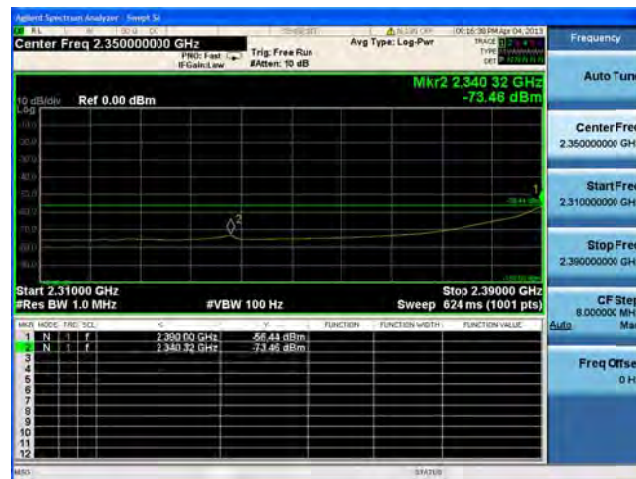
Conducted Bandedge Average, 2412 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Antenna C**

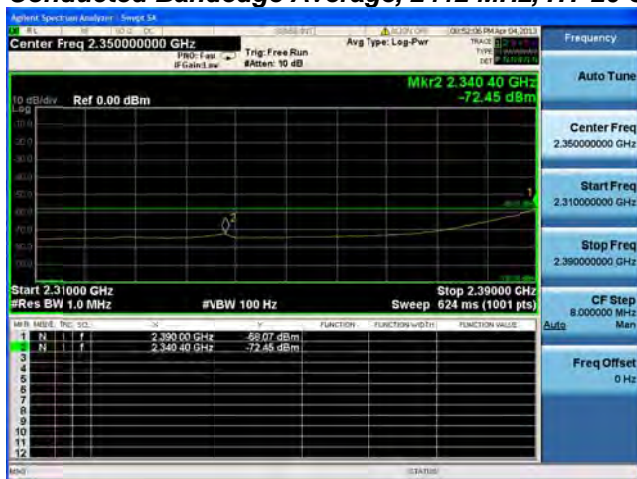
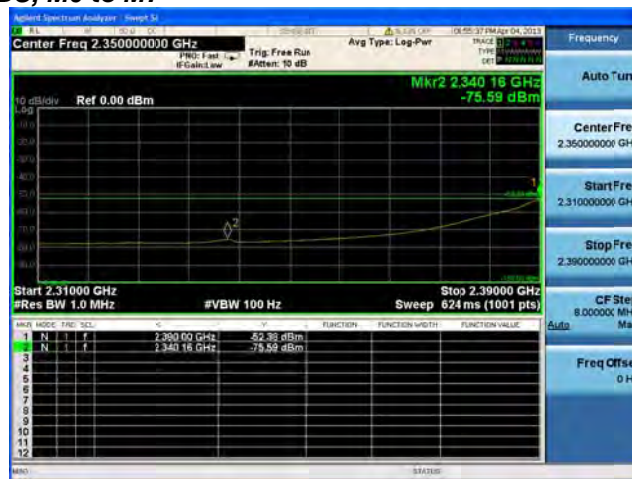
Conducted Bandedge Average, 2412 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Average, 2412 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C**

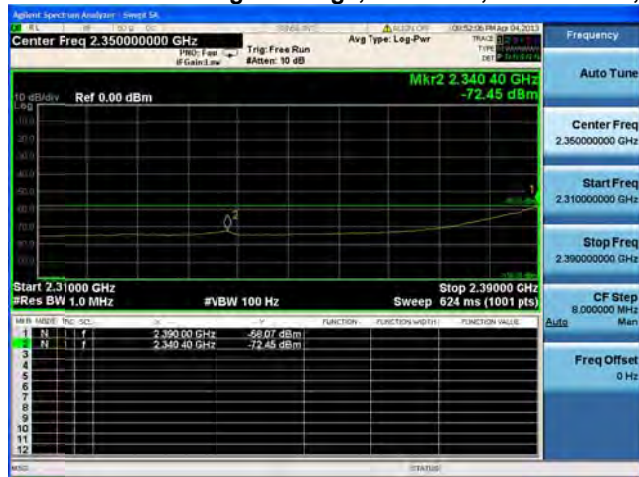
Conducted Bandedge Average, 2412 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Average, 2412 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

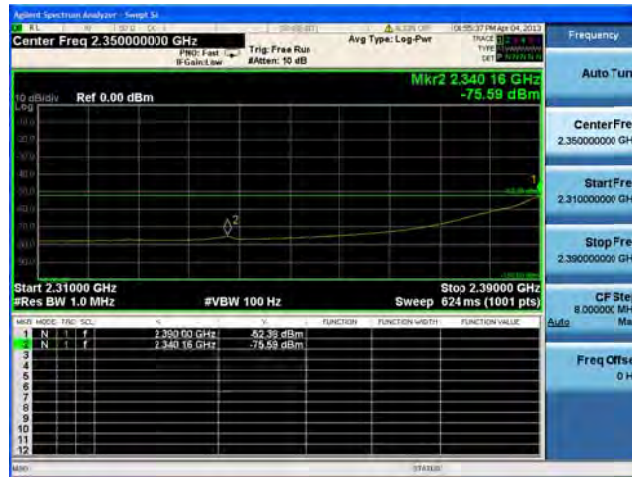
Conducted Bandedge Average, 2412 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Average, 2412 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B**

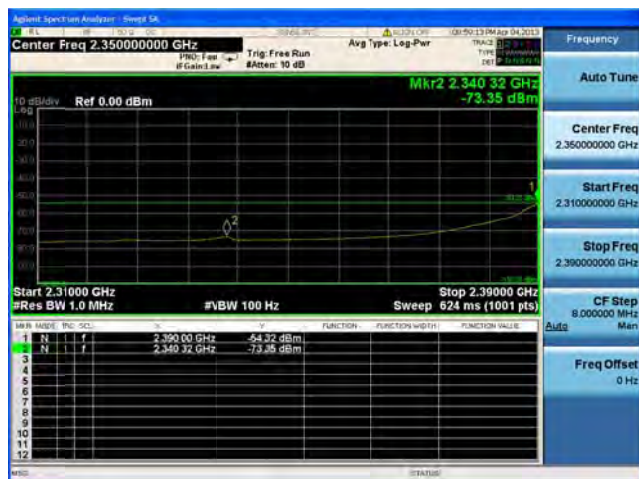
Conducted Bandedge Average, 2412 MHz, HT-20 STBC, M0 to M7



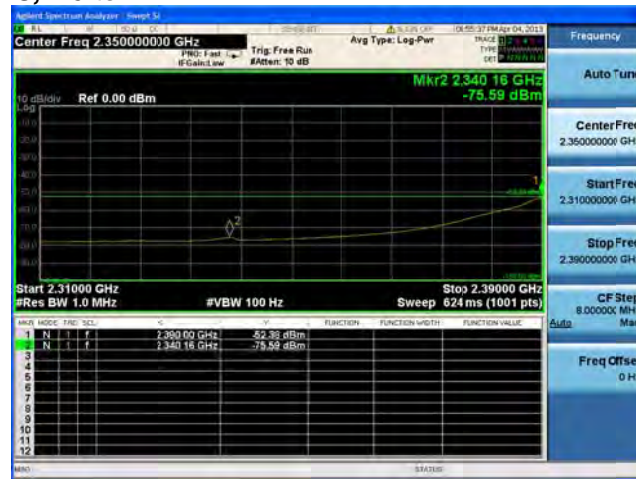
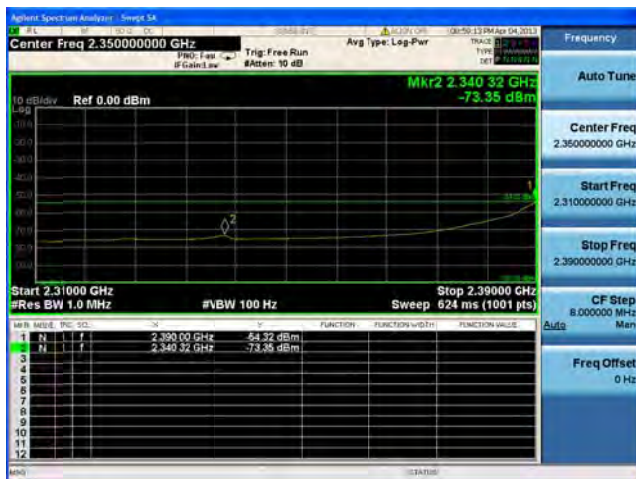
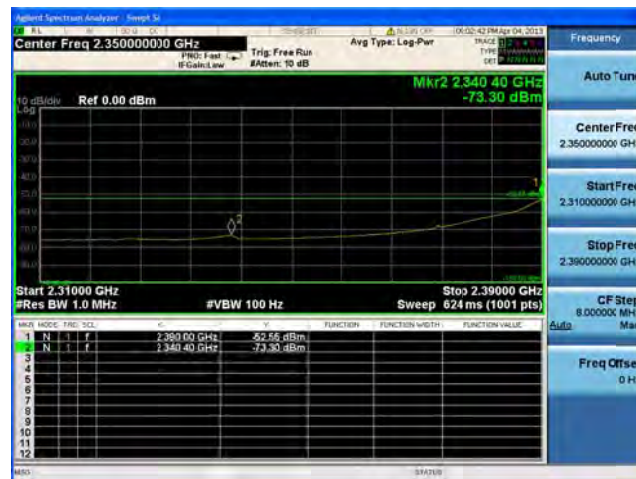
Antenna A

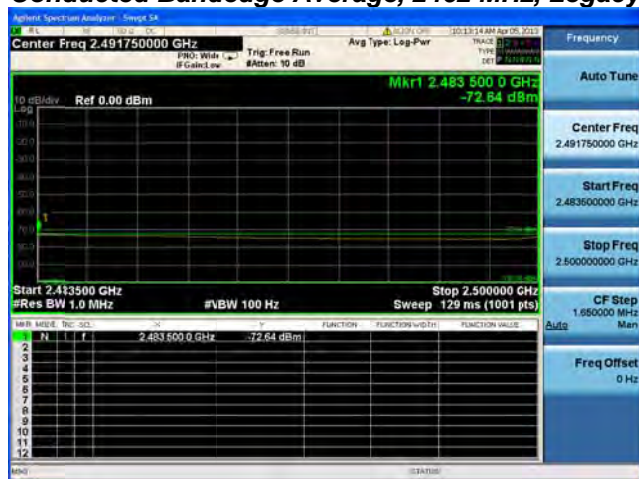


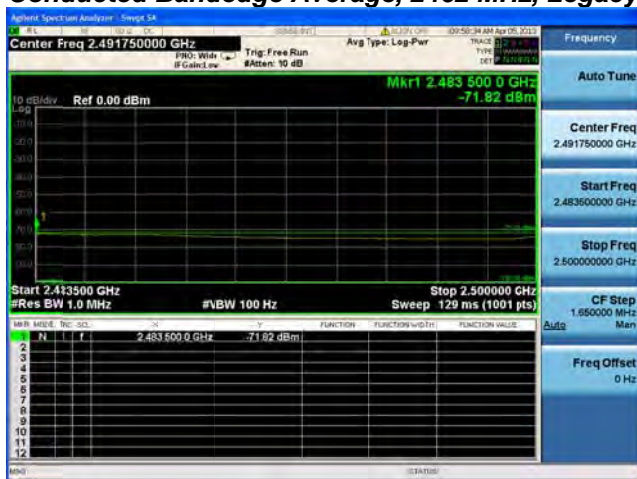
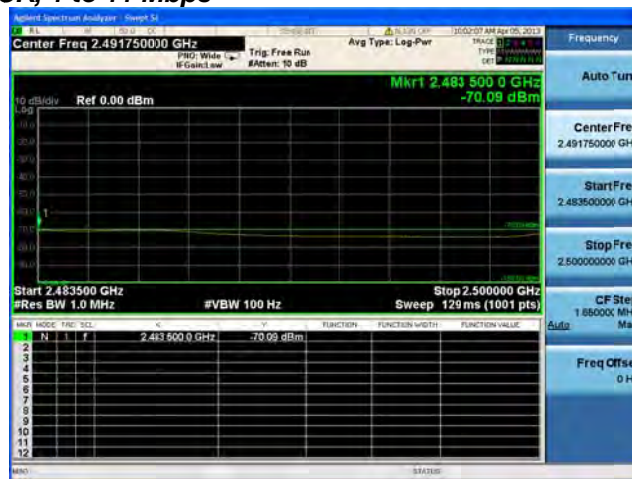
Antenna B

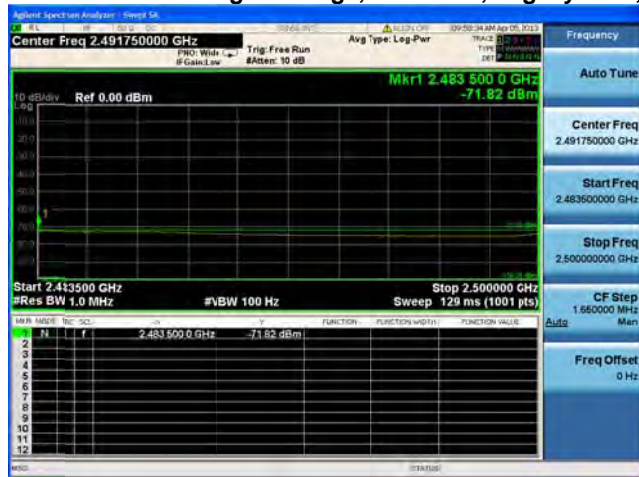
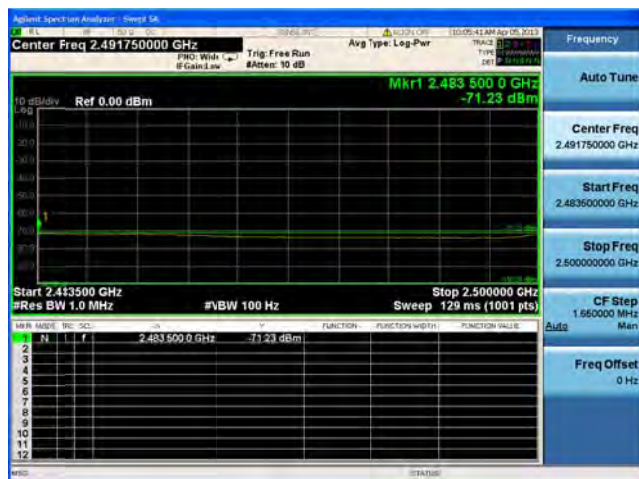


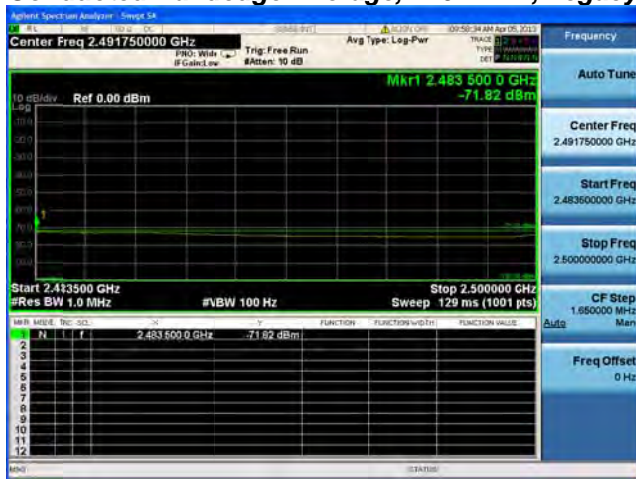
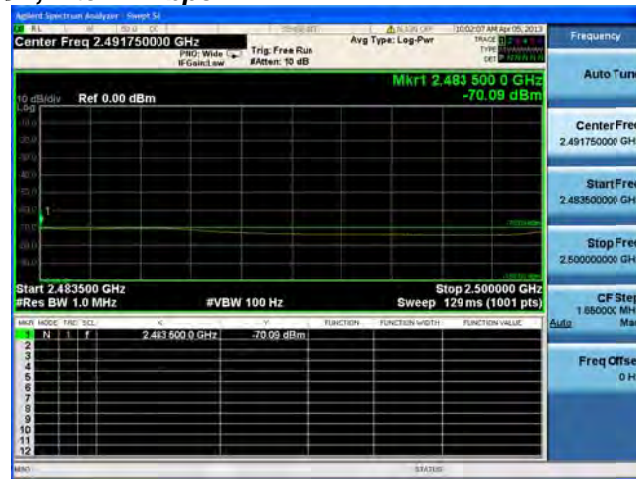
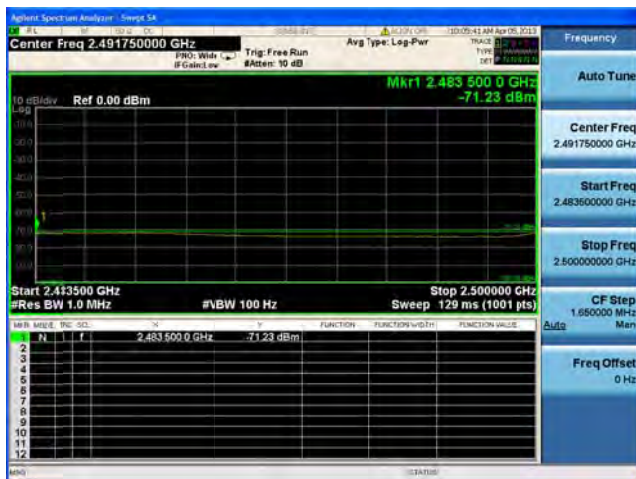
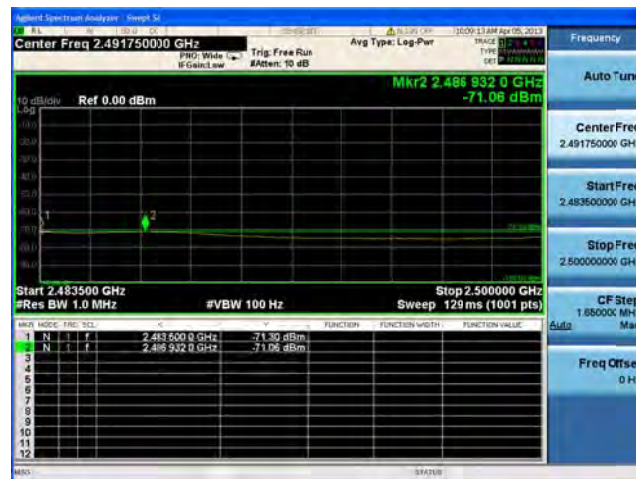
Antenna C

Conducted Bandedge Average, 2412 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

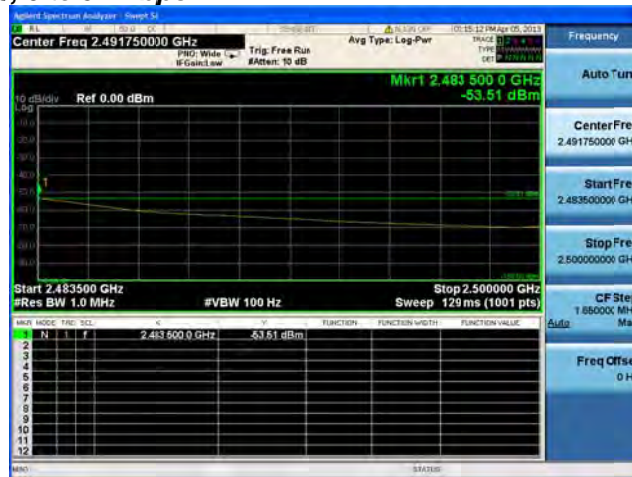
Conducted Bandedge Average, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A**

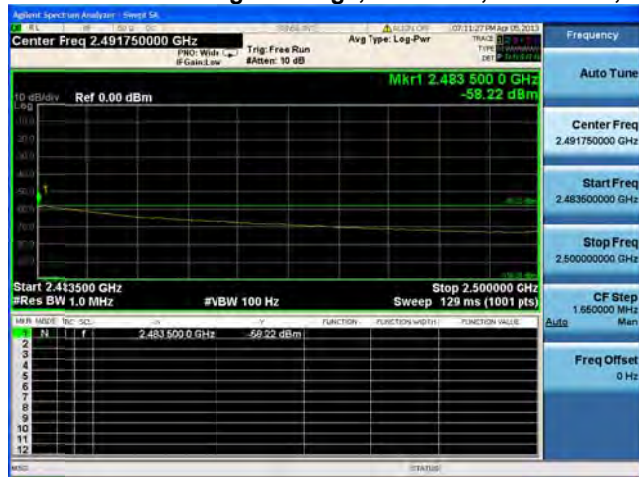
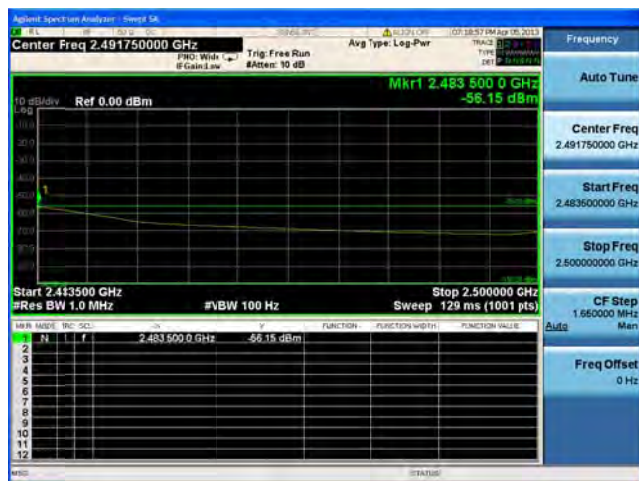
Conducted Bandedge Average, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B**

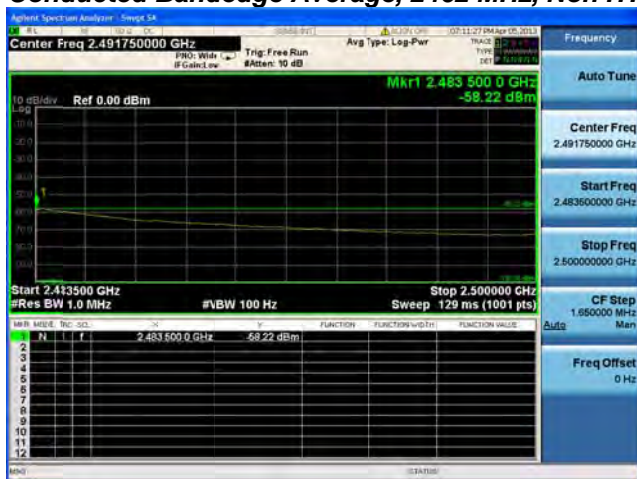
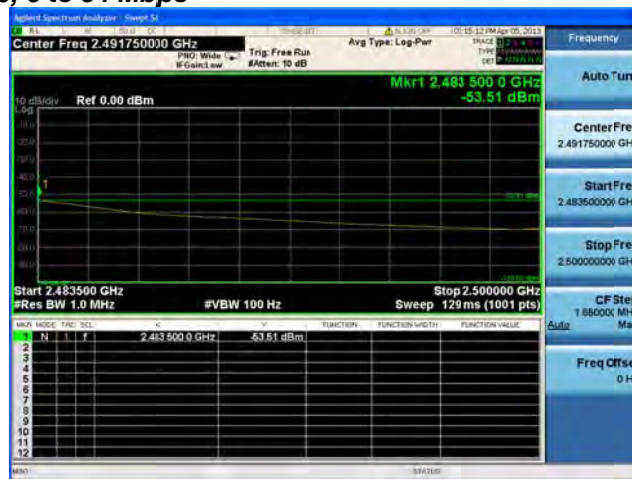
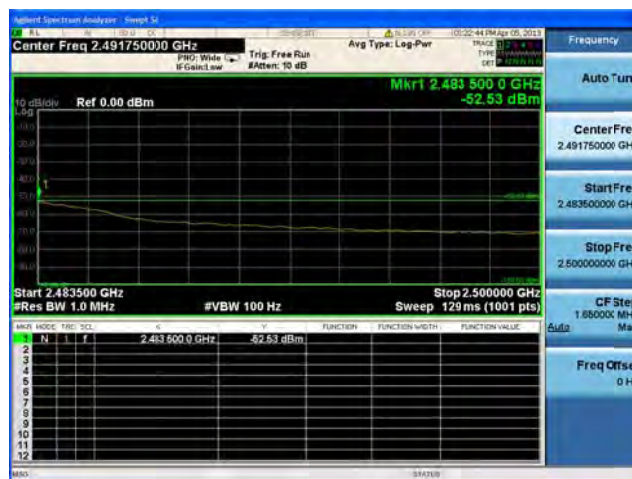
Conducted Bandedge Average, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B****Antenna C**

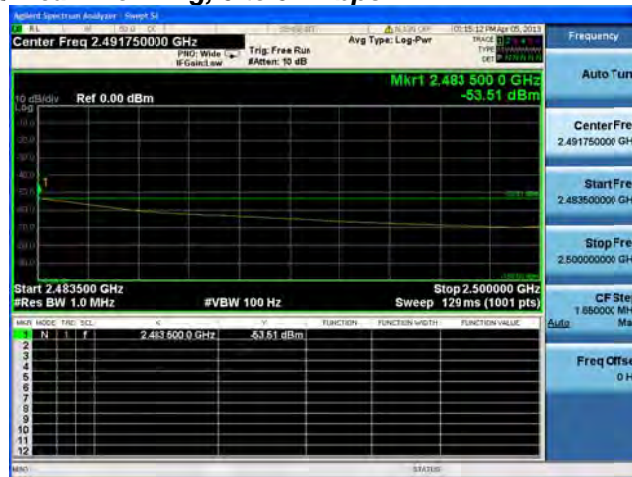
Conducted Bandedge Average, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

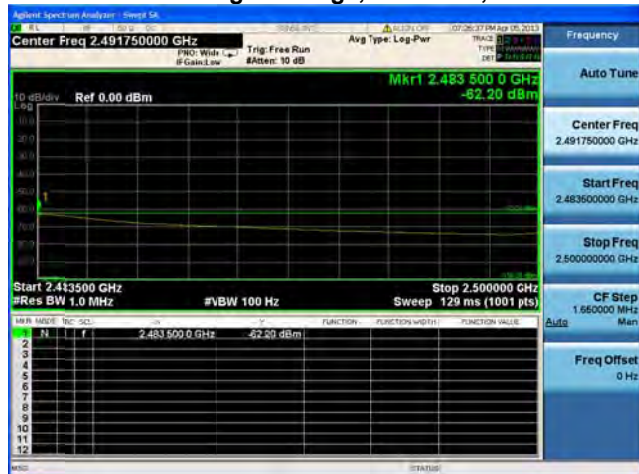
Conducted Bandedge Average, 2462 MHz, Non HT-20, 6 to 54 Mbps**Antenna A**

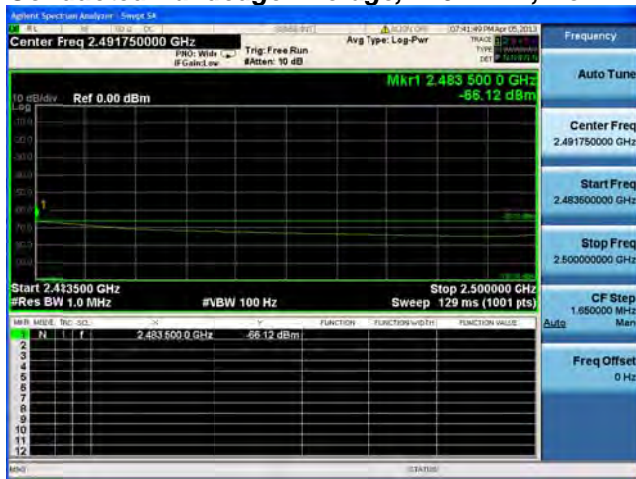
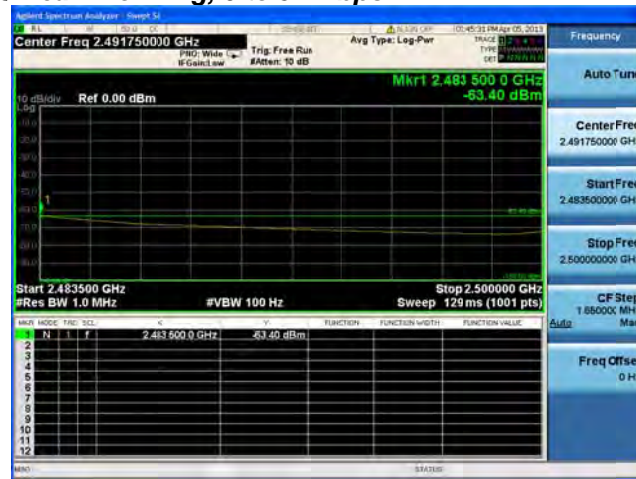
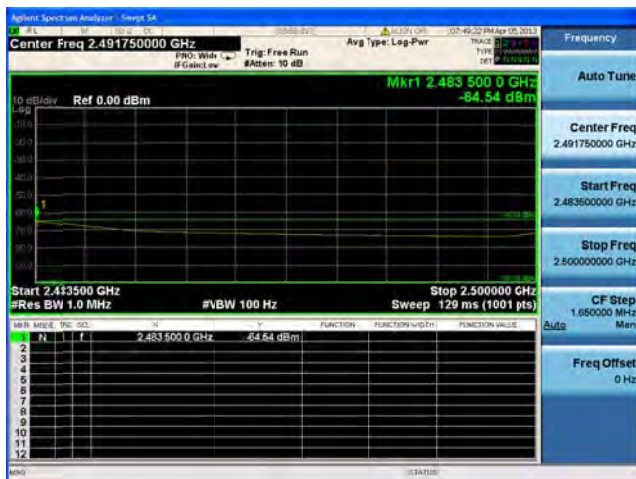
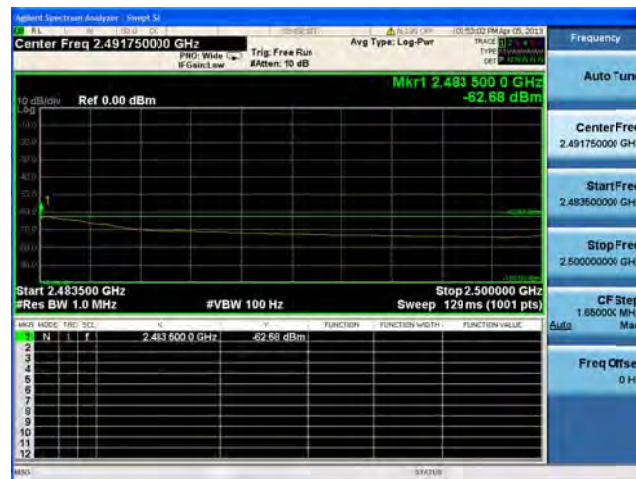
Conducted Bandedge Average, 2462 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B**

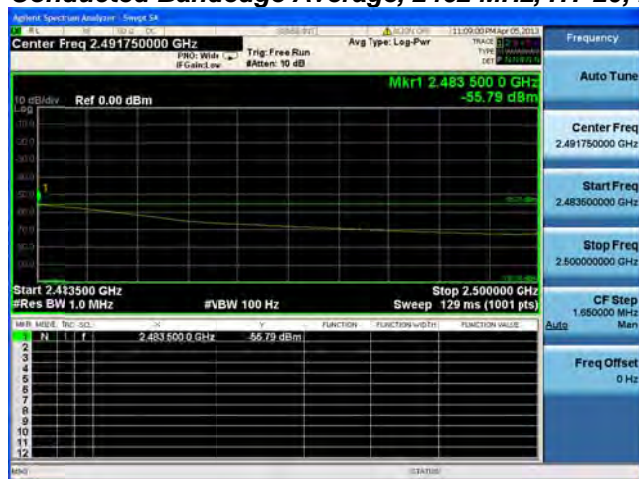
Conducted Bandedge Average, 2462 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

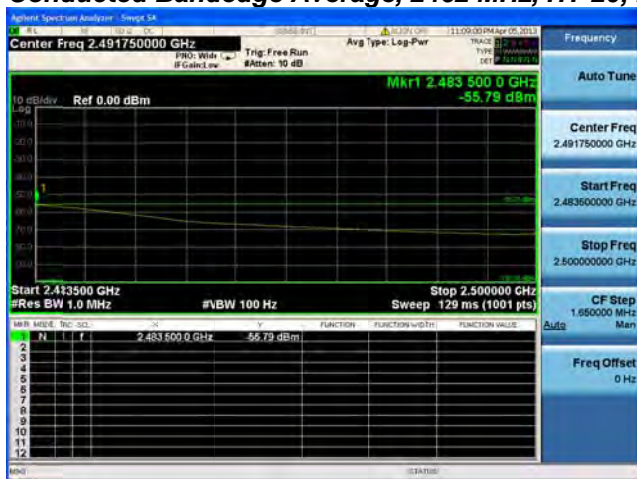
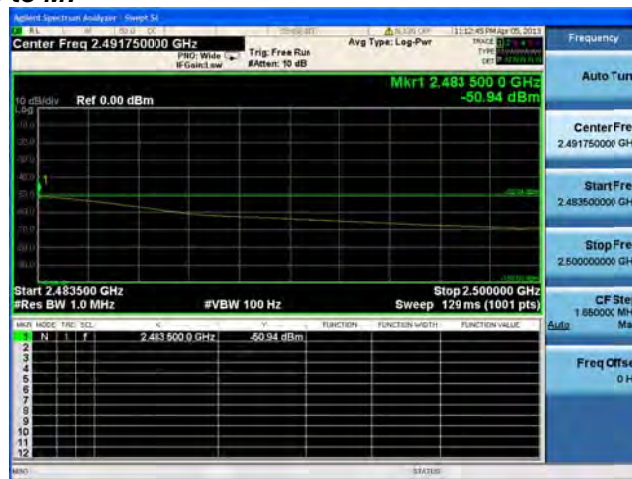
Conducted Bandedge Average, 2462 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

**Conducted Bandedge Average, 2462 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps****Antenna A****Antenna B**

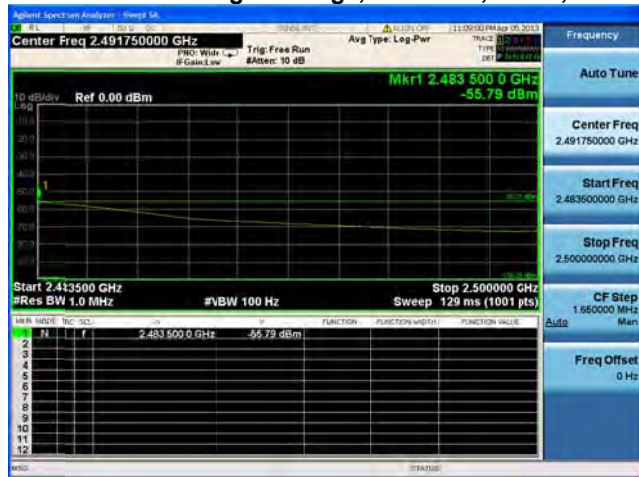
Conducted Bandedge Average, 2462 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Average, 2462 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Average, 2462 MHz, HT-20, M0 to M7**Antenna A**

Conducted Bandedge Average, 2462 MHz, HT-20, M0 to M7**Antenna A****Antenna B**

Conducted Bandedge Average, 2462 MHz, HT-20, M8 to M15

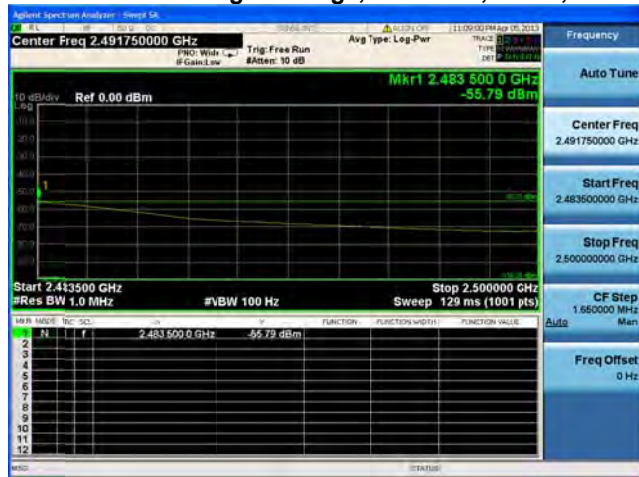


Antenna A



Antenna B

Conducted Bandedge Average, 2462 MHz, HT-20, M0 to M7



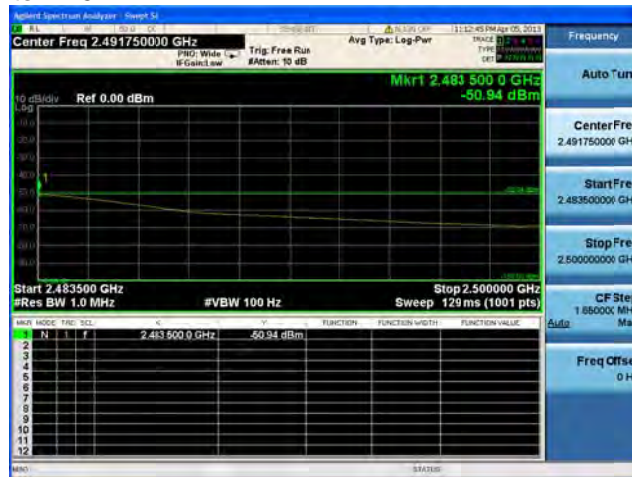
Antenna A

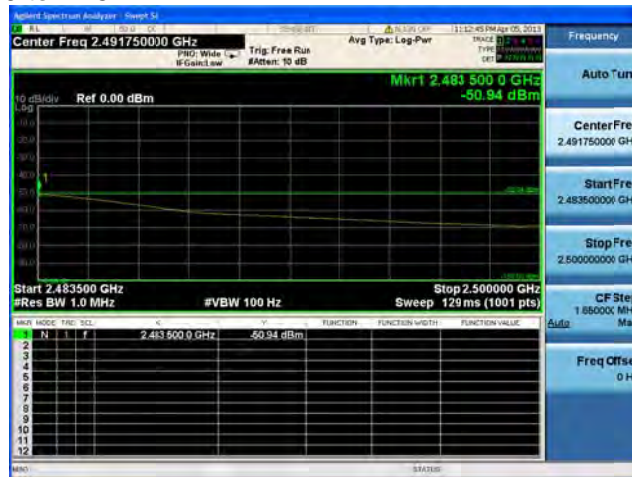
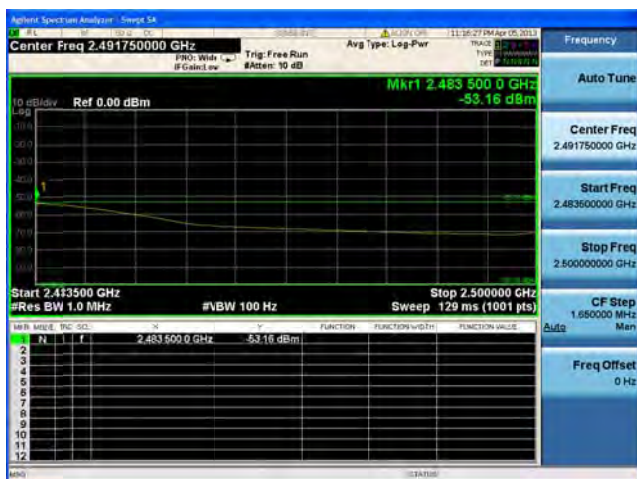


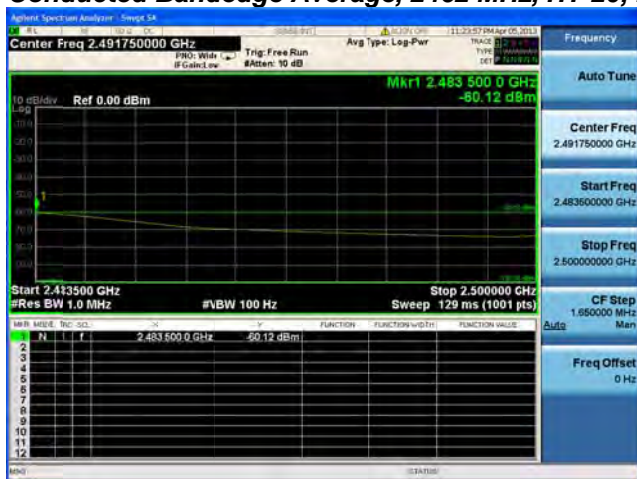
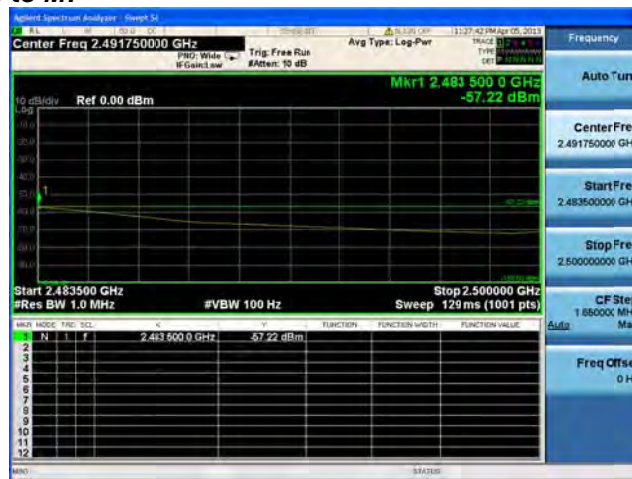
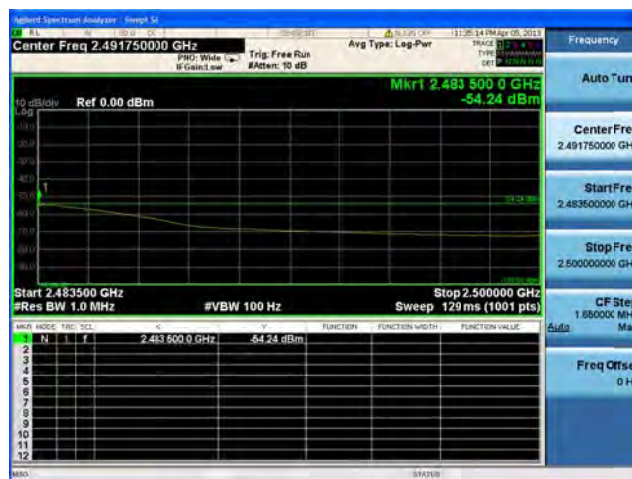
Antenna B

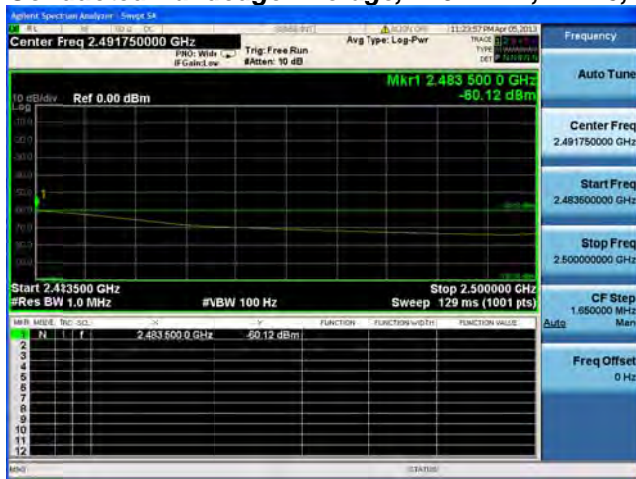
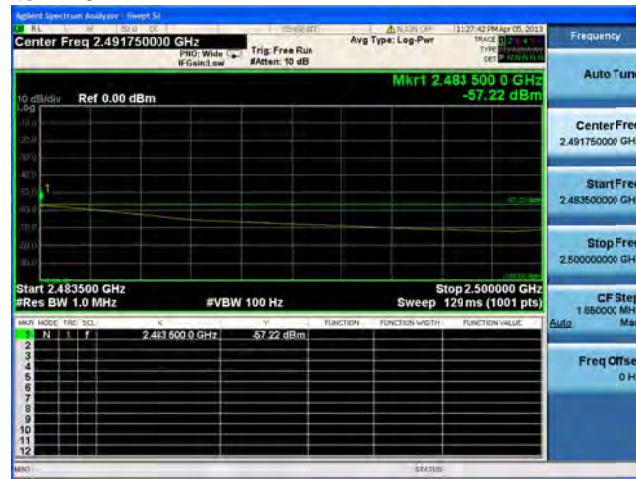
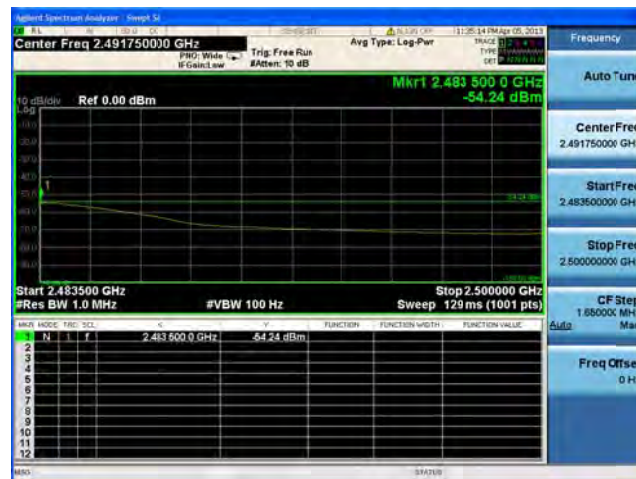


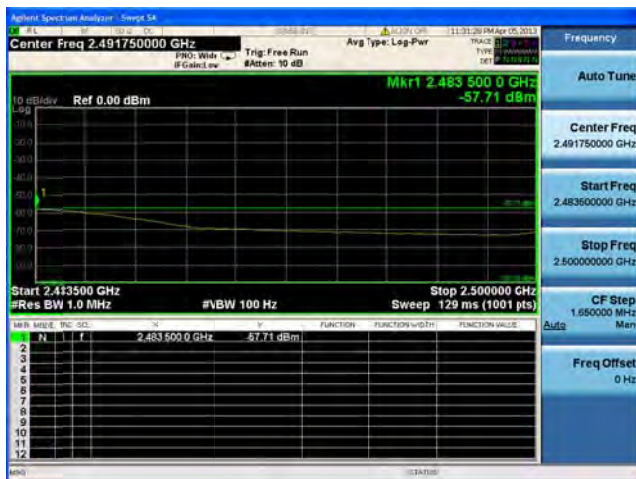
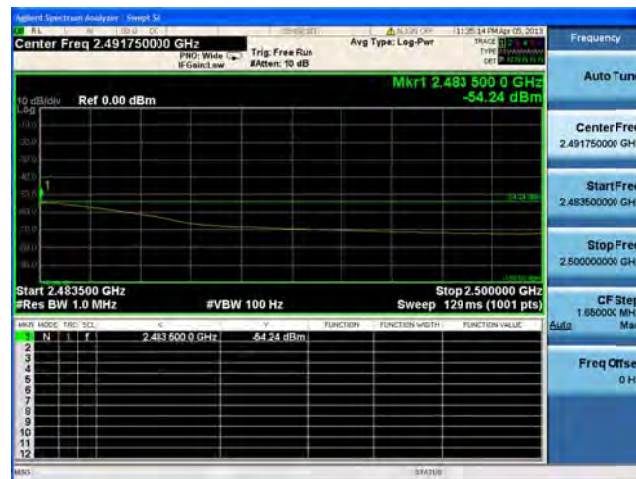
Antenna C

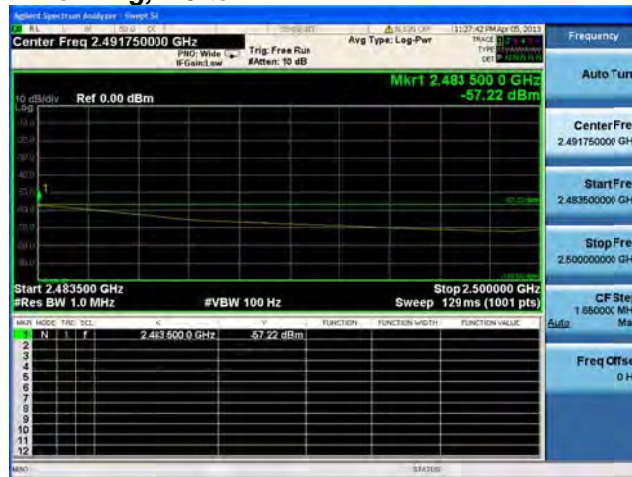
Conducted Bandedge Average, 2462 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C**

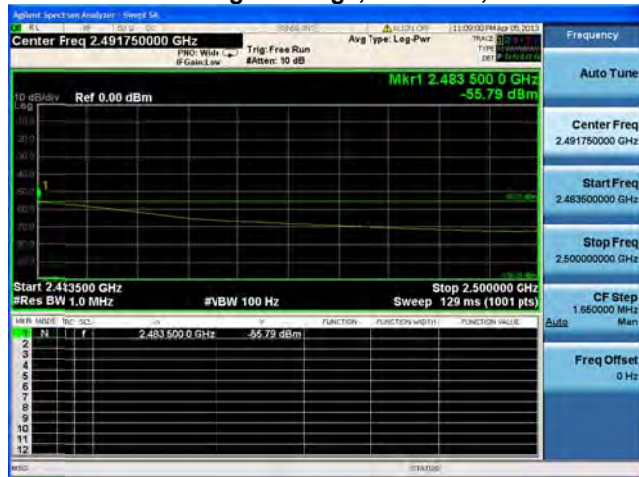
Conducted Bandedge Average, 2462 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Average, 2462 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

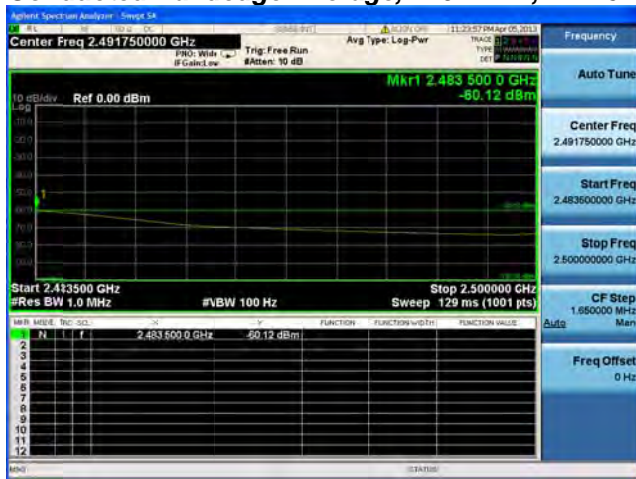
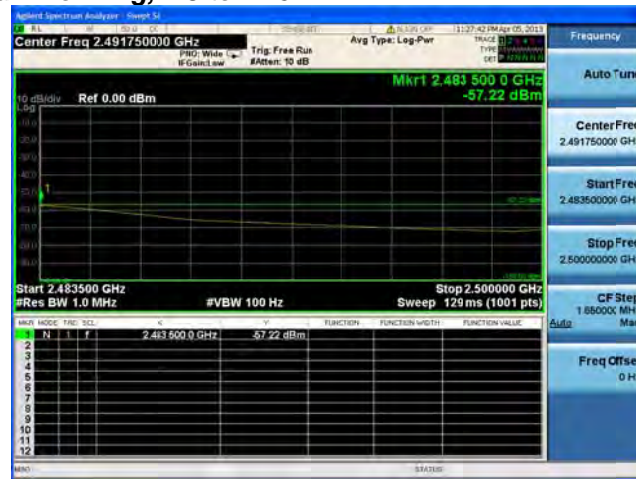
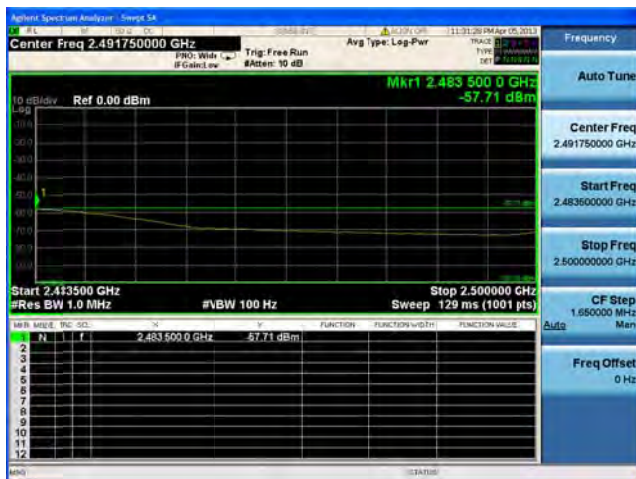
Conducted Bandedge Average, 2462 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

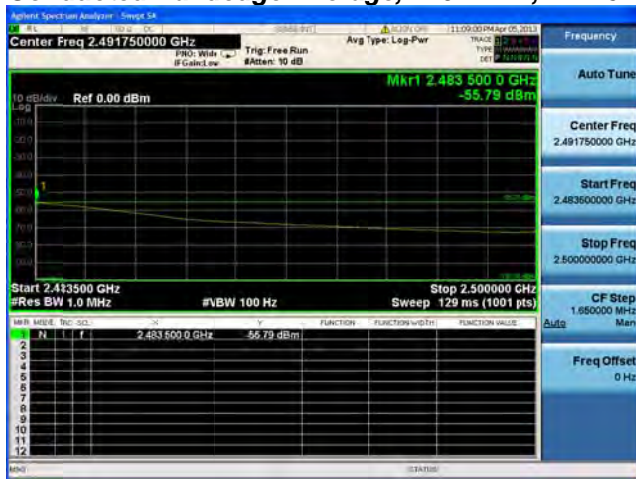
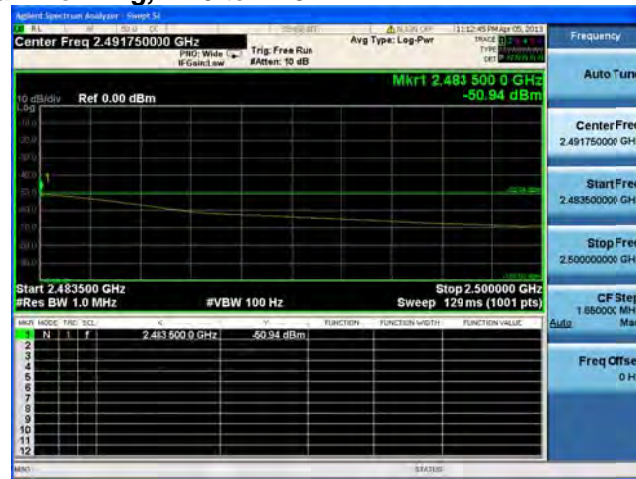
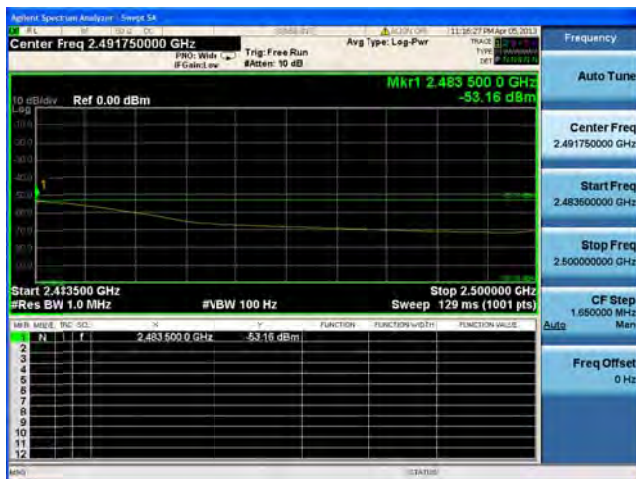
Conducted Bandedge Average, 2462 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

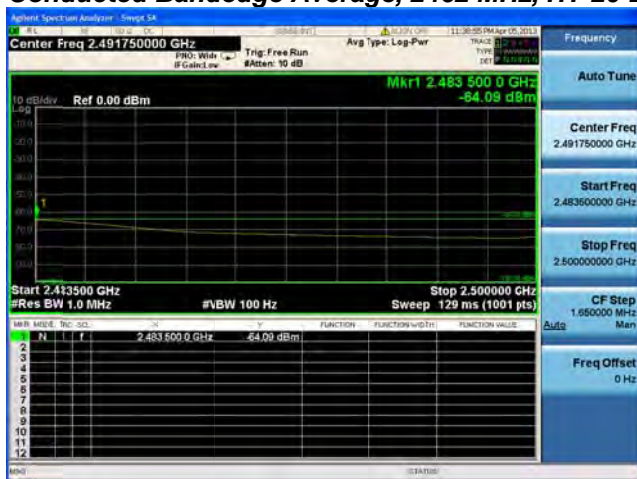
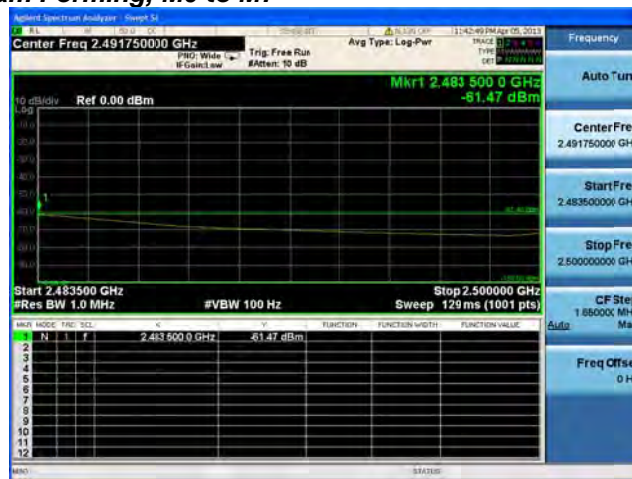
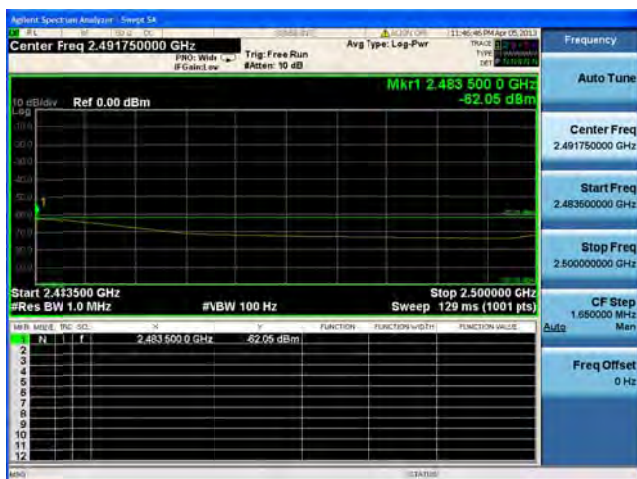
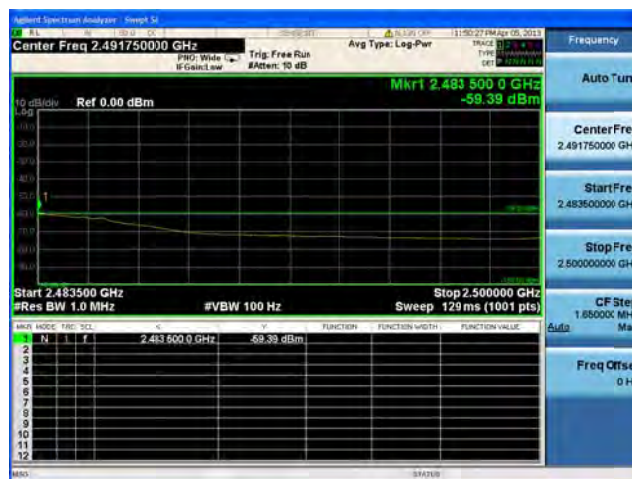
Conducted Bandedge Average, 2462 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B**

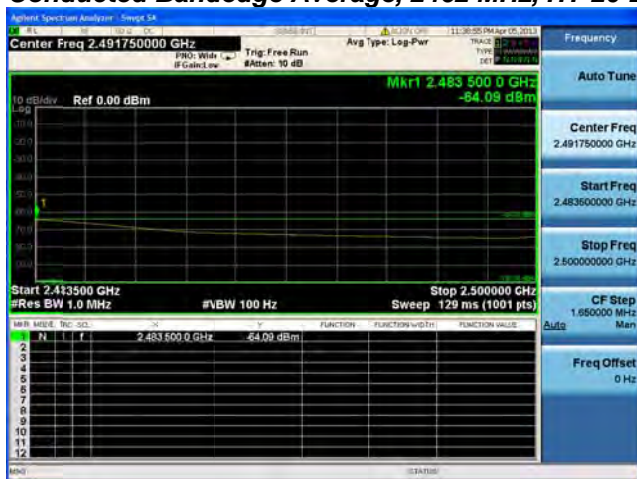
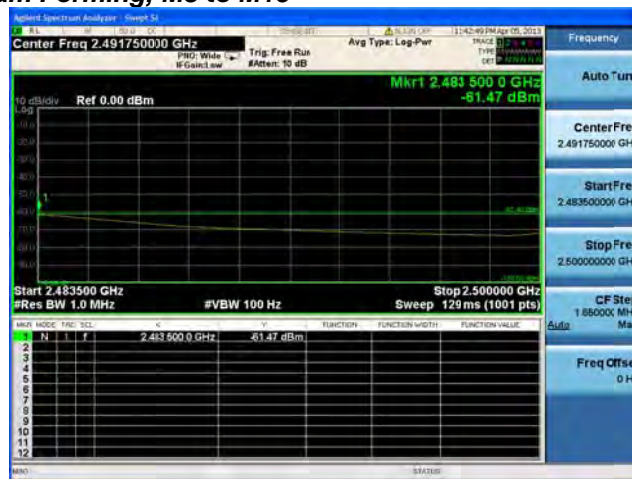
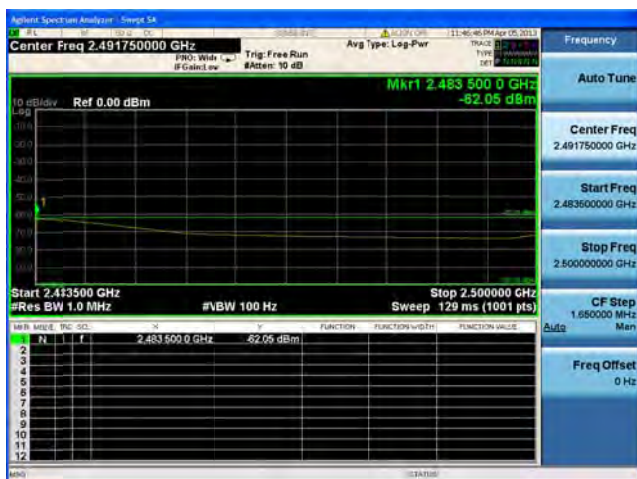
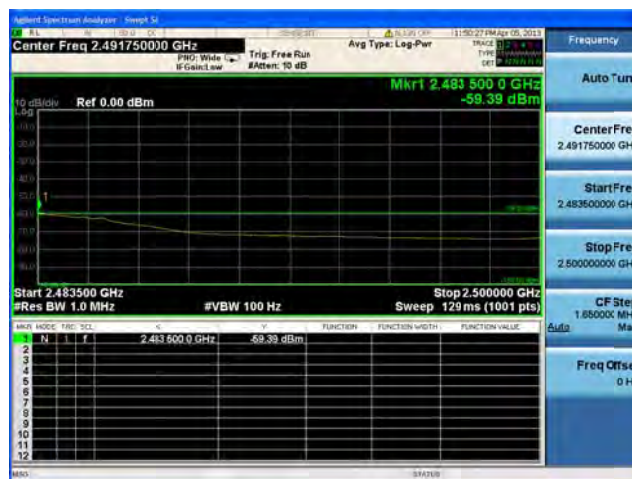
Conducted Bandedge Average, 2462 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B**

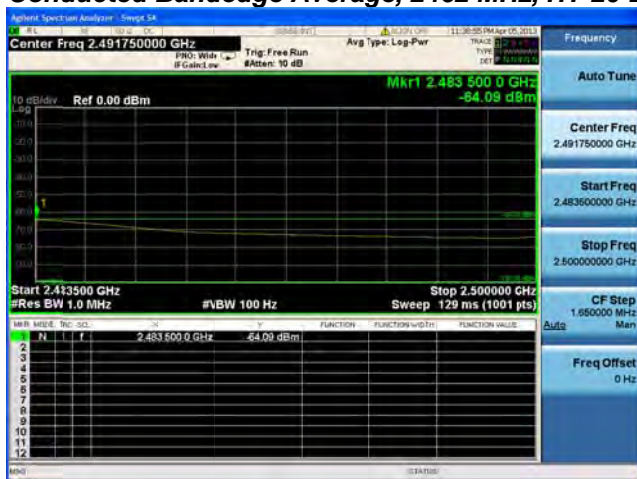
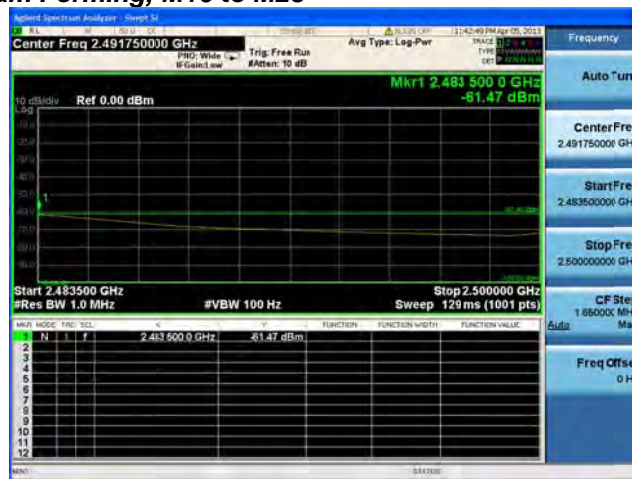
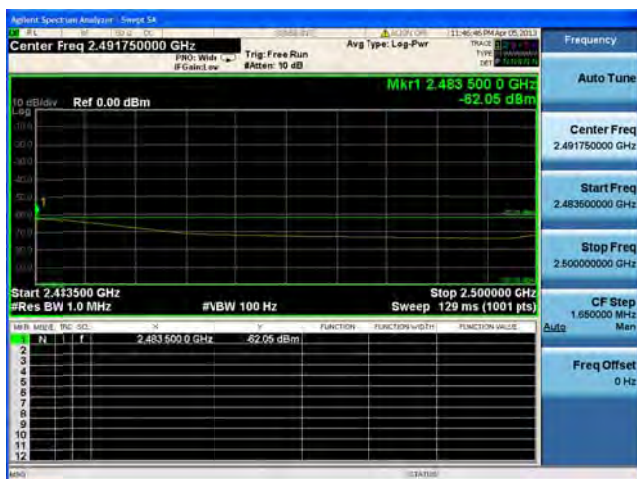
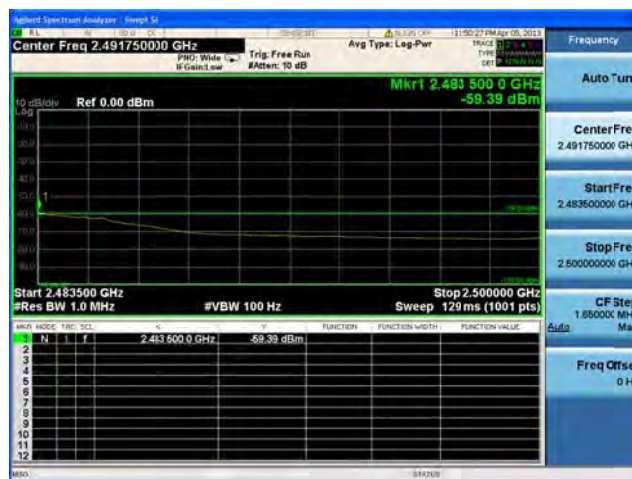
Conducted Bandedge Average, 2462 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Antenna C**

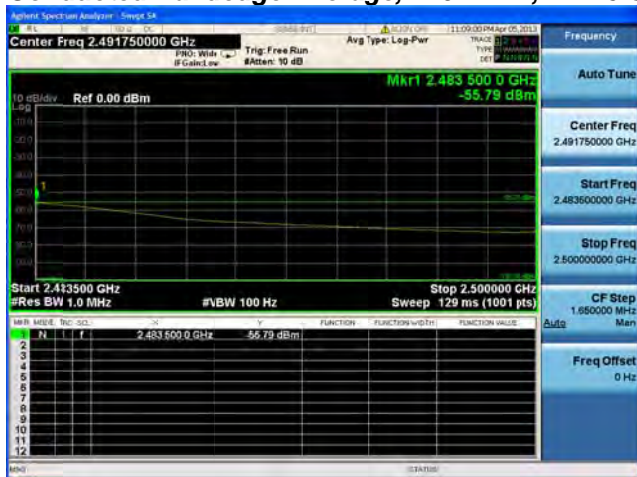
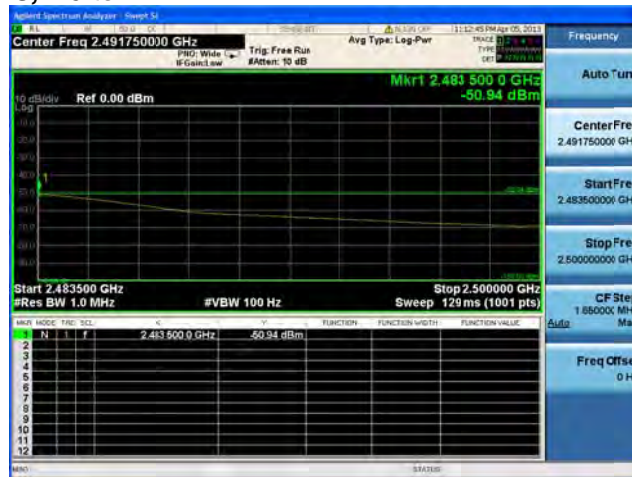
Conducted Bandedge Average, 2462 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Average, 2462 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C**

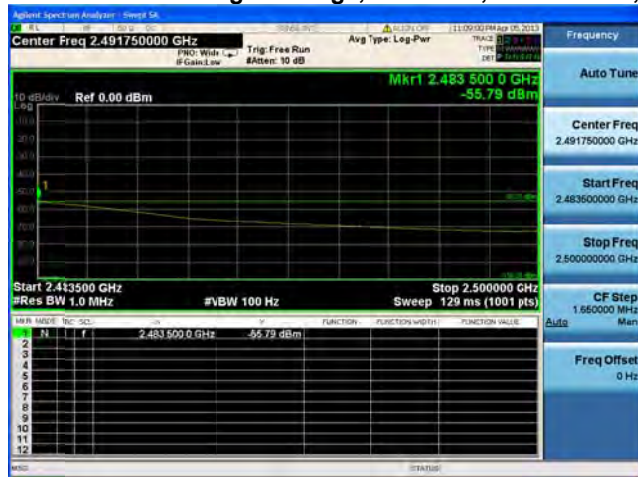
Conducted Bandedge Average, 2462 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Average, 2462 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Average, 2462 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Average, 2462 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B**

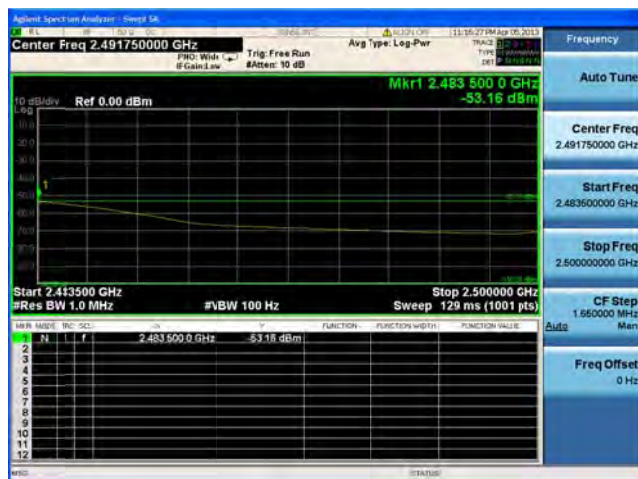
Conducted Bandedge Average, 2462 MHz, HT-20 STBC, M0 to M7



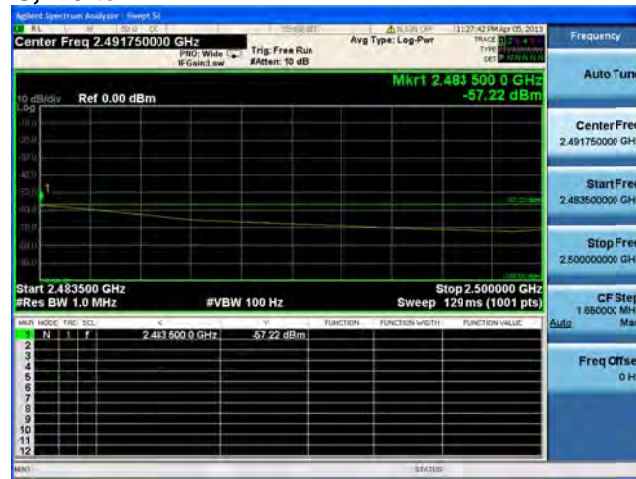
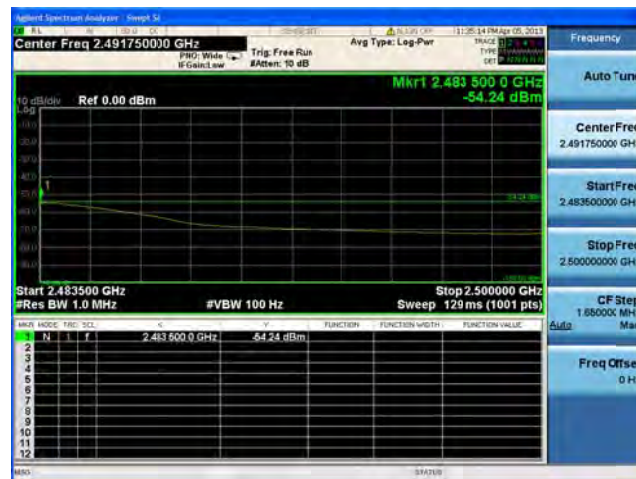
Antenna A



Antenna B



Antenna C

Conducted Bandedge Average, 2462 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**



Peak Bandedge Data

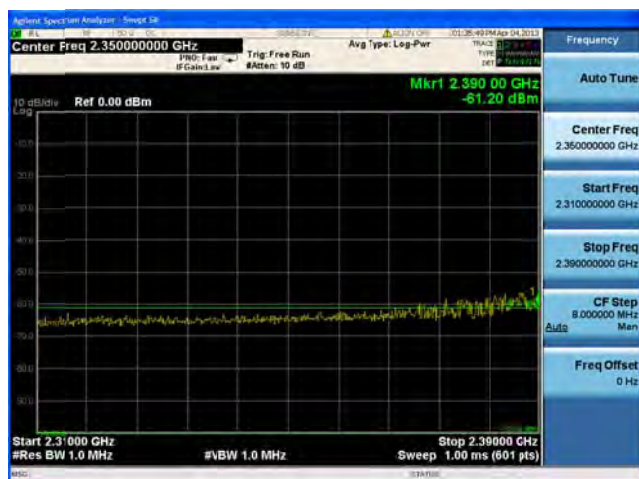
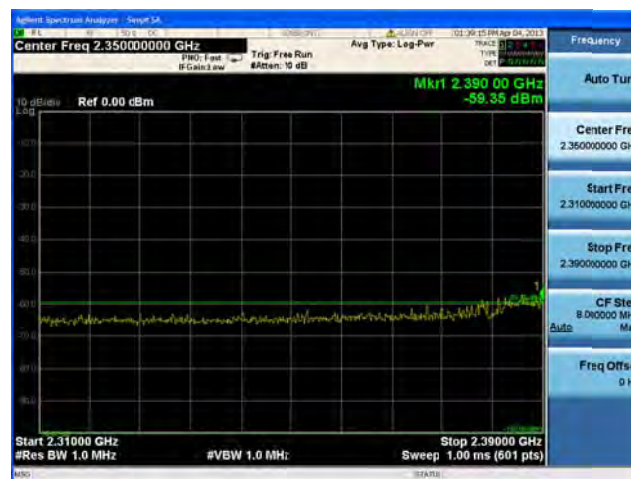
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
2412	Legacy CCK, 1 to 11 Mbps	1	6	<u>-60.90</u>				-54.90	-21.25	33.65
	Legacy CCK, 1 to 11 Mbps	2	6	<u>-60.60</u>	<u>-60.50</u>	<u>-61.20</u>		-51.54	-21.25	30.29
	Legacy CCK, 1 to 11 Mbps	4	6	<u>-60.60</u>	<u>-60.50</u>	<u>-61.20</u>	<u>-59.30</u>	-48.32	-21.25	27.07
	Non HT-20, 6 to 54 Mbps	1	6	<u>-40.60</u>				-34.60	-21.25	13.35
	Non HT-20, 6 to 54 Mbps	2	6	<u>-40.60</u>	<u>-37.90</u>			-30.03	-21.25	8.78
	Non HT-20, 6 to 54 Mbps	3	6	<u>-40.60</u>	<u>-37.90</u>	<u>-39.90</u>		-28.54	-21.25	7.29
	Non HT-20, 6 to 54 Mbps	4	6	<u>-40.60</u>	<u>-37.90</u>	<u>-39.90</u>	<u>-36.90</u>	-26.55	-21.25	5.30
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	9	<u>-40.60</u>	<u>-37.90</u>			-27.03	-21.25	5.78
	Non HT-20 Beam Forming, 6 to 54 Mbps	3	11	<u>-42.30</u>	<u>-41.80</u>	<u>-44.30</u>		-27.10	-21.25	5.85
	Non HT-20 Beam Forming, 6 to 54 Mbps	4	12	<u>-42.30</u>	<u>-41.80</u>	<u>-44.30</u>	<u>-41.40</u>	-24.30	-21.25	3.05
	HT-20, M0 to M7	1	6	<u>-38.30</u>				-32.30	-21.25	11.05
	HT-20, M0 to M7	2	6	<u>-38.30</u>	<u>-36.20</u>			-28.11	-21.25	6.86
	HT-20, M8 to M15	2	6	<u>-38.30</u>	<u>-36.20</u>			-28.11	-21.25	6.86
	HT-20, M0 to M7	3	6	<u>-38.30</u>	<u>-36.20</u>	<u>-34.60</u>		-25.34	-21.25	4.09
	HT-20, M8 to M15	3	6	<u>-38.30</u>	<u>-36.20</u>	<u>-34.60</u>		-25.34	-20.25	5.09
	HT-20, M16 to M23	3	6	<u>-38.30</u>	<u>-36.20</u>	<u>-34.60</u>		-25.34	-21.25	4.09
	HT-20, M0 to M7	4	6	<u>-38.30</u>	<u>-36.20</u>	<u>-34.60</u>	<u>-30.80</u>	-22.05	-21.25	0.80
	HT-20, M8 to M15	4	6	<u>-38.30</u>	<u>-36.20</u>	<u>-34.60</u>	<u>-30.80</u>	-22.05	-21.25	0.80
	HT-20, M16 to M23	4	6	<u>-38.30</u>	<u>-36.20</u>	<u>-34.60</u>	<u>-30.80</u>	-22.05	-21.25	0.80
	HT-20 Beam Forming, M0 to M7	2	9	<u>-38.30</u>	<u>-36.20</u>			-25.11	-21.25	3.86
	HT-20 Beam Forming, M8 to M15	2	6	<u>-38.30</u>	<u>-36.20</u>			-28.11	-21.25	6.86
	HT-20 Beam Forming, M0 to M7	3	11	<u>-39.20</u>	<u>-36.20</u>	<u>-40.10</u>		-22.59	-21.25	1.34
	HT-20 Beam Forming, M8 to M15	3	8	<u>-38.30</u>	<u>-36.20</u>	<u>-34.60</u>		-23.54	-21.25	2.29
	HT-20 Beam Forming, M16 to M23	3	6	<u>-38.30</u>	<u>-36.20</u>	<u>-34.60</u>		-25.34	-21.25	4.09
	HT-20 Beam Forming, M0 to M7	4	12	<u>-42.50</u>	<u>-43.60</u>	<u>-44.50</u>	<u>-41.90</u>	-24.99	-21.25	3.74
	HT-20 Beam Forming, M8 to M15	4	9	<u>-39.20</u>	<u>-36.20</u>	<u>-40.10</u>	<u>-37.70</u>	-23.02	-21.25	1.77
	HT-20 Beam Forming, M16 to M23	4	7	<u>-39.20</u>	<u>-36.20</u>	<u>-40.10</u>	<u>-37.70</u>	-24.82	-21.25	3.57
	HT-20 STBC, M0 to M7	2	6	<u>-38.30</u>	<u>-36.20</u>			-28.11	-21.25	6.86
	HT-20 STBC, M0 to M7	3	6	<u>-38.30</u>	<u>-36.20</u>	<u>-34.60</u>		-25.34	-21.25	4.09



	HT-20 STBC, M0 to M7	4	6	<u>-38.30</u>	<u>-36.20</u>	<u>-34.60</u>	<u>-30.80</u>	-22.05	-21.25	0.80
2462	Legacy CCK, 1 to 11 Mbps	1	6	<u>-62.60</u>				-56.60	-21.25	35.35
	Legacy CCK, 1 to 11 Mbps	2	6	<u>-61.20</u>	<u>-59.90</u>			-51.49	-21.25	30.24
	Legacy CCK, 1 to 11 Mbps	3	6	<u>-61.20</u>	<u>-59.90</u>	<u>-55.40</u>		-47.31	-21.25	26.06
	Legacy CCK, 1 to 11 Mbps	4	6	<u>-61.20</u>	<u>-59.90</u>	<u>-55.40</u>	<u>-59.60</u>	-46.39	-21.25	25.14
	Non HT-20, 6 to 54 Mbps	1	6	<u>-36.20</u>				-30.20	-21.25	8.95
	Non HT-20, 6 to 54 Mbps	2	6	<u>-36.20</u>	<u>-33.00</u>			-25.30	-21.25	4.05
	Non HT-20, 6 to 54 Mbps	3	6	<u>-36.20</u>	<u>-33.00</u>	<u>-37.80</u>		-24.42	-21.25	3.17
	Non HT-20, 6 to 54 Mbps	4	6	<u>-36.20</u>	<u>-33.00</u>	<u>-37.80</u>	<u>-32.60</u>	-22.37	-21.25	1.12
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	9	<u>-36.20</u>	<u>-33.00</u>			-22.30	-21.25	1.05
	Non HT-20 Beam Forming, 6 to 54 Mbps	3	11	<u>-44.80</u>	<u>-38.90</u>	<u>-42.40</u>		-25.79	-21.25	4.54
	Non HT-20 Beam Forming, 6 to 54 Mbps	4	12	<u>-48.60</u>	<u>-43.30</u>	<u>-46.50</u>	<u>-40.90</u>	-25.85	-21.25	4.60
	HT-20, M0 to M7	1	6	<u>-31.20</u>				-25.20	-21.25	3.95
	HT-20, M0 to M7	2	6	<u>-31.20</u>	<u>-31.10</u>			-22.14	-21.25	0.89
	HT-20, M8 to M15	2	6	<u>-31.20</u>	<u>-31.10</u>			-22.14	-21.25	0.89
	HT-20, M0 to M7	3	6	<u>-31.20</u>	<u>-31.10</u>	<u>-34.90</u>		-21.31	-21.25	0.06
	HT-20, M8 to M15	3	6	<u>-31.20</u>	<u>-31.10</u>	<u>-34.90</u>		-21.31	-21.25	0.06
	HT-20, M16 to M23	3	6	<u>-31.20</u>	<u>-31.10</u>	<u>-34.90</u>		-21.31	-21.25	0.06
	HT-20, M0 to M7	4	6	<u>-37.30</u>	<u>-34.90</u>	<u>-34.30</u>	<u>-31.70</u>	-22.08	-21.25	0.83
	HT-20, M8 to M15	4	6	<u>-37.30</u>	<u>-34.90</u>	<u>-34.30</u>	<u>-31.70</u>	-22.08	-21.25	0.83
	HT-20, M16 to M23	4	6	<u>-37.30</u>	<u>-34.90</u>	<u>-34.30</u>	<u>-31.70</u>	-22.08	-21.25	0.83
	HT-20 Beam Forming, M0 to M7	2	9	<u>-37.30</u>	<u>-34.90</u>			-23.93	-21.25	2.68
	HT-20 Beam Forming, M8 to M15	2	6	<u>-31.20</u>	<u>-31.10</u>			-22.14	-21.25	0.89
	HT-20 Beam Forming, M0 to M7	3	11	<u>-42.70</u>	<u>-38.00</u>	<u>-42.40</u>		-24.89	-21.25	3.64
	HT-20 Beam Forming, M8 to M15	3	8	<u>-37.30</u>	<u>-34.90</u>	<u>-34.30</u>		-22.75	-21.25	1.50
	HT-20 Beam Forming, M16 to M23	3	6	<u>-31.20</u>	<u>-31.10</u>	<u>-34.90</u>		-21.31	-21.25	0.06
	HT-20 Beam Forming, M0 to M7	4	12	<u>-42.70</u>	<u>-38.00</u>	<u>-42.40</u>	<u>-40.80</u>	-22.52	-21.25	1.27
	HT-20 Beam Forming, M8 to M15	4	9	<u>-42.70</u>	<u>-38.00</u>	<u>-42.40</u>	<u>-40.80</u>	-25.52	-21.25	4.27
	HT-20 Beam Forming, M16 to M23	4	7	<u>-42.70</u>	<u>-38.00</u>	<u>-42.40</u>	<u>-40.80</u>	-27.32	-21.25	6.07
	HT-20 STBC, M0 to M7	2	6	<u>-31.20</u>	<u>-31.10</u>			-22.14	-21.25	0.89
	HT-20 STBC, M0 to M7	3	6	<u>-31.20</u>	<u>-31.10</u>	<u>-34.90</u>		-21.31	-21.25	0.06
	HT-20 STBC, M0 to M7	4	6	<u>-37.30</u>	<u>-34.90</u>	<u>-34.30</u>	<u>-31.70</u>	-22.08	-21.25	0.83

**Conducted Bandedge Peak, 2412 MHz, Legacy CCK, 1 to 11 Mbps****Antenna A**

Conducted Bandedge Peak, 2412 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B**

**Conducted Bandedge Peak, 2412 MHz, Legacy CCK, 1 to 11 Mbps****Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Peak, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A**

Conducted Bandedge Peak, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B**

Conducted Bandedge Peak, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Peak, 2412 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Peak, 2412 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B**

Conducted Bandedge Peak, 2412 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

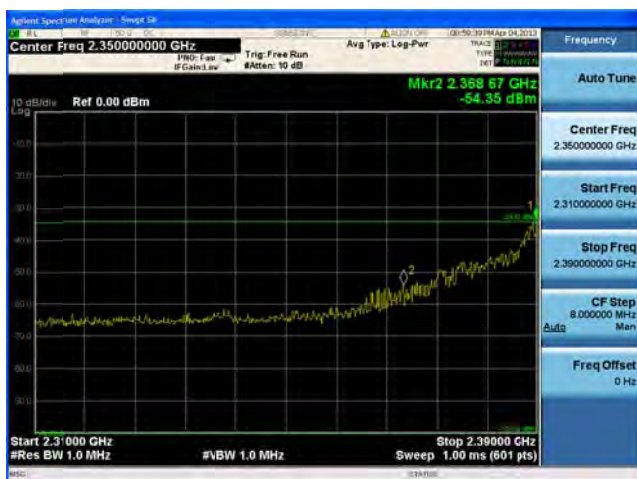
**Conducted Bandedge Peak, 2412 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps****Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Peak, 2412 MHz, HT-20, M0 to M7**Antenna A**

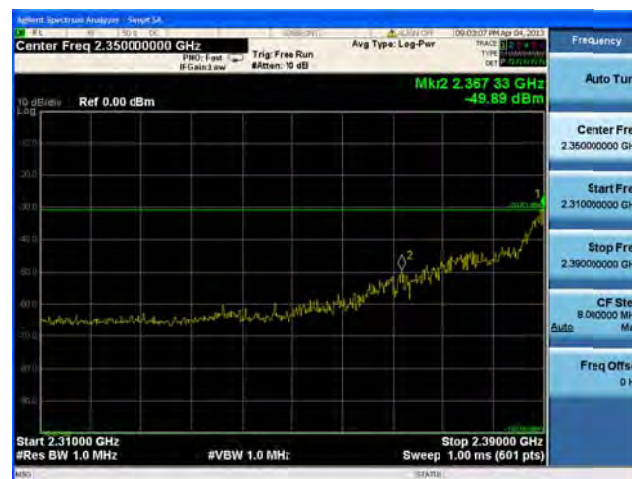
Conducted Bandedge Peak, 2412 MHz, HT-20, M0 to M7**Antenna A****Antenna B**

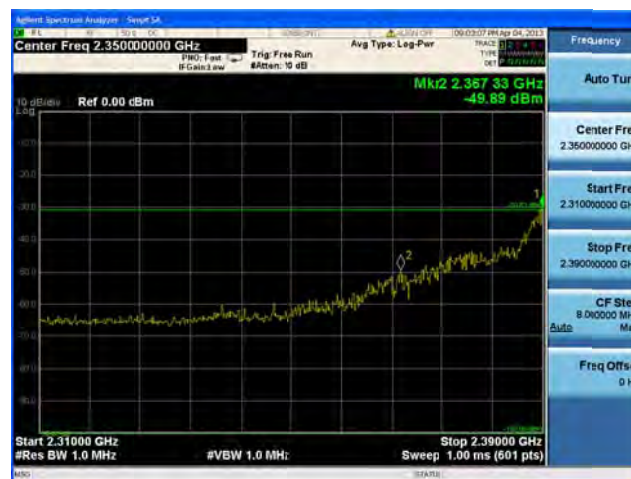
Conducted Bandedge Peak, 2412 MHz, HT-20, M8 to M15**Antenna A****Antenna B**

Conducted Bandedge Peak, 2412 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Peak, 2412 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Peak, 2412 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C**

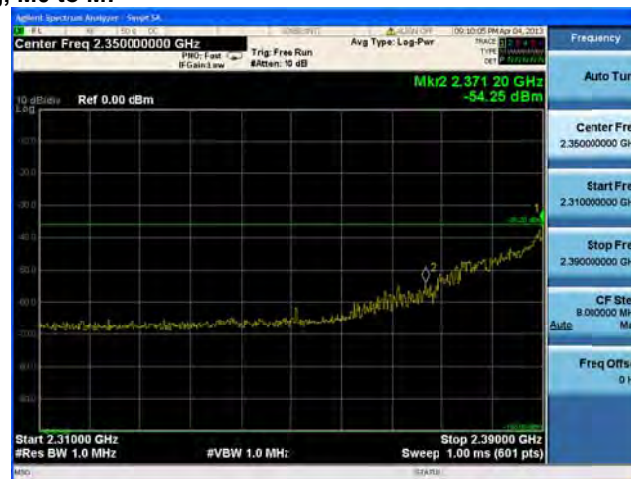
Conducted Bandedge Peak, 2412 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Peak, 2412 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Peak, 2412 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Peak, 2412 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B**

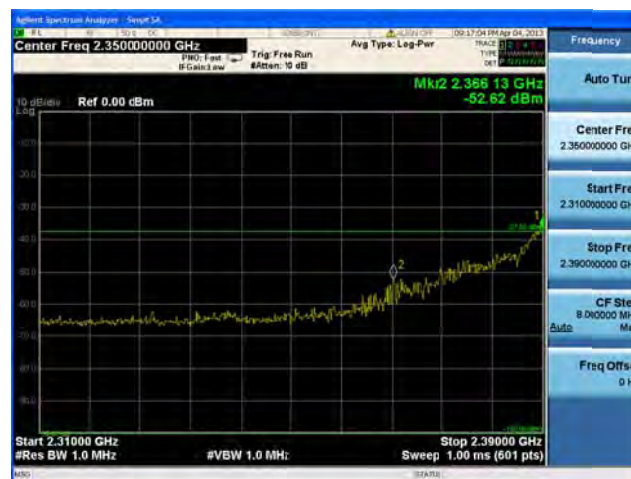
Conducted Bandedge Peak, 2412 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B**

Conducted Bandedge Peak, 2412 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Peak, 2412 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Peak, 2412 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Peak, 2412 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

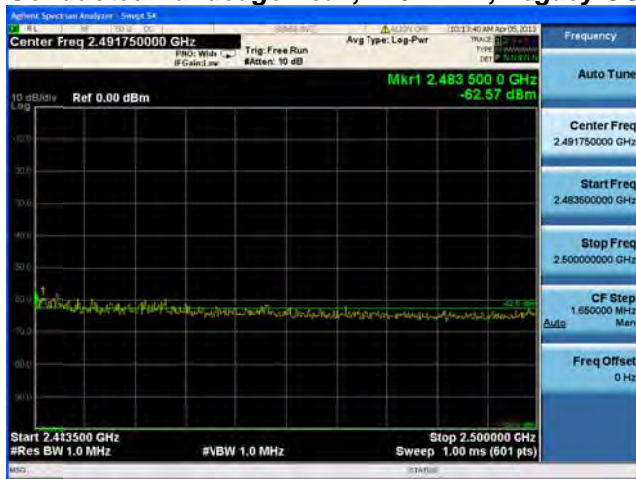
Conducted Bandedge Peak, 2412 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

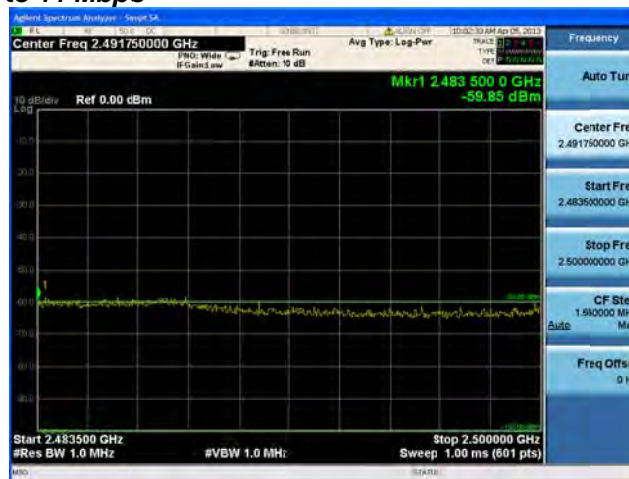
Conducted Bandedge Peak, 2412 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

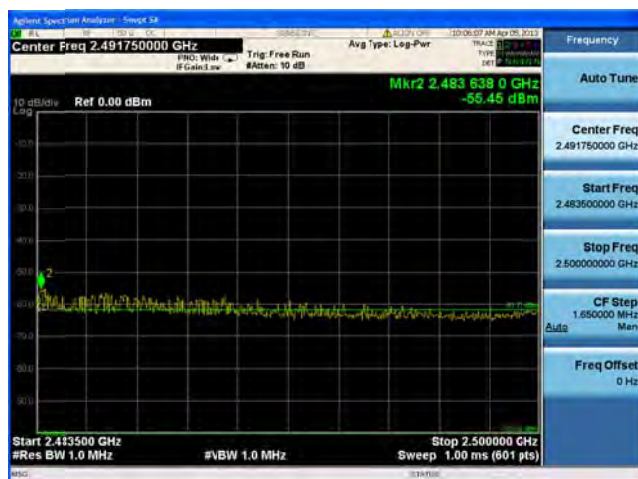
Conducted Bandedge Peak, 2412 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B**

Conducted Bandedge Peak, 2412 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Peak, 2412 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

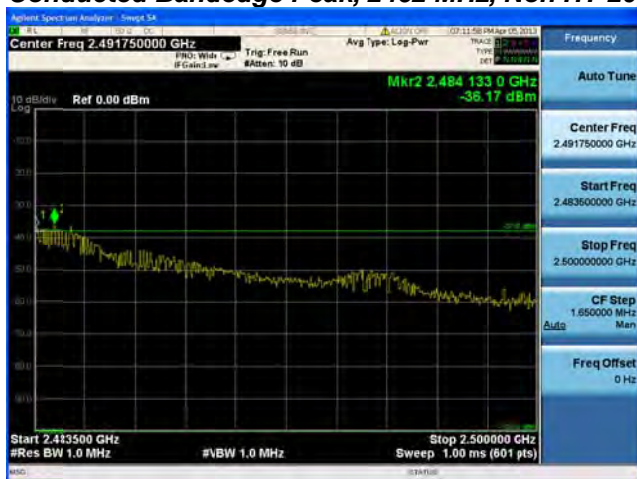
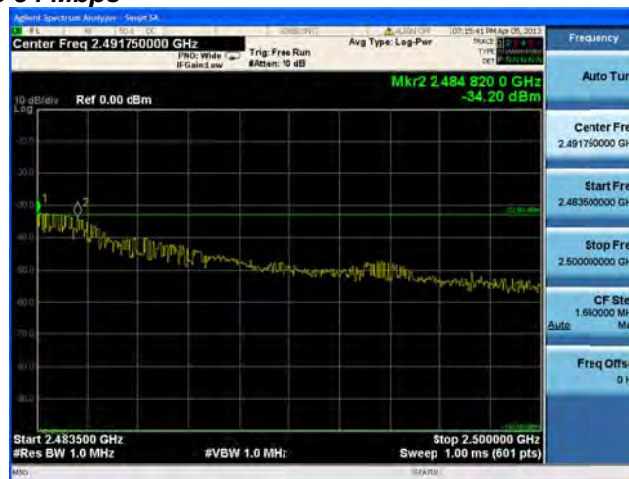
**Conducted Bandedge Peak, 2462 MHz, Legacy CCK, 1 to 11 Mbps****Antenna A**

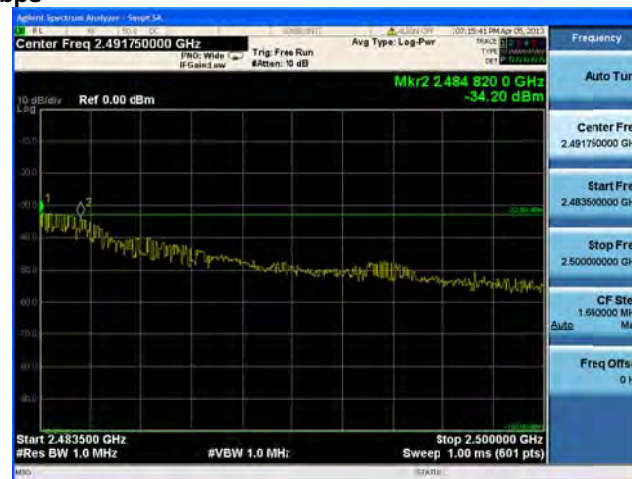
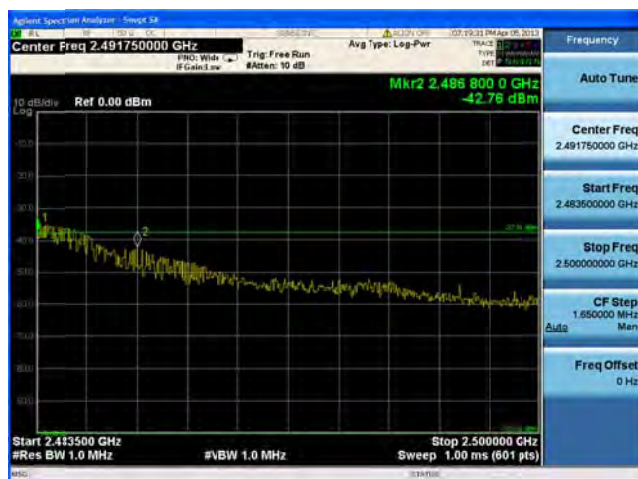
Conducted Bandedge Peak, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B**

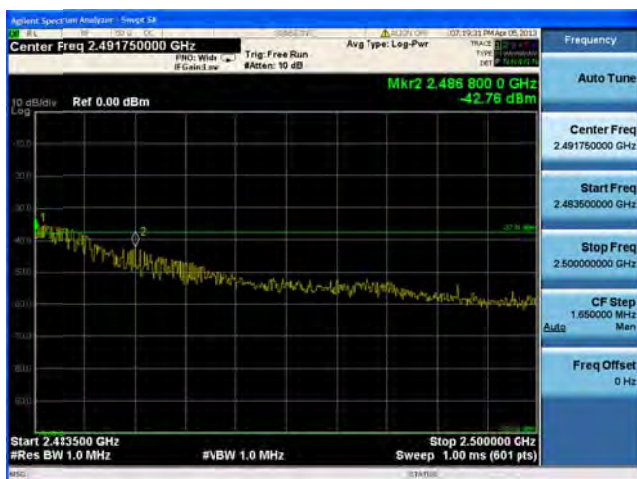
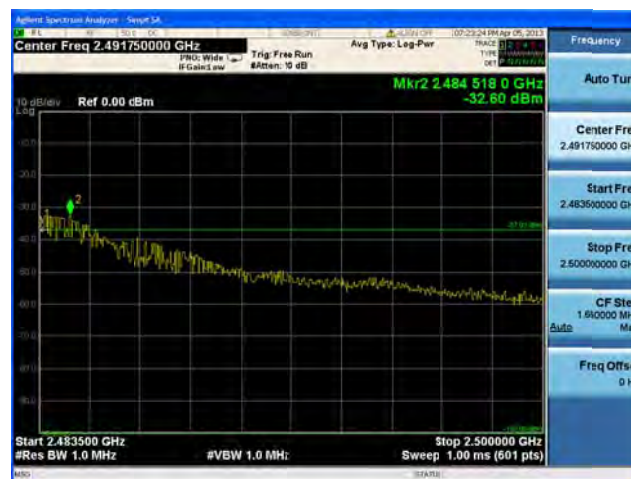
Conducted Bandedge Peak, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B****Antenna C**

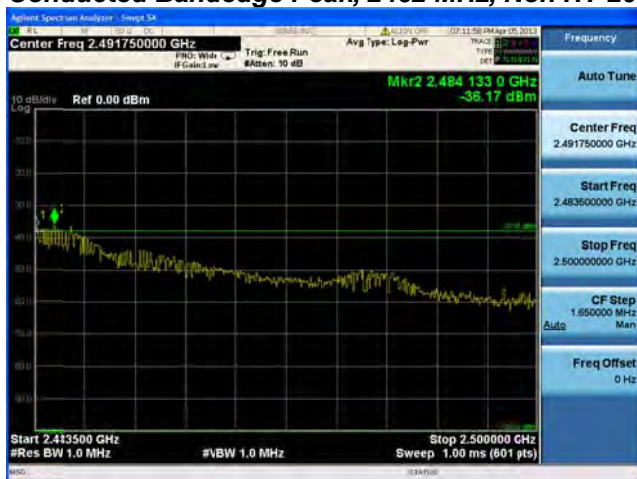
Conducted Bandedge Peak, 2462 MHz, Legacy CCK, 1 to 11 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

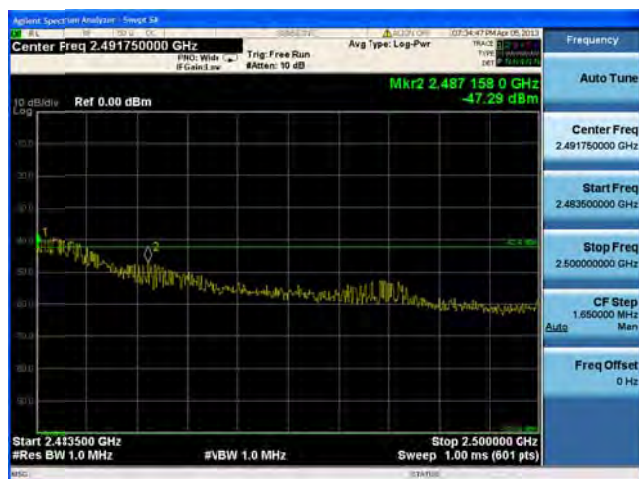
**Conducted Bandedge Peak, 2462 MHz, Non HT-20, 6 to 54 Mbps****Antenna A**

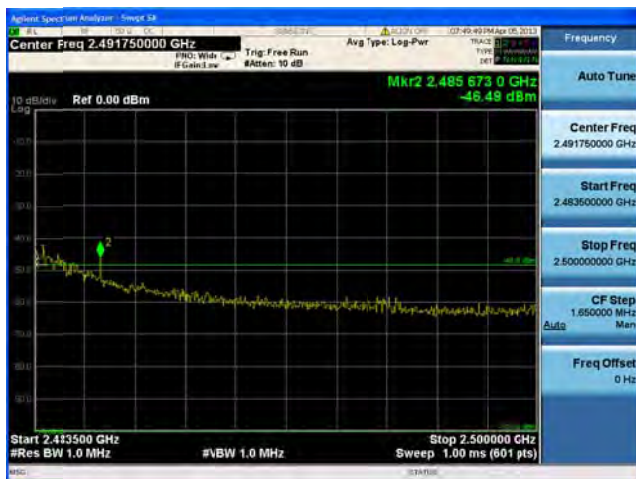
Conducted Bandedge Peak, 2462 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B**

Conducted Bandedge Peak, 2462 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

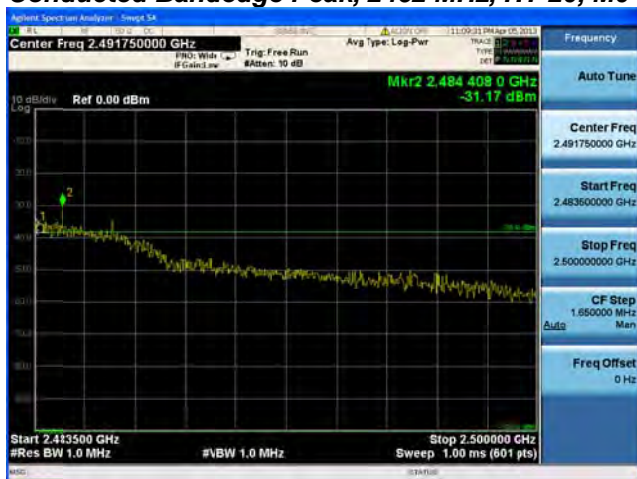
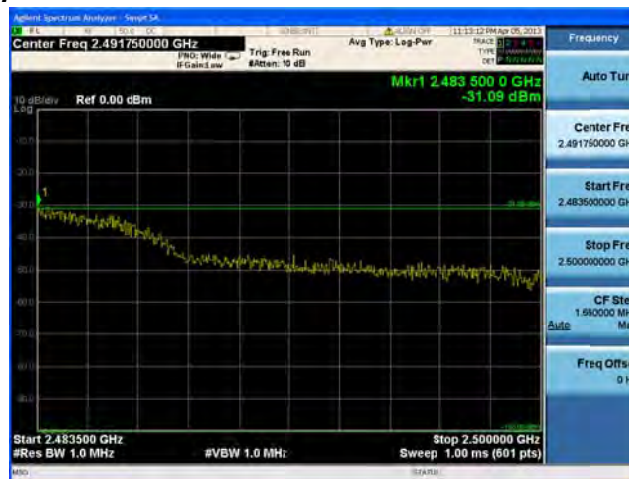
Conducted Bandedge Peak, 2462 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

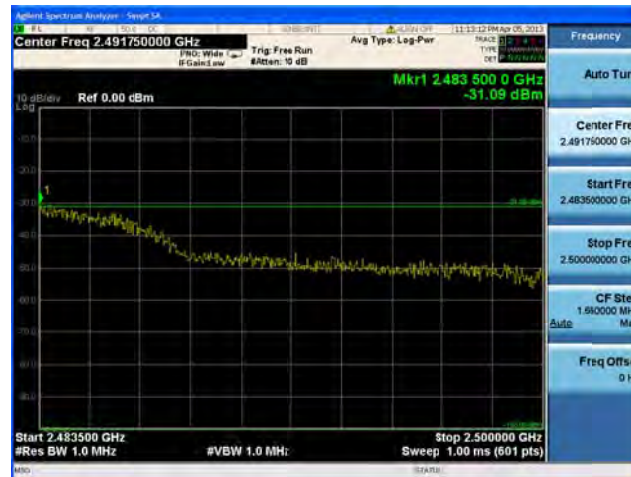
**Conducted Bandedge Peak, 2462 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps****Antenna A****Antenna B**

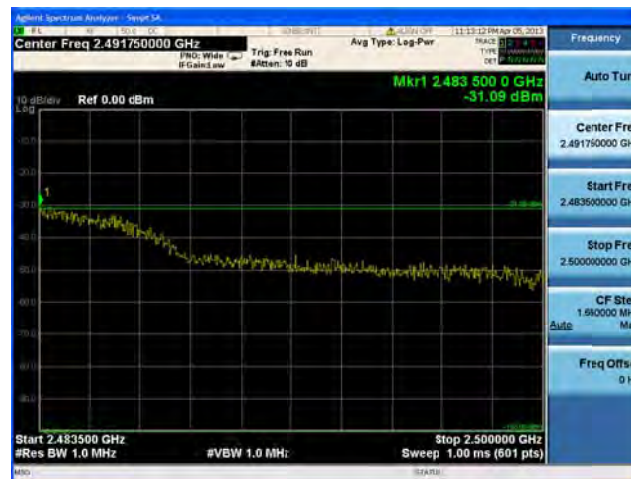
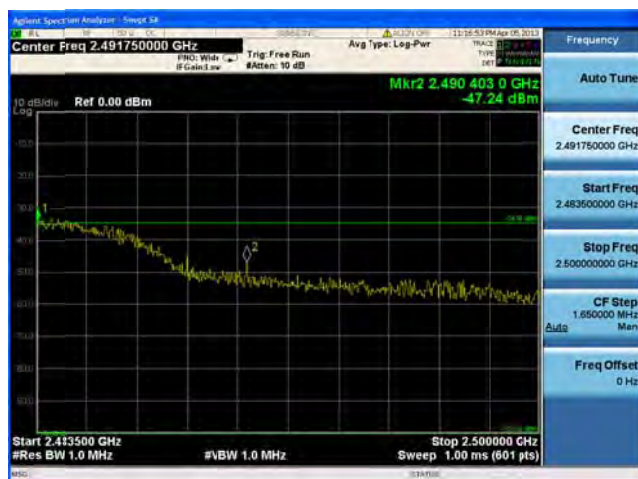
Conducted Bandedge Peak, 2462 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**

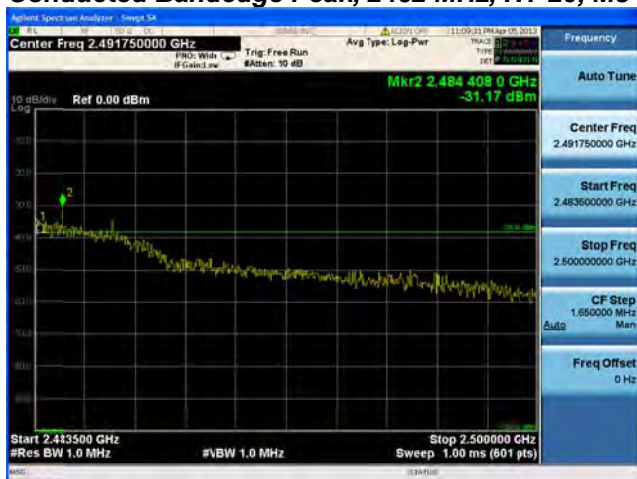
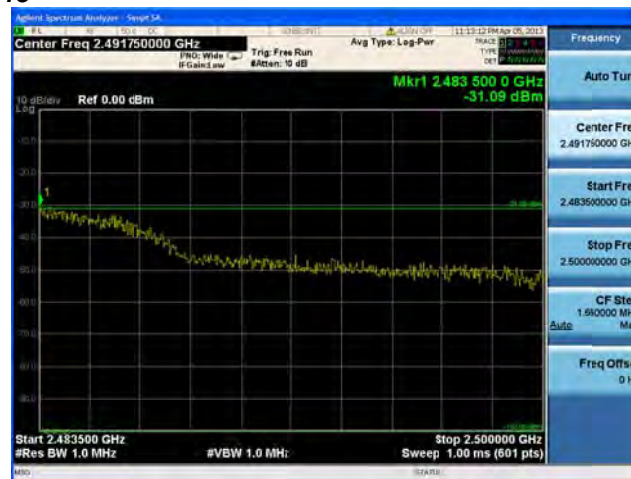
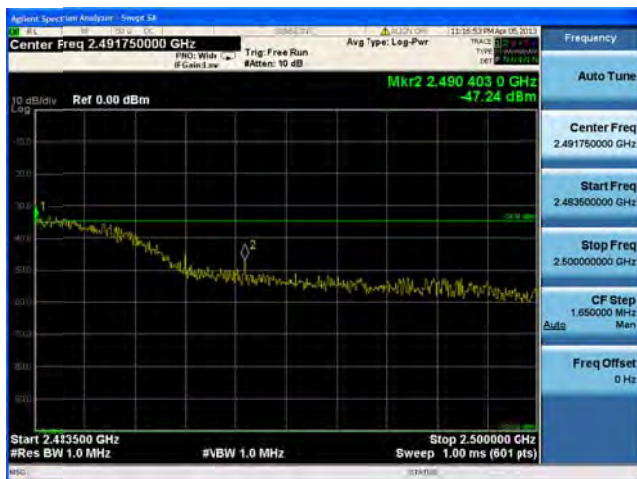
Conducted Bandedge Peak, 2462 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C****Antenna D**

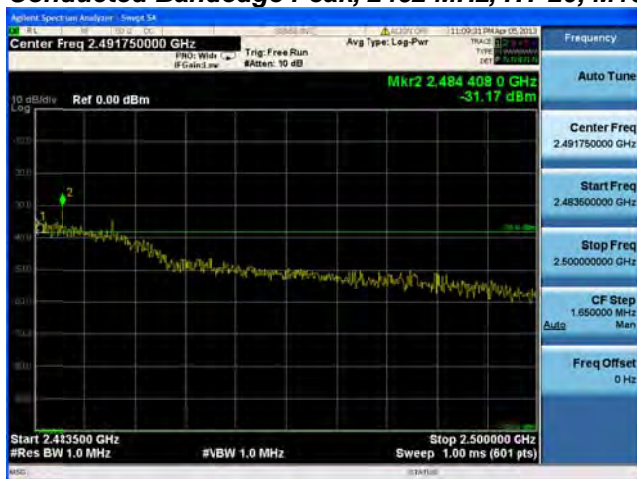
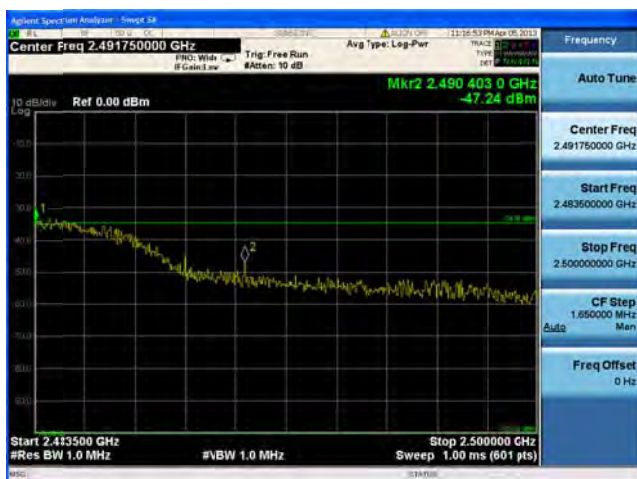
**Conducted Bandedge Peak, 2462 MHz, HT-20, M0 to M7****Antenna A**

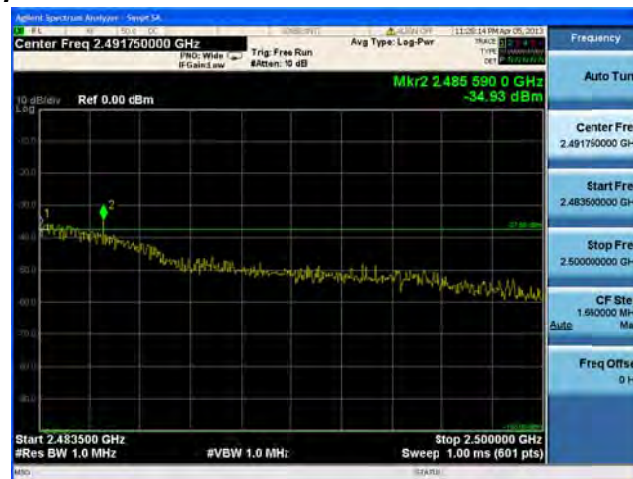
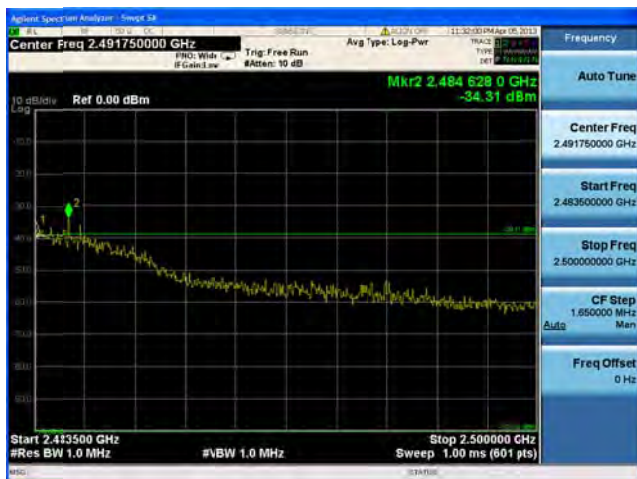
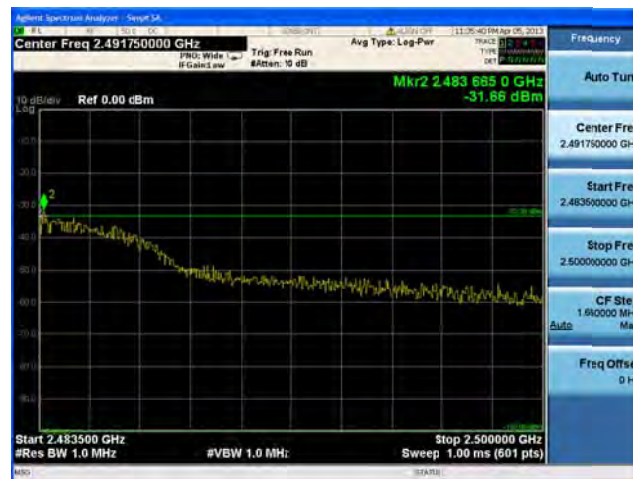
Conducted Bandedge Peak, 2462 MHz, HT-20, M0 to M7**Antenna A****Antenna B**

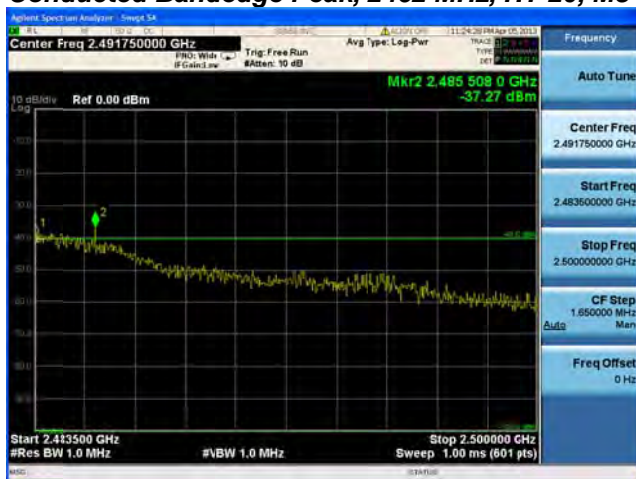
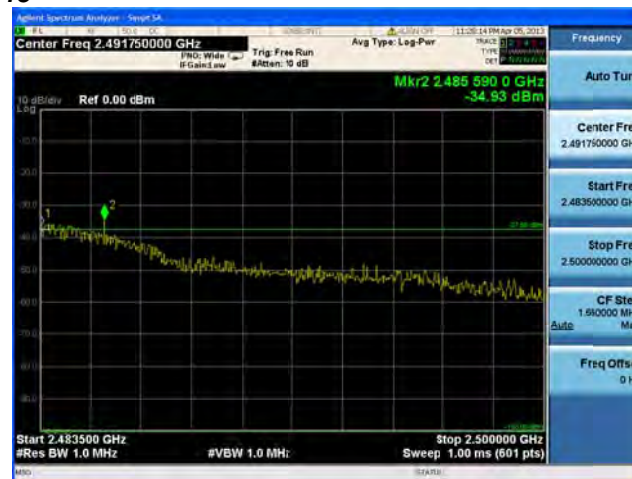
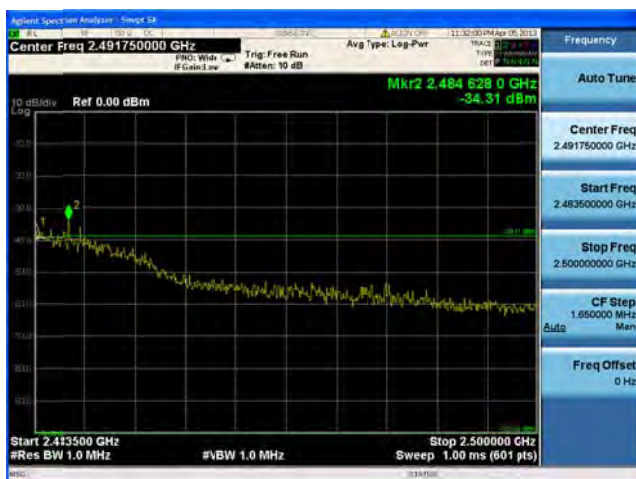
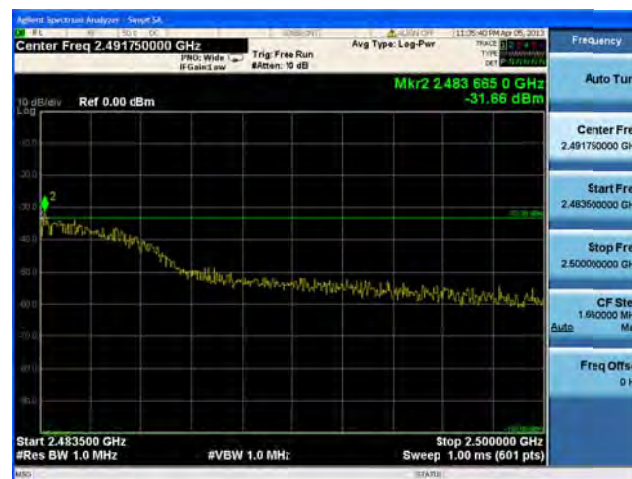
Conducted Bandedge Peak, 2462 MHz, HT-20, M8 to M15**Antenna A****Antenna B**

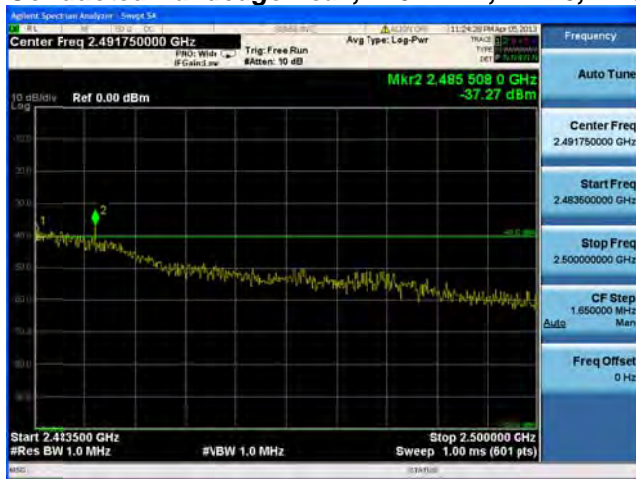
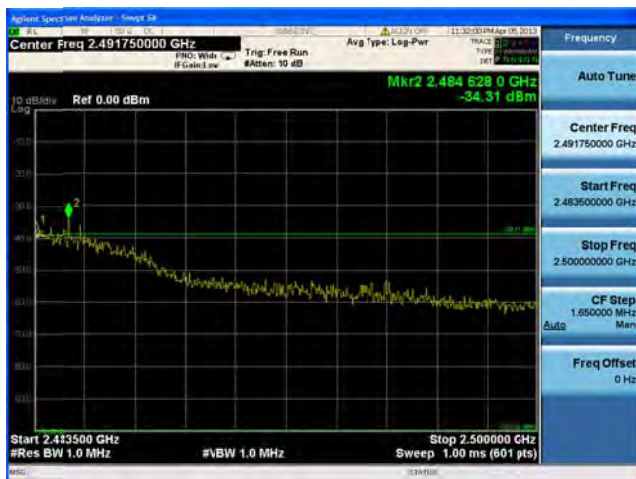
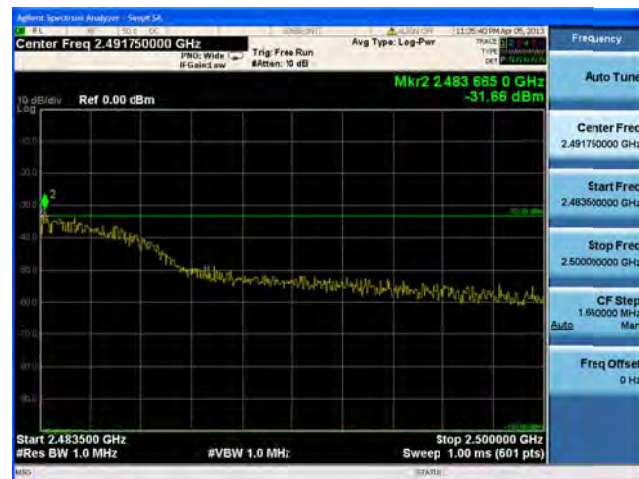
Conducted Bandedge Peak, 2462 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Antenna C**

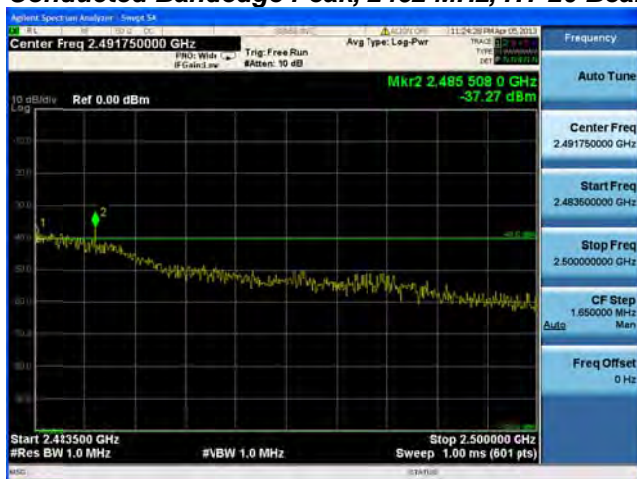
Conducted Bandedge Peak, 2462 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Antenna C**

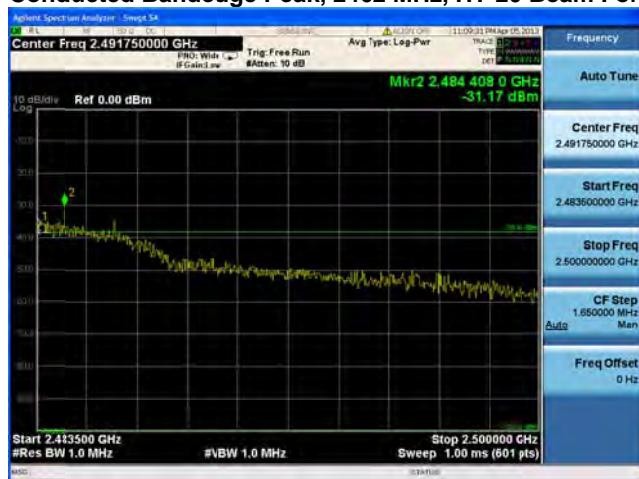
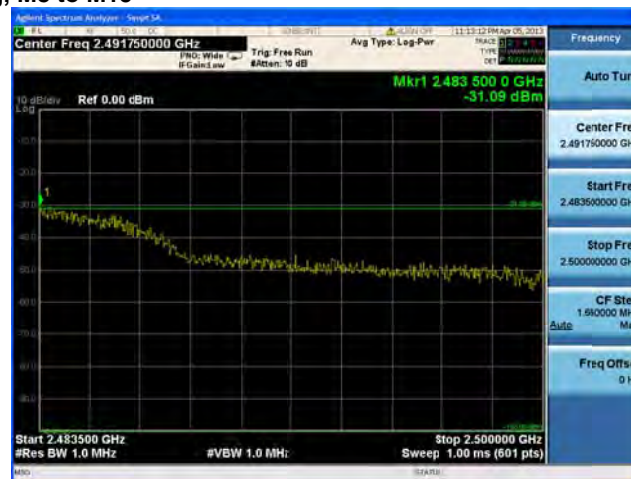
Conducted Bandedge Peak, 2462 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C**

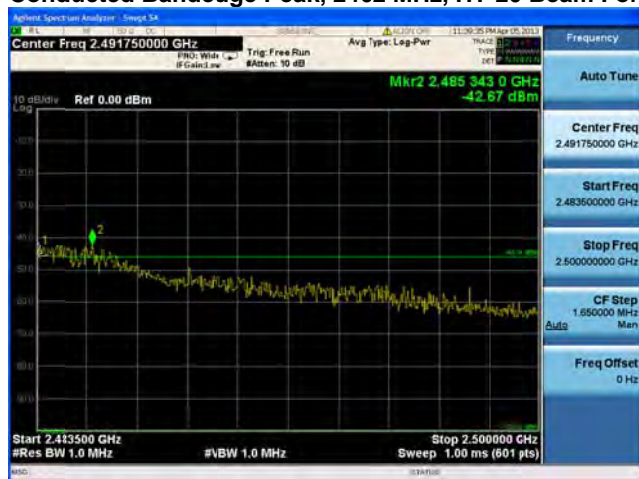
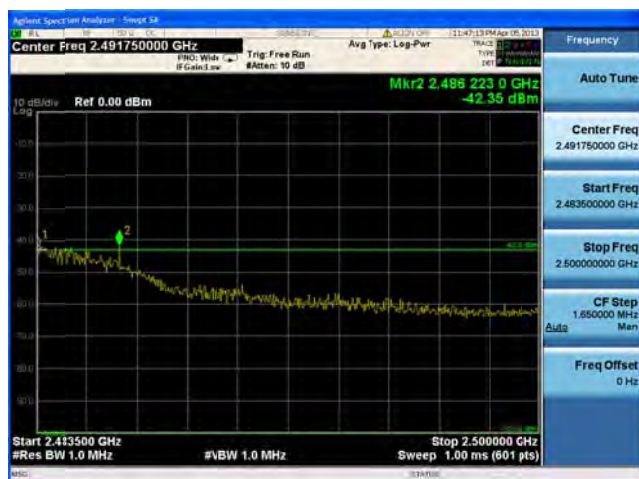
Conducted Bandedge Peak, 2462 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

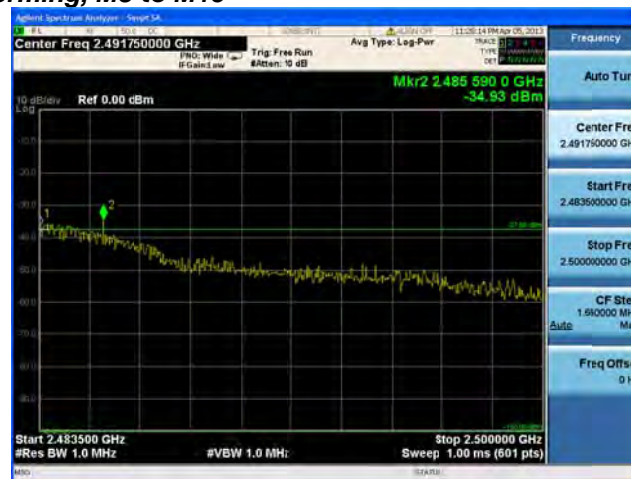
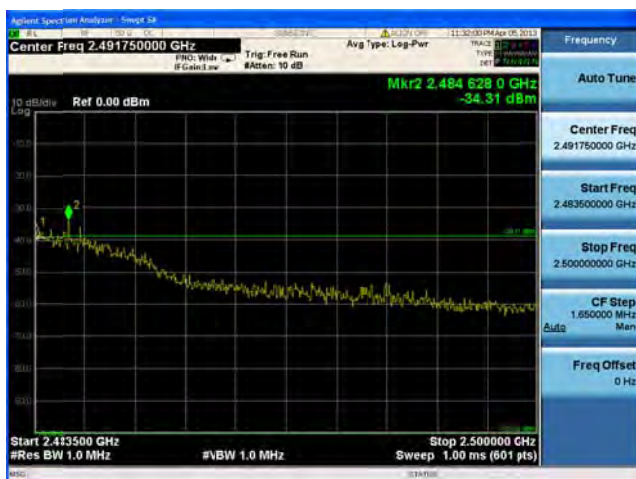
**Conducted Bandedge Peak, 2462 MHz, HT-20, M8 to M15****Antenna A****Antenna B****Antenna C****Antenna D**

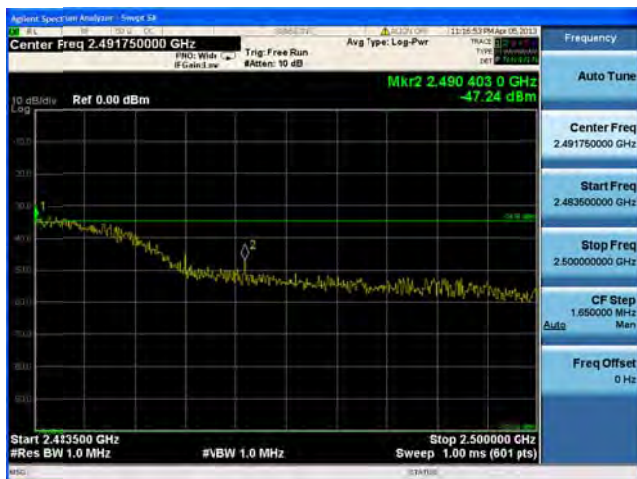
Conducted Bandedge Peak, 2462 MHz, HT-20, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

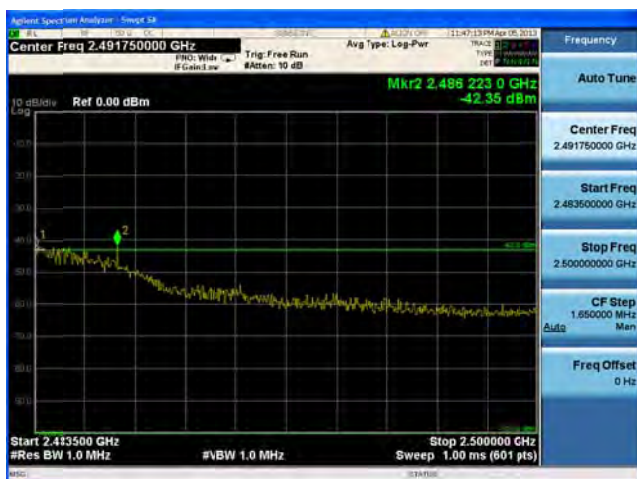
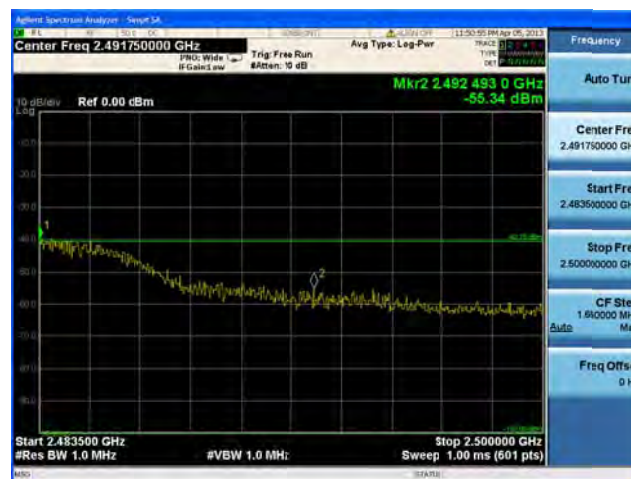
Conducted Bandedge Peak, 2462 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B**

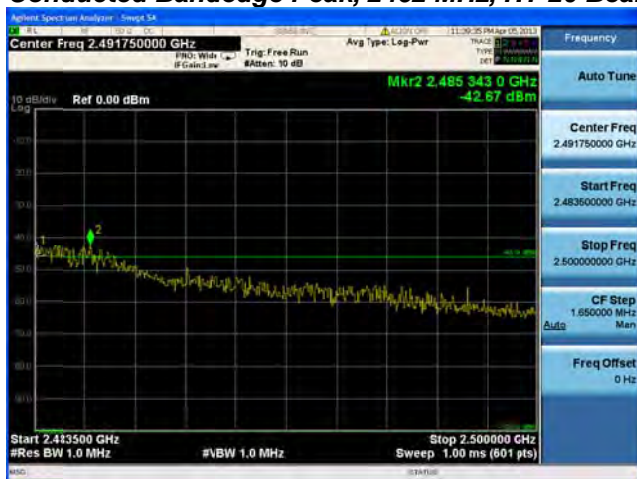
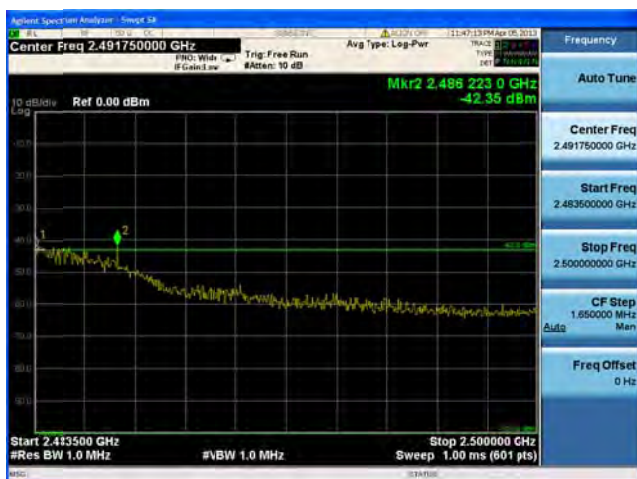
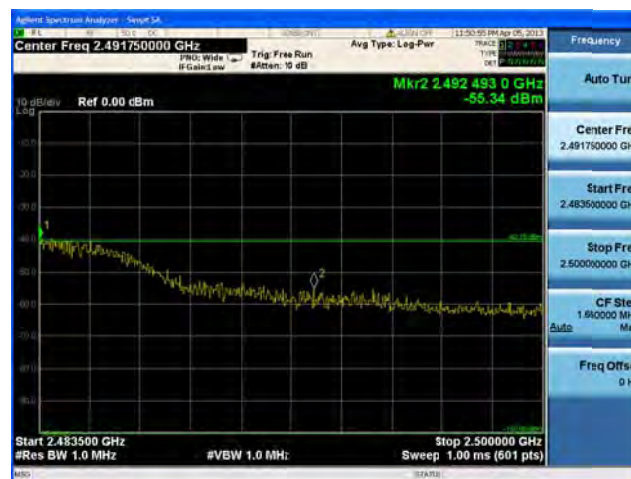
Conducted Bandedge Peak, 2462 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B**

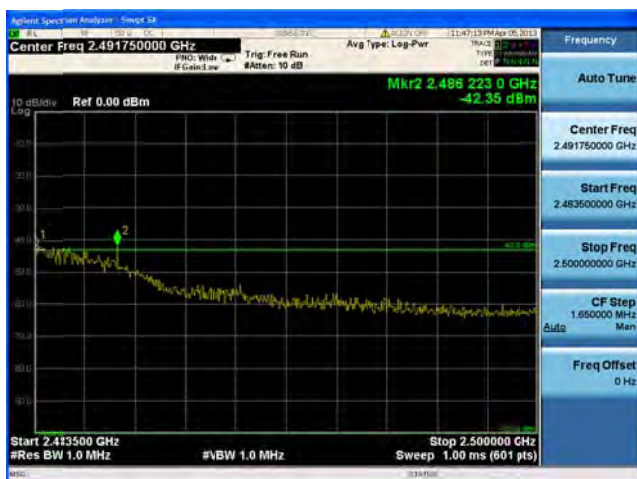
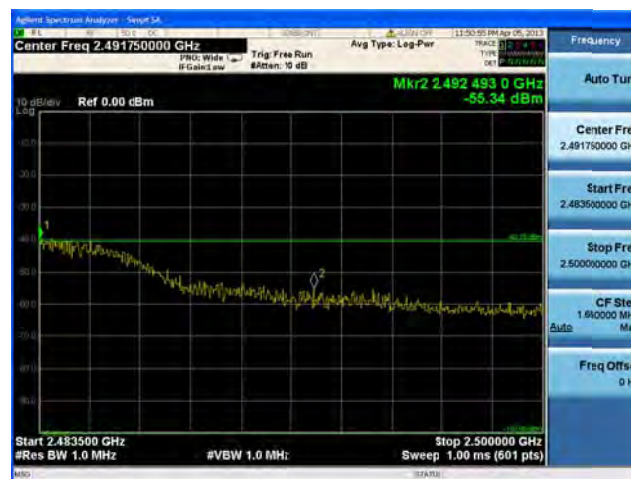
Conducted Bandedge Peak, 2462 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Antenna C**

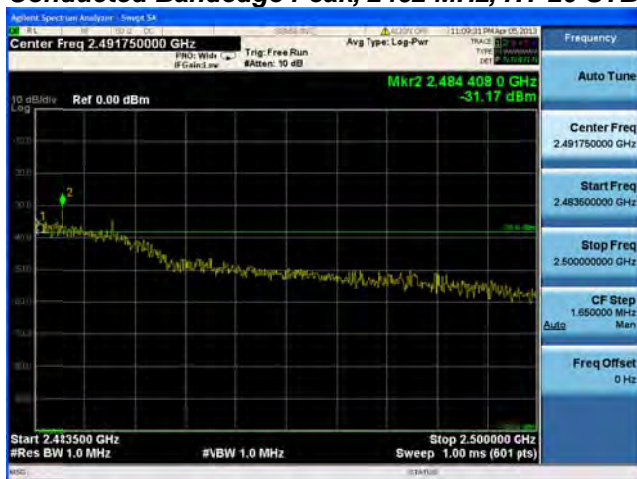
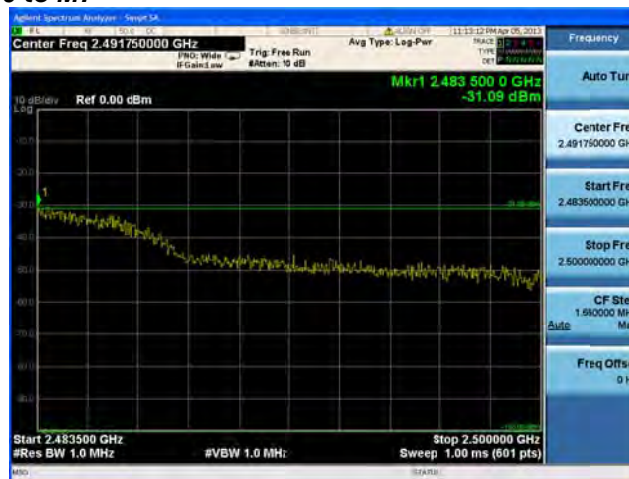
Conducted Bandedge Peak, 2462 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C**

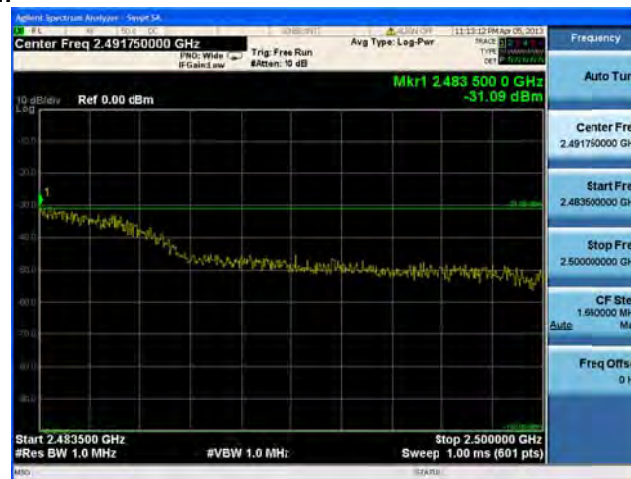
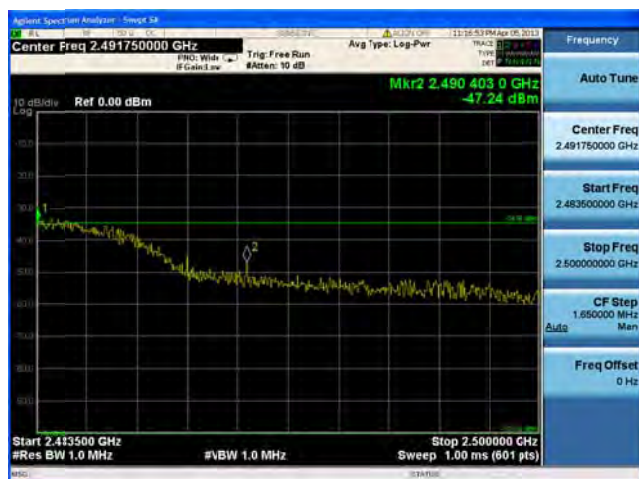
Conducted Bandedge Peak, 2462 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C**

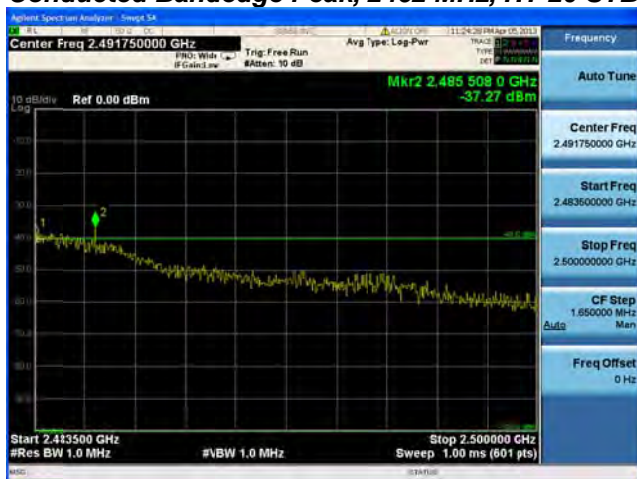
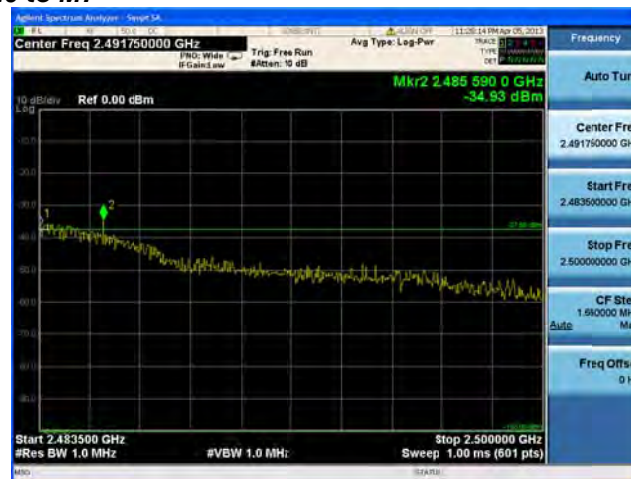
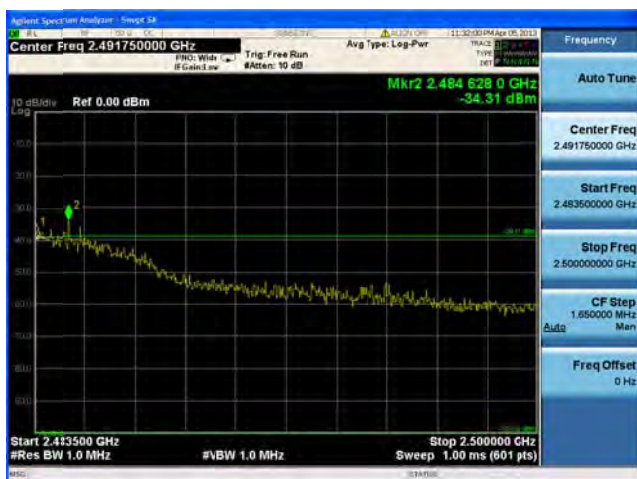
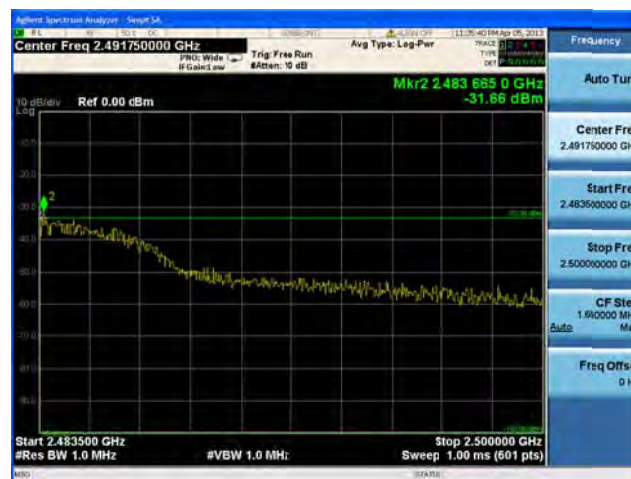
Conducted Bandedge Peak, 2462 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Peak, 2462 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Peak, 2462 MHz, HT-20 Beam Forming, M16 to M23**Antenna A****Antenna B****Antenna C****Antenna D**

Conducted Bandedge Peak, 2462 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B**

Conducted Bandedge Peak, 2462 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C**

Conducted Bandedge Peak, 2462 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Antenna C****Antenna D**



Conducted Test Setup Photo



Appendix B: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134, USA

Radiated Spurious Emissions

15.205 / RSS-210 2.7: Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	1GHz – 18 GHz
Reference Level:	80 dBuV
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz
Video Bandwidth:	1 MHz for peak, 10 Hz for average
Detector:	Peak

Terminate the access Point RF ports with 50 ohm loads.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= 54dBuV/m @3m
 2) Peak plot (Vertical and Horizontal), Limit = 74dBuV/m @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.
Also measure any emissions in the restricted bands.

This report represents the worst case data for all supported operating modes and antennas.
There are no measurable emissions above 18 GHz.



Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2412	Legacy CCK, 1 to 11 Mbps	1	44.07	<54	9.9
	Non HT-20, 6 to 54 Mbps	6	44.07	<54	9.9
	Non HT-20 Beam Forming, 6 to 54 Mbps	6	44.07	<54	9.9
	HT-20, M0 to M23	m0	44.07	<54	9.9
	HT-20 STBC, M0 to M7	m0	44.07	<54	9.9
	HT-20 Beam Forming, M0 to M23	m0	44.07	<54	9.9
2442	Legacy CCK, 1 to 11 Mbps	1	43.81	<54	10.19
	Non HT-20, 6 to 54 Mbps	6	43.81	<54	10.19
	Non HT-20 Beam Forming, 6 to 54 Mbps	6	43.81	<54	10.19
	HT-20, M0 to M23	m0	43.81	<54	10.19
	HT-20 STBC, M0 to M7	m0	43.81	<54	10.19
	HT-20 Beam Forming, M0 to M23	m0	43.81	<54	10.19
2462	Legacy CCK, 1 to 11 Mbps	1	43.68	<54	10.3
	Non HT-20, 6 to 54 Mbps	6	43.68	<54	10.3
	Non HT-20 Beam Forming, 6 to 54 Mbps	6	43.68	<54	10.3
	HT-20, M0 to M23	m0	43.68	<54	10.3
	HT-20 STBC, M0 to M7	m0	43.68	<54	10.3
	HT-20 Beam Forming, M0 to M23	m0	43.68	<54	10.3

Radiated Transmitter Spurs, 2412 MHz, All Rates, All Modes, Average



Radiated Transmitter Spurs, 2442 MHz, All Rates, All Modes, Average



Radiated Transmitter Spurs, 2462 MHz, All Rates, All Modes, Average



Radiated Transmitter Spurs, 2412 MHz, All Rates, All Modes, Peak





Radiated Transmitter Spurs, 2442 MHz, All Rates, All Modes, Peak



Radiated Transmitter Spurs, 2462 MHz, All Rates, All Modes, Peak

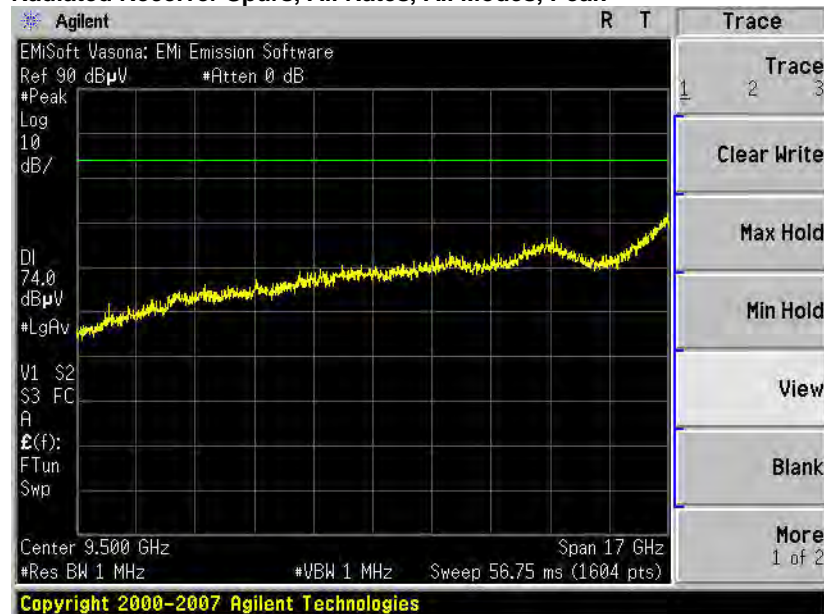


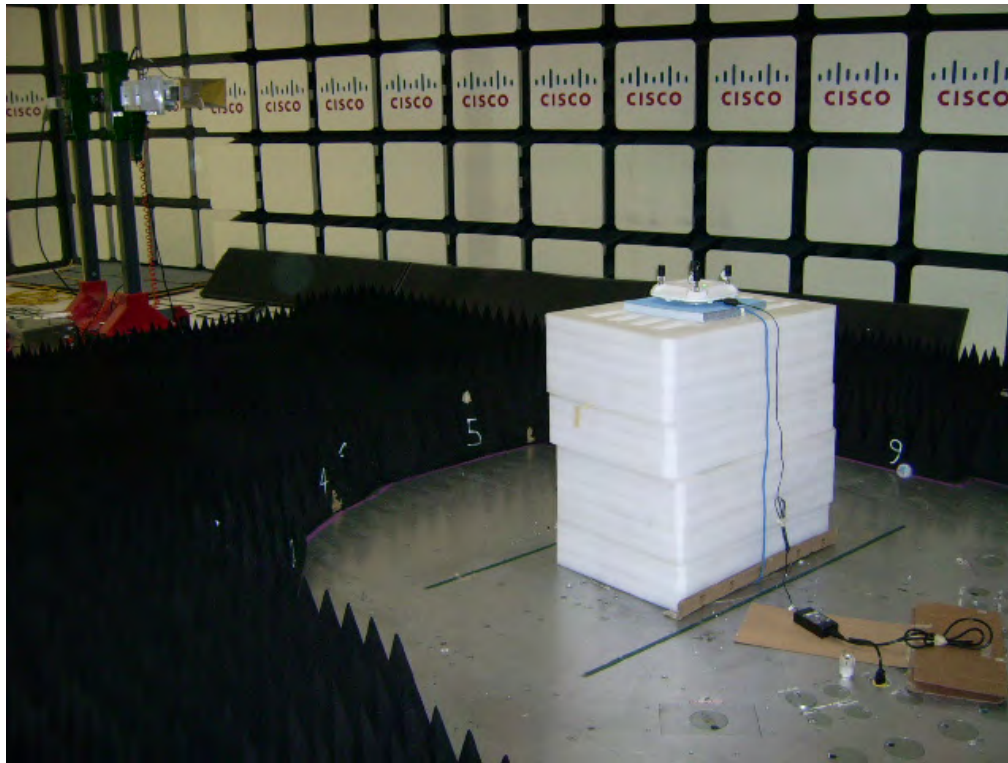
Receiver Radiated Spurious Emissions

Radiated Receiver Spurs, All Rates, All Modes, Average



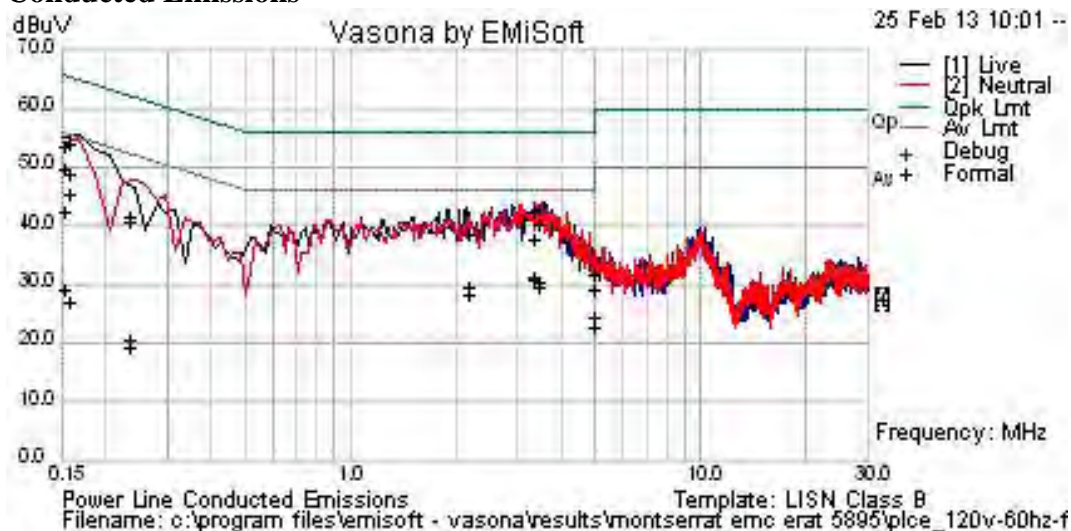
Radiated Receiver Spurs, All Rates, All Modes, Peak





Radiated Test Setup Photo

Conducted Emissions



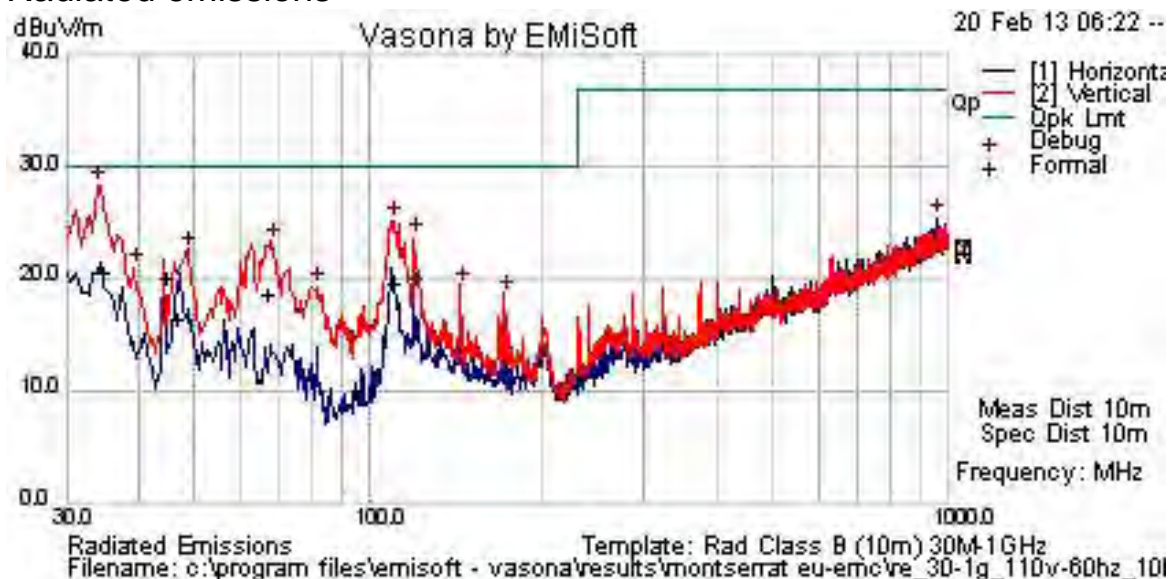
Test Results Table

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
0.15736	24	21.3	0.1	45.4	Av	N	55.6	-10.2	Pass	
0.15736	32.8	21.3	0.1	54.2	Qp	N	65.6	-11.4	Pass	
0.15288	32	21.4	0.1	53.5	Qp	N	65.8	-12.4	Pass	
3.424	22.7	20	0	42.8	Qp	N	56	-13.2	Pass	
0.15288	21	21.4	0.1	42.4	Av	L	55.8	-13.4	Pass	
3.351	22.5	20	0.1	42.6	Qp	N	56	-13.4	Pass	
3.351	11.1	20	0.1	31.2	Av	N	46	-14.8	Pass	
3.351	10.9	20	0.1	30.9	Av	L	46	-15.1	Pass	
3.424	20.3	20	0	40.3	Qp	L	56	-15.7	Pass	
3.424	10.2	20	0	30.3	Av	N	46	-15.7	Pass	
0.15288	28.1	21.4	0.1	49.6	Qp	L	65.8	-16.3	Pass	
3.424	9.4	20	0	29.5	Av	L	46	-16.5	Pass	
2.158	9.4	20	0	29.5	Av	N	46	-16.5	Pass	
0.15736	27.5	21.3	0.1	48.9	Qp	L	65.6	-16.7	Pass	
2.158	18.6	20	0	38.7	Qp	N	56	-17.3	Pass	
2.158	18.6	20	0	38.6	Qp	L	56	-17.4	Pass	
2.158	8.5	20	0	28.5	Av	L	46	-17.5	Pass	
3.351	17.6	20	0.1	37.6	Qp	L	56	-18.4	Pass	
0.23346	20.6	20.9	0	41.5	Qp	L	62.3	-20.8	Pass	
0.23346	19.8	20.9	0	40.7	Qp	N	62.3	-21.6	Pass	
4.916	4.3	20	0	24.4	Av	N	46	-21.6	Pass	
4.916	2.5	20	0	22.6	Av	L	46	-23.4	Pass	

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
4.916	11.8	20	0	31.9	Qp	N	56	-24.1	Pass	
0.15288	7.8	21.4	0.1	29.2	Av	N	55.8	-26.6	Pass	
4.916	9	20	0	29.1	Qp	L	56	-26.9	Pass	
0.15736	5.7	21.3	0.1	27.1	Av	L	55.6	-28.5	Pass	
0.23346	-0.1	20.9	0	20.8	Av	N	52.3	-31.6	Pass	
0.23346	-1.5	20.9	0	19.4	Av	L	52.3	-32.9	Pass	

**Title:** Power Line Conducted Emissions Test Setup

Radiated emissions



Test Results Table

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
34.65	30.1	0.6	-10.1	20.6	Qp	V	124	218	30	-9.4	Pass	
44.239	36.6	0.7	-17.2	20.2	Qp	V	198	221	30	-9.8	Pass	
120.013	32.5	1.2	-13.6	20.2	Qp	V	135	87	30	-9.8	Pass	
110.373	33.2	1.2	-14.7	19.7	Qp	V	131	175	30	-10.3	Pass	
66.612	37.4	1	-19.7	18.6	Qp	V	102	271	30	-11.4	Pass	
46.154	33.9	0.7	-18.3	16.3	Qp	V	254	195	30	-13.7	Pass	



Title: Radiated Emissions 10m Test Distance

Maximum Permissible Exposure (MPE) Calculations

15.247: U-NII devices are subject to the radio frequency radiation exposure requirements specified in Sec. 1.1307(b), Sec. 2.1091 and Sec. 2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a "general population/uncontrolled" environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

Given

$$E = \sqrt{(30 \cdot P \cdot G)/d} \text{ and } S = E^2/3770$$

where

E=Field Strength in Volts/meter

P=Power in Watts

G=Numeric Antenna Gain

d=Distance in meters

S=Power Density in mW/cm²

Combine equations and rearrange the terms to express the distance as a function of the remaining variables:

$$d = \sqrt{((30 \cdot P \cdot G)/(3770 \cdot S))}$$

Changing to units of power in mW and distance in cm, using:

$$P(\text{mW}) = P(\text{W})/1000 \quad d(\text{cm}) = 100 \cdot d(\text{m})$$

yields

$$d = 100 \cdot \sqrt{((30 \cdot (P/1000) \cdot G)/(3770 \cdot S))}$$

$$d = 0.282 \cdot \sqrt{(P \cdot G/S)}$$

where

d=Distance in cm

P=Power in mW

G=Numeric Antenna Gain

S=Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P(\text{mW}) = 10^{(P(\text{dBm})/10)} \quad G(\text{numeric}) = 10^{(G(\text{dBi})/10)}$$

yields

$$d = 0.282 \cdot 10^{((P+G)/20)} / \sqrt{S} \quad \text{Equation (1)}$$

and

$$S = ((0.282 \cdot 10^{((P+G)/20)})/d)^2 \quad \text{Equation (2)}$$

where

d=MPE distance in cm

P=Power in dBm

G=Antenna Gain in dBi

S=Power Density in mW/cm²

Equation (1) and the measured peak power are used to calculate the MPE distance. Note that for mobile or fixed location transmitters such as an access point, the minimum separation distance is 20 cm even if the calculations indicate that the MPE distance may be less.

$S=1\text{mW/cm}^2$ maximum. The highest supported antenna gain is 6 dBi (9dBi with beamforming). Using the peak power levels recorded in the test report along with Equation 1 above, the MPE distances are calculated as follows.

Frequency (MHz)	Power Density (mW/cm ²)	Peak Transmit Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)	Limit (cm)	Margin (cm)
2412	1	20.0	12	11.23	20	8.77
2437	1	21.1	12	12.71	20	7.29
2462	1	18.8	12	9.78	20	10.22

MPE Calculations

To maintain compliance, installations will assure a separation distance of at least 20cm.

Using Equation 2, the MPE levels (s) at 20 cm are calculated as follows:

Frequency (MHz)	MPE Distance (cm)	Peak Transmit Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm ²)	Limit (mW/cm ²)	Margin (mW/cm ²)
2412	20	20.0	12	0.32	1	0.68
2437	20	21.1	12	0.41	1	0.59
2462	20	18.8	12	0.24	1	0.76

**Appendix C: Test Equipment/Software Used to perform the test**

Equip #	Manufacturer	Model	Description	Last Cal	Next Due
CIS004882	EMC Test Systems	3115	Double Ridged Guide Horn Antenna	04-Jun-12	04-Jun-13
CIS004927	Miteq	NSP1000-S1	Broadband Preamplifier	01-Feb-13	01-Feb-14
CIS007704	Fischer	FCC-LISN-50/250-50-2-01	LISN	11-May-12	11-May-13
CIS021117	Micro-Coax	UFB311A-0-2484-520520	RF Coaxial Cable, to 18GHz, 248.4 in	24-Aug-12	24-Aug-13
CIS030564	Micro-Coax	UFB311A-1-0950-504504	RF Coaxial Cable, to 18GHz, 95 in	24-Aug-12	24-Aug-13
CIS030652	Sunol Sciences	JB1	Combination Antenna, 30MHz-2GHz	04-Sep-12	04-Sep-13
CIS044940	Rohde & Schwarz	ESU40	EMI Test Receiver	08-May-12	08-May-13
CIS018313	HP	8447D	RF Preamplifier	08-Jan-13	08-Jan-14
CIS043116	Huber + Suhner	Sucoflex 104PE	N & SMA RF cable	14-Dec-12	14-Dec-13
CIS049381	Agilent	N9030A	Spectrum Analyzer	28-Aug-12	28-Aug-13