



产品规格书

PRODUCT SPECIFICATION FOR APPROVAL

客户名称:

CUSTOMER

产品名称:

PRODUCT NAME

物料编码:

PART No.

产品规格:

PRODUCT SPEC

日期:

DATE

版本型号:

VERSION

A11 Coil

A14538

Sensitivity specification: 6.5uH $\pm$ 10%

Disk specification: 43.5*5.3*0.5 dual slot

Cable specification: 0.08*70*10Ts (20.5mm inner

diameter) Outlet length: 50mm/ single slot outlet

The reverse side is affixed with ordinary double-sided
tape /3mm high-temperature tape

2024/09/05

REV 1.0

版本 Revision	变更内容 Modified Content	责任人 Principle	日期 Date	备注 Note
REV 1.0	首次发布	薛磊	2024-09-05	

制定/PREPARED BY	审核/CHECKED BY	核准/APPROVED BY


客户认可签名及盖章 Authorized signature & company chop		
---	--	--



产品规格

SPECIFICATION

	Disk diameter A	43.5±0.5mm
	Coil outside diameterB	38±1.5mm
	Inside diameter of coilC	20.5±0.5mm
	Product thickness D	<1.6mm
	Outlet length E	50mm±2mm
	Solder length F	3±1mm
	Disk opening diameter G	5±0.3mm
	Diskette thickness	0.45±0.05mm
	Diskette shape	Circular double slot
	Backing thickness	Reverse plain double-sided tape
	Shatter-proof black film	/

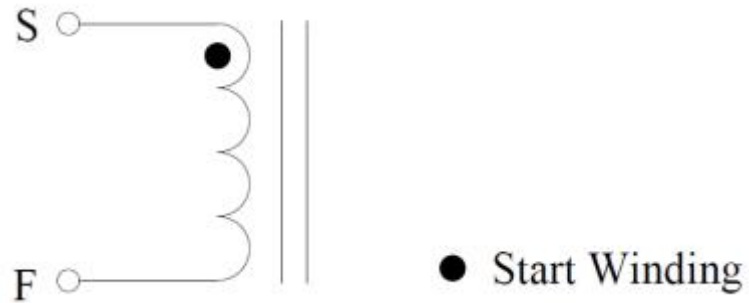

端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
S	F	silk-covered wire 0.08*70	10Ts	CCW

温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±20%

项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
IND.	S-F	6.5uH±10%	100KHz/1.0V	LCZ METER 1062B