

DH5 Conducted Spurious Emissions

Channel 00 (2402MHz)




Channel 78 (2480MHz)



2DH5 Conducted Spurious Emissions

Channel 00 (2402MHz)

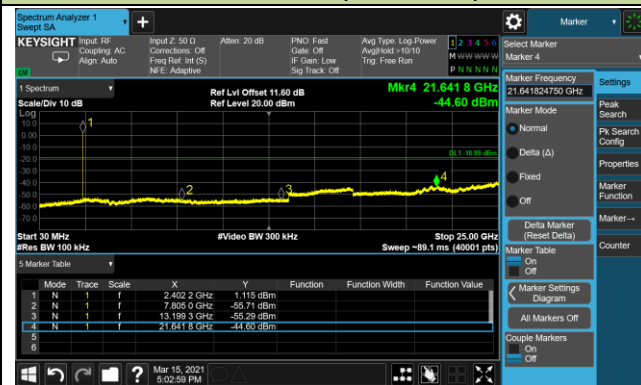

Channel 78 (2480MHz)



3DH5 Conducted Spurious Emissions

Channel 00 (2402MHz)



Channel 78 (2480MHz)



6.9. Radiated Spurious Emission Measurement

6.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measured Distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.9.2. Test Procedure Used

ANSI C63.10-2013 - Section 6.3 & 6.4 & 6.5 & 6.6

6.9.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = As specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = Auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
4. Detector = Peak
5. Sweep time = Auto
6. Trace mode = Max hold
7. Trace was allowed to stabilize

6.9.4. Test Setup

Below 1GHz Test Setup:

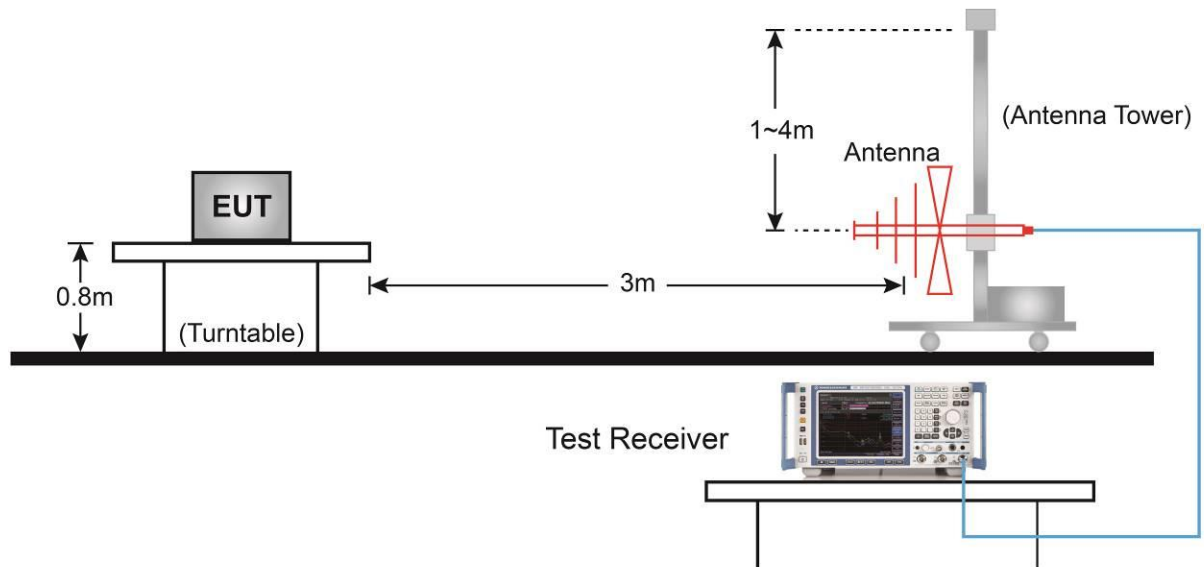

Above 1GHz Test Setup:

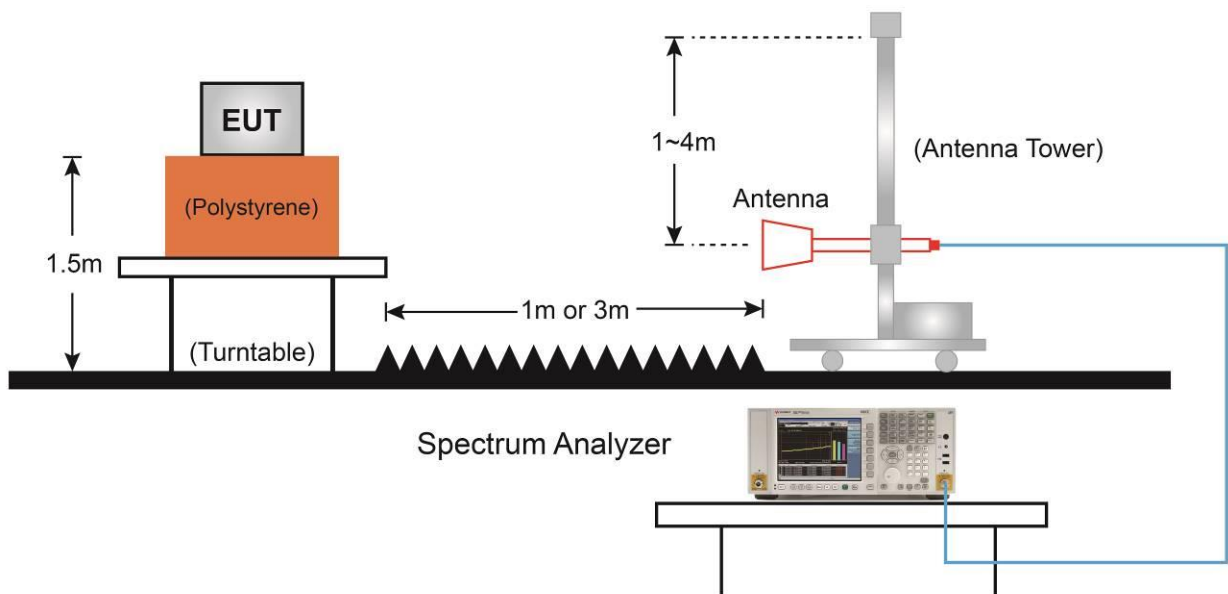

6.9.5. Test Result

Test Site	WZ-AC1	Test Engineer	Antony Yang
Test Mode	DH5	Test Date	2021/03/16
Test Channel	00		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
4808.0	39.4	5.3	44.7	74.0	-29.3	Peak	Horizontal
7460.0	36.6	9.6	46.2	74.0	-27.8	Peak	Horizontal
8208.0	37.3	10.3	47.6	74.0	-26.4	Peak	Horizontal
4816.5	39.1	5.0	44.1	74.0	-29.9	Peak	Vertical
7613.0	36.5	9.4	45.9	74.0	-28.1	Peak	Vertical
8429.0	38.1	10.1	48.2	74.0	-25.8	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Antony Yang
Test Mode	DH5	Test Date	2021/03/16
Test Channel	39		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
5046.0	38.0	5.7	43.7	74.0	-30.3	Peak	Horizontal
7417.5	36.7	9.6	46.3	74.0	-27.7	Peak	Horizontal
8242.0	36.8	10.0	46.8	74.0	-27.2	Peak	Horizontal
3924.0	39.4	2.4	41.8	74.0	-32.2	Peak	Vertical
4808.0	39.1	5.3	44.4	74.0	-29.6	Peak	Vertical
11004.5	37.8	14.7	52.5	74.0	-21.5	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Antony Yang
Test Mode	DH5	Test Date	2021/03/16
Test Channel	78		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
4978.0	37.8	5.2	43.0	74.0	-31.0	Peak	Horizontal
7553.5	37.2	9.7	46.9	74.0	-27.1	Peak	Horizontal
8276.0	37.4	10.1	47.5	74.0	-26.5	Peak	Horizontal
3983.5	39.4	2.6	42.0	74.0	-32.0	Peak	Vertical
7485.5	37.7	9.7	47.4	74.0	-26.6	Peak	Vertical
11038.5	37.4	14.5	51.9	74.0	-22.1	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Antony Yang
Test Mode	2DH5	Test Date	2021/03/16
Test Channel	00		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
4808.0	38.1	5.3	43.4	74.0	-30.6	Peak	Horizontal
7502.5	36.5	9.7	46.2	74.0	-27.8	Peak	Horizontal
11089.5	36.7	14.5	51.2	74.0	-22.8	Peak	Horizontal
4808.0	39.2	5.3	44.5	74.0	-29.5	Peak	Vertical
7494.0	38.2	9.7	47.9	74.0	-26.1	Peak	Vertical
8199.5	37.7	10.2	47.9	74.0	-26.1	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Antony Yang
Test Mode	2DH5	Test Date	2021/03/16
Test Channel	39		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
4808.0	39.4	5.3	44.7	74.0	-29.3	Peak	Horizontal
7545.0	36.8	9.6	46.4	74.0	-27.6	Peak	Horizontal
8208.0	36.8	10.3	47.1	74.0	-26.9	Peak	Horizontal
3992.0	40.3	2.5	42.8	74.0	-31.2	Peak	Vertical
5054.5	38.0	5.8	43.8	74.0	-30.2	Peak	Vertical
7451.5	38.0	9.6	47.6	74.0	-26.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Antony Yang
Test Mode	2DH5	Test Date	2021/03/16
Test Channel	78		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
4816.5	38.0	5.0	43.0	74.0	-31.0	Peak	Horizontal
7579.0	35.6	9.6	45.2	74.0	-28.8	Peak	Horizontal
8259.0	36.9	10.3	47.2	74.0	-26.8	Peak	Horizontal
4833.5	37.8	4.9	42.7	74.0	-31.3	Peak	Vertical
7502.5	37.4	9.7	47.1	74.0	-26.9	Peak	Vertical
9355.5	38.0	13.0	51.0	74.0	-23.0	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Antony Yang
Test Mode	3DH5	Test Date	2021/03/16
Test Channel	00		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
4816.5	38.5	5.0	43.5	74.0	-30.5	Peak	Horizontal
7655.5	35.7	9.5	45.2	74.0	-28.8	Peak	Horizontal
8148.5	36.9	10.1	47.0	74.0	-27.0	Peak	Horizontal
4094.0	37.6	2.9	40.5	74.0	-33.5	Peak	Vertical
4808.0	38.0	5.3	43.3	74.0	-30.7	Peak	Vertical
7638.5	36.1	9.5	45.6	74.0	-28.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Antony Yang
Test Mode	3DH5	Test Date	2021/03/16
Test Channel	39		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
4153.5	39.0	3.0	42.0	74.0	-32.0	Peak	Horizontal
4808.0	38.4	5.3	43.7	74.0	-30.3	Peak	Horizontal
7519.5	36.9	9.6	46.5	74.0	-27.5	Peak	Horizontal
4799.5	38.4	5.2	43.6	74.0	-30.4	Peak	Vertical
7519.5	36.9	9.6	46.5	74.0	-27.5	Peak	Vertical
8480.0	38.1	10.3	48.4	74.0	-25.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Antony Yang
Test Mode	3DH5	Test Date	2021/03/16
Test Channel	78		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
4808.0	38.2	5.3	43.5	74.0	-30.5	Peak	Horizontal
7613.0	36.6	9.4	46.0	74.0	-28.0	Peak	Horizontal
8199.5	36.4	10.2	46.6	74.0	-27.4	Peak	Horizontal
3992.0	40.5	2.5	43.0	74.0	-31.0	Peak	Vertical
4816.5	38.6	5.0	43.6	74.0	-30.4	Peak	Vertical
7587.5	35.6	9.5	45.1	74.0	-28.9	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site: WZ-AC1	Time: 2021/03/16
Limit: FCC_Part15.209_RSE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_VULB 9168 _30-1000MHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Worst Case Mode: Transmit by BT at channel 2402MHz	

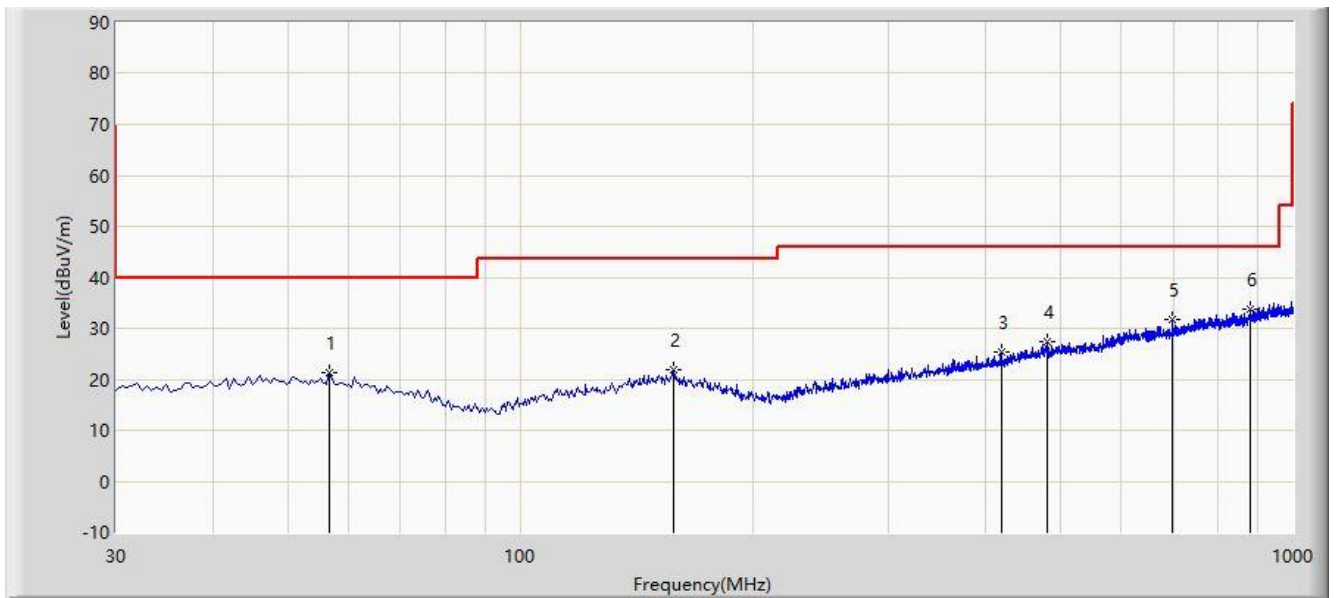

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			56.675	21.179	3.316	-18.821	40.000	17.863	PK
2			158.040	21.981	3.723	-21.519	43.500	18.258	PK
3			418.970	25.268	3.689	-20.732	46.000	21.579	PK
4			481.535	27.468	4.162	-18.532	46.000	23.306	PK
5			699.300	31.843	4.574	-14.157	46.000	27.269	PK
6		*	880.205	33.670	4.043	-12.330	46.000	29.627	PK


Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: WZ-AC1	Time: 2021/03/16
Limit: FCC_Part15.209_RSE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_VULB 9168 _30-1000MHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Worst Case Mode: Transmit by BT at channel 2402MHz	

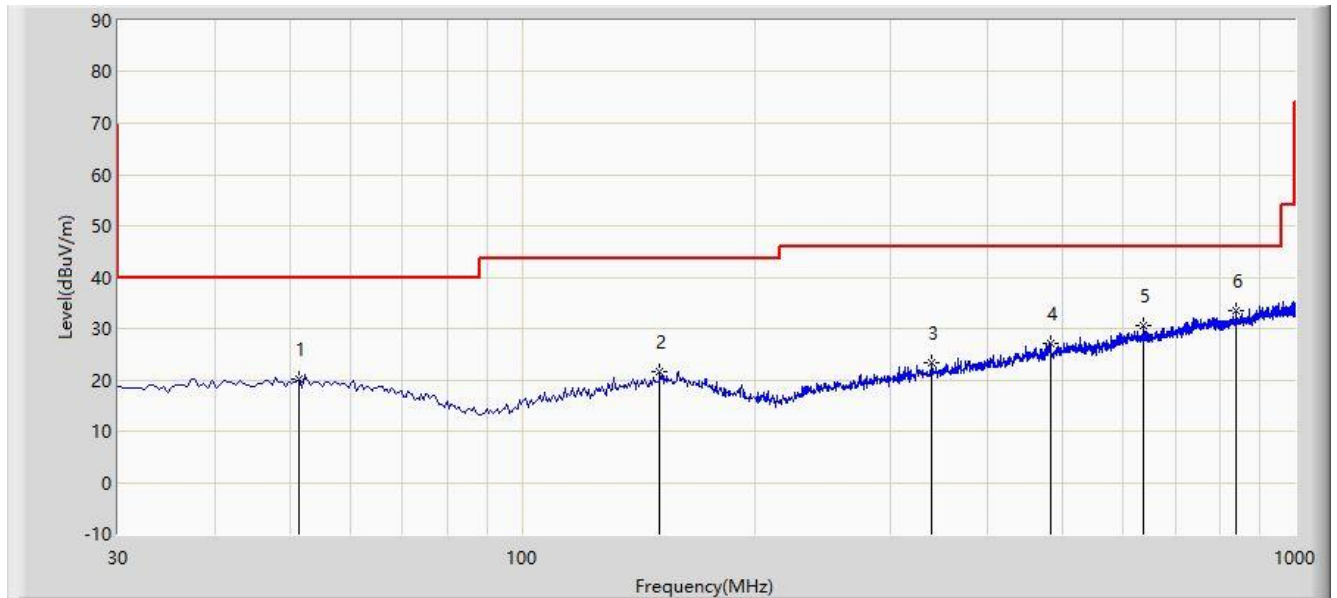

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			51.340	20.264	2.175	-19.736	40.000	18.089	PK
2			150.765	21.473	3.245	-22.027	43.500	18.229	PK
3			338.460	23.238	3.524	-22.762	46.000	19.714	PK
4			482.020	27.177	3.867	-18.823	46.000	23.310	PK
5			637.705	30.483	4.096	-15.517	46.000	26.387	PK
6		*	838.980	33.586	4.403	-12.414	46.000	29.183	PK

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

6.10. Radiated Restricted Band Edge Measurement

6.10.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measured Distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.10.2. Test Procedure Used

ANSI C63.10-2013 - Section 6.3 & 6.6 & 6.10

6.10.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
4. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.10.4.Test Setup

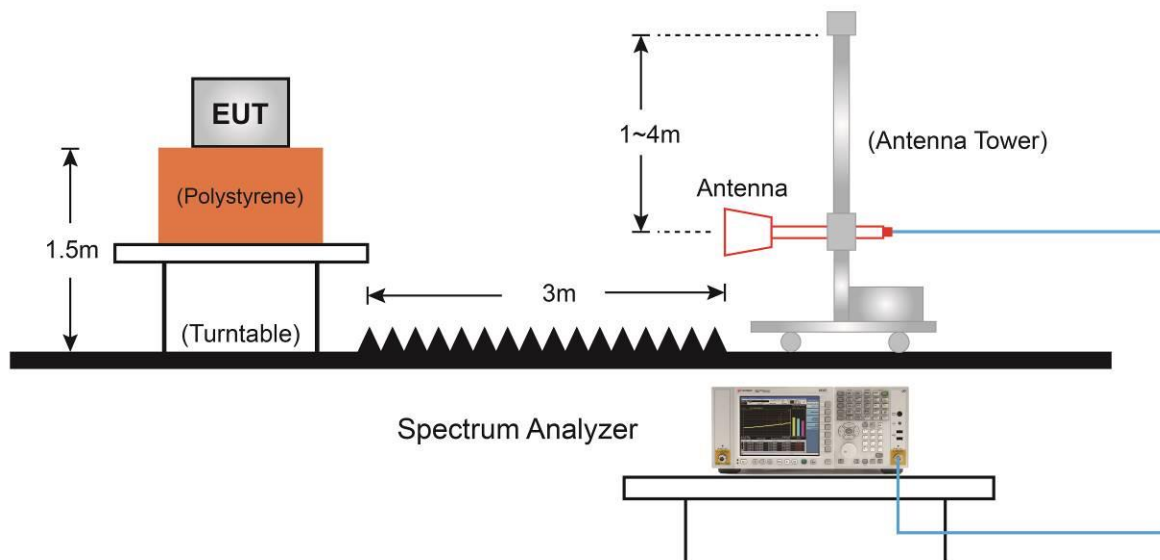

6.10.5. Test Result

Site: WZ-AC1	Time: 2021/03/13 - 16:33
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2402MHz	

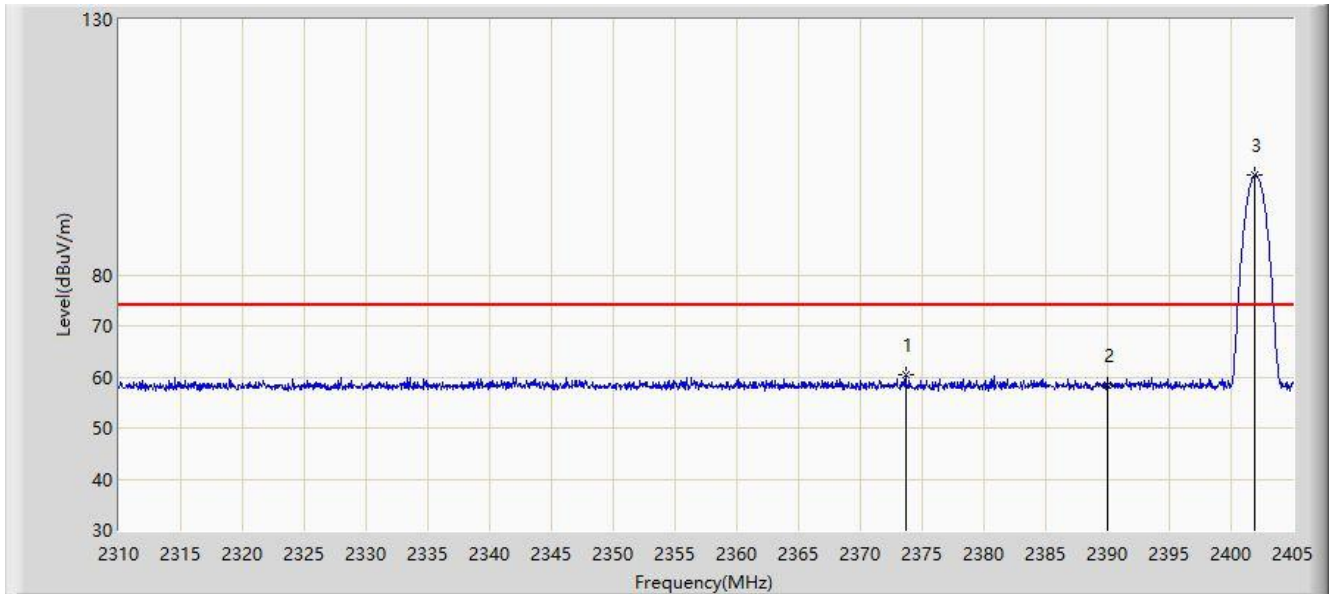


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2373.650	60.487	27.961	-13.513	74.000	32.526	PK
2			2390.000	58.403	25.870	-15.597	74.000	32.533	PK
3		*	2401.913	99.451	66.910	N/A	N/A	32.541	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/03/13 - 16:34
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2402MHz	

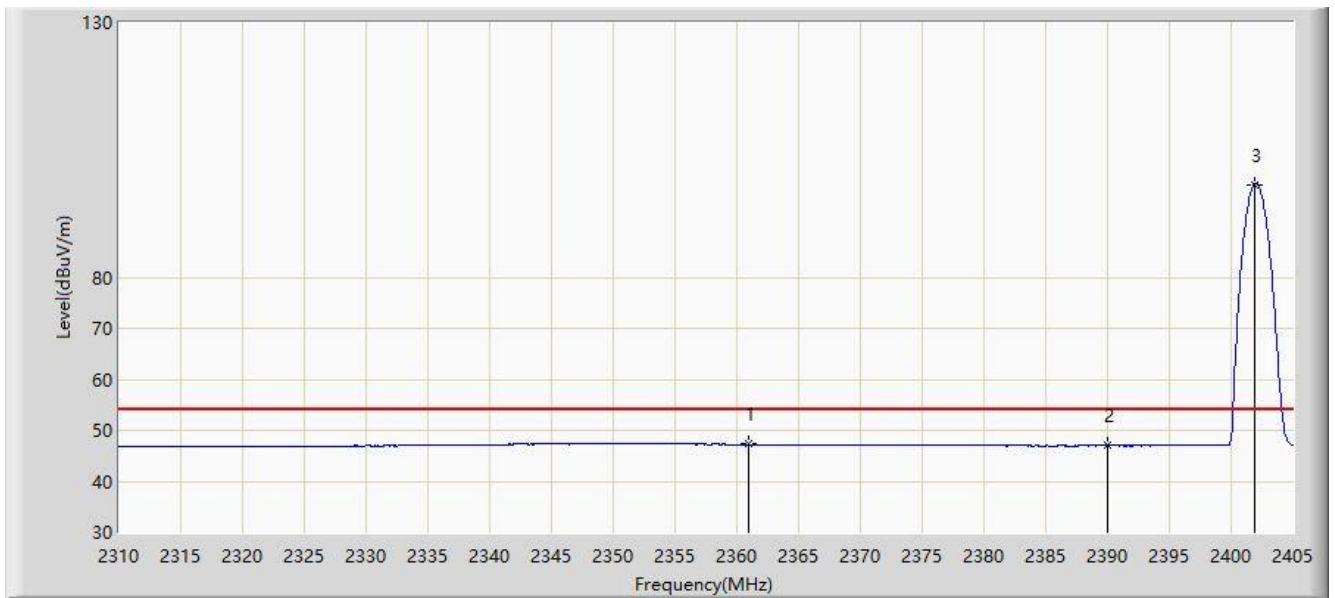


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2360.920	47.261	14.659	-6.739	54.000	32.602	AV
2			2390.000	46.978	14.445	-7.022	54.000	32.533	AV
3		*	2401.865	98.180	65.639	N/A	N/A	32.541	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/03/13 - 16:37
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2402MHz	

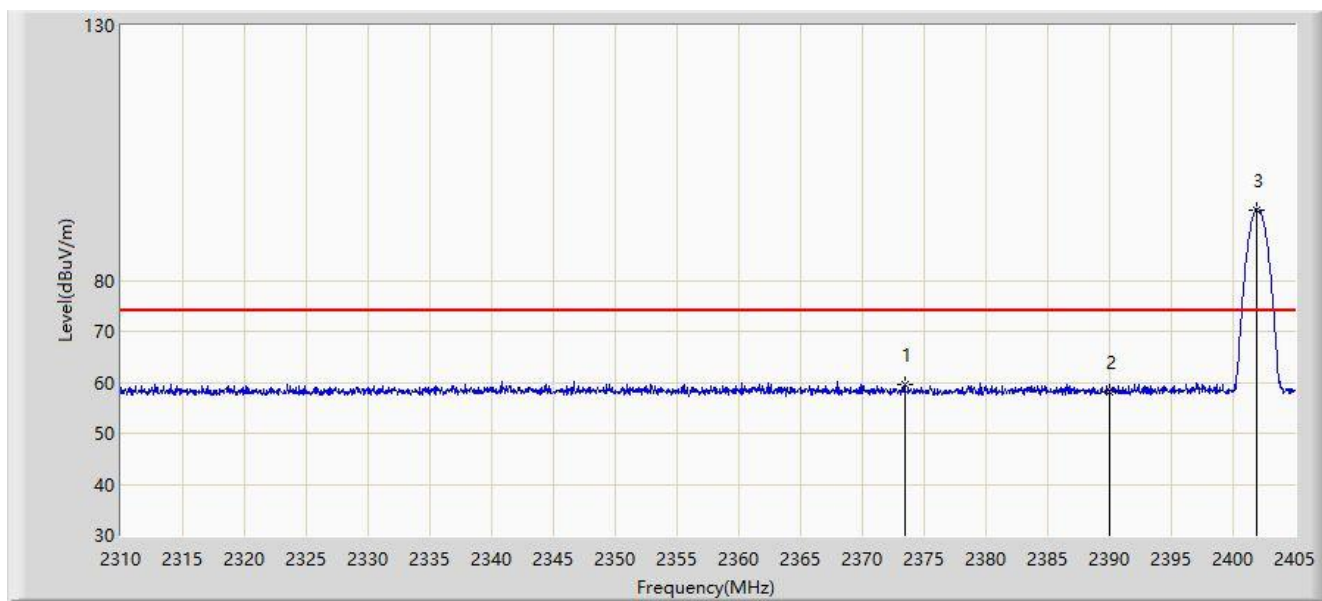


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2373.460	59.481	26.954	-14.519	74.000	32.526	PK
2			2390.000	58.147	25.614	-15.853	74.000	32.533	PK
3		*	2401.865	93.868	61.327	N/A	N/A	32.541	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/03/13 - 16:38
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2402MHz	

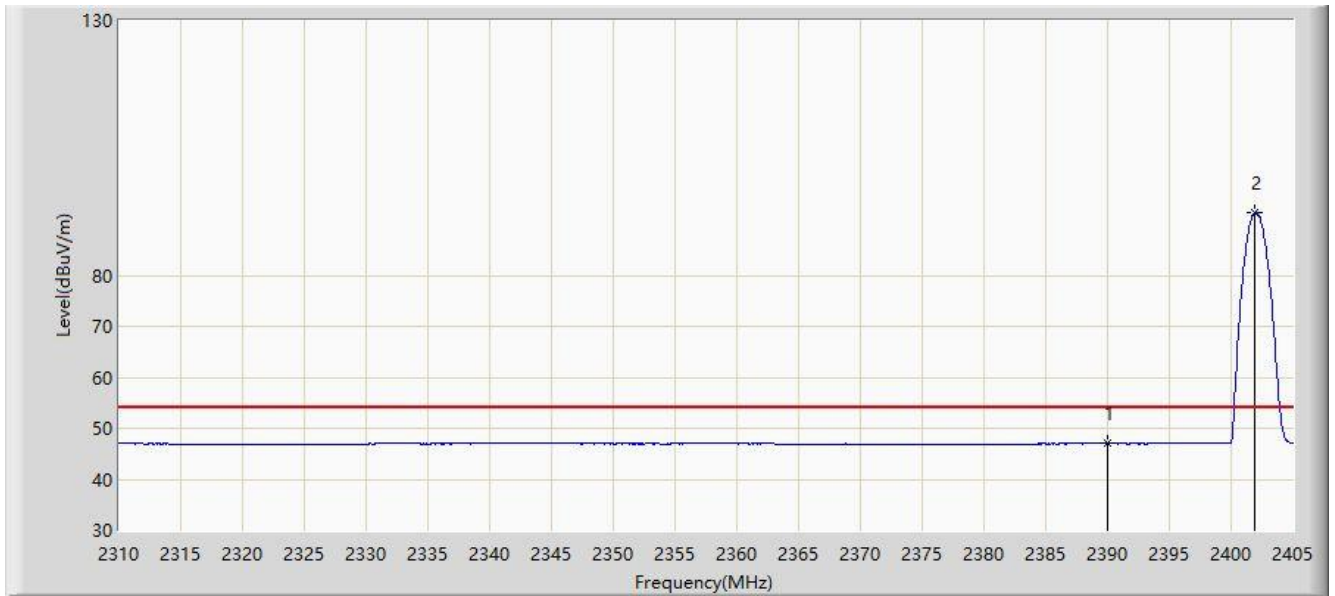


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2390.000	46.980	14.447	-7.020	54.000	32.533	AV
2		*	2401.960	92.292	59.752	N/A	N/A	32.540	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/03/13 - 16:41
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2480MHz	

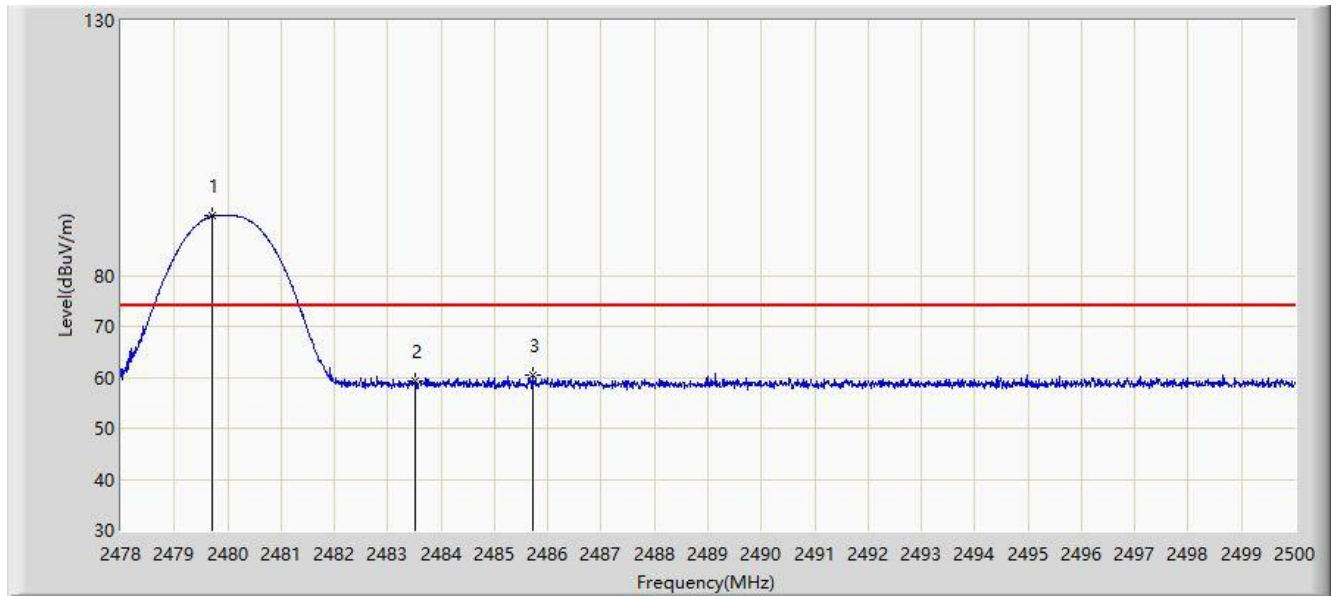


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2479.716	91.653	59.202	N/A	N/A	32.451	PK
2			2483.500	59.190	26.761	-14.810	74.000	32.429	PK
3			2485.711	60.426	28.011	-13.574	74.000	32.416	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/03/13 - 16:43
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2480MHz	

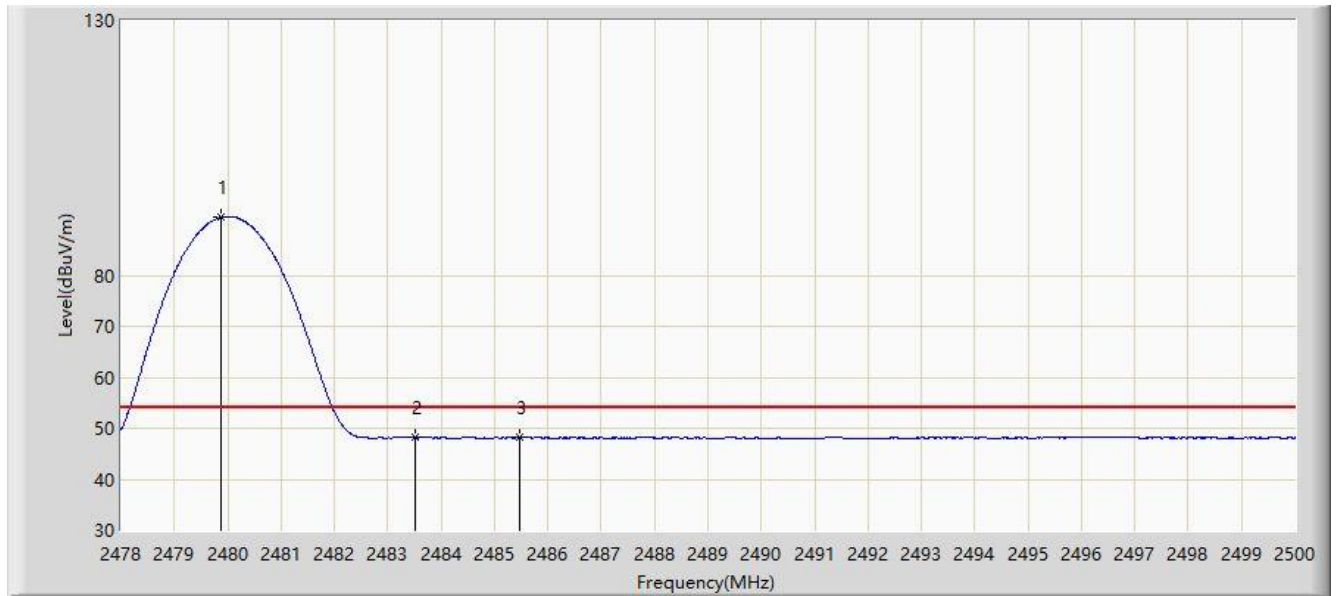


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2479.870	91.363	58.913	N/A	N/A	32.450	AV
2			2483.500	48.196	15.767	-5.804	54.000	32.429	AV
3			2485.480	48.262	15.845	-5.738	54.000	32.416	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/03/13 - 16:45
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2480MHz	

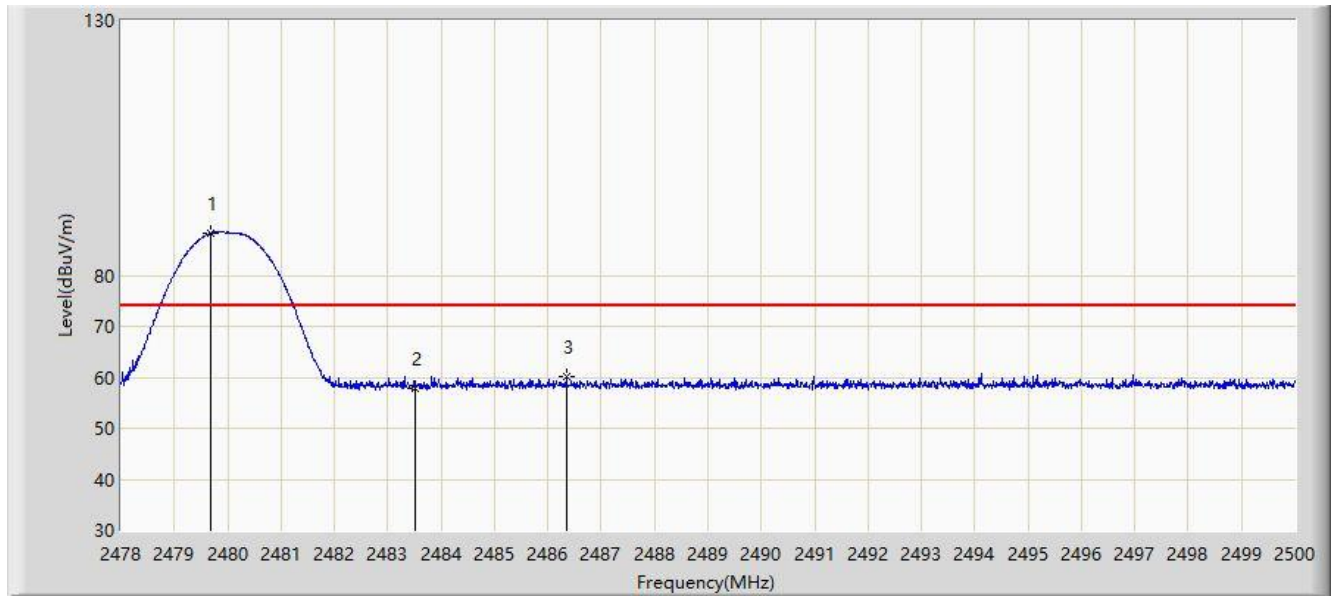


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2479.683	88.268	55.817	N/A	N/A	32.452	PK
2			2483.500	57.971	25.542	-16.029	74.000	32.429	PK
3			2486.349	60.019	27.608	-13.981	74.000	32.412	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/03/13 - 16:46
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2480MHz	

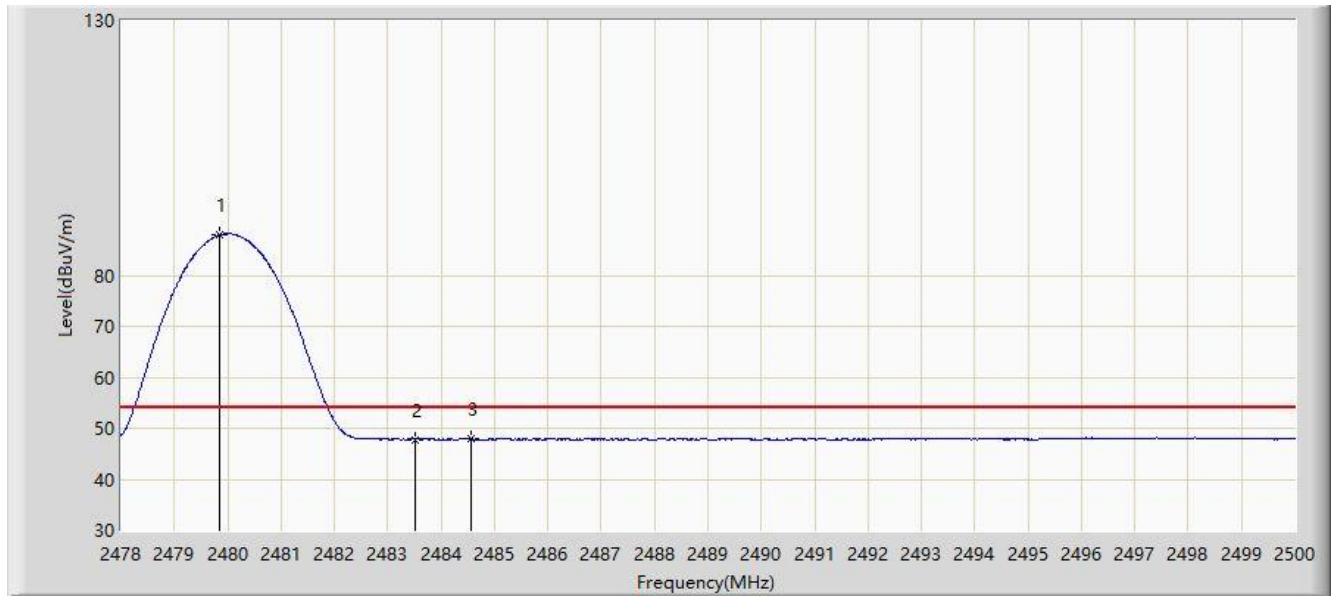


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2479.848	87.923	55.473	N/A	N/A	32.450	AV
2			2483.500	47.821	15.392	-6.179	54.000	32.429	AV
3			2484.556	47.877	15.455	-6.123	54.000	32.422	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/03/13 - 16:48
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

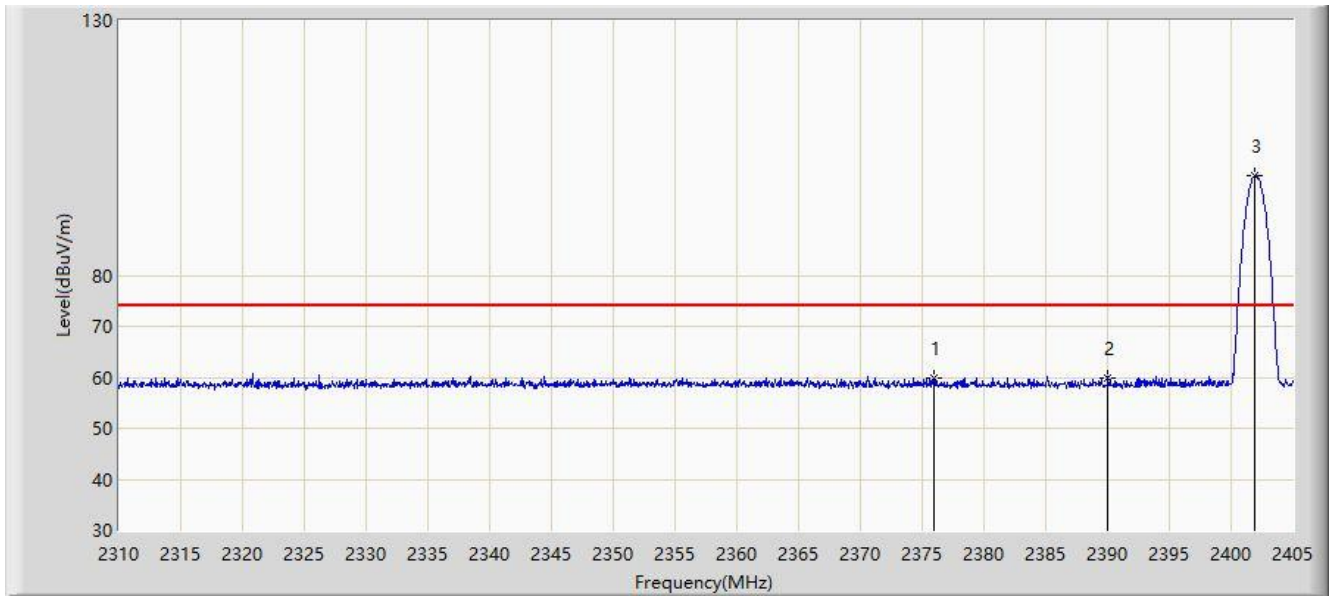


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2375.978	59.998	27.487	-14.002	74.000	32.511	PK
2			2390.000	59.716	27.183	-14.284	74.000	32.533	PK
3		*	2401.865	99.493	66.952	N/A	N/A	32.541	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/03/13 - 16:56
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

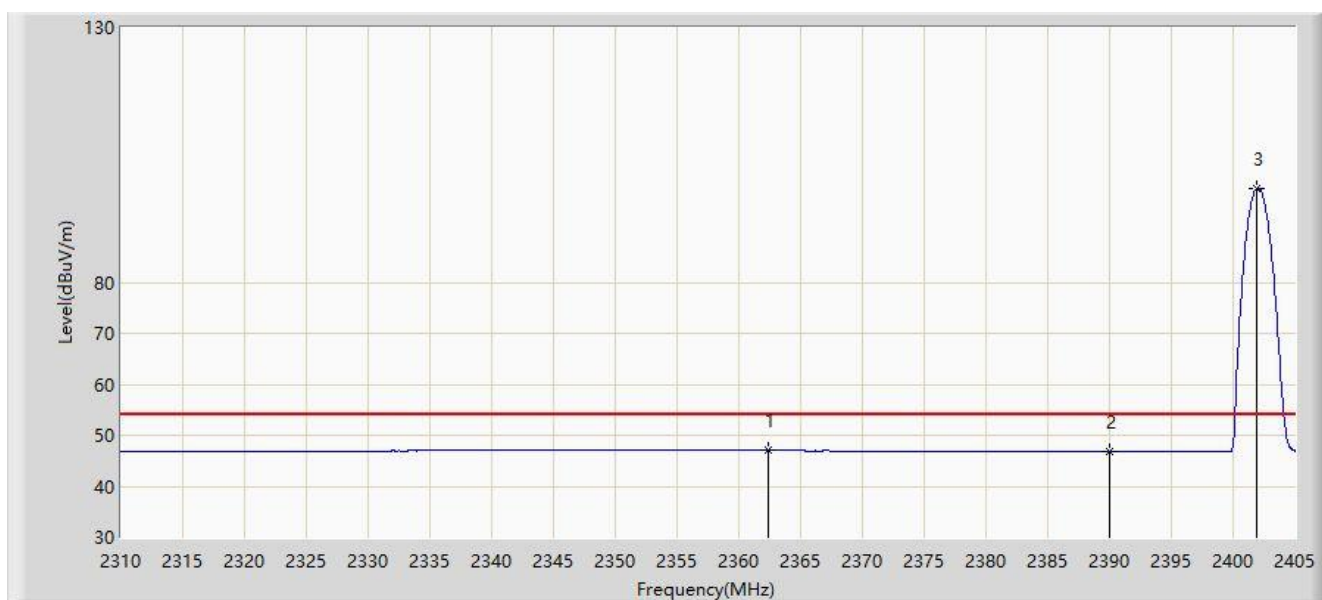


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2362.393	47.078	14.483	-6.922	54.000	32.594	AV
2			2390.000	46.761	14.228	-7.239	54.000	32.533	AV
3		*	2401.960	98.531	65.991	N/A	N/A	32.540	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/03/13 - 16:58
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

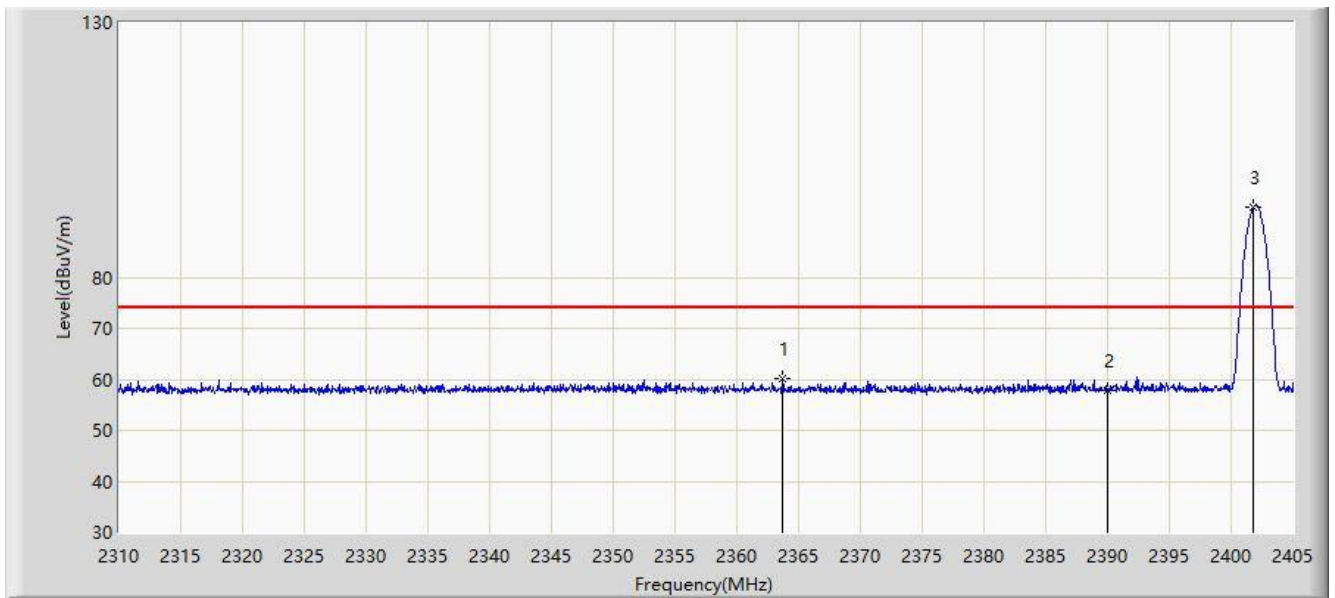


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2363.722	60.006	27.420	-13.994	74.000	32.586	PK
2			2390.000	57.948	25.415	-16.052	74.000	32.533	PK
3		*	2401.817	93.829	61.288	N/A	N/A	32.541	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/03/13 - 16:59
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

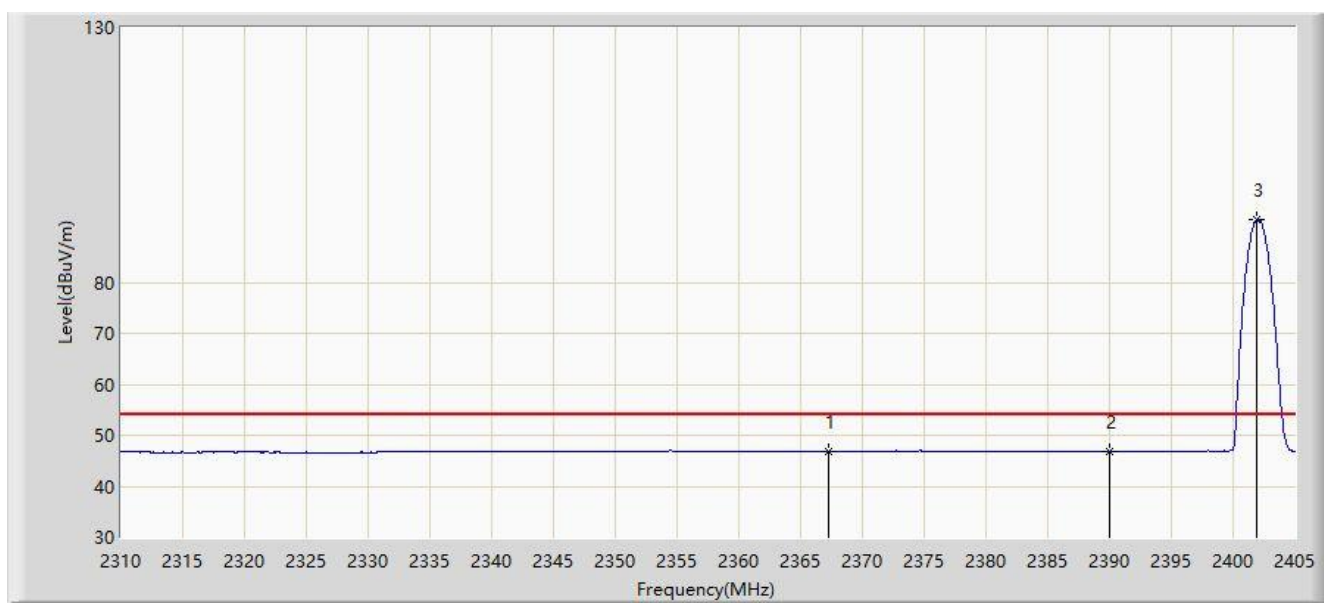


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2367.285	46.927	14.362	-7.073	54.000	32.565	AV
2			2390.000	46.860	14.327	-7.140	54.000	32.533	AV
3		*	2401.913	92.298	59.757	N/A	N/A	32.541	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/04 - 01:53
Limit: FCC_Part15_Band Edge(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by BT 2DH5 Mode at Channel 2480MHz	

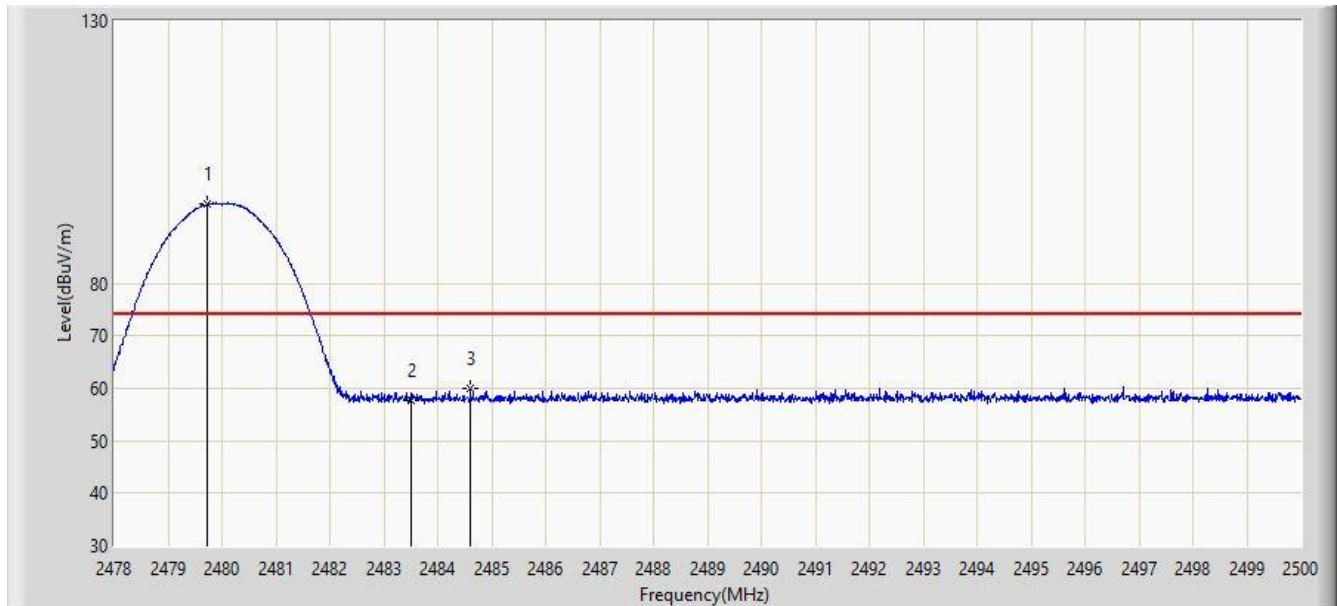


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.738	95.149	64.273	N/A	N/A	30.876	PK
2		2483.500	57.562	26.674	-16.438	74.000	30.888	PK
3		2484.600	59.892	29.001	-14.108	74.000	30.891	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/04 - 01:59
Limit: FCC_Part15_Band Edge(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by BT 2DH5 Mode at Channel 2480MHz	

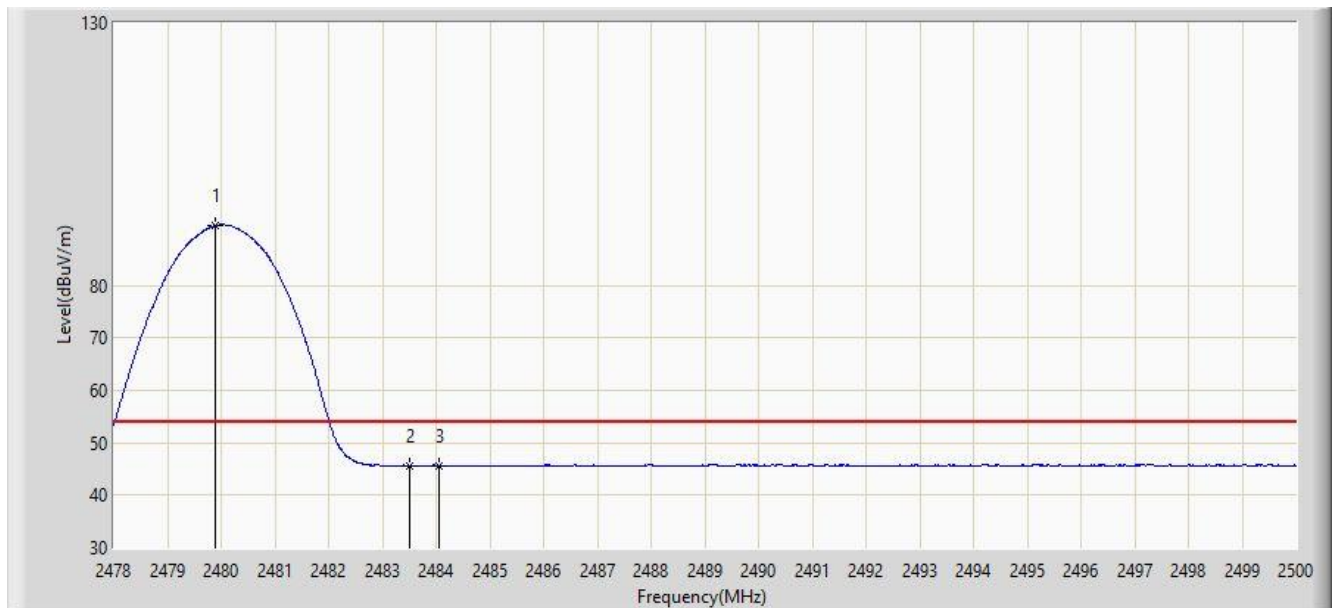


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.892	91.374	60.498	N/A	N/A	30.876	AV
2		2483.500	45.637	14.749	-8.363	54.000	30.888	AV
3		2484.050	45.699	14.809	-8.301	54.000	30.890	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/03/13 - 17:06
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

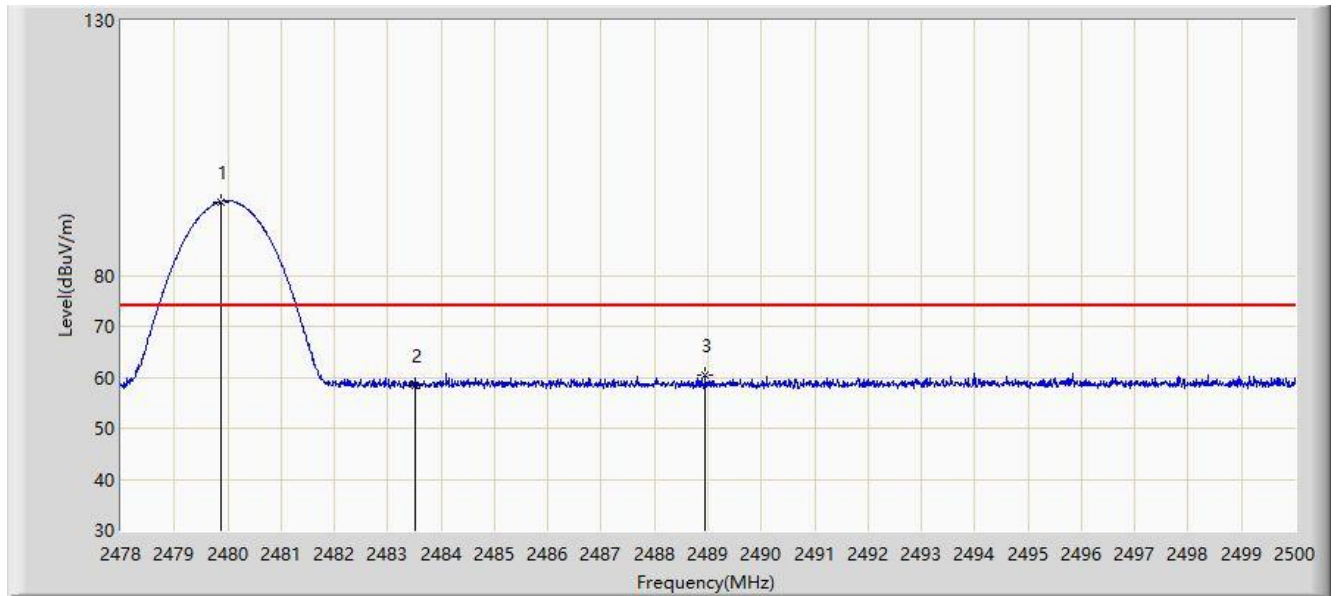


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2479.870	94.456	62.006	N/A	N/A	32.450	PK
2			2483.500	58.519	26.090	-15.481	74.000	32.429	PK
3			2488.945	60.351	27.943	-13.649	74.000	32.409	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/03/13 - 17:08
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

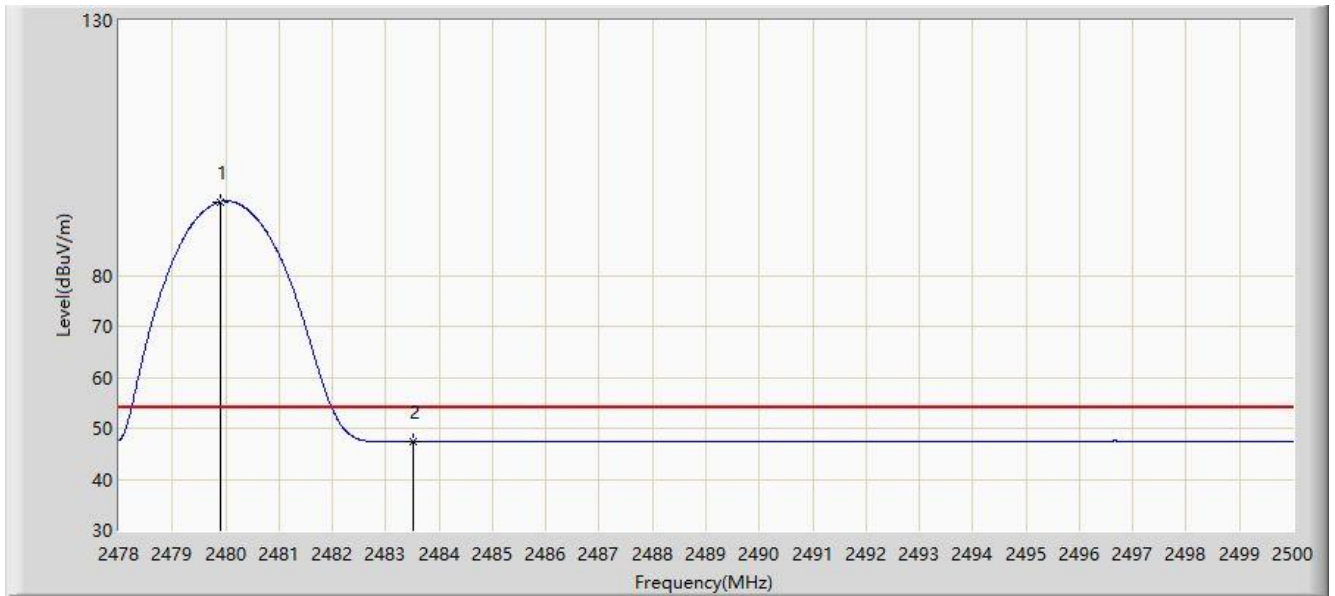


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2479.903	94.444	61.994	N/A	N/A	32.450	AV
2			2483.500	47.418	14.989	-6.582	54.000	32.429	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/03/13 - 17:11
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

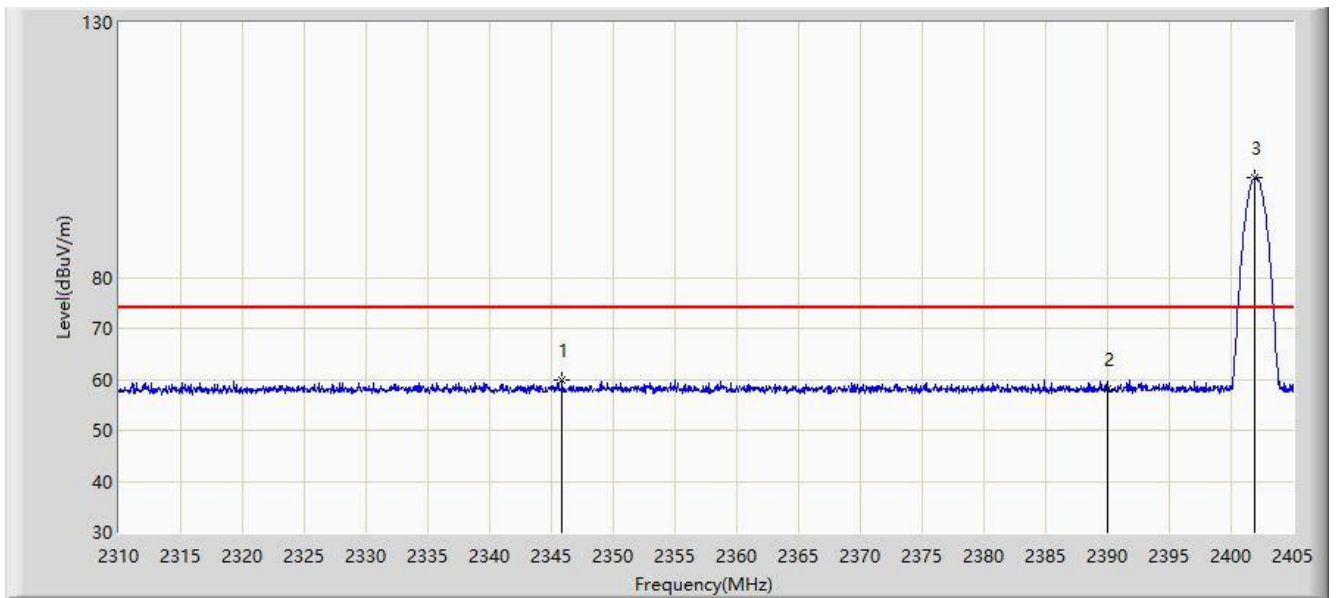


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2345.863	59.874	27.194	-14.126	74.000	32.680	PK
2			2390.000	58.215	25.682	-15.785	74.000	32.533	PK
3		*	2401.865	99.535	66.994	N/A	N/A	32.541	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/03/13 - 17:18
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

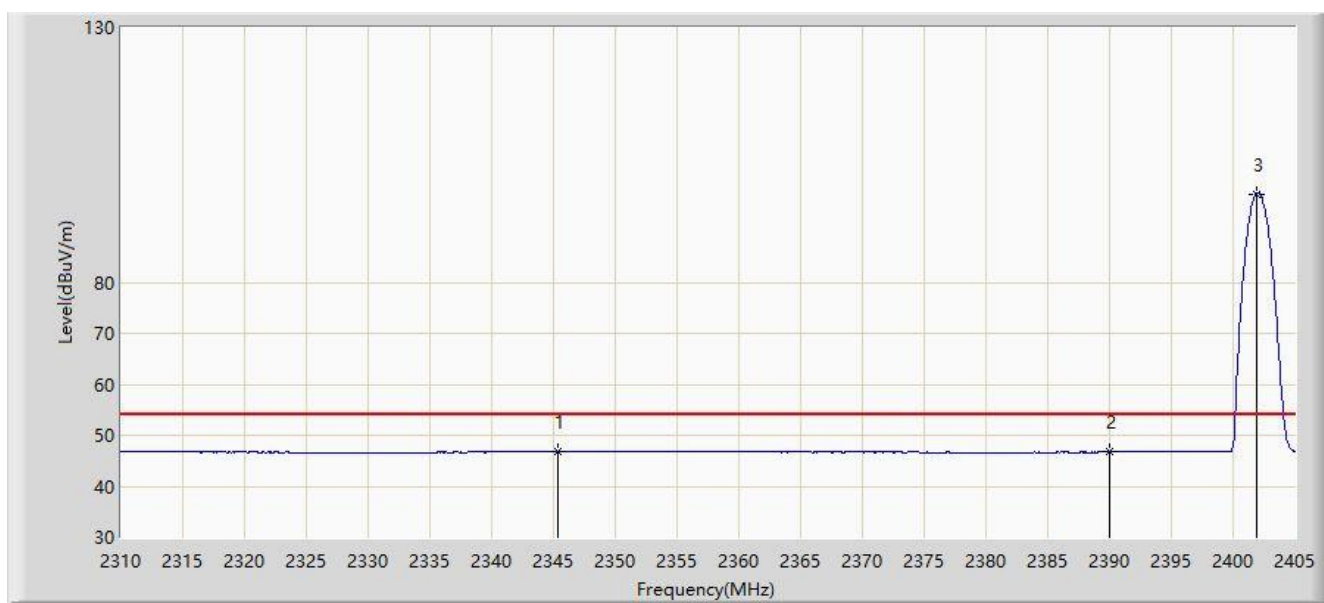


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2345.387	46.736	14.053	-7.264	54.000	32.683	AV
2			2390.000	46.697	14.164	-7.303	54.000	32.533	AV
3		*	2401.865	97.305	64.764	N/A	N/A	32.541	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/03/13 - 17:22
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

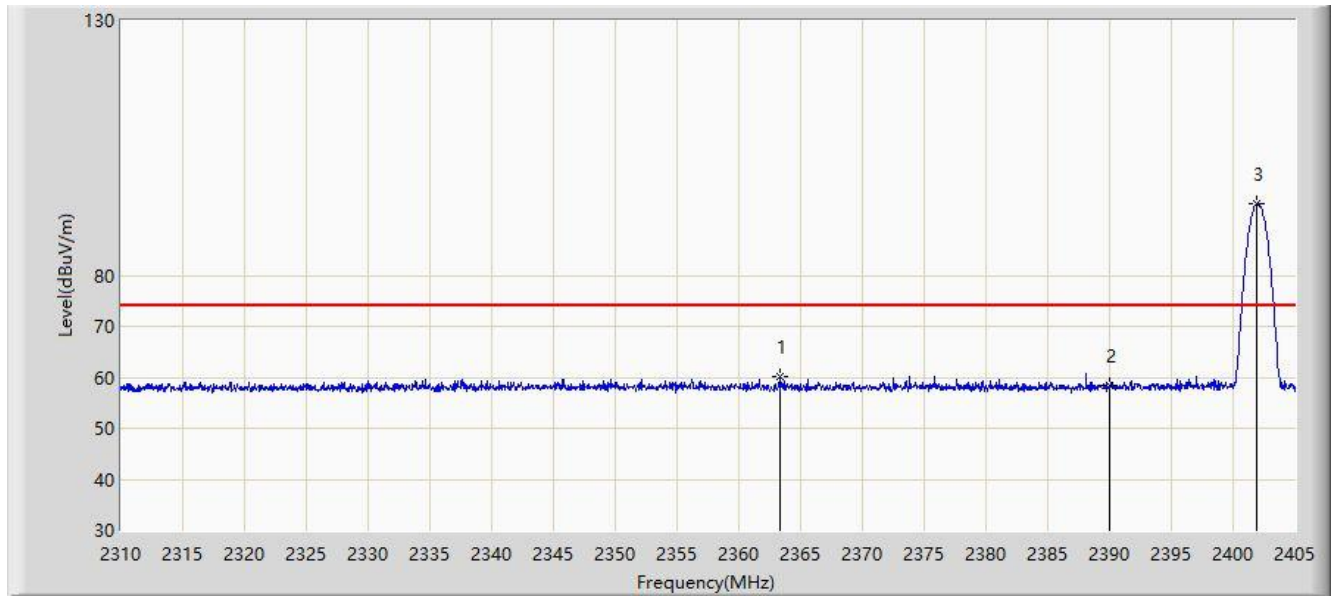


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2363.390	60.255	27.667	-13.745	74.000	32.588	PK
2			2390.000	58.298	25.765	-15.702	74.000	32.533	PK
3		*	2401.960	94.156	61.616	N/A	N/A	32.540	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/03/13 - 17:24
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

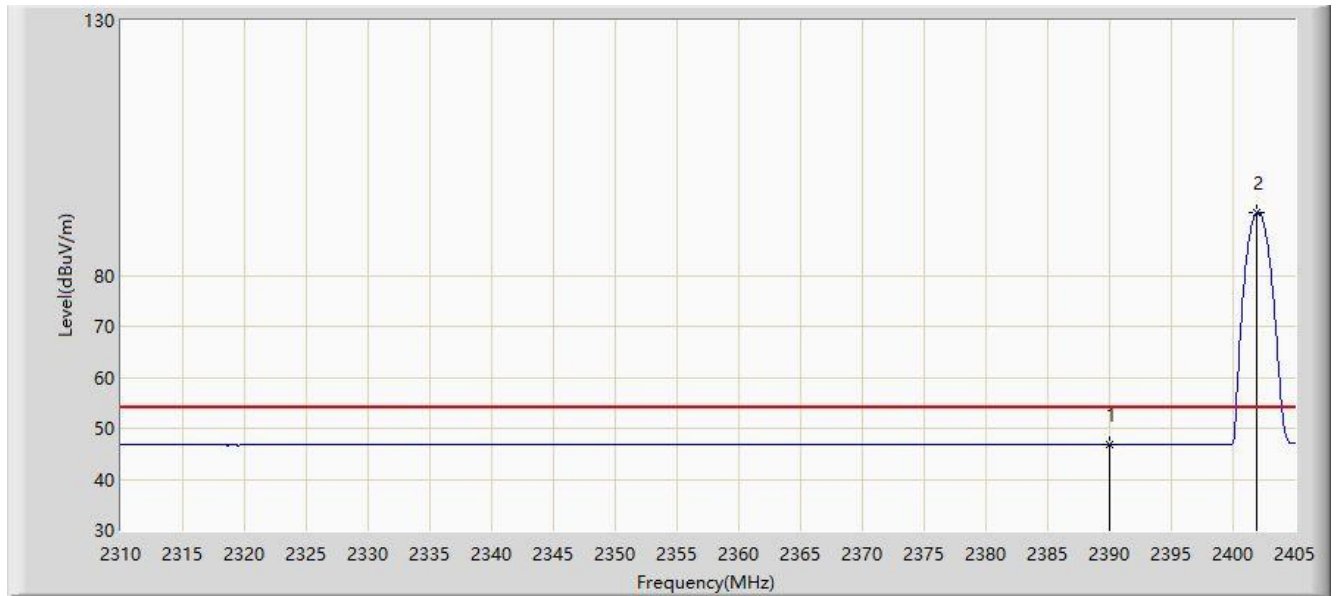


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.811	14.278	-7.189	54.000	32.533	AV
2		*	2401.913	92.375	59.834	N/A	N/A	32.541	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/03/13 - 17:25
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

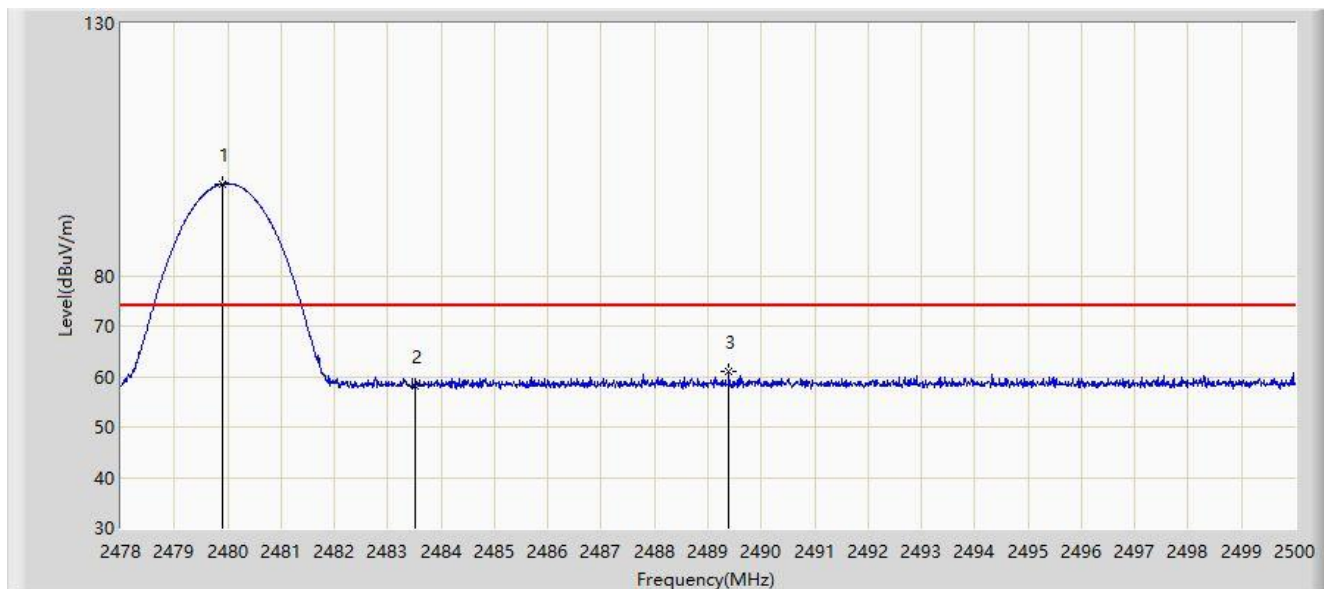


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2479.903	98.171	65.721	N/A	N/A	32.450	PK
2			2483.500	58.179	25.750	-15.821	74.000	32.429	PK
3			2489.385	60.873	28.463	-13.127	74.000	32.409	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/03/13 - 17:27
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

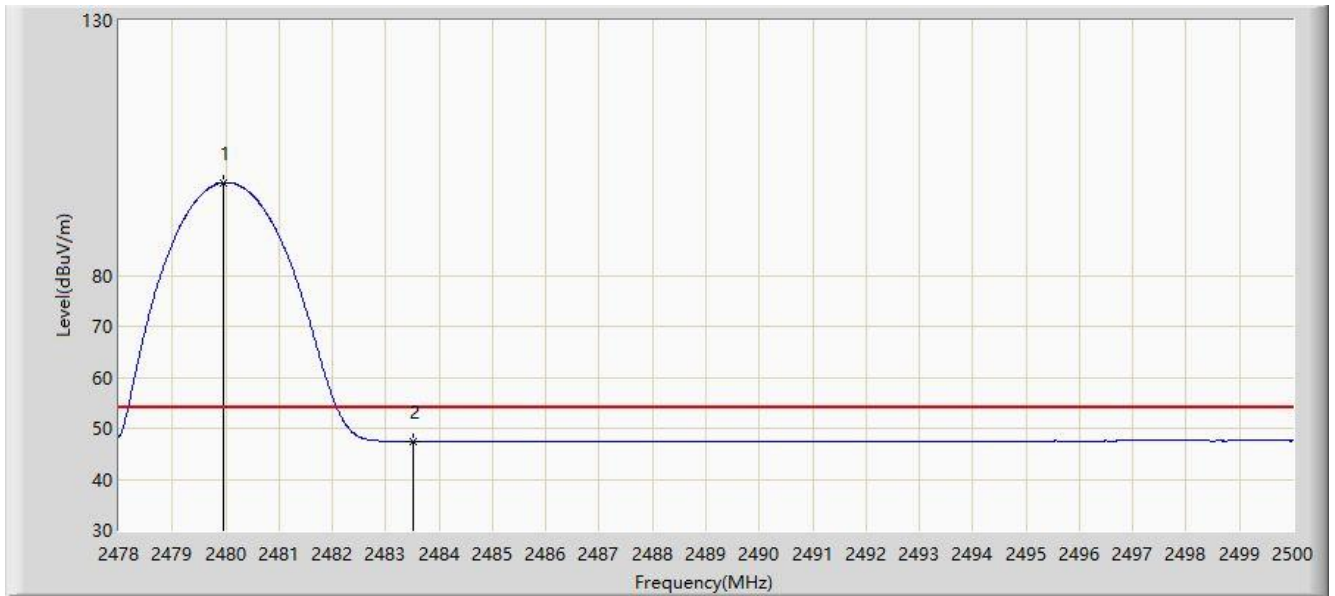


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2479.958	98.170	65.720	N/A	N/A	32.450	AV
2			2483.500	47.407	14.978	-6.593	54.000	32.429	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/03/13 - 17:28
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

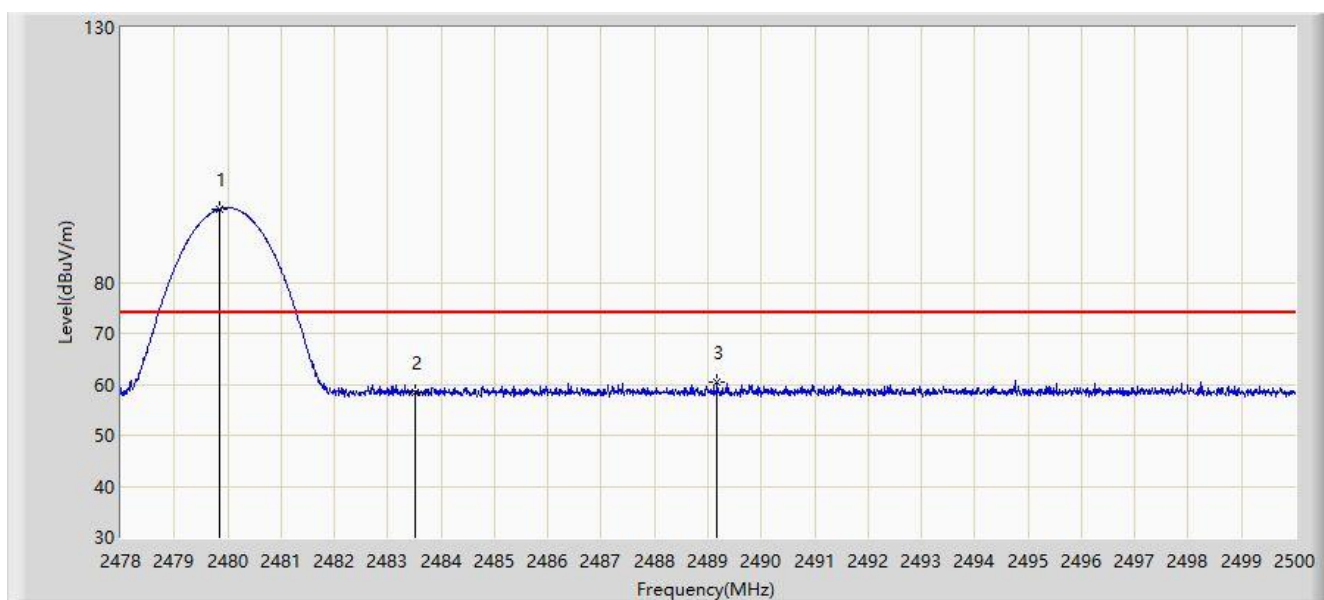


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2479.859	94.445	61.995	N/A	N/A	32.450	PK
2			2483.500	58.448	26.019	-15.552	74.000	32.429	PK
3			2489.176	60.332	27.923	-13.668	74.000	32.409	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/03/13 - 17:30
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

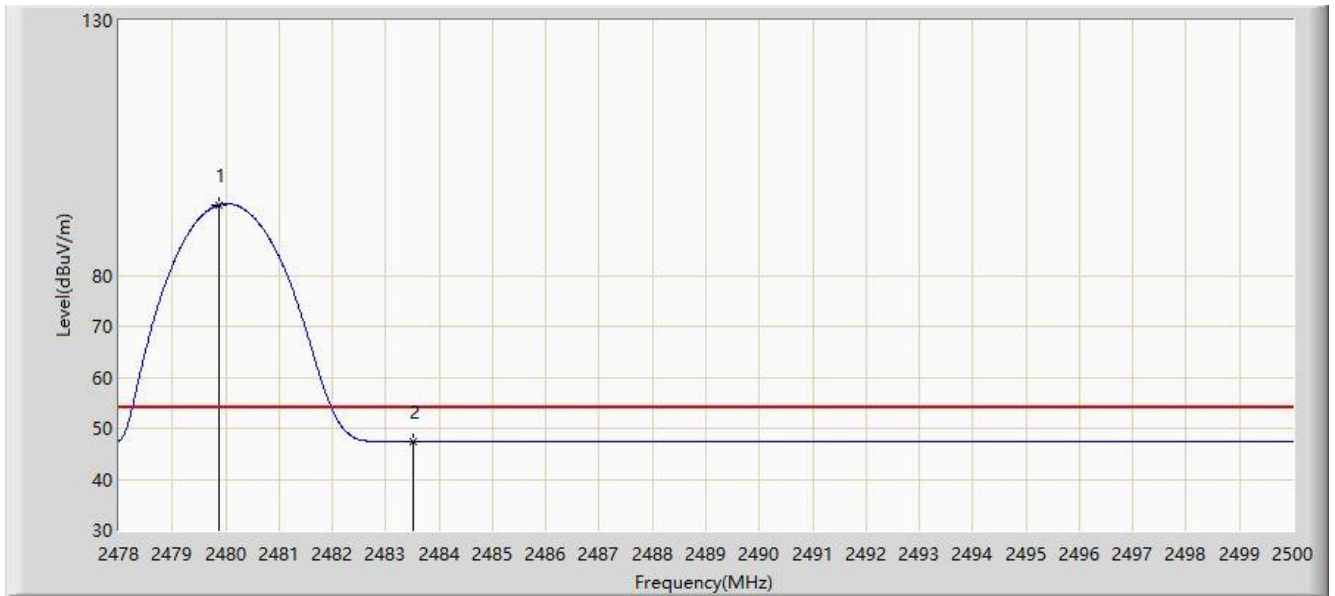

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2479.881	93.826	61.376	N/A	N/A	32.450	AV
2			2483.500	47.409	14.980	-6.591	54.000	32.429	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

6.11. AC Conducted Emissions Measurement


6.11.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.11.2. Test Setup

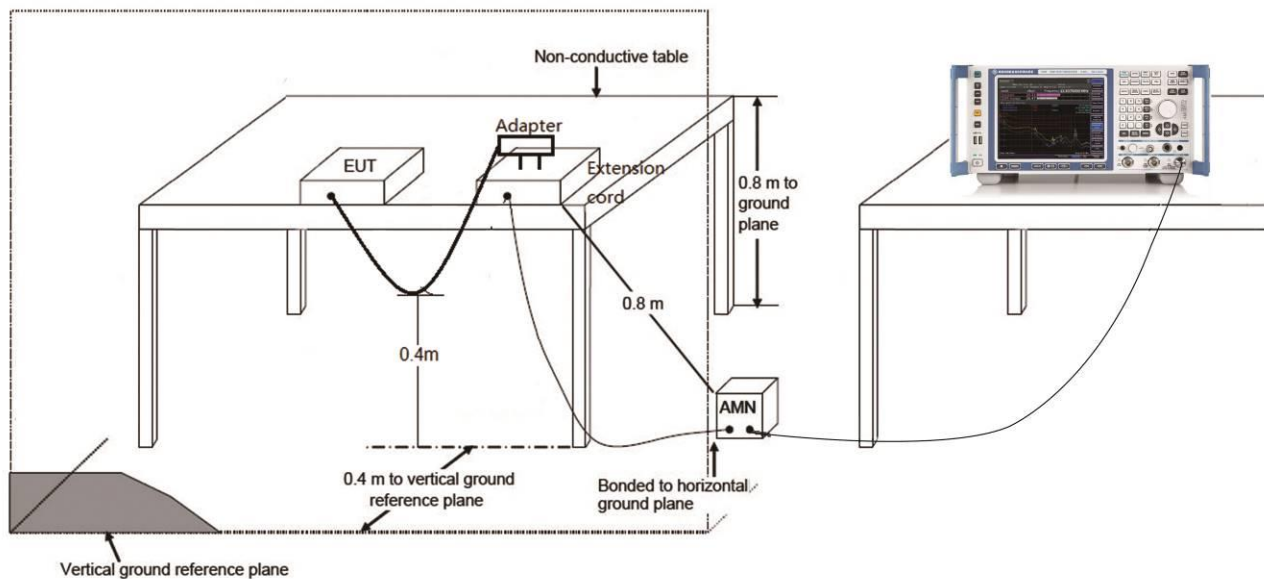

6.11.3.Test Result

Site: WZ-SR2	Time: 2021/04/19
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_Without Adapter	Polarity: Line
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at channel 2402MHz	

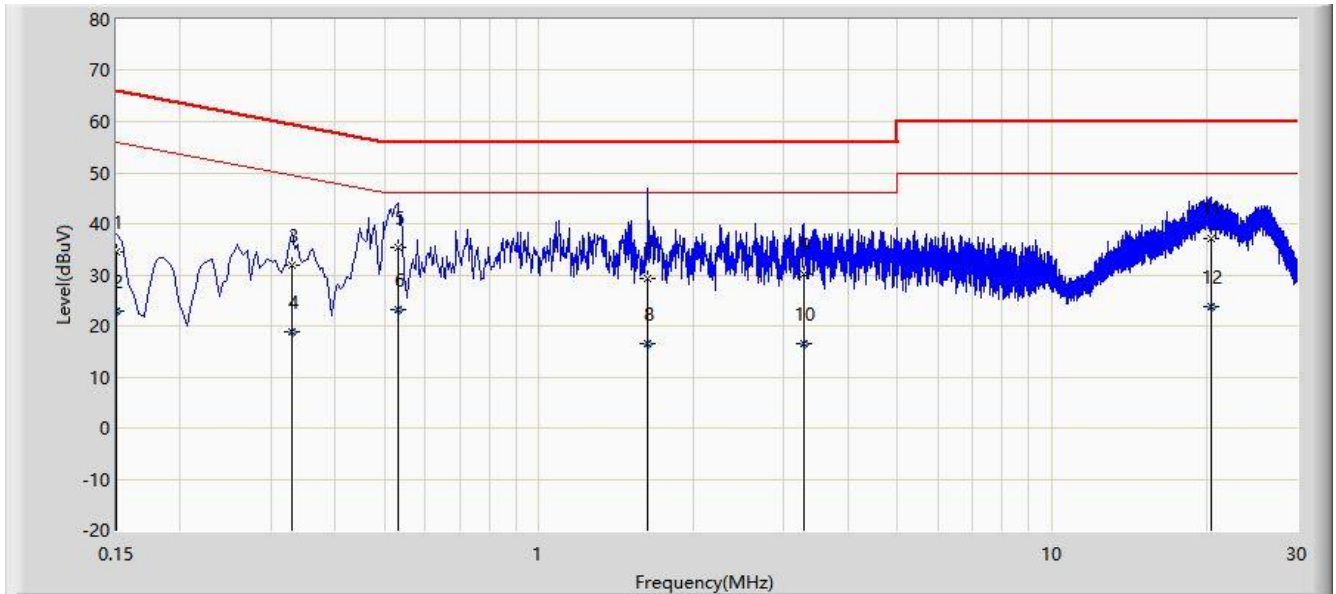


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor	Type
1			0.150	34.561	24.764	-31.439	66.000	9.798	QP
2			0.150	22.797	12.999	-33.203	56.000	9.798	AV
3			0.330	31.895	22.054	-27.556	59.451	9.841	QP
4			0.330	18.940	9.099	-30.511	49.451	9.841	AV
5		*	0.530	35.301	25.428	-20.699	56.000	9.872	QP
6			0.530	23.174	13.302	-22.826	46.000	9.872	AV
7			1.630	29.166	19.266	-26.834	56.000	9.900	QP
8			1.630	16.619	6.719	-29.381	46.000	9.900	AV
9			3.282	30.241	20.118	-25.759	56.000	10.123	QP
10			3.282	16.661	6.538	-29.339	46.000	10.123	AV
11			20.366	37.222	26.389	-22.778	60.000	10.833	QP
12			20.366	23.710	12.877	-26.290	50.000	10.833	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: WZ-SR2	Time: 2021/04/19
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_Without Adapter	Polarity: Neutral
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at channel 2402MHz	

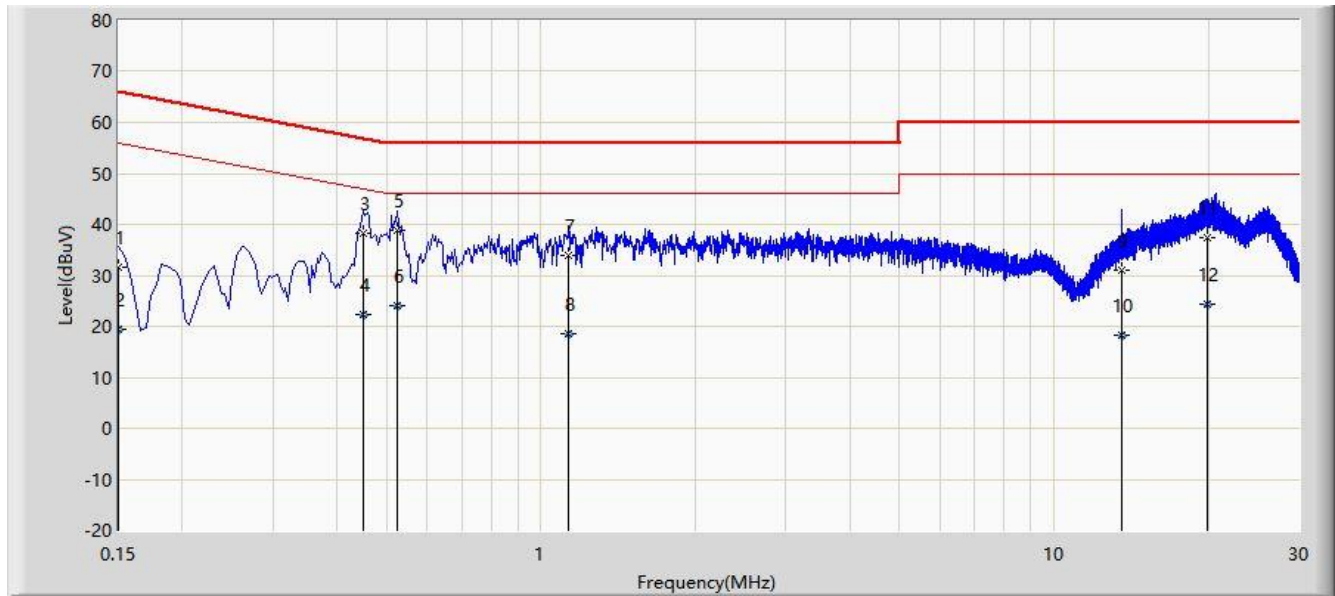

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor	Type
1			0.150	31.734	21.946	-34.266	66.000	9.788	QP
2			0.150	19.500	9.712	-36.500	56.000	9.788	AV
3			0.450	38.282	28.431	-18.593	56.875	9.851	QP
4			0.450	22.253	12.402	-24.622	46.875	9.851	AV
5		*	0.526	38.758	28.895	-17.242	56.000	9.862	QP
6			0.526	24.041	14.179	-21.959	46.000	9.862	AV
7			1.134	33.947	24.056	-22.053	56.000	9.891	QP
8			1.134	18.533	8.642	-27.467	46.000	9.891	AV
9			13.566	31.043	20.454	-28.957	60.000	10.589	QP
10			13.566	18.394	7.805	-31.606	50.000	10.589	AV
11			19.954	37.266	26.538	-22.734	60.000	10.728	QP
12			19.954	24.449	13.721	-25.551	50.000	10.728	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

7. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC rules.

The End

Appendix A - Test Setup Photograph

Refer to “2102RSU043-UT” file.

Appendix B - EUT Photograph

Refer to “2102RSU043-UE” file.