



## SAR EVALUATION REPORT

FCC 47 CFR § 2.1093  
IEEE Std 1528-2013

*For*  
**GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC**

**FCC ID: PY7-68553B**

**Report Number: 12393500-S1V1**  
**Issue Date: 8/7/2018**

*Prepared for*  
**SONY MOBILE COMMUNICATIONS INC.**  
**4-12-3 HIGASHI-SHINAGAWA**  
**SHINAGAWA-KU,TOKYO, 140-0002, JAPAN**

*Prepared by*  
**UL VERIFICATION SERVICES INC.**  
**47173 BENICIA STREET**  
**FREMONT, CA 94538, U.S.A.**  
**TEL: (510) 771-1000**  
**FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

**Revision History**

Rev.	Date	Revisions	Revised By
V1	8/7/2018	Initial Issue	--

**Table of Contents**

<b>1.</b>	<b>Attestation of Test Results .....</b>	<b>5</b>
<b>2.</b>	<b>Test Specification, Methods and Procedures.....</b>	<b>6</b>
<b>3.</b>	<b>Facilities and Accreditation .....</b>	<b>6</b>
<b>4.</b>	<b>SAR Measurement System &amp; Test Equipment .....</b>	<b>7</b>
4.1.	<i>SAR Measurement System.....</i>	7
4.2.	<i>SAR Scan Procedures.....</i>	8
4.3.	<i>Test Equipment.....</i>	10
<b>5.</b>	<b>Measurement Uncertainty.....</b>	<b>11</b>
<b>6.</b>	<b>Device Under Test (DUT) Information .....</b>	<b>12</b>
6.1.	<i>DUT Description .....</i>	12
6.2.	<i>Wireless Technologies.....</i>	13
6.3.	<i>General LTE SAR Test and Reporting Considerations.....</i>	14
6.4.	<i>LTE (TDD) Considerations.....</i>	16
6.5.	<i>LTE Carrier Aggregation .....</i>	17
<b>7.</b>	<b>RF Exposure Conditions (Test Configurations).....</b>	<b>18</b>
<b>8.</b>	<b>Dielectric Property Measurements &amp; System Check .....</b>	<b>19</b>
8.1.	<i>Dielectric Property Measurements .....</i>	19
8.2.	<i>System Check.....</i>	22
<b>9.</b>	<b>Conducted Output Power Measurements.....</b>	<b>24</b>
9.1.	<i>GSM.....</i>	24
9.2.	<i>W-CDMA .....</i>	27
9.3.	<i>LTE.....</i>	31
9.4.	<i>LTE Carrier Aggregation .....</i>	40
9.5.	<i>Wi-Fi 2.4GHz (DTS Band) .....</i>	42
9.6.	<i>Wi-Fi 5GHz (U-NII Bands).....</i>	43
9.7.	<i>Bluetooth .....</i>	46
<b>10.</b>	<b>Measured and Reported (Scaled) SAR Results.....</b>	<b>47</b>
10.1.	<i>GSM850.....</i>	48
10.2.	<i>GSM1900.....</i>	48
10.3.	<i>W-CDMA Band II.....</i>	49
10.4.	<i>W-CDMA Band IV .....</i>	49
10.5.	<i>LTE Band 2 (20MHz Bandwidth) .....</i>	50
10.6.	<i>LTE Band 4 (20MHz Bandwidth) .....</i>	50

10.7.	<i>LTE Band 12 (10MHz Bandwidth)</i> .....	51
10.8.	<i>LTE Band 17 (10MHz Bandwidth)</i> .....	51
10.9.	<i>LTE Band 41 (20MHz Bandwidth)</i> .....	52
10.10.	<i>Wi-Fi (DTS Band)</i> .....	53
10.11.	<i>Wi-Fi (U-NII Band)</i> .....	54
10.12.	<i>Bluetooth</i> .....	55
<b>11.</b>	<b>SAR Measurement Variability</b> .....	<b>56</b>
<b>12.</b>	<b>Simultaneous Transmission Conditions</b> .....	<b>57</b>
12.1.	<i>Simultaneous transmission SAR test exclusion considerations</i> .....	57
12.1.1.	<i>Sum of SAR</i> .....	57
12.2.	<i>Sum of the SAR for WWAN &amp; Wi-Fi &amp; BT</i> .....	57
<b>Appendices</b>	.....	<b>58</b>
	12393500-S1V1 Appendix A: SAR Setup Photos .....	58
	12393500-S1V1 Appendix B: SAR System Check Plots.....	58
	12393500-S1V1 Appendix C: Highest SAR Test Plots .....	58
	12393500-S1V1 Appendix D: SAR Liquid Tissue Ingredients.....	58
	12393500-S1V1 Appendix E: SAR Probe Calibration Certificates .....	58
	12393500-S1V1 Appendix F: SAR Dipole Calibration Certificates.....	58

## 1. Attestation of Test Results

Applicant Name	SONY MOBILE COMMUNICATIONS INC.		
FCC ID	PY7-68553B		
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013		
Exposure Category	SAR Limits (W/Kg)		
	Peak spatial-average (1g of tissue)	Extremities (hands, wrists, ankles, etc.) (10g of tissue)	
General population / Uncontrolled exposure	1.6		4
RF Exposure Conditions	Equipment Class - Highest Reported SAR (W/kg)		
	PCE	DTS	NII
Head	0.110	0.581	0.617
Body-worn	0.470	0.058	0.144
Hotspot/Wi-Fi Direct	0.940	0.165	N/A
Product Specific 10g SAR	N/A	N/A	0.551
Simultaneous TX	1.014	1.010	1.014
Date Tested	7/23/2018 to 8/1/2018		
Test Results	Pass		
<p>UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p><b>Note:</b> The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.</p>			
Approved & Released By: 	Prepared By: 		
Dave Weaver Operations Leader UL Verification Services Inc.	AJ Newcomer Laboratory Engineer UL Verification Services Inc.		

## 2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure KDB procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 447498 D03 Supplement C Cross-Reference v01
- 648474 D04 Handset SAR v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- 941225 D06 Hotspot Mode v02r01

In addition to the above, the following information was used:

- [TCB workshop](#) April 2015; Page 33, RF Exposure Procedures Update (Overlapping LTE Bands)
- [TCB workshop](#) October 2014; Page 37, RF Exposure Procedures Update (Other LTE Considerations)
- [TCB workshop](#) October 2015; Page 6, RF Exposure Procedures (KDB 941225 D05A)
- [TCB workshop](#) April 2016; Page 13, RF Exposure Procedures (LTE Carrier Aggregation for DL)
- [TCB workshop](#) October 2016; Page 7, RF Exposure Procedures (Bluetooth Duty Factor)
- [TCB workshop](#) October 2016; Page 18, RF Exposure Procedures (DUT Holder Perturbations)
- [TCB workshop](#) May 2017; Page 9, Broadband Liquid Above 3 GHz

## 3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	SAR Lab 5
SAR Lab F	SAR Lab 6
SAR Lab G	SAR Lab 7
SAR Lab H	SAR Lab 8

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

## 4. SAR Measurement System & Test Equipment

### 4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

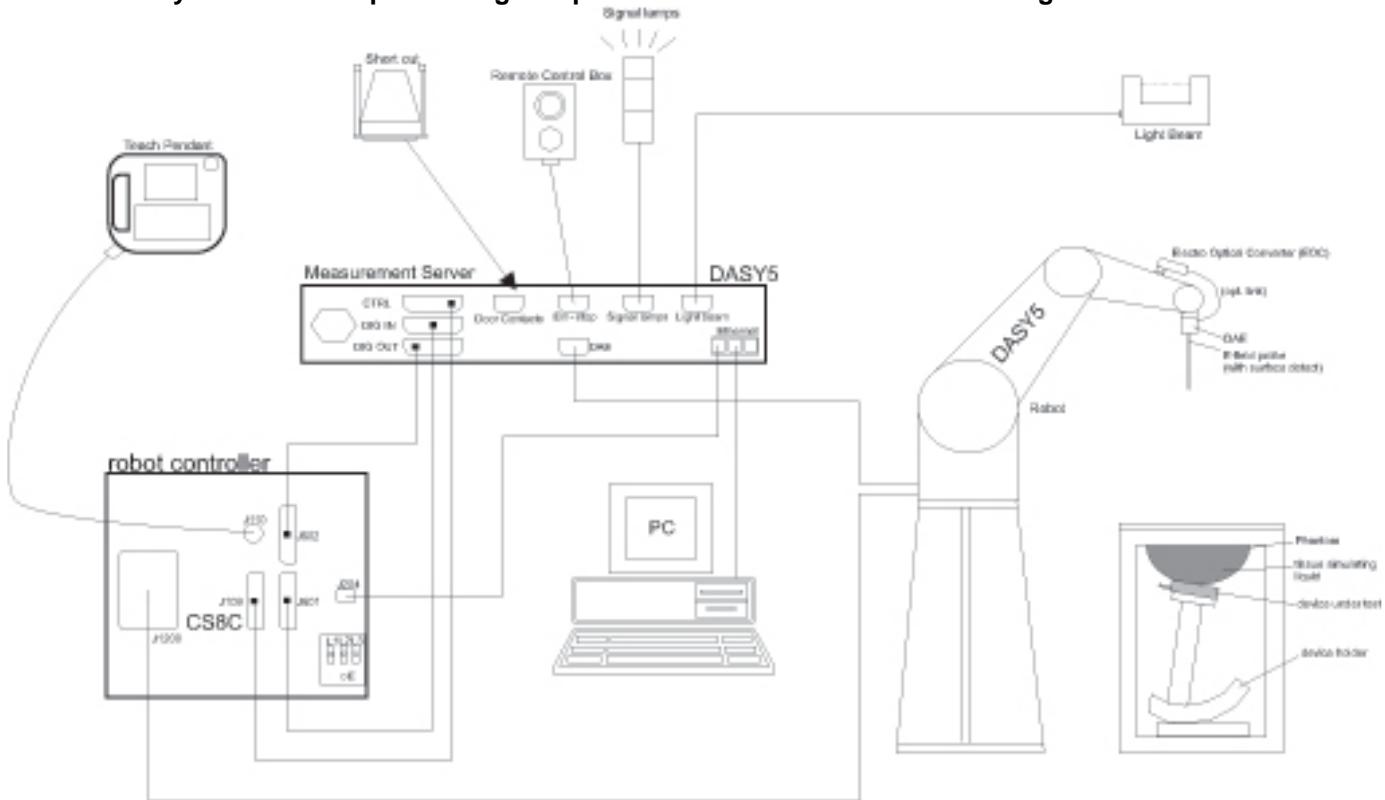

## 4.2. SAR Scan Procedures

### Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
	$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

### Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		$\leq 3$ GHz	$> 3$ GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm $2 - 3$ GHz: $\leq 5$ mm*	$3 - 4$ GHz: $\leq 5$ mm* $4 - 6$ GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	$3 - 4$ GHz: $\leq 4$ mm $4 - 5$ GHz: $\leq 3$ mm $5 - 6$ GHz: $\leq 2$ mm
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface $\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 4$ mm $\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	$3 - 4$ GHz: $\geq 28$ mm $4 - 5$ GHz: $\geq 25$ mm $5 - 6$ GHz: $\geq 22$ mm

Note:  $\delta$  is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

\* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is  $\leq 1.4$  W/kg,  $\leq 8$  mm,  $\leq 7$  mm and  $\leq 5$  mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

### Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

### Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

## 4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

### Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
S-Parameter Network Analyzer	Agilent	8753ES	MY40000980	5/14/2019
Dielectric Probe kit	SPEAG	DAK-3.5	1082	10/17/2018
Shorting Block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	10/17/2018
Thermometer	Fisher Scientific	Traceable	140562250	11/7/2018

### System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Signal Generator	Agilent	N5181A	MY50140610	6/7/2019
Power Meter	Keysight	N1912A	MY55196004	7/31/2018
Power Sensor	Agilent	N1921A	MY53020038	4/23/2019
Power Sensor	Agilent	N1921A	MY5226009	1/8/2019
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795093	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2149	N/A
DC Power Supply	HP	6296A	2841A-05955	N/A
Synthesized Signal Generator	Agilent	N5181A	MY50140630	5/25/2019
Power Meter	HP	437B	3125U12345	8/10/2018
Power Meter	HP	437B	3125U11347	8/15/2018
Power Sensor	HP	8481A	1926A27048	8/10/2018
Power Sensor	HP	8481A	3318A92374	8/15/2018
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795092	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2141	N/A
DC Power Supply	BK Precision	1611	215-02292	N/A

### Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe (SAR Lab 5)	SPEAG	EX3DV4	7498	5/4/2019
E-Field Probe (SAR Lab 6)	SPEAG	EX3DV4	3885	10/24/2018
E-Field Probe (SAR Lab 7)	SPEAG	EX3DV4	7500	5/4/2019
E-Field Probe (SAR Lab 8)	SPEAG	EX3DV4	7501	5/4/2019
Data Acquisition Electronics (SAR Lab 5)	SPEAG	DAE4	1546	5/3/2019
Data Acquisition Electronics (SAR Lab 6)	SPEAG	DAE4	1545	4/13/2019
Data Acquisition Electronics (SAR Lab 7)	SPEAG	DAE4	1547	5/3/2019
Data Acquisition Electronics (SAR Lab 8)	SPEAG	DAE4	1258	5/22/2019
System Validation Dipole	SPEAG	D750V3	1071	11/21/2018
System Validation Dipole	SPEAG	D835V2	4d002	11/21/2018
System Validation Dipole	SPEAG	D1750V2	1077	10/5/2018
System Validation Dipole	SPEAG	D1900V2	5d043	11/22/2018
System Validation Dipole	SPEAG	D1900V2	5d163	10/5/2018
System Validation Dipole	SPEAG	D2450V2	706	5/18/2019
System Validation Dipole	SPEAG	D2600V2	1036	3/16/2019
System Validation Dipole	SPEAG	D5GHzV2	1003	3/13/2019
Thermometer (SAR Lab 5/6/7/8)	Fisher Sceintific	Traceable	181062300	2/26/2019

**Other**

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Keysight	N1912A	MY55196015	3/1/2019
Power Sensor	Agilent	N1921A	MY53260010	10/17/2018
Base Station Simulator	R & S	R & S	164541-CI	2/19/2019
Base Station Simulator	Agilent	8960	GB47050526	3/22/2019
PXA Spectrum Analyzer	Keysight	N9030A	MY53311010	2/3/2019

## 5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

## 6. Device Under Test (DUT) Information

### 6.1. DUT Description

Device Dimension	This is a Phablet Device (display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm) Refer to Appendix A		
Back Cover	The Back Cover is not removable		
Battery Options	The rechargeable battery is not user accessible.		
Accessory	Headset		
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz)		
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz)		
Test sample information	S/N	IMEI	Notes
	BH9400A2DA	004402458797853	SAR GSM/UMTS (conducted)
	BH94008HDA	004402458797903	SAR LTE (LB/MB) (conducted)
	BH9400HWDA	004402458797861	SAR LTE (HB) (conducted)
	BH94007YDA	004402458795238	SAR - GSM/UMTS #1
	BH9400DEDA	004402458795592	SAR - GSM/UMTS #2
	BH94001YDA	004402458795287	SAR - LTE(LB/MB)(Radiated) #1
	BH940093DA	004402458795246	SAR - LTE(LB/MB)(Radiated) #2
	BH94002NDA	004402458799255	SAR - LTE(HB)(Radiated) #1
	BH940034DA	004402458799206	SAR - LTE(HB)(Radiated) #2
	BH9400FTDA	004402458797887	WLAN - 2.4GHz (Conducted) #1
	BH9400A3DA	004402458797937	WLAN - 5GHz (Conducted) #1
	BH940025DA	004402458798158	SAR WLAN - 2.4GHz (Radiated) #1
	BH940026DA	004402458798174	SAR WLAN - 2.4GHz (Radiated) #2
	BH94001TDA	004402458798182	SAR WLAN SAR - 5GHz (Radiated) #1
	BH94001KDA	004402458798208	SAR WLAN SAR - 5GHz (Radiated) #2
	BH94004JDA	004402458798273	SAR WLAN SAR - 5GHz (Radiated) #3
	BH94000WDA	004402458798265	SAR WLAN SAR - 5GHz (Radiated) #4
	BH94004WDA	004402458798232	SAR WLAN SAR - 5GHz (Radiated) #5
Hardware Version	A		
Software Version	0.119		

## 6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EDGE (8PSK)	Multi-Slot Class: Class 33 - 4 Up, 5 Down
Does this device support DTM (Dual Transfer Mode)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
W-CDMA (UMTS)	Band II Band IV	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6) HSPA+ (Rel. 7)	100%
LTE	FDD Band 2 FDD Band 4 FDD Band 12 FDD Band 17 TDD Band 41	QPSK 16QAM 64QAM Rel. 12 Carrier Aggregation (1 Uplink and 2 Downlinks)	100% (FDD) 63.3% (TDD) <sup>4</sup> Refer to §6.4
Does this device support SV-LTE (1xRTT-LTE)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)	802.11b <sup>1</sup> : 100%
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)	802.11n (HT40) <sup>2</sup> : 93.67% 802.11ac (VHT80) <sup>2</sup> : 88.81%
Does this device support bands 5.60 ~ 5.65 GHz? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
Does this device support Band gap channel(s)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
Bluetooth	2.4 GHz	Version 5.0 LE	GFSK <sup>3</sup> : 76.89% EDR, LE <sup>5</sup> : N/A

### Notes:

1. Refer to §9.5 for Measured Duty Cycle
2. Refer to §9.6 for Measured Duty Cycle
3. Refer to §9.7 for Measured Duty Cycle
4. This device supports uplink-downlink configuration 0-6. The configuration with the highest duty cycle was used (Subframe Number 0 at 63.3%).
5. Measured Duty Cycle is not required due to SAR test exemption.

### 6.3. General LTE SAR Test and Reporting Considerations

Item	Description					
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Frequency range: 1850 - 1910 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low	18700 /1860	18675/ 1857.5	18650/ 1855	18625/ 1852.5	18615/ 1851.5
		18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880
		19100/ 1900	19125/ 1902.5	19150/ 1905	19175/ 1907.5	19185/ 1908.5
	Band 4 <sup>2</sup>	Frequency range: 1710 - 1755 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5
		20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
		20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5
	Band 12 <sup>2</sup>	Frequency range: 699 – 716 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low			23060/ 704	23035/ 701.5	23025/ 700.5
				23095/ 707.5	23095/ 707.5	23095/ 707.5
				23130/ 711	23155/ 713.5	23165/ 714.5
	Band 17 <sup>2,4</sup>	Frequency range: 704 - 716 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low			23780/ 709	23755/ 706.5	
				23790/ 710	23790/ 710	
				23800/ 711	23825/ 713.5	
	Band 41 <sup>1</sup>	Frequency range: 2496 - 2690 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low	39750 / 2506.0				
		40185 / 2549.5				
		40620 / 2593.0				
		41055 / 2636.5				
		41490 / 2680.0				

**General LTE SAR Test and Reporting Considerations (Continued)**

LTE transmitter and antenna implementation	Refer to Appendix A.																																																														
Maximum power reduction (MPR)	<p style="text-align: center;"><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</b></p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (<math>N_{RB}</math>)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td></td> <td></td> <td></td> <td>≥ 1</td> <td></td> <td></td> <td>≤ 5</td> </tr> </tbody> </table> <p>MPR Built-in by design The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing</p>	Modulation	Channel bandwidth / Transmission bandwidth ( $N_{RB}$ )						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM				≥ 1			≤ 5
Modulation	Channel bandwidth / Transmission bandwidth ( $N_{RB}$ )						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM				≥ 1			≤ 5																																																								
Power reduction	No																																																														
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														

**Notes:**

1. LTE band 41 test channels in accordance with October 2014 TCB workshop for all channels bandwidths.
2. Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.
3. LTE QPSK configuration has the highest maximum average output power per 3GPP standard.
4. LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.
5. SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

## 6.4. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

### Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink x ( $T_s$ ) x # of S + # of U

#### Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle =  $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$  seconds

#### Note(s):

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: **Uplink-Downlink Configuration 0 at 63.3% duty cycle and Special Subframe 7.**

## 6.5. LTE Carrier Aggregation

Combination	CA configuration	Bandwidth (MHz)											
		PCC						SCC1					
		20	15	10	5	3	1.4	20	15	10	5	3	1.4
Intra-Band contiguous	41C				√			√					
				√				√					
			√					√	√				
		√						√	√	√	√		

**Note(s):**

For supported channels, please refer to §6.3

## 7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN (Main Ant. 1 & 2)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	< 25 mm	Yes	
WLAN/BT (Chain 0)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot / Wi-Fi Direct (2.4 GHz only)	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	
	Product Specific (5 GHz bands only)	0 mm	Rear	< 25 mm	Yes	2
			Front	< 25 mm	Yes	2
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	
			Edge 3 (Bottom)	> 25 mm	No	
			Edge 4 (Left)	< 25 mm	Yes	2
WLAN (Chain 1)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot / Wi-Fi Direct (2.4 GHz only)	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	> 25 mm	No	1
	Product Specific (5 GHz bands only)	0 mm	Rear	< 25 mm	Yes	2
			Front	< 25 mm	Yes	2
			Edge 1 (Top)	> 25 mm	No	
			Edge 2 (Right)	< 25 mm	Yes	2
			Edge 3 (Bottom)	> 25 mm	No	
			Edge 4 (Left)	> 25 mm	No	

### Notes:

1. SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
2. For Phablet devices: when Hotspot Mode is not supported, Product Specific 10-g SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.
3. For Phablet devices: when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.
4. The WWAN Sub Antenna (AS-Div) does not support FCC bands.

## 8. Dielectric Property Measurements & System Check

### 8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant ( $\epsilon_r$ ) and conductivity ( $\sigma$ ) of typical tissue-equivalent media recipes are expected to be within  $\pm 5\%$  of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for  $\epsilon_r$  and  $\sigma$  may be relaxed to  $\pm 10\%$ . This is limited to frequencies  $\leq 3 \text{ GHz}$ .

#### Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma (\text{S/m})$	$\epsilon_r$	$\sigma (\text{S/m})$
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

#### IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

**Dielectric Property Measurements Results:**

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity ( $\epsilon_r$ )			Conductivity ( $\sigma$ )		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
5	7/23/2018	750	Head	750	41.15	41.96	-1.93	0.91	0.89	1.98
				695	41.26	42.24	-2.33	0.89	0.89	-0.38
				790	41.14	41.76	-1.48	0.92	0.90	2.62
5	7/23/2018	750	Body	750	53.99	55.55	-2.80	0.97	0.96	0.59
				695	54.11	55.76	-2.96	0.94	0.96	-1.76
				790	54.03	55.39	-2.46	0.98	0.97	1.14
5	7/26/2018	1750	Body	1750	51.05	53.44	-4.47	1.49	1.49	0.53
				1710	51.15	53.54	-4.47	1.47	1.46	0.58
				1800	51.02	53.30	-4.28	1.53	1.52	0.66
5	7/26/2018	1750	Head	1750	39.38	40.08	-1.76	1.37	1.37	0.15
				1710	39.45	40.15	-1.73	1.35	1.35	-0.10
				1800	39.30	40.00	-1.75	1.40	1.40	0.07
6	7/23/2018	2600	Body	2600	50.30	52.51	-4.21	2.14	2.16	-1.01
				2495	50.50	52.64	-4.07	2.06	2.01	2.07
				2690	50.18	52.40	-4.23	2.23	2.29	-2.68
6	7/25/2018	2600	Head	2600	39.19	39.01	0.46	1.89	1.96	-3.88
				2495	39.33	39.14	0.48	1.81	1.85	-2.31
				2690	39.07	38.90	0.44	1.96	2.06	-4.93
7	7/23/2018	5250	Head	5250	35.93	35.93	-0.01	4.47	4.70	-4.92
				5150	36.10	36.05	0.15	4.40	4.60	-4.43
				5350	35.83	35.82	0.03	4.61	4.80	-4.03
7	7/23/2018	5600	Head	5600	35.32	35.53	-0.60	4.89	5.06	-3.38
				5500	35.52	35.65	-0.36	4.75	4.96	-4.11
				5725	35.13	35.39	-0.74	5.03	5.19	-3.09
7	7/23/2018	5750	Head	5750	35.20	35.36	-0.46	5.05	5.21	-3.12
				5700	35.14	35.42	-0.79	5.03	5.16	-2.65
				5850	34.97	35.30	-0.93	5.20	5.27	-1.42
7	7/23/2018	5250	Body	5250	47.23	48.95	-3.52	5.27	5.35	-1.61
				5150	47.35	49.09	-3.54	5.17	5.24	-1.23
				5350	47.09	48.82	-3.54	5.45	5.47	-0.39
7	7/26/2018	835	Head	835	39.72	41.50	-4.29	0.94	0.90	3.99
				805	39.83	41.68	-4.44	0.93	0.90	3.16
				915	39.48	41.50	-4.87	0.97	0.98	-1.27
7	7/26/2018	835	Body	835	54.92	55.20	-0.51	1.00	0.97	3.30
				805	55.05	55.33	-0.51	1.00	0.97	3.13
				915	54.82	55.00	-0.33	1.04	1.06	-2.17

**Dielectric Property Measurements Results (continued):**

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity ( $\epsilon_r$ )			Conductivity ( $\sigma$ )		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
8	7/23/2018	5600	Body	5600	47.38	48.48	-2.26	5.80	5.76	0.62
				5500	47.56	48.61	-2.17	5.63	5.64	-0.24
				5725	47.11	48.31	-2.48	6.01	5.91	1.68
8	7/23/2018	5750	Body	5750	47.22	48.27	-2.18	5.99	5.94	0.96
				5700	47.07	48.34	-2.63	5.99	5.88	1.96
				5850	46.94	48.20	-2.61	6.20	6.00	3.32
8	7/25/2018	2450	Body	2450	50.48	52.70	-4.21	2.01	1.95	2.87
				2400	50.46	52.77	-4.38	1.97	1.90	3.95
				2480	50.45	52.66	-4.20	2.04	1.99	2.40
8	7/25/2018	2450	Head	2450	38.32	39.20	-2.24	1.78	1.80	-1.17
				2400	38.30	39.30	-2.54	1.75	1.75	0.08
				2480	38.32	39.16	-2.15	1.80	1.83	-1.66
8	7/26/2018	1900	Head	1900	41.42	40.00	3.55	1.47	1.40	4.93
				1850	41.46	40.00	3.65	1.44	1.40	2.86
				1980	41.35	40.00	3.38	1.52	1.40	8.36
8	7/26/2018	1900	Body	1900	50.85	53.30	-4.60	1.61	1.52	6.18
				1850	50.92	53.30	-4.47	1.58	1.52	4.08
				1980	50.84	53.30	-4.62	1.66	1.52	9.47
8	7/30/2018	1900	Head	1900	38.43	40.00	-3.93	1.42	1.40	1.29
				1850	38.50	40.00	-3.75	1.39	1.40	-1.07
				1980	38.33	40.00	-4.18	1.46	1.40	3.93
8	7/30/2018	1900	Body	1900	51.70	53.30	-3.00	1.65	1.52	8.68
				1850	51.75	53.30	-2.91	1.61	1.52	6.12
				1920	51.69	53.30	-3.02	1.67	1.52	9.80

## 8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

### System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness:  $2.0 \pm 0.2$  mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be  $\geq 15.0$  cm for SAR measurements  $\leq 3$  GHz and  $\geq 10.0$  cm for measurements  $> 3$  GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.  
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.  
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

## System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within  $\pm 10\%$  of the manufacturer calibrated dipole SAR target. Refer to Appendix B for the SAR System Check Plots.

SAR Lab	Date	Tissue Type	Dipole Type _Serial #	Dipole Cal. Due Data	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
					Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
5	7/23/2018	Head	D750V3 SN:1071	11/21/2018	0.823	8.23	8.59	-4.19	0.538	5.38	5.73	-6.11	
5	7/23/2018	Body	D750V3 SN:1071	11/21/2018	0.916	9.16	8.52	<b>7.51</b>	0.608	6.08	5.69	6.85	1,2
5	7/26/2018	Body	D1750V2 SN:1077	10/5/2018	3.660	36.60	37.34	<b>-1.98</b>	1.950	19.50	19.98	-2.40	3,4
5	7/26/2018	Head	D1750V2 SN:1077	10/5/2018	3.620	36.20	36.26	-0.17	1.910	19.10	19.34	-1.24	
6	7/23/2018	Body	D2600V2 SN:1036	3/16/2019	5.300	53.00	56.13	<b>-5.58</b>	2.350	23.50	25.04	-6.15	
6	7/25/2018	Head	D2600V2 SN:1036	3/16/2019	5.880	58.80	54.54	<b>7.81</b>	2.640	26.40	24.56	7.49	5,6
7	7/23/2018	Head	D5GHzV2 SN:1003 (5.25 GHz)	3/13/2019	7.750	77.50	80.60	-3.85	2.210	22.10	23.20	-4.74	
7	7/23/2018	Head	D5GHzV2 SN:1003 (5.60 GHz)	3/13/2019	8.790	87.90	84.50	<b>4.02</b>	2.470	24.70	24.00	2.92	7,8
7	7/23/2018	Head	D5GHzV2 SN:1003 (5.75 GHz)	3/13/2019	7.970	79.70	78.40	<b>1.66</b>	2.260	22.60	22.20	1.80	9,10
7	7/23/2018	Body	D5GHzV2 SN:1003 (5.25 GHz)	3/13/2019	7.950	79.50	73.60	<b>8.02</b>	2.250	22.50	20.50	9.76	11,12
7	7/26/2018	Head	D835V2 SN:4d002	11/21/2018	1.010	10.10	10.27	-1.66	0.653	6.53	6.76	-3.40	
7	7/26/2018	Body	D835V2 SN:4d002	11/21/2018	0.999	9.99	10.23	<b>-2.35</b>	0.651	6.51	6.80	-4.26	13,14
8	7/23/2018	Body	D5GHzV2 SN:1003 (5.60 GHz)	3/13/2019	7.980	79.80	77.70	<b>2.70</b>	2.240	22.40	21.70	3.23	15,16
8	7/23/2018	Body	D5GHzV2 SN:1003 (5.75 GHz)	3/13/2019	7.420	74.20	73.90	<b>0.41</b>	2.080	20.80	20.60	0.97	17,18
8	7/25/2018	Head	D2450V2 SN:706	5/18/2019	5.050	50.50	52.60	<b>-3.99</b>	2.340	23.40	24.60	-4.88	19,20
8	7/25/2018	Body	D2450V2 SN:706	5/18/2019	5.170	51.70	50.60	2.17	2.400	24.00	23.70	1.27	
8	7/26/2018	Head	D1900V2 SN:5d163	10/5/2018	3.830	38.30	38.77	-1.21	1.980	19.80	20.10	-1.49	
8	7/26/2018	Body	D1900V2 SN:5d163	10/5/2018	3.880	38.80	42.99	<b>-9.75</b>	2.020	20.20	21.97	-8.06	21,22
8	7/30/2018	Head	D1900V2 SN:5d043	11/22/2018	3.940	39.40	42.99	-8.35	2.040	20.40	22.17	-7.98	
8	7/30/2018	Body	D1900V2 SN:5d043	11/22/2018	4.230	42.30	41.00	3.17	2.210	22.10	20.90	5.74	

## 9. Conducted Output Power Measurements

### 9.1. GSM

#### Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

When different maximum output power applies to GSM voice or GPRS/EDGE time slots, GSM voice and GPRS/EDGE time slots should be tested separately to determine compliance by summing the corresponding reported SAR.

The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance

#### Per October 2013 TCB Workshop:

When the maximum frame-averaged powers levels are within 0.25 dB of each other, test the configuration with the most number of time slots.

#### GSM850 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			
					Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GSM/GPRS	CS1	1	128	824.2	31.34	22.31	32.20	23.17
			190	836.6	31.62	22.59		
			251	848.8	31.70	22.67		
		2	128	824.2	29.41	23.39	30.20	24.18
			190	836.6	29.49	23.47		
			251	848.8	29.54	23.52		
GPRS (GMSK)	MCS5	3	128	824.2	27.50	23.24	28.20	23.94
			190	836.6	27.58	23.32		
			251	848.8	27.84	23.58		
		4	128	824.2	26.44	23.43	27.20	24.19
			190	836.6	26.53	23.52		
			251	848.8	26.71	23.70		
GSM/EDGE	MCS5	1	128	824.2	26.76	17.73	28.00	18.97
			190	836.6	26.83	17.80		
			251	848.8	26.90	17.87		
		2	128	824.2	24.62	18.60	26.50	20.48
			190	836.6	24.70	18.68		
			251	848.8	24.81	18.79		
EDGE (8PSK)	MCS5	3	128	824.2	23.67	19.41	24.50	20.24
			190	836.6	23.70	19.44		
			251	848.8	23.77	19.51		
		4	128	824.2	21.68	18.67	23.50	20.49
			190	836.6	21.72	18.71		
			251	848.8	21.83	18.82		

#### Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GPRS (GMSK) mode with 4 time slots for Max power, based on the Tune-up Procedure.
- SAR is not required for EDGE (8PSK) mode because the maximum output power and tune-up limit is  $\leq 1/4$ dB higher than GPRS (GMSK) or the adjusted SAR of the highest reported SAR of GPRS (GMSK) is  $\leq 1.2$ W/kg.

**GSM850 DTM Measured Results**

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)							
					Measured				Tune-up Limit			
					CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr	CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr
GSM (Voice) + GPRS (GMSK)	CS1	1	128	824.2	31.34	22.31			32.20		23.17	
			190	836.6	31.36	22.33						
			251	848.8	31.66	22.63						
		2	128	824.2	29.22	29.37	23.20	23.35	30.20	30.20	24.2	24.2
			190	836.6	29.27	29.45	23.25	23.43				
			251	848.8	29.57	29.73	23.55	23.71				
		3	128	824.2	27.28	27.47	23.02	23.21	28.20	28.20	23.94	23.94
			190	836.6	27.35	27.49	23.09	23.23				
			251	848.8	27.61	27.75	23.35	23.49				
GSM (Voice) + EDGE (8PSK)	MCS5	1	128	824.2	31.55		22.52		32.20		23.17	
			190	836.6	31.58		22.55					
			251	848.8	31.62		22.59					
		2	128	824.2	29.26	24.69	23.24	18.67	30.20	26.50	24.2	20.48
			190	836.6	29.30	24.72	23.28	18.70				
			251	848.8	29.69	24.81	23.67	18.79				
		3	128	824.2	27.39	23.54	23.13	19.28	28.20	24.50	23.94	20.24
			190	836.6	27.42	23.69	23.16	19.43				
			251	848.8	27.70	23.76	23.44	19.50				

**Notes:**

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GSM(Voice) + GPRS (GMSK) with 2 time slots for Max power, based on the Tune-up Procedure.
- SAR is not required for GSM(Voice) + EDGE (8PSK) mode because the maximum output power and tune-up limit is  $\leq 1/4$ dB higher than that of GSM(Voice) + GPRS (GMSK) mode or the adjusted SAR of the highest reported SAR of GSM(Voice) + GPRS (GMSK) is  $\leq 1.2$ W/kg.

**GSM1900 Measured Results**

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			
					Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GSM/GPRS	CS1	1	512	1850.2	29.98	20.95	30.70	21.67
			661	1880.0	29.87	20.84		
			810	1909.8	30.10	21.07		
		2	512	1850.2	27.99	21.97	28.70	22.68
			661	1880.0	27.96	21.94		
			810	1909.8	28.08	22.06		
GPRS (GMSK)		3	512	1850.2	26.03	21.77	26.70	22.44
			661	1880.0	25.99	21.73		
			810	1909.8	26.11	21.85		
		4	512	1850.2	25.03	22.02	25.70	22.69
			661	1880.0	25.01	22.00		
			810	1909.8	25.11	22.10		
GSM/EDGE	MCS5	1	512	1850.2	25.69	16.66	27.00	17.97
			661	1880.0	25.60	16.57		
			810	1909.8	25.70	16.67		
		2	512	1850.2	23.70	17.68	25.50	19.48
			661	1880.0	23.60	17.58		
			810	1909.8	23.68	17.66		
EDGE (8PSK)		3	512	1850.2	22.87	18.61	23.50	19.24
			661	1880.0	22.82	18.56		
			810	1909.8	22.83	18.57		
		4	512	1850.2	21.72	18.71	22.50	19.49
			661	1880.0	21.70	18.69		
			810	1909.8	21.80	18.79		

**Notes:**

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GPRS (GMSK) mode with 4 time slots for Max power, based on the Tune-up Procedure.
- SAR is not required for EDGE (8PSK) mode because the maximum output power and tune-up limit is  $\leq 1/4$ dB higher than GPRS (GMSK) or the adjusted SAR of the highest reported SAR of GPRS (GMSK) is  $\leq 1.2$ W/kg.

**GSM1900 DTM Measured Results**

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)							
					Measured				Tune-up Limit			
					CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr	CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr
GSM (Voice) + GPRS (GMSK)	CS1	1	512	1850.2	30.14		21.11		30.70	21.67		
			661	1880.0	30.04		21.01					
			810	1909.8	30.25		21.22					
		2	512	1850.2	27.89	28.06	21.87	22.04	28.70	28.70	22.7	22.7
			661	1880.0	27.92	28.09	21.90	22.07				
			810	1909.8	27.95	28.13	21.93	22.11				
		3	512	1850.2	25.97	26.13	21.71	21.87	26.70	26.70	22.44	22.44
			661	1880.0	26.10	26.26	21.84	22.00				
			810	1909.8	26.02	26.19	21.76	21.93				
GSM (Voice) + EDGE (8PSK)	MCS5	1	512	1850.2	30.13		21.10		30.70	21.67		
			661	1880.0	30.13		21.10					
			810	1909.8	30.26		21.23					
		2	512	1850.2	27.90	23.78	21.88	17.76	28.70	25.50	22.68	19.48
			661	1880.0	27.95	23.73	21.93	17.71				
			810	1909.8	28.14	23.85	22.12	17.83				
		3	512	1850.2	25.98	23.06	21.72	18.80	26.70	23.50	22.44	19.24
			661	1880.0	25.99	23.01	21.73	18.75				
			810	1909.8	25.98	23.02	21.72	18.76				

**Notes:**

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GSM(Voice) + GPRS (GMSK) with 2 time slots for Max power, based on the Tune-up Procedure.
- SAR is not required for GSM(Voice) + EDGE (8PSK) mode because the maximum output power and tune-up limit is  $\leq 1/4$ dB higher than that of GSM(Voice) + GPRS (GMSK) mode or the adjusted SAR of the highest reported SAR of GSM(Voice) + GPRS (GMSK) is  $\leq 1.2$ W/kg.

## 9.2. W-CDMA

### **Release 99 Setup Procedures used to establish the test signals**

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	$\beta_c/\beta_d$	8/15

### **HSDPA Setup Procedures used to establish the test signals**

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings is illustrated below:

**Table C.10.2.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	$\beta_c$	2/15	11/15	15/15	15/15
	$\beta_d$	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	$\beta_c/\beta_d$	2/15	11/15	15/8	15/4
	$\beta_{hs}$	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D <sub>ACK</sub>	8			
	D <sub>NAK</sub>	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
$A_{hs} = \beta_{hs}/\beta_c$		30/15			

**HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals**

The following 5 Sub-tests were completed according to Release 6 procedures in table C.11.1.3 of 3GPP TS 34.121-1

A summary of these settings is illustrated below:

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

	Mode	HSPA				
		1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	$\beta_c$	11/15	6/15	15/15	2/15	15/15
	$\beta_d$	15/15	15/15	9/15	15/15	0
	$\beta_{ec}$	209/225	12/15	30/15	2/15	5/15
	$\beta_c/\beta_d$	11/15	6/15	15/9	2/15	-
	$\beta_{hs}$	22/15	12/15	30/15	4/15	5/15
HSDPA Specific Settings	$\beta_{ed}$	1309/225	94/75	47/15	56/75	47/15
	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
	DACK	8				0
	DNAK	8				0
	DCQI	8				0
HSUPA Specific Settings	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
	E-DPDCCH	6	8	8	5	0
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelization Codes	2xSF2				SF4

**HSPA+ Release 7**

Since 16QAM is not used for uplink, RF conducted power measurements are not required for HSPA+.

**W-CDMA Band II Measured Results**

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	20.85	N/A	21.70
		9400	1880.0	20.91		
		9538	1907.6	21.04		
HSDPA	Subtest 1	9262	1852.4	19.83	0	21.00
		9400	1880.0	19.91		
		9538	1907.6	20.04		
	Subtest 2	9262	1852.4	19.88	0	21.00
		9400	1880.0	19.93		
		9538	1907.6	20.05		
	Subtest 3	9262	1852.4	19.38	0.5	20.50
		9400	1880.0	19.46		
		9538	1907.6	19.63		
	Subtest 4	9262	1852.4	19.40	0.5	20.50
		9400	1880.0	19.46		
		9538	1907.6	19.57		
HSUPA	Subtest 1	9262	1852.4	19.87	0	21.00
		9400	1880.0	19.92		
		9538	1907.6	20.08		
	Subtest 2	9262	1852.4	17.86	2	19.00
		9400	1880.0	17.94		
		9538	1907.6	18.10		
	Subtest 3	9262	1852.4	18.84	1	20.00
		9400	1880.0	18.90		
		9538	1907.6	19.07		
	Subtest 4	9262	1852.4	17.81	2	19.00
		9400	1880.0	17.90		
		9538	1907.6	18.05		
	Subtest 5	9262	1852.4	19.91	0	21.00
		9400	1880.0	20.01		
		9538	1907.6	20.10		

**W-CDMA Band IV Measured Results**

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99 (Rel 99) (RMC, 12.2 kbps)	1312 1413 1513	1312	1712.4	22.51	N/A	23.20
		1413	1732.6	22.50		
		1513	1752.6	22.60		
HSDPA	Subtest 1	1312	1712.4	21.54	0	22.50
		1413	1732.6	21.52		
		1513	1752.6	21.58		
	Subtest 2	1312	1712.4	21.55	0	22.50
		1413	1732.6	21.54		
		1513	1752.6	21.60		
	Subtest 3	1312	1712.4	21.08	0.5	22.00
		1413	1732.6	21.09		
		1513	1752.6	21.13		
	Subtest 4	1312	1712.4	21.02	0.5	22.00
		1413	1732.6	21.04		
		1513	1752.6	21.12		
HSUPA	Subtest 1	1312	1712.4	21.54	0	22.50
		1413	1732.6	21.54		
		1513	1752.6	21.61		
	Subtest 2	1312	1712.4	19.61	2	20.50
		1413	1732.6	19.60		
		1513	1752.6	19.64		
	Subtest 3	1312	1712.4	20.53	1	21.50
		1413	1732.6	20.57		
		1513	1752.6	20.61		
	Subtest 4	1312	1712.4	19.51	2	20.50
		1413	1732.6	19.47		
		1513	1752.6	19.57		
	Subtest 5	1312	1712.4	21.59	0	22.50
		1413	1732.6	21.58		
		1513	1752.6	21.63		

### 9.3. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3**

Modulation	Channel bandwidth / Transmission bandwidth ( $N_{RB}$ )						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM				≥ 1			≤ 5

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS\_01".

**Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)**

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks ( $N_{RB}$ )	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36, 66, 70	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2, 6.6.3.3.19	41	5, 10, 15, 20	Table 6.2.4-4, Table 6.2.4-4a	
NS_05	6.6.3.3.1	65 (NOTE 3)	1	10, 15, 20 15, 20	≥ 50 (NOTE1) ≤ 1 (NOTE1)
			15, 20	Table 6.2.4-18 (NOTE2)	
			10, 15, 20 15, 20	≥ 50 ≤ 1 (NOTE 1) 15, 20	Table 6.2.4-18 (NOTE 2)
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.3	19	10, 15	>44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	>40 >55	≤ 1 ≤ 2
NS_10		20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1 6.6.3.3.13	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5, 10, 15	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9 Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.6.2.2.1 6.6.3.3.14	23	5, 10, 15, 20	Table 6.2.4-15	
NS_21	6.6.2.2.1 6.6.3.3.15	30	5, 10	Table 6.2.4-16	
NS_22	6.6.3.3.16	42, 43	5, 10, 15, 20	Table 6.2.4-17	
NS_23	6.6.3.3.17	42, 43	5, 10, 15, 20	N/A	
NS_24	6.6.3.3.20	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-19	
NS_25	6.6.3.3.21	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-20	
NS_26	6.6.3.3.22	68	10, 15	Table 6.2.4-21	
NS_27	6.6.2.2.5, 6.6.3.3.23	48	5, 10, 15, 20	Table 6.2.4-22	
NS_28	6.2.2A, 6.6.3.3.24	46 (NOTE 5)	20	Table 6.2.4-23	
NS_29	6.2.2A, 6.6.2.3.1a, 6.6.3.3.25	46 (NOTE 5)	20	Table 6.2.4-24	
NS_30	6.2.2A, 6.6.3.3.26	46 (NOTE 5)	20	Table 6.2.4-25	
NS_31	6.2.2A, 6.6.3.3.27	46 (NOTE 5)	20	Table 6.2.4-26	
NS_32	-	-	-	-	-

NOTE 1: Applicable when the lower edge of the assigned E-UTRA UL channel bandwidth frequency is larger than or equal to the upper edge of PHS band (1915.7 MHz) + 4 MHz + the channel BW assigned, where channel BW is as defined in subclause 5.6. A-MPR for

**LTE Band 2 Measured Results**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					
				18700	18900	19100	MPR	Tune-up Limit	
				1860 MHz	1880 MHz	1900 MHz			
20 MHz	QPSK	1	0	20.91	21.05	21.17	0	21.5	
		1	49	20.76	21.02	21.07	0	21.5	
		1	99	20.83	20.95	21.01	0	21.5	
		50	0	20.88	21.03	21.12	0	21.5	
		50	24	20.93	20.98	21.06	0	21.5	
		50	50	20.90	20.96	21.08	0	21.5	
		100	0	20.94	20.94	21.06	0	21.5	
	16QAM	1	0	20.91	21.12	21.12	0	21.5	
		1	49	20.71	21.12	20.98	0	21.5	
		1	99	20.78	21.04	20.94	0	21.5	
		50	0	20.47	20.63	20.67	0	21.5	
		50	24	20.56	20.58	20.60	0	21.5	
		50	50	20.51	20.54	20.65	0	21.5	
		100	0	20.52	20.57	20.61	0	21.5	
	64QAM	1	0	20.80	20.84	21.39	0	21.5	
		1	49	20.70	20.80	21.26	0	21.5	
		1	99	20.71	20.78	21.24	0	21.5	
		50	0	20.55	20.65	20.75	0	21.5	
		50	24	20.59	20.60	20.67	0	21.5	
		50	50	20.57	20.55	20.72	0	21.5	
		100	0	20.55	20.59	20.60	0	21.5	
15 MHz	QPSK	1	0	21.01	21.07	21.05	0	21.5	
		1	37	20.82	21.02	21.05	0	21.5	
		1	74	20.92	21.00	21.00	0	21.5	
		36	0	20.88	20.98	20.96	0	21.5	
		36	20	20.85	20.95	21.03	0	21.5	
		36	39	20.93	20.92	20.95	0	21.5	
		75	0	20.94	20.96	20.89	0	21.5	
	16QAM	1	0	20.89	20.49	21.01	0	21.5	
		1	37	20.73	20.50	20.87	0	21.5	
		1	74	20.79	20.51	20.90	0	21.5	
		36	0	20.51	20.58	20.51	0	21.5	
		36	20	20.47	20.54	20.57	0	21.5	
		36	39	20.57	20.53	20.52	0	21.5	
		75	0	20.55	20.55	20.48	0	21.5	
	64QAM	1	0	20.68	20.96	21.19	0	21.5	
		1	37	20.50	20.92	21.19	0	21.5	
		1	74	20.59	20.90	21.13	0	21.5	
		36	0	20.59	20.65	20.59	0	21.5	
		36	20	20.55	20.62	20.65	0	21.5	
		36	39	20.58	20.59	20.58	0	21.5	
		75	0	20.61	20.59	20.58	0	21.5	
10 MHz	QPSK	1	0	21.09	20.95	20.95	0	21.5	
		1	25	21.04	21.03	20.90	0	21.5	
		1	49	20.98	21.01	20.92	0	21.5	
		25	0	21.03	20.96	21.03	0	21.5	
		25	12	21.07	20.96	21.04	0	21.5	
		25	25	20.99	20.96	20.95	0	21.5	
		50	0	21.02	20.96	20.98	0	21.5	
	16QAM	1	0	20.99	20.39	20.64	0	21.5	
		1	25	20.93	20.50	20.50	0	21.5	
		1	49	20.88	20.47	20.49	0	21.5	
		25	0	20.64	20.52	20.67	0	21.5	
		25	12	20.65	20.54	20.68	0	21.5	
		25	25	20.60	20.48	20.62	0	21.5	
		50	0	20.61	20.51	20.58	0	21.5	
	64QAM	1	0	20.78	20.90	20.83	0	21.5	
		1	25	20.74	20.92	20.69	0	21.5	
		1	49	20.71	20.92	20.64	0	21.5	
		25	0	20.70	20.61	20.68	0	21.5	
		25	12	20.73	20.64	20.67	0	21.5	
		25	25	20.68	20.59	20.62	0	21.5	
		50	0	20.67	20.58	20.58	0	21.5	

**LTE Band 2 Measured Results (continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				18625	18900	19175	MPR	Tune-up Limit
				1852.5 MHz	1880 MHz	1907.5 MHz		
5 MHz	QPSK	1	0	21.08	21.05	20.87	0	21.5
		1	12	21.02	21.11	20.85	0	21.5
		1	24	21.01	21.00	20.82	0	21.5
		12	0	21.05	20.92	20.83	0	21.5
		12	7	21.05	21.04	20.95	0	21.5
		12	13	21.05	20.91	20.94	0	21.5
		25	0	21.06	20.96	20.96	0	21.5
	16QAM	1	0	21.11	20.64	20.65	0	21.5
		1	12	21.10	20.73	20.58	0	21.5
		1	24	21.09	20.63	20.61	0	21.5
		12	0	20.74	20.57	20.58	0	21.5
		12	7	20.77	20.67	20.55	0	21.5
		12	13	20.74	20.54	20.51	0	21.5
		25	0	20.65	20.50	20.48	0	21.5
3 MHz	QPSK	1	0	20.95	20.46	20.79	0	21.5
		1	12	20.95	20.54	20.74	0	21.5
		1	24	20.89	20.42	20.74	0	21.5
		12	0	20.60	20.58	20.61	0	21.5
		12	7	20.63	20.70	20.60	0	21.5
		12	13	20.58	20.55	20.59	0	21.5
		25	0	20.61	20.53	20.55	0	21.5
	16QAM	1	0	20.96	20.48	20.51	0	21.5
		1	8	21.05	20.56	20.57	0	21.5
		1	14	20.91	20.33	20.46	0	21.5
		8	0	20.72	20.73	20.52	0	21.5
		8	4	20.70	20.70	20.54	0	21.5
		8	7	20.71	20.73	20.55	0	21.5
		15	0	20.66	20.52	20.43	0	21.5
1.4 MHz	QPSK	1	0	20.72	20.88	20.60	0	21.5
		1	8	20.84	20.99	20.65	0	21.5
		1	14	20.70	20.76	20.62	0	21.5
		8	0	20.71	20.71	20.51	0	21.5
		8	4	20.71	20.69	20.50	0	21.5
		8	7	20.72	20.48	20.54	0	21.5
		15	0	20.69	20.68	20.54	0	21.5
	16QAM	1	0	20.64	20.48	20.72	0	21.5
		1	3	20.71	20.57	20.78	0	21.5
		1	5	20.65	20.53	20.71	0	21.5
		3	0	20.60	20.61	20.55	0	21.5
		3	1	20.64	20.68	20.60	0	21.5
		3	3	20.63	20.68	20.59	0	21.5
		6	0	20.72	20.68	20.34	0	21.5
	64QAM	1	0	20.72	20.61	20.77	0	21.5
		1	3	20.80	20.72	20.86	0	21.5
		1	5	20.75	20.61	20.74	0	21.5
		3	0	20.52	20.63	20.68	0	21.5
		3	1	20.56	20.70	20.77	0	21.5
		3	3	20.57	20.71	20.75	0	21.5
		6	0	20.68	20.87	20.41	0	21.5

**LTE Band 4 Measured Results**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20050 1720 MHz	20175 1732.5 MHz	20300 1745 MHz	MPR	Tune-up Limit
20 MHz	QPSK	1	0	22.60			0	23
		1	49	22.41			0	23
		1	99	22.40			0	23
		50	0	22.57			0	23
		50	24	22.53			0	23
		50	50	22.48			0	23
		100	0	22.51			0	23
	16QAM	1	0	22.71			0	23
		1	49	22.54			0	23
		1	99	22.53			0	23
		50	0	22.19			0	23
		50	24	22.15			0	23
		50	50	22.12			0	23
		100	0	22.14			0	23
15 MHz	QPSK	1	0	22.45			0	23
		1	49	22.28			0	23
		1	99	22.26			0	23
		50	0	21.23			1	22
		50	24	21.16			1	22
		50	50	21.14			1	22
		100	0	21.15			1	22
	16QAM	1	0	22.59	22.59	22.59	0	23
		1	37	22.56	22.44	22.56	0	23
		1	74	22.63	22.41	22.52	0	23
		36	0	22.58	22.52	22.49	0	23
		36	20	22.56	22.48	22.41	0	23
		36	39	22.53	22.47	22.53	0	23
		75	0	22.57	22.49	22.44	0	23
10 MHz	16QAM	1	0	22.55	22.11	22.54	0	23
		1	37	22.49	21.96	22.51	0	23
		1	74	22.58	21.95	22.48	0	23
		36	0	22.26	22.15	22.04	0	23
		36	20	22.21	22.08	21.99	0	23
		36	39	22.15	22.08	22.07	0	23
		75	0	22.20	22.10	22.03	0	23
	64QAM	1	0	22.32	22.53	22.73	0	23
		1	37	22.27	22.38	22.71	0	23
		1	74	22.35	22.32	22.70	0	23
		36	0	21.29	21.16	21.08	1	22
		36	20	21.24	21.13	21.03	1	22
		36	39	21.20	21.10	21.11	1	22
		75	0	21.23	21.12	21.09	1	22

**Note(s):**

20 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

**LTE Band 4 Measured Results (continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				19975	20175	20375	MPR	Tune-up Limit
				1712.5 MHz	1732.5 MHz	1752.5 MHz		
5 MHz	QPSK	1	0	22.57	22.57	22.56	0	23
		1	12	22.51	22.50	22.50	0	23
		1	24	22.66	22.53	22.52	0	23
		12	0	22.58	22.46	22.53	0	23
		12	7	22.59	22.47	22.52	0	23
		12	13	22.55	22.45	22.53	0	23
		25	0	22.70	22.49	22.52	0	23
	16QAM	1	0	22.66	22.24	22.21	0	23
		1	12	22.64	22.17	22.16	0	23
		1	24	22.76	22.19	22.17	0	23
		12	0	22.30	22.15	22.17	0	23
		12	7	22.30	22.15	22.15	0	23
		12	13	22.29	22.12	22.12	0	23
		25	0	22.32	22.08	22.05	0	23
	64QAM	1	0	22.14	22.36	22.42	0	23
		1	12	22.08	22.29	22.40	0	23
		1	24	22.18	22.31	22.35	0	23
		12	0	21.23	21.14	21.06	1	22
		12	7	21.21	21.15	21.07	1	22
		12	13	21.20	21.14	21.05	1	22
		25	0	21.25	21.10	21.08	1	22
3 MHz	QPSK	1	0	22.54	22.41	22.44	0	23
		1	8	22.63	22.50	22.50	0	23
		1	14	22.49	22.37	22.37	0	23
		8	0	22.53	22.41	22.44	0	23
		8	4	22.53	22.45	22.47	0	23
		8	7	22.55	22.44	22.45	0	23
		15	0	22.53	22.45	22.46	0	23
	16QAM	1	0	22.51	21.93	22.11	0	23
		1	8	22.56	22.01	22.14	0	23
		1	14	22.47	21.88	22.05	0	23
		8	0	22.20	22.10	22.06	0	23
		8	4	22.22	22.14	22.11	0	23
		8	7	22.22	22.13	22.09	0	23
		15	0	22.16	22.05	22.01	0	23
	64QAM	1	0	22.25	22.31	22.28	0	23
		1	8	22.36	22.43	22.32	0	23
		1	14	22.23	22.32	22.21	0	23
		8	0	21.17	21.08	21.01	1	22
		8	4	21.22	21.12	21.06	1	22
		8	7	21.20	21.13	21.05	1	22
		15	0	21.18	21.03	21.11	1	22
1.4 MHz	QPSK	1	0	22.42	22.40	22.26	0	23
		1	3	22.49	22.45	22.36	0	23
		1	5	22.43	22.39	22.27	0	23
		3	0	22.52	22.32	22.30	0	23
		3	1	22.54	22.40	22.40	0	23
		3	3	22.54	22.41	22.41	0	23
		6	0	22.41	22.36	22.36	0	23
	16QAM	1	0	22.41	22.05	21.94	0	23
		1	3	22.44	22.13	22.02	0	23
		1	5	22.39	22.07	21.95	0	23
		3	0	22.27	22.00	22.12	0	23
		3	1	22.31	22.07	22.19	0	23
		3	3	22.32	22.07	22.18	0	23
		6	0	21.94	22.10	22.10	0	23
	64QAM	1	0	22.16	22.33	22.09	0	23
		1	3	22.23	22.44	22.17	0	23
		1	5	22.10	22.33	22.12	0	23
		3	0	22.20	22.27	21.90	0	23
		3	1	22.29	22.37	21.98	0	23
		3	3	22.30	22.35	21.99	0	23
		6	0	21.32	20.94	21.02	1	22

**LTE Band 12 Measured Results**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23060 704 MHz	23095 707.5 MHz	23130 711 MHz	MPR	Tune-up Limit
10 MHz	QPSK	1	0	24.65			0	25
		1	25	24.66			0	25
		1	49	24.58			0	25
		25	0	23.79			1	24
		25	12	23.74			1	24
		25	25	23.70			1	24
	16QAM	50	0	23.74			1	24
		1	0	23.13			1	24
		1	25	23.17			1	24
		1	49	23.09			1	24
	64QAM	25	0	22.35			2	23
		25	12	22.32			2	23
		25	25	22.27			2	23
		50	0	22.29			2	23
		1	0	22.52			2	23
		1	25	22.55			2	23
		1	49	22.47			2	23
		25	0	21.38			3	22
		25	12	21.38			3	22
		25	25	21.31			3	22
		50	0	21.31			3	22
5 MHz	QPSK	RB Allocation	RB offset	Maximum Average Power (dBm)				
		23035 701.5 MHz	23095 707.5 MHz	23155 713.5 MHz			MPR	Tune-up Limit
			701.5 MHz	707.5 MHz	713.5 MHz			
		1	0	24.71	24.81	24.57	0	25
		1	12	24.65	24.73	24.53	0	25
		1	24	24.63	24.72	24.48	0	25
	16QAM	12	0	23.70	23.68	23.54	1	24
		12	7	23.73	23.68	23.55	1	24
		12	13	23.67	23.67	23.52	1	24
		25	0	23.73	23.68	23.53	1	24
	64QAM	1	0	23.79	23.43	23.24	1	24
		1	12	23.74	23.39	23.16	1	24
		1	24	23.72	23.36	23.16	1	24
		12	0	22.44	22.36	22.13	2	23
		12	7	22.41	22.36	22.14	2	23
		12	13	22.37	22.36	22.14	2	23
		25	0	22.37	22.32	22.05	2	23
3 MHz	QPSK	RB Allocation	RB offset	Maximum Average Power (dBm)				
		23025 700.5 MHz	23095 707.5 MHz	23165 714.5 MHz			MPR	Tune-up Limit
			700.5 MHz	707.5 MHz	714.5 MHz			
		1	0	24.72	24.67	24.53	0	25
		1	8	24.81	24.75	24.56	0	25
		1	14	24.71	24.66	24.43	0	25
	16QAM	8	0	23.69	23.69	23.49	1	24
		8	4	23.72	23.70	23.54	1	24
		8	7	23.69	23.73	23.55	1	24
		15	0	23.69	23.71	23.51	1	24
	64QAM	1	0	23.66	23.17	23.14	1	24
		1	8	23.70	23.25	23.17	1	24
		1	14	23.62	23.14	23.09	1	24
		8	0	22.34	22.37	22.12	2	23
		8	4	22.37	22.39	22.15	2	23
		8	7	22.36	22.39	22.13	2	23
		15	0	22.30	22.29	22.06	2	23
		1	0	22.37	22.59	22.33	2	23
		1	8	22.48	22.65	22.35	2	23
		1	14	22.37	22.57	22.24	2	23
		8	0	21.30	21.35	21.06	3	22
		8	4	21.36	21.39	21.11	3	22
		8	7	21.33	21.37	21.08	3	22
		15	0	21.31	21.29	21.14	3	22

**Note(s):**

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

**LTE Band 12 Measured Results (continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23017	23095	23173	MPR	Tune-up Limit
				699.7 MHz	707.5 MHz	715.3 MHz		
1.4 MHz	QPSK	1	0	24.64	24.64	24.54	0	25
		1	3	24.72	24.71	24.48	0	25
		1	5	24.65	24.64	24.38	0	25
		3	0	24.71	24.59	24.42	0	25
		3	1	24.70	24.67	24.46	0	25
		3	3	24.69	24.67	24.47	0	25
		6	0	23.62	23.63	23.42	1	24
	16QAM	1	0	23.57	23.31	23.01	1	24
		1	3	23.64	23.37	23.08	1	24
		1	5	23.53	23.32	23.04	1	24
		3	0	23.45	23.29	23.17	1	24
		3	1	23.48	23.32	23.25	1	24
		3	3	23.43	23.33	23.26	1	24
	64QAM	6	0	22.10	22.32	22.17	2	23
		1	0	22.31	22.59	22.14	2	23
		1	3	22.41	22.70	22.21	2	23
		1	5	22.31	22.59	22.17	2	23
		3	0	22.35	22.55	21.93	2	23
		3	1	22.47	22.63	22.02	2	23
		3	3	22.41	22.62	22.03	2	23
		6	0	21.50	21.19	21.05	3	22

**LTE Band 17 Measured Results**

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

**LTE Band 41 Measured Results**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)							
				39750	40185	40620	41055	41490	MPR	Tune-up Limit	
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz			
20 MHz	QPSK	1	0	23.22	23.35	23.38	23.29	23.45	0	23.5	
		1	49	23.17	23.30	23.20	23.35	23.27	0	23.5	
		1	99	23.10	23.26	23.13	23.35	23.12	0	23.5	
		50	0	23.29	23.37	23.26	23.39	23.36	0	23.5	
		50	24	23.27	23.34	23.22	23.34	23.26	0	23.5	
		50	50	23.15	23.30	23.18	23.35	23.18	0	23.5	
		100	0	23.23	23.32	23.21	23.28	23.24	0	23.5	
	16QAM	1	0	22.75	22.78	23.02	22.85	22.83	0	23.5	
		1	49	22.66	22.71	22.86	22.88	22.65	0	23.5	
		1	99	22.61	22.65	22.77	22.91	22.51	0	23.5	
		50	0	22.35	22.50	22.42	22.41	22.43	0.5	23	
		50	24	22.32	22.43	22.38	22.40	22.36	0.5	23	
		50	50	22.23	22.40	22.29	22.41	22.27	0.5	23	
		100	0	22.29	22.41	22.31	22.38	22.36	0.5	23	
	64QAM	1	0	22.35	22.79	22.34	22.44	22.86	0.5	23	
		1	49	22.31	22.73	22.18	22.46	22.63	0.5	23	
		1	99	22.24	22.67	22.11	22.48	22.54	0.5	23	
		50	0	21.42	21.50	21.39	21.49	21.43	1.5	22	
		50	24	21.36	21.44	21.36	21.45	21.35	1.5	22	
		50	50	21.29	21.40	21.25	21.43	21.29	1.5	22	
		100	0	21.35	21.42	21.31	21.42	21.35	1.5	22	
15 MHz	QPSK	1	0	23.20	23.34	23.28	23.40	23.28	0	23.5	
		1	37	23.19	23.26	23.17	23.33	23.16	0	23.5	
		1	74	23.09	23.16	23.12	23.22	23.06	0	23.5	
		36	0	23.22	23.34	23.25	23.30	23.26	0	23.5	
		36	20	23.20	23.35	23.20	23.25	23.23	0	23.5	
		36	39	23.13	23.29	23.14	23.27	23.17	0	23.5	
		75	0	23.17	23.28	23.20	23.24	23.19	0	23.5	
	16QAM	1	0	22.82	22.92	22.85	23.00	22.86	0	23.5	
		1	37	22.75	22.80	22.73	22.95	22.72	0	23.5	
		1	74	22.72	22.76	22.66	22.84	22.60	0	23.5	
		36	0	22.37	22.38	22.30	22.39	22.35	0.5	23	
		36	20	22.32	22.40	22.27	22.38	22.33	0.5	23	
		36	39	22.25	22.36	22.23	22.39	22.26	0.5	23	
		75	0	22.29	22.40	22.30	22.35	22.30	0.5	23	
	64QAM	1	0	22.13	22.05	22.66	22.33	22.02	0.5	23	
		1	37	22.11	21.96	22.52	22.27	21.90	0.5	23	
		1	74	22.04	21.88	22.45	22.19	21.77	0.5	23	
		36	0	21.27	21.48	21.38	21.38	21.45	1.5	22	
		36	20	21.25	21.50	21.36	21.35	21.42	1.5	22	
		36	39	21.23	21.41	21.31	21.38	21.35	1.5	22	
		75	0	21.31	21.43	21.33	21.36	21.32	1.5	22	
10 MHz	QPSK	1	0	23.10	23.27	23.23	23.31	23.24	0	23.5	
		1	25	23.16	23.24	23.19	23.34	23.17	0	23.5	
		1	49	23.11	23.21	23.13	23.26	23.12	0	23.5	
		25	0	23.25	23.33	23.25	23.32	23.26	0	23.5	
		25	12	23.21	23.33	23.23	23.33	23.22	0	23.5	
		25	25	23.17	23.30	23.18	23.33	23.18	0	23.5	
		50	0	23.19	23.30	23.22	23.28	23.23	0	23.5	
	16QAM	1	0	22.84	22.89	22.78	23.00	22.81	0	23.5	
		1	25	22.85	22.81	22.74	23.00	22.71	0	23.5	
		1	49	22.83	22.79	22.68	22.94	22.67	0	23.5	
		25	0	22.32	22.43	22.32	22.38	22.35	0.5	23	
		25	12	22.32	22.40	22.32	22.37	22.29	0.5	23	
		25	25	22.28	22.38	22.23	22.43	22.25	0.5	23	
		50	0	22.32	22.40	22.32	22.40	22.28	0.5	23	
	64QAM	1	0	22.27	22.00	22.59	22.47	21.98	0.5	23	
		1	25	22.33	21.96	22.53	22.50	21.87	0.5	23	
		1	49	22.30	21.91	22.48	22.44	21.84	0.5	23	
		25	0	21.26	21.46	21.26	21.31	21.40	1.5	22	
		25	12	21.24	21.46	21.27	21.33	21.38	1.5	22	
		25	25	21.21	21.44	21.21	21.32	21.34	1.5	22	
		50	0	21.27	21.39	21.26	21.32	21.32	1.5	22	

**LTE Band 41 Measured Results (continued)**

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)							
				39750	40185	40620	41055	41490	MPR	Tune-up Limit	
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz			
5 MHz	QPSK	1	0	23.13	23.29	23.19	23.20	23.21	0	23.5	
		1	12	23.11	23.30	23.17	23.28	23.17	0	23.5	
		1	24	23.11	23.26	23.14	23.23	23.15	0	23.5	
		12	0	23.24	23.35	23.20	23.30	23.22	0	23.5	
		12	7	23.25	23.34	23.23	23.39	23.23	0	23.5	
		12	13	23.23	23.33	23.21	23.36	23.22	0	23.5	
		25	0	23.25	23.31	23.18	23.30	23.21	0	23.5	
	16QAM	1	0	22.69	22.82	22.83	22.78	22.72	0	23.5	
		1	12	22.67	22.83	22.83	22.84	22.70	0	23.5	
		1	24	22.64	22.76	22.81	22.79	22.65	0	23.5	
		12	0	22.32	22.36	22.32	22.37	22.26	0.5	23	
		12	7	22.33	22.36	22.33	22.47	22.27	0.5	23	
		12	13	22.33	22.34	22.32	22.44	22.25	0.5	23	
		25	0	22.27	22.39	22.28	22.36	22.32	0.5	23	
	64QAM	1	0	22.00	22.78	22.45	22.09	22.67	0.5	23	
		1	12	21.99	22.75	22.41	22.15	22.65	0.5	23	
		1	24	21.96	22.73	22.39	22.10	22.64	0.5	23	
		12	0	21.30	21.51	21.22	21.36	21.40	1.5	22	
		12	7	21.30	21.51	21.23	21.45	21.40	1.5	22	
		12	13	21.28	21.46	21.21	21.44	21.40	1.5	22	
		25	0	21.31	21.36	21.19	21.38	21.27	1.5	22	

## 9.4. LTE Carrier Aggregation

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

For inter-band carrier aggregation with uplink assigned to one E-UTRA band (Table 5.6A-1), the requirements in subclause 6.2.3 apply.

For inter-band carrier aggregation with one component carrier per operating band and the uplink active in two E-UTRA bands, the requirements in subclause 6.2.3 apply for each uplink component carrier.

For intra-band contiguous carrier aggregation the allowed Maximum Power Reduction (MPR) for the maximum output power applicable to the DUT in table below. In case the modulation format is different on different component carriers then the MPR is determined by the rules applied to higher order of those modulations.

Modulation	CA bandwidth Class B and C / Smallest Component Carrier Transmission Bandwidth Configuration				MPR (dB)
	25 RB	50 RB	75 RB	100 RB	
QPSK	> 8 and ≤ 25	> 12 and ≤ 50	> 16 and ≤ 75	> 18 and ≤ 100	≤ 1
QPSK	> 25	> 50	> 75	> 100	≤ 2
16 QAM	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 8 and ≤ 25	> 12 and ≤ 50	> 16 and ≤ 75	> 18 and ≤ 100	≤ 2
16 QAM	> 25	> 50	> 75	> 100	≤ 3
64 QAM	≤ 8 and allocation wholly contained within a single CC	≤ 12 and allocation wholly contained within a single CC	≤ 16 and allocation wholly contained within a single CC	≤ 18 and allocation wholly contained within a single CC	≤ 2
64 QAM	> 8 or allocation extends across two CC's	> 12 or allocation extends across two CC's	> 16 or allocation extends across two CC's	> 18 or allocation extends across two CC's	≤ 3

For PUCCH and SRS transmissions, the allowed MPR is according to that specified for PUSCH WPDK modulation for the corresponding transmission bandwidth.

For intra-band contiguous carrier aggregation bandwidth class C with non-contiguous resource allocation, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2A-1 is specified as follows

$$\text{MPR} = \text{CEIL}\{\min(M_A, M_{IM5}), 0.5\}$$

Where  $M_A$  is defined as follows

$M_A =$	8.2	$; 0 \leq A < 0.025$
	9.2 – 40A	$; 0.025 \leq A < 0.05$
	8 – 16A	$; 0.05 \leq A < 0.25$
	4.83 – 3.33A	$; 0.25 \leq A \leq 0.4$
	3.83 – 0.83A	$; 0.4 \leq A \leq 1$

and  $M_{IM5}$  is defined as follows

$M_{IM5} =$	4.5	$; \Delta IM5 < 1.5 * BW_{Channel\_CA}$
	6.0	$; 1.5 * BW_{Channel\_CA} \leq \Delta IM5 < BW_{Channel\_CA}/2 + \Delta f_{ooB}$
	$M_A$	$; \Delta IM5 \geq BW_{Channel\_CA}/2 + \Delta f_{ooB}$

Where

$$A = N_{RB\_alloc} / N_{RB\_agg}$$

$$\Delta IM5 = \max(|F_{C\_agg} - (3*F_{agg\_alloc\_low} - 2*F_{agg\_alloc\_high})|, |F_{C\_agg} - (3*F_{agg\_alloc\_high} - 2*F_{agg\_alloc\_low})|)$$

$\text{CEIL}\{M_A, 0.5\}$  means rounding upwards to closest 0.5dB, i.e.  $\text{MPR} \in [3.0, 3.5, 4.0, 4.5, 5.0, 5.5, 6.0, 6.5, 7.0, 7.5, 8.0, 8.5]$

For intra-band carrier aggregation, the MPR is evaluated per slot and given by the maximum value taken over the transmission(s) on all component carriers within the slot; the maximum MPR over the two slots is then applied for the entire subframe.

For intra-band non-contiguous carrier aggregation with one uplink carrier on the PCC, the requirements in the subclause 6.2.3 apply. For intra-band non-contiguous aggregation with two uplink carriers the MPR is defined for those E-UTRA bands where maximum possible  $W_{GAP} \leq 42.2$  MHz as follows

$$\text{MPR} = \text{CEIL}\{M_N, 0.5\}$$

Where  $M_N$  is defined as follows

$M_N =$	-0.125N + 18.25	$; 2 \leq N \leq 50$
	-0.0333 N + 13.67	$; 50 < N \leq 200$

Where  $N = N_{RB\_alloc}$  is the number of allocated resource blocks.

For the UE maximum output power modified by MPR, the power limits specified in subclause 6.2.5A apply.

### LTE Carrier Aggregation Measured Results

The following power measurements were performed with a single carrier uplink. CA is only supported in the downlinks. The DUT supports downlink CA combinations up to one (1) Uplink and two (2) Downlinks.

Type	LTE CA combinations PCC + SCC	PCC (UL)					SCC (DL)			LTE Rel 8 Tx. Power [dBm]	LTE Rel 12 Tx. Power [dBm]	Delta
		Mode	BW (MHz)	Channel	Freq. (MHz)	RB/Offset	BW (MHz)	Channel	Freq. (MHz)			
Intra-Band Contiguous	41C	QPSK	20	39750	2506.0	1,0	20	39948	2525.8	23.26	23.25	0.0%

## 9.5. Wi-Fi 2.4GHz (DTS Band)

### Wi-Fi 2.4GHz Measured Results

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)			
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)	
DSSS 2.4 GHz	802.11b	1 Mbps	1	2412	16.03	17.00	Yes	14.35	15.50	Yes	
			6	2437	16.03	17.00		14.38	15.50		
			11	2462	15.65	17.00		14.17	15.50		
			12	2467	Not Required	16.23		14.68	11.68		
			13	2472		13.27		11.68			
	OFDM 2.4 GHz	6 Mbps	3	2422	16.09	17.00	No	14.59	15.50	No	
			6	2437	16.17	17.00		14.43	15.50		
			10	2457	16.19	17.00		14.66	15.50		
			12	2467	Not Required	10.85		8.89	2.89		
			13	2472		4.85		Not Required			
	802.11n (HT20)	6.5 Mbps	3	2422	16.00	17.00	No	14.49	15.50	No	
			6	2437	16.08	17.00		14.43	15.50		
			10	2457	16.11	17.00		14.55	15.50		
			12	2467	Not Required	9.22		7.35	0.85		
			13	2472		2.72		Not Required			

#### Note(s):


1. SAR is not required for 802.11g/n modes when the adjusted SAR for 802.11b is < 1.2 W/kg.
2. For "Not required", SAR Test reduction was applied in accordance with KDB 248227 §2.1, b), 1).
3. SAR is not required for Channels 12 and 13 because the tune-up limit for these two channels are lower than those for the default test channels.

### Duty Factor Measured Results

Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
802.11b	1 Mbps	8.108	8.108	100.00%	1.00

### Duty Cycle plot

802.11b 1Mbps

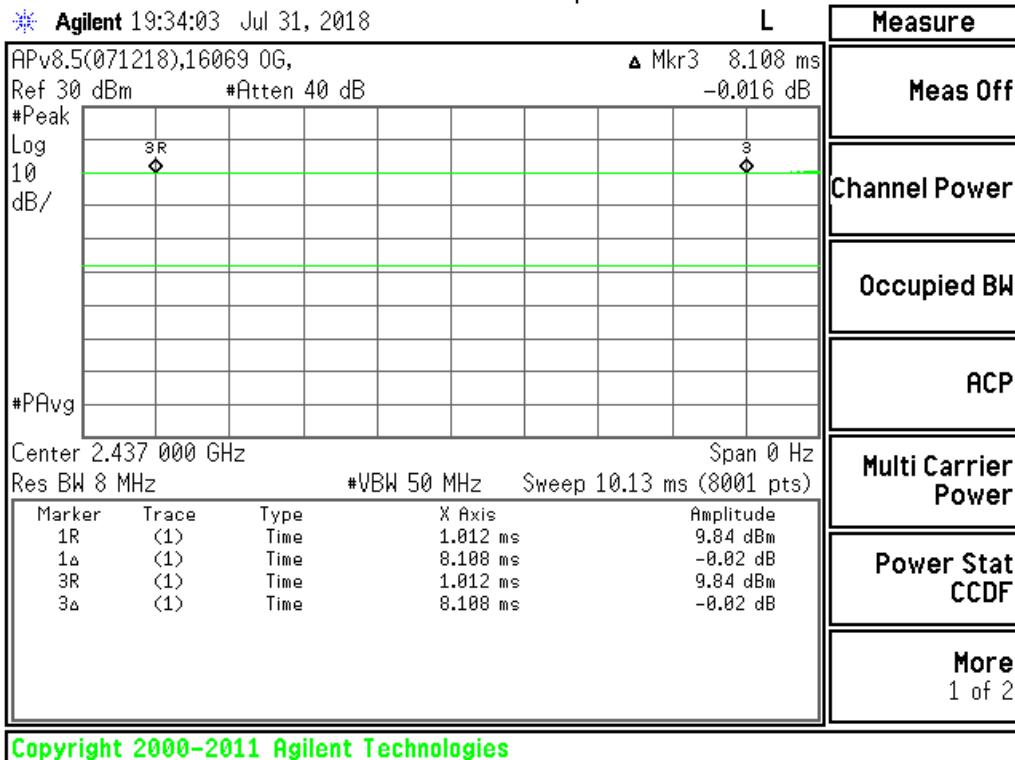

## 9.6. Wi-Fi 5GHz (U-NII Bands)

### Wi-Fi 5 GHz Measured Results

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)					
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)			
U-NII 1 5.2 GHz	802.11a	6 Mbps	36	5180	Not Required	16.00	No	Not Required	14.00	No			
			40	5200		16.00			14.00				
			44	5220		16.00			14.00				
			48	5240		16.00			14.00				
	802.11n (HT20)	6.5 Mbps	36	5180	Not Required	16.00	No	Not Required	14.00	No			
			40	5200		16.00			14.00				
			44	5220		16.00			14.00				
			48	5240		16.00			14.00				
	802.11ac (VHT20)	6.5 Mbps	36	5180	Not Required	16.00	No	Not Required	14.00	No			
			40	5200		16.00			14.00				
			44	5220		16.00			14.00				
			48	5240		16.00			14.00				
	802.11n (HT40)	13.5 Mbps	38	5190	Not Required	14.99	Yes	Not Required	9.29	Yes			
			46	5230	15.25	16.00		13.24	14.00				
	802.11ac (VHT40)	13.5 Mbps	38	5190	Not Required	14.95	No	Not Required	9.17	No			
			46	5230	15.23	16.00		13.24	14.00				
	802.11ac (VHT80)	29.3 Mbps	42	5210	Not Required	14.09	No	Not Required	8.33	No			
U-NII 2A 5.3 GHz	802.11a	6 Mbps	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)					
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)			
					52	5260	Not Required	No	Not Required	14.00	No		
					56	5280				14.00			
					60	5300				14.00			
					64	5320				14.00			
	802.11n (HT20)	6.5 Mbps			52	5260	Not Required	No	Not Required	14.00	No		
					56	5280				14.00			
					60	5300				14.00			
					64	5320				14.00			
	802.11ac (VHT20)	6.5 Mbps			52	5260	Not Required	No	Not Required	14.00	No		
					56	5280				14.00			
					60	5300				14.00			
					64	5320				14.00			
	802.11n (HT40)	13.5 Mbps	54	5270	15.01	16.00	Yes	13.20	14.00	Yes			
			62	5310	Not Required	14.87		Not Required	9.60				
	802.11ac (VHT40)	13.5 Mbps	54	5270	15.01	16.00	No	13.19	14.00	No			
			62	5310	Not Required	14.87		Not Required	9.60				
	802.11ac (VHT80)	29.3 Mbps	58	5290	Not Required	13.87	No	Not Required	8.60	No			

#### Note(s):

- For "Not required", SAR Test reduction was applied in accordance with KDB 248227 §2.1, b), 1).
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
- When the specified maximum output power is the same for both U-NII band I and U-NII band 2A, begin SAR measurement in U-NII band 2A; and if the highest reported SAR for U-NII band 2A is
  - ≤ 1.2 W/kg, SAR is not required for U-NII band I
  - > 1.2 W/kg, both bands should be tested independently for SAR.

**Wi-Fi 5 GHz Measured Results (continued)**

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-2C 5.5 GHz	802.11a	6 Mbps	100	5500	Not Required	16.00	No	Not Required	14.00	No
			116	5580		16.00			14.00	
			124	5620		16.00			14.00	
			140	5700		14.11			10.97	
			144	5720		16.00			14.00	
	802.11n (HT20)	6.5 Mbps	100	5500	Not Required	16.00	No	Not Required	14.00	No
			116	5580		16.00			14.00	
			124	5620		16.00			14.00	
			140	5700		14.10			10.91	
			144	5720		16.00			14.00	
	802.11ac (VHT20)	6.5 Mbps	100	5500	Not Required	16.00	No	Not Required	14.00	No
			116	5580		16.00			14.00	
			124	5620		16.00			14.00	
			140	5700		13.96			10.99	
			144	5720		16.00			14.00	
	802.11n (HT40)	13.5 Mbps	102	5510	Not Required	14.10	No	Not Required	10.61	No
			118	5590		16.00			14.00	
			126	5630		16.00			14.00	
			142	5710		16.00			14.00	
	802.11ac (VHT40)	13.5 Mbps	102	5510	Not Required	13.96	No	Not Required	10.65	No
			118	5590		16.00			14.00	
			126	5630		16.00			14.00	
			142	5710		16.00			14.00	
	802.11ac (VHT80)	29.3 Mbps	106	5530	Not Required	13.96	Yes	Not Required	10.03	Yes
			122	5610	14.56	16.00		12.60	14.00	
			138	5690	14.61	16.00		12.62	14.00	
Band	Mode	Data Rate	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-3 5.8 GHz	802.11a	6 Mbps	149	5745	Not Required	13.12	No	Not Required	11.72	No
			157	5785		16.00			14.00	
			165	5825		13.12			11.72	
	802.11n (HT20)	6.5 Mbps	149	5745	Not Required	13.05	No	Not Required	11.69	No
			157	5785		16.00			14.00	
			165	5825		13.05			11.69	
	802.11ac (VHT20)	6.5 Mbps	149	5745	Not Required	13.11	No	Not Required	11.38	No
			157	5785		16.00			14.00	
			165	5825		13.11			11.38	
	802.11n (HT40)	13.5 Mbps	151	5755	Not Required	13.05	Yes	Not Required	10.18	Yes
			159	5795	14.24	16.00		12.74	14.00	
	802.11ac (VHT40)	13.5 Mbps	151	5755	Not Required	13.11	No	Not Required	10.24	No
			159	5795	14.25	16.00		12.73	14.00	
	802.11ac (VHT80)	29.3 Mbps	155	5775	Not Required	13.11	No	Not Required	10.98	No

**Note(s):**


- For "Not required", SAR Test reduction was applied in accordance with KDB 248227 §2.1, b), 1).
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.

**Duty Factor Measured Results**


Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
802.11n	HT40	1.228	1.311	93.67%	1.07
802.11ac	VHT80	0.5922	0.6668	88.81%	1.13

## Duty Cycle plots

802.11n HT40

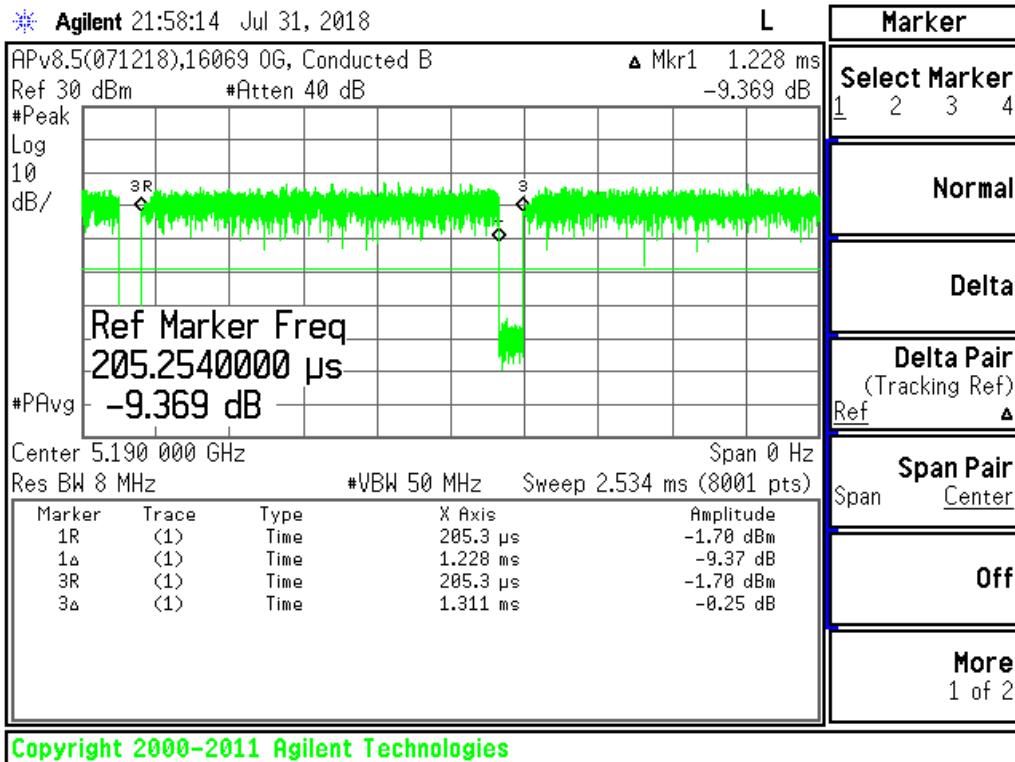

802.11ac VHT80

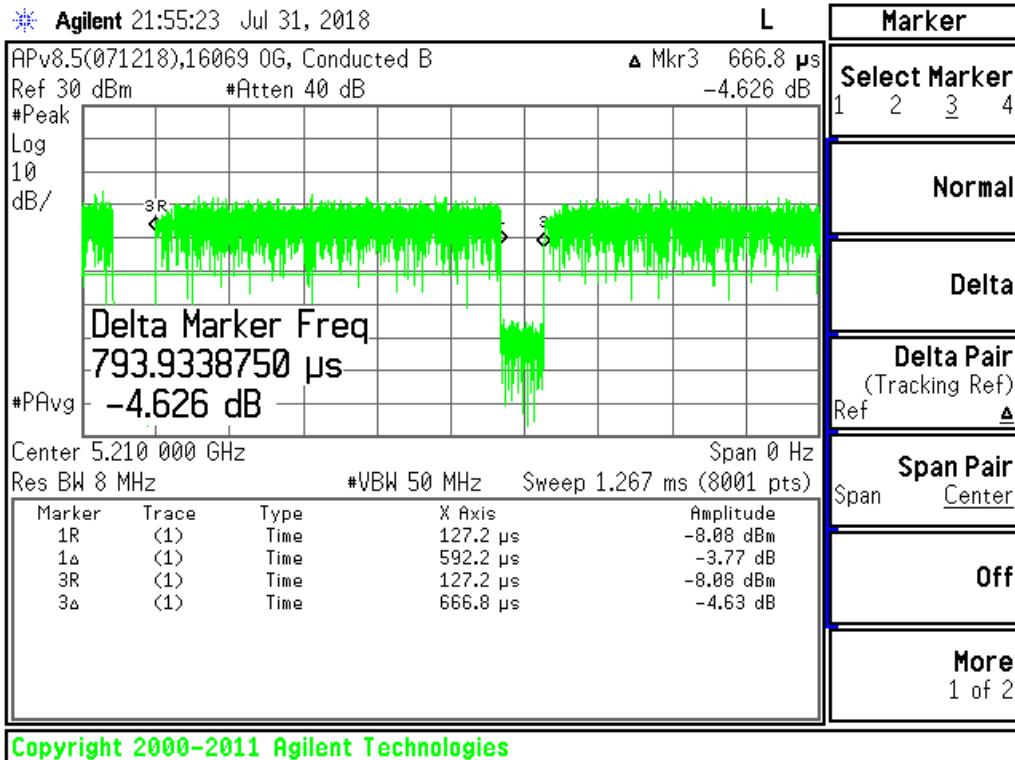

## 9.7. Bluetooth


### Bluetooth Measured Results

Band	Mode	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)
2.4	GFSK	0	2402	10.02	11.71	Yes
		39	2441	10.72	12.37	
		78	2480	9.98	11.43	
	EDR, $\pi/4$ DQPSK	0	2402	7.48	9.30	No
		39	2441	8.27	10.00	
		78	2480	7.82	9.07	
	EDR, 8-DPSK	0	2402	7.51	9.30	No
		39	2441	8.26	10.00	
		78	2480	7.79	9.07	
	LE, GFSK 1 Mbps	0	2402	3.66	5.66	No
		19	2440	4.94	6.83	
		39	2480	4.91	5.93	
	LE, GFSK 2 Mbps	0	2402	3.66	5.66	No
		19	2440	4.98	6.83	
		39	2480	4.93	5.93	

### Duty Factor Measured Results

Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
GFSK	DH5	2.884	3.751	76.89%	1.30

### Duty Cycle plot

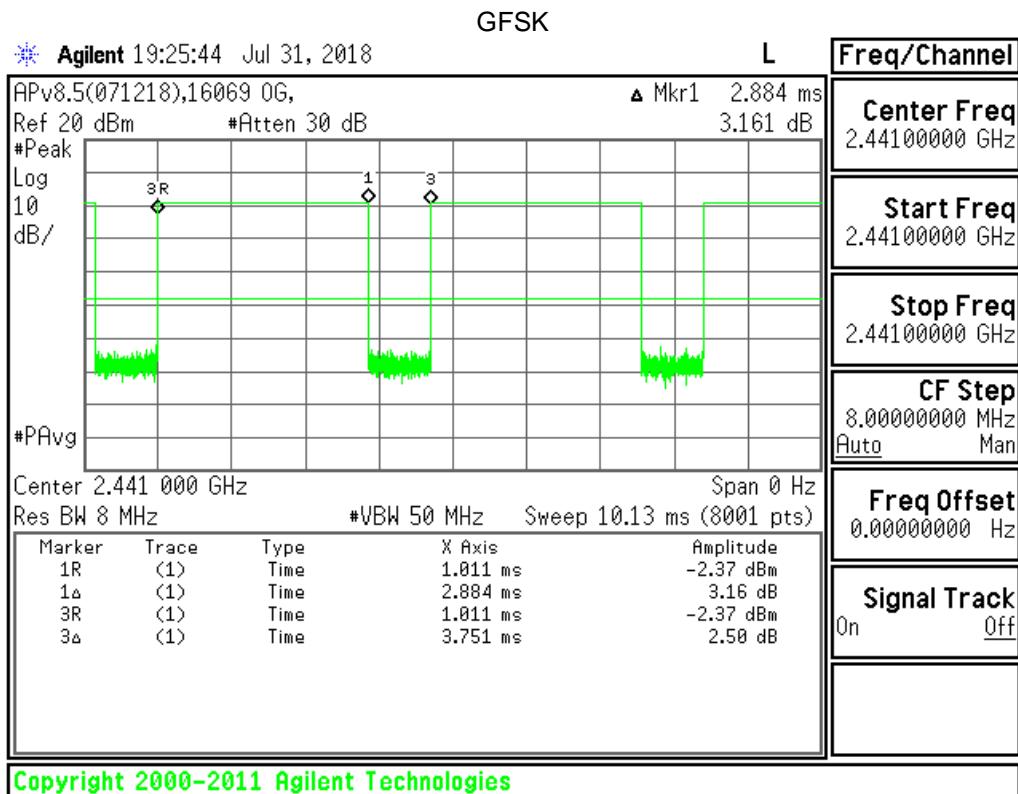

## 10. Measured and Reported (Scaled) SAR Results

### SAR Test Reduction criteria are as follows:

- Reported SAR(W/kg) for WWAN = Measured SAR \*Tune-up Scaling Factor
- Reported SAR(W/kg) for Wi-Fi and Bluetooth = Measured SAR \* Tune-up scaling factor \* Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

### KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- $\leq 0.8 \text{ W/kg}$  or  $2.0 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\leq 100 \text{ MHz}$
- $\leq 0.6 \text{ W/kg}$  or  $1.5 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is between  $100 \text{ MHz}$  and  $200 \text{ MHz}$
- $\leq 0.4 \text{ W/kg}$  or  $1.0 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\geq 200 \text{ MHz}$

### KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is  $> 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

### KDB 648474 D04 Handset SAR (Phablet Only):

When hotspot mode does not apply, Product Specific 10-g SAR is required for all surfaces and edges with an antenna located at  $\leq 25 \text{ mm}$  from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions. When hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR  $> 1.2 \text{ W/kg}$ .

### KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4} \text{ dB}$  higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2 \text{ W/kg}$ , SAR measurement is not required for the secondary mode.

### KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is  $> 0.8 \text{ W/kg}$ , testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are  $> 0.8 \text{ W/kg}$ . Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation  $< 1.45 \text{ W/kg}$ .
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is  $< 1.45 \text{ W/Kg}$  and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is  $< 1.45 \text{ W/Kg}$  and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

### KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode

configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPc mini-tablet configurations may be reduced according to the highest reported SAR determined using the *initial test position(s)* by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The *initial test position(s)* is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). Initial Test Position SAR Test Reduction Procedure is outlined in KDB 248227 D01 §5.1.1. To determine the *initial test position*, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the *initial test position*.

## 10.1. GSM850

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	GPRS 4 Slots	0	Left Touch	190	836.6	27.2	26.5	0.052	0.061	
			Left Tilt	190	836.6	27.2	26.5	0.031	0.036	
			Right Touch	190	836.6	27.2	26.5	0.094	<b>0.110</b>	1
			Right Tilt	190	836.6	27.2	26.5	0.032	0.037	
Body-worn	GPRS 4 Slots	15	Rear	190	836.6	27.2	26.5	0.176	0.205	
			Front	190	836.6	27.2	26.5	0.192	<b>0.224</b>	2
Hotspot	GPRS 4 Slots	10	Rear	190	836.6	27.2	26.5	0.300	0.350	
			Front	190	836.6	27.2	26.5	0.334	0.390	
			Edge 2	190	836.6	27.2	26.5	0.167	0.195	
			Edge 3	190	836.6	27.2	26.5	0.257	0.300	
			Edge 4	190	836.6	27.2	26.5	0.072	0.084	
Hotspot	DTM 2 Slots	10	Front	190	836.6	30.2	29.5	0.376	<b>0.447</b>	3

## 10.2. GSM1900

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	GPRS 4 Slots	0	Left Touch	661	1880.0	25.7	25.0	0.082	<b>0.096</b>	4
			Left Tilt	661	1880.0	25.7	25.0	0.035	0.041	
			Right Touch	661	1880.0	25.7	25.0	0.060	0.070	
			Right Tilt	661	1880.0	25.7	25.0	0.032	0.038	
Body-worn	GPRS 4 Slots	15	Rear	661	1880.0	25.7	25.0	0.248	0.291	
			Front	661	1880.0	25.7	25.0	0.293	<b>0.343</b>	5
Hotspot	GPRS 4 Slots	10	Rear	661	1880.0	25.7	25.0	0.506	0.593	
			Front	661	1880.0	25.7	25.0	0.551	0.646	
			Edge 2	661	1880.0	25.7	25.0	0.061	0.072	
			Edge 3	661	1880.0	25.7	25.0	0.669	0.784	
			Edge 4	661	1880.0	25.7	25.0	0.196	0.230	
Hotspot	DTM 2 Slots	10	Edge 3	512	1850.2	28.7	28.1	0.652	0.756	
				661	1880.0	28.7	28.1	0.755	0.869	
				810	1909.8	28.7	28.1	0.824	<b>0.940</b>	6

### 10.3. W-CDMA Band II

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	9400	1880.0	21.7	20.9	0.054	<b>0.065</b>	7
			Left Tilt	9400	1880.0	21.7	20.9	0.023	0.028	
			Right Touch	9400	1880.0	21.7	20.9	0.053	0.064	
			Right Tilt	9400	1880.0	21.7	20.9	0.025	0.030	
Body-worn	Rel 99 RMC	15	Rear	9400	1880.0	21.7	20.9	0.177	0.212	
			Front	9400	1880.0	21.7	20.9	0.249	<b>0.299</b>	8
Hotspot	Rel 99 RMC	10	Rear	9400	1880.0	21.7	20.9	0.284	0.341	
			Front	9400	1880.0	21.7	20.9	0.367	0.440	
			Edge 2	9400	1880.0	21.7	20.9	0.045	0.054	
			Edge 3	9262	1852.4	21.7	20.9	0.635	0.772	
				9400	1880.0	21.7	20.9	0.711	0.853	
			9538	1907.6	21.7	21.0	0.789	<b>0.918</b>		9
			Edge 4	9400	1880.0	21.7	20.9	0.176	0.211	

### 10.4. W-CDMA Band IV

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	1413	1732.6	23.2	22.5	0.070	<b>0.082</b>	10
			Left Tilt	1413	1732.6	23.2	22.5	0.016	0.019	
			Right Touch	1413	1732.6	23.2	22.5	0.066	0.078	
			Right Tilt	1413	1732.6	23.2	22.5	0.015	0.018	
Body-worn	Rel 99 RMC	15	Rear	1413	1732.6	23.2	22.5	0.351	0.412	
			Front	1413	1732.6	23.2	22.5	0.400	<b>0.470</b>	11
Hotspot	Rel 99 RMC	10	Rear	1413	1732.6	23.2	22.5	0.615	0.723	
			Front	1413	1732.6	23.2	22.5	0.669	<b>0.786</b>	12
			Edge 2	1413	1732.6	23.2	22.5	0.035	0.041	
			Edge 3	1413	1732.6	23.2	22.5	0.633	0.744	
			Edge 4	1413	1732.6	23.2	22.5	0.202	0.237	

## 10.5. LTE Band 2 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	18900	1880.0	1	0	21.5	21.1	0.053	0.058	
						50	0	21.5	21.0	0.053	<b>0.059</b>	13
			Left Tilt	18900	1880.0	1	0	21.5	21.1	0.025	0.028	
						50	0	21.5	21.0	0.027	0.030	
			Right Touch	18900	1880.0	1	0	21.5	21.1	0.053	0.059	
	QPSK	15				50	0	21.5	21.0	0.051	0.056	
			Right Tilt	18900	1880.0	1	0	21.5	21.1	0.022	0.024	
						50	0	21.5	21.0	0.021	0.024	
			Rear	18900	1880.0	1	0	21.5	21.1	0.154	0.171	
						50	0	21.5	21.0	0.158	0.176	
Hotspot	QPSK	10	Front	18900	1880.0	1	0	21.5	21.1	0.174	0.193	
						50	0	21.5	21.0	0.179	<b>0.199</b>	14
			Rear	18900	1880.0	1	0	21.5	21.1	0.335	0.372	
						50	0	21.5	21.0	0.343	0.382	
			Front	18900	1880.0	1	0	21.5	21.1	0.392	0.435	
	QPSK	10	Edge 2	18900	1880.0	1	0	21.5	21.1	0.052	0.057	
						50	0	21.5	21.0	0.053	0.059	
			Edge 3	18900	1880.0	1	0	21.5	21.1	0.603	0.669	
						50	0	21.5	21.0	0.622	<b>0.693</b>	15
			Edge 4	18900	1880.0	1	0	21.5	21.1	0.145	0.161	
						50	0	21.5	21.0	0.153	0.170	

## 10.6. LTE Band 4 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	20175	1732.5	1	0	23.0	22.6	0.041	0.045	
						50	0	23.0	22.6	0.043	0.047	
			Left Tilt	20175	1732.5	1	0	23.0	22.6	0.008	0.009	
						50	0	23.0	22.6	0.010	0.011	
			Right Touch	20175	1732.5	1	0	23.0	22.6	0.045	0.049	
	QPSK	15				50	0	23.0	22.6	0.048	<b>0.053</b>	16
			Right Tilt	20175	1732.5	1	0	23.0	22.6	0.005	0.006	
						50	0	23.0	22.6	0.007	0.008	
			Rear	20175	1732.5	1	0	23.0	22.6	0.258	0.283	
						50	0	23.0	22.6	0.253	0.279	
Hotspot	QPSK	10	Front	20175	1732.5	1	0	23.0	22.6	0.291	<b>0.319</b>	17
						50	0	23.0	22.6	0.283	0.312	
			Rear	20175	1732.5	1	0	23.0	22.6	0.545	0.598	
						50	0	23.0	22.6	0.533	0.588	
			Front	20175	1732.5	1	0	23.0	22.6	0.564	<b>0.618</b>	18
	QPSK	10				50	0	23.0	22.6	0.549	0.606	
			Edge 2	20175	1732.5	1	0	23.0	22.6	0.022	0.024	
						50	0	23.0	22.6	0.020	0.022	
			Edge 3	20175	1732.5	1	0	23.0	22.6	0.508	0.557	
						50	0	23.0	22.6	0.522	0.576	
			Edge 4	20175	1732.5	1	0	23.0	22.6	0.133	0.146	
						50	0	23.0	22.6	0.132	0.146	

## 10.7. LTE Band 12 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	23095	707.5	1	25	25.0	24.7	0.055	0.059	
						25	0	24.0	23.8	0.031	0.033	
			Left Tilt	23095	707.5	1	25	25.0	24.7	0.032	0.035	
						25	0	24.0	23.8	0.006	0.007	
			Right Touch	23095	707.5	1	25	25.0	24.7	0.065	<b>0.070</b>	19
						25	0	24.0	23.8	0.040	0.042	
			Right Tilt	23095	707.5	1	25	25.0	24.7	0.035	0.038	
						25	0	24.0	23.8	0.018	0.019	
Body-worn	QPSK	15	Rear	23095	707.5	1	25	25.0	24.7	0.100	0.108	
						25	0	24.0	23.8	0.065	0.068	
			Front	23095	707.5	1	25	25.0	24.7	0.102	<b>0.110</b>	20
						25	0	24.0	23.8	0.066	0.069	
Hotspot	QPSK	10	Rear	23095	707.5	1	25	25.0	24.7	0.104	0.112	
						25	0	24.0	23.8	0.067	0.070	
			Front	23095	707.5	1	25	25.0	24.7	0.105	0.114	
						25	0	24.0	23.8	0.066	0.069	
			Edge 2	23095	707.5	1	25	25.0	24.7	0.145	<b>0.157</b>	21
						25	0	24.0	23.8	0.094	0.099	
			Edge 3	23095	707.5	1	25	25.0	24.7	0.047	0.051	
						25	0	24.0	23.8	0.029	0.030	
			Edge 4	23095	707.5	1	25	25.0	24.7	0.082	0.089	
						25	0	24.0	23.8	0.056	0.059	

## 10.8. LTE Band 17 (10MHz Bandwidth)

SAR for LTE Band 17 (Frequency Range: 704-716 MHz) is covered by LTE Band 12 (Frequency Range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

## 10.9. LTE Band 41 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	40620	2593.0	1	0	23.5	23.4	0.040	0.041	
						50	0	23.5	23.3	0.054	0.057	
			Left Tilt	40620	2593.0	1	0	23.5	23.4	0.021	0.022	
						50	0	23.5	23.3	0.003	0.003	
			Right Touch	40620	2593.0	1	0	23.5	23.4	0.101	0.104	
						50	0	23.5	23.3	0.101	<b>0.107</b>	22
			Right Tilt	40620	2593.0	1	0	23.5	23.4	0.009	0.010	
						50	0	23.5	23.3	0.007	0.007	
Body-worn	QPSK	15	Rear	40620	2593.0	1	0	23.5	23.4	0.188	0.193	
						50	0	23.5	23.3	0.182	0.192	
			Front	40620	2593.0	1	0	23.5	23.4	0.196	<b>0.201</b>	23
						50	0	23.5	23.3	0.189	0.200	
Hotspot	QPSK	10	Rear	40620	2593.0	1	0	23.5	23.4	0.337	0.346	
						50	0	23.5	23.3	0.327	0.345	
			Front	40620	2593.0	1	0	23.5	23.4	0.386	0.397	
						50	0	23.5	23.3	0.372	0.393	
			Edge 2	40620	2593.0	1	0	23.5	23.4	0.206	0.212	
						50	0	23.5	23.3	0.215	0.227	
			Edge 3	39750	2506.0	1	0	23.5	23.2	0.426	0.454	
						40185	2549.5	1	0	23.5	23.3	0.676
				40620	2593.0	1	0	23.5	23.4	0.785	<b>0.807</b>	24
						50	0	23.5	23.3	0.757	0.799	
			41055	2636.5	1	49	23.5	23.4	0.577	0.597		
			41490	2680.0	1	0	23.5	23.4	0.382	0.387		
			Edge 4	40620	2593.0	1	0	23.5	23.4	0.053	0.054	
						50	0	23.5	23.3	0.052	0.055	

## 10.10. Wi-Fi (DTS Band)

When the 802.11b reported SAR of the highest measured maximum output power channel is  $\leq 0.8 \text{ W/kg}$ , no further SAR testing is required. If SAR is  $> 0.8 \text{ W/kg}$  and  $\leq 1.2 \text{ W/kg}$ , SAR is required for the next highest measured output power channel. Finally, if SAR is  $> 1.2 \text{ W/kg}$ , SAR is required for the third channel.

SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2 \text{ W/kg}$ .

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
2.4 GHz	Chain 0	802.11b 1 Mbps	Head	0	Left Touch	6	2437.0	100.00%	0.207	17.0	16.0			
					Left Tilt	6	2437.0	100.00%	0.219	17.0	16.0			
					Right Touch	6	2437.0	100.00%	0.588	17.0	16.0	0.465	0.581	25
					Right Tilt	6	2437.0	100.00%	0.663	17.0	16.0	0.293	0.366	
			Body-worn	15	Rear	6	2437.0	100.00%	0.039	17.0	16.0			
					Front	6	2437.0	100.00%	0.070	17.0	16.0	0.046	0.058	26
			Hotspot & Wi-Fi Direct	10	Rear	6	2437.0	100.00%	0.079	17.0	16.0			
					Front	6	2437.0	100.00%	0.126	17.0	16.0			
					Edge 1	6	2437.0	100.00%	0.050	17.0	16.0			
					Edge 4	6	2437.0	100.00%	0.192	17.0	16.0	0.132	0.165	27
2.4 GHz	Chain 1	802.11b 1 Mbps	Head	0	Left Touch	6	2437.0	100.00%	0.025	15.5	14.4			
					Left Tilt	6	2437.0	100.00%	0.009	15.5	14.4			
					Right Touch	6	2437.0	100.00%	0.038	15.5	14.4	0.032	0.041	28
					Right Tilt	6	2437.0	100.00%	0.034	15.5	14.4			
			Body-worn	15	Rear	6	2437.0	100.00%	0.028	15.5	14.4	0.019	0.025	29
					Front	6	2437.0	100.00%	0.006	15.5	14.4			
			Hotspot & Wi-Fi Direct	10	Rear	6	2437.0	100.00%	0.069	15.5	14.4	0.045	0.059	30
					Front	6	2437.0	100.00%	0.014	15.5	14.4			
					Edge 2	6	2437.0	100.00%	0.024	15.5	14.4			

Adjusted SAR for OFDM Modes:

Antenna	802.11b Max. Power		802.11g Max. Power		802.11n HT20 Max. Power		Highest Reported SAR for 802.11b (W/kg)	Adjusted SAR for 802.11g (W/kg)	Adjusted SAR for 802.11n HT20 (W/kg)
	dBm	mW	dBm	mW	dBm	mW			
Chain 0	17.0	50	17.0	50	17.0	50	0.625	0.625	0.625
Chain 1	15.5	35.5	15.5	35.5	15.5	35.5	0.063	0.063	0.063

**Note(s):**

Adjusted SAR for OFDM modes is  $< 1.2 \text{ W/kg}$ , therefore SAR testing is not required for OFDM modes.

## 10.11. Wi-Fi (U-NII Band)

### U-NII 1 &2A

When the specified maximum output power is the same for both U-NII band 1 and U-NII band 2A, begin SAR measurement in U-NII band 2A; and if the highest *reported* SAR for U-NII band 2A is

- ≤ 1.2 W/kg, SAR is not required for U-NII band 1
- > 1.2 W/kg, both bands should be tested independently for SAR.

Per KDB 248227 D01 §1: While 1-g SAR thresholds are specified in the procedures for SAR test reduction and exclusion, these thresholds should be multiplied by 2.5 when 10-g extremity SAR is considered.

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
5.3 GHz U-NII 2A	Chain 0	802.11n HT40	Head	0	Left Touch	54	5270.0	93.67%	0.298	16.0	15.0			
					Left Tilt	54	5270.0	93.67%	0.246	16.0	15.0			
					Right Touch	54	5270.0	93.67%	0.934	16.0	15.0	0.460	0.617	31
					Right Tilt	54	5270.0	93.67%	0.770	16.0	15.0	0.337	0.452	
	Chain 1	802.11n HT40	Body-worn	15	Rear	54	5270.0	93.67%	0.079	16.0	15.0	0.033	0.044	32
					Front	54	5270.0	93.67%	0.075	16.0	15.0			
					Left Touch	54	5270.0	93.67%	0.066	14.0	13.2	0.031	0.040	33
					Left Tilt	54	5270.0	93.67%	0.018	14.0	13.2			
5.3 GHz U-NII 2A	Chain 1	802.11n HT40	Head	0	Right Touch	54	5270.0	93.67%	0.017	14.0	13.2			
					Right Tilt	54	5270.0	93.67%	0.016	14.0	13.2			
					Rear	54	5270.0	93.67%	0.058	14.0	13.2	0.018	0.023	34
					Front	54	5270.0	93.67%	0.023	14.0	13.2			

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		10-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
5.3 GHz U-NII 2A	Chain 0	802.11n HT40	Product Specific 10g	0	Rear	54	5270.0	93.67%	0.952	16.0	15.0			
					Front	54	5270.0	93.67%	2.610	16.0	15.0	0.283	0.379	35
					Edge 1	54	5270.0	93.67%	0.389	16.0	15.0			
					Edge 4	54	5270.0	93.67%	2.230	16.0	15.0			
5.3 GHz U-NII 2A	Chain 1	802.11n HT40	Product Specific 10g	0	Rear	54	5270.0	93.67%	1.410	14.0	13.2	0.158	0.203	36
					Front	54	5270.0	93.67%	0.541	14.0	13.2			
					Edge 2	54	5270.0	93.67%	1.010	14.0	13.2			

### Note(s):

1. Highest Reported 1-g SAR for U-NII 2A mode is < 1.2 W/kg, therefore SAR testing is not required for U-NII 1 mode.
2. Highest Reported 10-g SAR for U-NII 2A mode is < 3.0 W/kg, therefore SAR testing is not required for U-NII 1 mode.

### U-NII 2C

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
5.6 GHz U-NII 2C	Chain 0	802.11ac VHT80	Head	0	Left Touch	138	5690.0	88.81%	0.126	16.0	14.6			
					Left Tilt	138	5690.0	88.81%	0.140	16.0	14.6			
					Right Touch	138	5690.0	88.81%	0.387	16.0	14.6	0.130	0.202	37
					Right Tilt	138	5690.0	88.81%	0.383	16.0	14.6			
	Chain 1	802.11ac VHT80	Head	0	Rear	138	5690.0	88.81%	0.077	16.0	14.6	0.026	0.040	38
					Front	138	5690.0	88.81%	0.052	16.0	14.6			
					Left Touch	138	5690.0	88.81%	0.041	14.0	12.6	0.006	0.009	39
					Left Tilt	138	5690.0	88.81%	0.019	14.0	12.6			
5.6 GHz U-NII 2C	Chain 1	802.11ac VHT80	Head	0	Right Touch	138	5690.0	88.81%	0.037	14.0	12.6			
					Right Tilt	138	5690.0	88.81%	0.018	14.0	12.6			
					Rear	138	5690.0	88.81%	0.201	14.0	12.6	0.093	0.144	40
					Front	138	5690.0	88.81%	0.011	14.0	12.6			

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		10-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
5.6 GHz U-NII 2C	Chain 0	802.11ac VHT80	Product Specific 10g	0	Rear	138	5690.0	88.81%	0.468	16.0	14.6			
					Front	138	5690.0	88.81%	0.589	16.0	14.6			
					Edge 1	138	5690.0	88.81%	0.386	16.0	14.6			
					Edge 4	138	5690.0	88.81%	1.950	16.0	14.6	0.289	0.448	41
5.6 GHz U-NII 2C	Chain 1	802.11ac VHT80	Product Specific 10g	0	Rear	138	5690.0	88.81%	4.310	14.0	12.6	0.160	0.248	42
					Front	138	5690.0	88.81%	0.500	14.0	12.6			
					Edge 2	138	5690.0	88.81%	0.551	14.0	12.6			

**U-NII 3**

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.	
										Tune-up limit	Meas.	Meas.	Scaled		
5.8 GHz U-NII 3	Chain 0	802.11n HT40	Head	0	Left Touch	159	5795.0	93.67%	0.115	16.0	14.2				
					Left Tilt	159	5795.0	93.67%	0.125	16.0	14.2				
					Right Touch	159	5795.0	93.67%	0.347	16.0	14.2	0.124	0.199	43	
					Right Tilt	159	5795.0	93.67%	0.296	16.0	14.2				
	Chain 0		Body-worn	15	Rear	159	5795.0	93.67%	0.067	16.0	14.2	0.023	0.037	44	
					Front	159	5795.0	93.67%	0.041	16.0	14.2				
5.8 GHz U-NII 3	Chain 1	802.11n HT40	Head	0	Left Touch	159	5795.0	93.67%	0.026	14.0	12.7				
					Left Tilt	159	5795.0	93.67%	0.012	14.0	12.7				
					Right Touch	159	5795.0	93.67%	0.041	14.0	12.7	0.012	0.017	45	
					Right Tilt	159	5795.0	93.67%	0.018	14.0	12.7				
	Chain 1		Body-worn	15	Rear	159	5795.0	93.67%	0.215	14.0	12.7	0.079	0.114	46	
					Front	159	5795.0	93.67%	0.018	14.0	12.7				

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		10-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
5.8 GHz U-NII 3	Chain 0	802.11n HT40	Product Specific 10g	0	Rear	159	5795.0	93.67%	0.609	16.0	14.2			
					Front	159	5795.0	93.67%	0.389	16.0	14.2			
					Edge 1	159	5795.0	93.67%	0.346	16.0	14.2			
					Edge 4	159	5795.0	93.67%	1.520	16.0	14.2	0.344	0.551	47
5.8 GHz U-NII 3	Chain 1	802.11n HT40	Product Specific 10g	0	Rear	159	5795.0	93.67%	2.330	14.0	12.7	0.097	0.140	48
					Front	159	5795.0	93.67%	0.112	14.0	12.7			
					Edge 2	159	5795.0	93.67%	0.294	14.0	12.7			

**10.12. Bluetooth**

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
2.4 GHz	Chain 0	GFSK	Head	0	Left Touch	39	2441.0	76.89%	12.4	10.7	0.040	0.076	
					Left Tilt	39	2441.0	76.89%	12.4	10.7	0.034	0.065	
					Right Touch	39	2441.0	76.89%	12.4	10.7	0.130	0.247	49
					Right Tilt	39	2441.0	76.89%	12.4	10.7	0.072	0.137	
			Body-worn	15	Rear	39	2441.0	76.89%	12.4	10.7	0.004	0.007	
					Front	39	2441.0	76.89%	12.4	10.7	0.011	0.021	50
			Hotspot	10	Rear	39	2441.0	76.89%	12.4	10.7	0.013	0.025	
					Front	39	2441.0	76.89%	12.4	10.7	0.021	0.040	
					Edge 1	39	2441.0	76.89%	12.4	10.7	0.010	0.019	
					Edge 4	39	2441.0	76.89%	12.4	10.7	0.037	0.070	51

## 11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is <0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.8$  or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  or 3.6 W/kg ( $\sim 10\%$  from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is  $\geq 1.5$  or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	First Repeated	
						Measured SAR (W/kg)	Largest to Smallest SAR Ratio
700	LTE Band 12	Hotspot	Edge 2	No	0.145	N/A	N/A
850	GSM 850	Hotspot	Front	No	0.376	N/A	N/A
1700	W-CDMA Band IV	Hotspot	Front	No	0.669	N/A	N/A
	LTE Band 4	Hotspot	Front	No	0.564	N/A	N/A
	GSM 1900	Hotspot	Edge 3	Yes	0.824	0.822	1.00
1900	W-CDMA Band II	Hotspot	Edge 3	No	0.789	N/A	N/A
	LTE Band 2	Hotspot	Edge 3	No	0.622	N/A	N/A
2400	Wi-Fi 802.11b	Head	Right Tilt	No	0.293	N/A	N/A
	BT	Head	Right Touch	No	0.130	N/A	N/A
2600	LTE Band 41	Hotspot	Edge 3	No	0.785	N/A	N/A
5300	Wi-Fi 802.11n HT40	Head	Right Touch	No	0.460	N/A	N/A
5500	Wi-Fi 802.11ac VHT80	Head	Right Touch	No	0.130	N/A	N/A
5800	Wi-Fi 802.11n HT40	Head	Right Touch	No	0.124	N/A	N/A

### Note(s):

Repeated Measurement is not required since the Highest measured SAR is < 0.8 W/kg.

### Product Specific 10g SAR:

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)
5300	Wi-Fi 802.11n HT40	Product Specific	Front	No	0.283
5500	Wi-Fi 802.11ac VHT80	Product Specific	Edge 4	No	0.289
5800	Wi-Fi 802.11n HT40	Product Specific	Edge 4	No	0.344

### Note(s):

Repeated Measurement is not required since the Highest measured SAR is < 2.0 W/kg.

## 12. Simultaneous Transmission Conditions

Case	Cellular	WLAN Chain0 / BT	WLAN Chain1
1	GSM/GPRS/EDGE	BT/BLE	(None)
2	GSM/GPRS/EDGE	WLAN 2.4G	WLAN 2.4G
3	GSM/GPRS/EDGE	WLAN 5G	WLAN 5G
4	UMTS/HSPA	BT/BLE	(None)
5	UMTS/HSPA	WLAN 2.4G	WLAN 2.4G
6	UMTS/HSPA	WLAN 5G	WLAN 5G
7	LTE	BT/BLE	(None)
8	LTE	WLAN 2.4G	WLAN 2.4G
9	LTE	WLAN 5G	WLAN 5G
10	(None)	BT/BLE WLAN 5G	WLAN 5G
11	GSM/GPRS/EDGE	BT/BLE WLAN 5G	WLAN 5G
12	UMTS/HSPA	BT/BLE WLAN 5G	WLAN 5G
13	LTE	BT/BLE WLAN 5G	WLAN 5G
14	GSM/GPRS/EDGE	WLAN 2.4G	WLAN 5G
15	UMTS/HSPA	WLAN 2.4G	WLAN 5G
16	LTE	WLAN 2.4G	WLAN 5G

### Note(s):

1. BT and WLAN 2.4G function can be used at the same time, but the antenna switch is shared for both RF paths.
2. Simultaneous cases other than Cases 1-16 (in above table) are not supported in this device.

## 12.1. Simultaneous transmission SAR test exclusion considerations

KDB 447498 D01 General RF Exposure Guidance provides two procedures for determining simultaneous transmission SAR test exclusion: Sum of SAR and SAR to Peak Location Ratio (SPLSR)

### 12.1.1. Sum of SAR

To qualify for simultaneous transmission SAR test exclusion based upon Sum of SAR the sum of the reported standalone SARs for all simultaneously transmitting antennas shall be below the applicable standalone SAR limit. If the sum of the SARs is above the applicable limit then simultaneous transmission SAR test exclusion may still apply if the requirements of the SAR to Peak Location Ratio (SPLSR) evaluation are met.

## 12.2. Sum of the SAR for WWAN & Wi-Fi & BT

RF Exposure conditions	Test Position	Standalone SAR (W/kg)						$\sum 1\text{-g SAR}$ (W/kg)							
		WWAN		DTS		U-NII		BT		WWAN+BT	WWAN+DTS	WWAN+DTS+U-NII	WWAN+U-NII	WWAN+U-NII+BT	U-NII+BT
		①	Chain 0 ②	Chain 1 ③	④	Chain 0 ⑤	Chain 1 ⑥	⑥	① + ⑥	① + ② + ③	① + ② + ⑤	① + ④ + ⑤	① + ④ + ⑤ + ⑥	④ + ⑤ + ⑥	
Head	Left Touch	0.096	0.366	0.041	0.452	0.040	0.076	0.172	0.503	0.502	0.588	0.664	0.568		
	Left Tilt	0.041	0.366	0.041	0.452	0.040	0.065	0.106	0.448	0.447	0.533	0.598	0.557		
	Right Touch	0.110	0.581	0.041	0.617	0.040	0.247	0.357	0.732	0.731	0.767	1.014	0.904		
	Right Tilt	0.038	0.366	0.041	0.452	0.040	0.137	0.175	0.445	0.444	0.530	0.667	0.629		
Body-worn	Rear	0.412	0.058	0.025	0.044	0.144	0.007	0.419	0.495	0.614	0.600	0.607	0.195		
	Front	0.470	0.058	0.025	0.044	0.144	0.021	0.491	0.553	0.672	0.658	0.679	0.209		
Hotspot	Rear	0.723	0.165	0.059			0.025	0.748	0.947						
	Front	0.786	0.165	0.059			0.040	0.826	1.010						
	Edge 1		0.165				0.019		0.165						
	Edge 2	0.227		0.059					0.286						
	Edge 3	0.940													
	Edge 4	0.237	0.165				0.070	0.307							

## Appendices

Refer to separated files for the following appendixes.

**12393500-S1V1 Appendix A: SAR Setup Photos**

**12393500-S1V1 Appendix B: SAR System Check Plots**

**12393500-S1V1 Appendix C: Highest SAR Test Plots**

**12393500-S1V1 Appendix D: SAR Liquid Tissue Ingredients**

**12393500-S1V1 Appendix E: SAR Probe Calibration Certificates**

**12393500-S1V1 Appendix F: SAR Dipole Calibration Certificates**

**END OF REPORT**