

 MOTOROLA SOLUTIONS	 CERTIFICATE 2518.01
DECLARATION OF COMPLIANCE: MPE ASSESSMENT	
EME Test Laboratory 8000 West Sunrise Blvd Fort Lauderdale, FL. 33322	Date of Report: December 11, 2015 Report Revision: B
Responsible Engineer: William Elliott (EME Test Engineer) Report author: William Elliott (EME Test Engineer) Date(s) Tested: 9/12/2015; 09/15/2015; 9/18/2015 Manufacturer: Motorola Solutions Inc. Date submitted for test: 08/27/2015 DUT Description: VHF Vehicular Mobile Radio with internal Bluetooth, GPS and WLAN. Test TX mode(s): CW Max. Power output: 54 W (VHF), 8.1 mW (Bluetooth), 17.8 mW (WLAN 802.11b); 13.2 mW (WLAN 802.11g); 8.3 mW (WLAN 802.11n) TX Frequency Bands: 136–174 MHz; 2.402–2.480 GHz (Bluetooth), 2.412 – 2.462 GHz (WLAN) Signaling type: FM; 4FSK 2:1 TDMA (LMR) / FHSS; $\pi/4$ DQPSK; 8DPSK; GFSK (Bluetooth) / BPSK; QPSK; 16 QAM; 64 QAM (WLAN) Model(s) Tested: PMUD2567B Model(s) Certified: PMUD2567B; AAM28JQC9RA1AN; AAM28JQN9RA1AN; AAM28JQN9WA1AN Serial Number(s): 511TRP5898 Classification: Occupational/Controlled Environment FCC ID: AZ492FT7081 IC: 109U-92FT7081 150.8 – 173.4 MHz; 2.402–2.480 GHz (Bluetooth), 2.412 – 2.462 GHz (WLAN) This report contains results that are immaterial for FCC equipment approval, which are clearly identified. This report contains results that are immaterial for IC equipment approval, which are clearly identified. The MPE results clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limits. FCC rules require compliance for Passengers and Bystanders to the FCC General Population/Uncontrolled limits. The test results clearly demonstrate compliance with ICNIRP Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz).	
Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 3.0 of this report. This report shall not be reproduced without written approval from an officially designated representative of the Motorola Solutions Inc. EME Laboratory. I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements. This reporting format is consistent with the suggested guidelines of the TIA TSB-159 April 2006 The results and statements contained in this report pertain only to the device(s) evaluated herein.	
 Deanna Zakharia EME Lab Senior Resource Manager and Laboratory Director Approval Date: 12/11/2015	

Document Revision History

Date	Revision	Comments
12/2/2015	A	Initial Release
12/11/2015	B	Updated a few KDB dates to newest revision

Table of Contents

1.0	Introduction.....	4
2.0	FCC MPE Summary	4
3.0	Abbreviations / Definitions.....	4
4.0	Referenced Standards and Guidelines.....	5
5.0	Power Density Limits.....	5
6.0	N _c Test Channels.....	7
7.0	Measurement Equipment	7
8.0	Measurement System Uncertainty Levels.....	7
9.0	Product and System Description.....	8
10.0	Additional Options and Accessories.....	9
11.0	Test Set-Up Description.....	9
12.0	Method of Measurement with trunk mounted antenna(s).....	10
12.1	External/Bystander vehicle MPE measurements.....	10
12.2	Internal/Passenger vehicle MPE measurements	10
13.0	Method of Measurement with roof mounted antenna(s).....	11
13.1	External/Bystander vehicle MPE measurements.....	11
13.2	Internal/Passenger vehicle MPE measurements	11
14.0	MPE Calculations	12
15.0	Antenna Summary.....	13
16.0	Test Results Summary	14
17.0	Conclusion	30
	Appendix A - Antenna Locations, Test Distances, and Cable Losses	32
	Appendix B - Probe Calibration Certificates	36
	Appendix C - Photos of Assessed Antennas.....	44
	Appendix D – MPE Measurement Results	45
	Appendix E – SAR Simulation Report.....	68

1.0 Introduction

This report details the test setup, test equipment and test results of Maximum Permissible Exposure (MPE) performed at Motorola Solutions' outside test site for product model PMUD2567B.

2.0 FCC MPE Summary

Table 1

Equipment Class	Frequency band (MHz)	Passenger (mW/cm ²)	Bystander (mW/cm ²)
TNB	150.8-173.4	0.56**	0.16
*DSS	2402 – 2480	NA	NA
*DTS	2412 – 2462	NA	NA
*Simultaneous Results		NA	NA

*Note Results not required per KDB 447498

** Requires SAR Simulation

3.0 Abbreviations / Definitions

$\pi/4$ DQPSK: Differential Quadrature Phase-Shift Keying with a $\pi/4$ offset to phase changes

4FSK: Four Level Frequency Shift Keying

8 DPSK: 8-level Differential Phase-Shift Keying

16 QAM: 16 Quadrature Amplitude Modulation

64 QAM: 64 Quadrature Amplitude Modulation

APCO: Association of Public-Safety Communications Officials

BPSK: Binary Phase-Shift Keying

BS: Bystander

BT: Bluetooth

CNR: Calibration Not Required

CW: Continuous Wave

DUT: Device Under Test

EME: Electromagnetic Energy

FHSS: Frequency Hopping Spread Spectrum

FM: Frequency Modulation

FSK: Frequency Shift Keying

GFSK: Gaussian Frequency-Shift Keying

GPS: Global Positioning System

LMR: Land Mobile Radio

MPE: Maximum Permissible Exposure

NA: Not Applicable

PB: Passenger Backseat

PF: Passenger Front seat

PTT: Push to Talk

QPSK: Quadrature Phase-Shift Keying
 TDMA: Time Division Multiple Access
 WLAN: Wireless Local Area Network

4.0 Referenced Standards and Guidelines

This product is designed to comply with the following applicable national and international standards and guidelines.

- United States Federal Communications Commission, Code of Federal Regulations; Rule Part 47CFR § 1.1310, § 2.1091 (d) and § 2.1093 for RF Exposure, where applicable.
- Federal Communications Commission, “Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields”, OET Bulletin 65 (Edition 97-01), FCC, Washington, D.C.: August 1997.
- American National Standards Institute (ANSI) / Institute of Electrical and Electronics Engineers (IEEE) C95. 1-1999
- American National Standards Institute (ANSI) / Institute of Electrical and Electronics Engineers (IEEE) C95. 1-1992. Specific to FCC rules and regulations.
- Institute of Electrical and Electronics Engineers (IEEE) C95.3-2002
- International Commission on Non-Ionizing Radiation Protection (ICNIRP) 1998
- Ministry of Health (Canada) Safety Code 6 (2015), Limits of Human Exposure to Radio frequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz
- RSS-102 (Issue 5) – Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
- FCC KDB – 447498 D01 General RF Exposure Guidance v06
- FCC KDB – 865664 D02 RF Exposure Reporting v01r02

5.0 Power Density Limits

Table 2 – Occupational / Controlled Exposure Limits

Frequency Range (MHz)	FCC OET Bulletin 65 mW/cm ²	ICNIRP W/m ²	IEEE C95.1 1992/1999 mW/cm ²	IEEE C95.1 2005 W/m ²	RSS-102 Issue 5 2015 W/m ²
10 - 20					10.0
20 – 48					$44.72 / f^{0.5}$
30 – 300	1.0				
48 – 100					6.455
10 – 400		10.0			
100 – 300			1.0	10.0	
100 – 6,000					$0.6455 f^{0.5}$
300 – 1,500	$f/300$				
300 - 3,000			$f/300$	$f/30$	
400 – 2,000		$f/40$			
1,500 – 15,000					

Table 2 (Cont.) – Occupational / Controlled Exposure Limits

Frequency Range (MHz)	FCC OET Bulletin 65	ICNIRP	IEEE C95.1 1992/1999	IEEE C95.1 2005	RSS-102 Issue 5 2015
	mW/cm ²	W/m ²	mW/cm ²	W/m ²	W/m ²
1,500 – 100,000	5.0				
2,000 – 300,000		50.0			
3,000 – 300,000			10.0	100.0	
6,000 – 15,000					50.0
15000 – 150,000					50.0
150000 – 300,000					$3.33 \times 10^{-4} f$

Table 3 – General Population / Uncontrolled Exposure Limits

Frequency Range (MHz)	FCC OET Bulletin 65	ICNIRP	IEEE C95.1 1992/1999	IEEE C95.1 2005	RSS-102 Issue 5 2015
	mW/cm ²	W/m ²	mW/cm ²	W/m ²	W/m ²
10 - 20					2.0
20 – 48					$8.944 / f^{0.5}$
30 – 300	0.2				
48 – 300					1.291
10 – 400		2.0			
100 – 300			0.2		
100 – 400				2.0	
300 – 1,500	$f/1,500$				
300 – 6000					$0.02619 f^{0.6834}$
400 – 2,000		$f/200$		$f/200$	
300 – 15,000			$f/1,500$		
1,500 – 15,000					
1,500 – 100,000	1.0				
2,000 – 100,000				10.0	
2,000 – 300,000		10.0			
6,000 – 15,000					10.0
15,000 – 150,000					10.0
150,000 - 300,000					$6.67 \times 10^{-5} f$

6.0 N_c Test Channels

The number of test channels is determined by using Equation 1 below. This equation is available in FCC's KDB 447498. The test channels are appropriately spaced across the antenna's frequency range.

Equation 1 – Number of test channels

$$N_c = \text{Round} \{ [100(f_{\text{high}} - f_{\text{low}})/f_c]^{0.5} \times (f_c / 100)^{0.2} \}$$

where N_c is the number of test channels, f_{high} and f_{low} are the highest and lowest frequencies within the transmission band, f_c is the mid-band frequency, and frequencies are in MHz.

7.0 Measurement Equipment

Table 4 - Equipment

Equipment Type	Model #	SN	Calibration Date	Calibration Due Date
Automobile	2003 Ford Crown Victoria, 4-Door	NA	NA	NA
Survey Meter	ETS Model HI-2200	00086316		
Probe – E-Field	ETS Model E100	000153632	12/10/2014	12/10/2015
Probe – H-Field	ETS Model H200	142394		

E field measurements are in mW/cm².

H field measurements are in A/m

8.0 Measurement System Uncertainty Levels

Table 5 - Uncertainty Budget for Near Field Probe Measurements

	Tol. (± %)	Prob. Dist.	Divisor	u_i (±%)	v_i
Measurement System					
Probe Calibration	6.0	N	1.00	6.0	∞
Survey Meter Calibration	3.0	N	1.00	3.0	∞
Hemispherical Isotropy	8.0	R	1.73	4.6	∞
Linearity	5.0	R	1.73	2.9	∞
Pulse Response	1.0	R	1.73	0.6	∞
RF Ambient Noise	3.0	R	1.73	1.7	∞
RF Reflections	8.0	R	1.73	4.6	∞
Probe Positioning	10.0	R	1.73	5.8	∞
Test sample Related					
Antenna Positioning	3.0	N	1.00	3.0	∞
Power drift	5.0	R	1.73	2.9	∞
Combined Standard Uncertainty		RSS		12.2	∞
Expanded Uncertainty (95% CONFIDENCE LEVEL)		$k=2$		24	

9.0 Product and System Description

Model PMUD2567B is a mobile transceiver that utilizes analog and digital two-way radio communications, WLAN, Bluetooth and GPS technologies. The analog modulation scheme uses narrowband Frequency Modulation (FM). The digital modulation scheme uses 4 Level Frequency Shift Keying (4FSK) and Time Division Multiple Access (TDMA). TDMA allocates portions of the RF signal by dividing time into two slots (2 slot TDMA). The system can accommodate 2-voice channels in a standard 12.5 kHz channel. Transmission from a unit or base station is accommodated in time-slot lengths of 30 milliseconds and frame lengths of 60 milliseconds. This product supports voice in analog mode, and both voice and data modes in digital mode.

This device operates in a half duplex system. A half duplex system only allows the user to transmit or receive. This device cannot transmit and receive simultaneously. The user must stop transmitting in order to receive a signal or listen for a response, regardless of PTT button or use of voice activated audio accessories. This type of operation, along with the RF safety booklet, which instructs the user to transmit no more than 50% of the time, justifies the use of 50% duty factor for this device.

The maximum duty cycle for TDMA is 1:2 (50%) and is controlled by software. The FM signal is continuous. However, because of hand shaking or Push-To-Talk (PTT) between users and/or base stations a conservative 50% duty cycle is applied. The TDMA mode was not tested because its duty cycle is inherently 50% and would include an additional 50% duty cycle for PTT.

This device incorporates a Bluetooth device which is Frequency Hopping Spread Spectrum (FHSS) technology. The Bluetooth radio modem is used to wirelessly link audio accessories. The maximum transmission duty cycle is imposed by the Bluetooth standard and for this product is 77%.

This device also incorporates a WLAN transmitter including 802.11b, 802.11g and 802.11n. 802.11b uses direct-sequence spread spectrum modulation (DSSS) and Complementary Code Keying (CCK). 802.11g and 802.11n use orthogonal frequency-division multiplexing (OFDM). 802.11g uses Binary Phase-Shift Keying (BPSK), Quadrature Phase-Shift Keying (QPSK), and Quadrature Amplitude Modulation (16QAM, 64QAM). 802.11n uses Modulation and Coding Schemes (MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6 MCS7). The maximum duty cycle for 802.11b is 99.8%, for 802.11g is 99.2% and for 802.11n is 99.1%.

The intended use of the radio is PTT while the device is properly installed in a vehicle with an external antenna mounted at the roof or trunk (VHF only). The Bluetooth / WLAN transmitters use a combined antenna that is internal to the radio itself. It is located behind the control head on the left side of the radio. The Bluetooth / WLAN transmitters cannot transmit at the same time.

This device will be marketed to and used by employees solely for work-related operations, such as public safety agencies, e.g. police, fire and emergency medical. User training is the responsibility of these agencies which can be expected to employ the usage instructions, safety information and operational cautions set forth in the user's manual, instructional sessions or other means.

Accordingly this product is classified as Occupational/Controlled Exposure. However, in accordance with FCC requirements, the passengers inside the vehicle and the bystanders external to the vehicle are evaluated to the General Population/Uncontrolled Exposure Limits.

(Note that “Bystanders” as used herein are people other than operator)

10.0 Additional Options and Accessories

Refer to Table 6 for complete list of tested antennas.

PMAN4004B - Optional GPS base.

Below are additional antenna kits which include the tested antennas and GPS base.

RAD4214A - Includes GPS base and tested antenna RAD4226A.

RAD4215A - Includes GPS base and tested antenna RAD4225A.

RAD4216A - Includes GPS base and tested antenna RAD4224A.

RAD4217A - Includes GPS base and tested antenna RAD4223A.

RAD4218A - Includes GPS base and tested antenna RAD4227A.

Below are additional antenna kits that are electrically identical to the tested antennas but have a BNC connector instead of the mini-U connector (tested) and / or a GPS base:

RAD4219A– Identical to tested antenna RAD4226A with GPS base and BNC connector

RAD4220A - Identical to tested antenna RAD4225A with GPS base and BNC connector

RAD4221A - Identical to tested antenna RAD4224A with GPS base and BNC connector

RAD4222A - Identical to tested antenna RAD4223A with GPS base and BNC connector

RAD4198A – Identical to tested antenna HAD4006A with BNC connector

RAD4199A – Identical to tested antenna HAD4007A with BNC connector

RAD4200A – Identical to tested antenna HAD4008A with BNC connector

RAD4201A - Identical to tested antenna HAD4009A with BNC connector

11.0 Test Set-Up Description

Assessments were performed with mobile radio installed in the test vehicle while engine was at idle, at the specified distances and test locations indicated in sections 11.0, 12.0 and Appendix A.

All antennas described in Table 6 were considered in order to develop the test plan for this product. Antennas were installed and tested per their appropriate mount locations (Roof / Trunk) and defined test channels.

The system was tested using a 16’ Teflon RG58A/U cable attaching the radio to the transmit antenna. This cable is shorter than the 17’ ARG-58U cables supplied in the customer kits for connecting the radio to the transmit antenna. The cable used in the test setup also has lower attenuation over the test frequency range than the cable provided in the customer kits. The use of a shorter cable with lower attenuation in the test setup ensures that the test data is more conservative with regards to the actual installation. Cable losses are reported in Appendix A.

12.0 Method of Measurement with trunk mounted antenna(s)

12.1 External/Bystander vehicle MPE measurements

Antenna is located at the center of the trunk. Refer to Appendix A for antenna location and distance.

MPE measurements for bystander (BS) conditions are determined by taking the average of (10) measurements in a 2 m vertical line for each of the (3) bystander test locations indicated in Appendix A with 20 cm height increments, with antenna to probe sensor separation distance of 90 cm (for rated conducted power from 40 to 110 W), 104 cm (45 degree radial) and 110.5 cm (90 degree radial). The separation distance used for testing is defined from the antenna whereas the RF safety booklet defines the same distance from the vehicle body to ensure that the assessment is applicable to other vehicles.

The measurement probe is positioned orthogonal to antenna (typically parallel to ground with a vertically mounted antenna) and aimed directly at the antenna's axis. These measurements are representative of persons other than the operator standing next to the vehicle.

Each of the offered antennas mounted at the center of the trunk were assessed at the rear of the vehicle while maintaining a minimum of twenty (20) centimeter separation distance between the probe sensor and vehicle body. The worst case antenna was then tested at a 45° radial at the corner of the trunk, and 90° radial at the side of the trunk.

Note: The distance from the centered trunk-mounted antenna to the rear edge of the vehicle is 42cm and the distance from the rear edge of the vehicle to the survey probe sensor is 48cm.

12.2 Internal/Passenger vehicle MPE measurements

Antenna is located toward the center of the trunk at a minimum 85cm from backseat passenger. Users are instructed, per installation manual, to mount antennas on the roof only if a minimum 85cm cannot be achieved. Refer to Appendix A for antenna location and distance.

MPE measurements for passenger front seat (PF) and backseat (PB) conditions are determined by taking the average of the (3) measurements (Head, Chest, and Lower Trunk) inside the vehicle for both the front and back seats.

The backseat is a bench seat and therefore each position (Head, Chest & Lower Trunk) were scanned across (horizontally) the seat starting from the middle of the seat to the edge of the seat stopping 20 cm from the vehicle door. Similar process was used in the front bucket seat.

The probe handle is oriented parallel (horizontal) to the ground and pointed towards the back of the vehicle. The probe handle is not oriented normal to the seat surface. The probe head (incorporating the field sensors) is scanned continuously (using the max-hold function available in the meter) along three test axes which are parallel to the seat angle (intended as the line determined by the intersection of the plane of the

seat and the plane of the backrest) and are 20 cm from the seat surface. One test axis is at the Head height, another is at the Chest height, and another is at the Lower Trunk height. The maximum field level value recorded for each test axis is logged. The MPE is determined by averaging these three maximum values regardless of the geometrical location where they were observed. For instance, the locations of the three maxima may lie on different vertical (relative to ground) lines.

This approach leads to results that are representative of the exposure of vehicle occupants since it is based on an average across the body portions closest to the antenna for both trunk and roof mount positions, and is conservatively biased because the highest results for each test axis are combined, e.g. the highest head exposure could be in the middle of the seat while the highest lower trunk exposure could be closer to the door.

13.0 Method of Measurement with roof mounted antenna(s)

13.1 External/Bystander vehicle MPE measurements

Antenna is located at the center of the roof. Refer to Appendix A for antenna location and distance.

MPE measurements for bystander (BS) conditions are determined by taking the average of (10) measurements in a 2m vertical line for the test location indicated in Appendix A with 20cm increments at the test distance of 117cm from the antenna under test. The measurement probe is positioned orthogonal to antenna (typically parallel to ground with a vertically mounted antenna) and aimed directly at the antenna's axis. These measurements are representative of persons other than the operator standing next to the vehicle.

Note: Actual test distance was approximately 117cm from centered roof-mounted antenna to the probe element (97cm from antenna to edge of car door and 20cm from the edge of the car door to the survey probe sensor); this is the closest distance that can be achieved to a centered roof-mounted antenna used for MPE compliance assessment herein.

13.2 Internal/Passenger vehicle MPE measurements

Antenna is located at the center of the roof. Refer to Appendix A for antenna location and distance.

MPE measurements for passenger front seat (PF) and backseat (PB) conditions are determined by taking the average of the (3) measurements (Head, Chest, and Lower Trunk) inside the vehicle for both the front and back seats.

The backseat is a bench seat and therefore each position (Head, Chest & Lower Trunk) were scanned across (horizontally) the seat starting from the middle of the seat to the edge of the seat stopping 20 cm from the vehicle door. Similar process was used in the front bucket seat.

The probe handle is oriented parallel (horizontal) to the ground and pointed towards the back of the vehicle. The probe handle is not oriented normal to the seat surface. The probe head (incorporating the field sensors) is scanned continuously (using the max-hold function available in the meter) along three test axes which are parallel to the seat angle

(intended as the line determined by the intersection of the plane of the seat and the plane of the backrest) and are 20 cm from the seat surface. One test axis is at the Head height, another is at the Chest height, and another is at the Lower Trunk height. The maximum field level value recorded for each test axis is logged. The MPE is determined by averaging these three maximum values regardless of the geometrical location where they were observed. For instance, the locations of the three maxima may lie on different vertical (relative to ground) lines.

This approach leads to results that are representative of the exposure of vehicle occupants since it is based on an average across the body portions closest to the antenna for both trunk and roof mount positions, and is conservatively biased because the highest results for each test axis are combined, e.g. the highest head exposure could be in the middle of the seat while the highest lower trunk exposure could be closer to the door.

14.0 MPE Calculations

The final MPE results for this mobile radio are presented in section 15.0 Tables 7 - 10. These results are based on 50% duty cycle for PTT.

Below is an explanation of how the MPE results are calculated. Refer to Appendix D for MPE measurement results and calculations.

External to vehicle (Bystander) - 10 measurements are averaged over the body (*Avg_over_body*).
Internal to vehicle (Passengers) - 3 measurements are averaged over the body (*Avg_over_body*).

The Average over Body test methodology is consistent with IEEE/ANSI C95.3-2002 guidelines.

Therefore;

Equation 2 – Power Density Calculation (*Calc._P.D.*)

$$\text{Calc._P.D.} = (\text{Avg_over_body}) * (\text{probe_frequency_cal_factor}) * (\text{duty_cycle})$$

Note1: The highest “average” cal factors from the calibration certificates were selected for the applicable frequency range. Linear interpretation was used to determine “probe_frequency_cal_factor” for the specific test frequencies.

Note 2: The E-field probe calibration certificate’s frequency cal factors were determined by measuring V/m. The survey meter’s results were measured in power density (mW/cm²) and therefore the “probe_frequency_cal_factor” was squared in equation 2 to account for these results.

Note 3: The H-field probe calibration certificate’s frequency cal factors were determined by measuring A/m. The survey meter’s results were measured in A/m and therefore the “Avg_over_body” A/m results were converted to power density (mW/cm²) using the equation 3. H-field measurements are only applicable to frequencies below 300MHz.

Equation 3 – Converting A/m to mW/cm²

$$\text{mW/cm}^2 = (\text{A/m})^2 * 37.699$$

Equation 4 – Power Density Maximum Calculation

$$Max_Calc._P.D. = P.D._calc * \frac{max_output_power}{initial_output_power}$$

Note 4: For initial output power > max_output_power; max_output_power / initial output power = 1

15.0 Antenna Summary

Table 6 below summarizes the tested or evaluated antennas and their descriptions, mount location (roof/trunk/internal), overlap of FCC bands, number of test channels per FCC KDB 447498 (FCC N_c) and actual number of tested channels (Actual N_c). This information was used to determine the test configurations presented in this report.

Table 6

#	Antenna Model	Frequency Range (MHz)	Physical Length (cm)	Gain (dBi)	Remarks	Mount Location (Roof/Trunk)	Overlap FCC Bands	FCC N _c	Actual N _c
1	HAD4006A	136-144	52.0	2.15	1/4 wave, wire	R	NA	3	3
2	HAD4007A	146-150.8	49.0	2.15	1/4 wave, wire	R	150.8	2	3
3	HAD4008A	150.8-162	45.5	2.15	1/4 wave, wire	R	150.8-162	3	3
4	HAD4009A	162-174	43.0	2.15	1/4 wave, wire	R/T	162-173.4	3	3
5	*HAD4022A	132-174	130.0 118.3 113.8 102.7 96.5 89.9	5.15	5/8 wave, wire	R/T	150.8-173.4	5	6
6	RAD4226A	136-144	50.4	2.15	1/4 wave, wire	R	NA	3	3
7	RAD4225A	146-150.8	47.5	2.15	1/4 wave, wire	R	150.8	2	3
8	RAD4224A	150.8-162	44.2	2.15	1/4 wave, wire	R	150.8-162	3	3
9	RAD4223A	162-174	41.0	2.15	1/4 wave, wire	R	162-173.4	3	3
10	RAD4227A	146-172	88.0	5.15	5/8 wave, wire	R	150.8-172	4	5

*Trimmed to Frequency

All quarter-wave antennas, RAD4227 (and equivalent RAD4218) are restricted to installation on the roof.

16.0 Test Results Summary

The following tables below summarize the MPE results for each test configuration: antenna location, test positions (BS-Bystander, PB-Passenger Backseat, PF-Passenger Front seat), E/H field measurements, angle, antenna model & freq. range, maximum output power, initial power, TX frequency, max calculated power density results, applicable FCC/IEEE/ICNIRP/IC specification limits and % of the applicable specification limits.

Data identified with “NA” are outside the permissible spectrum allowed by Industry Canada, therefore the IC limits are not applicable.

Table 7
Bystander MPE assessment for trunk mounted antennas

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm^2)	FCC / ICNIRP Limit	% To FCC / ICNIRP Spec Limit	IC Limit	% To IC Limit
Trunk	BS	E	0	HAD4022A, 5/8 wave (132-174MHz)	54	53.5	136.0125	0.10	0.20	51.3	0.13	79.5
						52.7	143.9875	0.10	0.20	52.3	0.13	81.0
						52.6	150.8000	0.09	0.20	47.0	0.13	72.8
						52.5	158.3000	0.10	0.20	49.1	0.13	76.1
						52.4	165.9875	0.11	0.20	53.2	0.13	82.5
						52.3	173.4000	0.12	0.20	55.3	0.13	89.2
						52.1	173.4000	0.12	0.20	60.2	0.13	93.3
45 (corner)												
Trunk	BS	E	0	HAD4022A, 5/8 wave (132-174MHz)	54	52.1	173.4000	0.12	0.20	60.5	0.13	93.8
90 (side)												
Trunk	BS	E	0	HAD4022A, 5/8 wave (132-174MHz)	54	52.1	173.4000	0.10	0.20	51.8	0.13	80.2

Table 7 (Cont.)

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm^2)	FCC / ICNIRP Limit	% To FCC / ICNIRP Spec Limit	IC Limit	% To IC Limit
Trunk	BS	H	0	HAD4022A, 5/8 wave (132-174MHz)	54	53.5	136.0125	0.11	0.20	55.0	0.13	85.2
						52.7	143.9875	0.12	0.20	59.3	0.13	91.9
						52.6	150.8000	0.11	0.20	53.7	0.13	83.2
						52.5	158.3000	0.12	0.20	61.8	0.13	95.8
						52.4	165.9875	0.13	0.20	62.9	0.13	97.5
						52.1	173.4000	0.14	0.20	69.9	0.13	108.4*
						45 (corner)						
Trunk	BS	H	0	HAD4022A, 5/8 wave (132-174MHz)	54	52.1	173.4000	0.16	0.20	79.4	0.13	123.0*
90 (side)												
Trunk	BS	H	0	HAD4022A, 5/8 wave (132-174MHz)	54	52.1	173.4000	0.15	0.20	75.7	0.13	117.3*

Results marked with a "*" require SAR Simulation to demonstrate compliance to the basic requirements

Table 8
Bystander MPE assessment for roof mounted antennas

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC / ICNIRP Limit	% To FCC / ICNIRP Spec Limit	IC Limit	% To IC Limit
Roof	BS	E	0	HAD4022A, 5/8 wave (132-174MHz)	54	53.5	136.0125	0.04	0.20	18.6	0.13	28.9
						52.7	143.9875	0.04	0.20	18.6	0.13	28.8
						52.6	150.8000	0.04	0.20	21.3	0.13	32.9
						52.5	158.3000	0.05	0.20	23.0	0.13	35.7
						52.4	165.9875	0.05	0.20	25.3	0.13	39.2
						52.1	173.4000	0.06	0.20	27.5	0.13	42.7

Table 8 (Cont.)

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC / ICNIRP Limit	% To FCC / ICNIRP Spec Limit	IC Limit	% To IC Limit
Roof	BS	E	0	RAD4227A, 5/8 wave (146-172MHz)	54	52.8	146.0125	0.05	0.20	23.4	0.13	36.2
						52.6	150.8000	0.05	0.20	27.2	0.13	42.1
						52.5	157.9875	0.06	0.20	28.5	0.13	44.1
						51.9	164.9875	0.04	0.20	18.8	0.13	29.2
						51.8	171.9875	0.02	0.20	10.5	0.13	16.3
Roof	BS	E	0	HAD4006A, 1/4 wave (136-144MHz)	54	53.5	136.0125	0.05	0.20	25.5	0.13	39.6
						52.7	140.0125	0.06	0.20	27.7	0.13	42.9
						52.7	143.9875	0.05	0.20	27.2	0.13	42.2
Roof	BS	E	0	HAD4007A, 1/4 wave (146-150.8MHz)	54	52.8	146.0125	0.05	0.20	27.2	0.13	42.2
						52.7	148.4000	0.06	0.20	28.6	0.13	44.3
						52.6	150.8000	0.06	0.20	30.9	0.13	47.9
Roof	BS	E	0	HAD4008A, 1/4 wave (150.8-162MHz)	54	52.6	150.8000	0.06	0.20	30.9	0.13	47.8
						52.3	156.4000	0.06	0.20	31.8	0.13	49.3
						52.1	161.9875	0.05	0.20	23.0	0.13	35.6
Roof	BS	E	0	HAD4009A, 1/4 wave (162-174MHz)	54	52.1	162.0125	0.06	0.20	28.3	0.13	43.8
						52.6	167.7000	0.07	0.20	36.0	0.13	55.8
						52.1	173.4000	0.07	0.20	34.7	0.13	53.7

Table 8 (Cont.)

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm^2)	FCC / ICNIRP Limit	% To FCC / ICNIRP Spec Limit	IC Limit	% To IC Limit
Roof	BS	E	0	RAD4226A, 1/4 wave (136-144MHz)	54	53.5	136.0125	0.05	0.20	26.9	0.13	41.6
						52.7	140.0125	0.06	0.20	32.4	0.13	50.2
						52.7	143.9875	0.06	0.20	32.1	0.13	49.8
Roof	BS	E	0	RAD4225A, 1/4 wave (146-150.8MHz)	54	52.8	146.0125	0.05	0.20	25.5	0.13	39.6
						52.7	148.4000	0.05	0.20	27.0	0.13	41.9
						52.6	150.8000	0.06	0.20	29.6	0.13	45.9
Roof	BS	E	0	RAD4224A, 1/4 wave (150.8-162MHz)	54	52.6	150.8000	0.05	0.20	23.2	0.13	35.9
						52.3	156.4000	0.06	0.20	31.6	0.13	49.0
						52.1	161.9875	0.06	0.20	28.5	0.13	44.2
Roof	BS	E	0	RAD4223A, 1/4 wave (162-174MHz)	54	52.1	162.0125	0.04	0.20	18.5	0.13	28.7
						52.6	167.7000	0.07	0.20	33.1	0.13	51.3
						52.1	173.4000	0.08	0.20	38.5	0.13	59.7
Roof	BS	H	0	HAD4022A, 5/8 wave (132-174MHz)	54	53.5	136.0125	0.03	0.20	16.7	0.13	25.9
						52.7	143.9875	0.04	0.20	19.7	0.13	30.5
						52.6	150.8000	0.04	0.20	18.6	0.13	28.8
						52.5	158.3000	0.04	0.20	21.5	0.13	33.4
						52.4	165.9875	0.05	0.20	24.3	0.13	37.6
						52.1	173.4000	0.05	0.20	26.9	0.13	41.6

Table 8 (Cont.)

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm^2)	FCC / ICNIRP Limit	% To FCC / ICNIRP Spec Limit	IC Limit	% To IC Limit
Roof	BS	H	0	RAD4227A, 5/8 wave (146-172MHz)	54	52.8	146.0125	0.05	0.20	25.9	0.13	40.2
						52.6	150.8000	0.06	0.20	28.5	0.13	44.1
						52.5	157.9875	0.06	0.20	27.5	0.13	42.6
						51.9	164.9875	0.04	0.20	20.8	0.13	32.3
						51.8	171.9875	0.02	0.20	12.1	0.13	18.8
Roof	BS	H	0	HAD4006A, 1/4 wave (136-144MHz)	54	53.5	136.0125	0.06	0.20	30.4	0.13	47.2
						52.7	140.0125	0.07	0.20	33.4	0.13	51.8
						52.7	143.9875	0.07	0.20	33.0	0.13	51.1
Roof	BS	H	0	HAD4007A, 1/4 wave (146-150.8MHz)	54	52.8	146.0125	0.06	0.20	31.1	0.13	48.1
						52.7	148.4000	0.06	0.20	29.3	0.13	45.4
						52.6	150.8000	0.06	0.20	30.8	0.13	47.7
Roof	BS	H	0	HAD4008A, 1/4 wave (150.8-162MHz)	54	52.1	150.8000	0.05	0.20	26.1	0.13	40.5
						52.6	156.4000	0.06	0.20	30.3	0.13	46.9
						52.1	161.9875	0.05	0.20	25.3	0.13	39.1
Roof	BS	H	0	HAD4009A, 1/4 wave (162-174MHz)	54	53.5	162.0125	0.05	0.20	23.7	0.13	36.8
						52.7	167.7000	0.05	0.20	25.9	0.13	40.1
						52.7	173.4000	0.06	0.20	28.0	0.13	43.4

Table 8 (Cont.)

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC / ICNIRP Limit	% To FCC / ICNIRP Spec Limit	IC Limit	% To IC Limit
Roof	BS	H	0	RAD4226A, 1/4 wave (136-144MHz)	54	52.8	136.0125	0.05	0.20	26.0	0.13	40.2
						52.7	140.0125	0.06	0.20	29.3	0.13	45.3
						52.6	143.9875	0.06	0.20	29.4	0.13	45.5
Roof	BS	H	0	RAD4225A, 1/4 wave (146-150.8MHz)	54	52.6	146.0125	0.05	0.20	27.2	0.13	42.1
						52.3	148.4000	0.06	0.20	30.4	0.13	47.0
						52.1	150.8000	0.07	0.20	33.6	0.13	52.1
Roof	BS	H	0	RAD4224A, 1/4 wave (150.8-162MHz)	54	52.6	150.8000	0.05	0.20	25.5	0.13	39.6
						52.3	156.4000	0.06	0.20	32.0	0.13	49.6
						52.1	161.9875	0.05	0.20	26.9	0.13	41.7
Roof	BS	H	0	RAD4223A, 1/4 wave (162-174MHz)	54	52.1	162.0125	0.04	0.20	20.8	0.13	32.2
						52.6	167.7000	0.05	0.20	27.3	0.13	42.3
						52.1	173.4000	0.07	0.20	34.7	0.13	53.7

Table 9
Passenger MPE assessment for trunk mounted antennas

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC / ICNIRP Limit	% To FCC / ICNIRP Spec Limit	IC Limit	% To IC Limit
Trunk	PB	E	NA	HAD4022A, 5/8 wave (132-174MHz)	54	53.5	136.0125	0.03	0.20	17.3	0.13	26.8
						52.7	143.9875	0.15	0.20	74.4	0.13	115.3*
						52.6	150.8000	0.13	0.20	65.4	0.13	101.3*
						52.5	158.3000	0.33	0.20	166.4*	0.13	257.8*
						52.4	165.9875	0.56	0.20	277.5*	0.13	430.0*
						52.1	173.4000	0.34	0.20	169.7*	0.13	262.9*
Trunk	PF	E	NA	HAD4022A, 5/8 wave (132-174MHz)	54	53.5	136.0125	0.02	0.20	11.3	0.13	17.5
						52.7	143.9875	0.01	0.20	7.4	0.13	11.4
						52.6	150.8000	0.02	0.20	11.0	0.13	17.0
						52.5	158.3000	0.03	0.20	16.2	0.13	25.2
						52.4	165.9875	0.06	0.20	32.4	0.13	50.2
						52.1	173.4000	0.12	0.20	61.0	0.13	94.6
Trunk	PB	H	NA	HAD4022A, 5/8 wave (132-174MHz)	54	53.5	136.0125	0.02	0.20	10.5	0.13	16.2
						52.7	143.9875	0.06	0.20	30.3	0.13	46.9
						52.6	150.8000	0.07	0.20	36.9	0.13	57.1
						52.5	158.3000	0.19	0.20	92.8	0.13	143.8*
						52.4	165.9875	0.50	0.20	251.4*	0.13	389.4*
						52.1	173.4000	0.36	0.20	179.7*	0.13	278.4*

Results marked with a “*” require SAR Simulation to demonstrate compliance to the basic requirements

Table 9 (cont.)

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC / ICNIRP Limit	% To FCC / ICNIRP Spec Limit	IC Limit	% To IC Limit
Trunk	PF	H	NA	HAD4022A, 5/8 wave (132-174MHz)	54	53.5	136.0125	0.01	0.20	5.5	0.13	8.5
						52.7	143.9875	0.03	0.20	13.0	0.13	20.2
						52.6	150.8000	0.03	0.20	14.4	0.13	22.3
						52.5	158.3000	0.03	0.20	15.5	0.13	24.0
						52.4	165.9875	0.04	0.20	17.8	0.13	27.6
						52.1	173.4000	0.07	0.20	33.1	0.13	51.2

Table 10
Passenger MPE assessment for roof mounted antennas

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC / ICNIRP Limit	% To FCC / ICNIRP Spec Limit	IC Limit	% To IC Limit
Roof	PB	E	NA	HAD4022A, 5/8 wave (132-174MHz)	54	53.5	136.0125	0.01	0.20	7.4	0.13	11.5
						52.7	143.9875	0.04	0.20	18.2	0.13	28.2
						52.6	150.8000	0.03	0.20	14.1	0.13	21.8
						52.5	158.3000	0.01	0.20	4.7	0.13	7.3
						52.4	165.9875	0.03	0.20	15.3	0.13	23.7
						52.1	173.4000	0.03	0.20	17.3	0.13	26.8
Roof	PB	E	NA	RAD4227A, 5/8 wave (146-172MHz)	54	52.8	146.0125	0.00	0.20	1.8	0.13	2.8
						52.6	150.8000	0.06	0.20	32.0	0.13	49.6
						52.5	157.9875	0.02	0.20	11.1	0.13	17.3
						51.9	164.9875	0.04	0.20	17.9	0.13	27.8
						51.8	171.9875	0.01	0.20	6.2	0.13	9.6

Table 10 (cont.)

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC / ICNIRP Limit	% To FCC / ICNIRP Spec Limit	IC Limit	% To IC Limit
Roof	PB	E	NA	HAD4006A, 1/4 wave (136-144MHz)	54	53.5	136.0125	0.03	0.20	15.1	0.13	23.4
						52.7	140.0125	0.23	0.20	112.8	0.13	174.7
						52.7	143.9875	0.12	0.20	60.0	0.13	93.0
Roof	PB	E	NA	HAD4007A, 1/4 wave (146-150.8MHz)	54	52.8	146.0125	0.08	0.20	40.5	0.13	62.8
						52.7	148.4000	0.09	0.20	42.5	0.13	65.9
						52.6	150.8000	0.10	0.20	48.3	0.13	74.8
Roof	PB	E	NA	HAD4008A, 1/4 wave (150.8-162MHz)	54	52.1	150.8000	0.09	0.20	44.8	0.13	69.4
						52.6	156.4000	0.02	0.20	10.4	0.13	16.1
						52.1	161.9875	0.07	0.20	34.5	0.13	53.5
Roof	PB	E	NA	HAD4009A, 1/4 wave (162-174MHz)	54	53.5	162.0125	0.07	0.20	34.8	0.13	53.9
						52.7	167.7000	0.06	0.20	28.2	0.13	43.7
						52.7	173.4000	0.05	0.20	23.4	0.13	36.2
Roof	PB	E	NA	RAD4226A, 1/4 wave (136-144MHz)	54	52.8	136.0125	0.04	0.20	18.0	0.13	27.9
						52.7	140.0125	0.22	0.20	108.2	0.13	167.7
						52.6	143.9875	0.13	0.20	63.2	0.13	98.0
Roof	PB	E	NA	RAD4225A, 1/4 wave (146-150.8MHz)	54	52.6	146.0125	0.08	0.20	39.1	0.13	60.6
						52.3	148.4000	0.08	0.20	41.8	0.13	64.8
						52.1	150.8000	0.10	0.20	52.0	0.13	80.5

Table 10 (cont.)

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC / ICNIRP Limit	% To FCC / ICNIRP Spec Limit	IC Limit	% To IC Limit
Roof	PB	E	NA	RAD4224A, 1/4 wave (150.8-162MHz)	54	52.6	150.8000	0.08	0.20	39.6	0.13	61.4
						52.3	156.4000	0.02	0.20	10.3	0.13	16.0
						52.1	161.9875	0.07	0.20	33.2	0.13	51.4
Roof	PB	E	NA	RAD4223A, 1/4 wave (162-174MHz)	54	52.1	162.0125	0.05	0.20	22.5	0.13	34.9
						52.6	167.7000	0.05	0.20	24.6	0.13	38.0
						52.1	173.4000	0.04	0.20	21.7	0.13	33.7
Roof	PF	E	NA	HAD4022A, 5/8 wave (132-174MHz)	54	53.5	136.0125	0.01	0.20	3.9	0.13	6.0
						52.7	143.9875	0.01	0.20	4.5	0.13	6.9
						52.6	150.8000	0.01	0.20	4.6	0.13	7.1
						52.5	158.3000	0.01	0.20	4.8	0.13	7.4
						52.4	165.9875	0.01	0.20	7.1	0.13	11.0
						52.1	173.4000	0.01	0.20	6.3	0.13	9.8
Roof	PF	E	NA	RAD4227A, 5/8 wave (146-172MHz)	54	52.8	146.0125	0.00	0.20	1.2	0.13	1.8
						52.6	150.8000	0.02	0.20	8.3	0.13	12.8
						52.5	157.9875	0.02	0.20	8.0	0.13	12.3
						51.9	164.9875	0.02	0.20	7.6	0.13	11.8
						51.8	171.9875	0.01	0.20	3.0	0.13	4.6

Table 10 (cont.)

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC / ICNIRP Limit	% To FCC / ICNIRP Spec Limit	IC Limit	% To IC Limit
Roof	PF	E	NA	HAD4006A, 1/4 wave (136-144MHz)	54	53.5	136.0125	0.03	0.20	12.8	0.13	19.8
						52.7	140.0125	0.03	0.20	15.3	0.13	23.7
						52.7	143.9875	0.03	0.20	13.7	0.13	21.3
Roof	PF	E	NA	HAD4007A, 1/4 wave (146-150.8MHz)	54	52.8	146.0125	0.03	0.20	14.3	0.13	22.2
						52.7	148.4000	0.04	0.20	18.1	0.13	28.1
						52.6	150.8000	0.03	0.20	15.6	0.13	24.2
Roof	PF	E	NA	HAD4008A, 1/4 wave (150.8-162MHz)	54	52.1	150.8000	0.03	0.20	15.4	0.13	23.9
						52.6	156.4000	0.02	0.20	11.8	0.13	18.3
						52.1	161.9875	0.03	0.20	14.1	0.13	21.9
Roof	PF	E	NA	HAD4009A, 1/4 wave (162-174MHz)	54	53.5	162.0125	0.03	0.20	13.2	0.13	20.5
						52.7	167.7000	0.03	0.20	15.2	0.13	23.5
						52.7	173.4000	0.02	0.20	9.9	0.13	15.3
Roof	PF	E	NA	RAD4226A, 1/4 wave (136-144MHz)	54	52.8	136.0125	0.02	0.20	11.9	0.13	18.5
						52.7	140.0125	0.03	0.20	15.9	0.13	24.6
						52.6	143.9875	0.03	0.20	13.2	0.13	20.5

Table 10 (cont.)

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC / ICNIRP Limit	% To FCC / ICNIRP Spec Limit	IC Limit	% To IC Limit
Roof	PF	E	NA	RAD4225A, 1/4 wave (146-150.8MHz)	54	52.6	146.0125	0.03	0.20	13.7	0.13	21.3
						52.3	148.4000	0.04	0.20	18.3	0.13	28.3
						52.1	150.8000	0.03	0.20	15.8	0.13	24.5
Roof	PF	E	NA	RAD4224A, 1/4 wave (150.8-162MHz)	54	52.6	150.8000	0.02	0.20	11.5	0.13	17.8
						52.3	156.4000	0.02	0.20	11.2	0.13	17.3
						52.1	161.9875	0.02	0.20	11.6	0.13	18.0
Roof	PF	E	NA	RAD4223A, 1/4 wave (162-174MHz)	54	52.1	162.0125	0.02	0.20	9.0	0.13	14.0
						52.6	167.7000	0.02	0.20	12.4	0.13	19.3
						52.1	173.4000	0.02	0.20	10.3	0.13	15.9
Roof	PB	H	NA	HAD4022A, 5/8 wave (132-174MHz)	54	53.5	136.0125	0.01	0.20	3.8	0.13	5.9
						52.7	143.9875	0.02	0.20	12.0	0.13	18.6
						52.6	150.8000	0.03	0.20	15.0	0.13	23.3
						52.5	158.3000	0.02	0.20	8.0	0.13	12.4
						52.4	165.9875	0.07	0.20	32.7	0.13	50.6
						52.1	173.4000	0.03	0.20	12.7	0.13	19.7

Table 10 (cont.)

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC / ICNIRP Limit	% To FCC / ICNIRP Spec Limit	IC Limit	% To IC Limit
Roof	PB	H	NA	RAD4227A, 5/8 wave (146-172MHz)	54	52.8	146.0125	0.04	0.20	18.6	0.13	28.8
						52.6	150.8000	0.05	0.20	25.7	0.13	39.9
						52.5	157.9875	0.02	0.20	9.5	0.13	14.8
						51.9	164.9875	0.05	0.20	25.1	0.13	38.9
						51.8	171.9875	0.01	0.20	7.5	0.13	11.6
Roof	PB	H	NA	HAD4006A, 1/4 wave (136-144MHz)	54	53.5	136.0125	0.02	0.20	12.4	0.13	19.2
						52.7	140.0125	0.10	0.20	50.5	0.13	78.2
						52.7	143.9875	0.07	0.20	35.9	0.13	55.6
Roof	PB	H	NA	HAD4007A, 1/4 wave (146-150.8MHz)	54	52.8	146.0125	0.05	0.20	27.0	0.13	41.9
						52.7	148.4000	0.06	0.20	28.2	0.13	43.7
						52.6	150.8000	0.06	0.20	29.6	0.13	45.9
Roof	PB	H	NA	HAD4008A, 1/4 wave (150.8-162MHz)	54	52.1	150.8000	0.06	0.20	29.0	0.13	44.9
						52.6	156.4000	0.01	0.20	6.7	0.13	10.3
						52.1	161.9875	0.06	0.20	31.8	0.13	49.3
Roof	PB	H	NA	HAD4009A, 1/4 wave (162-174MHz)	54	53.5	162.0125	0.06	0.20	31.3	0.13	48.4
						52.7	167.7000	0.09	0.20	44.5	0.13	69.0
						52.7	173.4000	0.03	0.20	15.0	0.13	23.3

Table 10 (cont.)

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC / ICNIRP Limit	% To FCC / ICNIRP Spec Limit	IC Limit	% To IC Limit
Roof	PB	H	NA	RAD4226A, 1/4 wave (136-144MHz)	54	52.8	136.0125	0.02	0.20	9.7	0.13	15.0
						52.7	140.0125	0.10	0.20	49.7	0.13	76.9
						52.6	143.9875	0.07	0.20	37.0	0.13	57.3
Roof	PB	H	NA	RAD4225A, 1/4 wave (146-150.8MHz)	54	52.6	146.0125	0.05	0.20	24.2	0.13	37.6
						52.3	148.4000	0.06	0.20	29.3	0.13	45.4
						52.1	150.8000	0.06	0.20	30.6	0.13	47.3
Roof	PB	H	NA	RAD4224A, 1/4 wave (150.8-162MHz)	54	52.6	150.8000	0.04	0.20	22.1	0.13	34.3
						52.3	156.4000	0.01	0.20	6.1	0.13	9.5
						52.1	161.9875	0.06	0.20	32.5	0.13	50.3
Roof	PB	H	NA	RAD4223A, 1/4 wave (162-174MHz)	54	52.1	162.0125	0.04	0.20	21.3	0.13	33.1
						52.6	167.7000	0.07	0.20	37.4	0.13	58.0
						52.1	173.4000	0.03	0.20	15.2	0.13	23.5
Roof	PF	H	NA	HAD4022A, 5/8 wave (132-174MHz)	54	53.5	136.0125	0.01	0.20	2.8	0.13	4.3
						52.7	143.9875	0.01	0.20	3.9	0.13	6.1
						52.6	150.8000	0.01	0.20	4.7	0.13	7.3
						52.5	158.3000	0.01	0.20	6.2	0.13	9.6
						52.4	165.9875	0.01	0.20	3.6	0.13	5.5
						52.1	173.4000	0.01	0.20	6.1	0.13	9.4

Table 10 (cont.)

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC / ICNIRP Limit	% To FCC / ICNIRP Spec Limit	IC Limit	% To IC Limit
Roof	PF	H	NA	RAD4227A, 5/8 wave (146-172MHz)	54	52.8	146.0125	0.02	0.20	9.2	0.13	14.2
						52.6	150.8000	0.02	0.20	11.3	0.13	17.5
						52.5	157.9875	0.02	0.20	9.4	0.13	14.5
						51.9	164.9875	0.01	0.20	4.3	0.13	6.6
						51.8	171.9875	0.00	0.20	2.3	0.13	3.6
Roof	PF	H	NA	HAD4006A, 1/4 wave (136-144MHz)	54	53.5	136.0125	0.03	0.20	13.2	0.13	20.5
						52.7	140.0125	0.03	0.20	15.8	0.13	24.4
						52.7	143.9875	0.02	0.20	12.4	0.13	19.2
Roof	PF	H	NA	HAD4007A, 1/4 wave (146-150.8MHz)	54	52.8	146.0125	0.03	0.20	12.8	0.13	19.8
						52.7	148.4000	0.03	0.20	15.7	0.13	24.4
						52.6	150.8000	0.03	0.20	16.2	0.13	25.0
Roof	PF	H	NA	HAD4008A, 1/4 wave (150.8-162MHz)	54	52.1	150.8000	0.03	0.20	14.5	0.13	22.5
						52.6	156.4000	0.02	0.20	7.9	0.13	12.2
						52.1	161.9875	0.02	0.20	12.4	0.13	19.1
Roof	PF	H	NA	HAD4009A, 1/4 wave (162-174MHz)	54	53.5	162.0125	0.03	0.20	15.1	0.13	23.4
						52.7	167.7000	0.02	0.20	9.2	0.13	14.2
						52.7	173.4000	0.02	0.20	7.8	0.13	12.0

Table 10 (cont.)

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC / ICNIRP Limit	% To FCC / ICNIRP Spec Limit	IC Limit	% To IC Limit
Roof	PF	H	NA	RAD4226A, 1/4 wave (136-144MHz)	54	52.8	136.0125	0.03	0.20	13.2	0.13	20.5
						52.7	140.0125	0.03	0.20	14.6	0.13	22.7
						52.6	143.9875	0.03	0.20	13.7	0.13	21.2

Assessment of Bluetooth / WLAN Radio and Simultaneous Transmission

The combined Bluetooth / WLAN antenna is located in the control head therefore Basic Restriction SAR was used for exposure conditions less than 20cm.

Both the Bluetooth and WLAN transmitters qualify for the standalone SAR exclusion.

Per guidelines in KDB 447498, the following formula was used to determine the test exclusion for standalone Bluetooth and WLAN transmitter;

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] * [\sqrt{F(\text{GHz})}]$$

Where for Bluetooth:

Max. power = 6.2 mW (8.1 mW*77% duty cycle)

Min. test separation distance = 50mm

F(GHz) = 2.48 GHz

= 0.3, which is ≤ 3 for 1-g SAR therefore the standalone exclusion applies for Bluetooth.

For WLAN:

Max. power = 17.8 mW (17.8 mW*99.8% duty cycle)

Min. test separation distance = 50mm

F(GHz) = 2.462 GHz

= 0.6, which is ≤ 3 for 1-g SAR therefore the standalone exclusion applies for Bluetooth.

Since WLAN source based average power is greater than Bluetooth and they both cannot transmit at the same time, the WLAN transmitter will be used to evaluate simultaneous transmission test exclusion.

Per guidelines in KDB 447498, the following formula was used to determine the estimated SAR of an antenna that transmits simultaneously with other antennas:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \times [\sqrt{F(\text{GHz})/X}]$$

$$= 0.07 \text{ which is } < 0.4 \text{ W/kg (1g)}$$

Where:

X = 7.5 for 1g-SAR; 18.75 for 10g

Max. power = 17.8 mW (17.8 mW*99.8% duty cycle)

Min. test separation distance = 50 mm

F(GHz) = 2.462 GHz

Pursuant to the guidance in KDB 447498 Section 7.2, the simultaneous transmission test exclusion applies if:

“The $[\Sigma \text{ of (the highest measured or estimated SAR for each standalone antenna configuration, adjusted for maximum tune-up tolerance) / 1.6 W/kg}] + [\Sigma \text{ of MPE ratios}] \leq 1.0$.”

For this device:

$$\Sigma \text{ Highest Estimated SAR (only WLAN) / 1.6} = 0.07 / 1.6 = 0.04$$

The worst case power density measured for the operator front seat condition, where the simultaneous conditions would be the worst, when using the HAD4022A antenna mounted on the trunk is 0.07 mW/cm² at 173.4 MHz where the MPE limit is 0.20 mW/cm². Therefore,

$$\Sigma \text{ MPE Ratio (only one antenna transmitting) is } 0.07/0.20 = 0.35$$

$$\text{Exclusion evaluation: } 0.04 + 0.35 = 0.39 \text{ which is } < 1$$

Therefore, the simultaneous transmission RF exposure test exclusion does apply in this case.

17.0 Conclusion

The assessments for this device were performed with an output power range as indicated in section 15.0 Tables 7 - 10. The maximum allowable output power is equal to the upper limit of the final test factory transmit power specification of 54W. The highest power density results (with regards to the applicable limits) for the mobile device scaled to the maximum allowable power output are indicated in the Table 11 for internal/passenger to the vehicle, and external/bystander to the vehicle.

Table 11: Maximum MPE RF Exposure Summary

Designator	Frequency (MHz)	Passenger (mW/cm ²)	Bystander (mW/cm ²)
Overall	136 - 174 MHz	0.16	0.56
FCC	150.8 – 173.4 MHz	0.16	0.56
IC	136 - 174 MHz	0.16	0.56

These MPE results herein demonstrate compliance to the FCC Occupational/Controlled Exposure limits. FCC rules require compliance for Passengers and Bystanders to the FCC General Population/Uncontrolled limits.

These MPE results demonstrate compliance to Industry Canada and ICNIRP Occupational / Controlled Exposure limits.


However, the configurations noted with a “*” in Tables 7 and 9 exceed the General Population / Uncontrolled MPE limits required for Bystanders and Passengers.

Although MPE is a convenient method of demonstrating RF Exposure requirements, SAR is recognized as the “basic restriction”. For those configurations noted “*” in Tables 7 and 9, compliance to the General Population / Uncontrolled SAR 1g limit of 1.6 W/kg is demonstrated through SAR computational analysis.


The computational results show that this device, when used with the offered antennas in accordance with the user manual instructions, exhibits the maximum peak average SAR values indicated in the Table below for the configurations requiring SAR analysis.

Maximum peak average SAR	
Overall RF Exposure Results for 136-174 MHz (1g)	1.23 W/kg
FCC RF Exposure Results for 150.8 – 173.4 MHz (1g)	1.23 W/kg
IC RF Exposure Results for 136 – 174 MHz (1g)	1.23 W/kg

Appendix A - Antenna Locations, Test Distances, and Cable Losses

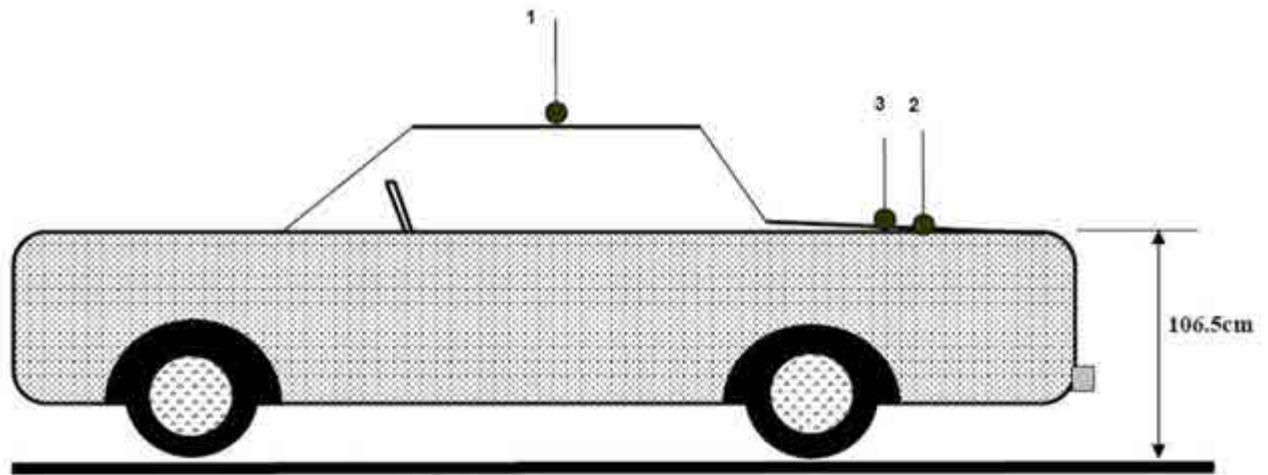

- 1 - Roof (center)
- 2 - Trunk (center)
- 3 - Trunk (85cm from back of the back seat)

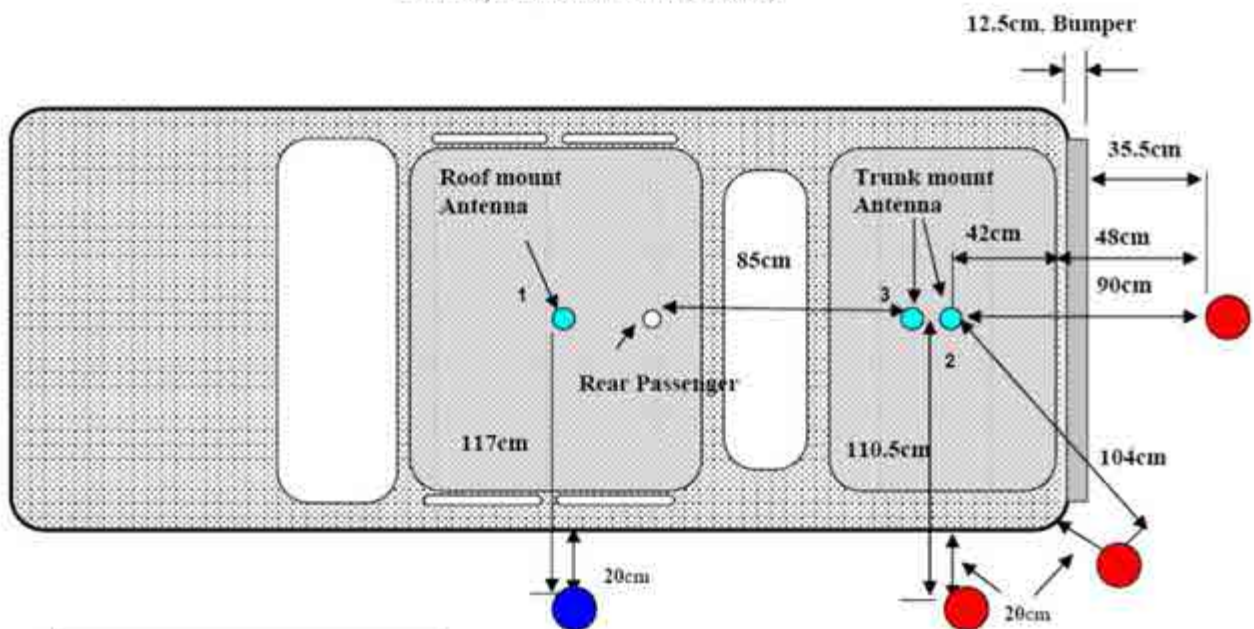

By-Stander Test Locations


- Roof Mount
- Trunk Mount

Note: The distance from the centered trunk-mounted antenna to the edge of the vehicle is 42cm and the distance from the edge of the vehicle to the survey probe sensor is 48cm.

Seat scan areas
(Applicable to both front and back seats)

Meter - Probe

Probe diameter is 5.5cm

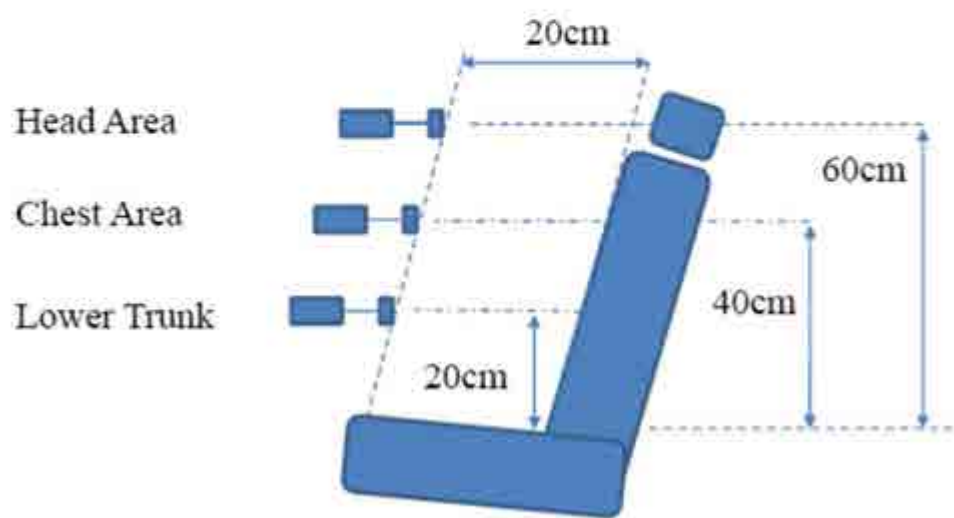

Cable Losses

Test CableTeflon RG58A/U Loss Per 100 Feet

160 MHz - 5 dB

450 MHz - 9 dB

1 GHz - 13.8 dB

Customer CableARG-58U Loss Per 100 Feet

200 MHz - 6.0 dB

400 MHz - 8.8 dB

1 GHz - 14.9 dB

Appendix B - Probe Calibration Certificates

Service Test Report
QAF 1126, 03/11

Report ID: 106049



An ESCO Technologies Company
1301 Arrow Point Drive
Cedar Park, Texas 78613
(512) 531-6400



An ESCO Technologies Company
Tracking # S000031863
Equipment Check
Attested by GC Date: 10-Dec-14
www.ets-lindgren.com

Certificate of Test Conformance

Page 1 of 1

Reference: S 000031863**Customer:** AGILENT/MOTOROLA - 8000 West Sunrise Blvd. Plantation, FL. 33322

The instrument listed below has been tested and verified to Internal Quality Standards. Test data is Not Applicable. Equipment used during instrument testing is controlled by laboratory compliance with ISO/IEC 17025-2005 and ANSI/NCSL Z540-1-1994 using ETS-Lindgren Quality Management System internal procedures.

Manufacturer ETS-Lindgren**Instrument Type** RF Survey Meter**Model** HI-2200**Serial Number/ID** 00086316 / BBBBD050**Status In**

In Tolerance

Date Completed

10-Dec-14

Status Out

Compliant with Internal Quality Standards

Remarks

Functional test performed with customer's probes s/n 00142394 and 00153632.

Sincerely,

A handwritten signature in black ink, appearing to read "George Cisneros".

George Cisneros

Calibration Supervisor

Date Attested: 10-Dec-14



An ESCO Technologies Company
1301 Arrow Point Drive
Cedar Park, Texas 78613
(512) 531-6400



Cert I.D.: 106048

Certificate of Calibration Conformance

Page 1 of 3

The instrument identified below has been individually calibrated in compliance with the following standard(s):
IEEE 1309 - 2013, Institute of Electrical and Electronics Engineers, Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas from 9 kHz to 40 GHz

Environment: Laboratory MTE is maintained in a temperature controlled environment with ambient conditions from 18 to 28 C, relative humidity less than 90%. The instrument under test has been calibrated in a suitable environment using an EMCO TEM Cell 5101C, GTEM1 5305 and an RF Shielded EMC Chamber which is conducive to maintaining accurate and reliable measurement quality.

Manufacturer:	ETS-Lindgren	Operating Range:	100kHz - 5GHz
Model Number:	E100	Instrument Type:	Isotropic Probe > 1 GHz
Serial Number/ ID:	00153632	Date Code:	
Tracking Number:	S 000031863	Alternate ID:	AAAA244
Date Completed:	10-Dec-14	Customer:	AGILENT/MOTOROLA - 8000 West Sunrise Blvd. Plantation, FL. 33322
Test Type:	Standard Field, Field Strength		

Calibration Uncertainty: Std Field Method 100kHz - 6 GHz, +/-0.7 dB, Isotropy +/- 0.86
k=2, (95% Confidence Level)

Test Remarks: Probe received in tolerance thus before and after data are the same.
Probe calibrated with HI-2200 s/n 00086316.
Special Cal data provided per customer.

Calibration Traceability: All Measuring and Test Equipment (MTE) identified below are traceable to the SI units through the National Institute for Standards and Technology (NIST) or other recognized National Metrology Institute. Calibration Laboratory and Quality System controls are compliant with ISO/IEC 17025-2005 and ANSI/NCSL Z540-1-1994.

Standards and Equipment Used:

Make / Model / Name / S/N / Recall Date

Agilent/HP	8648C	Signal Generator	3623A03573	16-Jan-15
Agilent	E4419B	Power Meter	MY45104171	08-Oct-15
Hewlett Packard	E4419B	Power Meter	US39250717	16-Jan-15
Agilent/HP	8648C	Signal Generator	3847A04406	16-Jan-15
Rohde & Schwarz	SMB 100A	Signal Generator	101558	24-Apr-15
Agilent	E9304A	Power Sensor	MY41497709	16-Jan-15
Agilent	E9304A	Power Sensor	MY41497894	16-Jan-15
Agilent	E9304A	Power Sensor	MY41499012	16-Jan-15
HP	E9304A	Power Sensor	MY41497446	06-Aug-15
Agilent	N5181A	MXG Analog Signal Gener	MY50140851	25-Jul-15
Agilent	E4419B	Power Meter	MY40510693	08-Sep-15
Rohde & Schwarz	857.8008.02	Power Meter NRVD	100451	13-Jun-15
Hewlett Packard	83650L	Synthesized Sweep Gen	3844A00422	10-May-15
Rohde & Schwarz	NRV-Z55	Thermal Power Sensor	100352	12-Mar-15
Rohde & Schwarz	NRV-Z55	Thermal Power Sensor	100037	01-May-15
Rohde & Schwarz	NRV-Z55	Thermal Power Sensor	100383	16-Jul-15
Rohde & Schwarz	NRP-Z91	Power Sensor	100734	27-Mar-15
Rohde & Schwarz	NRP-Z91	Power Sensor	100248	27-Mar-15

Condition of Instrument

Upon Receipt:

In Tolerance to Internal Quality Standards

On Release:

In Tolerance to Internal Quality Standards

Calibration Completed By
Shawn Schmitt, Calibration Technician

Attested and Issued on 10-Dec-14
George Cisneros, Calibration Supervisor

This document provides traceability of measurements to recognized national standards using controlled processes at the ETS-Lindgren Calibration Laboratory. Uncertainties listed are derived from the methods described by NIST Tech Note 1297. This certificate and report may not be reproduced, except in full, without the written approval of ETS-Lindgren Calibration Laboratory in accordance with ISO/IEC 17025-2005 and ANSI/NCSL Z540-1-1994. The results in this document relate only to the item(s) listed and should not be considered representative of a population unless otherwise noted. QAF 1127 (03/11)

CALIBRATION REPORT

Electric Field Sensor

Model	S/N
E100	00153632
HI-2200	00086316

Date: 10 Dec 2014

New Instrument
 _ Other
 _ Out of Tolerance
 X Within Tolerance

Frequency Response

Frequency Response		Nominal Field	Cal Factor*	Deviation
	MHz	V/m	(E _{Applied} /E _{Indicated})	dB
1	1	20	1.07	-0.58
2	15	20	1.00	0.01
3	30	20	1.00	-0.02
4	75	20	0.94	0.50
5	100	20	1.02	-0.21
6	150	20	0.95	0.43
7	200	20	0.95	0.44
8	250	20	0.94	0.57
9	300	20	0.94	0.51
10	400	20	0.93	0.64
11	500	20	0.98	0.21
12	600	20	1.00	-0.02
13	700	20	1.02	-0.14
14	800	20	0.98	0.18
15	900	20	0.98	0.17
16	1000	20	0.93	0.67
17	2000	20	1.03	-0.28
18	2450	20	1.05	-0.43
19	3000	20	1.08	-0.65
20	3500	20	1.09	-0.77
21	4000	20	1.11	-0.93
22	5000	20	0.83	1.59
23	5500	20	0.76	2.39
24	6000	20	0.78	2.21

* Corrected electric field values (V/m) can be obtained by multiplying the Cal Factor with the indicated E field readings.

Linearity

maximum linearity deviation is 0.47 dB

(measurements taken from 0.3 V/m to 800 V/m at 27.12 MHz)

Test Conditions

Calibration performed at ambient room temperature: 23 ±3°C



PROBE ROTATIONAL RESPONSE

Model E100
S/N 00153632
Report S000031863
Date Date of Calibration 10 December 2014
Time 04:32:18 PM
Isotropy * + 0.215 dB/ -0.215 dB

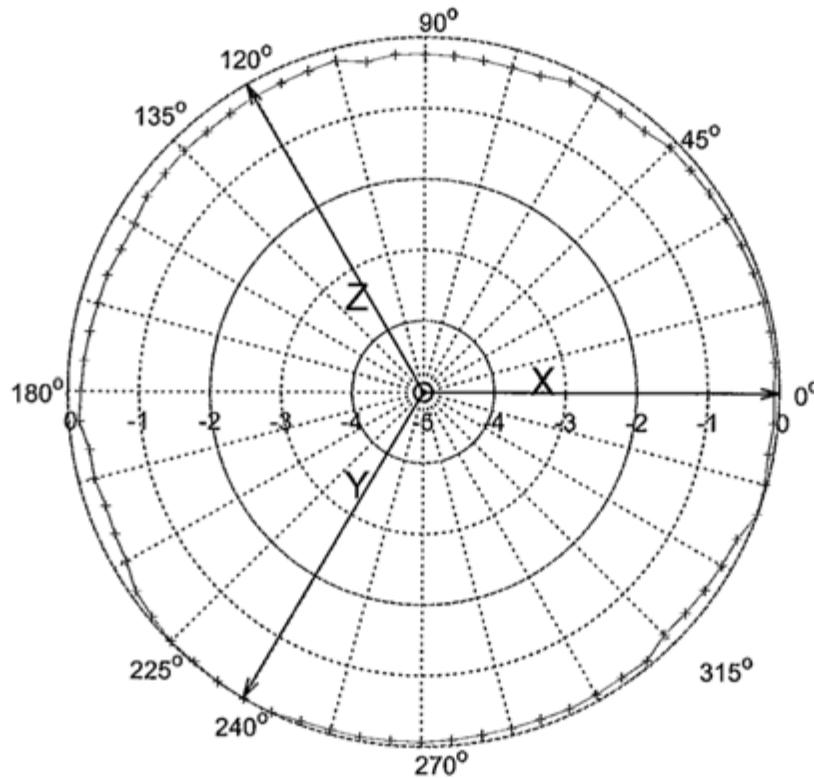


Figure 1: Probe Isotropic Response Chart.

Isotropic response is measured in a 20 V/m field at 400 MHz

*Isotropy is the maximum deviation from the geometric mean as defined by IEEE 1309-2005.



Cert I.D.: 106047



1301 Arrow Point Drive
Cedar Park, Texas 78613
(512) 531-6400

Track# S000031863 Ltd Cal ☐

By SS Date 10-Dec-14

Next Cal Due

www.ets-lindgren.com

Certificate of Calibration Conformance

Page 1 of 2

The instrument identified below has been individually calibrated in compliance with the following standard(s):
IEEE 1309 - 2013, Institute of Electrical and Electronics Engineers, Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas from 9 kHz to 40 GHz

Environment: Laboratory MTE is maintained in a temperature controlled environment with ambient conditions from 18 to 28 C, relative humidity less than 90%. The instrument under test has been calibrated in a suitable environment using an EMC TEM Cell 5101C, GTEM! 5305 and an RF Shielded EMC Chamber which is conducive to maintaining accurate and reliable measurement quality.

Manufacturer:	ETS-Lindgren	Operating Range:	5-300MHz / 30mA/m-10A/m
Model Number:	H200	Instrument Type:	Isotropic Magnetic Field Probe (2)
Serial Number/ ID:	00142394	Date Code:	
Tracking Number:	S 000031863	Alternate ID:	AAAA130
Date Completed:	10-Dec-14	Customer:	AGILENT/MOTOROLA - 8000 West Sunrise Blvd. Plantation, FL. 33322
Test Type:	Standard Field, Field Strength		

Calibration Uncertainty: Direct Field Method 1.15dB
k=2, (95% Confidence Level)

Test Remarks: Probe received in tolerance thus before and after data are the same.
Probe calibrated with HI-2200 s/n 00086316.
Special Cal data provided per customer.

Calibration Traceability: All Measuring and Test Equipment (MTE) identified below are traceable to the SI units through the National Institute for Standards and Technology (NIST) or other recognized National Metrology Institute. Calibration Laboratory and Quality System controls are compliant with ISO/IEC 17025-2005 and ANSI/NCSL Z540-1-1994.

Standards and Equipment Used:**Make / Model / Name / S/N / Recall Date**

Agilent/HP	8648C	Signal Generator	3623A03573	16-Jan-15
Agilent	E4419B	Power Meter	MY45104171	08-Oct-15
Hewlett Packard	E4419B	Power Meter	US39250717	16-Jan-15
Agilent/HP	8648C	Signal Generator	3847A04406	16-Jan-15
Rohde & Schwarz	SMB 100A	Signal Generator	101558	24-Apr-15
Agilent	E9304A	Power Sensor	MY41497709	16-Jan-15
Agilent	E9304A	Power Sensor	MY41497694	16-Jan-15
Agilent	E9304A	Power Sensor	MY41499012	16-Jan-15
HP	E9304A	Power Sensor	MY41497448	06-Aug-15
Agilent	N5181A	MXG Analog Signal Gener	MY50140851	25-Jul-15
Agilent	E4419B	Power Meter	MY40510693	08-Sep-15

Condition of Instrument**Upon Receipt:**

In Tolerance to Internal Quality Standards

On Release:

In Tolerance to Internal Quality Standards

Calibration Completed By
Shawn Schmitt, Calibration Technician

Attested and Issued on 10-Dec-14
George Cisneros, Calibration Supervisor

This document provides traceability of measurements to recognized national standards using controlled processes at the ETS-Lindgren Calibration Laboratory. Uncertainties listed are derived from the methods described by NIST Tech Note 1297. This certificate and report may not be reproduced, except in full, without the written approval of ETS-Lindgren Calibration Laboratory in accordance with ISO/IEC 17025-2005 and ANSI/NCSL Z540-1-1994. The results in this document relate only to the item(s) listed and should not be considered representative of a population unless otherwise noted. QAF 1127 (03/11)

CALIBRATION REPORT

Electric Field Sensor

Model	S/N
H200	00142394
HI-2200	00086316

Date: 10 Dec 2014

New Instrument
- Other
- Out of Tolerance
X Within Tolerance

Frequency Response

Frequency Response		Nominal Field	Cal Factor*	Deviation
	MHz	A/m	(Applied/Indicated)	dB
1	10	0.08	1.02	-0.21
2	15	0.08	0.99	0.07
3	30	0.08	0.97	0.23
4	50	0.08	0.96	0.37
5	75	0.08	0.94	0.53
6	100	0.08	0.91	0.81
7	150	0.08	0.87	1.21
8	175	0.08	0.85	1.42
9	200	0.08	0.81	1.85
10	250	0.08	0.74	2.62
11	300	0.08	0.66	3.65

* Corrected electric field values (A/m) can be obtained by multiplying the Cal Factor with the indicated E field readings.

Linearity

maximum linearity deviation is 0.05 dB

(measurements taken from 30 mA/m to 9 A/m at 27.12 MHz)

Test Conditions

Calibration performed at ambient room temperature: 23 ±3°C

The above sensor was calibrated to factory specifications. This calibration is performed per IEEE 1309 standard. All equipment used are traceable to US National Institute of Standards and Technology (NIST).

Appendix C - Photos of Assessed Antennas
(Refer to Exhibit 7B)

Appendix D – MPE Measurement Results

MPE measurement data for Bystander

D.U.T. Info.							Probe Info.			MPE Measurements										DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		20 cm	40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm	200 cm				
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	136.0125	54	53.5	CW	E	0.94	BS	0.026	0.047	0.071	0.112	0.171	0.290	0.371	0.386	0.349	0.341	0.5	0.216	0.102	0.10
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	143.9875	54	52.7	CW	E	0.92	BS	0.047	0.079	0.103	0.132	0.186	0.291	0.352	0.362	0.342	0.327	0.5	0.222	0.102	0.10
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	150.8000	54	52.6	CW	E	0.90	BS	0.038	0.061	0.086	0.116	0.160	0.241	0.327	0.340	0.332	0.327	0.5	0.203	0.092	0.09
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	158.3000	54	52.5	CW	E	0.90	BS	0.044	0.063	0.089	0.117	0.176	0.277	0.325	0.370	0.339	0.316	0.5	0.212	0.095	0.10
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	165.9875	54	52.4	CW	E	0.90	BS	0.035	0.056	0.083	0.129	0.217	0.319	0.384	0.389	0.353	0.324	0.5	0.229	0.103	0.11
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	173.4000	54	52.1	CW	E	0.90	BS	0.043	0.063	0.076	0.134	0.246	0.374	0.438	0.433	0.404	0.365	0.5	0.258	0.116	0.12
45 (corner)																							
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	173.4000	54	52.1	CW	E	0.90	BS	0.121	0.216	0.218	0.222	0.305	0.352	0.330	0.300	0.276	0.248	0.5	0.259	0.117	0.12
90 (side)																							
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	173.4000	54	52.1	CW	E	0.90	BS	0.085	0.137	0.114	0.181	0.316	0.354	0.316	0.269	0.234	0.208	0.5	0.221	0.100	0.10
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	136.0125	54	53.5	CW	H	0.88	BS	0.033	0.033	0.042	0.060	0.075	0.092	0.113	0.131	0.142	0.142	0.5	0.086	0.109	0.11
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	143.9875	54	52.7	CW	H	0.87	BS	0.045	0.042	0.049	0.067	0.084	0.102	0.121	0.130	0.132	0.124	0.5	0.090	0.116	0.12
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	150.8000	54	52.6	CW	H	0.87	BS	0.036	0.036	0.046	0.061	0.078	0.096	0.115	0.127	0.134	0.128	0.5	0.086	0.105	0.11
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	158.3000	54	52.5	CW	H	0.86	BS	0.040	0.044	0.056	0.072	0.090	0.109	0.125	0.133	0.133	0.123	0.5	0.093	0.120	0.12
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15		54	52.4	CW	H	0.86	BS	0.032	0.037	0.054	0.075	0.097	0.117	0.131	0.138	0.137	0.121	0.5	0.094	0.122	0.13
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	173.4000	54	52.1	CW	H	0.85	BS	0.035	0.042	0.062	0.084	0.105	0.122	0.138	0.144	0.138	0.124	0.5	0.099	0.135	0.14

MPE calculations are defined in section 13.0.

MPE measurement data for Bystander

D.U.T. Info.							Probe Info.			MPE Measurements										DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Test Pos.	20 cm	40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm				
45 (corner)																							
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	173.4000	54	52.1	CW	H	0.85	BS	0.067	0.082	0.094	0.105	0.115	0.124	0.124	0.123	0.115	0.110	0.5	0.106	0.153	0.16
90 (side)																							
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	173.4000	54	52.1	CW	H	0.85	BS	0.054	0.073	0.100	0.114	0.117	0.122	0.120	0.119	0.111	0.104	0.5	0.103	0.146	0.15
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	136.0125	54	53.5	CW	E	0.94	BS	0.017	0.022	0.028	0.032	0.033	0.053	0.107	0.121	0.180	0.193	0.5	0.079	0.037	0.04
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	143.9875	54	52.7	CW	E	0.92	BS	0.030	0.046	0.046	0.039	0.027	0.040	0.084	0.139	0.180	0.158	0.5	0.079	0.036	0.04
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	150.8000	54	52.6	CW	E	0.90	BS	0.030	0.038	0.033	0.015	0.021	0.061	0.106	0.184	0.208	0.222	0.5	0.092	0.041	0.04
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	158.3000	54	52.5	CW	E	0.90	BS	0.030	0.040	0.018	0.013	0.046	0.093	0.138	0.191	0.203	0.221	0.5	0.099	0.045	0.05
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	165.9875	54	52.4	CW	E	0.90	BS	0.015	0.018	0.054	0.029	0.070	0.128	0.172	0.177	0.212	0.213	0.5	0.109	0.049	0.05
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	173.4000	54	52.1	CW	E	0.90	BS	0.005	0.011	0.007	0.030	0.096	0.145	0.172	0.213	0.253	0.246	0.5	0.118	0.053	0.06
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	146.0125	54	52.8	CW	E	0.91	BS	0.042	0.079	0.060	0.031	0.029	0.071	0.141	0.175	0.195	0.178	0.5	0.100	0.046	0.05
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	150.8000	54	52.6	CW	E	0.90	BS	0.039	0.056	0.044	0.023	0.054	0.116	0.184	0.226	0.212	0.219	0.5	0.117	0.053	0.05
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	157.9875	54	52.5	CW	E	0.90	BS	0.039	0.044	0.021	0.021	0.083	0.168	0.217	0.228	0.202	0.205	0.5	0.123	0.055	0.06
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	164.9875	54	51.9	CW	E	0.90	BS	0.016	0.020	0.015	0.018	0.048	0.096	0.122	0.143	0.154	0.170	0.5	0.080	0.036	0.04
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	171.9875	54	51.8	CW	E	0.90	BS	0.005	0.006	0.004	0.013	0.036	0.054	0.070	0.082	0.088	0.090	0.5	0.045	0.020	0.02

MPE calculations are defined in section 13.0.

MPE measurement data for Bystander

D.U.T. Info.							Probe Info.			MPE Measurements										DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		20 cm	40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm	200 cm				
Roof	HAD4006A, 1/4 wave (136- 144MHz)	2.15	136.0125	54	53.5	CW	E	0.94	BS	0.042	0.072	0.097	0.082	0.064	0.082	0.131	0.173	0.168	0.166	0.5	0.108	0.051	0.05
Roof	HAD4006A, 1/4 wave (136- 144MHz)	2.15	140.0125	54	52.7	CW	E	0.93	BS	0.053	0.071	0.096	0.064	0.062	0.097	0.179	0.184	0.196	0.161	0.5	0.116	0.054	0.06
Roof	HAD4006A, 1/4 wave (136- 144MHz)	2.15	143.9875	54	52.7	CW	E	0.92	BS	0.062	0.111	0.102	0.060	0.048	0.091	0.150	0.180	0.174	0.179	0.5	0.116	0.053	0.05
Roof	HAD4007A, 1/4 wave (146- 150.8MHz)	2.15	146.0125	54	52.8	CW	E	0.91	BS	0.057	0.091	0.078	0.044	0.045	0.100	0.158	0.184	0.207	0.202	0.5	0.117	0.053	0.05
Roof	HAD4007A, 1/4 wave (146- 150.8MHz)	2.15	148.4000	54	52.7	CW	E	0.91	BS	0.044	0.067	0.055	0.036	0.048	0.131	0.178	0.233	0.219	0.220	0.5	0.123	0.056	0.06
Roof	HAD4007A, 1/4 wave (146- 150.8MHz)	2.15	150.8000	54	52.6	CW	E	0.90	BS	0.042	0.051	0.047	0.074	0.086	0.156	0.213	0.222	0.222	0.223	0.5	0.134	0.060	0.06
Roof	HAD4008A, 1/4 wave (150.8- 162MHz)	2.15	150.8000	54	52.6	CW	E	0.90	BS	0.041	0.056	0.047	0.044	0.093	0.166	0.243	0.245	0.201	0.197	0.5	0.133	0.060	0.06
Roof	HAD4008A, 1/4 wave (150.8- 162MHz)	2.15	156.4000	54	52.3	CW	E	0.90	BS	0.039	0.043	0.046	0.040	0.086	0.206	0.228	0.242	0.220	0.216	0.5	0.137	0.062	0.06
Roof	HAD4008A, 1/4 wave (150.8- 162MHz)	2.15	161.9875	54	52.1	CW	E	0.90	BS	0.024	0.026	0.024	0.034	0.065	0.122	0.180	0.179	0.172	0.158	0.5	0.098	0.044	0.05
Roof	HAD4009A, 1/4 wave (162- 174MHz)	2.15	162.0125	54	52.1	CW	E	0.90	BS	0.027	0.040	0.025	0.039	0.115	0.162	0.201	0.212	0.192	0.197	0.5	0.121	0.055	0.06
Roof	HAD4009A, 1/4 wave (162- 174MHz)	2.15	167.7000	54	52.6	CW	E	0.90	BS	0.019	0.027	0.030	0.075	0.171	0.227	0.252	0.255	0.244	0.255	0.5	0.156	0.070	0.07
Roof	HAD4009A, 1/4 wave (162- 174MHz)	2.15	173.4000	54	52.1	CW	E	0.90	BS	0.017	0.024	0.033	0.083	0.175	0.197	0.212	0.233	0.247	0.262	0.5	0.148	0.067	0.07
Roof	RAD4226A, 1/4 wave (136- 144MHz)	2.15	136.0125	54	53.5	CW	E	0.94	BS	0.044	0.079	0.108	0.073	0.083	0.097	0.131	0.172	0.166	0.179	0.5	0.113	0.053	0.05
Roof	RAD4226A, 1/4 wave (136- 144MHz)	2.15	140.0125	54	52.7	CW	E	0.93	BS	0.054	0.100	0.104	0.093	0.078	0.128	0.179	0.218	0.196	0.210	0.5	0.136	0.063	0.06
Roof	RAD4226A, 1/4 wave (136- 144MHz)	2.15	143.9875	54	52.7	CW	E	0.92	BS	0.060	0.102	0.093	0.071	0.073	0.126	0.174	0.230	0.215	0.222	0.5	0.137	0.063	0.06

MPE calculations are defined in section 13.0.

MPE measurement data for Bystander

D.U.T. Info.							Probe Info.			MPE Measurements										DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		20 cm	40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm	200 cm				
Roof	RAD4225A, 1/4 wave (146- 150.8MHz)	2.15	146.0125	54	52.8	CW	E	0.91	BS	0.042	0.069	0.048	0.040	0.057	0.100	0.168	0.188	0.184	0.198	0.5	0.109	0.050	0.05
Roof	RAD4225A, 1/4 wave (146- 150.8MHz)	2.15	148.4000	54	52.7	CW	E	0.91	BS	0.033	0.058	0.042	0.032	0.057	0.109	0.180	0.217	0.220	0.215	0.5	0.116	0.053	0.05
Roof	RAD4225A, 1/4 wave (146- 150.8MHz)	2.15	150.8000	54	52.6	CW	E	0.90	BS	0.032	0.049	0.045	0.039	0.090	0.144	0.205	0.241	0.222	0.212	0.5	0.128	0.058	0.06
Roof	RAD4224A, 1/4 wave (150.8- 162MHz)	2.15	150.8000	54	52.6	CW	E	0.90	BS	0.024	0.046	0.043	0.033	0.070	0.119	0.156	0.173	0.170	0.167	0.5	0.100	0.045	0.05
Roof	RAD4224A, 1/4 wave (150.8- 162MHz)	2.15	156.4000	54	52.3	CW	E	0.90	BS	0.041	0.059	0.044	0.029	0.079	0.171	0.236	0.246	0.238	0.215	0.5	0.136	0.061	0.06
Roof	RAD4224A, 1/4 wave (150.8- 162MHz)	2.15	161.9875	54	52.1	CW	E	0.90	BS	0.026	0.037	0.029	0.042	0.092	0.174	0.210	0.209	0.199	0.202	0.5	0.122	0.055	0.06
Roof	RAD4223A, 1/4 wave (162- 174MHz)	2.15	162.0125	54	52.1	CW	E	0.90	BS	0.016	0.023	0.015	0.028	0.068	0.109	0.143	0.134	0.131	0.125	0.5	0.079	0.036	0.04
Roof	RAD4223A, 1/4 wave (162- 174MHz)	2.15	167.7000	54	52.6	CW	E	0.90	BS	0.022	0.027	0.024	0.065	0.134	0.214	0.245	0.244	0.232	0.222	0.5	0.143	0.064	0.07
Roof	RAD4223A, 1/4 wave (162- 174MHz)	2.15	173.4000	54	52.1	CW	E	0.90	BS	0.019	0.024	0.036	0.104	0.208	0.255	0.256	0.252	0.233	0.261	0.5	0.165	0.074	0.08
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	136.0125	54	53.5	CW	H	0.88	BS	0.023	0.028	0.032	0.038	0.041	0.044	0.048	0.060	0.075	0.087	0.5	0.048	0.033	0.03
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	143.9875	54	52.7	CW	H	0.87	BS	0.022	0.030	0.035	0.042	0.046	0.050	0.055	0.066	0.078	0.092	0.5	0.052	0.038	0.04
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	150.8000	54	52.6	CW	H	0.87	BS	0.021	0.027	0.032	0.036	0.046	0.051	0.057	0.067	0.077	0.090	0.5	0.050	0.036	0.04
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	158.3000	54	52.5	CW	H	0.86	BS	0.022	0.030	0.036	0.043	0.049	0.054	0.059	0.072	0.086	0.095	0.5	0.055	0.042	0.04
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	165.9875	54	52.4	CW	H	0.86	BS	0.022	0.027	0.037	0.047	0.052	0.056	0.066	0.079	0.093	0.104	0.5	0.058	0.047	0.05
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	173.4000	54	52.1	CW	H	0.85	BS	0.019	0.023	0.037	0.045	0.056	0.061	0.075	0.089	0.102	0.109	0.5	0.062	0.052	0.05

MPE calculations are defined in section 13.0.

MPE measurement data for Bystander

D.U.T. Info.							Probe Info.			MPE Measurements										DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		20 cm	40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm	200 cm				
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	146.0125	54	52.8	CW	H	0.87	BS	0.026	0.037	0.044	0.051	0.058	0.064	0.069	0.077	0.083	0.085	0.5	0.059	0.051	0.05
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	150.8000	54	52.6	CW	H	0.87	BS	0.026	0.036	0.043	0.052	0.063	0.072	0.076	0.082	0.086	0.088	0.5	0.062	0.055	0.06
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	157.9875	54	52.5	CW	H	0.86	BS	0.029	0.037	0.043	0.052	0.059	0.065	0.072	0.079	0.089	0.092	0.5	0.062	0.054	0.06
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	164.9875	54	51.9	CW	H	0.86	BS	0.021	0.025	0.034	0.044	0.051	0.057	0.060	0.072	0.083	0.090	0.5	0.054	0.040	0.04
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	171.9875	54	51.8	CW	H	0.85	BS	0.013	0.016	0.023	0.033	0.038	0.041	0.050	0.058	0.068	0.072	0.5	0.041	0.023	0.02
Roof	HAD4006A, 1/4 wave (136- 144MHz)	2.15	136.0125	54	53.5	CW	H	0.88	BS	0.026	0.037	0.050	0.062	0.067	0.075	0.078	0.082	0.083	0.082	0.5	0.064	0.060	0.06
Roof	HAD4006A, 1/4 wave (136- 144MHz)	2.15	140.0125	54	52.7	CW	H	0.88	BS	0.029	0.038	0.050	0.064	0.073	0.078	0.083	0.085	0.086	0.084	0.5	0.067	0.065	0.07
Roof	HAD4006A, 1/4 wave (136- 144MHz)	2.15	143.9875	54	52.7	CW	H	0.87	BS	0.030	0.041	0.055	0.066	0.069	0.076	0.081	0.084	0.084	0.082	0.5	0.067	0.064	0.07
Roof	HAD4007A, 1/4 wave (146- 150.8MHz)	2.15	146.0125	54	52.8	CW	H	0.87	BS	0.028	0.040	0.049	0.061	0.068	0.075	0.079	0.083	0.084	0.083	0.5	0.065	0.061	0.06
Roof	HAD4007A, 1/4 wave (146- 150.8MHz)	2.15	148.4000	54	52.7	CW	H	0.87	BS	0.026	0.035	0.044	0.055	0.066	0.074	0.080	0.083	0.085	0.084	0.5	0.063	0.057	0.06
Roof	HAD4007A, 1/4 wave (146- 150.8MHz)	2.15	150.8000	54	52.6	CW	H	0.87	BS	0.025	0.035	0.047	0.060	0.069	0.079	0.082	0.084	0.085	0.083	0.5	0.065	0.060	0.06
Roof	HAD4008A, 1/4 wave (150.8- 162MHz)	2.15	150.8000	54	52.1	CW	H	0.87	BS	0.021	0.033	0.043	0.052	0.063	0.070	0.075	0.079	0.080	0.079	0.5	0.060	0.050	0.05
Roof	HAD4008A, 1/4 wave (150.8- 162MHz)	2.15	156.4000	54	52.6	CW	H	0.86	BS	0.027	0.040	0.048	0.058	0.065	0.074	0.079	0.083	0.086	0.087	0.5	0.065	0.059	0.06
Roof	HAD4008A, 1/4 wave (150.8- 162MHz)	2.15	161.9875	54	52.1	CW	H	0.86	BS	0.022	0.034	0.042	0.054	0.066	0.069	0.069	0.071	0.080	0.084	0.5	0.059	0.049	0.05

MPE calculations are defined in section 13.0.

MPE measurement data for Bystander

D.U.T. Info.							Probe Info.			MPE Measurements										DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		20 cm	40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm	200 cm				
Roof	HAD4009A, 1/4 wave (162- 174MHz)	2.15	162.0125	54	53.5	CW	H	0.86	BS	0.020	0.033	0.041	0.054	0.067	0.068	0.069	0.071	0.077	0.081	0.5	0.058	0.047	0.05
Roof	HAD4009A, 1/4 wave (162- 174MHz)	2.15	167.7000	54	52.7	CW	H	0.86	BS	0.017	0.026	0.036	0.053	0.063	0.067	0.076	0.082	0.090	0.095	0.5	0.061	0.051	0.05
Roof	HAD4009A, 1/4 wave (162- 174MHz)	2.15	173.4000	54	52.7	CW	H	0.85	BS	0.018	0.023	0.039	0.055	0.064	0.071	0.078	0.089	0.096	0.100	0.5	0.063	0.055	0.06
Roof	RAD4226A, 1/4 wave (136- 144MHz)	2.15	136.0125	54	52.8	CW	H	0.88	BS	0.023	0.033	0.044	0.057	0.064	0.069	0.071	0.079	0.075	0.074	0.5	0.059	0.051	0.05
Roof	RAD4226A, 1/4 wave (136- 144MHz)	2.15	140.0125	54	52.7	CW	H	0.88	BS	0.022	0.036	0.051	0.059	0.067	0.072	0.078	0.080	0.082	0.080	0.5	0.063	0.057	0.06
Roof	RAD4226A, 1/4 wave (136- 144MHz)	2.15	143.9875	54	52.6	CW	H	0.87	BS	0.027	0.039	0.051	0.059	0.066	0.072	0.077	0.079	0.081	0.079	0.5	0.063	0.057	0.06
Roof	RAD4225A, 1/4 wave (146- 150.8MHz)	2.15	146.0125	54	52.6	CW	H	0.87	BS	0.031	0.041	0.047	0.054	0.061	0.071	0.072	0.075	0.077	0.078	0.5	0.061	0.053	0.05
Roof	RAD4225A, 1/4 wave (146- 150.8MHz)	2.15	148.4000	54	52.3	CW	H	0.87	BS	0.029	0.037	0.045	0.060	0.066	0.075	0.080	0.082	0.084	0.083	0.5	0.064	0.059	0.06
Roof	RAD4225A, 1/4 wave (146- 150.8MHz)	2.15	150.8000	54	52.1	CW	H	0.87	BS	0.031	0.040	0.049	0.062	0.075	0.079	0.084	0.086	0.086	0.083	0.5	0.068	0.065	0.07
Roof	RAD4224A, 1/4 wave (150.8- 162MHz)	2.15	150.8000	54	52.6	CW	H	0.87	BS	0.026	0.035	0.043	0.059	0.061	0.070	0.073	0.074	0.076	0.074	0.5	0.059	0.050	0.05
Roof	RAD4224A, 1/4 wave (150.8- 162MHz)	2.15	156.4000	54	52.3	CW	H	0.86	BS	0.032	0.041	0.050	0.061	0.071	0.076	0.079	0.083	0.085	0.085	0.5	0.066	0.062	0.06
Roof	RAD4224A, 1/4 wave (150.8- 162MHz)	2.15	161.9875	54	52.1	CW	H	0.86	BS	0.027	0.034	0.045	0.056	0.067	0.070	0.071	0.075	0.082	0.083	0.5	0.061	0.052	0.05
Roof	RAD4223A, 1/4 wave (162- 174MHz)	2.15	162.0125	54	52.1	CW	H	0.86	BS	0.025	0.029	0.040	0.052	0.058	0.062	0.061	0.065	0.071	0.073	0.5	0.054	0.040	0.04
Roof	RAD4223A, 1/4 wave (162- 174MHz)	2.15	167.7000	54	52.6	CW	H	0.86	BS	0.024	0.029	0.041	0.056	0.065	0.071	0.074	0.082	0.087	0.092	0.5	0.062	0.053	0.05
Roof	RAD4223A, 1/4 wave (162- 174MHz)	2.15	173.4000	54	52.1	CW	H	0.85	BS	0.025	0.033	0.046	0.063	0.080	0.077	0.082	0.091	0.100	0.103	0.5	0.070	0.067	0.07

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.			Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	136.0125	54	53.5	CW	E	0.94	PB	0.082	0.077	0.060	0.5	0.073	0.034	0.03
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	143.9875	54	52.7	CW	E	0.92	PB	0.342	0.343	0.264	0.5	0.316	0.145	0.15
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	150.8000	54	52.6	CW	E	0.90	PB	0.289	0.297	0.261	0.5	0.282	0.127	0.13
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	158.3000	54	52.5	CW	E	0.90	PB	0.702	0.812	0.637	0.5	0.717	0.324	0.33
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	165.9875	54	52.4	CW	E	0.90	PB	0.857	1.343	1.381	0.5	1.194	0.539	0.56
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	173.4000	54	52.1	CW	E	0.90	PB	0.689	0.730	0.758	0.5	0.726	0.327	0.34
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	136.0125	54	53.5	CW	E	0.94	PF	0.043	0.063	0.037	0.5	0.048	0.022	0.02
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	143.9875	54	52.7	CW	E	0.92	PF	0.038	0.036	0.020	0.5	0.031	0.014	0.01
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	150.8000	54	52.6	CW	E	0.90	PF	0.057	0.051	0.034	0.5	0.047	0.021	0.02
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	158.3000	54	52.5	CW	E	0.90	PF	0.083	0.043	0.084	0.5	0.070	0.032	0.03
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	165.9875	54	52.4	CW	E	0.90	PF	0.077	0.163	0.178	0.5	0.139	0.063	0.06
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	173.4000	54	52.1	CW	E	0.90	PF	0.261	0.328	0.194	0.5	0.261	0.118	0.12

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.			Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	136.0125	54	53.5	CW	H	0.88	PB	0.040	0.030	0.043	0.5	0.038	0.021	0.02
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	143.9875	54	52.7	CW	H	0.87	PB	0.082	0.065	0.045	0.5	0.064	0.059	0.06
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	150.8000	54	52.6	CW	H	0.87	PB	0.085	0.069	0.059	0.5	0.071	0.072	0.07
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	158.3000	54	52.5	CW	H	0.86	PB	0.142	0.111	0.087	0.5	0.113	0.180	0.19
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	165.9875	54	52.4	CW	H	0.86	PB	0.229	0.201	0.133	0.5	0.188	0.488	0.50
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	173.4000	54	52.1	CW	H	0.85	PB	0.183	0.175	0.120	0.5	0.159	0.347	0.36
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	136.0125	54	53.5	CW	H	0.88	PF	0.027	0.030	0.025	0.5	0.027	0.011	0.01
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	143.9875	54	52.7	CW	H	0.87	PF	0.051	0.045	0.030	0.5	0.042	0.025	0.03
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	150.8000	54	52.6	CW	H	0.87	PF	0.052	0.052	0.029	0.5	0.044	0.028	0.03
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	158.3000	54	52.5	CW	H	0.86	PF	0.053	0.043	0.043	0.5	0.046	0.030	0.03
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	165.9875	54	52.4	CW	H	0.86	PF	0.057	0.052	0.041	0.5	0.050	0.035	0.04
Trunk	HAD4022A, 5/8 wave (132- 174MHz)	5.15	173.4000	54	52.1	CW	H	0.85	PF	0.077	0.066	0.062	0.5	0.068	0.064	0.07

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.			Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	136.0125	54	53.5	CW	E	0.94	PB	0.022	0.036	0.036	0.5	0.031	0.015	0.01
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	143.9875	54	52.7	CW	E	0.92	PB	0.051	0.081	0.100	0.5	0.077	0.036	0.04
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	150.8000	54	52.6	CW	E	0.90	PB	0.039	0.060	0.083	0.5	0.061	0.027	0.03
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	158.3000	54	52.5	CW	E	0.90	PB	0.027	0.015	0.019	0.5	0.020	0.009	0.01
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	165.9875	54	52.4	CW	E	0.90	PB	0.025	0.055	0.117	0.5	0.066	0.030	0.03
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	173.4000	54	52.1	CW	E	0.90	PB	0.075	0.065	0.082	0.5	0.074	0.033	0.03
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	146.0125	54	52.8	CW	E	0.91	PB	0.008	0.008	0.007	0.5	0.008	0.004	0.00
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	150.8000	54	52.6	CW	E	0.90	PB	0.123	0.146	0.146	0.5	0.138	0.062	0.06
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	157.9875	54	52.5	CW	E	0.90	PB	0.031	0.042	0.071	0.5	0.048	0.022	0.02
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	164.9875	54	51.9	CW	E	0.90	PB	0.034	0.067	0.128	0.5	0.076	0.034	0.04
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	171.9875	54	51.8	CW	E	0.90	PB	0.026	0.021	0.032	0.5	0.026	0.012	0.01

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.			Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	HAD4006A, 1/4 wave (136- 144MHz)	2.15	136.0125	54	53.5	CW	E	0.94	PB	0.078	0.068	0.045	0.5	0.064	0.030	0.03
Roof	HAD4006A, 1/4 wave (136- 144MHz)	2.15	140.0125	54	52.7	CW	E	0.93	PB	0.509	0.504	0.408	0.5	0.474	0.220	0.23
Roof	HAD4006A, 1/4 wave (136- 144MHz)	2.15	143.9875	54	52.7	CW	E	0.92	PB	0.244	0.269	0.252	0.5	0.255	0.117	0.12
Roof	HAD4007A, 1/4 wave (146- 150.8MHz)	2.15	146.0125	54	52.8	CW	E	0.91	PB	0.158	0.179	0.184	0.5	0.174	0.079	0.08
Roof	HAD4007A, 1/4 wave (146- 150.8MHz)	2.15	148.4000	54	52.7	CW	E	0.91	PB	0.137	0.207	0.205	0.5	0.183	0.083	0.09
Roof	HAD4007A, 1/4 wave (146- 150.8MHz)	2.15	150.8000	54	52.6	CW	E	0.90	PB	0.201	0.232	0.192	0.5	0.208	0.094	0.10
Roof	HAD4008A, 1/4 wave (150.8- 162MHz)	2.15	150.8000	54	52.1	CW	E	0.90	PB	0.181	0.213	0.181	0.5	0.192	0.086	0.09
Roof	HAD4008A, 1/4 wave (150.8- 162MHz)	2.15	156.4000	54	52.6	CW	E	0.90	PB	0.030	0.054	0.051	0.5	0.045	0.020	0.02
Roof	HAD4008A, 1/4 wave (150.8- 162MHz)	2.15	161.9875	54	52.1	CW	E	0.90	PB	0.069	0.145	0.229	0.5	0.148	0.067	0.07

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.			Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	HAD4009A, 1/4 wave (162- 174MHz)	2.15	162.0125	54	53.5	CW	E	0.90	PB	0.075	0.151	0.232	0.5	0.153	0.069	0.07
Roof	HAD4009A, 1/4 wave (162- 174MHz)	2.15	167.7000	54	52.7	CW	E	0.90	PB	0.061	0.124	0.181	0.5	0.122	0.055	0.06
Roof	HAD4009A, 1/4 wave (162- 174MHz)	2.15	173.4000	54	52.7	CW	E	0.90	PB	0.081	0.087	0.135	0.5	0.101	0.046	0.05
Roof	RAD4226A, 1/4 wave (136- 144MHz)	2.15	136.0125	54	52.8	CW	E	0.91	PB	0.113	0.072	0.046	0.5	0.077	0.035	0.04
Roof	RAD4226A, 1/4 wave (136- 144MHz)	2.15	140.0125	54	52.7	CW	E	0.91	PB	0.509	0.506	0.383	0.5	0.466	0.211	0.22
Roof	RAD4226A, 1/4 wave (136- 144MHz)	2.15	143.9875	54	52.6	CW	E	0.90	PB	0.259	0.293	0.267	0.5	0.273	0.123	0.13
Roof	RAD4225A, 1/4 wave (146- 150.8MHz)	2.15	146.0125	54	52.6	CW	E	0.91	PB	0.142	0.181	0.178	0.5	0.167	0.076	0.08
Roof	RAD4225A, 1/4 wave (146- 150.8MHz)	2.15	148.4000	54	52.3	CW	E	0.91	PB	0.130	0.204	0.202	0.5	0.179	0.081	0.08
Roof	RAD4225A, 1/4 wave (146- 150.8MHz)	2.15	150.8000	54	52.1	CW	E	0.90	PB	0.202	0.251	0.214	0.5	0.222	0.100	0.10

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.			Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	RAD4224A, 1/4 wave (150.8- 162MHz)	2.15	150.8000	54	52.6	CW	E	0.90	PB	0.162	0.183	0.168	0.5	0.171	0.077	0.08
Roof	RAD4224A, 1/4 wave (150.8- 162MHz)	2.15	156.4000	54	52.3	CW	E	0.90	PB	0.034	0.047	0.052	0.5	0.044	0.020	0.02
Roof	RAD4224A, 1/4 wave (150.8- 162MHz)	2.15	161.9875	54	52.1	CW	E	0.90	PB	0.070	0.135	0.221	0.5	0.142	0.064	0.07
Roof	RAD4223A, 1/4 wave (162- 174MHz)	2.15	162.0125	54	52.1	CW	E	0.90	PB	0.046	0.100	0.143	0.5	0.096	0.043	0.05
Roof	RAD4223A, 1/4 wave (162- 174MHz)	2.15	167.7000	54	52.6	CW	E	0.90	PB	0.053	0.101	0.164	0.5	0.106	0.048	0.05
Roof	RAD4223A, 1/4 wave (162- 174MHz)	2.15	173.4000	54	52.1	CW	E	0.90	PB	0.076	0.082	0.121	0.5	0.093	0.042	0.04
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	136.0125	54	53.5	CW	E	0.94	PF	0.020	0.018	0.011	0.5	0.016	0.008	0.01
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	143.9875	54	52.7	CW	E	0.92	PF	0.020	0.014	0.023	0.5	0.019	0.009	0.01
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	150.8000	54	52.6	CW	E	0.90	PF	0.021	0.015	0.023	0.5	0.020	0.009	0.01
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	158.3000	54	52.5	CW	E	0.90	PF	0.006	0.022	0.034	0.5	0.021	0.009	0.01
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	165.9875	54	52.4	CW	E	0.90	PF	0.018	0.031	0.043	0.5	0.031	0.014	0.01
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	173.4000	54	52.1	CW	E	0.90	PF	0.024	0.032	0.025	0.5	0.027	0.012	0.01

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.			Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	146.0125	54	52.8	CW	E	0.91	PF	0.005	0.006	0.004	0.5	0.005	0.002	0.00
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	150.8000	54	52.6	CW	E	0.90	PF	0.015	0.032	0.060	0.5	0.036	0.016	0.02
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	157.9875	54	52.5	CW	E	0.90	PF	0.015	0.036	0.052	0.5	0.034	0.015	0.02
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	164.9875	54	51.9	CW	E	0.90	PF	0.015	0.030	0.052	0.5	0.032	0.015	0.02
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	171.9875	54	51.8	CW	E	0.90	PF	0.014	0.013	0.011	0.5	0.013	0.006	0.01
Roof	HAD4006A, 1/4 wave (136- 144MHz)	2.15	136.0125	54	53.5	CW	E	0.94	PF	0.059	0.063	0.040	0.5	0.054	0.025	0.03
Roof	HAD4006A, 1/4 wave (136- 144MHz)	2.15	140.0125	54	52.7	CW	E	0.93	PF	0.093	0.056	0.044	0.5	0.064	0.030	0.03
Roof	HAD4006A, 1/4 wave (136- 144MHz)	2.15	143.9875	54	52.7	CW	E	0.92	PF	0.056	0.050	0.069	0.5	0.058	0.027	0.03
Roof	HAD4007A, 1/4 wave (146- 150.8MHz)	2.15	146.0125	54	52.8	CW	E	0.91	PF	0.044	0.062	0.078	0.5	0.061	0.028	0.03
Roof	HAD4007A, 1/4 wave (146- 150.8MHz)	2.15	148.4000	54	52.7	CW	E	0.91	PF	0.070	0.085	0.079	0.5	0.078	0.035	0.04
Roof	HAD4007A, 1/4 wave (146- 150.8MHz)	2.15	150.8000	54	52.6	CW	E	0.90	PF	0.049	0.067	0.086	0.5	0.067	0.030	0.03

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.			Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	HAD4008A, 1/4 wave (150.8- 162MHz)	2.15	150.8000	54	52.1	CW	E	0.90	PF	0.053	0.065	0.080	0.5	0.066	0.030	0.03
Roof	HAD4008A, 1/4 wave (150.8- 162MHz)	2.15	156.4000	54	52.6	CW	E	0.90	PF	0.040	0.051	0.062	0.5	0.051	0.023	0.02
Roof	HAD4008A, 1/4 wave (150.8- 162MHz)	2.15	161.9875	54	52.1	CW	E	0.90	PF	0.032	0.045	0.104	0.5	0.060	0.027	0.03
Roof	HAD4009A, 1/4 wave (162- 174MHz)	2.15	162.0125	54	53.5	CW	E	0.90	PF	0.028	0.049	0.097	0.5	0.058	0.026	0.03
Roof	HAD4009A, 1/4 wave (162- 174MHz)	2.15	167.7000	54	52.7	CW	E	0.90	PF	0.044	0.074	0.079	0.5	0.066	0.030	0.03
Roof	HAD4009A, 1/4 wave (162- 174MHz)	2.15	173.4000	54	52.7	CW	E	0.90	PF	0.041	0.054	0.033	0.5	0.043	0.019	0.02
Roof	RAD4226A, 1/4 wave (136- 144MHz)	2.15	136.0125	54	52.8	CW	E	0.94	PF	0.053	0.061	0.035	0.5	0.050	0.023	0.02
Roof	RAD4226A, 1/4 wave (136- 144MHz)	2.15	140.0125	54	52.7	CW	E	0.93	PF	0.096	0.060	0.044	0.5	0.067	0.031	0.03
Roof	RAD4226A, 1/4 wave (136- 144MHz)	2.15	143.9875	54	52.6	CW	E	0.92	PF	0.058	0.048	0.062	0.5	0.056	0.026	0.03

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.			Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	RAD4225A, 1/4 wave (146- 150.8MHz)	2.15	146.0125	54	52.6	CW	E	0.91	PF	0.048	0.062	0.066	0.5	0.059	0.027	0.03
Roof	RAD4225A, 1/4 wave (146- 150.8MHz)	2.15	148.4000	54	52.3	CW	E	0.91	PF	0.068	0.074	0.092	0.5	0.078	0.035	0.04
Roof	RAD4225A, 1/4 wave (146- 150.8MHz)	2.15	150.8000	54	52.1	CW	E	0.90	PF	0.046	0.064	0.093	0.5	0.068	0.031	0.03
Roof	RAD4224A, 1/4 wave (150.8- 162MHz)	2.15	150.8000	54	52.6	CW	E	0.90	PF	0.032	0.045	0.072	0.5	0.050	0.022	0.02
Roof	RAD4224A, 1/4 wave (150.8- 162MHz)	2.15	156.4000	54	52.3	CW	E	0.90	PF	0.047	0.047	0.050	0.5	0.048	0.022	0.02
Roof	RAD4224A, 1/4 wave (150.8- 162MHz)	2.15	161.9875	54	52.1	CW	E	0.90	PF	0.027	0.040	0.082	0.5	0.050	0.022	0.02
Roof	RAD4223A, 1/4 wave (162- 174MHz)	2.15	162.0125	54	52.1	CW	E	0.90	PF	0.017	0.030	0.069	0.5	0.039	0.017	0.02
Roof	RAD4223A, 1/4 wave (162- 174MHz)	2.15	167.7000	54	52.6	CW	E	0.90	PF	0.038	0.057	0.066	0.5	0.054	0.024	0.02
Roof	RAD4223A, 1/4 wave (162- 174MHz)	2.15	173.4000	54	52.1	CW	E	0.90	PF	0.035	0.052	0.045	0.5	0.044	0.020	0.02

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.			Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	136.0125	54	53.5	CW	H	0.88	PB	0.027	0.022	0.019	0.5	0.023	0.008	0.01
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	143.9875	54	52.7	CW	H	0.87	PB	0.050	0.041	0.030	0.5	0.040	0.023	0.02
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	150.8000	54	52.6	CW	H	0.87	PB	0.056	0.046	0.034	0.5	0.045	0.029	0.03
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	158.3000	54	52.5	CW	H	0.86	PB	0.030	0.035	0.035	0.5	0.033	0.016	0.02
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	165.9875	54	52.4	CW	H	0.86	PB	0.069	0.067	0.067	0.5	0.068	0.063	0.07
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	173.4000	54	52.1	CW	H	0.85	PB	0.044	0.048	0.035	0.5	0.042	0.024	0.03
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	146.0125	54	52.8	CW	H	0.87	PB	0.059	0.050	0.042	0.5	0.050	0.036	0.04
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	150.8000	54	52.6	CW	H	0.87	PB	0.078	0.061	0.039	0.5	0.059	0.050	0.05
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	157.9875	54	52.5	CW	H	0.86	PB	0.037	0.040	0.032	0.5	0.036	0.019	0.02
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	164.9875	54	51.9	CW	H	0.86	PB	0.070	0.066	0.041	0.5	0.059	0.048	0.05
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	171.9875	54	51.8	CW	H	0.85	PB	0.033	0.038	0.026	0.5	0.032	0.014	0.01

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.			Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	HAD4006A, 1/4 wave (136- 144MHz)	2.15	136.0125	54	53.5	CW	H	0.88	PB	0.048	0.042	0.033	0.5	0.041	0.025	0.02
Roof	HAD4006A, 1/4 wave (136- 144MHz)	2.15	140.0125	54	52.7	CW	H	0.88	PB	0.096	0.083	0.068	0.5	0.082	0.098	0.10
Roof	HAD4006A, 1/4 wave (136- 144MHz)	2.15	143.9875	54	52.7	CW	H	0.87	PB	0.078	0.068	0.063	0.5	0.070	0.070	0.07
Roof	HAD4007A, 1/4 wave (146- 150.8MHz)	2.15	146.0125	54	52.8	CW	H	0.87	PB	0.067	0.059	0.056	0.5	0.061	0.053	0.05
Roof	HAD4007A, 1/4 wave (146- 150.8MHz)	2.15	148.4000	54	52.7	CW	H	0.87	PB	0.074	0.060	0.052	0.5	0.062	0.055	0.06
Roof	HAD4007A, 1/4 wave (146- 150.8MHz)	2.15	150.8000	54	52.6	CW	H	0.87	PB	0.082	0.064	0.045	0.5	0.064	0.058	0.06
Roof	HAD4008A, 1/4 wave (150.8- 162MHz)	2.15	150.8000	54	52.1	CW	H	0.87	PB	0.082	0.064	0.042	0.5	0.063	0.056	0.06
Roof	HAD4008A, 1/4 wave (150.8- 162MHz)	2.15	156.4000	54	52.6	CW	H	0.86	PB	0.037	0.031	0.023	0.5	0.030	0.013	0.01
Roof	HAD4008A, 1/4 wave (150.8- 162MHz)	2.15	161.9875	54	52.1	CW	H	0.86	PB	0.078	0.073	0.048	0.5	0.066	0.061	0.06

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.		Test Pos.	Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	HAD4009A, 1/4 wave (162- 174MHz)	2.15	162.0125	54	53.5	CW	H	0.86	PB	0.080	0.073	0.047	0.5	0.067	0.062	0.06
Roof	HAD4009A, 1/4 wave (162- 174MHz)	2.15	167.7000	54	52.7	CW	H	0.86	PB	0.089	0.090	0.059	0.5	0.079	0.087	0.09
Roof	HAD4009A, 1/4 wave (162- 174MHz)	2.15	173.4000	54	52.7	CW	H	0.85	PB	0.045	0.051	0.043	0.5	0.046	0.029	0.03
Roof	RAD4226A, 1/4 wave (136- 144MHz)	2.15	136.0125	54	52.8	CW	H	0.88	PB	0.041	0.037	0.030	0.5	0.036	0.019	0.02
Roof	RAD4226A, 1/4 wave (136- 144MHz)	2.15	140.0125	54	52.7	CW	H	0.88	PB	0.094	0.083	0.068	0.5	0.082	0.097	0.10
Roof	RAD4226A, 1/4 wave (136- 144MHz)	2.15	143.9875	54	52.6	CW	H	0.87	PB	0.078	0.071	0.063	0.5	0.071	0.072	0.07
Roof	RAD4225A, 1/4 wave (146- 150.8MHz)	2.15	146.0125	54	52.6	CW	H	0.87	PB	0.064	0.056	0.052	0.5	0.057	0.047	0.05
Roof	RAD4225A, 1/4 wave (146- 150.8MHz)	2.15	148.4000	54	52.3	CW	H	0.87	PB	0.075	0.060	0.054	0.5	0.063	0.057	0.06
Roof	RAD4225A, 1/4 wave (146- 150.8MHz)	2.15	150.8000	54	52.1	CW	H	0.87	PB	0.085	0.064	0.044	0.5	0.064	0.059	0.06

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.			Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	RAD4224A, 1/4 wave (150.8- 162MHz)	2.15	150.8000	54	52.6	CW	H	0.87	PB	0.071	0.056	0.038	0.5	0.055	0.043	0.04
Roof	RAD4224A, 1/4 wave (150.8- 162MHz)	2.15	156.4000	54	52.3	CW	H	0.86	PB	0.035	0.029	0.023	0.5	0.029	0.012	0.01
Roof	RAD4224A, 1/4 wave (150.8- 162MHz)	2.15	161.9875	54	52.1	CW	H	0.86	PB	0.080	0.073	0.048	0.5	0.067	0.063	0.06
Roof	RAD4223A, 1/4 wave (162- 174MHz)	2.15	162.0125	54	52.1	CW	H	0.86	PB	0.064	0.059	0.040	0.5	0.054	0.041	0.04
Roof	RAD4223A, 1/4 wave (162- 174MHz)	2.15	167.7000	54	52.6	CW	H	0.86	PB	0.081	0.083	0.054	0.5	0.073	0.073	0.07
Roof	RAD4223A, 1/4 wave (162- 174MHz)	2.15	173.4000	54	52.1	CW	H	0.85	PB	0.045	0.051	0.043	0.5	0.046	0.029	0.03
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	136.0125	54	53.5	CW	H	0.88	PF	0.023	0.021	0.014	0.5	0.019	0.005	0.01
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	143.9875	54	52.7	CW	H	0.87	PF	0.024	0.025	0.020	0.5	0.023	0.008	0.01
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	150.8000	54	52.6	CW	H	0.87	PF	0.024	0.028	0.024	0.5	0.025	0.009	0.01
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	158.3000	54	52.5	CW	H	0.86	PF	0.035	0.032	0.021	0.5	0.029	0.012	0.01
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	165.9875	54	52.4	CW	H	0.86	PF	0.019	0.022	0.026	0.5	0.022	0.007	0.01
Roof	HAD4022A, 5/8 wave (132- 174MHz)	5.15	173.4000	54	52.1	CW	H	0.85	PF	0.036	0.032	0.020	0.5	0.029	0.012	0.01

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.			Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	146.0125	54	52.8	CW	H	0.87	PF	0.036	0.039	0.031	0.5	0.035	0.018	0.02
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	150.8000	54	52.6	CW	H	0.87	PF	0.040	0.043	0.035	0.5	0.039	0.022	0.02
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	157.9875	54	52.5	CW	H	0.86	PF	0.040	0.039	0.029	0.5	0.036	0.018	0.02
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	164.9875	54	51.9	CW	H	0.86	PF	0.017	0.028	0.028	0.5	0.024	0.008	0.01
Roof	RAD4227A, 5/8 wave (146- 172MHz)	5.15	171.9875	54	51.8	CW	H	0.85	PF	0.021	0.021	0.012	0.5	0.018	0.004	0.00
Roof	HAD4006A, 1/4 wave (136- 144MHz)	2.15	136.0125	54	53.5	CW	H	0.88	PF	0.047	0.049	0.031	0.5	0.042	0.026	0.03
Roof	HAD4006A, 1/4 wave (136- 144MHz)	2.15	140.0125	54	52.7	CW	H	0.88	PF	0.050	0.051	0.037	0.5	0.046	0.031	0.03
Roof	HAD4006A, 1/4 wave (136- 144MHz)	2.15	143.9875	54	52.7	CW	H	0.87	PF	0.042	0.041	0.040	0.5	0.041	0.024	0.02
Roof	HAD4007A, 1/4 wave (146- 150.8MHz)	2.15	146.0125	54	52.8	CW	H	0.87	PF	0.040	0.047	0.038	0.5	0.042	0.025	0.03
Roof	HAD4007A, 1/4 wave (146- 150.8MHz)	2.15	148.4000	54	52.7	CW	H	0.87	PF	0.048	0.053	0.038	0.5	0.046	0.031	0.03
Roof	HAD4007A, 1/4 wave (146- 150.8MHz)	2.15	150.8000	54	52.6	CW	H	0.87	PF	0.049	0.049	0.043	0.5	0.047	0.031	0.03

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.			Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	HAD4008A, 1/4 wave (150.8- 162MHz)	2.15	150.8000	54	52.1	CW	H	0.87	PF	0.045	0.049	0.039	0.5	0.044	0.028	0.03
Roof	HAD4008A, 1/4 wave (150.8- 162MHz)	2.15	156.4000	54	52.6	CW	H	0.86	PF	0.039	0.032	0.028	0.5	0.033	0.015	0.02
Roof	HAD4008A, 1/4 wave (150.8- 162MHz)	2.15	161.9875	54	52.1	CW	H	0.86	PF	0.032	0.050	0.042	0.5	0.041	0.024	0.02
Roof	HAD4009A, 1/4 wave (162- 174MHz)	2.15	162.0125	54	53.5	CW	H	0.86	PF	0.039	0.051	0.049	0.5	0.046	0.030	0.03
Roof	HAD4009A, 1/4 wave (162- 174MHz)	2.15	167.7000	54	52.7	CW	H	0.86	PF	0.049	0.027	0.032	0.5	0.036	0.018	0.02
Roof	HAD4009A, 1/4 wave (162- 174MHz)	2.15	173.4000	54	52.7	CW	H	0.85	PF	0.037	0.037	0.026	0.5	0.033	0.015	0.02
Roof	RAD4226A, 1/4 wave (136- 144MHz)	2.15	136.0125	54	52.8	CW	H	0.88	PF	0.046	0.048	0.032	0.5	0.042	0.026	0.03
Roof	RAD4226A, 1/4 wave (136- 144MHz)	2.15	140.0125	54	52.7	CW	H	0.88	PF	0.050	0.046	0.037	0.5	0.044	0.029	0.03
Roof	RAD4226A, 1/4 wave (136- 144MHz)	2.15	143.9875	54	52.6	CW	H	0.87	PF	0.046	0.048	0.035	0.5	0.043	0.027	0.03

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.			Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	RAD4225A, 1/4 wave (146- 150.8MHz)	2.15	146.0125	54	52.6	CW	H	0.87	PF	0.039	0.045	0.040	0.5	0.041	0.025	0.03
Roof	RAD4225A, 1/4 wave (146- 150.8MHz)	2.15	148.4000	54	52.3	CW	H	0.87	PF	0.049	0.048	0.039	0.5	0.045	0.029	0.03
Roof	RAD4225A, 1/4 wave (146- 150.8MHz)	2.15	150.8000	54	52.1	CW	H	0.87	PF	0.051	0.050	0.043	0.5	0.048	0.033	0.03
Roof	RAD4224A, 1/4 wave (150.8- 162MHz)	2.15	150.8000	54	52.6	CW	H	0.87	PF	0.041	0.043	0.035	0.5	0.040	0.022	0.02
Roof	RAD4224A, 1/4 wave (150.8- 162MHz)	2.15	156.4000	54	52.3	CW	H	0.86	PF	0.040	0.034	0.029	0.5	0.034	0.017	0.02
Roof	RAD4224A, 1/4 wave (150.8- 162MHz)	2.15	161.9875	54	52.1	CW	H	0.86	PF	0.035	0.052	0.050	0.5	0.046	0.029	0.03
Roof	RAD4223A, 1/4 wave (162- 174MHz)	2.15	162.0125	54	52.1	CW	H	0.86	PF	0.035	0.044	0.039	0.5	0.039	0.022	0.02
Roof	RAD4223A, 1/4 wave (162- 174MHz)	2.15	167.7000	54	52.6	CW	H	0.86	PF	0.078	0.028	0.033	0.5	0.046	0.030	0.03
Roof	RAD4223A, 1/4 wave (162- 174MHz)	2.15	173.4000	54	52.1	CW	H	0.85	PF	0.045	0.040	0.021	0.5	0.035	0.017	0.02

MPE calculations are defined in section 13.0.

Appendix E – SAR Simulation Report