

EMI – TEST REPORT

- FCC Part 15.249, RSS210 -

Type / Model Name : PR 300-HV2S

Product Description : Rotating Laser

Applicant : Hilti AG

Address : Feldkircherstrasse 100

9494 SCHAAN, LIECHTENSTEIN

Manufacturer : HILLOS GmbH

Address : Prüssingstraße 41

07745 JENA, GERMANY

Licence holder : Hilti AG

Address : Feldkircherstrasse 100

9494 SCHAAN, LIECHTENSTEIN

Test Result according to the standards
listed in clause 1 test standards:

POSITIVE

Test Report No. : T39470-00-01TK

14. July 2015

Date of issue



Deutsche
Akkreditierungsstelle
D-PL-12030-01-01
D-PL-12030-01-02

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test results
without the written permission of the test laboratory.

Contents

1	<u>TEST STANDARDS</u>	3
2	<u>EQUIPMENT UNDER TEST</u>	4
2.1	Photo documentation of the EUT – Detailed photos see attachment A	4
2.2	Equipment category	4
2.3	Short description of the equipment under test (EUT)	4
2.4	Variants of the EUT	4
2.5	Operation frequency and channel plan	5
2.6	Transmit operating modes	5
2.7	Antenna	5
2.8	Power supply system utilised	5
2.9	Peripheral devices and interface cables	5
2.10	Determination of worst case conditions for final measurement	6
3	<u>TEST RESULT SUMMERY</u>	7
3.1	Final assessment	7
4	<u>TEST ENVIRONMENT</u>	8
4.1	Address of the test laboratory	8
4.2	Environmental conditions	8
4.3	Statement of the measurement uncertainty	8
4.4	Measurement protocol for FCC and IC	9
5	<u>TEST CONDITIONS AND RESULTS</u>	10
5.1	AC power line conducted emissions	10
5.2	Field strength of fundamental	14
5.3	Out-of-band emission, radiated	16
5.4	EBW and OBW	23
5.5	Correction for pulse operation (duty cycle)	24
5.6	Antenna application	27
6	<u>USED TEST EQUIPMENT AND ACCESSORIES</u>	28

ATTACHMENT B as separate supplement

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15, Subpart A - General (September, 2014)

Part 15, Subpart A, Section 15.31	Measurement standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart A, Section 15.35	Measurement detector functions and bandwidths

FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (September, 2014)

Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.205	Restricted bands of operation
Part 15, Subpart C, Section 15.207	Conducted limits
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements
Part 15, Subpart C, Section 15.249	Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz

ANSI C63.4: 2014	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
------------------	---

ANSI C63.10: 2013	Testing Unlicensed Wireless Devices
-------------------	-------------------------------------

ANSI C95.1: 2005	IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
------------------	--

CISPR 16-4-2: 2013	Uncertainty in EMC measurement
--------------------	--------------------------------

CISPR 22: 2008 EN 55022: 2010	Information technology equipment
----------------------------------	----------------------------------

2 EQUIPMENT UNDER TEST

2.1 Photo documentation of the EUT – Detailed photos see attachment B

2.2 General Remarks

According to the customers modification a re-test of the EUT was performed to show further compliance. The EUT is tested and compliant according CFR 47, Part 15.249, FCC ID: SDL-PR3XR01 with the Test Report No. T33893-01-02HS, 2010-08-02 and RSS 210, IC ID: 5228A-PR3XR01 with the Test Report No. T33893-01-03HS, 2010-08-03 by **mikes testing partners GmbH**. The EUT is re-tested and compliant according CFR 47, Part 15.249, FCC ID: SDL - PR3XR02 and IC ID: 5228A – PR3XR02 within the Test Report No. T36776-01-01TK, 2013-07-05 by **mikes testing partners GmbH**.

The EUT is modified with a second inclinor circuit. A modification of the RF section was not made. All other parts are the same in position and value.

This Test Report shows the further compliance with CFR 47, Part 15.249 by re-measurement of the most concerned tests to the RF-part.

The following tests are selected for re-measurement:

- Equivalent isotropic radiated power
- Transmitter spurious emissions

2.3 Equipment category

WPAN Zigbee device, portable equipment.

2.4 Short description of the equipment under test (EUT)

The EUT is equipped with an RF transceiver operating within the free 2.4 GHz ISM band that enables the user to control the whole alignment system remote. The RF section is not modified.

Number of tested samples : 1
Serial number : Pre-production sample
Firmware version :

EUT configuration:

(The CDF filled by the applicant can be viewed at the test laboratory.)

2.5 Variants of the EUT

None

2.6 Operation frequency and channel plan

The operating frequency is 2400 MHz to 2483.5 MHz.

Channel plan:

Channels	Frequency
1	2405
2	2440
3	2480

Note: the marked frequencies are determined for final testing.

2.7 Transmit operating modes

The EUT use GFSK and provide following data rate:

250 kbps

(kbps = *kilobits per second*)

2.8 Antenna

The following antennas shall be used with the EUT:

Number	Characteristic	Model number	Plug	Frequency range (MHz)
1	F-type PCB-antenna	-	-	2400 -2483.5

Note: The EUT uses a PCB antenna. Due to the absence of an antenna connector no temporary antenna can be connected.

2.9 Power supply system utilised

Power supply voltage, V_{nom} : 7.2 VDC Battery

Power supply voltage (alternative) : Input: 110-240 V, 47-63 Hz, 1 ϕ Power supply,
Output: +12 VDC.

2.10 Peripheral devices and interface cables

The following peripheral devices and interface cables are connected during the measurements:

- Power supply battery Model : PRA 84
- _____ Model : _____
- _____ Model : _____

2.11 Determination of worst case conditions for final measurement

Measurements have been made in all three orthogonal axes and the settings of the EUT were changed to locate at which position and at what setting of the EUT produce the maximum of the emissions.

2.11.1 Test jig

No test jig was used.

2.11.2 Test software

No special test software was used.

3 TEST RESULT SUMMERY

Operating in the 2400 MHz – 2483.5 MHz band:

FCC Rule Part	RSS Rule Part	Description	Result
15.35(c)	RSS-Gen, 6.10	Pulsed operation	not tested
15.203	RSS Gen, 8.3	Antenna requirement	not tested
15.204	RSS Gen, 8.2	External radio frequency power amplifiers	not tested
15.205(a)	RSS Gen, 8.1	Emissions in restricted bands	not tested
15.207(a)	RSS Gen, 8.8	AC power line conducted emissions	passed
15.215(c)	-	EBW	not tested
-	RSS-Gen, 6.6	OBW	not tested
15.249(a)	RSS-210, A2.9(a)	Field strength of fundamental	passed
15.249(d)	RSS-210, A2.9(b)	Out-of-band emission, radiated	passed
-	RSS-Gen, 6.11	Transmitter frequency stability	not tested

The mentioned RSS Rule Parts in the above table are related to:

RSS Gen, Issue 4, November 2014

RSS 210, Issue 8, December 2010

3.1 Final assessment

The equipment under test fulfills the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 21 April 2015

Testing concluded on : 18 June 2015

Checked by:

Tested by:

Klaus Gegenfurtner
Teamleader Radio

Tobias Kammerer
Radio Team

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

**CSA Group Bayern GmbH
Ohmstrasse 1-4
94342 STRASSKIRCHEN
GERMANY**

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 / 11.2003 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements“ and is documented in the quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, CSA Group Bayern GmbH, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

4.4 Measurement protocol for FCC and IC

4.4.1 General information

4.4.1.1 Test methodology

Conducted and radiated disturbance testing is performed according to the procedures set out by the International Special Committee on Radio Interference (CISPR) Publication 22, European Standard EN 55022 as shown under section 1 of this report.

The Open Area test site is a listed Open Site under the Canadian Test-Sites File-No:

IC 3009A-1

In compliance with RSS 210 testing for RSS compliance may be achieved by following the procedures set out in ANSI C63.4 and applying the CISPR 22 limits.

4.4.1.2 Justification

The equipment under test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral using the appropriate impedance characteristic or left unterminated. Where appropriate, cables are manually manipulated with respect to each other thus obtaining maximum disturbances from the unit.

4.4.1.3 Details of test procedures

The test methods used comply with CISPR Publication 22, EN 55022 - "Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement" and with ANSI C63.4 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". In compliance with 47 CFR Part 15 Subpart A, Section 15.38 testing for FCC compliance may be achieved by following the procedures set out in ANSI C63.4 and applying the CISPR 22 limits.

5 TEST CONDITIONS AND RESULTS


5.1 AC power line conducted emissions

For test instruments and accessories used see section 6 Part A 4.

5.1.1 Description of the test location

Test location: Shielded Room S2

5.1.2 Photo documentation of the test set-up

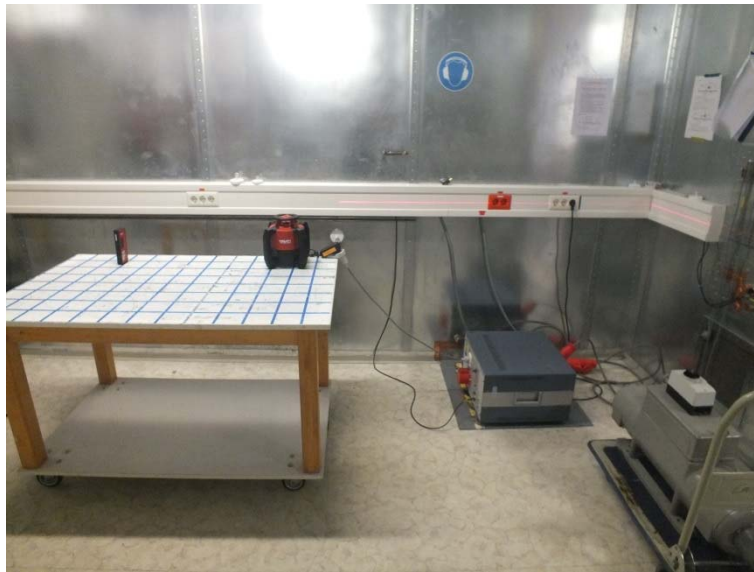

5.1.3 Applicable standard

According to FCC Part 15, Section 15.207(a):

Except as shown in paragraphs (b) and (c) of this Section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the given limits.

5.1.4 Description of Measurement

The measurements are performed following the procedures set out in ANSI C63.4 described under item 4.4.3. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

5.1.5 Test result

Frequency range: 0.15 MHz - 30 MHz

Min. limit margin -30.6 dB at 0.467 MHz

Limit according to FCC Part 15, Section 15.207(a):

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50


* Decreases with the logarithm of the frequency

The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocols.

5.1.6 Test protocol


Test point L1
 Operation mode: TX active, laser rotation active
 Result: passed
 Remarks: 115 VAC 60Hz

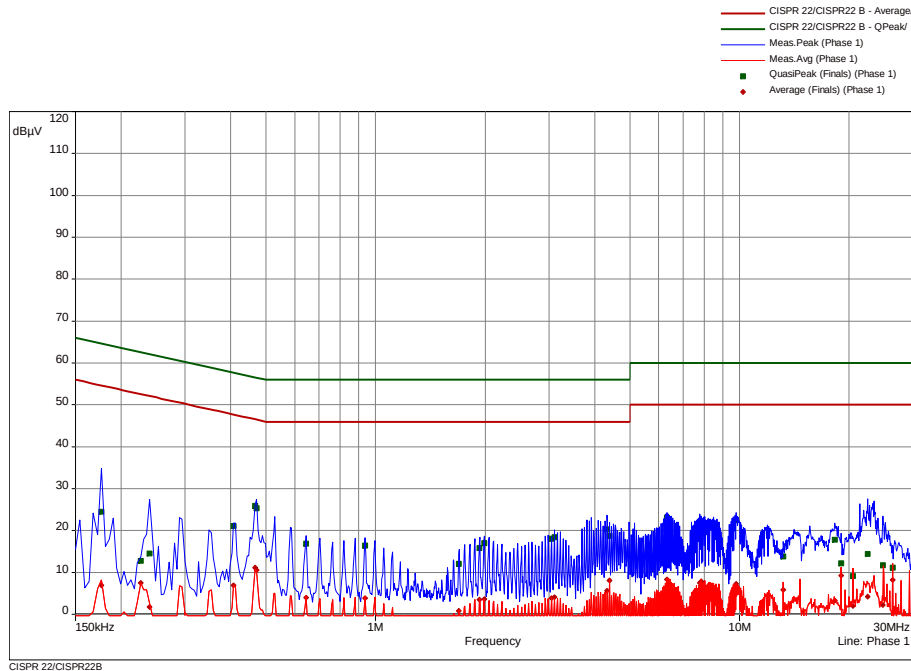

freq	SR	QP	margin	limit	AV	margin	limit	line
MHz		dB(μV)	dB	dB	dB(μV)	dB	dB	
0.177	1	24.5	-40.2	64.6	6.9	-47.7	54.6	Phase 1
0.227	1	12.8	-49.8	62.6	7.5	-45.1	52.6	Phase 1
0.240	1	14.6	-47.5	62.1	1.8	-50.3	52.1	Phase 1
0.408	2	21.1	-36.6	57.7	7.0	-40.7	47.7	Phase 1
0.467	2	26.0	-30.6	56.6	11.2	-35.4	46.6	Phase 1
0.471	2	25.4	-31.1	56.5	10.6	-35.9	46.5	Phase 1
0.645	3	16.9	-39.1	56.0	4.0	-42.0	46.0	Phase 1
0.938	3	16.5	-39.5	56.0	3.8	-42.2	46.0	Phase 1
1.695	4	12.1	-43.9	56.0	0.9	-45.1	46.0	Phase 1
1.929	4	15.8	-40.2	56.0	3.5	-42.5	46.0	Phase 1
1.992	4	17.0	-39.0	56.0	3.6	-42.4	46.0	Phase 1
3.044	5	18.0	-38.0	56.0	3.9	-42.1	46.0	Phase 1
3.102	5	18.4	-37.6	56.0	4.1	-41.9	46.0	Phase 1
4.331	5	20.3	-35.7	56.0	5.6	-40.4	46.0	Phase 1
4.394	5	18.7	-37.3	56.0	8.1	-38.0	46.0	Phase 1
6.321	6	23.1	-36.9	60.0	8.3	-41.7	50.0	Phase 1
7.784	6	22.1	-37.9	60.0	7.5	-42.5	50.0	Phase 1
7.842	6	22.2	-37.9	60.0	7.9	-42.2	50.0	Phase 1
9.776	7	22.5	-37.5	60.0	7.3	-42.7	50.0	Phase 1
13.169	7	13.8	-46.2	60.0	5.9	-44.1	50.0	Phase 1
18.267	7	17.8	-42.2	60.0	3.3	-46.7	50.0	Phase 1
19.019	7	12.2	-47.8	60.0	9.2	-40.8	50.0	Phase 1
20.478	8	9.1	-50.9	60.0	2.0	-48.0	50.0	Phase 1
22.449	8	14.4	-45.6	60.0	4.3	-45.8	50.0	Phase 1
24.767	8	11.8	-48.2	60.0	2.2	-47.8	50.0	Phase 1
26.324	8	11.2	-48.8	60.0	8.2	-41.8	50.0	Phase 1

Test point: N
Operation mode: TX active, laser rotation active
Remarks: 115 VAC 60Hz

Result: passed

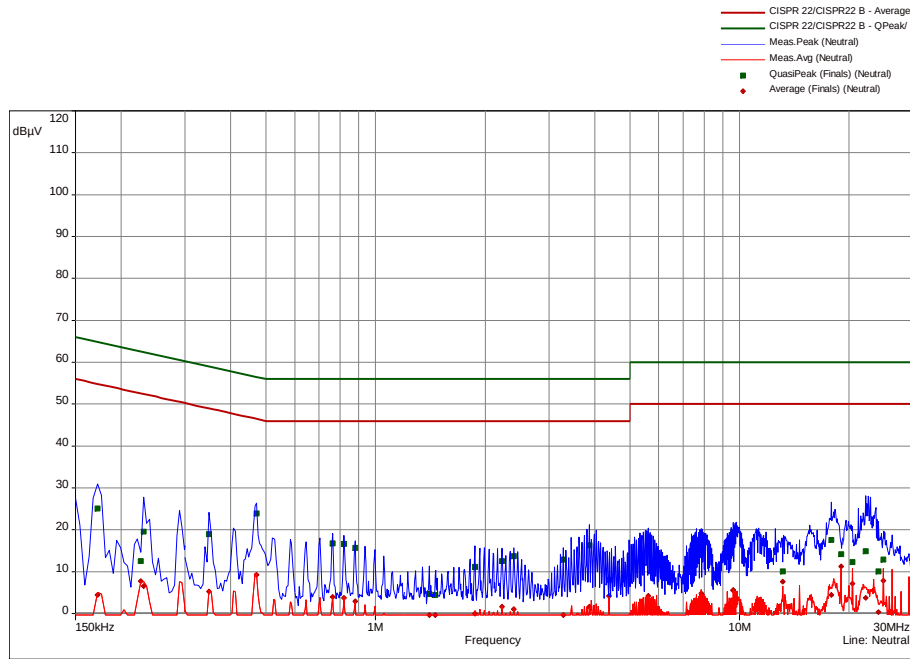

freq	SR	QP	margin	limit	AV	margin	limit	line
MHz		dB(μV)	dB	dB	dB(μV)	dB	dB	
0.173	9	25.1	-39.8	64.8	4.4	-50.4	54.8	Neutral
0.227	9	12.5	-50.1	62.6	7.7	-44.9	52.6	Neutral
0.231	9	19.6	-42.8	62.4	6.5	-45.9	52.4	Neutral
0.350	10	19.0	-40.0	59.0	5.3	-43.6	49.0	Neutral
0.471	10	23.9	-32.6	56.5	9.3	-37.2	46.5	Neutral
0.762	11	16.8	-39.2	56.0	4.0	-42.0	46.0	Neutral
0.821	11	16.6	-39.4	56.0	3.7	-42.3	46.0	Neutral
0.879	11	15.7	-40.3	56.0	3.0	-43.0	46.0	Neutral
1.407	12	4.7	-51.3	56.0	-2.8	-48.8	46.0	Neutral
1.461	12	4.5	-51.5	56.0	-0.2	-46.2	46.0	Neutral
1.875	12	11.1	-44.9	56.0	0.0	-46.0	46.0	Neutral
2.226	12	12.5	-43.5	56.0	1.6	-44.4	46.0	Neutral
2.400	13	13.8	-42.3	56.0	1.1	-44.9	46.0	Neutral
3.278	13	12.9	-43.1	56.0	0.0	-46.0	46.0	Neutral
3.863	13	16.3	-39.7	56.0	1.7	-44.3	46.0	Neutral
4.380	13	8.1	-47.9	56.0	4.2	-41.8	46.0	Neutral
5.619	14	18.3	-41.7	60.0	4.3	-45.7	50.0	Neutral
7.847	14	18.7	-41.3	60.0	4.9	-45.1	50.0	Neutral
9.600	14	19.2	-40.8	60.0	5.6	-44.4	50.0	Neutral
9.600	15	19.2	-40.8	60.0	5.5	-44.5	50.0	Neutral
13.142	15	10.1	-49.9	60.0	7.7	-42.3	50.0	Neutral
17.862	15	17.5	-42.5	60.0	4.4	-45.6	50.0	Neutral
18.983	15	14.2	-45.8	60.0	11.2	-38.8	50.0	Neutral
20.442	16	12.3	-47.7	60.0	7.1	-42.9	50.0	Neutral
22.179	16	14.9	-45.1	60.0	3.7	-46.3	50.0	Neutral
24.074	16	10.1	-49.9	60.0	0.3	-49.7	50.0	Neutral
24.821	16	12.9	-47.1	60.0	7.8	-42.2	50.0	Neutral


5.2 Field strength of fundamental

For test instruments and accessories used see section 6 Part CPR 3.

5.2.1 Description of the test location

Test location: Anechoic chamber 1
Test distance: 3 m

5.2.2 Photo documentation of the test set-up

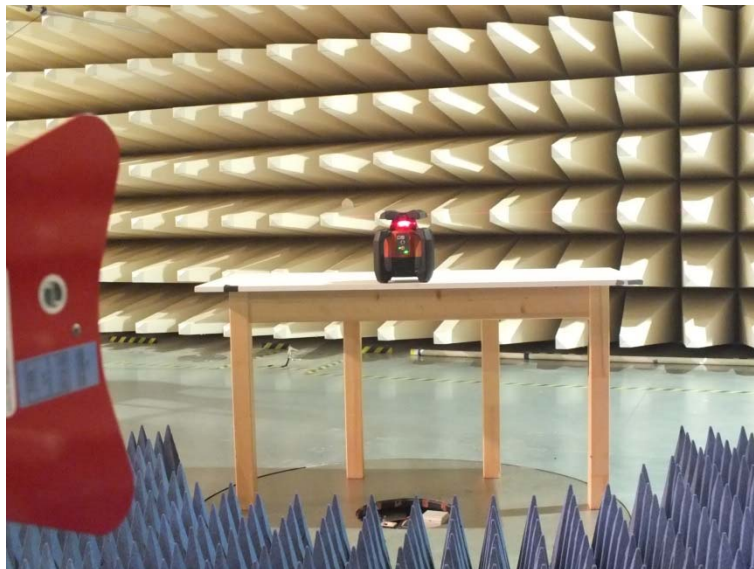

5.2.1 Applicable standard

According to FCC Part 15C, Section 15.249(a):

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the effective limits.

5.2.2 Description of Measurement

The radiated emission of the fundamental wave from the EUT is measured using a spectrum analyser and appropriate linear polarized antennas. The set up of the EUT and the measurement procedure is in accordance to ANSI C63.10, Item 6.5. The EUT is measured in TX continuous mode modulated under normal conditions.

Analyser settings:

Peak measurement: RBW: 1 MHz

VBW: 1 MHz

Detector: Max peak

AV measurement: RBW: 1 MHz

VBW: 10 Hz

Detector: Max peak

5.2.3 Test result

Frequency	Reading level PK	Bandwidth	Correction factor	Corrected level PK	Limit PK	Duty cycle correction factor K_E	Corrected level AV	Limit AV
(MHz)	(dB μ V)	(kHz)	(dB)	dB(μ V/m)	dB(μ V/m)	(dB)	dB(μ V/m)	dB(μ V/m)
2405	119.2	1000	-14.8	104.4	114	-36.6	67.8	94
2440	117.8	1000	-14.7	103.1	114	-36.6	66.5	94
2480	117.1	1000	-14.2	102.9	114	-36.6	66.3	94

Note: The correction factor includes cable loss and antenna factor.

Average-Limit according to FCC Part 15C, Section 15.249(a):

Frequency	Field strength of fundamental	
(MHz)	(mV/m)	dB(μ V/m)
902 - 928	50	94
2400 - 2483.5	50	94
5725-5875	50	94
24000 - 24250	250	108

Peak-Limit according to FCC Part 15C, Section 15.249(e):

However the peak fieldstrength shall not exceed the maximum permitted average limit by more than 20 dB.

The requirements are **FULFILLED**.

Remarks:

5.3 Out-of-band emission, radiated

For test instruments and accessories used see section 6 Part SER 2, SER 3.

5.3.1 Description of the test location


Test location: OATS 1
Test location: Anechoic chamber 2
Test distance: 3 m

5.3.2 Photo documentation of the test set-up

Test setup 30 MHz – 1000 MHz:



Test setup 1 GHz – 18 GHz:

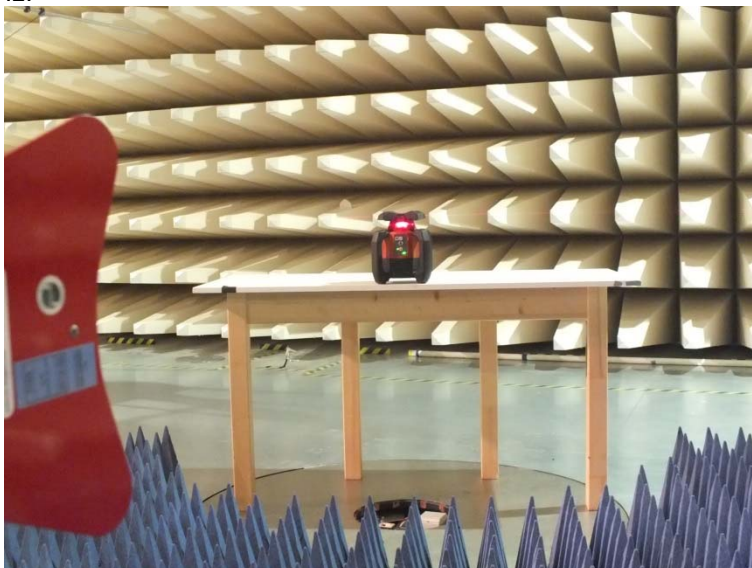

5.3.3 Applicable standard

According to FCC Part 15C, Section 15.249 (d):

Emission radiated outside of the specified frequency bands, except harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated limit in FCC Part 15C, Section 15.209, whichever is the lesser attenuation.

5.3.4 Description of Measurement

The radiated emissions from the EUT are measured in the frequency range of 9 kHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. The setup of the EUT and the measurement procedure is in accordance to ANSI C63.10, Item 6.3. In the frequency range above 1 GHz a spectrum analyser is used with appropriate linear polarized antennas. If the emission level in peak mode complies with the average limit testing is stopped and peak values will be reported, otherwise, the emission is measured in average mode again and reported. The EUT is measured in TX continuous mode unmodulated under normal conditions.

Note:

According to section 2.2 of the present document the measurements in the frequency ranges from 9 kHz to 30 MHz and 18 GHz to 25 GHz were not performed because within these frequency ranges no emissions could be detected within former tests.

Instrument settings:

30 MHz – 1000 MHz:	RBW:	120 kHz
1000 MHz – 25 GHz	RBW:	1 MHz

5.3.5 Test result f 30 – 1000 MHz

Frequency (MHz)	Reading Vert. (dBµV)	Reading Hor. (dBµV)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level Vert. (dBµV/m)	Level Hor. (dBµV/m)	Limit (dBµV/m)	Dlimit (dB)
83.25	0.5	-2.5	9.9	10.1	10.4	7.6	40.0	-29.6
149.29	11.2	-1.6	13.8	14.5	25.0	12.9	43.5	-18.5
160.96	19.5	18.0	14.4	14.9	33.9	32.9	43.5	-9.6
174.33	8.9	8.6	13.6	14.1	22.5	22.7	43.5	-20.8
175.30	10.5	10.0	13.6	14.0	24.1	24.0	43.5	-19.4
288.58	14.6	10.3	16.1	15.7	30.7	26.0	46.0	-15.3

5.3.6 Test result f 1 GHz – 18 GHz
Channel 1

CH1, 2405 MHz								
Test conditions:								
TX active			Test results					
Start frequency (MHz)	Stop frequency (MHz)	RBW (kHz)	Maximum emission		AV Limit (dBµV/m)	Duty cycle correction (dB)	Margin (dB)	Detector
			(MHz)	(dBµV/m)				
1000	2400	1000	2350.30	51.6	54.0	0.0	-2.4	PK
2483.5	4000	1000	3861.99	52.5	54.0	0.0	-1.5	PK
4000	8000	1000	4810.00	49.6	54.0	0.0	-4.4	PK
8000	12000	1000	11966.00	47.7	54.0	0.0	-6.3	PK
12000	18000	1000	17424.00	52.1	54.0	0.0	-1.9	PK
Measurement uncertainty				±6 dB				

Channel 2

CH1, 2440 MHz								
Test conditions:								
TX active			Test results					
Start frequency	Stop frequency	RBW (kHz)	Maximum emission		AV Limit (dBµV/m)	Duty cycle correction	Margin (dB)	Detector
			(MHz)	(dBµV/m)				
1000	2400	1000	2032.85	48.9	54.0	0.0	-5.1	PK
2483.5	4000	1000	3845.32	52.7	54.0	0.0	-1.3	PK
4000	8000	1000	4879.00	49.7	54.0	0.0	-4.4	PK
8000	12000	1000	11912.00	47.8	54.0	0.0	-6.2	PK
12000	18000	1000	16113.00	51.8	54.0	0.0	-2.2	PK
Measurement uncertainty				±6 dB				

Channel 3

CH1, 2480 MHz								
Test conditions:								
TX active			Test results					
Start frequency	Stop frequency	RBW (kHz)	Maximum emission		AV Limit (dBµV/m)	Duty cycle correction	Margin (dB)	Detector
			(MHz)	(dBµV/m)				
1000	2400	1000	2351.70	51.3	54.0	0.0	-2.7	PK
2483.5	4000	1000	2483.50	62.6	54.0	-36.6	-28.1	PK
4000	8000	1000	4960.00	47.6	54.0	0.0	-6.5	PK
8000	12000	1000	11976.00	46.7	54.0	0.0	-7.3	PK
12000	18000	1000	17935.50	52.4	54.0	0.0	-1.6	PK
Measurement uncertainty				±6 dB				

Limit according to FCC Part 15C, Section 15.209:

Frequency (MHz)	15.209 Limits ($\mu\text{V/m}$)	Measurement distance (m)
0.009 - -0.49	$2400/f(\text{kHz})$	300
0.49 – 1.705	$24000/f(\text{kHz})$	30
1.705 – 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Average limit according to FCC Part 15C, Section 15.249(a):

Fundamental frequency (MHz)	Field strength of harmonics	
	($\mu\text{V/m}$)	dB($\mu\text{V/m}$)
902 - 928	500	54
2400 - 2483.5	500	54
5725 - 5875	500	54
24000 - 24250	2500	68


The requirements are **FULFILLED**.

Remarks:


5.3.7 Test protocols

Channel 1, 2405 MHz


Spurious emissions from 1 to 2.4 GHz

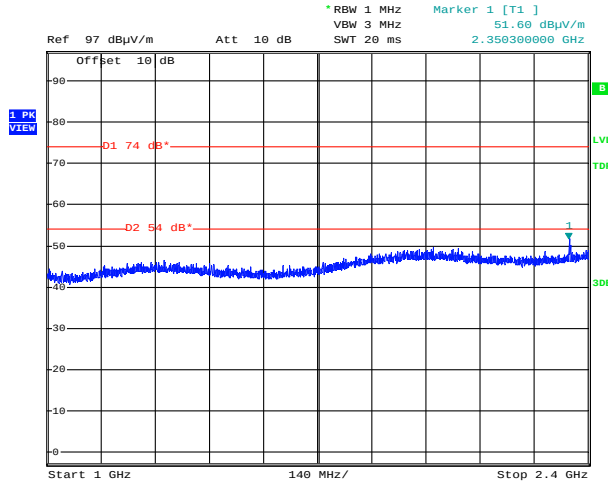


Spurious emissions from 2.4835 to 4 GHz

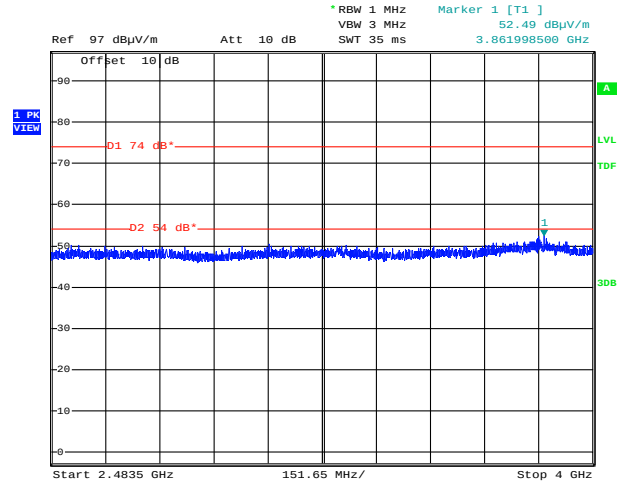


Spurious emissions from 4 to 8 GHz

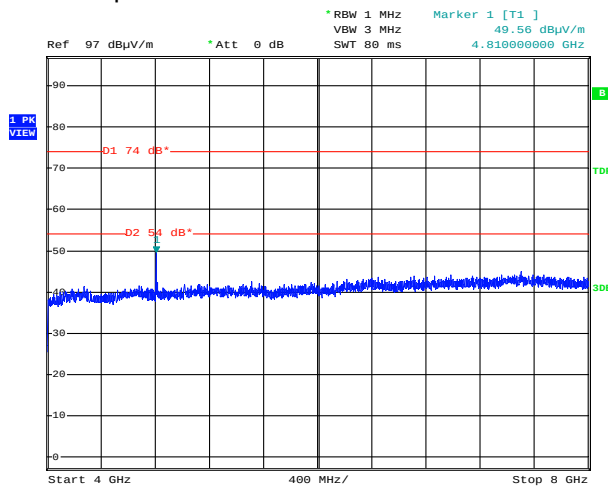


Spurious emissions from 8 to 12 GHz

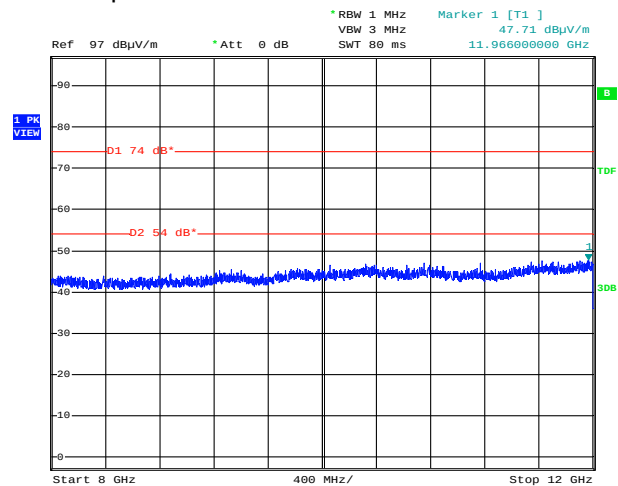


Spurious emissions from 12 to 18 GHz

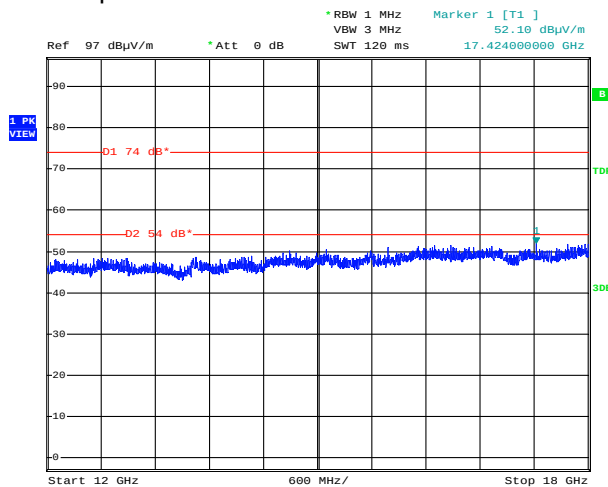


Spurious emissions from 1 to 2.4 GHz

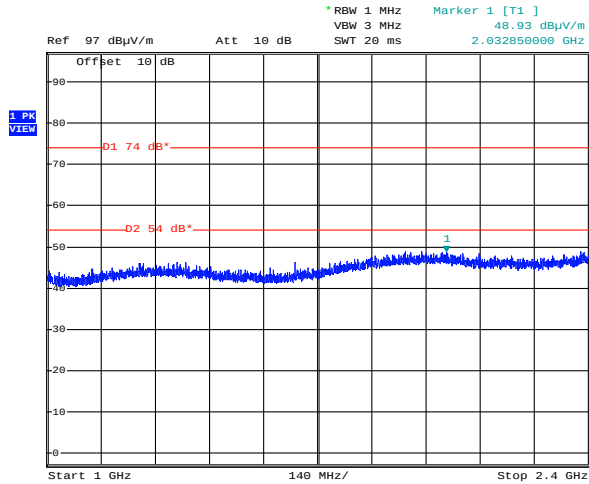


Spurious emissions from 2.4835 to 4 GHz

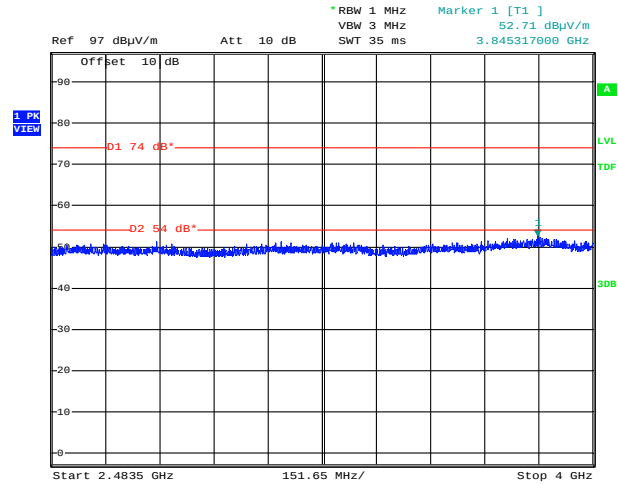


Spurious emissions from 4 to 8 GHz

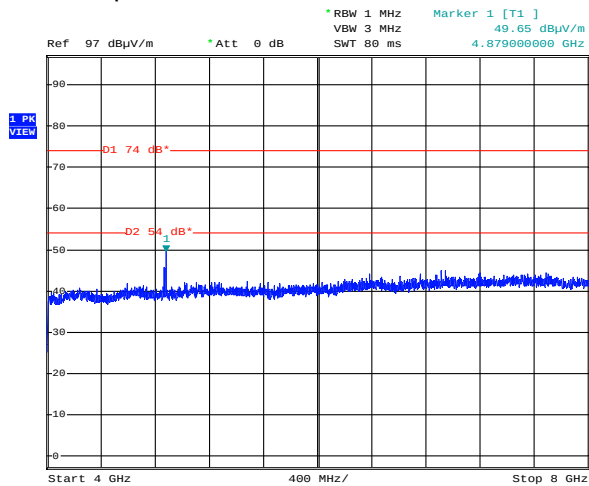


Spurious emissions from 8 to 12 GHz

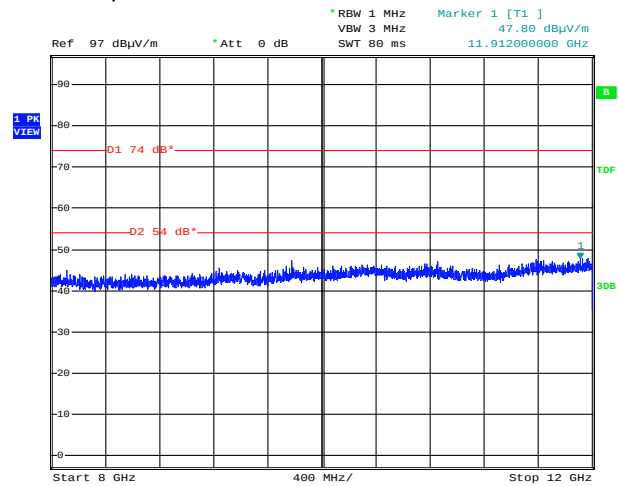


Spurious emissions from 12 to 18 GHz

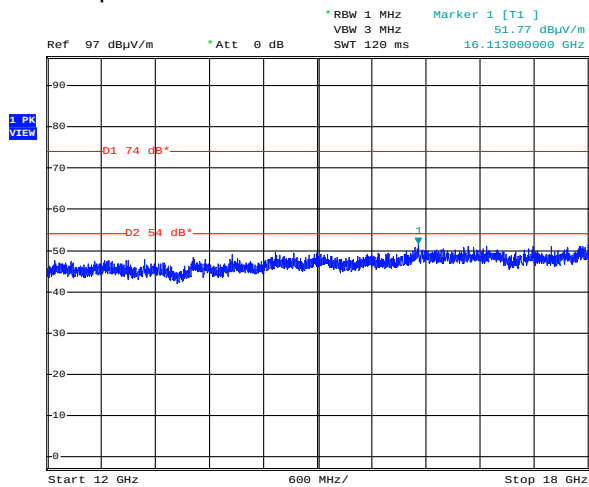


Spurious emissions from 1 to 2.4 GHz

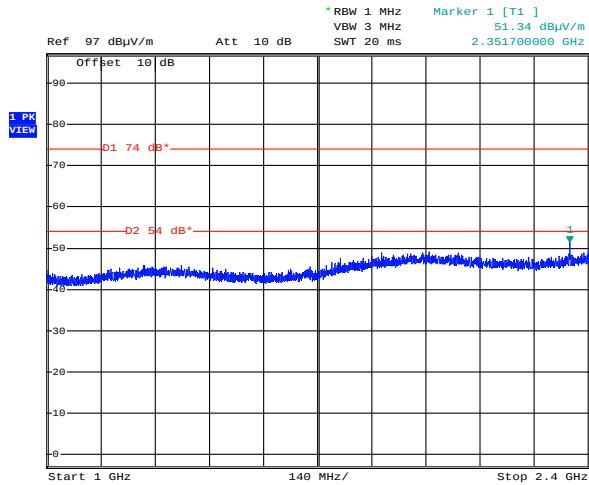


Spurious emissions from 2.4835 to 4 GHz

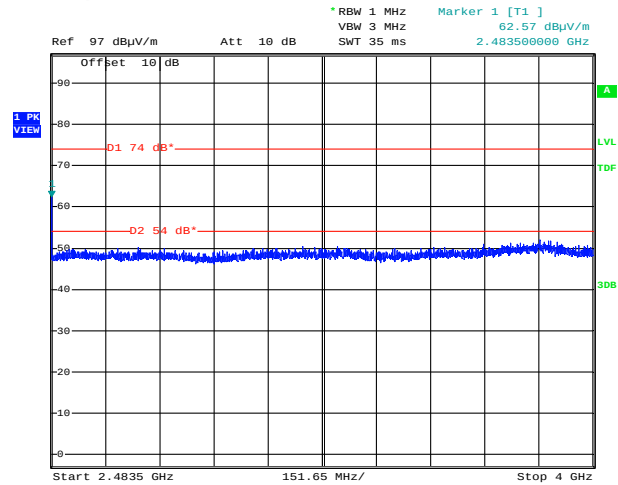


Spurious emissions from 4 to 8 GHz

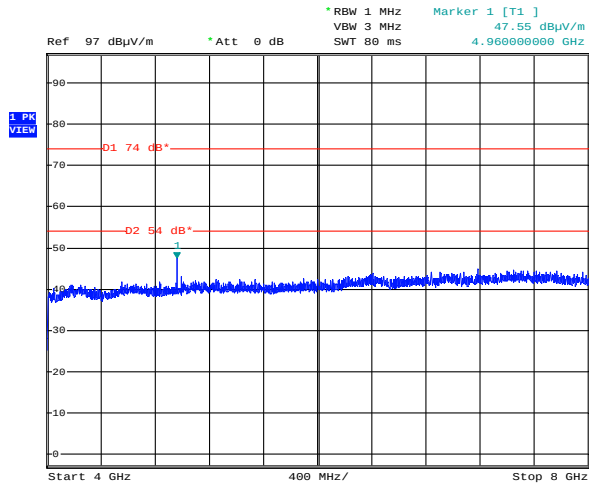

Spurious emissions from 8 to 12 GHz

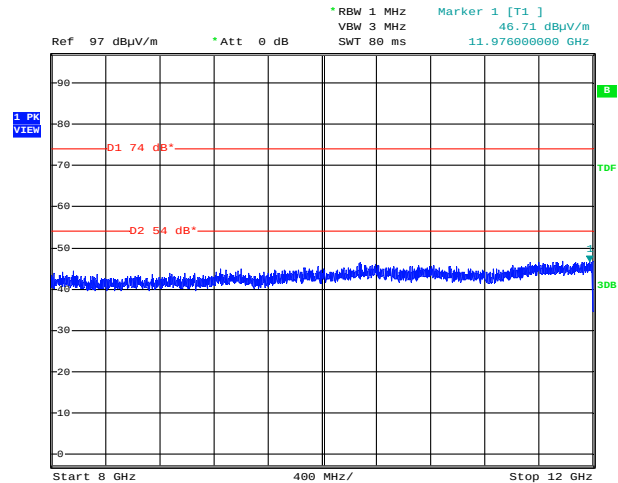

Spurious emissions from 12 to 18 GHz

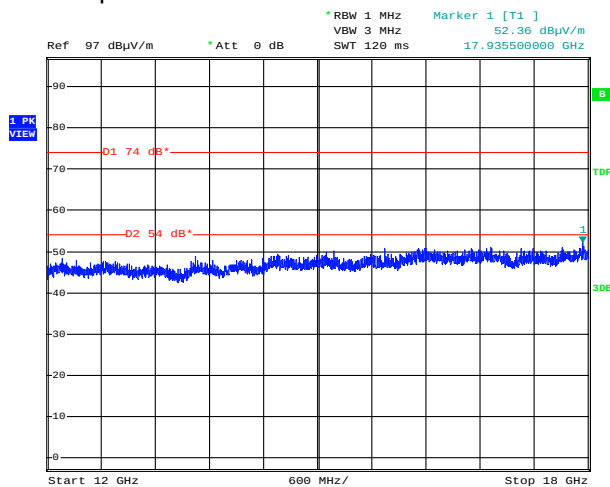

5.4 EBW and OBW

For test instruments and accessories used see section 6 Part MB.

5.4.1 Description of the test location

Test location: NONE

Remarks: Not tested, because the RF section was not modified.

5.5 Correction for pulse operation (duty cycle)

For test instruments and accessories used see section 6 Part DC.

5.5.1 Description of the test location

Test location: Anechoic chamber 1

5.5.2 Photo documentation of the test set-up



5.5.3 Applicable standard

According to FCC Part 15A, Section 15.35(c):

When the radiated emission limits are expressed in terms of average value and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete puls train, including blanking intervals, as long as the pulse train does not exceed 0.1s. In cases where the puls train exceeds 0.1s, the measured field strength shall be determined from the average absolute voltage during a 0.1s interval during which the field strength is at its maximum. The exact method of calculating the average field strength shall be submitted.

5.5.4 Description of Measurement

The duty cycle factor (dB) is calculated applying the following formula:

$$KE = 20 \log ((t_{iw}/T_w) * (t_{iB}/T_B))$$

KE: pulse operation correction factor
 t_{iw} : pulse duration for one complete pulse track
 t_{iB} : pulse duration for one pulse
 T_w : a period of the pulse track
 T_B : a period of one pulse

5.5.5 Test result


t_{iw} (ms)	T_w (ms)	t_{iB} (ms)	T_B (ms)	K_E (dB)
100	100	1.475	100	-36.6

Remarks: The pulse train (T_w) exceeds 100 ms, therefore the duty cycle have been calculated by averaging the sum of the pulse widths over the 100 ms width with the highest average value.


For detailed results, please see the test protocol below.

5.5.6 Test protocol

Correction for Pulse Operation (Duty Cycle) FCC Part 15A, Section 15.35(c)

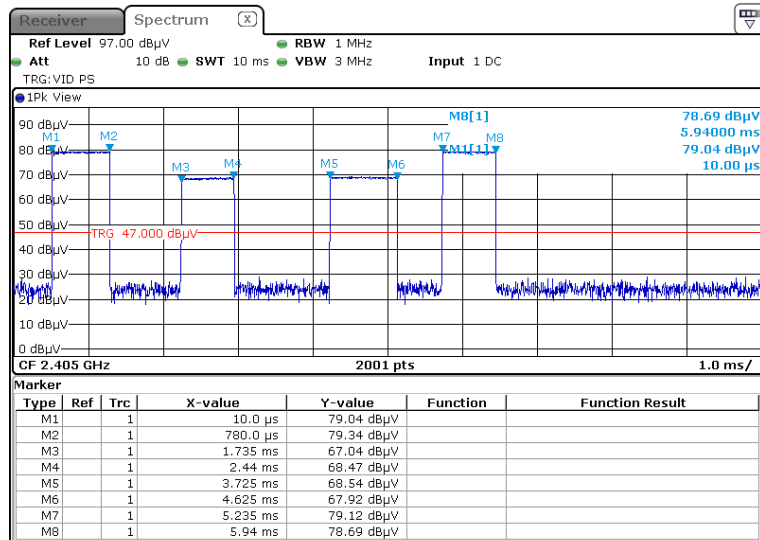

Note: The markers M3, M4, M5 and M6 are marker values according to the response of the companion device. The markers M1, M2, M7 and M8 represent the on-time of the EUT.

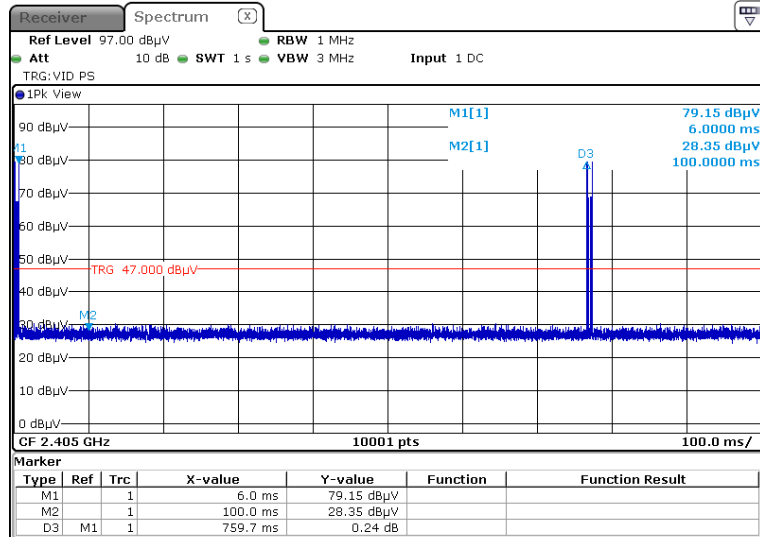

5.6 Antenna application

5.6.1 Applicable standard

According to FCC Part 15C, Section 15.203(a):

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section.

Remarks: Not applicable, because the RF section was not modified.

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
A 4	ESHS 30	02-02/03-05-002	17/07/2015	17/07/2014		
	ESCI 02-02/03-05-005	09/12/2015	09/12/2014			
	ESH 2 - Z 5	02-02/20-05-004	18/10/2015	18/10/2013	09/08/2015	09/02/2015
	N-4000-BNC	02-02/50-05-138				
	N-1500-N	02-02/50-05-140				
	ESH 3 - Z 2	02-02/50-05-155	19/11/2015	19/11/2014	09/12/2015	09/06/2015
	SP 103 /3.5-60	02-02/50-05-182				
CPR 3	FSP 40	02-02/11-11-001	02/10/2015	02/10/2014		
	AFS5-12001800-18-10P-6	02-02/17-06-002				
	AFS4-01000400-10-10P-4	02-02/17-13-002				
	AMF-4F-04001200-15-10P	02-02/17-13-003				
	3117 02-02/24-05-009	12/05/2016	12/05/2015			
	Sucoflex N-2000-SMA	02-02/50-05-075				
	SF104/11N/11N/1500MM	02-02/50-13-015				
SER 2	ESVS 30	02-02/03-05-006	26/06/2016	26/06/2015		
	VULB 9168	02-02/24-05-005	17/04/2016	17/04/2015	20/11/2015	20/05/2015
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
	KK-SD_7/8-2X21N-33,0M	02-02/50-15-028				
SER 3	FSP 40	02-02/11-11-001	02/10/2015	02/10/2014		
	AFS5-12001800-18-10P-6	02-02/17-06-002				
	AFS4-01000400-10-10P-4	02-02/17-13-002				
	AMF-4F-04001200-15-10P	02-02/17-13-003				
	3117 02-02/24-05-009	12/05/2016	12/05/2015			
	Sucoflex N-2000-SMA	02-02/50-05-075				
	SF104/11N/11N/1500MM	02-02/50-13-015				