


Antenna report

产品测试参数			
产品名称(Name)	Rubber rod antenna	产品型号(Model Type)	KR-2.4G/1158
电性能指标 (Electrical Specifications)			
频率范围 (Frequency Range)	2400MHz——2500MHz	极化方式 (Polarization)	垂直 vertical
输入阻抗(Impedance)	50 Ω	辐射方向 (Radiation direction)	全向 omnidirectional
驻波比 (VSWR)	≤2.0	功率容量(Power)	50W
增益(Gain)	2dBi		
机械指标 (Mechanical Specifications)			
外壳颜色(Radome Color)	黑色 black		
连接器型号 (Connector)	SMA (J)		
外壳材料 Radome Material	ABS /TPEE		
工作温度 (Working Temperature)	-40℃-+85℃	存放温度 (Limit Temperature)	-40℃-+85℃

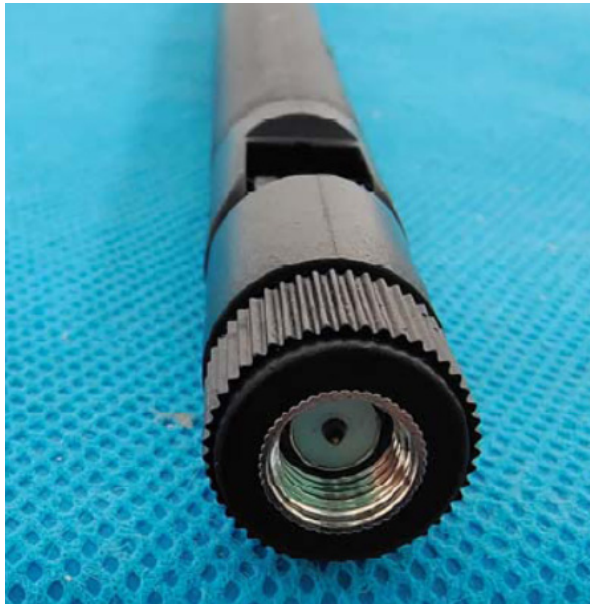


(Antenna Type: External)

Manufacturer:

DALS Lighting, Inc


80 De La Seigneurie East Blainville, Quebec Canada J7C 4N1

RoHS

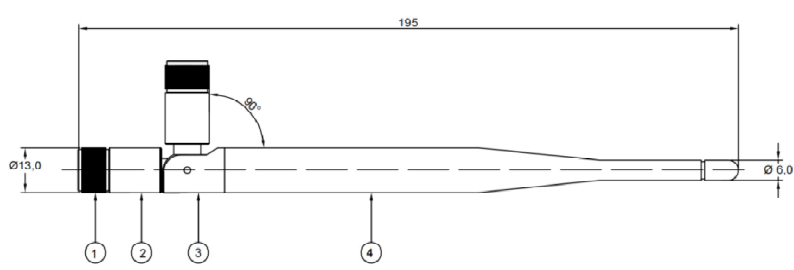


General Tolerance			Date 日期: 2020.9.15	Unit 单位: mm	Rev 版本: A1	Scale 比例: 1:1	Product Name 产品名称:
Dim mm	A	B	Designed 设计:	Material 材料:	Material Code 物料编码:		
	5-10	± 0.10	± 0.20	Checked 审核:	Process 工艺:	Model Name 产品型号:	
	10-20	± 0.15	± 0.30	Approval 批准:	Third Angle 第三视角	 Customer Part Name 客户料号:	
	20-40	± 0.20	± 0.40				
	40	± 0.25	± 0.50				



VSWR , Return loss, Smith

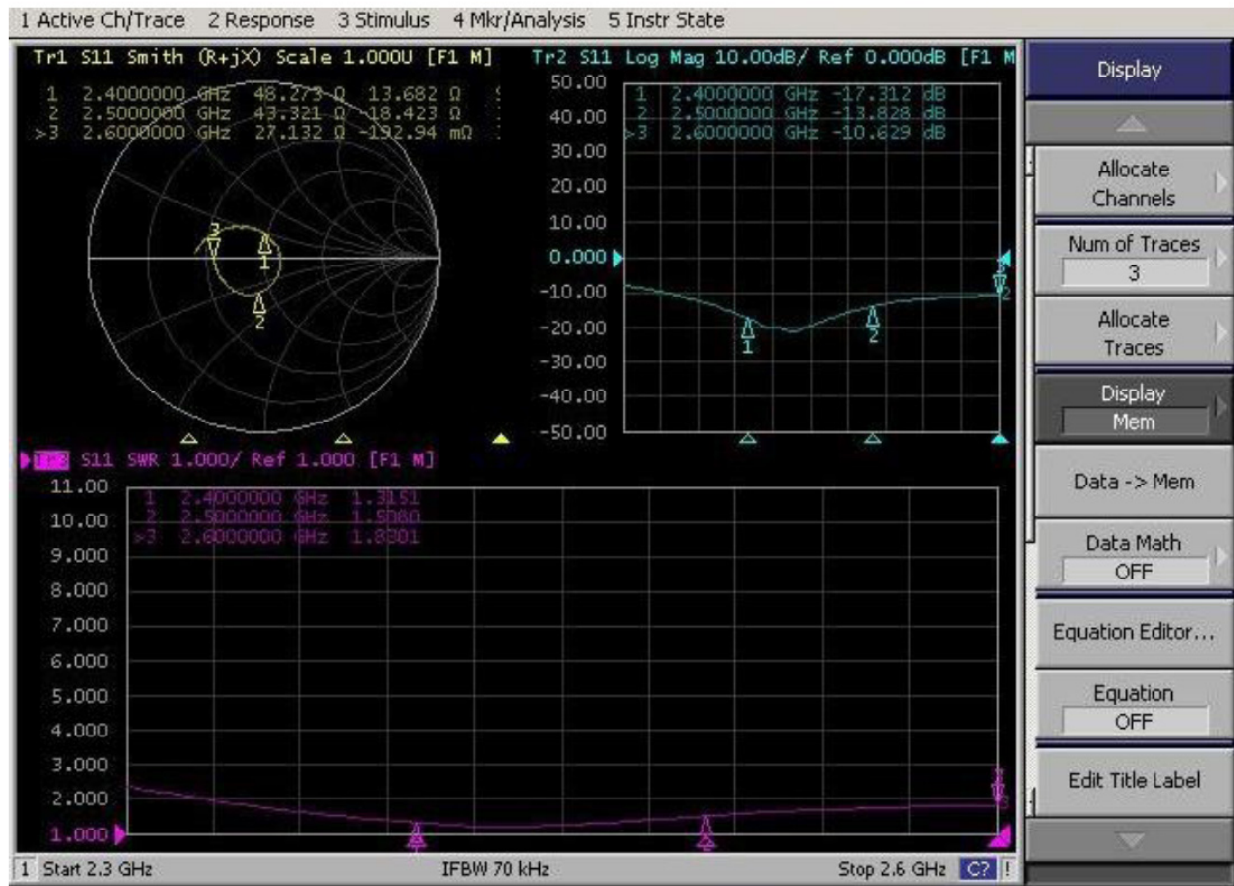


2400MHz

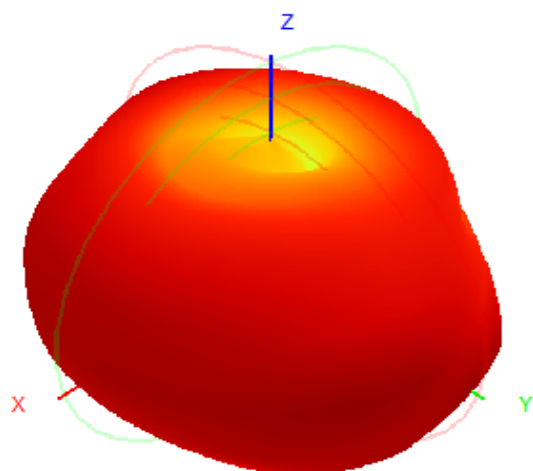



Back View

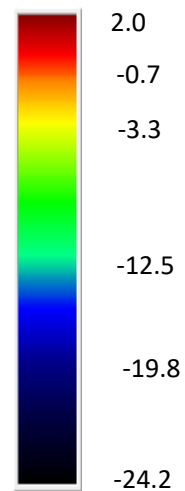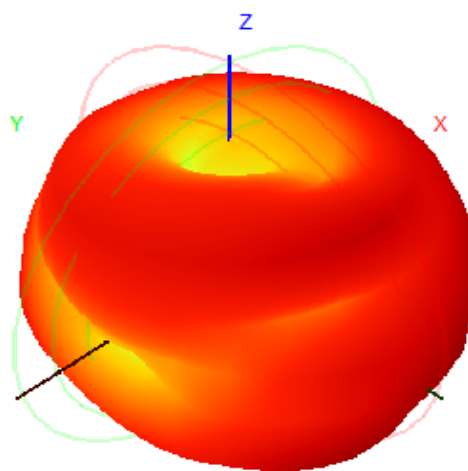


2450MHz

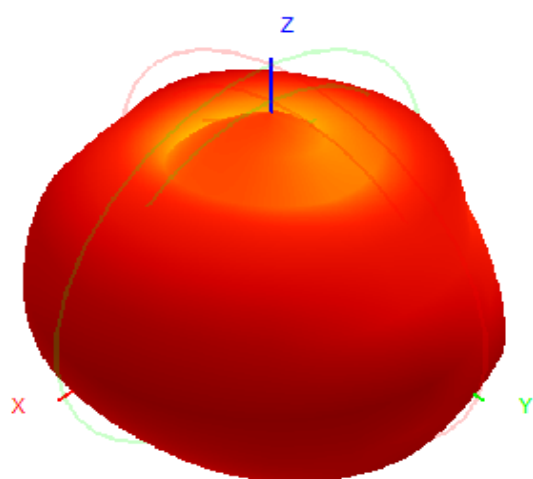

Back View

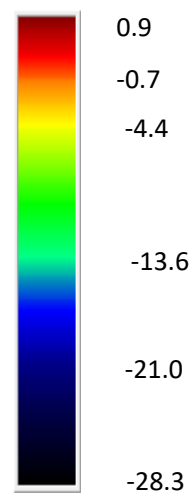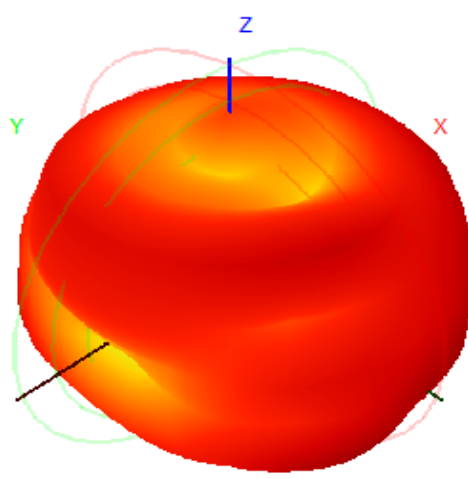

2500 MHz

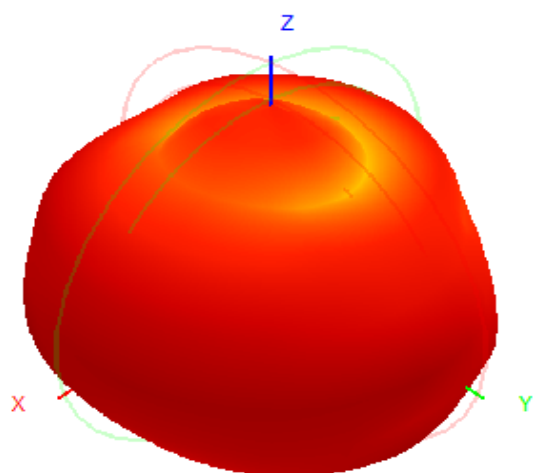

Back View

