

Measurement Report for GSM 850, TOUCH, Main, Normal

Exposure Conditions

|                                  |                               |                        |                 |
|----------------------------------|-------------------------------|------------------------|-----------------|
| Band                             | GSM 850                       | TSL Permittivity       | 40.1            |
| Frequency [MHz]   Channel Number | 836.6   190                   | TSL Conductivity [S/m] | 0.970           |
| Group   UID                      | GSM   10090-DAC               | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 9.77                          | Test Distance [mm]     | 0.00            |
| Communication Configuration      | GPRS-FDD (TDMA, GMSK, TN 0-4) |                        |                 |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     |               |                    |
|---------------------|---------------|--------------------|
|                     | Area Scan     | Zoom Scan          |
| Grid Extents [mm]   | 120.0 x 120.0 | 50.0 x 50.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 88.0               |
| Dist 3dB Peak [mm]  |               | 17.3               |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.136     | 0.139     |
| psSAR10g [W/Kg]  | 0.092     | 0.103     |
| Power Drift [dB] | 0.02      | 0.18      |

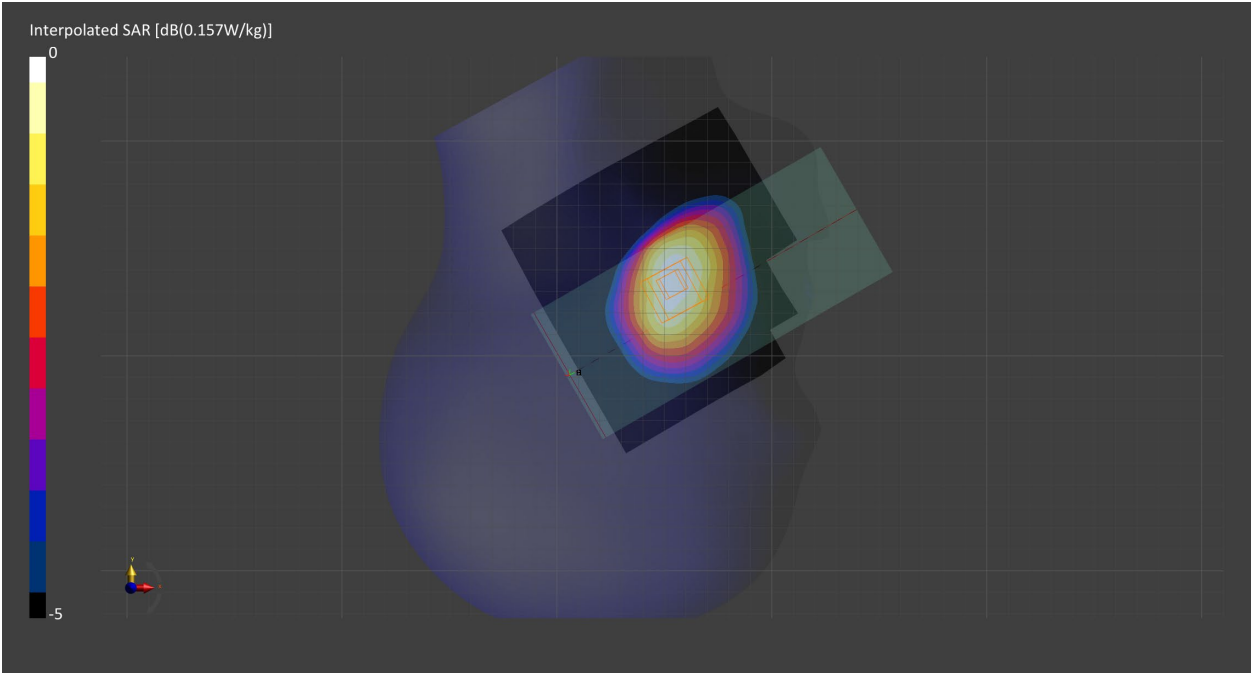

Measurement Report for GSM 850, REAR, Main, Normal

Exposure Conditions

|                                  |                               |                        |            |
|----------------------------------|-------------------------------|------------------------|------------|
| Band                             | GSM 850                       | TSL Permittivity       | 40.1       |
| Frequency [MHz]   Channel Number | 836.6   190                   | TSL Conductivity [S/m] | 0.970      |
| Group   UID                      | GSM   10090-DAC               | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 9.77                          | Test Distance [mm]     | 10.00      |
| Communication Configuration      | GPRS-FDD (TDMA, GMSK, TN 0-4) |                        |            |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 77.5               |
| Dist 3dB Peak [mm]  |               | 12.2               |

Measurement Results

|                  | Area Scan | Zoom Scan    |
|------------------|-----------|--------------|
| psSAR1g [W/Kg]   | 0.424     | <b>0.419</b> |
| psSAR10g [W/Kg]  | 0.261     | <b>0.225</b> |
| Power Drift [dB] | -0.02     | 0.01         |

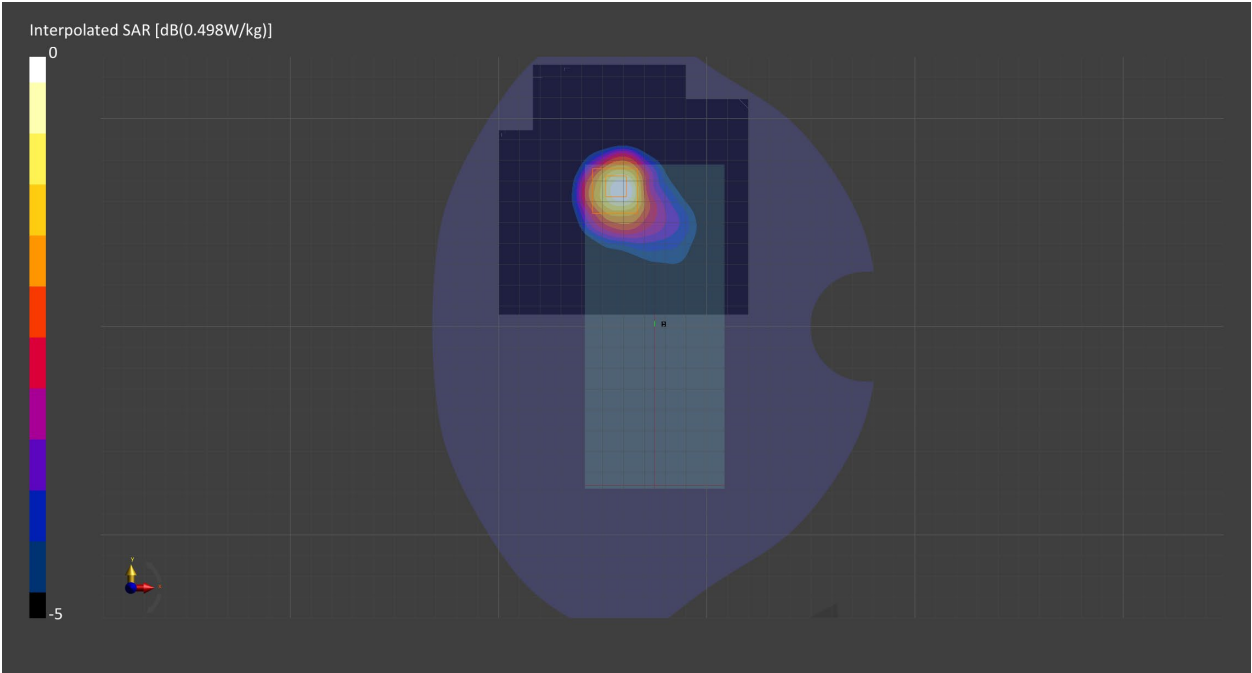

Measurement Report for PCS 1900, TOUCH, Main, Normal

Exposure Conditions

|                                  |                               |                        |                 |
|----------------------------------|-------------------------------|------------------------|-----------------|
| Band                             | PCS 1900                      | TSL Permittivity       | 39.3            |
| Frequency [MHz]   Channel Number | 1880.0   661                  | TSL Conductivity [S/m] | 1.44            |
| Group   UID                      | GSM   10090-DAC               | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 8.42                          | Test Distance [mm]     | 0.00            |
| Communication Configuration      | GPRS-FDD (TDMA, GMSK, TN 0-4) |                        |                 |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 96.3               |
| Dist 3dB Peak [mm]  |               | > 15.0             |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.013     | 0.012     |
| psSAR10g [W/Kg]  | 0.007     | 0.007     |
| Power Drift [dB] | -0.05     | -0.06     |

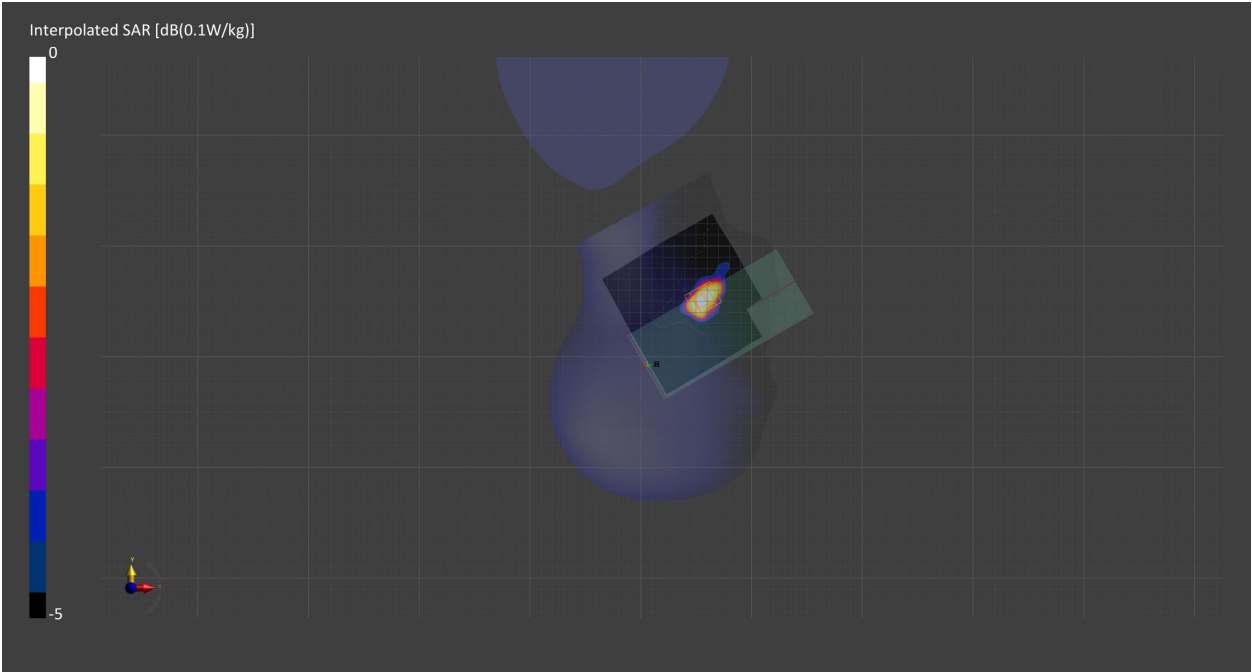

Measurement Report for PCS 1900, FRONT, Main, Normal

Exposure Conditions

|                                  |                               |                        |            |
|----------------------------------|-------------------------------|------------------------|------------|
| Band                             | PCS 1900                      | TSL Permittivity       | 39.3       |
| Frequency [MHz]   Channel Number | 1880.0   661                  | TSL Conductivity [S/m] | 1.44       |
| Group   UID                      | GSM   10090-DAC               | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.42                          | Test Distance [mm]     | 10.00      |
| Communication Configuration      | GPRS-FDD (TDMA, GMSK, TN 0-4) |                        |            |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 59.6               |
| Dist 3dB Peak [mm]  |               | 12.4               |

Measurement Results

|                  | Area Scan | Zoom Scan    |
|------------------|-----------|--------------|
| psSAR1g [W/Kg]   | 0.075     | <b>0.078</b> |
| psSAR10g [W/Kg]  | 0.044     | <b>0.044</b> |
| Power Drift [dB] | 0.02      | -0.04        |

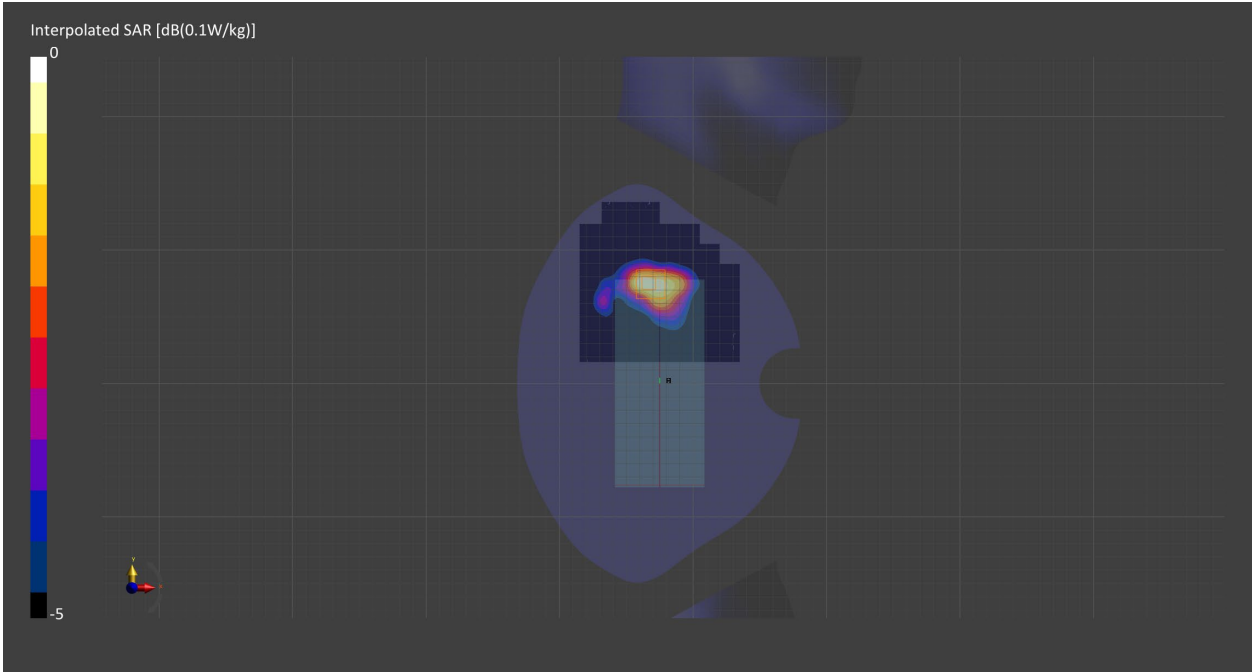

Measurement Report for PCS 1900, EDGE 3, Main, Normal

Exposure Conditions

|                                  |                               |                        |            |
|----------------------------------|-------------------------------|------------------------|------------|
| Band                             | PCS 1900                      | TSL Permittivity       | 39.3       |
| Frequency [MHz]   Channel Number | 1880.0   661                  | TSL Conductivity [S/m] | 1.44       |
| Group   UID                      | GSM   10090-DAC               | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.42                          | Test Distance [mm]     | 10.00      |
| Communication Configuration      | GPRS-FDD (TDMA, GMSK, TN 0-4) |                        |            |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 103.2 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 8.6 x 15.0    | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 82.4               |
| Dist 3dB Peak [mm]  |               | 12.0               |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.148     | 0.152     |
| psSAR10g [W/Kg]  | 0.081     | 0.085     |
| Power Drift [dB] | -0.04     | -0.06     |

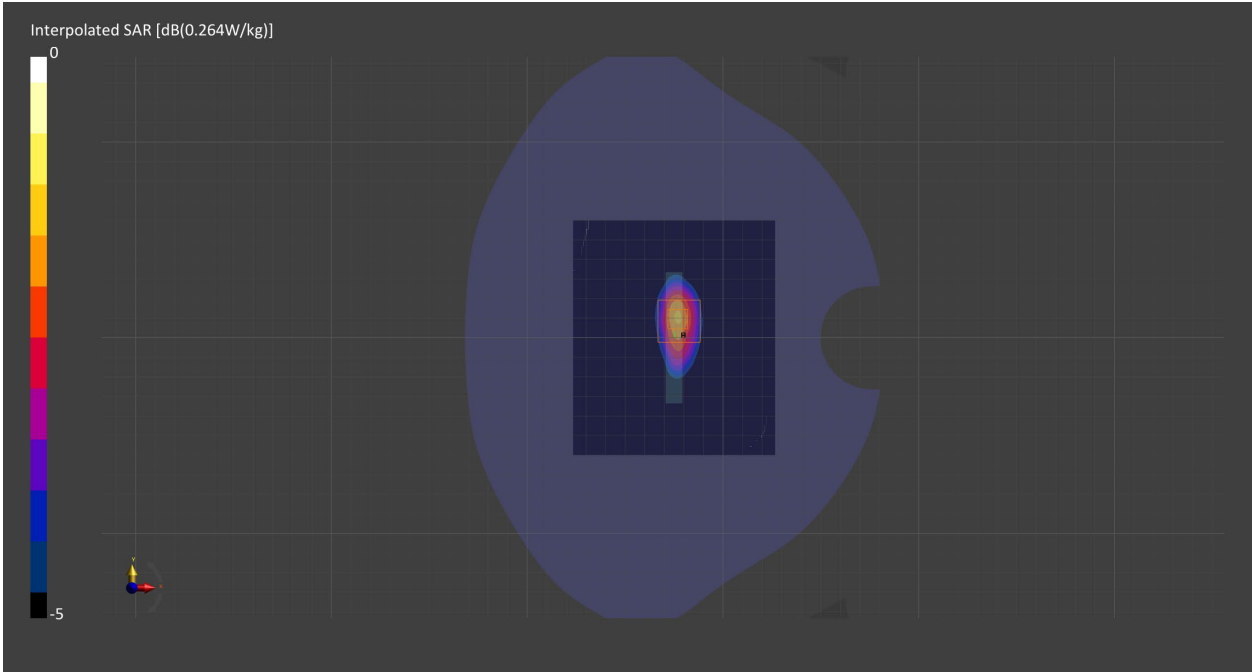

Measurement Report for Band 5, UTRA/FDD, TOUCH, Main, Normal

Exposure Conditions

|                                  |                   |                        |                 |
|----------------------------------|-------------------|------------------------|-----------------|
| Band                             | Band 5, UTRA/FDD  | TSL Permittivity       | 40.2            |
| Frequency [MHz]   Channel Number | 836.6   4183      | TSL Conductivity [S/m] | 0.966           |
| Group   UID                      | WCDMA   10011-CAB | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 9.77              | Test Distance [mm]     | 0.00            |
| Communication Configuration      | UMTS-FDD (WCDMA)  |                        |                 |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     |               |                    |
|---------------------|---------------|--------------------|
|                     | Area Scan     | Zoom Scan          |
| Grid Extents [mm]   | 120.0 x 210.0 | 50.0 x 50.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 93.9               |
| Dist 3dB Peak [mm]  |               | 19.6               |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.146     | 0.151     |
| psSAR10g [W/Kg]  | 0.099     | 0.113     |
| Power Drift [dB] | -0.02     | 0.00      |

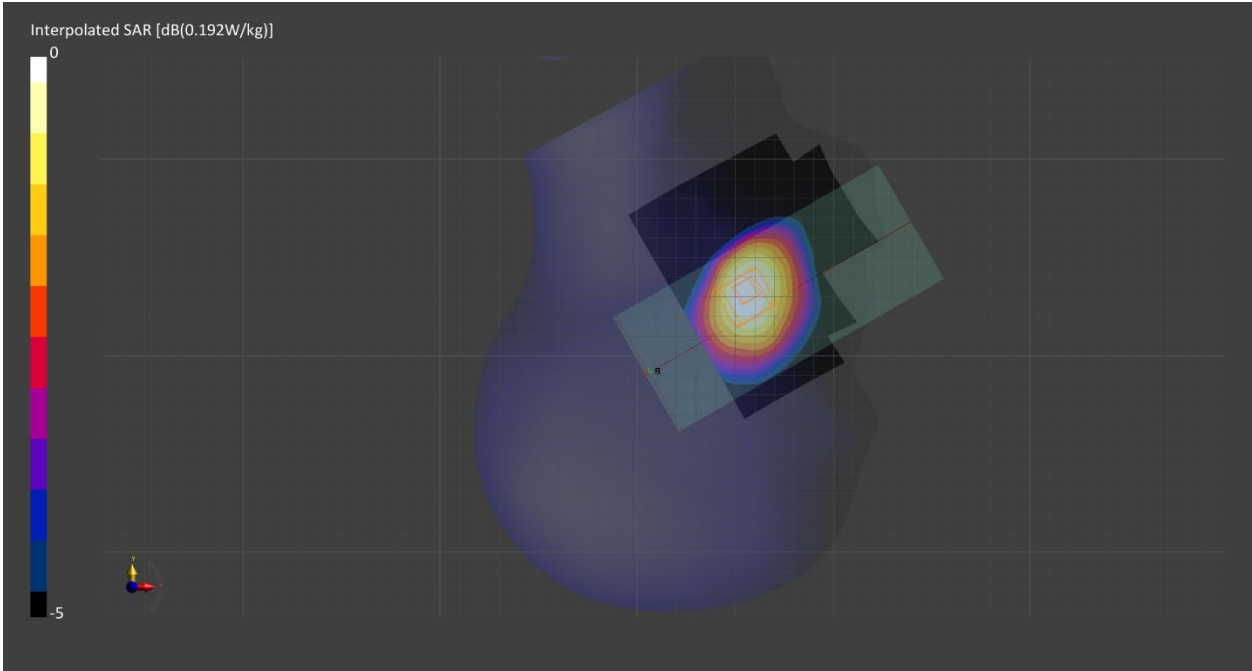

Measurement Report for Band 5, UTRA/FDD, REAR, Main, Normal

Exposure Conditions

|                                  |                   |                        |            |
|----------------------------------|-------------------|------------------------|------------|
| Band                             | Band 5, UTRA/FDD  | TSL Permittivity       | 40.2       |
| Frequency [MHz]   Channel Number | 836.6   4183      | TSL Conductivity [S/m] | 0.966      |
| Group   UID                      | WCDMA   10011-CAB | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 9.77              | Test Distance [mm]     | 10.00      |
| Communication Configuration      | UMTS-FDD (WCDMA)  |                        |            |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 79.1               |
| Dist 3dB Peak [mm]  |               | 13.2               |

Measurement Results

|                  | Area Scan | Zoom Scan    |
|------------------|-----------|--------------|
| psSAR1g [W/Kg]   | 0.312     | <b>0.324</b> |
| psSAR10g [W/Kg]  | 0.198     | <b>0.177</b> |
| Power Drift [dB] | 0.00      | -0.00        |

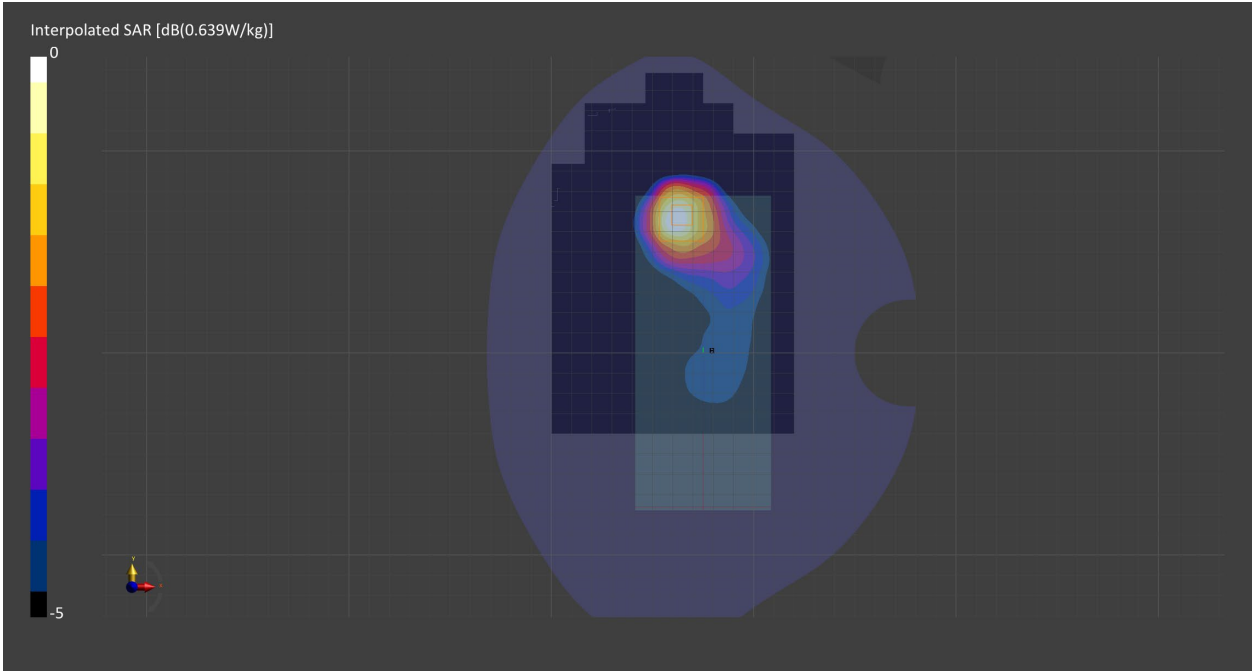

Measurement Report for Band 4, E-UTRA/FDD, TOUCH, Main, Normal

Exposure Conditions

|                                  |                                                                        |                        |                 |
|----------------------------------|------------------------------------------------------------------------|------------------------|-----------------|
| Band                             | Band 4, E-UTRA/FDD                                                     | TSL Permittivity       | 38.9            |
| Frequency [MHz]   Channel Number | 1732.5   20175                                                         | TSL Conductivity [S/m] | 1.36            |
| Group   UID                      | LTE-FDD   10297-AAD                                                    | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 8.89                                                                   | Test Distance [mm]     | 0.00            |
| Communication Configuration      | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) RBPosition:Low AntennaCfg:SISO |                        |                 |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom          | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-29              |

Scans Setup

|                     |               |                    |
|---------------------|---------------|--------------------|
|                     | Area Scan     | Zoom Scan          |
| Grid Extents [mm]   | 120.0 x 120.0 | 50.0 x 50.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 88.7               |
| Dist 3dB Peak [mm]  |               | > 25.0             |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.019     | 0.018     |
| psSAR10g [W/Kg]  | 0.011     | 0.010     |
| Power Drift [dB] | -0.02     | -0.05     |

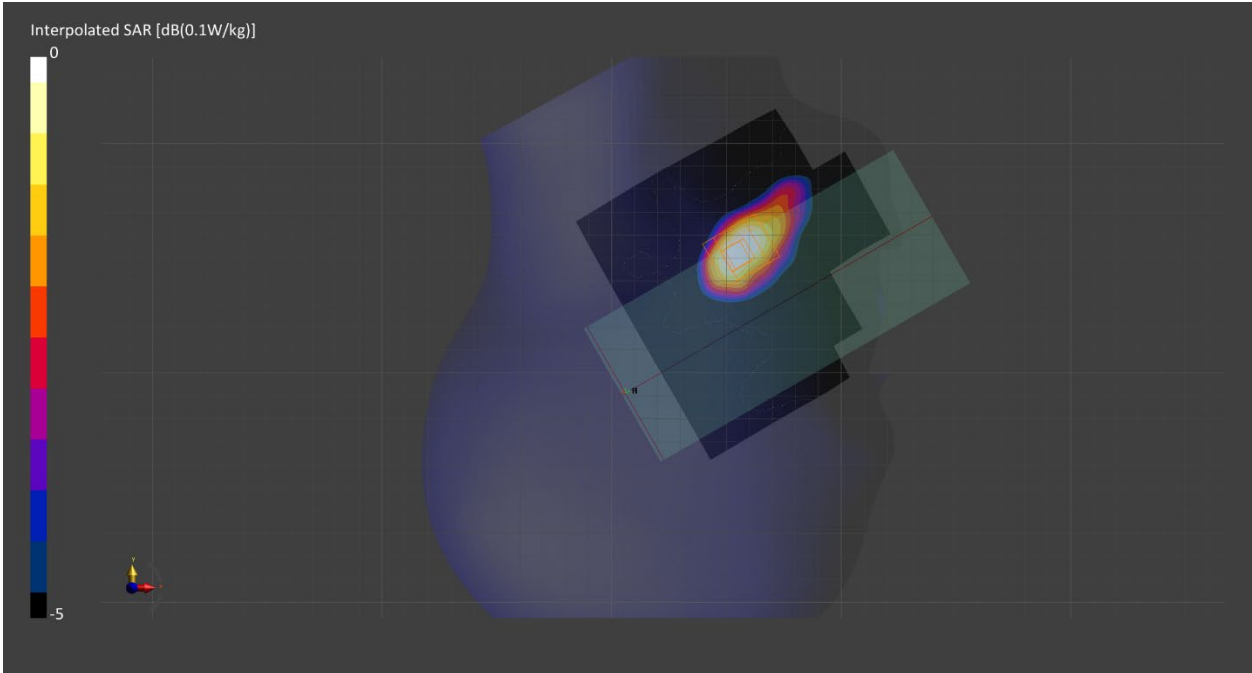

Measurement Report for Band 4, E-UTRA/FDD, REAR, Main, Normal

Exposure Conditions

|                                  |                                                                        |                        |            |
|----------------------------------|------------------------------------------------------------------------|------------------------|------------|
| Band                             | Band 4, E-UTRA/FDD                                                     | TSL Permittivity       | 40.9       |
| Frequency [MHz]   Channel Number | 1732.5   20175                                                         | TSL Conductivity [S/m] | 1.37       |
| Group   UID                      | LTE-FDD   10297-AAD                                                    | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.89                                                                   | Test Distance [mm]     | 10.00      |
| Communication Configuration      | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) RBPosition:Low AntennaCfg:SISO |                        |            |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 83.9               |
| Dist 3dB Peak [mm]  |               | 13.2               |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.124     | 0.126     |
| psSAR10g [W/Kg]  | 0.071     | 0.075     |
| Power Drift [dB] | -0.02     | -0.03     |

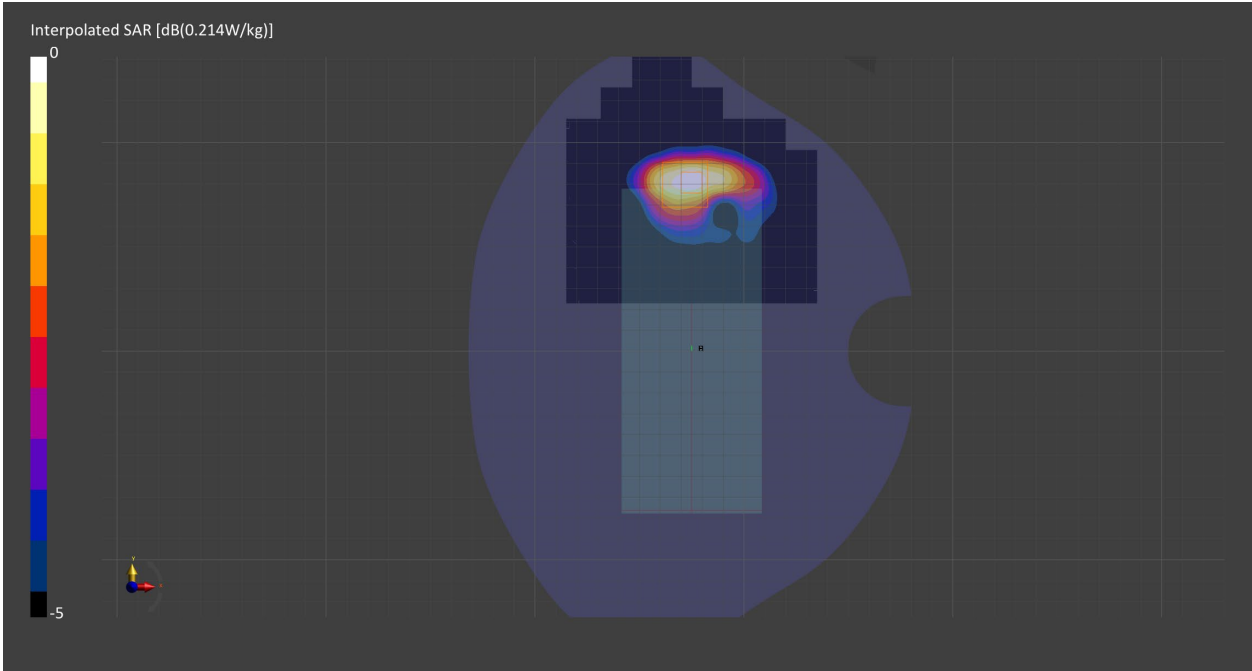

Measurement Report for Band 4, E-UTRA/FDD, EDGE 3, Main, Normal

Exposure Conditions

|                                  |                                                                        |                        |            |
|----------------------------------|------------------------------------------------------------------------|------------------------|------------|
| Band                             | Band 4, E-UTRA/FDD                                                     | TSL Permittivity       | 40.9       |
| Frequency [MHz]   Channel Number | 1732.5   20175                                                         | TSL Conductivity [S/m] | 1.37       |
| Group   UID                      | LTE-FDD   10297-AAD                                                    | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.89                                                                   | Test Distance [mm]     | 10.00      |
| Communication Configuration      | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) RBPosition:Low AntennaCfg:SISO |                        |            |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 112.0 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 8.0 x 15.0    | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 83.1               |
| Dist 3dB Peak [mm]  |               | 11.4               |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.255     | 0.264     |
| psSAR10g [W/Kg]  | 0.142     | 0.148     |
| Power Drift [dB] | 0.00      | -0.00     |

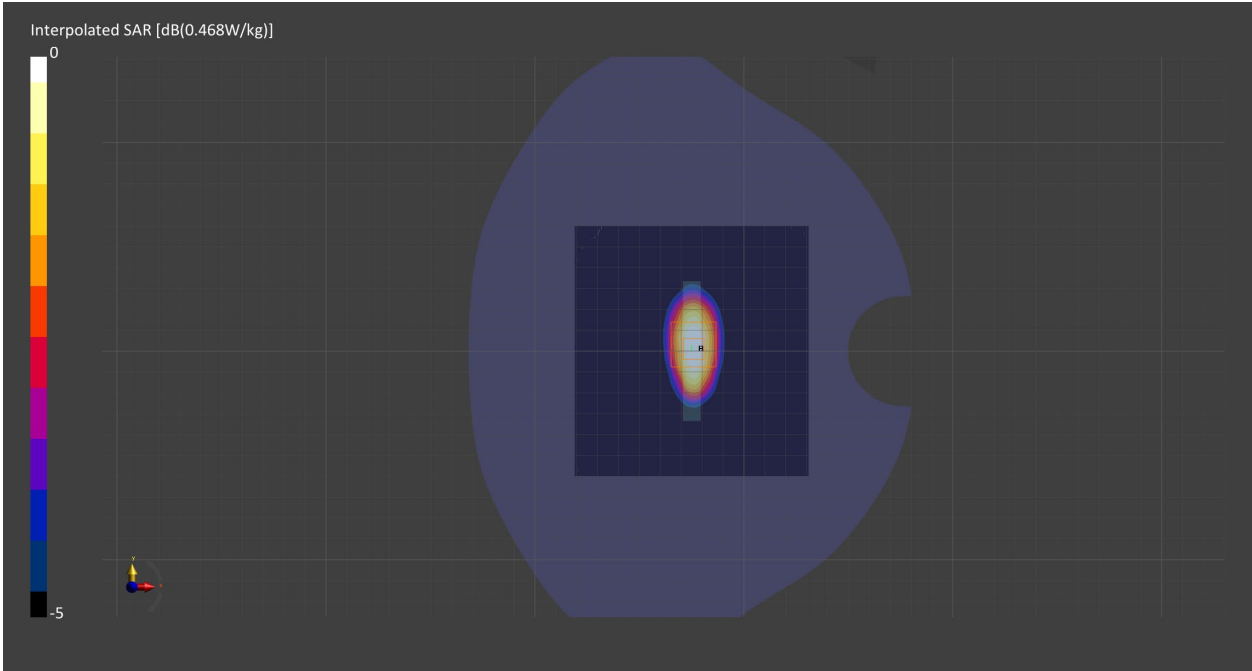

Measurement Report for Band 5, E-UTRA/FDD, TOUCH, Main, Normal

Exposure Conditions

|                                  |                                                                      |                        |                |
|----------------------------------|----------------------------------------------------------------------|------------------------|----------------|
| Band                             | Band 5, E-UTRA/FDD                                                   | TSL Permittivity       | 40.2           |
| Frequency [MHz]   Channel Number | 836.5   20525                                                        | TSL Conductivity [S/m] | 0.966          |
| Group   UID                      | LTE-FDD   10175-CAG                                                  | Phantom Section   TSL  | LeftHead   HSL |
| Conversion Factor                | 9.77                                                                 | Test Distance [mm]     | 0.00           |
| Communication Configuration      | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO |                        |                |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     |               |                    |
|---------------------|---------------|--------------------|
|                     | Area Scan     | Zoom Scan          |
| Grid Extents [mm]   | 120.0 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 94.5               |
| Dist 3dB Peak [mm]  |               | 21.3               |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.084     | 0.089     |
| psSAR10g [W/Kg]  | 0.058     | 0.068     |
| Power Drift [dB] | -0.00     | -0.01     |

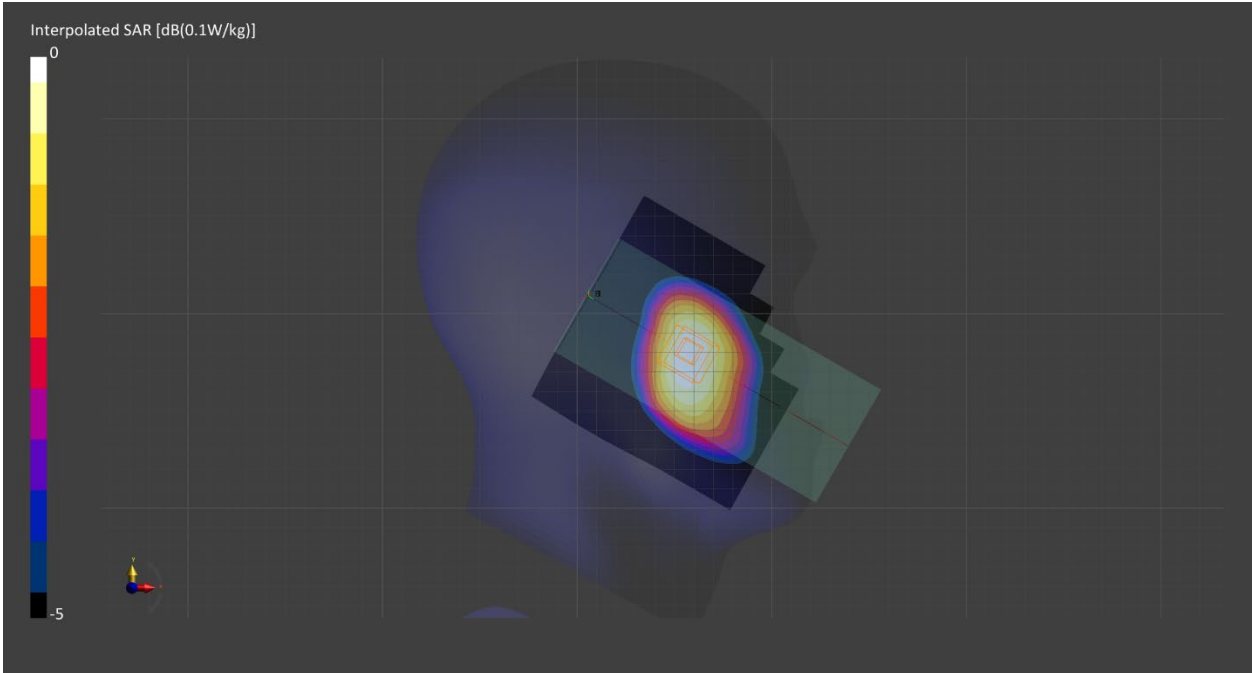

Measurement Report for Band 5, E-UTRA/FDD, REAR, Main, Normal

Exposure Conditions

|                                  |                                                                      |                        |            |
|----------------------------------|----------------------------------------------------------------------|------------------------|------------|
| Band                             | Band 5, E-UTRA/FDD                                                   | TSL Permittivity       | 40.2       |
| Frequency [MHz]   Channel Number | 836.5   20525                                                        | TSL Conductivity [S/m] | 0.966      |
| Group   UID                      | LTE-FDD   10175-CAG                                                  | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 9.77                                                                 | Test Distance [mm]     | 10.00      |
| Communication Configuration      | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO |                        |            |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 80.6               |
| Dist 3dB Peak [mm]  |               | 13.2               |

Measurement Results

|                  | Area Scan | Zoom Scan    |
|------------------|-----------|--------------|
| psSAR1g [W/Kg]   | 0.239     | <b>0.237</b> |
| psSAR10g [W/Kg]  | 0.149     | <b>0.131</b> |
| Power Drift [dB] | 0.01      | -0.01        |

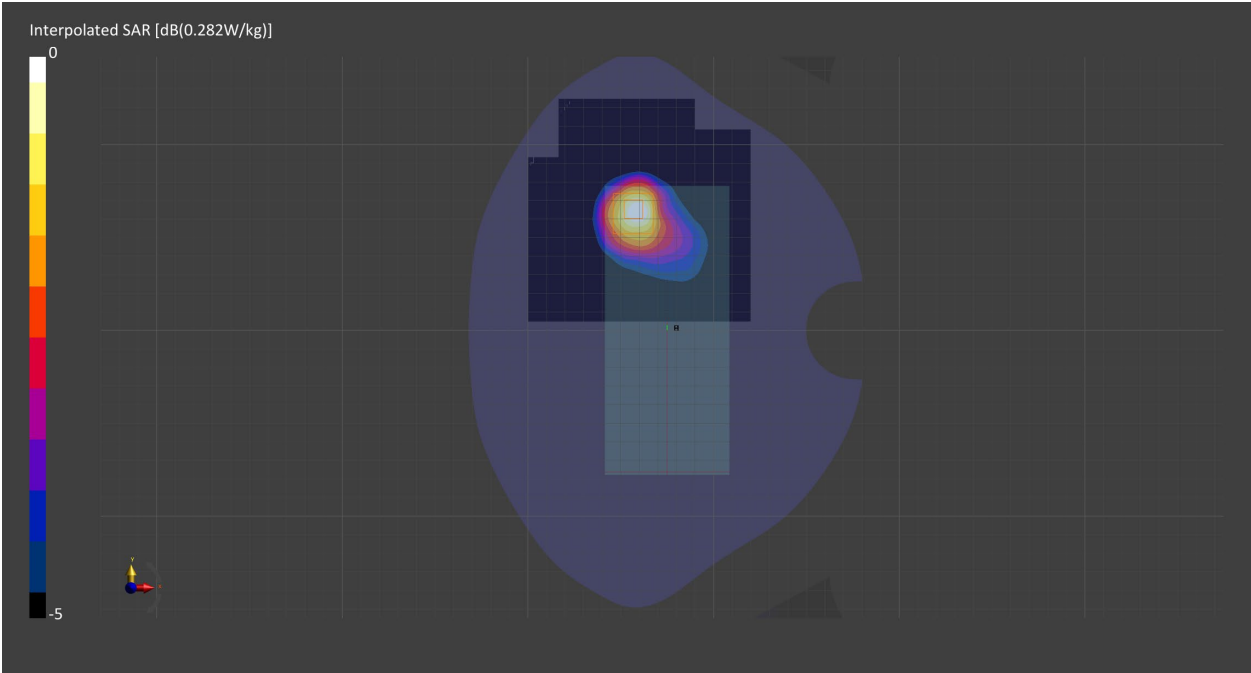

Measurement Report for Band 12, E-UTRA/FDD, TOUCH, Main, Normal

Exposure Conditions

|                                  |                                                                       |                        |                |
|----------------------------------|-----------------------------------------------------------------------|------------------------|----------------|
| Band                             | Band 12, E-UTRA/FDD                                                   | TSL Permittivity       | 40.5           |
| Frequency [MHz]   Channel Number | 707.5   23095                                                         | TSL Conductivity [S/m] | 0.894          |
| Group   UID                      | LTE-FDD   10175-CAG                                                   | Phantom Section   TSL  | LeftHead   HSL |
| Conversion Factor                | 10.25                                                                 | Test Distance [mm]     | 0.00           |
| Communication Configuration      | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:High AntennaCfg:SISO |                        |                |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     |               |                    |
|---------------------|---------------|--------------------|
|                     | Area Scan     | Zoom Scan          |
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 94.5               |
| Dist 3dB Peak [mm]  |               | > 15.0             |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.058     | 0.062     |
| psSAR10g [W/Kg]  | 0.041     | 0.048     |
| Power Drift [dB] | -0.03     | -0.08     |

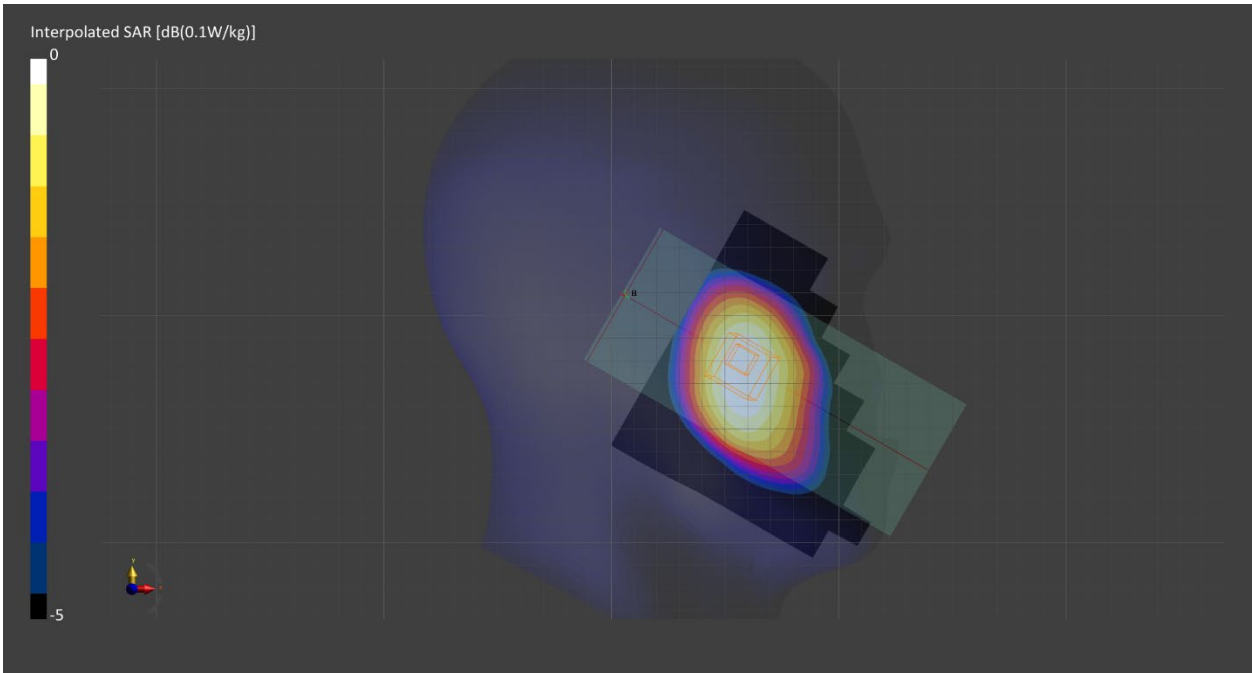

Measurement Report for Band 12, E-UTRA/FDD, REAR, Main, Normal

Exposure Conditions

|                                  |                                                                       |                        |            |
|----------------------------------|-----------------------------------------------------------------------|------------------------|------------|
| Band                             | Band 12, E-UTRA/FDD                                                   | TSL Permittivity       | 40.5       |
| Frequency [MHz]   Channel Number | 707.5   23095                                                         | TSL Conductivity [S/m] | 0.894      |
| Group   UID                      | LTE-FDD   10175-CAG                                                   | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 10.25                                                                 | Test Distance [mm]     | 10.00      |
| Communication Configuration      | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:High AntennaCfg:SISO |                        |            |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     |               |                    |
|---------------------|---------------|--------------------|
|                     | Area Scan     | Zoom Scan          |
| Grid Extents [mm]   | 120.0 x 210.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 82.5               |
| Dist 3dB Peak [mm]  |               | 17.0               |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.122     | 0.119     |
| psSAR10g [W/Kg]  | 0.081     | 0.072     |
| Power Drift [dB] | 0.01      | 0.01      |

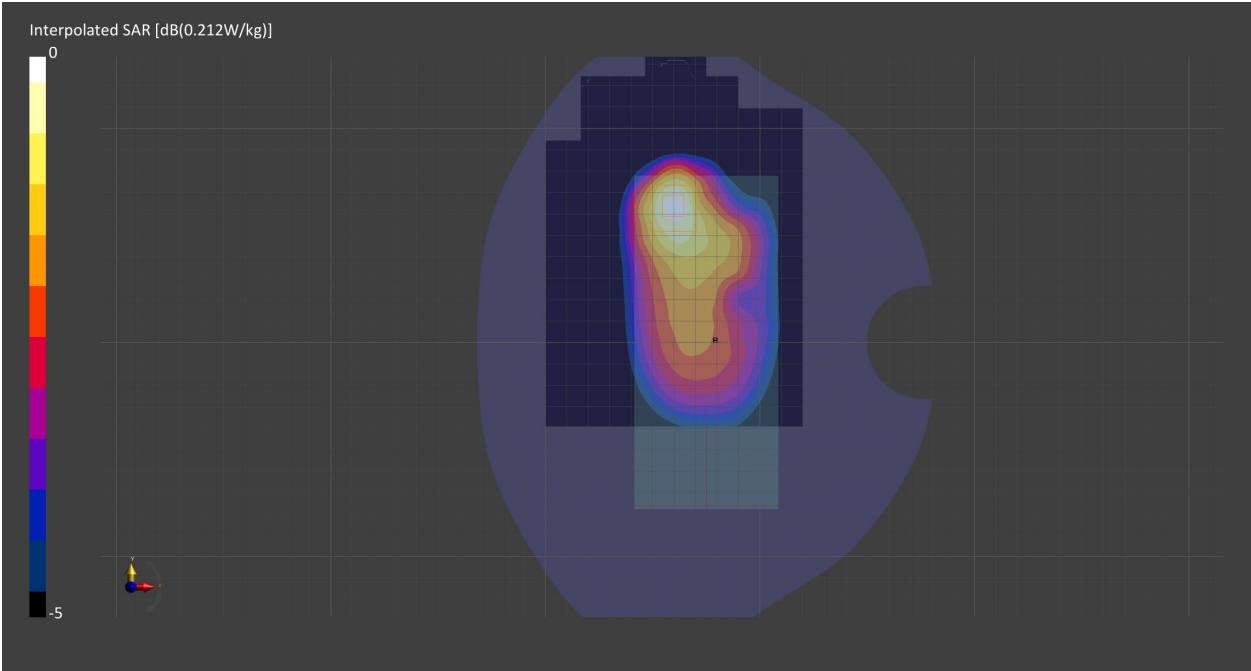

Measurement Report for Band 13, E-UTRA/FDD, TOUCH, Main, Normal

Exposure Conditions

|                                  |                                                                        |                        |                |
|----------------------------------|------------------------------------------------------------------------|------------------------|----------------|
| Band                             | Band 13, E-UTRA/FDD                                                    | TSL Permittivity       | 40.3           |
| Frequency [MHz]   Channel Number | 782.0   23230                                                          | TSL Conductivity [S/m] | 0.922          |
| Group   UID                      | LTE-FDD   10154-CAG                                                    | Phantom Section   TSL  | LeftHead   HSL |
| Conversion Factor                | 10.25                                                                  | Test Distance [mm]     | 0.00           |
| Communication Configuration      | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) RBPosition:Low AntennaCfg:SISO |                        |                |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 93.7               |
| Dist 3dB Peak [mm]  |               | > 15.0             |

Measurement Results

|                  | Area Scan | Zoom Scan    |
|------------------|-----------|--------------|
| psSAR1g [W/Kg]   | 0.092     | <b>0.098</b> |
| psSAR10g [W/Kg]  | 0.064     | <b>0.074</b> |
| Power Drift [dB] | -0.00     | 0.00         |

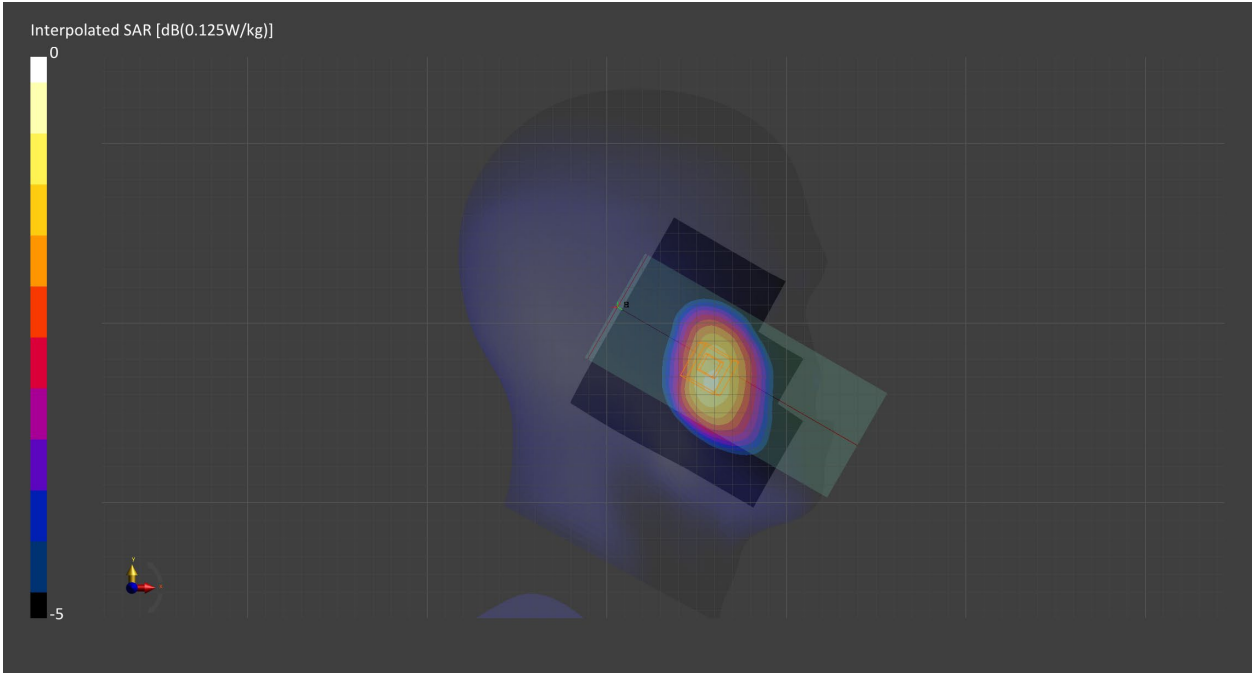

Measurement Report for Band 13, E-UTRA/FDD, BACK, Main, Normal

Exposure Conditions

|                                  |                                                                      |                        |            |
|----------------------------------|----------------------------------------------------------------------|------------------------|------------|
| Band                             | Band 13, E-UTRA/FDD                                                  | TSL Permittivity       | 41.6       |
| Frequency [MHz]   Channel Number | 782.0   23230                                                        | TSL Conductivity [S/m] | 0.936      |
| Group   UID                      | LTE-FDD   10175-CAG                                                  | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 10.25                                                                | Test Distance [mm]     | 10.00      |
| Communication Configuration      | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Low AntennaCfg:SISO |                        |            |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 180.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 79.7               |
| Dist 3dB Peak [mm]  |               | 15.0               |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.152     | 0.143     |
| psSAR10g [W/Kg]  | 0.099     | 0.084     |
| Power Drift [dB] | 0.09      | -0.10     |

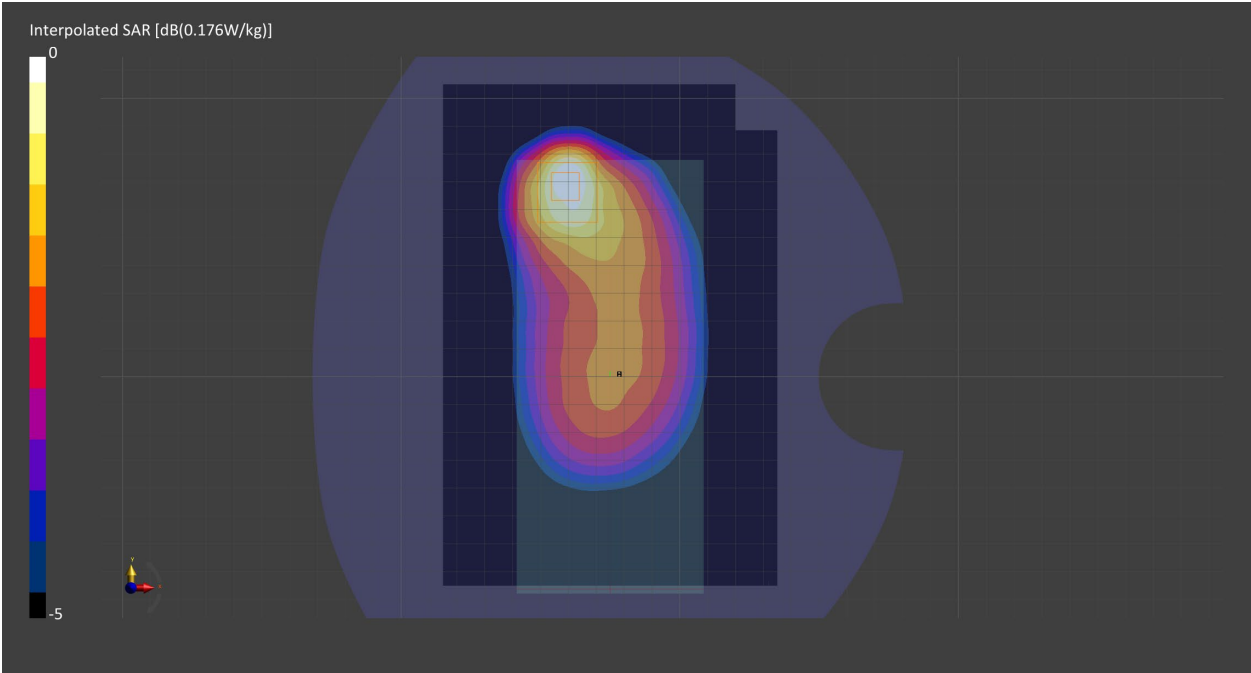

Measurement Report for Band 13, E-UTRA/FDD, EDGE 4, Main, Normal

Exposure Conditions

|                                  |                                                                      |                        |            |
|----------------------------------|----------------------------------------------------------------------|------------------------|------------|
| Band                             | Band 13, E-UTRA/FDD                                                  | TSL Permittivity       | 40.3       |
| Frequency [MHz]   Channel Number | 782.0   23230                                                        | TSL Conductivity [S/m] | 0.922      |
| Group   UID                      | LTE-FDD   10175-CAG                                                  | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 10.25                                                                | Test Distance [mm]     | 10.00      |
| Communication Configuration      | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Low AntennaCfg:SISO |                        |            |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 103.2 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 8.6 x 15.0    | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 87.4               |
| Dist 3dB Peak [mm]  |               | > 15.0             |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.148     | 0.147     |
| psSAR10g [W/Kg]  | 0.101     | 0.10      |
| Power Drift [dB] | -0.04     | -0.02     |

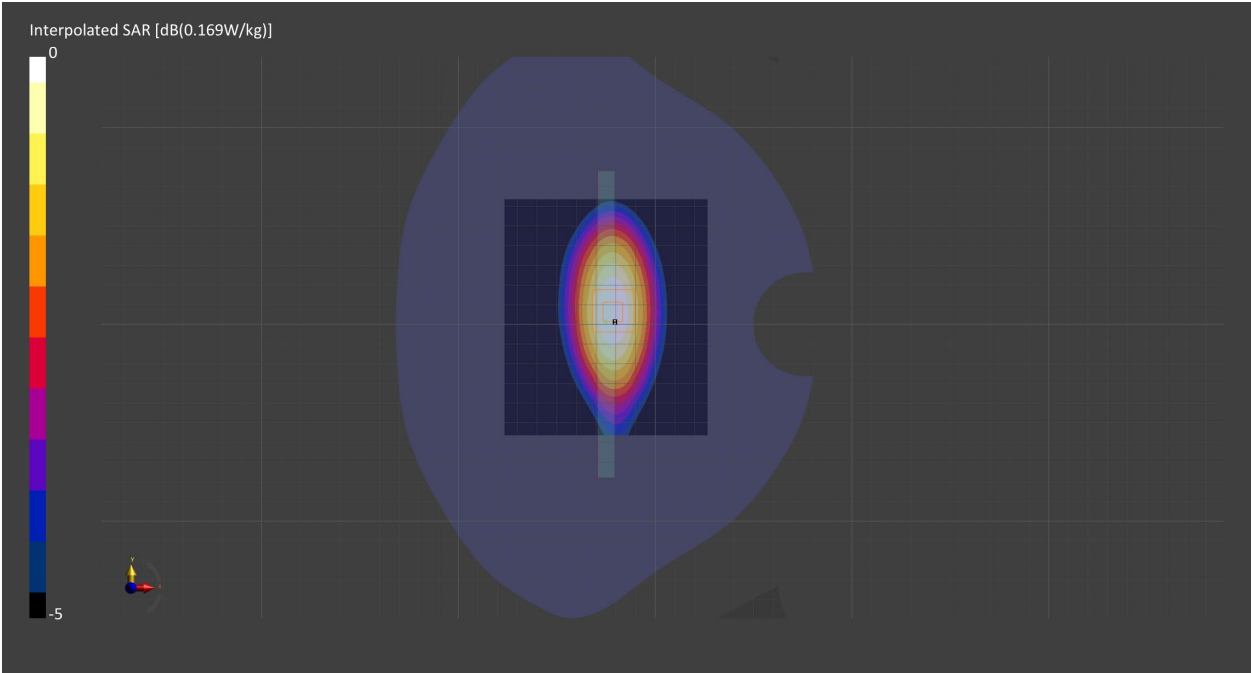

Measurement Report for Band 41, E-UTRA/TDD, TOUCH, Main, Normal

Exposure Conditions

|                                  |                                                                                                |                        |                 |
|----------------------------------|------------------------------------------------------------------------------------------------|------------------------|-----------------|
| Band                             | Band 41, E-UTRA/TDD                                                                            | TSL Permittivity       | 37.7            |
| Frequency [MHz]   Channel Number | 2593.0   40620                                                                                 | TSL Conductivity [S/m] | 1.93            |
| Group   UID                      | LTE-TDD   10435-AAF                                                                            | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 8.01                                                                                           | Test Distance [mm]     | 0.00            |
| Communication Configuration      | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) RBPosition:High AntennaCfg:SISO |                        |                 |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 160.0 x 160.0 | 50.0 x 50.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 84.8               |
| Dist 3dB Peak [mm]  |               | > 25.0             |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.057     | 0.061     |
| psSAR10g [W/Kg]  | 0.029     | 0.029     |
| Power Drift [dB] | 0.23      | 0.07      |

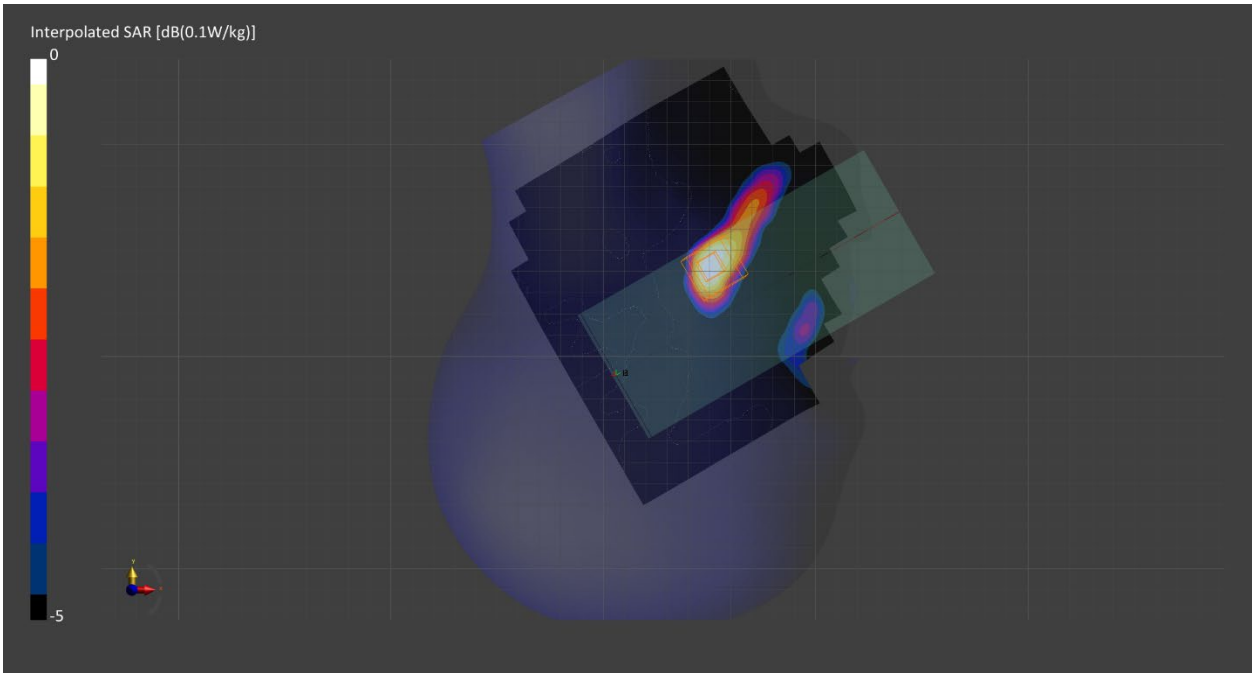

Measurement Report for Band 41, E-UTRA/TDD, FRONT, Main, Normal

Exposure Conditions

|                                  |                                                                                                |                        |            |
|----------------------------------|------------------------------------------------------------------------------------------------|------------------------|------------|
| Band                             | Band 41, E-UTRA/TDD                                                                            | TSL Permittivity       | 40.2       |
| Frequency [MHz]   Channel Number | 2593.0   40620                                                                                 | TSL Conductivity [S/m] | 1.96       |
| Group   UID                      | LTE-TDD   10435-AAF                                                                            | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.01                                                                                           | Test Distance [mm]     | 10.00      |
| Communication Configuration      | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) RBPosition:High AntennaCfg:SISO |                        |            |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 200.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 80.0               |
| Dist 3dB Peak [mm]  |               | 14.6               |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.089     | 0.090     |
| psSAR10g [W/Kg]  | 0.048     | 0.048     |
| Power Drift [dB] | -0.02     | -0.02     |

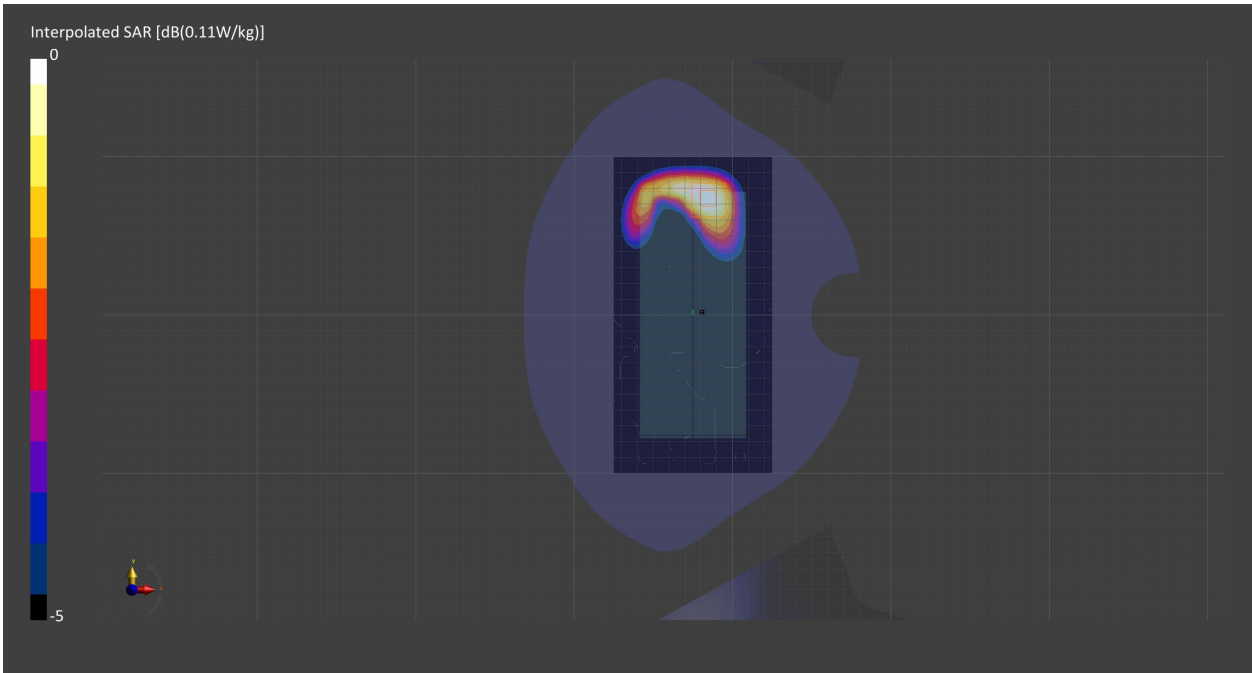

Measurement Report for Band 41, E-UTRA/TDD, EDGE 3, Main, Normal

Exposure Conditions

|                                  |                                                                                                 |                        |            |
|----------------------------------|-------------------------------------------------------------------------------------------------|------------------------|------------|
| Band                             | Band 41, E-UTRA/TDD                                                                             | TSL Permittivity       | 40.2       |
| Frequency [MHz]   Channel Number | 2593.0   40620                                                                                  | TSL Conductivity [S/m] | 1.96       |
| Group   UID                      | LTE-TDD   10494-AAF                                                                             | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.01                                                                                            | Test Distance [mm]     | 10.00      |
| Communication Configuration      | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) RBPosition:Low AntennaCfg:SISO |                        |            |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 103.2 x 100.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 8.6 x 10.0    | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 80.3               |
| Dist 3dB Peak [mm]  |               | 12.0               |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.149     | 0.153     |
| psSAR10g [W/Kg]  | 0.075     | 0.077     |
| Power Drift [dB] | 0.05      | -0.01     |

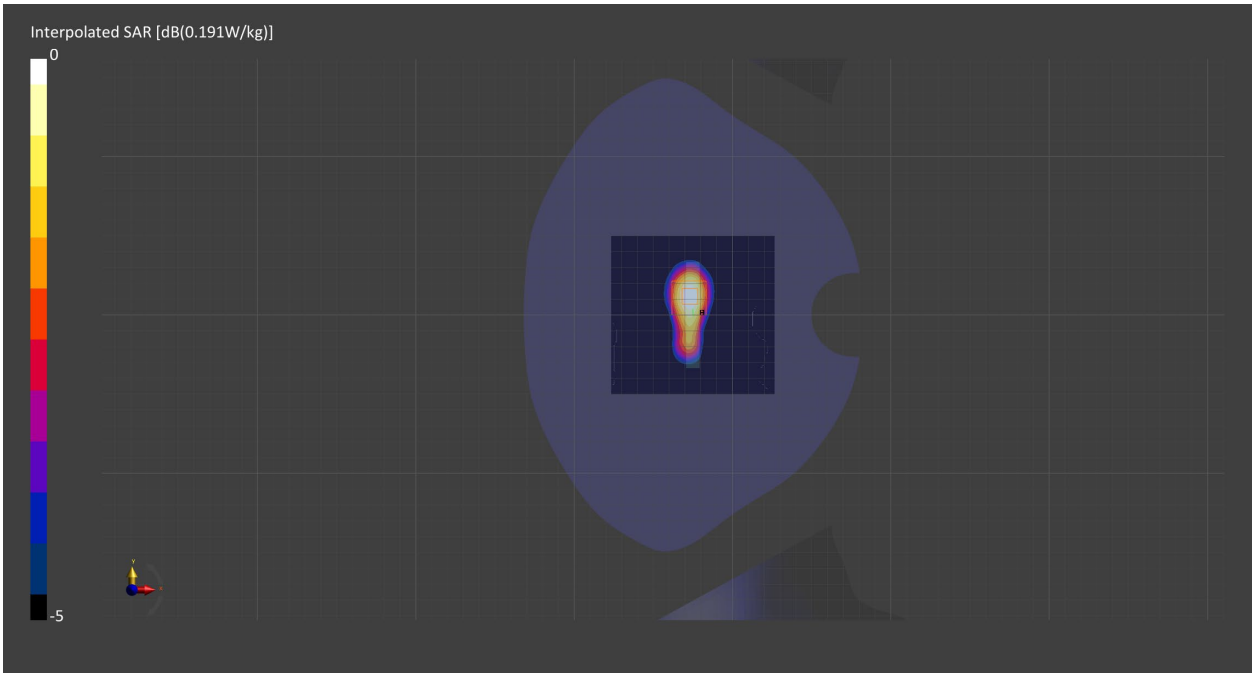

Measurement Report for WLAN 2.4GHz, TOUCH, Normal, Main

Exposure Conditions

|                                  |                                                           |                        |                 |
|----------------------------------|-----------------------------------------------------------|------------------------|-----------------|
| Band                             | WLAN 2.4GHz                                               | TSL Permittivity       | 39.1            |
| Frequency [MHz]   Channel Number | 2437.0   6                                                | TSL Conductivity [S/m] | 1.85            |
| Group   UID                      | WLAN   10415-AAA                                          | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 8.15                                                      | Test Distance [mm]     | 0.00            |
| Communication Configuration      | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) |                        |                 |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom          | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-27              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 100.0 | 50.0 x 50.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 3.3 x 3.3 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 75.1               |
| Dist 3dB Peak [mm]  |               | 4.2                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.441     | 0.505     |
| psSAR10g [W/Kg]  | 0.170     | 0.179     |
| Power Drift [dB] | 0.01      | -0.02     |

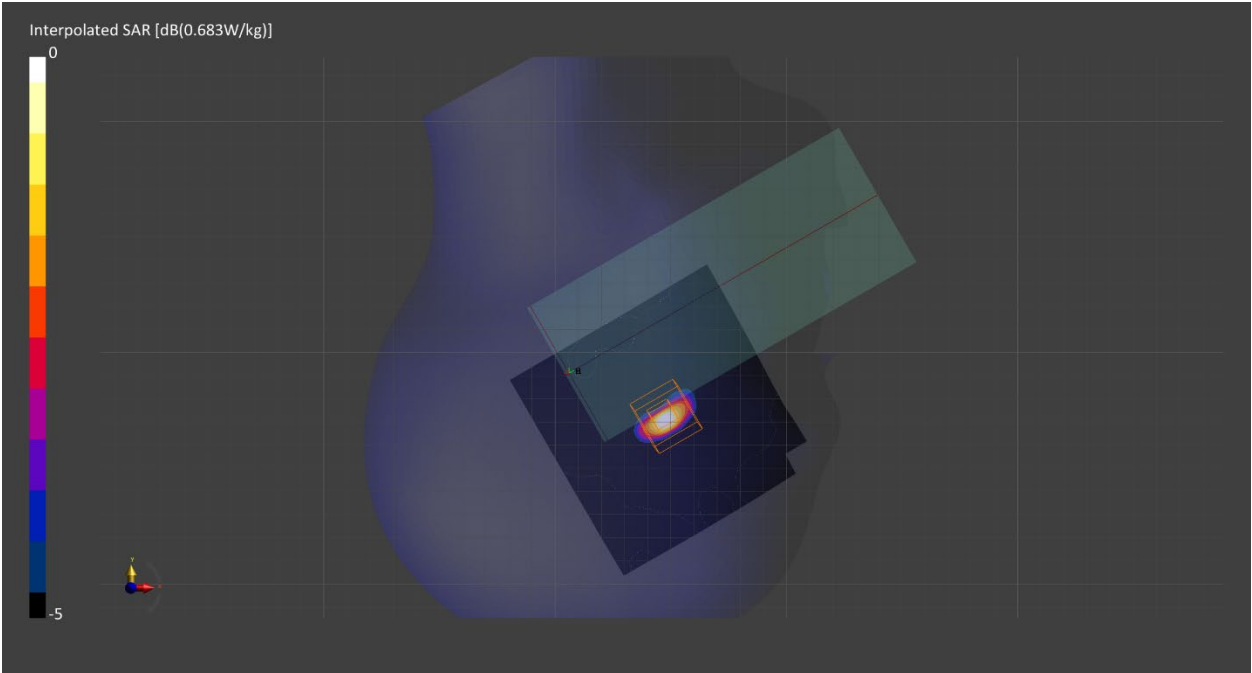

Measurement Report for WLAN 2.4GHz, REAR, Normal, Main

Exposure Conditions

|                                  |                                                           |                        |            |
|----------------------------------|-----------------------------------------------------------|------------------------|------------|
| Band                             | WLAN 2.4GHz                                               | TSL Permittivity       | 39.1       |
| Frequency [MHz]   Channel Number | 2437.0   6                                                | TSL Conductivity [S/m] | 1.85       |
| Group   UID                      | WLAN   10415-AAA                                          | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.15                                                      | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom          | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-27              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 100.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 78.1               |
| Dist 3dB Peak [mm]  |               | 9.0                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.108     | 0.106     |
| psSAR10g [W/Kg]  | 0.051     | 0.049     |
| Power Drift [dB] | 0.03      | 0.01      |

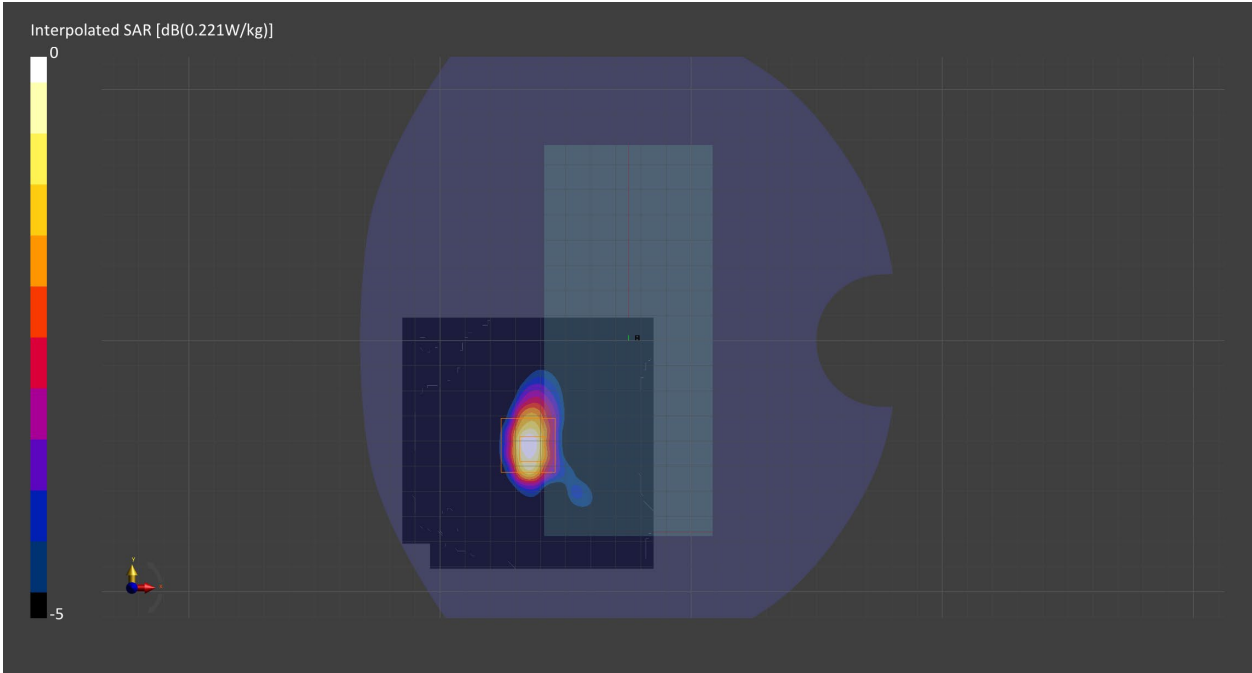

Measurement Report for WLAN 2.4GHz, EDGE 4, Normal, Main

Exposure Conditions

|                                  |                                                           |                        |            |
|----------------------------------|-----------------------------------------------------------|------------------------|------------|
| Band                             | WLAN 2.4GHz                                               | TSL Permittivity       | 39.1       |
| Frequency [MHz]   Channel Number | 2437.0   6                                                | TSL Conductivity [S/m] | 1.85       |
| Group   UID                      | WLAN   10415-AAA                                          | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.15                                                      | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom          | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-27              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 103.2 x 100.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 8.6 x 10.0    | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 79.3               |
| Dist 3dB Peak [mm]  |               | 8.0                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.198     | 0.202     |
| psSAR10g [W/Kg]  | 0.088     | 0.089     |
| Power Drift [dB] | 0.02      | -0.03     |

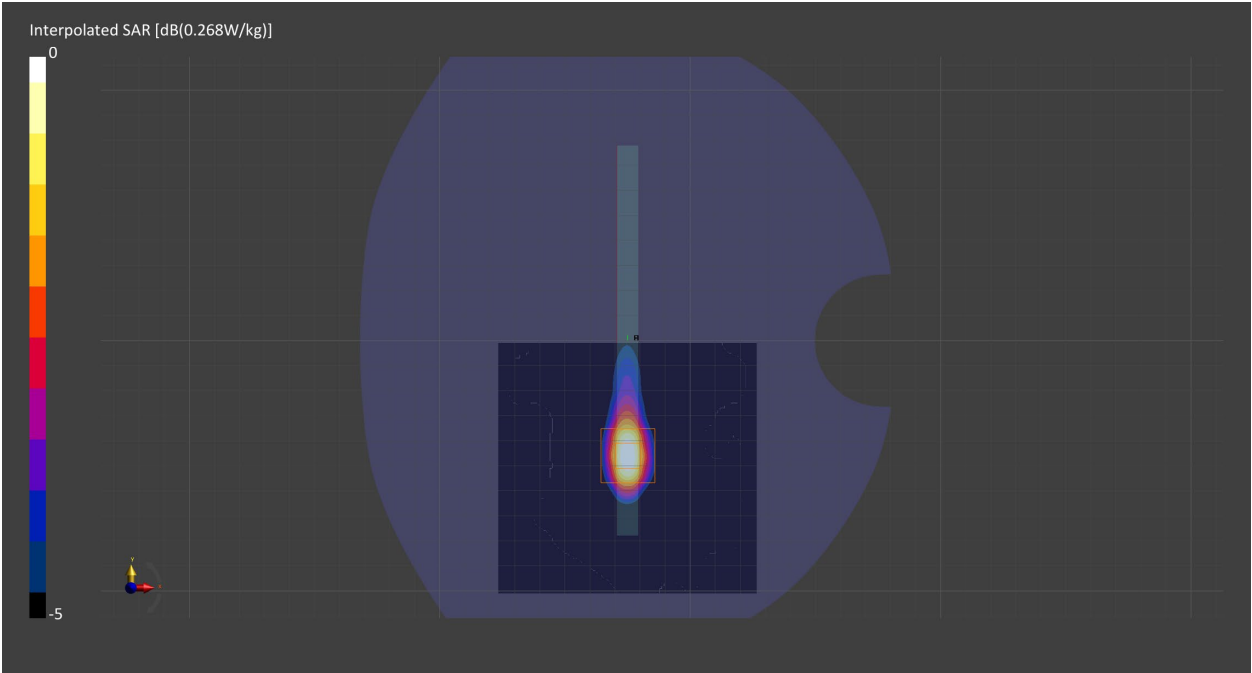

Measurement Report for WLAN 2.4GHz, TILT, Normal, Main

Exposure Conditions

|                                  |                                                           |                        |                |
|----------------------------------|-----------------------------------------------------------|------------------------|----------------|
| Band                             | WLAN 2.4GHz                                               | TSL Permittivity       | 37.9           |
| Frequency [MHz]   Channel Number | 2437.0   6                                                | TSL Conductivity [S/m] | 1.81           |
| Group   UID                      | WLAN   10415-AAA                                          | Phantom Section   TSL  | LeftHead   HSL |
| Conversion Factor                | 8.15                                                      | Test Distance [mm]     | 0.00           |
| Communication Configuration      | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) |                        |                |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom          | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-27              |

Scans Setup

|                     |               |           |
|---------------------|---------------|-----------|
|                     | Area Scan     | Zoom Scan |
| Grid Extents [mm]   | 100.0 x 180.0 | x x       |
| Grid Steps [mm]     | 10.0 x 10.0   | x x       |
| Sensor Surface [mm] | 3.0           |           |
| Graded Grid         | Yes           |           |
| M2/M1 [%]           |               |           |
| Dist 3dB Peak [mm]  |               |           |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0         |           |
| psSAR10g [W/Kg]  | 0         |           |
| Power Drift [dB] | 24.94     |           |

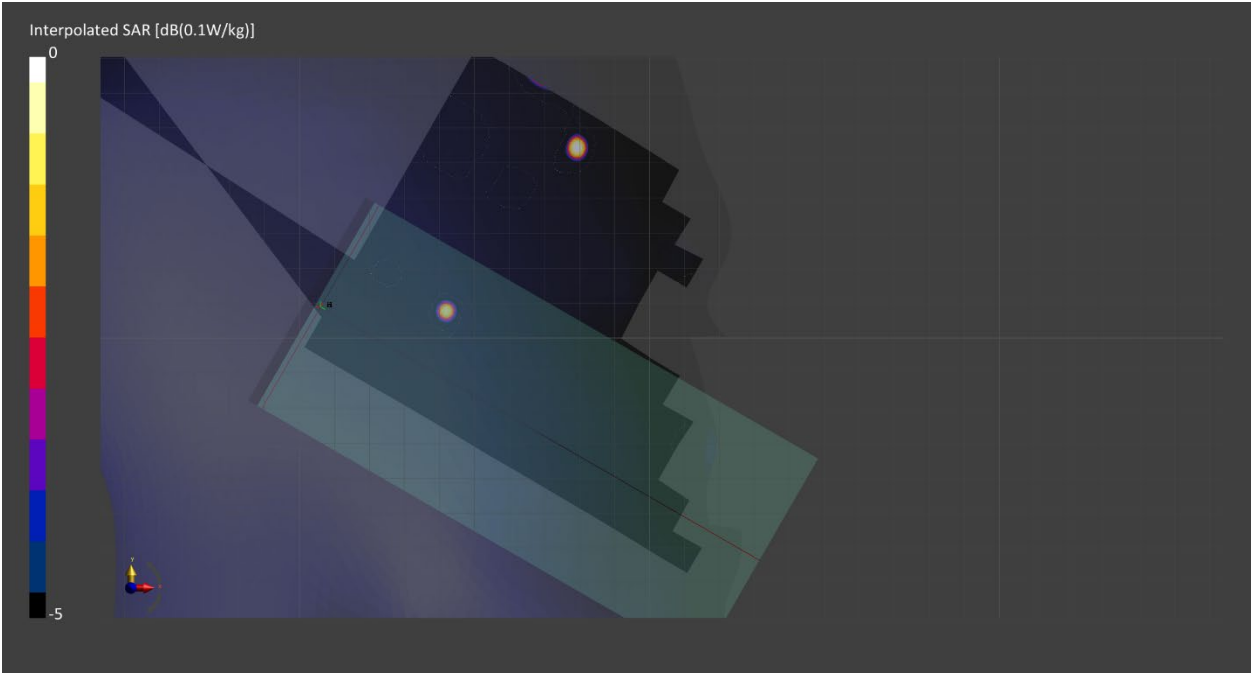

Measurement Report for WLAN 2.4GHz, REAR, Normal, Main

Exposure Conditions

|                                  |                                                           |                        |            |
|----------------------------------|-----------------------------------------------------------|------------------------|------------|
| Band                             | WLAN 2.4GHz                                               | TSL Permittivity       | 37.9       |
| Frequency [MHz]   Channel Number | 2437.0   6                                                | TSL Conductivity [S/m] | 1.81       |
| Group   UID                      | WLAN   10415-AAA                                          | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.15                                                      | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom          | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-29              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 100.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 77.5               |
| Dist 3dB Peak [mm]  |               | 7.0                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.110     | 0.121     |
| psSAR10g [W/Kg]  | 0.049     | 0.049     |
| Power Drift [dB] | -0.04     | -0.07     |

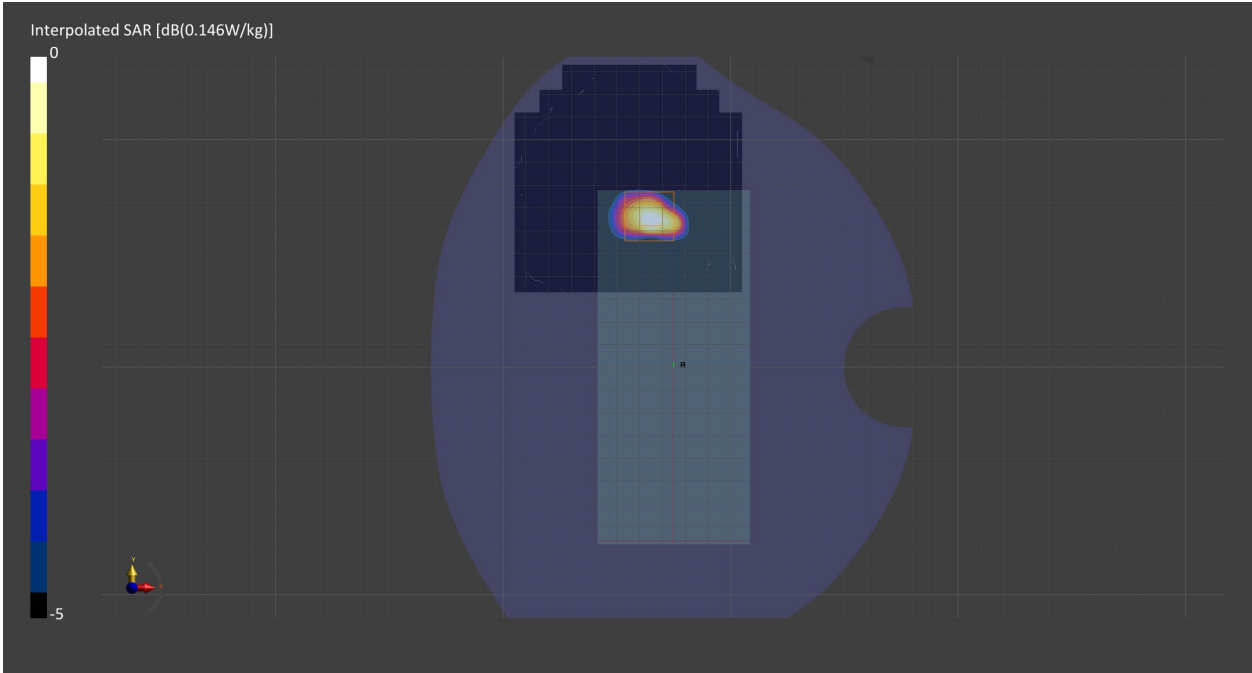

Measurement Report for WLAN 2.4GHz, TOUCH, Simul, Main

Exposure Conditions

|                                  |                                                           |                        |                 |
|----------------------------------|-----------------------------------------------------------|------------------------|-----------------|
| Band                             | WLAN 2.4GHz                                               | TSL Permittivity       | 39.2            |
| Frequency [MHz]   Channel Number | 2412.0   1                                                | TSL Conductivity [S/m] | 1.84            |
| Group   UID                      | WLAN   10415-AAA                                          | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 8.15                                                      | Test Distance [mm]     | 0.00            |
| Communication Configuration      | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) |                        |                 |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom          | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-27              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 100.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 3.5 x 3.5 x 1.2    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 76.9               |
| Dist 3dB Peak [mm]  |               | 4.9                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.292     | 0.345     |
| psSAR10g [W/Kg]  | 0.112     | 0.120     |
| Power Drift [dB] | -0.06     | 0.01      |

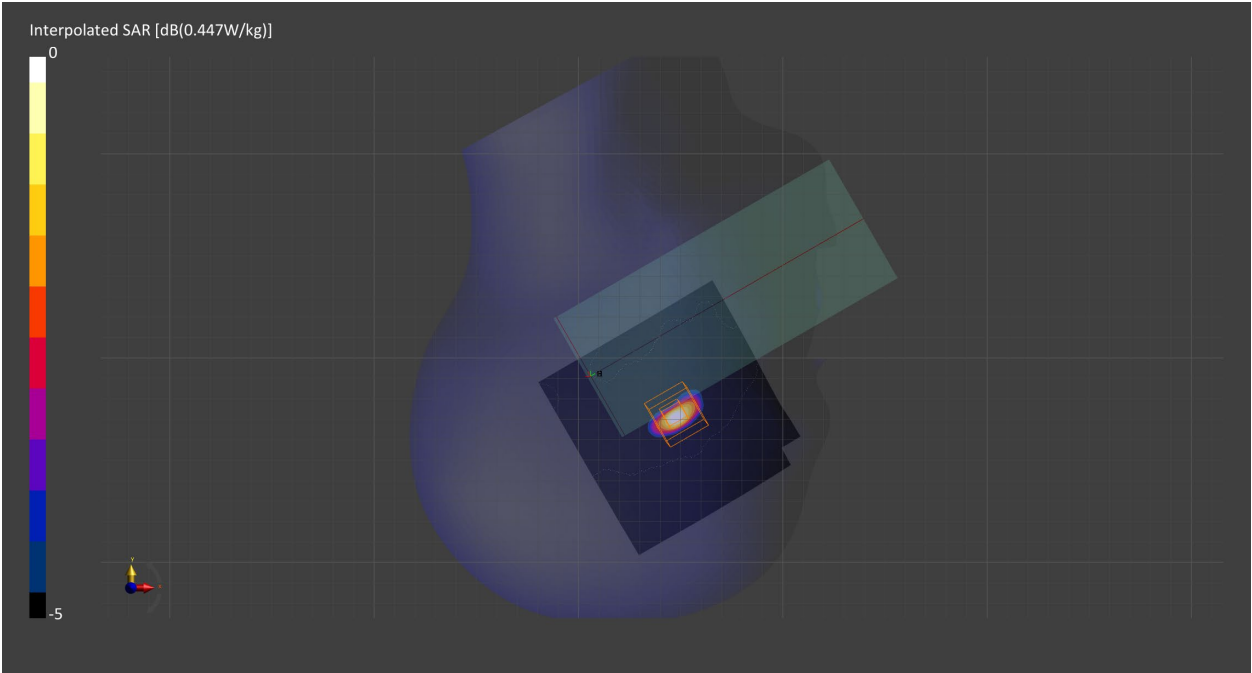

Measurement Report for WLAN 2.4GHz, REAR, Simul, Main

Exposure Conditions

|                                  |                                                           |                        |            |
|----------------------------------|-----------------------------------------------------------|------------------------|------------|
| Band                             | WLAN 2.4GHz                                               | TSL Permittivity       | 39.2       |
| Frequency [MHz]   Channel Number | 2412.0   1                                                | TSL Conductivity [S/m] | 1.84       |
| Group   UID                      | WLAN   10415-AAA                                          | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.15                                                      | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom          | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-27              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 100.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 84.9               |
| Dist 3dB Peak [mm]  |               | > 15.0             |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.041     | 0.040     |
| psSAR10g [W/Kg]  | 0.019     | 0.018     |
| Power Drift [dB] | 0.05      | 0.20      |

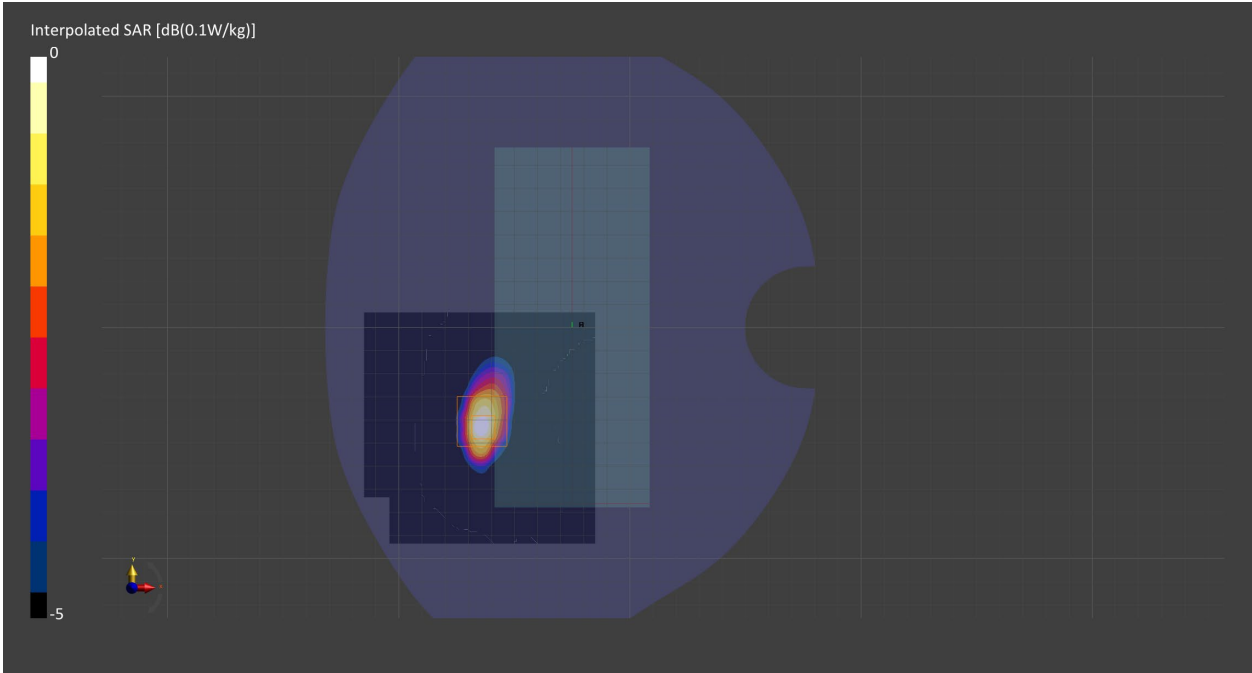

Measurement Report for WLAN 2.4GHz, EDGE 4, Simul, Main

Exposure Conditions

|                                  |                                                           |                        |            |
|----------------------------------|-----------------------------------------------------------|------------------------|------------|
| Band                             | WLAN 2.4GHz                                               | TSL Permittivity       | 39.2       |
| Frequency [MHz]   Channel Number | 2412.0   1                                                | TSL Conductivity [S/m] | 1.84       |
| Group   UID                      | WLAN   10415-AAA                                          | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.15                                                      | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom          | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-27              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 103.2 x 100.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 8.6 x 10.0    | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 77.8               |
| Dist 3dB Peak [mm]  |               | 8.0                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.097     | 0.099     |
| psSAR10g [W/Kg]  | 0.044     | 0.043     |
| Power Drift [dB] | 0.01      | -0.04     |

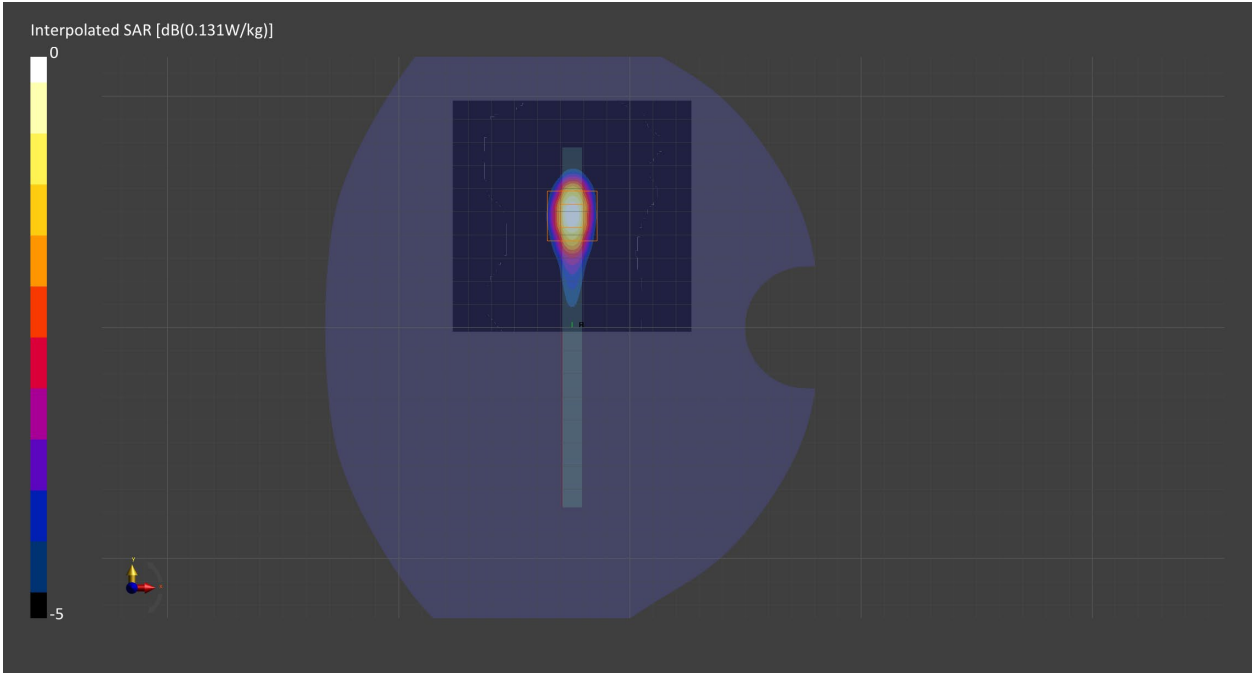

Measurement Report for WLAN 2.4GHz, TILT, Simul, Sub

Exposure Conditions

|                                  |                                                           |                        |                 |
|----------------------------------|-----------------------------------------------------------|------------------------|-----------------|
| Band                             | WLAN 2.4GHz                                               | TSL Permittivity       | 37.9            |
| Frequency [MHz]   Channel Number | 2437.0   6                                                | TSL Conductivity [S/m] | 1.81            |
| Group   UID                      | WLAN   10415-AAA                                          | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 8.15                                                      | Test Distance [mm]     | 0.00            |
| Communication Configuration      | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) |                        |                 |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan |
|---------------------|---------------|-----------|
| Grid Extents [mm]   | 100.0 x 100.0 | x x       |
| Grid Steps [mm]     | 10.0 x 10.0   | x x       |
| Sensor Surface [mm] | 3.0           |           |
| Graded Grid         | Yes           |           |
| M2/M1 [%]           |               |           |
| Dist 3dB Peak [mm]  |               |           |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0         |           |
| psSAR10g [W/Kg]  | 0         |           |
| Power Drift [dB] | n/a       |           |

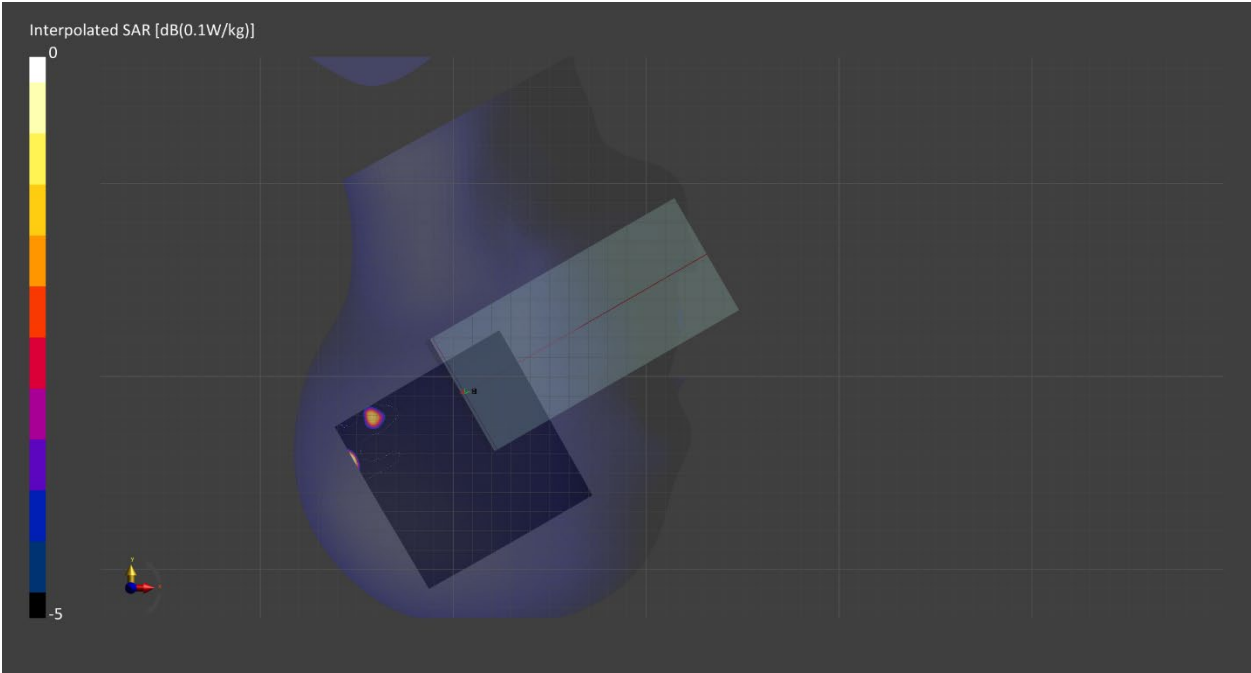

Measurement Report for WLAN 2.4GHz, REAR, Simul, Sub

Exposure Conditions

|                                  |                                                           |                        |            |
|----------------------------------|-----------------------------------------------------------|------------------------|------------|
| Band                             | WLAN 2.4GHz                                               | TSL Permittivity       | 37.9       |
| Frequency [MHz]   Channel Number | 2437.0   6                                                | TSL Conductivity [S/m] | 1.81       |
| Group   UID                      | WLAN   10415-AAA                                          | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.15                                                      | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 100.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 76.6               |
| Dist 3dB Peak [mm]  |               | 6.3                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.095     | 0.102     |
| psSAR10g [W/Kg]  | 0.041     | 0.039     |
| Power Drift [dB] | -0.02     | -0.05     |

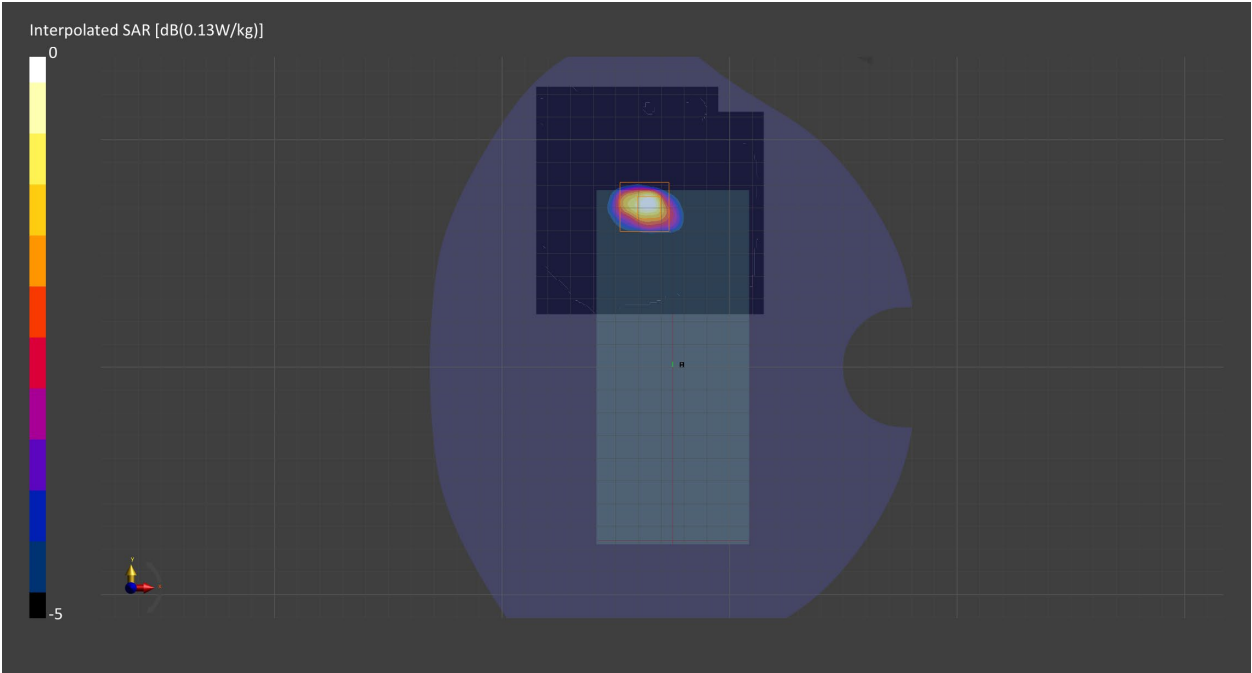

Measurement Report for WLAN 5GHz, EDGE 4, Normal, Main

Exposure Conditions

|                                  |                                                   |                        |            |
|----------------------------------|---------------------------------------------------|------------------------|------------|
| Band                             | WLAN 5GHz                                         | TSL Permittivity       | 36.4       |
| Frequency [MHz]   Channel Number | 5210.0   42                                       | TSL Conductivity [S/m] | 4.54       |
| Group   UID                      | WLAN   10544-AAC                                  | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 5.75                                              | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-28              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 103.2 x 100.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 8.6 x 10.0    | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 67.5               |
| Dist 3dB Peak [mm]  |               | 8.2                |

Measurement Results

|                  | Area Scan | Zoom Scan    |
|------------------|-----------|--------------|
| psSAR1g [W/Kg]   | 0.104     | <b>0.105</b> |
| psSAR10g [W/Kg]  | 0.038     | <b>0.034</b> |
| Power Drift [dB] | -0.11     | -0.30        |

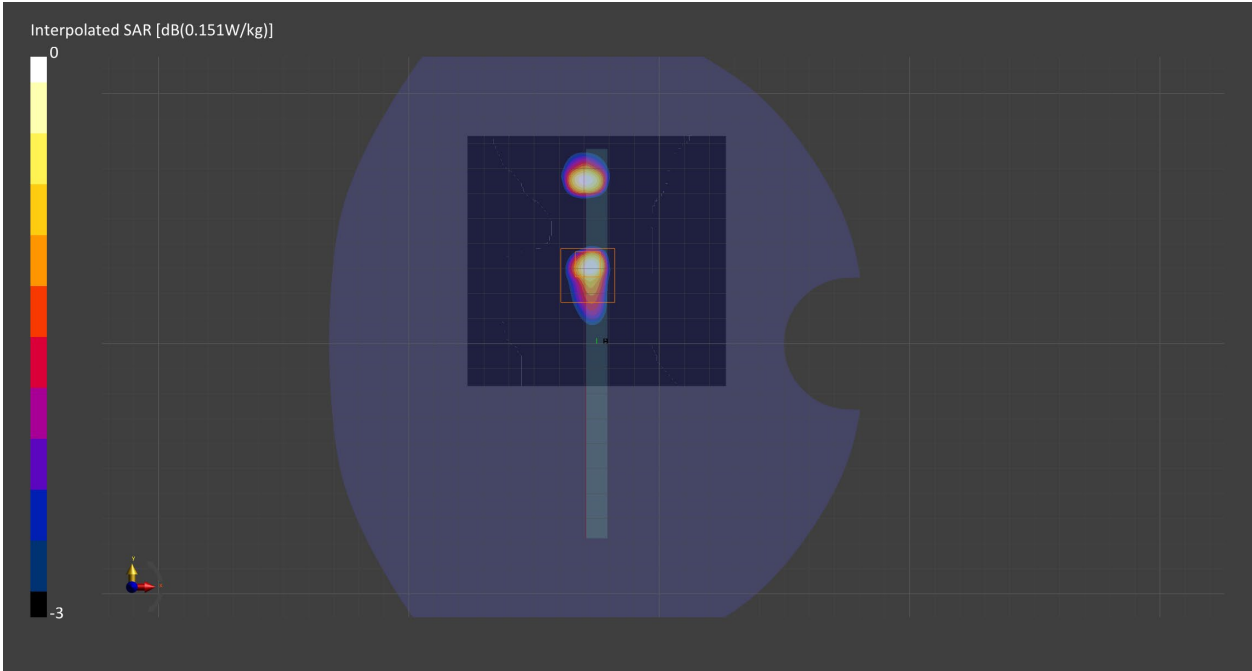

Measurement Report for WLAN 5GHz, REAR, Sub, Normal

Exposure Conditions

|                                  |                                                   |                        |            |
|----------------------------------|---------------------------------------------------|------------------------|------------|
| Band                             | WLAN 5GHz                                         | TSL Permittivity       | 34.9       |
| Frequency [MHz]   Channel Number | 5210.0   42                                       | TSL Conductivity [S/m] | 4.49       |
| Group   UID                      | WLAN   10544-AAC                                  | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 5.14                                              | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7549   2022-02-21 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2084 |
| DAE   Calibration Date   | DAE4 Sn1715   2022-02-22     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-29              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 100.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 67.0               |
| Dist 3dB Peak [mm]  |               | 7.2                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.058     | 0.063     |
| psSAR10g [W/Kg]  | 0.021     | 0.019     |
| Power Drift [dB] | 0.21      | 0.19      |

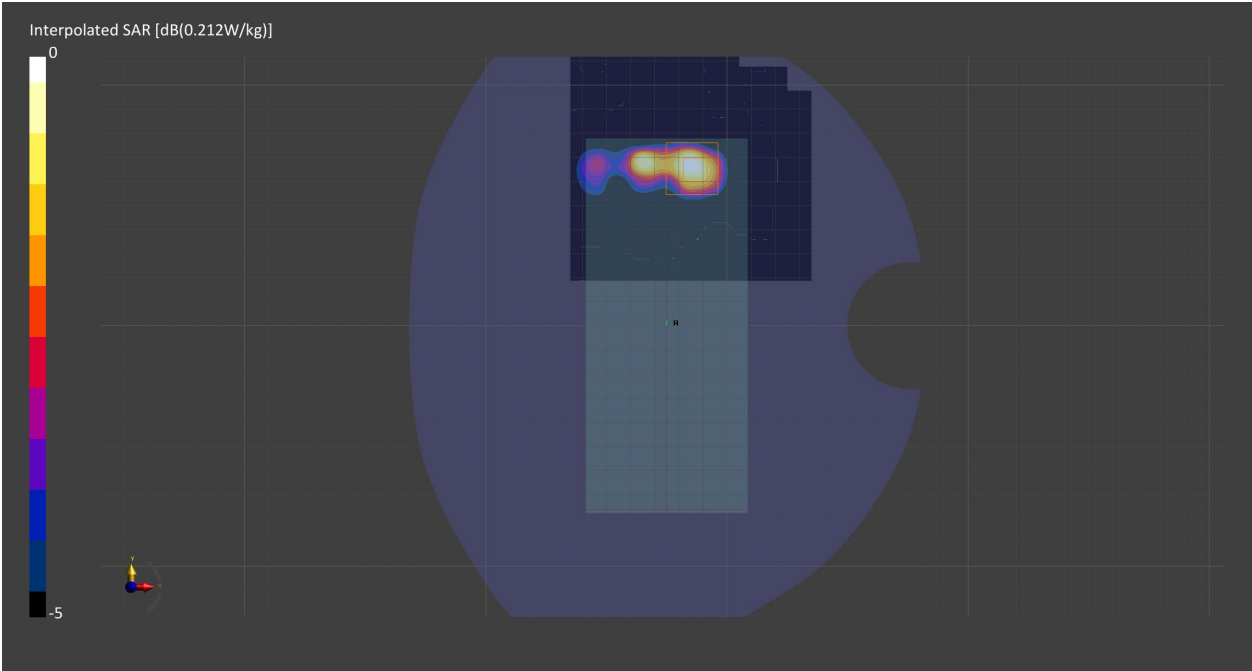

Measurement Report for WLAN 5GHz, EDGE 4, Simul, Main

Exposure Conditions

|                                  |                                                   |                        |            |
|----------------------------------|---------------------------------------------------|------------------------|------------|
| Band                             | WLAN 5GHz                                         | TSL Permittivity       | 35.5       |
| Frequency [MHz]   Channel Number | 5210.0   42                                       | TSL Conductivity [S/m] | 4.54       |
| Group   UID                      | WLAN   10544-AAC                                  | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 5.75                                              | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL   Meas. Date | HBBL-600-10000   2022-Aug-01              |

Scans Setup

|                     | Area Scan    | Zoom Scan          |
|---------------------|--------------|--------------------|
| Grid Extents [mm]   | 60.0 x 180.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0  | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0          | 1.4                |
| Graded Grid         | Yes          | Yes                |
| M2/M1 [%]           |              | 60.2               |
| Dist 3dB Peak [mm]  |              | 6.8                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.049     | 0.041     |
| psSAR10g [W/Kg]  | 0.015     | 0.011     |
| Power Drift [dB] | -0.47     | 1.40      |

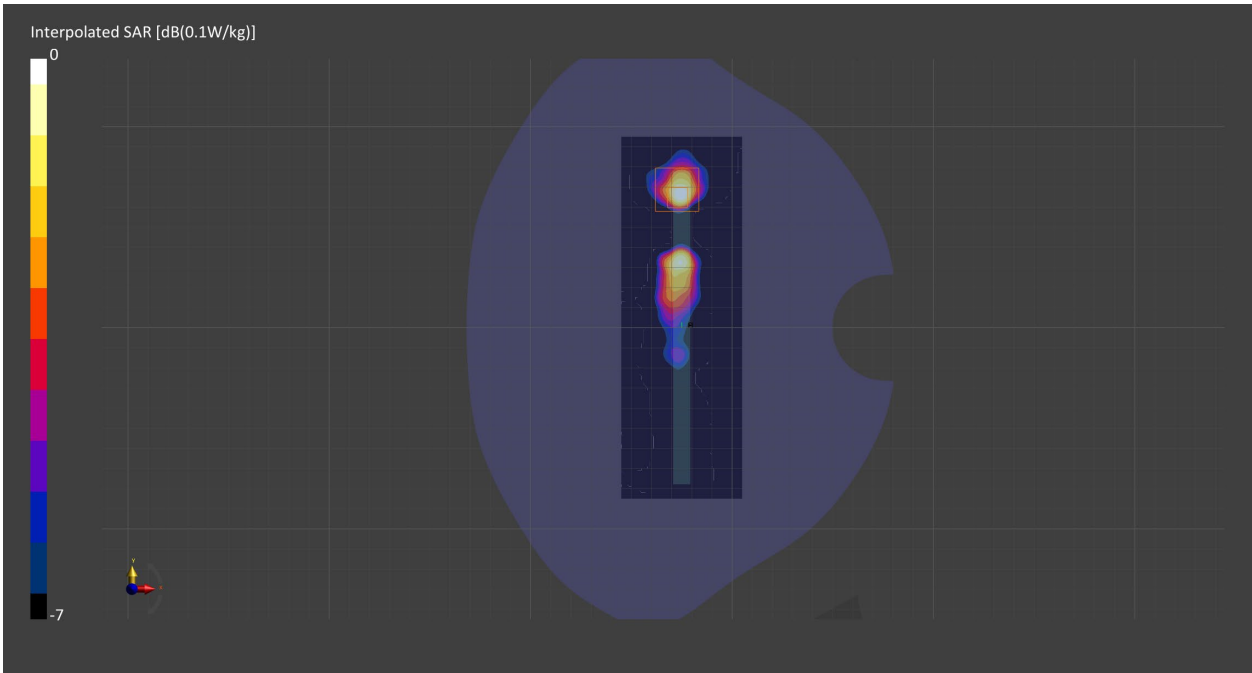

Measurement Report for WLAN 5GHz, REAR, Simul, Sub

Exposure Conditions

|                                  |                                                   |                        |            |
|----------------------------------|---------------------------------------------------|------------------------|------------|
| Band                             | WLAN 5GHz                                         | TSL Permittivity       | 35.2       |
| Frequency [MHz]   Channel Number | 5210.0   42                                       | TSL Conductivity [S/m] | 4.65       |
| Group   UID                      | WLAN   10544-AAC                                  | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 5.14                                              | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7549   2022-02-21 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2084 |
| DAE   Calibration Date   | DAE4 Sn1715   2022-02-22     | TSL   Meas. Date | HBBL-600-10000   2022-Aug-01              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 100.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 69.7               |
| Dist 3dB Peak [mm]  |               | > 11.0             |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.021     | 0.021     |
| psSAR10g [W/Kg]  | 0.008     | 0.004     |
| Power Drift [dB] | -1.60     | 0.38      |

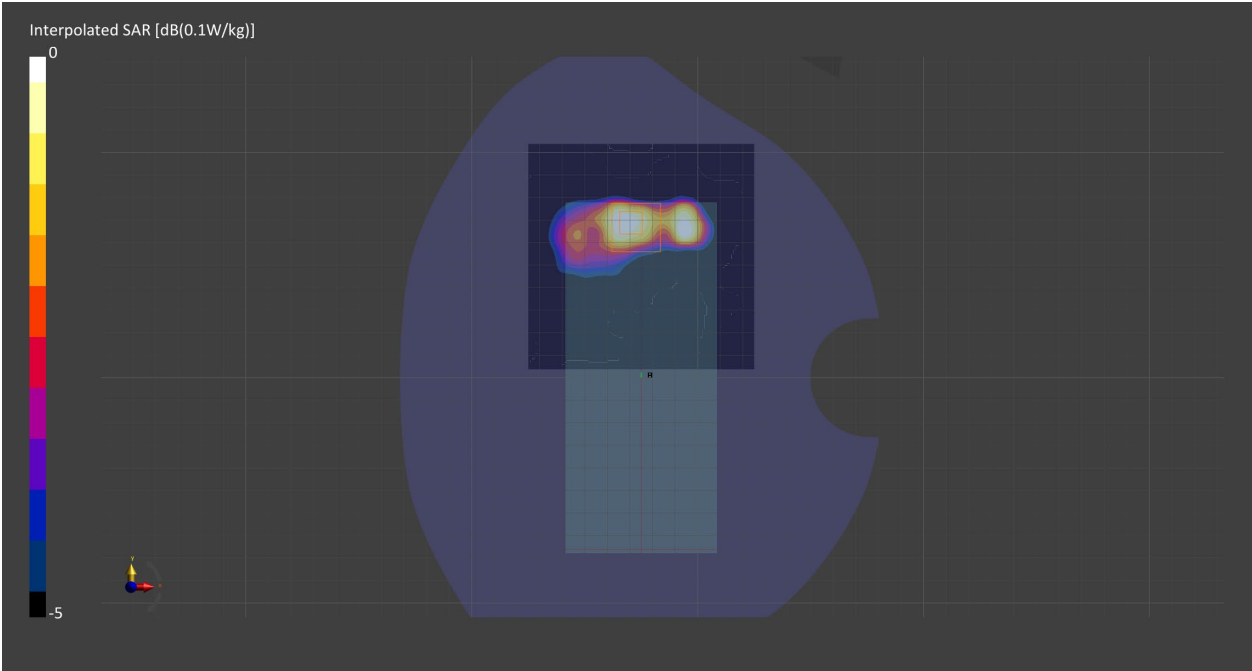

Measurement Report for WLAN 5GHz, TOUCH, Normal, Main

Exposure Conditions

|                                  |                                                    |                        |                 |
|----------------------------------|----------------------------------------------------|------------------------|-----------------|
| Band                             | WLAN 5GHz                                          | TSL Permittivity       | 36.3            |
| Frequency [MHz]   Channel Number | 5250.0   50                                        | TSL Conductivity [S/m] | 4.59            |
| Group   UID                      | WLAN   10554-AAD                                   | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 5.75                                               | Test Distance [mm]     | 0.00            |
| Communication Configuration      | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) |                        |                 |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-28              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 100.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 66.5               |
| Dist 3dB Peak [mm]  |               | 4.1                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.211     | 0.277     |
| psSAR10g [W/Kg]  | 0.071     | 0.082     |
| Power Drift [dB] | -0.04     | 0.16      |

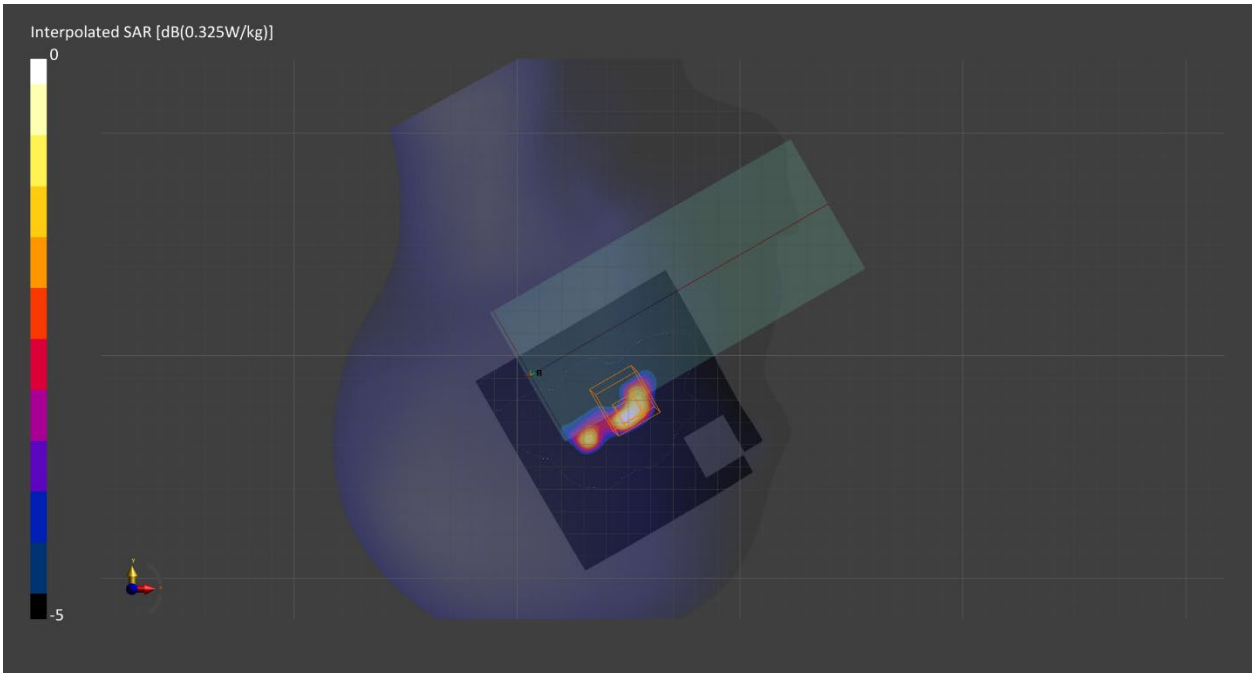

Measurement Report for WLAN 5GHz, REAR, Normal, Main

Exposure Conditions

|                                  |                                                    |                        |            |
|----------------------------------|----------------------------------------------------|------------------------|------------|
| Band                             | WLAN 5GHz                                          | TSL Permittivity       | 35.4       |
| Frequency [MHz]   Channel Number | 5250.0   50                                        | TSL Conductivity [S/m] | 4.59       |
| Group   UID                      | WLAN   10554-AAD                                   | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 5.75                                               | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL   Meas. Date | HBBL-600-10000   2022-Aug-01              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 120.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 70.5               |
| Dist 3dB Peak [mm]  |               | 7.9                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.056     | 0.049     |
| psSAR10g [W/Kg]  | 0.020     | 0.013     |
| Power Drift [dB] | -0.10     | -0.06     |

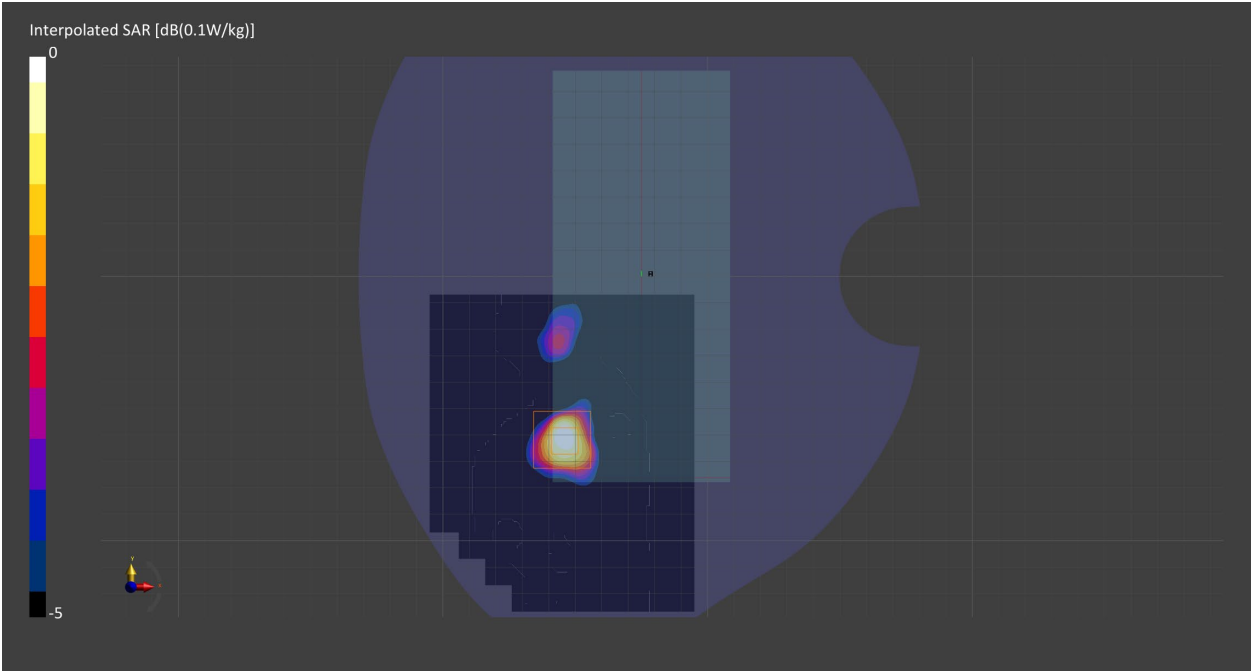

Measurement Report for WLAN 5GHz, TOUCH, Normal, Sub

Exposure Conditions

|                                  |                                                    |                        |                 |
|----------------------------------|----------------------------------------------------|------------------------|-----------------|
| Band                             | WLAN 5GHz                                          | TSL Permittivity       | 34.8            |
| Frequency [MHz]   Channel Number | 5250.0   50                                        | TSL Conductivity [S/m] | 4.54            |
| Group   UID                      | WLAN   10554-AAD                                   | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 5.14                                               | Test Distance [mm]     | 0.00            |
| Communication Configuration      | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) |                        |                 |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7549   2022-02-21 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2084 |
| DAE   Calibration Date   | DAE4 Sn1715   2022-02-22     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-28              |

Scans Setup

|                     | Area Scan     | Zoom Scan |
|---------------------|---------------|-----------|
| Grid Extents [mm]   | 160.0 x 160.0 | x x       |
| Grid Steps [mm]     | 10.0 x 10.0   | x x       |
| Sensor Surface [mm] | 3.0           |           |
| Graded Grid         | Yes           |           |
| M2/M1 [%]           |               |           |
| Dist 3dB Peak [mm]  |               |           |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0         |           |
| psSAR10g [W/Kg]  | 0         |           |
| Power Drift [dB] | -0.03     |           |

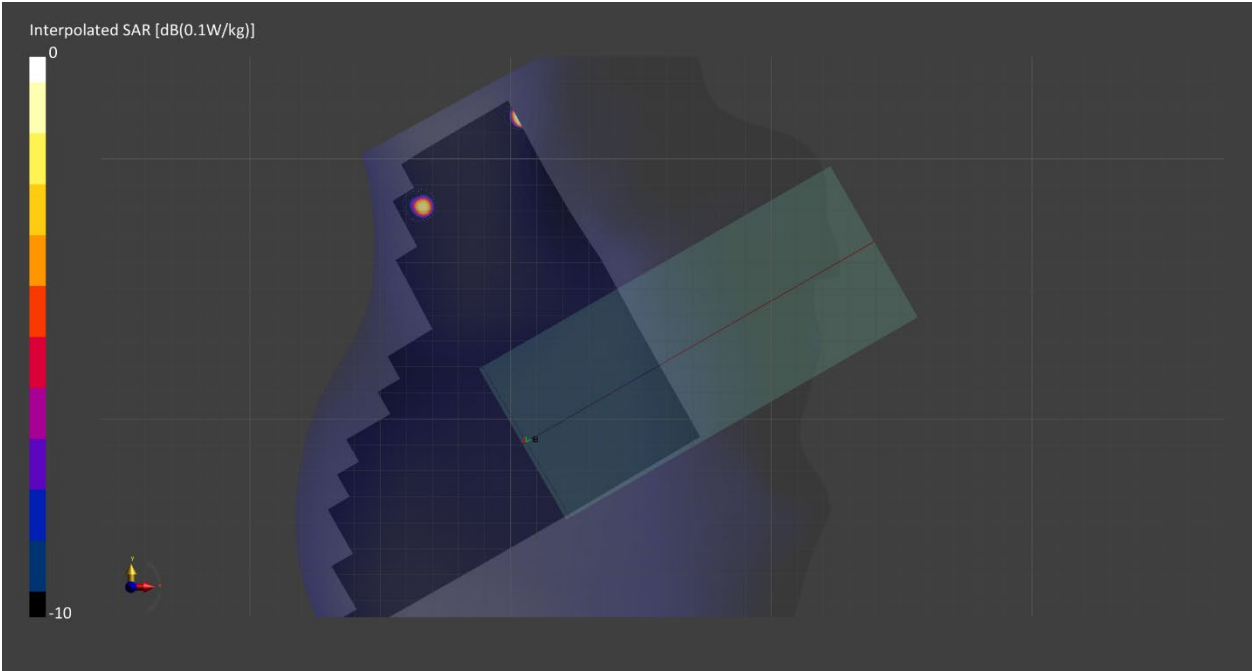

Measurement Report for WLAN 5GHz, REAR, Normal, Sub

Exposure Conditions

|                                  |                                                    |                        |            |
|----------------------------------|----------------------------------------------------|------------------------|------------|
| Band                             | WLAN 5GHz                                          | TSL Permittivity       | 34.8       |
| Frequency [MHz]   Channel Number | 5250.0   50                                        | TSL Conductivity [S/m] | 4.54       |
| Group   UID                      | WLAN   10554-AAD                                   | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 5.14                                               | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7549   2022-02-21 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2084 |
| DAE   Calibration Date   | DAE4 Sn1715   2022-02-22     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-28              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 160.0 x 160.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 65.0               |
| Dist 3dB Peak [mm]  |               | 8.2                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.067     | 0.071     |
| psSAR10g [W/Kg]  | 0.024     | 0.021     |
| Power Drift [dB] | -0.20     | 0.07      |

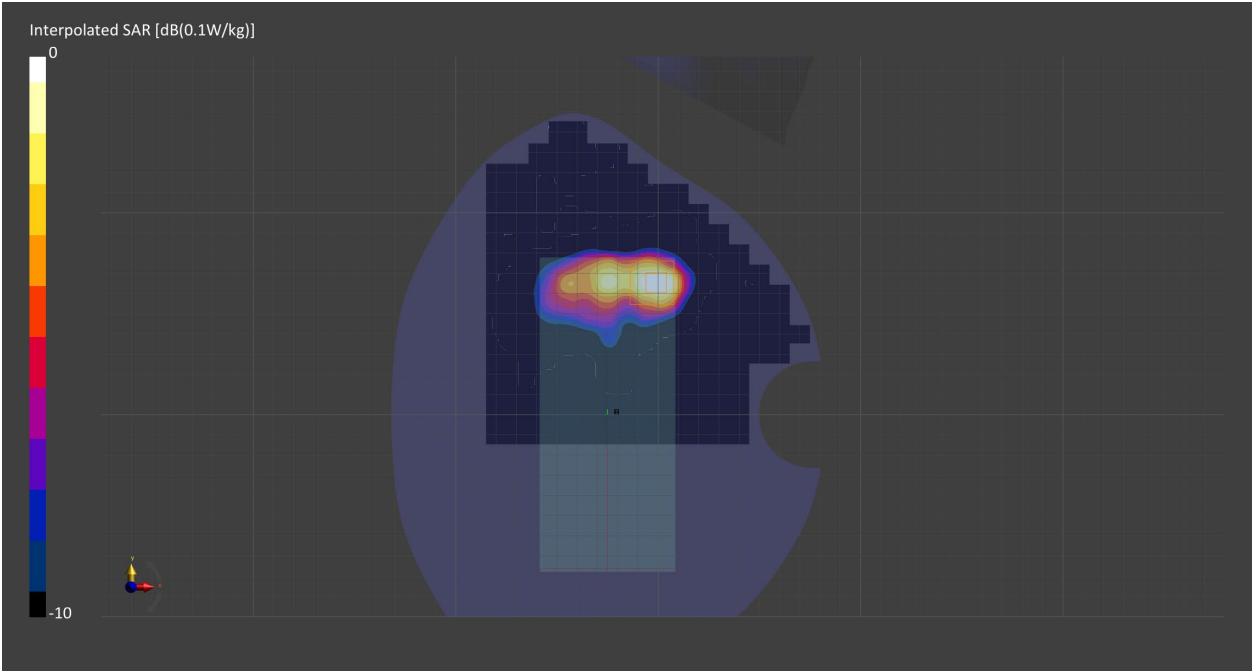

Measurement Report for WLAN 5GHz, EDGE 4, Normal, Main

Exposure Conditions

|                                  |                                                    |                        |            |
|----------------------------------|----------------------------------------------------|------------------------|------------|
| Band                             | WLAN 5GHz                                          | TSL Permittivity       | 36.3       |
| Frequency [MHz]   Channel Number | 5250.0   50                                        | TSL Conductivity [S/m] | 4.59       |
| Group   UID                      | WLAN   10554-AAD                                   | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 5.75                                               | Test Distance [mm]     | 0.00       |
| Communication Configuration      | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-28              |

Scans Setup

|                     |              |                    |
|---------------------|--------------|--------------------|
|                     | Area Scan    | Zoom Scan          |
| Grid Extents [mm]   | 60.0 x 120.0 | 30.0 x 30.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0  | 2.6 x 2.6 x 1.4    |
| Sensor Surface [mm] | 3.0          | 1.4                |
| Graded Grid         | Yes          | Yes                |
| M2/M1 [%]           |              | 63.7               |
| Dist 3dB Peak [mm]  |              | 3.6                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 1.47      | 1.56      |
| psSAR10g [W/Kg]  | 0.328     | 0.321     |
| Power Drift [dB] | -0.01     | 0.02      |

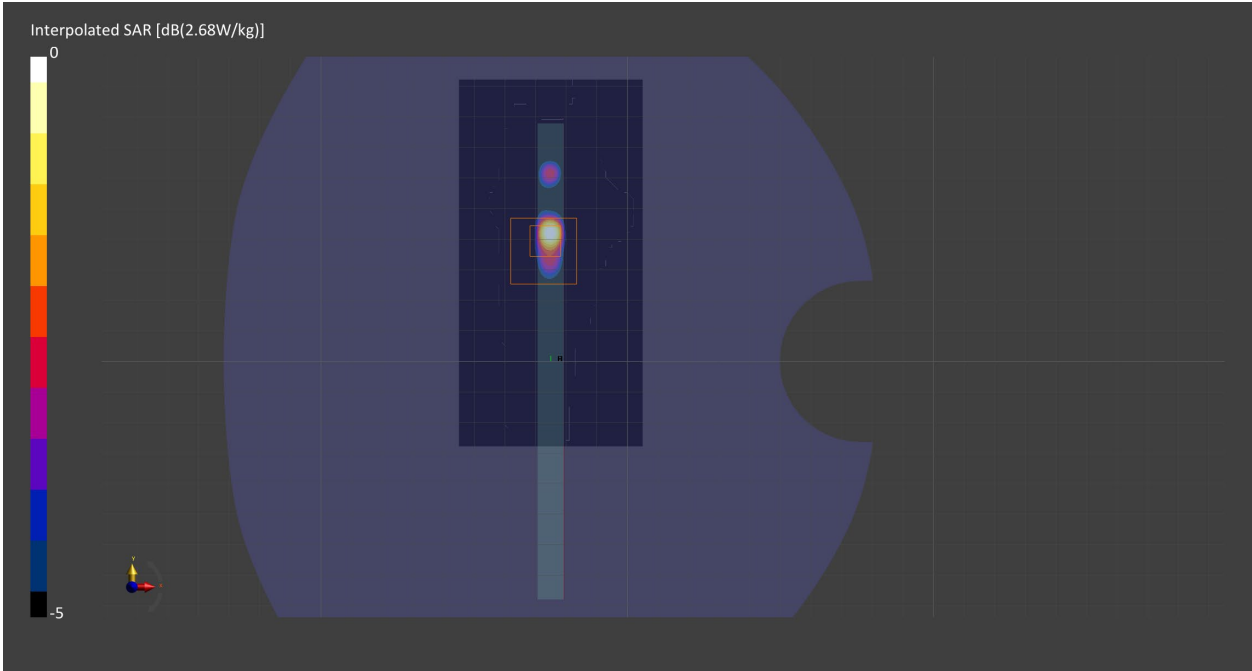

Measurement Report for WLAN 5GHz, REAR, Normal, Sub

Exposure Conditions

|                                  |                                                    |                        |            |
|----------------------------------|----------------------------------------------------|------------------------|------------|
| Band                             | WLAN 5GHz                                          | TSL Permittivity       | 34.8       |
| Frequency [MHz]   Channel Number | 5250.0   50                                        | TSL Conductivity [S/m] | 4.54       |
| Group   UID                      | WLAN   10554-AAD                                   | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 5.14                                               | Test Distance [mm]     | 0.00       |
| Communication Configuration      | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7549   2022-02-21 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2084 |
| DAE   Calibration Date   | DAE4 Sn1715   2022-02-22     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-29              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 160.0 x 160.0 | 30.0 x 30.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 3.2 x 3.2 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 60.7               |
| Dist 3dB Peak [mm]  |               | 4.3                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.724     | 0.937     |
| psSAR10g [W/Kg]  | 0.173     | 0.194     |
| Power Drift [dB] | -0.05     | -0.05     |

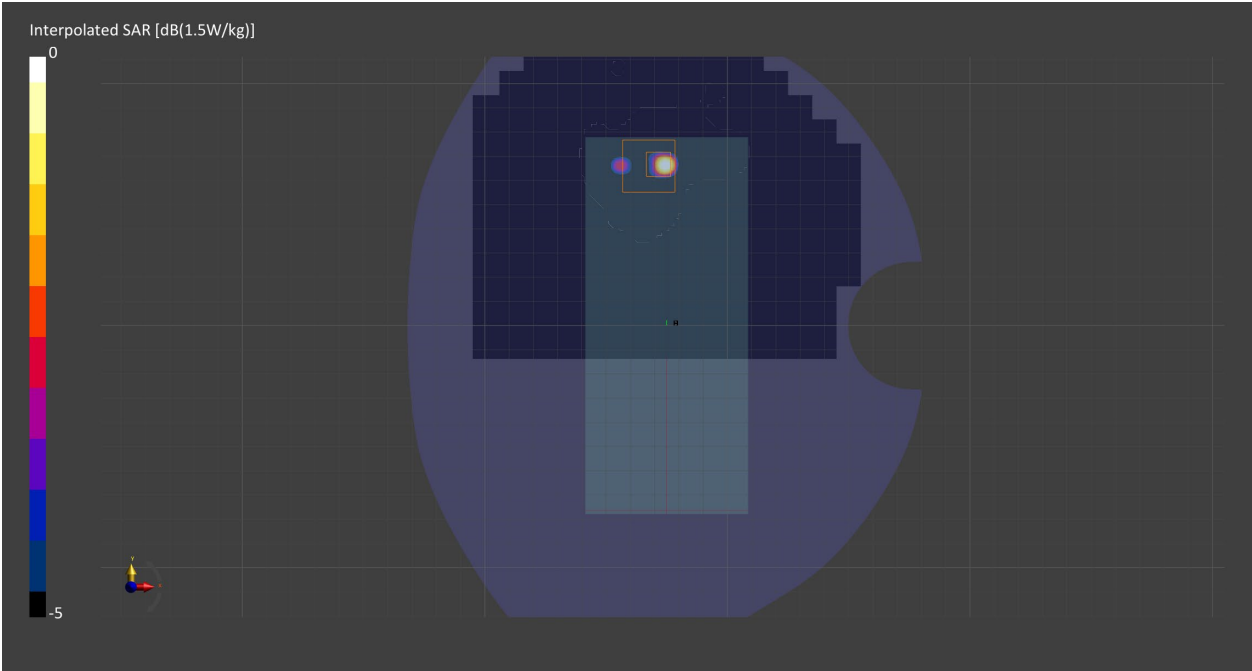

Measurement Report for U-NII-1, U-NII-2A, TOUCH, Main, Simul

Exposure Conditions

|                                  |                                                    |                        |                 |
|----------------------------------|----------------------------------------------------|------------------------|-----------------|
| Band                             | U-NII-1, U-NII-2A                                  | TSL Permittivity       | 36.3            |
| Frequency [MHz]   Channel Number | 5250.0   50                                        | TSL Conductivity [S/m] | 4.59            |
| Group   UID                      | WLAN   10554-AAD                                   | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 5.75                                               | Test Distance [mm]     | 0.00            |
| Communication Configuration      | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) |                        |                 |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-28              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 100.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 3.1 x 3.1 x 1.2    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 71.5               |
| Dist 3dB Peak [mm]  |               | 3.8                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.109     | 0.153     |
| psSAR10g [W/Kg]  | 0.038     | 0.040     |
| Power Drift [dB] | 0.02      | 0.02      |

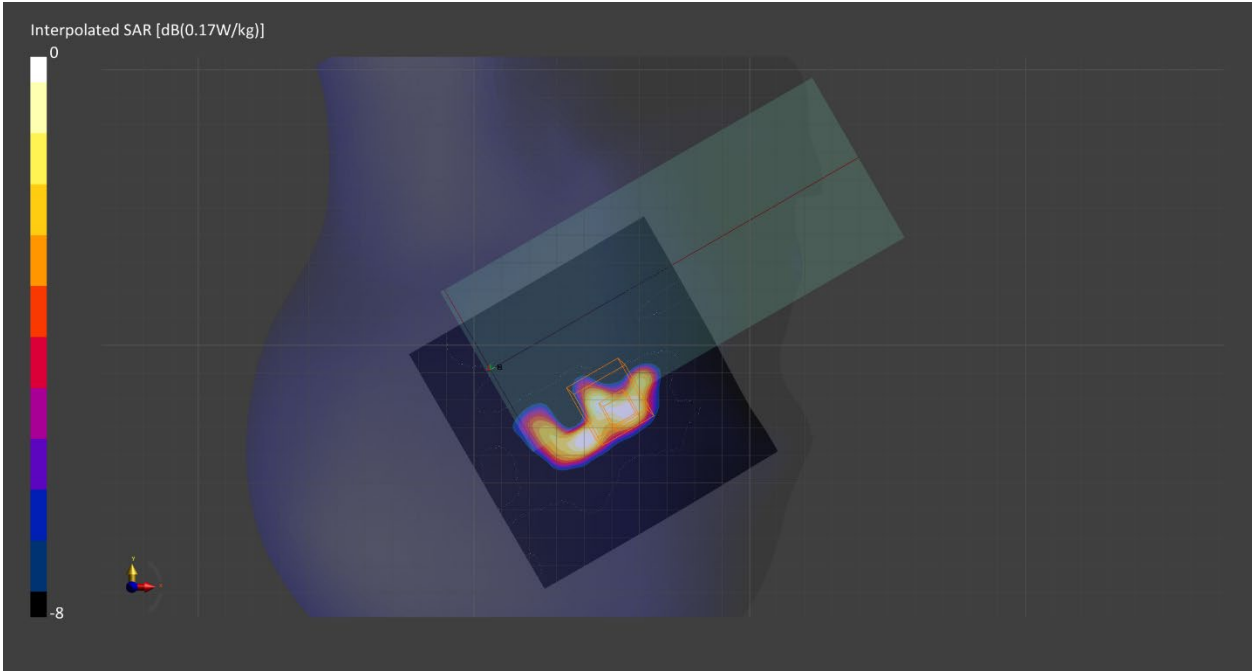

Measurement Report for U-NII-1, U-NII-2A, REAR, Main, Simul

Exposure Conditions

|                                  |                                                    |                        |            |
|----------------------------------|----------------------------------------------------|------------------------|------------|
| Band                             | U-NII-1, U-NII-2A                                  | TSL Permittivity       | 35.4       |
| Frequency [MHz]   Channel Number | 5250.0   50                                        | TSL Conductivity [S/m] | 4.59       |
| Group   UID                      | WLAN   10554-AAD                                   | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 5.75                                               | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL   Meas. Date | HBBL-600-10000   2022-Aug-01              |

Scans Setup

|                     |               |                    |
|---------------------|---------------|--------------------|
|                     | Area Scan     | Zoom Scan          |
| Grid Extents [mm]   | 100.0 x 120.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 68.4               |
| Dist 3dB Peak [mm]  |               | > 11.0             |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.034     | 0.025     |
| psSAR10g [W/Kg]  | 0.011     | 0.004     |
| Power Drift [dB] | -0.33     | -0.27     |

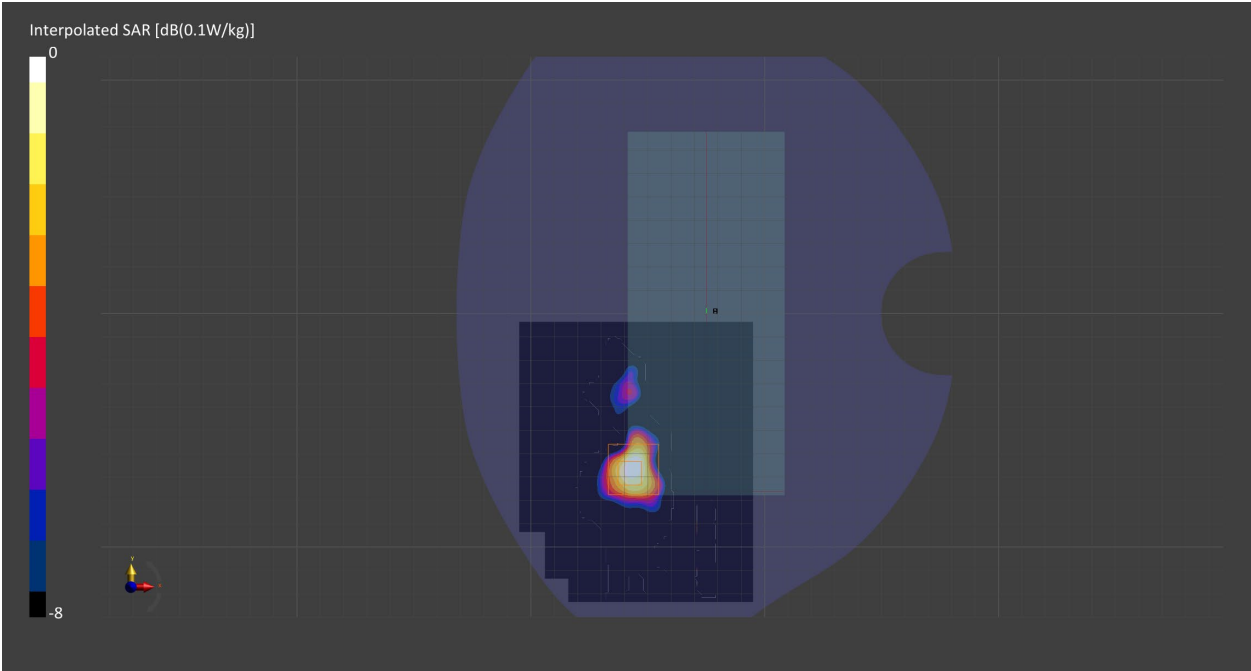

Measurement Report for WLAN 5GHz, TOUCH, Simul, Sub

Exposure Conditions

|                                  |                                                    |                        |                |
|----------------------------------|----------------------------------------------------|------------------------|----------------|
| Band                             | WLAN 5GHz                                          | TSL Permittivity       | 34.8           |
| Frequency [MHz]   Channel Number | 5250.0   50                                        | TSL Conductivity [S/m] | 4.54           |
| Group   UID                      | WLAN   10554-AAD                                   | Phantom Section   TSL  | LeftHead   HSL |
| Conversion Factor                | 5.14                                               | Test Distance [mm]     | 0.00           |
| Communication Configuration      | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) |                        |                |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7549   2022-02-21 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2084 |
| DAE   Calibration Date   | DAE4 Sn1715   2022-02-22     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-29              |

Scans Setup

|                     | Area Scan     | Zoom Scan |
|---------------------|---------------|-----------|
| Grid Extents [mm]   | 100.0 x 100.0 | x x       |
| Grid Steps [mm]     | 10.0 x 10.0   | x x       |
| Sensor Surface [mm] | 3.0           |           |
| Graded Grid         | Yes           |           |
| M2/M1 [%]           |               |           |
| Dist 3dB Peak [mm]  |               |           |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0         |           |
| psSAR10g [W/Kg]  | 0         |           |
| Power Drift [dB] | -4.64     |           |

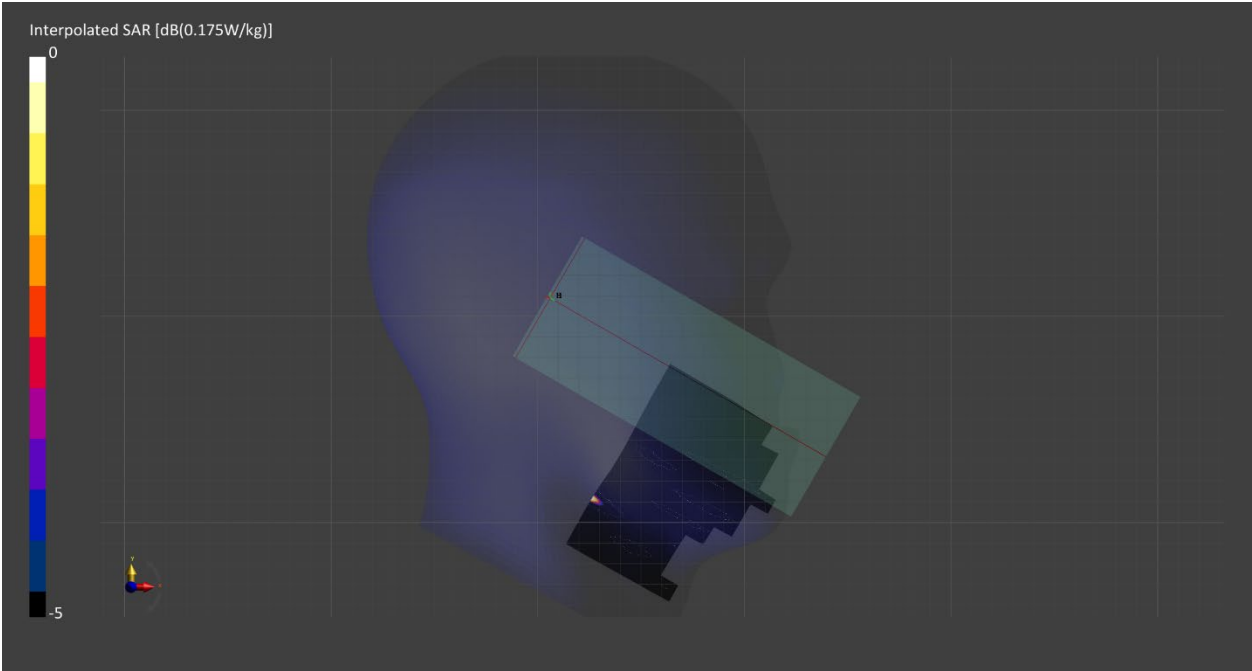

Measurement Report for WLAN 5GHz, REAR, Simul, Sub

Exposure Conditions

|                                  |                                                    |                        |            |
|----------------------------------|----------------------------------------------------|------------------------|------------|
| Band                             | WLAN 5GHz                                          | TSL Permittivity       | 34.8       |
| Frequency [MHz]   Channel Number | 5250.0   50                                        | TSL Conductivity [S/m] | 4.54       |
| Group   UID                      | WLAN   10554-AAD                                   | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 5.14                                               | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7549   2022-02-21 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2084 |
| DAE   Calibration Date   | DAE4 Sn1715   2022-02-22     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-29              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 100.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 60.4               |
| Dist 3dB Peak [mm]  |               | > 11.0             |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.033     | 0.032     |
| psSAR10g [W/Kg]  | 0.011     | 0.009     |
| Power Drift [dB] | 0.66      | -0.09     |

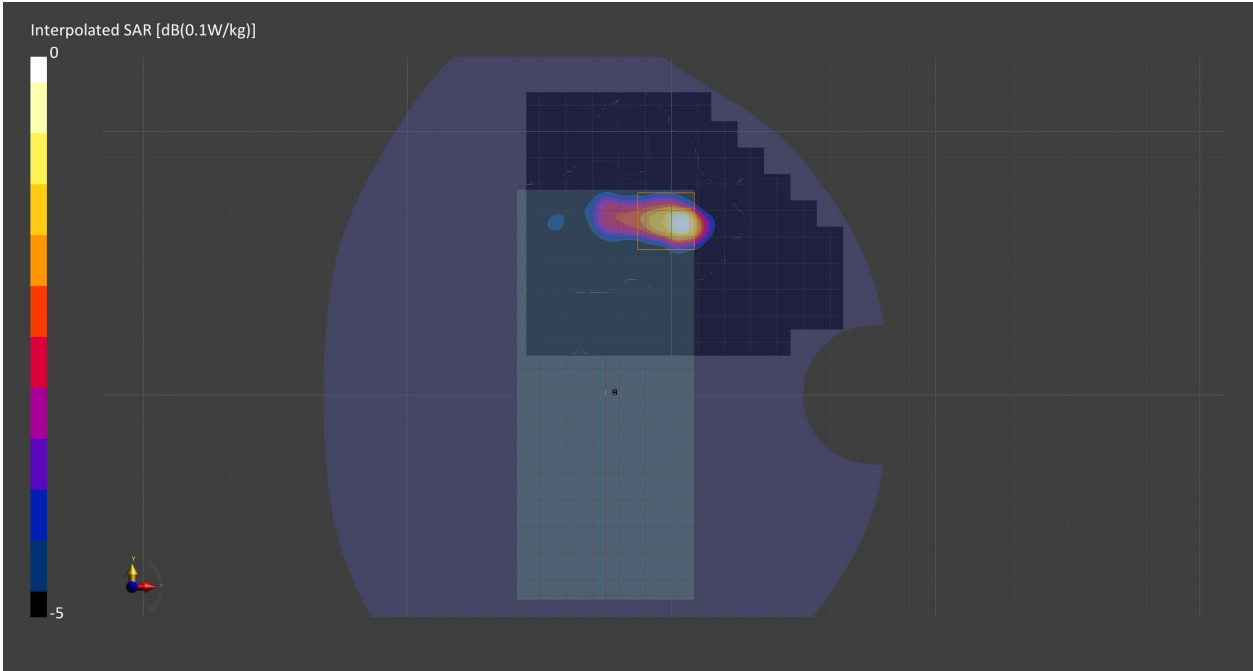

Measurement Report for WLAN 5GHz, TOUCH, Normal, Main

Exposure Conditions

|                                  |                                                    |                        |                 |
|----------------------------------|----------------------------------------------------|------------------------|-----------------|
| Band                             | WLAN 5GHz                                          | TSL Permittivity       | 35.7            |
| Frequency [MHz]   Channel Number | 5570.0   114                                       | TSL Conductivity [S/m] | 4.95            |
| Group   UID                      | WLAN   10554-AAD                                   | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 5.08                                               | Test Distance [mm]     | 0.00            |
| Communication Configuration      | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) |                        |                 |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-28              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 100.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 2.7 x 2.7 x 1.2    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 64.2               |
| Dist 3dB Peak [mm]  |               | 3.3                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.113     | 0.167     |
| psSAR10g [W/Kg]  | 0.033     | 0.040     |
| Power Drift [dB] | 0.06      | -1.08     |

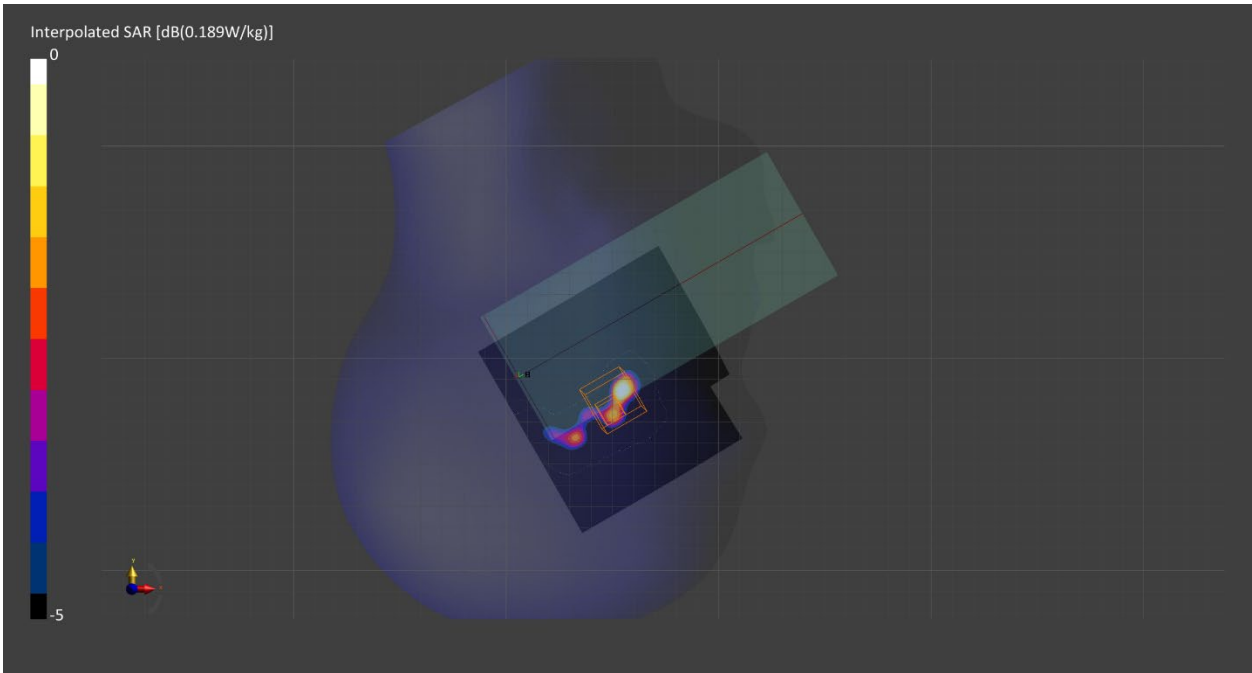

Measurement Report for WLAN 5GHz, REAR, Normal, Main

Exposure Conditions

|                                  |                                                    |                        |            |
|----------------------------------|----------------------------------------------------|------------------------|------------|
| Band                             | WLAN 5GHz                                          | TSL Permittivity       | 34.8       |
| Frequency [MHz]   Channel Number | 5570.0   114                                       | TSL Conductivity [S/m] | 4.95       |
| Group   UID                      | WLAN   10554-AAD                                   | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 5.08                                               | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL   Meas. Date | HBBL-600-10000   2022-Aug-01              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 120.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 72.3               |
| Dist 3dB Peak [mm]  |               | > 11.0             |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.029     | 0.024     |
| psSAR10g [W/Kg]  | 0.009     | 0.003     |
| Power Drift [dB] | -1.13     | -0.66     |

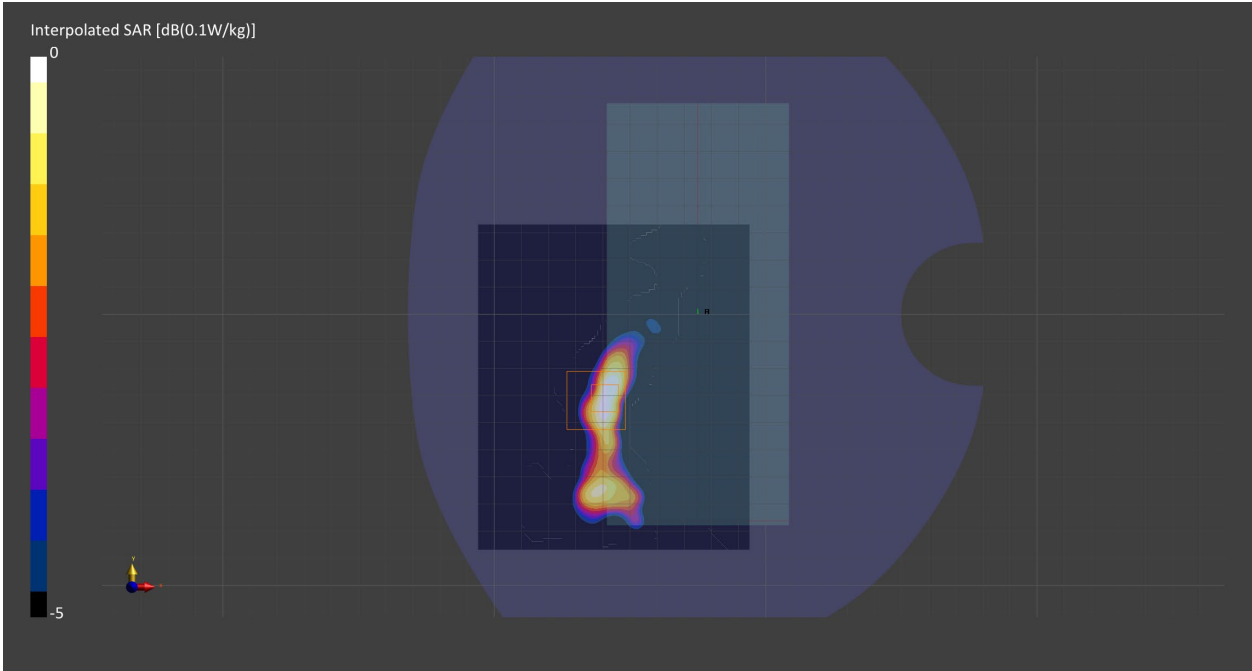

Measurement Report for WLAN 5GHz, TILT, Normal, Sub

Exposure Conditions

|                                  |                                                    |                        |                |
|----------------------------------|----------------------------------------------------|------------------------|----------------|
| Band                             | WLAN 5GHz                                          | TSL Permittivity       | 34.3           |
| Frequency [MHz]   Channel Number | 5570.0   114                                       | TSL Conductivity [S/m] | 4.88           |
| Group   UID                      | WLAN   10554-AAD                                   | Phantom Section   TSL  | LeftHead   HSL |
| Conversion Factor                | 4.56                                               | Test Distance [mm]     | 0.00           |
| Communication Configuration      | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) |                        |                |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7549   2022-02-21 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2084 |
| DAE   Calibration Date   | DAE4 Sn1715   2022-02-22     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-28              |

Scans Setup

|                     | Area Scan     | Zoom Scan |
|---------------------|---------------|-----------|
| Grid Extents [mm]   | 100.0 x 200.0 | x x       |
| Grid Steps [mm]     | 10.0 x 10.0   | x x       |
| Sensor Surface [mm] | 3.0           |           |
| Graded Grid         | Yes           |           |
| M2/M1 [%]           |               |           |
| Dist 3dB Peak [mm]  |               |           |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.001     |           |
| psSAR10g [W/Kg]  | 0         |           |
| Power Drift [dB] | -2.35     |           |

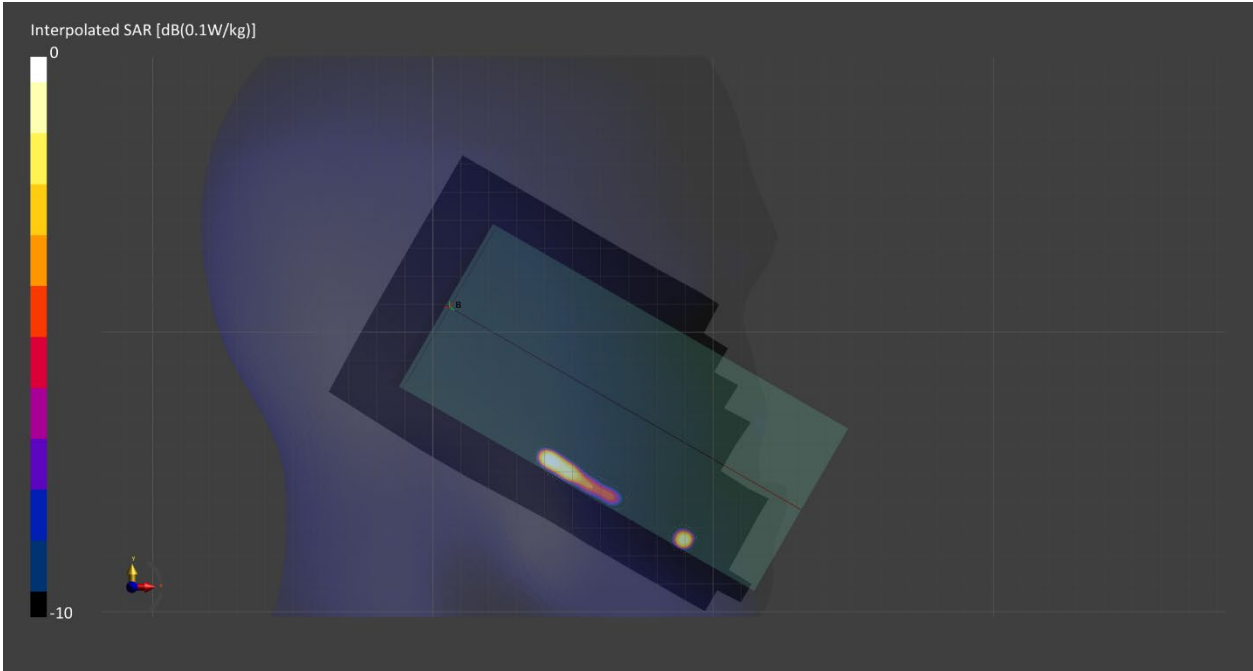

Measurement Report for WLAN 5GHz, REAR, Normal, Sub

Exposure Conditions

|                                  |                                                    |                        |            |
|----------------------------------|----------------------------------------------------|------------------------|------------|
| Band                             | WLAN 5GHz                                          | TSL Permittivity       | 34.3       |
| Frequency [MHz]   Channel Number | 5570.0   114                                       | TSL Conductivity [S/m] | 4.88       |
| Group   UID                      | WLAN   10554-AAD                                   | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 4.56                                               | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7549   2022-02-21 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2084 |
| DAE   Calibration Date   | DAE4 Sn1715   2022-02-22     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-28              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 100.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 62.1               |
| Dist 3dB Peak [mm]  |               | 5.8                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.077     | 0.077     |
| psSAR10g [W/Kg]  | 0.023     | 0.020     |
| Power Drift [dB] | 0.28      | -0.01     |

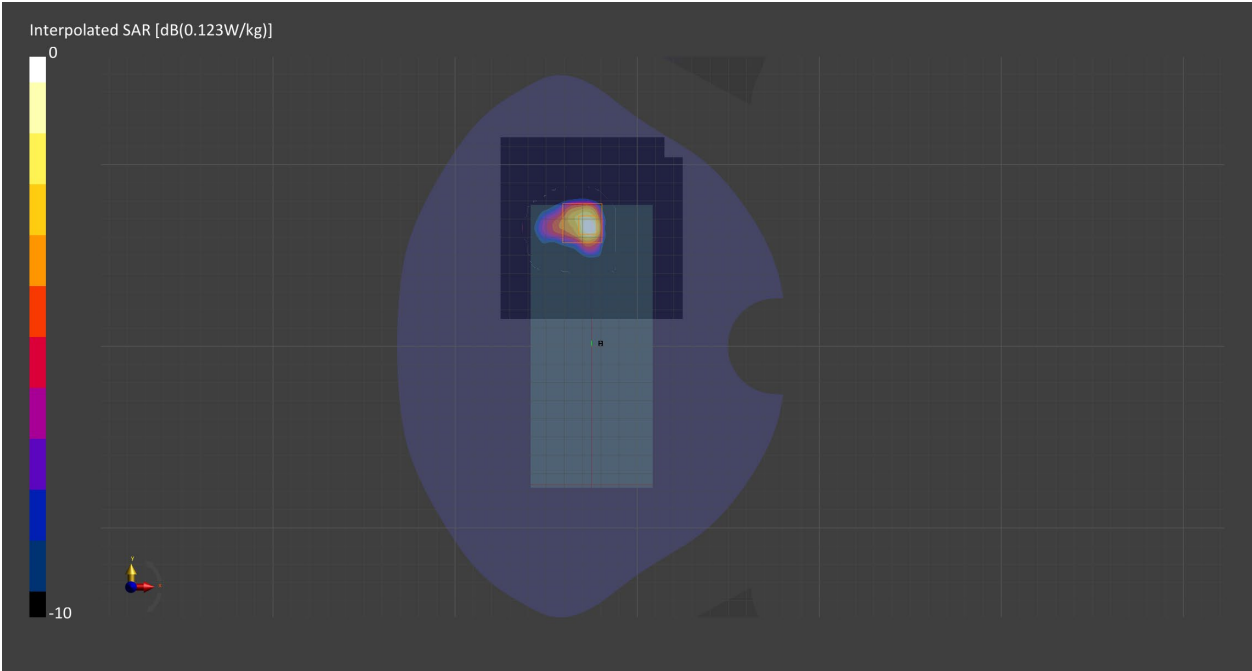

Measurement Report for WLAN 5GHz, EDGE 4, Normal, Main

Exposure Conditions

|                                  |                                                    |                        |            |
|----------------------------------|----------------------------------------------------|------------------------|------------|
| Band                             | WLAN 5GHz                                          | TSL Permittivity       | 35.7       |
| Frequency [MHz]   Channel Number | 5570.0   114                                       | TSL Conductivity [S/m] | 4.95       |
| Group   UID                      | WLAN   10554-AAD                                   | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 5.08                                               | Test Distance [mm]     | 0.00       |
| Communication Configuration      | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-28              |

Scans Setup

|                     |              |                    |
|---------------------|--------------|--------------------|
|                     | Area Scan    | Zoom Scan          |
| Grid Extents [mm]   | 60.0 x 120.0 | 30.0 x 30.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0  | 3.2 x 3.2 x 1.4    |
| Sensor Surface [mm] | 3.0          | 1.4                |
| Graded Grid         | Yes          | Yes                |
| M2/M1 [%]           |              | 61.0               |
| Dist 3dB Peak [mm]  |              | 4.0                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 1.40      | 1.59      |
| psSAR10g [W/Kg]  | 0.353     | 0.357     |
| Power Drift [dB] | 0.04      | 0.07      |

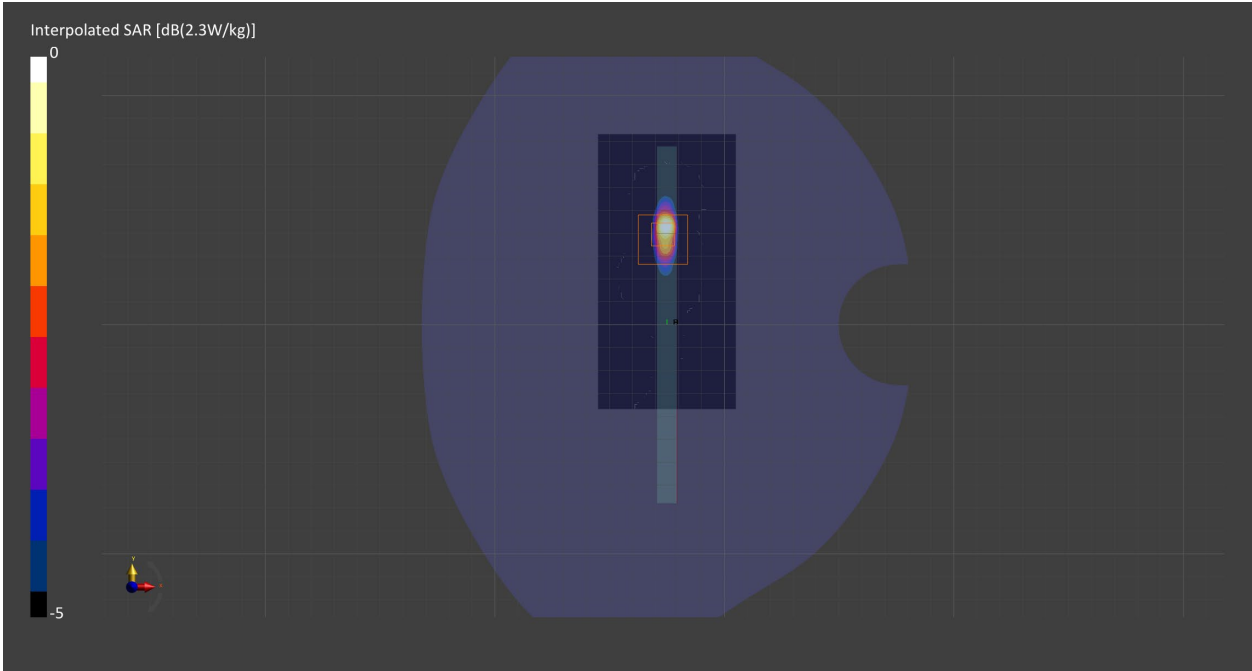

Measurement Report for WLAN 5GHz, REAR, Normal, Sub

Exposure Conditions

|                                  |                                                    |                        |            |
|----------------------------------|----------------------------------------------------|------------------------|------------|
| Band                             | WLAN 5GHz                                          | TSL Permittivity       | 34.3       |
| Frequency [MHz]   Channel Number | 5570.0   114                                       | TSL Conductivity [S/m] | 4.88       |
| Group   UID                      | WLAN   10554-AAD                                   | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 4.56                                               | Test Distance [mm]     | 0.00       |
| Communication Configuration      | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7549   2022-02-21 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2084 |
| DAE   Calibration Date   | DAE4 Sn1715   2022-02-22     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-29              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 100.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 3.0 x 3.0 x 1.2    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 60.4               |
| Dist 3dB Peak [mm]  |               | 3.6                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 2.01      | 1.93      |
| psSAR10g [W/Kg]  | 0.404     | 0.400     |
| Power Drift [dB] | -0.02     | -0.04     |

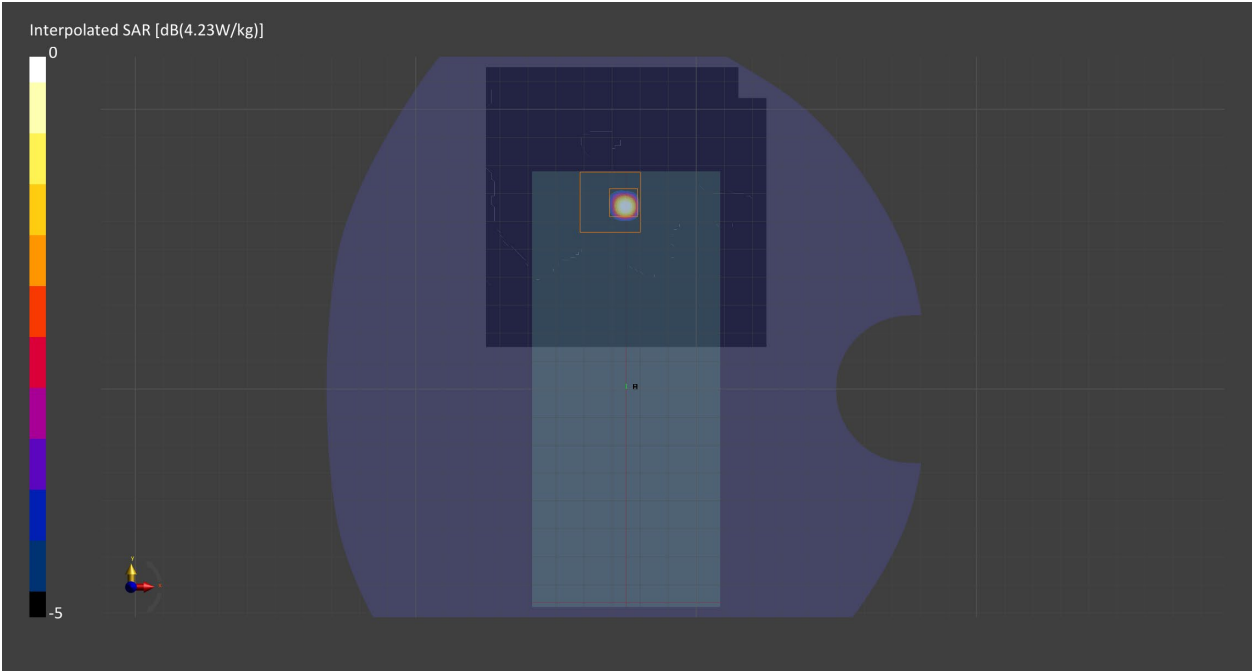

Measurement Report for WLAN 5GHz, TOUCH, Simul, Main

Exposure Conditions

|                                  |                                                    |                        |                 |
|----------------------------------|----------------------------------------------------|------------------------|-----------------|
| Band                             | WLAN 5GHz                                          | TSL Permittivity       | 35.7            |
| Frequency [MHz]   Channel Number | 5570.0   114                                       | TSL Conductivity [S/m] | 4.95            |
| Group   UID                      | WLAN   10554-AAD                                   | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 5.08                                               | Test Distance [mm]     | 0.00            |
| Communication Configuration      | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) |                        |                 |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-28              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 100.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 3.1 x 3.1 x 1.2    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 67.0               |
| Dist 3dB Peak [mm]  |               | 2.5                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.055     | 0.072     |
| psSAR10g [W/Kg]  | 0.018     | 0.015     |
| Power Drift [dB] | 0.33      | -0.57     |

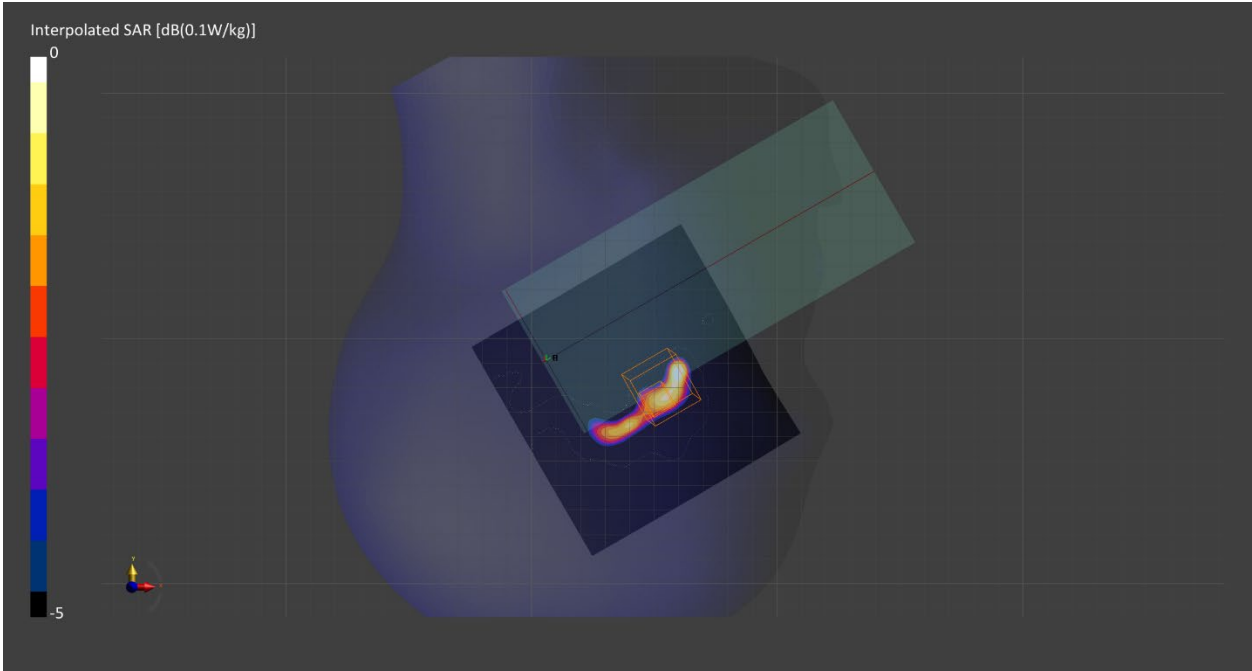

Measurement Report for WLAN 5GHz, REAR, Simul, Main

Exposure Conditions

|                                  |                                                    |                        |            |
|----------------------------------|----------------------------------------------------|------------------------|------------|
| Band                             | WLAN 5GHz                                          | TSL Permittivity       | 34.8       |
| Frequency [MHz]   Channel Number | 5570.0   114                                       | TSL Conductivity [S/m] | 4.95       |
| Group   UID                      | WLAN   10554-AAD                                   | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 5.08                                               | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL   Meas. Date | HBBL-600-10000   2022-Aug-01              |

Scans Setup

|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 60.0 x 80.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0 | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | Yes         | Yes                |
| M2/M1 [%]           |             | 79.1               |
| Dist 3dB Peak [mm]  |             | > 11.0             |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.006     | 0.002     |
| psSAR10g [W/Kg]  | 0         | 0         |
| Power Drift [dB] | 1.33      | -0.01     |

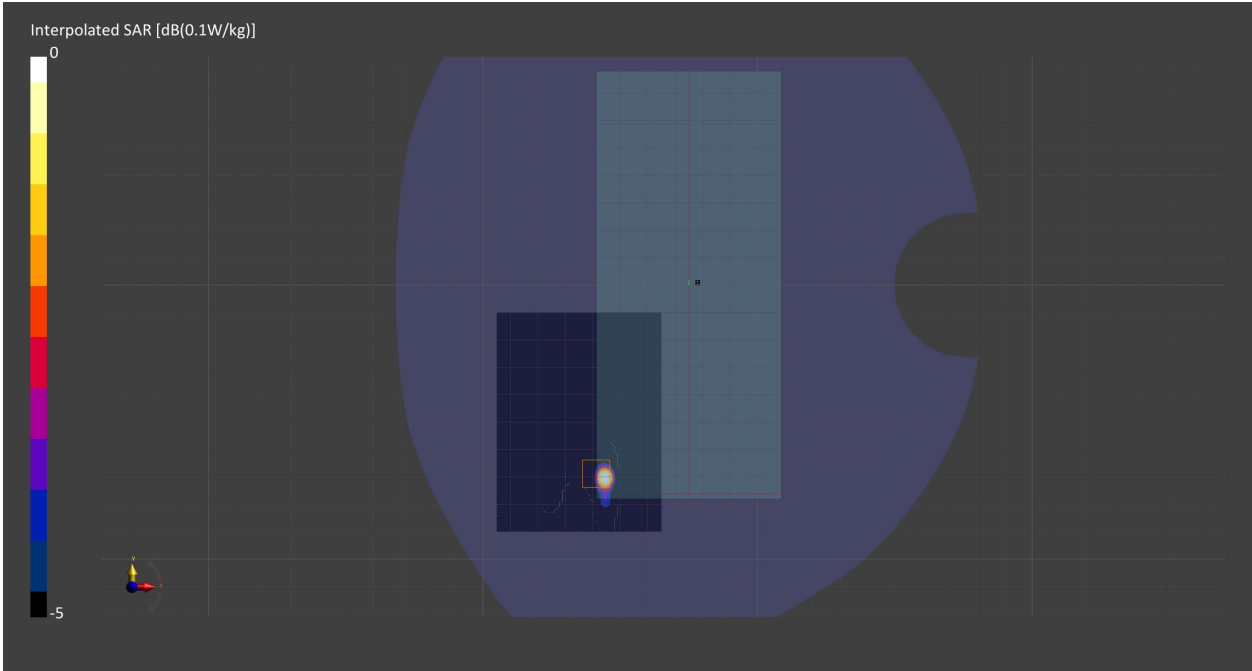

Measurement Report for WLAN 5GHz, TOUCH, Simul, Sub

Exposure Conditions

|                                  |                                                    |                        |                |
|----------------------------------|----------------------------------------------------|------------------------|----------------|
| Band                             | WLAN 5GHz                                          | TSL Permittivity       | 34.3           |
| Frequency [MHz]   Channel Number | 5570.0   114                                       | TSL Conductivity [S/m] | 4.88           |
| Group   UID                      | WLAN   10554-AAD                                   | Phantom Section   TSL  | LeftHead   HSL |
| Conversion Factor                | 4.56                                               | Test Distance [mm]     | 0.00           |
| Communication Configuration      | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) |                        |                |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7549   2022-02-21 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2084 |
| DAE   Calibration Date   | DAE4 Sn1715   2022-02-22     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-29              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 200.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 98.2               |
| Dist 3dB Peak [mm]  |               | > 11.0             |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0         | 0         |
| psSAR10g [W/Kg]  | 0         | 0         |
| Power Drift [dB] | -0.84     | -1.60     |

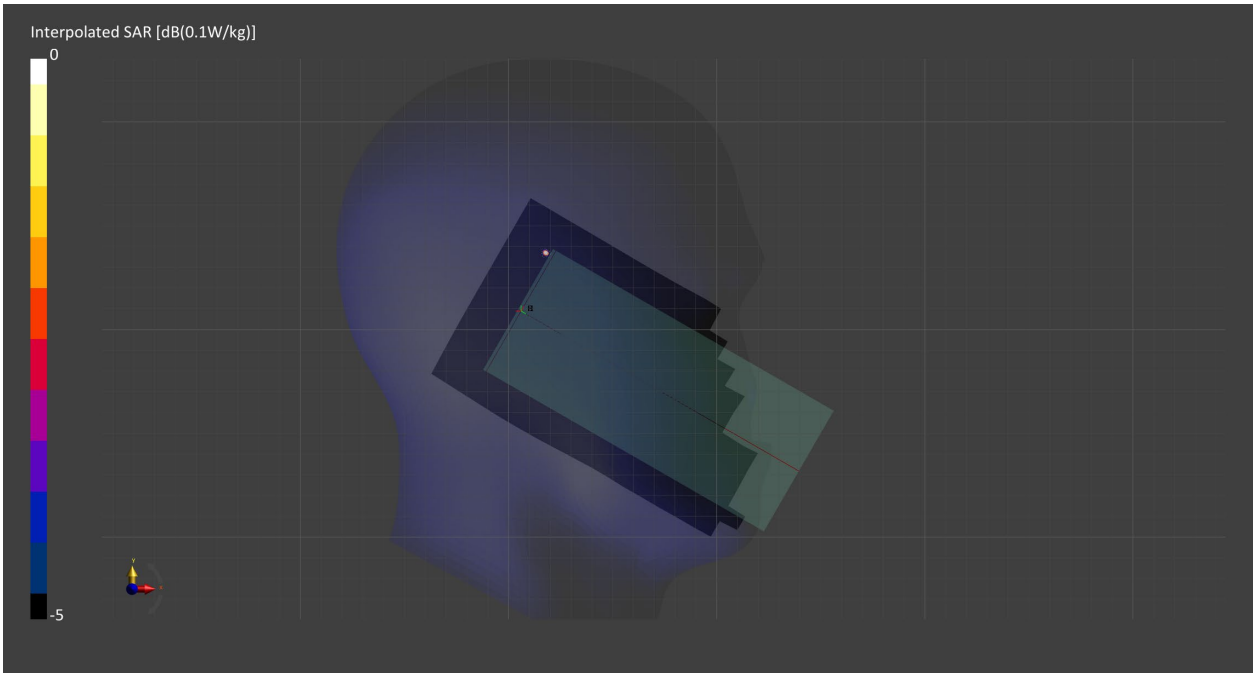

Measurement Report for WLAN 5GHz, REAR, Simul, Sub

Exposure Conditions

|                                  |                                                    |                        |            |
|----------------------------------|----------------------------------------------------|------------------------|------------|
| Band                             | WLAN 5GHz                                          | TSL Permittivity       | 34.3       |
| Frequency [MHz]   Channel Number | 5570.0   114                                       | TSL Conductivity [S/m] | 4.88       |
| Group   UID                      | WLAN   10554-AAD                                   | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 4.56                                               | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7549   2022-02-21 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2084 |
| DAE   Calibration Date   | DAE4 Sn1715   2022-02-22     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-29              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 100.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 60.5               |
| Dist 3dB Peak [mm]  |               | 6.6                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.040     | 0.040     |
| psSAR10g [W/Kg]  | 0.012     | 0.008     |
| Power Drift [dB] | -0.28     | 0.67      |

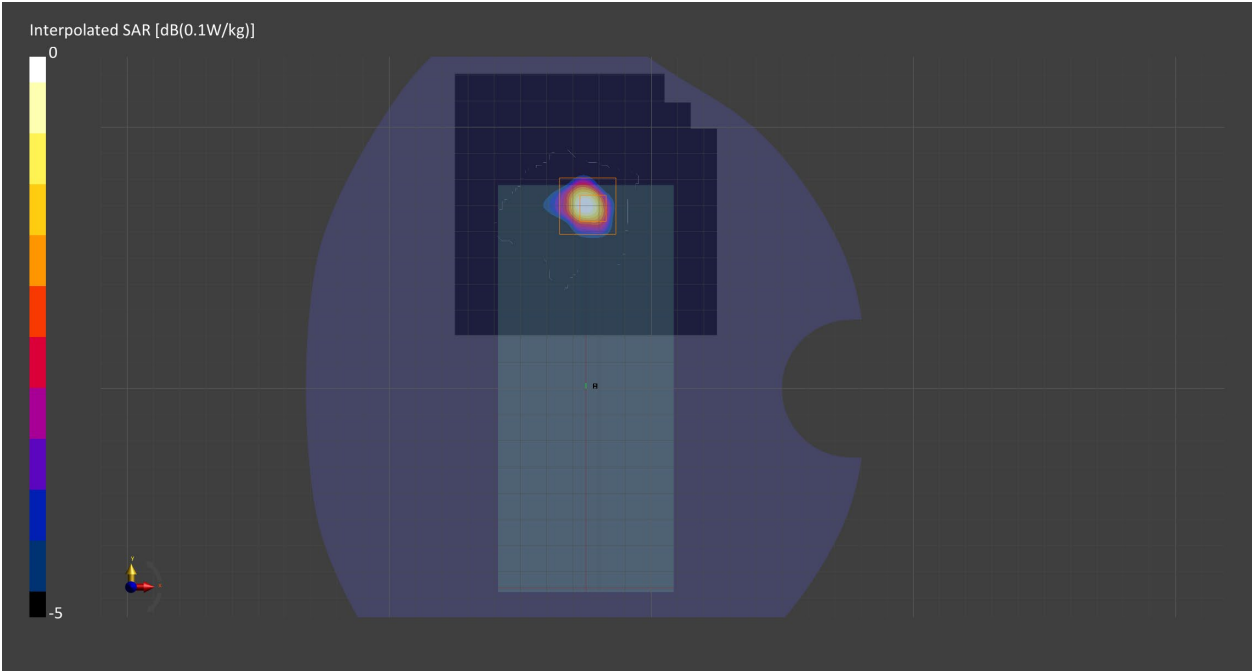

Measurement Report for WLAN 5GHz, TOUCH, Normal, Main

Exposure Conditions

|                                  |                                                   |                        |                 |
|----------------------------------|---------------------------------------------------|------------------------|-----------------|
| Band                             | WLAN 5GHz                                         | TSL Permittivity       | 35.3            |
| Frequency [MHz]   Channel Number | 5775.0   155                                      | TSL Conductivity [S/m] | 5.19            |
| Group   UID                      | WLAN   10544-AAC                                  | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 5.25                                              | Test Distance [mm]     | 0.00            |
| Communication Configuration      | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) |                        |                 |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-28              |

Scans Setup

|                     |               |                    |
|---------------------|---------------|--------------------|
|                     | Area Scan     | Zoom Scan          |
| Grid Extents [mm]   | 100.0 x 100.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 3.4 x 3.4 x 1.2    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 68.0               |
| Dist 3dB Peak [mm]  |               | 2.5                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.056     | 0.072     |
| psSAR10g [W/Kg]  | 0.013     | 0.013     |
| Power Drift [dB] | 0.16      | -0.91     |

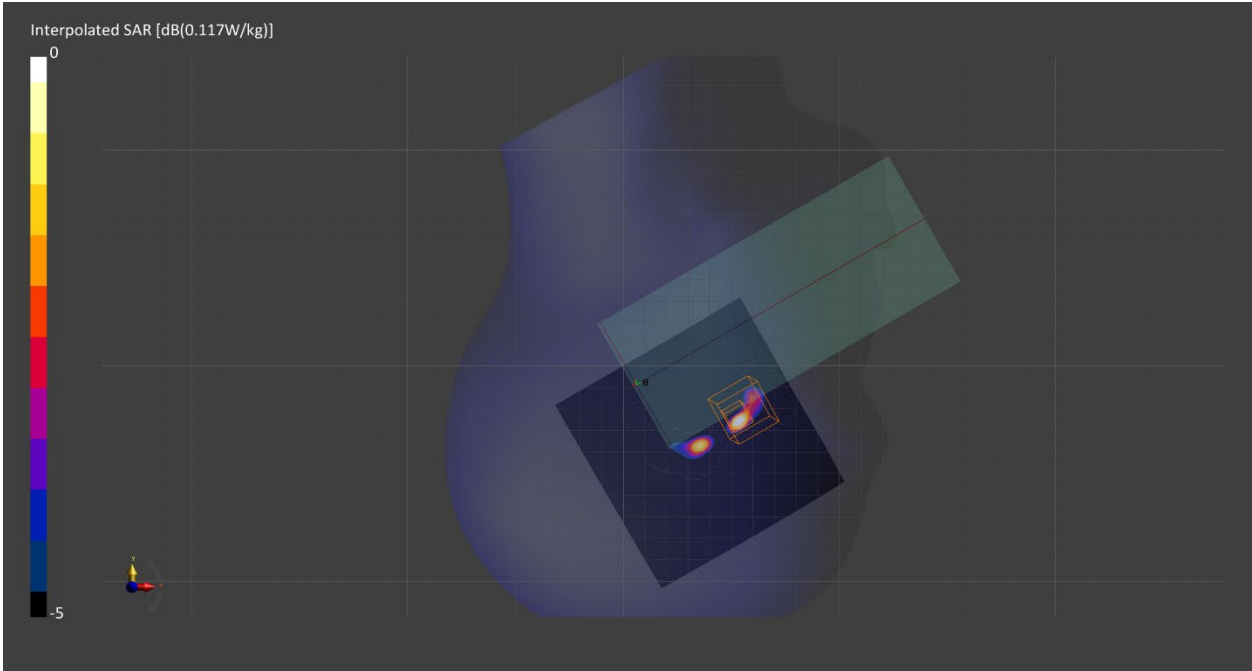

Measurement Report for WLAN 5GHz, REAR, Normal, Main

Exposure Conditions

|                                  |                                                   |                        |            |
|----------------------------------|---------------------------------------------------|------------------------|------------|
| Band                             | WLAN 5GHz                                         | TSL Permittivity       | 34.4       |
| Frequency [MHz]   Channel Number | 5775.0   155                                      | TSL Conductivity [S/m] | 5.18       |
| Group   UID                      | WLAN   10544-AAC                                  | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 5.25                                              | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL   Meas. Date | HBBL-600-10000   2022-Aug-01              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 120.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 68.4               |
| Dist 3dB Peak [mm]  |               | 4.3                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.040     | 0.035     |
| psSAR10g [W/Kg]  | 0.012     | 0.006     |
| Power Drift [dB] | 0.22      | 0.66      |

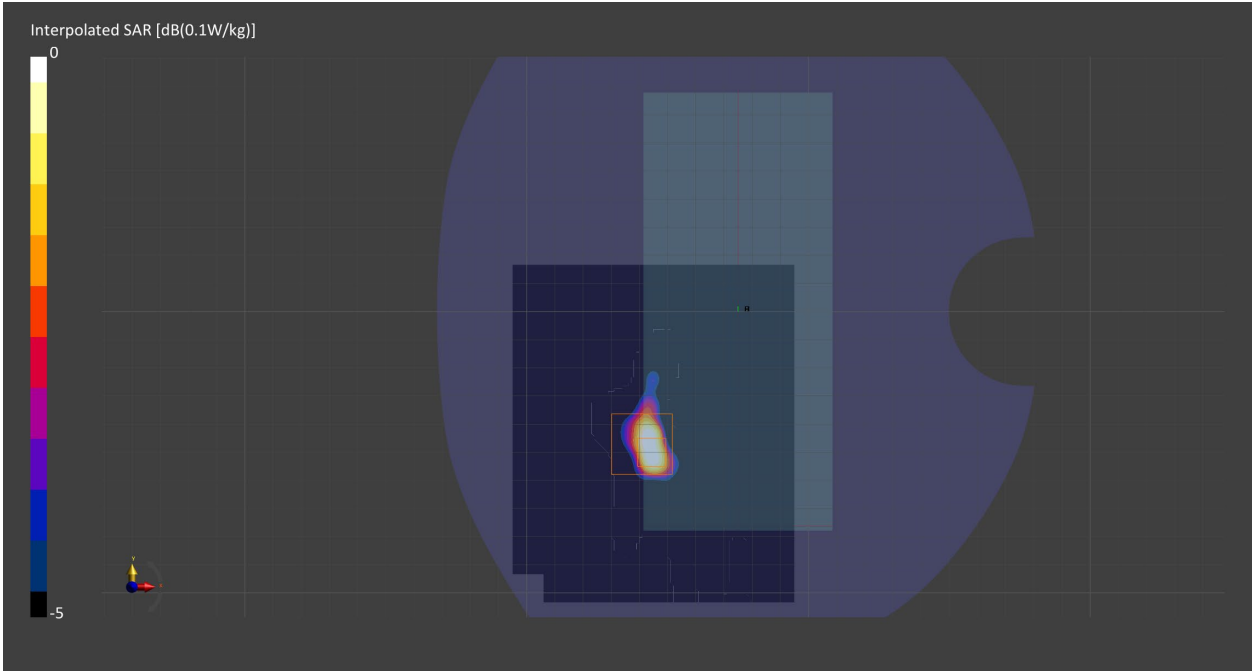

Measurement Report for WLAN 5GHz, EDGE 4, Normal, Main

Exposure Conditions

|                                  |                                                   |                        |            |
|----------------------------------|---------------------------------------------------|------------------------|------------|
| Band                             | WLAN 5GHz                                         | TSL Permittivity       | 35.3       |
| Frequency [MHz]   Channel Number | 5775.0   155                                      | TSL Conductivity [S/m] | 5.19       |
| Group   UID                      | WLAN   10544-AAC                                  | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 5.25                                              | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-28              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 103.2 x 100.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 8.6 x 10.0    | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 67.5               |
| Dist 3dB Peak [mm]  |               | 6.6                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.061     | 0.059     |
| psSAR10g [W/Kg]  | 0.020     | 0.014     |
| Power Drift [dB] | -0.76     | -1.65     |

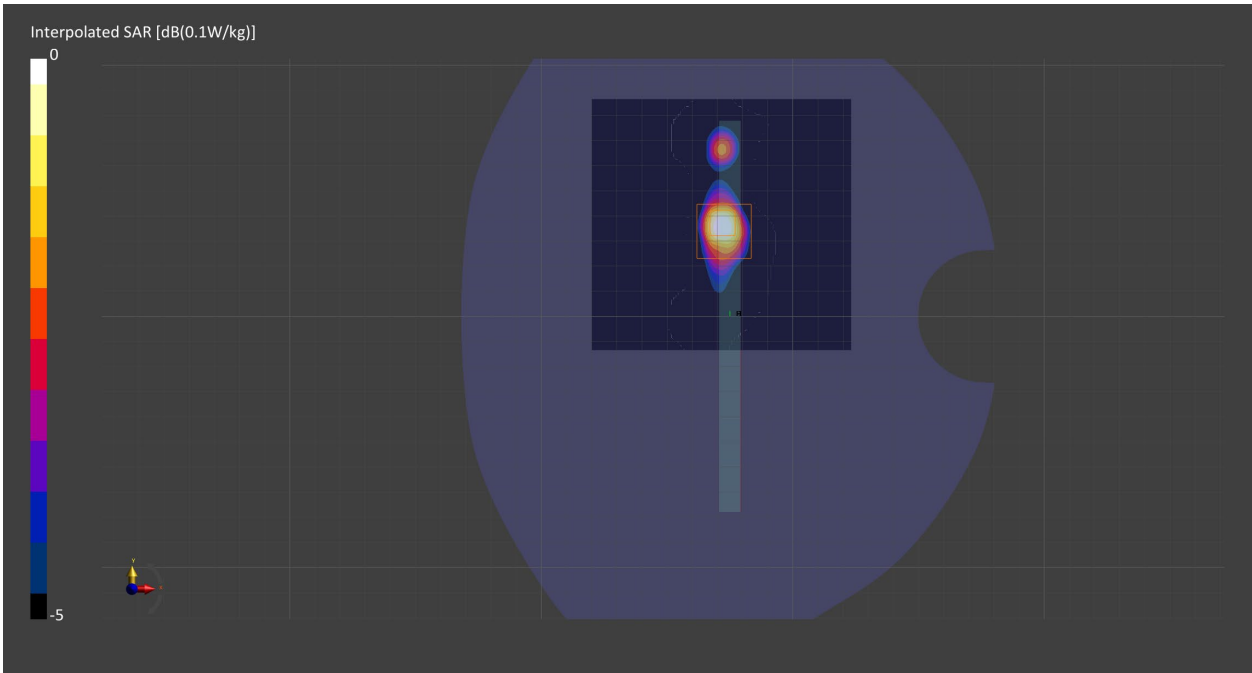

Measurement Report for WLAN 5GHz, TOUCH, Normal, Sub

Exposure Conditions

|                                  |                                                   |                        |                 |
|----------------------------------|---------------------------------------------------|------------------------|-----------------|
| Band                             | WLAN 5GHz                                         | TSL Permittivity       | 33.9            |
| Frequency [MHz]   Channel Number | 5775.0   155                                      | TSL Conductivity [S/m] | 5.11            |
| Group   UID                      | WLAN   10544-AAC                                  | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 4.7                                               | Test Distance [mm]     | 0.00            |
| Communication Configuration      | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) |                        |                 |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7549   2022-02-21 | Phantom | Twin-SAM V8.0 (30deg probe tilt) - SN2084 |
| DAE   Calibration Date   | DAE4 Sn1715   2022-02-22     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan |
|---------------------|---------------|-----------|
| Grid Extents [mm]   | 100.0 x 100.0 | x x       |
| Grid Steps [mm]     | 10.0 x 10.0   | x x       |
| Sensor Surface [mm] | 3.0           |           |
| Graded Grid         | Yes           |           |
| M2/M1 [%]           |               |           |
| Dist 3dB Peak [mm]  |               |           |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0         |           |
| psSAR10g [W/Kg]  | 0         |           |
| Power Drift [dB] | -0.49     |           |

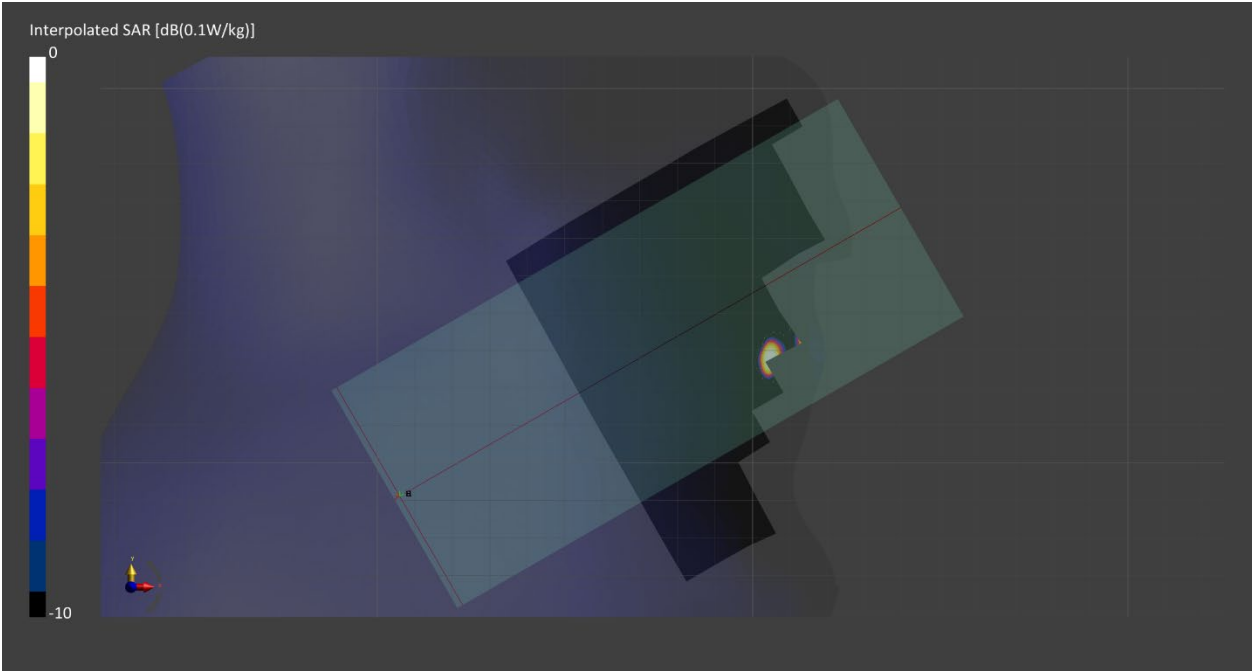

Measurement Report for WLAN 5GHz, REAR, Normal, Sub

Exposure Conditions

|                                  |                                                   |                        |            |
|----------------------------------|---------------------------------------------------|------------------------|------------|
| Band                             | WLAN 5GHz                                         | TSL Permittivity       | 33.9       |
| Frequency [MHz]   Channel Number | 5775.0   155                                      | TSL Conductivity [S/m] | 5.11       |
| Group   UID                      | WLAN   10544-AAC                                  | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 4.7                                               | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7549   2022-02-21 | Phantom | Twin-SAM V8.0 (30deg probe tilt) - SN2084 |
| DAE   Calibration Date   | DAE4 Sn1715   2022-02-22     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 100.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 58.9               |
| Dist 3dB Peak [mm]  |               | 6.6                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.091     | 0.092     |
| psSAR10g [W/Kg]  | 0.027     | 0.023     |
| Power Drift [dB] | -0.04     | -0.20     |

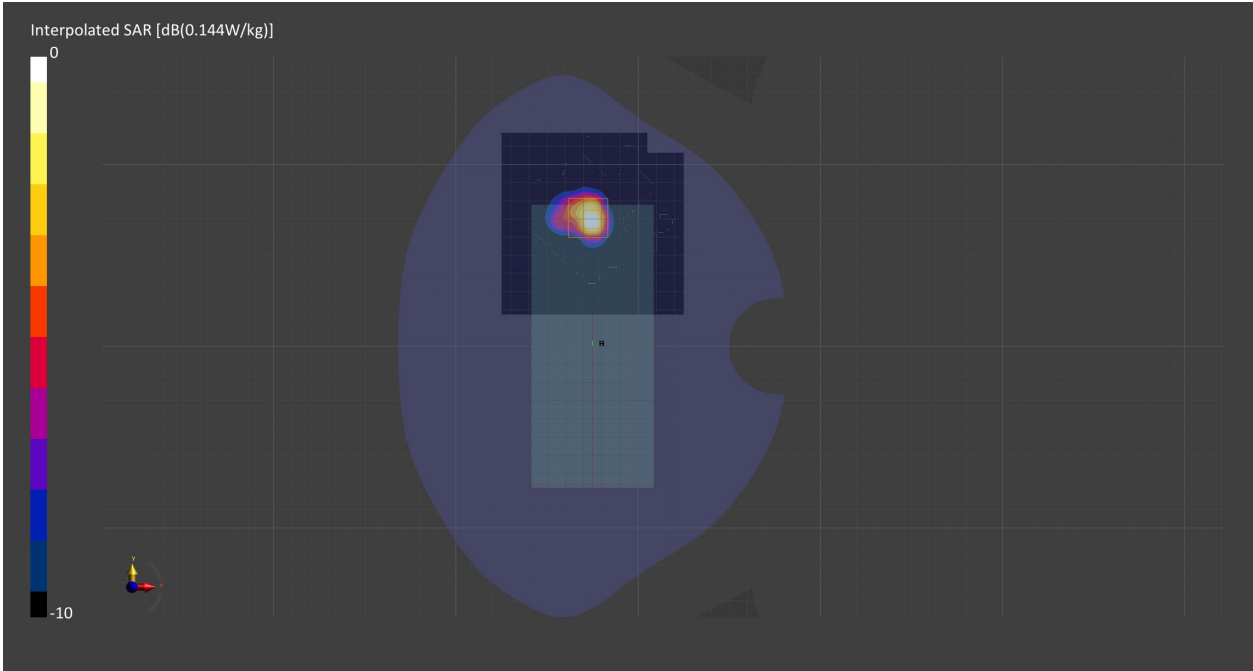

Measurement Report for WLAN 5GHz, TOUCH, Simul, Main

Exposure Conditions

|                                  |                                                   |                        |                 |
|----------------------------------|---------------------------------------------------|------------------------|-----------------|
| Band                             | WLAN 5GHz                                         | TSL Permittivity       | 35.3            |
| Frequency [MHz]   Channel Number | 5775.0   155                                      | TSL Conductivity [S/m] | 5.19            |
| Group   UID                      | WLAN   10544-AAC                                  | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 5.25                                              | Test Distance [mm]     | 0.00            |
| Communication Configuration      | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) |                        |                 |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-28              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 160.0 x 160.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 2.6 x 2.6 x 1.2    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 64.3               |
| Dist 3dB Peak [mm]  |               | 2.8                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.031     | 0.057     |
| psSAR10g [W/Kg]  | 0.008     | 0.009     |
| Power Drift [dB] | -0.61     | -0.03     |

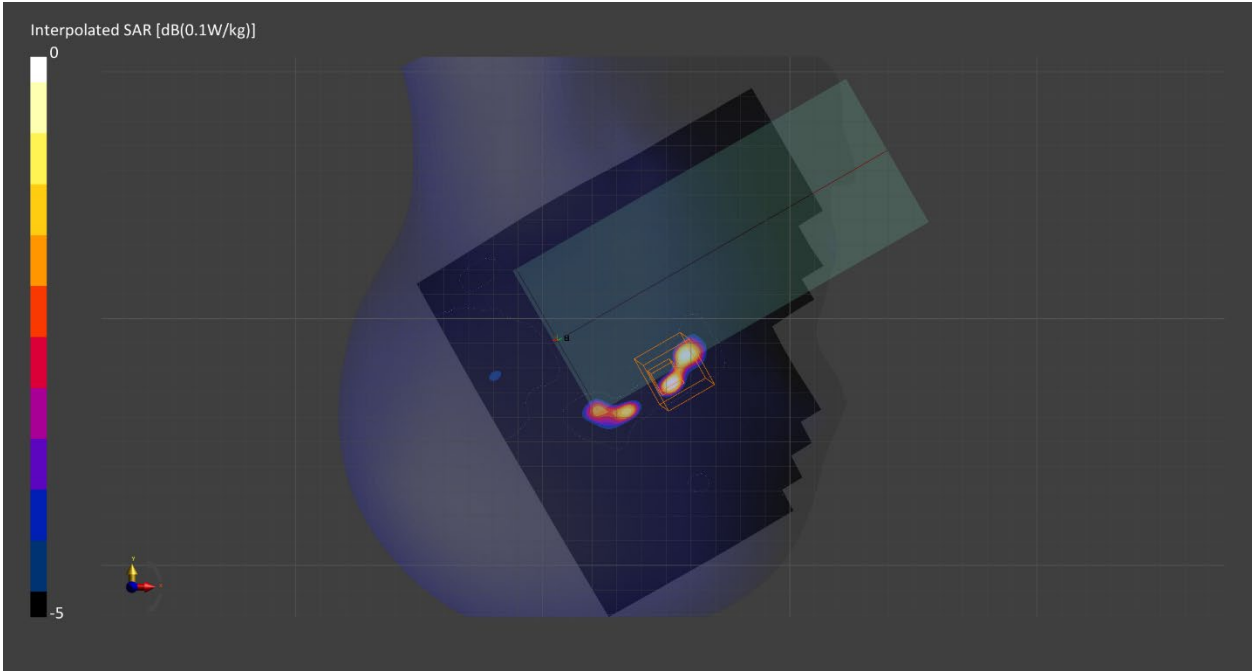

Measurement Report for WLAN 5GHz, REAR, Simul, Main

Exposure Conditions

|                                  |                                                   |                        |            |
|----------------------------------|---------------------------------------------------|------------------------|------------|
| Band                             | WLAN 5GHz                                         | TSL Permittivity       | 34.4       |
| Frequency [MHz]   Channel Number | 5775.0   155                                      | TSL Conductivity [S/m] | 5.18       |
| Group   UID                      | WLAN   10544-AAC                                  | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 5.25                                              | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL   Meas. Date | HBBL-600-10000   2022-Aug-01              |

Scans Setup

|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 60.0 x 60.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0 | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | Yes         | Yes                |
| M2/M1 [%]           |             | 64.6               |
| Dist 3dB Peak [mm]  |             | > 11.0             |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.014     | 0.009     |
| psSAR10g [W/Kg]  | 0.003     | 0         |
| Power Drift [dB] | -1.21     | 0.14      |

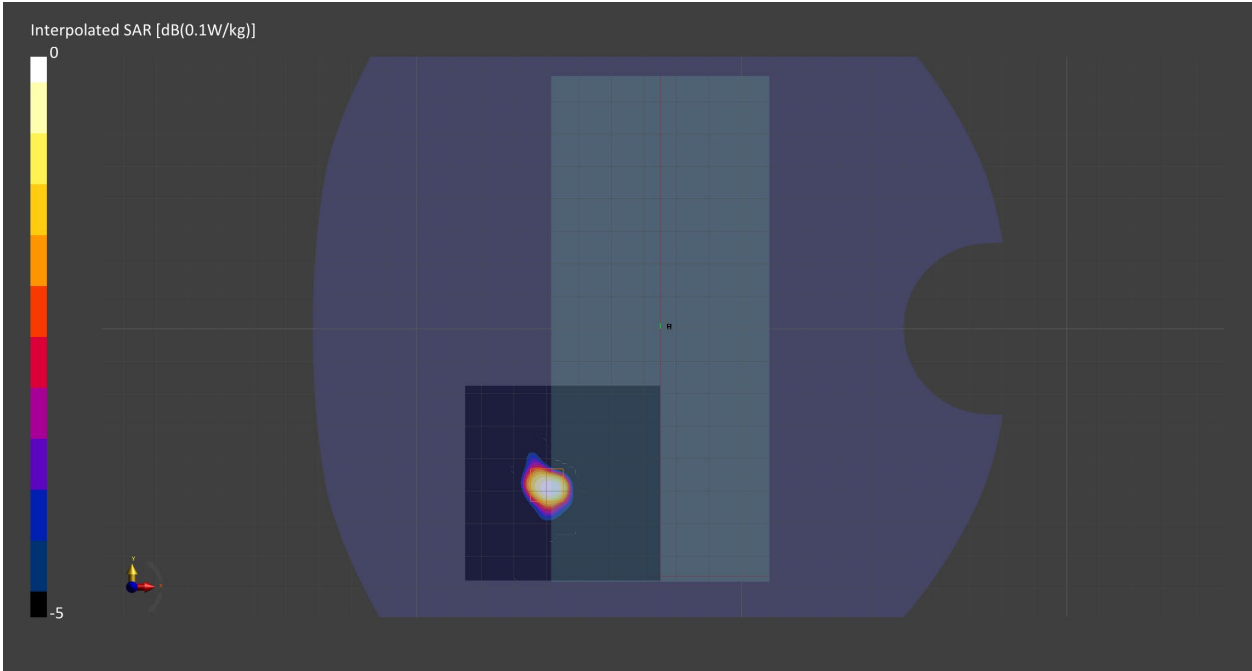

Measurement Report for WLAN 5GHz, EDGE 4, Simul, Main

Exposure Conditions

|                                  |                                                   |                        |            |
|----------------------------------|---------------------------------------------------|------------------------|------------|
| Band                             | WLAN 5GHz                                         | TSL Permittivity       | 35.3       |
| Frequency [MHz]   Channel Number | 5775.0   155                                      | TSL Conductivity [S/m] | 5.19       |
| Group   UID                      | WLAN   10544-AAC                                  | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 5.25                                              | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7709   2022-02-25 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2082 |
| DAE   Calibration Date   | DAE4 Sn1714   2022-02-23     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-28              |

Scans Setup

|                     | Area Scan    | Zoom Scan          |
|---------------------|--------------|--------------------|
| Grid Extents [mm]   | 51.6 x 120.0 | 30.0 x 30.0 x 22.0 |
| Grid Steps [mm]     | 8.6 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0          | 1.4                |
| Graded Grid         | Yes          | Yes                |
| M2/M1 [%]           |              | 66.5               |
| Dist 3dB Peak [mm]  |              | > 15.0             |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.032     | 0.029     |
| psSAR10g [W/Kg]  | 0.01      | 0.006     |
| Power Drift [dB] | -1.03     | -0.78     |

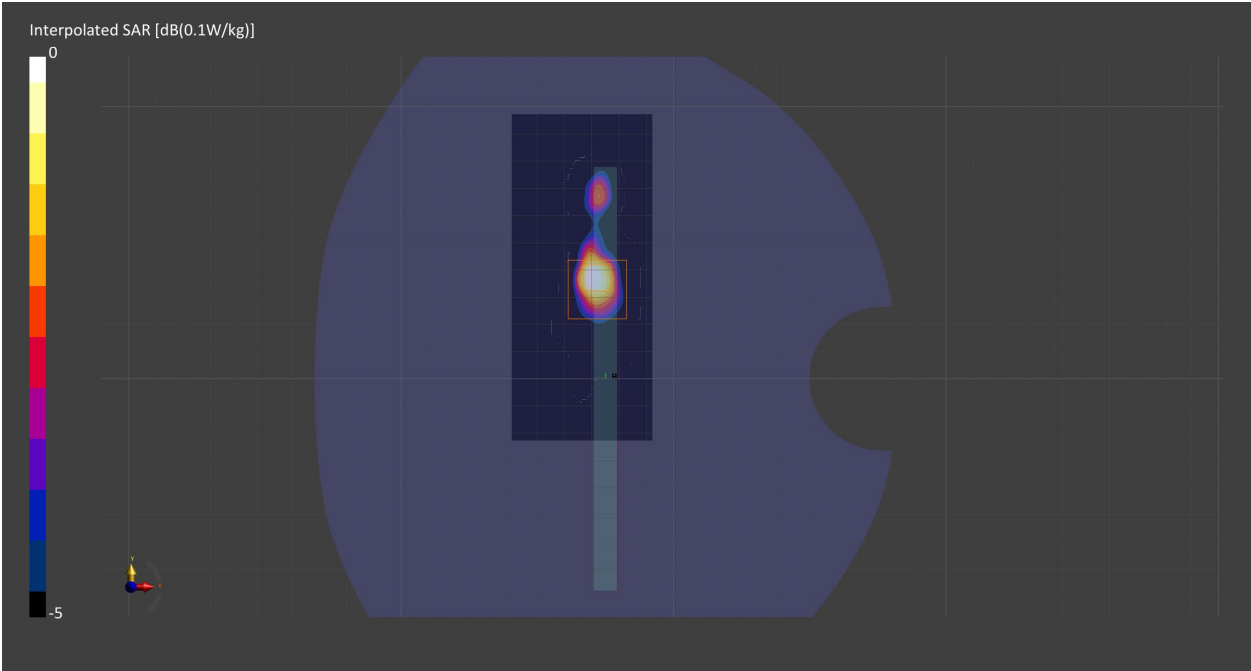

Measurement Report for WLAN 5GHz, TOUCH, Simul, Sub

Exposure Conditions

|                                  |                                                   |                        |                |
|----------------------------------|---------------------------------------------------|------------------------|----------------|
| Band                             | WLAN 5GHz                                         | TSL Permittivity       | 33.9           |
| Frequency [MHz]   Channel Number | 5775.0   155                                      | TSL Conductivity [S/m] | 5.11           |
| Group   UID                      | WLAN   10544-AAC                                  | Phantom Section   TSL  | LeftHead   HSL |
| Conversion Factor                | 4.7                                               | Test Distance [mm]     | 0.00           |
| Communication Configuration      | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) |                        |                |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7549   2022-02-21 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2084 |
| DAE   Calibration Date   | DAE4 Sn1715   2022-02-22     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-29              |

Scans Setup

|                     | Area Scan     | Zoom Scan |
|---------------------|---------------|-----------|
| Grid Extents [mm]   | 160.0 x 160.0 | x x       |
| Grid Steps [mm]     | 10.0 x 10.0   | x x       |
| Sensor Surface [mm] | 3.0           |           |
| Graded Grid         | Yes           |           |
| M2/M1 [%]           |               |           |
| Dist 3dB Peak [mm]  |               |           |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0         |           |
| psSAR10g [W/Kg]  | 0         |           |
| Power Drift [dB] | -1.63     |           |

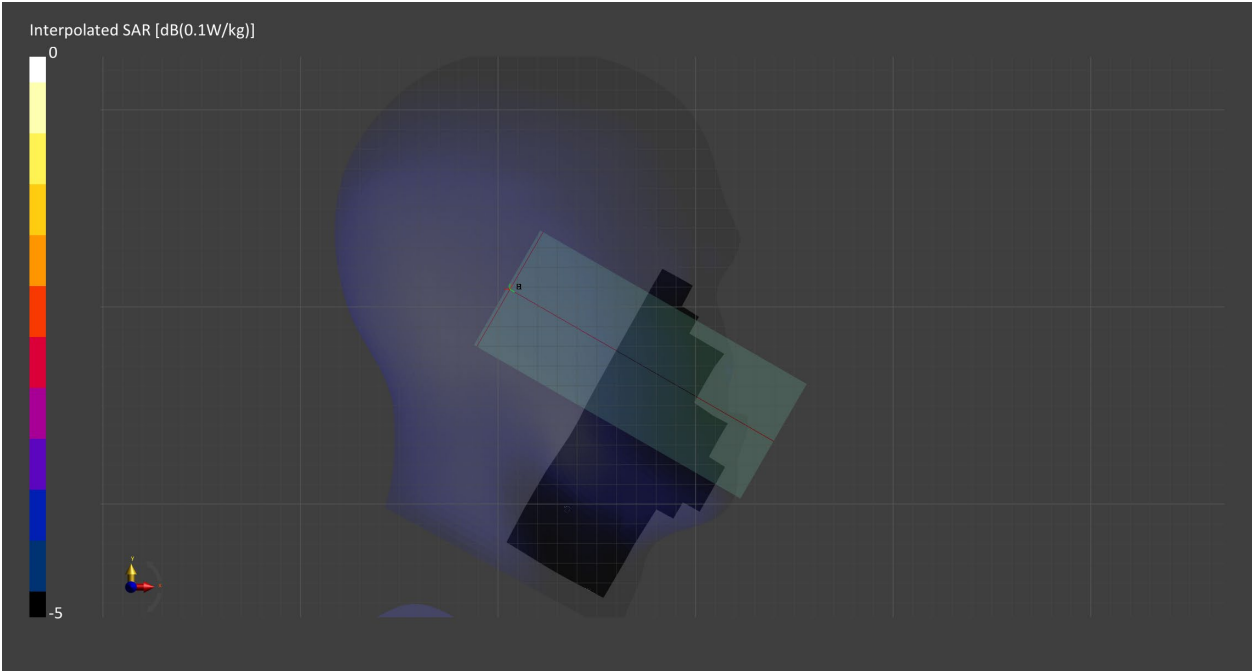

Measurement Report for WLAN 5GHz, REAR, Simul, Sub

Exposure Conditions

|                                  |                                                   |                        |            |
|----------------------------------|---------------------------------------------------|------------------------|------------|
| Band                             | WLAN 5GHz                                         | TSL Permittivity       | 33.9       |
| Frequency [MHz]   Channel Number | 5775.0   155                                      | TSL Conductivity [S/m] | 5.11       |
| Group   UID                      | WLAN   10544-AAC                                  | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 4.7                                               | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) |                        |            |

Hardware Setup


|                          |                              |                  |                                           |
|--------------------------|------------------------------|------------------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7549   2022-02-21 | Phantom          | Twin-SAM V8.0 (30deg probe tilt) - SN2084 |
| DAE   Calibration Date   | DAE4 Sn1715   2022-02-22     | TSL   Meas. Date | HBBL-600-10000   2022-Jul-29              |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 100.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 60.9               |
| Dist 3dB Peak [mm]  |               | 6.4                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.046     | 0.048     |
| psSAR10g [W/Kg]  | 0.014     | 0.011     |
| Power Drift [dB] | -0.04     | -0.06     |

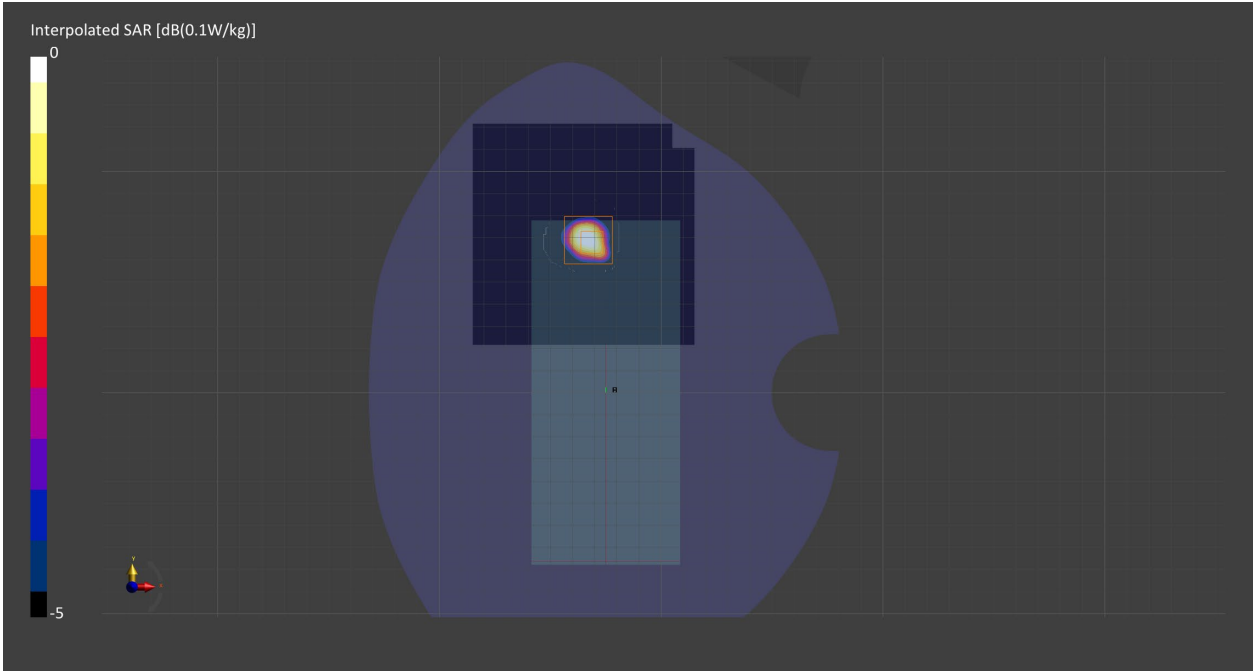

Measurement Report for ISM 2.4 GHz Band, TOUCH, Normal, Main

Exposure Conditions

|                                  |                                     |                        |                 |
|----------------------------------|-------------------------------------|------------------------|-----------------|
| Band                             | ISM 2.4 GHz Band                    | TSL Permittivity       | 37.9            |
| Frequency [MHz]   Channel Number | 2441.0   39                         | TSL Conductivity [S/m] | 1.82            |
| Group   UID                      | Bluetooth   10032-CAA               | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 8.15                                | Test Distance [mm]     | 0.00            |
| Communication Configuration      | IEEE 802.15.1 Bluetooth (GFSK, DH5) |                        |                 |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.9 x 4.9 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 76.7               |
| Dist 3dB Peak [mm]  |               | 5.9                |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.182     | 0.191     |
| psSAR10g [W/Kg]  | 0.068     | 0.069     |
| Power Drift [dB] | -0.04     | -0.02     |

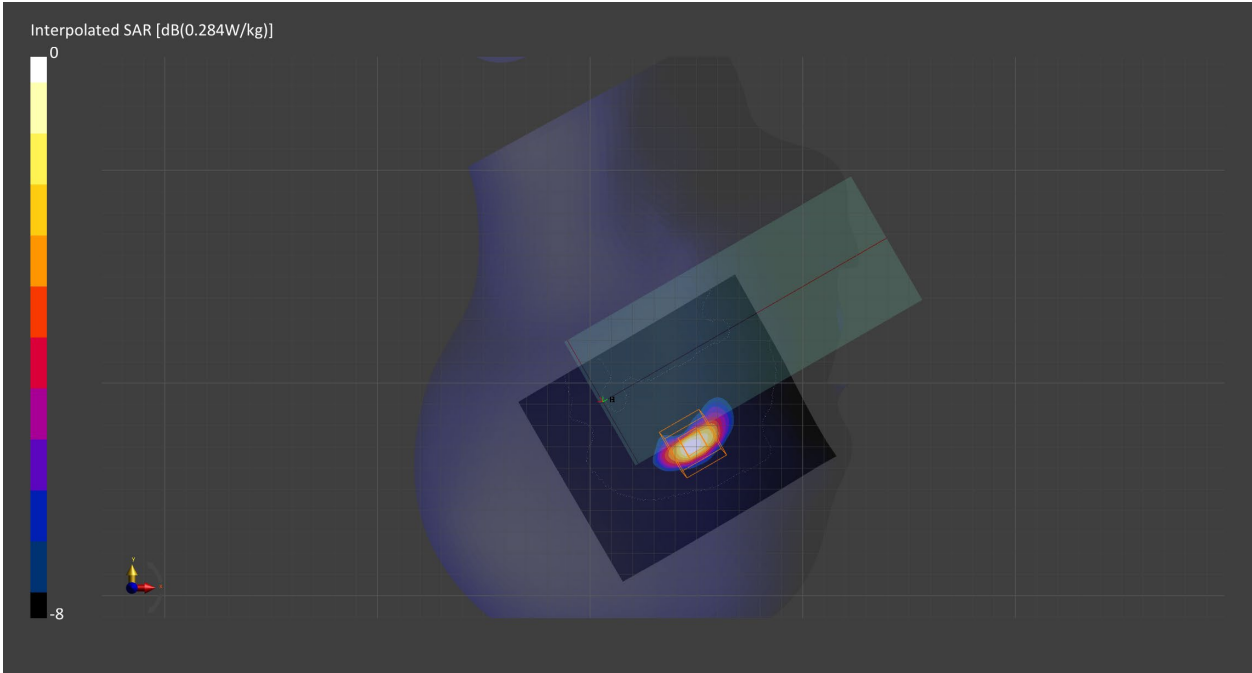

Measurement Report for ISM 2.4 GHz Band, REAR, Normal, Main

Exposure Conditions

|                                  |                                     |                        |            |
|----------------------------------|-------------------------------------|------------------------|------------|
| Band                             | ISM 2.4 GHz Band                    | TSL Permittivity       | 37.9       |
| Frequency [MHz]   Channel Number | 2441.0   39                         | TSL Conductivity [S/m] | 1.82       |
| Group   UID                      | Bluetooth   10032-CAA               | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.15                                | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.15.1 Bluetooth (GFSK, DH5) |                        |            |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 100.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 76.6               |
| Dist 3dB Peak [mm]  |               | > 15.0             |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.044     | 0.044     |
| psSAR10g [W/Kg]  | 0.020     | 0.019     |
| Power Drift [dB] | 0.11      | 0.10      |

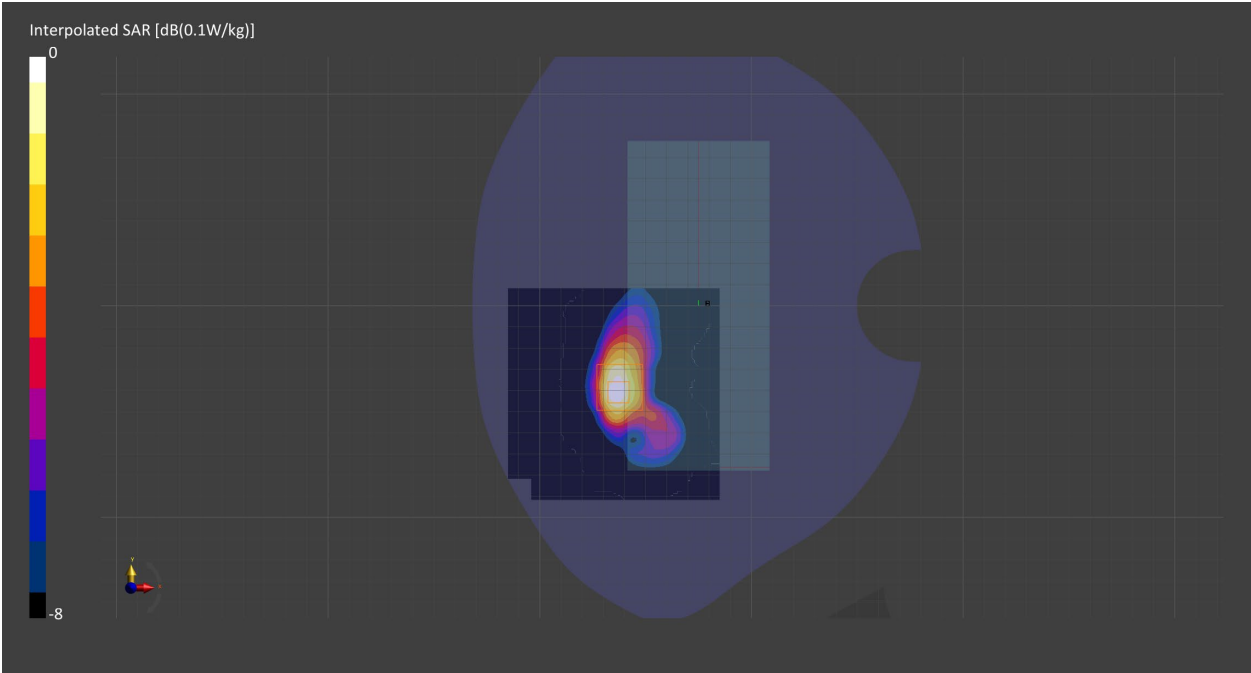

Measurement Report for ISM 2.4 GHz Band, EDGE 4, Normal, Main

Exposure Conditions

|                                  |                                     |                        |            |
|----------------------------------|-------------------------------------|------------------------|------------|
| Band                             | ISM 2.4 GHz Band                    | TSL Permittivity       | 37.9       |
| Frequency [MHz]   Channel Number | 2441.0   39                         | TSL Conductivity [S/m] | 1.82       |
| Group   UID                      | Bluetooth   10032-CAA               | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.15                                | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.15.1 Bluetooth (GFSK, DH5) |                        |            |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     |              |                    |
|---------------------|--------------|--------------------|
|                     | Area Scan    | Zoom Scan          |
| Grid Extents [mm]   | 80.0 x 180.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0  | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0          | 1.4                |
| Graded Grid         | Yes          | Yes                |
| M2/M1 [%]           |              | 79.1               |
| Dist 3dB Peak [mm]  |              | 8.0                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.065     | 0.068     |
| psSAR10g [W/Kg]  | 0.029     | 0.030     |
| Power Drift [dB] | -0.04     | 0.05      |

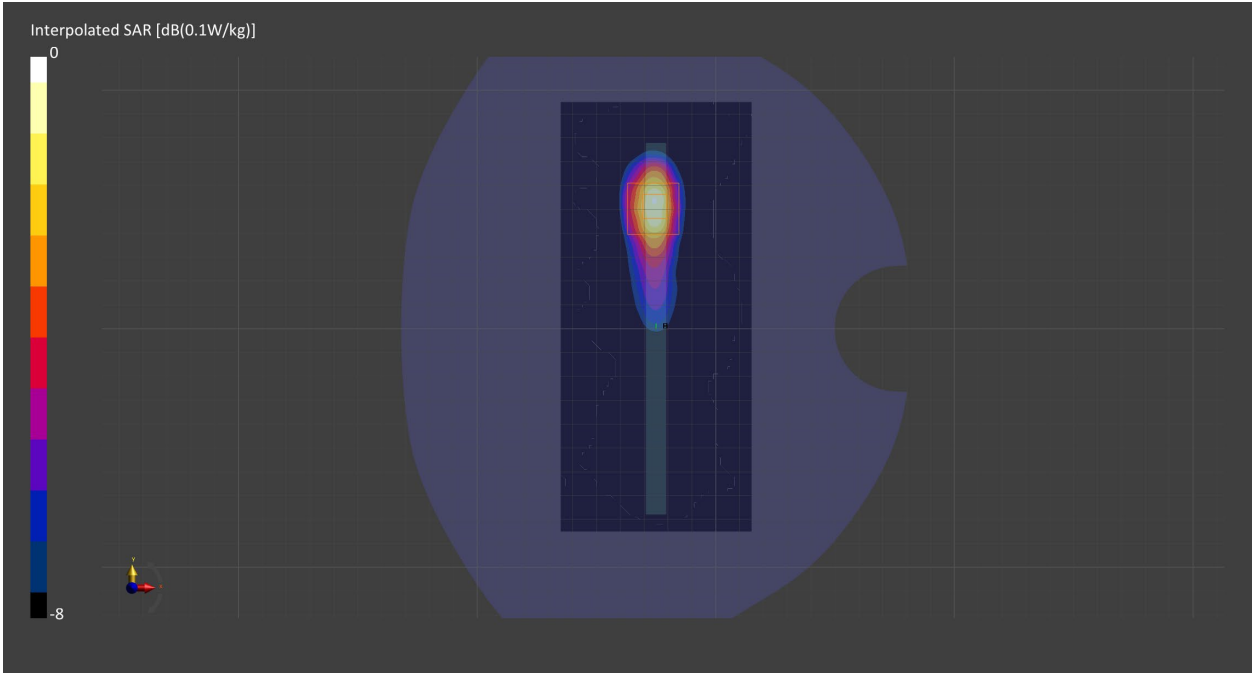

Measurement Report for ISM 2.4 GHz Band, TILT, Normal, Sub

Exposure Conditions

|                                  |                                     |                        |                |
|----------------------------------|-------------------------------------|------------------------|----------------|
| Band                             | ISM 2.4 GHz Band                    | TSL Permittivity       | 39.1           |
| Frequency [MHz]   Channel Number | 2441.0   39                         | TSL Conductivity [S/m] | 1.86           |
| Group   UID                      | Bluetooth   10032-CAA               | Phantom Section   TSL  | LeftHead   HSL |
| Conversion Factor                | 8.15                                | Test Distance [mm]     | 0.00           |
| Communication Configuration      | IEEE 802.15.1 Bluetooth (GFSK, DH5) |                        |                |

Hardware Setup


|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan |
|---------------------|---------------|-----------|
| Grid Extents [mm]   | 120.0 x 160.0 | x x       |
| Grid Steps [mm]     | 10.0 x 10.0   | x x       |
| Sensor Surface [mm] | 3.0           |           |
| Graded Grid         | Yes           |           |
| M2/M1 [%]           |               |           |
| Dist 3dB Peak [mm]  |               |           |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0         |           |
| psSAR10g [W/Kg]  | 0         |           |
| Power Drift [dB] | 2.19      |           |

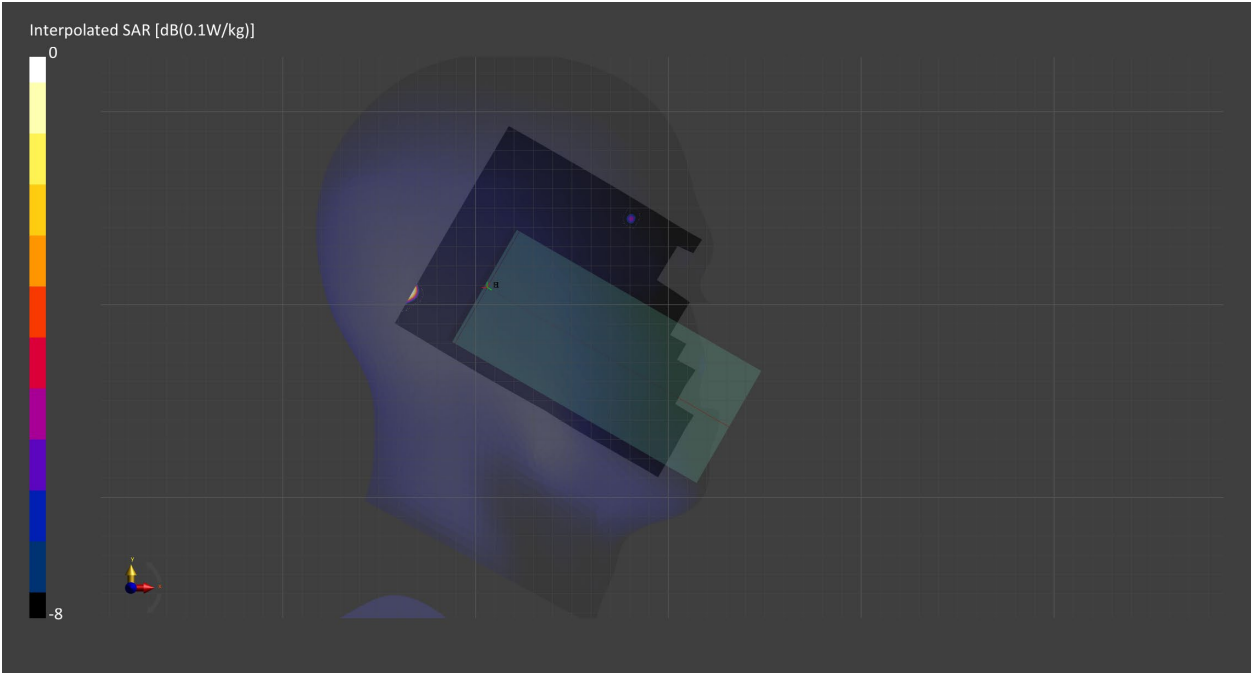

Measurement Report for ISM 2.4 GHz Band, REAR, Normal, Sub

Exposure Conditions

|                                  |                                     |                        |            |
|----------------------------------|-------------------------------------|------------------------|------------|
| Band                             | ISM 2.4 GHz Band                    | TSL Permittivity       | 37.9       |
| Frequency [MHz]   Channel Number | 2441.0   39                         | TSL Conductivity [S/m] | 1.82       |
| Group   UID                      | Bluetooth   10032-CAA               | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.15                                | Test Distance [mm]     | 10.00      |
| Communication Configuration      | IEEE 802.15.1 Bluetooth (GFSK, DH5) |                        |            |

Hardware Setup

|                          |                              |         |                                           |
|--------------------------|------------------------------|---------|-------------------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7711   2022-03-11 | Phantom | Twin-SAM V5.0 (30deg probe tilt) - SN1742 |
| DAE   Calibration Date   | DAE4 Sn1716   2022-03-08     | TSL     | HBBL-600-10000                            |

Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| M2/M1 [%]           |               | 74.4               |
| Dist 3dB Peak [mm]  |               | > 15.0             |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.024     | 0.034     |
| psSAR10g [W/Kg]  | 0.011     | 0.012     |
| Power Drift [dB] | -0.03     | 0.09      |

