



# FCC SAR TEST REPORT

**Report No.:** SET2020-04982

**Product:** USB Modem

**Trade Name:** ZTE

**Model No.:** A002ZT, MF863

**FCC ID:** SRQ-MF863

**Applicant:** ZTE CORPORATION

**Address:** ZTE Plaza, Keji Road South, Shenzhen, China.

**Issued by:** CCIC Southern Testing Co., Ltd.

**Lab Location:** Electronic Testing Building, No. 43 Shahe Road, Xili Street,  
Nanshan District, Shenzhen, Guangdong, China.



**Tel:** 86 755 26627338      **Fax:** 86 755 26627238

**Mail:** manager@ccic-set.com      **Website:** <http://www.ccic-set.com>

This test report consists of 46 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



## Test Report

**Product. ....:** USB Modem  
**Model No. ....:** A002ZT, MF863  
**Brand Name.....:** ZTE  
**FCC ID.....:** SRQ-MF863  
**Applicant.....:** ZTE CORPORATION  
**Applicant Address.....:** ZTE Plaza, Keji Road South, Shenzhen, China  
**Manufacturer.....:** ZTE CORPORATION  
**Manufacturer Address:** ZTE Plaza, Keji Road South, Shenzhen, China  
**Test Standards.....:** **47CFR §2.1093-** Radiofrequency Radiation Exposure Evaluation: Portable Devices;  
**ANSI C95.1-1992:** Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.( IEEE Std C95.1-1991)  
**IEEE 1528-2013:** IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques  
**Test Result.....:** Pass  
**Test Date.....:** 2020.05.10-2020.05.17  
**Tested by .....**  2020-06-08  
\_\_\_\_\_  
Mei Chun, Test Engineer  
**Reviewed by.....:**  2020-06-08  
\_\_\_\_\_  
Chris You, Senior Engineer  
**Approved by.....:**  2020-06-08  
\_\_\_\_\_  
Shuangwen Zhang, Manager

## Contents

|                                                                  |           |
|------------------------------------------------------------------|-----------|
| Test Report .....                                                | 2         |
| <b>1. Administrative Data.....</b>                               | <b>4</b>  |
| <b>2. Equipment Under Test (EUT) .....</b>                       | <b>5</b>  |
| <b>3. SAR Summary .....</b>                                      | <b>7</b>  |
| <b>4. Specific Absorption Rate (SAR) .....</b>                   | <b>8</b>  |
| <b>5. Tissue check and recommend Dielectric Parameters .....</b> | <b>12</b> |
| <b>6. SAR measurement procedure .....</b>                        | <b>17</b> |
| <b>7. Conducted RF Output Power .....</b>                        | <b>18</b> |
| <b>8. Scaling Factor calculation .....</b>                       | <b>32</b> |
| <b>9. Test Results .....</b>                                     | <b>34</b> |
| <b>10. Simultaneous Transmissions Analysis .....</b>             | <b>40</b> |
| <b>11. Measurement Uncertainty .....</b>                         | <b>41</b> |
| <b>12. Equipment List .....</b>                                  | <b>45</b> |
| ANNEX A: Appendix A: SAR System performance Check Plots.....     | 46        |
| ANNEX B: Appendix B: SAR Measurement results Plots.....          | 46        |
| ANNEX C: Appendix C: Calibration reports .....                   | 46        |
| ANNEX D: Appendix D: SAR Test Setup.....                         | 46        |

## 1. Administrative Data

### 1.1 Testing Laboratory

**Test Site:** CCIC Southern Testing Co., Ltd.

**Address:** Electronic Testing Building, No. 43 Shahe Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China

**CNAS Lab Code:** CCIC-SET is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

**NVLAP Lab Code:** CCIC-SET is a third party testing organization accredited by NVLAP according to ISO/IEC 17025. The accreditation certificate number is 201008-0.

**FCC Registration:** CCIC-SET . EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN5031, valid time is until December 31, 2020.

**ISED Registration:** CCIC-SET EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until December 31, 2020.

**Test Environment** Temperature (°C): 21°C

**Condition:** Relative Humidity (%): 60%

Atmospheric Pressure (kPa): 86KPa-106KPa

## 2. Equipment Under Test (EUT)

### Identification of the Equipment under Test

|                             |                                                                                                              |
|-----------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Device Type:</b>         | Portable                                                                                                     |
| <b>Exposure Category:</b>   | Population/Uncontrolled                                                                                      |
| <b>Sample Name:</b>         | USB Modem                                                                                                    |
| <b>Brand Name:</b>          | ZTE                                                                                                          |
| <b>Model Name:</b>          | A002ZT,MF863                                                                                                 |
|                             | GSM850/900/1800/1900MHz,<br>WCDMA 2100MHz/900MHz/850MHz/1900MHz/1700MHz<br>LTE Band 1/2/3/4/8/11/12/17/28/41 |
| Support Band                |                                                                                                              |
|                             | GSM850MHz/1900MHz,<br>WCDMA 850MHz/1900MHz/1700MHz,<br>LTE Band 2/4/12/17/41                                 |
| Test Band                   |                                                                                                              |
| IMEI                        | 868402040001082                                                                                              |
| Device Class                | Class B                                                                                                      |
| Multi Class                 | GPRS: Class 10; EGPRS: Class 12                                                                              |
| Development Stage           | Identical Prototype                                                                                          |
| <b>General description:</b> |                                                                                                              |
| Accessories                 | Power Supply                                                                                                 |
| Hotspot                     | N/A                                                                                                          |
| Antenna type                | Internal Antenna                                                                                             |
| Operation mode              | GSM /WCDMA / LTE                                                                                             |
| Modulation mode             | GSM(GMSK),UMTS(QPSK),LTE(QPSK,16QAM,64QAM),                                                                  |
| DTM mode                    | Not support                                                                                                  |
| Hardware Version            | md8B                                                                                                         |
| Software Version            | BD_A002ZTV0.0.0B03                                                                                           |
| Battery options :           | N/A                                                                                                          |
| Max. SAR Value              | Body: 1.358 W/Kg(Limit:1.6W/Kg, 5mm distance)                                                                |

### NOTE:

- The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
- These two model only model name is different

### EUT testing configuration

| Tested frequency range(s)    | Transmitter Frequency Range                   | Receiver Frequency Range |
|------------------------------|-----------------------------------------------|--------------------------|
| GSM850:                      | 824-849 MHz                                   | 869-894 MHz              |
| GSM1900:                     | 1850-1910 MHz                                 | 1930-1990 MHz            |
| UMTS Band II:                | 1850-1910 MHz                                 | 1930-1990 MHz            |
| UMTS Band IV:                | 1710-1755 MHz                                 | 2110-2155 MHz            |
| UMTS Band V:                 | 824-849 MHz                                   | 869-894 MHz              |
| LTE Band2:                   | 1850-1910 MHz                                 | 1930-1990 MHz            |
| LTE Band4:                   | 1710-1755 MHz                                 | 2110-2155 MHz            |
| LTE Band12:                  | 698-716 MHz                                   | 728-746 MHz              |
| LTE Band17:                  | 704-716 MHz                                   | 734-746 MHz              |
| LTE Band41:                  | 2496-2690 MHz                                 |                          |
| Test channels(low-mid-high): | 128-190-251(GSM850)                           |                          |
|                              | 512-661-810(GSM1900)                          |                          |
|                              | 9262-9400-9538(UMTS Band II)                  |                          |
|                              | 1312-1412-1513(UMTS Band IV)                  |                          |
|                              | 4132-4183-4233(UMTS Band V)                   |                          |
|                              | 18700-18900-19100( LTE Band 2 Bandwidth 20M)  |                          |
|                              | 20050-20175-20300( LTE Band 4 Bandwidth 20M)  |                          |
|                              | 23060-23095-23130( LTE Band 12 Bandwidth 10M) |                          |
|                              | 23780-23790-23800( LTE Band 17 Bandwidth 10M) |                          |
|                              | 39750-40620-41490( LTE Band 41 Bandwidth 20M) |                          |

### 3. SAR Summary

| Exposure Position      | Frequency Band | Scaled 1g-SAR(W/kg) | Highest Scaled 1g-SAR(W/kg) |
|------------------------|----------------|---------------------|-----------------------------|
| Body-worn<br>(5mm Gap) | GSM850         | 1.248               | 1.358                       |
|                        | GSM1900        | 0.329               |                             |
|                        | WCDMA Band II  | 0.776               |                             |
|                        | WCDMA Band IV  | 1.128               |                             |
|                        | WCDMA Band V   | 1.314               |                             |
|                        | LTE Band 2     | 0.772               |                             |
|                        | LTE Band 4     | 1.312               |                             |
|                        | LTE Band 12    | 0.818               |                             |
|                        | LTE Band 17    | 0.743               |                             |
|                        | LTE Band 41    | 1.358               |                             |

## 4. Specific Absorption Rate (SAR)

### 4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \frac{\delta T}{\delta t}$$

where C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

where  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 4.2 Applicable Standards and Limits

### 4.2.1 Applicable Standards

|                 |                                                                                                                                                                                  |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 47CFR §2.1093   | Radiofrequency Radiation Exposure Evaluation: Portable Devices                                                                                                                   |
| ANSI C95.1–1992 | Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.( IEEE Std C95.1-1991)                                                   |
| IEEE 1528–2013  | IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques |
| KDB 248227 D01  | v02r02 802.11 Wi-Fi SAR                                                                                                                                                          |
| KDB 447498 D01  | v06 General RF Exposure Guidance                                                                                                                                                 |
| KDB 648474 D04  | v01r03 Handset SAR                                                                                                                                                               |
| KDB 865664 D01  | v01r04 SAR Measurement 100MHz to 6GHz                                                                                                                                            |
| KDB 865664 D02  | v01r02 SAR Exposure Reporting                                                                                                                                                    |
| KDB 941225 D01  | v03r01 3G SAR Procedures                                                                                                                                                         |
| KDB 941225 D05  | v02r05 SAR for LTE Devices                                                                                                                                                       |
| KDB 941225 D05A | v01r02 LTE Rel.10 KDB Inquiry Sheet                                                                                                                                              |
| KDB 941225 D06  | v02r01 Hotspot Mode                                                                                                                                                              |
|                 |                                                                                                                                                                                  |
|                 |                                                                                                                                                                                  |

### 4.2.2 RF exposure Limits

| Human Exposure                               | Uncontrolled Environment<br>General Population |
|----------------------------------------------|------------------------------------------------|
| <b>Spatial Peak SAR*</b><br>(Brain/Body)     | <b>1.60 mW/g</b>                               |
| <b>Spatial Average SAR**</b><br>(Whole Body) | 0.08 mW/g                                      |
| <b>Spatial Peak SAR***</b><br>(Limbs)        | 4.00 mW/g                                      |

The limit applied in this test report is shown in bold letters.

Notes:

\* The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

\*\* The Spatial Average value of the SAR averaged over the whole body.

\*\*\* The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

### 4.3 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SATIMO. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.




SAM Twin Phantom

### 4.4 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SATIMO as an integral part of the COMOSAR test system.

The device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

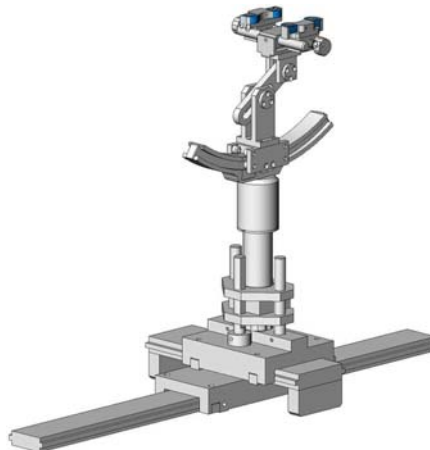

Device holder

## 4.5 Probe Specification




|               |                                                                                                                                                                                    |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction  | Symmetrical design with triangular core<br>Interleaved sensors<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |
| Calibration   | ISO/IEC 17025 calibration service available.                                                                                                                                       |
| Frequency     | 700 MHz to 3 GHz;<br>Linearity: $\pm 0.5$ dB (700 MHz to 3 GHz)                                                                                                                    |
| Directivity   | $\pm 0.25$ dB in HSL (rotation around probe axis)<br>$\pm 0.5$ dB in tissue material (rotation normal to probe axis)                                                               |
| Dynamic Range | $1.5 \mu\text{W/g}$ to $100 \text{ mW/g}$ ;<br>Linearity: $\pm 0.5$ dB                                                                                                             |
| Dimensions    | Overall length: 330 mm (Tip: 20 mm)<br>Tip diameter: 5 mm<br>Distance from probe tip to dipole centers: $<2.7$ mm                                                                  |
| Application   | General dosimetry up to 3 GHz<br>Dosimetry in strong gradient fields<br>Compliance tests of mobile phones                                                                          |
| Compatibility | COMOSAR                                                                                                                                                                            |

### Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

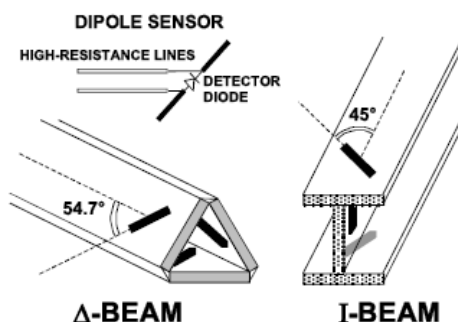

## 5. Tissue check and recommend Dielectric Parameters

### 5.1 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness Power drifts in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Table 1: Recommended Dielectric Performance of Tissue

| Ingredients<br>(% by<br>weight ) | Frequency (MHz) |       |       |      |       |       |       |      |      |      |       |       |
|----------------------------------|-----------------|-------|-------|------|-------|-------|-------|------|------|------|-------|-------|
|                                  | 450             |       | 835   |      | 915   |       | 1900  |      | 2450 |      | 2600  |       |
| Tissue Type                      | Head            | Body  | Head  | Body | Head  | Body  | Head  | Body | Head | Body | Head  | Body  |
| Water                            | 38.56           | 51.16 | 41.46 | 52.4 | 41.05 | 56.0  | 54.9  | 40.4 | 62.7 | 73.2 | 55.24 | 64.49 |
| Salt (NaCl)                      | 3.95            | 1.49  | 1.45  | 1.4  | 1.35  | 0.76  | 0.18  | 0.5  | 0.5  | 0.04 | 0.5   | 0.024 |
| Sugar                            | 56.32           | 46.78 | 56.0  | 45.0 | 56.5  | 41.76 | 0.0   | 58.0 | 0.0  | 0.0  | 0.0   | 0.0   |
| HEC                              | 0.98            | 0.52  | 1.0   | 1.0  | 1.0   | 1.21  | 0.0   | 1.0  | 0.0  | 0.0  | 0.0   | 0.0   |
| Bactericide                      | 0.19            | 0.05  | 0.1   | 0.1  | 0.1   | 0.27  | 0.0   | 0.1  | 0.0  | 0.0  | 0.0   | 0.0   |
| Triton x-100                     | 0.0             | 0.0   | 0.0   | 0.0  | 0.0   | 0.0   | 0.0   | 0.0  | 36.8 | 0.0  | 44.45 | 32.25 |
| DGBE                             | 0.0             | 0.0   | 0.0   | 0.0  | 0.0   | 0.0   | 44.92 | 0.0  | 0.0  | 26.7 | 0.0   | 26.7  |
| Dielectric<br>Constant           | 43.42           | 58.0  | 42.54 | 56.1 | 42.0  | 56.8  | 39.9  | 54.0 | 39.2 | 52.5 | 39.0  | 52.5  |
| Conductivity<br>(s/m)            | 0.85            | 0.83  | 0.91  | 0.95 | 1.0   | 1.07  | 1.42  | 1.45 | 1.80 | 1.78 | 1.96  | 2.16  |

MSL/HSL750 (Body and Head liquid for 650 – 850 MHz)

|                        |                                                                                                                                                         |  |                     |  |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|--|---------------------|--|
| Item                   | Head Tissue Simulation Liquid HSL750<br>Muscle(body)Tissue Simulation Liquid MSL750                                                                     |  |                     |  |
| H2O                    | Water, 35 – 58%                                                                                                                                         |  |                     |  |
| Sucrose                | Sugar, white, refined, 40-60%                                                                                                                           |  |                     |  |
| NaCl                   | Sodium Chloride, 0-6%                                                                                                                                   |  |                     |  |
| Hydroxyethyl-cellulose | Medium Viscosity (CAS# 9004-62-0), <0.3%                                                                                                                |  |                     |  |
| Preventol-D7           | Preservative: aqueous preparation, (CAS# 55965-84-9), containing<br>5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone,<br>0.1-0.7% |  |                     |  |
| Frequency (MHz)        | Head $\epsilon_r$                                                                                                                                       |  | Body $\epsilon_r$   |  |
| 750                    | 41.9                                                                                                                                                    |  | 55.2                |  |
|                        | Head $\sigma$ (S/m)                                                                                                                                     |  | Body $\sigma$ (S/m) |  |
|                        | 0.89                                                                                                                                                    |  | 0.97                |  |

Note: The liquid of 700MHz&2600MHz typical liquid composition is provided by SATIMO.

| Frequency:5200/5400/5600/5800MHz |               |
|----------------------------------|---------------|
| Ingredients                      | (% by weight) |
| Water                            | 78            |
| Mineral oil                      | 11            |
| Emulsifiers                      | 9             |
| Additives and Salt               | 2             |

Table 2 Recommended Tissue Dielectric Parameters

| Frequency (MHz) | Head Tissue  |                      | Body Tissue  |                      |
|-----------------|--------------|----------------------|--------------|----------------------|
|                 | $\epsilon_r$ | $\sigma(\text{S/m})$ | $\epsilon_r$ | $\sigma(\text{S/m})$ |
| 150             | 52.3         | 0.76                 | 61.9         | 0.80                 |
| 300             | 45.3         | 0.87                 | 58.2         | 0.92                 |
| 450             | 43.5         | 0.87                 | 56.7         | 0.94                 |
| 835             | 41.5         | 0.90                 | 55.2         | 0.97                 |
| 900             | 41.5         | 0.97                 | 55.0         | 1.05                 |
| 915             | 41.5         | 0.98                 | 55.0         | 1.06                 |
| 1450            | 40.5         | 1.20                 | 54.0         | 1.30                 |
| 1610            | 40.3         | 1.29                 | 53.8         | 1.40                 |
| 1800-2000       | 40.0         | 1.40                 | 53.3         | 1.52                 |
| 2450            | 39.2         | 1.80                 | 52.7         | 1.95                 |
| 3000            | 38.5         | 2.40                 | 52.0         | 2.73                 |
| 5800            | 35.3         | 5.27                 | 48.2         | 6.00                 |

## 5.2 Simulate liquid

Liquid check results:


Table 3: Performance of Body Tissue Simulating Liquid

| Temperature: 23.2°C; Humidity: 64%; |           |                         |                             |
|-------------------------------------|-----------|-------------------------|-----------------------------|
| /                                   | Frequency | Permittivity $\epsilon$ | Conductivity $\sigma$ (S/m) |
| Target value                        | 750MHz    | 55.5±5%                 | 0.96±5%                     |
| Validation value<br>(2020-05-10)    | 750MHz    | 55.53                   | 0.97                        |
| Target value                        | 835MHz    | 55.2±5%                 | 0.97±5%                     |
| Validation value<br>(2020-05-11)    | 835MHz    | 55.23                   | 0.98                        |
| Target value                        | 1800MHz   | 53.3±5%                 | 1.52±5%                     |
| Validation value<br>(2020-05-13)    | 1800MHz   | 53.35                   | 1.51                        |
| Target value                        | 1900MHz   | 53.3±5%                 | 1.52±5%                     |
| Validation value<br>(2020-05-14)    | 1900MHz   | 53.28                   | 1.53                        |
| Target value                        | 2600MHz   | 52.5±5%                 | 2.16±5%                     |
| Validation value<br>(2020-05-17)    | 2600MHz   | 52.54                   | 2.17                        |

## SAR System validation

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of  $\pm 10\%$ . The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The following procedure, recommended for performing validation tests using box phantoms is based on the procedures described in the IEEE standard P1528. Setup according to the setup diagram below:

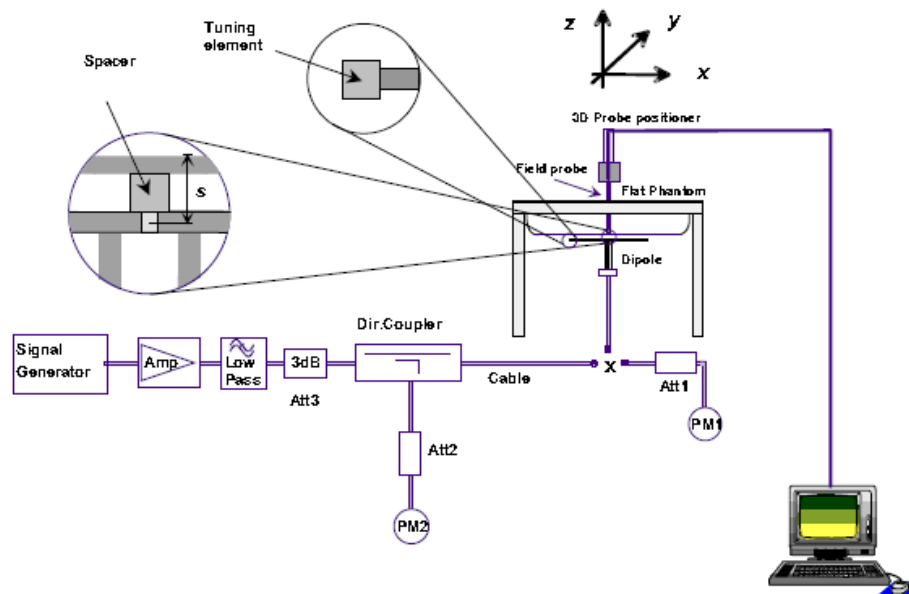

With the SG and Amp and with directional coupler in place, set up the source signal at the relevant frequency and use a power meter to measure the power at the end of the SMA cable that you intend to connect to the balanced dipole. Adjust the SG to make this, say, 0.01W (10 dBm). If this level is too high to read directly with the power meter sensor, insert a calibrated attenuator (e.g. 10 or 20 dB) and make a suitable correction to the power meter reading.

- Note 1: In this method, the directional coupler is used for monitoring rather than setting the exact feed power level. If, however, the directional coupler is used for power measurement, you should check the frequency range and power rating of the coupler and measure the coupling factor (referred to output) at the test frequency using a VNA.
- Note 2: Remember that the use of a 3dB attenuator (as shown in Figure 8.1 of P1528) means that you need an RF amplifier of 2 times greater power for the same feed power. The other issue is the cable length. You might get up to 1dB of loss per meter of cable, so the cable length after the coupler needs to be quite short.
- Note 3: For the validation testing done using CW signals, most power meters are suitable. However, if you are measuring the output of a modulated signal from either a signal generator or a handset, you must ensure that the power meter correctly reads the modulated signals.

The measured 1-gram averaged SAR values of the device against the phantom are provided in Tables 5 and Table 6. The humidity and ambient temperature of test facility were 64% and 23.2°C respectively. The body phantom were full of the body tissue simulating liquid. The EUT was supplied with full-charged battery for each measurement.

The distance between the back of the EUT and the bottom of the flat phantom is 10 mm (taking into account of the IEEE 1528 and the place of the antenna).

Table 4: Body SAR system validation (1g)


| Frequency           | Duty cycle | Target value<br>(W/kg) | Test value (W/kg) |       |
|---------------------|------------|------------------------|-------------------|-------|
|                     |            |                        | 10 mW             | 1W    |
| 750MHz(2020-05-10)  | 1:1        | 8.68±10%               | 0.0879            | 8.79  |
| 835MHz(2020-05-11)  | 1:1        | 9.88±10%               | 0.1034            | 10.34 |
| 1800MHz(2020-05-13) | 1:1        | 37.68±10%              | 0.4067            | 40.67 |
| 1900MHz(2020-05-14) | 1:1        | 38.84±10%              | 0.4054            | 40.54 |
| 2600MHz(2020-05-17) | 1:1        | 53.45±10%              | 0.5118            | 51.18 |

\* Note: Target value was referring to the measured value in the calibration certificate of reference dipole.

Note: All SAR values are normalized to 1W forward power.

## 6. SAR measurement procedure

The SAR test against the head phantom was carried out as follow:

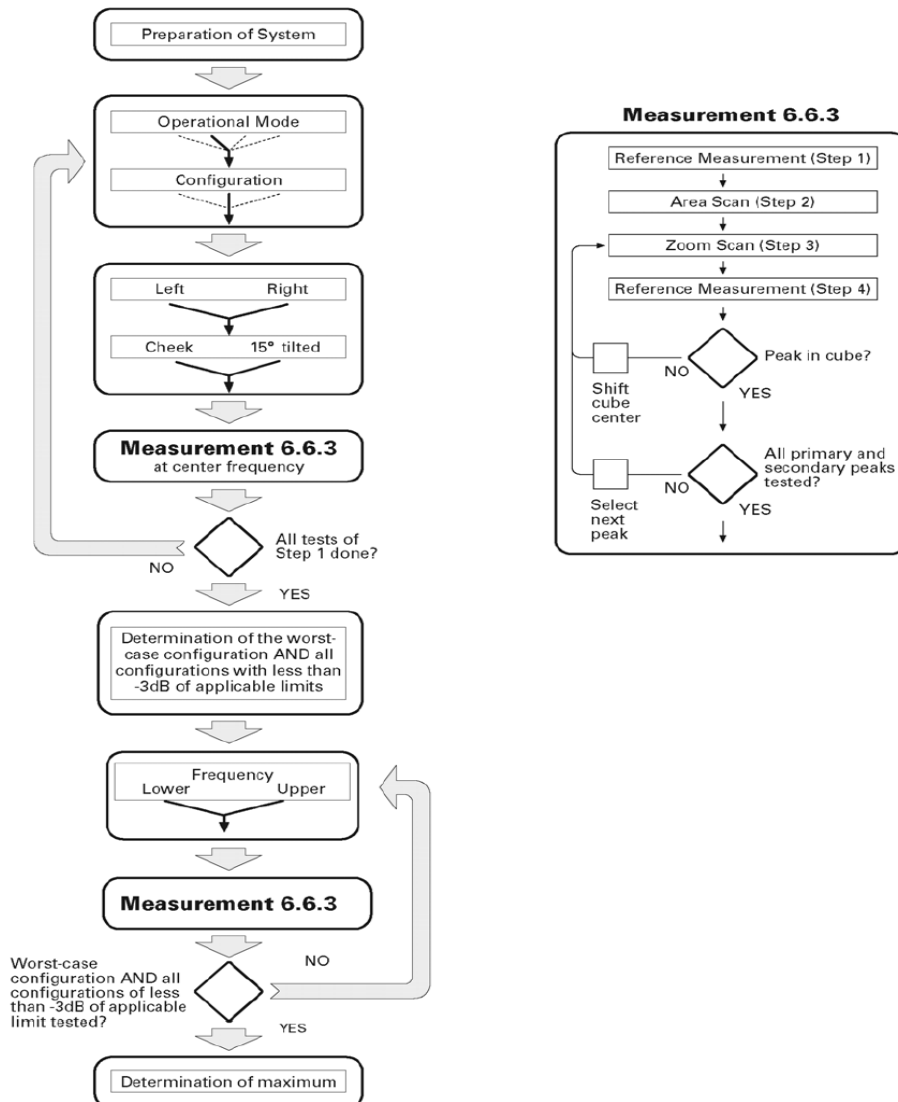

Establish a call with the maximum output power with a base station simulator, the connection between the EUT and the base station simulator is established via air interface.

After an area scan has been done at a fixed distance of 2mm from the surface of the phantom on the source side, a 3D scan is set up around the location of the maximum spot SAR. First, a point within the scan area is visited by the probe and a SAR reading taken at the start of testing. At the end of testing, the probe is returned to the same point and a second reading is taken. Comparison between these start and end readings enables the power drift during measurement to be assessed.

Above is the scanning procedure flow chart and table from the IEEE p1528 standard. This is the procedure for which all compliant testing should be carried out to ensure that all variations of the device position and transmission behavior are tested.

## 7. Conducted RF Output Power

### 7.1 GSM Conducted Power

| GSM850      |            | Burst-Averaged output Power (dBm) |       |       | Division Factors | Frame-Averaged output Power (dBm) |       |       |
|-------------|------------|-----------------------------------|-------|-------|------------------|-----------------------------------|-------|-------|
|             |            | 128CH                             | 190CH | 251CH |                  | 28CH                              | 190CH | 251CH |
| GPRS (GMSK) | 1 Tx Slot  | 32.90                             | 32.83 | 32.59 | -9.03            | 23.87                             | 23.80 | 23.56 |
|             | 2 Tx Slots | 31.75                             | 31.77 | 31.43 | -6.02            | 25.73                             | 25.75 | 25.41 |
| EDGE (8PSK) | 1 Tx Slot  | 27.11                             | 27.14 | 27.26 | -9.03            | 18.08                             | 18.11 | 18.23 |
|             | 2 Tx Slots | 26.03                             | 26.05 | 26.13 | -6.02            | 20.01                             | 20.03 | 20.11 |
|             | 3 Tx Slots | 24.89                             | 24.92 | 24.97 | -4.26            | 20.63                             | 20.66 | 20.71 |
|             | 4 Tx Slots | 23.68                             | 23.73 | 23.80 | -3.01            | 20.67                             | 20.72 | 20.79 |
| GSM1900     |            | Burst-Averaged output Power (dBm) |       |       | Division Factors | Frame-Averaged output Power (dBm) |       |       |
|             |            | 512CH                             | 661CH | 810CH |                  | 512CH                             | 661CH | 810CH |
| GPRS (GMSK) | 1 Tx Slot  | 29.98                             | 30.14 | 30.07 | -9.03            | 20.95                             | 21.11 | 21.04 |
|             | 2 Tx Slots | 28.87                             | 29.09 | 29.02 | -6.02            | 22.85                             | 23.07 | 23.00 |
| EDGE (8PSK) | 1 Tx Slot  | 26.65                             | 26.19 | 26.33 | -9.03            | 17.62                             | 17.16 | 17.30 |
|             | 2 Tx Slots | 25.56                             | 25.03 | 25.24 | -6.02            | 19.54                             | 19.01 | 19.22 |
|             | 3 Tx Slots | 24.02                             | 23.84 | 23.95 | -4.26            | 19.76                             | 19.58 | 19.69 |
|             | 4 Tx Slots | 22.67                             | 22.45 | 22.56 | -3.01            | 19.66                             | 19.44 | 19.55 |

**Note:** Per KDB 447498 D01 v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.

For hotspot SAR, EUT was performed at GPRS Class 12 multi-slots(4Tx) mode

For Head and Body-worn SAR testing, EUT was set in GSM Voice mode for both GSM850 and GSM1900

#### Timeslot consignations

| No. Of Slots      | Slot 1   | Slot 2  | Slot 3  | Slot 4   |
|-------------------|----------|---------|---------|----------|
| Slot Consignation | 1Up4Down | 2UpDown | 3UpDown | 4Up1Down |
| Duty Cycle        | 1:8      | 1:4     | 1:2.67  | 1:2      |
| Crest Factor      | -9.03dB  | -6.02dB | -4.26dB | -3.01dB  |

## 7.2 WCDMA Conducted output Power

| UMTS1900<br>(Band II) |              | Average Power (dBm) |        |        |
|-----------------------|--------------|---------------------|--------|--------|
|                       |              | 9262CH              | 9400CH | 9538cH |
| WCDMA                 | 12.2kbps RMC | 23.24               | 23.25  | 22.79  |
| HSDPA                 | Subtest 1    | 23.13               | 23.16  | 22.67  |
|                       | Subtest 2    | 23.02               | 23.04  | 22.56  |
|                       | Subtest 3    | 22.94               | 22.96  | 22.48  |
|                       | Subtest 4    | 22.87               | 22.88  | 22.37  |
| HSUPA                 | Subtest 1    | 22.76               | 22.78  | 22.26  |
|                       | Subtest 2    | 22.65               | 22.67  | 22.19  |
|                       | Subtest 3    | 22.56               | 22.58  | 22.08  |
|                       | Subtest 4    | 22.43               | 22.47  | 21.97  |
|                       | Subtest 5    | 22.34               | 22.36  | 21.88  |
| UMTS1700<br>(Band IV) |              | Average Power (dBm) |        |        |
|                       |              | 1313CH              | 1413CH | 1513CH |
| WCDMA                 | 12.2kbps RMC | 23.38               | 23.03  | 23.58  |
| HSDPA                 | Subtest 1    | 23.27               | 22.96  | 23.48  |
|                       | Subtest 2    | 23.19               | 22.85  | 23.37  |
|                       | Subtest 3    | 23.06               | 22.77  | 23.26  |
|                       | Subtest 4    | 22.94               | 22.66  | 23.18  |
| HSUPA                 | Subtest 1    | 22.86               | 22.54  | 23.06  |
|                       | Subtest 2    | 22.75               | 22.45  | 22.97  |
|                       | Subtest 3    | 22.67               | 22.37  | 22.84  |
|                       | Subtest 4    | 22.56               | 22.28  | 22.75  |
|                       | Subtest 5    | 22.48               | 22.16  | 22.62  |
| UMTS850<br>(Band V)   |              | Average Power (dBm) |        |        |
|                       |              | 4132CH              | 4183CH | 4233CH |
| WCDMA                 | 12.2kbps RMC | 22.76               | 22.46  | 22.27  |
| HSDPA                 | Subtest 1    | 22.67               | 22.39  | 22.16  |
|                       | Subtest 2    | 22.58               | 22.28  | 22.07  |
|                       | Subtest 3    | 22.46               | 22.17  | 21.98  |
|                       | Subtest 4    | 22.35               | 22.08  | 21.87  |
| HSUPA                 | Subtest 1    | 22.26               | 21.96  | 21.77  |
|                       | Subtest 2    | 22.18               | 21.85  | 21.65  |
|                       | Subtest 3    | 22.07               | 21.77  | 21.56  |
|                       | Subtest 4    | 21.94               | 21.67  | 21.43  |
|                       | Subtest 5    | 21.85               | 21.56  | 21.32  |

### Note:

- WCDMA SAR was tested under RMC 12.2kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25dB higher than the RMC level and SAR was less than 1.2W/kg.
- It is expected by the manufacturer that MPR for some HSPA subtests may be up to 2dB more than specified by 3GPP, but also as low as 0dB according to the chipset implementation in this model

## 7.3 LTE Conducted peak output Power

### LTE Test Configurations

The CMW500 Wide Band Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all frames.

#### 1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

#### 2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction(MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101:

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3**

| Modulation | Channel bandwidth / Transmission bandwidth configuration [RB] |         |       |        |        |        | MPR (dB) |
|------------|---------------------------------------------------------------|---------|-------|--------|--------|--------|----------|
|            | 1.4 MHz                                                       | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz |          |
| QPSK       | > 5                                                           | > 4     | > 8   | > 12   | > 16   | > 18   | ≤ 1      |
| 16 QAM     | ≤ 5                                                           | ≤ 4     | ≤ 8   | ≤ 12   | ≤ 16   | ≤ 18   | ≤ 1      |
| 16 QAM     | > 5                                                           | > 4     | > 8   | > 12   | > 16   | > 18   | ≤ 2      |

#### 3)A-MPR LTE procedures for SAR testing

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signaling Value of “NS\_01” on the base station simulator.

#### 4)LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test

requirements i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8\text{W/kg}$ , testing of the remaining RB offset configurations and required test channels is not required for 1RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45\text{W/kg}$ , SAR is required for all three RB offset configurations for that required test channel.

At the bottom of the Main Antenna:

### 1. LTE Band 2 Conducted Power Test Verdict:

| LTE FDD Band 2 |            |         |           | Conducted Power(dBm) |            |              |          |
|----------------|------------|---------|-----------|----------------------|------------|--------------|----------|
| Bandwidth      | Modulation | RB size | RB offset | Channel/Frequency    |            |              | Tune up  |
|                |            |         |           | 18607/1850.7         | 18900/1880 | 19193/1909.3 |          |
| 1.4MHz         | QPSK       | 1       | 0         | 21.89                | 21.91      | 21.78        | 21.0±1.0 |
|                |            | 1       | 3         | 21.87                | 21.95      | 21.83        |          |
|                |            | 1       | 5         | 21.66                | 21.76      | 21.9         |          |
|                |            | 3       | 0         | 21.36                | 21.53      | 21.43        | 21.0±1.0 |
|                |            | 3       | 2         | 21.57                | 21.32      | 21.51        |          |
|                |            | 3       | 3         | 21.53                | 21.57      | 21.57        |          |
|                |            | 6       | 0         | 21.2                 | 21.2       | 21.21        | 20.5±1.0 |
|                | 16QAM      | 1       | 0         | 20.93                | 21.01      | 20.93        | 20.5±1.0 |
|                |            | 1       | 3         | 21                   | 21.07      | 21.09        |          |
|                |            | 1       | 5         | 20.98                | 20.97      | 20.88        |          |
|                |            | 3       | 0         | 20.58                | 20.72      | 20.49        | 20.0±1.0 |
|                |            | 3       | 2         | 20.5                 | 20.49      | 20.75        |          |
|                |            | 3       | 3         | 20.71                | 20.51      | 20.65        |          |
|                |            | 6       | 0         | 20.33                | 20.37      | 20.38        | 19.5±1.0 |
| Bandwidth      | Modulation | RB size | RB offset | Channel/Frequency    |            |              | Tune up  |
|                |            |         |           | 18615/1851.5         | 18900/1880 | 19185/1908.5 |          |
| 3MHz           | QPSK       | 1       | 0         | 21.73                | 21.7       | 21.87        | 21.0±1.0 |
|                |            | 1       | 7         | 21.86                | 21.72      | 21.86        |          |
|                |            | 1       | 14        | 21.86                | 21.73      | 21.82        |          |
|                |            | 8       | 0         | 21.32                | 21.37      | 21.55        | 21.0±1.0 |
|                |            | 8       | 4         | 21.4                 | 21.53      | 21.38        |          |
|                |            | 8       | 7         | 21.46                | 21.55      | 21.44        |          |
|                |            | 15      | 0         | 21.24                | 21.25      | 21.18        | 20.5±1.0 |
|                | 16QAM      | 1       | 0         | 20.85                | 20.86      | 21           | 20.5±1.0 |
|                |            | 1       | 7         | 20.9                 | 21.05      | 20.8         |          |
|                |            | 1       | 14        | 21.06                | 21.08      | 20.84        |          |
|                |            | 8       | 0         | 20.74                | 20.48      | 20.53        | 20.0±1.0 |
|                |            | 8       | 4         | 20.74                | 20.73      | 20.56        |          |
|                |            | 8       | 7         | 20.45                | 20.63      | 20.64        |          |
|                |            | 15      | 0         | 20.34                | 20.32      | 20.32        | 19.5±1.0 |

| LTE FDD Band 2 |            |         |           | Conducted Power(dBm) |            |              |          |
|----------------|------------|---------|-----------|----------------------|------------|--------------|----------|
| Bandwidth      | Modulation | RB size | RB offset | Channel/Frequency    |            |              | Tune up  |
|                |            |         |           | 18625/1852.5         | 18900/1880 | 19175/1907.5 |          |
| 5MHz           | QPSK       | 1       | 0         | 21.85                | 21.79      | 21.95        | 21.0±1.0 |
|                |            | 1       | 13        | 21.91                | 21.78      | 21.83        |          |
|                |            | 1       | 24        | 21.87                | 21.89      | 21.75        |          |
|                |            | 12      | 0         | 21.57                | 21.59      | 21.47        | 21.0±1.0 |
|                |            | 12      | 6         | 21.59                | 21.44      | 21.51        |          |
|                |            | 12      | 13        | 21.34                | 21.43      | 21.44        |          |
|                |            | 25      | 0         | 21.19                | 21.23      | 21.25        | 20.5±1.0 |
|                | 16QAM      | 1       | 0         | 20.94                | 20.88      | 20.8         | 20.5±1.0 |
|                |            | 1       | 13        | 20.91                | 20.89      | 21.04        |          |
|                |            | 1       | 24        | 20.97                | 20.93      | 21.04        |          |
|                |            | 12      | 0         | 20.69                | 20.66      | 20.64        | 20.0±1.0 |
|                |            | 12      | 6         | 20.67                | 20.69      | 20.68        |          |
|                |            | 12      | 13        | 20.59                | 20.73      | 20.56        |          |
|                |            | 25      | 0         | 20.36                | 20.4       | 20.3         | 19.5±1.0 |
| Bandwidth      | Modulation | RB size | RB offset | Channel/Frequency    |            |              | Tune up  |
|                |            |         |           | 18650/1855           | 18900/1880 | 19150/1905   |          |
| 10MHz          | QPSK       | 1       | 0         | 21.76                | 21.84      | 21.87        | 21.0±1.0 |
|                |            | 1       | 25        | 21.83                | 21.95      | 21.76        |          |
|                |            | 1       | 49        | 21.91                | 21.68      | 21.74        |          |
|                |            | 25      | 0         | 21.35                | 21.35      | 21.42        | 21.0±1.0 |
|                |            | 25      | 13        | 21.48                | 21.58      | 21.5         |          |
|                |            | 25      | 25        | 21.53                | 21.41      | 21.38        |          |
|                |            | 50      | 0         | 21.22                | 21.22      | 21.21        | 20.5±1.0 |
|                | 16QAM      | 1       | 0         | 20.93                | 20.93      | 21.02        | 20.5±1.0 |
|                |            | 1       | 25        | 20.99                | 21.06      | 20.92        |          |
|                |            | 1       | 49        | 21.04                | 20.94      | 20.88        |          |
|                |            | 25      | 0         | 20.72                | 20.69      | 20.74        | 20.0±1.0 |
|                |            | 25      | 13        | 20.5                 | 20.72      | 20.61        |          |
|                |            | 25      | 25        | 20.53                | 20.51      | 20.67        |          |
|                |            | 50      | 0         | 20.3                 | 20.33      | 20.39        | 19.5±1.0 |

| LTE FDD Band 2 |            |         |           | Conducted Power(dBm) |            |              |          |
|----------------|------------|---------|-----------|----------------------|------------|--------------|----------|
| Bandwidth      | Modulation | RB size | RB offset | Channel/Frequency    |            |              | Tune up  |
|                |            |         |           | 18675/1857.5         | 18900/1880 | 19125/1902.5 |          |
| 15MHz          | QPSK       | 1       | 0         | 21.73                | 21.71      | 21.71        | 21.0±1.0 |
|                |            | 1       | 38        | 21.87                | 21.71      | 21.81        |          |
|                |            | 1       | 74        | 21.92                | 21.83      | 21.72        |          |
|                |            | 36      | 0         | 21.52                | 21.31      | 21.46        | 21.0±1.0 |
|                |            | 36      | 18        | 21.3                 | 21.47      | 21.6         |          |
|                |            | 36      | 39        | 21.34                | 21.58      | 21.46        |          |
|                |            | 75      | 0         | 21.23                | 21.2       | 21.22        | 20.5±1.0 |
|                | 16QAM      | 1       | 0         | 21.05                | 21.08      | 20.87        | 20.5±1.0 |
|                |            | 1       | 38        | 21.02                | 20.92      | 21.02        |          |
|                |            | 1       | 74        | 21                   | 21.07      | 20.88        |          |
|                |            | 36      | 0         | 20.61                | 20.54      | 20.62        | 20.0±1.0 |
|                |            | 36      | 18        | 20.64                | 20.51      | 20.7         |          |
|                |            | 36      | 39        | 20.74                | 20.5       | 20.55        |          |
|                |            | 75      | 0         | 20.37                | 20.39      | 20.39        | 19.5±1.0 |
| Bandwidth      | Modulation | RB size | RB offset | Channel/Frequency    |            |              | Tune up  |
|                |            |         |           | 18700/1860           | 18900/1880 | 19100/1900   |          |
| 20MHz          | QPSK       | 1       | 0         | 21.74                | 21.69      | 22           | 21.0±1.0 |
|                |            | 1       | 50        | 21.75                | 21.65      | 21.68        |          |
|                |            | 1       | 99        | 21.67                | 21.75      | 21.87        |          |
|                |            | 50      | 0         | 21.3                 | 21.56      | 21.32        | 21.0±1.0 |
|                |            | 50      | 25        | 21.38                | 21.55      | 21.45        |          |
|                |            | 50      | 50        | 21.44                | 21.45      | 21.34        |          |
|                |            | 100     | 0         | 21.16                | 21.24      | 21.21        | 20.5±1.0 |
|                | 16QAM      | 1       | 0         | 20.9                 | 20.9       | 20.87        | 20.5±1.0 |
|                |            | 1       | 50        | 20.92                | 21.07      | 20.83        |          |
|                |            | 1       | 99        | 21.02                | 20.91      | 20.88        |          |
|                |            | 50      | 0         | 20.64                | 20.66      | 20.46        | 20.0±1.0 |
|                |            | 50      | 25        | 20.67                | 20.55      | 20.5         |          |
|                |            | 50      | 50        | 20.62                | 20.59      | 20.54        |          |
|                |            | 100     | 0         | 20.38                | 20.35      | 20.32        | 19.5±1.0 |

## 2. LTE Band 4 Conducted Power Test Verdict:

| LTE FDD Band 4 |            |         |           | Conducted Power(dBm) |              |              |          |
|----------------|------------|---------|-----------|----------------------|--------------|--------------|----------|
| Bandwidth      | Modulation | RB size | RB offset | Channel/Frequency    |              |              | Tune up  |
|                |            |         |           | 19957/1710.7         | 20175/1732.5 | 20393/1754.3 |          |
| 1.4MHz         | QPSK       | 1       | 0         | 21.38                | 21.26        | 21.36        | 20.5±1.0 |
|                |            | 1       | 3         | 21.24                | 21.39        | 21.36        |          |
|                |            | 1       | 5         | 21.37                | 21.23        | 21.41        |          |
|                |            | 3       | 0         | 20.91                | 20.88        | 20.95        | 20.5±1.0 |
|                |            | 3       | 2         | 20.89                | 21.12        | 20.92        |          |
|                |            | 3       | 3         | 21.06                | 20.94        | 21.09        |          |
|                |            | 6       | 0         | 20.77                | 20.77        | 20.76        | 20.0±1.0 |
|                | 16QAM      | 1       | 0         | 20.42                | 20.52        | 20.57        | 20.0±1.0 |
|                |            | 1       | 3         | 20.38                | 20.55        | 20.58        |          |
|                |            | 1       | 5         | 20.63                | 20.42        | 20.54        |          |
|                |            | 3       | 0         | 20.26                | 20.25        | 20.2         | 19.5±1.0 |
|                |            | 3       | 2         | 20.02                | 20.16        | 20.22        |          |
|                |            | 3       | 3         | 20.26                | 20.28        | 20.06        |          |
|                |            | 6       | 0         | 19.87                | 19.85        | 19.85        | 19.0±1.0 |
| Bandwidth      | Modulation | RB size | RB offset | Channel/Frequency    |              |              | Tune up  |
|                |            |         |           | 19965/1711.5         | 20175/1732.5 | 20385/1753.5 |          |
| 3MHz           | QPSK       | 1       | 0         | 21.45                | 21.29        | 21.22        | 20.5±1.0 |
|                |            | 1       | 7         | 21.49                | 21.5         | 21.49        |          |
|                |            | 1       | 14        | 21.28                | 21.35        | 21.4         |          |
|                |            | 8       | 0         | 21.08                | 21.1         | 21.13        | 20.5±1.0 |
|                |            | 8       | 4         | 21.11                | 21.12        | 21.09        |          |
|                |            | 8       | 7         | 20.89                | 21.09        | 21.09        |          |
|                |            | 15      | 0         | 20.73                | 20.76        | 20.8         | 20.0±1.0 |
|                | 16QAM      | 1       | 0         | 20.38                | 20.48        | 20.36        | 20.0±1.0 |
|                |            | 1       | 7         | 20.37                | 20.55        | 20.44        |          |
|                |            | 1       | 14        | 20.6                 | 20.59        | 20.51        |          |
|                |            | 8       | 0         | 20.17                | 20.16        | 20.24        | 19.5±1.0 |
|                |            | 8       | 4         | 20.24                | 20.07        | 20.19        |          |
|                |            | 8       | 7         | 20.05                | 20.19        | 20.19        |          |
|                |            | 15      | 0         | 19.9                 | 19.85        | 19.85        | 19.0±1.0 |

| LTE FDD Band 4 |            |         |           | Conducted Power(dBm) |              |              |          |
|----------------|------------|---------|-----------|----------------------|--------------|--------------|----------|
| Bandwidth      | Modulation | RB size | RB offset | Channel/Frequency    |              |              | Tune up  |
|                |            |         |           | 19975/1712.5         | 20175/1732.5 | 20375/1752.5 |          |
| 5MHz           | QPSK       | 1       | 0         | 21.34                | 21.45        | 21.44        | 20.5±1.0 |
|                |            | 1       | 13        | 21.5                 | 21.23        | 21.25        |          |
|                |            | 1       | 24        | 21.23                | 21.2         | 21.22        |          |
|                |            | 12      | 0         | 21.06                | 20.93        | 20.95        | 20.5±1.0 |
|                |            | 12      | 6         | 20.94                | 21.07        | 21.07        |          |
|                |            | 12      | 13        | 21.12                | 20.92        | 20.91        |          |
|                |            | 25      | 0         | 20.75                | 20.7         | 20.71        | 20.0±1.0 |
|                | 16QAM      | 1       | 0         | 20.57                | 20.44        | 20.41        | 20.0±1.0 |
|                |            | 1       | 13        | 20.44                | 20.55        | 20.48        |          |
|                |            | 1       | 24        | 20.43                | 20.39        | 20.58        |          |
|                |            | 12      | 0         | 20.08                | 20           | 20.28        | 19.5±1.0 |
|                |            | 12      | 6         | 20.23                | 20.24        | 20.16        |          |
|                |            | 12      | 13        | 20.26                | 20.23        | 20.09        |          |
|                |            | 25      | 0         | 19.92                | 19.95        | 19.94        | 19.0±1.0 |
| Bandwidth      | Modulation | RB size | RB offset | Channel/Frequency    |              |              | Tune up  |
|                |            |         |           | 20000/1715           | 20175/1732.5 | 20350/1750   |          |
| 10MHz          | QPSK       | 1       | 0         | 21.5                 | 21.48        | 21.46        | 20.5±1.0 |
|                |            | 1       | 25        | 21.44                | 21.38        | 21.45        |          |
|                |            | 1       | 49        | 21.28                | 21.38        | 21.2         |          |
|                |            | 25      | 0         | 21.11                | 20.98        | 20.95        | 20.5±1.0 |
|                |            | 25      | 13        | 20.96                | 21.04        | 21.05        |          |
|                |            | 25      | 25        | 21.09                | 21.15        | 21.11        |          |
|                |            | 50      | 0         | 20.77                | 20.8         | 20.76        | 20.0±1.0 |
|                | 16QAM      | 1       | 0         | 20.58                | 20.62        | 20.43        | 20.0±1.0 |
|                |            | 1       | 25        | 20.6                 | 20.38        | 20.55        |          |
|                |            | 1       | 49        | 20.41                | 20.6         | 20.59        |          |
|                |            | 25      | 0         | 20.24                | 20.09        | 20.23        | 19.5±1.0 |
|                |            | 25      | 13        | 20.28                | 20.15        | 20.03        |          |
|                |            | 25      | 25        | 20.29                | 20.2         | 20.02        |          |
|                |            | 50      | 0         | 19.86                | 19.85        | 19.9         | 19.0±1.0 |

| LTE FDD Band 4 |            |         |           | Conducted Power(dBm) |              |              |          |
|----------------|------------|---------|-----------|----------------------|--------------|--------------|----------|
| Bandwidth      | Modulation | RB size | RB offset | Channel/Frequency    |              |              | Tune up  |
|                |            |         |           | 20025/1717.5         | 20175/1732.5 | 20325/1747.5 |          |
| 15MHz          | QPSK       | 1       | 0         | 21.38                | 21.42        | 21.4         | 20.5±1.0 |
|                |            | 1       | 38        | 21.39                | 21.23        | 21.32        |          |
|                |            | 1       | 74        | 21.34                | 21.35        | 21.34        |          |
|                |            | 36      | 0         | 21.13                | 21.01        | 20.9         | 20.5±1.0 |
|                |            | 36      | 18        | 20.86                | 21.05        | 20.99        |          |
|                |            | 36      | 39        | 20.93                | 21           | 21.06        |          |
|                |            | 75      | 0         | 20.72                | 20.75        | 20.76        | 20.0±1.0 |
|                | 16QAM      | 1       | 0         | 20.52                | 20.46        | 20.43        | 20.0±1.0 |
|                |            | 1       | 38        | 20.52                | 20.58        | 20.57        |          |
|                |            | 1       | 74        | 20.62                | 20.56        | 20.35        |          |
|                |            | 36      | 0         | 20.1                 | 20.12        | 20.21        | 19.5±1.0 |
|                |            | 36      | 18        | 20.11                | 20.12        | 20.21        |          |
|                |            | 36      | 39        | 20.09                | 20.27        | 20.18        |          |
|                |            | 75      | 0         | 19.9                 | 19.89        | 19.88        | 19.0±1.0 |
| Bandwidth      | Modulation | RB size | RB offset | Channel/Frequency    |              |              | Tune up  |
|                |            |         |           | 20050/1720           | 20175/1732.5 | 20300/1745   |          |
| 20MHz          | QPSK       | 1       | 0         | 21.38                | 21.43        | 21.58        | 20.7±1.0 |
|                |            | 1       | 50        | 21.2                 | 21.43        | 21.31        |          |
|                |            | 1       | 99        | 21.31                | 21.35        | 21.35        |          |
|                |            | 50      | 0         | 20.95                | 21           | 20.94        | 20.5±1.0 |
|                |            | 50      | 25        | 21.04                | 21.03        | 20.94        |          |
|                |            | 50      | 50        | 21.08                | 20.91        | 20.85        |          |
|                |            | 100     | 0         | 20.7                 | 20.75        | 20.71        | 20.0±1.0 |
|                | 16QAM      | 1       | 0         | 20.37                | 20.58        | 20.42        | 20.0±1.0 |
|                |            | 1       | 50        | 20.65                | 20.45        | 20.49        |          |
|                |            | 1       | 99        | 20.36                | 20.54        | 20.62        |          |
|                |            | 50      | 0         | 20.16                | 20.12        | 20.13        | 19.5±1.0 |
|                |            | 50      | 25        | 20.09                | 20.24        | 20.18        |          |
|                |            | 50      | 50        | 20.09                | 20.28        | 20.29        |          |
|                |            | 100     | 0         | 19.86                | 19.86        | 19.9         | 19.0±1.0 |

### 3. LTE Band 12 Conducted Power Test Verdict:

| LTE FDD Band 12 |            |         |           | Conducted Power(dBm) |             |             |          |
|-----------------|------------|---------|-----------|----------------------|-------------|-------------|----------|
| Bandwidth       | Modulation | RB size | RB offset | Channel/Frequency    |             |             | Tune up  |
|                 |            |         |           | 23017/699.7          | 23095/707.5 | 23173/715.3 |          |
| 1.4MHz          | QPSK       | 1       | 0         | 21.86                | 21.78       | 21.83       | 21.0±1.0 |
|                 |            | 1       | 3         | 21.83                | 21.75       | 21.63       |          |
|                 |            | 1       | 5         | 21.64                | 21.83       | 21.88       |          |
|                 |            | 3       | 0         | 21.36                | 21.39       | 21.44       | 20.5±1.0 |
|                 |            | 3       | 2         | 21.21                | 21.4        | 21.46       |          |
|                 |            | 3       | 3         | 21.39                | 21.49       | 21.43       |          |
|                 |            | 6       | 0         | 21.07                | 21.08       | 21.15       | 20.5±1.0 |
|                 | 16QAM      | 1       | 0         | 20.8                 | 20.98       | 20.77       | 20.0±1.0 |
|                 |            | 1       | 3         | 20.72                | 20.91       | 20.9        |          |
|                 |            | 1       | 5         | 20.7                 | 20.98       | 20.87       |          |
|                 |            | 3       | 0         | 20.54                | 20.55       | 20.47       | 20.0±1.0 |
|                 |            | 3       | 2         | 20.46                | 20.45       | 20.61       |          |
|                 |            | 3       | 3         | 20.6                 | 20.58       | 20.41       |          |
|                 |            | 6       | 0         | 20.21                | 20.29       | 20.21       | 19.5±1.0 |
| Bandwidth       | Modulation | RB size | RB offset | Channel/Frequency    |             |             | Tune up  |
|                 |            |         |           | 23025/700.5          | 23095/707.5 | 23165/714.5 |          |
| 3MHz            | QPSK       | 1       | 0         | 21.89                | 21.78       | 21.6        | 21.0±1.0 |
|                 |            | 1       | 7         | 21.88                | 21.85       | 21.65       |          |
|                 |            | 1       | 14        | 21.69                | 21.79       | 21.79       |          |
|                 |            | 8       | 0         | 21.5                 | 21.36       | 21.3        | 20.5±1.0 |
|                 |            | 8       | 4         | 21.2                 | 21.42       | 21.27       |          |
|                 |            | 8       | 7         | 21.23                | 21.4        | 21.36       |          |
|                 |            | 15      | 0         | 21.15                | 21.14       | 21.1        | 20.5±1.0 |
|                 | 16QAM      | 1       | 0         | 20.75                | 20.94       | 20.78       | 20.0±1.0 |
|                 |            | 1       | 7         | 20.7                 | 20.78       | 20.71       |          |
|                 |            | 1       | 14        | 20.99                | 20.85       | 20.99       |          |
|                 |            | 8       | 0         | 20.51                | 20.42       | 20.46       | 20.0±1.0 |
|                 |            | 8       | 4         | 20.46                | 20.61       | 20.38       |          |
|                 |            | 8       | 7         | 20.58                | 20.52       | 20.37       |          |
|                 |            | 15      | 0         | 20.21                | 20.3        | 20.26       | 19.5±1.0 |

| LTE FDD Band 12 |            |         |           | Conducted Power(dBm) |             |             |          |
|-----------------|------------|---------|-----------|----------------------|-------------|-------------|----------|
| Bandwidth       | Modulation | RB size | RB offset | Channel/Frequency    |             |             | Tune up  |
|                 |            |         |           | 23035/701.5          | 23095/707.5 | 23155/713.5 |          |
| 5MHz            | QPSK       | 1       | 0         | 21.84                | 21.68       | 21.87       | 21.0±1.0 |
|                 |            | 1       | 13        | 21.85                | 21.71       | 21.81       |          |
|                 |            | 1       | 24        | 21.64                | 21.73       | 21.76       |          |
|                 |            | 12      | 0         | 21.28                | 21.43       | 21.2        | 20.5±1.0 |
|                 |            | 12      | 6         | 21.49                | 21.41       | 21.28       |          |
|                 |            | 12      | 13        | 21.31                | 21.38       | 21.31       |          |
|                 |            | 25      | 0         | 21.07                | 21.05       | 21.11       | 20.5±1.0 |
|                 | 16QAM      | 1       | 0         | 20.73                | 20.75       | 20.83       | 20.0±1.0 |
|                 |            | 1       | 13        | 20.98                | 20.96       | 20.97       |          |
|                 |            | 1       | 24        | 20.72                | 20.77       | 20.76       |          |
|                 |            | 12      | 0         | 20.59                | 20.58       | 20.36       | 20.0±1.0 |
|                 |            | 12      | 6         | 20.44                | 20.46       | 20.48       |          |
|                 |            | 12      | 13        | 20.65                | 20.56       | 20.48       |          |
|                 |            | 25      | 0         | 20.25                | 20.3        | 20.22       | 19.5±1.0 |
| Bandwidth       | Modulation | RB size | RB offset | Channel/Frequency    |             |             | Tune up  |
|                 |            |         |           | 23060/704            | 23095/707.5 | 23130/711   |          |
| 10MHz           | QPSK       | 1       | 0         | 21.92                | 21.97       | 21.88       | 21.0±1.0 |
|                 |            | 1       | 25        | 21.76                | 21.66       | 21.62       |          |
|                 |            | 1       | 49        | 21.8                 | 21.7        | 21.6        |          |
|                 |            | 25      | 0         | 21.4                 | 21.49       | 21.22       | 20.5±1.0 |
|                 |            | 25      | 13        | 21.23                | 21.37       | 21.26       |          |
|                 |            | 25      | 25        | 21.34                | 21.35       | 21.31       |          |
|                 |            | 50      | 0         | 21.06                | 21.08       | 21.08       | 20.5±1.0 |
|                 | 16QAM      | 1       | 0         | 20.83                | 20.96       | 20.75       | 20.0±1.0 |
|                 |            | 1       | 25        | 20.73                | 20.72       | 20.77       |          |
|                 |            | 1       | 49        | 20.72                | 20.74       | 20.97       |          |
|                 |            | 25      | 0         | 20.36                | 20.53       | 20.57       | 20.0±1.0 |
|                 |            | 25      | 13        | 20.48                | 20.44       | 20.45       |          |
|                 |            | 25      | 25        | 20.62                | 20.62       | 20.51       |          |
|                 |            | 50      | 0         | 20.24                | 20.21       | 20.28       | 19.5±1.0 |

## 6. LTE Band 17 Conducted Power Test Verdict:

| LTE FDD Band 17 |            |         |           | Conducted Power(dBm) |           |             |          |
|-----------------|------------|---------|-----------|----------------------|-----------|-------------|----------|
| Bandwidth       | Modulation | RB size | RB offset | Channel/Frequency    |           |             | Tune up  |
|                 |            |         |           | 23755/706.5          | 23790/710 | 23825/713.5 |          |
| 5MHz            | QPSK       | 1       | 0         | 21.67                | 21.63     | 21.49       | 21.0±1.0 |
|                 |            | 1       | 13        | 21.56                | 21.42     | 21.61       |          |
|                 |            | 1       | 24        | 21.65                | 21.66     | 21.59       |          |
|                 |            | 12      | 0         | 21.34                | 21.15     | 21.21       | 20.5±1.0 |
|                 |            | 12      | 6         | 21.31                | 21.13     | 21.08       |          |
|                 |            | 12      | 13        | 21.34                | 21.29     | 21.35       |          |
|                 |            | 25      | 0         | 20.9                 | 20.99     | 20.98       | 20.0±1.0 |
|                 | 16QAM      | 1       | 0         | 20.61                | 20.84     | 20.65       | 20.0±1.0 |
|                 |            | 1       | 13        | 20.56                | 20.63     | 20.66       |          |
|                 |            | 1       | 24        | 20.55                | 20.56     | 20.58       |          |
|                 |            | 12      | 0         | 20.48                | 20.41     | 20.48       | 19.5±1.0 |
|                 |            | 12      | 6         | 20.24                | 20.5      | 20.47       |          |
|                 |            | 12      | 13        | 20.24                | 20.26     | 20.42       |          |
|                 |            | 25      | 0         | 20.11                | 20.15     | 20.05       | 19.5±1.0 |
| Bandwidth       | Modulation | RB size | RB offset | Channel/Frequency    |           |             | Tune up  |
|                 |            |         |           | 23780/709            | 23790/710 | 23800/711   |          |
| 10MHz           | QPSK       | 1       | 0         | 21.67                | 21.74     | 21.63       | 21.0±1.0 |
|                 |            | 1       | 25        | 21.44                | 21.66     | 21.5        |          |
|                 |            | 1       | 49        | 21.63                | 21.55     | 21.67       |          |
|                 |            | 25      | 0         | 21.16                | 21.23     | 21.08       | 20.5±1.0 |
|                 |            | 25      | 13        | 21.22                | 21.18     | 21.17       |          |
|                 |            | 25      | 25        | 21.12                | 21.08     | 21.11       |          |
|                 |            | 50      | 0         | 20.99                | 20.98     | 21          | 20.0±1.0 |
|                 | 16QAM      | 1       | 0         | 20.85                | 20.82     | 20.64       | 20.0±1.0 |
|                 |            | 1       | 25        | 20.8                 | 20.79     | 20.76       |          |
|                 |            | 1       | 49        | 20.55                | 20.7      | 20.66       |          |
|                 |            | 25      | 0         | 20.38                | 20.5      | 20.23       | 19.5±1.0 |
|                 |            | 25      | 13        | 20.33                | 20.35     | 20.35       |          |
|                 |            | 25      | 25        | 20.43                | 20.35     | 20.45       |          |
|                 |            | 50      | 0         | 20.08                | 20.05     | 20.06       | 19.5±1.0 |

## 7. LTE Band 41 Conducted Power Test Verdict:

| LTE TDD Band 41 |            |         |           | Conducted Power(dBm) |            |              |          |
|-----------------|------------|---------|-----------|----------------------|------------|--------------|----------|
| Bandwidth       | Modulation | RB size | RB offset | Channel/Frequency    |            |              | Tune up  |
|                 |            |         |           | 39675/2498.5         | 40620/2593 | 41565/2687.5 |          |
| 5MHz            | QPSK       | 1       | 0         | 21.61                | 21.66      | 21.61        | 21.0±1.0 |
|                 |            | 1       | 13        | 21.45                | 21.68      | 21.56        |          |
|                 |            | 1       | 24        | 21.47                | 21.65      | 21.42        |          |
|                 |            | 12      | 0         | 21.25                | 21.1       | 21.06        | 20.5±1.0 |
|                 |            | 12      | 6         | 21.23                | 21.14      | 21.34        |          |
|                 |            | 12      | 13        | 21.19                | 21.22      | 21.35        |          |
|                 |            | 25      | 0         | 20.92                | 20.97      | 20.97        | 20.0±1.0 |
|                 | 16QAM      | 1       | 0         | 20.66                | 20.65      | 20.78        | 20.0±1.0 |
|                 |            | 1       | 13        | 20.68                | 20.55      | 20.84        |          |
|                 |            | 1       | 24        | 20.69                | 20.84      | 20.8         |          |
|                 |            | 12      | 0         | 20.34                | 20.26      | 20.27        | 19.5±1.0 |
|                 |            | 12      | 6         | 20.46                | 20.41      | 20.34        |          |
|                 |            | 12      | 13        | 20.29                | 20.23      | 20.36        |          |
|                 |            | 25      | 0         | 20.14                | 20.13      | 20.13        | 19.5±1.0 |
| Bandwidth       | Modulation | RB size | RB offset | Channel/Frequency    |            |              | Tune up  |
|                 |            |         |           | 39700/2501           | 40620/2593 | 41540/2685   |          |
| 10MHz           | QPSK       | 1       | 0         | 21.55                | 21.59      | 21.68        | 21.0±1.0 |
|                 |            | 1       | 25        | 21.69                | 21.61      | 21.42        |          |
|                 |            | 1       | 49        | 21.5                 | 21.63      | 21.4         |          |
|                 |            | 25      | 0         | 21.05                | 21.07      | 21.13        | 20.5±1.0 |
|                 |            | 25      | 13        | 21.1                 | 21.26      | 21.24        |          |
|                 |            | 25      | 25        | 21.21                | 21.23      | 21.34        |          |
|                 |            | 50      | 0         | 20.96                | 20.92      | 20.9         | 20.0±1.0 |
|                 | 16QAM      | 1       | 0         | 20.81                | 20.72      | 20.68        | 20.0±1.0 |
|                 |            | 1       | 25        | 20.71                | 20.74      | 20.62        |          |
|                 |            | 1       | 49        | 20.57                | 20.66      | 20.75        |          |
|                 |            | 25      | 0         | 20.37                | 20.28      | 20.44        | 19.5±1.0 |
|                 |            | 25      | 13        | 20.38                | 20.42      | 20.38        |          |
|                 |            | 25      | 25        | 20.4                 | 20.33      | 20.22        |          |
|                 |            | 50      | 0         | 20.08                | 20.15      | 20.14        | 19.5±1.0 |

| LTE TDD Band 41 |            |         |           | Conducted Power(dBm) |            |              |          |
|-----------------|------------|---------|-----------|----------------------|------------|--------------|----------|
| Bandwidth       | Modulation | RB size | RB offset | Channel/Frequency    |            |              | Tune up  |
|                 |            |         |           | 39725/2503.5         | 40620/2593 | 41515/2682.5 |          |
| 15MHz           | QPSK       | 1       | 0         | 21.55                | 21.65      | 21.47        | 21.0±1.0 |
|                 |            | 1       | 38        | 21.6                 | 21.66      | 21.47        |          |
|                 |            | 1       | 74        | 21.5                 | 21.41      | 21.47        |          |
|                 |            | 36      | 0         | 21.17                | 21.08      | 21.1         | 20.5±1.0 |
|                 |            | 36      | 18        | 21.23                | 21.27      | 21.31        |          |
|                 |            | 36      | 39        | 21.17                | 21.18      | 21.1         |          |
|                 |            | 75      | 0         | 20.92                | 20.92      | 20.91        | 20.0±1.0 |
|                 | 16QAM      | 1       | 0         | 20.69                | 20.82      | 20.74        | 20.0±1.0 |
|                 |            | 1       | 38        | 20.8                 | 20.84      | 20.67        |          |
|                 |            | 1       | 74        | 20.63                | 20.58      | 20.56        |          |
|                 |            | 36      | 0         | 20.24                | 20.25      | 20.3         | 19.5±1.0 |
|                 |            | 36      | 18        | 20.39                | 20.36      | 20.29        |          |
|                 |            | 36      | 39        | 20.3                 | 20.23      | 20.38        |          |
|                 |            | 75      | 0         | 20.07                | 20.14      | 20.13        | 19.5±1.0 |
| Bandwidth       | Modulation | RB size | RB offset | Channel/Frequency    |            |              | Tune up  |
|                 |            |         |           | 39750/2506           | 40620/2593 | 41490/2680   |          |
| 20MHz           | QPSK       | 1       | 0         | 21.5                 | 21.71      | 21.32        | 21.0±1.0 |
|                 |            | 1       | 50        | 21.68                | 21.69      | 21.5         |          |
|                 |            | 1       | 99        | 21.63                | 21.42      | 21.67        |          |
|                 |            | 50      | 0         | 21.11                | 21.35      | 21.15        | 20.5±1.0 |
|                 |            | 50      | 25        | 21.13                | 21.12      | 21.34        |          |
|                 |            | 50      | 50        | 21.07                | 21.26      | 21.08        |          |
|                 |            | 100     | 0         | 20.91                | 20.9       | 20.94        | 20.0±1.0 |
|                 | 16QAM      | 1       | 0         | 20.75                | 20.68      | 20.57        | 20.0±1.0 |
|                 |            | 1       | 50        | 20.69                | 20.55      | 20.76        |          |
|                 |            | 1       | 99        | 20.73                | 20.8       | 20.79        |          |
|                 |            | 50      | 0         | 20.3                 | 20.33      | 20.35        | 19.5±1.0 |
|                 |            | 50      | 25        | 20.44                | 20.41      | 20.44        |          |
|                 |            | 50      | 50        | 20.31                | 20.44      | 20.35        |          |
|                 |            | 100     | 0         | 20.11                | 20.14      | 20.11        | 19.5±1.0 |

The Body SAR measurement positions of each band are as below:

| Antenna                | Front | Back | Edge A | Edge B | Edge C | Edge D |
|------------------------|-------|------|--------|--------|--------|--------|
| WWAN Antenna Body-worn | Yes   | Yes  | No     | No     | No     | No     |
| WWAN Antenna hotspot   | Yes   | Yes  | No     | Yes    | Yes    | Yes    |

Note: According to KDB 941225 D06 v02r01, when antenna-to-edge>2.5cm, SAR is not required.

## 8. Scaling Factor calculation

At the bottom of the Main Antenna:

| Operation Mode       | Channel /Frequency | Output Power(dBm) | Tune up Power in tolerance (dBm) | Max. Tune up(dBm) | Scaling Factor |
|----------------------|--------------------|-------------------|----------------------------------|-------------------|----------------|
| GPRS850 (GPRS 2Tx)   | 128/824.2          | 31.75             | 31.0 ± 1.0                       | 32.00             | 1.059          |
|                      | 190/836.6          | 31.77             | 31.0 ± 1.0                       | 32.00             | 1.054          |
|                      | 251/848.8          | 31.43             | 31.0 ± 1.0                       | 32.00             | 1.140          |
| GPRS1900 (GPRS 2Tx)  | 512/1850.2         | 28.87             | 28.5 ± 1.0                       | 29.50             | 1.156          |
|                      | 661/1880.0         | 29.09             | 28.5 ± 1.0                       | 29.50             | 1.099          |
|                      | 810/1909.8         | 29.02             | 28.5 ± 1.0                       | 29.50             | 1.117          |
| WCDMA850             | 4132/826.4         | 22.76             | 21.8 ± 1.0                       | 22.80             | 1.009          |
|                      | 4183/836.6         | 22.46             | 21.8 ± 1.0                       | 22.80             | 1.081          |
|                      | 4233/846.6         | 22.27             | 21.8 ± 1.0                       | 22.80             | 1.130          |
| WCDMA1900            | 9262/1852.4        | 23.24             | 22.5 ± 1.0                       | 23.50             | 1.062          |
|                      | 9400/1880.0        | 23.25             | 22.5 ± 1.0                       | 23.50             | 1.059          |
|                      | 9538/1907.6        | 22.79             | 22.5 ± 1.0                       | 23.50             | 1.178          |
| WCDMA1700            | 1312/1712.4        | 23.38             | 23.0 ± 1.0                       | 24.00             | 1.153          |
|                      | 1413/1732.6        | 23.03             | 23.0 ± 1.0                       | 24.00             | 1.250          |
|                      | 1513/1752.6        | 23.58             | 23.0 ± 1.0                       | 24.00             | 1.102          |
| LTE B2 20MHz 1RB#0   | 18700/1860         | 21.74             | 21.0 ± 1.0                       | 22.00             | 1.062          |
|                      | 18900/1880         | 21.69             | 21.0 ± 1.0                       | 22.00             | 1.074          |
|                      | 19100/1900         | 22.00             | 21.0 ± 1.0                       | 22.00             | 1.000          |
| LTE B2 20MHz 50RB#50 | 18700/1860         | 21.30             | 21.0 ± 1.0                       | 22.00             | 1.175          |
|                      | 18900/1880         | 21.56             | 21.0 ± 1.0                       | 22.00             | 1.107          |
|                      | 19100/1900         | 21.32             | 21.0 ± 1.0                       | 22.00             | 1.169          |
| LTE B4 20MHz 1RB#0   | 20050/1720         | 21.38             | 20.7 ± 1.0                       | 21.70             | 1.076          |
|                      | 20175/1732.5       | 21.43             | 20.7 ± 1.0                       | 21.70             | 1.064          |
|                      | 20300/1745         | 21.58             | 20.7 ± 1.0                       | 21.70             | 1.028          |
| LTE B4 20MHz 50RB#0  | 20050/1720         | 20.95             | 20.0 ± 1.0                       | 21.00             | 1.012          |
|                      | 20175/1732.5       | 21.00             | 20.0 ± 1.0                       | 21.00             | 1.000          |
|                      | 20300/1745         | 20.94             | 20.0 ± 1.0                       | 21.00             | 1.014          |
| LTE B12 10MHz 1RB#0  | 23060/704          | 21.92             | 21.0 ± 1.0                       | 22.00             | 1.019          |
|                      | 23095/707.5        | 21.97             | 21.0 ± 1.0                       | 22.00             | 1.007          |
|                      | 23130/711          | 21.88             | 21.0 ± 1.0                       | 22.00             | 1.028          |

|                         |             |       |                |       |       |
|-------------------------|-------------|-------|----------------|-------|-------|
| LTE B12 10MHz<br>25RB#0 | 23060/704   | 21.40 | $20.5 \pm 1.0$ | 21.50 | 1.023 |
|                         | 23095/707.5 | 21.49 | $20.5 \pm 1.0$ | 21.50 | 1.002 |
|                         | 23130/711   | 21.22 | $20.5 \pm 1.0$ | 21.50 | 1.067 |
| LTE B17 10MHz<br>1RB#0  | 23780/709   | 21.67 | $21.0 \pm 1.0$ | 22.00 | 1.079 |
|                         | 23790/710   | 21.74 | $21.0 \pm 1.0$ | 22.00 | 1.062 |
|                         | 23800/711   | 21.63 | $21.0 \pm 1.0$ | 22.00 | 1.089 |
| LTE B17 10MHz<br>25RB#0 | 23780/709   | 21.16 | $20.5 \pm 1.0$ | 21.50 | 1.081 |
|                         | 23790/710   | 21.23 | $20.5 \pm 1.0$ | 21.50 | 1.064 |
|                         | 23800/711   | 21.08 | $20.5 \pm 1.0$ | 21.50 | 1.102 |
| LTE B41 20MHz<br>1RB#0  | 39750/2506  | 21.50 | $21.0 \pm 1.0$ | 22.00 | 1.122 |
|                         | 40620/2593  | 21.71 | $21.0 \pm 1.0$ | 22.00 | 1.069 |
|                         | 41490/2680  | 21.32 | $21.0 \pm 1.0$ | 22.00 | 1.169 |
| LTE B41 20MHz<br>50RB#0 | 39750/2506  | 21.11 | $20.5 \pm 1.0$ | 21.50 | 1.094 |
|                         | 40620/2593  | 21.35 | $20.5 \pm 1.0$ | 21.50 | 1.035 |
|                         | 41490/2680  | 21.15 | $20.5 \pm 1.0$ | 21.50 | 1.084 |

Note: for LTE power tolerance, only QPSK modulation mode was provide here.

## 9. Test Results

### Results overview of GSM850

| Body-worn (5mm)        | Channel /Frequency | Mode     | SAR Value (W/kg)1-g | Power drift(%) | Scaled Factor | Scaled SAR (W/Kg)1-g | SAR Plot. |
|------------------------|--------------------|----------|---------------------|----------------|---------------|----------------------|-----------|
| Face Upward            | 128/824.2          | GPRS 2Tx | 1.173               | -3.58          | 1.059         | 1.243                | /         |
|                        | 190/836.6          | GPRS 2Tx | <b>1.184</b>        | -4.95          | 1.054         | <b>1.248</b>         | Yes       |
|                        | 251/848.8          | GPRS 2Tx | 1.092               | 1.07           | 1.140         | 1.245                | /         |
| Face Upward (Repeated) | 128/824.2          | GPRS 2Tx | 1.103               | -3.26          | 1.059         | 1.168                | /         |
|                        | 190/836.6          | GPRS 2Tx | 1.115               | -1.57          | 1.054         | 1.175                | /         |
|                        | 251/848.8          | GPRS 2Tx | 1.028               | -2.00          | 1.140         | 1.172                | /         |
| Back Upward            | 128/824.2          | GPRS 2Tx | 1.005               | -1.87          | 1.059         | 1.064                | /         |
|                        | 190/836.6          | GPRS 2Tx | 1.018               | -1.54          | 1.054         | 1.073                | /         |
|                        | 251/848.8          | GPRS 2Tx | 0.937               | -2.61          | 1.140         | 1.068                | /         |
| Back Upward (Repeated) | 128/824.2          | GPRS 2Tx | 0.974               | -2.38          | 1.059         | 1.031                | /         |
|                        | 190/836.6          | GPRS 2Tx | 0.982               | -3.31          | 1.054         | 1.035                | /         |
|                        | 251/848.8          | GPRS 2Tx | 0.906               | 2.08           | 1.140         | 1.033                | /         |
| Edge B                 | 190/836.6          | GPRS 2Tx | 0.732               | 0.20           | 1.054         | 0.772                | /         |
| Edge C                 | 190/836.6          | GPRS 2Tx | 0.181               | -0.20          | 1.054         | 0.191                | /         |
| Edge D                 | 190/836.6          | GPRS 2Tx | 0.646               | 1.02           | 1.054         | 0.681                | /         |

### Results overview of GSM1900

| Body-worn (5mm) | Channel /Frequency | Mode     | SAR Value (W/kg)1-g | Power drift(%) | Scaled Factor | Scaled SAR (W/Kg)1-g | SAR Plot. |
|-----------------|--------------------|----------|---------------------|----------------|---------------|----------------------|-----------|
| Back Upward     | 661/1880.0         | GPRS 2Tx | <b>0.299</b>        | -4.17          | 1.099         | <b>0.329</b>         | Yes       |
| Face Upward     | 661/1880.0         | GPRS 2Tx | 0.250               | -3.74          | 1.099         | 0.275                | /         |
| Edge B          | 661/1880.0         | GPRS 2Tx | 0.198               | -3.11          | 1.099         | 0.218                | /         |
| Edge C          | 661/1880.0         | GPRS 2Tx | 0.156               | 0.52           | 1.099         | 0.171                | /         |
| Edge D          | 661/1880.0         | GPRS 2Tx | 0.214               | -0.08          | 1.099         | 0.235                | /         |

### Results overview of WCDMA850

| Body-worn (5mm)        | Channel /Frequency | Mode | SAR Value (W/kg)1-g | Power drift(%) | Scaled Factor | Scaled SAR (W/Kg)1-g | SAR Plot. |
|------------------------|--------------------|------|---------------------|----------------|---------------|----------------------|-----------|
| Face Upward            | 4132/826.4         | RMC  | 1.212               | -4.08          | 1.009         | 1.223                | /         |
|                        | 4183/836.6         | RMC  | <b>1.216</b>        | -0.10          | 1.081         | 1.314                | Yes       |
|                        | 4233/846.6         | RMC  | 1.162               | -0.93          | 1.130         | 1.313                | /         |
| Face Upward (Repeated) | 4132/826.4         | RMC  | 1.195               | -1.74          | 1.009         | 1.206                | /         |
|                        | 4183/836.6         | RMC  | 1.197               | -2.08          | 1.081         | 1.294                | /         |
|                        | 4233/846.6         | RMC  | 1.142               | -2.33          | 1.130         | 1.290                | /         |
| Face Upward (Repeated) | 4132/826.4         | RMC  | 1.181               | -3.14          | 1.009         | 1.192                | /         |
|                        | 4183/836.6         | RMC  | 1.184               | 0.45           | 1.081         | 1.280                | /         |
|                        | 4233/846.6         | RMC  | 1.130               | 1.06           | 1.130         | 1.277                | /         |
| Back Upward            | 4132/826.4         | RMC  | 1.158               | -3.33          | 1.009         | 1.168                | /         |
|                        | 4183/836.6         | RMC  | 1.161               | -4.56          | 1.081         | 1.255                | /         |
|                        | 4233/846.6         | RMC  | 1.110               | 0.77           | 1.130         | 1.254                | /         |
| Back Upward (Repeated) | 4132/826.4         | RMC  | 1.146               | -1.58          | 1.009         | 1.156                | /         |
|                        | 4183/836.6         | RMC  | 1.148               | 1.69           | 1.081         | 1.241                | /         |
|                        | 4233/846.6         | RMC  | 1.035               | -2.21          | 1.130         | 1.170                | /         |
| Edge B                 | 4183/836.6         | RMC  | 0.500               | 1.96           | 1.081         | 0.541                | /         |
| Edge C                 | 4183/836.6         | RMC  | 0.481               | 0.08           | 1.081         | 0.520                | /         |
| Edge D                 | 4183/836.6         | RMC  | 0.565               | 3.87           | 1.081         | 0.611                | /         |

### Results overview of WCDMA1900

| Body-worn (5mm) | Channel /Frequency | Mode | SAR Value (W/kg)1-g | Power drift(%) | Scaled Factor | Scaled SAR (W/Kg)1-g | SAR Plot. |
|-----------------|--------------------|------|---------------------|----------------|---------------|----------------------|-----------|
| Face Upward     | 9400/1880.0        | RMC  | <b>0.733</b>        | -1.46          | 1.059         | <b>0.776</b>         | Yes       |
| Back Upward     | 9400/1880.0        | RMC  | 0.640               | 3.34           | 1.059         | 0.678                | /         |
| Edge B          | 9400/1880.0        | RMC  | 0.398               | 3.93           | 1.059         | 0.422                | /         |
| Edge C          | 9400/1880.0        | RMC  | 0.407               | -0.55          | 1.059         | 0.431                | /         |
| Edge D          | 9400/1880.0        | RMC  | 0.509               | 1.32           | 1.059         | 0.539                | /         |

### Results overview of WCDMA1700

| Body-worn (5mm)        | Channel /Frequency | Mode | SAR Value (W/kg)1-g | Power drift(%) | Scaled Factor | Scaled SAR (W/Kg)1-g | SAR Plot. |
|------------------------|--------------------|------|---------------------|----------------|---------------|----------------------|-----------|
| Back Upward            | 1312/1712.4        | RMC  | 0.892               | 0.51           | 1.153         | 1.029                | /         |
|                        | 1413/1732.6        | RMC  | <b>0.902</b>        | -0.60          | 1.250         | <b>1.128</b>         | Yes       |
|                        | 1513/1752.6        | RMC  | 0.900               | 3.43           | 1.102         | 0.991                | /         |
| Back Upward (Repeated) | 1312/1712.4        | RMC  | 0.882               | -1.52          | 1.153         | 1.017                | /         |
|                        | 1413/1732.6        | RMC  | 0.888               | 0.94           | 1.250         | 1.110                | /         |
|                        | 1513/1752.6        | RMC  | 0.885               | -3.66          | 1.102         | 0.975                | /         |
| Face Upward            | 1312/1712.4        | RMC  | 0.720               | -1.97          | 1.153         | 0.830                | /         |
|                        | 1413/1732.6        | RMC  | 0.725               | -1.24          | 1.250         | 0.906                | /         |
|                        | 1513/1752.6        | RMC  | 0.722               | -2.89          | 1.102         | 0.796                | /         |
| Edge B                 | 1413/1732.6        | RMC  | 0.484               | -3.95          | 1.250         | 0.605                | /         |
| Edge C                 | 1312/1712.4        | RMC  | 0.660               | -1.52          | 1.153         | 0.761                | /         |
|                        | 1413/1732.6        | RMC  | 0.664               | -2.58          | 1.250         | 0.830                | /         |
|                        | 1513/1752.6        | RMC  | 0.663               | -3.01          | 1.102         | 0.731                | /         |
| Edge D                 | 1413/1732.6        | RMC  | 0.527               | -1.81          | 1.250         | 0.659                | /         |

### Results overview of FDD LTE Band 2, QPSK, 20MHz Bandwidth

| Body-worn (5mm) | Channel /Frequency | Mode | SAR Value (W/kg)1-g | Power drift(%) | Scaled Factor | Scaled SAR (W/Kg)1-g | Limit (W/kg) |
|-----------------|--------------------|------|---------------------|----------------|---------------|----------------------|--------------|
| 1RB#0           |                    |      |                     |                |               |                      |              |
| Face Upward     | 18900/1880         | Data | <b>0.719</b>        | 3.31           | 1.074         | <b>0.772</b>         | Yes          |
| Back Upward     | 18900/1880         | Data | 0.586               | 2.65           | 1.074         | 0.629                | /            |
| Edge B          | 18900/1880         | Data | 0.499               | 2.46           | 1.074         | 0.536                | /            |
| Edge C          | 18900/1880         | Data | 0.253               | -1.13          | 1.074         | 0.272                | /            |
| Edge D          | 18900/1880         | Data | 0.645               | -0.61          | 1.074         | 0.693                | /            |
| 50%RB#0         |                    |      |                     |                |               |                      |              |
| Face Upward     | 18900/1880         | Data | 0.691               | 3.69           | 1.107         | 0.765                | /            |
| Back Upward     | 18900/1880         | Data | 0.560               | 2.95           | 1.107         | 0.620                | /            |
| Edge B          | 18900/1880         | Data | 0.476               | -2.30          | 1.107         | 0.527                | /            |
| Edge C          | 18900/1880         | Data | 0.234               | 2.24           | 1.107         | 0.259                | /            |
| Edge D          | 18900/1880         | Data | 0.621               | -3.84          | 1.107         | 0.687                | /            |

**Results overview of FDD LTE Band 4, QPSK, 20MHz Bandwidth**

| Body-worn (5mm)        | Channel /Frequency | Mode | SAR Value (W/kg)1-g | Power drift(%) | Scaled Factor | Scaled SAR (W/Kg)1-g | Limit (W/kg) |
|------------------------|--------------------|------|---------------------|----------------|---------------|----------------------|--------------|
| 1RB#0                  |                    |      |                     |                |               |                      |              |
| Back Upward            | 20050/1720         | Data | 1.217               | 0.42           | 1.076         | 1.309                | /            |
|                        | 20175/1732.5       | Data | <b>1.233</b>        | -2.29          | 1.064         | <b>1.312</b>         | Yes          |
|                        | 20300/1745         | Data | 1.230               | -2.15          | 1.028         | 1.264                | /            |
| Back Upward (Repeated) | 20050/1720         | Data | 1.195               | 0.07           | 1.076         | 1.286                | /            |
|                        | 20175/1732.5       | Data | 1.211               | -0.05          | 1.064         | 1.289                | /            |
|                        | 20300/1745         | Data | 1.208               | -0.85          | 1.028         | 1.242                | /            |
| Back Upward (Repeated) | 20050/1720         | Data | 1.182               | -2.84          | 1.076         | 1.272                | /            |
|                        | 20175/1732.5       | Data | 1.198               | -1.99          | 1.064         | 1.275                | /            |
|                        | 20300/1745         | Data | 1.195               | -2.64          | 1.028         | 1.228                | /            |
| Face Upward            | 20050/1720         | Data | 0.884               | -3.30          | 1.076         | 0.951                | /            |
|                        | 20175/1732.5       | Data | 0.900               | 4.14           | 1.064         | 0.958                | /            |
|                        | 20300/1745         | Data | 0.897               | 1.62           | 1.028         | 0.922                | /            |
| Face Upward (Repeated) | 20050/1720         | Data | 0.850               | -0.55          | 1.076         | 0.915                | /            |
|                        | 20175/1732.5       | Data | 0.862               | -1.62          | 1.064         | 0.917                | /            |
|                        | 20300/1745         | Data | 0.860               | 1.33           | 1.028         | 0.884                | /            |
| Edge B                 | 20050/1720         | Data | 0.732               | -0.28          | 1.076         | 0.788                | /            |
|                        | 20175/1732.5       | Data | 0.751               | 3.12           | 1.064         | 0.799                | /            |
|                        | 20300/1745         | Data | 0.749               | -2.49          | 1.028         | 0.770                | /            |
| Edge C                 | 20175/1732.5       | Data | 0.498               | -3.97          | 1.064         | 0.530                | /            |
| Edge D                 | 20050/1720         | Data | 0.889               | -4.52          | 1.076         | 0.957                | /            |
|                        | 20175/1732.5       | Data | 0.903               | 4.42           | 1.064         | 0.961                | /            |
|                        | 20300/1745         | Data | 0.901               | -3.79          | 1.028         | 0.926                | /            |
| Edge D (Repeated)      | 20050/1720         | Data | 0.842               | -2.55          | 1.076         | 0.906                | /            |
|                        | 20175/1732.5       | Data | 0.866               | -1.06          | 1.064         | 0.921                | /            |
|                        | 20300/1745         | Data | 0.863               | -0.29          | 1.028         | 0.887                | /            |
| 50%RB#0                |                    |      |                     |                |               |                      |              |
| Back Upward            | 20050/1720         | Data | 1.117               | -2.01          | 1.076         | 1.130                | /            |
|                        | 20175/1732.5       | Data | 1.132               | -2.53          | 1.064         | 1.132                | /            |
|                        | 20300/1745         | Data | 1.114               | -3.30          | 1.028         | 1.130                | /            |
| Back Upward (Repeated) | 20050/1720         | Data | 1.071               | -4.78          | 1.076         | 1.084                | /            |
|                        | 20175/1732.5       | Data | 1.087               | -2.43          | 1.064         | 1.087                | /            |
|                        | 20300/1745         | Data | 1.067               | 1.32           | 1.028         | 1.082                | /            |
| Face Upward            | 20175/1732.5       | Data | 0.788               | 1.59           | 1.064         | 0.788                | /            |
| Edge B                 | 20175/1732.5       | Data | 0.689               | -0.47          | 1.064         | 0.689                | /            |
| Edge C                 | 20175/1732.5       | Data | 0.437               | -4.93          | 1.064         | 0.437                | /            |
| Edge D                 | 20175/1732.5       | Data | 0.792               | -2.86          | 1.064         | 0.792                | /            |

**Results overview of FDD LTE Band 12, QPSK, 10MHz Bandwidth**

| Body-worn (5mm)        | Channel /Frequency | Mode | SAR Value (W/kg)1-g | Power drift(%) | Scaled Factor | Scaled SAR (W/Kg)1-g | Limit (W/kg) |
|------------------------|--------------------|------|---------------------|----------------|---------------|----------------------|--------------|
| 1RB#0                  |                    |      |                     |                |               |                      |              |
| Face Upward            | 23060/704          | Data | 0.801               | -4.26          | 1.019         | 0.816                | /            |
|                        | 23095/707.5        | Data | <b>0.812</b>        | 0.56           | 1.007         | <b>0.818</b>         | Yes          |
|                        | 23130/711          | Data | 0.795               | -2.49          | 1.028         | 0.817                | /            |
| Face Upward (Repeated) | 23060/704          | Data | 0.784               | 1.01           | 1.019         | 0.799                | /            |
|                        | 23095/707.5        | Data | 0.798               | 0.66           | 1.007         | 0.804                | /            |
|                        | 23130/711          | Data | 0.778               | -1.70          | 1.028         | 0.793                | /            |
| Back Upward            | 23095/707.5        | Data | 0.494               | -1.01          | 1.007         | 0.497                | /            |
| Edge B                 | 23095/707.5        | Data | 0.232               | -2.47          | 1.007         | 0.234                | /            |
| Edge C                 | 23095/707.5        | Data | 0.171               | 3.10           | 1.007         | 0.172                | /            |
| Edge D                 | 23095/707.5        | Data | 0.184               | 2.09           | 1.007         | 0.185                | /            |
| 50%RB#0                |                    |      |                     |                |               |                      |              |
| Face Upward            | 23095/707.5        | Data | 0.775               | -2.73          | 1.002         | 0.777                | /            |
| Back Upward            | 23095/707.5        | Data | 0.478               | -0.33          | 1.002         | 0.479                | /            |
| Edge B                 | 23095/707.5        | Data | 0.216               | 0.47           | 1.002         | 0.216                | /            |
| Edge C                 | 23095/707.5        | Data | 0.153               | 1.66           | 1.002         | 0.153                | /            |
| Edge D                 | 23095/707.5        | Data | 0.164               | -4.56          | 1.002         | 0.164                | /            |

**Results overview of FDD LTE Band 17, QPSK, 10MHz Bandwidth**

| Body-worn (5mm) | Channel /Frequency | Mode | SAR Value (W/kg)1-g | Power drift(%) | Scaled Factor | Scaled SAR (W/Kg)1-g | Limit (W/kg) |
|-----------------|--------------------|------|---------------------|----------------|---------------|----------------------|--------------|
| 1RB#0           |                    |      |                     |                |               |                      |              |
| Face Upward     | 23790/710          | Data | <b>0.700</b>        | -0.88          | 1.062         | <b>0.743</b>         | Yes          |
| Back Upward     | 23790/710          | Data | 0.438               | -0.54          | 1.062         | 0.465                | /            |
| Edge B          | 23790/710          | Data | 0.203               | -4.59          | 1.062         | 0.216                | /            |
| Edge C          | 23790/710          | Data | 0.168               | -4.35          | 1.062         | 0.178                | /            |
| Edge D          | 23790/710          | Data | 0.170               | -0.83          | 1.062         | 0.180                | /            |
| 50%RB#0         |                    |      |                     |                |               |                      |              |
| Face Upward     | 23790/710          | Data | 0.676               | -1.60          | 1.064         | 0.719                | /            |
| Back Upward     | 23790/710          | Data | 0.402               | -1.12          | 1.064         | 0.428                | /            |
| Edge B          | 23790/710          | Data | 0.182               | 1.25           | 1.064         | 0.194                | /            |
| Edge C          | 23790/710          | Data | 0.140               | -0.74          | 1.064         | 0.149                | /            |
| Edge D          | 23790/710          | Data | 0.146               | 4.84           | 1.064         | 0.155                | /            |

**Results overview of TDD LTE Band 41, QPSK, 20MHz Bandwidth**

| Body-worn (5mm)        | Channel /Frequency | Mode | SAR Value (W/kg)1-g | Power drift(%) | Scaled Factor | Scaled SAR (W/Kg)1-g | Limit (W/kg) |
|------------------------|--------------------|------|---------------------|----------------|---------------|----------------------|--------------|
| 1RB#0                  |                    |      |                     |                |               |                      |              |
| Face Upward            | 39750/2506         | Data | 1.205               | 4.50           | 1.122         | 1.352                | /            |
|                        | 40620/2593         | Data | <b>1.270</b>        | -4.20          | 1.069         | <b>1.358</b>         | Yes          |
|                        | 41490/2680         | Data | 1.156               | -2.78          | 1.169         | 1.352                | /            |
| Face Upward (Repeated) | 39750/2506         | Data | 1.178               | -1.38          | 1.122         | 1.322                | /            |
|                        | 40620/2593         | Data | 1.242               | -0.28          | 1.069         | 1.328                | /            |
|                        | 41490/2680         | Data | 1.131               | 3.18           | 1.169         | 1.322                | /            |
| Face Upward (Repeated) | 39750/2506         | Data | 1.160               | -1.43          | 1.122         | 1.302                | /            |
|                        | 40620/2593         | Data | 1.220               | -1.33          | 1.069         | 1.304                | /            |
|                        | 41490/2680         | Data | 1.105               | -2.20          | 1.169         | 1.292                | /            |
| Back Upward            | 40620/2593         | Data | 0.718               | -3.43          | 1.069         | 0.768                | /            |
| Edge B                 | 40620/2593         | Data | 0.108               | -2.73          | 1.069         | 0.115                | /            |
| Edge C                 | 40620/2593         | Data | 0.160               | 0.93           | 1.069         | 0.171                | /            |
| Edge D                 | 39750/2506         | Data | 0.901               | -1.61          | 1.122         | 1.011                | /            |
|                        | 40620/2593         | Data | 0.949               | 0.62           | 1.069         | 1.015                | /            |
|                        | 41490/2680         | Data | 0.866               | 1.38           | 1.169         | 1.012                | /            |
| Edge D (Repeated)      | 39750/2506         | Data | 0.877               | -3.58          | 1.122         | 0.984                | /            |
|                        | 40620/2593         | Data | 0.922               | -2.61          | 1.069         | 0.986                | /            |
|                        | 41490/2680         | Data | 0.833               | -4.37          | 1.169         | 0.974                | /            |
| 50%RB#0                |                    |      |                     |                |               |                      |              |
| Face Upward            | 39750/2506         | Data | 1.122               | -4.52          | 1.094         | 1.227                | /            |
|                        | 40620/2593         | Data | 1.189               | -4.06          | 1.035         | 1.231                | /            |
|                        | 41490/2680         | Data | 1.134               | -3.26          | 1.084         | 1.230                | /            |
| Face Upward (Repeated) | 39750/2506         | Data | 1.079               | 1.32           | 1.094         | 1.180                | /            |
|                        | 40620/2593         | Data | 1.143               | -2.16          | 1.035         | 1.183                | /            |
|                        | 41490/2680         | Data | 1.090               | -2.09          | 1.084         | 1.182                | /            |
| Back Upward            | 40620/2593         | Data | 0.667               | -2.66          | 1.035         | 0.690                | /            |
| Edge B                 | 40620/2593         | Data | 0.089               | 4.37           | 1.035         | 0.092                | /            |
| Edge C                 | 40620/2593         | Data | 0.137               | -0.91          | 1.035         | 0.142                | /            |
| Edge D                 | 39750/2506         | Data | 0.752               | -2.00          | 1.094         | 0.823                | /            |
|                        | 40620/2593         | Data | 0.799               | 0.63           | 1.035         | 0.827                | /            |
|                        | 41490/2680         | Data | 0.761               | -1.79          | 1.084         | 0.825                | /            |

Note: Per KDB941225 D06 v02r01, When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested. As the manufacture requirement the separation distance use 5mm for Hotspot mode. Per KDB Publication 941225 D01v03r01. RMC 12.2kbps was as primary mode SAR, when the primary mode SAR less than 1.2W/kg, secondary SAR (HSPA) was not requires.

When the 1-g SAR for the mid-band channel or the channel with the highest output power satisfy the following conditions, testing of the other channels in the band is not required. (Per KDB 447498 D01 General RF Exposure Guidance v06)

- $\leq 0.8$  W/kg, when the transmission band is  $\leq 100$  MHz
- $\leq 0.6$  W/kg, when the transmission band is between 100 MHz and 200 MHz
- $\leq 0.4$  W/kg, when the transmission band is  $\geq 200$  MHz

## 10. Simultaneous Transmissions Analysis

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 6 of this report. Maximum localized SAR is **below** exposure limits specified in the relevant standards.

Simultaneous Tx Combination of GSM/WCDMA/LTE Body&Hotspot).

| Test Position/Freq.                                      |            | BACK  | FACE  | Edge A | Edge B | Edge C | Edge D |
|----------------------------------------------------------|------------|-------|-------|--------|--------|--------|--------|
| Body<br>&Hotspot<br>MAX 1-g<br>SAR(W/Kg)<br>5mm distance | GSM850     | 1.073 | 1.248 | /      | 0.772  | 0.191  | 0.681  |
|                                                          | GSM1900    | 0.329 | 0.275 | /      | 0.218  | 0.171  | 0.235  |
|                                                          | WCDMA 850  | 1.255 | 1.314 | /      | 0.541  | 0.520  | 0.611  |
|                                                          | WCDMA 1900 | 0.678 | 0.776 | /      | 0.422  | 0.431  | 0.539  |
|                                                          | WCDMA 1700 | 1.128 | 0.906 | /      | 0.605  | 0.830  | 0.659  |
|                                                          | LTE Band2  | 0.629 | 0.772 | /      | 0.536  | 0.272  | 0.693  |
|                                                          | LTE Band4  | 1.312 | 0.958 | /      | 0.799  | 0.530  | 0.961  |
|                                                          | LTE Band12 | 0.497 | 0.818 | /      | 0.234  | 0.172  | 0.185  |
|                                                          | LTE Band17 | 0.465 | 0.743 | /      | 0.216  | 0.178  | 0.180  |
|                                                          | LTE Band41 | 0.768 | 1.358 | /      | 0.115  | 0.171  | 1.015  |

The estimated SAR value with \* Signal

### **SAR to Peak Location Separation Ratio (SPLSR)**

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required

## 11.Measurement Uncertainty

| No.                      | Uncertainty Component                                                             | Type | Uncertainty Value (%) | Probability Distribution | k          | ci  | Standard Uncertainty (%) $u_i(\%)$ | Degree of freedom $\nu_{eff}$ or $\nu_i$ |
|--------------------------|-----------------------------------------------------------------------------------|------|-----------------------|--------------------------|------------|-----|------------------------------------|------------------------------------------|
| Measurement System       |                                                                                   |      |                       |                          |            |     |                                    |                                          |
| 1                        | - Probe Calibration                                                               | B    | 5.8                   | N                        | 1          | 1   | 5.8                                | $\infty$                                 |
| 2                        | - Axial isotropy                                                                  | B    | 3.5                   | R                        | $\sqrt{3}$ | 0.5 | 1.43                               | $\infty$                                 |
| 3                        | — Hemispherical Isotropy                                                          | B    | 5.9                   | R                        | $\sqrt{3}$ | 0.5 | 2.41                               | $\infty$                                 |
| 4                        | - Boundary Effect                                                                 | B    | 1                     | R                        | $\sqrt{3}$ | 1   | 0.58                               | $\infty$                                 |
| 5                        | - Linearity                                                                       | B    | 4.7                   | R                        | $\sqrt{3}$ | 1   | 2.71                               | $\infty$                                 |
| 6                        | - System Detection Limits                                                         | B    | 1.0                   | R                        | $\sqrt{3}$ | 1   | 0.58                               | $\infty$                                 |
| 7                        | Modulation response                                                               | B    | 3                     | N                        | 1          | 1   | 3.00                               |                                          |
| 8                        | - Readout Electronics                                                             | B    | 0.5                   | N                        | 1          | 1   | 0.50                               | $\infty$                                 |
| 9                        | - Response Time                                                                   | B    | 1.4                   | R                        | $\sqrt{3}$ | 1   | 0.81                               | $\infty$                                 |
| 10                       | - Integration Time                                                                | B    | 3.0                   | R                        | $\sqrt{3}$ | 1   | 1.73                               | $\infty$                                 |
| 11                       | - RF Ambient Conditions                                                           | B    | 3.0                   | R                        | $\sqrt{3}$ | 1   | 1.73                               | $\infty$                                 |
| 12                       | - Probe Position Mechanical tolerance                                             | B    | 1.4                   | R                        | $\sqrt{3}$ | 1   | 0.81                               | $\infty$                                 |
| 13                       | - Probe Position with respect to Phantom Shell                                    | B    | 1.4                   | R                        | $\sqrt{3}$ | 1   | 0.81                               | $\infty$                                 |
| 14                       | - Extrapolation, Interpolation and Integration Algorithms for Max. SAR evaluation | B    | 2.3                   | R                        | $\sqrt{3}$ | 1   | 1.33                               | $\infty$                                 |
| Uncertainties of the DUT |                                                                                   |      |                       |                          |            |     |                                    |                                          |

|                                                              |                                                                               |   |     |     |            |     |       |          |
|--------------------------------------------------------------|-------------------------------------------------------------------------------|---|-----|-----|------------|-----|-------|----------|
| 15                                                           | - Position of the DUT                                                         | A | 2.6 | N   | $\sqrt{3}$ | 1   | 2.6   | 5        |
| 16                                                           | - Holder of the DUT                                                           | A | 3   | N   | $\sqrt{3}$ | 1   | 3.0   | 5        |
| 17                                                           | - Output Power Variation<br>-SAR drift measurement                            | B | 5.0 | R   | $\sqrt{3}$ | 1   | 2.89  | $\infty$ |
| <b>Phantom and Tissue Parameters</b>                         |                                                                               |   |     |     |            |     |       |          |
| 18                                                           | - Phantom Uncertainty(shape and thickness tolerances)                         | B | 4   | R   | $\sqrt{3}$ | 1   | 2.31  | $\infty$ |
| 19                                                           | Uncertainty in SAR correction for deviation(in permittivity and conductivity) | B | 2   | N   | 1          | 1   | 2.00  |          |
| 20                                                           | - Liquid Conductivity Target -tolerance                                       | B | 2.5 | R   | $\sqrt{3}$ | 0.6 | 1.95  | $\infty$ |
| 21                                                           | - Liquid Conductivity -measurement Uncertainty)                               | B | 4   | N   | $\sqrt{3}$ | 1   | 0.92  | 9        |
| 22                                                           | - Liquid Permittivity Target tolerance                                        | B | 2.5 | R   | $\sqrt{3}$ | 0.6 | 1.95  | $\infty$ |
| 23                                                           | - Liquid Permittivity -measurement uncertainty                                | B | 5   | N   | $\sqrt{3}$ | 1   | 1.15  | $\infty$ |
| <b>Combined Standard Uncertainty</b>                         |                                                                               |   |     | RSS |            |     | 10.63 |          |
| <b>Expanded uncertainty</b><br>(Confidence interval of 95 %) |                                                                               |   |     | K=2 |            |     | 21.26 |          |

### System Check Uncertainty

| No.                       | Uncertainty Component | Type | Uncertainty Value (%) | Probability Distribution | k          | ci  | Standard Uncertainty (%) $u_i(\%)$ | Degree of freedom $V_{eff}$ or $v_i$ |
|---------------------------|-----------------------|------|-----------------------|--------------------------|------------|-----|------------------------------------|--------------------------------------|
| <b>Measurement System</b> |                       |      |                       |                          |            |     |                                    |                                      |
| 1                         | - Probe Calibration   | B    | 5.8                   | N                        | 1          | 1   | 5.8                                | $\infty$                             |
| 2                         | - Axial isotropy      | B    | 3.5                   | R                        | $\sqrt{3}$ | 0.5 | 1.43                               | $\infty$                             |

|                               |                                                                                   |   |      |   |            |     |      |          |
|-------------------------------|-----------------------------------------------------------------------------------|---|------|---|------------|-----|------|----------|
| 3                             | — Hemispherical Isotropy                                                          | B | 5.9  | R | $\sqrt{3}$ | 0.5 | 2.41 | $\infty$ |
| 4                             | - Boundary Effect                                                                 | B | 1    | R | $\sqrt{3}$ | 1   | 0.58 | $\infty$ |
| 5                             | - Linearity                                                                       | B | 4.7  | R | $\sqrt{3}$ | 1   | 2.71 | $\infty$ |
| 6                             | - System Detection Limits                                                         | B | 1    | R | $\sqrt{3}$ | 1   | 0.58 | $\infty$ |
| 7                             | Modulation response                                                               | B | 0    | N | 1          | 1   | 0.00 |          |
| 8                             | - Readout Electronics                                                             | B | 0.5  | N | 1          | 1   | 0.50 | $\infty$ |
| 9                             | - Response Time                                                                   | B | 0.00 | R | $\sqrt{3}$ | 1   | 0.00 | $\infty$ |
| 10                            | - Integration Time                                                                | B | 1.4  | R | $\sqrt{3}$ | 1   | 0.81 | $\infty$ |
| 11                            | - RF Ambient Conditions                                                           | B | 3.0  | R | $\sqrt{3}$ | 1   | 1.73 | $\infty$ |
| 12                            | - Probe Position Mechanical tolerance                                             | B | 1.4  | R | $\sqrt{3}$ | 1   | 0.81 | $\infty$ |
| 13                            | - Probe Position with respect to Phantom Shell                                    | B | 1.4  | R | $\sqrt{3}$ | 1   | 0.81 | $\infty$ |
| 14                            | - Extrapolation, Interpolation and Integration Algorithms for Max. SAR evaluation | B | 2.3  | R | $\sqrt{3}$ | 1   | 1.33 | $\infty$ |
| Uncertainties of the DUT      |                                                                                   |   |      |   |            |     |      |          |
| 15                            | Deviation of experimental source from numerical source                            | A | 4    | N | 1          | 1   | 4.00 | 5        |
| 16                            | Input Power and SAR drift measurement                                             | A | 5    | R | $\sqrt{3}$ | 1   | 2.89 | 5        |
| 17                            | Dipole Axis to Liquid Distance                                                    | B | 2    | R | $\sqrt{3}$ | 1   | 1.2  | $\infty$ |
| Phantom and Tissue Parameters |                                                                                   |   |      |   |            |     |      |          |
| 18                            | - Phantom Uncertainty(shape                                                       | B | 4    | R | $\sqrt{3}$ | 1   | 2.31 | $\infty$ |

|                                                              |                                                                               |   |     |     |            |     |       |          |
|--------------------------------------------------------------|-------------------------------------------------------------------------------|---|-----|-----|------------|-----|-------|----------|
|                                                              | and thickness tolerances)                                                     |   |     |     |            |     |       |          |
| 19                                                           | Uncertainty in SAR correction for deviation(in permittivity and conductivity) | B | 2   | N   | 1          | 1   | 2.00  |          |
| 20                                                           | - Liquid Conductivity Target -tolerance                                       | B | 2.5 | R   | $\sqrt{3}$ | 0.6 | 1.95  | $\infty$ |
| 21                                                           | - Liquid Conductivity -measurement Uncertainty)                               | B | 4   | N   | $\sqrt{3}$ | 1   | 0.92  | 9        |
| 22                                                           | - Liquid Permittivity Target tolerance                                        | B | 2.5 | R   | $\sqrt{3}$ | 0.6 | 1.95  | $\infty$ |
| 23                                                           | - Liquid Permittivity -measurement uncertainty                                | B | 5   | N   | $\sqrt{3}$ | 1   | 1.15  | $\infty$ |
| <b>Combined Standard Uncertainty</b>                         |                                                                               |   |     | RSS |            |     | 10.15 |          |
| <b>Expanded uncertainty</b><br>(Confidence interval of 95 %) |                                                                               |   |     | K=2 |            |     | 20.29 |          |

## 12. Equipment List

This table is a complete overview of the SAR measurement equipment. Devices used during the test described are marked ☒.

|                                     | EQUIPMENT                          | Model         | Serial number          | Calibration Date | Due Date   |
|-------------------------------------|------------------------------------|---------------|------------------------|------------------|------------|
| <input checked="" type="checkbox"/> | SAR Probe                          | SSE2          | SN41/18 EPG0330        | 2019/05/21       | 2020/05/20 |
| <input checked="" type="checkbox"/> | Dipole                             | SID750        | SN 23/15 DIP0G750-378  | 2017/11/27       | 2020/11/26 |
| <input checked="" type="checkbox"/> | Dipole                             | SID835        | SN 09/13 DIP0G835-217  | 2017/11/27       | 2020/11/26 |
| <input type="checkbox"/>            | Dipole                             | SID900        | SN 09/13 DIP0G900-215  | 2017/11/27       | 2020/11/26 |
| <input checked="" type="checkbox"/> | Dipole                             | SID1800       | SN 09/13 DIP1G800-216  | 2017/11/27       | 2020/11/26 |
| <input checked="" type="checkbox"/> | Dipole                             | SID1900       | SN 09/13 DIP2G000-218  | 2017/11/27       | 2020/11/26 |
| <input type="checkbox"/>            | Dipole                             | SID2000       | SN 09/13 DIP2G000-219  | 2017/11/27       | 2020/11/26 |
| <input type="checkbox"/>            | Dipole                             | SID2450       | SN_09/13_DIP2G450-220  | 2017/11/27       | 2020/11/26 |
| <input checked="" type="checkbox"/> | Dipole                             | SID2600       | SN 32/14_DIP2G600-338  | 2017/11/27       | 2020/11/26 |
| <input checked="" type="checkbox"/> | Dipole                             | SWG5500       | SN15/15 WGA39          | 2017/11/27       | 2020/11/26 |
| <input checked="" type="checkbox"/> | Multimeter                         | Keithley-2000 | 4014020                | 2020/04/03       | 2021/04/03 |
| <input checked="" type="checkbox"/> | System Simulator(Agilent 8960)     | E5515C        | GB 47200710            | 2019/11/27       | 2020/11/26 |
| <input checked="" type="checkbox"/> | System Simulator(R&S)              | CMW500        | 130805                 | 2019/07/30       | 2020/07/29 |
| <input checked="" type="checkbox"/> | KEYSIGHT                           | E7515A        | MY56040357             | 2020/04/03       | 2021/04/03 |
| <input checked="" type="checkbox"/> | Vector Network Analyzer(R&S)       | ZVB8          | A0802530               | 2020/04/03       | 2021/04/03 |
| <input checked="" type="checkbox"/> | PC 3.5 Fixed Match Calibration Kit | ZV-Z32        | 100571                 | 2019/11/29       | 2020/11/28 |
| <input checked="" type="checkbox"/> | Dielectric Probe Kit               | SCLMP         | SN 09/13 OCPG51        | 2019/11/27       | 2020/11/26 |
| <input checked="" type="checkbox"/> | Signal Generator                   | SMU200A       | A140801888             | 2020/03/16       | 2021/03/15 |
| <input checked="" type="checkbox"/> | Amplifier                          | Nucletudes    | 143060                 | 2020/03/16       | 2021/03/15 |
| <input checked="" type="checkbox"/> | Directional Coupler                | DC6180A       | 305827                 | 2020/03/16       | 2021/03/15 |
| <input checked="" type="checkbox"/> | Power Meter                        | NRP2          | A140401673             | 2020/03/16       | 2021/03/15 |
| <input checked="" type="checkbox"/> | Power Sensor                       | NPR-Z11       | 1138.3004.02-114072-nq | 2020/03/16       | 2021/03/15 |
| <input checked="" type="checkbox"/> | Power Meter                        | NRVS          | A0802531               | 2020/03/16       | 2021/03/15 |
| <input checked="" type="checkbox"/> | Power Sensor                       | NRV-Z4        | 100069                 | 2020/03/16       | 2021/03/15 |

## ANNEX A: Appendix A: SAR System performance Check Plots

(Please See Appendix A)

## ANNEX B: Appendix B: SAR Measurement results Plots

(Please See Appendix B)

## ANNEX C: Appendix C: Calibration reports

(Please See Appendix C)

## ANNEX D: Appendix D: SAR Test Setup

(Please See Appendix D)

—End of the Report—