



REPORT No. : SZ14090028W01

FCC TEST REPORT

APPLICANT : GUANGDONG OPPO MOBILE
TELECOMMUNICATIONS CORP.,LTD

PRODUCT NAME : Mobile Phone

MODEL NAME : OPPO R8106

TRADE NAME : OPPO

BRAND NAME : OPPO

FCC ID : R9C-R8106

STANDARD(S) : 47 CFR Part 22 Subpart H
47 CFR Part 24 Subpart E

ISSUE DATE : 2014-10-24



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555
[Http://www.morlab.com](http://www.morlab.com)

Fax: 86-755-36698525
E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION	3
1. GENERAL INFORMATION	4
1.1. EUT DESCRIPTION	4
1.2. TEST STANDARDS AND RESULTS	6
1.3. FACILITIES AND ACCREDITATIONS	7
2. 47 CFR PART 2, PART 22H & 24E REQUIREMENTS	8
2.1. CONDUCTED RF OUTPUT POWER	8
2.2. PEAK TO AVERAGE RADIO	20
2.3. 99% OCCUPIED BANDWIDTH	26
2.4. FREQUENCY STABILITY	49
2.5. CONDUCTED OUT OF BAND EMISSIONS	57
2.6. BAND EDGE	95
2.7. TRANSMITTER RADIATED POWER (EIRP/ERP)	109
2.8. RADIATED OUT OF BAND EMISSIONS	121

Change History		
Issue	Date	Reason for change
1.0	2014-10-24	First edition



REPORT No. : SZ14090028W01

Test Report Declaration

Applicant	GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP.,LTD
Applicant Address	NO.18 HAIBIN ROAD, WUSHA, CHANG'AN, DONGGUAN, GUANGDONG,CHINA
Manufacturer	GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP.,LTD
Manufacturer Address	NO.18 HAIBIN ROAD, WUSHA, CHANG'AN, DONGGUAN, GUANGDONG,CHINA
Product Name	Mobile Phone
Model Name	OPPO R8106
Brand Name	OPPO
HW Version	11
SW Version	ColorOS V2.0.0i
Test Standards	47 CFR Part 22 Subpart H 47 CFR Part 24 Subpart E
Test Date	2014-09-15to 2014-10-17
Test Result	PASS

Tested by : Liu Zhisen

Liu Zhisen

Reviewed by : Peng Huarui

Peng Huarui

Approved by : Zeng Dexin

Zeng Dexin



1. GENERAL INFORMATION

1.1. EUT Description

EUT Type: Mobile Phone
Serial No.: (n.a, marked #1 by test site)
Hardware Version: 11
Software Version.....: C11olorOS V2.0.0i
Applicant: GUANGDONG OPPO MOBILE TELECOMMUNICATIONS
CORP., LTD
NO.18 HAIBIN ROAD, WUSHA, CHANG'AN, DONGGUAN,
GUANGDONG,CHINA
Manufacturer: GUANGDONG OPPO MOBILE TELECOMMUNICATIONS
CORP., LTD
NO.18 HAIBIN ROAD, WUSHA, CHANG'AN, DONGGUAN,
GUANGDONG,CHINA
Frequency Range: GSM 850MHz:
Tx: 824.20 - 848.80MHz (at intervals of 200kHz);
Rx: 869.20 - 893.80MHz (at intervals of 200kHz)
GSM 1900MHz:
Tx: 1850.20 - 1909.80MHz (at intervals of 200kHz);
Rx: 1930.20 - 1989.80MHz (at intervals of 200kHz)
WCDMA 850MHz
Tx: 826.4 - 846.6MHz (at intervals of 200kHz);
Rx: 871.4 - 891.6MHz (at intervals of 200kHz)
WCDMA 1900MHz
Tx: 1852.4 - 1907.6MHz (at intervals of 200kHz);
Rx: 1932.4 - 1987.6MHz (at intervals of 200kHz)
Modulation Type.....: GSM,GPRS Mode with GMSK Modulation
EDGE Mode with 8PSK Modulation
WCDMA Mode with QPSK Modulation
HSDPA Mode with QPSK Modulation
HSUPA Mode with QPSK Modulation
HSPA+ Mode with QPSK Modulation
Multislot Class.....: GPRS: Multislot Class 12,EGPRS: Multislot Class 12
Antenna Type: PIFA Antenna
Emission Designators: GSM 850:253KGXW,GSM 1900:247KGXW



EGPRS850:247KG7W, EGPRS1900:246KG7W,
WCDMA 850:4M15F9W ,WCDMA1900:4M16F9W

- Note 1:** The transmitter (Tx) frequency arrangement of the Cellular 850MHz band used by the EUT can be represented with the formula $F(n)=824.2+0.2*(n-128)$, $128 \leq n \leq 251$; the lowest, middle, highest channel numbers (ARFCHs) used and tested in this report are separately 128 (824.2MHz), 190 (836.6MHz) and 251 (848.8MHz).
- Note 2:** The transmitter (Tx) frequency arrangement of the PCS 1900MHz band used by the EUT can be represented with the formula $F(n)=1850.2+0.2*(n-512)$, $512 \leq n \leq 810$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 512 (1850.2MHz), 661 (1880.0MHz) and 810 (1909.8MHz).
- Note 3:** The transmitter (Tx) frequency arrangement of the WCDMA 850MHz band used by the EUT can be represented with the formula $F(n)=826.4+0.2*(n-4132)$, $4132 \leq n \leq 4233$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 4132 (826.4MHz), 4175(835MHz) and 4233 (846.6MHz).
- Note 4:** The transmitter (Tx) frequency arrangement of the WCDMA 1900MHz band used by the EUT can be represented with the formula $F(n)=1852.4+0.2*(n-9262)$, $9262 \leq n \leq 9538$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 9262 (1852.4MHz), 9400 (1880MHz) and 9538 (1907.6MHz).
- Note 5:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.2. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22 and Part 24 for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-13 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 (10-1-13 Edition)	Public Mobile Services
3	47 CFR Part 24 (10-1-13 Edition)	Personal Communications Services

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	2.1046	Conducted RF Output Power	PASS
2.	24.232(d)	Peak to average radio	PASS
2	2.1049,22.917 24.238	99% Occupied Bandwidth	PASS
3	2.1055,22.355 24.235	Frequency Stability	PASS
4	2.1051,2.1057 22.917,24.238,	Conducted Out of Band Emissions	PASS
5	2.1051,2.1057 22.917,24.238	Band Edge	PASS
6	22.913,24.232	Transmitter Radiated Power (EIPR/ERP)	PASS
7	2.1053,2.1057 22.917,24.238	Radiated Out of Band Emissions	PASS

NOTE: Measurement method according to TIA/EIA 603.D-2010



1.3. Facilities and Accreditations

1.3.1. Facilities

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, No.8 LongChang Road,Block 67, BaoAn District, ShenZhen, GuangDong Province,P. R. China 518101. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 695796.

1.3.2. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR Part 2, Part 22H & 24E Requirements


2.1. Conducted RF Output Power

2.1.1. Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

2.1.2. Test Description

1. Test Setup:

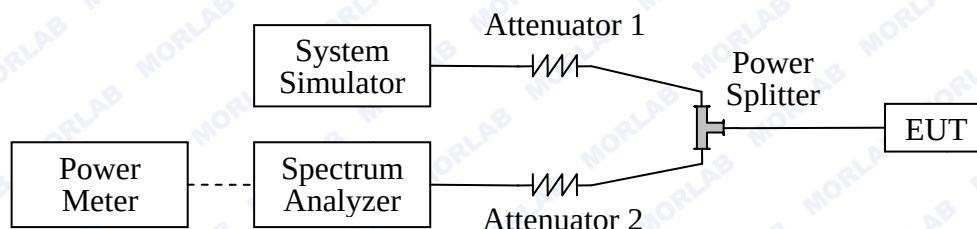

The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

The Power Meter was just used for the Conducted RF Output Power test of WCDMA Model.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2014.02.26	2015.02.25
Spectrum Analyzer	Agilent	E7405A	US44210471	2014.02.26	2015.02.25



Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Power Meter	Agilent	E4418B	GB43318055	2014.02.26	2015.02.25
Power Sensor	Agilent	8482A	MY41091706	2014.02.26	2015.02.25
Power Splitter	Weinschel	1506A	NW521	2014.02.26	2015.02.25
Attenuator 1	Resnet	20dB	(n.a.)	2014.02.26	2015.02.25
Attenuator 2	Resnet	3dB	(n.a.)	2014.02.26	2015.02.25

2.1.3. Test Results

Here the lowest, middle and highest channels are selected to perform testing to verify the conducted RF output power of the EUT.

1. GSM Model Test Verdict:

Band	Channel	Frequency (MHz)	Measured Output Power		Limit	Verdict
			dBm	Refer to Plot	dBm	
GSM 850MHz	128	824.2	33.18	Plot A1 to A3	35	<u>PASS</u>
	190	836.6	33.19			<u>PASS</u>
	251	848.8	33.07			<u>PASS</u>
GSM 1900MHz	512	1850.2	29.51	Plot B1 to B3	32	<u>PASS</u>
	661	1880.0	29.92			<u>PASS</u>
	810	1909.8	30.20			<u>PASS</u>
GPRS 850MHz	128	824.2	25.33	Plot C1 to C3 ^{Note 1}	35	<u>PASS</u>
	190	836.6	25.36			<u>PASS</u>
	251	848.8	25.56			<u>PASS</u>
GPRS 1900MHz	512	1850.2	21.32	Plot D1 to D3 ^{Note 1}	32	<u>PASS</u>
	661	1880.0	21.99			<u>PASS</u>
	810	1909.8	22.80			<u>PASS</u>
EGPRS 850MHz	128	824.2	29.38	Plot E1 to E3 ^{Note 1}	35	<u>PASS</u>
	190	836.6	29.56			<u>PASS</u>
	251	848.8	29.43			<u>PASS</u>
EGPRS 1900MHz	512	1850.2	26.14	Plot F1 to F3 ^{Note 1}	32	<u>PASS</u>
	661	1880.0	26.47			<u>PASS</u>
	810	1909.8	26.80			<u>PASS</u>

Note 1: For the GPRS and EGPRS model, all the slots were tested and just the worst data was record in this report.



REPORT No. : SZ14090028W01


2. WCDMA Model Test Verdict:

Item	band	WCDMA 850			WCDMA 1900		
	ARFCN	4132	4175	4233	9262	9400	9538
	subtest	dBm			dBm		
5.2(WCDMA)	non	23.21	23.08	23.52	23.47	23.48	23.33
HSDPA	1	23.23	22.95	23.42	23.35	23.40	23.52
	2	23.22	22.93	23.40	23.36	23.38	23.50
	3	22.71	22.42	22.90	22.85	22.89	23.01
	4	22.72	22.44	22.92	22.84	22.87	22.98
HSUPA	1	23.13	22.95	23.50	23.16	23.14	23.44
	2	21.12	20.94	21.48	21.15	21.10	21.45
	3	22.10	21.98	22.51	22.15	22.12	22.42
	4	21.11	20.95	21.47	21.14	21.15	21.47
	5	22.12	21.97	22.49	22.17	22.13	22.43
HSPA+	1	23.29	22.91	23.52	23.32	23.28	23.50
Note:	The Conducted RF Output Power test of WCDMA /HSDPA /HSUPA /HSPA+ was tested by power meter.						




REPORT No. : SZ14090028W01

3. GSM Model Test Plots:

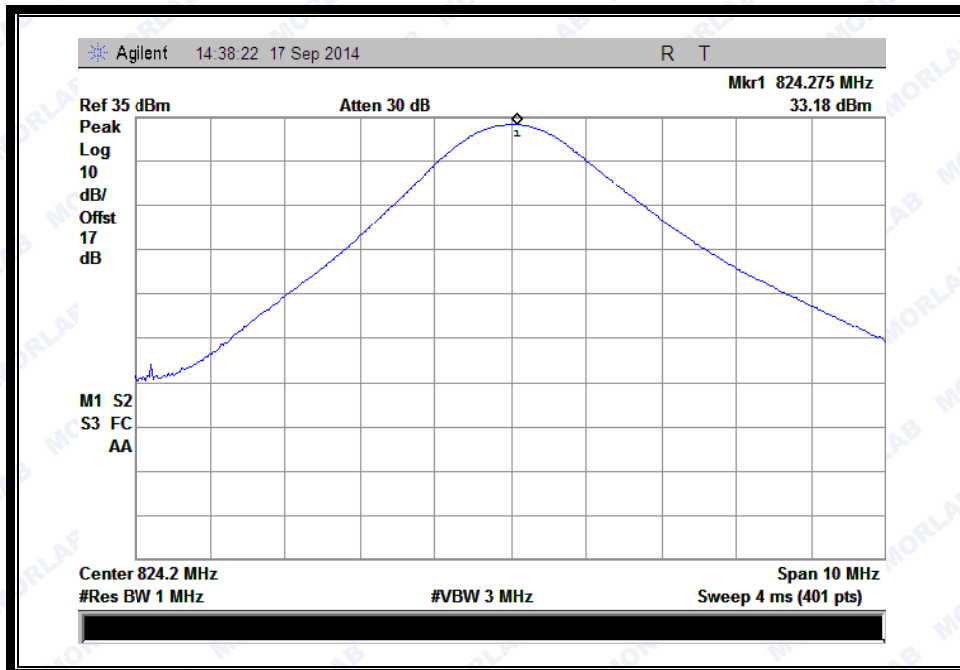


(Plot A1:GSM 850MHz Channel = 128)

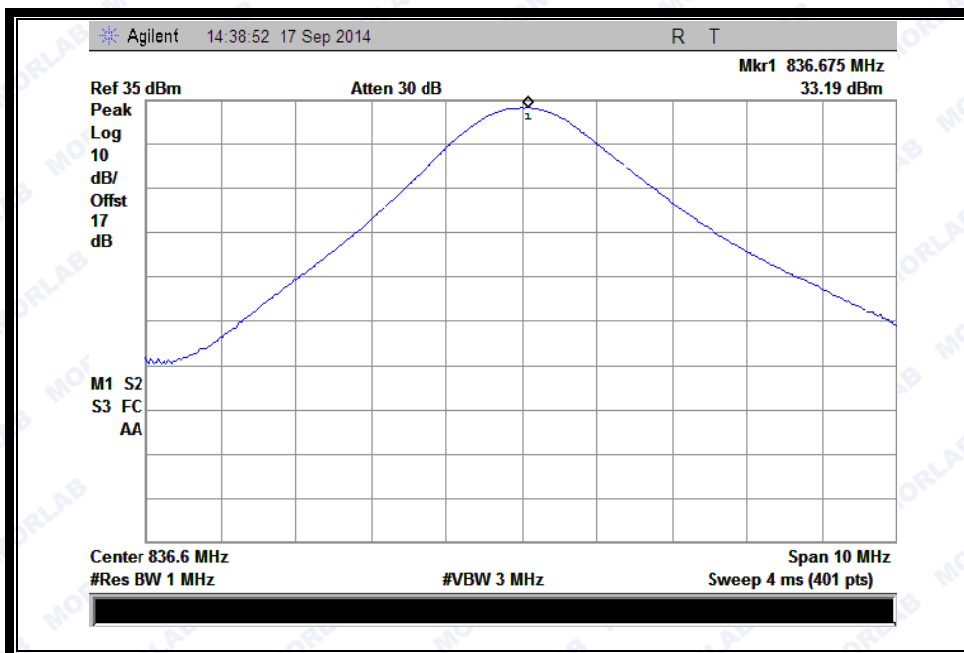


(Plot A2:GSM 850MHz Channel = 190)



REPORT No. : SZ14090028W01

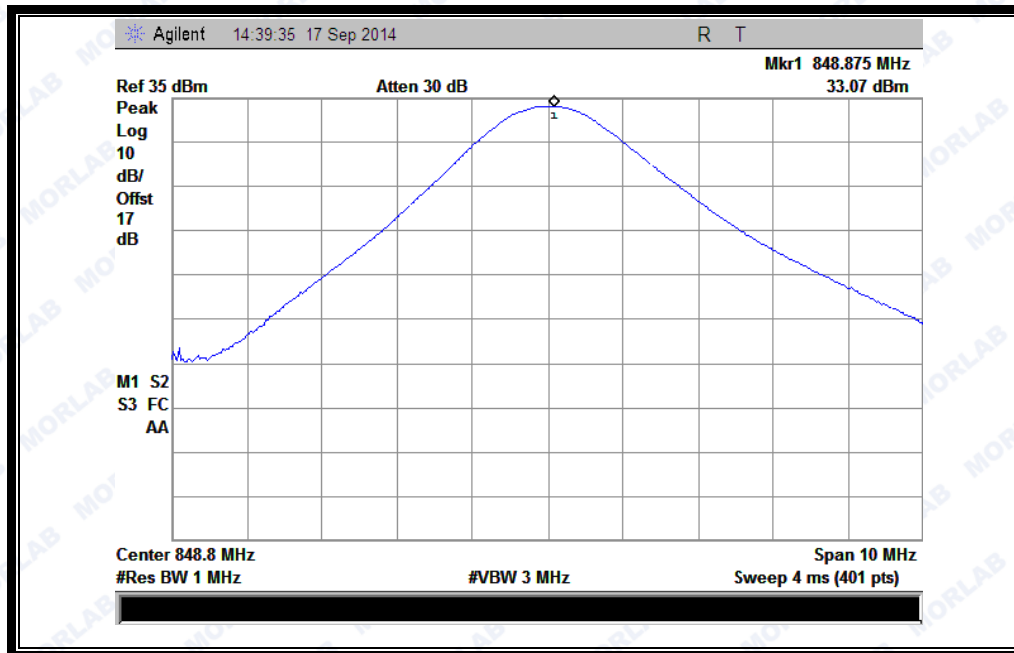


(Plot A3:GSM 850MHz Channel = 251)

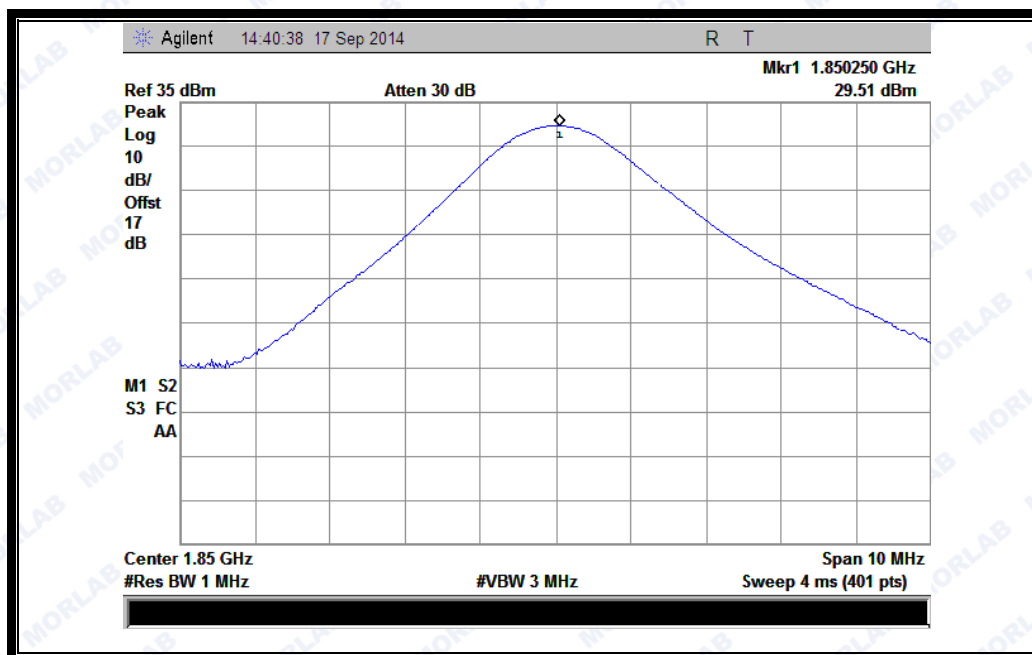


(Plot B1: GSM 1900MHz Channel = 512)



REPORT No. : SZ14090028W01

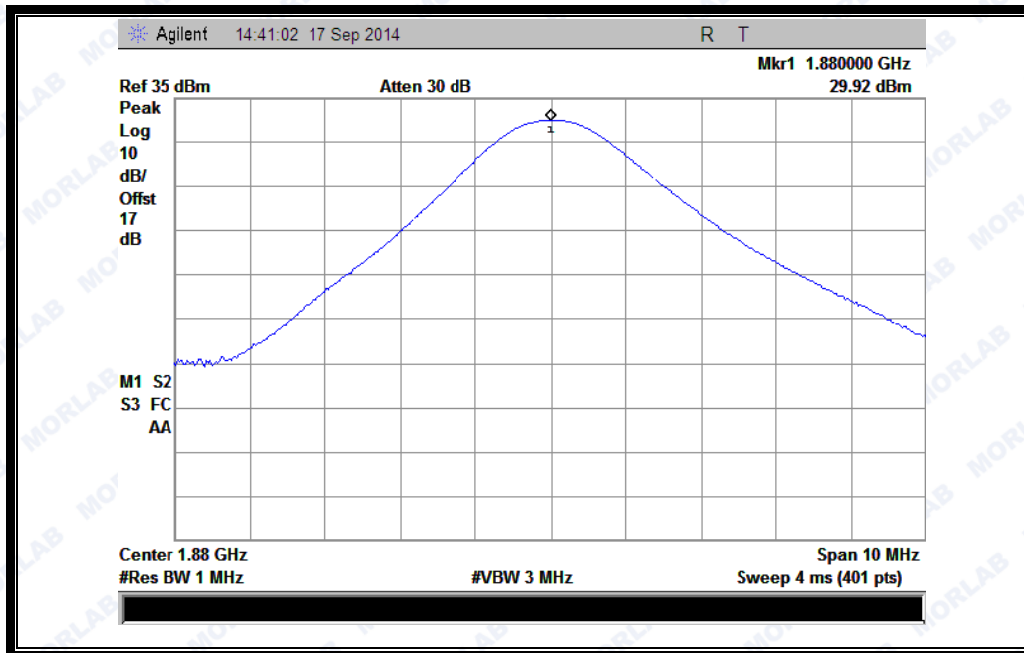


(Plot B2: GSM 1900MHz Channel = 661)

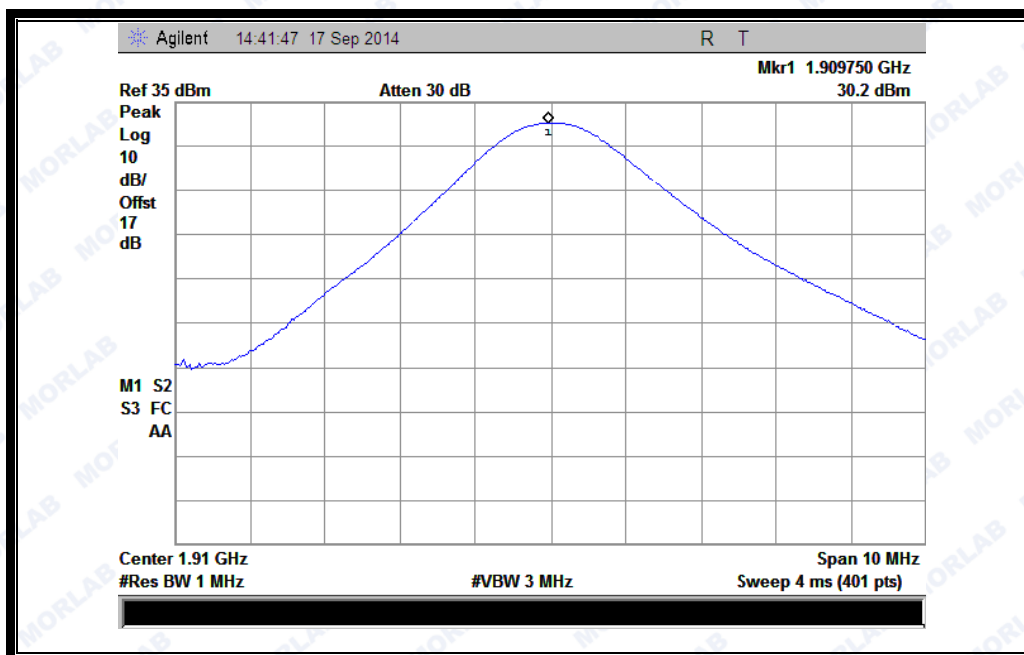


(Plot B3: GSM 1900Hz Channel = 810)



REPORT No. : SZ14090028W01

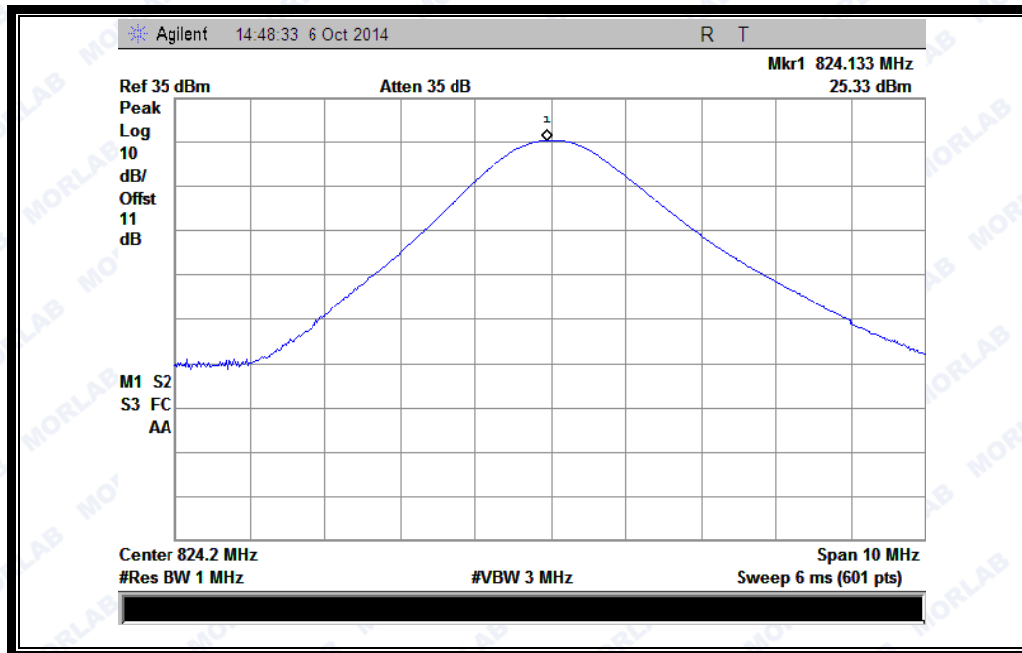


(Plot C 1: GPRS 850MHz Channel = 128)

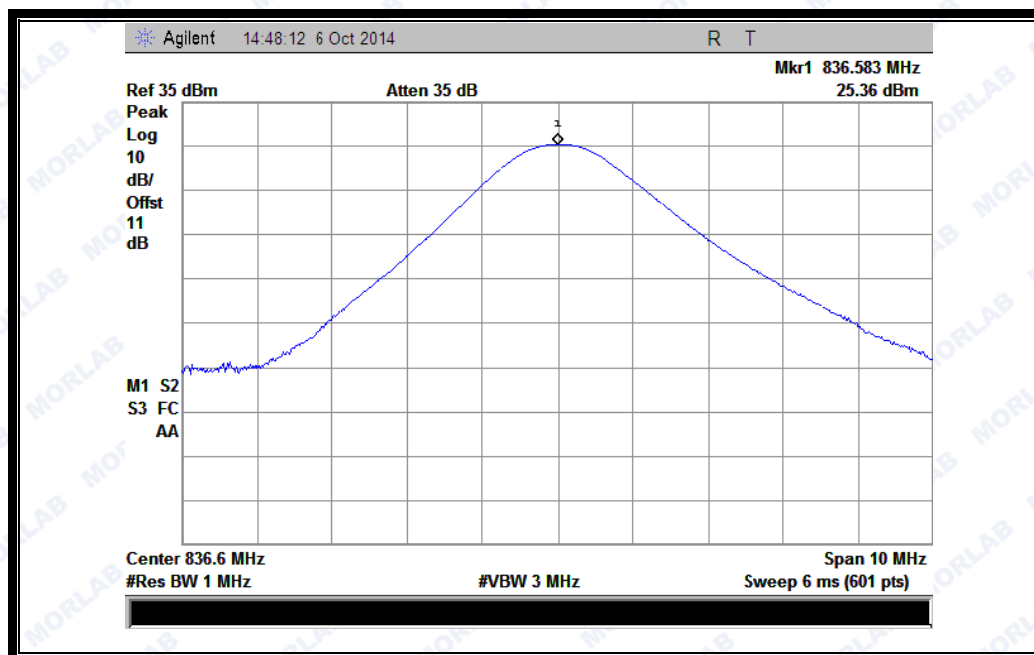


(Plot C 2: GPRS 850MHz Channel = 190)



REPORT No. : SZ14090028W01

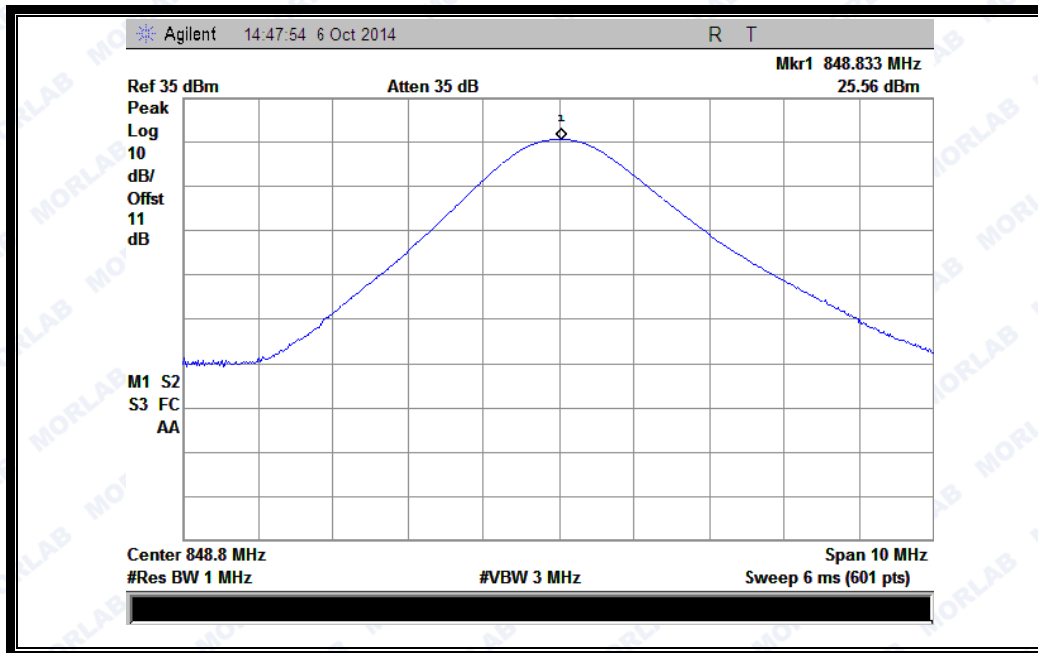


(Plot C 3: GPRS 850MHz Channel = 251)

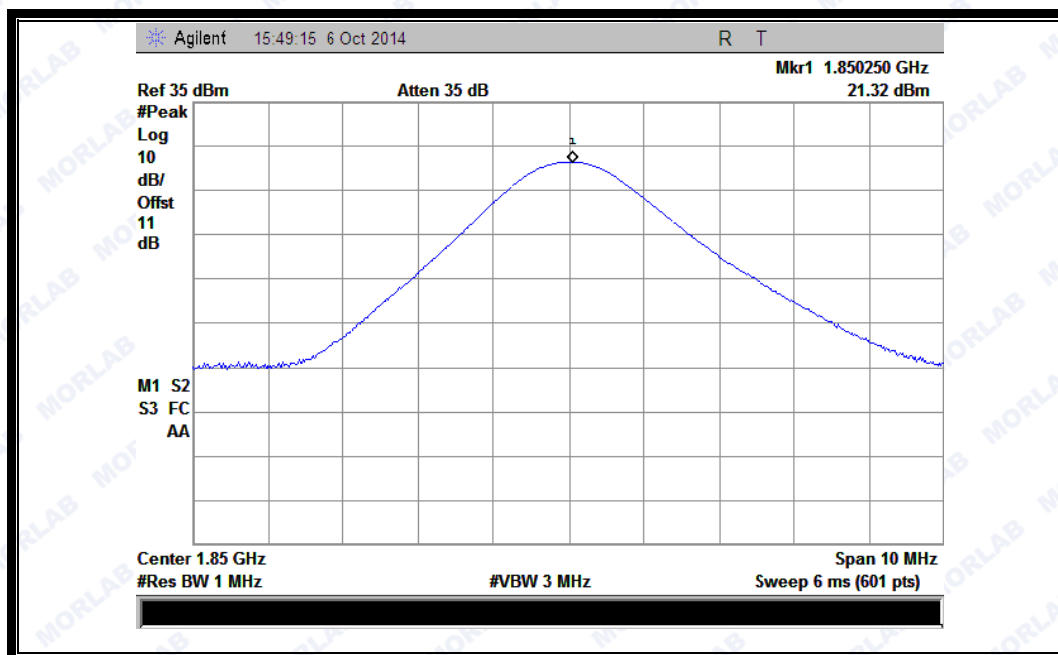


(Plot D 1: GPRS 1900MHz Channel = 512)



REPORT No. : SZ14090028W01

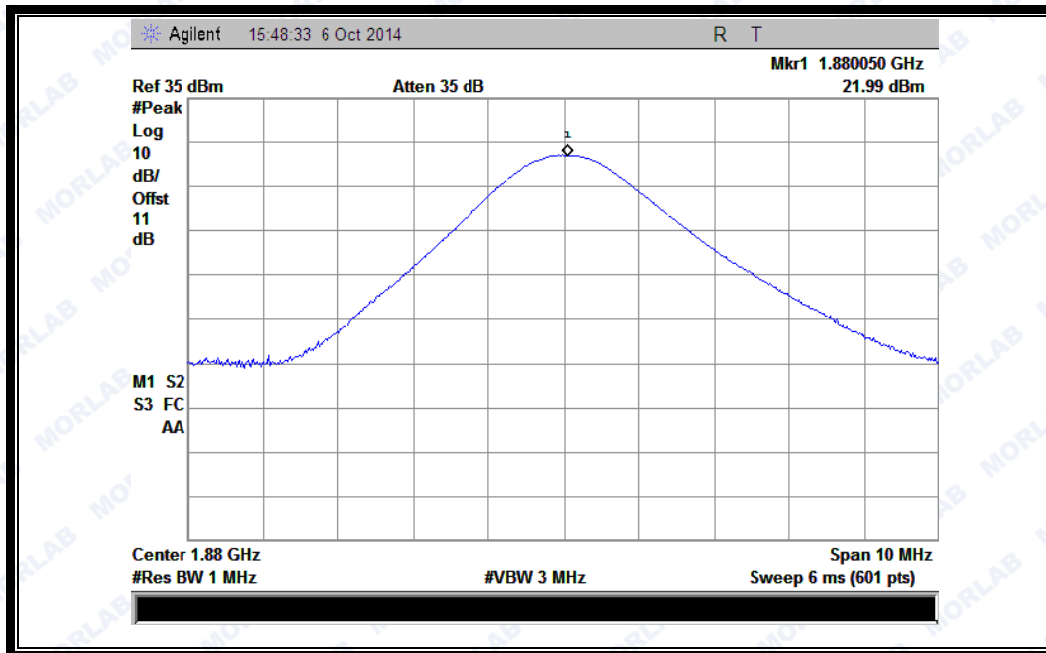


(Plot D 2: GPRS 1900MHz Channel = 661)

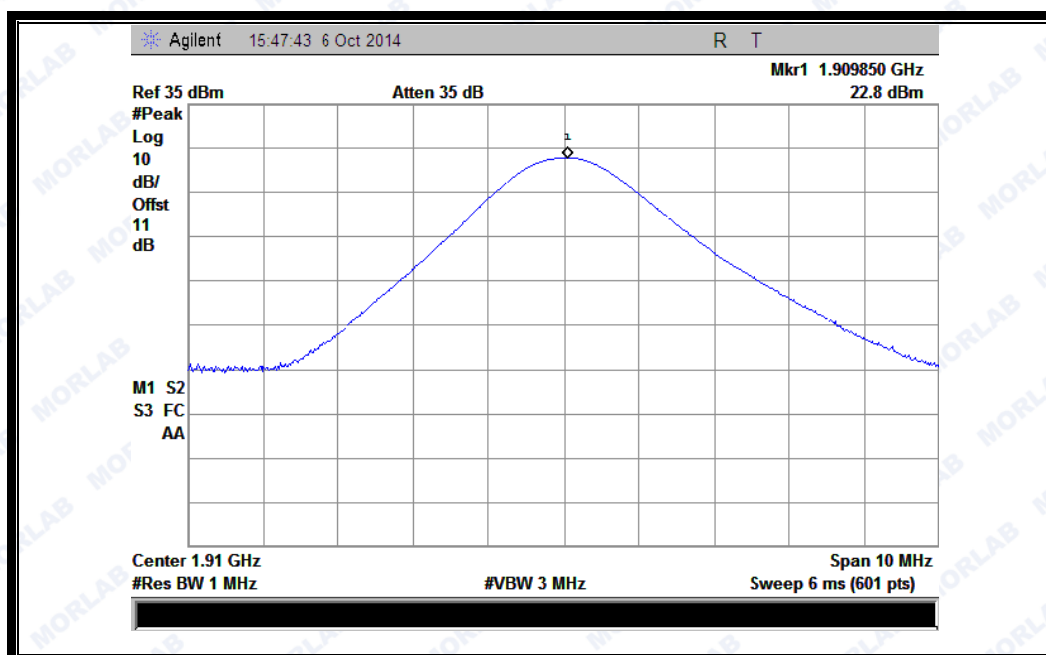


(Plot D 3: GPRS 1900MHz Channel = 810)



REPORT No. : SZ14090028W01

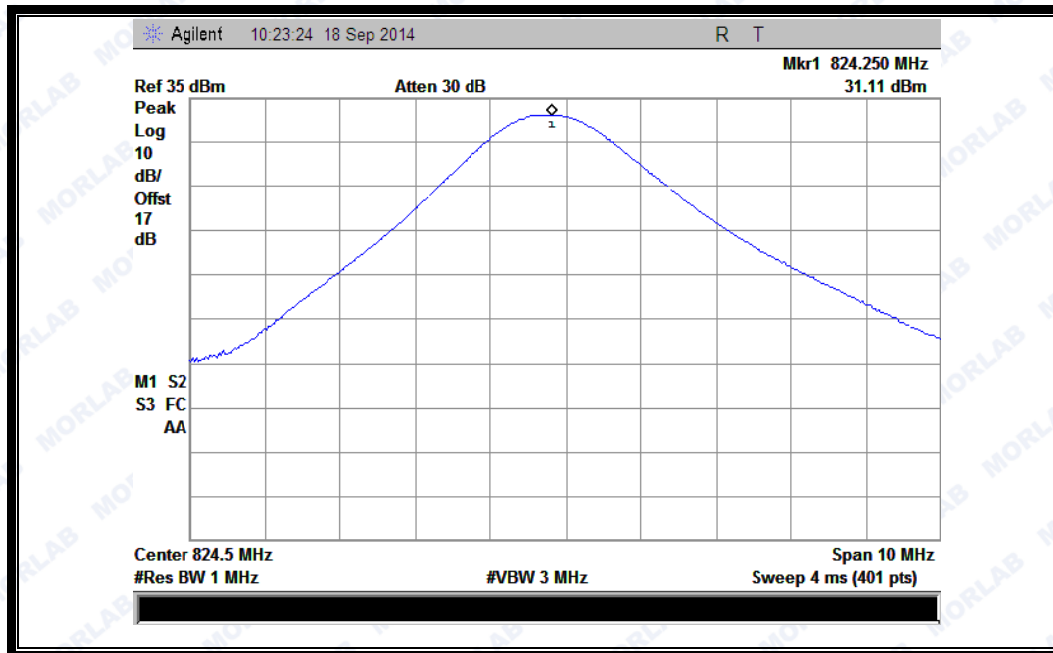


(Plot E1: EGPRS 850MHz Channel = 128)

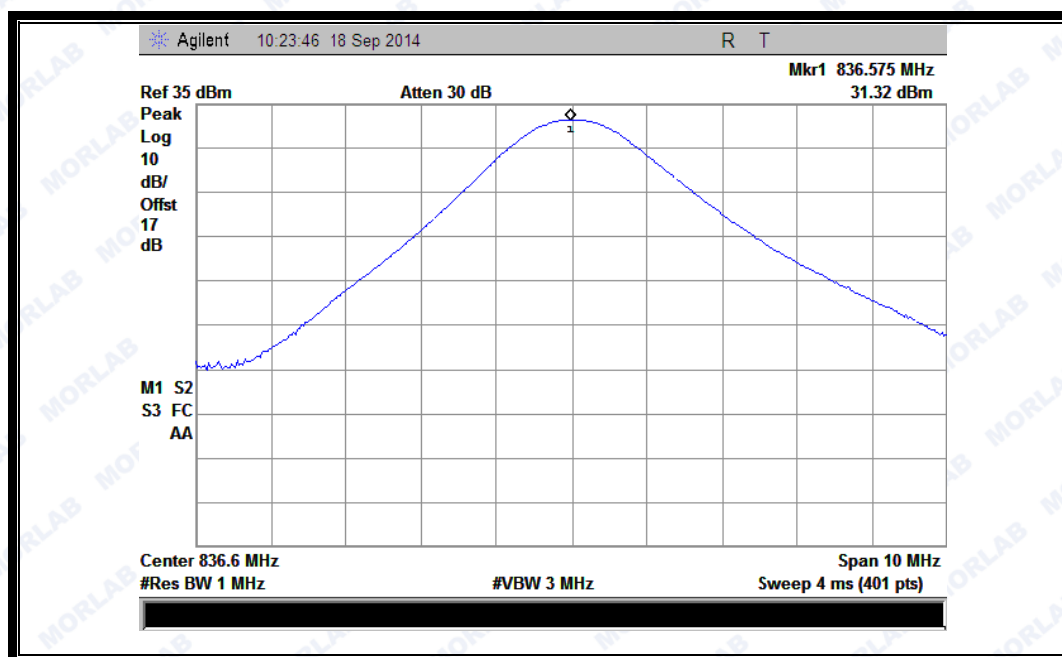


(Plot E2: EGPRS 850MHz Channel = 190)



REPORT No. : SZ14090028W01

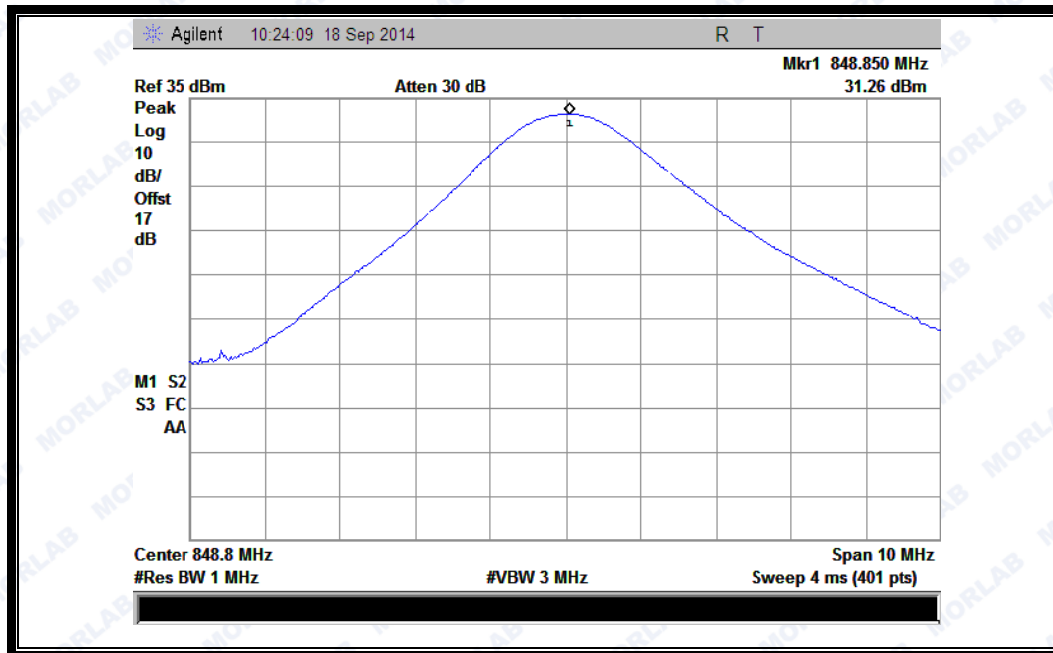


(Plot E3: EGPRS 850MHz Channel = 251)

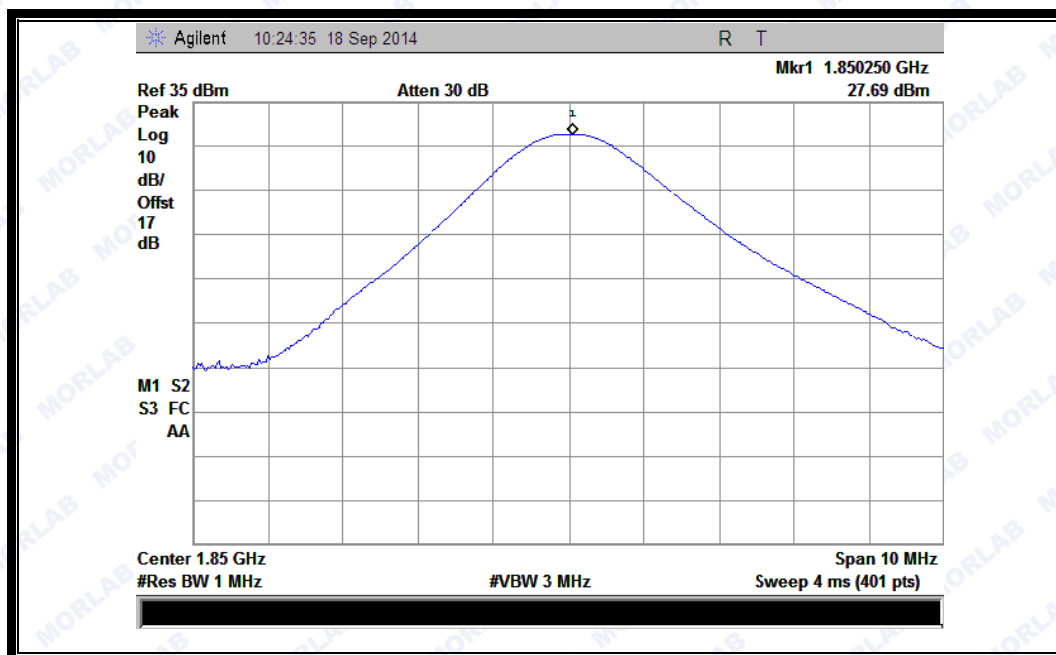


(Plot F1:EGPRS 1900MHz Channel = 512)



REPORT No. : SZ14090028W01

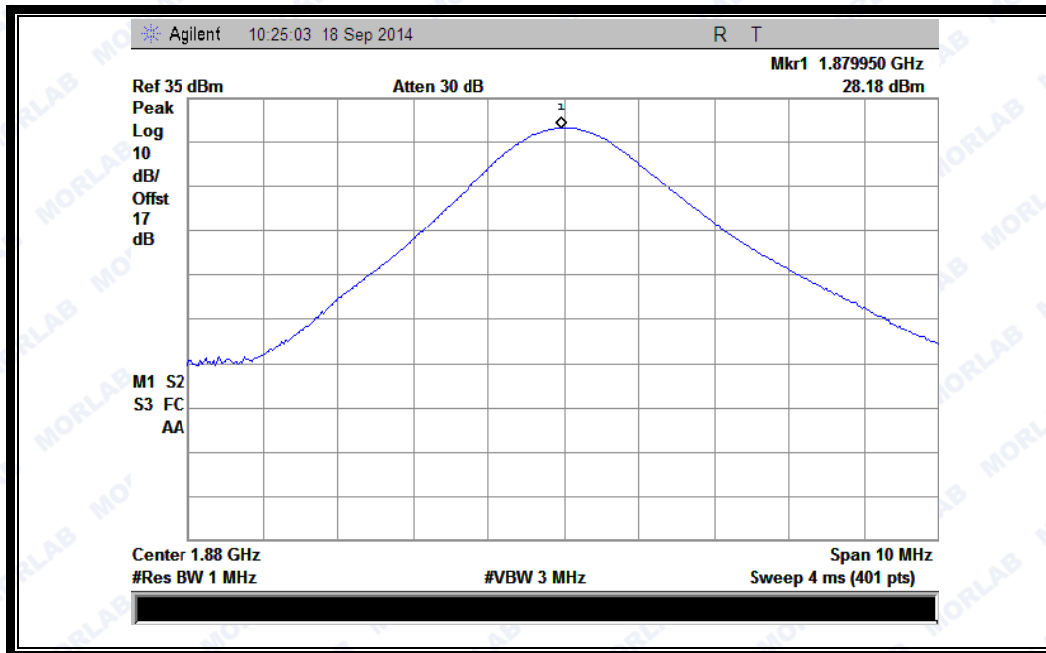

(Plot F2:EGPRS 1900MHz Channel = 661)

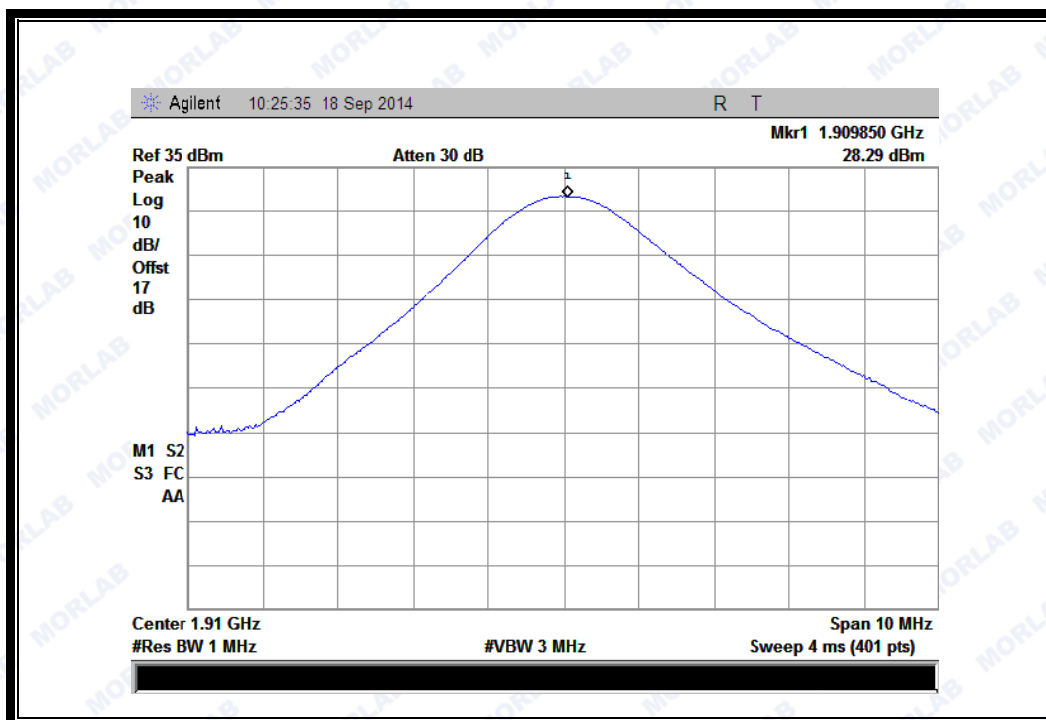

(Plot F3:EGPRS 1900Hz Channel = 810)



2.2. Peak to Average Radio

2.2.1. Definition

According to FCC section 2.1049 and FCC 24.232(d) the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

2.2.2. Test Description

See section 2.1.2 of this report.

2.2.3. Test Verdict

Here the lowest, middle and highest channels are selected to perform testing to verify the peak-to-average ratio.

Test procedures:

A .For GSM/EGPRS operating mode:

- Set RBW=1MHz, VBW=1MHz, peak detector in spectrum analyzer.
- Set EUT in maximum output power, and triggered the bust signal.
- Measured respectively the peak level and mean level, and the deviation was recorded as Peak to Average radio.

B. For UMTS operating mode:

- Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1%.


Test Verdict:

Band	Channel	Frequency (MHz)	Peak to Average radio		Limit	Verdict
			dBm	Refer to Plot	dBm	
GSM 1900MHz	512	1850.2	0.08	Plot A1 to A3	13	PASS
	661	1880.0	0.08			PASS
	810	1909.8	0.11			PASS
EGPRS 1900MHz	512	1850.2	0.05	Plot B1 to B3	13	PASS
	661	1880.0	0.02			PASS
	810	1909.8	0.01			PASS




REPORT No. : SZ14090028W01


Band	Channel	Frequency (MHz)	Peak to Average radio		Limit dBm	Verdict
			dBm	Refer to Plot		
WCDMA 1900MHz	9262	1852.4	3.23	Plot C1 toC3	13	PASS
	9400	1880	3.33			PASS
	9538	1907.6	3.46			PASS


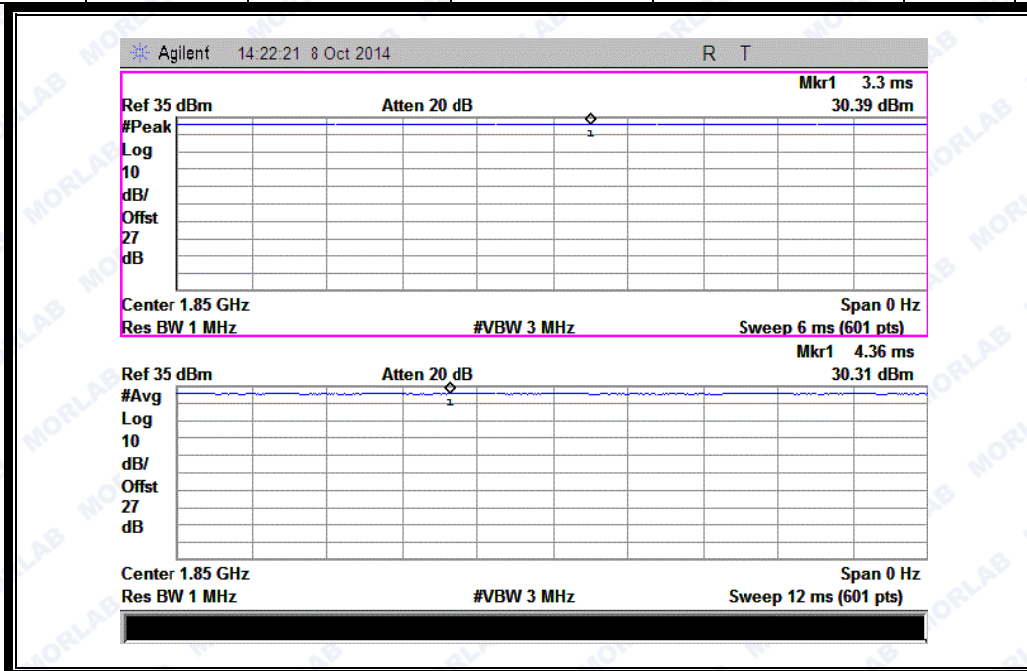


(Plot A1:GSM 1900 MHz Channel = 512)

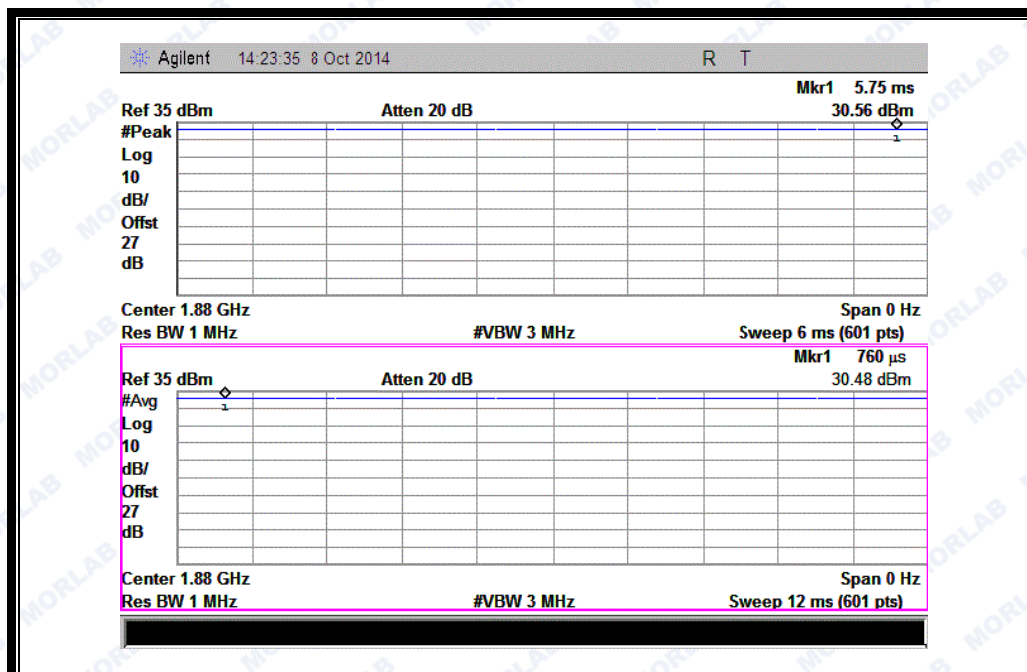


(Plot A2:GSM 1900 MHz Channel = 661)








REPORT No. : SZ14090028W01

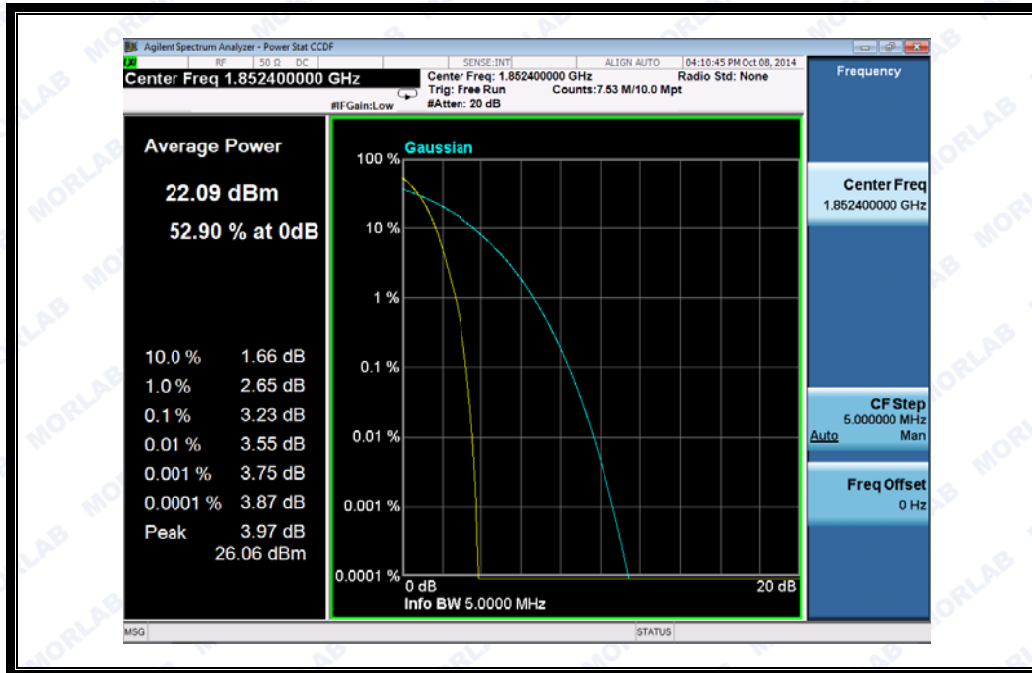


(Plot C1: WCDMA 1900MHz Channel = 9262)

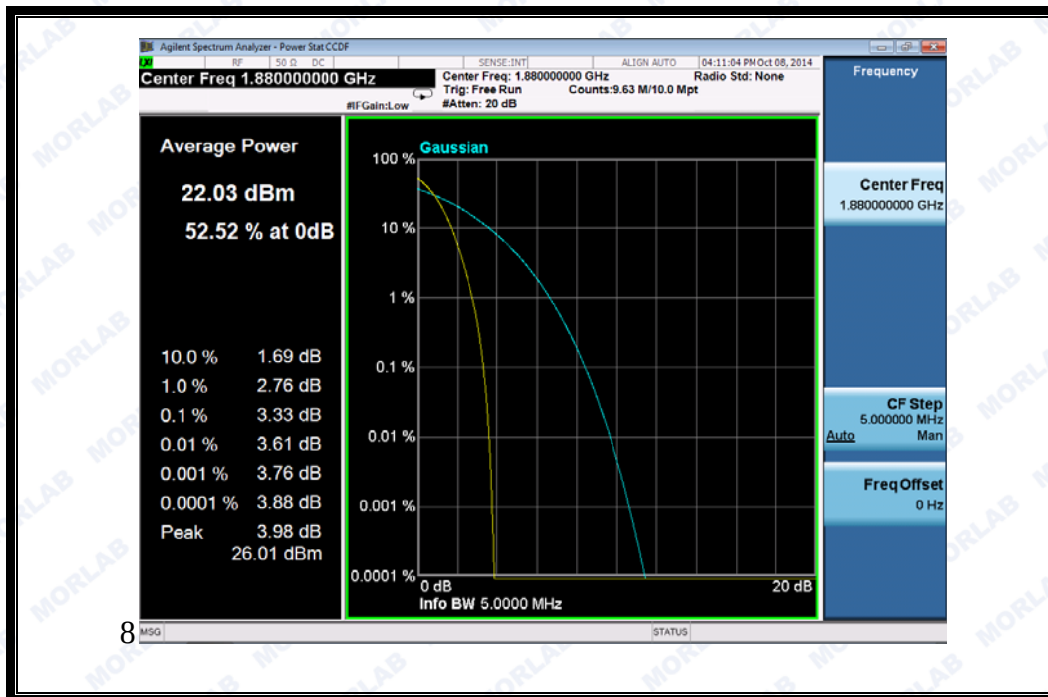

(Plot C2: WCDMA 1900MHz Channel = 9400)



REPORT No. : SZ14090028W01

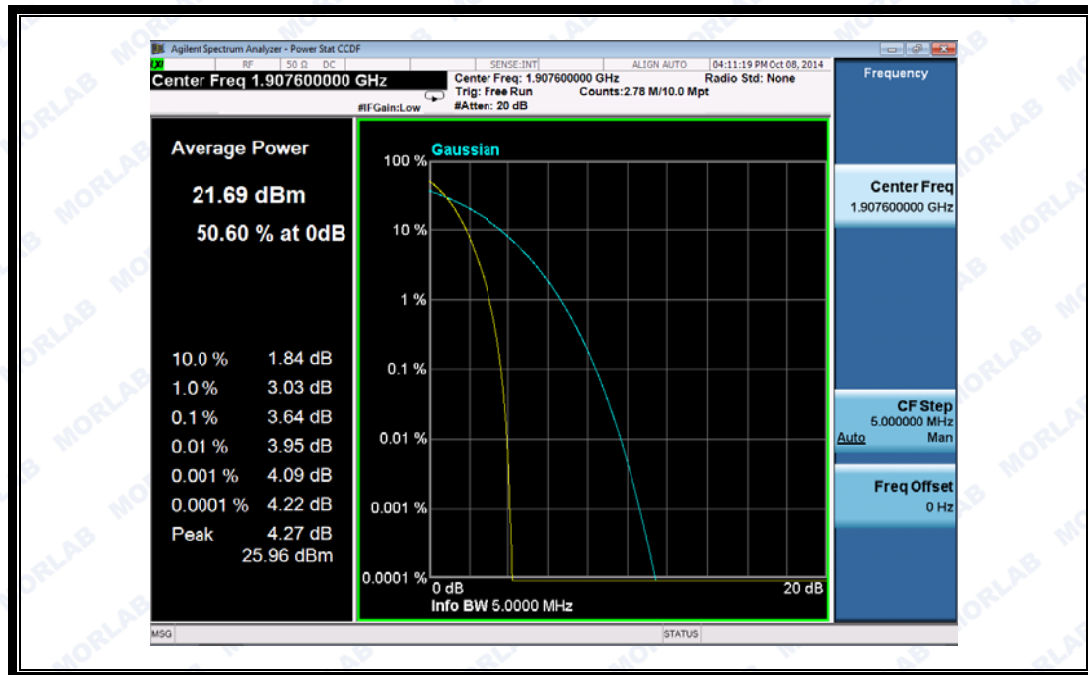

(Plot C3: WCDMA 1900MHz Channel = 9538)



2.3. 99% Occupied Bandwidth

2.3.1. Definition

According to FCC section 2.1049 and FCC § 22.917 & 24.238 the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as the 99% emission bandwidth,

2.3.2. Test Description

See section 2.1.2 of this report.

2.3.3. Test Verdict

Here the lowest, middle and highest channels are selected to perform testing to verify the 99% occupied bandwidth.

Test Verdict:

Band	Channel	Frequency (MHz)	26dB bandwidth	99% Occupied Bandwidth	Refer to Plot
EDGE 850MHz	128	824.2	324.471 KHz	246.7398 KHz	Plot A
	190	836.6	326.032 KHz	247.0716 KHz	Plot B
	251	848.8	316.034 KHz	239.8110 KHz	Plot C
EDGE 1900MHz	512	1850.2	310.966 KHz	245.9077 KHz	Plot D
	661	1880.0	317.833 KHz	245.5265 KHz	Plot E
	810	1909.8	324.512 KHz	242.2780 KHz	Plot F
WCDMA 850MHz	4132	826.4	4.630 MHz	4.1355 MHz	Plot G
	4175	835	4.630 MHz	4.1465 MHz	Plot H
	4233	846.6	4.632 MHz	4.1385 MHz	Plot I
WCDMA 1900MHz	9262	1852.4	4.624 MHz	4.1487 MHz	Plot J
	9400	1880	4.605 MHz	4.1465 MHz	Plot K
	9538	1907.6	4.612 MHz	4.1422 MHz	Plot L
HSDPA 850MHz	4132	826.4	4.623 MHz	4.1437 MHz	Plot M
	4175	835	4.649 MHz	4.1530 MHz	Plot N




REPORT No. : SZ14090028W01

Band	Channel	Frequency (MHz)	26dB bandwidth	99% Occupied Bandwidth	Refer to Plot
HSDPA 1900MHz	4233	846.6	4.638 MHz	4.1622 MHz	Plot O
	9262	1852.4	4.639 MHz	4.1560 MHz	Plot P
	9400	1880	4.607 MHz	4.1418 MHz	Plot Q
	9538	1907.6	4.608 MHz	4.1382 MHz	Plot R
HSUPA 850MHz	4132	826.4	4.626 MHz	4.1420 MHz	Plot S
	4175	835	4.613 MHz	4.1458 MHz	Plot T
	4233	846.6	4.639 MHz	4.1435 MHz	Plot U
HSUPA 1900MHz	9262	1852.4	4.639 MHz	4.1531 MHz	Plot V
	9400	1880	4.619 MHz	4.1492 MHz	Plot W
	9538	1907.6	4.605 MHz	4.1398 MHz	Plot X
HSPA+ 850MHz	4132	826.4	4.627 MHz	4.1418 MHz	Plot Y
	4175	835	4.618 MHz	4.1395 MHz	Plot Z
	4233	846.6	4.606 MHz	4.1423 MHz	Plot A1
HSPA+ 1900MHz	9262	1852.4	4.625 MHz	4.1524 MHz	Plot B1
	9400	1880	4.605 MHz	4.1434 MHz	Plot C1
	9538	1907.6	4.606 MHz	4.1473 MHz	Plot D1
GSM 850MHz	128	824.2	312.169 KHz	247.7361 KHz	Plot E1
	190	836.6	317.035 KHz	246.4939 KHz	Plot F1
	251	848.8	316.756 KHz	253.1616 KHz	Plot G1
GSM 1900MHz	512	1850.2	316.790 KHz	238.1112 KHz	Plot H1
	661	1880.0	309.253 KHz	246.4495 KHz	Plot I1
	810	1909.8	321.584 KHz	243.9617 KHz	Plot J2
GPRS 850MHz	128	824.2	316.597 KHz	245.9519 KHz	Plot K1
	190	836.6	320.929 KHz	245.4877 KHz	Plot L1
	251	848.8	320.074 KHz	244.9794 KHz	Plot M1
GPRS 1900MHz	512	1850.2	316.724 KHz	246.5646 KHz	Plot N1
	661	1880.0	312.015 KHz	242.8000 KHz	Plot O1
	810	1909.8	315.178 KHz	243.9011 KHz	Plot P1




REPORT No. : SZ14090028W01

Test Plots:

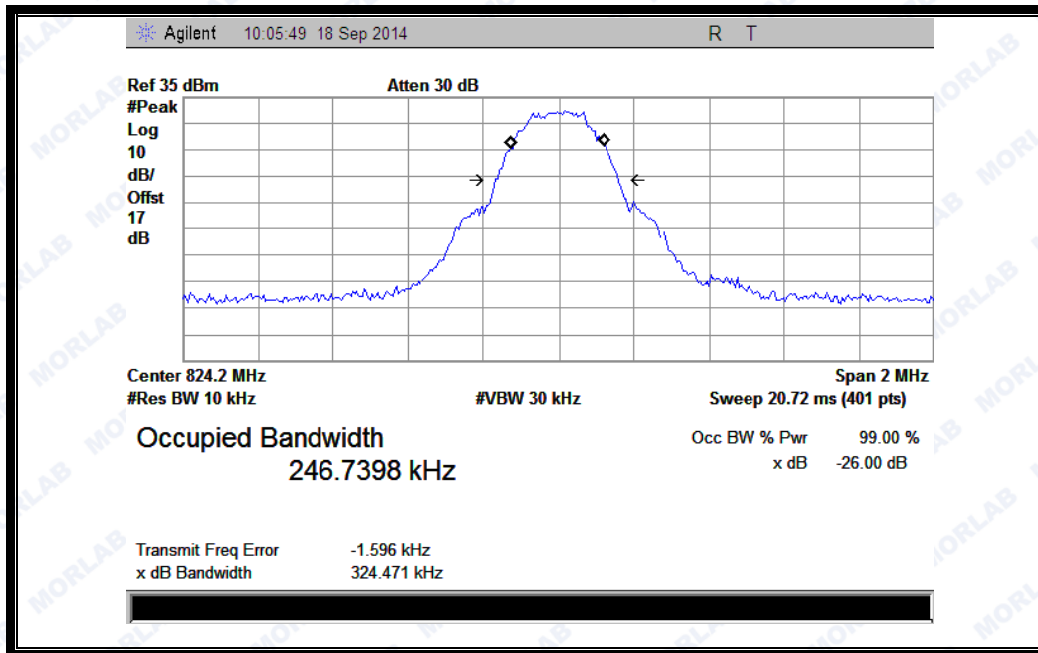


(Plot A: EGPRS 850MHz Channel = 128)

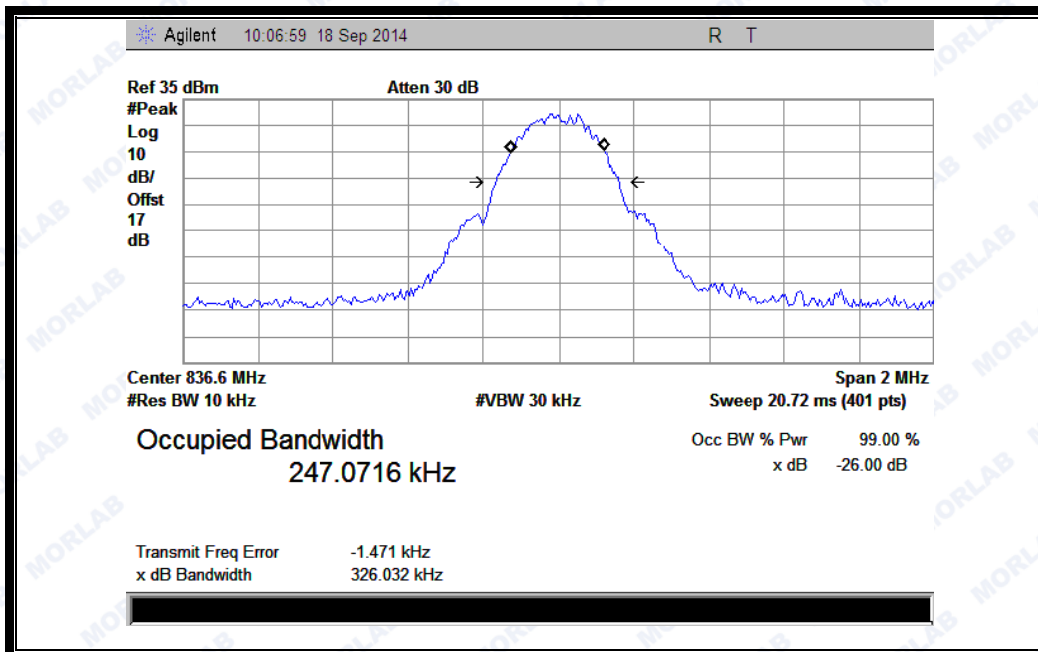


(Plot B: EGPRS 850MHz Channel = 190)



REPORT No. : SZ14090028W01

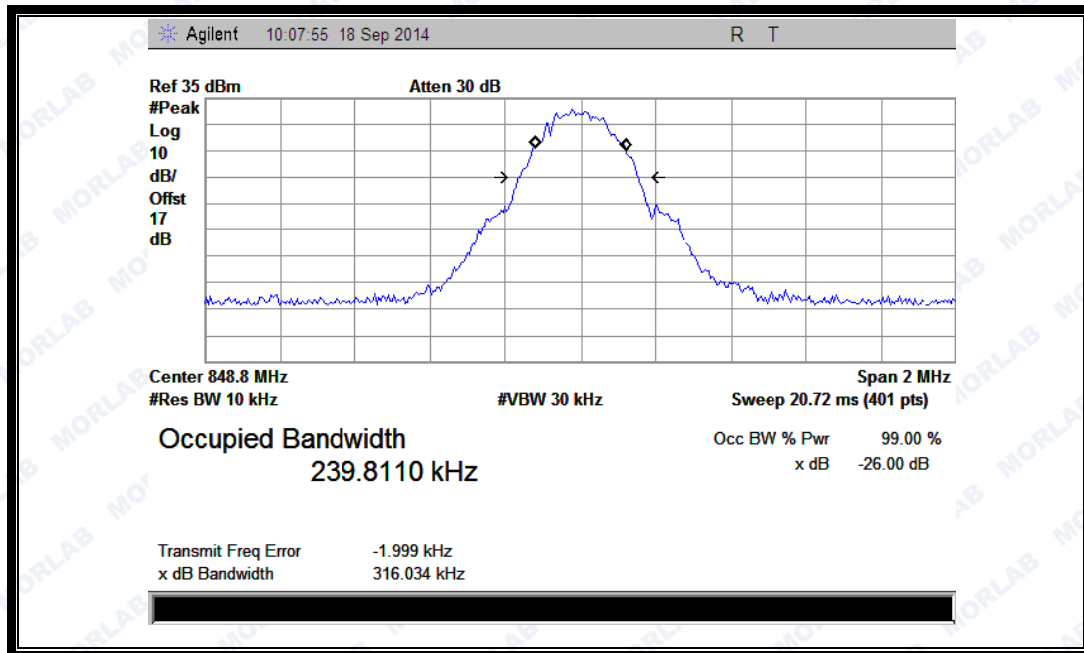


(Plot C: EGPRS 850MHz Channel = 251)

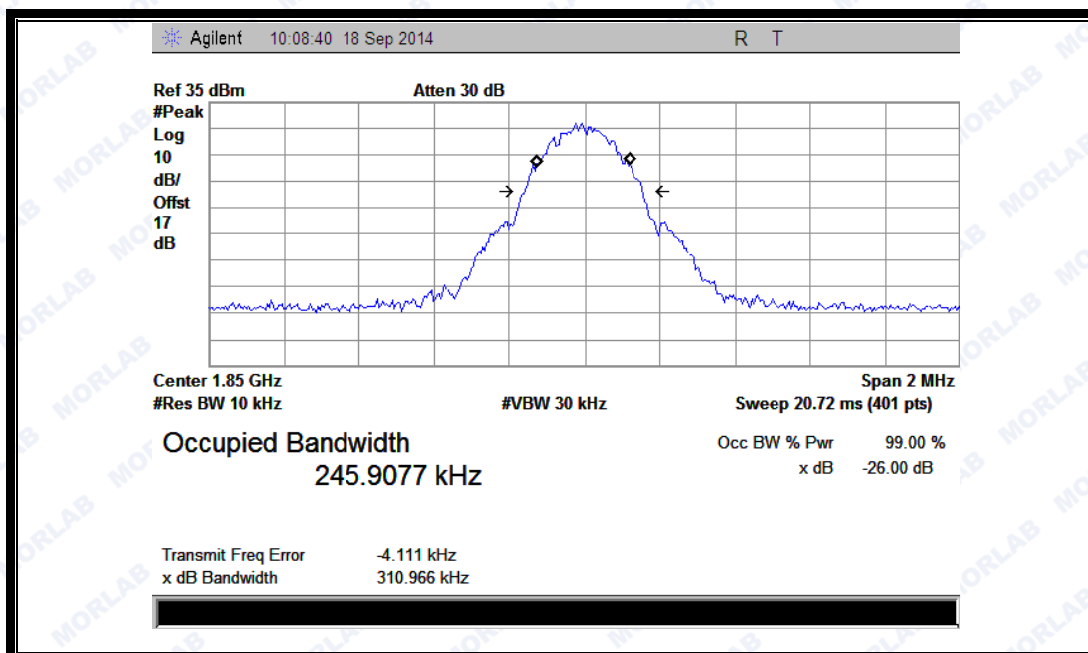


(Plot D: EGPRS1900MHz Channel = 512)



REPORT No. : SZ14090028W01

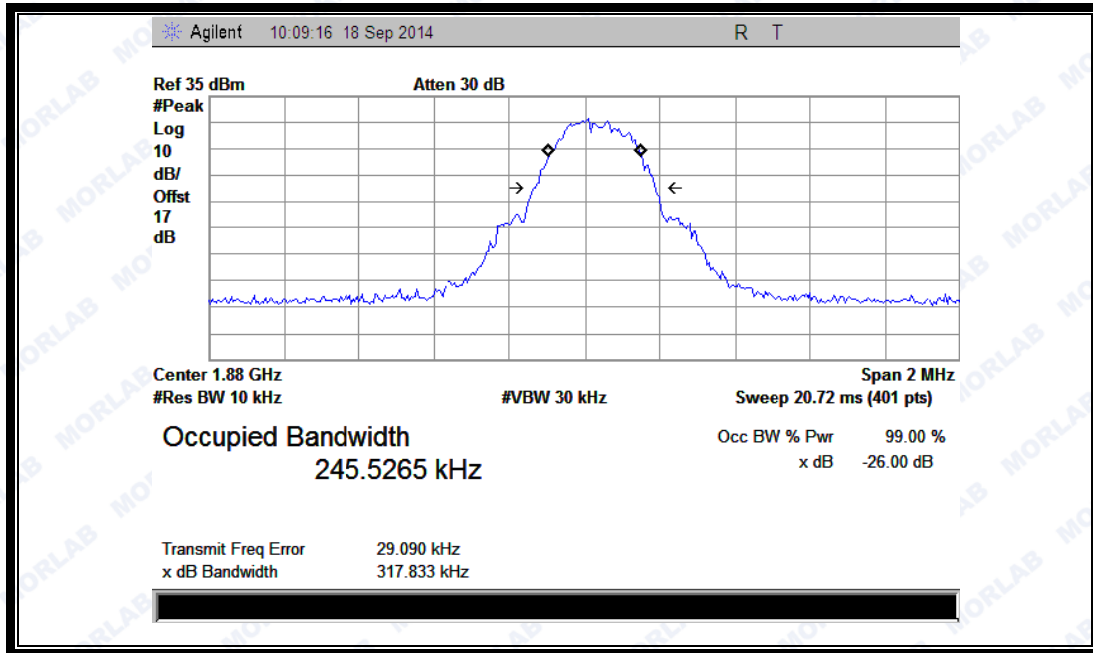


(Plot E: EGPRS1900MHz Channel = 661)

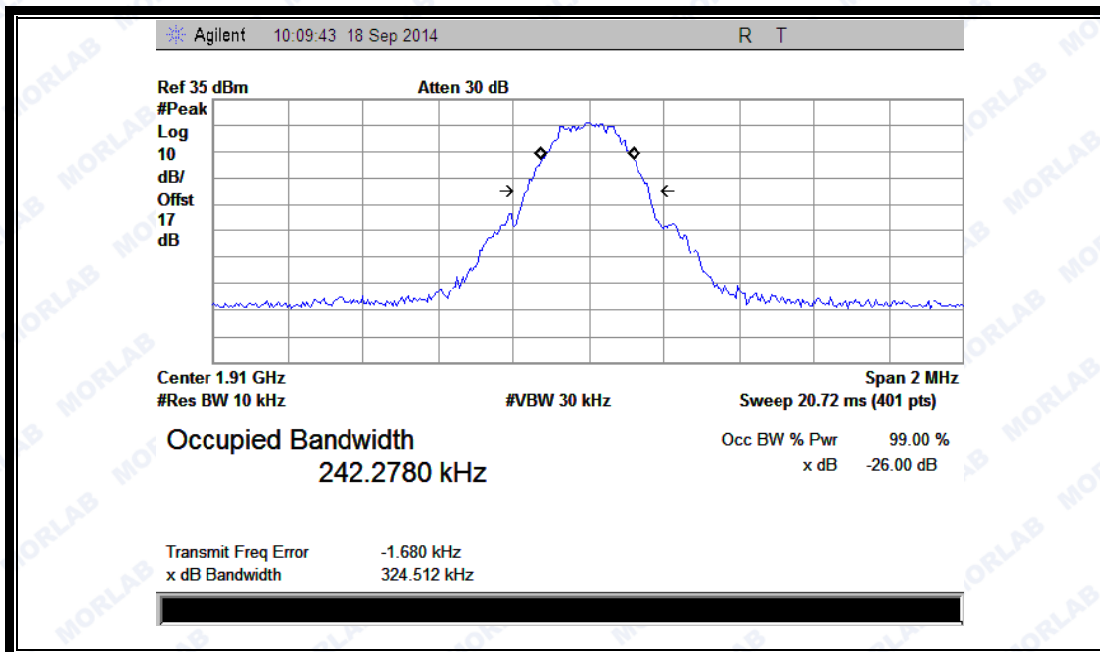


(Plot F: EGPRS 1900MHz Channel = 810)



REPORT No. : SZ14090028W01

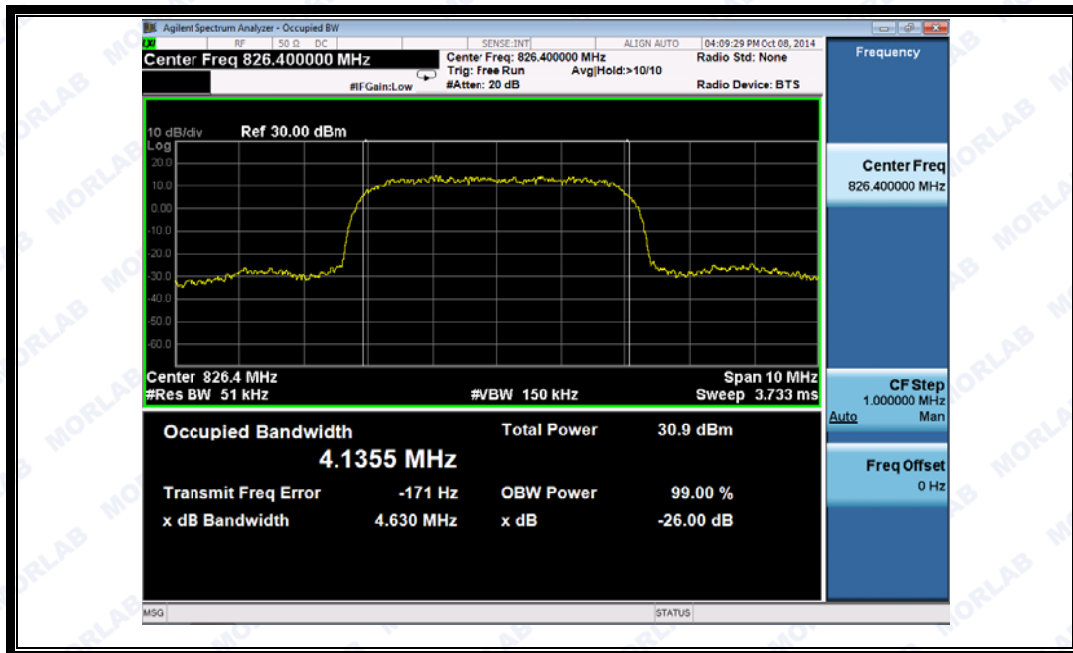


(Plot G: WCDMA 850MHz Channel = 4132)

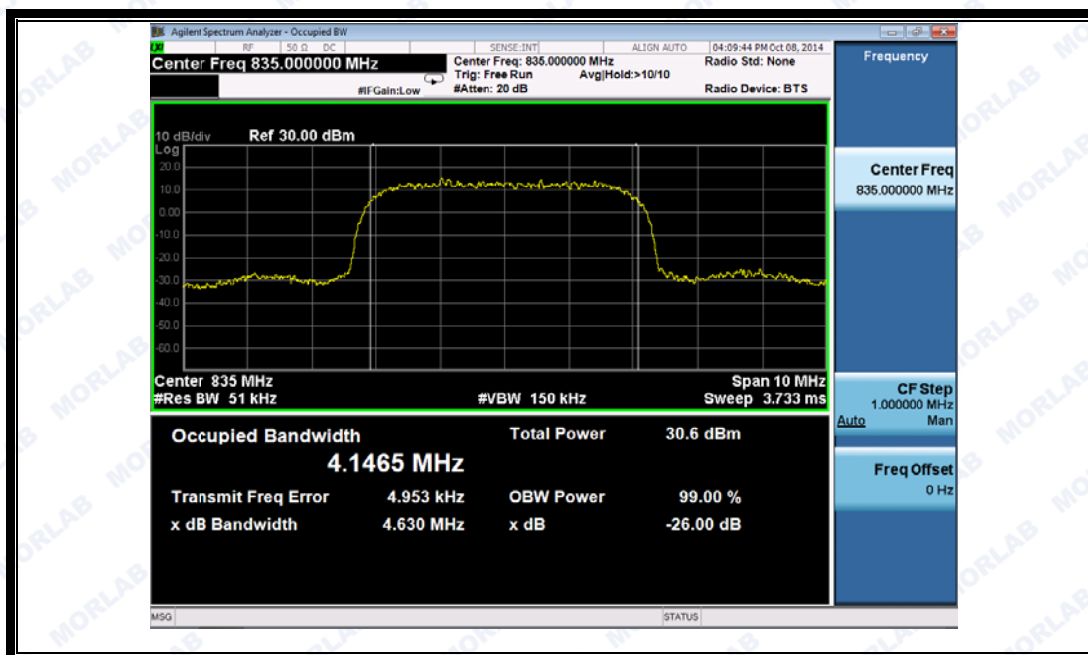


(Plot H: WCDMA 850 MHz Channel = 4175)



REPORT No. : SZ14090028W01

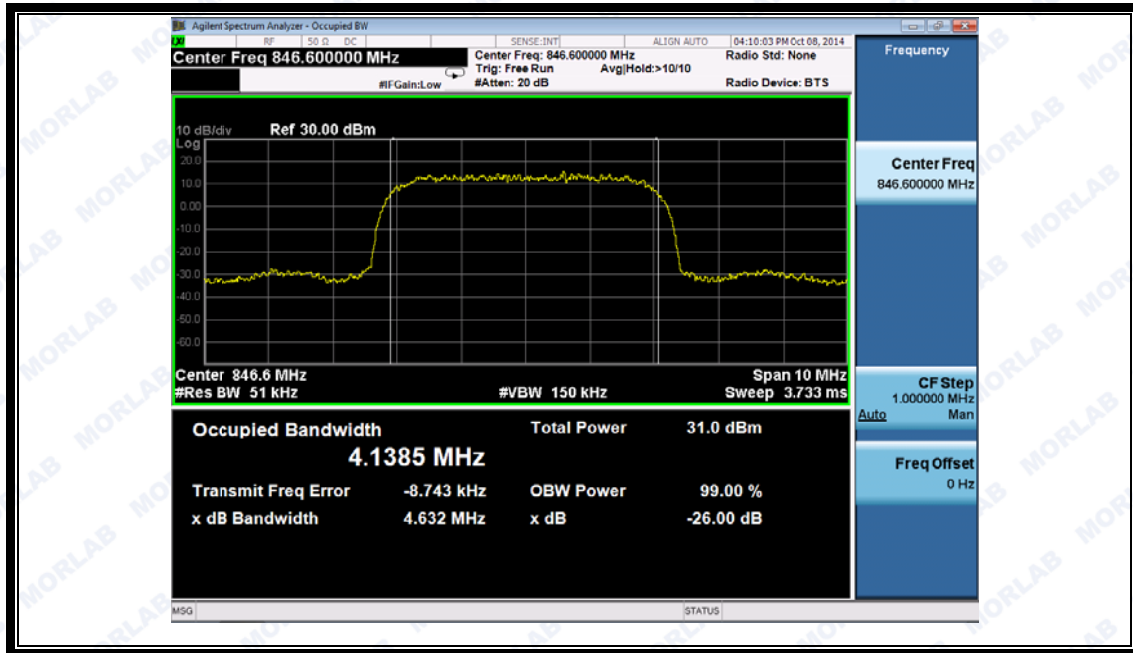


(Plot I: WCDMA 850MHz Channel = 4233)

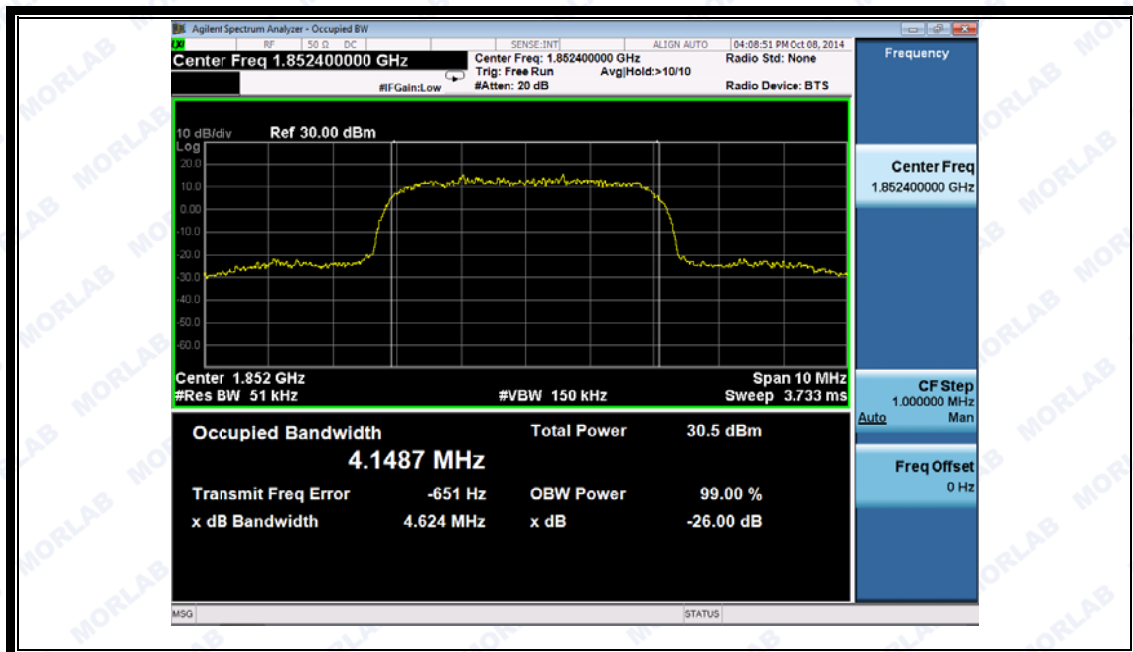


(Plot J: WCDMA 1900MHz Channel = 9262)



REPORT No. : SZ14090028W01

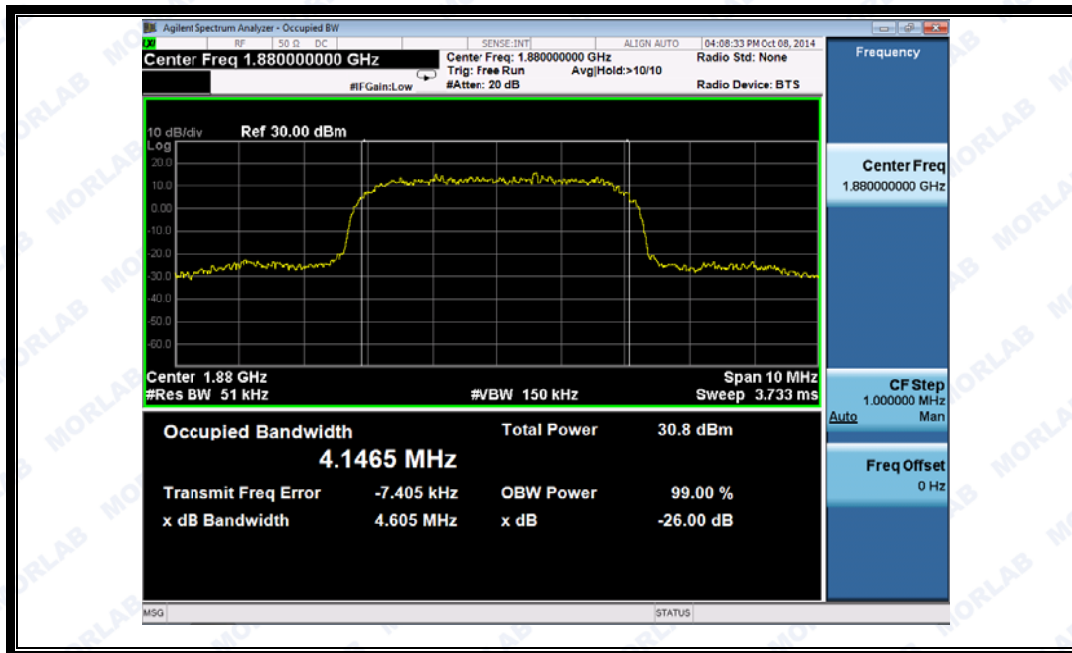


(Plot K: WCDMA 1900 MHz Channel = 9400)

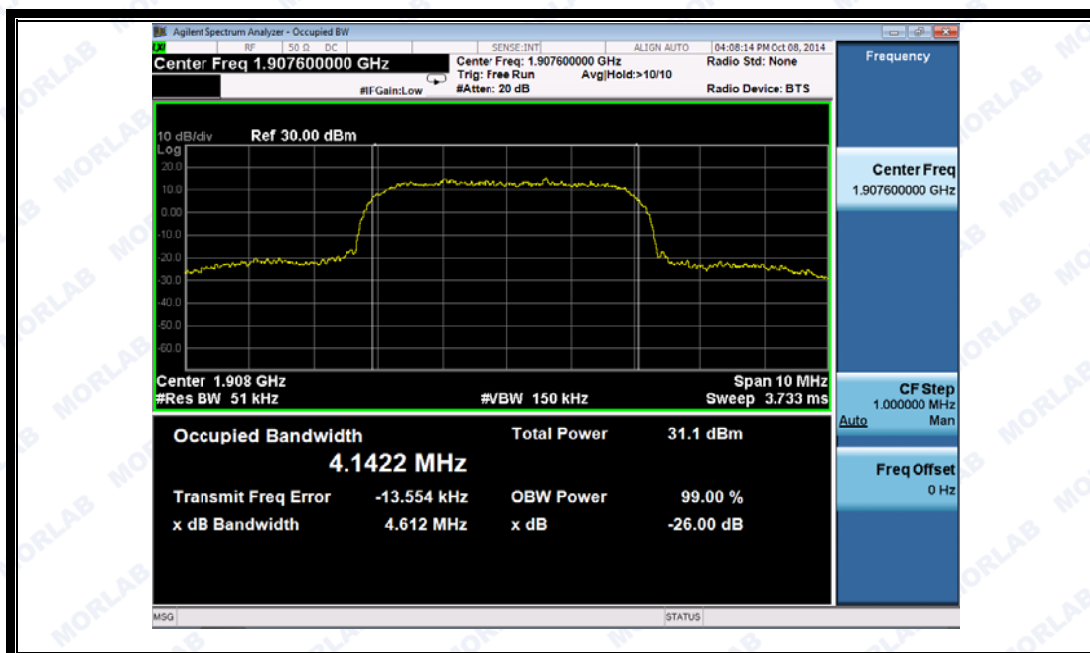


(Plot L: WCDMA1900MHz Channel = 9538)



REPORT No. : SZ14090028W01

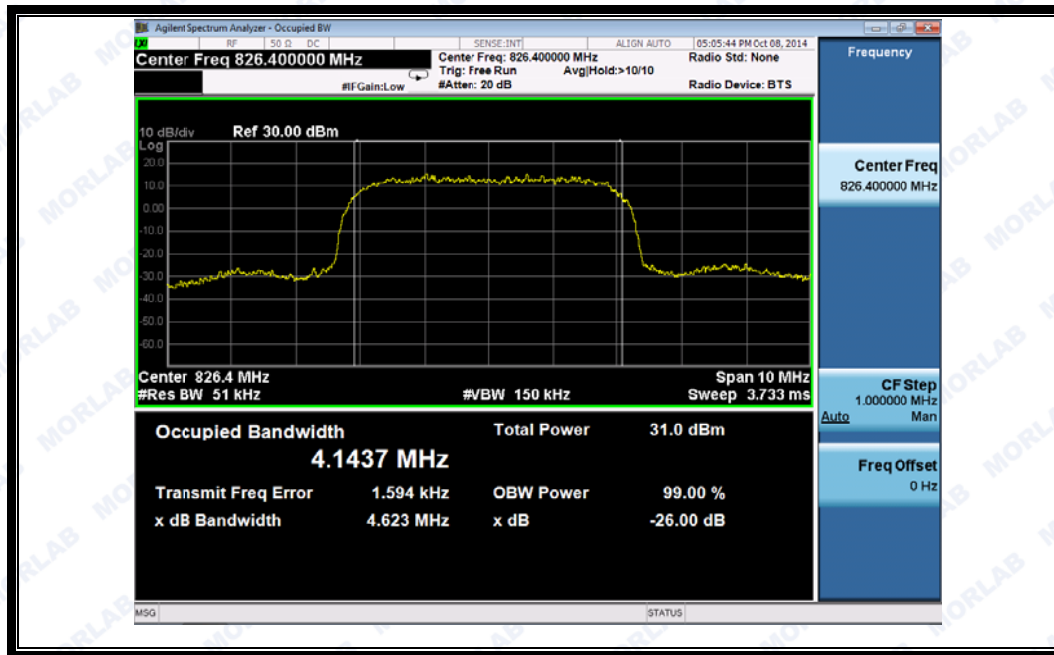


(Plot M: HSDPA 850MHz Channel = 4132)

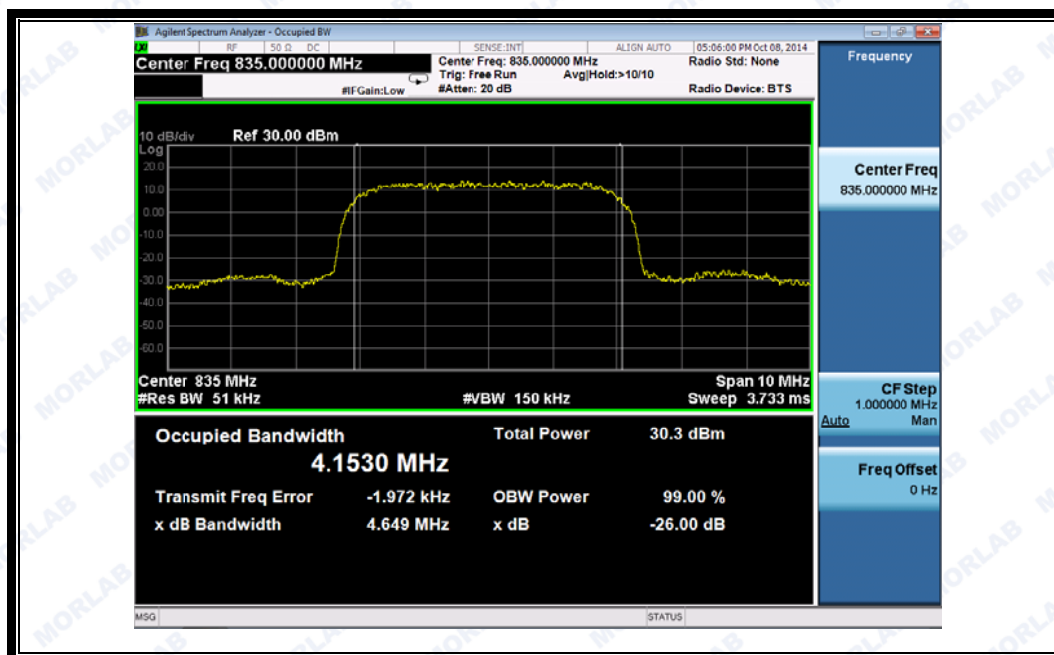


(Plot N: HSDPA850 MHz Channel = 4175)



REPORT No. : SZ14090028W01

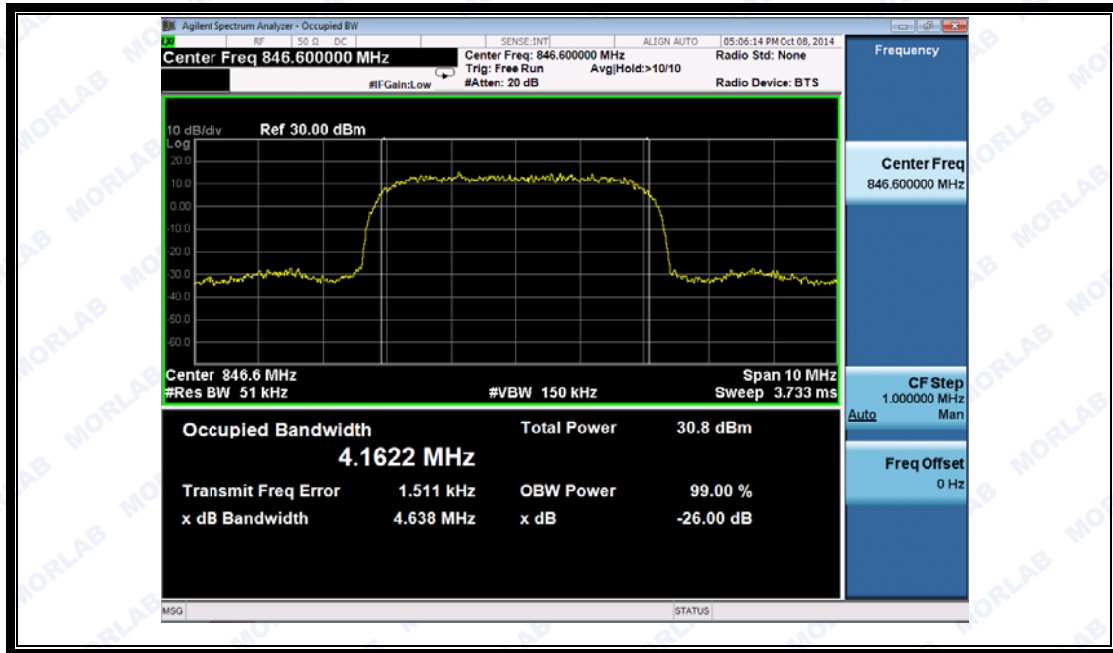


(Plot O: HSDPA 850 MHz Channel = 4233)

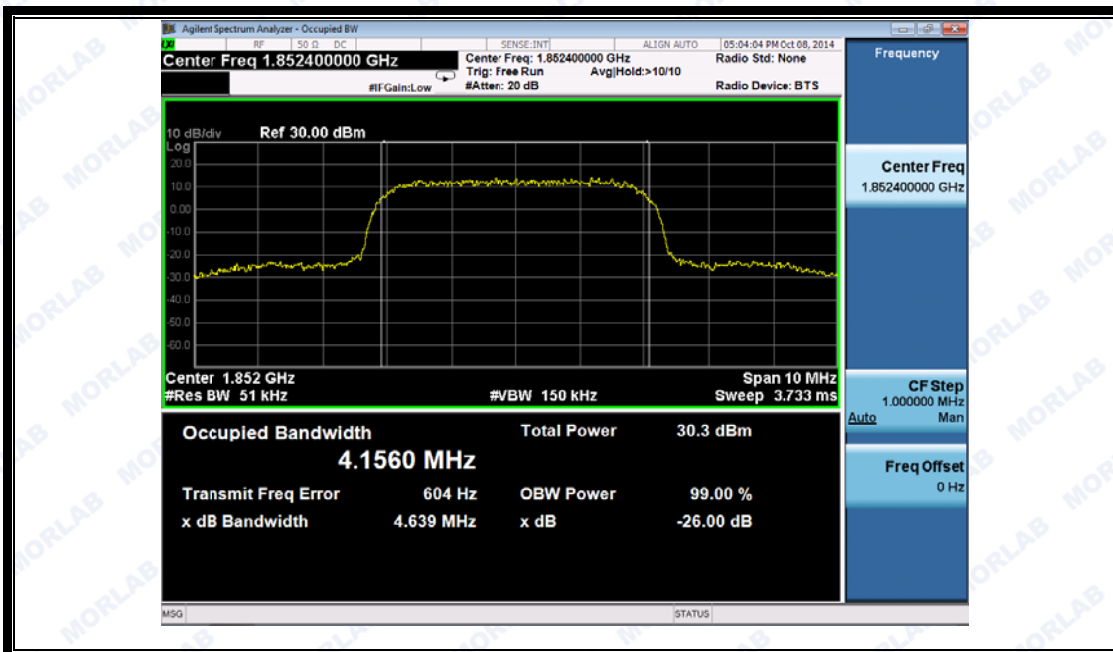


(Plot P: HSDPA1900 MHz Channel = 9262)



REPORT No. : SZ14090028W01

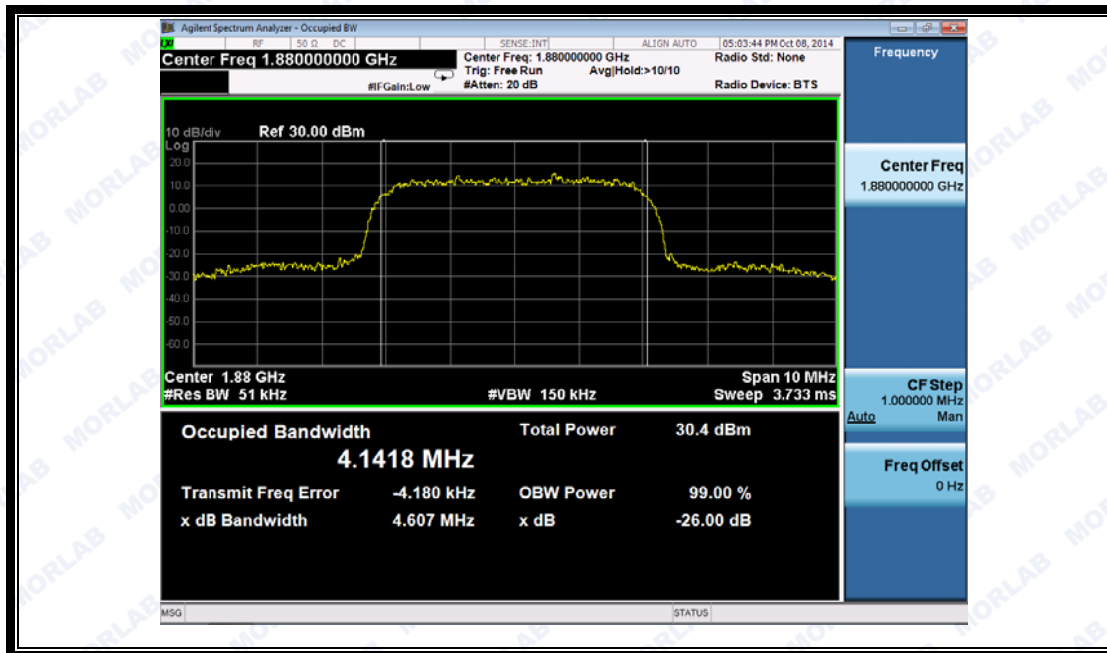


(Plot Q: HSDPA1900 MHz Channel = 9400)

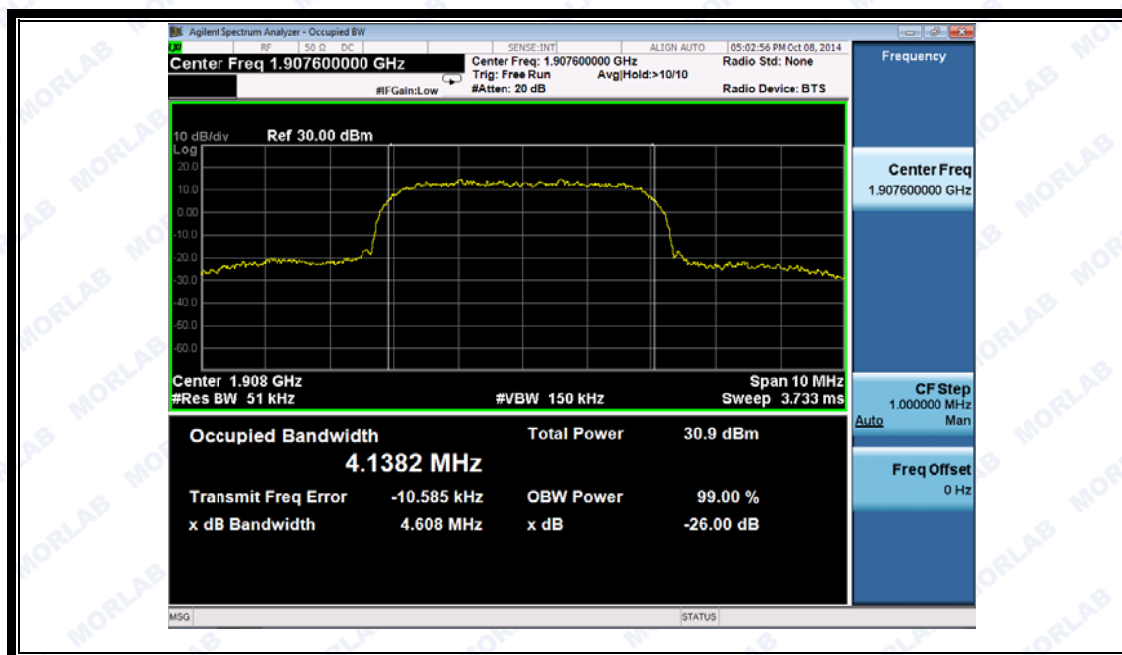


(Plot R: HSDPA 1900 MHz Channel = 9538)



REPORT No. : SZ14090028W01

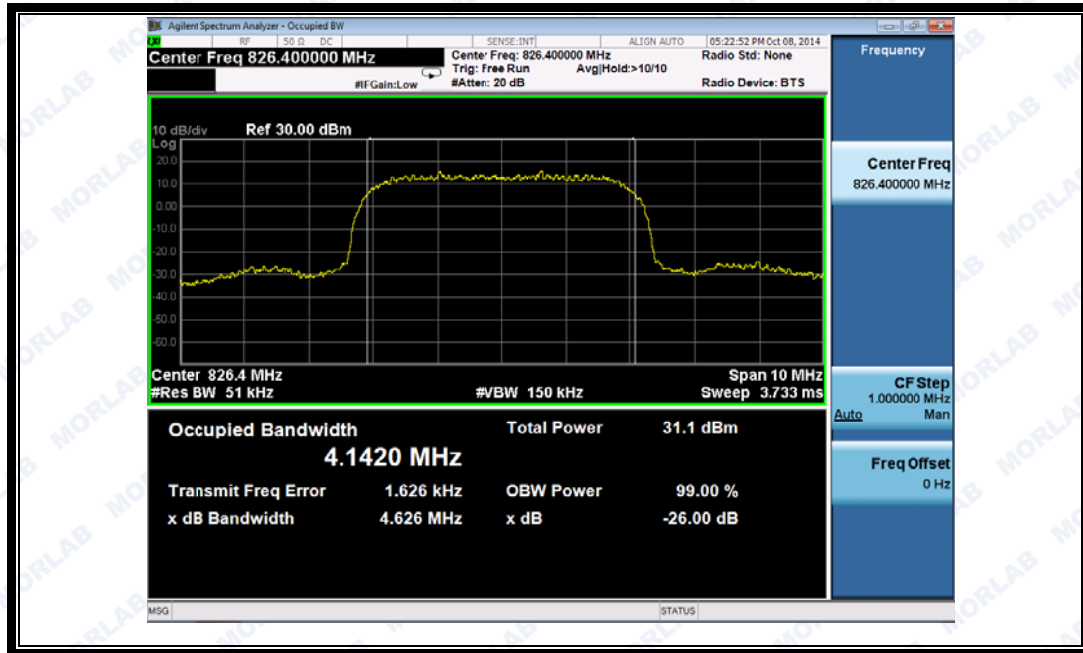


(Plot S: HSUPA850 MHz Channel = 4132)

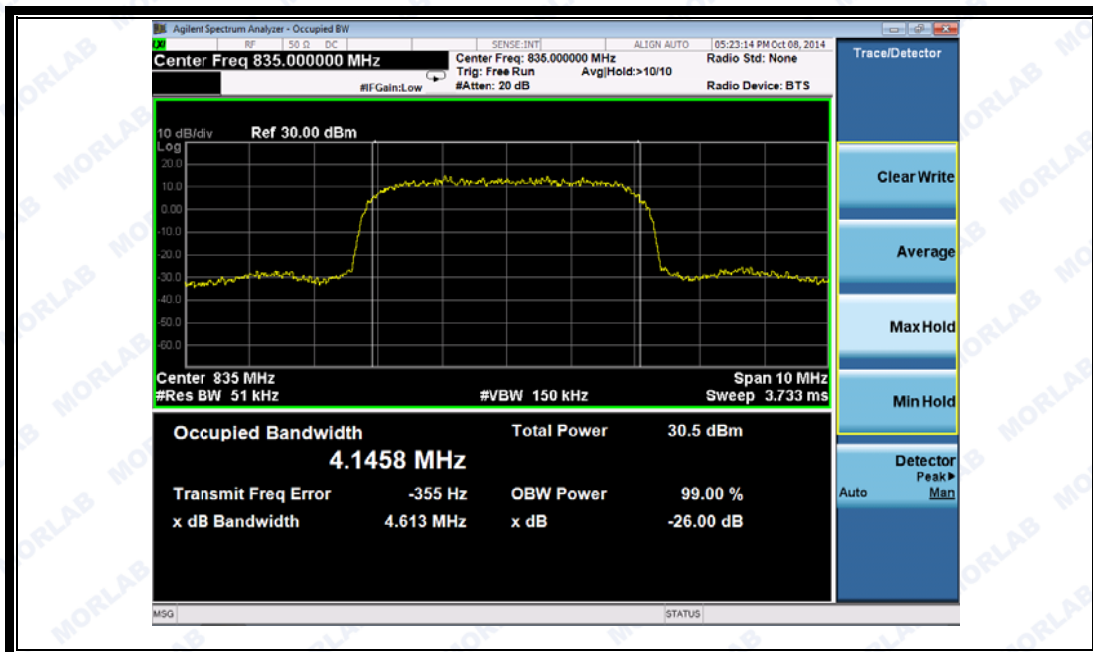


(Plot T: HSUPA850 MHz Channel = 4175)



REPORT No. : SZ14090028W01

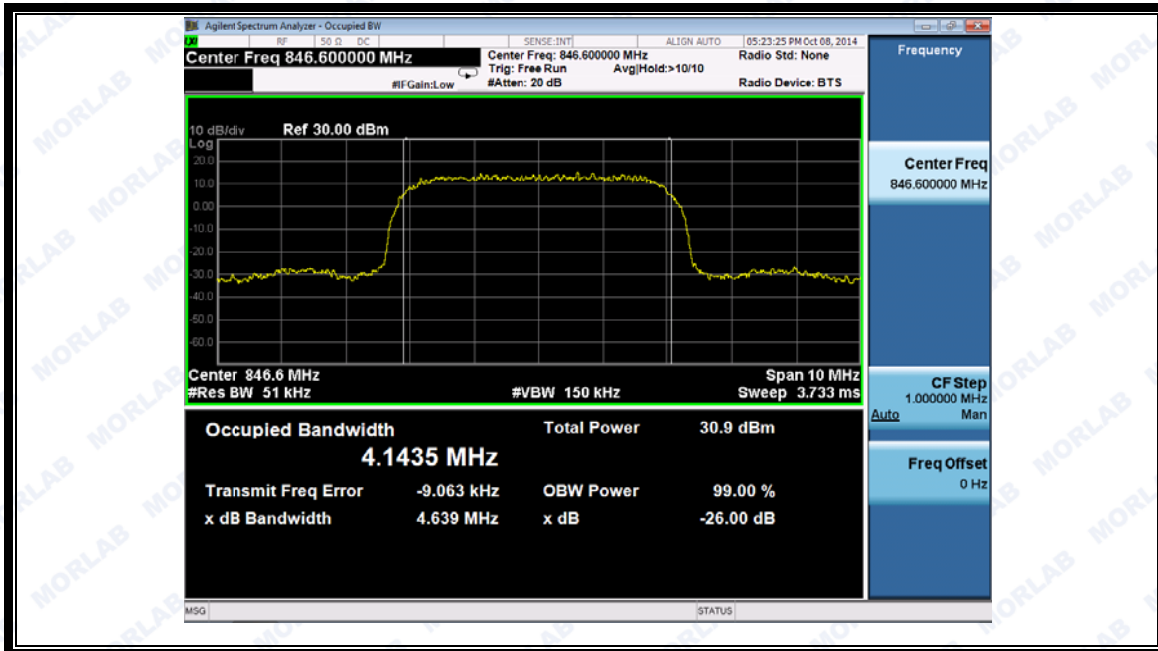


(Plot U: HSUPA850 MHz Channel = 4233)

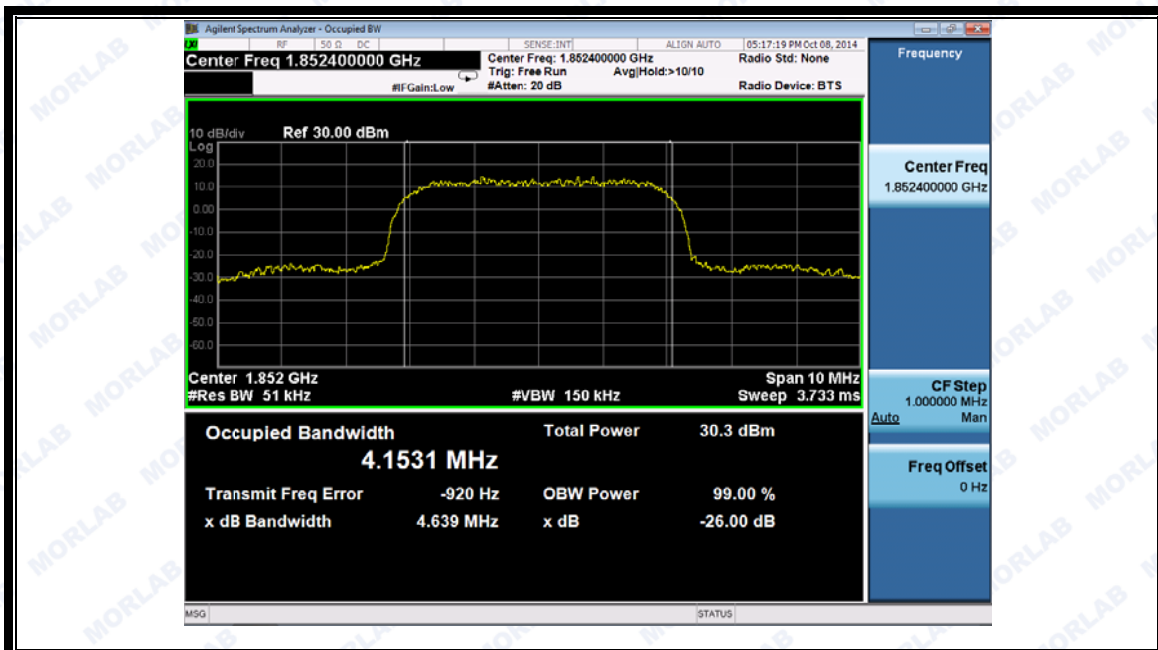


(Plot V: HSUPA1900 MHz Channel = 9262)



REPORT No. : SZ14090028W01

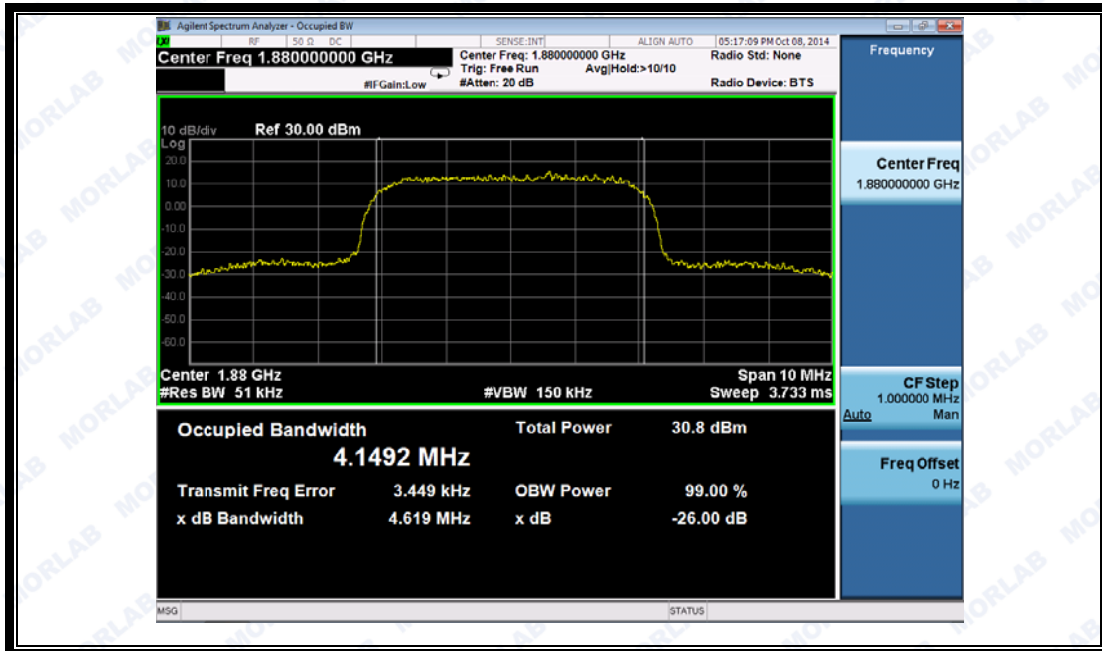


(Plot W: HSUPA1900 MHz Channel = 9400)

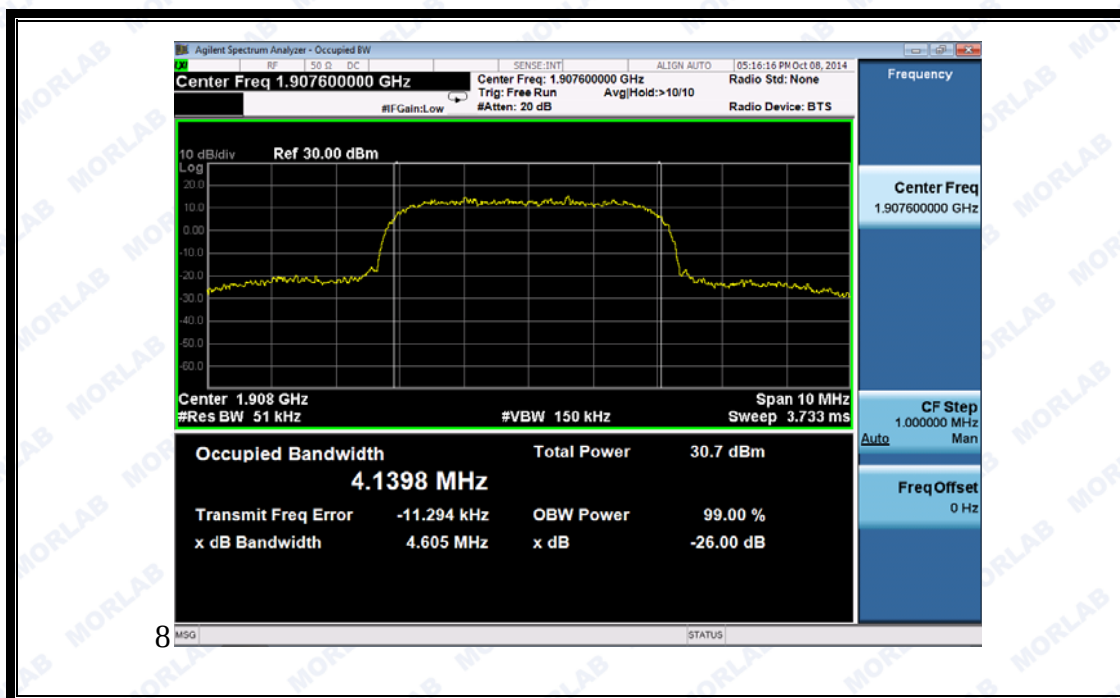


(Plot X: HSUPA1900 MHz Channel = 9538)



REPORT No. : SZ14090028W01

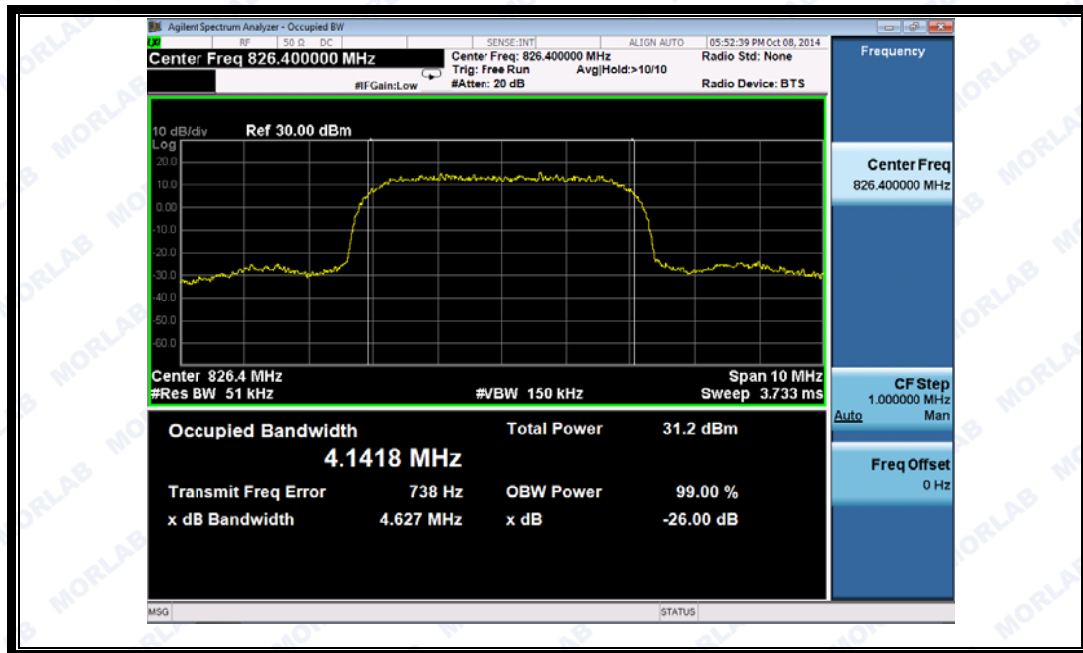


(Plot Y: HSPA+850 MHz Channel = 4132)

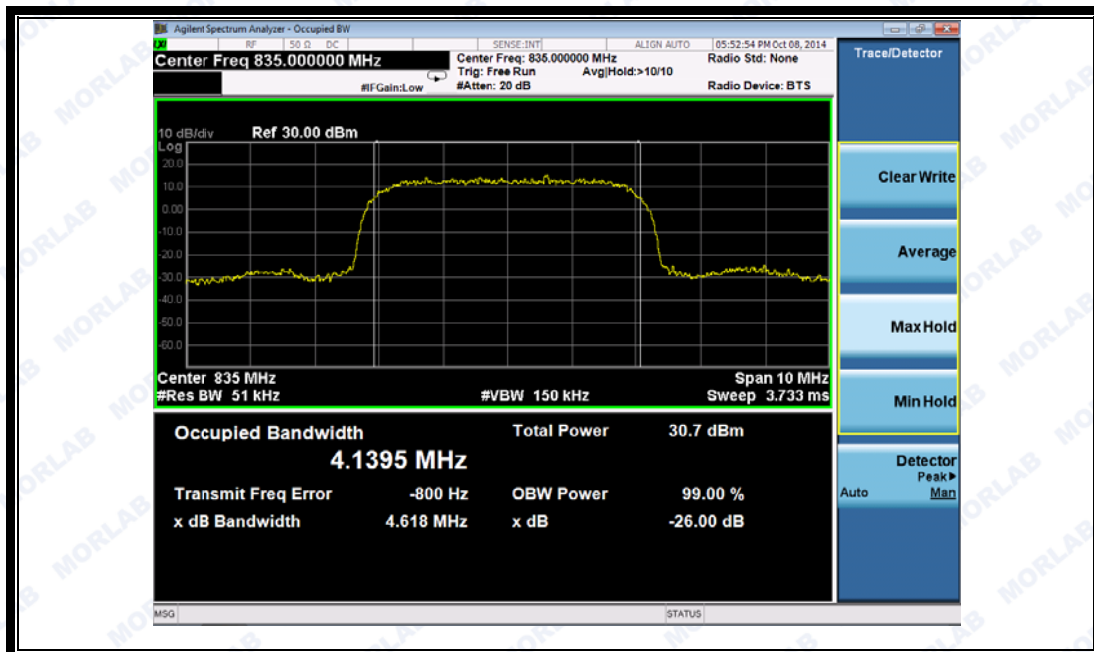


(Plot Z: HSPA+850 MHz Channel = 4175)



REPORT No. : SZ14090028W01

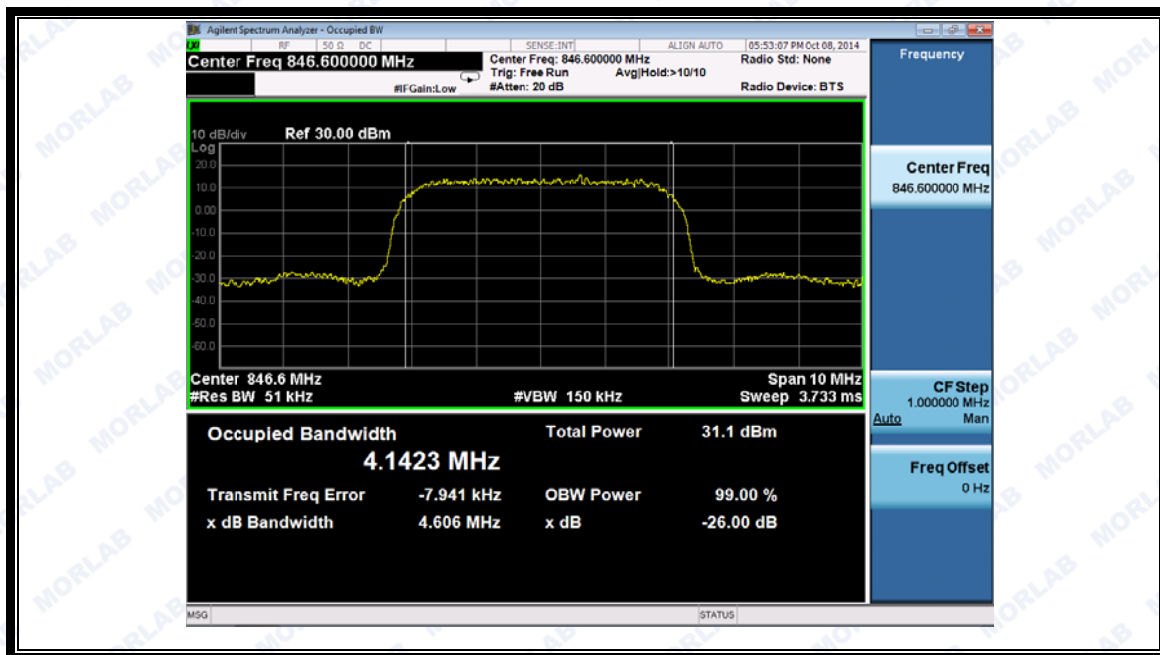


(Plot A1:HSPA+850 MHz Channel = 4233)

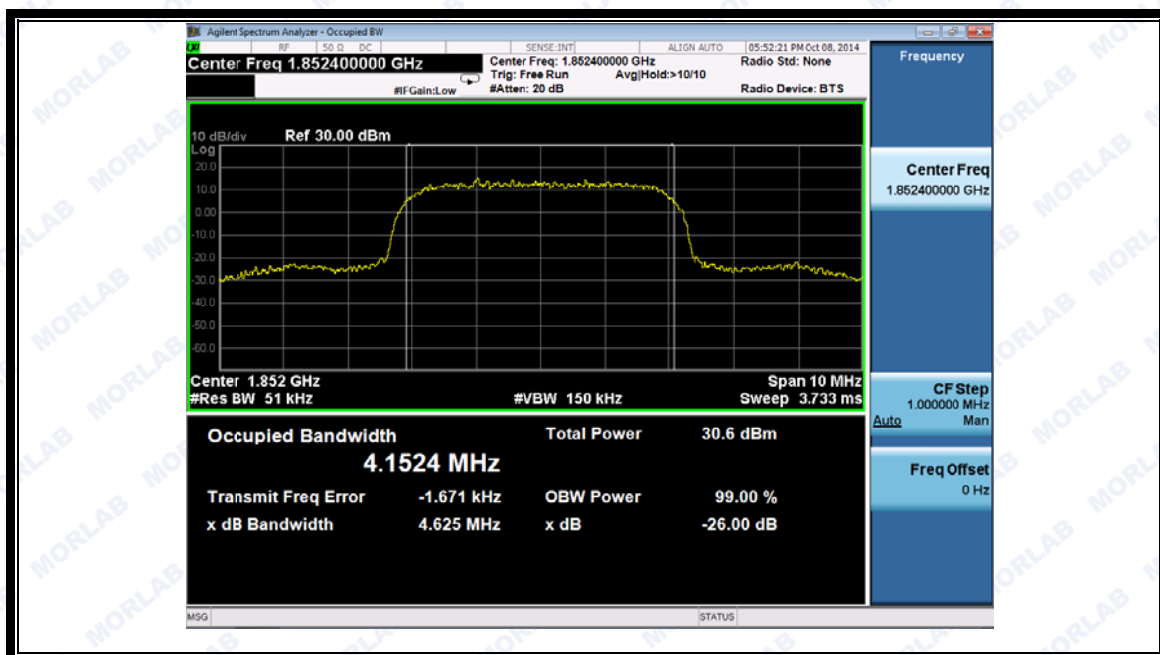


(Plot B1: HSPA+1900 MHz Channel = 9262)



REPORT No. : SZ14090028W01

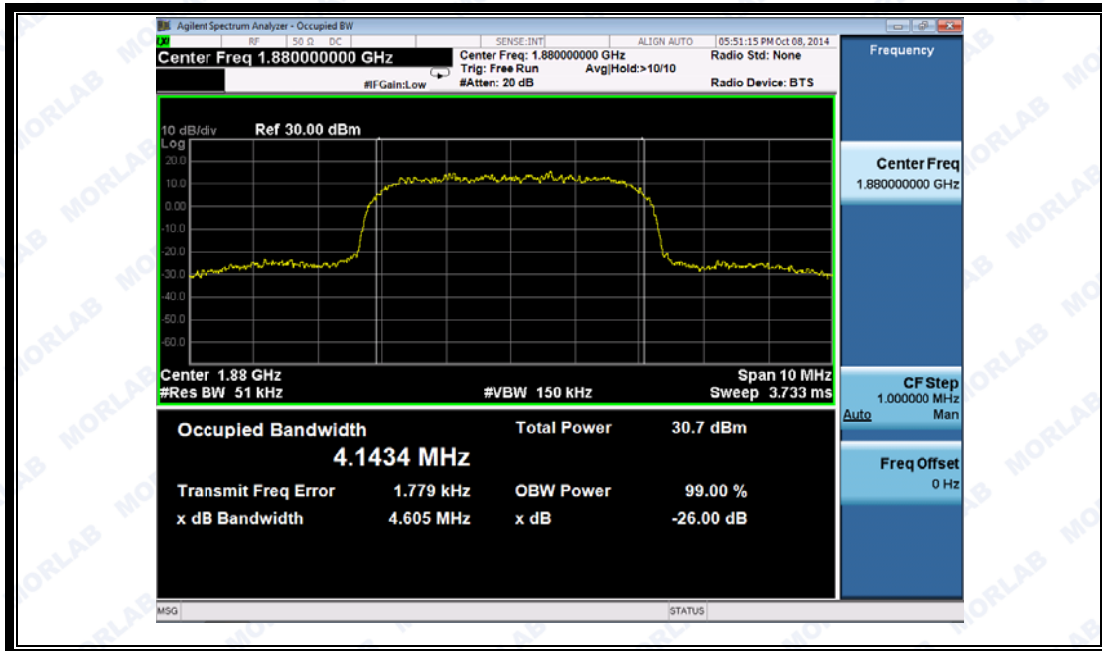


(Plot C1: HSPA+1900 MHz Channel = 9400)

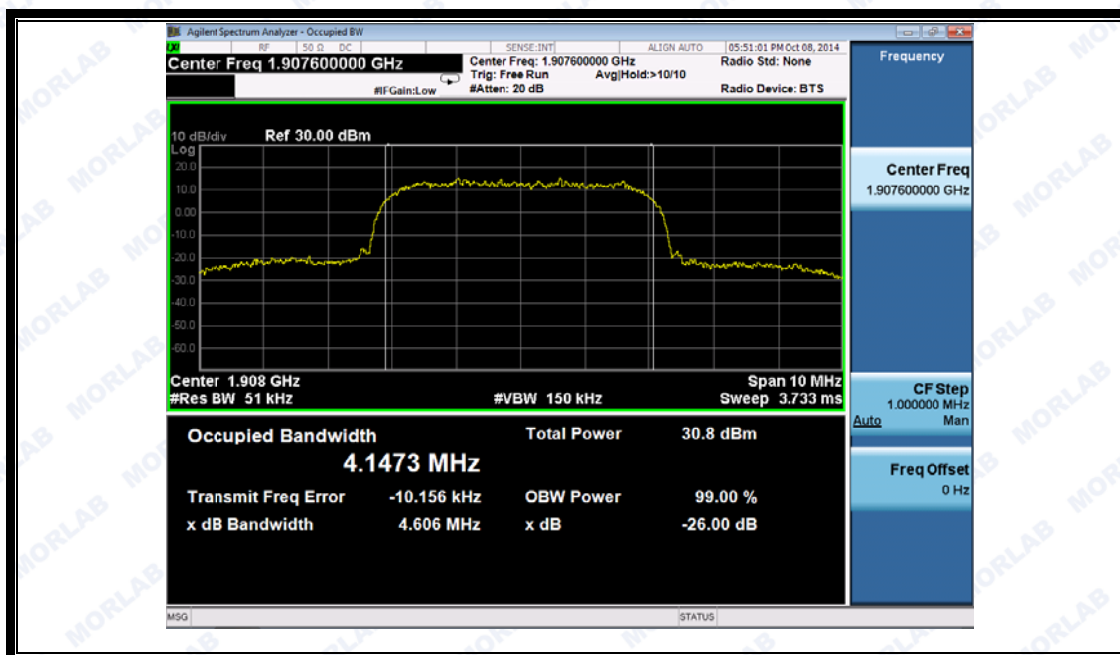


(Plot D1: HSPA+1900 MHz Channel = 9538)



REPORT No. : SZ14090028W01

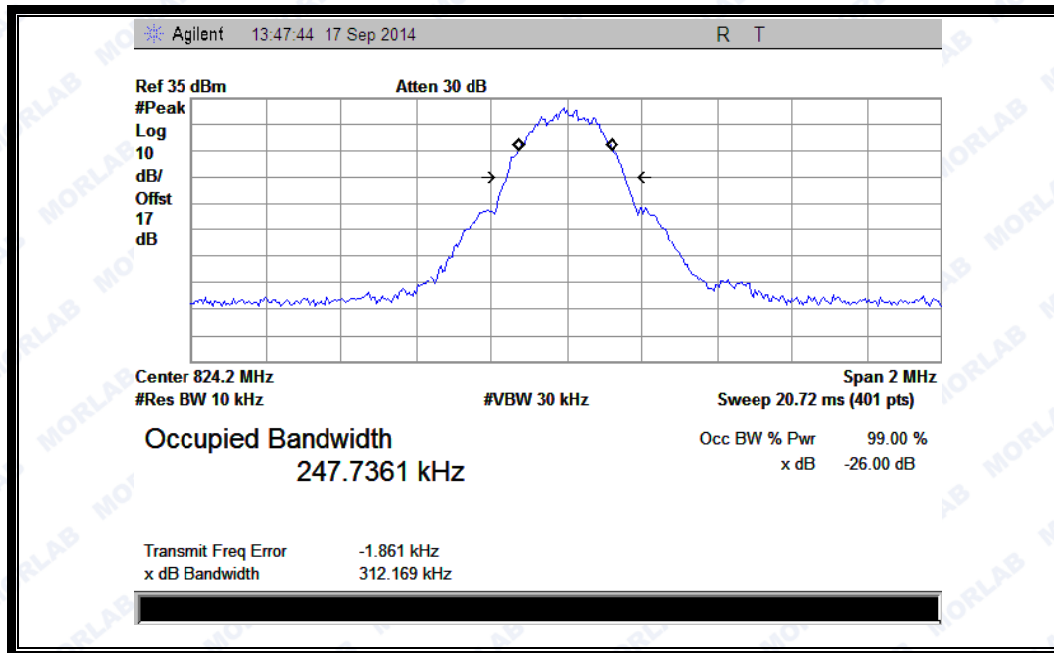


(Plot E1: GSM 850MHz Channel = 128)

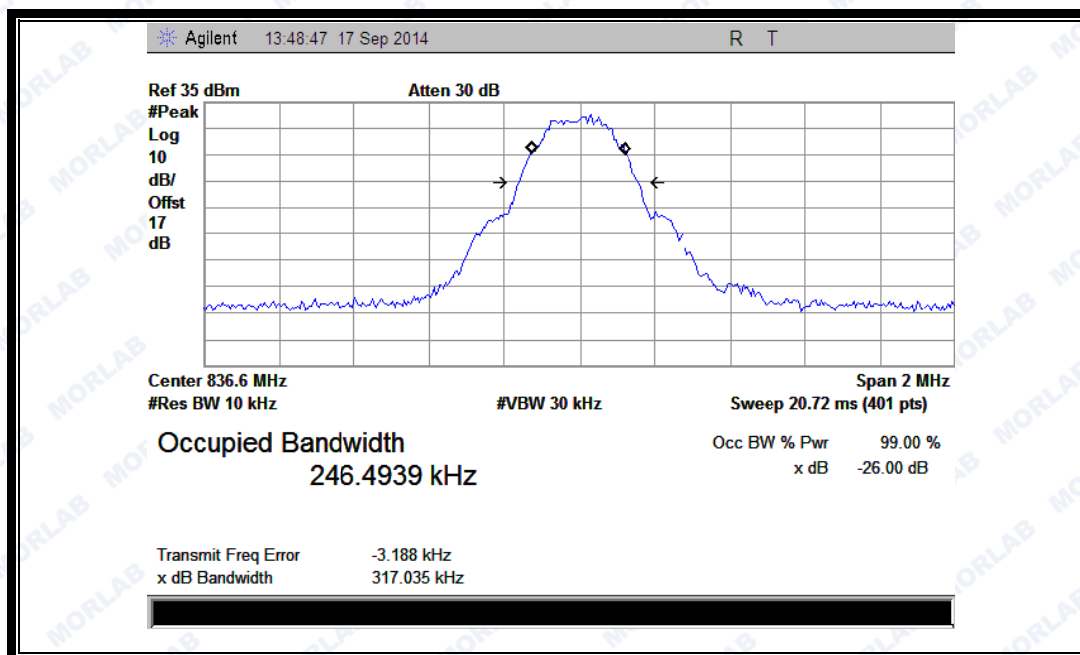


(Plot F1:GSM 850MHz Channel = 190)



REPORT No. : SZ14090028W01

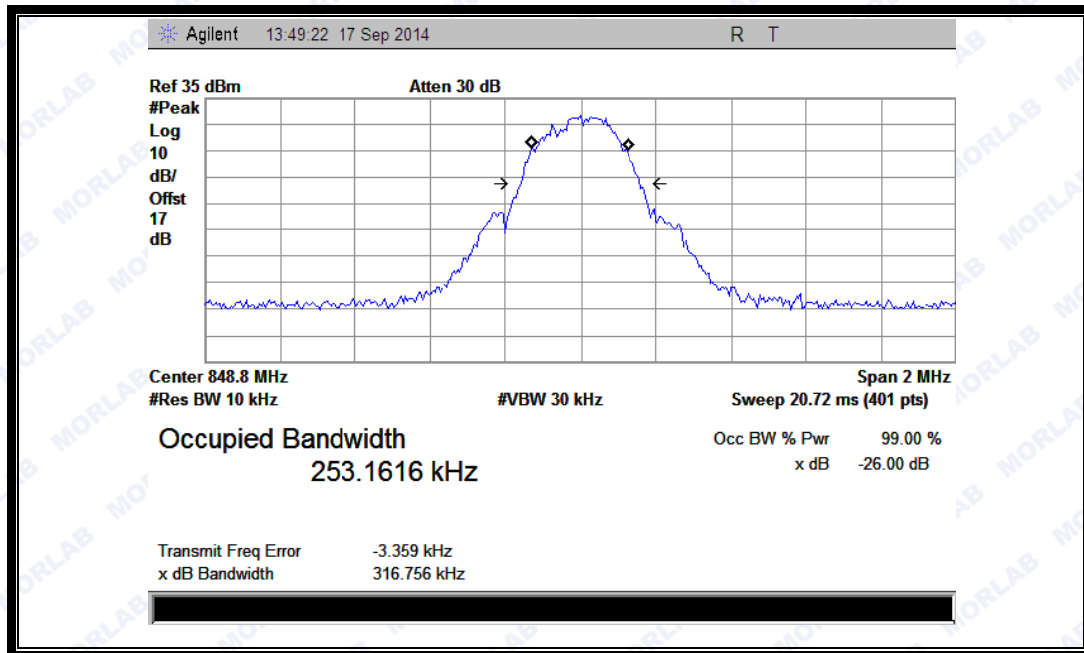


(Plot G1: GSM 850MHz Channel = 251)

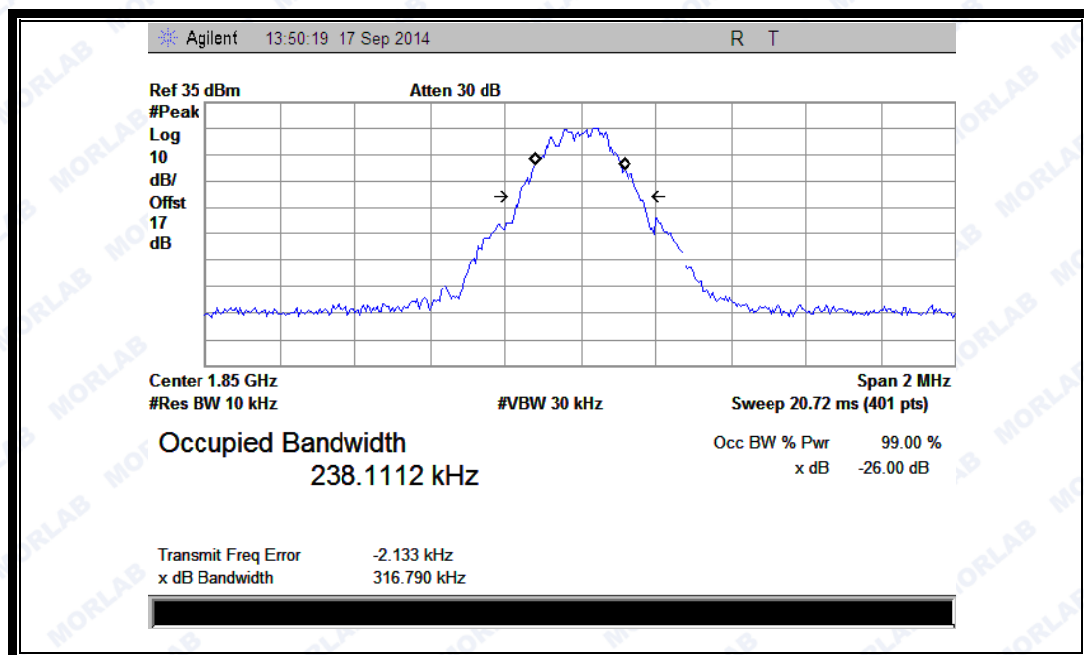


(Plot H1: GSM 1900MHz Channel = 512)



REPORT No. : SZ14090028W01

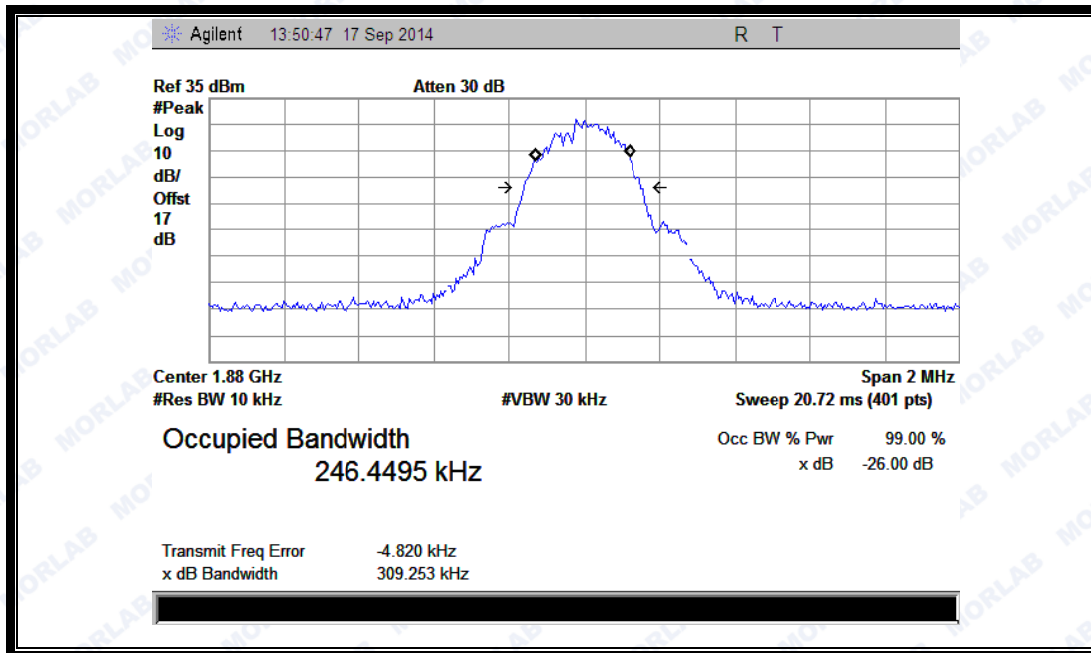


(Plot I1: GSM 1900MHz Channel = 661)

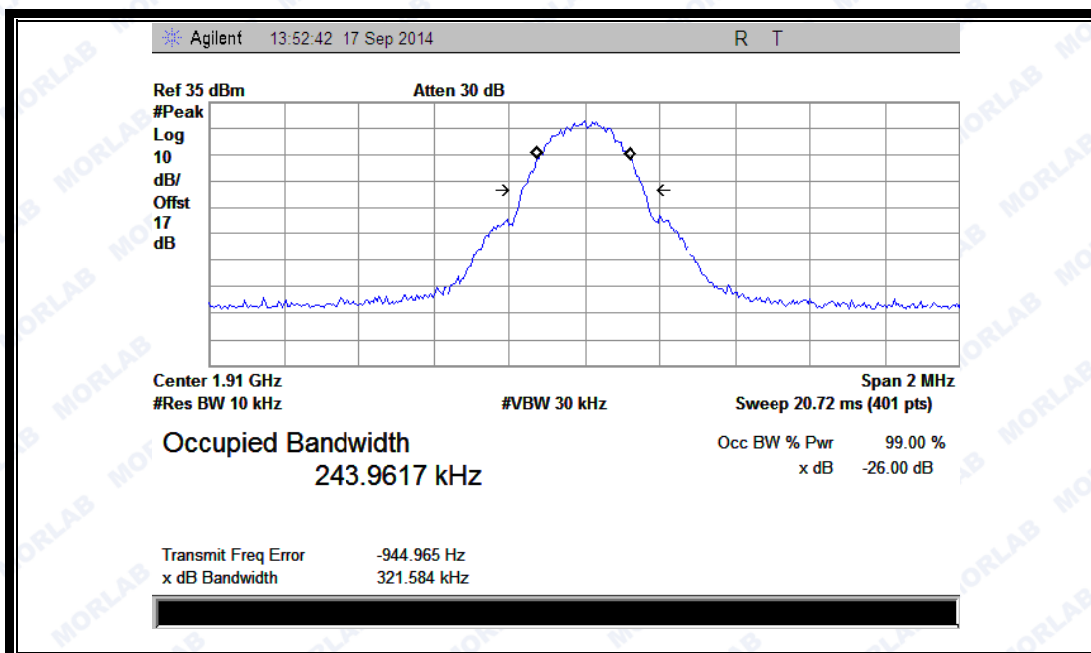


(Plot J1: GSM 1900MHz Channel = 810)



REPORT No. : SZ14090028W01

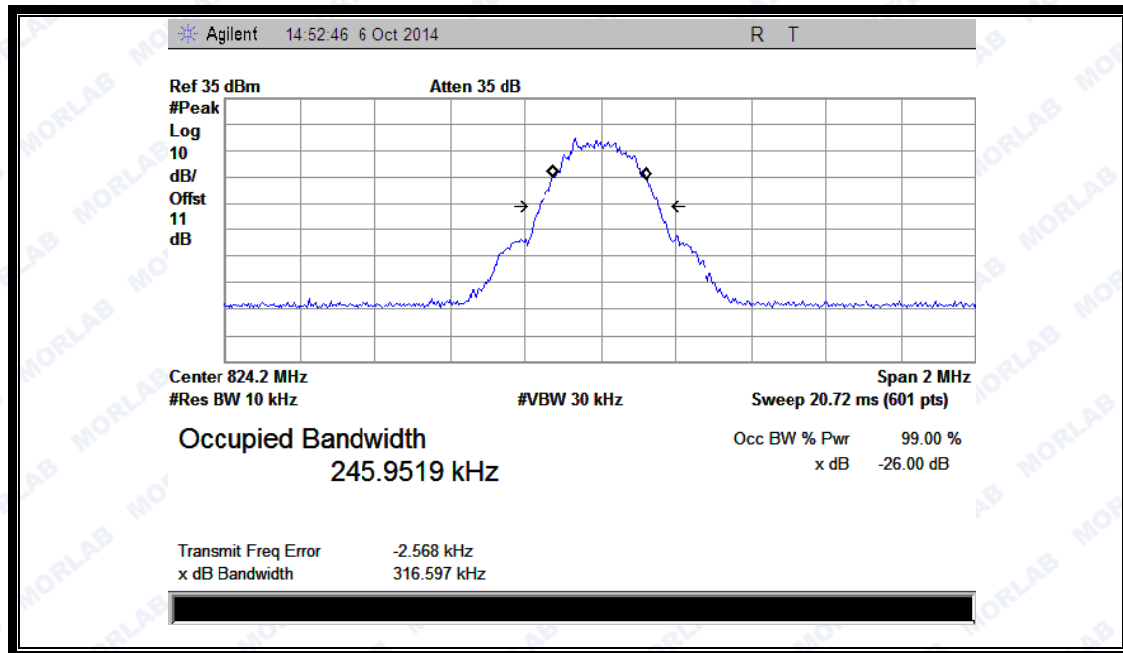


(Plot K1: GPRS 850MHz Channel = 128)

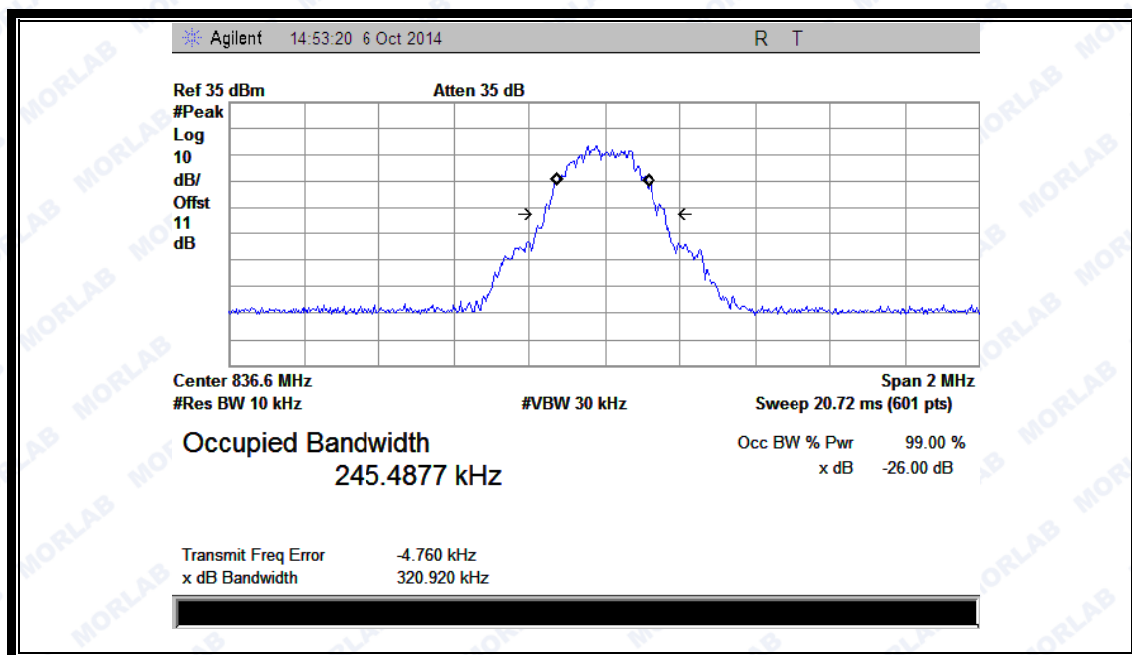


(Plot L1: GPRS 850MHz Channel = 190)



REPORT No. : SZ14090028W01

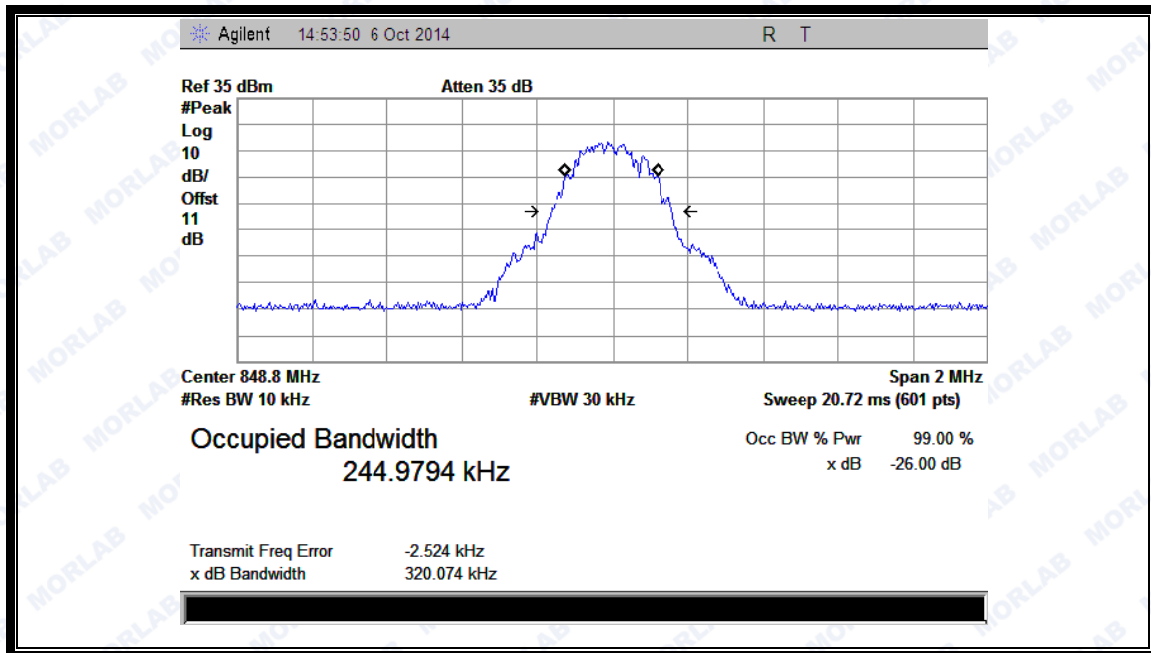


(Plot M1: GPRS850MHz Channel = 251)

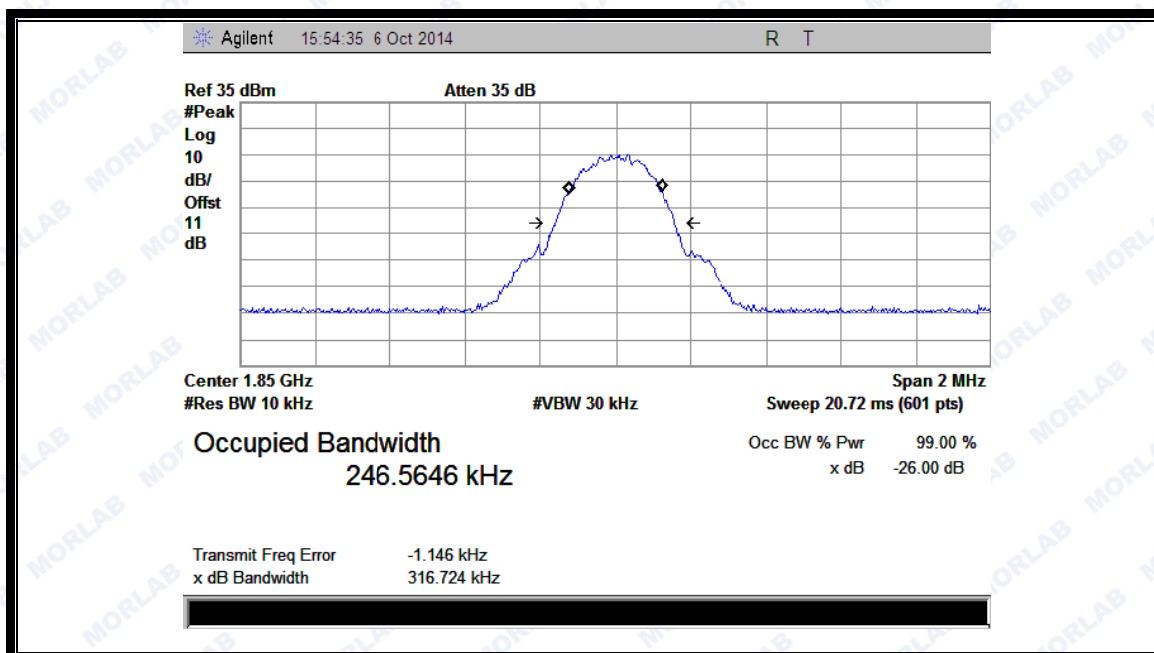


(Plot N1: GPRS 1900MHz Channel = 512)



REPORT No. : SZ14090028W01

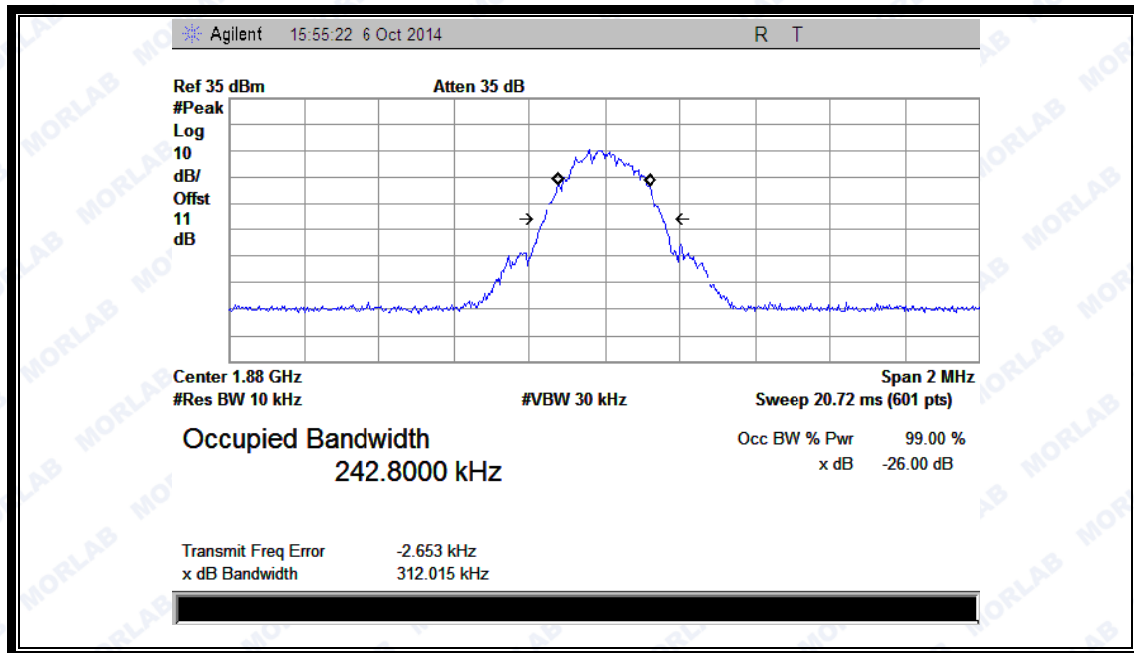

(Plot O1: GPRS 1900MHz Channel = 661)

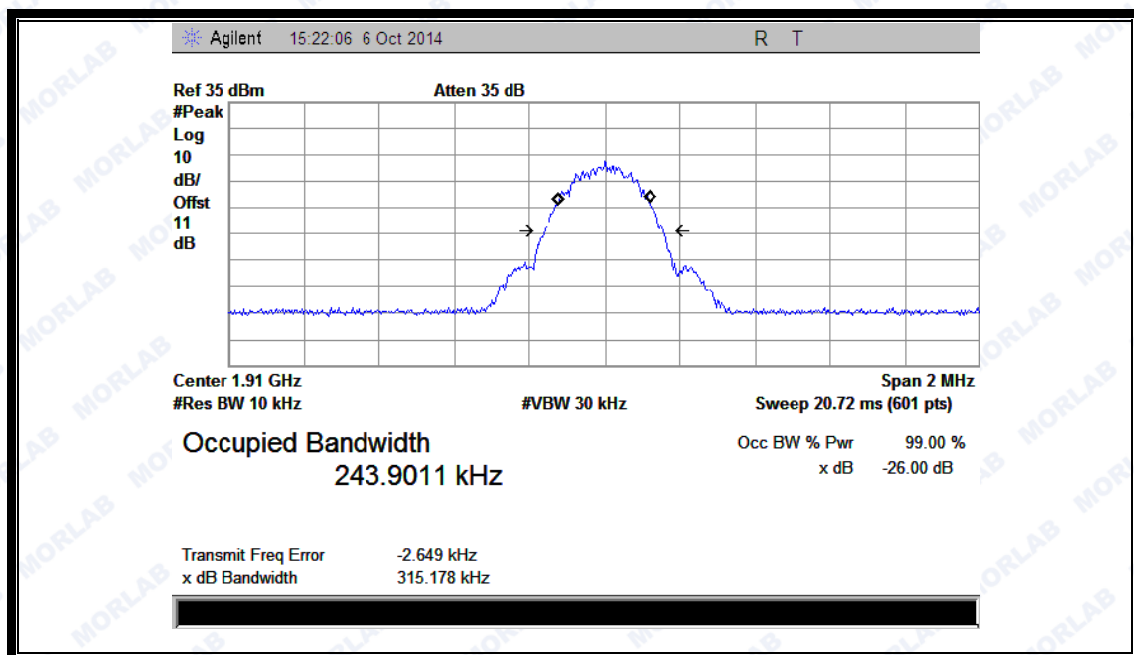

(Plot P1: GPRS 1900MHz Channel = 810)

2.4. Frequency Stability


2.4.1. Requirement

According to FCC section 22.355 and FCC section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30°C to $+50^{\circ}\text{C}$ at intervals of not more than 10°C .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

2.4.2. Test Description

Test Setup:

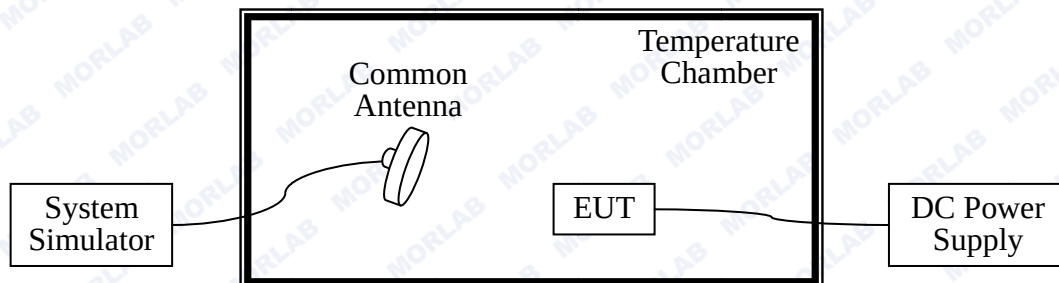

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.

3. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2014.02.26	2015.02.25
DC Power Supply	Good Will	GPS-3030DD	EF920938	2014.02.26	2015.02.25
Temperature Chamber	YinHe Experimental Equip.	HL4003T	(n.a.)	2014.02.26	2015.02.25



2.4.3. Test Verdict

The nominal, highest and lowest extreme voltages are separately 3.8VDC, 4.35VDC and 3.6VDC, which are specified by the applicant; the normal temperature here used is 25°C. The frequency deviation limit of 850MHz band is ± 2.5 ppm, and 1900MHz is ± 1 ppm.

GSM 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 128 (824.2MHz)		Channel = 190 (836.6MHz)		Channel = 251 (848.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	-24.45	±2060.5	22.12	±2091.5	18.17	±2122	<u>PASS</u>
	-20	27.11		12.43		-15.02		
	-10	-2.25		-17.46		15.11		
	0	31.26		31.14		5.05		
	+10	21.79		-24.93		3.02		
	+20	-19.56		-17.19		10.76		
	+30	34.36		19.36		-16.53		
	+40	42.63		19.64		-2.13		
	+55	35.28		23.27		-12.89		
4.35	+25	-15.73		29.05	-7.55			
3.6	+25	-17.65		37.13	7.78			

GSM 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	18.21	±1850.2	21.18	±1880.0	32.15	±1909.8	<u>PASS</u>
	-20	37.18		-21.48		-18.88		
	-10	-2.05		-13.76		-16.88		
	0	40.06		-18.38		19.32		
	+10	1.98		-21.61		25.31		
	+20	-19.76		15.52		31.26		
	+30	39.76		-0.78		-29.21		
	+40	44.56		34.37		19.33		
	+55	39.88		24.02		-19.37		



REPORT No. : SZ14090028W01

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
4.35	+25	37.88		23.72		27.09		
3.6	+25	-5.69		15.22		19.89		

EDGE 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 128 (824.2MHz)		Channel = 190 (836.6MHz)		Channel = 251 (848.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	-31.22	±2060.5	26.29	±2091.5	6.22	±2122	<u>PASS</u>
	-20	36.98		13.73		-13.8		
	-10	-3.25		-18.35		11.16		
	0	41.06		38.10		5.05		
	+10	1.99		-22.06		3.02		
	+20	-19.86		-16.11		10.76		
	+30	39.56		17.76		-16.5		
	+40	46.62		15.54		-2.11		
	+55	39.98		3.57		-12.89		
4.35	+25	-15.71		14.05		-7.83		
3.6	+25	-15.01		7.93		6.88		

EDGE 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	-12.87	±1850.2	25.22	±1880.0	1.77	±1909.8	<u>PASS</u>
	-20	2.72		7.63		-13.76		
	-10	1.25		-25.18		-13.21		
	0	2.57		-1.36		13.23		
	+10	-10.78		-17.98		5.23		
	+20	-2.11		-21.61		36.16		
	+30	14.03		14.58		-26.88		
	+40	5.43		-0.78		19.34		
	+55	-2.46		38.07		-16.77		



REPORT No. : SZ14090028W01

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
4.35	+25	19.02		4.08		26.59		
3.6	+25	-7.19		14.13		19.03		

WCDMA 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.8	-30	17.11	±2066	12.21	±2087.5	-1.10	±2116.5	<u>PASS</u>
	-20	-7.51		-0.62		-18.48		
	-10	-3.43		22.45		7.67		
	0	16.47		13.25		4.32		
	+10	30.18		1.31		-17.33		
	+20	31.07		-12.22		11.90		
	+30	-7.98		30.62		6.63		
	+40	26.31		13.45		29.93		
	+55	12.10		-12.42		19.76		
4.35	+25	-6.17		31.12		23.89		
3.6	+25	18.56		-17.80		-18.12		

WCDMA 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	-4.12	±1852.4	-11.67	±1880.0	-1.29	±1907.6	<u>PASS</u>
	-20	19.15		12.28		25.60		
	-10	5.35		-14.36		15.11		
	0	18.92		18.59		-3.17		
	+10	31.40		21.39		18.12		
	+20	13.55		38.27		-10.39		
	+30	2.31		2.37		17.47		
	+40	-12.52		-13.47		28.84		



REPORT No. : SZ14090028W01

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
	+55	-13.65		-5.81		-2.53		
4.35	+25	24.23		14.68		21.05		
3.6	+25	23.12		25.37		-25.11		

HSDPA 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.8	-30	28.46	±2066	-24.87	±2087.5	17.11	±2116.5	<u>PASS</u>
	-20	-8.66		-14.06		14.41		
	-10	20.85		37.23		21.57		
	0	12.78		-8.41		-24.37		
	+10	-14.75		-13.95		-13.96		
	+20	8.78		-24.37		35.11		
	+30	-1.49		12.88		-8.31		
	+40	17.14		-14.75		-13.95		
	+55	-23.61		23.37		25.37		
4.35	+25	33.03		7.93		7.98		
3.6	+25	17.14		-31.21		1.98		

HSDPA 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	11.57	±1852.4	-3.54	±1880	2.50	±1907.6	<u>PASS</u>
	-20	-16.05		22.71		-8.48		
	-10	20.42		15.37		-14.02		
	0	-3.11		-12.21		-9.01		
	+10	21.71		10.60		5.64		



REPORT No. : SZ14090028W01

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	11.57	±1852.4	-3.54	±1880	2.50	±	<u>PASS</u>
	+20	20.12		-4.81		-3.85		
	+30	-15.01		35.11		9.57		
	+40	23.71		8.46		28.32		
	+55	16.42		-24.88		-12.42		
4.35	+25	-11.25		29.53		-2.83		
3.6	+25	11.53		-2.17		14.32		

HSUPA 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.8	-30	27.12	±2066	14.51	±2087.5	15.05	±2116.5	<u>PASS</u>
	-20	-15.40		-19.43		27.52		
	-10	-12.71		-12.79		38.71		
	0	-14.09		-0.44		-7.32		
	+10	-0.37		0.01		-4.91		
	+20	-11.85		-6.64		21.35		
	+30	28.57		24.25		-5.94		
	+40	-11.89		9.73		13.78		
	+55	-0.45		25.76		28.55		
4.35	+25	2.78		-4.67		29.31		
3.6	+25	3.65		5.65		-6.60		

HSUPA 1900MHz Band

Test Conditions		Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)	Channel = 9400 (1880.0MHz)	Channel = 9538 (1907.6MHz)	



REPORT No. : SZ14090028W01

		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	33.54	±1852.4	-11.69	±1880	7.17	±1907.6	<u>PASS</u>
	-20	28.13		-0.74		2.12		
	-10	7.82		0.11		-4.85		
	0	2.41		14.82		17.08		
	+10	-4.73		-15.25		-1.86		
	+20	16.22		-11.79		23.52		
	+30	-1.55		-0.44		-0.48		
	+40	24.16		1.25		-12.05		
	+55	14.79		-7.84		-5.81		
4.35	+25	-8.08		6.72		26.38		
3.6	+25	22.78		-1.72		-15.45		



REPORT No. : SZ14090028W01

HSPA+ 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.8	-30	27.55	±2066	13.31	±2087.5	13.45	±2116.5	<u>PASS</u>
	-20	-14.40		-19.33		27.52		
	-10	-12.71		-12.79		37.71		
	0	-14.09		-0.44		-7.32		
	+10	-0.37		0.01		-4.91		
	+20	-11.85		-6.64		21.35		
	+30	28.57		24.25		-5.94		
	+40	-11.89		9.73		13.78		
	+55	-0.45		25.76		28.55		
4.35	+25	1.78		-4.67		29.98		
3.6	+25	1.35		6.35		-7.93		

HSPA+ 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	31.67	±1852.4	-12.19	±1880	7.29	±1907.6	<u>PASS</u>
	-20	28.23		-0.82		2.12		
	-10	7.82		0.21		-4.85		
	0	2.41		15.82		17.08		
	+10	-4.73		-15.25		-1.86		
	+20	16.22		-11.79		23.52		
	+30	-1.55		-0.44		-0.48		
	+40	24.16		1.25		-12.05		
	+55	14.79		-7.84		-5.81		
4.35	+25	-8.08		6.71		27.38		
3.6	+25	22.38		-1.22		-16.38		



2.5. Conducted Out of Band Emissions

2.5.1. Requirement

According to FCC section 22.917(a) and FCC section 24.238(a) the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

2.5.2. Test Description

See section 2.1.2 of this report.

2.5.3. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.

1. Test Verdict:

Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
GSM 850MHz	128	824.2	-20.01	Plot A1toA1.1	-13	<u>PASS</u>
	190	836.6	-19.41	Plot A2toA2.1		<u>PASS</u>
	251	848.8	-19.62	Plot A3toA3.1		<u>PASS</u>
GSM 1900MHz	512	1850.2	-20.02	Plot B1toB1.1	-13	<u>PASS</u>
	661	1880.0	-19.66	Plot B2toB2.1		<u>PASS</u>
	810	1909.8	-18.96	Plot B3toB3.1		<u>PASS</u>
EDGE 850MHz	128	824.2	-19.48	Plot C1toC1.1	-13	<u>PASS</u>
	190	836.6	-20.04	Plot C2toC2.1		<u>PASS</u>
	251	848.8	-19.47	Plot C3toC3.1		<u>PASS</u>
EDGE 1900MHz	512	1850.2	-19.71	Plot D1toD1.1	-13	<u>PASS</u>
	661	1880.0	-20.24	Plot D2toD2.1		<u>PASS</u>
	810	1909.8	-19.02	Plot D3toD3.1		<u>PASS</u>
WCDMA	4132	826.4	<-25	Plot E1toE1.1	-13	<u>PASS</u>




REPORT No. : SZ14090028W01

Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
850MHz	4175	835	<-25	Plot E2toE2.1		<u>PASS</u>
	4233	846.6	<-25	Plot E3toE3.1		<u>PASS</u>
WCDMA 1900MHz	9262	1852.4	<-25	Plot F1toF1.1	-13	<u>PASS</u>
	9400	1880	<-25	Plot F2toF2.1		<u>PASS</u>
	9538	1907.6	<-25	Plot F3toF3.1		<u>PASS</u>
HSDPA 850MHz	4132	826.4	<-25	Plot G1toG1.1	-13	<u>PASS</u>
	4175	835	<-25	Plot G2toG2.1		<u>PASS</u>
	4233	846.6	<-25	Plot G3toG3.1		<u>PASS</u>
HSDPA 1900MHz	9262	1852.4	<-25	Plot H1toH1.1	-13	<u>PASS</u>
	9400	1880	<-25	Plot H2toH2.1		<u>PASS</u>
	9538	1907.6	<-25	Plot H3toH3.1		<u>PASS</u>
HSUPA 850MHz	4132	826.4	<-25	Plot I1toI1.1	-13	<u>PASS</u>
	4175	835	<-25	Plot I2toI2.1		<u>PASS</u>
	4233	846.6	<-25	Plot I3toI3.1		<u>PASS</u>
HSUPA 1900MHz	9262	1852.4	<-25	Plot J1toJ1.1	-13	<u>PASS</u>
	9400	1880	<-25	Plot J2toJ2.1		<u>PASS</u>
	9538	1907.6	<-25	Plot J3toJ3.1		<u>PASS</u>
HSPA+ 850MHz	4132	826.4	<-25	Plot K1toK1.1	-13	<u>PASS</u>
	4175	835	<-25	Plot K2toK2.1		<u>PASS</u>
	4233	846.6	<-25	Plot K3toK3.1		<u>PASS</u>
HSPA+ 1900MHz	9262	1852.4	<-25	Plot L1toL1.1	-13	<u>PASS</u>
	9400	1880	<-25	Plot L2toL2.1		<u>PASS</u>
	9538	1907.6	<-25	Plot L3toL3.1		<u>PASS</u>




2. Test Plots for the Whole Measurement Frequency Range:

Note: the power of the EUT transmitting frequency should be ignored.

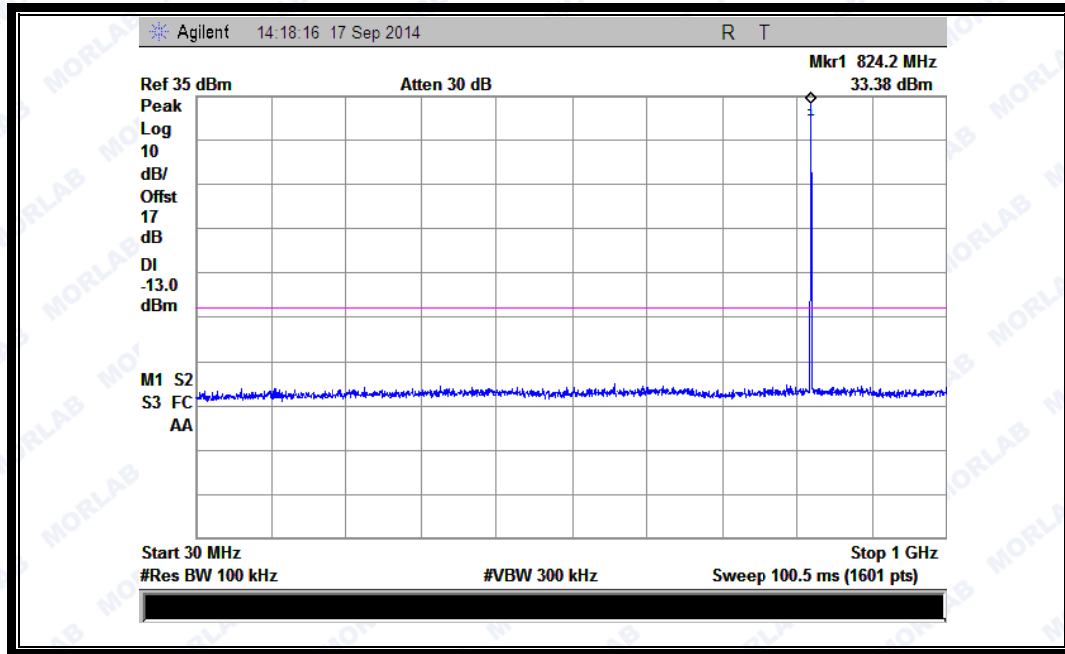


(Plot A1: GSM 850MHz Channel = 128, 30MHz to 1GHz)

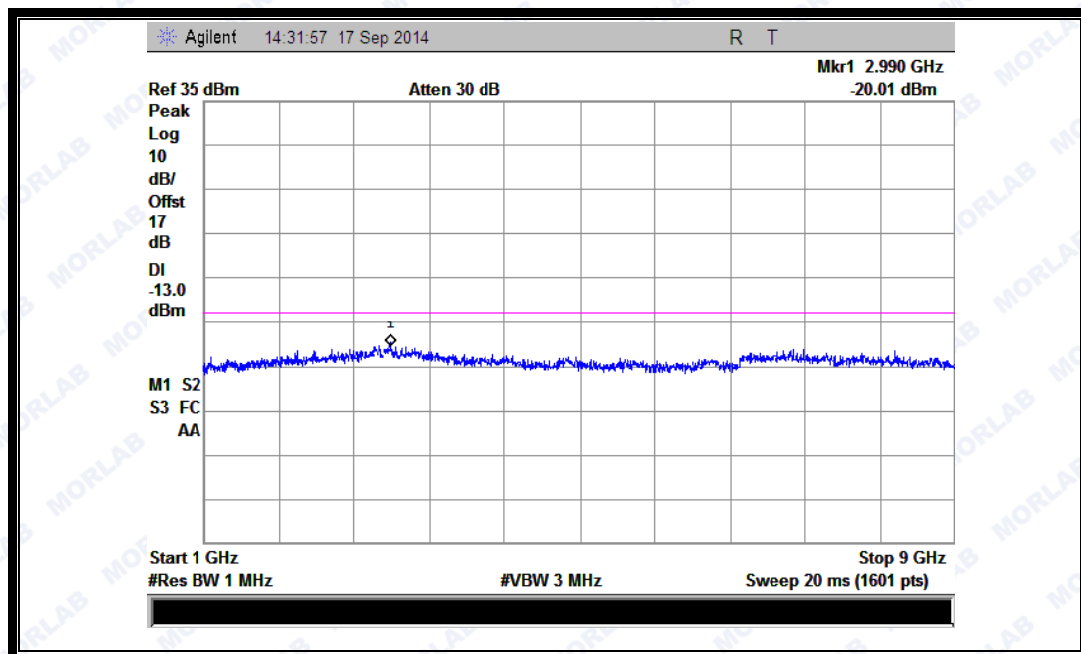


(Plot A1.1: GSM 850MHz Channel = 128, 1GHz to 9GHz)



REPORT No. : SZ14090028W01

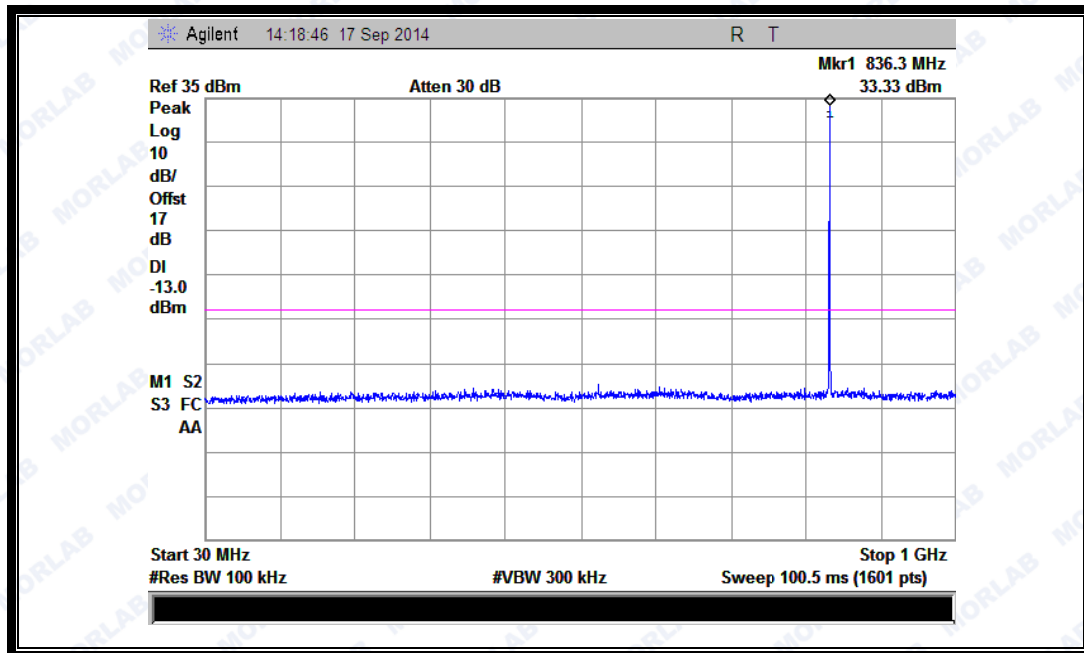


(Plot A2: GSM 850MHz Channel = 190, 30MHz to 1GHz)

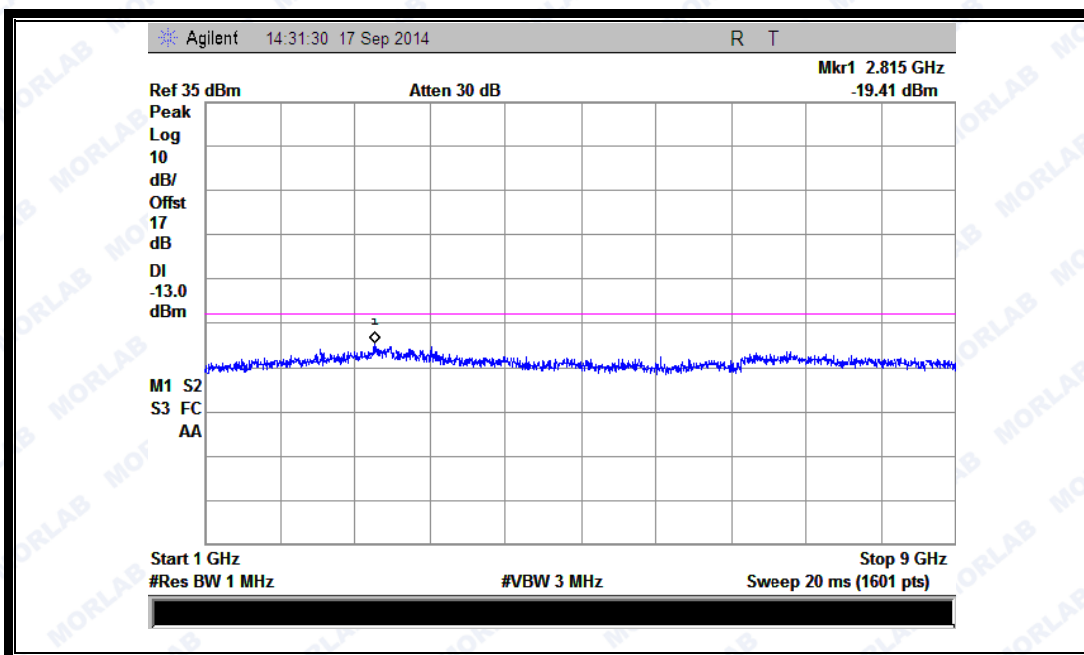


(Plot A2.1: GSM 850MHz Channel = 190, 1GHz to 9GHz)



REPORT No. : SZ14090028W01

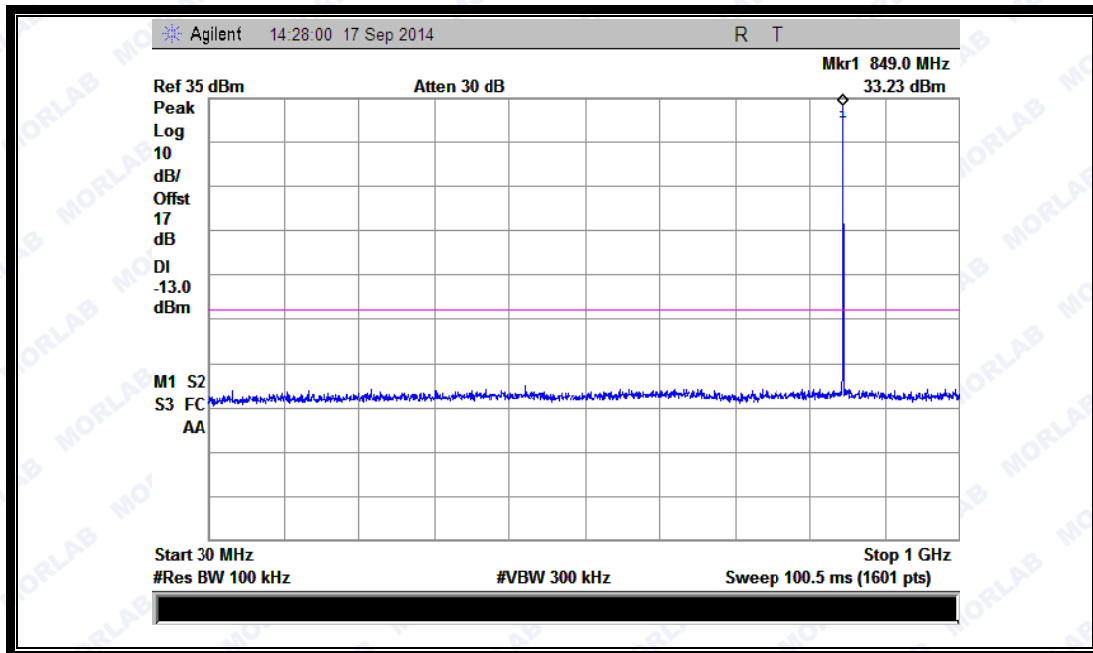


(Plot A3:GSM 850MHz Channel = 251, 30MHz to 1GHz)

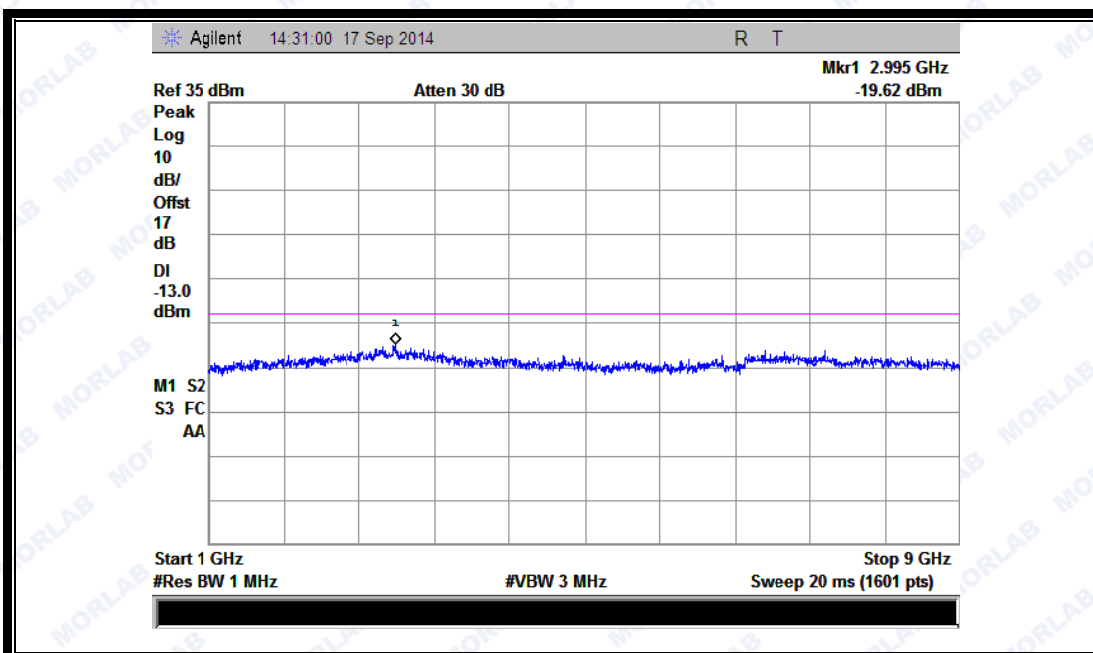


(Plot A3.1: GSM 850MHz Channel = 251, 1GHz to 9GHz)



REPORT No. : SZ14090028W01

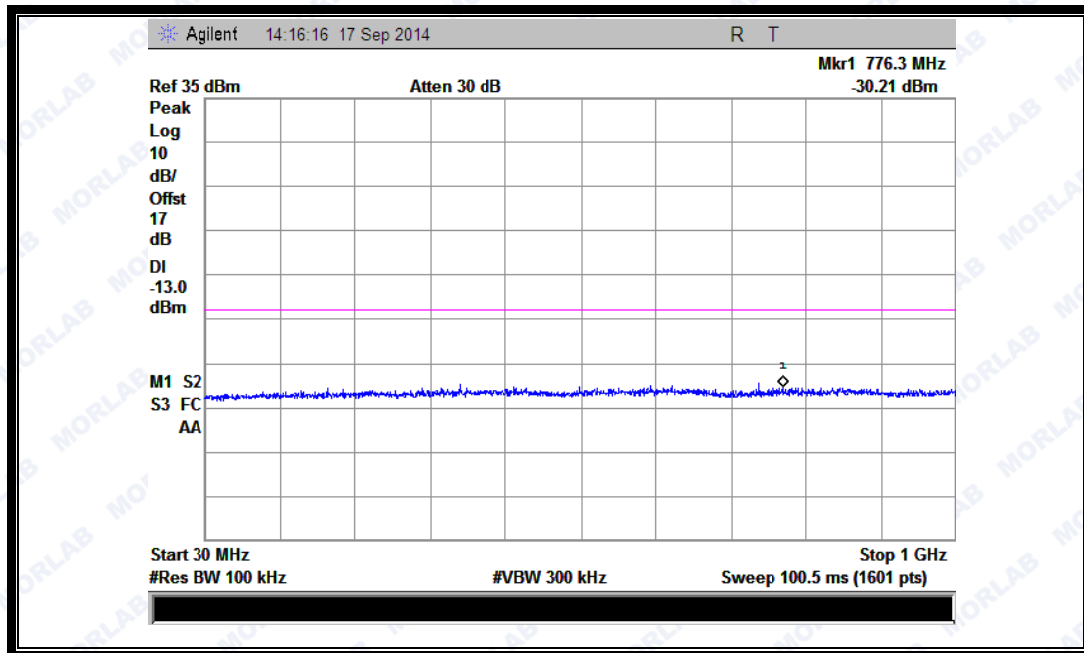


(Plot B1: GSM 1900MHz Channel = 512, 30MHz to 1GHz)

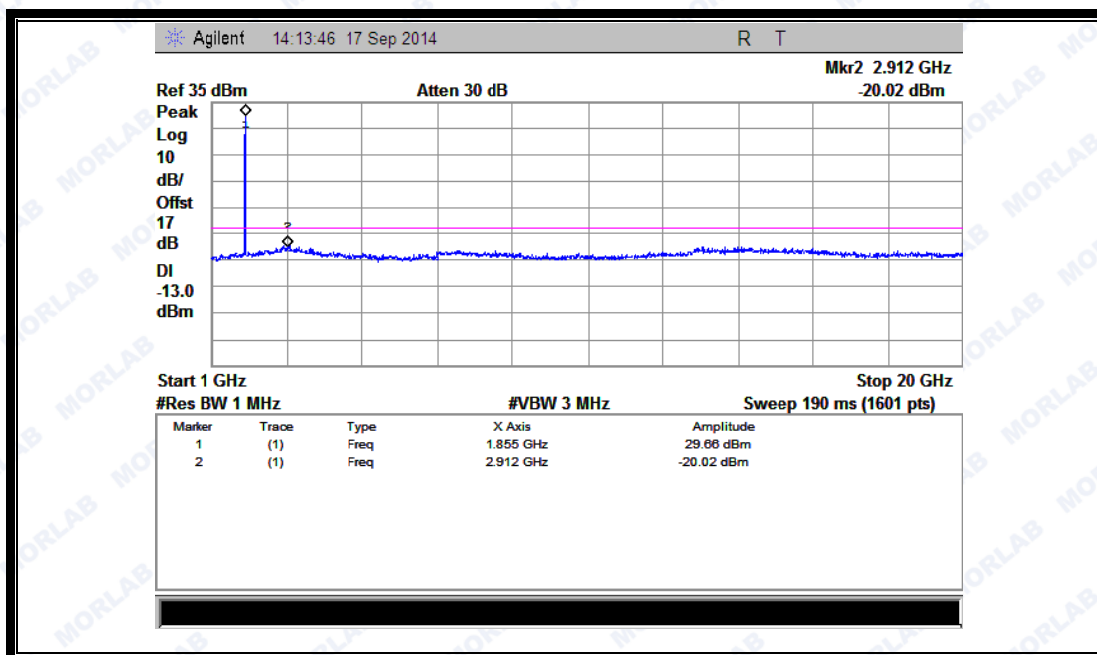


(Plot B1.1: GSM 1900MHz Channel = 512, 1GHz to 20GHz)



REPORT No. : SZ14090028W01

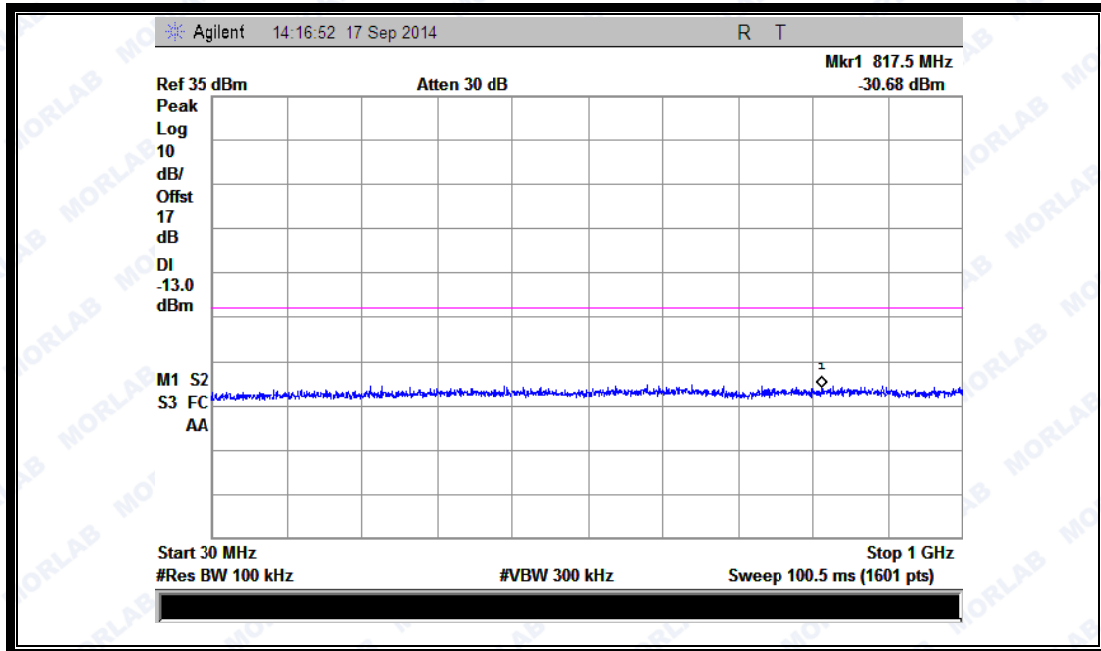


(Plot B2: GSM 1900MHz Channel = 661, 30MHz to 1GHz)

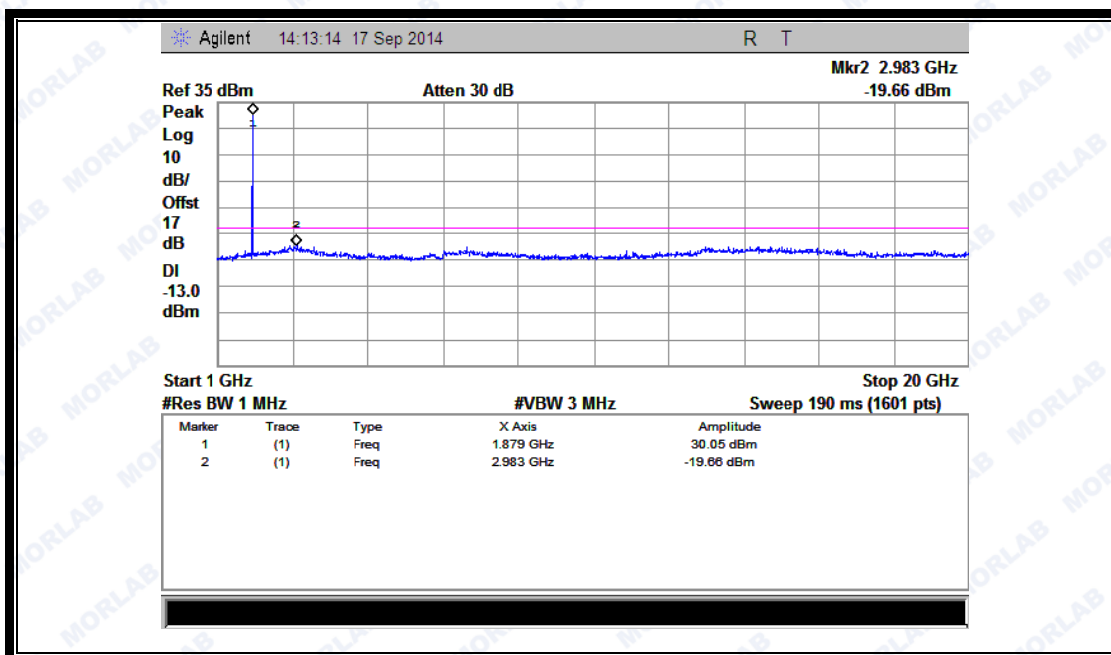


(Plot B2.1: GSM 1900MHz Channel = 661, 1GHz to 20GHz)



REPORT No. : SZ14090028W01

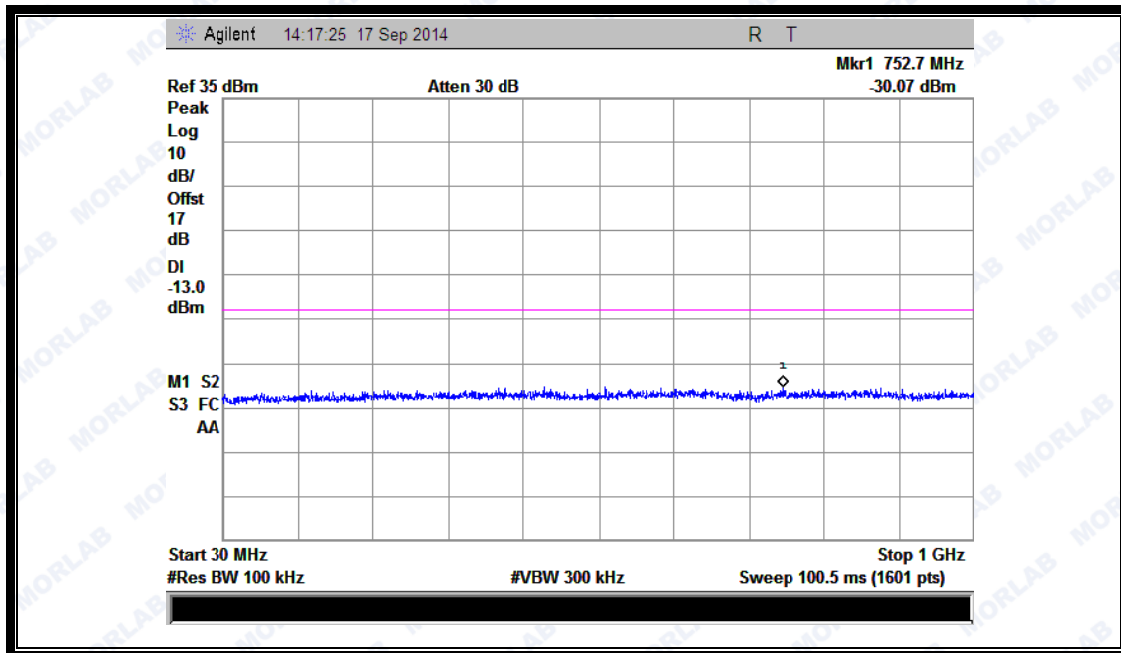


(Plot B3: GSM 1900MHz Channel = 810, 30MHz to 1GHz)

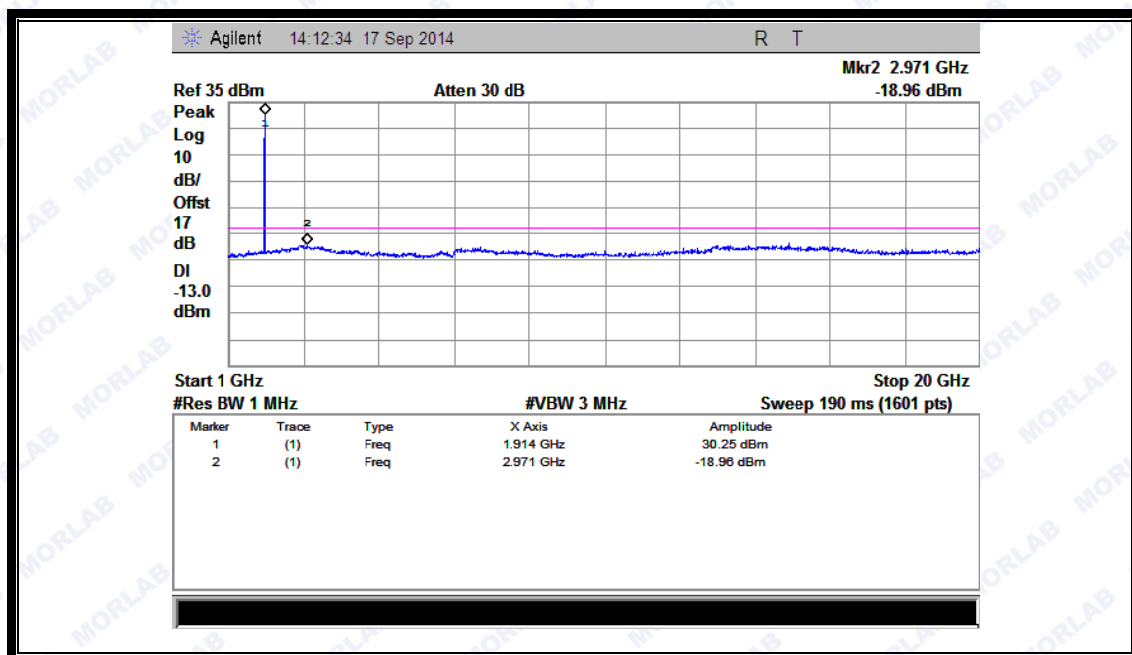


(Plot B3.1: GSM 1900MHz Channel = 810, 1GHz to 20GHz)



REPORT No. : SZ14090028W01

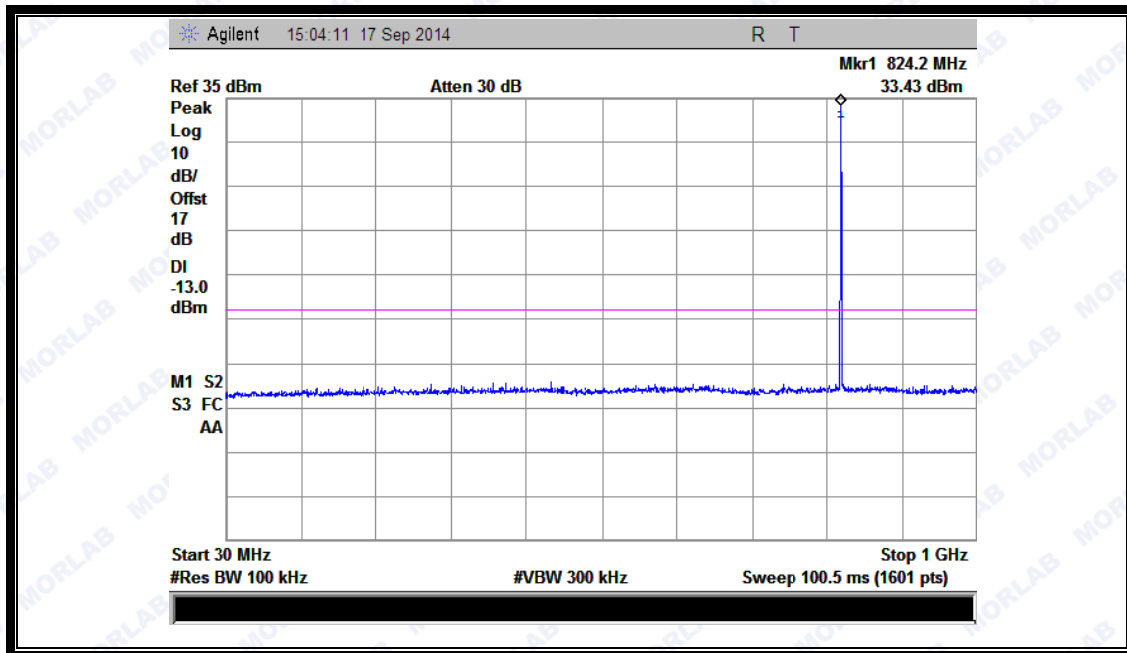


(Plot C1: EDGE 850MHz Channel = 128, 30MHz to 1GHz)

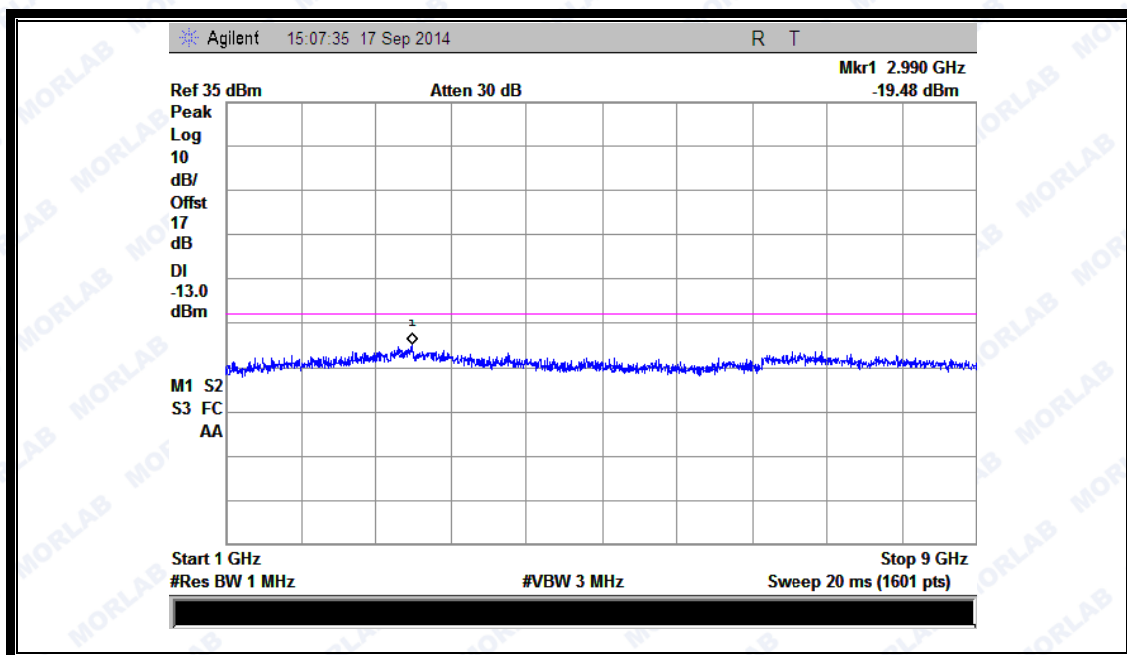


(Plot C1.1: EDGE 850MHz Channel = 128, 1GHz to 9GHz)



REPORT No. : SZ14090028W01

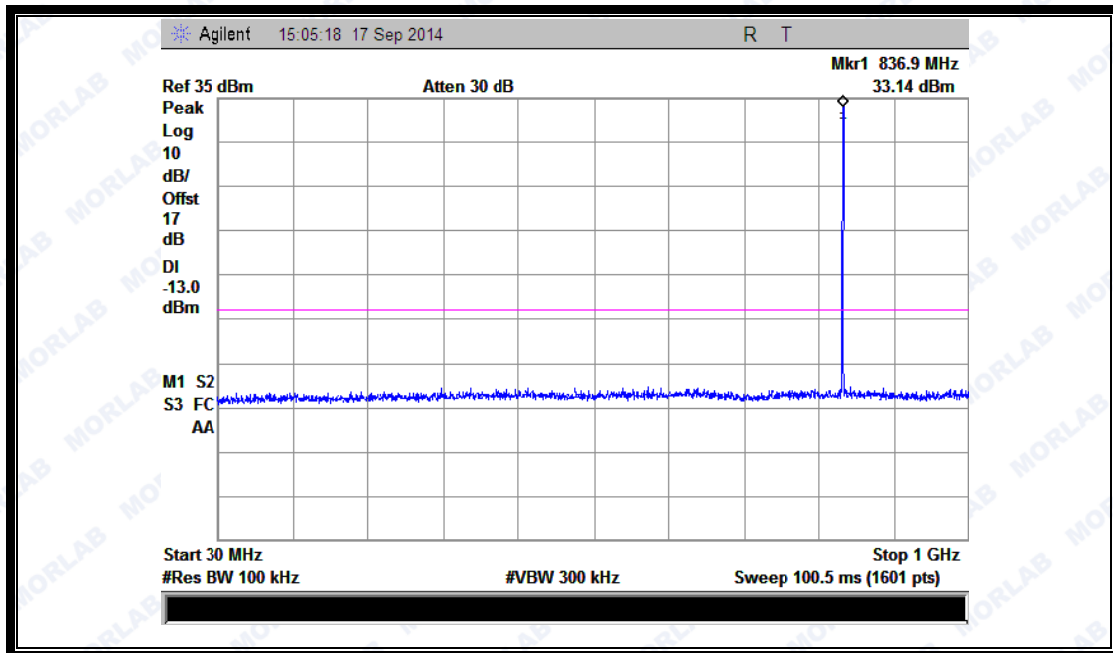


(Plot C2: EDGE 850MHz Channel = 190, 30MHz to 1GHz)

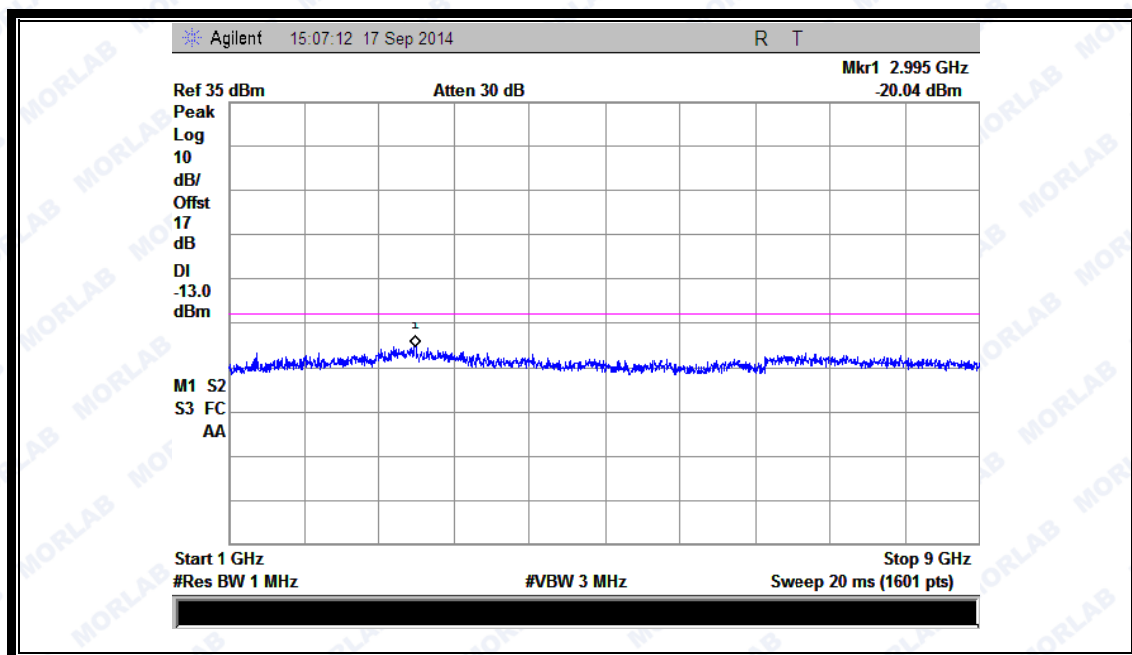


(Plot C2.1: EDGE 850MHz Channel = 190, 1GHz to 9GHz)



REPORT No. : SZ14090028W01

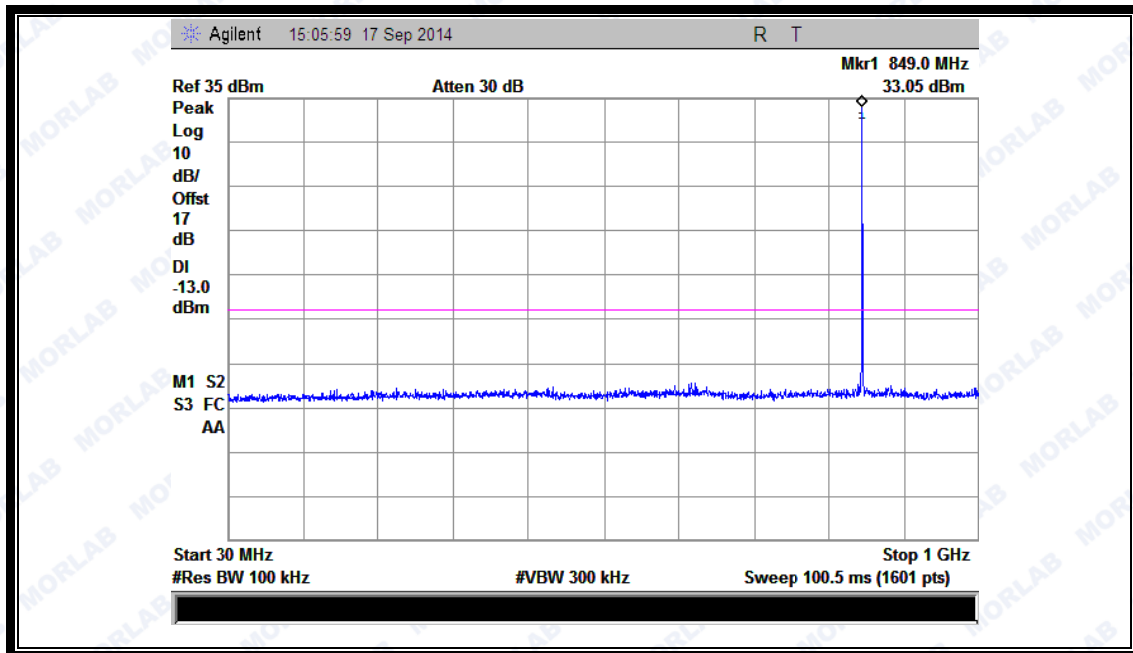


(Plot C3: EDGE 850MHz Channel = 251, 30MHz to 1GHz)

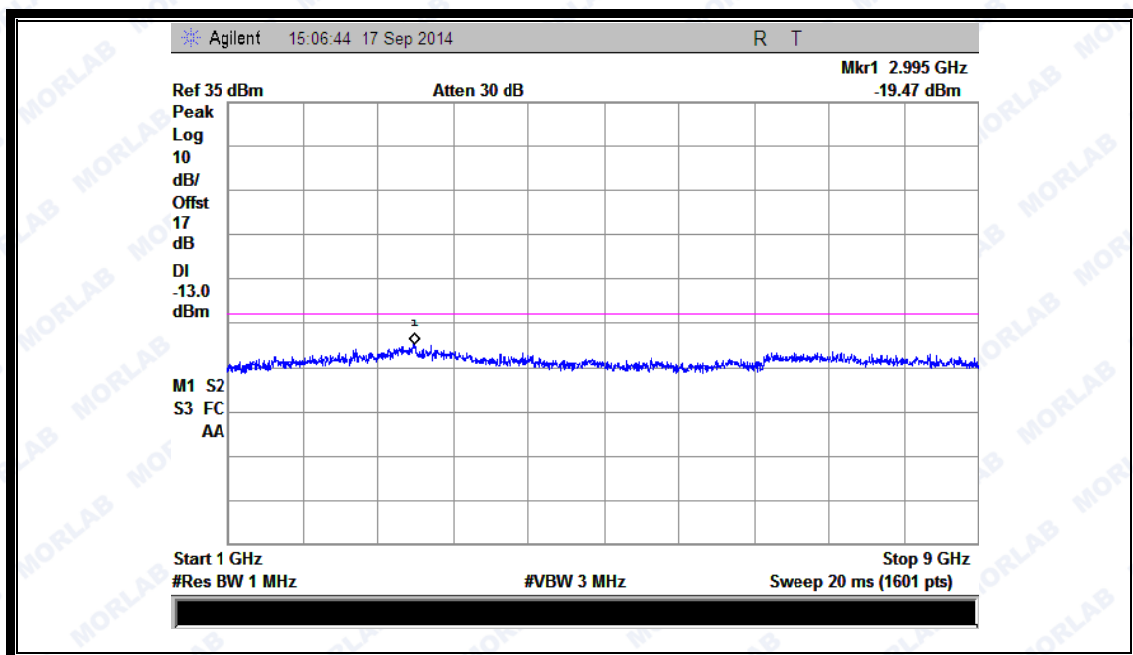


(Plot C3.1: EDGE 850MHz Channel = 251, 1GHz to 9GHz)



REPORT No. : SZ14090028W01

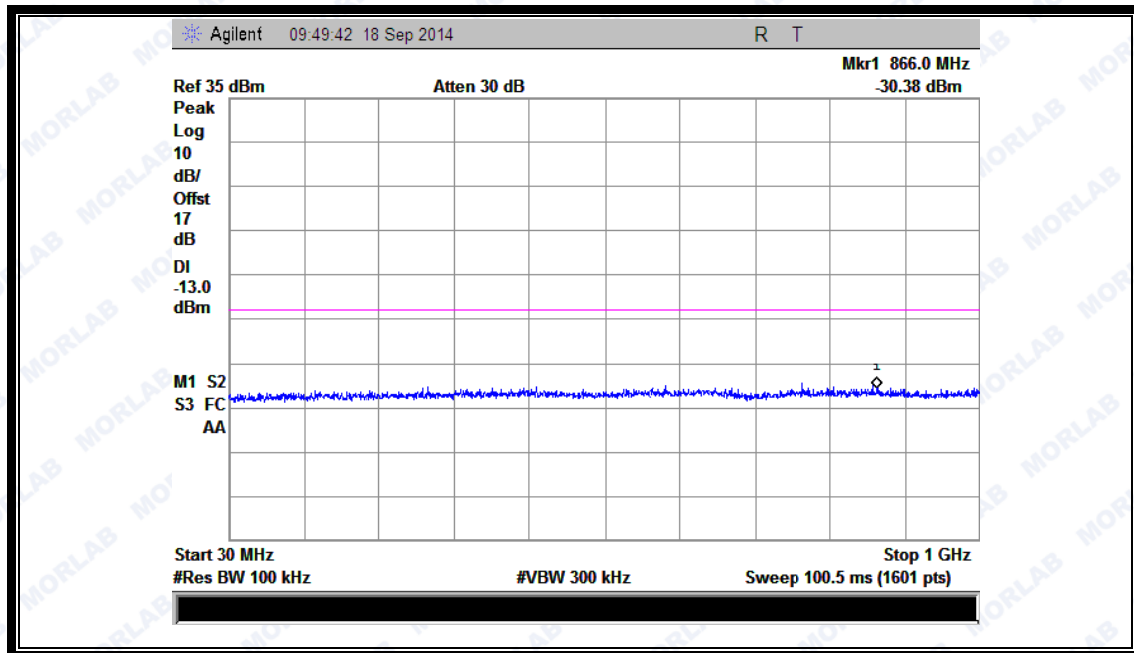


(Plot D1: EDGE 1900MHz Channel = 512, 30MHz to 1GHz)

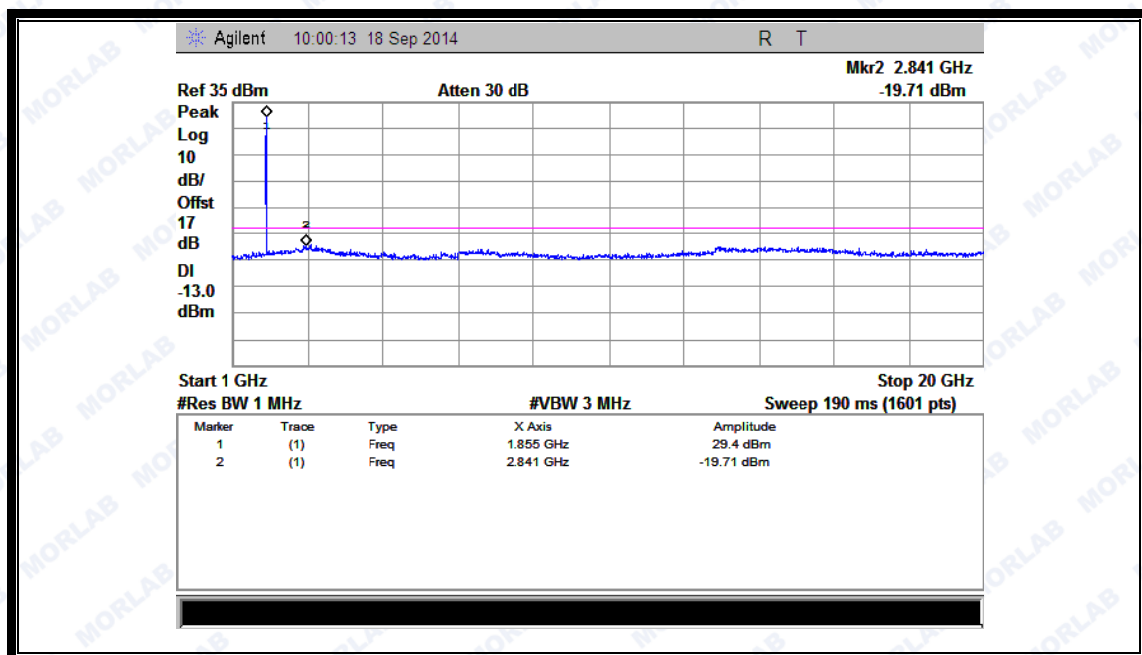


(Plot D1.1: EDGE 1900MHz Channel = 512, 1GHz to 20GHz)



REPORT No. : SZ14090028W01

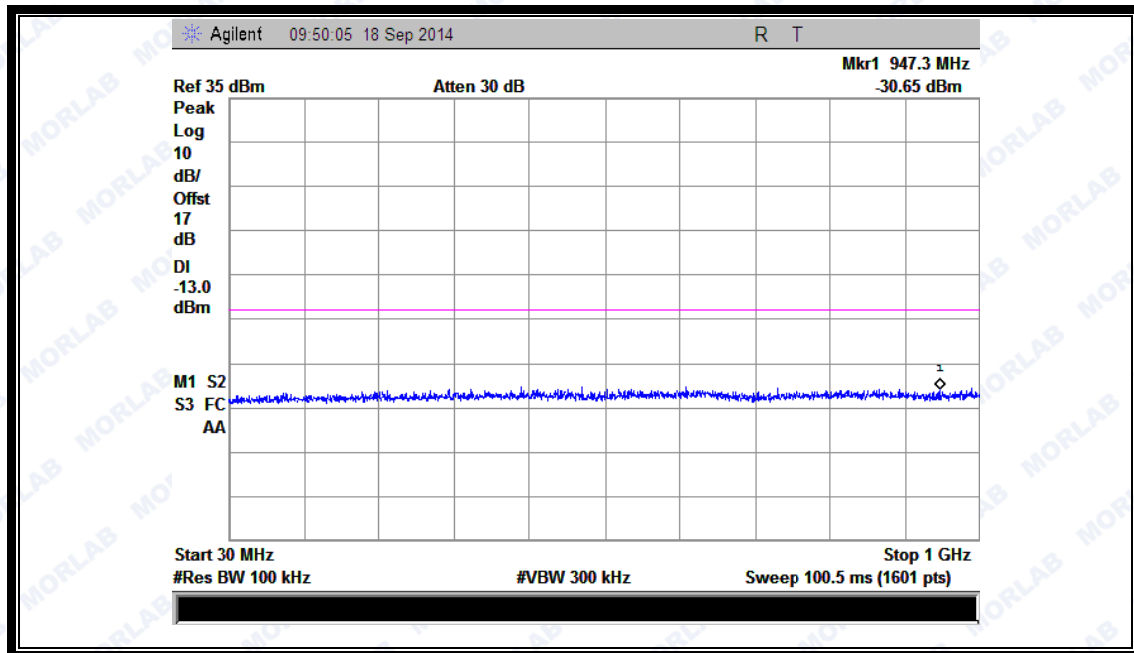


(Plot D2: EDGE 1900MHz Channel = 661, 30MHz to 1GHz)

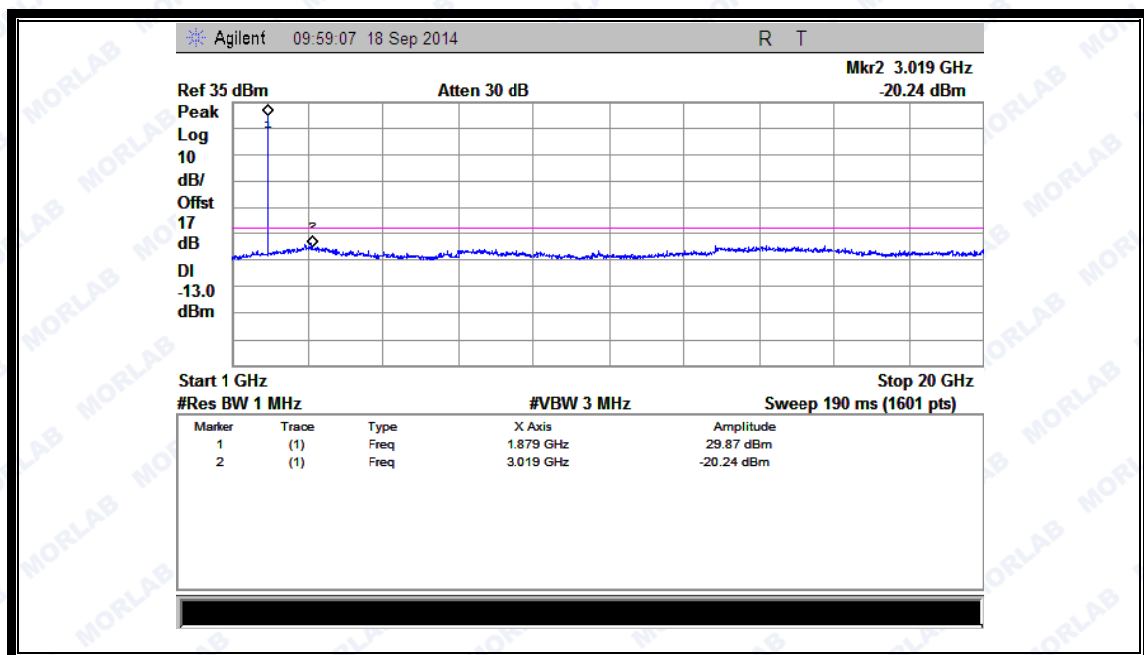


(Plot D2.1: EDGE 1900MHz Channel = 661,1GHz to 20GHz)



REPORT No. : SZ14090028W01

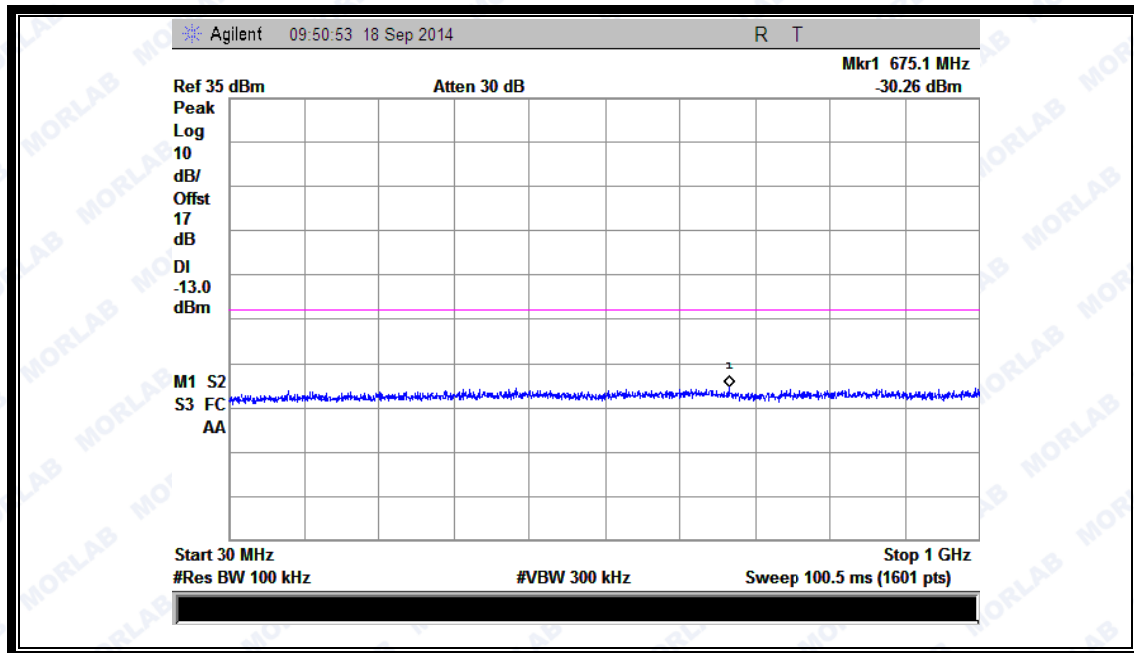


(Plot D3: EDGE 1900MHz Channel = 810, 30MHz to 1GHz)

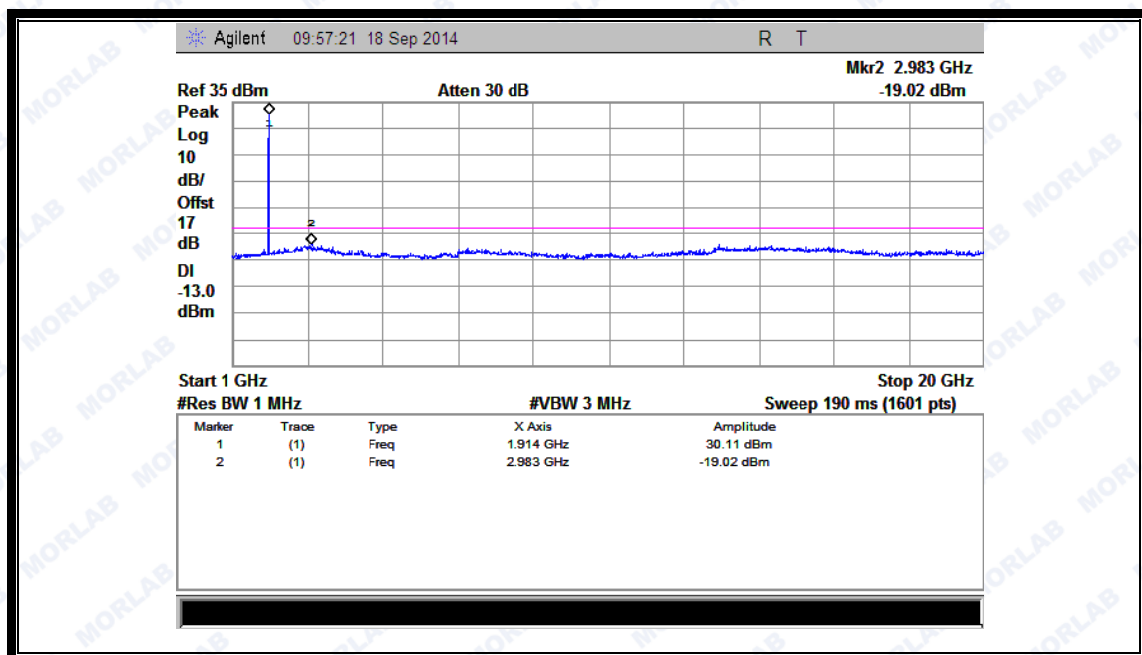


(Plot D3.1: EDGE 1900MHz Channel = 810, 1GHz to 20GHz)



REPORT No. : SZ14090028W01

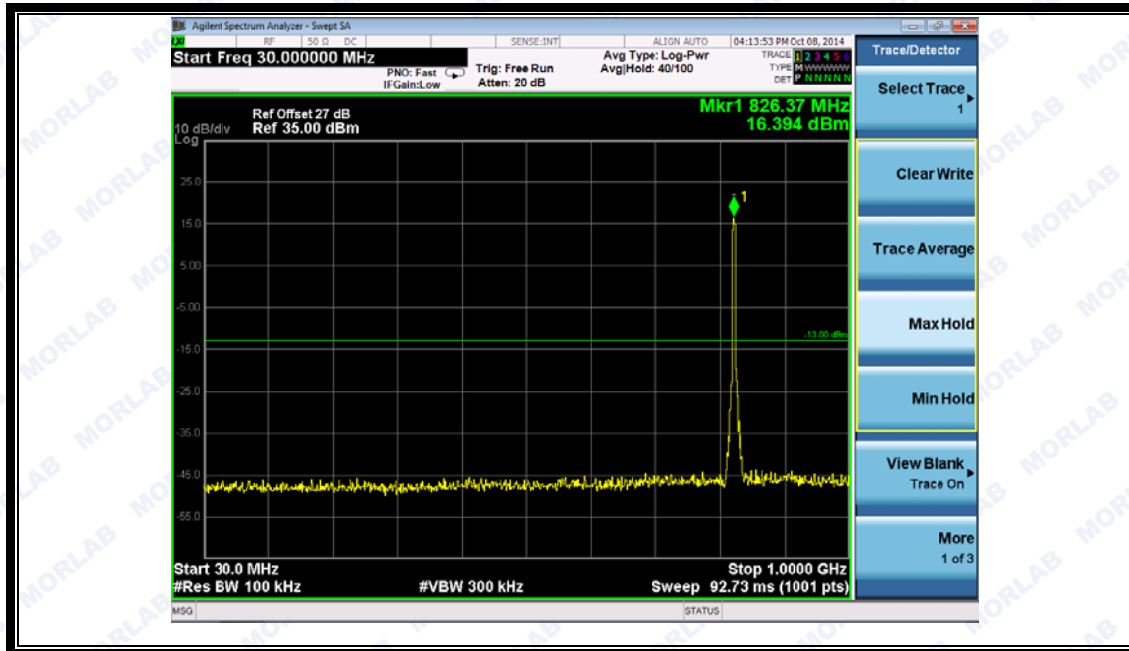


(Plot E1: WCDMA850MHz Channel = 4132, 30MHz to 1GHz)

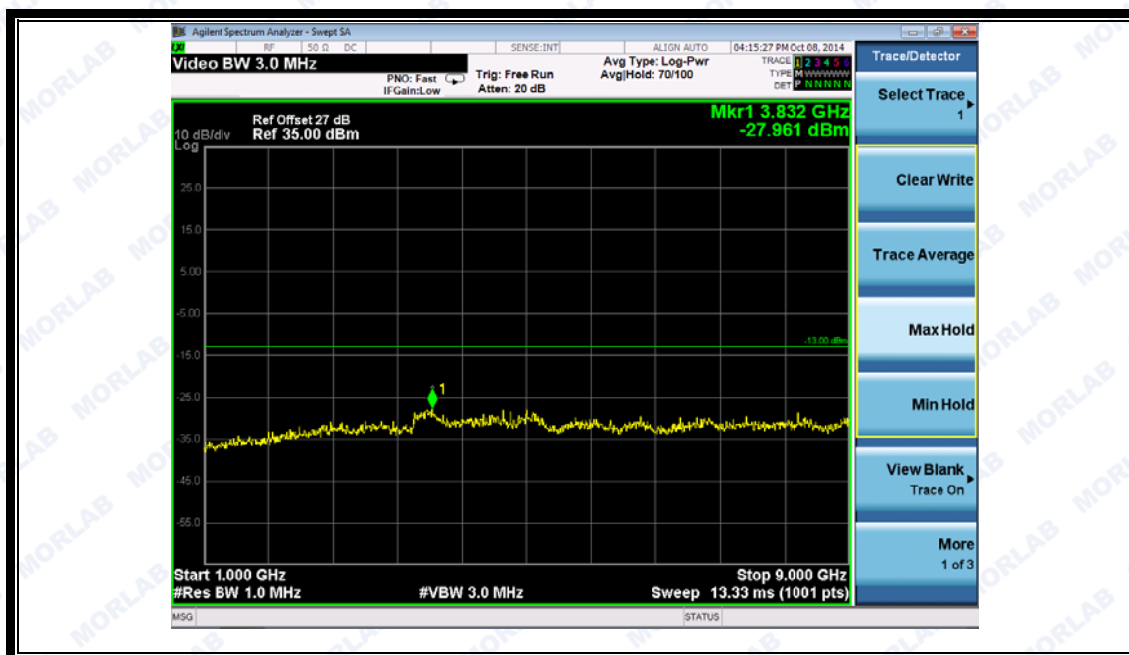


(Plot E1.1: WCDMA850MHz Channel = 4132, 1GHz to 9GHz)



REPORT No. : SZ14090028W01

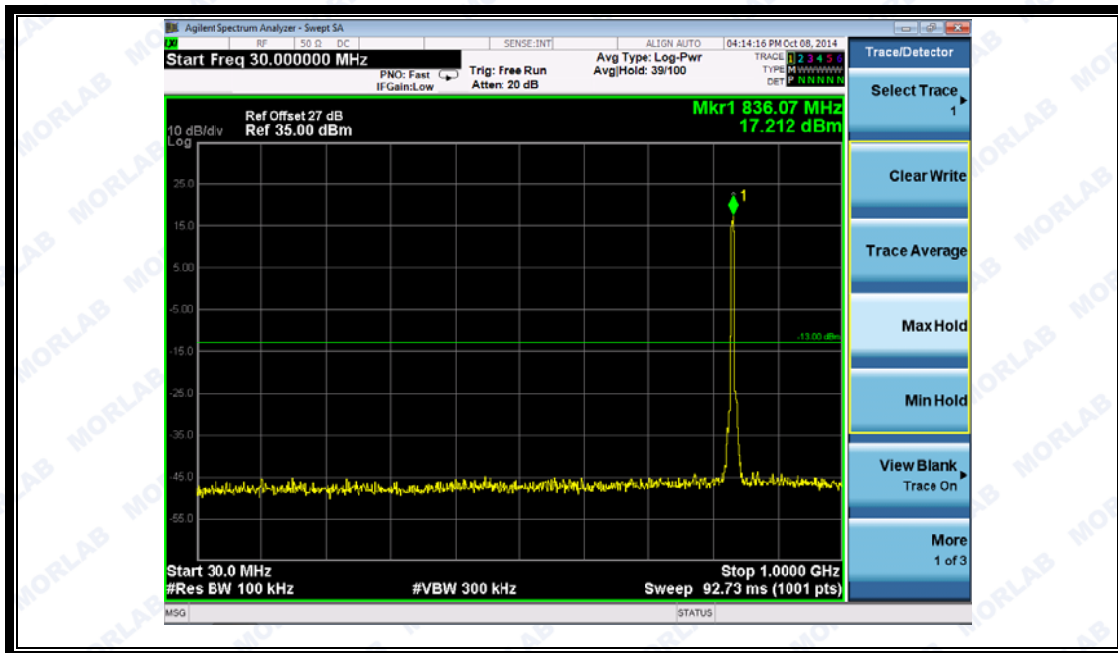


(Plot E2: WCDMA850MHz Channel = 4175, 30MHz to 1GHz)

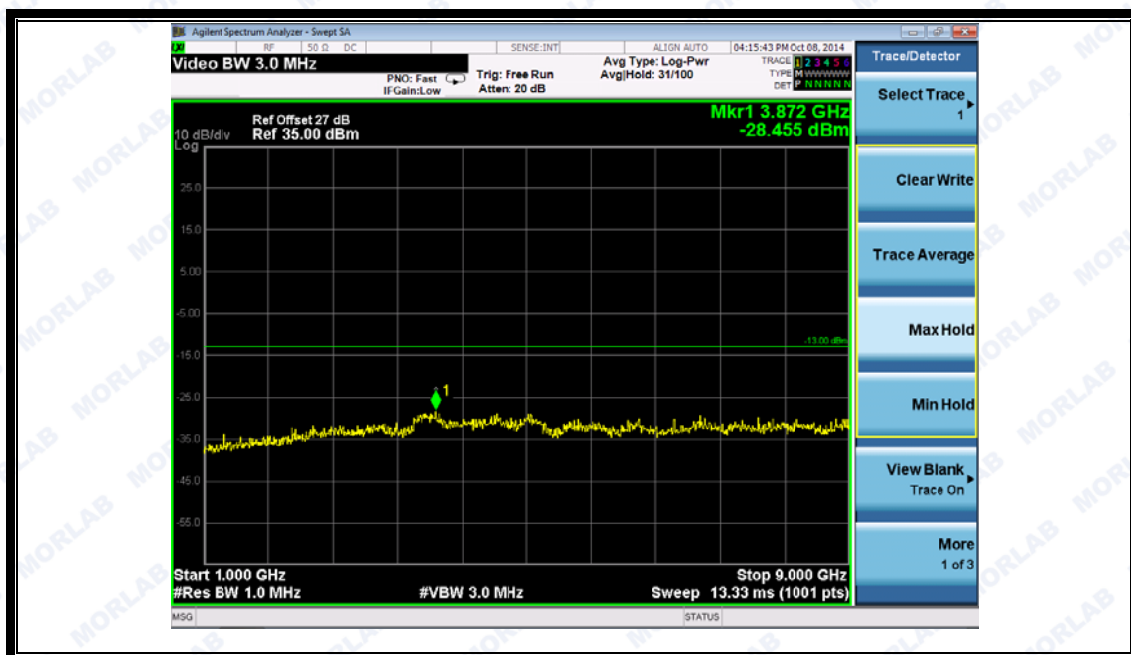


(Plot E2.1: WCDMA850MHz Channel = 4175, 1GHz to 9GHz)



REPORT No. : SZ14090028W01

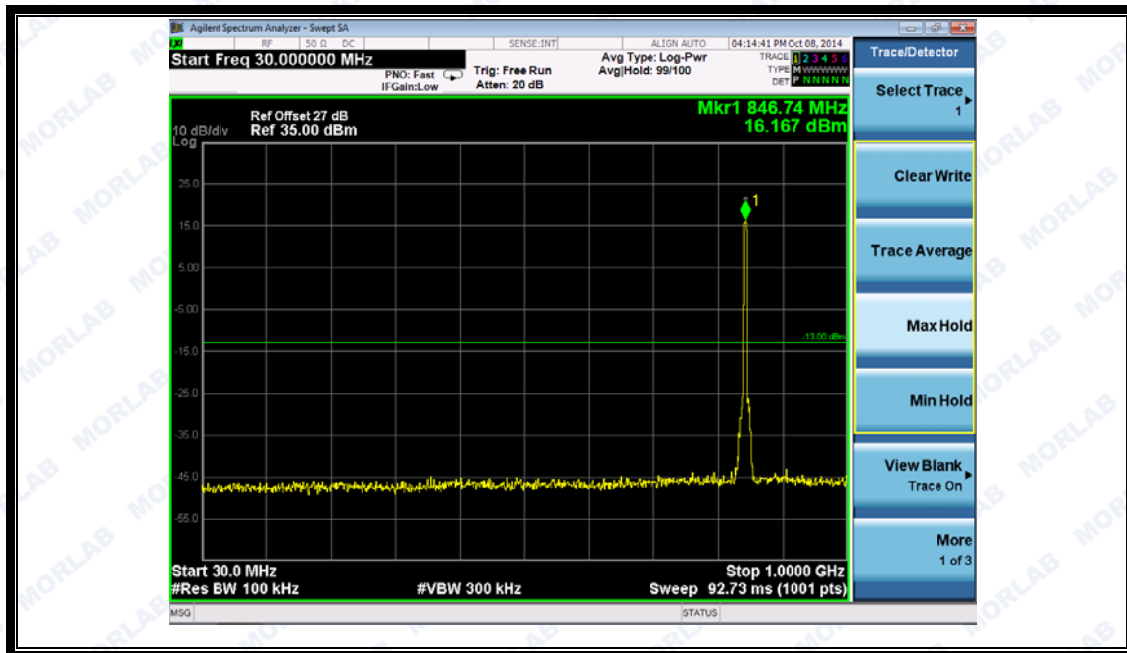


(Plot E3: WCDMA850MHz Channel = 4233, 30MHz to 1GHz)

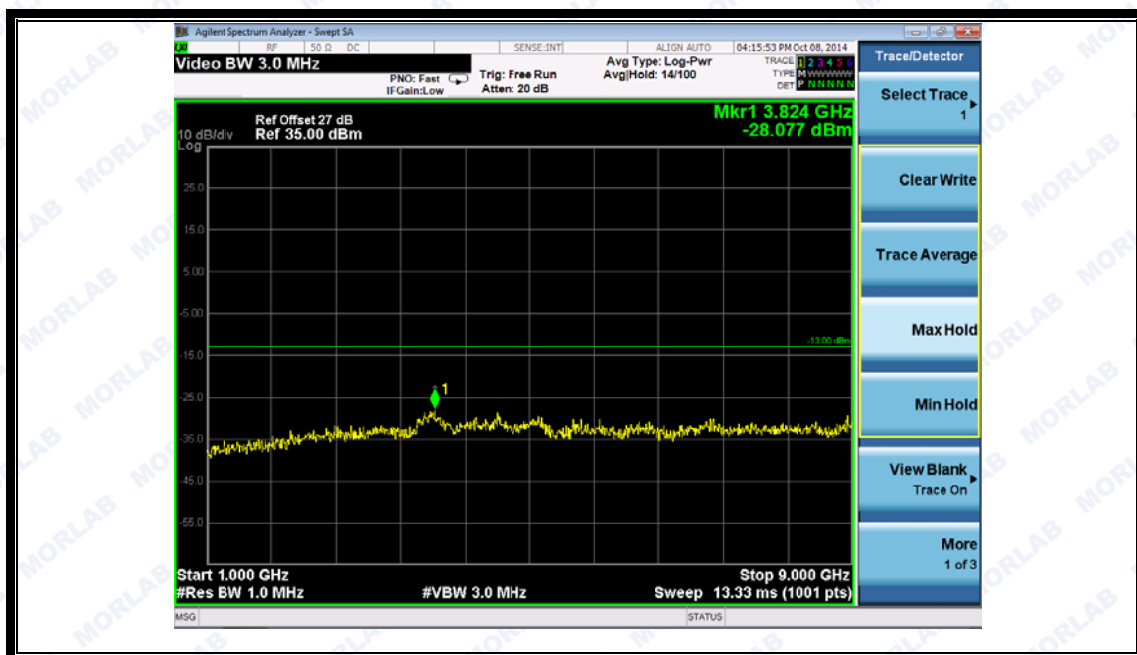


(Plot E3.1: WCDMA850MHz Channel = 4233, 1GHz to 9GHz)



REPORT No. : SZ14090028W01

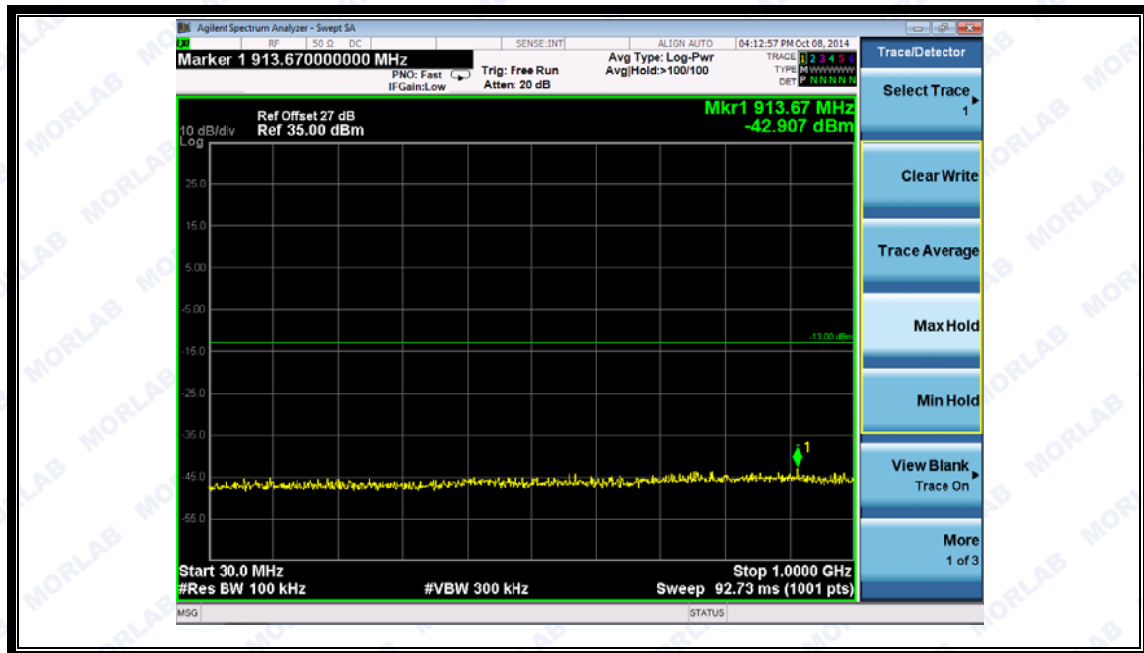


(Plot F1:WCDMA1900MHz Channel = 9262, 30MHz to 1GHz)

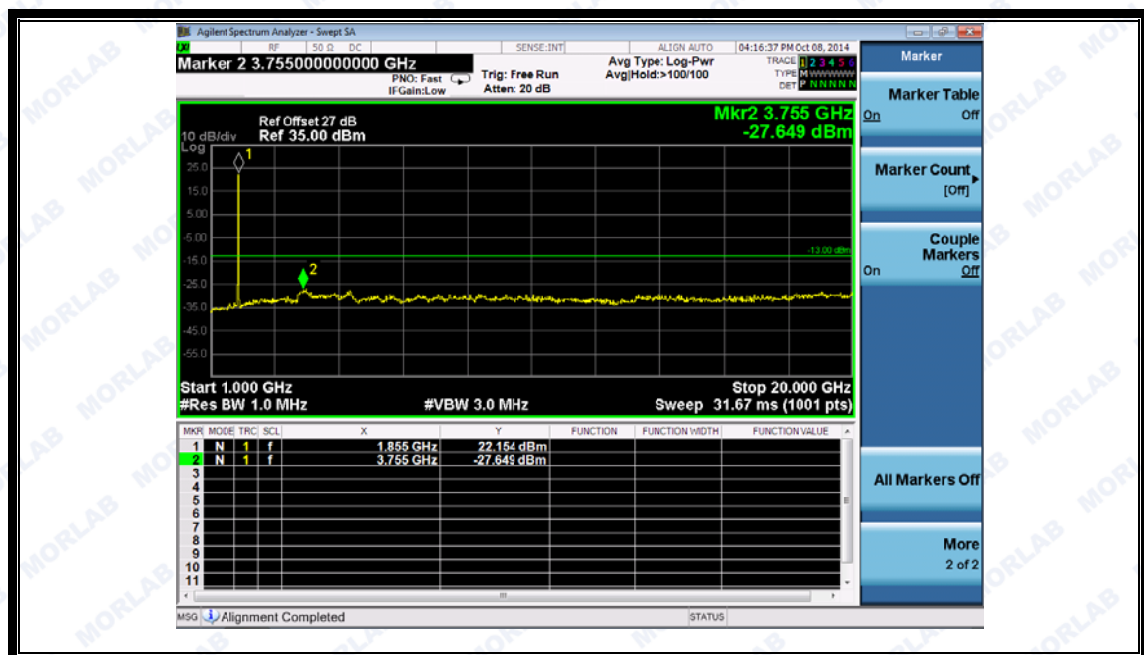


(Plot F1.1: WCDMA1900MHz Channel = 9262, 1GHz to 20GHz)



REPORT No. : SZ14090028W01

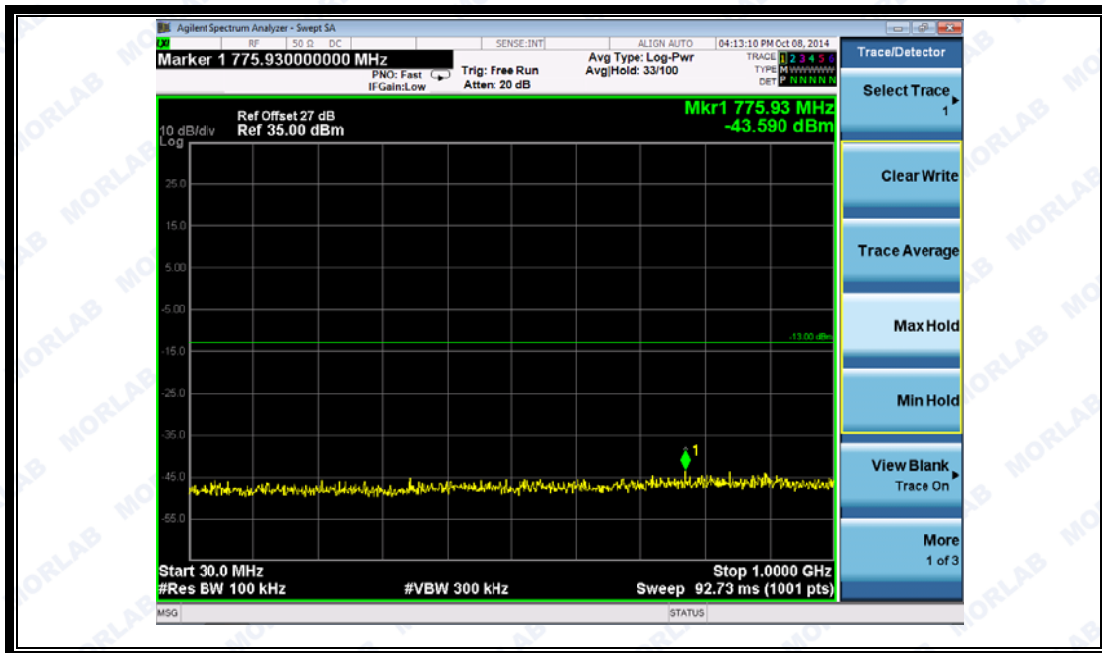


(Plot F2:WCDMA1900MHz Channel = 9400, 30MHz to 1GHz)

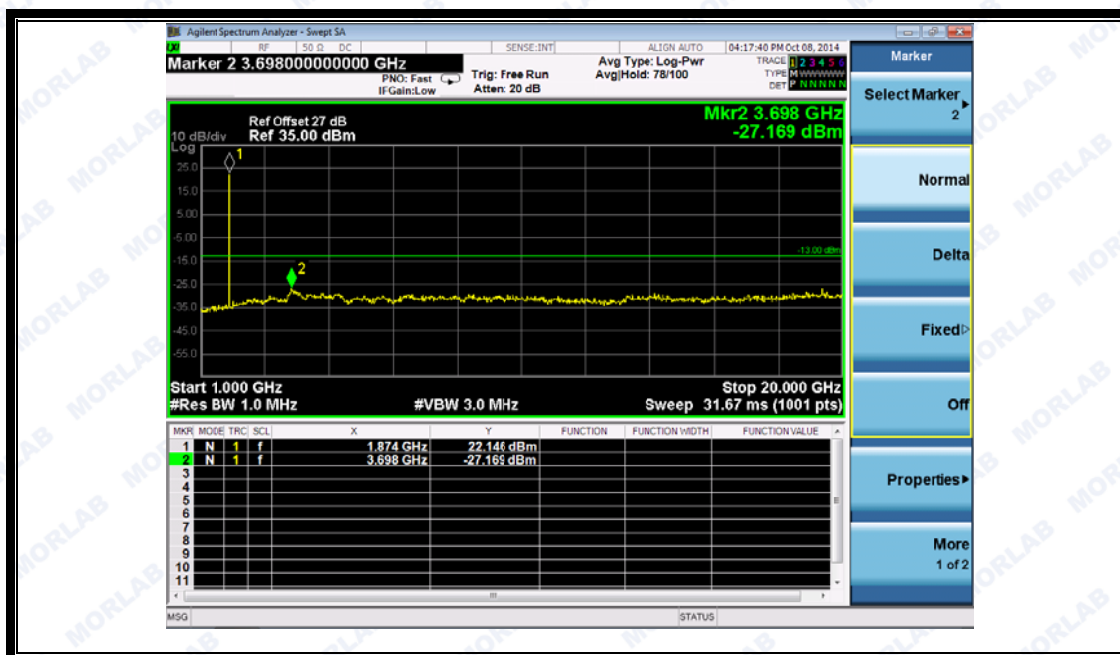


(Plot F2.1: WCDMA1900MHz Channel = 9400, 1GHz to 20GHz)



REPORT No. : SZ14090028W01

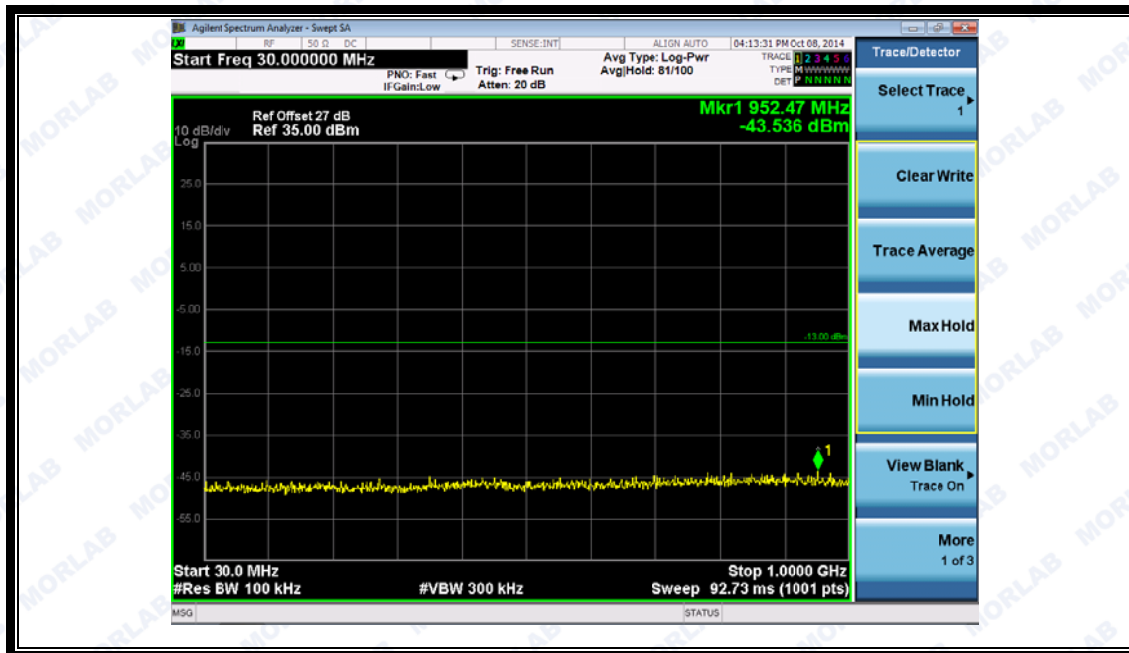

(Plot F3:WCDMA1900MHz Channel = 9538, 30MHz to 1GHz)

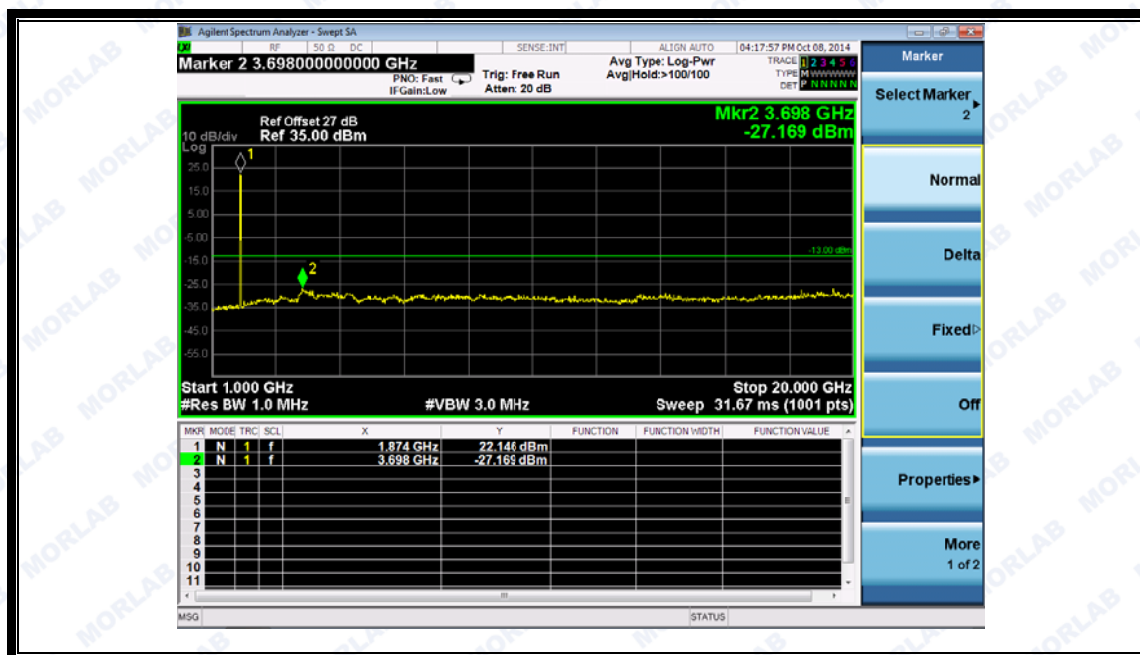

(Plot F3.1: WCDMA1900MHz Channel = 9538 1GHz to 20GHz)