


TEST REPORT

Report No.: **KS2203S1203E01**
FCC ID.....: 2ANPBRMSLP4-G2
Applicant.....: RNG International Inc.
Address.....: 5050 S Archibald Ave, Ontario, CA 91762
Manufacturer.....: RENOGY New Energy Co., Ltd.
Address.....: Room 624-625, Taicang German Overseas Students Pioneer Park,
No.66 Ningbo East Road, Taicang Economic Development Zone,
Taicang, JiangSu, 215000 China.
Product Name.....: **Renogy ONE M1**
Trade Mark.....: 
Model/Type reference.....: RMS-LP4-G2
Listed Model(s): N/A
Standard.....: **FCC 15.247**
Date of receipt of test sample...: Mar 28, 2022
Date of testing.....: Mar 29, 2022~May 23, 2022
Date of issue.....: May 24, 2022
Test Result.....: **PASS**

Supervised by:
(Printed Name + Signature) Sky Dong



Approved by:
(Printed Name + Signature) Neil Wan



Testing Laboratory Name.....: **KSIGN(Guangdong) Testing Co., Ltd.**
Address.....: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu
Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen,
Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by KSIGN. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to KSIGN within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely corresponds to the test sample.

TABLE OF CONTENTS**Page**

1.TEST SUMMARY	3
1.1. TEST STANDARDS	3
1.2. REPORT VERSION	3
1.3. TEST DESCRIPTION	4
1.4. TEST FACILITY	5
1.5. MEASUREMENT UNCERTAINTY	6
1.6. ENVIRONMENTAL CONDITIONS	6
2. GENERAL INFORMATION	7
2.1. GENERAL DESCRIPTION OF EUT	7
2.2. OPERATION STATE	8
2.3. MEASUREMENT INSTRUMENTS LIST	9
2.5. TEST SOFTWARE	10
3. TEST ITEM AND RESULTS	11
3.1. ANTENNA REQUIREMENT	11
3.2. PEAK OUTPUT POWER	12
3.3. POWER SPECTRAL DENSITY	12
3.4. BANDWIDTH	22
3.5. BAND EDGE AND SPURIOUS EMISSION (CONDUCTED)	36
3.6. BAND EDGE EMISSIONS(RADIATED)	43
3.7. SPURIOUS EMISSION (RADIATED)	45
3.8. CONDUCTED EMISSION	52
4. EUT TEST PHOTOS	52
5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL	57

1.TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB 558074 D01 : The measurement guidance provided herein is applicable only to Digital Transmission System (DTS) devices operating in the 902-928 MHz. 2400-2483.5 MHz and/or 5725-5850 MHz bands under §15.247 of the FCC rules (Title 47 of the Code of Federal Regulations).

1.2. Report version

Revised No.	Date of issue	Description
01	May 24, 2022	Original

1.3. Test Description

FCC Part 15 Subpart C(15.247)			
Test Item	Standard Section	Result	Test Engineer
	FCC		
Antenna Requirement	15.203	Pass	Cyril Cai
Conducted Emission	15.207	Pass	Cyril Cai
6dB&99% Bandwidth	15.247(a)(2)	Pass	Cyril Cai
Peak Output Power	15.247(b)	Pass	Cyril Cai
Power Spectral Density	15.247(e)	Pass	Cyril Cai
Restricted Band	15.247(d)/15.205	Pass	Cyril Cai
Band Edge and Spurious Emission(Conducted)	15.247(d)	Pass	Cyril Cai
Spurious Emission(Radiated)	15.247(d)&15.209	Pass	Cyril Cai

Note: The measurement uncertainty is not included in the test result.

1.4. Test Facility

Address of the report laboratory

KSIGN(Guangdong) Testing Co., Ltd.

West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, People's Republic of China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L13261

KSIGN(Guangdong) Testing Co., Ltd. has been assessed and proved to be in Compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5457.01

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: CN0096

The 3m alternate test site of KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: CN0096

FCC-Registration No.: CN1272

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the KSIGN(Guangdong) Testing Co., Ltd. system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device. Below is the best measurement capability for KSIGN(Guangdong) Testing Co., Ltd.

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.42 dB	(1)
Transmitter power Radiated	2.14 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.20 dB	(1)
Radiated Emissions 30~1000MHz	4.70 dB	(1)
Radiated Emissions 1~18GHz	5.00 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	2.80 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

2. GENERAL INFORMATION

2.1. General Description of EUT

Test Sample Number:	1-1-1(Normal Sample),1-1-2(Engineering Sample)
Product Name:	Renogy ONE M1
Trade Mark:	
Model/Type reference:	RMS-LP4-G2
Listed Model(s):	N/A
Model Different:	N/A
Power supply(Adapter):	Input voltage: DC12V Power current: DC5A Rated voltage: AC120V/60Hz
Power supply(Battery):	N/A
Hardware version:	mb_1.2
Software version:	V1.0.30
2.4GHz WIFI	
Modulation:	802.11b: DSSS(CCK, DQPSK, DBPSK) 802.11g/n: OFDM(BPSK,QPSK,16QAM,64QAM)
Operation frequency:	802.11b/g/n(HT20): 2412MHz~2462MHz 802.11n(HT40): 2422MHz~2452MHz
Max Peak Output Power:	802.11b: 6.86dBm 802.11g: 6.10dBm 802.11n (HT20): 6.11dBm 802.11n (HT40): 6.25dBm
Channel number:	802.11b/g/n(HT20):11 channels 802.11n(HT40):7 channels
Test frequency:	CH01/03: 2412MHz/2422MHz; CH06: 2437MHz; CH09/11: 2452MHz/2462MHz
Channel separation:	5MHz
Antenna type:	Integrated Antenna
Antenna gain:	2.0dBi

2.2. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Operation Frequency List:

Channel	Frequency (MHz)
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

Note:

- 1.CH 01~CH 11 for 802.11b/g/n(HT20), CH03~CH09 for 802.11n(HT40).
- 2.The display in grey were the channel selected for testing.

Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit (duty cycle>98%).
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit(duty cycle>98%). The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data Recorded in the report.

2.3. Measurement Instruments List

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
1	Spectrum Analyzer	R&S	FSV40-N	101798	03/04/2023
2	Vector Signal Generator	Agilent	N5182A	MY50142520	03/04/2023
3	Analog Signal Generator	HP	83752A	3344A00337	03/04/2023
4	Power Sensor	Agilent	E9304A	MY50390009	03/04/2023
5	Power Sensor	Agilent	E9300A	MY41498315	03/04/2023
6	Wideband Radio Communication Tester	R&S	CMW500	157282	03/04/2023
7	Climate Chamber	Angul	AGNH80L	1903042120	03/04/2023
8	Dual Output DC Power Supply	Agilent	E3646A	MY40009992	03/04/2023
9	RF Control Unit	Tonscend	JS0806-2	/	03/04/2023

Transmitter spurious emissions & Receiver spurious emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
1	EMI Test Receiver	R&S	ESR	102525	03/04/2023
2	High Pass Filter	Chengdu E-Microwave	OHF-3-18-S	0E01901038	03/04/2023
3	High Pass Filter	Chengdu E-Microwave	OHF-6.5-18-S	0E01901039	03/04/2023
4	Spectrum Analyzer	HP	8593E	3831U02087	03/04/2023
5	Ultra-Broadband logarithmic period Antenna	Schwarzbeck	VULB 9163	01230	12/04/2023
6	Loop Antenna	Beijin ZHINAN	ZN30900C	18050	03/15/2023
7	Spectrum Analyzer	R&S	FSV40-N	101798	03/04/2023
8	Horn Antenna	Schwarzbeck	BBHA 9120 D	2023	03/29/2023
9	Pre-Amplifier	Schwarzbeck	BBV 9745	9745#129	03/04/2023
10	Pre-Amplifier	EMCI	EMC051835S E	980662	03/04/2023
11	Pre-Amplifier	Schwarzbeck	BBV-9721	57	03/04/2023
12	Horn Antenna	Schwarzbeck	BBHA 9170	00939	03/04/2023

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV432	1326.6105.02	03/04/2023
2	EMI Test Receiver	R&S	ESR	102524	03/04/2023
3	Manual RF Switch	JS TOYO	/	MSW-01/002	03/04/2023

Note:

1)The Cal. Interval was one year.

2)The cable loss has calculated in test result which connection between each test instruments.

TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

2.5. Test Software

Software name	Model	Version
Conducted emission Measurement Software	EZ-EMC	EMC-Con 3A1.1
Radiated emission Measurement Software	EZ-EMC	FA-03A.2.RE
Bluetooth and WIFI Test System	JS1120-3	2.5.77.0418

3. TEST ITEM AND RESULTS

3.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.

Note: The antenna is permanently fixed to the EUT

3.2. Peak Output Power

Limit

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	1 Watt or 30 dBm	2400~2483.5

Test Configuration



Test Procedure

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
2. The measurement is according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.
3. Spectrum Setting:
Set analyser center frequency to DTS channel center frequency.
Set the RBW to: 1MHz
Set the VBW to: 3MHz
Detector: peak
Sweep time: auto
Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.
4. The power sensor video bandwidth is greater than or equal to the DTS bandwidth of the equipment.

Test Mode

Please refer to the clause 2.2

Test Result


Mode	Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)	Result
802.11b	2412	6.66	30	PASS
	2437	6.86	30	PASS
	2462	6.28	30	PASS
802.11g	2412	5.86	30	PASS
	2437	6.10	30	PASS
	2462	5.49	30	PASS
802.11n (HT20)	2412	5.67	30	PASS
	2437	6.11	30	PASS
	2462	5.93	30	PASS
802.11n (HT40)	2422	6.25	30	PASS
	2437	6.03	30	PASS
	2452	5.75	30	PASS

3.3. Power Spectral Density

Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range(MHz)
Power Spectral Density	8dBm(in any 3 kHz)	2400~2483.5

Test Configuration



Test Procedure

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.
3. Spectrum Setting:
 Set analyser center frequency to DTS channel center frequency.
 Set the span to 1.5 times the DTS bandwidth.
 Set the RBW to: 10 kHz
 Set the VBW to: 30 kHz
 Detector: peak
 Sweep time: auto
 Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode


Please refer to the clause 2.2

Test Result

Mode	Frequency	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.11b	2412 MHz	-17.83	8	Pass
	2437 MHz	-17.58	8	Pass
	2462 MHz	-18.06	8	Pass
802.11g	2412 MHz	-25.74	8	Pass
	2437 MHz	-24.87	8	Pass
	2462 MHz	-25.78	8	Pass
802.11n(HT20)	2412 MHz	-26.41	8	Pass
	2437 MHz	-25.47	8	Pass
	2462 MHz	-25.54	8	Pass
802.11n(HT40)	2422 MHz	-27.91	8	Pass
	2437 MHz	-28.27	8	Pass
	2452 MHz	-27.94	8	Pass


802.11b

2412 MHz

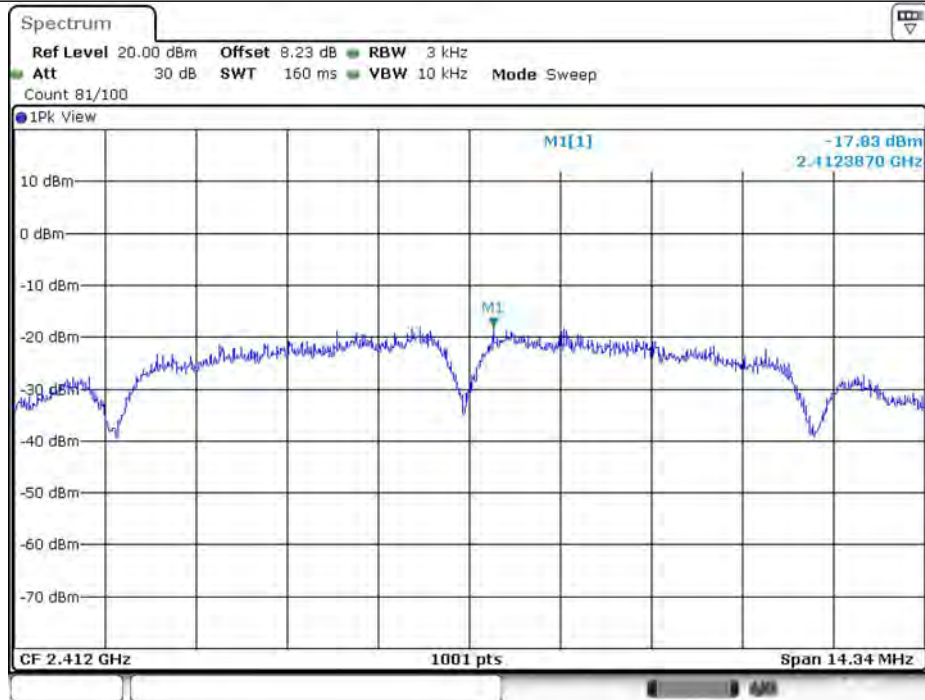

Date: 21.APR.2022 11:14:05

2437 MHz

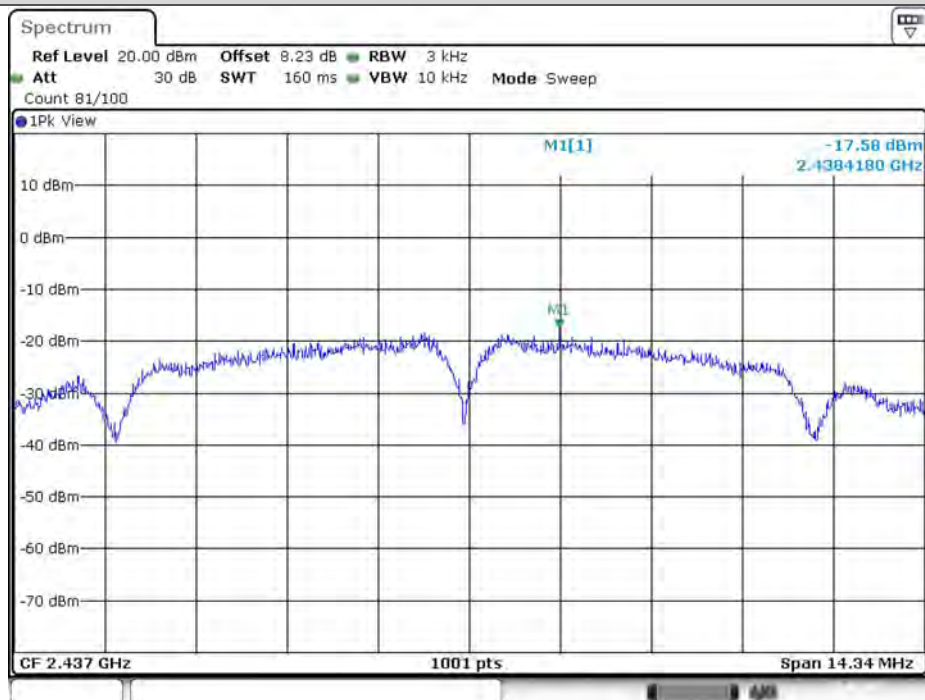


Date: 21.APR.2022 11:19:15

TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

2462 MHz

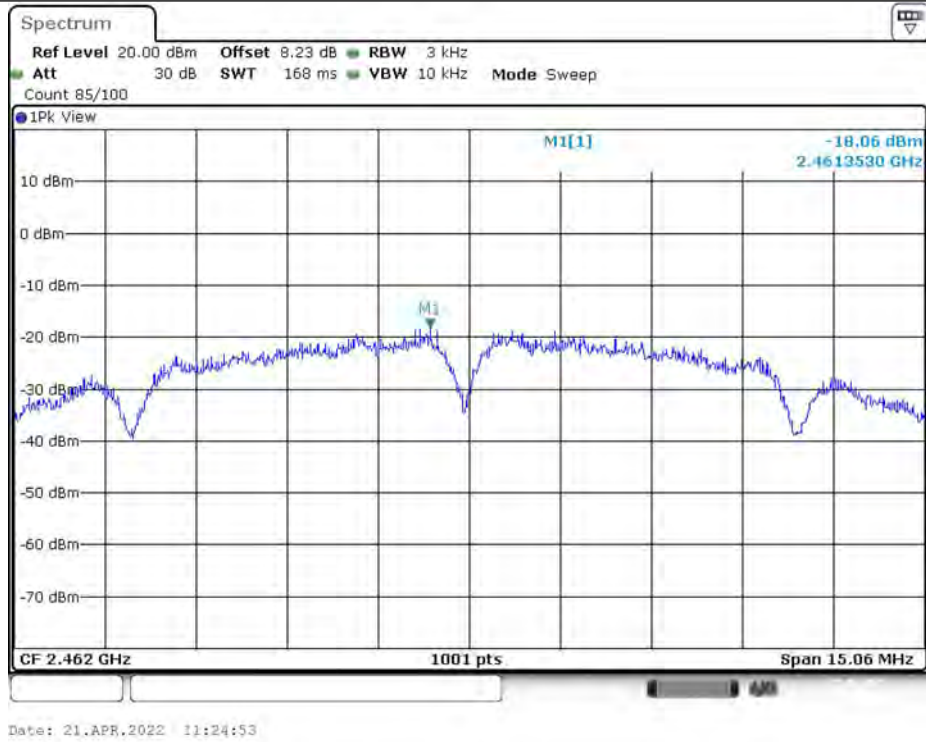

802.11g

2412 MHz

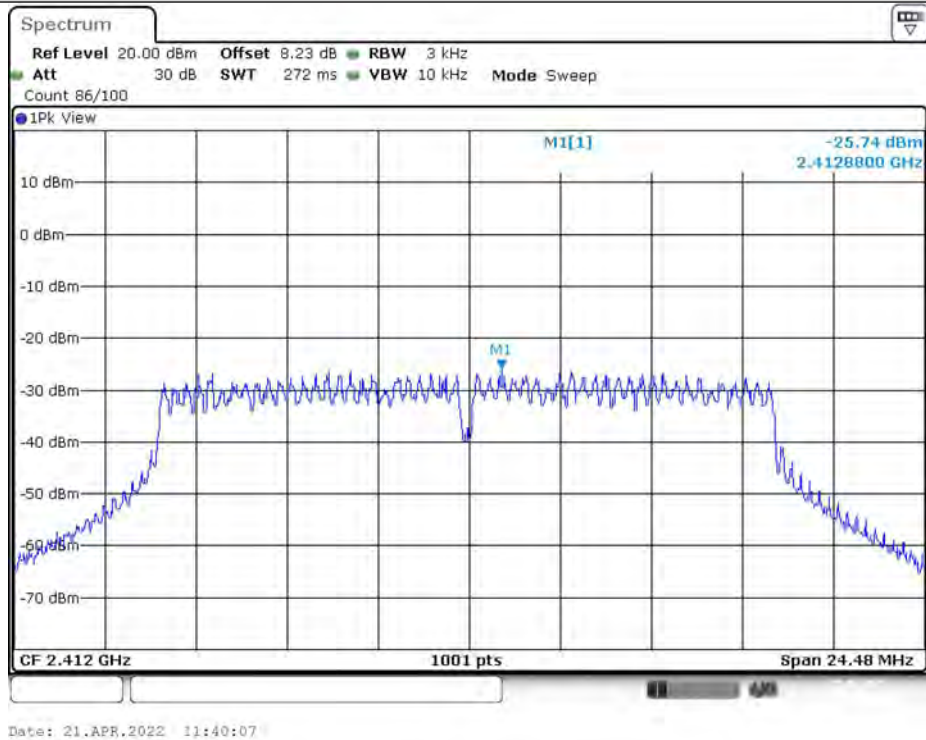


TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing,
Bao'an District, Shenzhen, Guangdong, China


Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

2437 MHz

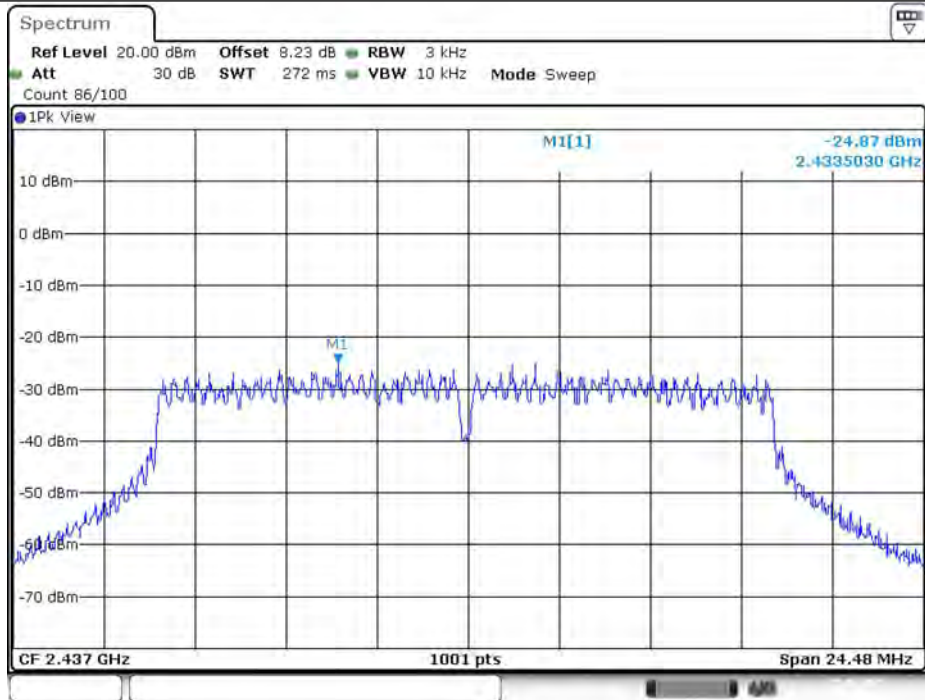

Date: 21.APR.2022 11:46:05

2462 MHz

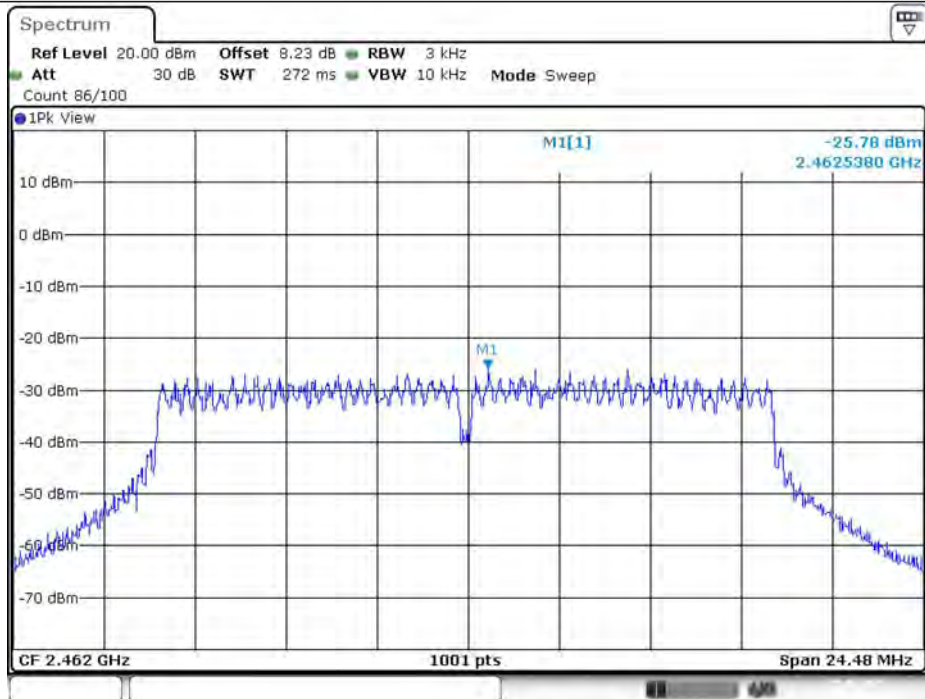

Date: 21.APR.2022 11:49:28


TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com


802.11n(HT20)

2412 MHz

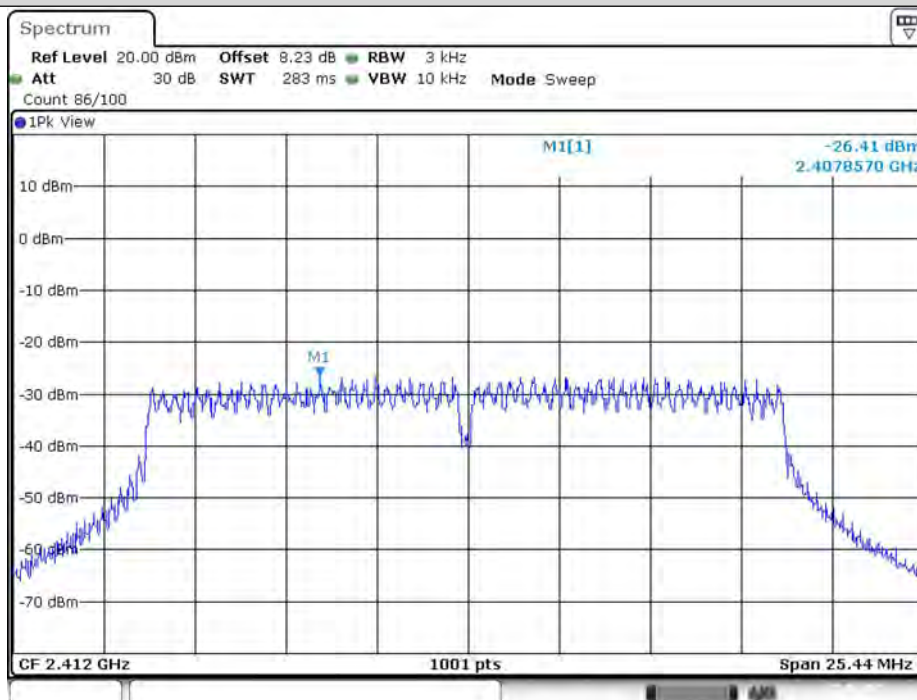

Date: 21.APR.2022 11:56:24

2437 MHz

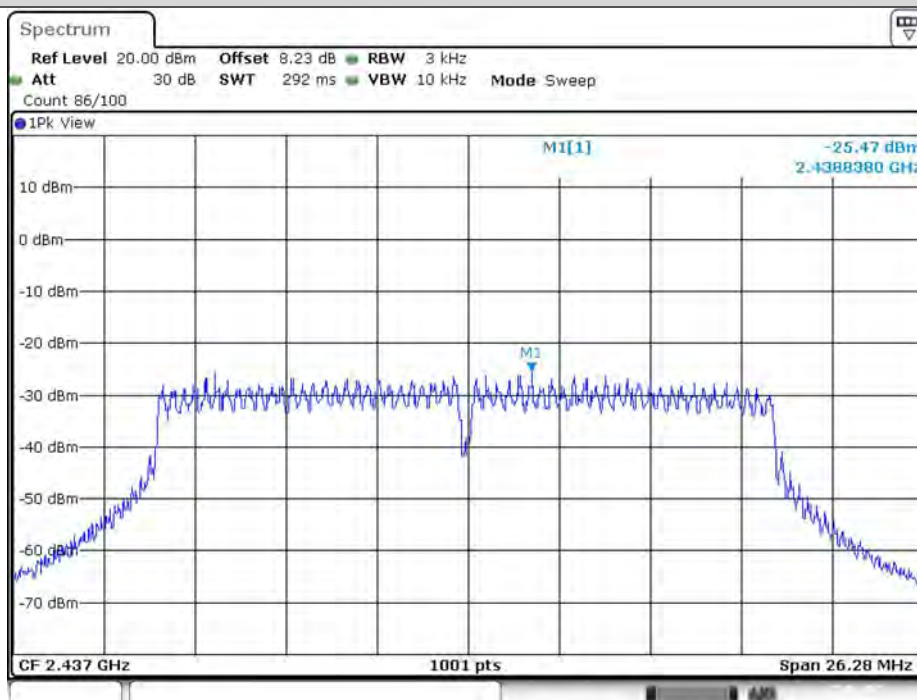


Date: 21.APR.2022 12:04:10

TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com


2462 MHz

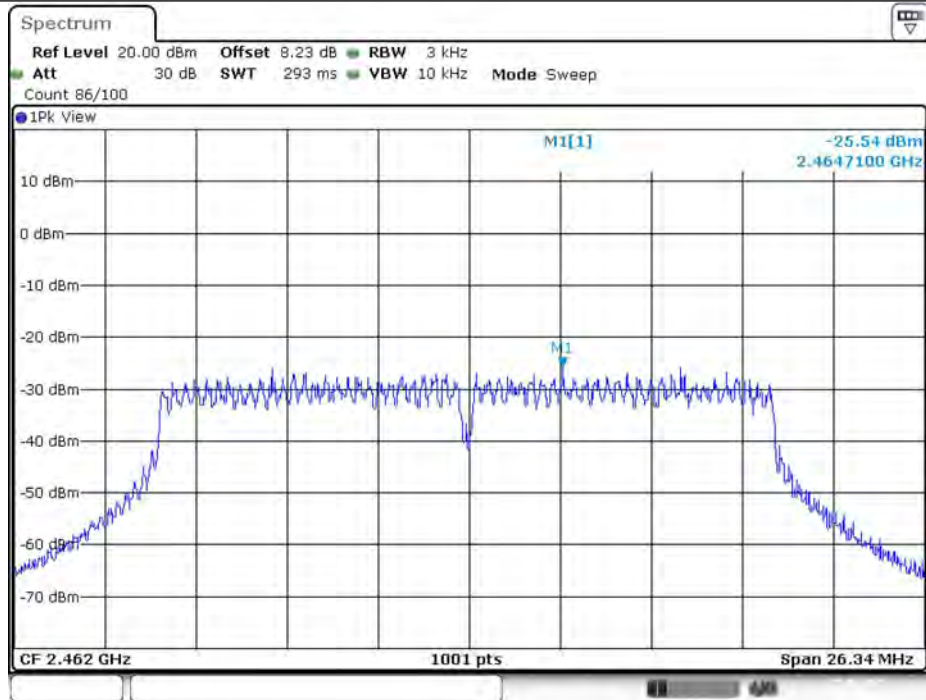

Date: 21.APR.2022 13:49:17

802.11n(HT40)

2422 MHz

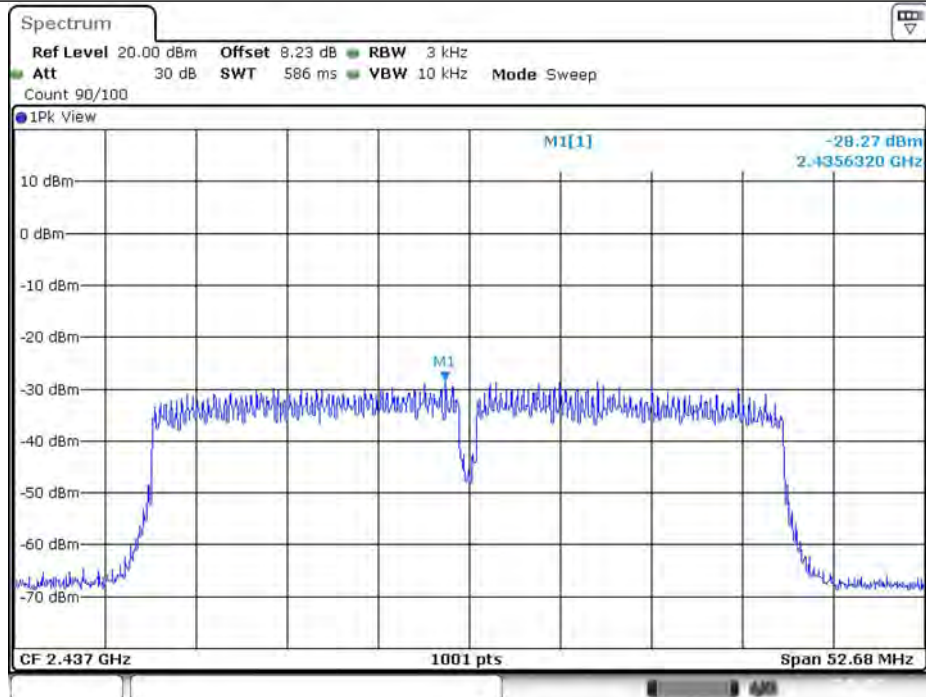


Date: 21.APR.2022 14:01:22

TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

2437 MHz

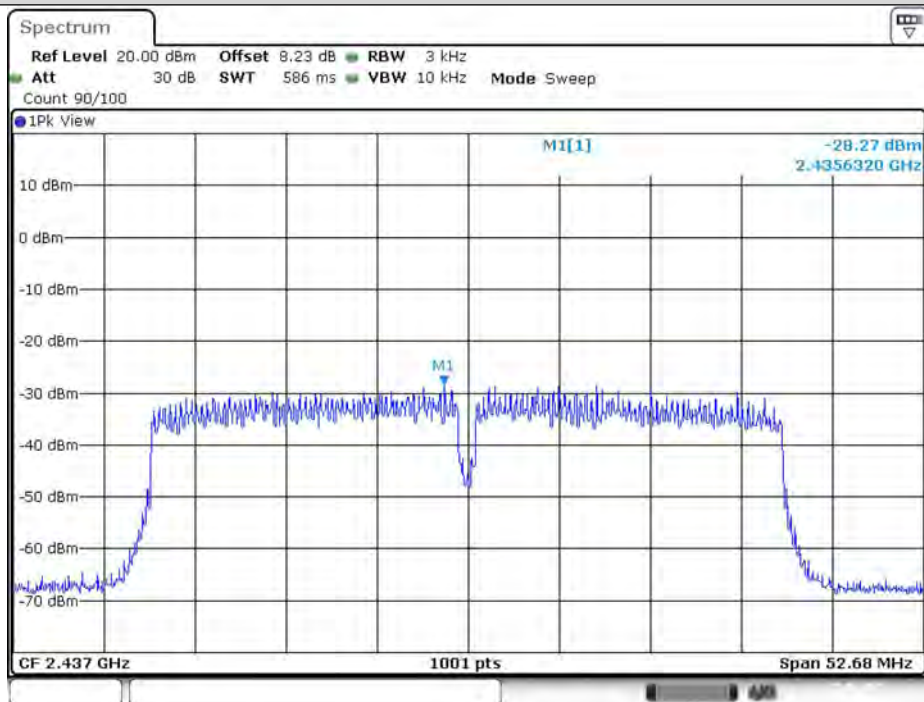

Date: 21.APR.2022 14:01:22

2452 MHz

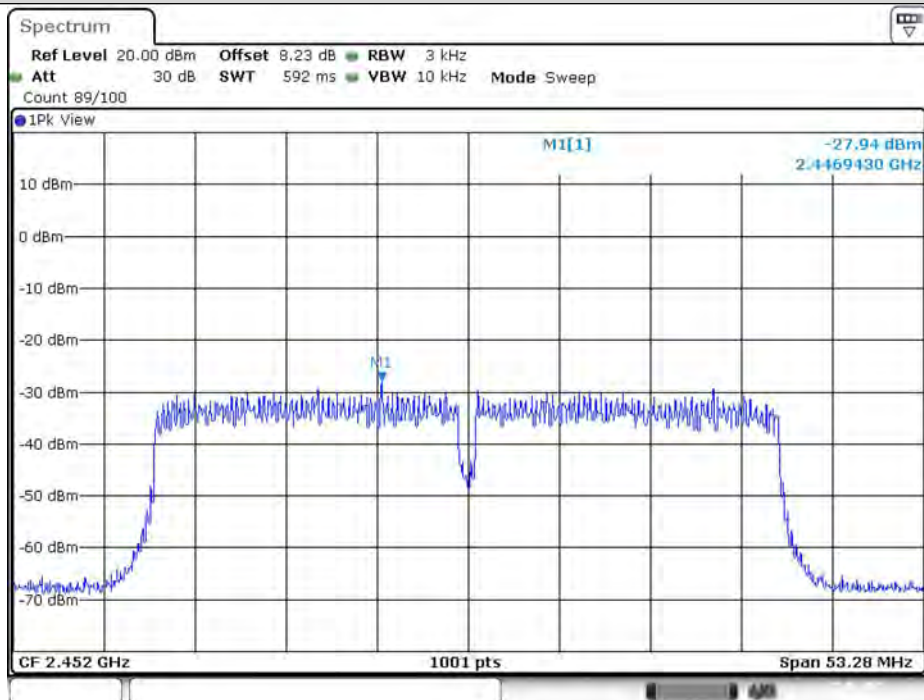

Date: 21.APR.2022 14:05:46

TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

3.4. Bandwidth

Limit

Test Item	Limit	Frequency Range(MHz)
Bandwidth	≥ 500 KHz (6dB bandwidth)	2400~2483.5

Test Configuration

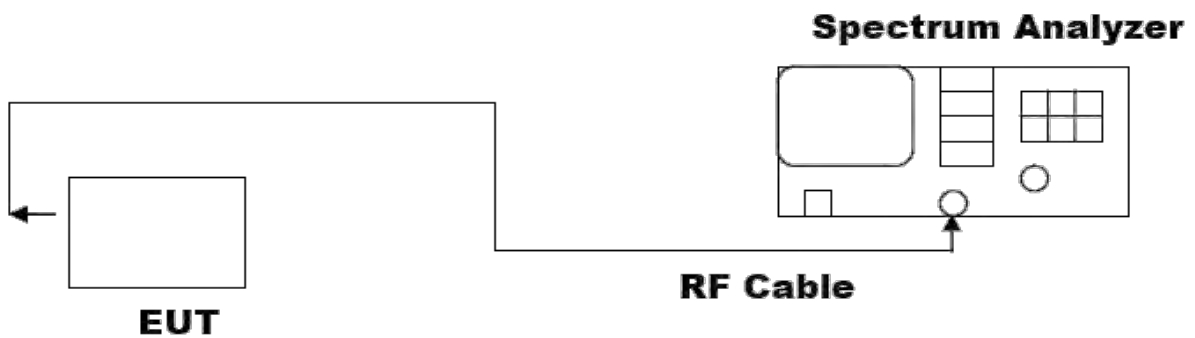

Test Procedure

- Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator:
6db Bandwidth
 - Set RBW = 100 kHz.
 - Set the video bandwidth (VBW) ≥ 3 RBW.
 - Detector = Peak.
 - Trace mode = Max hold.
 - Sweep = Auto couple.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode


Please refer to the clause 2.2.

Test Results


Mode	Frequency	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Result
802.11b	2412 MHz	9.56	14.825	≥ 0.5	Pass
	2437 MHz	9.56	14.825	≥ 0.5	Pass
	2462 MHz	10.04	14.905	≥ 0.5	Pass
802.11g	2412 MHz	16.32	17.423	≥ 0.5	Pass
	2437 MHz	16.32	17.343	≥ 0.5	Pass
	2462 MHz	16.32	17.343	≥ 0.5	Pass
802.11n(HT20)	2412 MHz	16.96	18.222	≥ 0.5	Pass
	2437 MHz	17.52	18.422	≥ 0.5	Pass
	2462 MHz	17.56	18.422	≥ 0.5	Pass
802.11n(HT40)	2422 MHz	35.12	35.884	≥ 0.5	Pass
	2437 MHz	35.12	35.804	≥ 0.5	Pass
	2452 MHz	35.52	36.044	≥ 0.5	Pass

802.11b_2412 MHz

6dB Bandwidth

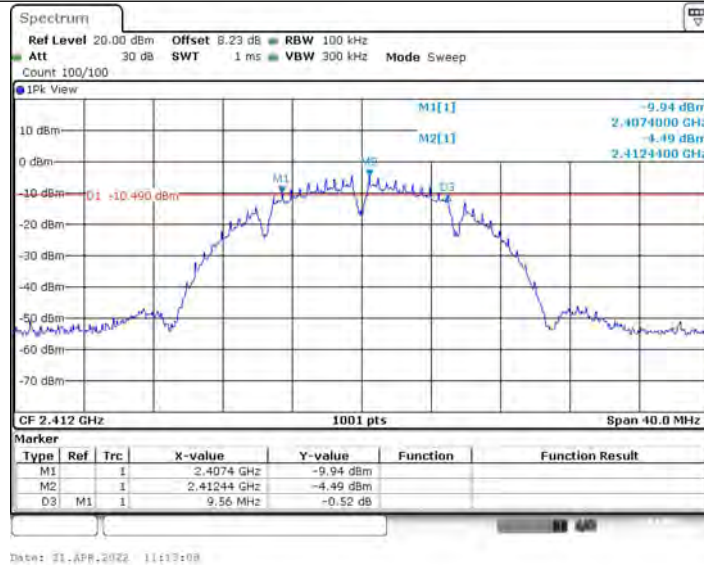

99% Bandwidth

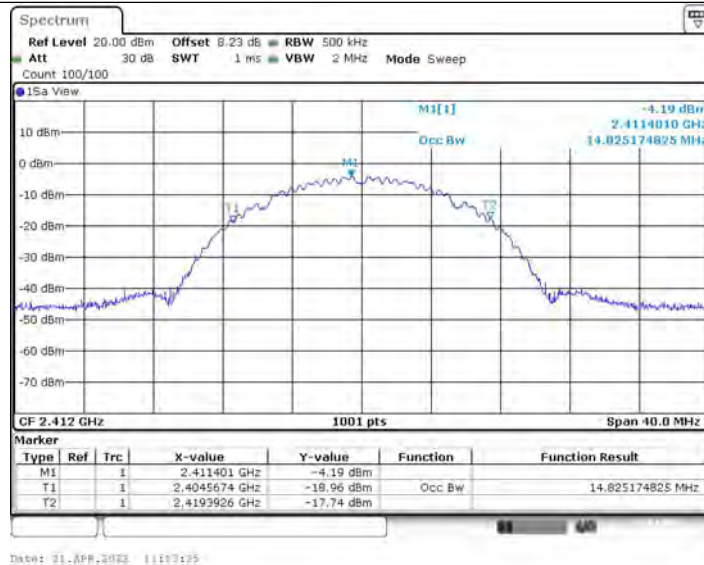


TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdkesign.cn Web: www.gdkesign.com

802.11b_2437 MHz

6dB Bandwidth

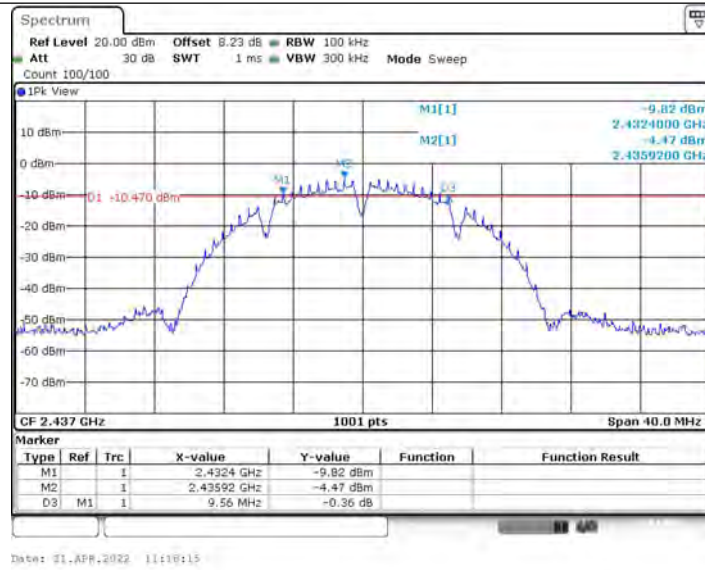

99% Bandwidth

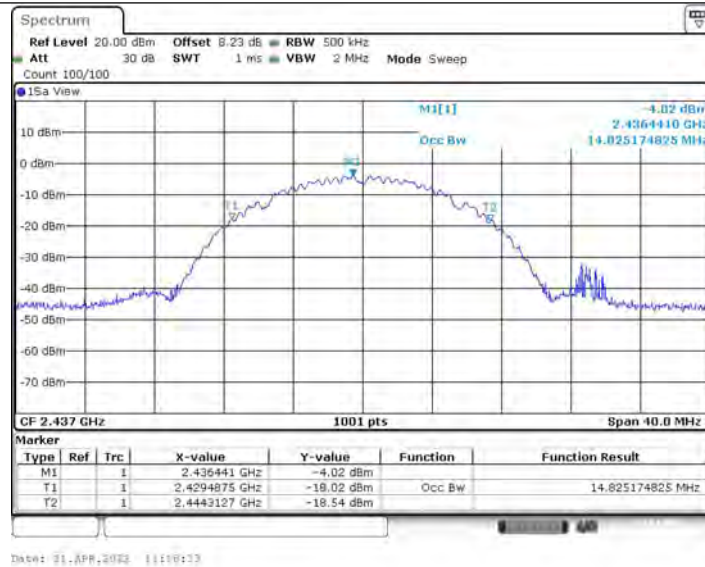


TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdkesign.cn Web: www.gdkesign.com

802.11b_2462 MHz

6dB Bandwidth

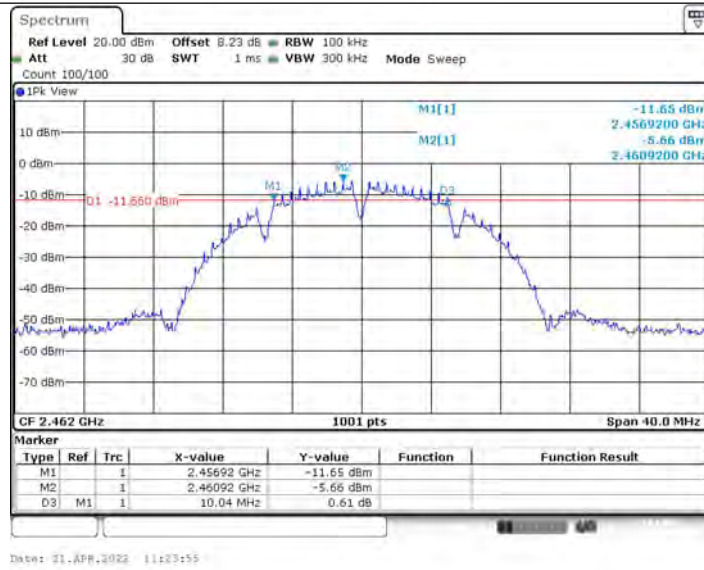


99% Bandwidth

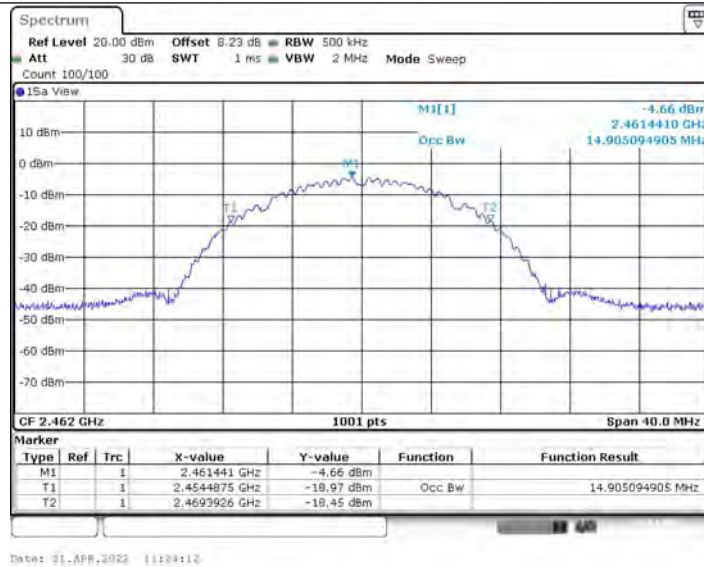


802.11g_2412 MHz

6dB Bandwidth

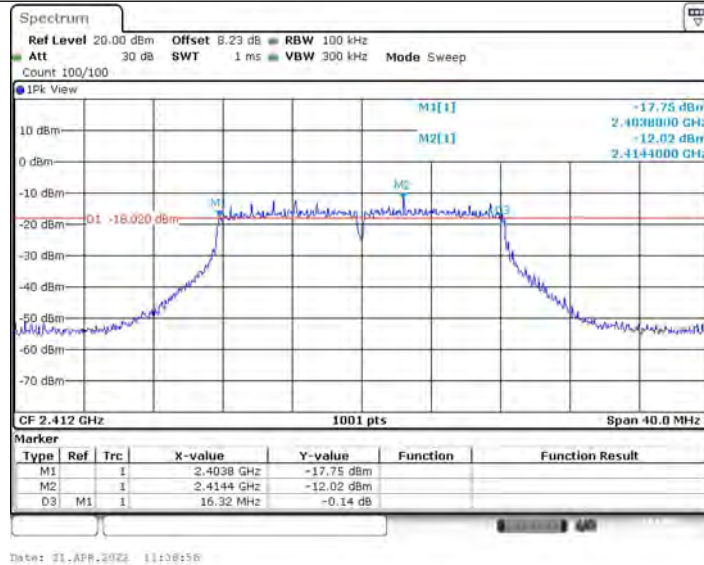

99% Bandwidth

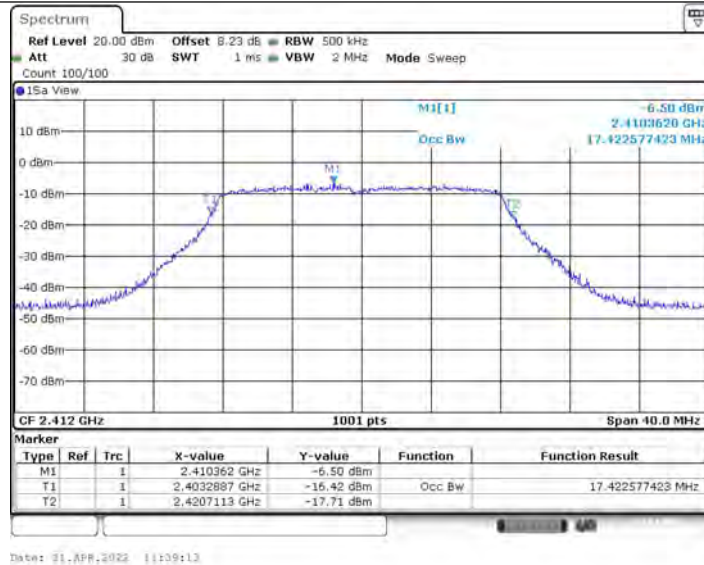


TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdkesign.cn Web: www.gdkesign.com

802.11g_2437 MHz

6dB Bandwidth

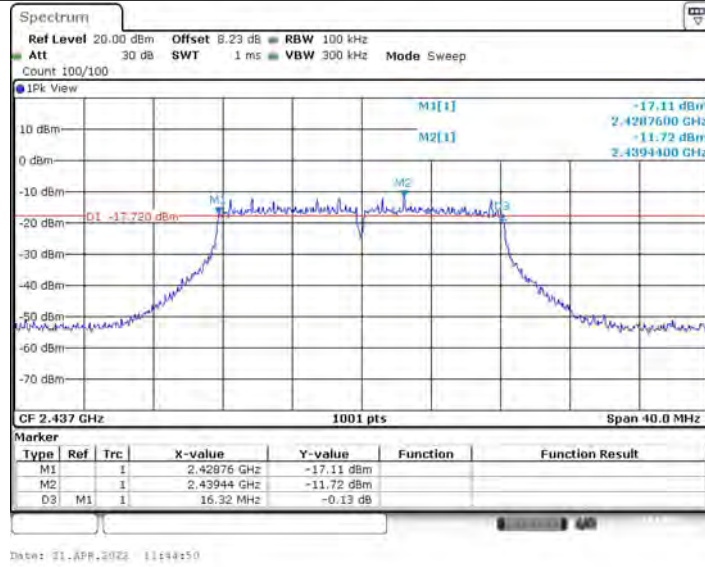

99% Bandwidth




TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

802.11g_2462 MHz

6dB Bandwidth

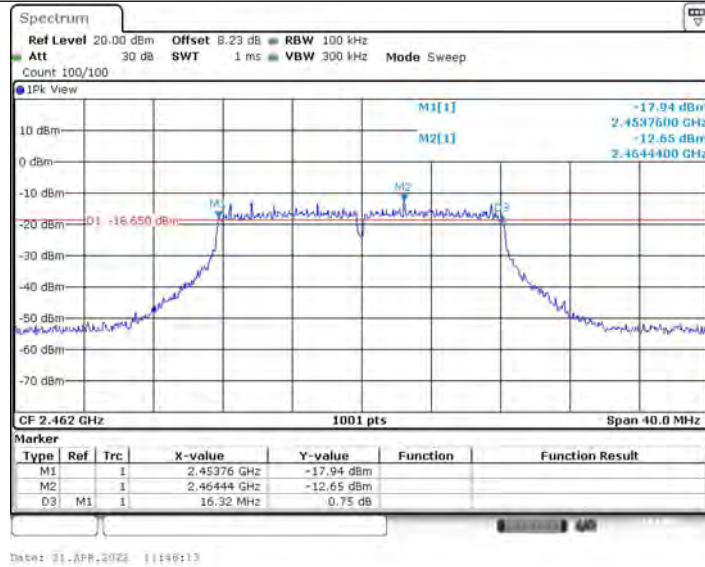


99% Bandwidth




802.11n(HT20)_2412 MHz

6dB Bandwidth

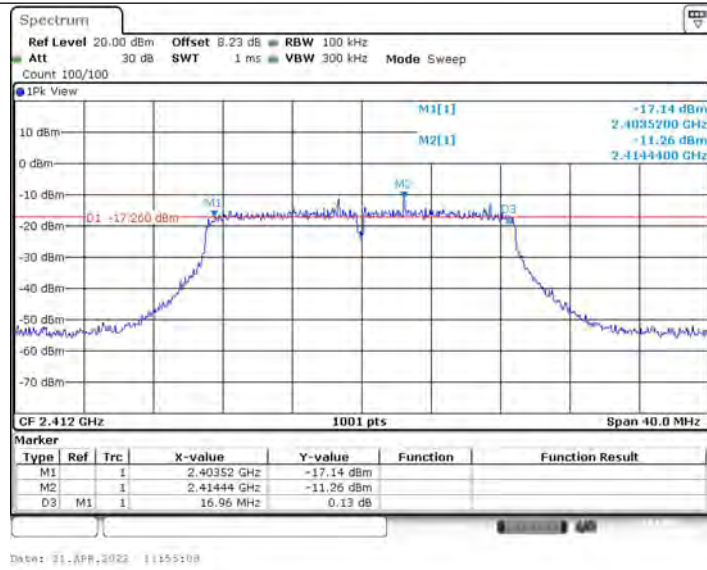


99% Bandwidth

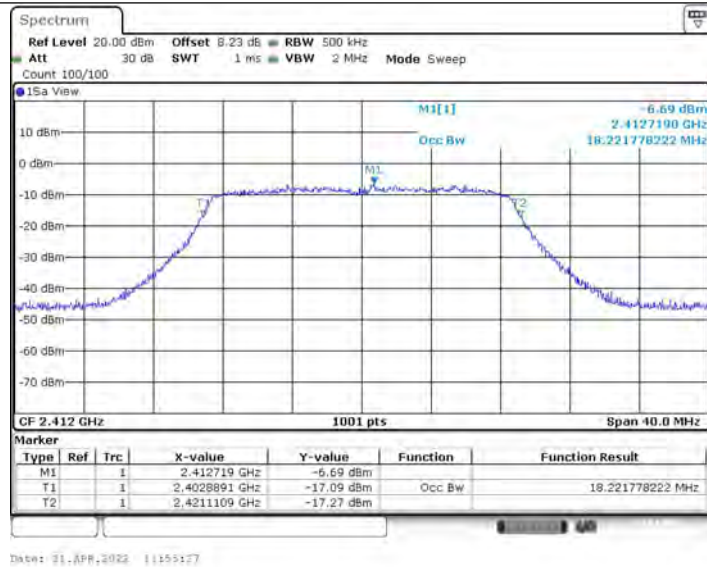


802.11n(HT20)_2437 MHz

6dB Bandwidth

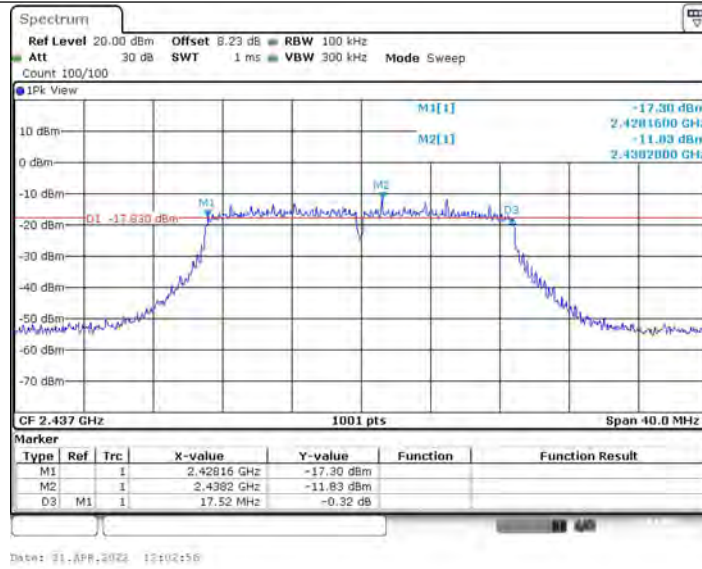


99% Bandwidth

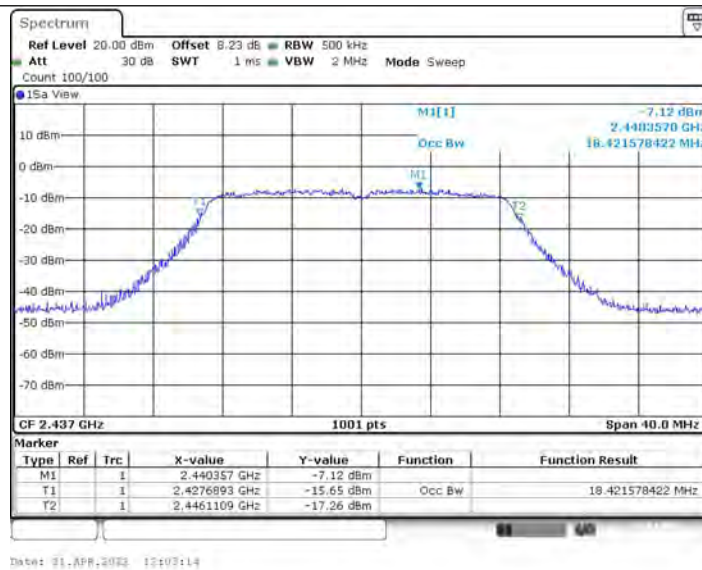


802.11n(HT20)_2462 MHz

6dB Bandwidth

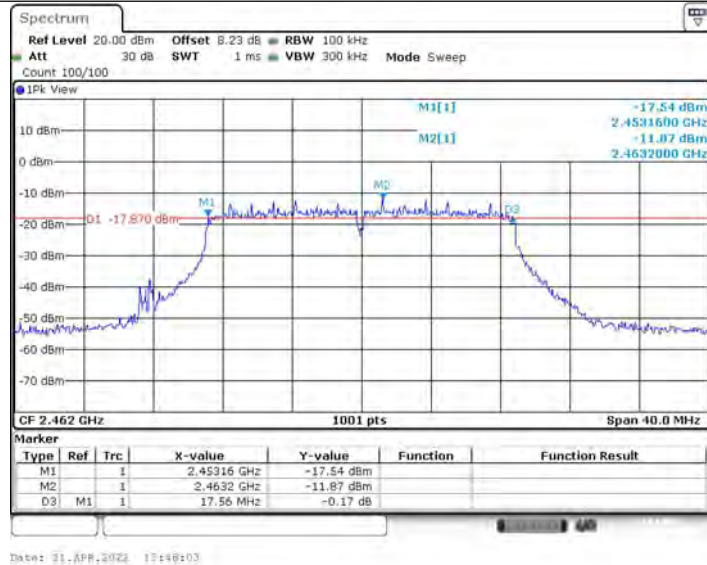

99% Bandwidth

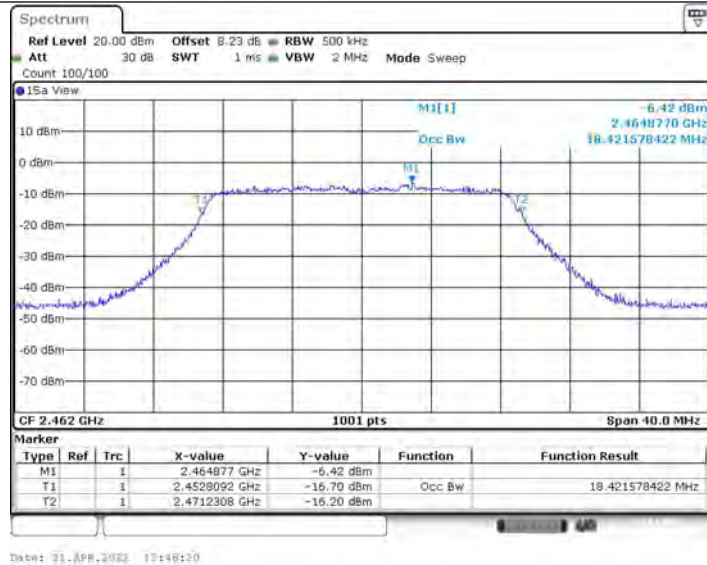


TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdkesign.cn Web: www.gdkesign.com

802.11n(HT40)_2422 MHz

6dB Bandwidth

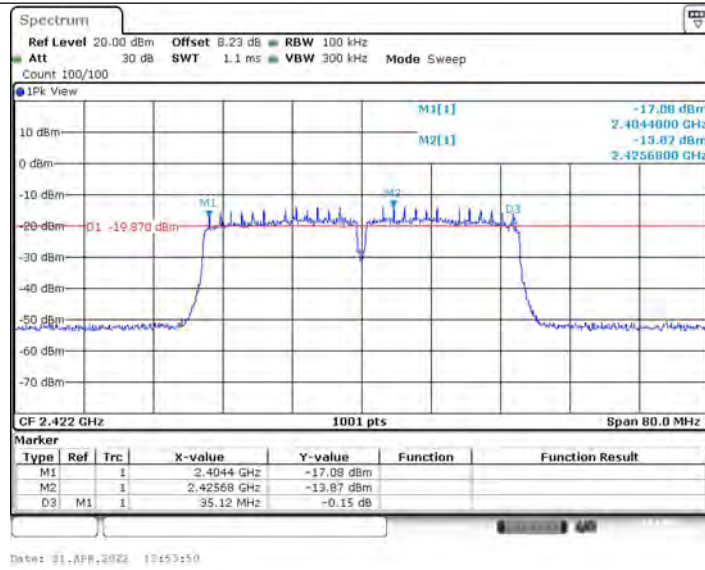


99% Bandwidth

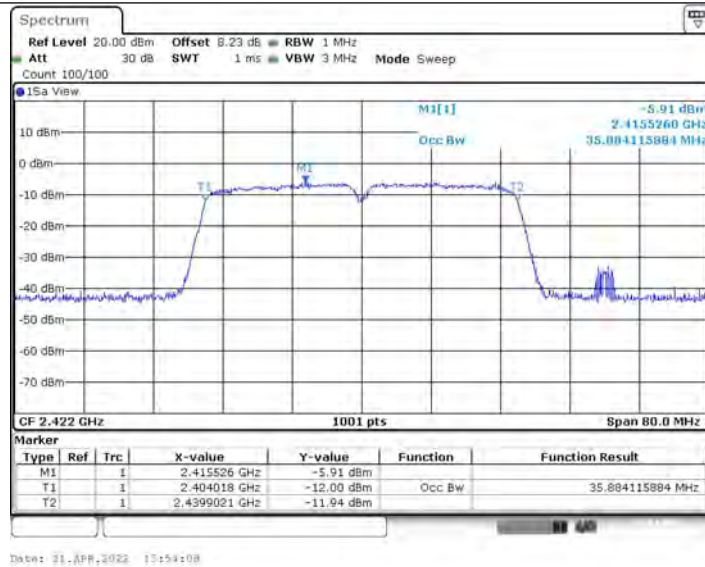


802.11n(HT40)_2437 MHz

6dB Bandwidth

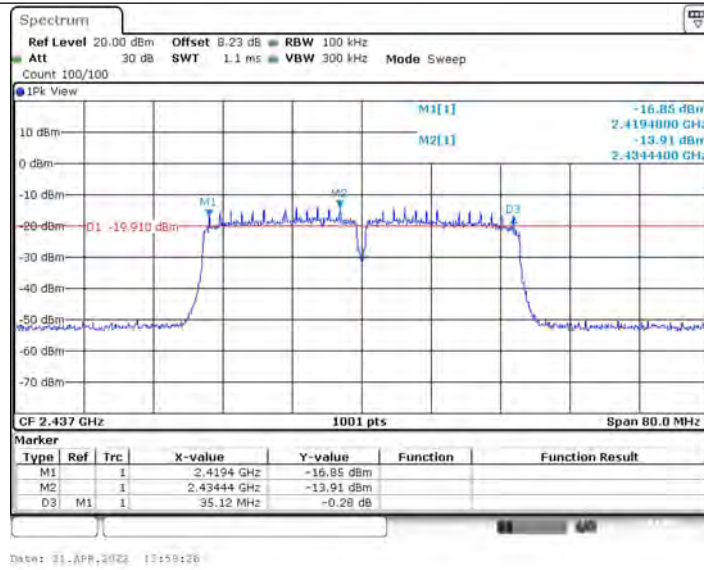

99% Bandwidth

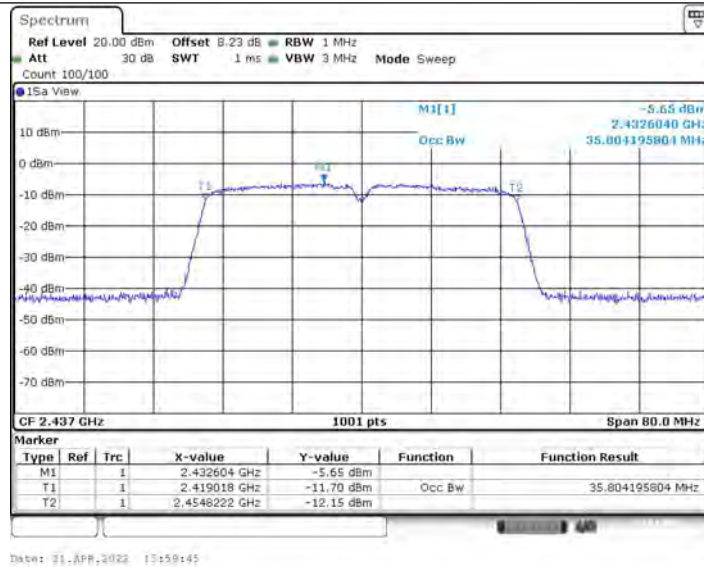


TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdkesign.cn Web: www.gdkesign.com

802.11n(HT40)_2452 MHz

6dB Bandwidth

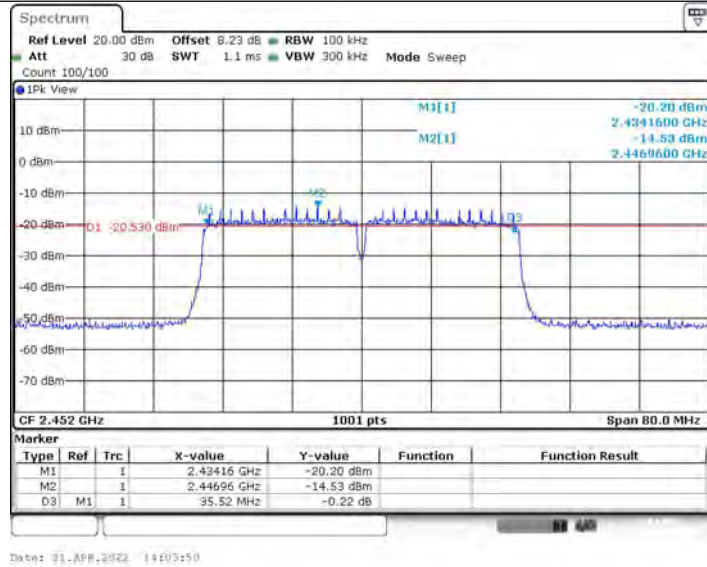

99% Bandwidth

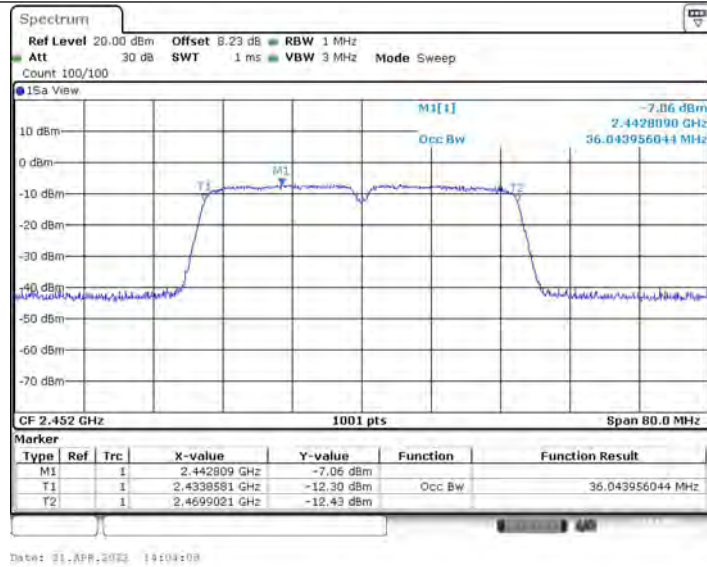

TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdkesign.cn Web: www.gdkesign.com


3.5. Band edge and Spurious Emission (Conducted)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Test Configuration

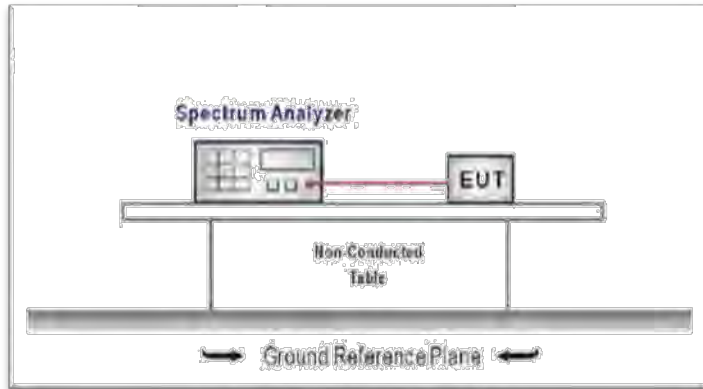

Test Procedure

1. Connect EUT RF Output port to the Spectrum Analyzer through an RF attenuator.
2. Spectrum Setting:
 - RBW=100KHz
 - VBW=300KHz.
 - Detector function: Peak.
 - Trace: Max hold.
 - Sweep = Auto couple.

Allow the trace to stabilize.


Test Mode

Please refer to the clause 2.2.


Test Results

802.11b

CH01-Bandedge


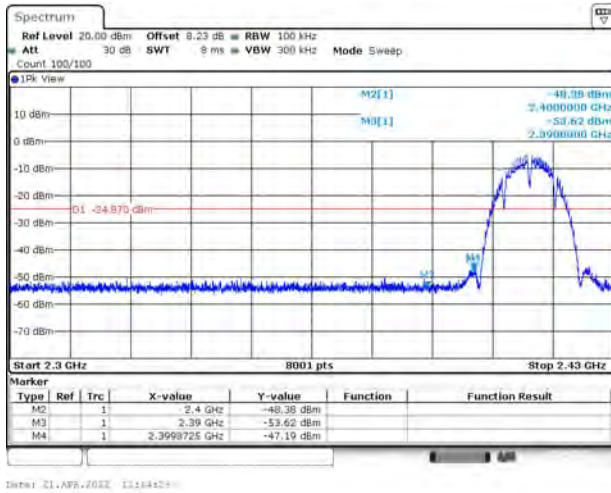


CH11-Bandedge


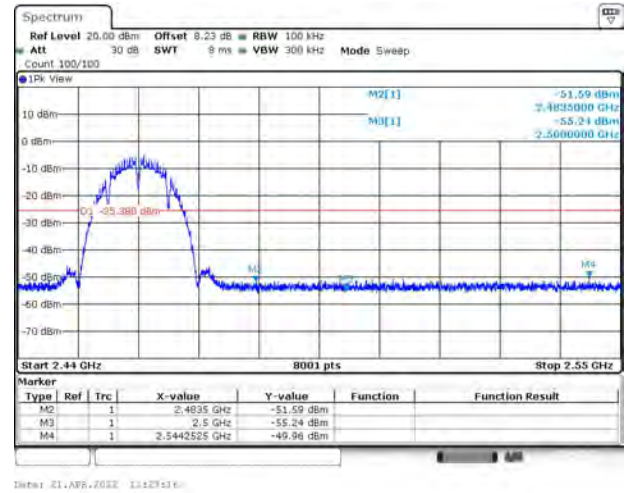


802.11b



CH01-SE

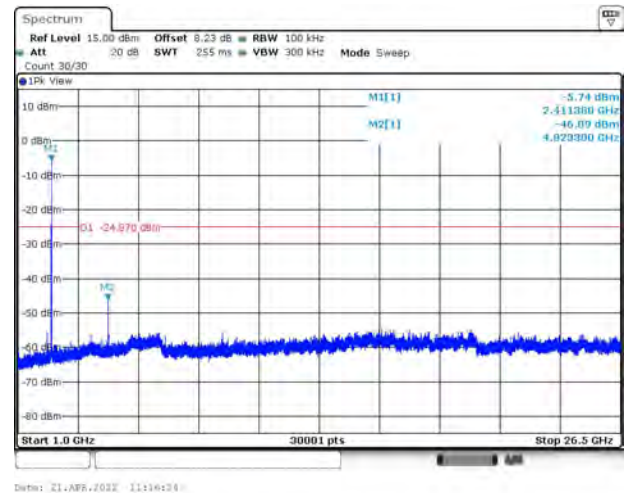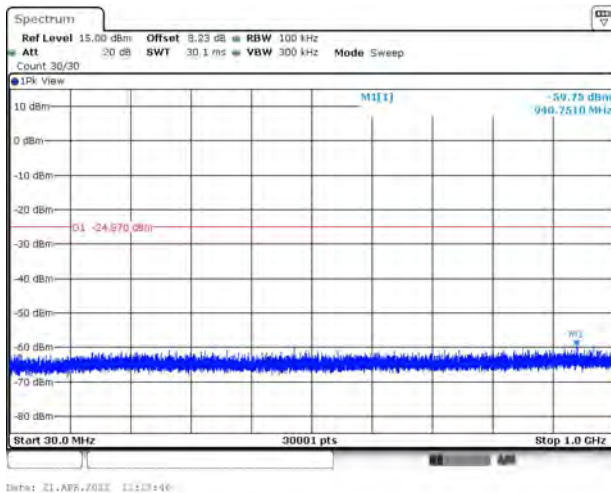

CH06-SE

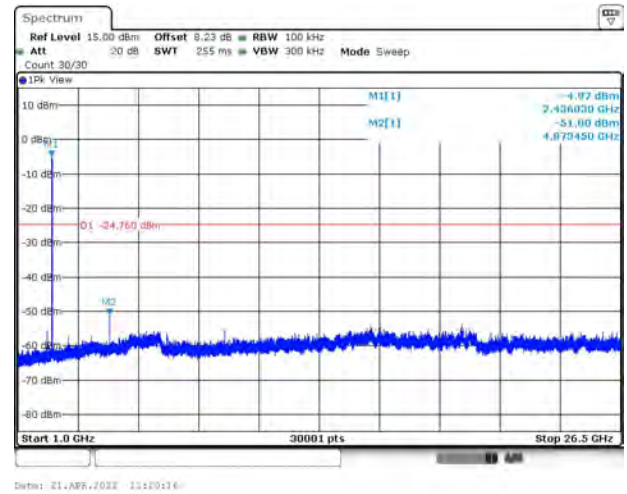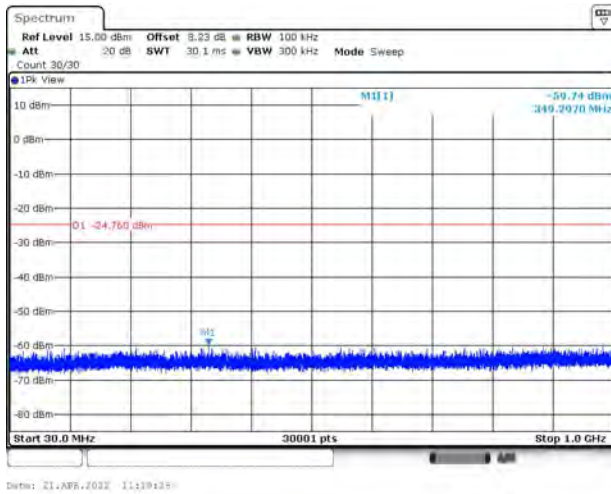


CH11-SE

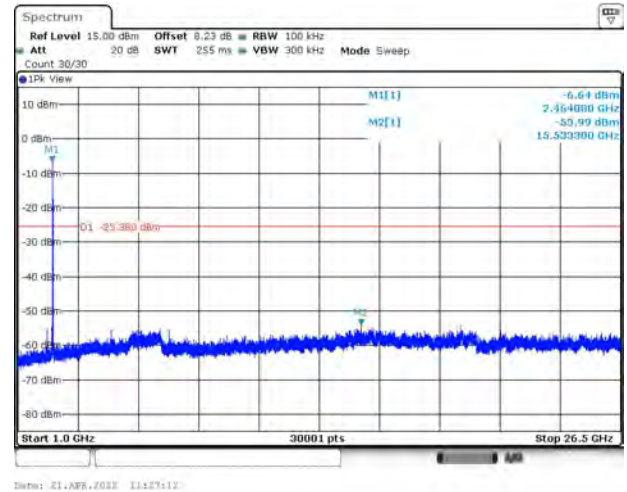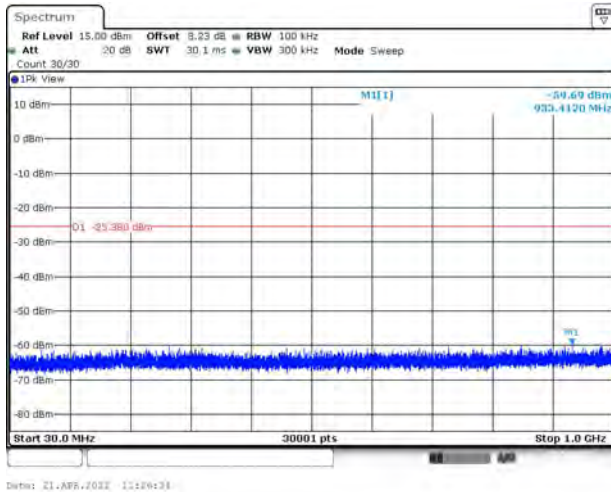


802.11g

CH01-Bandedge

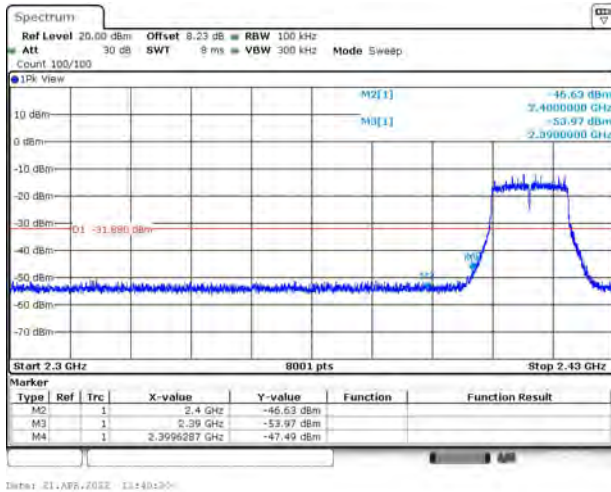

CH11-Bandedge

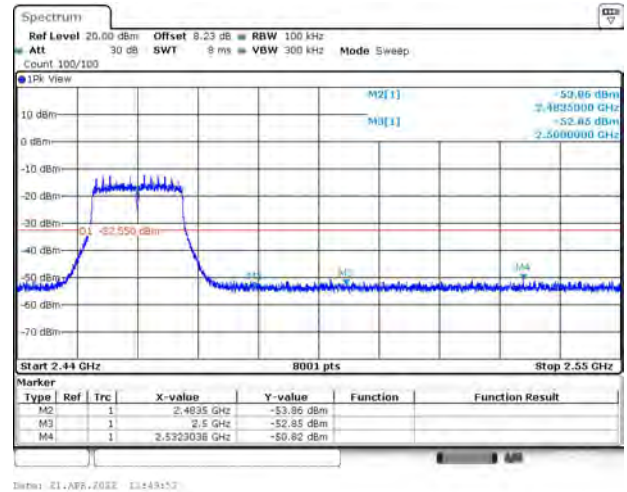



TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China



Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

802.11g



CH01-SE

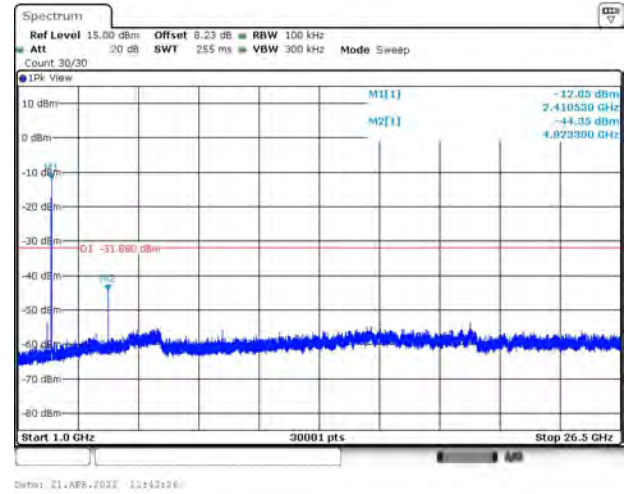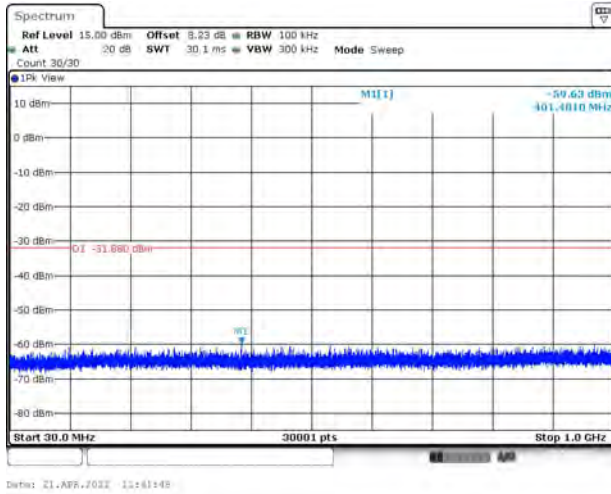

CH06-SE

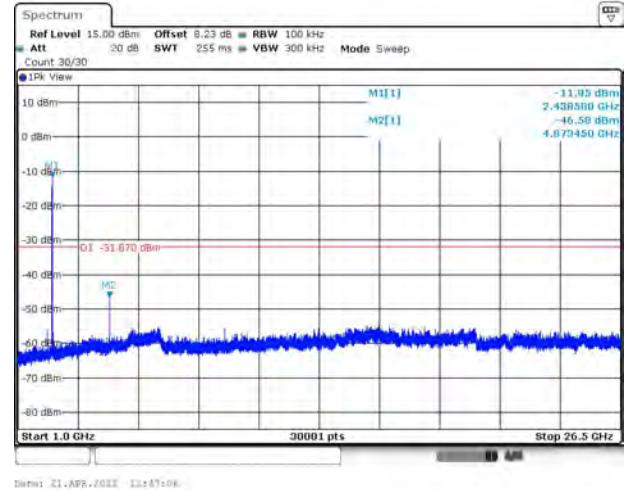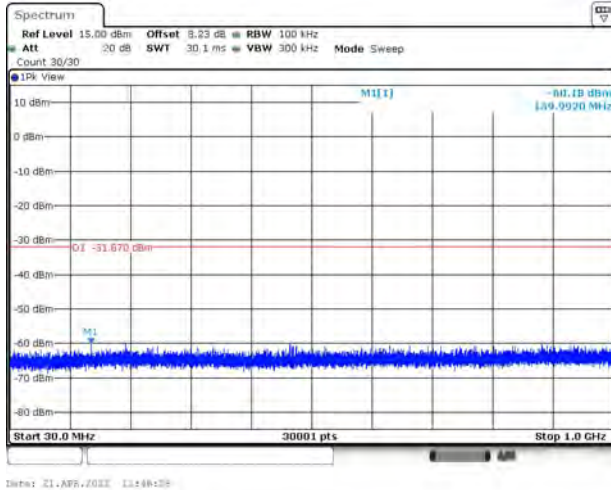

CH11-SE

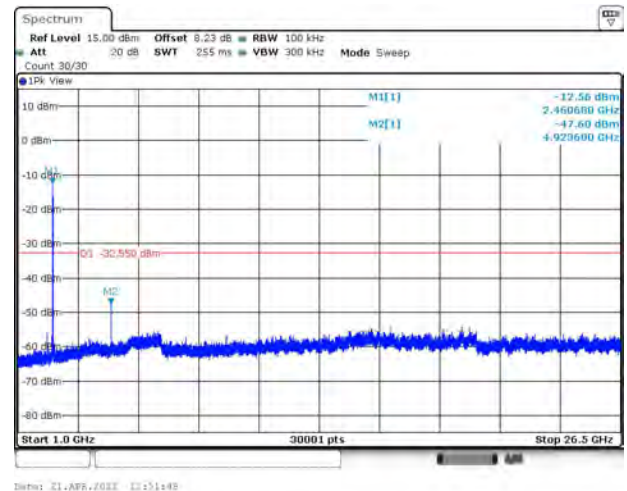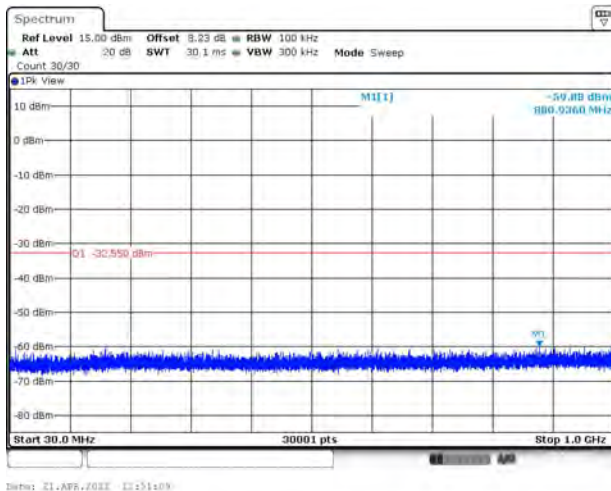


TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

802.11n(HT20)

CH01-Bandedge


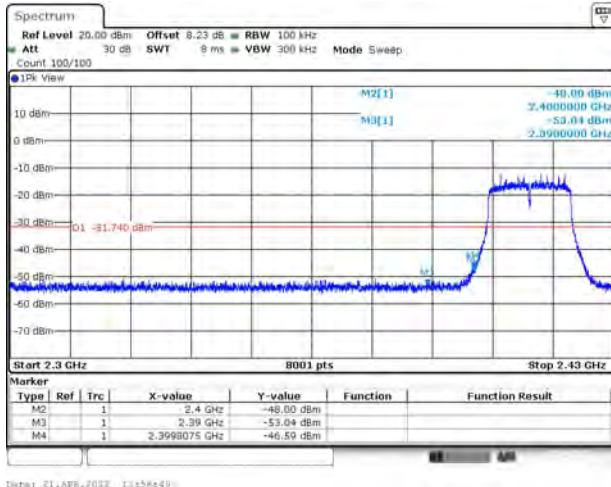


CH11-Bandedge


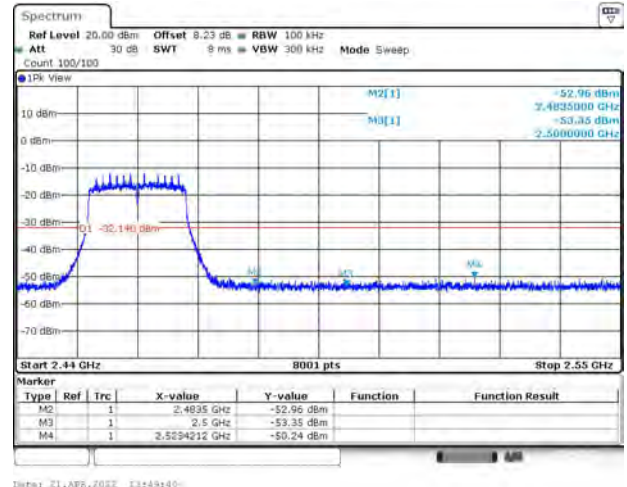


802.11n(HT20)



CH01-SE

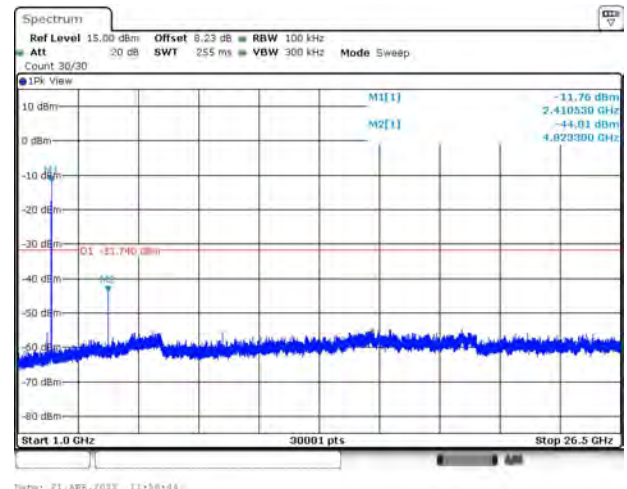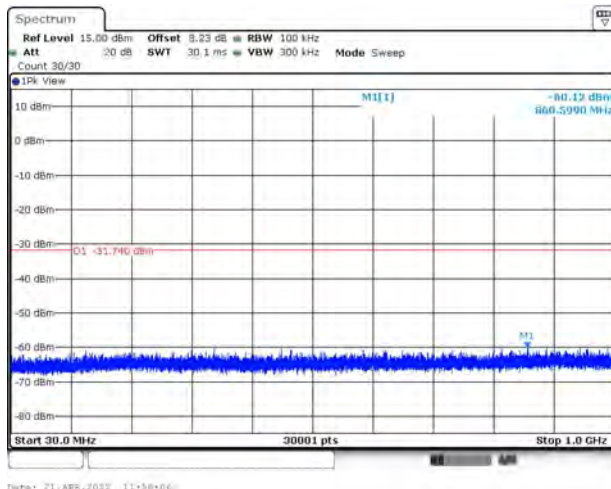

CH06-SE

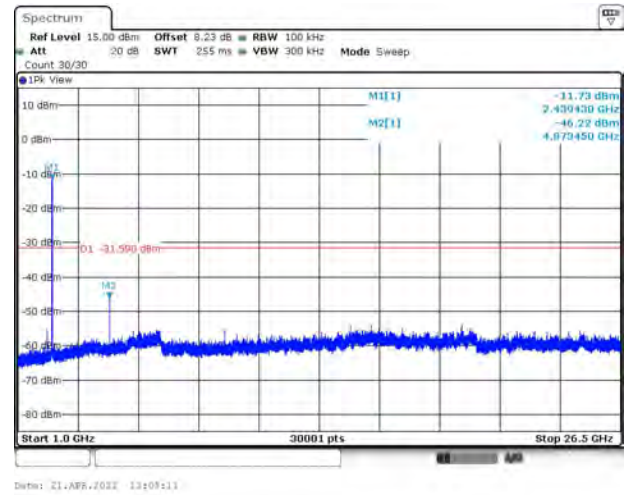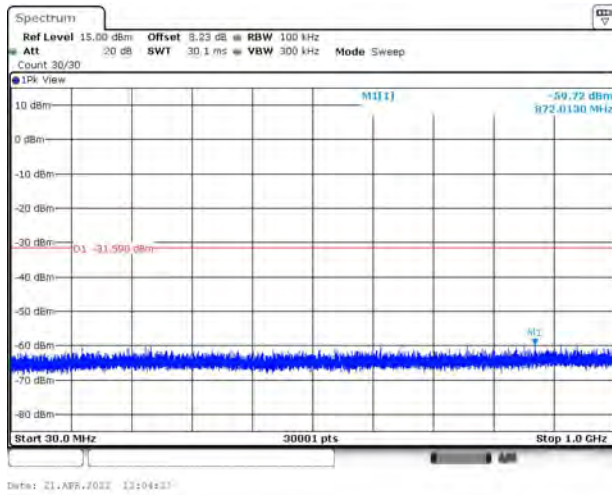


CH11-SE

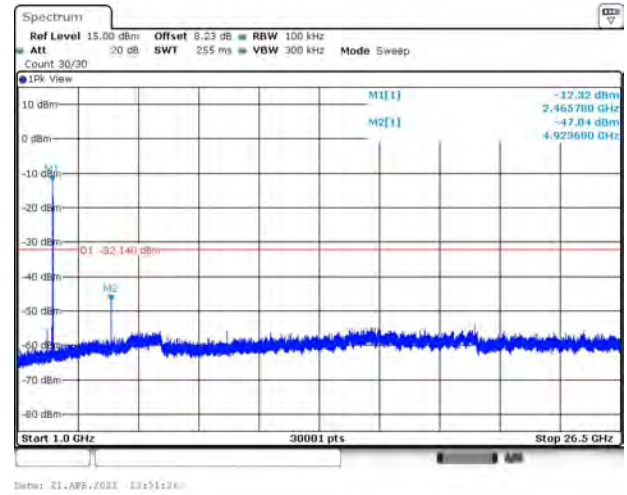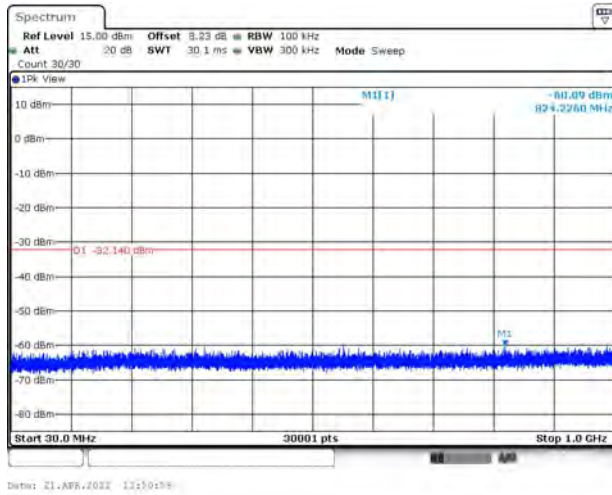


802.11n(HT40)

CH03-Bandedge

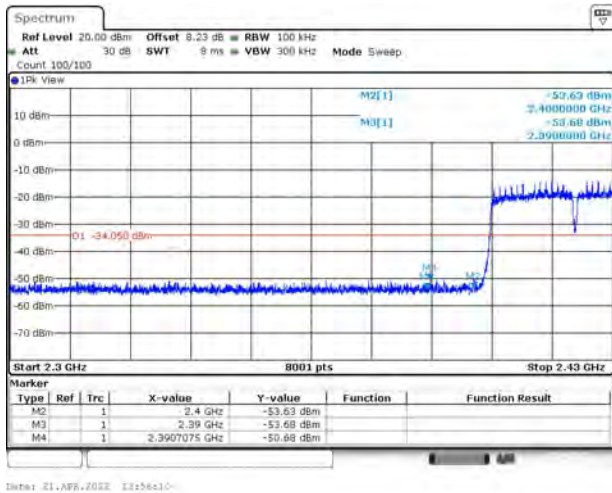

CH09-Bandedge

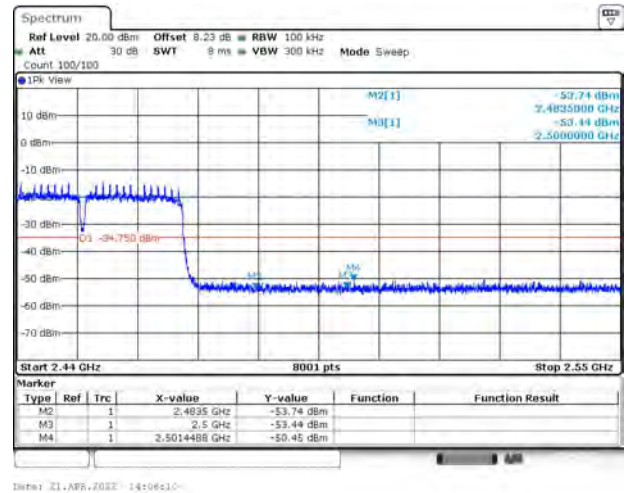



TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China



Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

802.11n(HT40)



CH03-SE

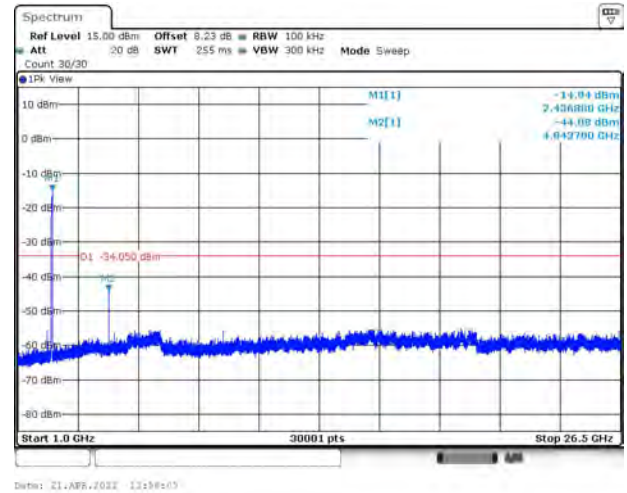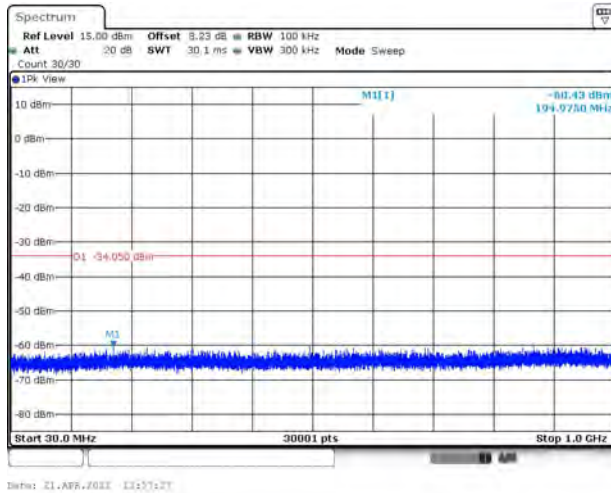

CH06-SE

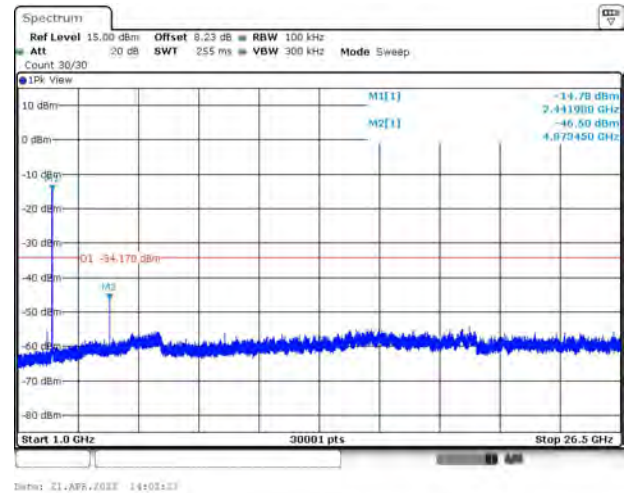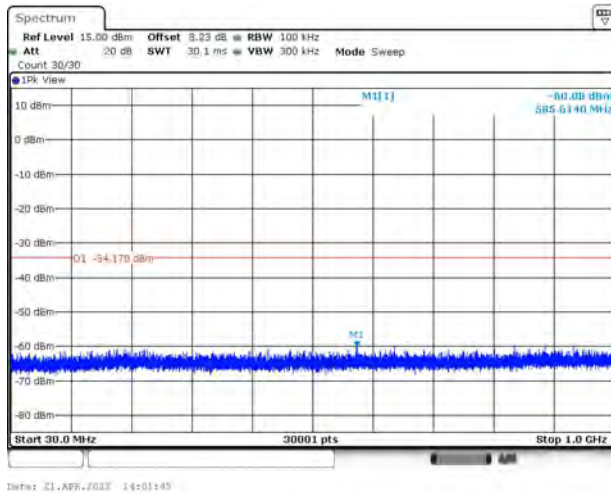

CH09-SE

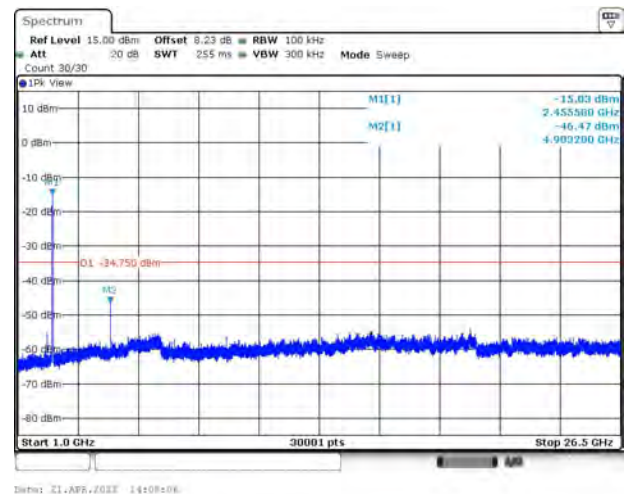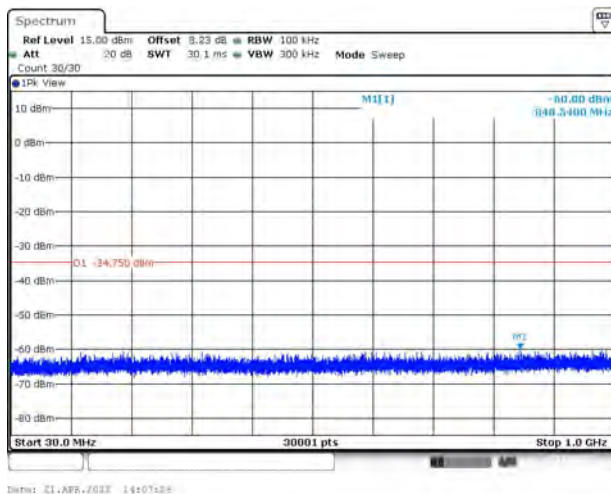

TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com


3.6. Band Edge Emissions(Radiated)

Limit

Restricted Frequency Band (MHz)	(dBuV/m)(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

Note: All restriction bands have been tested, only the worst case is reported.

Test Configuration

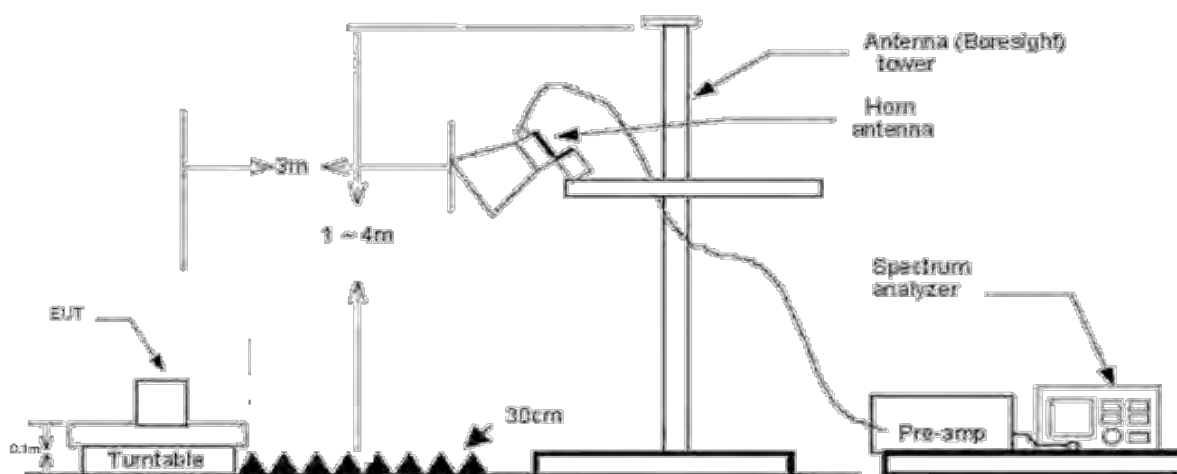

Test Procedure

- The EUT was setup and tested according to ANSI C63.10:2013 requirements.
- The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
- The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
- The receiver set as follow:
RBW=1MHz, VBW=3MHz PEAK detector for Peak value.
RBW=1MHz, VBW=10Hz with PEAK detector for Average Value.

Test Mode

Please refer to the clause 2.2.

Test Results

Note:

- Measurement = Reading level + Correct Factor
Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor
- Pre-scan 802.11b, 802.11g, 802.11n(HT20) and 802.11n(HT40) mode, and found the 802.11n20 mode which it is worse case, so only show the test data for worse case.

TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdkesign.cn Web: www.gdkesign.com

Frequency(MHz):		2412		Polarity:		HORIZONTAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
2390.00	46.41	-10.92	35.49	74	38.51	PK
2390.00	32.93	-10.92	22.01	54	31.99	AV

Frequency(MHz):		2412		Polarity:		HORIZONTAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
2390.00	47.86	-10.92	36.94	74	37.06	PK
2390.00	34.01	-10.92	23.09	54	30.91	AV

Frequency(MHz):		2462		Polarity:		HORIZONTAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
2483.50	53.45	-10.88	42.57	74	31.43	PK
2483.50	42.66	-10.88	31.78	54	22.22	AV

Frequency(MHz):		2462		Polarity:		HORIZONTAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
2483.50	55.62	-10.88	44.74	74	29.26	PK
2483.50	44.31	-10.88	33.43	54	20.57	AV

3.7. Spurious Emission (Radiated)

Limit

Radiated Emission Limits (9 kHz~1000 MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	Distance Meters(at 3m)	
	Peak	Average
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).


Test Configuration

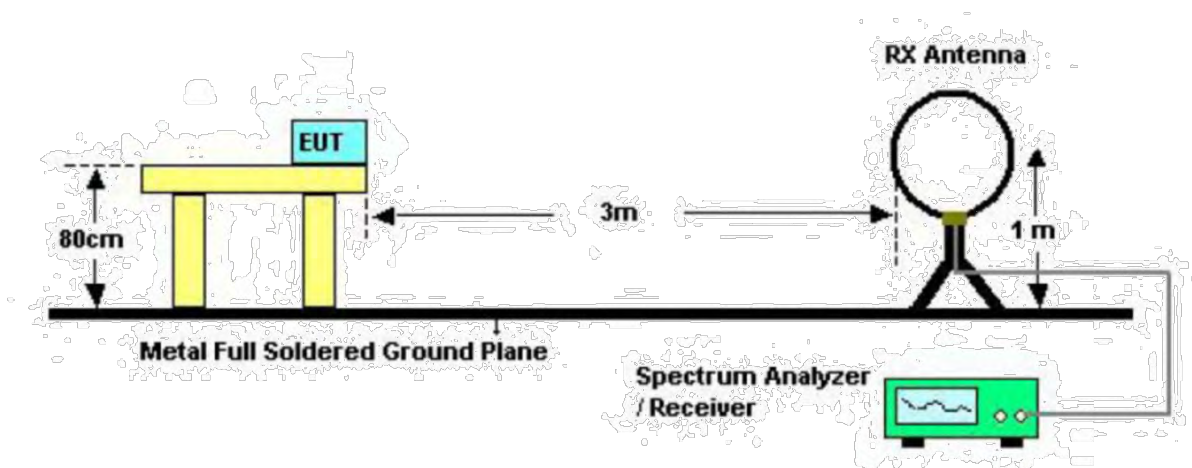

Below 30MHz Test Setup

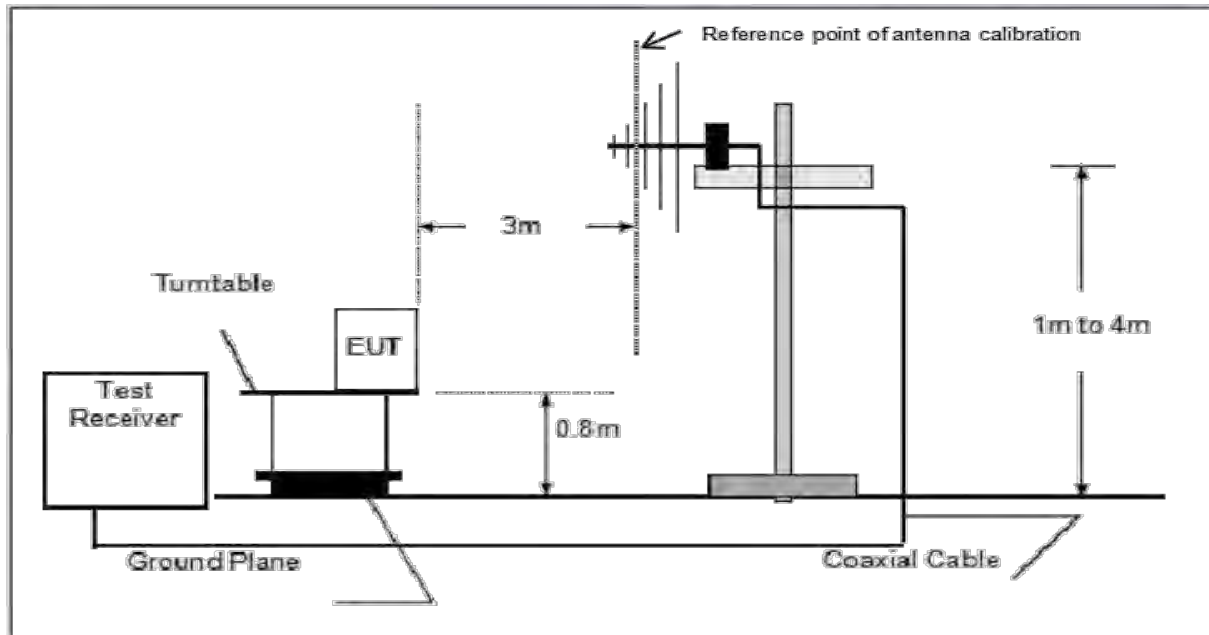

Below 1000MHz Test Setup

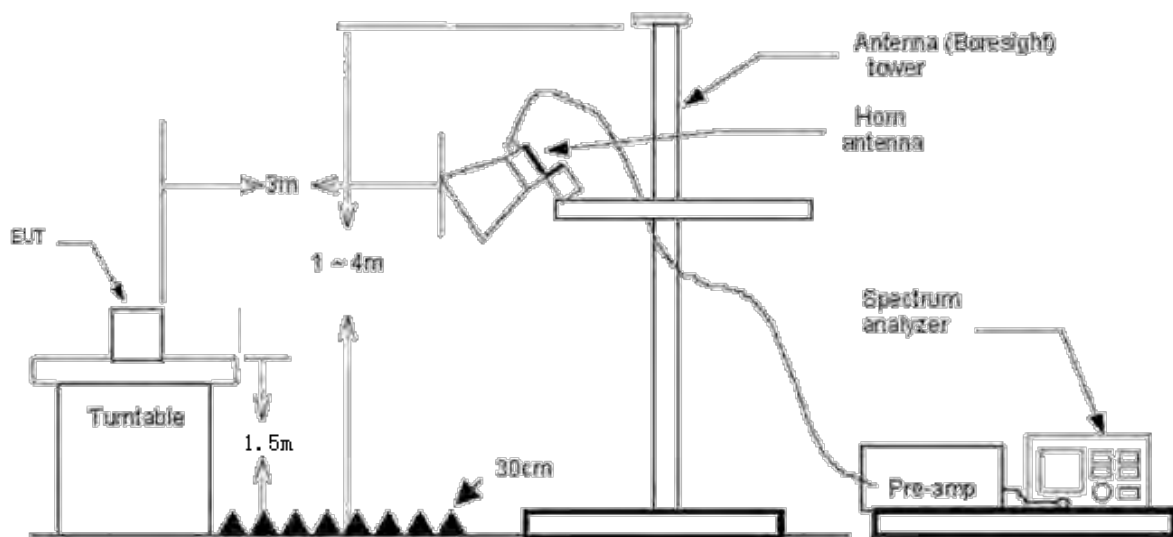

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=1MHz Peak detector for Peak value.
RBW=1MHz, VBW=10Hz Peak detector for Average value.

Test Mode

Please refer to the clause 2.2

Test Result

9 KHz~30 MHz and 18GHz~25GHz

From 9 KHz~30 MHz and 18GHz~25GHz: Conclusion: PASS


Note:

- 1) Measurement = Reading level + Correct Factor
Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor
- 2) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
- 3) The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4) The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 5) Pre-scan 802.11b/g/n(HT20/HT40) modulation, found 802.11b_2412MHz which it is worse case for 30MHz-1GHz , the 802.11b modulation which it is worse case for above 1GHz, so only show the test data for worse case.

BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.


30MHz-1GHz

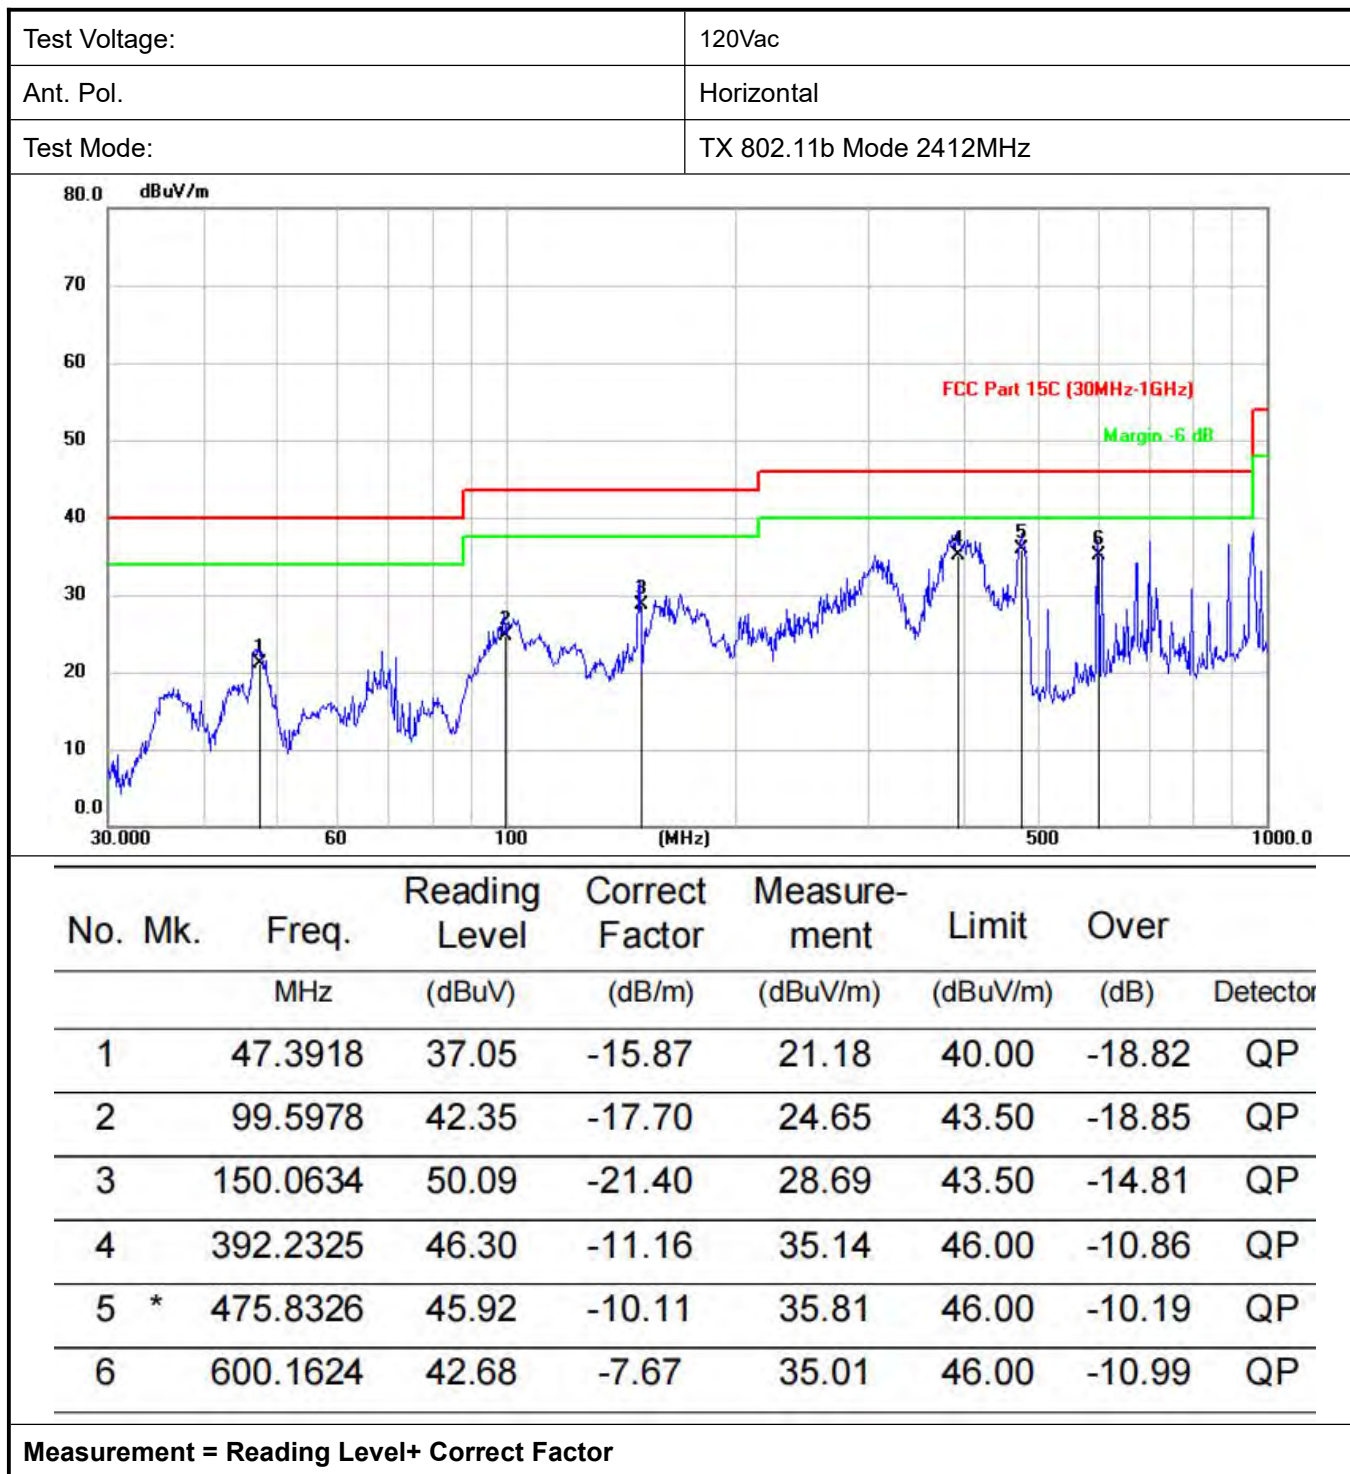

TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

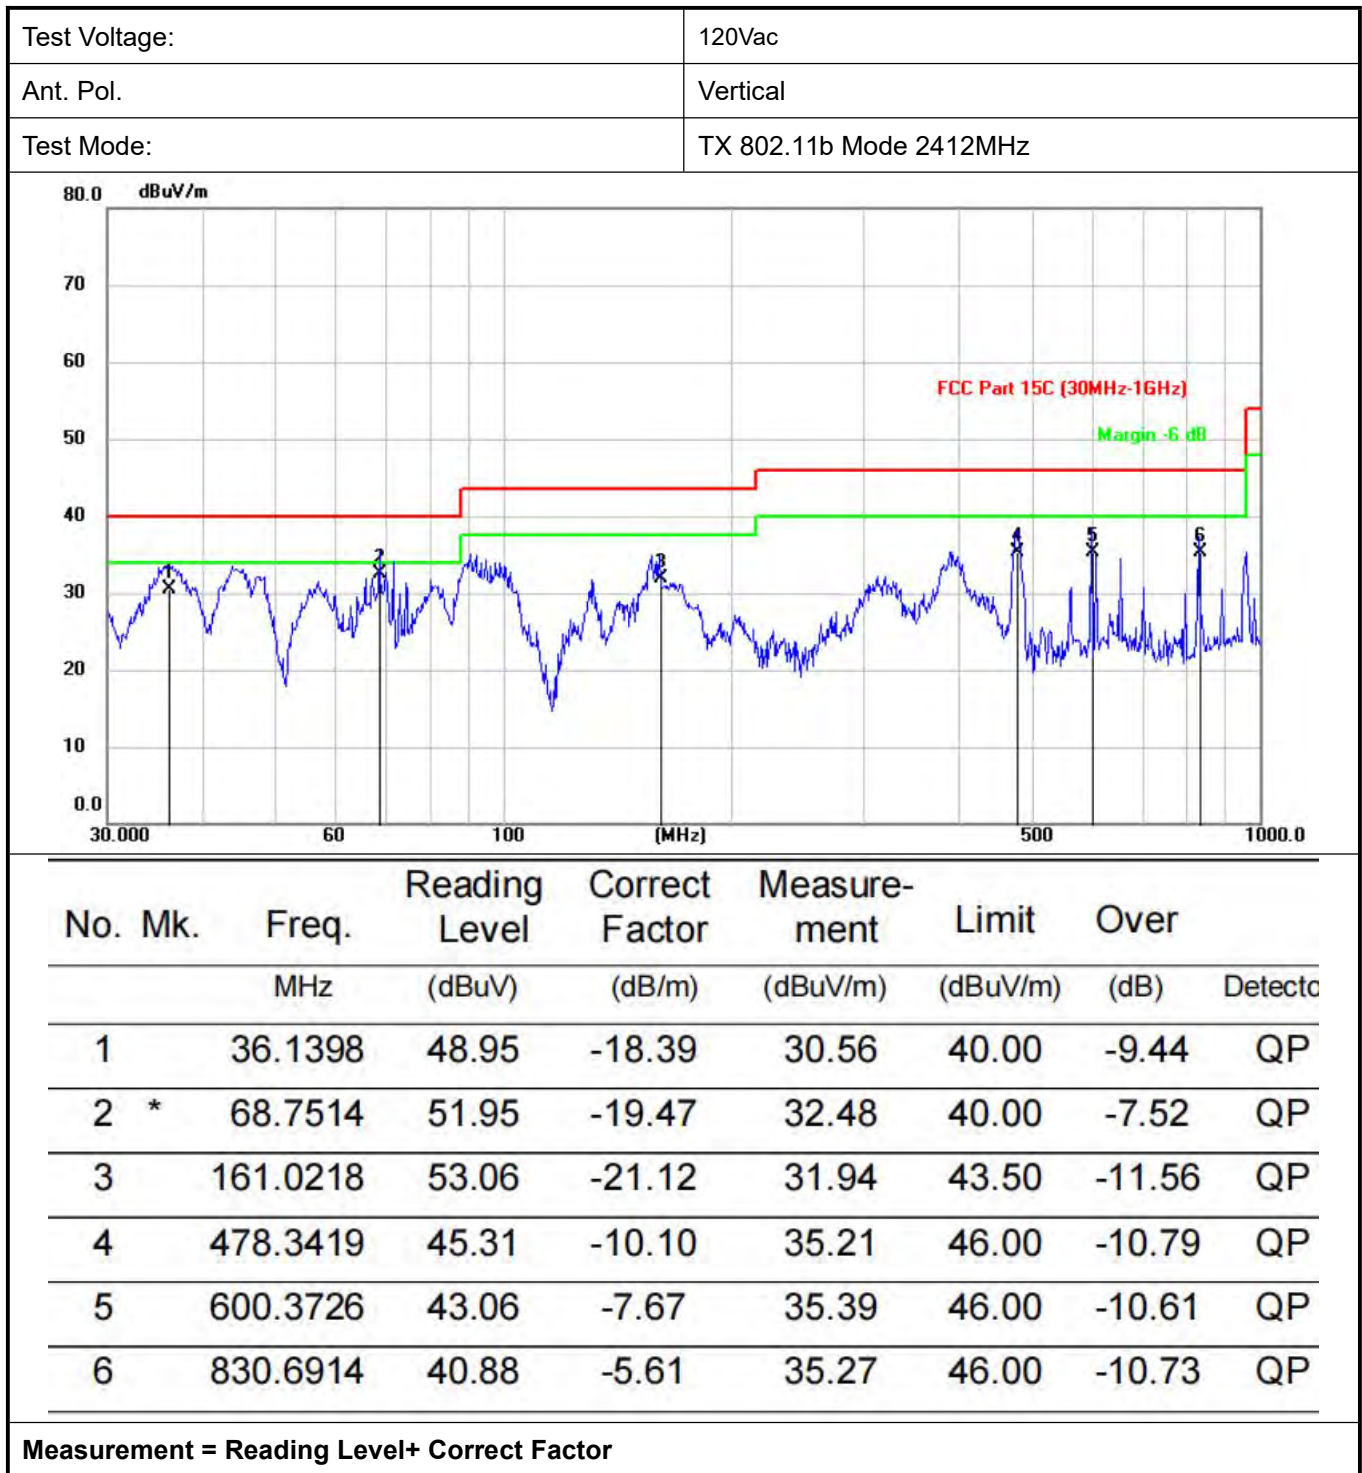

TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

Above 1GHz

Frequency(MHz):		2412		Polarity:		HORIZONTAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
4824.00	55.68	-5.92	49.76	74	24.24	PK
4824.00	42.71	-5.92	36.79	54	17.21	AV
7236.00	54.45	-1.81	52.64	74	21.36	PK
7236.00	42.47	-1.81	40.66	54	13.34	AV

Frequency(MHz):		2412		Polarity:		VERTICAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
4824.00	57.41	-5.92	51.49	74	22.51	PK
4824.00	44.57	-5.92	38.65	54	15.35	AV
7236.00	56.65	-1.81	54.84	74	19.16	PK
7236.00	44.35	-1.81	42.54	54	11.46	AV

Frequency(MHz):		2437		Polarity:		HORIZONTAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
4886.00	55.43	-5.71	49.72	74	24.28	PK
4886.00	42.69	-5.71	36.98	54	17.02	AV
7326.00	54.68	-0.36	54.32	74	19.68	PK
7326.00	42.54	-0.36	42.18	54	11.82	AV

Frequency(MHz):		2437		Polarity:		VERTICAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
4874.00	56.58	-5.71	50.87	74	23.13	PK
4874.00	43.71	-5.71	38.00	54	16.00	AV
7311.00	55.59	-0.36	55.23	74	18.77	PK
7311.00	44.01	-0.36	43.65	54	10.35	AV

Frequency(MHz):		2462		Polarity:		HORIZONTAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
4924.00	53.87	-5.51	48.36	74	25.64	PK
4924.00	43.66	-5.51	38.15	54	15.85	AV
7386.00	53.86	0.99	54.85	74	19.15	PK
7386.00	43.71	0.99	44.70	54	9.30	AV

TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

Frequency(MHz):		2462		Polarity:		VERTICAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
4948.00	56.19	-5.51	50.68	74	23.32	PK
4948.00	44.71	-5.51	39.20	54	14.80	AV
7416.00	55.98	0.99	56.97	74	17.03	PK
7416.00	44.69	0.99	45.68	54	8.32	AV

Note:

- 1.All test modes had been tested. The 802.11b modulation is the worst case and recorded in the report.
2. 18GHz-26.5GHz is the background of the site, there is no radiated spurious.

3.8. Conducted Emission

Limit


Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Test Configuration

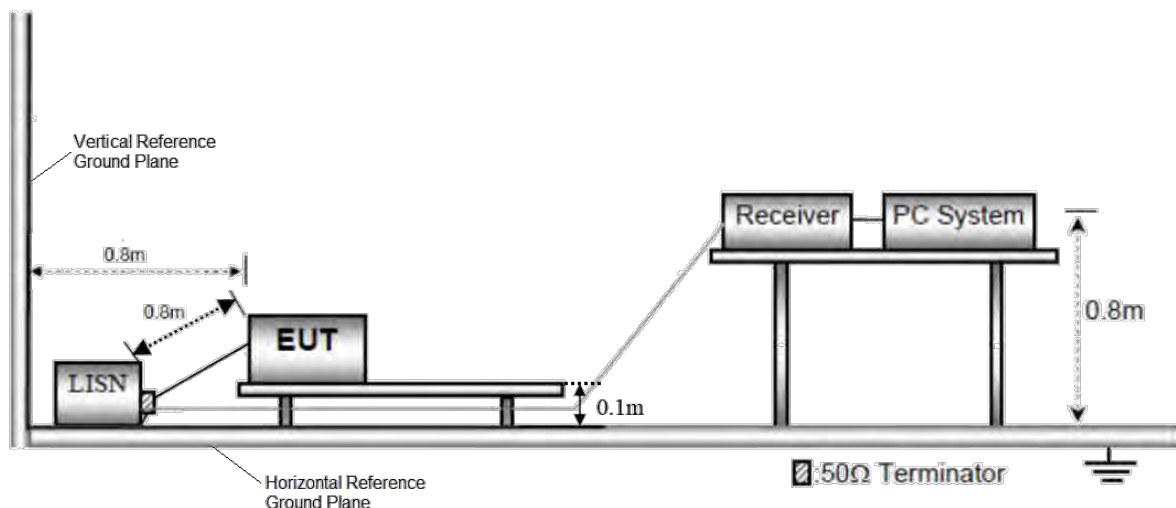

Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 0.1m above the conducting ground plane. The vertical conducting plane was located 80 cm to the rear of the EUT. All other surfaces of EUT were at least 0.8m from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment.
The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.

Test Mode:

Please refer to the clause 2.2.


TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

Test Results

Pre-scan 802.11b/g/n(HT20/HT40) modulation, and found the 802.11b modulation 2412MHz which it is worse case, so only show the test data for worse case.

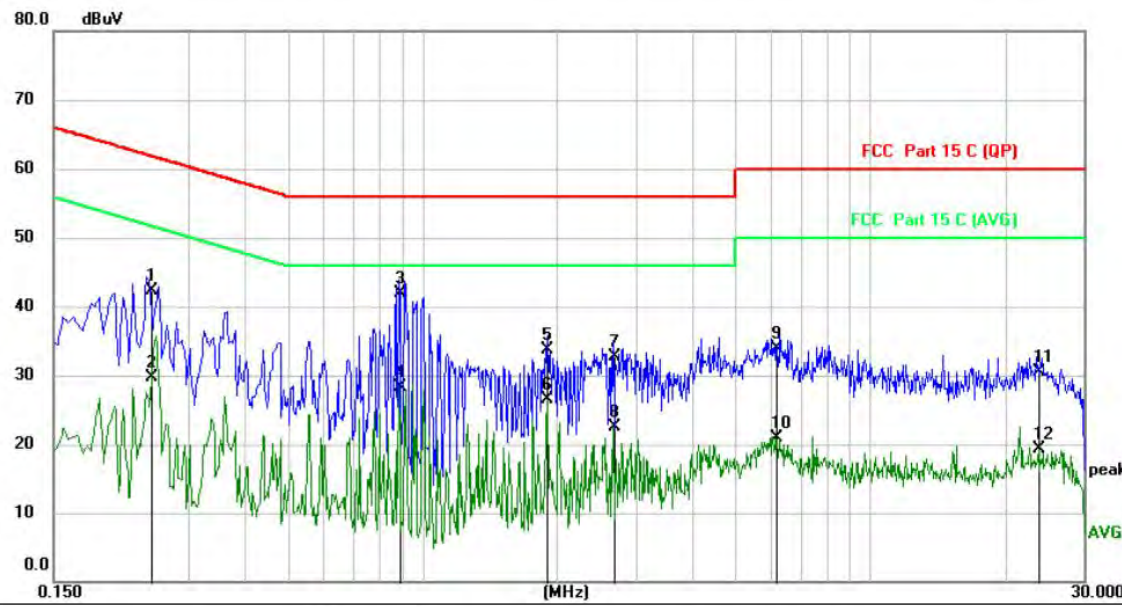
Test Voltage:	AC 120V/60Hz																																																																																																																														
Terminal:	Line																																																																																																																														
Test Mode:	2.4G WIFI																																																																																																																														
																																																																																																																															
<table><tr><th>No.</th><th>Mk.</th><th>Freq.</th><th>Reading Level</th><th>Correct Factor</th><th>Measure-ment</th><th>Limit</th><th>Over</th><th></th></tr><tr><td></td><td></td><td>MHz</td><td>dBuV</td><td>dB</td><td>dBuV</td><td>dBuV</td><td>dB</td><td>Detector</td></tr><tr><td>1</td><td></td><td>0.2479</td><td>31.40</td><td>10.95</td><td>42.35</td><td>61.83</td><td>-19.48</td><td>QP</td></tr><tr><td>2</td><td></td><td>0.2479</td><td>18.68</td><td>10.95</td><td>29.63</td><td>51.83</td><td>-22.20</td><td>AVG</td></tr><tr><td>3</td><td>*</td><td>0.8860</td><td>30.75</td><td>11.06</td><td>41.81</td><td>56.00</td><td>-14.19</td><td>QP</td></tr><tr><td>4</td><td></td><td>0.8860</td><td>17.28</td><td>11.06</td><td>28.34</td><td>46.00</td><td>-17.66</td><td>AVG</td></tr><tr><td>5</td><td></td><td>1.8971</td><td>22.66</td><td>11.10</td><td>33.76</td><td>56.00</td><td>-22.24</td><td>QP</td></tr><tr><td>6</td><td></td><td>1.8971</td><td>15.33</td><td>11.10</td><td>26.43</td><td>46.00</td><td>-19.57</td><td>AVG</td></tr><tr><td>7</td><td></td><td>2.6739</td><td>21.49</td><td>11.13</td><td>32.62</td><td>56.00</td><td>-23.38</td><td>QP</td></tr><tr><td>8</td><td></td><td>2.6739</td><td>11.32</td><td>11.13</td><td>22.45</td><td>46.00</td><td>-23.55</td><td>AVG</td></tr><tr><td>9</td><td></td><td>6.1657</td><td>22.67</td><td>11.16</td><td>33.83</td><td>60.00</td><td>-26.17</td><td>QP</td></tr><tr><td>10</td><td></td><td>6.1657</td><td>9.83</td><td>11.16</td><td>20.99</td><td>50.00</td><td>-29.01</td><td>AVG</td></tr><tr><td>11</td><td></td><td>23.7652</td><td>19.19</td><td>11.41</td><td>30.60</td><td>60.00</td><td>-29.40</td><td>QP</td></tr><tr><td>12</td><td></td><td>23.7652</td><td>7.91</td><td>11.41</td><td>19.32</td><td>50.00</td><td>-30.68</td><td>AVG</td></tr></table>		No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over				MHz	dBuV	dB	dBuV	dBuV	dB	Detector	1		0.2479	31.40	10.95	42.35	61.83	-19.48	QP	2		0.2479	18.68	10.95	29.63	51.83	-22.20	AVG	3	*	0.8860	30.75	11.06	41.81	56.00	-14.19	QP	4		0.8860	17.28	11.06	28.34	46.00	-17.66	AVG	5		1.8971	22.66	11.10	33.76	56.00	-22.24	QP	6		1.8971	15.33	11.10	26.43	46.00	-19.57	AVG	7		2.6739	21.49	11.13	32.62	56.00	-23.38	QP	8		2.6739	11.32	11.13	22.45	46.00	-23.55	AVG	9		6.1657	22.67	11.16	33.83	60.00	-26.17	QP	10		6.1657	9.83	11.16	20.99	50.00	-29.01	AVG	11		23.7652	19.19	11.41	30.60	60.00	-29.40	QP	12		23.7652	7.91	11.41	19.32	50.00	-30.68	AVG
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over																																																																																																																								
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector																																																																																																																							
1		0.2479	31.40	10.95	42.35	61.83	-19.48	QP																																																																																																																							
2		0.2479	18.68	10.95	29.63	51.83	-22.20	AVG																																																																																																																							
3	*	0.8860	30.75	11.06	41.81	56.00	-14.19	QP																																																																																																																							
4		0.8860	17.28	11.06	28.34	46.00	-17.66	AVG																																																																																																																							
5		1.8971	22.66	11.10	33.76	56.00	-22.24	QP																																																																																																																							
6		1.8971	15.33	11.10	26.43	46.00	-19.57	AVG																																																																																																																							
7		2.6739	21.49	11.13	32.62	56.00	-23.38	QP																																																																																																																							
8		2.6739	11.32	11.13	22.45	46.00	-23.55	AVG																																																																																																																							
9		6.1657	22.67	11.16	33.83	60.00	-26.17	QP																																																																																																																							
10		6.1657	9.83	11.16	20.99	50.00	-29.01	AVG																																																																																																																							
11		23.7652	19.19	11.41	30.60	60.00	-29.40	QP																																																																																																																							
12		23.7652	7.91	11.41	19.32	50.00	-30.68	AVG																																																																																																																							
Remarks: 1.Measurement = Reading Level+ Correct Factor 2.Over = Measurement -Limit																																																																																																																															

TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

Test Voltage:	AC 120V/60Hz
Terminal:	Neutral
Test Mode:	2.4GWIFI

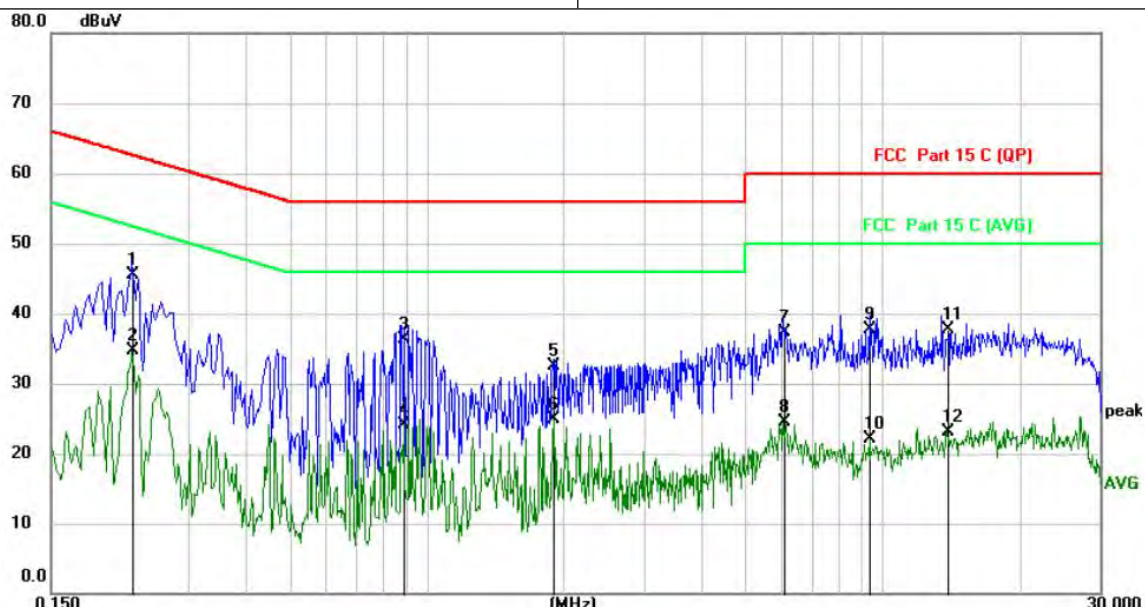

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1	*	0.2260	34.97	10.51	45.48	62.60	-17.12	QP
2		0.2260	24.10	10.51	34.61	52.60	-17.99	AVG
3		0.8940	25.55	10.78	36.33	56.00	-19.67	QP
4		0.8940	13.38	10.78	24.16	46.00	-21.84	AVG
5		1.8971	21.70	10.87	32.57	56.00	-23.43	QP
6		1.8971	13.95	10.87	24.82	46.00	-21.18	AVG
7		6.0617	26.25	11.05	37.30	60.00	-22.70	QP
8		6.0617	13.42	11.05	24.47	50.00	-25.53	AVG
9		9.3536	26.69	11.11	37.80	60.00	-22.20	QP
10		9.3536	11.01	11.11	22.12	50.00	-27.88	AVG
11		13.8739	26.19	11.42	37.61	60.00	-22.39	QP
12		13.8739	11.78	11.42	23.20	50.00	-26.80	AVG

Remarks:
1.Measurement = Reading Level+ Correct Factor
2.Over = Measurement -Limit

TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

4.EUT TEST PHOTOS


Radiated Measurement (Below 1GHz)



Radiated Measurement (Above 1GHz)

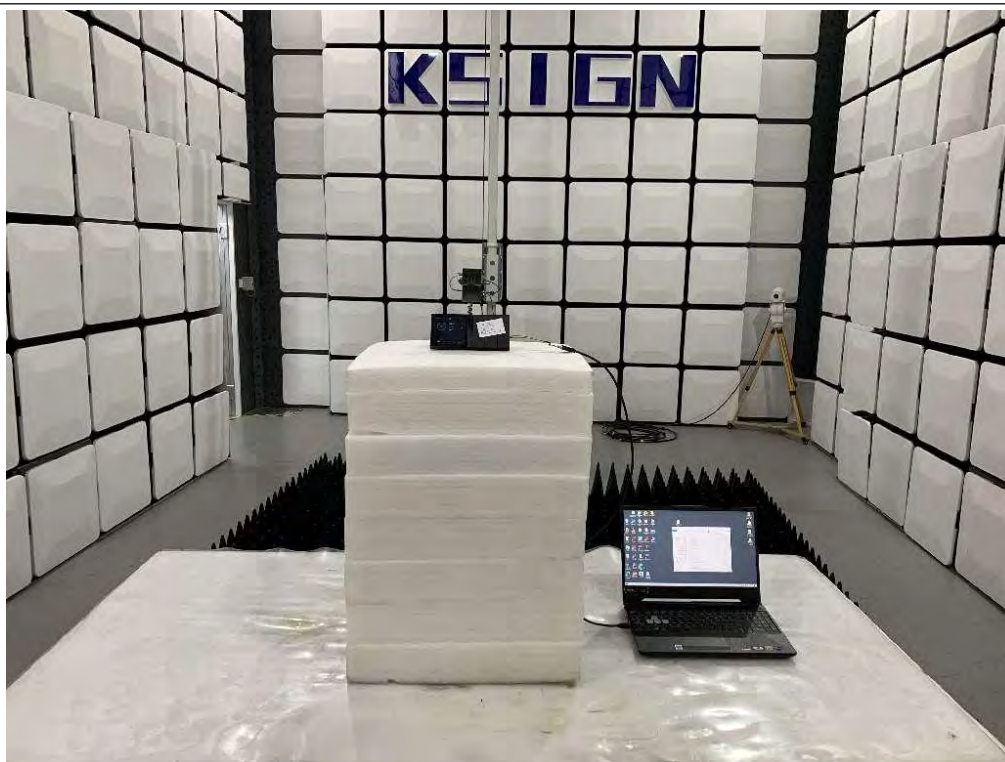

Conducted Emission

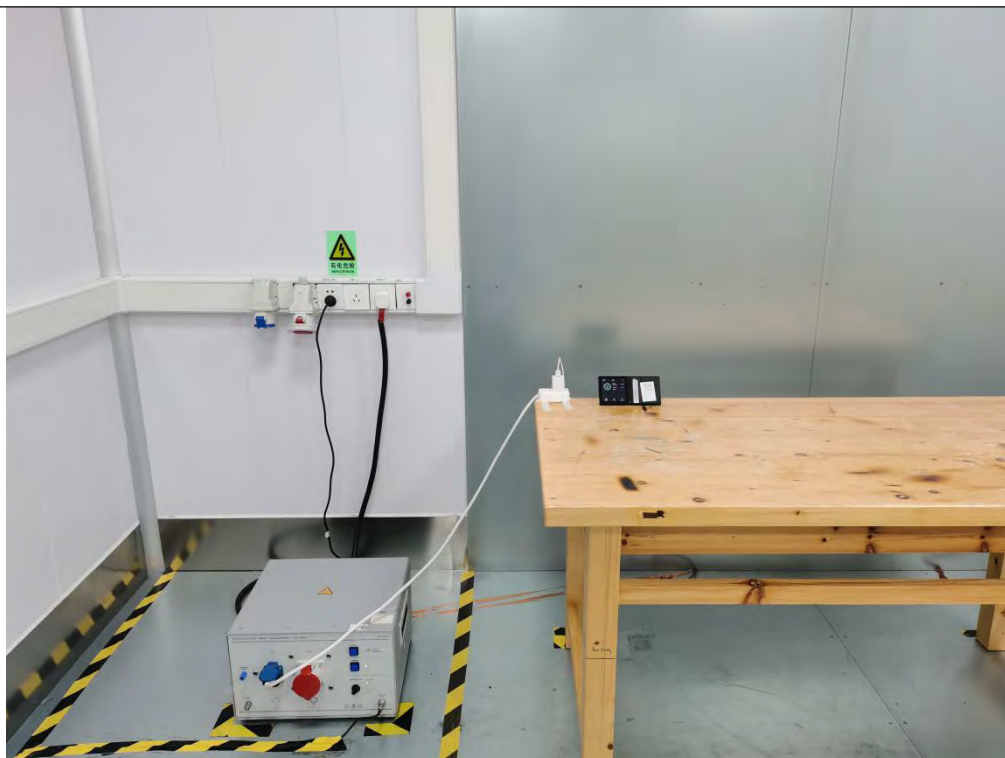

RF Conducted



TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdkesign.cn Web: www.gdkesign.com

5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL

External Photographs

Photo 1


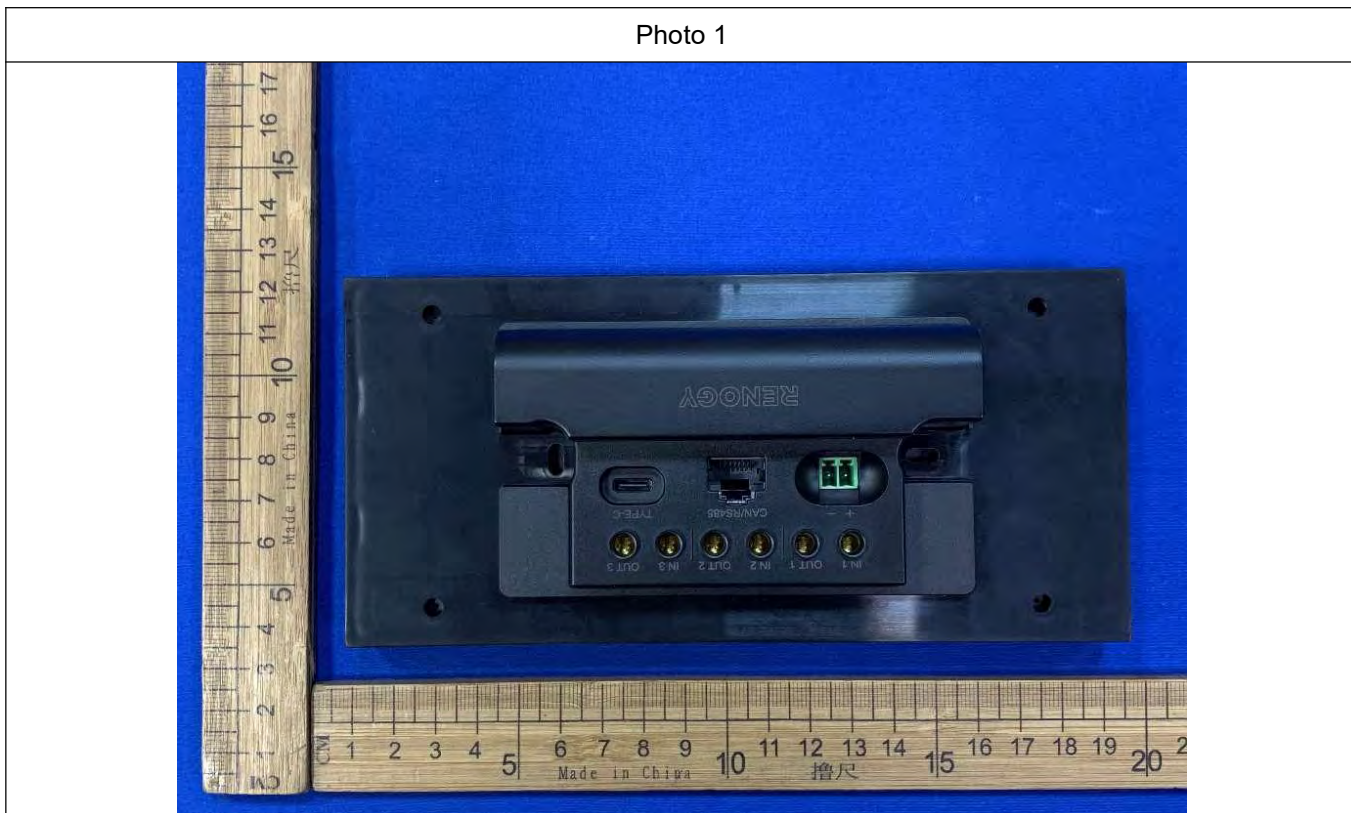


Photo 2

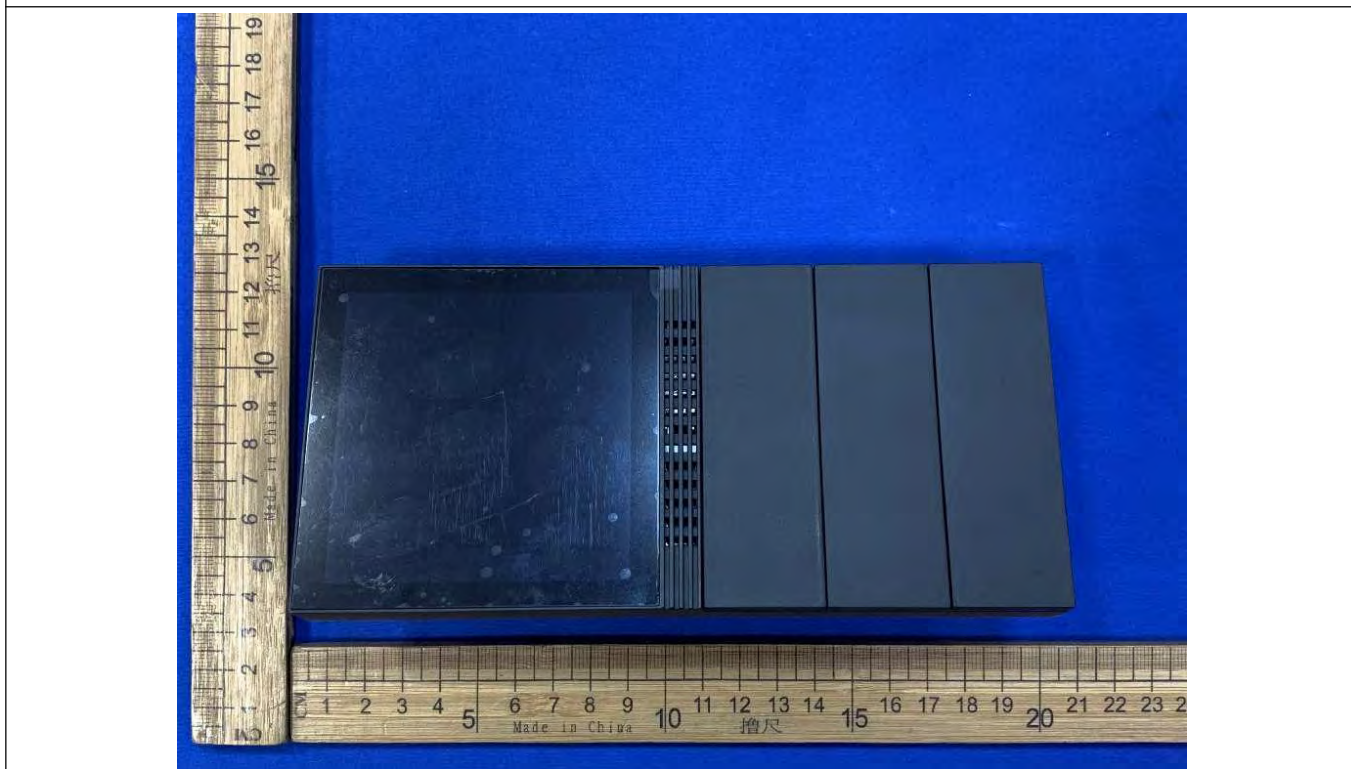

TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdkesign.cn Web: www.gdkesign.com

Photo 3

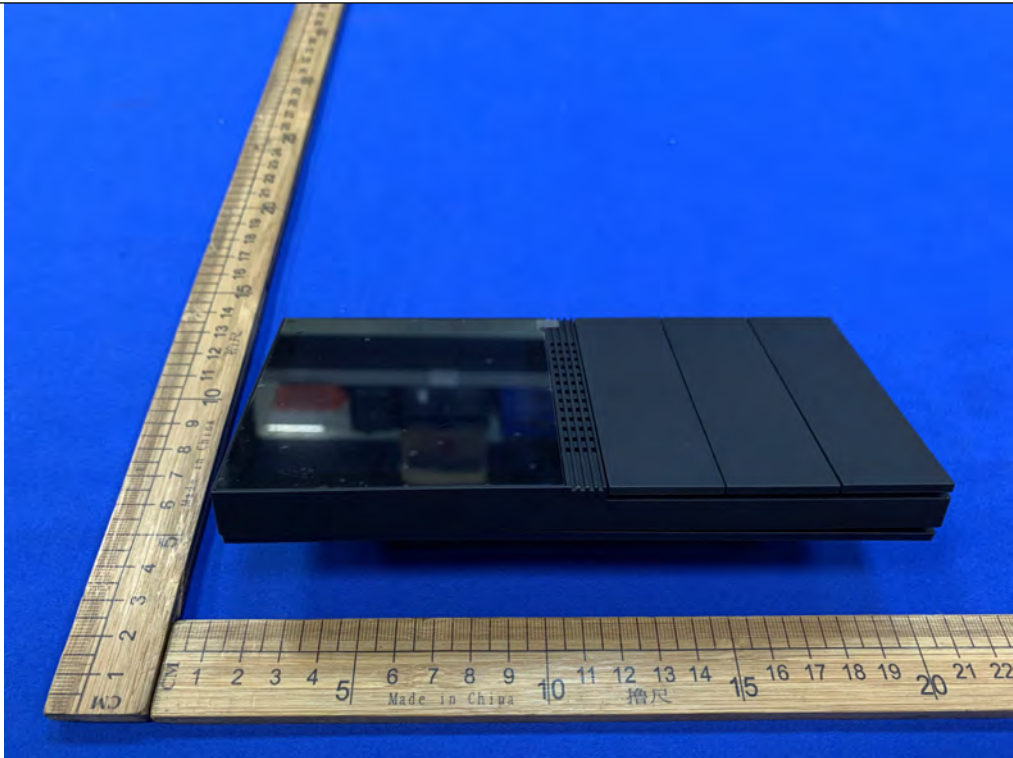


Photo 4

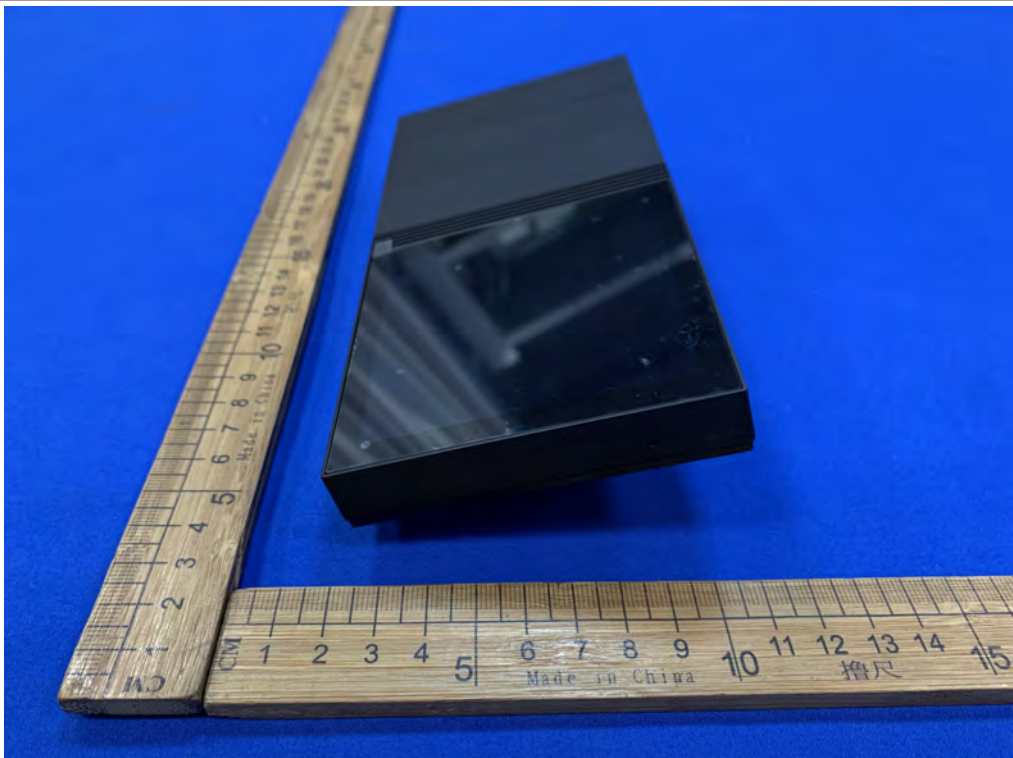


Photo 5



Photo 6

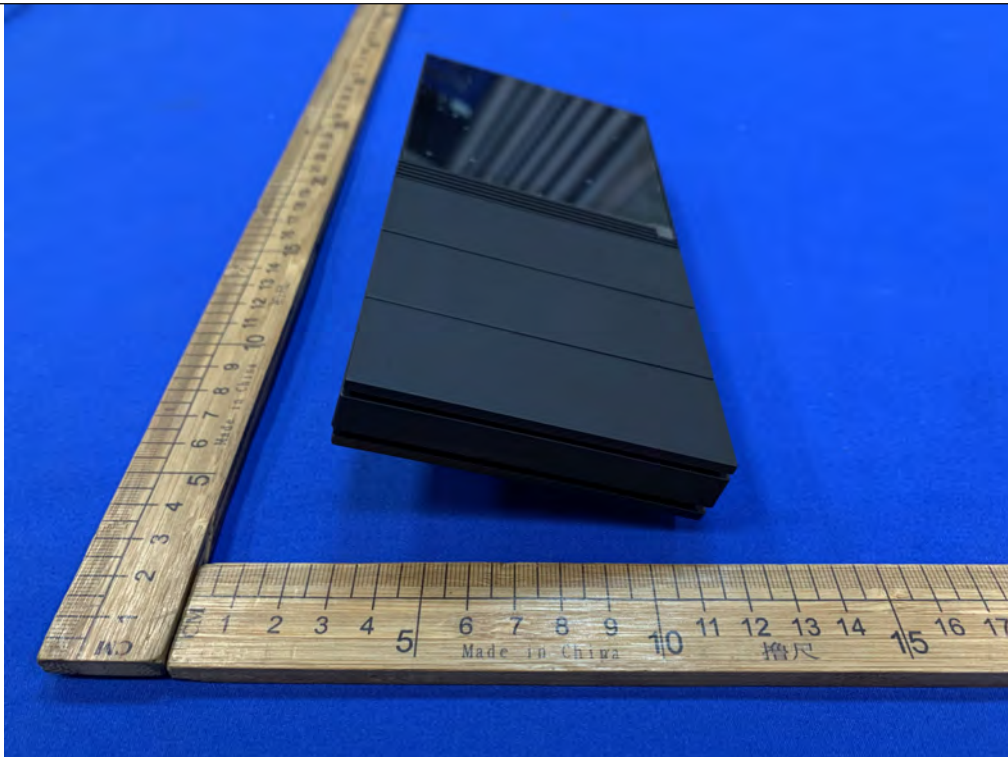


Photo 7




Internal Photographs

Photo 1



Photo 2

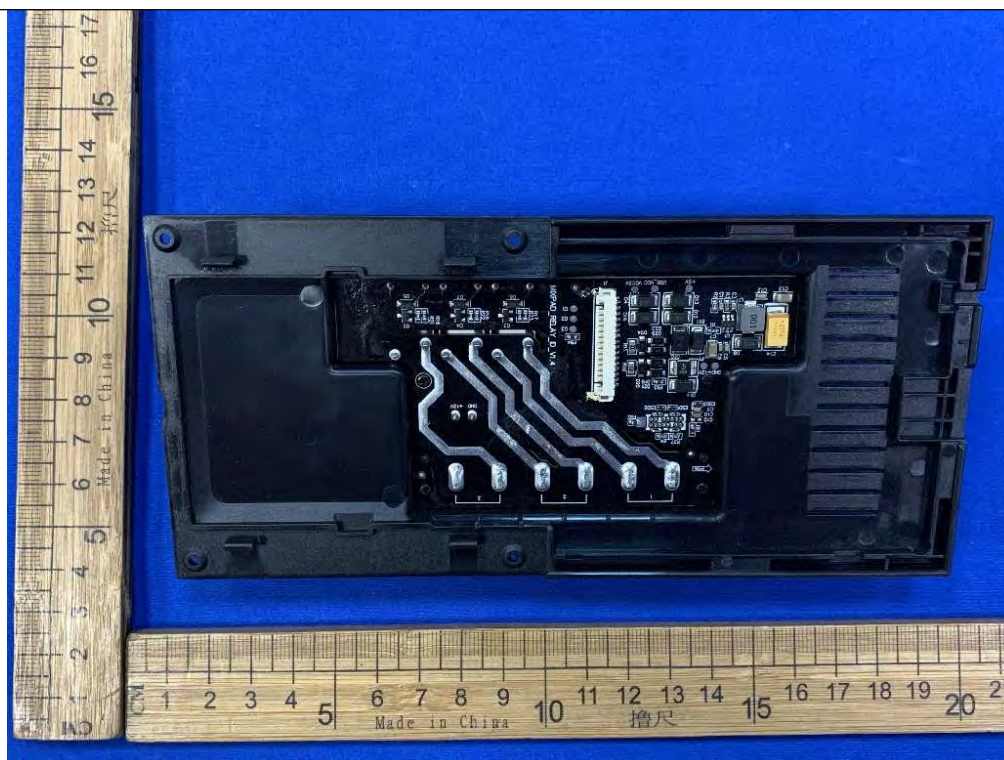

TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdkesign.cn Web: www.gdkesign.com

Photo 3


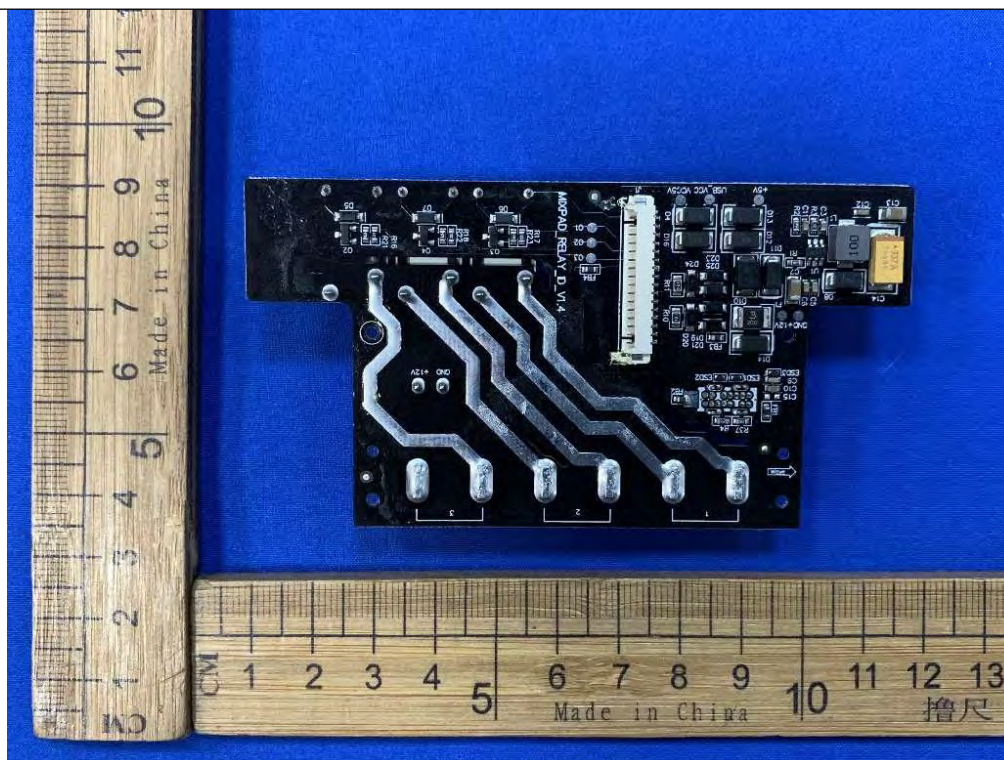


Photo 4

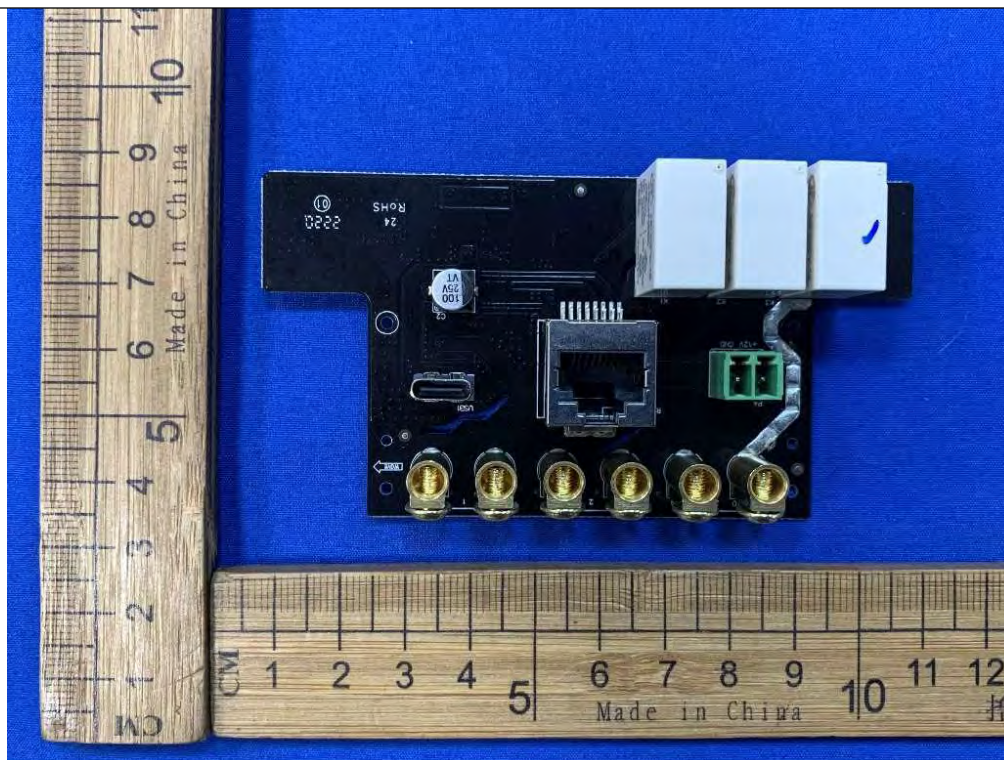

TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

Photo 5


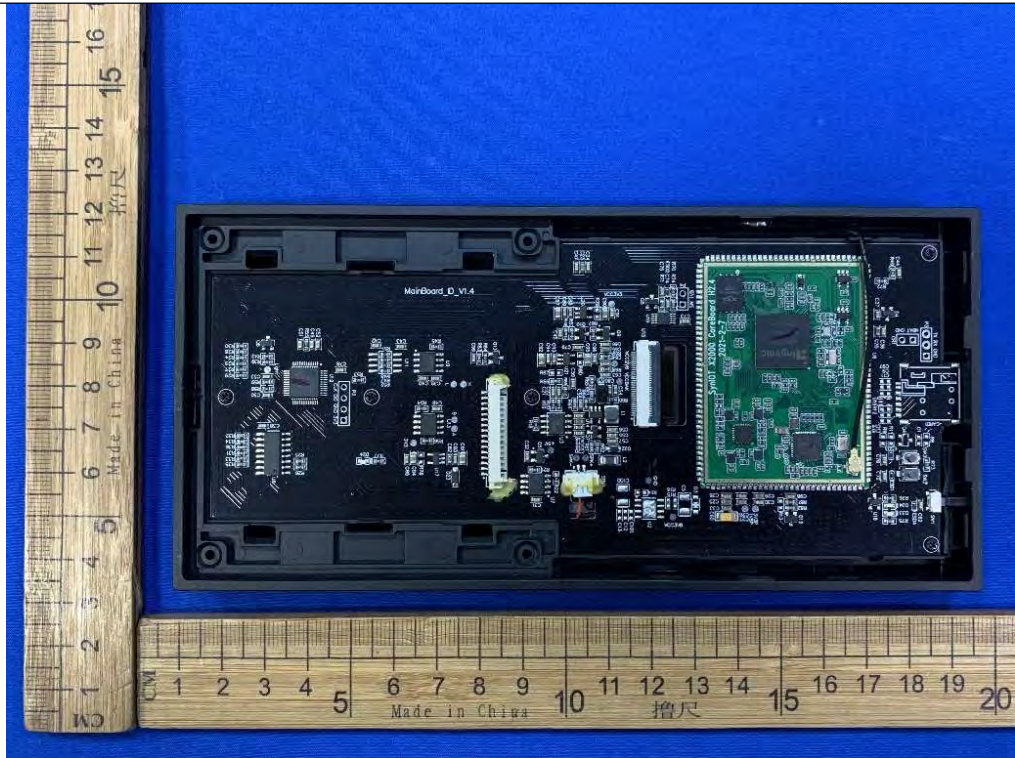


Photo 6

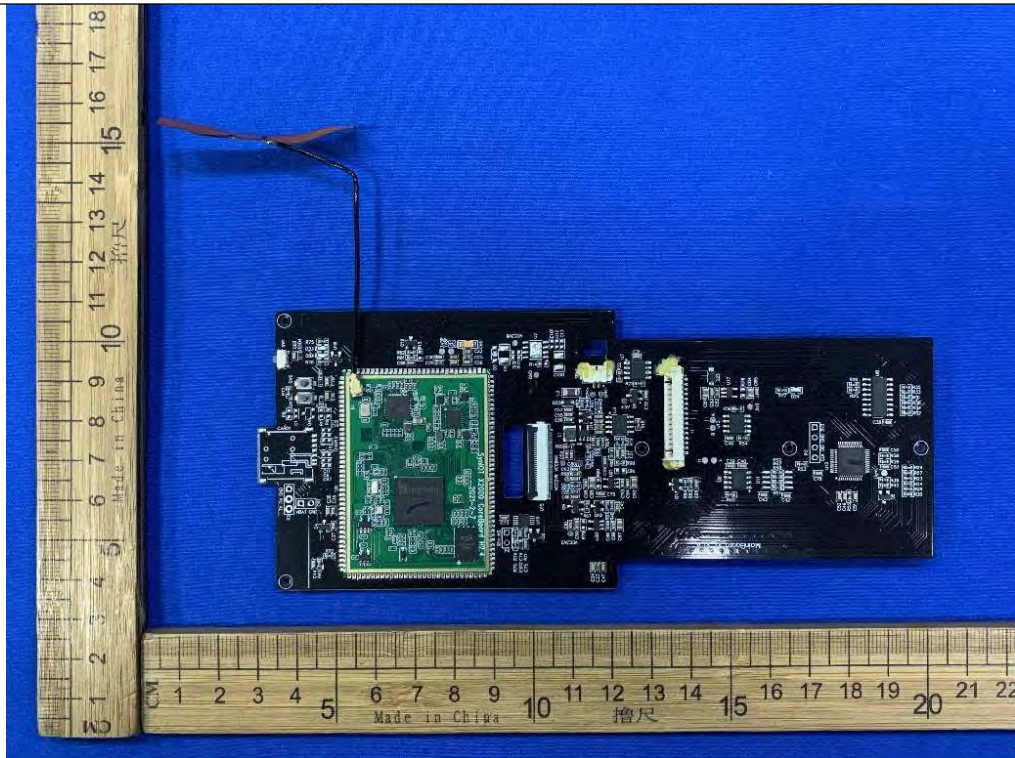

TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdkesign.cn Web: www.gdkesign.com

Photo 7


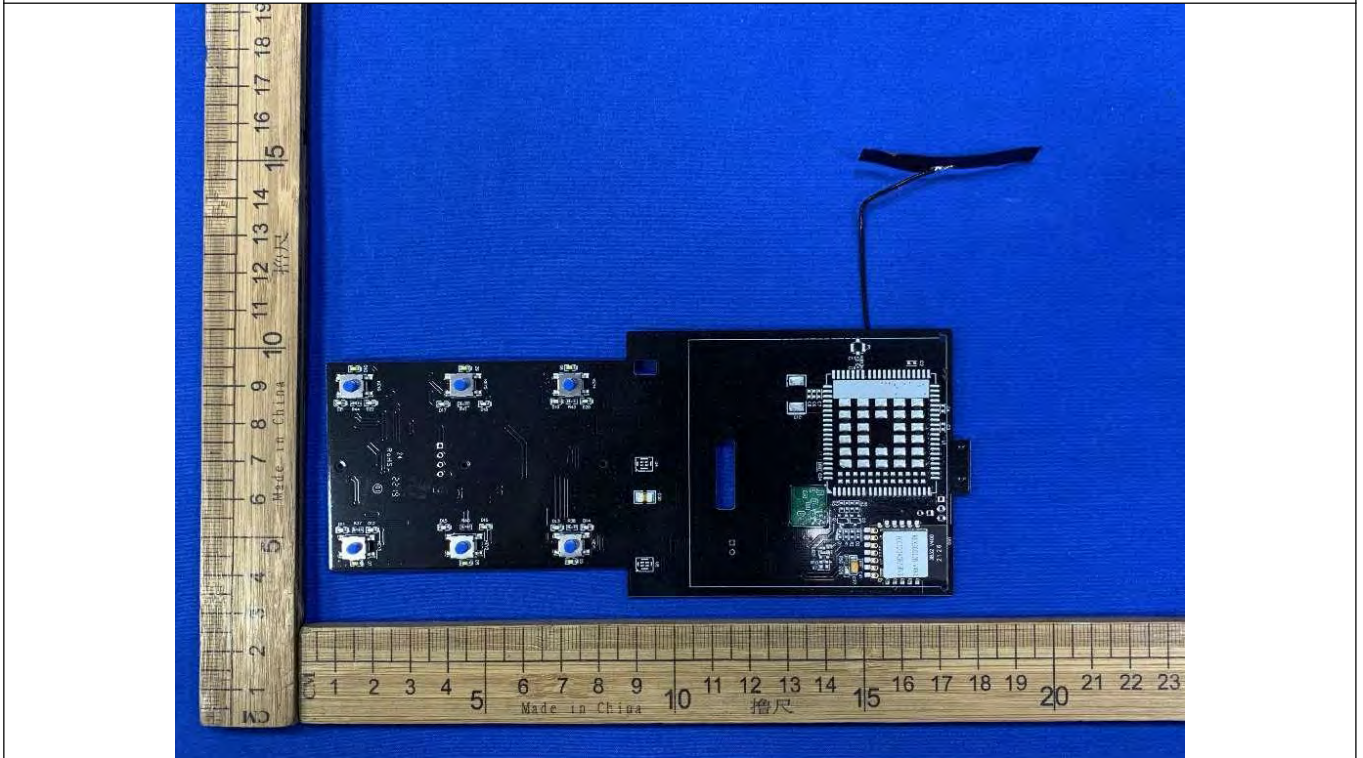


Photo 8

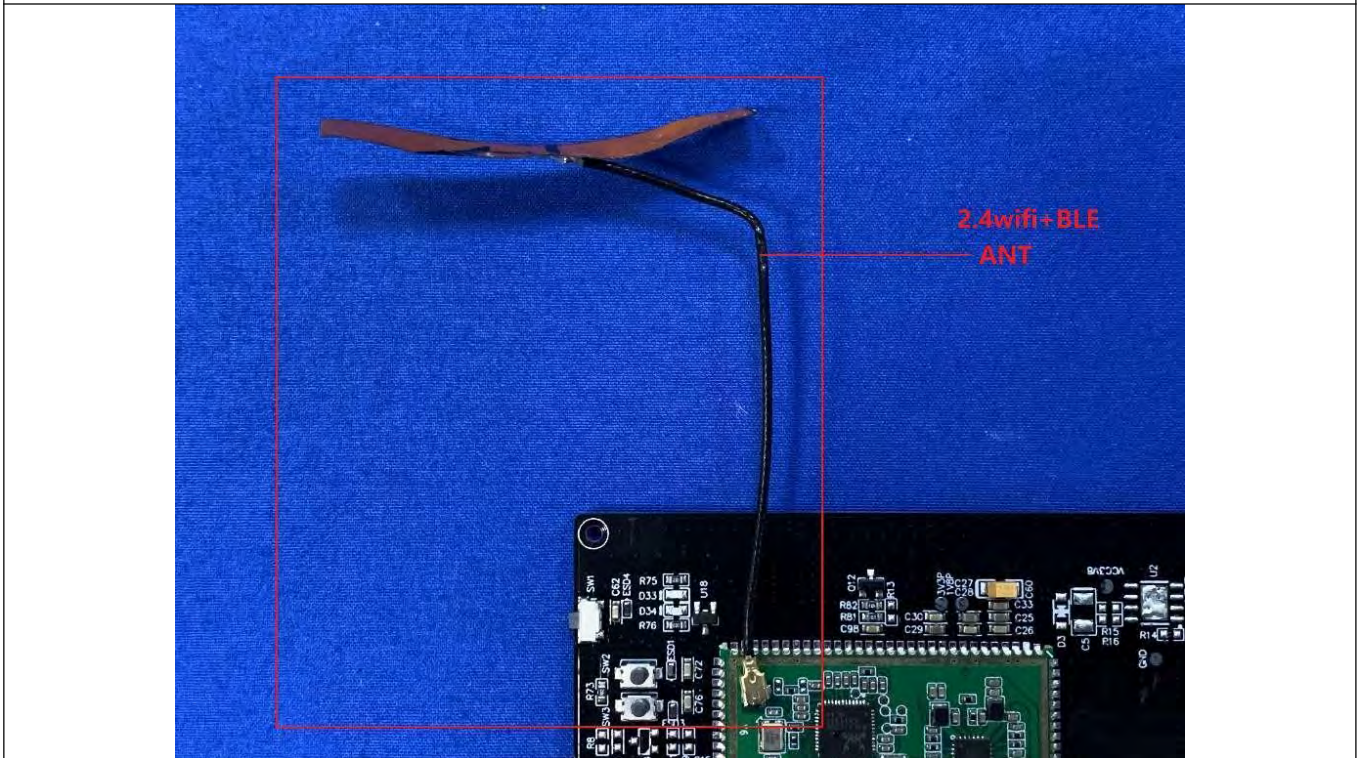

TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdkesign.cn Web: www.gdkesign.com

Photo 9


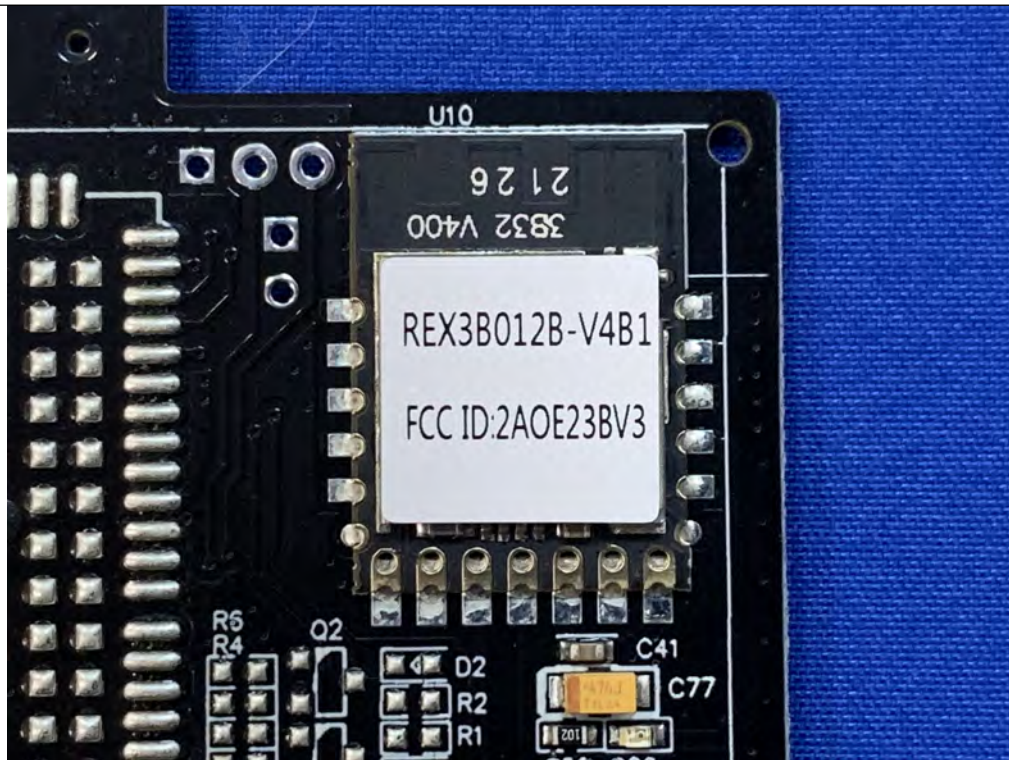


Photo 10

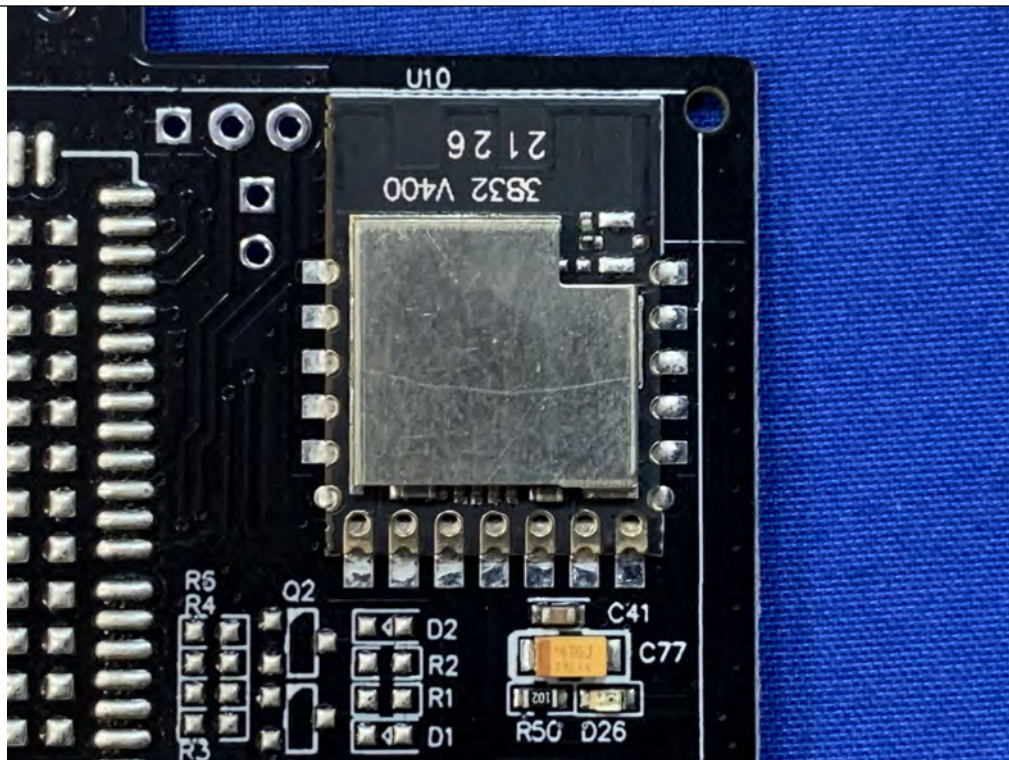

TRF No. FCC 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdkesign.cn Web: www.gdkesign.com

Photo 11

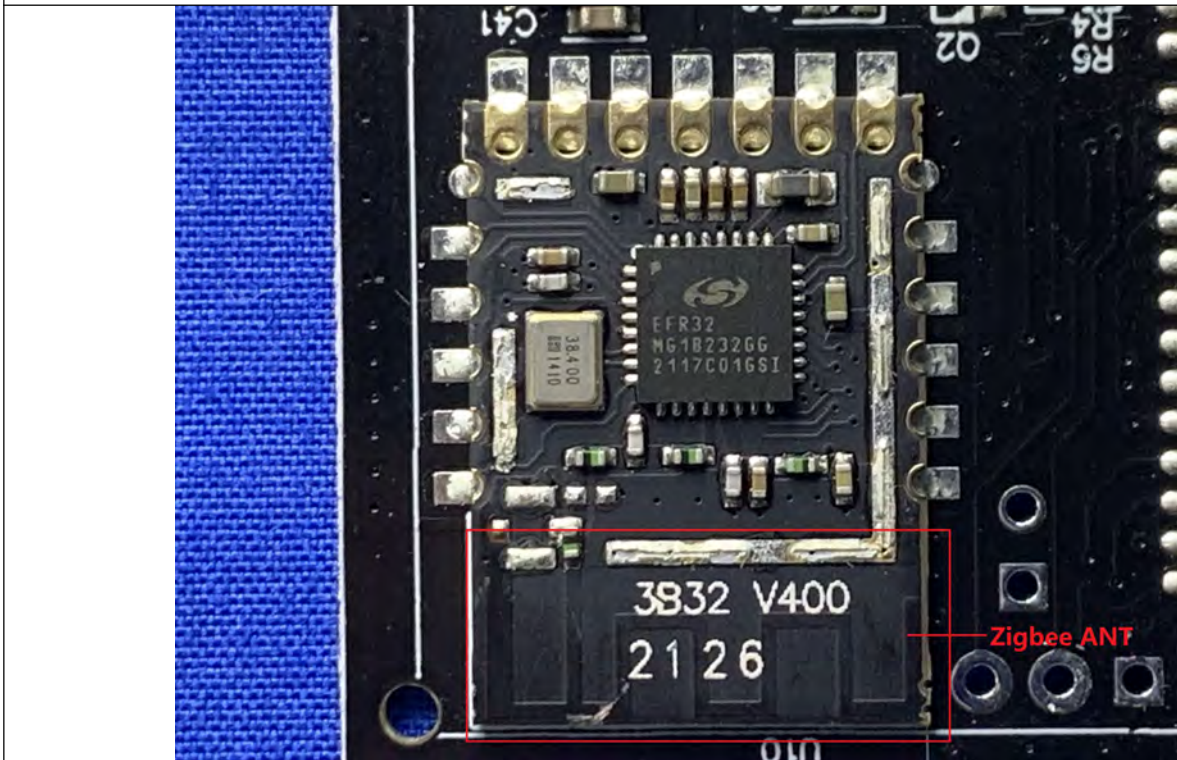


Photo 12



Photo 13

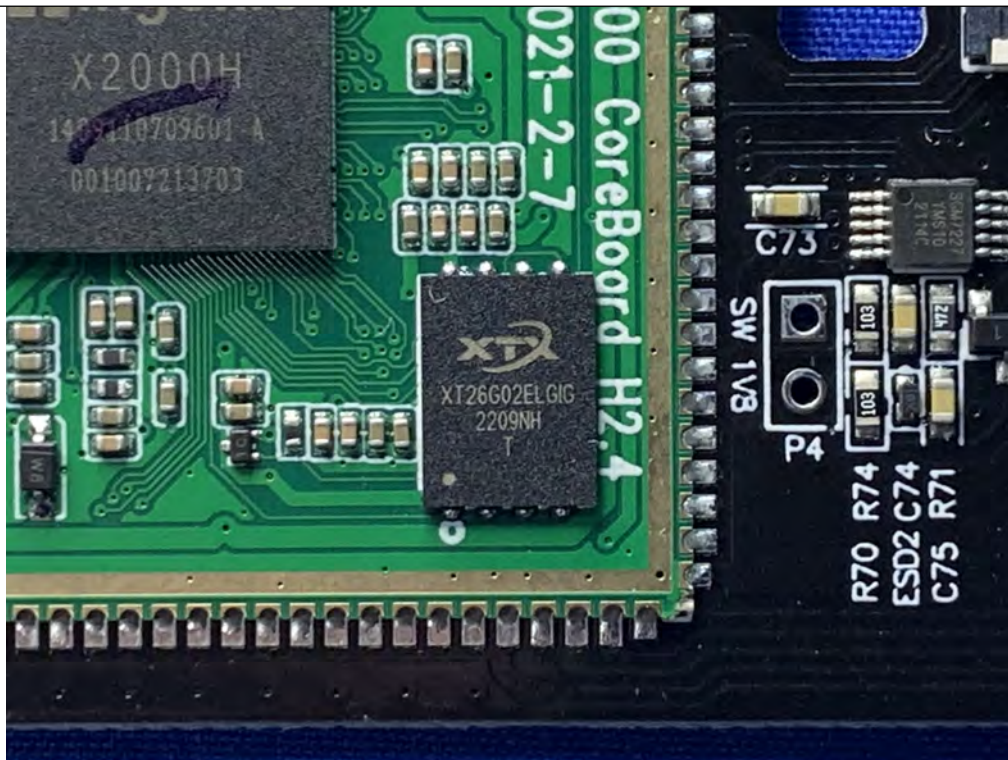


Photo 14


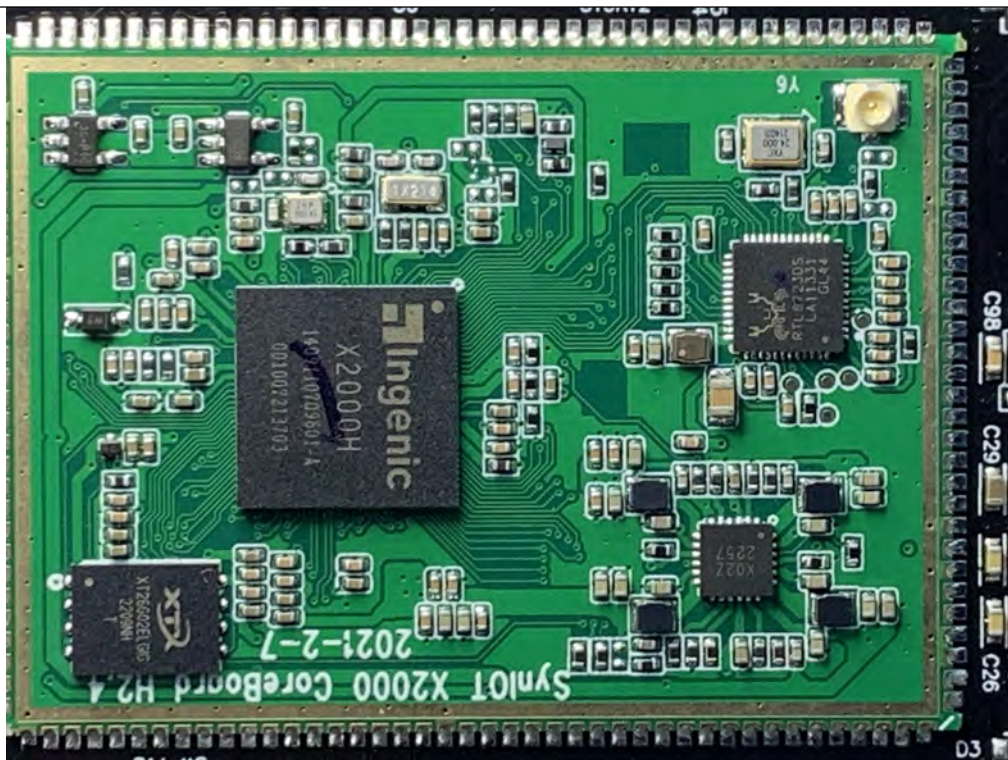


Photo 15

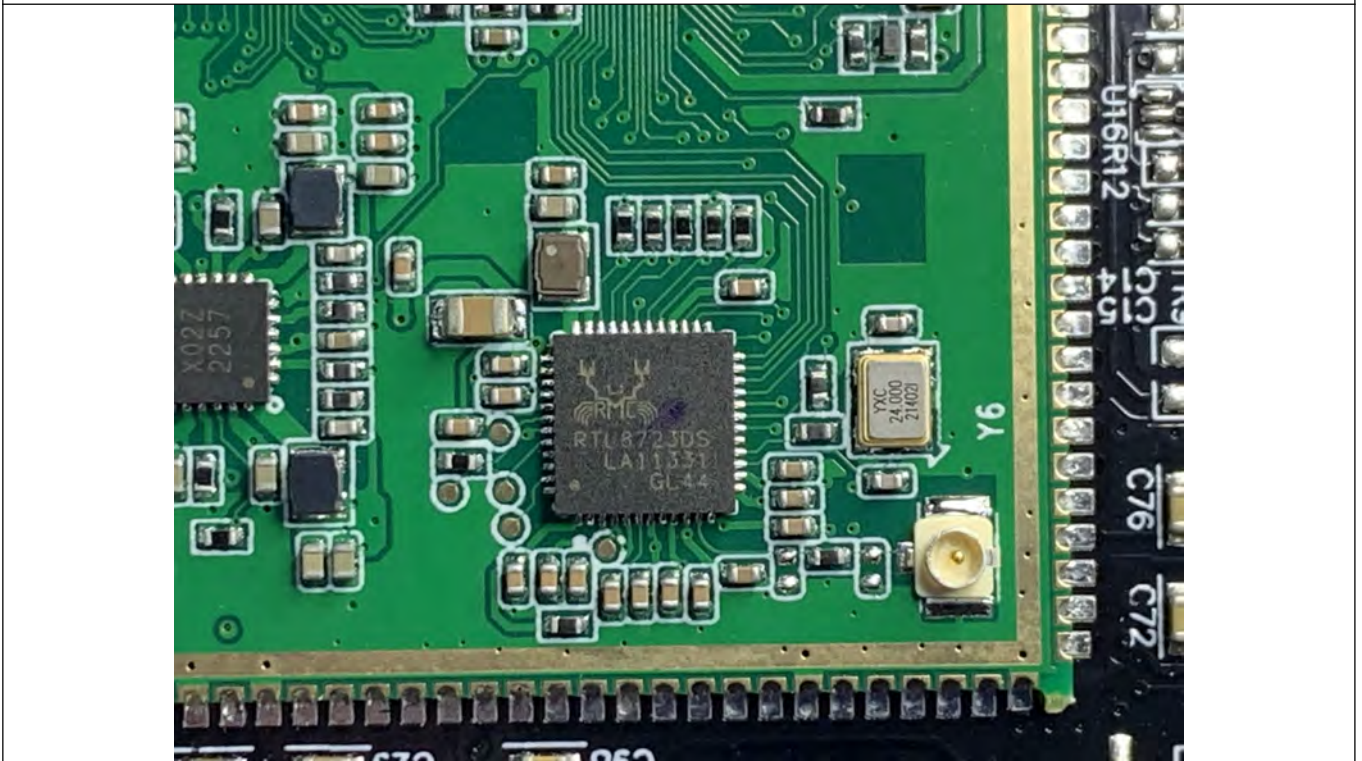

--THE END--