

FCC- TEST REPORT

Report Number	:	68.940.18.0016.01	Date of Issue:	June 28, 2018
Model	:	MJDP01YL		
Product Type	:	Mi LED Smart Bulb (White and Color)		
Applicant	:	Qingdao Yeelink Information Technology Co., Ltd.		
Address	:	F10-B4, Bldg.B, International Innovation Park, 1# Keyuanweiyi Rd., Laoshan, Qingdao, Shandong Province, PEOPLE'S REPUBLIC OF CHINA		
Production Facility	:	Qingdao Yeelink Information Technology Co., Ltd.		
Address	:	F10-B4, Bldg.B, International Innovation Park, 1# Keyuanweiyi Rd., Laoshan, Qingdao, Shandong Province, PEOPLE'S REPUBLIC OF CHINA		
Test Result	:	☒ Positive ☐ Negative		
Total pages including Appendices	:	48		

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.

1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment under Test	4
4	Summary of Test Standards	5
5	Summary of Test Results.....	6
6	General Remarks	7
7	Test Setups	8
8	Systems test configuration.....	9
9	Technical Requirement.....	10
9.1	Conducted Emission	10
9.2	Conducted Average output power	14
9.3	6dB and 99% bandwidth	15
9.4	Power spectral density	21
9.5	Spurious RF conducted emissions	26
9.6	Band edge	36
9.7	Spurious radiated emissions for transmitter.....	40
10	Test Equipment List.....	47
11	System Measurement Uncertainty.....	48



2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12&13, Zhiheng Wisdomland Business Park,
Nantou Checkpoint Road 2, Nanshan District,
Shenzhen City, 518052,
P. R. China

FCC Registration Number: 514049

IC Registration Number: 10320A-1

Telephone: 86 755 8828 6998
Fax: 86 755 8828 5299

3 Description of the Equipment under Test

Description of the Equipment Under Test

Product:	Mi LED Smart Bulb (White and Color)
Model no.:	MJDP01YL
FCC ID:	2ABEU-MJDP01YL
Options and accessories:	NIL
Rated Input:	120VAC, 60Hz
Rated Power:	10W
RF Transmission Frequency:	2412-2462MHz
No. of Operated Channel:	11
Modulation:	CCK, DQPSK, DBPSK for 802.11b QPSK, BPSK for 802.11g/n HT20
Antenna Type:	Integral Antenna
Antenna Gain:	3dBi
Description of the EUT:	The EUT is a Mi LED Smart Bulb supports 2.4GHz WIFI function.

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2017 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB558074 D01 v04 DTS Measurement Guidance and ANSI C63.10 (2013).

5 Summary of Test Results

Technical Requirements				
FCC Part 15 Subpart C				
Test Condition		Pages	Test Result	Test Site
§15.207	Conducted emission AC power port	10	Pass	Site 1
§15.247(b)(3)	Conducted peak output power for DTS	14	Pass	Site 1
§15.247(e)	Power spectral density	21	Pass	Site 1
§15.247(a)(2)	6dB bandwidth	15	Pass	Site 1
§15.247(a)(1)	20dB bandwidth and 99% Occupied Bandwidth	15	Pass	Site 1
§15.247(a)(1)	Carrier frequency separation	--	N/A	--
§15.247(a)(1)(iii)	Number of hopping frequencies	--	N/A	--
§15.247(a)(1)(iii)	Dwell Time	--	N/A	--
§15.247(d)	Spurious RF conducted emissions	26	Pass	Site 1
§15.247(d)	Band edge	26	Pass	Site 1
§15.247(d) & §15.209 & §15.205	Spurious radiated emissions for transmitter	40	Pass	Site 1
§15.203	Antenna requirement	See note 1	Pass	--

Remark 1: N/A – Not Applicable.

Note 1: The EUT uses a permanently integral antenna, which gain is 3dBi. According to §15.203, it is considered sufficiently to comply with the provisions of this section.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2ABEU-MJDP01YL, complies with Section 15.207, 15.209, 15.205, 15.247 of the FCC Part 15, Subpart C rules.

The EUT has multiple work modes, the worst test results are listed in the report.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - Not Performed

The Equipment under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: April 11, 2018

Testing Start Date: April 11, 2018



Testing End Date: May 24, 2018

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch -

Reviewed by:

Prepared by:

Tested by:



Laurent Yuan
EMC Project Manager


Dawi Xu
EMC Project Engineer

Tree Zhan
EMC Test Engineer


7 Test Setups

7.1 Radiated test setups


Below 1GHz

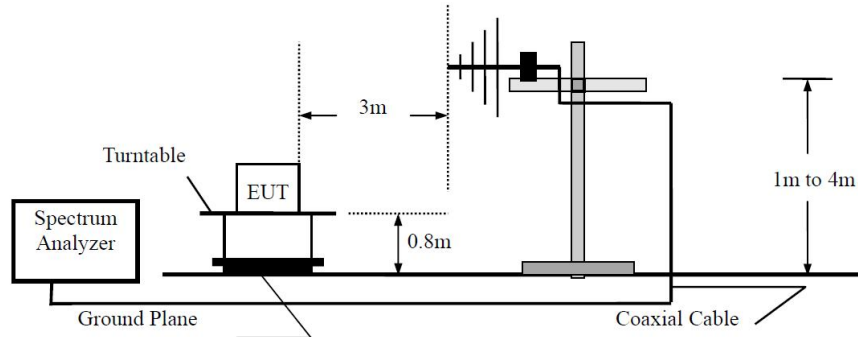


Above 1GHz

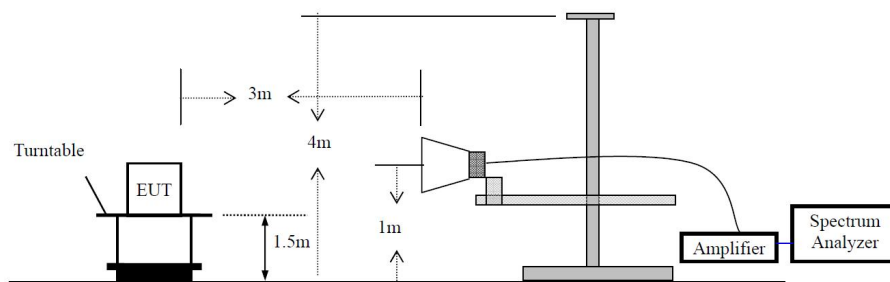

7.2 Conducted RF test setups



7.3 AC Power Line Conducted Emission test setups

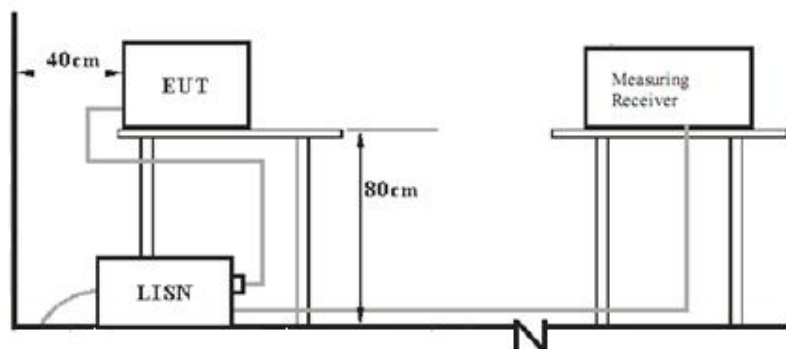

8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
---	---	---	---

Test software: RF test tool


The system was configured to channel 1, 6 and 11 for the test.

9 Technical Requirement

9.1 Conducted Emission

M/N: MJDP01YL
 Op Cond.: ON-MAX+WIFI TX
 Test Spec.: Power Line, Live
 Comment: AC 120V/60Hz

Temperature (°C): 22.5 Relative Humidity (%): 46.7 Atmospheric Pressure(mbar) : 1012

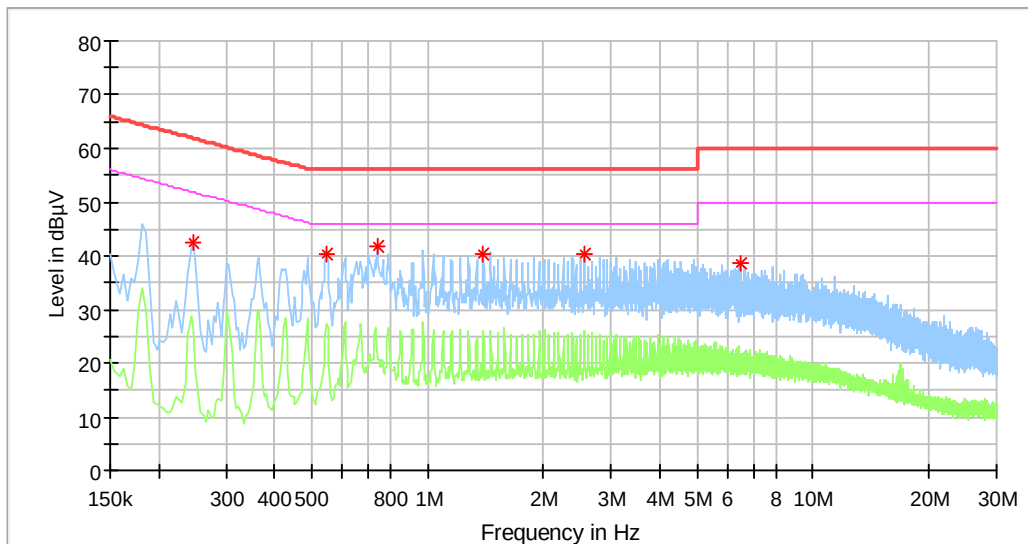


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.246000	42.36	---	61.89	19.53	L1	10.2
0.546000	40.40	---	56.00	15.60	L1	10.2
0.738000	41.70	---	56.00	14.30	L1	10.2
1.398000	40.49	---	56.00	15.51	L1	10.2
2.554000	40.44	---	56.00	15.56	L1	10.3
6.502000	38.58	---	60.00	21.42	L1	10.5

Conducted Emission Test 150kHz – 30MHz

M/N: MJDP01YL
 Op Cond.: ON-MAX+WIFI TX
 Test Spec.: Power Line, Neutral
 Comment: AC 120V/60Hz

Temperature (°C): 22.5 Relative Humidity (%): 46.7 Atmospheric Pressure(mbar) : 1012

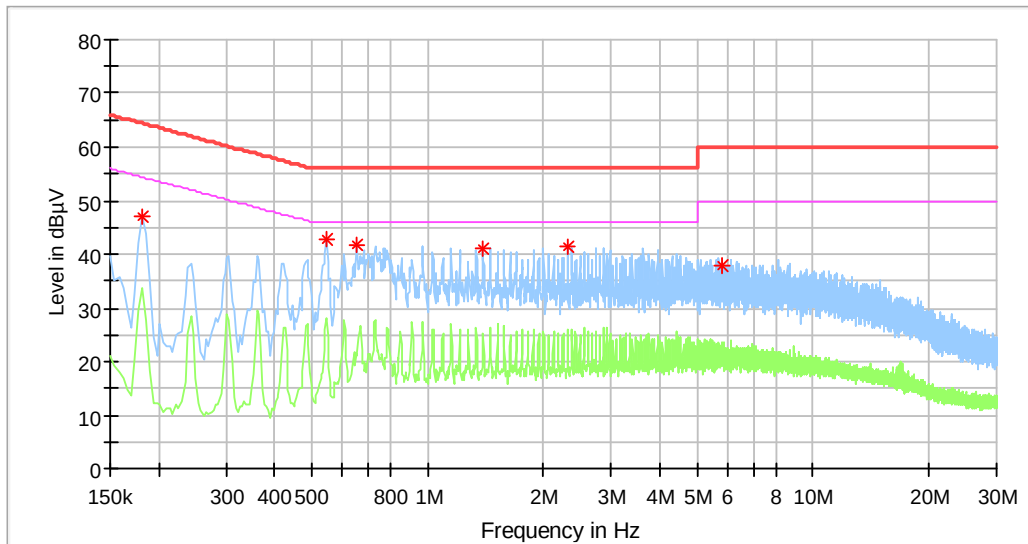


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.182000	47.18	---	64.39	17.22	N	10.3
0.546000	42.73	---	56.00	13.27	N	10.4
0.658000	41.90	---	56.00	14.10	N	10.4
1.394000	41.12	---	56.00	14.88	N	10.4
2.306000	41.57	---	56.00	14.43	N	10.4
5.830000	37.80	---	60.00	22.20	N	10.6

Conducted Emission Test 150kHz – 30MHz

M/N: MJDP01YL
 Op Cond.: ON-MIN+WIFI TX
 Test Spec.: Power Line, Live
 Comment: AC 120V/60Hz

Temperature (°C): 22.5 Relative Humidity (%): 46.7 Atmospheric Pressure(mbar) : 1012

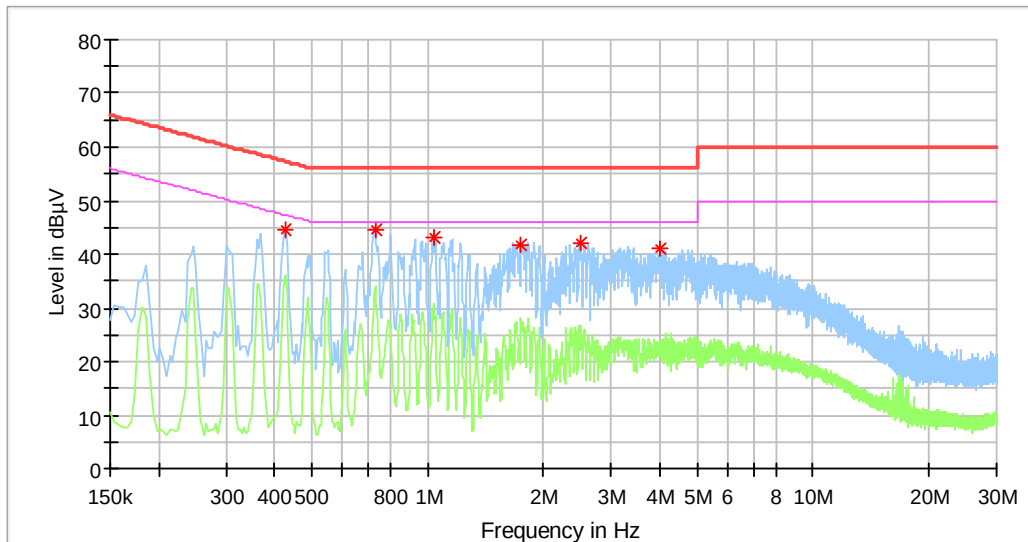


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.426000	44.45	---	57.33	12.88	L1	11.3
0.730000	44.53	---	56.00	11.47	L1	10.2
1.034000	43.24	---	56.00	12.76	L1	10.2
1.750000	41.88	---	56.00	14.12	L1	10.2
2.494000	42.21	---	56.00	13.79	L1	10.3
4.006000	41.07	---	56.00	14.93	L1	10.3

Conducted Emission Test 150kHz – 30MHz

M/N: MJDP01YL
 Op Cond.: ON-MIN+WIFI TX
 Test Spec.: Power Line, Neutral
 Comment: AC 120V/60Hz

Temperature (°C): 22.5 Relative Humidity (%): 46.7 Atmospheric Pressure(mbar) : 1012

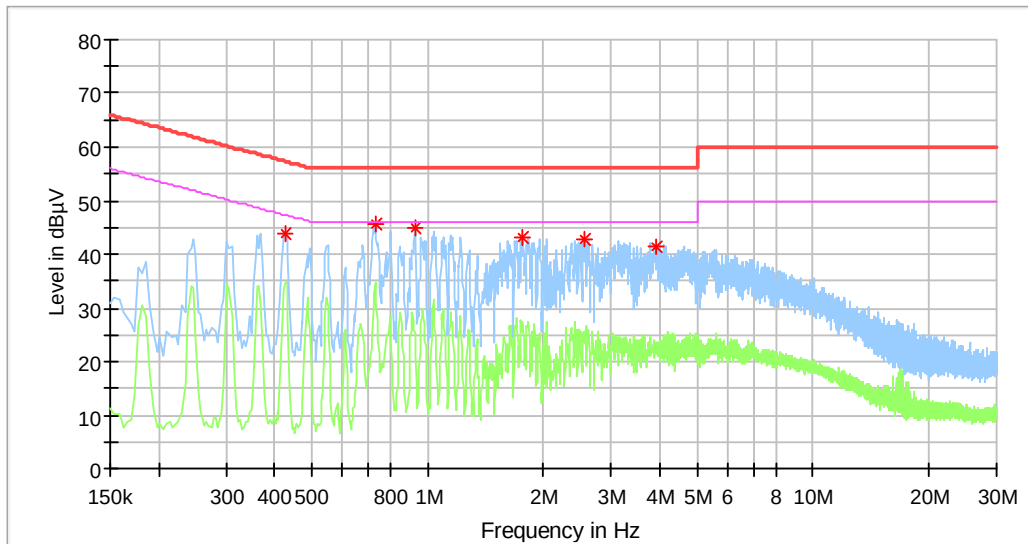

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.426000	43.88	---	57.33	13.45	N	10.3
0.730000	45.48	---	56.00	10.52	N	10.4
0.926000	44.77	---	56.00	11.23	N	10.4
1.758000	43.03	---	56.00	12.97	N	10.4
2.562000	42.80	---	56.00	13.20	N	10.4
3.926000	41.36	---	56.00	14.64	N	10.5

9.2 Conducted Average output power

Test Method

1. Connect the power meter to the EUT
 - a) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
 - b) At all times the EUT is transmitting at its maximum power control level.
 - c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle to the measurement result.

Limits

According to §15.247 (b) (1), conducted AV output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

Test result as below table

802.11b

Frequency MHz	Conducted AV Output Power dBm	Result
Top channel 2412MHz	17.3	Pass
Middle channel 2437MHz	17.1	Pass
Bottom channel 2462MHz	17.0	Pass

802.11g

Frequency MHz	Conducted AV Output Power dBm	Result
Top channel 2412MHz	14.8	Pass
Middle channel 2437MHz	14.8	Pass
Bottom channel 2462MHz	14.2	Pass

802.11nHT20

Frequency MHz	Conducted AV Output Power dBm	Result
Top channel 2412MHz	13.9	Pass
Middle channel 2437MHz	14.1	Pass
Bottom channel 2462MHz	13.2	Pass

9.3 6dB and 99% bandwidth

Test Method

1. Use the following spectrum analyzer settings:
RBW=100K, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be $\geq$ 6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.

Limit

Limit [kHz]

≥ 500

Test result

802.11b

Frequency MHz	6dB Bandwidth KHz	99 Bandwidth KHz	Result
Bottom channel 2412MHz	10080	13986	Pass
Middle channel 2437MHz	10240	13986	Pass
Top channel 2462MHz	9680	13826	Pass

802.11g

Frequency MHz	6dB Bandwidth KHz	99 Bandwidth KHz	Result
Bottom channel 2412MHz	16600	17223	Pass
Middle channel 2437MHz	16600	17183	Pass
Top channel 2462MHz	16520	17183	Pass


802.11n HT20

Frequency MHz	6dB Bandwidth KHz	99 Bandwidth KHz	Result
Bottom channel 2412MHz	16440	18102	Pass
Middle channel 2437MHz	17880	18022	Pass
Top channel 2462MHz	17840	18022	Pass




6dB and 99% bandwidth

802.11b

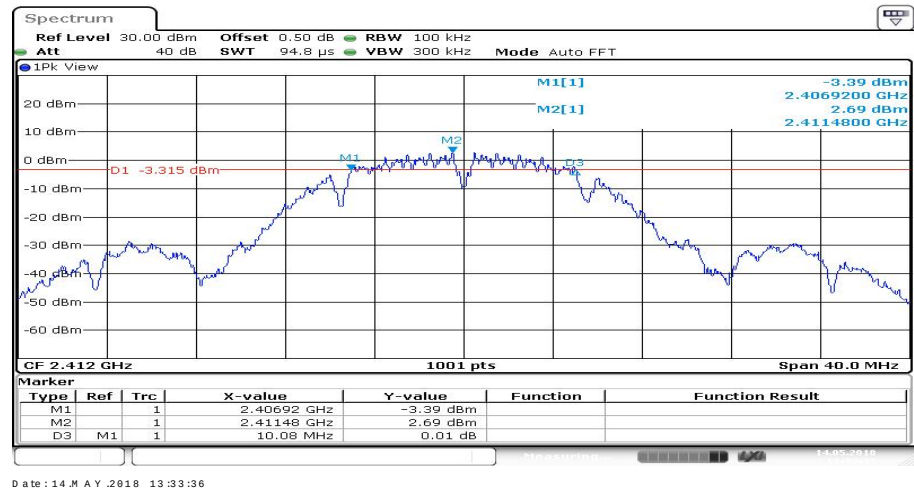


2412MHz

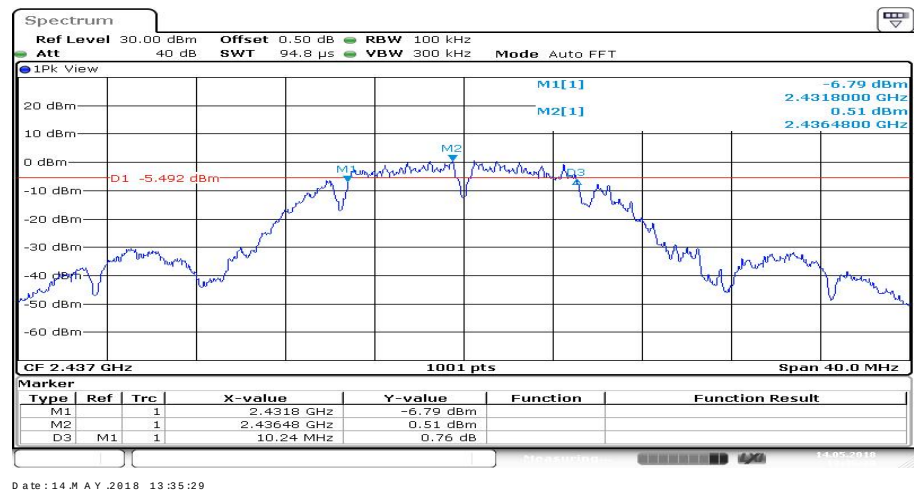

2437MHz




6dB and 99% bandwidth

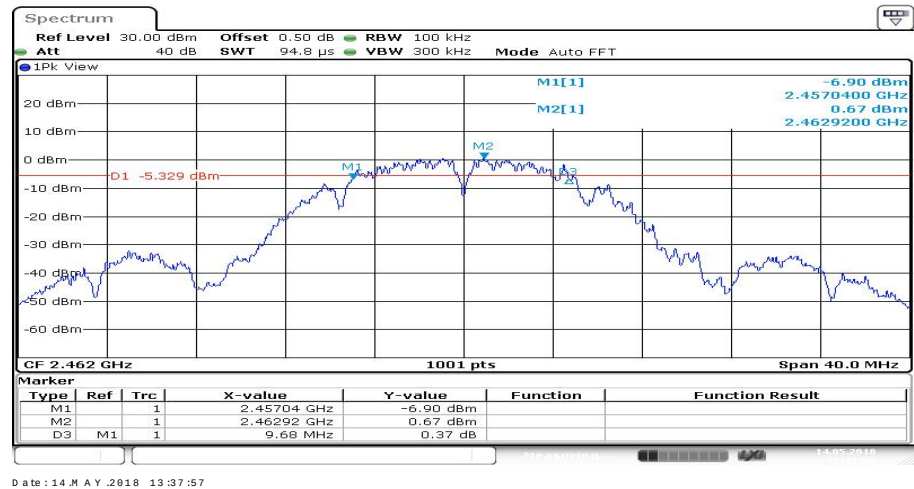

2462MHz


802.11g

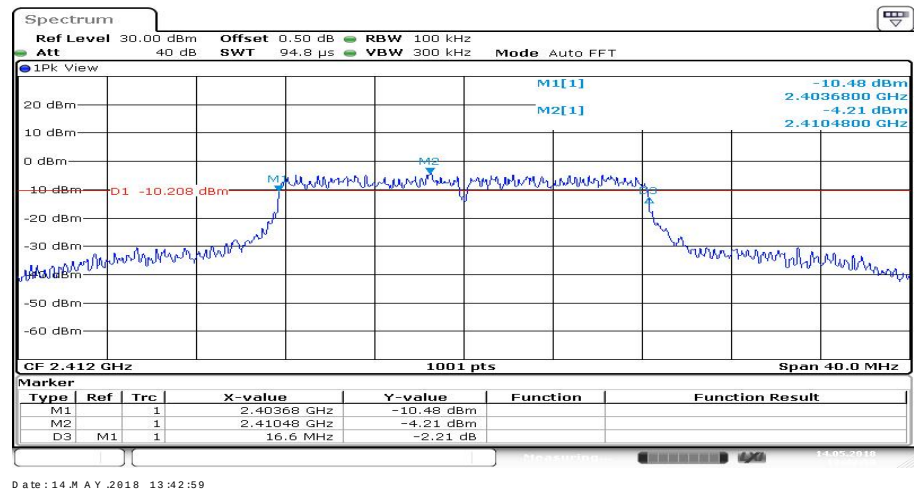


2412MHz



6dB and 99% bandwidth

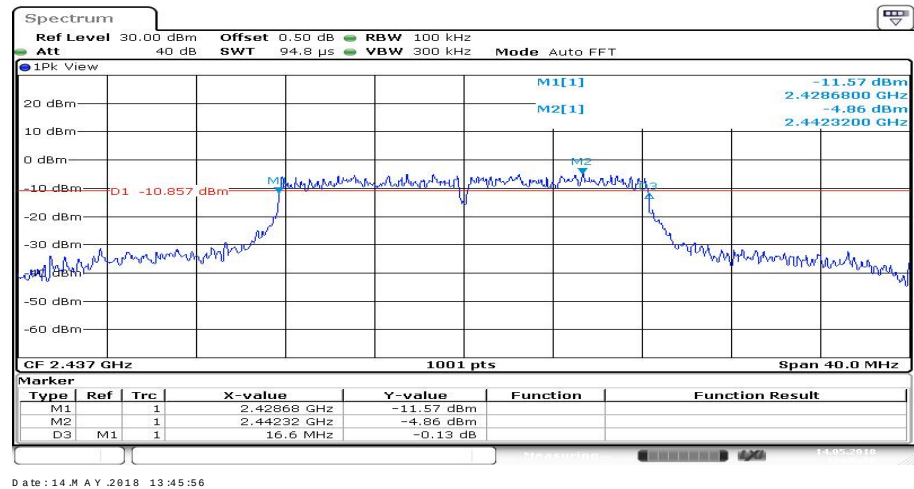

2437MHz

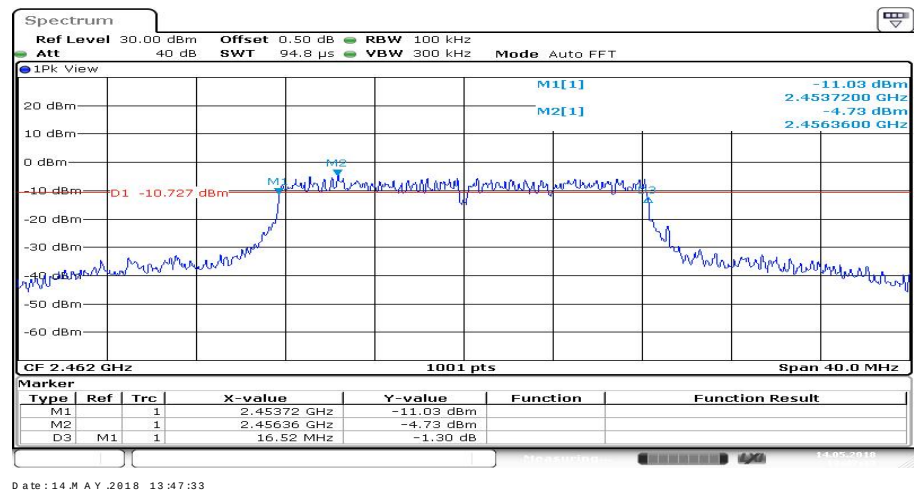


2462MHz




6dB and 99% bandwidth

802.11nHT20

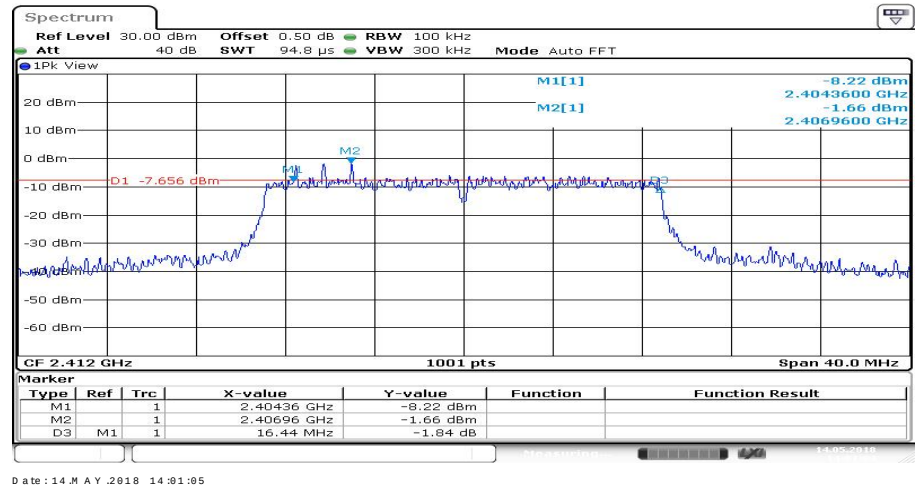


2412MHz

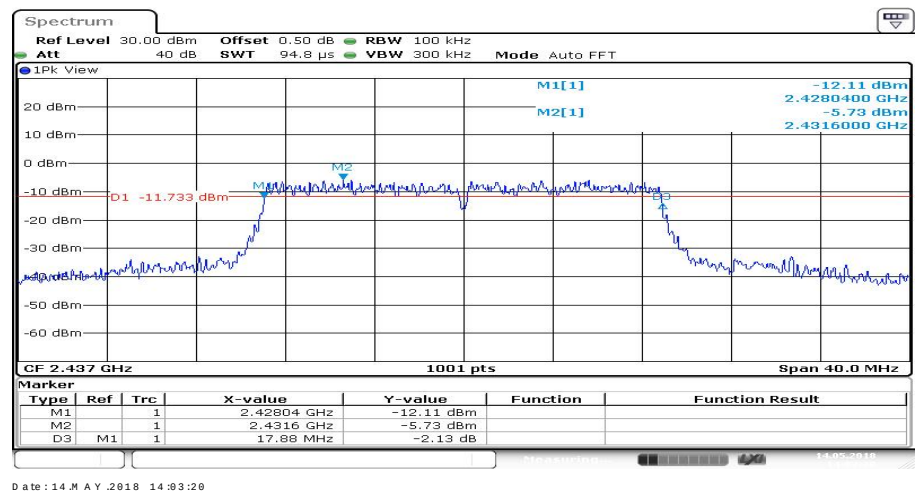

2437MHz



6dB and 99% bandwidth

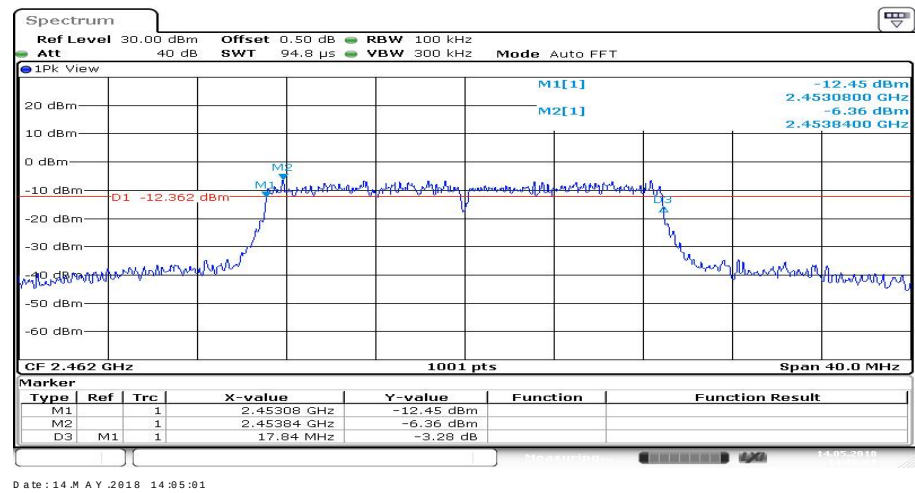

2462MHz

9.4 Power spectral density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW $\geq$ 3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
2. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
3. Repeat above procedures until other frequencies measured were completed.

Limit

Limit [dBm]

≤ 8

Test result

802.11b

Frequency MHz	Power spectral density dBm	Result
Top channel 2412MHz	-3.33	Pass
Middle channel 2437MHz	-4.71	Pass
Bottom channel 2462MHz	-5.30	Pass

802.11g

Frequency MHz	Power spectral density dBm	Result
Top channel 2412MHz	-7.57	Pass
Middle channel 2437MHz	-7.36	Pass
Bottom channel 2462MHz	-9.24	Pass


802.11n HT20

Frequency MHz	Power spectral density dBm	Result
Top channel 2412MHz	-9.09	Pass
Middle channel 2437MHz	-8.31	Pass
Bottom channel 2462MHz	-9.00	Pass




Power spectral density

802.11b

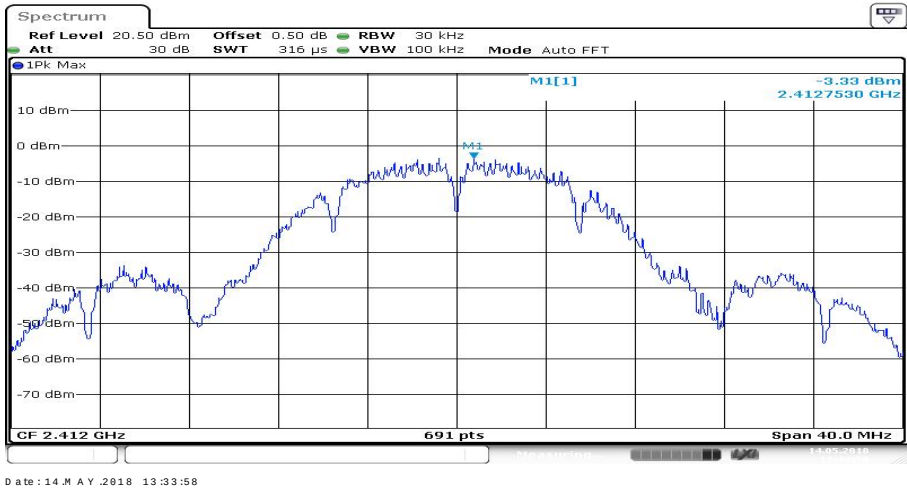


2412MHz

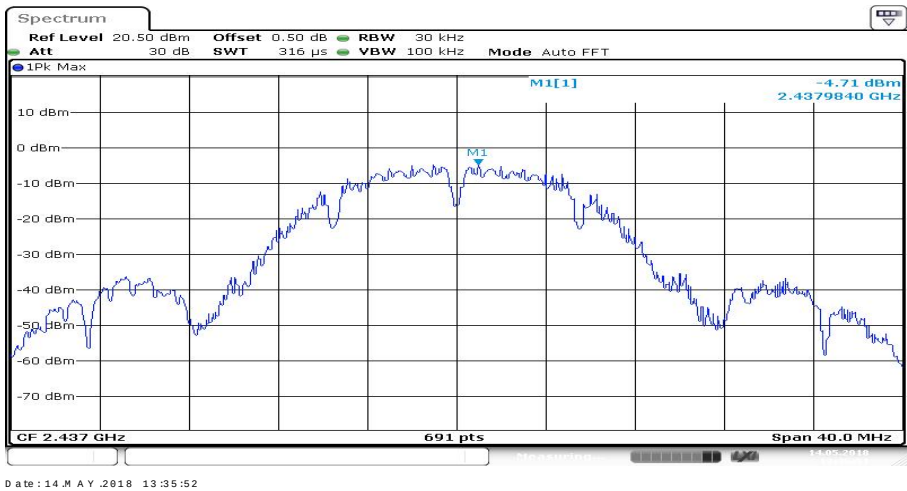

2437MHz




Power spectral density

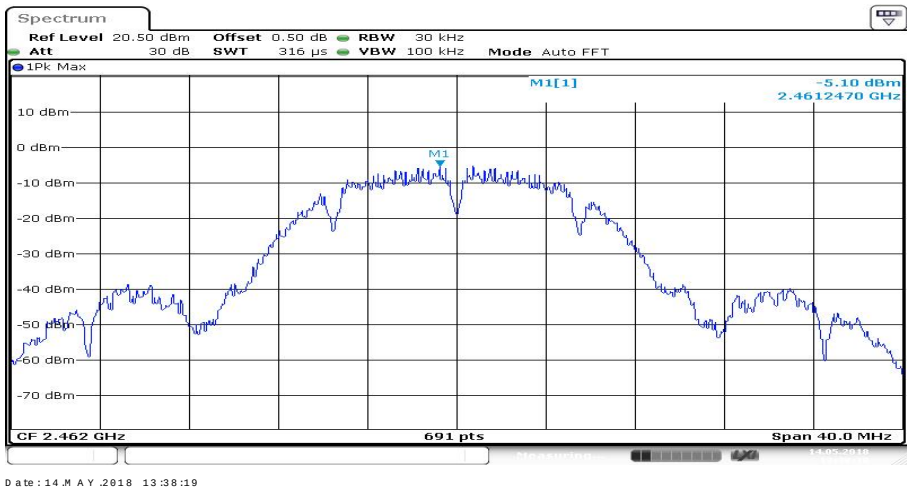


2462MHz

802.11g

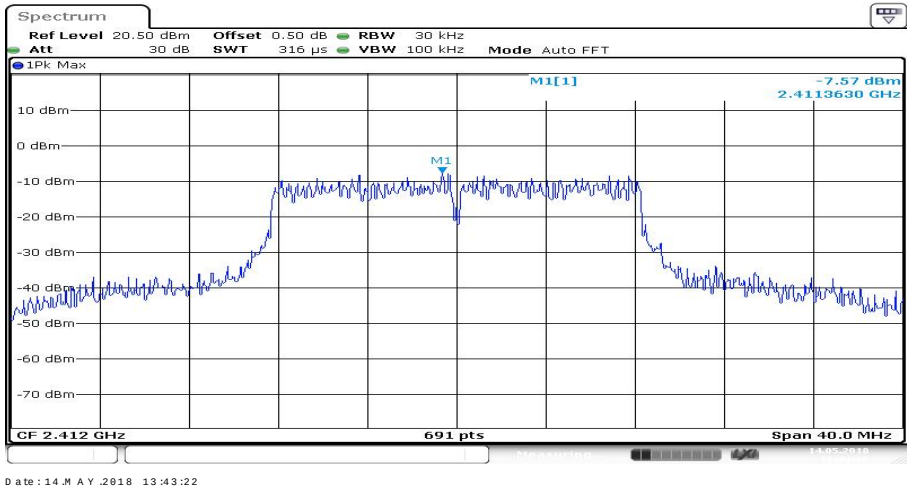

2412MHz

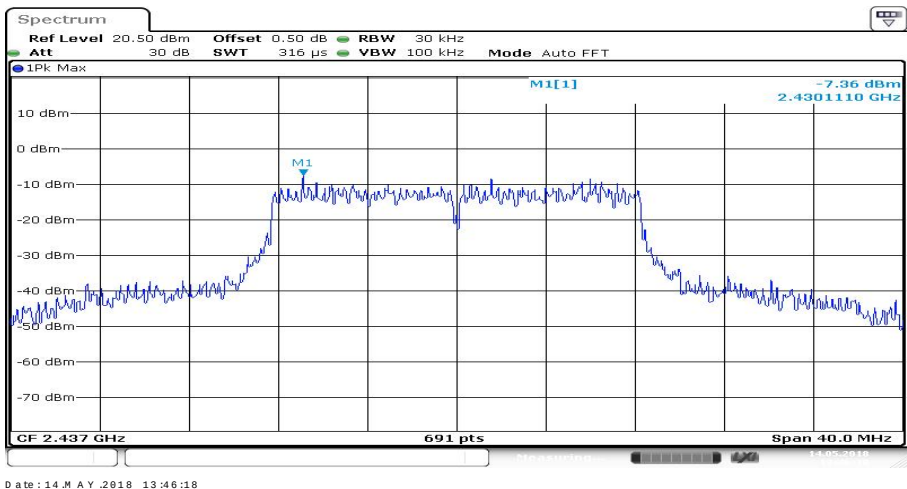

2437MHz

Spectrum

Ref Level 20.50 dBm Offset 0.50 dB RBW 30 kHz
Att 30 dB SWT 316 μ s VBW 100 kHz Mode Auto FFT

1pk Max

10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm


M1[1] -5.10 dBm
2.4612470 GHz

M1


CF 2.462 GHz 691 pts Span 40.0 MHz

Date: 14 MAY 2018 13:38:19

802.11nHT20

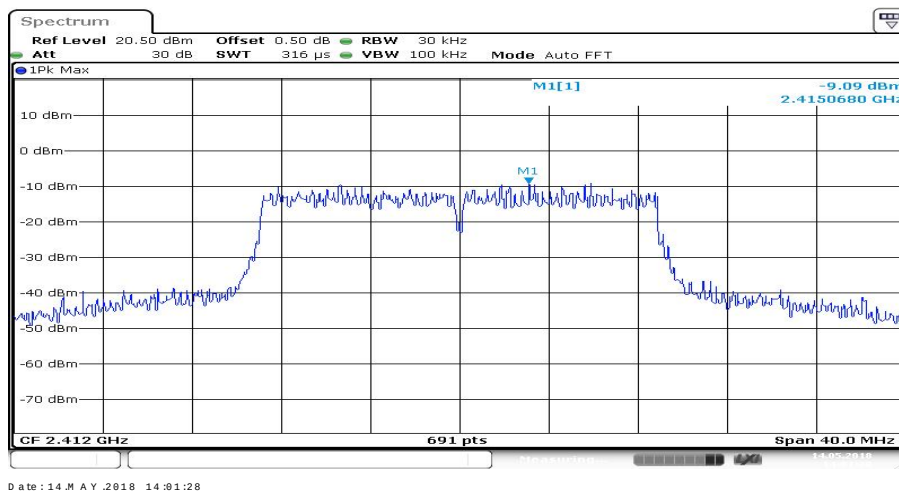


2412MHz

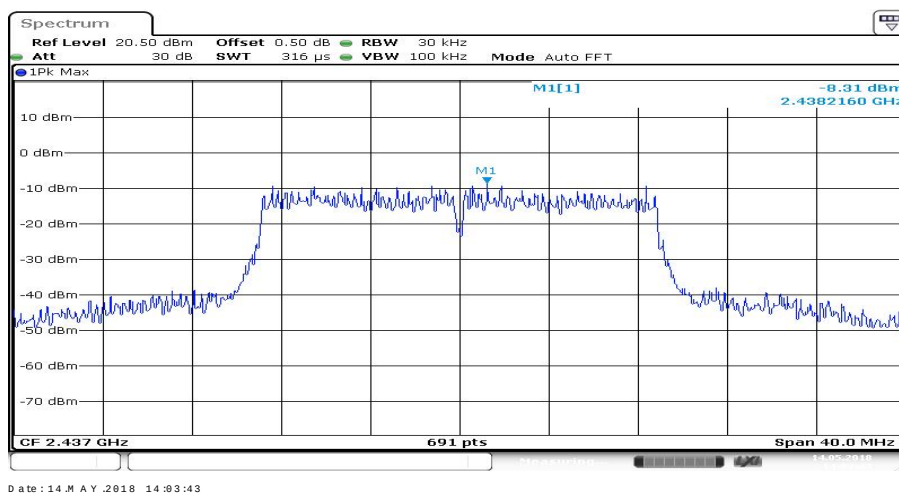

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12&13, Zhiheng Wisdomland Business Park, Nantou Checkpoint Road 2, Nanshan District,
Shenzhen City, 518052, P. R. China Tel. +86 755 8828 6998, Fax: +86 755 8828 5299



Power spectral density

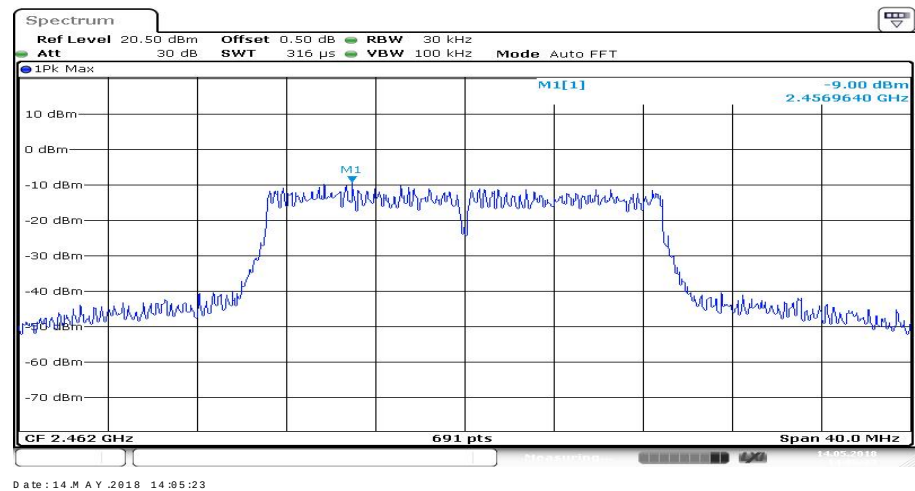

2462MHz

9.5 Spurious RF conducted emissions

Test Method

1. Establish a reference level by using the following procedure:
 - a. Set RBW=100 kHz. VBW $\geq$ 3RBW. Detector =peak, Sweep time = auto couple, Trace mode = max hold.
 - b. Allow trace to fully stabilize, use the peak marker function to determine the maximum PSD level.
2. Use the maximum PSD level to establish the reference level.
 - a. Set the center frequency and span to encompass frequency range to be measured.
 - b. Use the peak marker function to determine the maximum amplitude level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements, report the three highest emissions relative to the limit.
3. Repeat above procedures until other frequencies measured were completed.



Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20



Spurious RF conducted emissions



802.11b

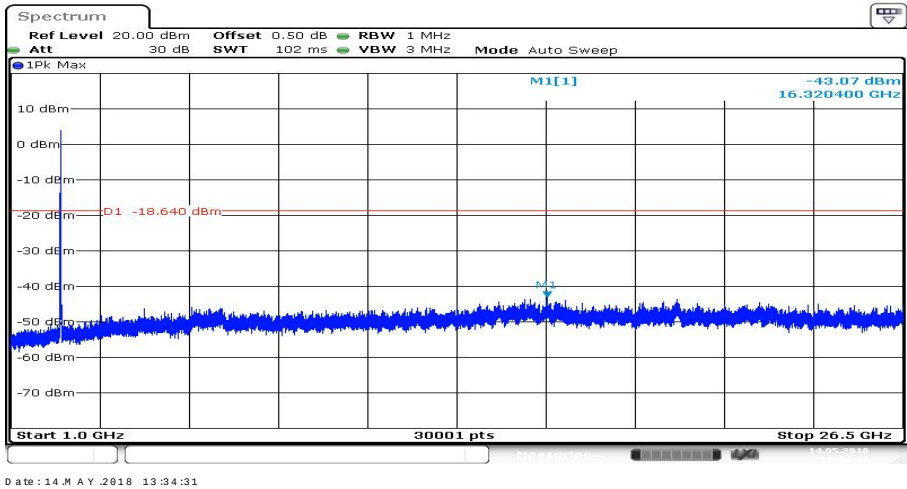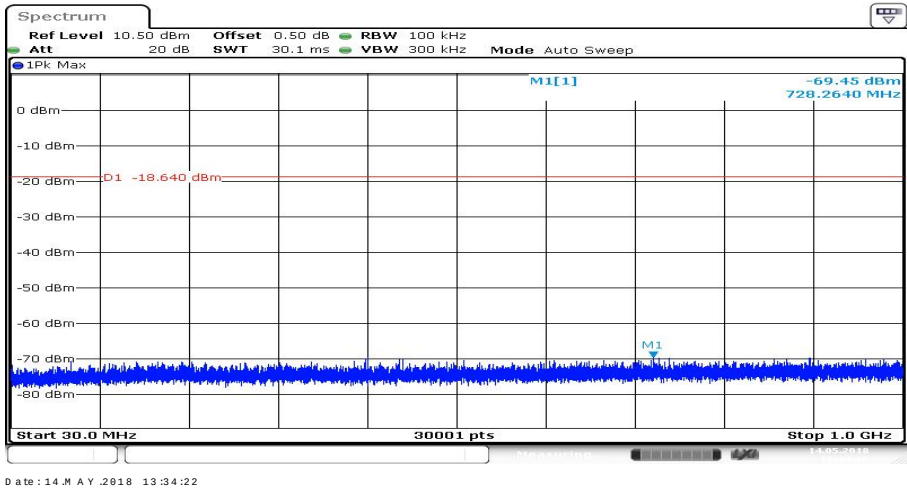

2412MHz




Spurious RF conducted emissions

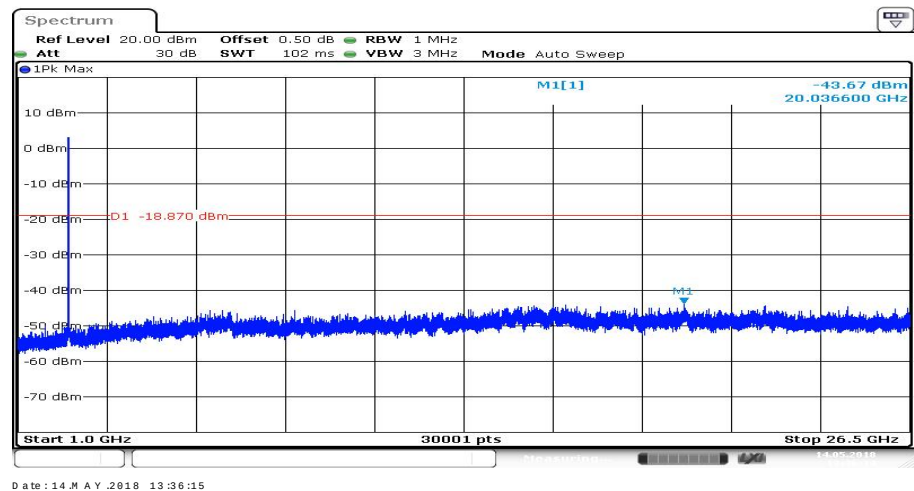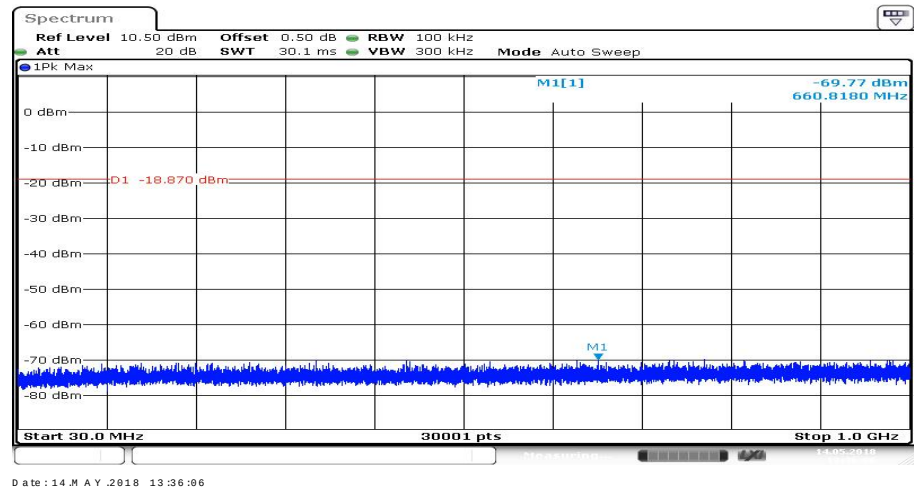


2437MHz



Spurious RF conducted emissions

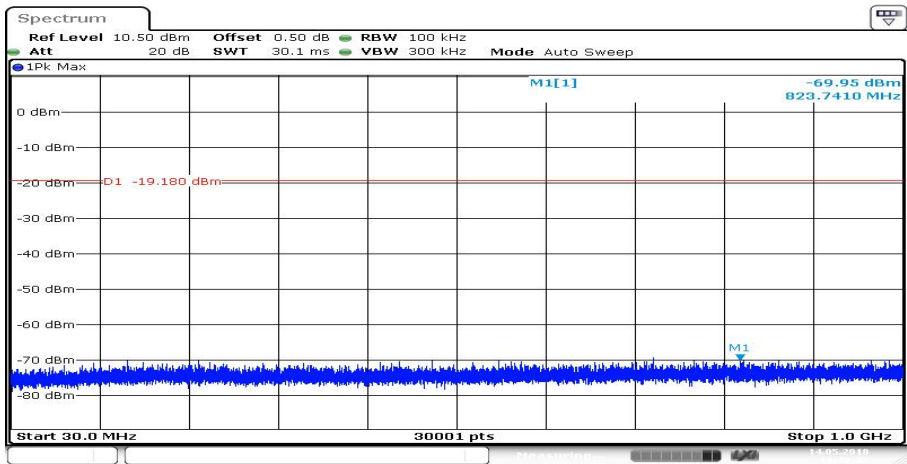

Date: 14 MAY 2018 13:38:42

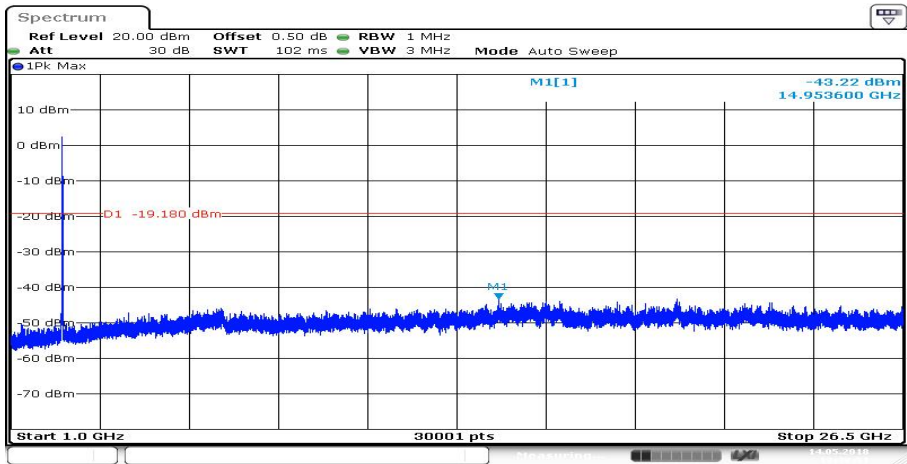



Date: 14 MAY 2018 13:38:51

2462MHz



Spurious RF conducted emissions



802.11g

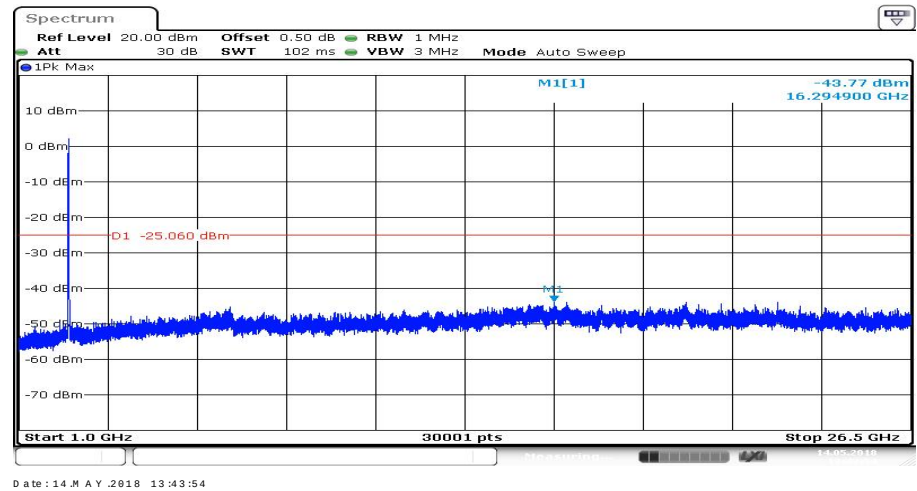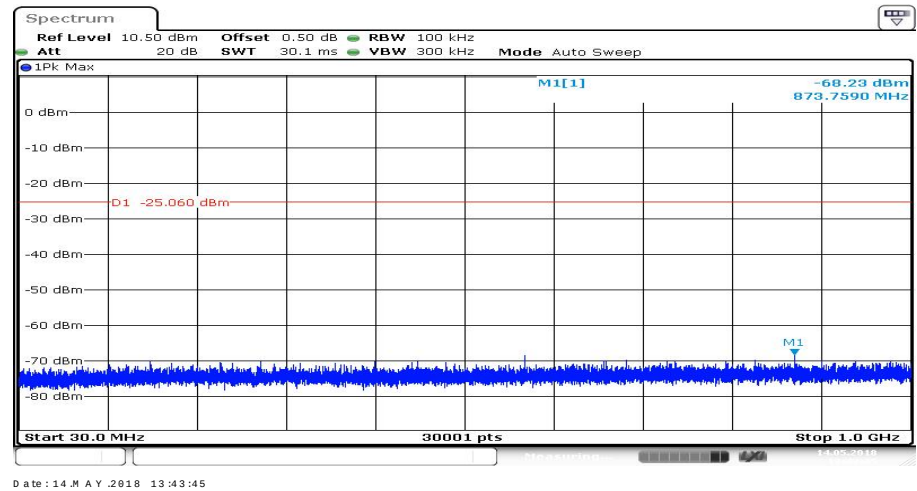

2412MHz





Spurious RF conducted emissions

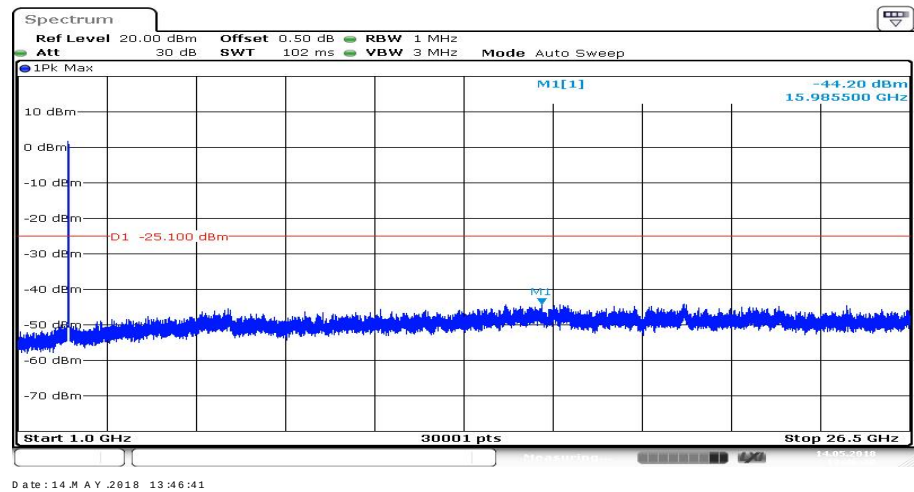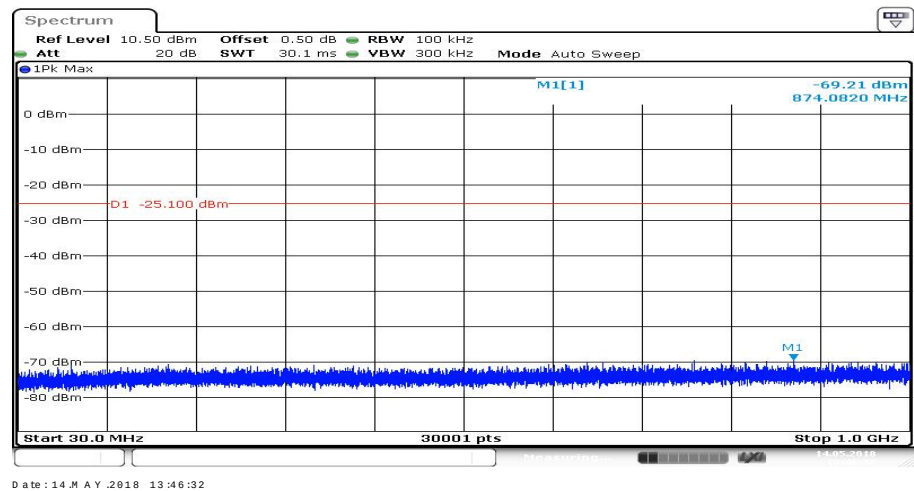

2437MHz



Spurious RF conducted emissions

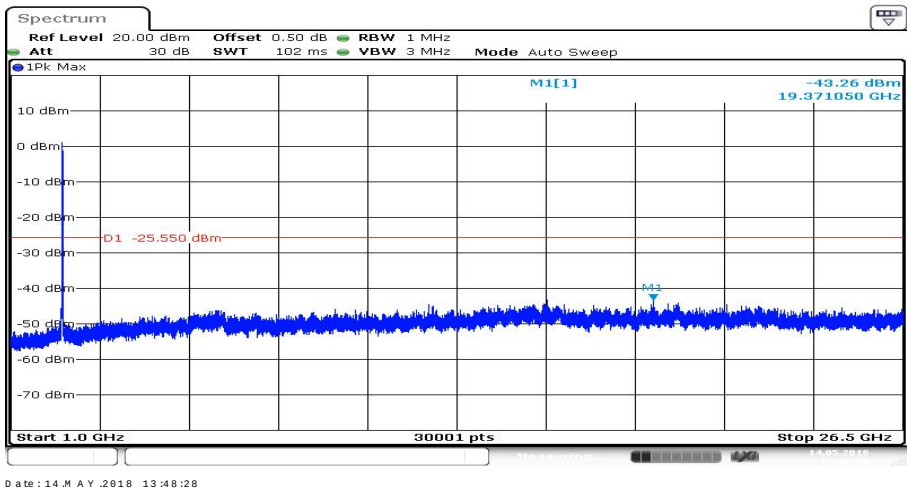
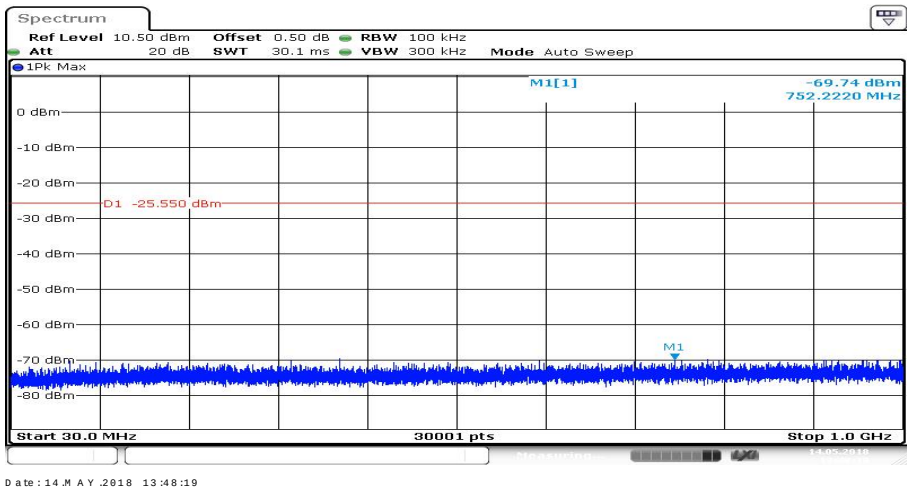


2462MHz



Spurious RF conducted emissions


802.11n HT20

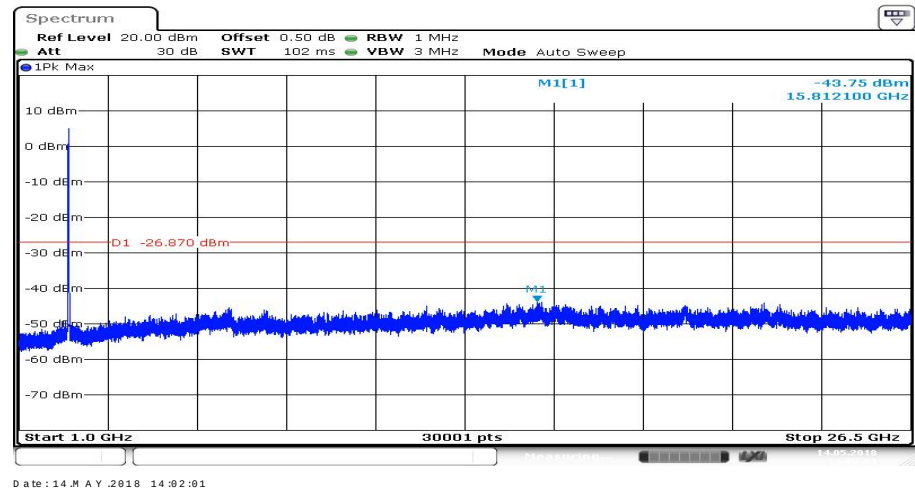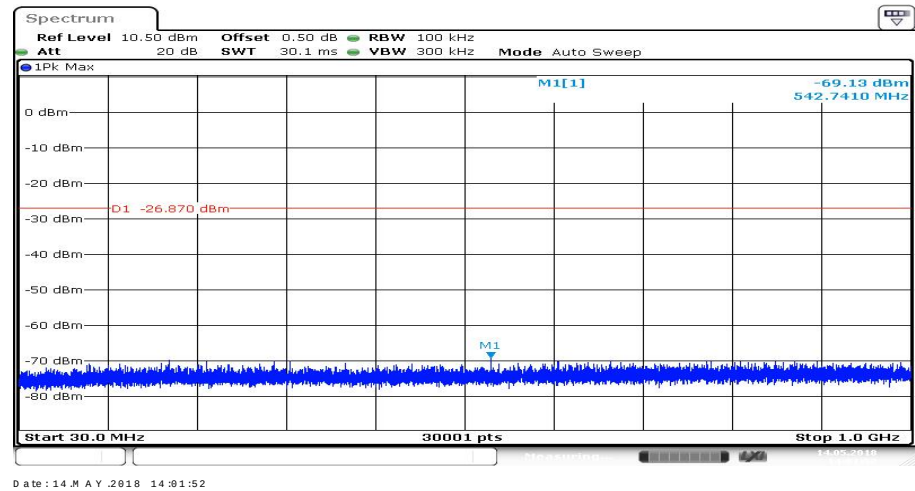


2412MHz



Spurious RF conducted emissions

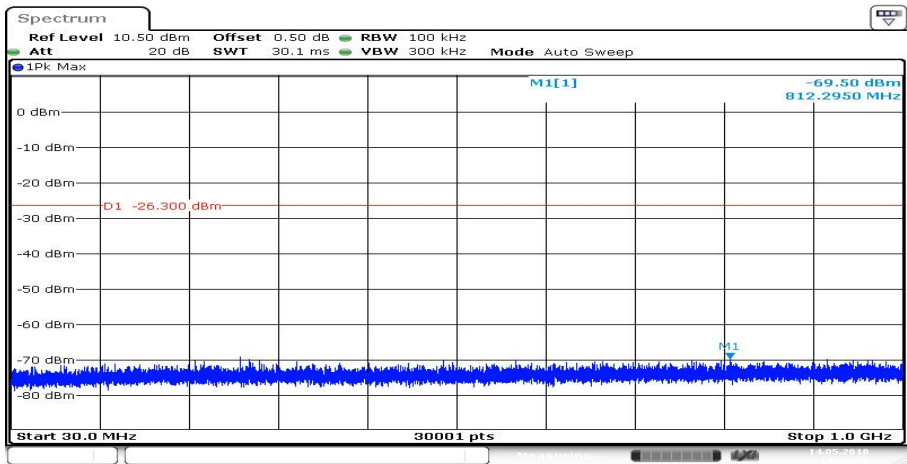

Date : 14 MAY 2018 14:03:58


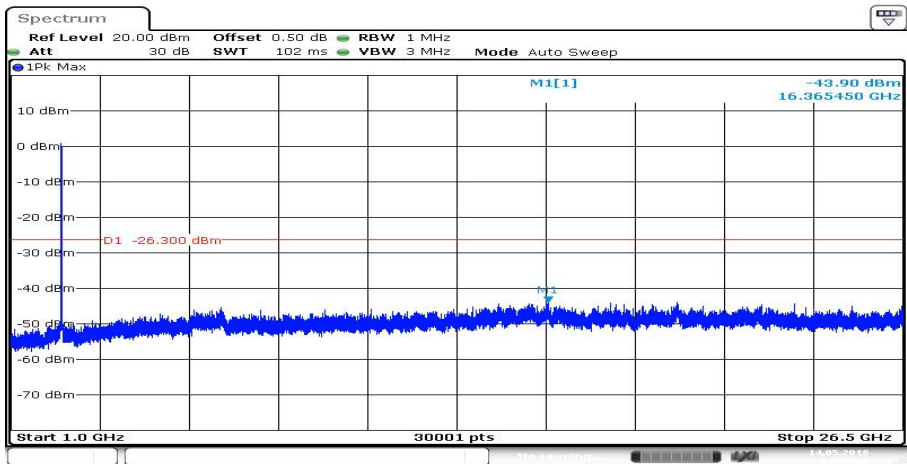


Date : 14 MAY 2018 14:04:06

2437MHz



Spurious RF conducted emissions

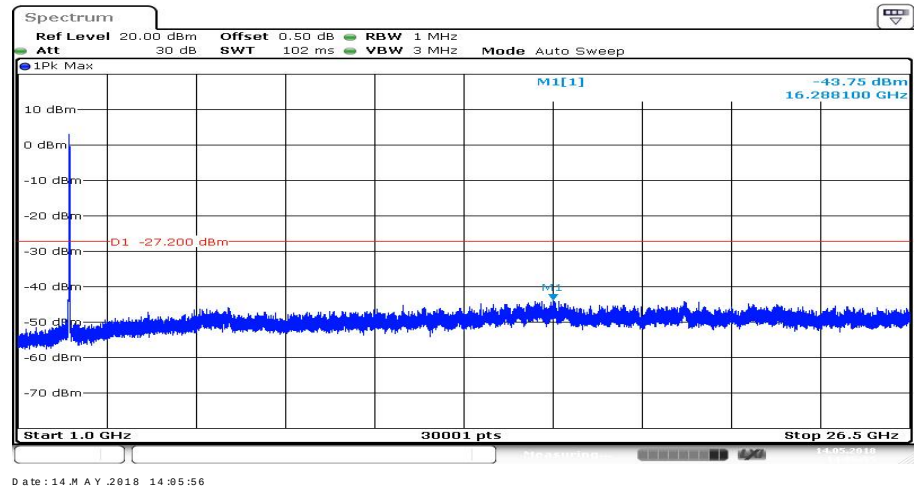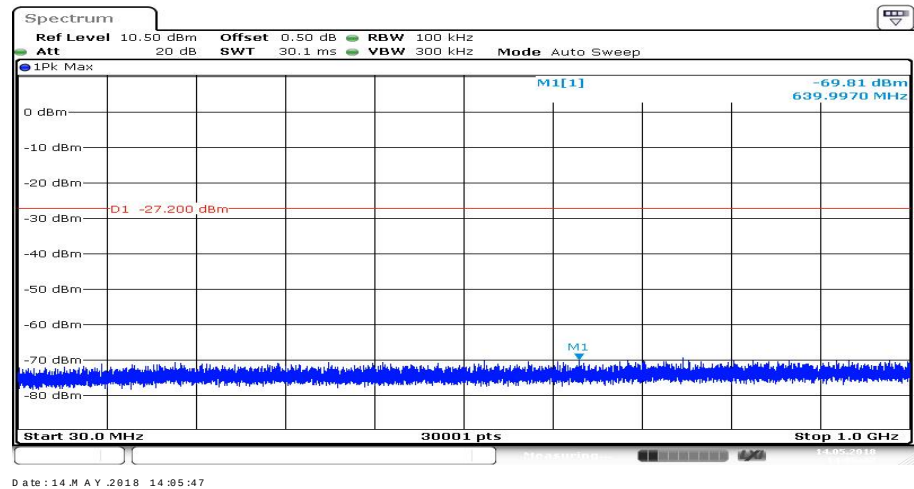

2462MHz



9.6 Band edge

Test Method


- 1 Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold.
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section.

Limit

Frequency Range	Limit (dBc)
MHz	
30-25000	-20

Test result


802.11b

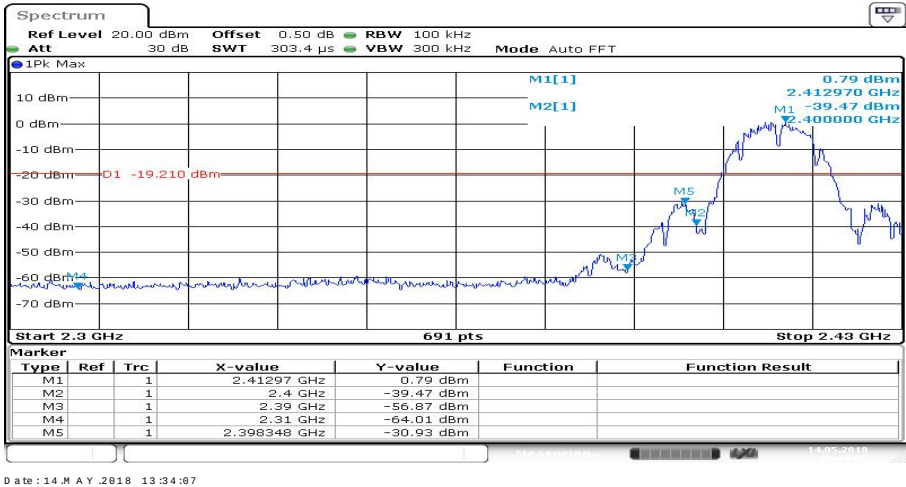

2412MHz




Band edge

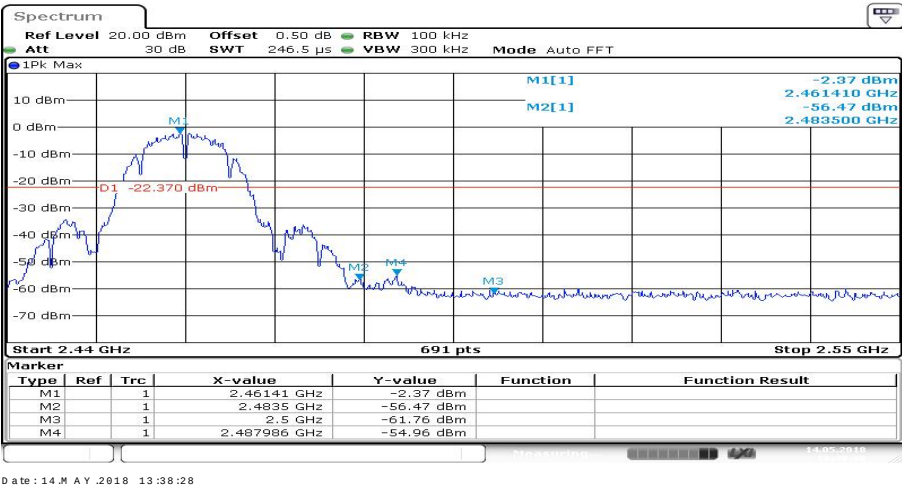

2462MHz


802.11g

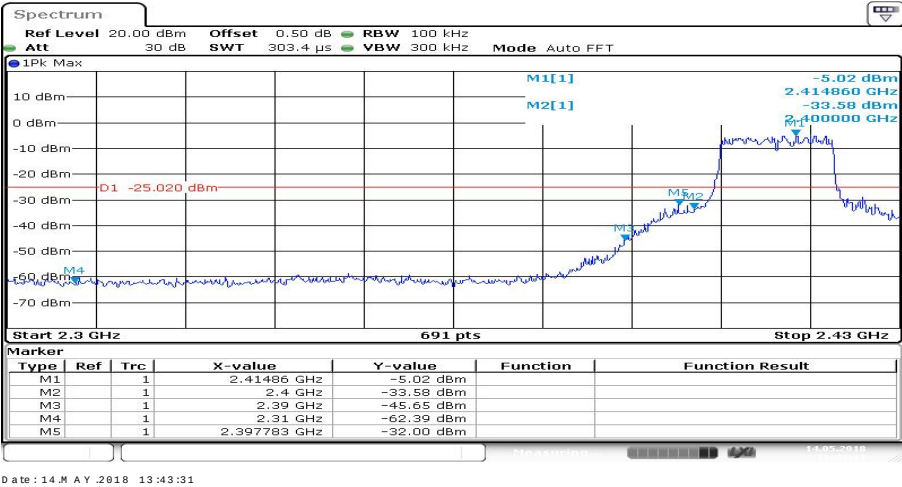

2412MHz




Band edge

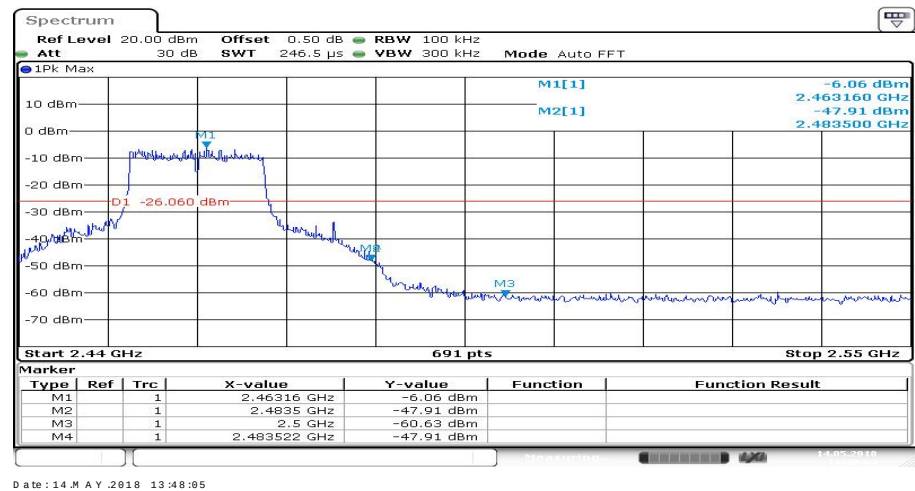

2462MHz


802.11n HT20

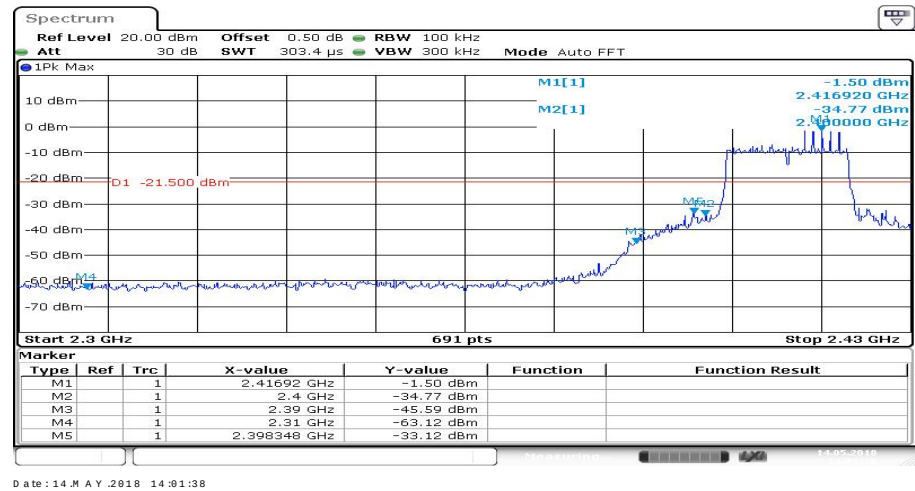

2412MHz



Band edge

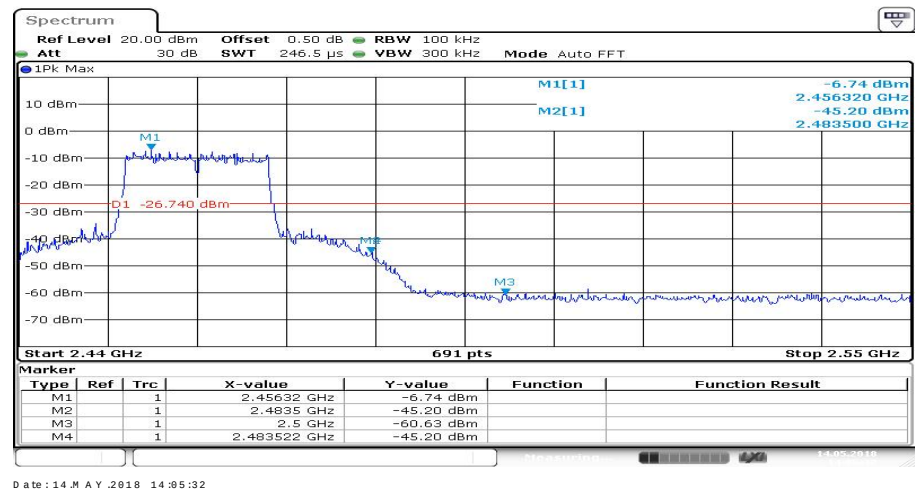

2462MHz

9.7 Spurious radiated emissions for transmitter

Test Method

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:

For Above 1GHz

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW $\geq$ RBW for peak measurement and VBW = 10Hz for average measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 KHz, VBW $\geq$ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Note:

- 1: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for peak detection (PK) at frequency above 1GHz.
- 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average ((duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($20\log(1/\text{duty cycle})$).
- 4: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.

Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength uV/m	Field Strength dBμV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Transmitting spurious emission test result as below:

802.11b

2412MHz (30MHz – 1GHz)

Frequency	Emission Level	Polarization	Limit	Detector	Result	Corr. (dB)
MHz	dBuV/m		dBμV/m			
277.35	35.56	Horizontal	46.00	QP	Pass	-21.7
274.16	37.71	Vertical	46.00	QP	Pass	-21.4

2412MHz (Above 1GHz)

Frequency	Emission Level	Polarization	Limit	Detector	Result	Corr. (dB)
MHz	dBuV/m		dBμV/m			
1593.50 *	40.03	Horizontal	74.00	PK	Pass	-9.7
1592.62*	32.43	Vertical	74.00	PK	Pass	-9.5

Remark:

- (1) Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (2) “*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (3) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
- (4) Below 1GHz: Corrector factor = Antenna Factor + Cable Loss

Spurious radiated emissions for transmitter

2437MHz (30MHz – 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBμV/m	Detector	Result
--	--	Horizontal	--	QP	Pass
--	--	Vertical	--	QP	Pass

2437MHz (Above 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBμV/m	Detector	Result	Corr. (dB)
1598.93*	39.43	Horizontal	74.00	PK	Pass	-9.7
1595.05*	36.81	Vertical	74.00	PK	Pass	-9.4

Remark:

- (1) Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (2) “*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (3) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
- (4) Below 1GHz: Corrector factor = Antenna Factor + Cable Loss

2462MHz (30MHz – 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBμV/m	Detector	Result
--	--	Horizontal	--	QP	Pass
--	--	Vertical	--	QP	Pass

2462MHz (Above 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBμV/m	Detector	Result	Corr. (dB)
1599.68*	38.37	Horizontal	74.00	PK	Pass	-9.6
2244.43*	31.77	Vertical	74.00	PK	Pass	-6.2

Remark:

- (1) Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (2) “*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (3) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
- (4) Below 1GHz: Corrector factor = Antenna Factor + Cable Loss

Spurious radiated emissions for transmitter

802.11g

2412MHz (30MHz – 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result
		Horizontal		QP	Pass
		Vertical		QP	Pass

2412MHz (Above 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result	Corr. (dB)
1599.97*	35.30	Horizontal	74.00	PK	Pass	-9.6
1598.62*	33.62	Vertical	74.00	PK	Pass	-9.5

Remark:

- (1) Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (2) “*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (3) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
- (4) Below 1GHz: Corrector factor = Antenna Factor + Cable Loss

2437MHz (30MHz – 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result
--	--	Horizontal	--	QP	Pass
--	--	Vertical	--	QP	Pass

2437MHz (Above 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result	Corr. (dB)
1598.93*	35.52	Horizontal	74.00	PK	Pass	-9.6
2362.81*	41.59	Vertical	74.00	PK	Pass	-5.9

Remark:

- (1) Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (2) “*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (3) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
- (4) Below 1GHz: Corrector factor = Antenna Factor + Cable Loss

Spurious radiated emissions for transmitter

2462MHz (30MHz – 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result
--	--	Horizontal	--	QP	Pass
--	--	Vertical	--	QP	Pass

2462MHz (Above 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result	Corr. (dB)
1592.62*	40.39	Horizontal	74.00	PK	Pass	-9.7
2247.50*	32.07	Vertical	74.00	PK	Pass	-6.3

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (2) "*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (3) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
- (4) Below 1GHz: Corrector factor = Antenna Factor + Cable Loss

802.11n HT20

2412MHz (30MHz – 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result
--	--	Horizontal	--	QP	Pass
--	--	Vertical	--	QP	Pass

2412MHz (Above 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result	Corr. (dB)
1592.56*	38.03	Horizontal	74.00	PK	Pass	-9.7
1599.93*	31.61	Vertical	74.00	PK	Pass	-9.4

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (2) "*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (3) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
- (4) Below 1GHz: Corrector factor = Antenna Factor + Cable Loss

Spurious radiated emissions for transmitter

2437MHz (30MHz – 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBμV/m	Detector	Result
--	--	Horizontal	--	QP	Pass
--	--	Vertical	--	QP	Pass

2437MHz (Above 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBμV/m	Detector	Result	Corr. (dB)
1599.87*	36.12	Horizontal	74.00	PK	Pass	-9.7
2248.06*	32.65	Vertical	74.00	PK	Pass	-6.2

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (2) "*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (3) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
- (4) Below 1GHz: Corrector factor = Antenna Factor + Cable Loss

2462MHz (30MHz – 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBμV/m	Detector	Result
--	--	Horizontal	--	QP	Pass
--	--	Vertical	--	QP	Pass

2462MHz (Above 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBμV/m	Detector	Result	Corr. (dB)
1592.68*	34.25	Horizontal	74.00	PK	Pass	-9.5
2244.64*	47.55	Vertical	74.00	PK	Pass	-6.2

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (2) "*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (3) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
- (4) Below 1GHz: Corrector factor = Antenna Factor + Cable Loss

10 Test Equipment List

Radiated Emission Test

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	2018-7-14
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	2018-7-14
Horn Antenna	Rohde & Schwarz	HF907	102294	2018-7-14
Pre-amplifier	Rohde & Schwarz	SCU 18	102230	2018-7-14
Signal Generator	Rohde & Schwarz	SMY01	839369/005	2018-7-7
Attenuator	Agilent	8491A	MY39264334	2018-7-7
3m Semi-anechoic chamber	TDK	9X6X6	----	2020-7-7
Test software	Rohde & Schwarz	EMC32	Version 9.15.00	N/A

Conducted Emission Test

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 3	101782	2018-7-14
LISN	Rohde & Schwarz	ENV4200	100249	2018-7-14
LISN	Rohde & Schwarz	ENV432	101318	2018-7-14
LISN	Rohde & Schwarz	ENV216	100326	2018-7-14
ISN	Rohde & Schwarz	ENY81	100177	2018-7-14
ISN	Rohde & Schwarz	ENY81-CA6	101664	2018-7-14
High Voltage Probe	Rohde & Schwarz	TK9420(VT94 20)	9420-584	2018-7-14
RF Current Probe	Rohde & Schwarz	EZ-17	100816	2018-7-14
Attenuator	Shanghai Huaxiang	TS2-26-3	080928189	2018-7-7
Test software	Rohde & Schwarz	EMC32	Version 9.15.00	N/A

C - Conducted RF tests

- Conducted peak output power
- 6dB bandwidth
- Power spectral density*
- Spurious RF conducted emissions
- Band edge

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Radiated Spurious Emission 25MHz-3000MHz	Horizontal: 4.98dB; Vertical: 5.06dB;
Uncertainty for Radiated Spurious Emission 3000MHz-18000MHz	Horizontal: 4.95dB; Vertical: 4.94dB;
Uncertainty for Radiated Spurious Emission 18000MHz-40000MHz	Horizontal: 5.14dB; Vertical: 5.12dB;
Uncertainty for Conducted RF test with TS 8997	Power level test involved: 2.06dB Frequency test involved: 1.16×10^{-7}
Uncertainty for Conducted Emission 150kHz-30MHz (for test using AMN ENV432 or ENV4200)	3.21dB