
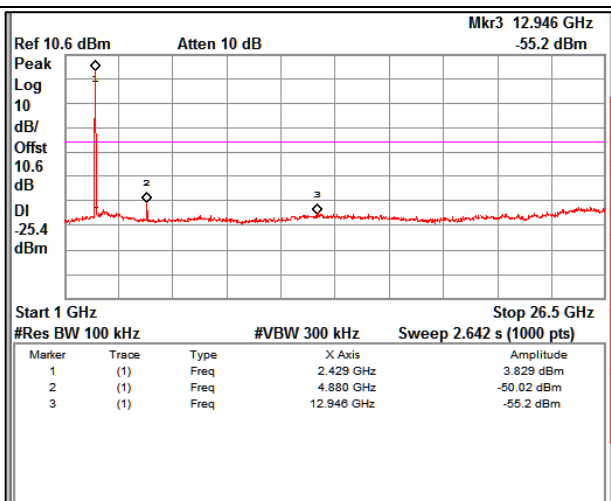
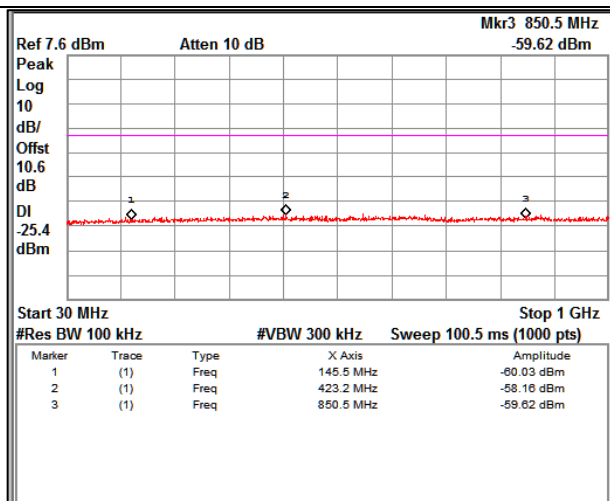
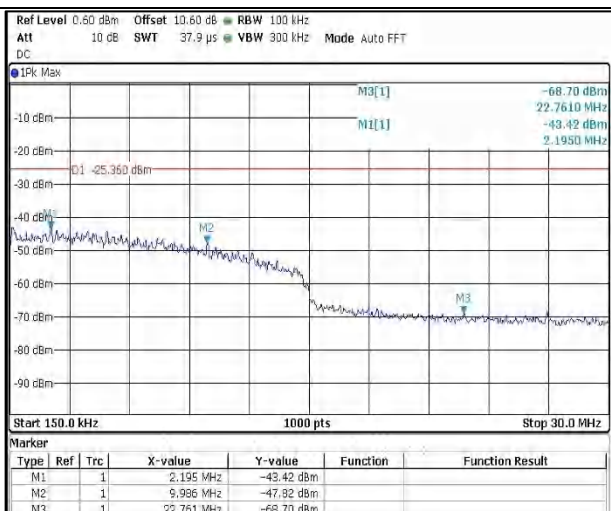


Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 101 von 197
Page 101 of 197

Channel Frequency 2437MHz




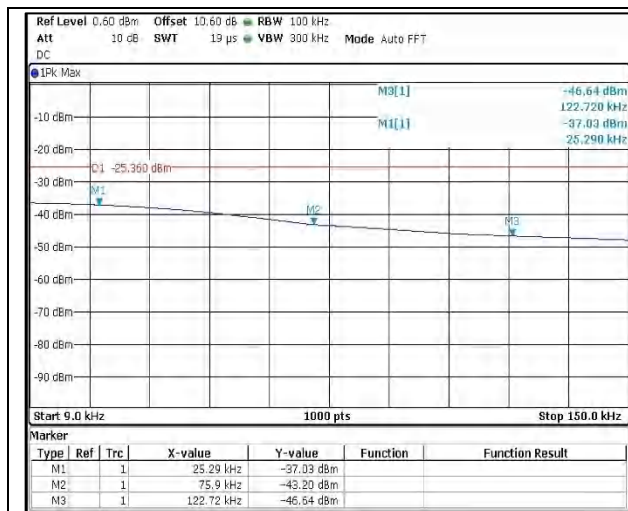


Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 102 von 197
Page 102 of 197

Channel Frequency 2462MHz

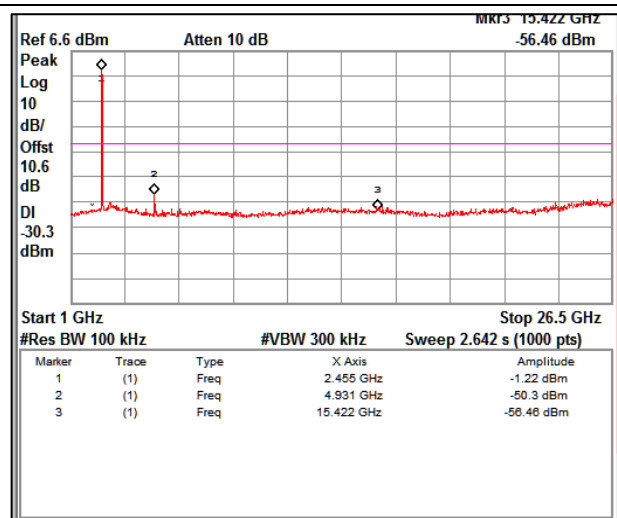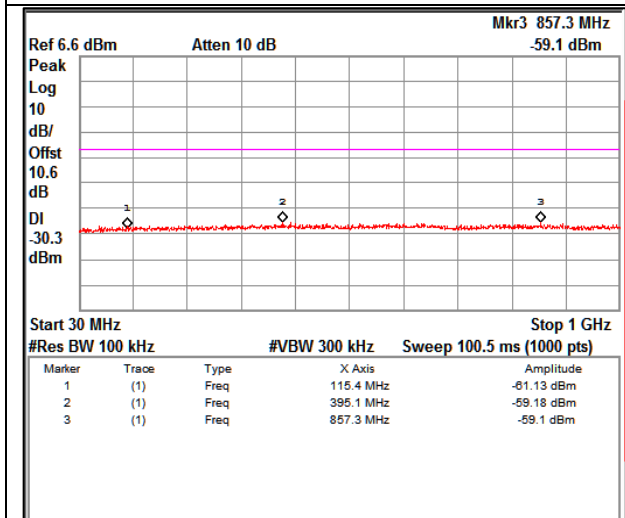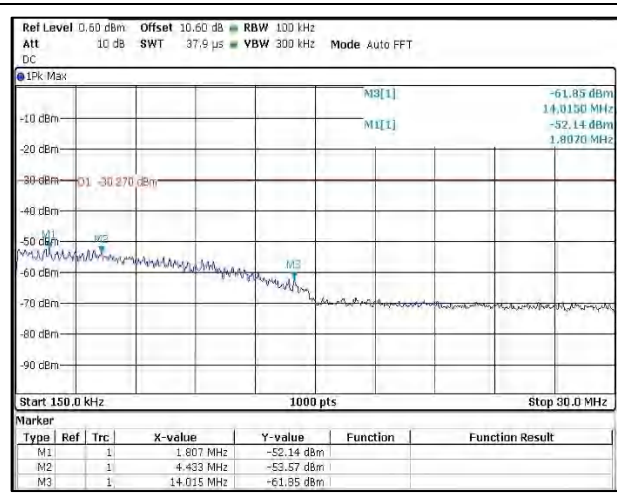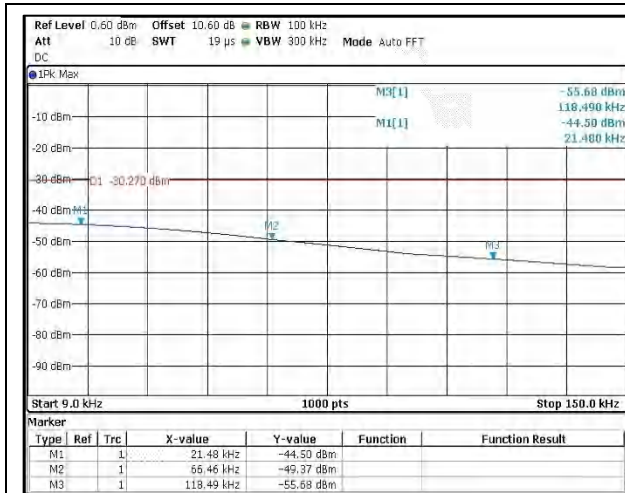





Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 103 von 197
Page 103 of 197

Data rate: MCS4

Channel Frequency 2412MHz

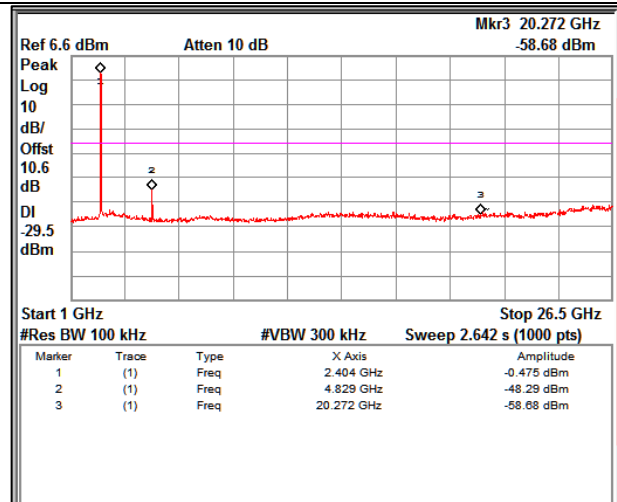
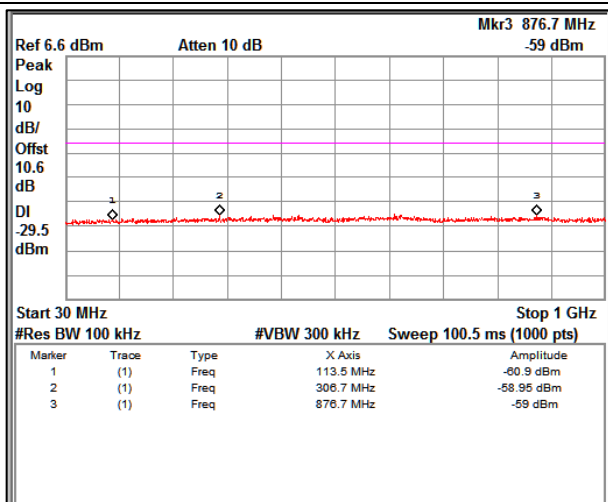
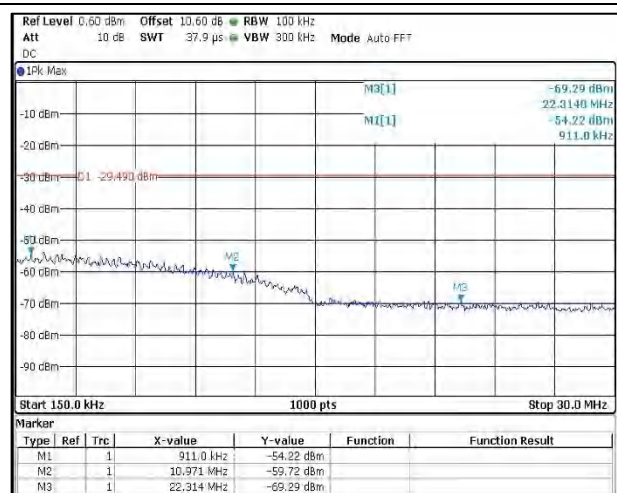
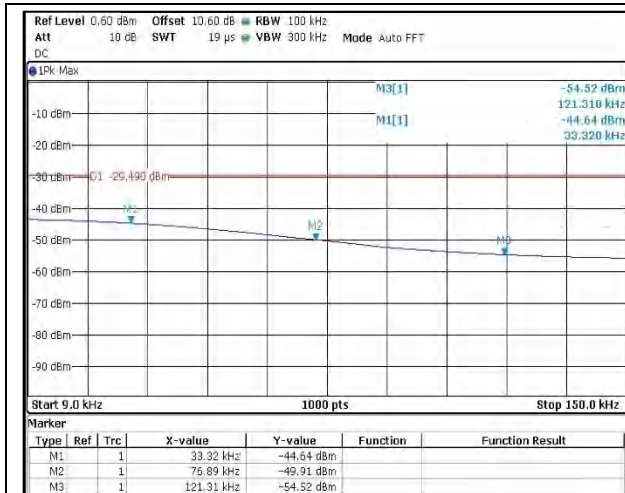


Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 104 von 197
Page 104 of 197

Channel Frequency 2437MHz

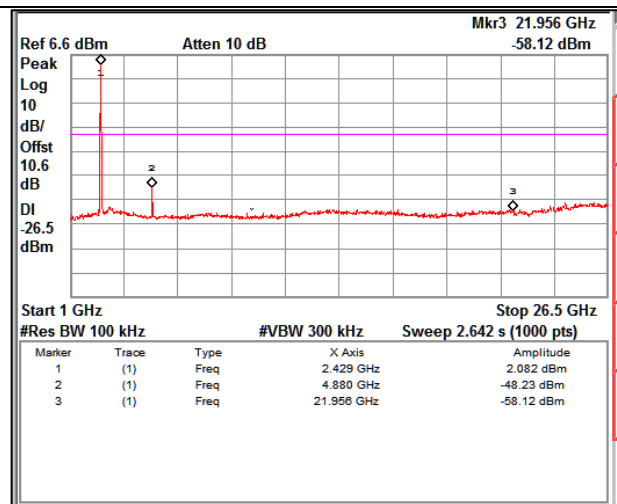
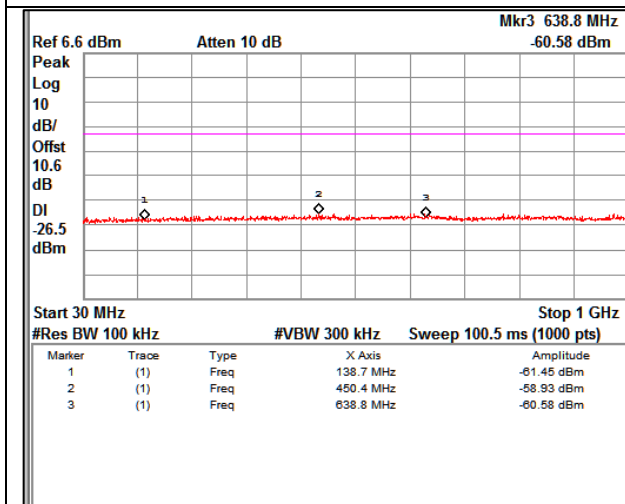
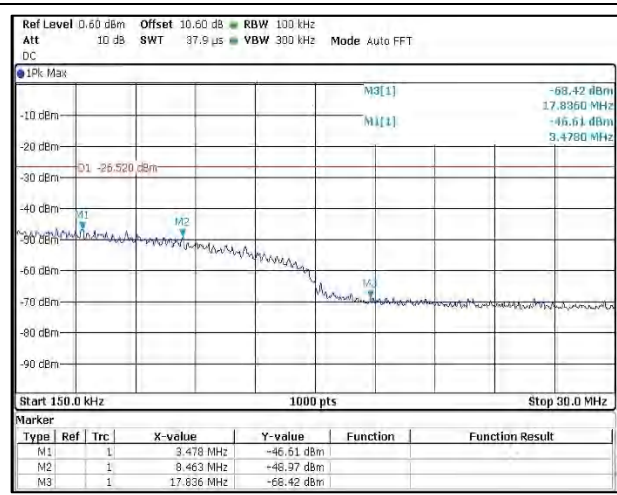
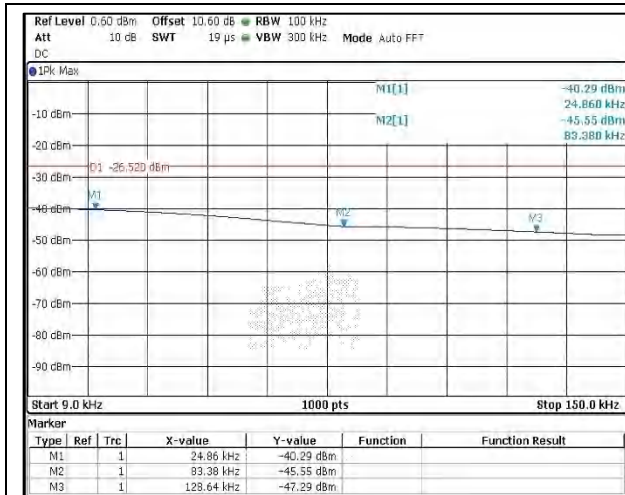


Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 105 von 197
Page 105 of 197

Channel Frequency 2462MHz

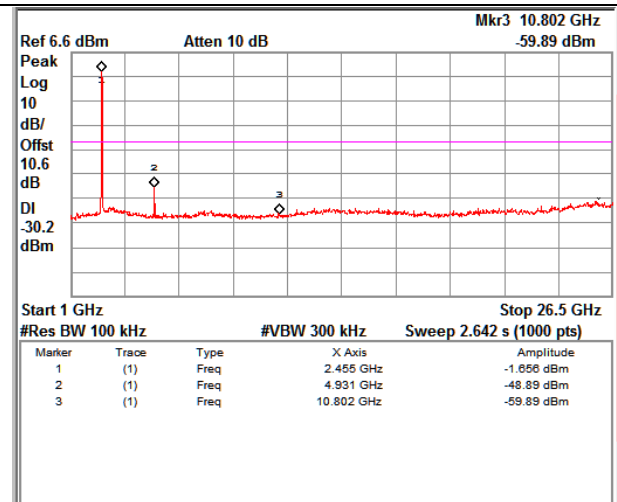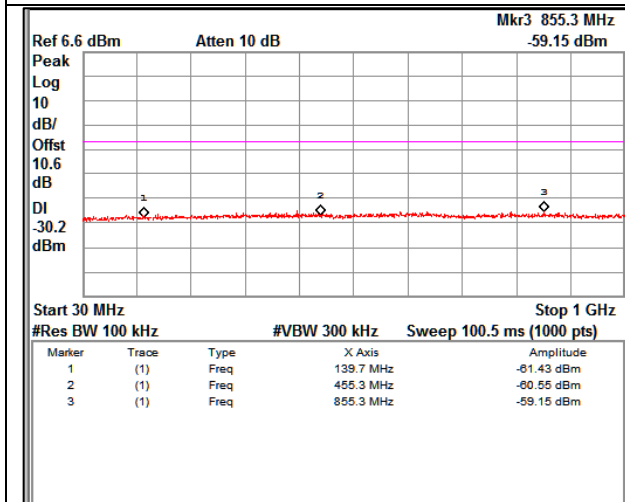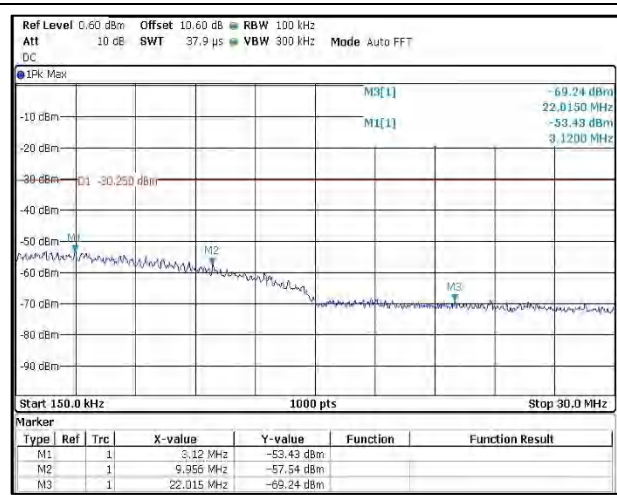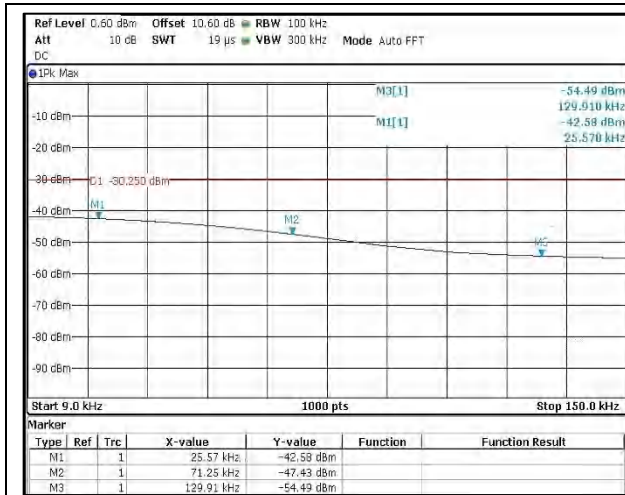

Prüfbericht - Nr.:

Test Report No.:





IN22T1OT 001
ULR-TC568822300000100F

Seite 106 von 197

Page 106 of 197

Data rate: MCS7

Channel Frequency 2412MHz

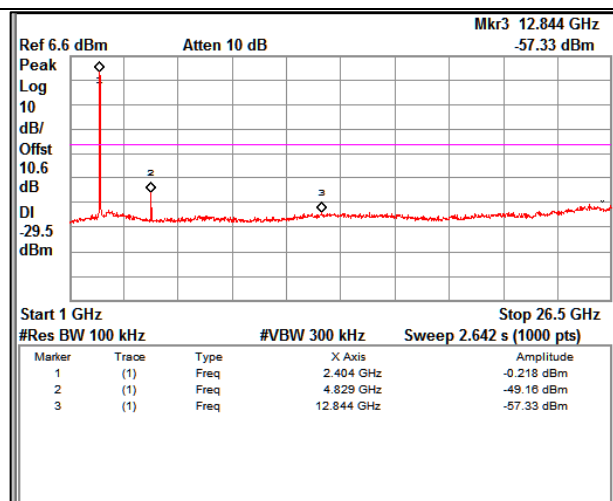
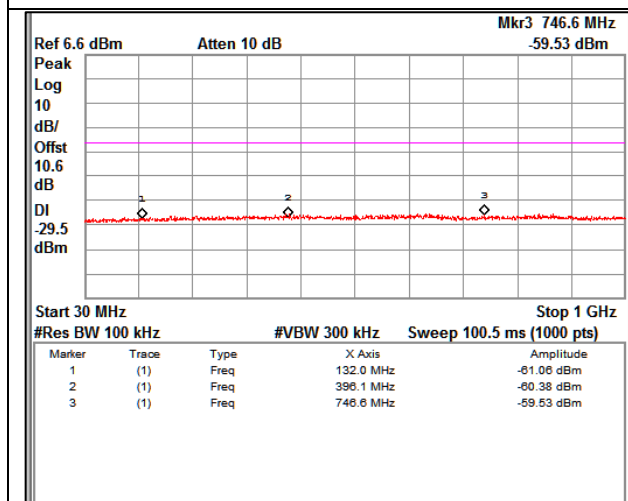
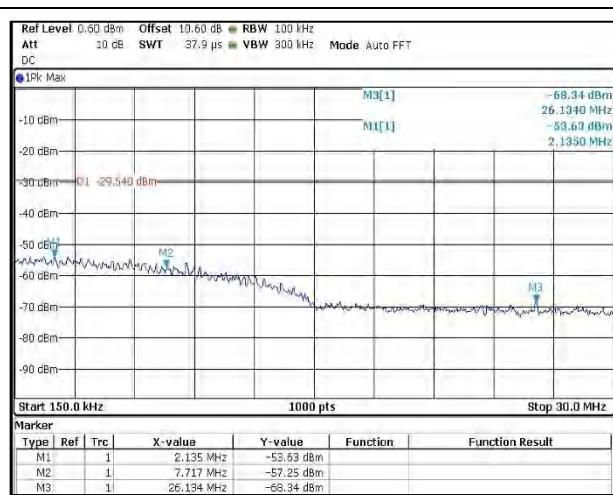
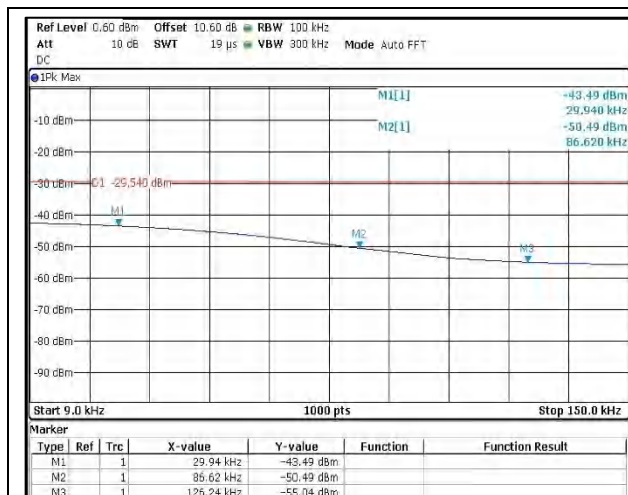


Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 107 von 197
Page 107 of 197

Channel Frequency 2437MHz

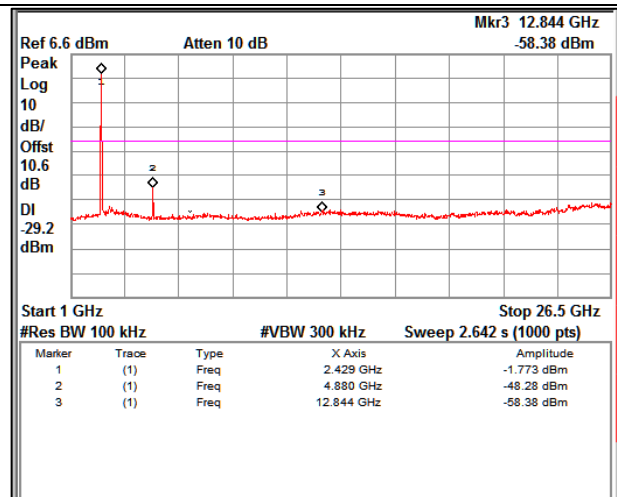
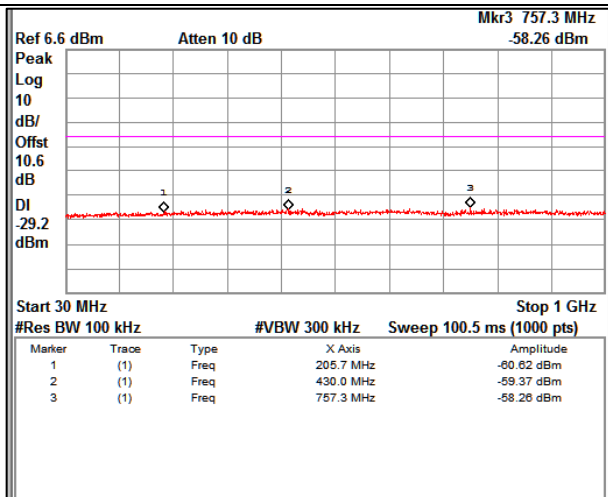
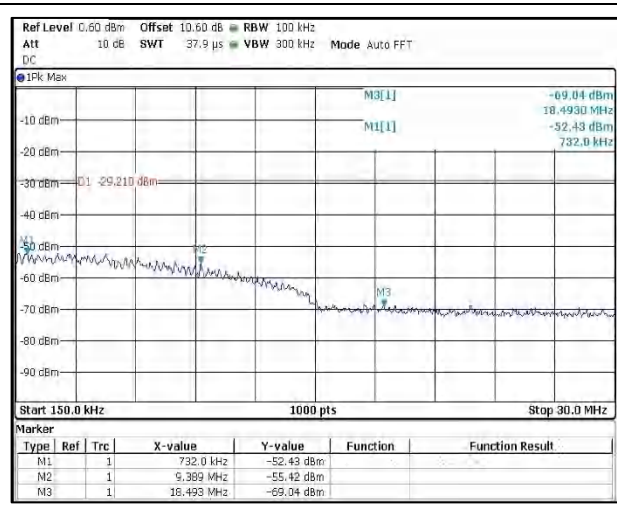
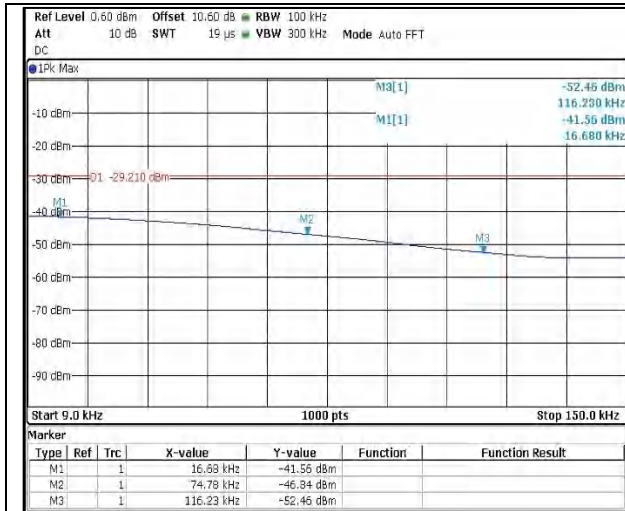


Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 108 von 197
Page 108 of 197

Channel Frequency 2462MHz

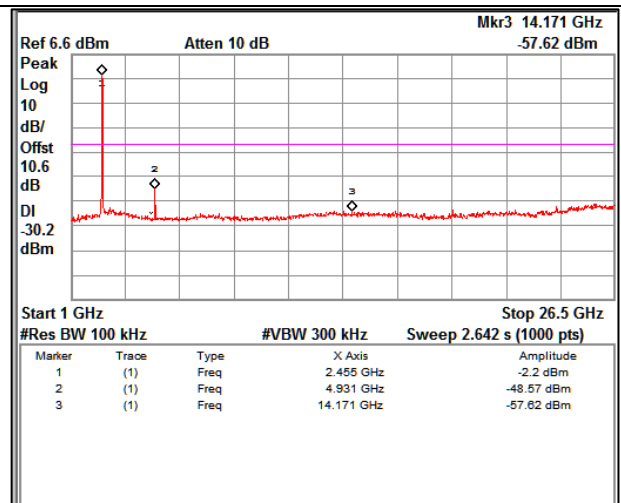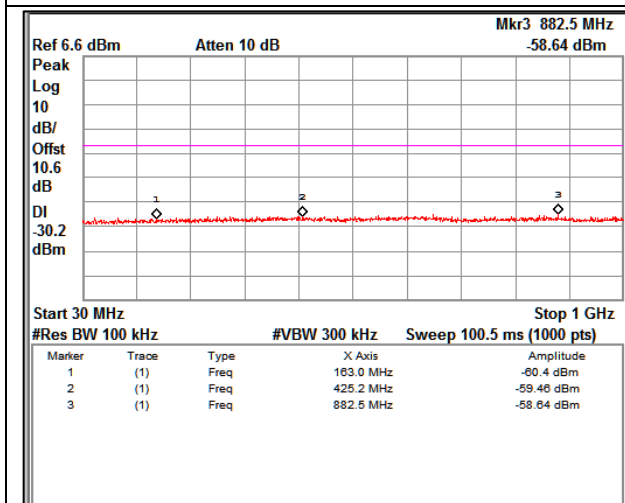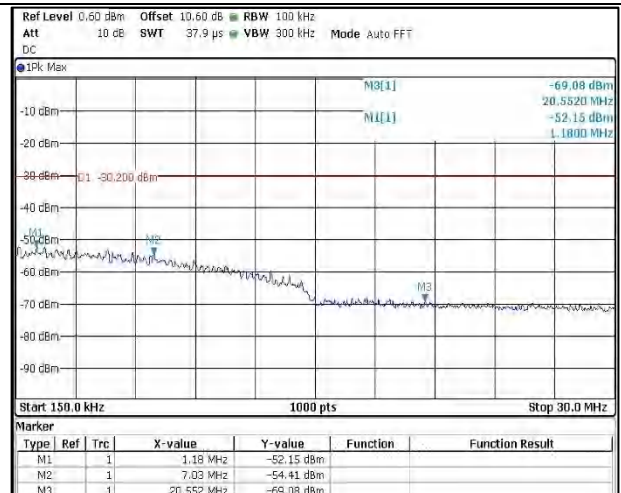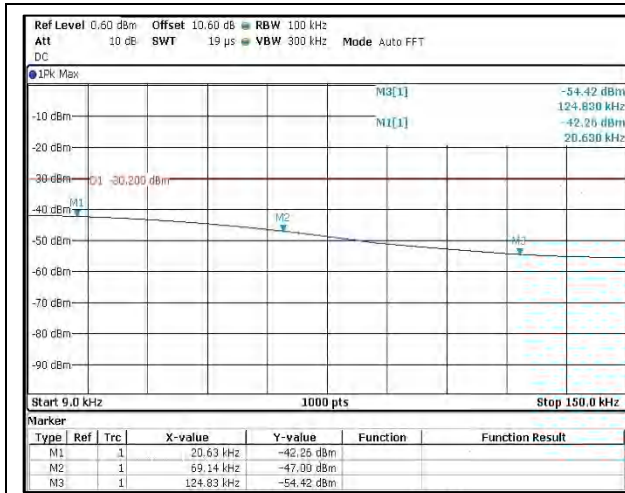

Prüfbericht - Nr.:

Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F





Seite 109 von 197

Page 109 of 197

Modulation: 802.11n_HT40

Data rate: MCS0

Channel Frequency 2422MHz

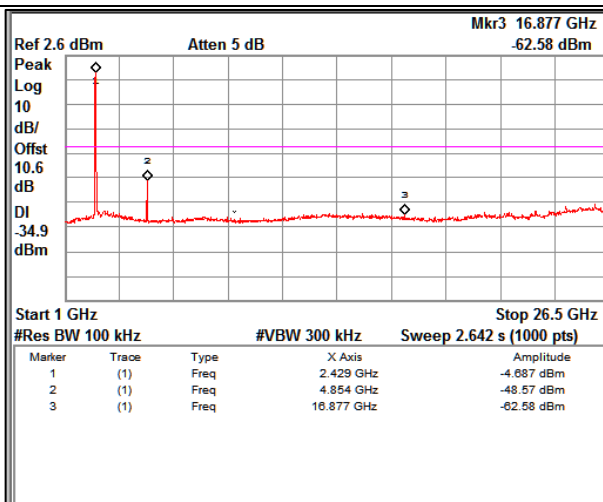
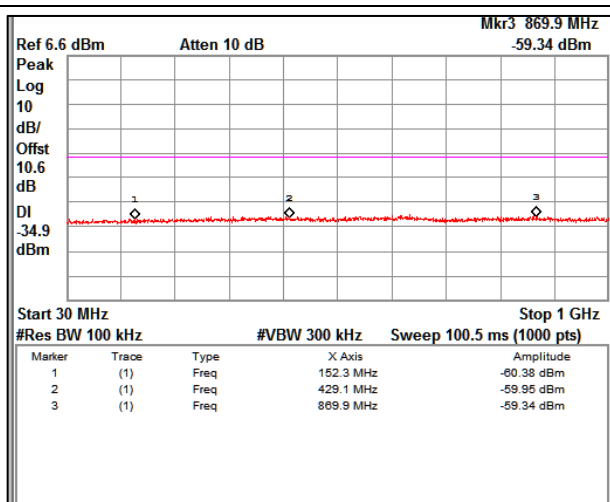
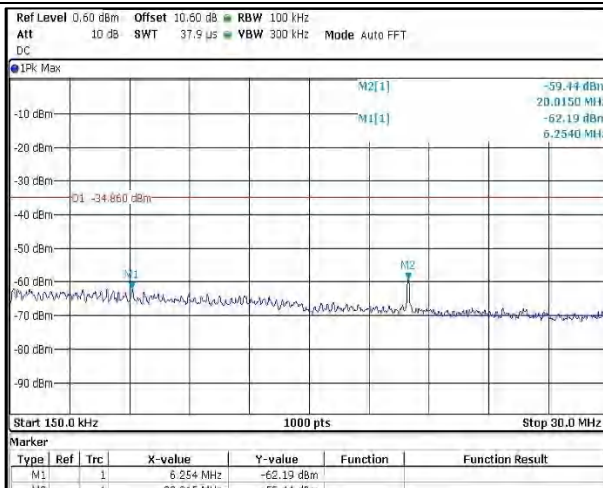
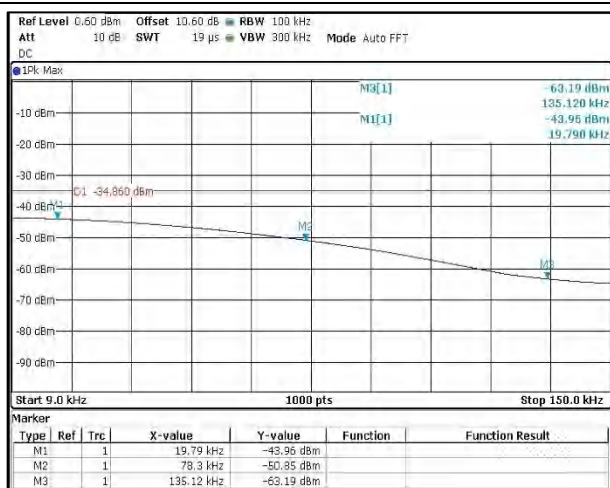


Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 110 von 197
Page 110 of 197

Channel Frequency 2452MHz

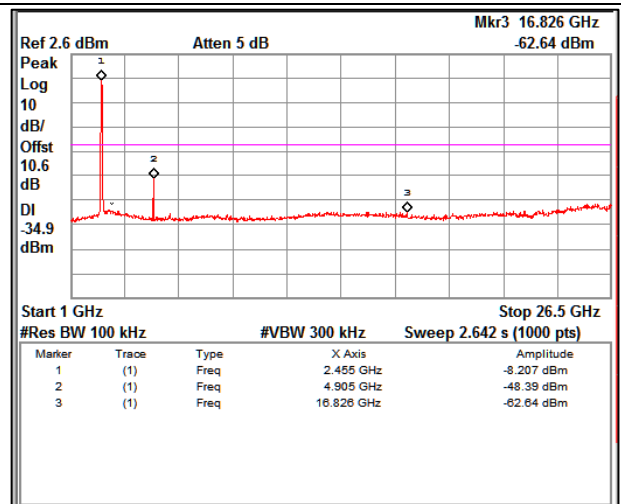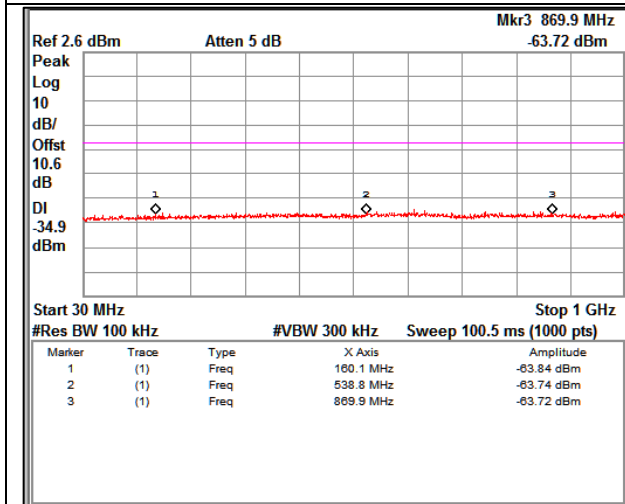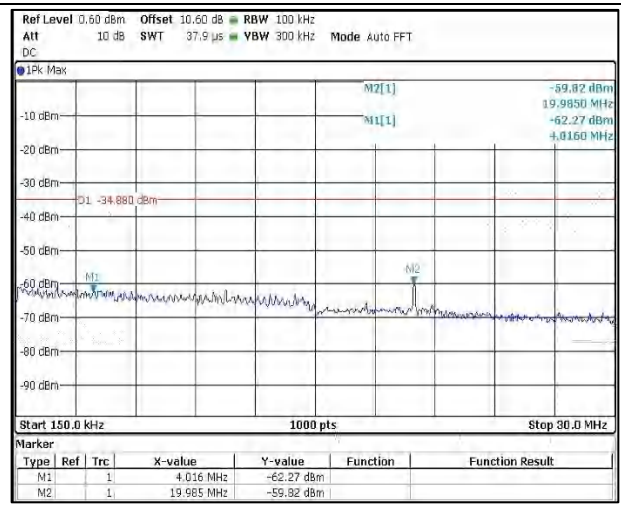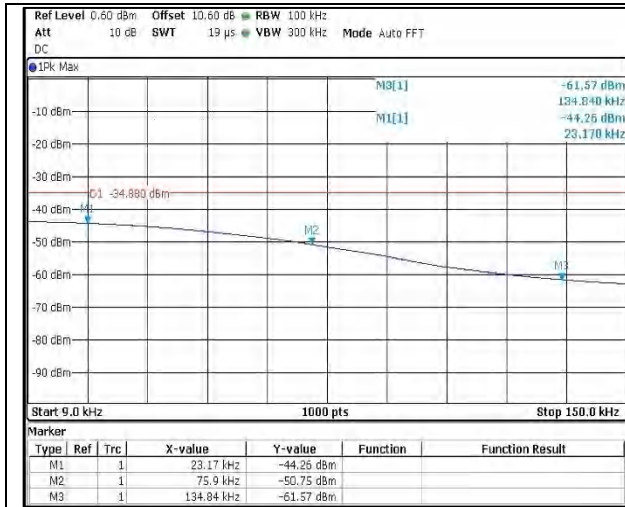





Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 111 von 197
Page 111 of 197

Data rate: MCS4

Channel Frequency 2422MHz

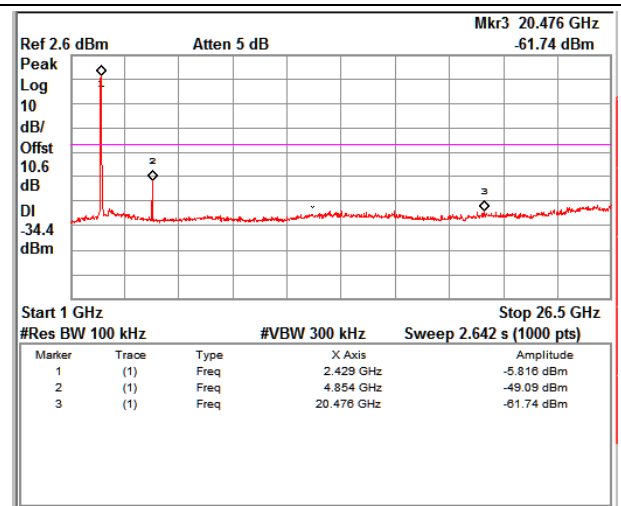
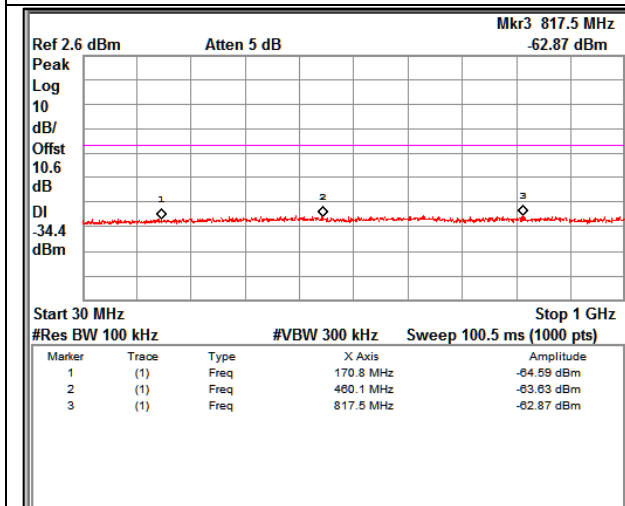
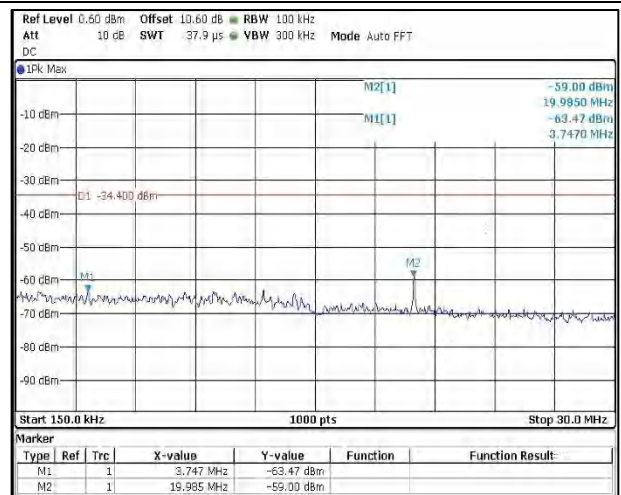
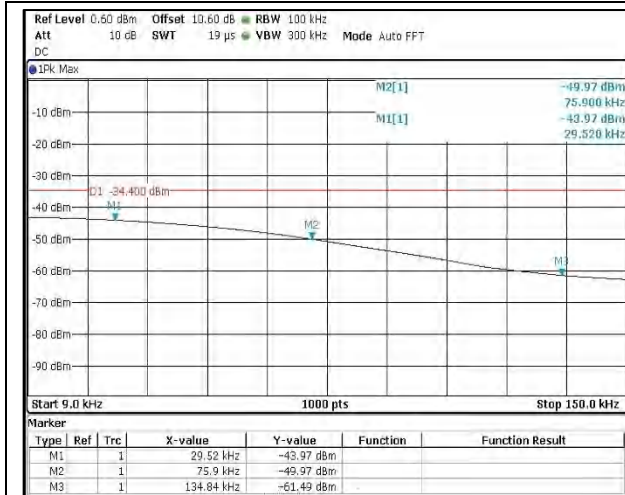


Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 112 von 197
Page 112 of 197

Channel Frequency 2452MHz

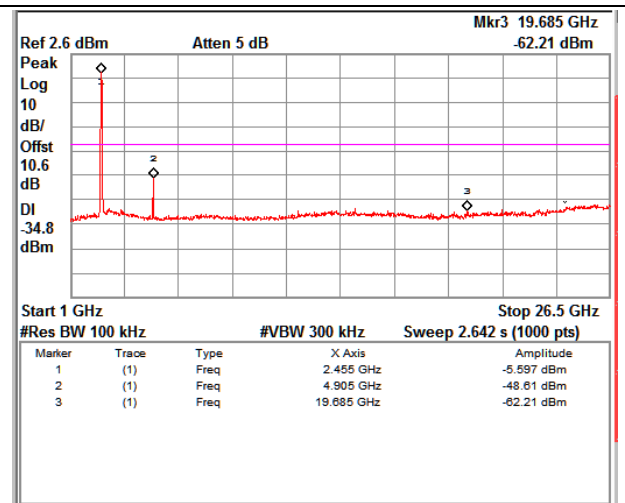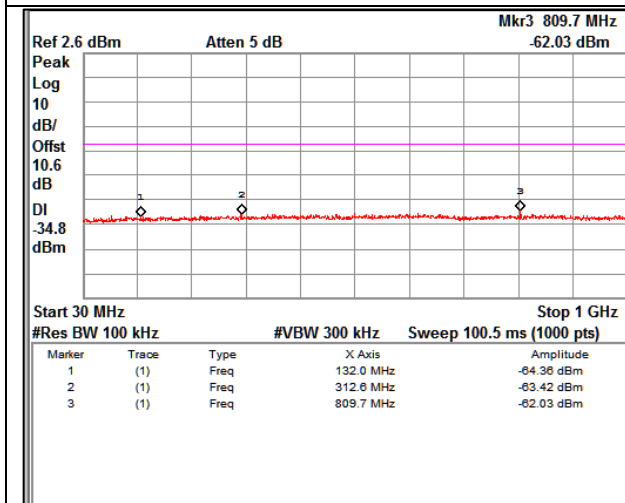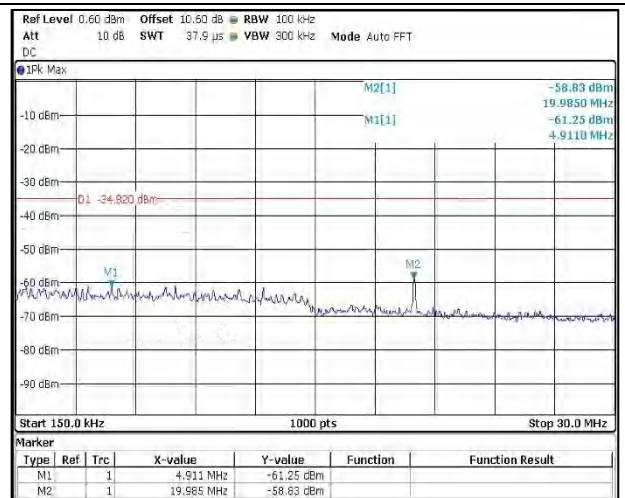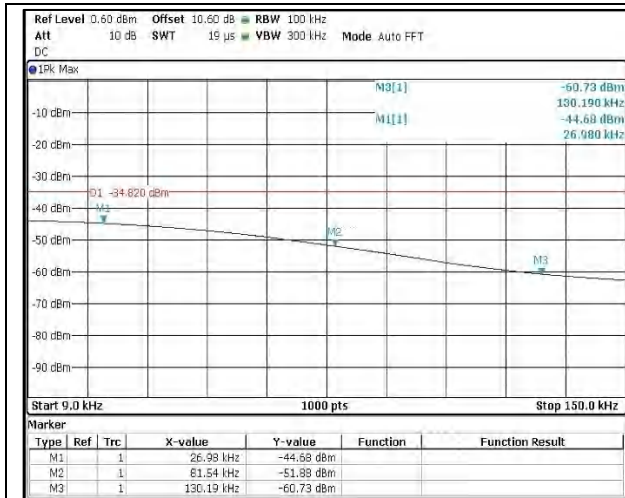





Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 113 von 197
Page 113 of 197

Data rate: MCS7

Channel Frequency 2422MHz

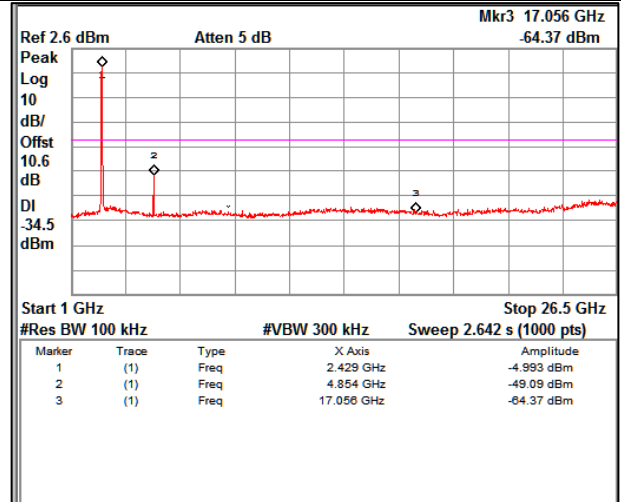
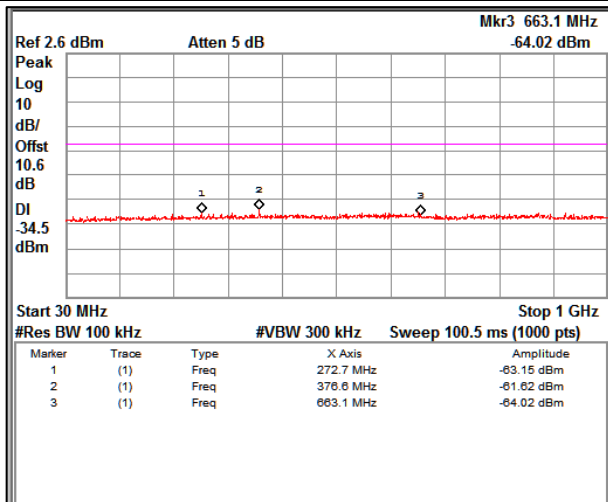
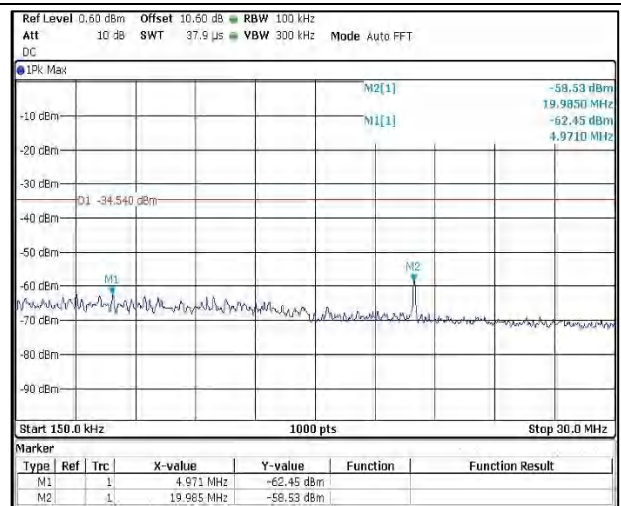
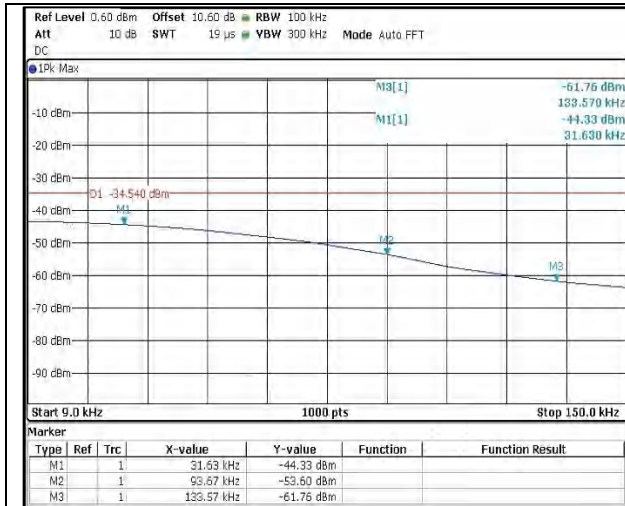


Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 114 von 197
Page 114 of 197

Channel Frequency 2452MHz

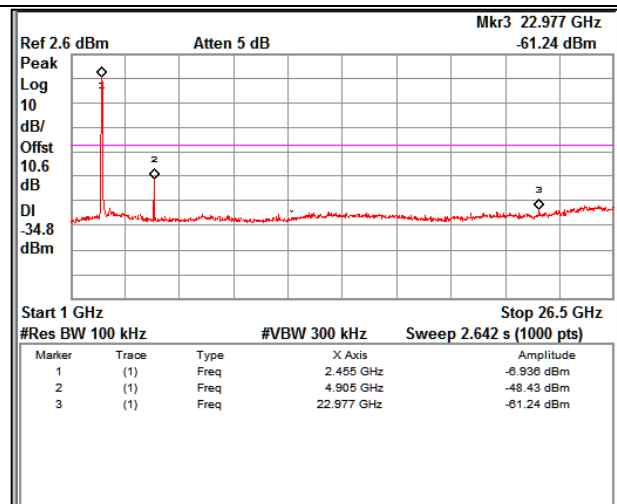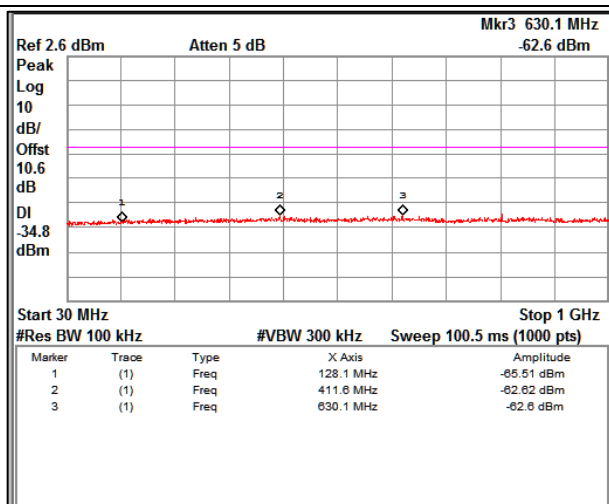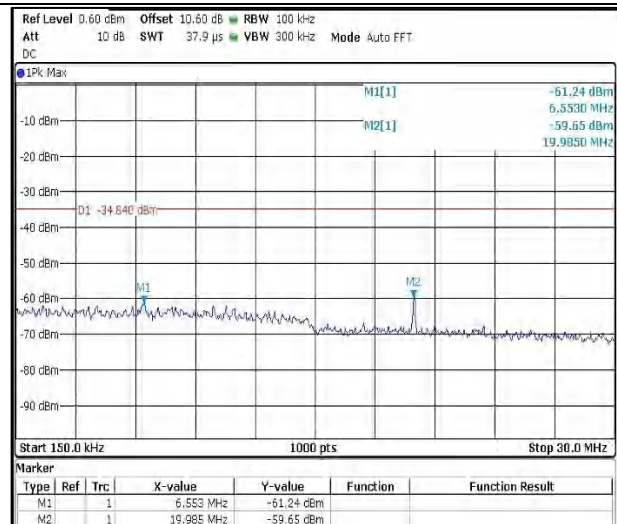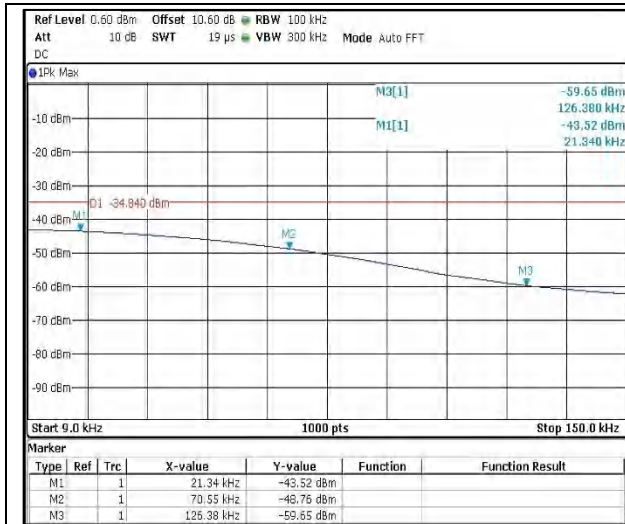

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 115 von 197
Page 115 of 197

7.5 Spurious Radiated Emissions & Restricted Bands of Operation

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (d) / (15.209 & 15.205) RSS-Gen Issue 5, Section 8.9 /8.10
Test Method	ANSI C63.10
Measurement Location	Semi Anechoic Chamber 30MHz - 1 GHz Fully Anechoic Chamber 1 GHz - 40GHz
Measurement Bandwidth	100 kHz for frequency range < 1GHz 1 MHz for Frequency range >1GHz
Detector	Refer remarks below
Measuring Distance	3 m
Requirement	As per the limits mentioned in the below table
Test setup	Refer Clause 7 TEST METHODOLOGY

Table 7: Transmitter limits for Radiated emission

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Distance of Measurement (m)
0.009 – 0.490	2400/F(kHz)	48.50 – 13.80	300*
0.490 – 1.705	24000/F(kHz)	33.80 – 23.00	30*
1.705 -30	30	29.54	30*
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.00	3

Remark: * The limit shows in the table above of frequency range 0.009 – 0.490, 0.490 – 1.705 MHz and 1.705-30MHz is at 300 meter, 30 meter and 30 meter range respectively, which corresponds to 128.51 – 93.80, 73.80 – 62.96 and 69.54.00 dBμV/m at 3m range by extrapolation calculation and the measurement of loop antenna.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.

Test Conditions:

Temperature (Norm) = + 22.5 °C

Voltage = 3.6V Li-Ion battery

Relative humidity = 62 %

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 116 von 197
Page 116 of 197

Test results:

Note: All the losses are included during measurement and final values are mentioned in the test report. Refer Clause 7 TEST METHODOLOGY for more details

Test results for frequency range 9kHz – 30MHz

No emissions found in frequency range 9 kHz to 30 MHz, and measured levels are below 20dB from the limit line, hence not reported

Vscan Air SL With Battery Mode: Cardiac



Test results for frequency range 30MHz – 1GHz

Antenna Polarization	Measured Frequency (MHz)	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	34.77	14.28	40.00	-25.72
	52.17	11.91	40.00	-28.09
	62.76	11.77	40.00	-28.23
	141.84	22.20	43.50	-21.30
	161.22	23.63	43.50	-19.87
	288.11	17.29	46.00	-28.71
	364.31	18.47	46.00	-27.53
	495.20	21.82	46.00	-24.18
	709.88	26.05	46.00	-19.95
Horizontal	30.63	13.39	40.00	-26.61
	52.98	9.54	40.00	-30.46
	91.77	9.69	43.50	-33.81
	142.05	12.30	43.50	-31.20
	299.99	17.03	46.00	-28.97
	418.91	19.91	46.00	-26.09
	549.50	23.69	46.00	-22.31
	713.03	24.88	46.00	-21.12

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F


Seite 117 von 197
Page 117 of 197

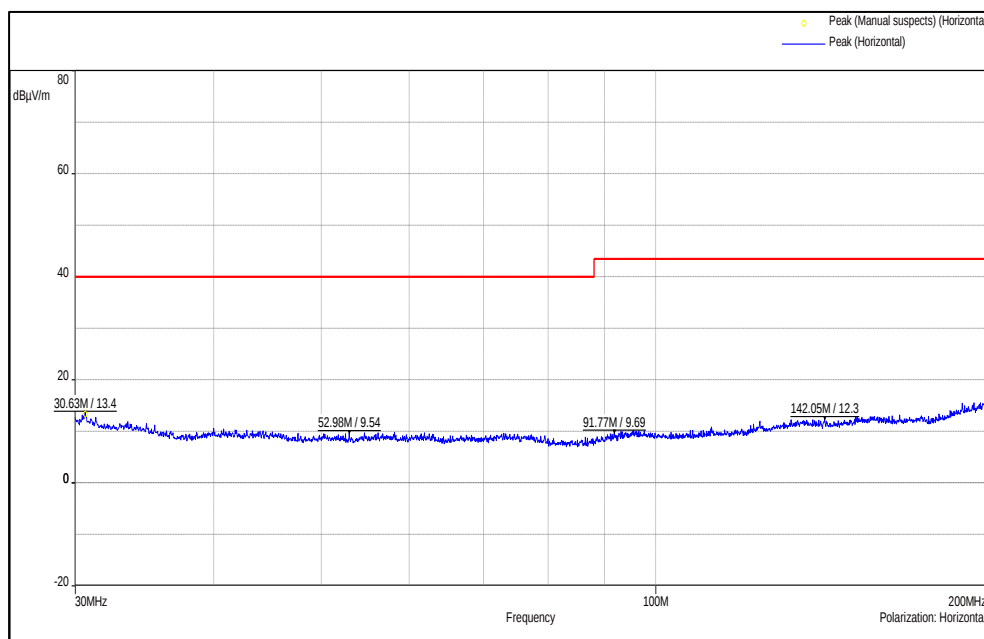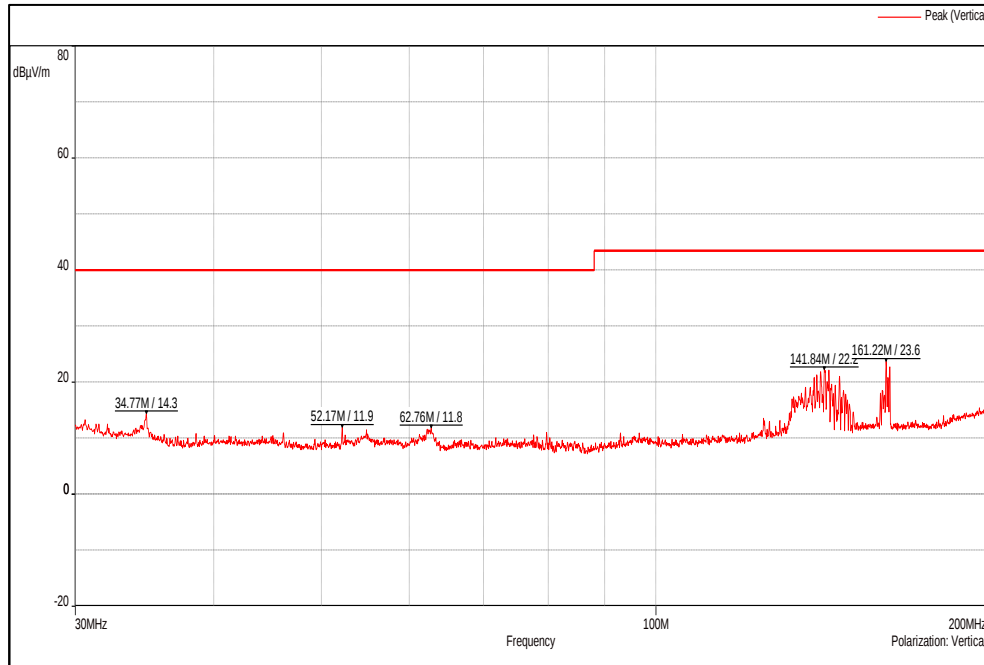

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 118 von 197
Page 118 of 197

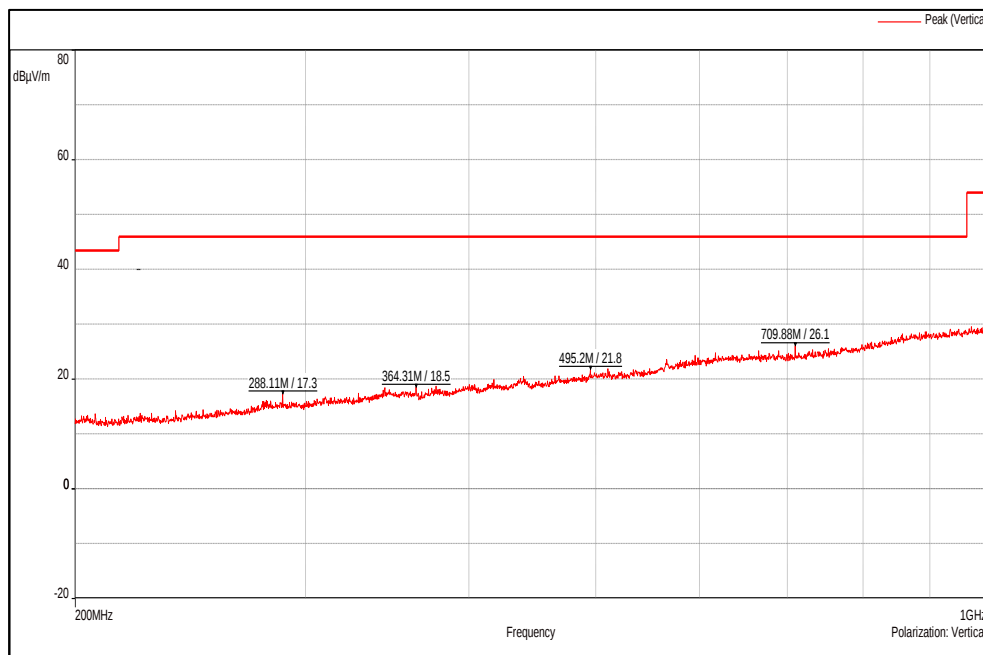

Channel Frequency 200MHz – 1GHz

Polarization Vertical

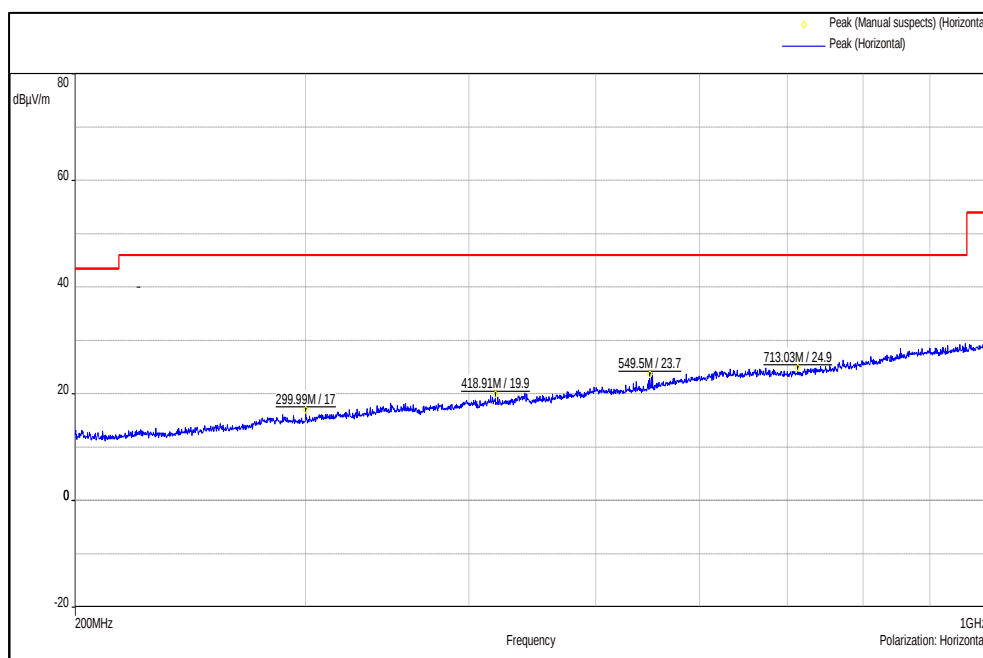

Channel Frequency 200MHz – 1GHz

Polarization Horizontal

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 119 von 197
Page 119 of 197

Vscan Air SL With Battery Mode: Vascular

Test results for frequency range 30MHz – 1GHz

Antenna Polarization	Measured Frequency (MHz)	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	53.88	12.64	40.00	-27.36
	85.62	13.80	40.00	-26.20
	112.20	20.15	43.50	-23.35
	124.89	14.95	43.50	-28.55
	268.13	15.24	46.00	-30.76
	339.02	17.84	46.00	-28.16
	401.99	19.49	46.00	-26.51
	868.79	28.99	46.00	-17.01
Horizontal	34.32	11.91	40.00	-28.09
	56.49	10.19	40.00	-29.81
	95.49	10.47	43.50	-33.03
	194.34	15.32	43.50	-28.18
	343.13	18.11	46.00	-27.89
	439.97	20.26	46.00	-25.74
	626.81	24.81	46.00	-21.19
	853.55	28.34	46.00	-17.66

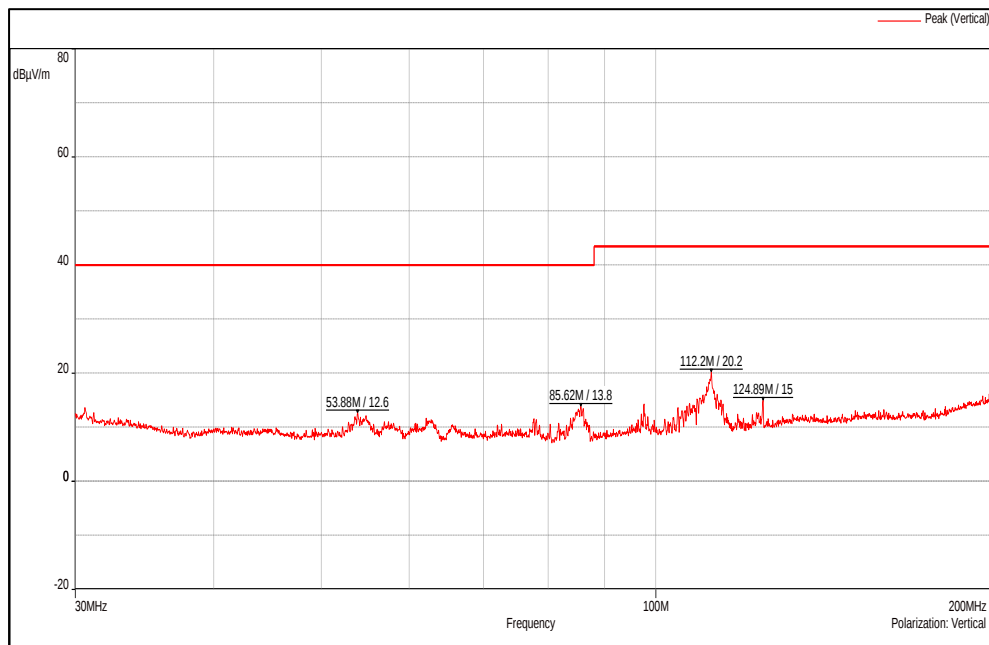


Channel Frequency 30MHz – 200MHz

Polarization Vertical

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 120 von 197
Page 120 of 197

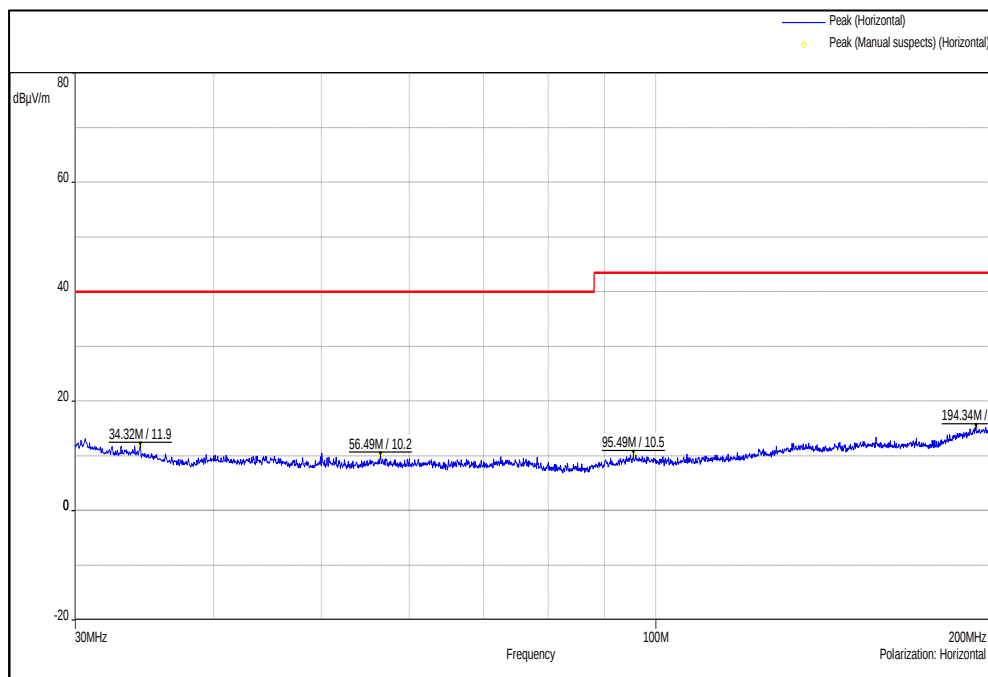

Channel Frequency 30MHz – 200MHz

Polarization Horizontal

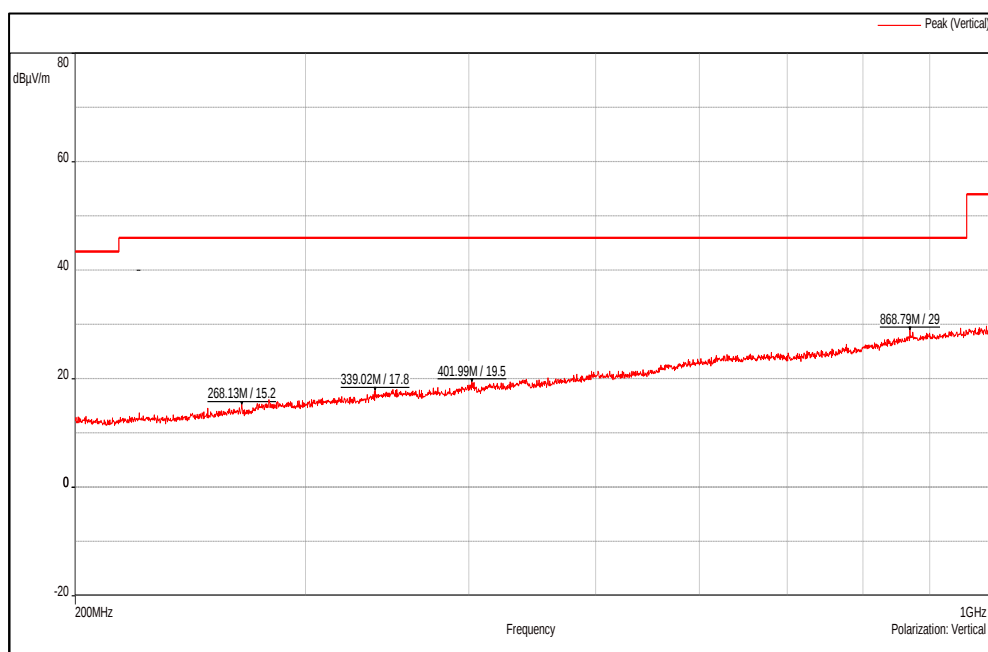


Channel Frequency 200MHz – 1GHz

Polarization Vertical

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 121 von 197
Page 121 of 197

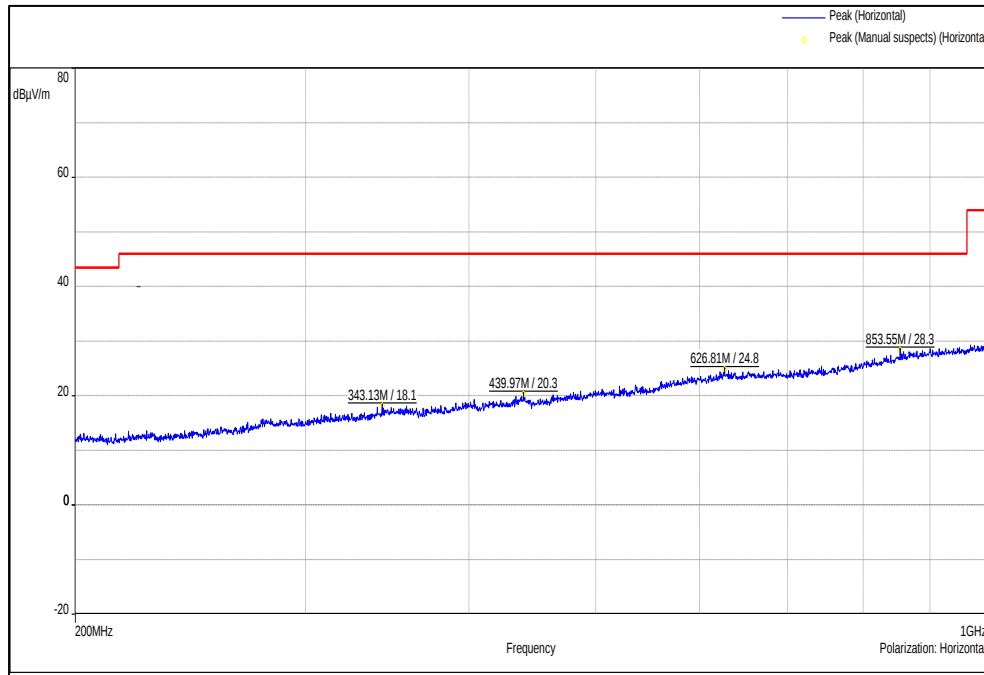

Vscan Air SL With Charging Mode: XP Adapter + Vscan Air Charger


Test results for frequency range 30MHz – 1GHz

Antenna Polarization	Measured Frequency (MHz)	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	63.21	31.95	40.00	-8.05
	85.02	27.16	40.00	-12.84
	187.20	31.39	43.50	-12.11
	208.01	29.96	43.50	-13.54
	256.13	26.43	46.00	-19.57
	546.50	29.41	46.00	-16.59
	662.69	33.67	46.00	-12.33
	680.27	32.26	46.00	-13.74
Horizontal	63.15	22.70	40.00	-17.30
	191.64	34.55	43.50	-8.95
	201.92	28.78	43.50	-14.72
	258.62	27.40	46.00	-18.60
	400.58	25.55	46.00	-20.45
	687.20	28.95	46.00	-17.05
	930.35	31.91	46.00	-14.09

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 122 von 197
Page 122 of 197

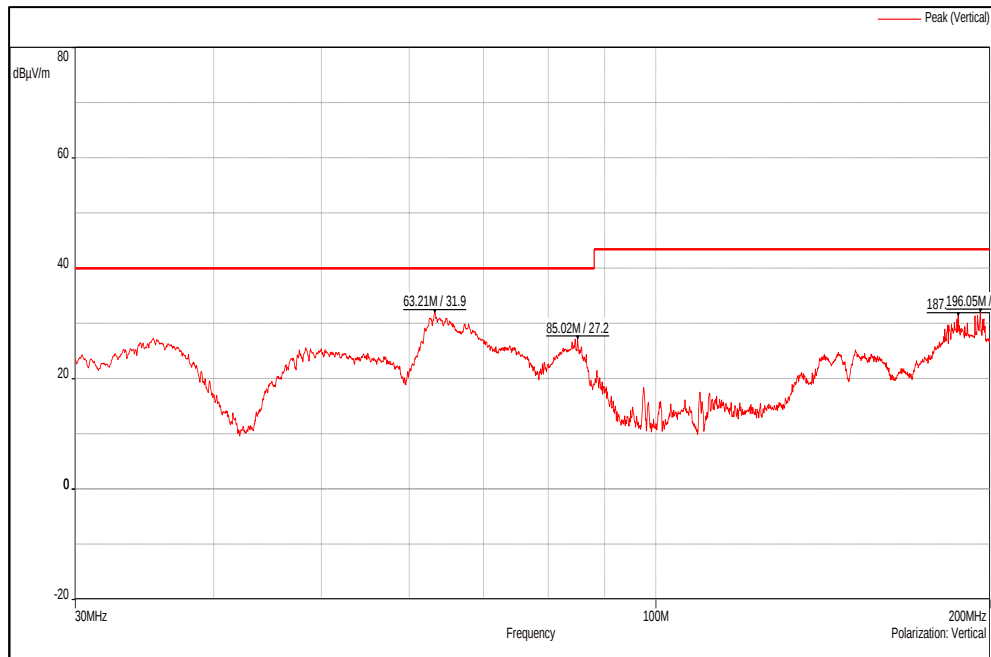

Channel Frequency 30MHz – 200MHz

Polarization Vertical

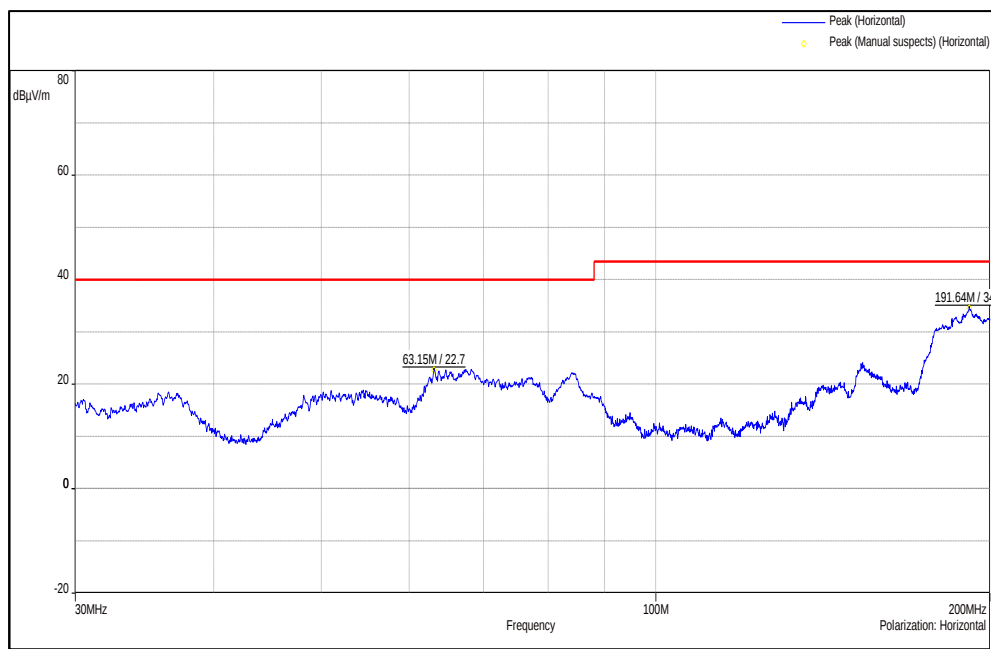


Channel Frequency 30MHz – 200MHz

Polarization Horizontal

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 123 von 197
Page 123 of 197

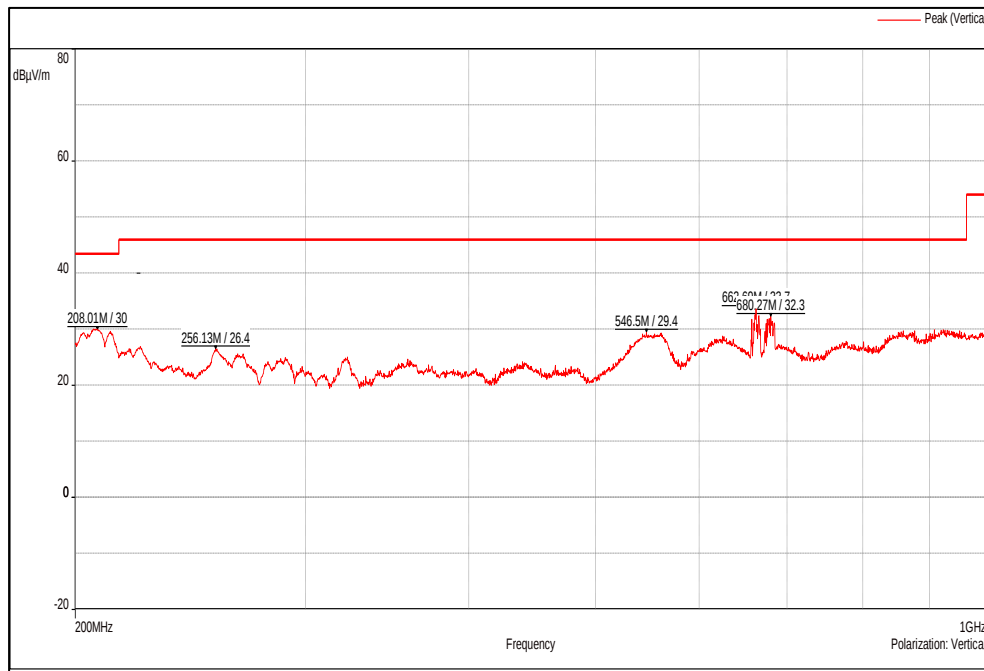

Channel Frequency 200MHz – 1GHz

Polarization Vertical

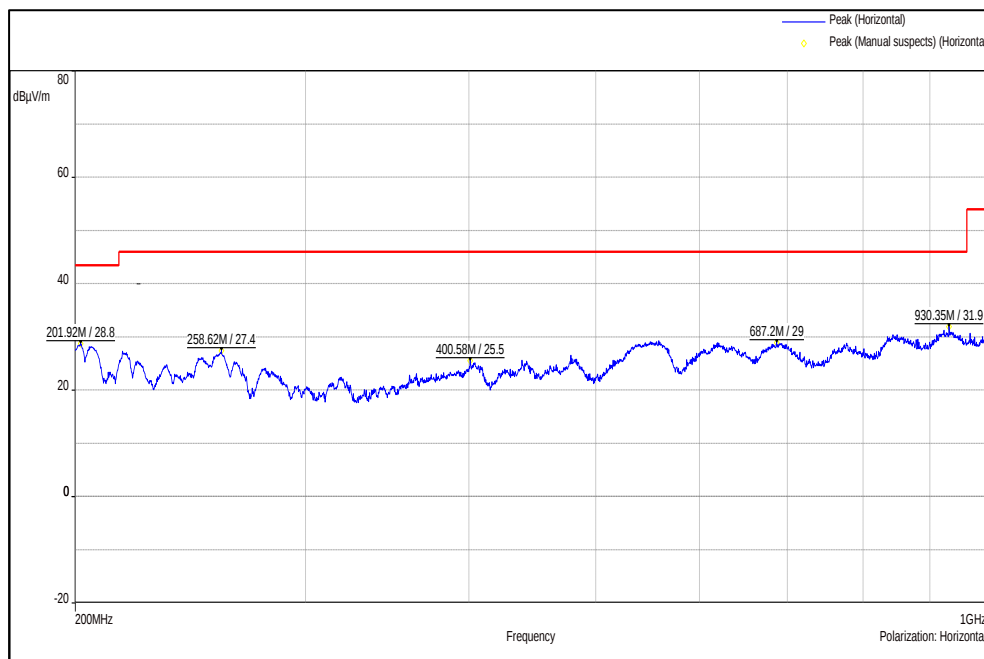

Channel Frequency 200MHz – 1GHz

Polarization Horizontal

Prüfbericht - Nr.:

Test Report No.:

IN22T1OT 001

ULR-TC568822300000100F

Seite 124 von 197

Page 124 of 197

Vscan Air SL With Charging Mode: GlobTek Power Adapter + Vscan Air Charger

Test results for frequency range 30MHz – 1GHz

Antenna Polarization	Measured Frequency (MHz)	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	35.19	32.07	40.00	-7.93
	48.56	17.06	40.00	-22.94
	63.49	27.71	40.00	-12.29
	96.06	29.90	43.50	-13.60
	160.98	30.40	43.50	-13.10
	202.37	27.76	46.00	-18.24
	256.25	24.08	46.00	-21.92
	558.71	26.17	46.00	-19.83
	619.85	27.46	46.00	-18.54
	771.47	27.76	46.00	-18.24
Horizontal	95.64	31.70	43.50	-11.80
	196.92	34.98	43.50	-8.52
	202.49	28.53	43.50	-14.97
	253.43	30.16	46.00	-15.84
	548.00	25.87	46.00	-20.13
	630.11	28.11	46.00	-17.89


Prüfbericht - Nr.:

Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F


Seite 125 von 197

Page 125 of 197

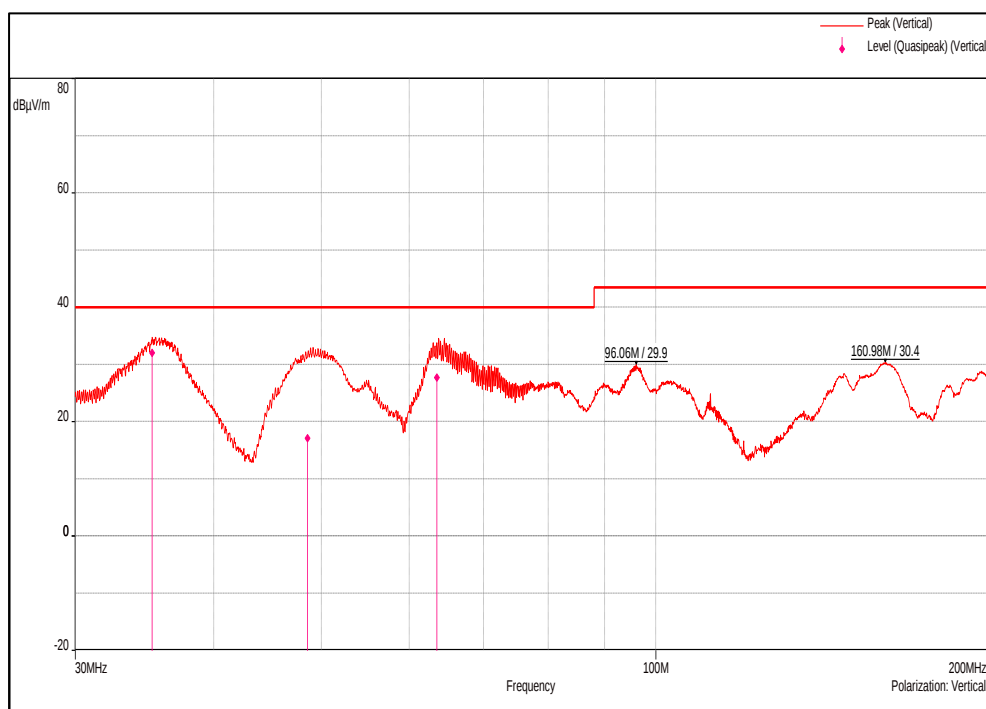

Channel Frequency 30MHz – 200MHz

Polarization Vertical

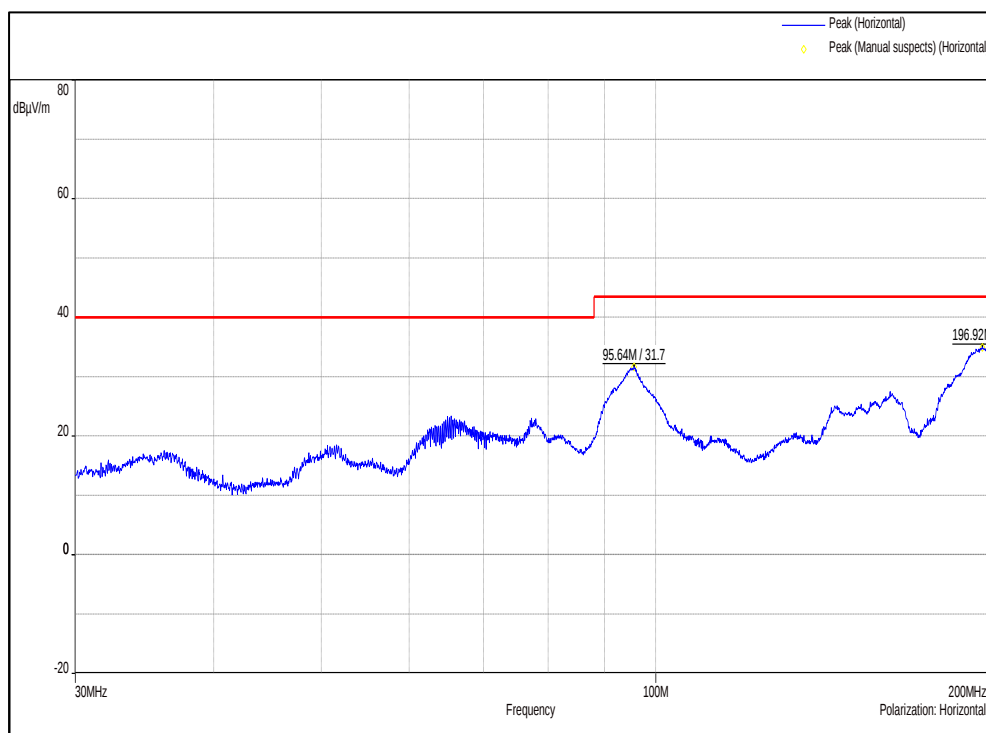


Channel Frequency 30MHz – 200MHz

Polarization Horizontal

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 126 von 197
Page 126 of 197

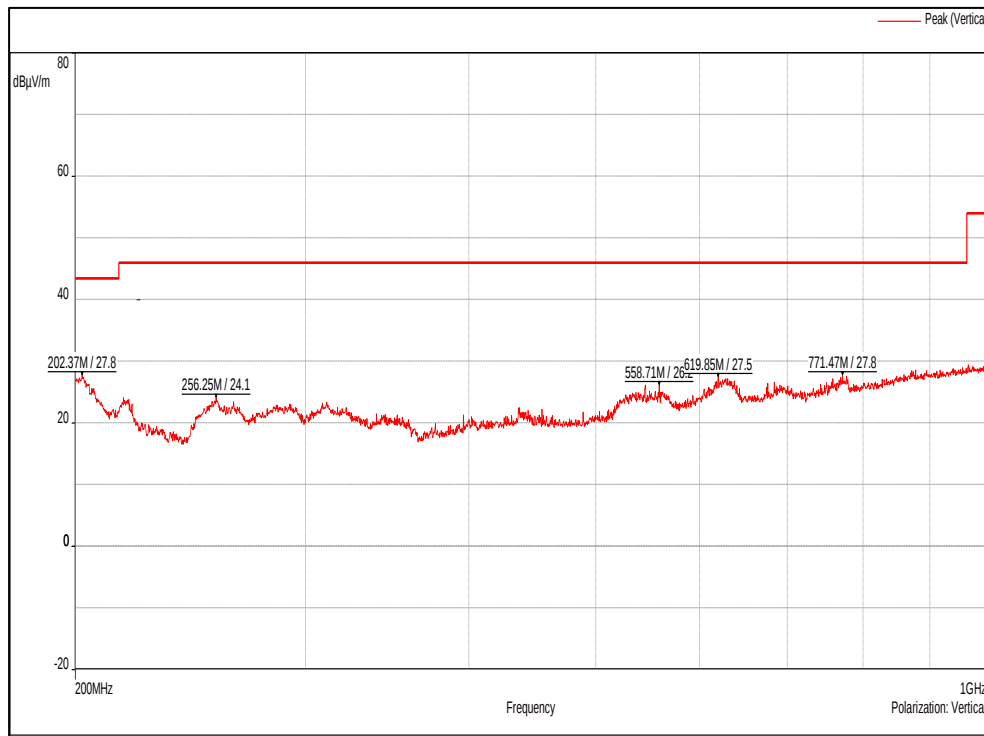

Channel Frequency 200MHz – 1GHz

Polarization Vertical

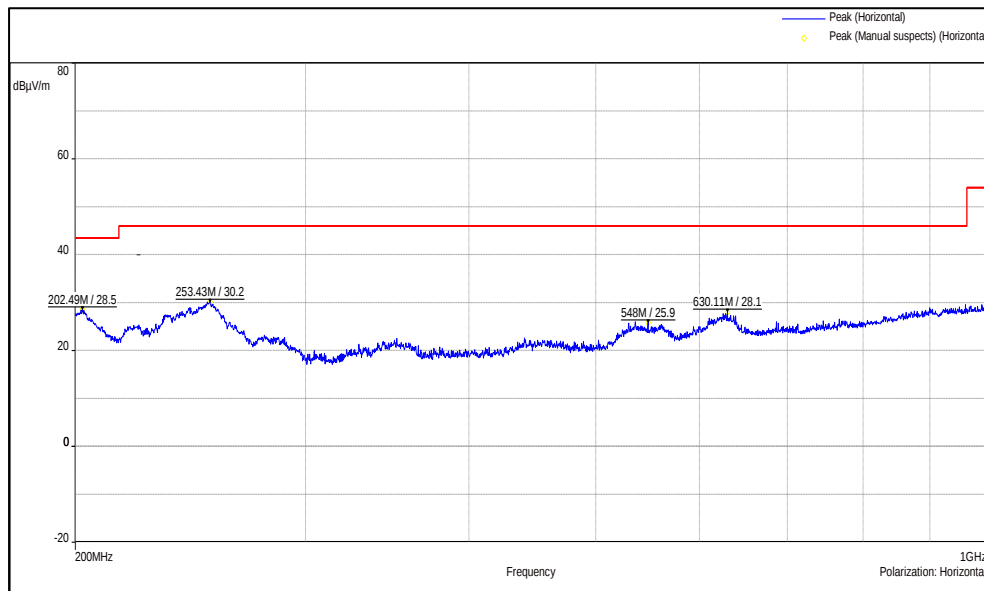

Channel Frequency 200MHz – 1GHz

Polarization Horizontal

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 127 von 197
Page 127 of 197

Vscan Air SL With Charging Mode: XP Power Adapter + Anker Charger Pad



Test results for frequency range 30MHz – 1GHz

Antenna Polarization	Measured Frequency (MHz)	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	36.714(Qp)	25.12	40.00	-14.88
	65.016(Qp)	24.68	40.00	-15.32
	49.95	26.17	40.00	-13.83
	191.61	31.46	43.50	-12.04
	202.52	31.94	43.50	-11.56
	324.49(Qp)	15.14	46.00	-30.86
	359.83(Qp)	13.42	46.00	-32.58
Horizontal	39.42	28.86	40.00	-11.14
	61.60(Qp)	6.04	40.00	-33.96
	66.69	28.44	40.00	-11.56
	156.81	24.31	43.50	-19.19
	192(Qp)	32.58	43.50	-10.92
	203.81	30.89	43.50	-12.61
	290.03	26.66	46.00	-19.34
	463.64	26.54	46.00	-19.46
	611.15	26.86	46.00	-19.14
	808.82	28.50	46.00	-17.50

Prüfbericht - Nr.:
Test Report No.:

IN22T10T 001
ULR-TC568822300000100F


Seite 128 von 197
Page 128 of 197

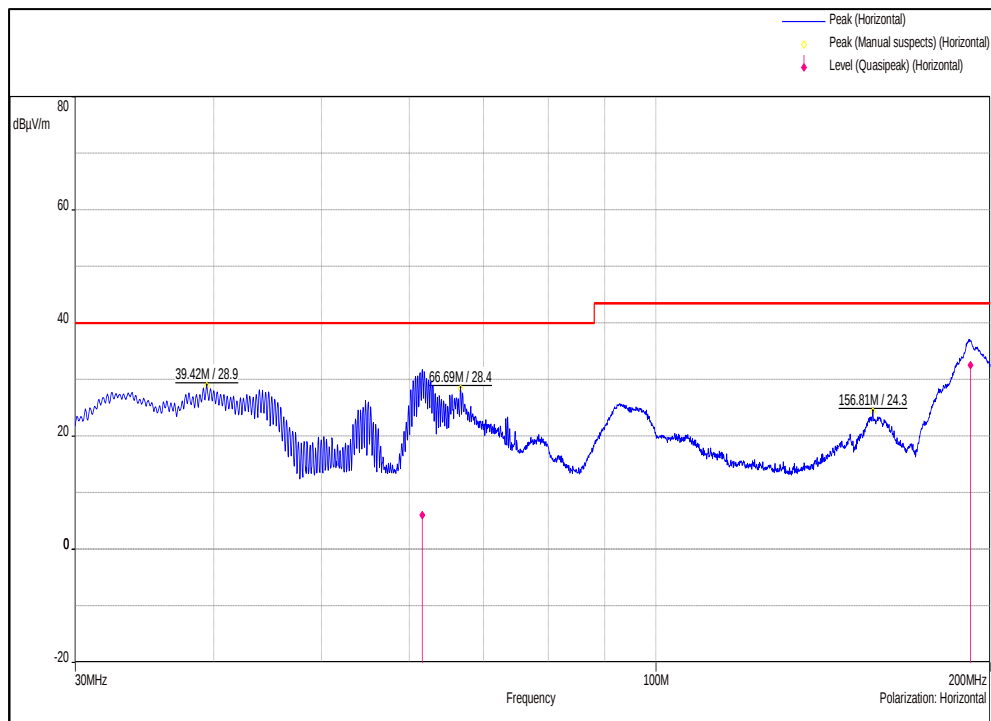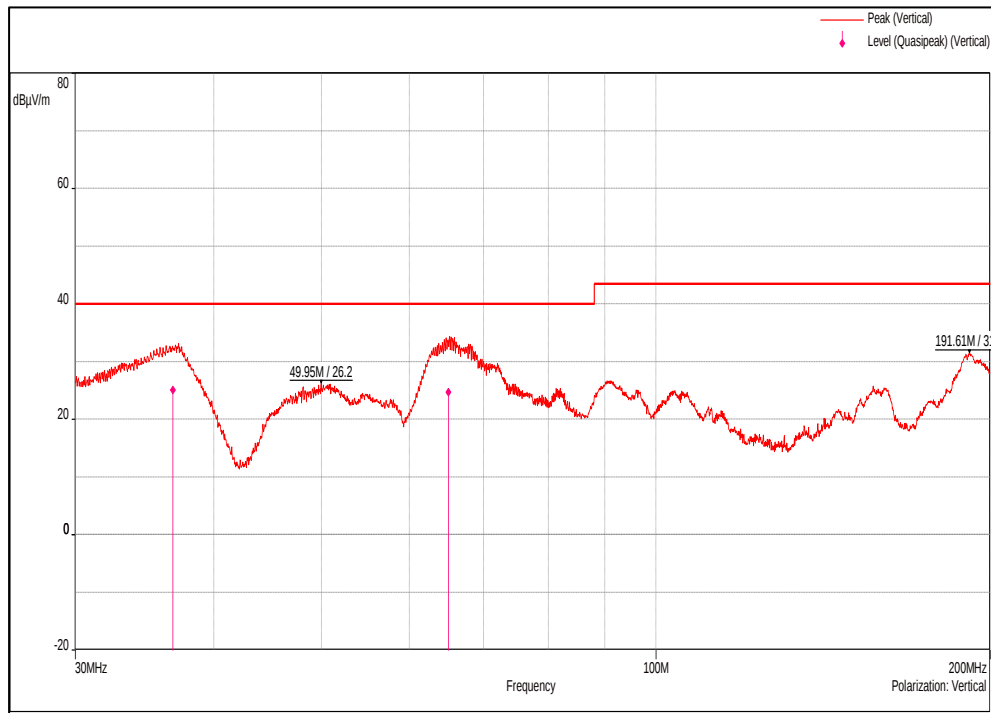

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 129 von 197
Page 129 of 197

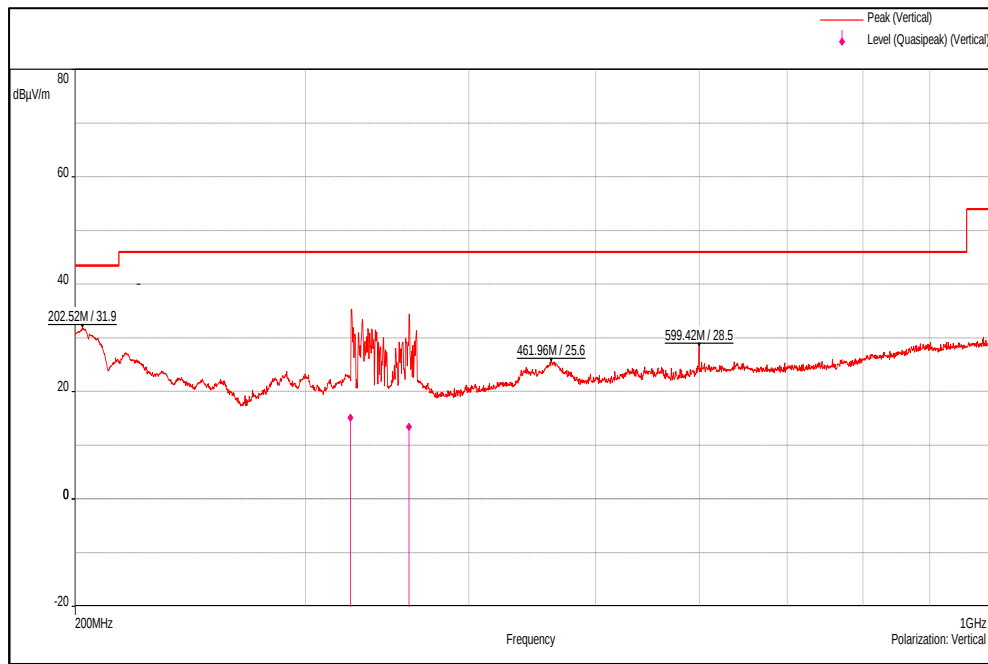

Channel Frequency 200MHz – 1GHz

Polarization Vertical

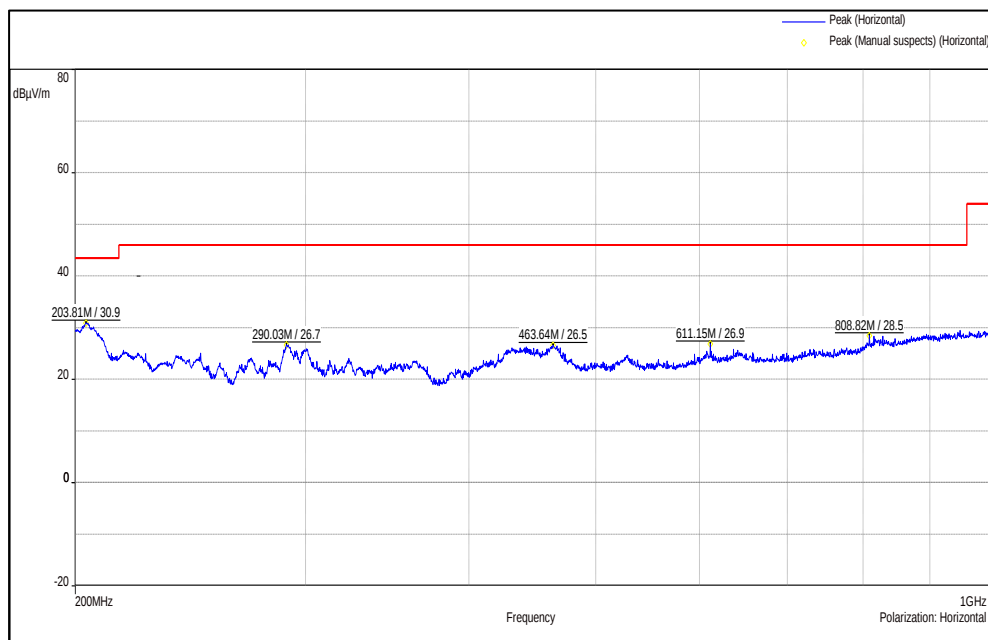

Channel Frequency 200MHz – 1GHz

Polarization Horizontal

Prüfbericht - Nr.:

Test Report No.:

IN22T1OT 001

ULR-TC568822300000100F

Seite 130 von 197

Page 130 of 197

Vscan Air SL With Charging Mode: GlobTek Power Adapter + Anker Charger Pad



Test results for frequency range 30MHz – 1GHz

Antenna Polarization	Measured Frequency (MHz)	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	35.196(Qp)	32.07	40.00	-7.93
	48.564(Qp)	17.06	40.00	-22.94
	63.498(Qp)	27.71	40.00	-12.29
	96.06	29.93	43.50	-13.57
	160.98	30.38	43.50	-13.12
	210.2	31.69	43.50	-11.81
	413.3	28.32	46.00	-17.68
	483.26	27.11	46.00	-18.89
	765.65	33.27	46.00	-12.73
	800.39	32.00	46.00	-14.00
Horizontal	95.64	31.69	43.50	-11.81
	196.92	34.98	43.50	-8.52
	205.76	32.77	43.50	-10.73
	246.74	28.73	46.00	-17.27
	279.95	28.29	46.00	-17.71
	494.87	25.77	46.00	-20.23

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F


Seite 131 von 197
Page 131 of 197

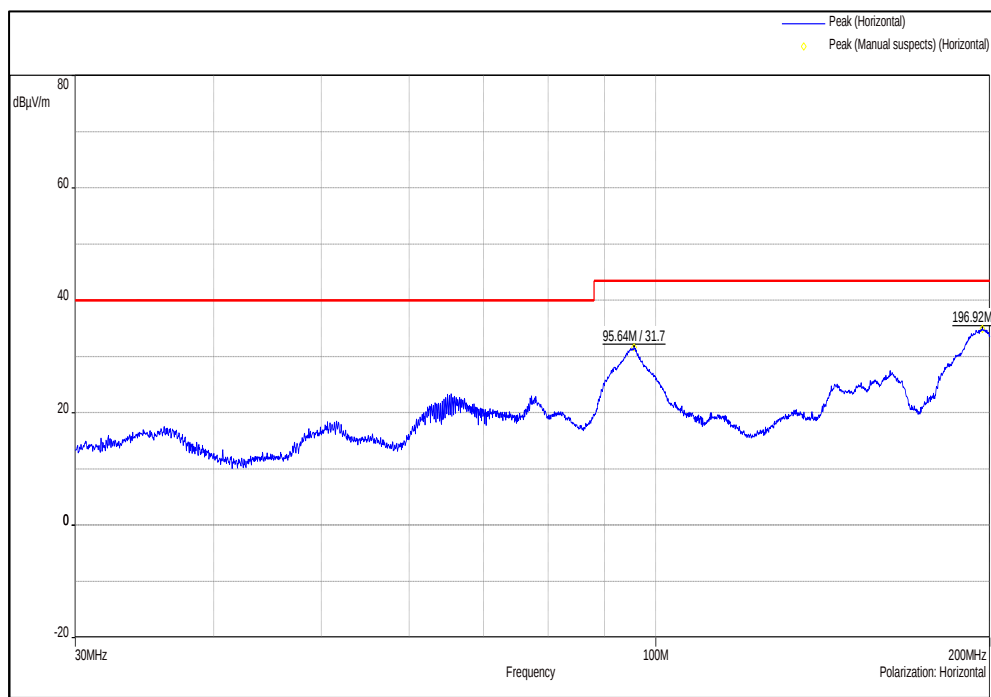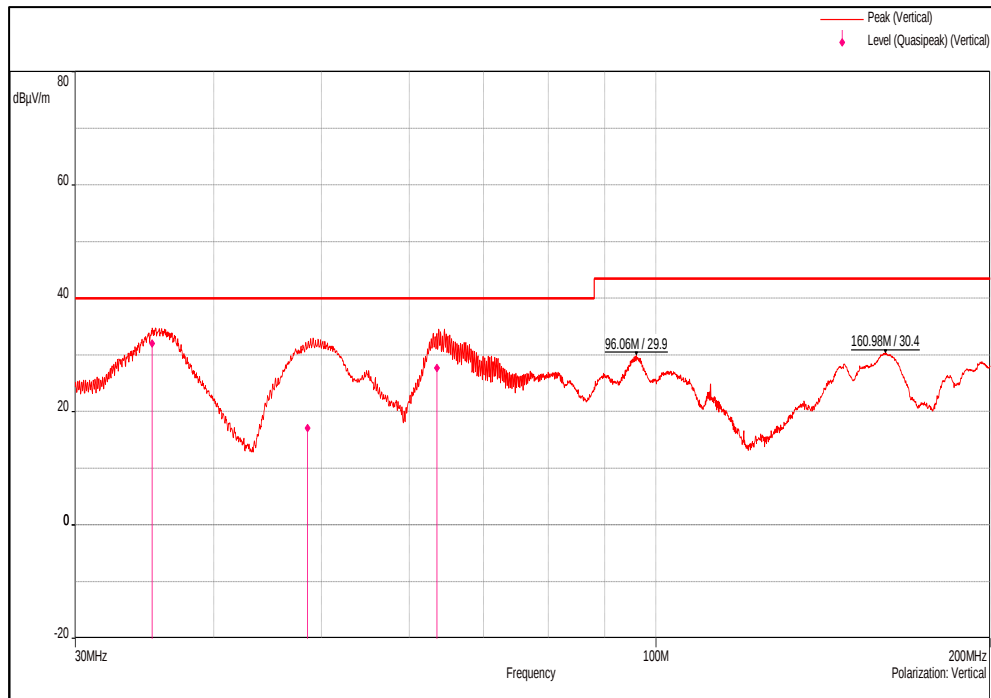

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 132 von 197
Page 132 of 197

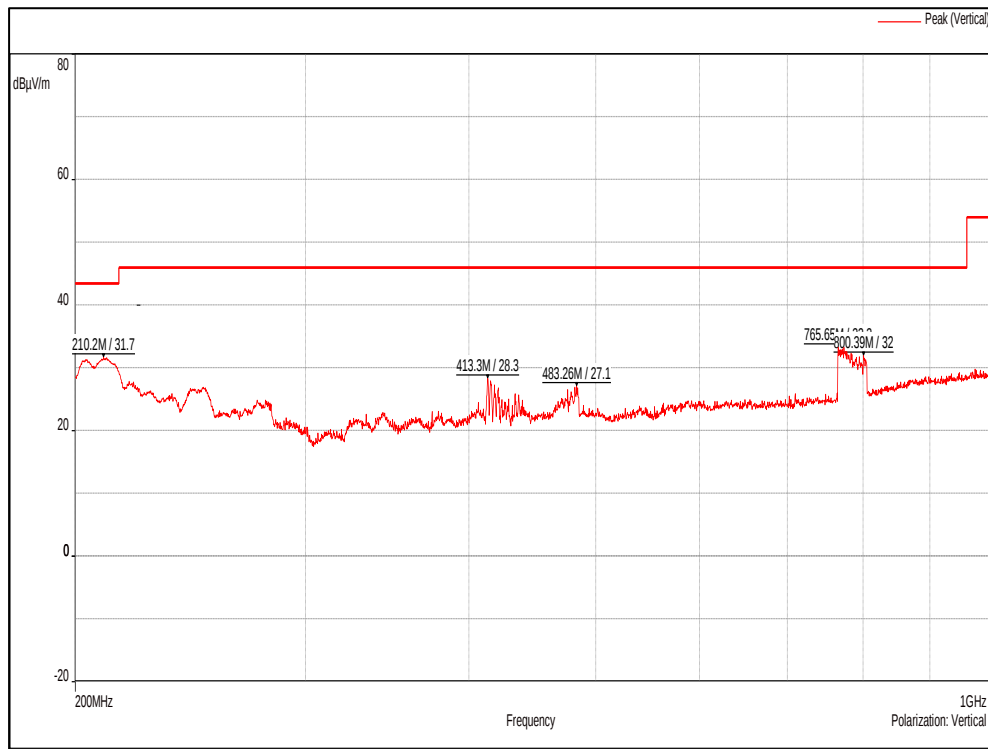

Channel Frequency 200MHz – 1GHz

Polarization Vertical

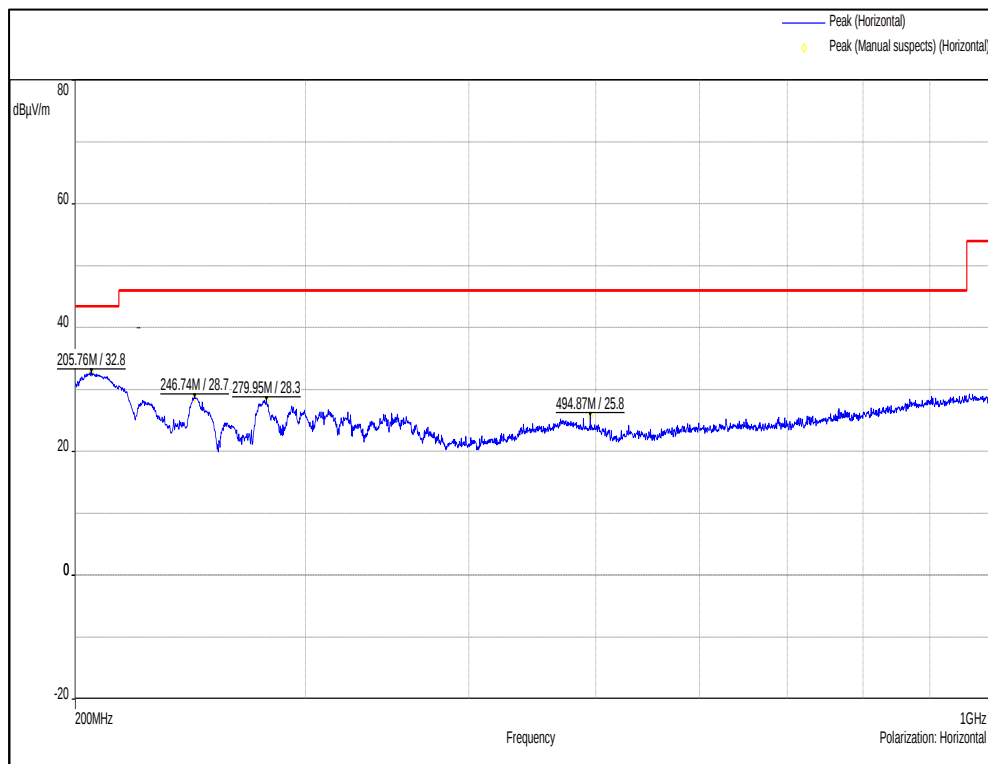

Channel Frequency 200MHz – 1GHz

Polarization Horizontal

Prüfbericht - Nr.:

Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 133 von 197

Page 133 of 197

Test results for the frequencies in the range 1 GHz to 26.5 GHz

Modulation: 802.11b

Data rate: 1Mbps

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2412	2412(Pk)	Vertical	94.96	-	-
	2412(Av)		92.52	-	-
	2390(Pk)		41.90	74*	-32.10
	2390(Av)		29.34	54*	-24.66
	4824(Pk)		44.10	74	-29.90
	4824(Av)		35.85	54	-18.15
	7236(Pk)		46.58	74	-27.42
	7236(Av)		34.66	54	-19.34
	2412(Pk)	Horizontal	100.58	-	-
	2412(Av)		98.23	-	-
	2390(Pk)		47.15	74*	-26.85
	2390(Av)		34.67	54*	-19.33
	4824(Pk)		43.61	74	-30.39
	4824(Av)		32.73	54	-21.27
	7236(Pk)		47.57	74	-26.43
	7236(Av)		34.70	54	-19.30
2437	2437(Pk)	Vertical	95.08	-	-
	2437(Av)		92.60	-	-
	4874(Pk)		45.71	74	-28.29
	4874(Av)		40.34	54	-13.66
	7311(Pk)		47.30	74	-26.70
	7311(Av)		34.83	54	-19.17
	2437(Pk)	Horizontal	101.61	-	-
	2437(Av)		99.18	-	-
	4874(Pk)		41.80	74	-32.20
	4874(Av)		30.27	54	-23.73
	7311(Pk)		47.42	74	-26.58
	7311(Av)		34.70	54	-19.30
2462	2462(Pk)	Vertical	96.10	-	-
	2462(Av)		93.61	-	-
	2483.5(Pk)		43.67	74*	-30.33
	2483.5(Av)		32.52	54*	-21.48
	4924(Pk)		44.26	74	-29.74
	4924(Av)		37.53	54	-16.47
	7386(Pk)		45.87	74	-28.13
	7386(Av)		34.16	54	-19.84
	2462(Pk)	Horizontal	101.84	-	-
	2462(Av)		99.34	-	-
	2483.5(Pk)		48.26	74*	-25.74
	2483.5(Av)		37.61	54*	-16.39
	4924(Pk)		44.71	74	-29.29
	4924(Av)		37.75	54	-16.25
	7386(Pk)		46.59	74	-27.41
	7386(Av)		34.31	54	-19.69

* : Indicate restricted band of operation §15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 134 von 197

Page 134 of 197

Modulation: 802.11b

Data rate: 11Mbps

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2412	2412(Pk)	Vertical	96.81	-	-
	2412(Av)		86.69	-	-
	2390(Pk)		54.27	74*	-19.73
	2390(Av)		33.45	54*	-20.55
	4824(Pk)		43.50	74	-30.50
	4824(Av)		29.10	54	-24.90
	7236(Pk)		46.91	74	-27.09
	7236(Av)		34.35	54	-19.65
	2412(Pk)	Horizontal	102.20	-	-
	2412(Av)		92.35	-	-
	2390(Pk)		60.36	74*	-13.64
	2390(Av)		39.46	54*	-14.54
	4824(Pk)		42.44	74	-31.56
	4824(Av)		31.22	54	-22.78
	7236(Pk)		46.54	74	-27.46
	7236(Av)		34.35	54	-19.65
2437	2437(Pk)	Vertical	101.69	-	-
	2437(Av)		90.97	-	-
	4874(Pk)		45.46	74	-28.54
	4874(Av)		39.09	54	-14.91
	7311(Pk)		46.70	74	-27.30
	7311(Av)		34.48	54	-19.52
	2437(Pk)	Horizontal	107.24	-	-
	2437(Av)		97.39	-	-
	4874(Pk)		42.21	74	-31.79
	4874(Av)		30.76	54	-23.24
	7311(Pk)		46.34	74	-27.66
	7311(Av)		34.38	54	-19.62
2462	2462(Pk)	Vertical	97.07	-	-
	2462(Av)		87.05	-	-
	2483.5(Pk)		57.92	74*	-16.08
	2483.5(Av)		34.36	54*	-19.64
	4924(Pk)		46.30	74	-27.70
	4924(Av)		41.31	54	-12.69
	7386(Pk)		46.29	74	-27.71
	7386(Av)		34.04	54	-19.96
	2462(Pk)	Horizontal	103.07	-	-
	2462(Av)		92.80	-	-
	2483.5(Pk)		63.33	74*	-10.67
	2483.5(Av)		39.17	54*	-14.83
	4924(Pk)		43.17	74	-30.83
	4924(Av)		35.31	54	-18.69
	7386(Pk)		45.47	74	-28.53
	7386(Av)		34.05	54	-19.95

* : Indicate restricted band of operation §15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 135 von 197

Page 135 of 197

Modulation: 802.11g

Data rate: 6Mbps

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2412	2412(Pk)	Vertical	100.07	-	-
	2412(Av)		90.15	-	-
	2390(Pk)		55.10	74.00*	-18.90
	2390(Av)		36.05	54.00*	-17.95
	4824(Pk)		49.32	74.00	-24.68
	4824(Av)		36.12	54.00	-17.88
	7236(Pk)		49.38	74.00	-24.62
	7236(Av)		36.27	54.00	-17.73
	2412(Pk)	Horizontal	106.42	-	-
	2412(Av)		96.36	-	-
	2390(Pk)		68.25	74.00*	-5.75
	2390(Av)		47.78	54.00*	-6.22
	4824(Pk)		55.49	74.00	-18.51
	4824(Av)		42.55	54.00	-11.45
	7236(Pk)		50.52	74.00	-23.48
	7236(Av)		36.95	54.00	-17.05
2437	2437(Pk)	Vertical	97.41	-	-
	2437(Av)		88.21	-	-
	4874(Pk)		48.59	74.00	-25.41
	4874(Av)		34.22	54.00	-19.78
	7311(Pk)		46.86	74.00	-27.14
	7311(Av)		35.54	54.00	-18.46
	2437(Pk)	Horizontal	106.23	-	-
	2437(Av)		96.16	-	-
	4874(Pk)		44.09	74.00	-29.91
	4874(Av)		31.55	54.00	-22.45
	7311(Pk)		46.78	74.00	-27.22
	7311(Av)		34.87	54.00	-19.13
2462	2462(Pk)	Vertical	99.53	-	-
	2462(Av)		90.10	-	-
	2483.5(Pk)		60.60	74.00*	-13.40
	2483.5(Av)		40.12	54.00*	-13.88
	4924(Pk)		48.75	74.00	-25.25
	4924(Av)		34.53	54.00	-19.47
	7386(Pk)		47.92	74.00	-26.08
	7386(Av)		35.75	54.00	-18.25
	2462(Pk)	Horizontal	107.20	-	-
	2462(Av)		97.00	-	-
	2483.5(Pk)		69.74	74.00*	-4.26
	2483.5(Av)		46.57	54.00*	-7.43
	4924(Pk)		53.28	74.00	-20.72
	4924(Av)		40.02	54.00	-13.98
	7386(Pk)		49.10	74.00	-24.90
	7386(Av)		36.44	54.00	-17.56

* : Indicate restricted band of operation §15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 136 von 197

Page 136 of 197

Modulation: 802.11g

Data Rate: 24Mbps

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2412	2412(Pk)	Vertical	97.60	-	-
	2412(Av)		85.48	-	-
	2390(Pk)		55.57	74*	-18.43
	2390(Av)		32.05	54*	-21.95
	4824(Pk)		46.27	74	-27.73
	4824(Av)		38.40	54	-15.60
	7236(Pk)		46.20	74	-27.80
	7236(Av)		34.27	54	-19.73
	2412(Pk)	Horizontal	103.20	-	-
	2412(Av)		91.27	-	-
	2390(Pk)		62.08	74*	-11.92
	2390(Av)		38.07	54*	-15.93
	4824(Pk)		42.68	74	-31.32
	4824(Av)		31.68	54	-22.32
	7236(Pk)		46.84	74	-27.16
	7236(Av)		34.33	54	-19.67
2437	2437(Pk)	Vertical	102.33	-	-
	2437(Av)		89.05	-	-
	4874(Pk)		43.13	74	-30.87
	4874(Av)		34.50	54	-19.50
	7311(Pk)		46.36	74	-27.64
	7311(Av)		34.44	54	-19.56
	2437(Pk)	Horizontal	108.74	-	-
	2437(Av)		95.49	-	-
	4874(Pk)		40.95	74	-33.05
	4874(Av)		30.22	54	-23.78
	7311(Pk)		46.02	74	-27.98
	7311(Av)		34.39	54	-19.61
2462	2462(Pk)	Vertical	97.46	-	-
	2462(Av)		85.53	-	-
	2483.5(Pk)		59.51	74*	-14.49
	2483.5(Av)		33.35	54*	-20.65
	4924(Pk)		44.49	74	-29.51
	4924(Av)		36.10	54	-17.90
	7386(Pk)		45.76	74	-28.24
	7386(Av)		34.17	54	-19.83
	2462(Pk)	Horizontal	103.74	-	-
	2462(Av)		91.62	-	-
	2483.5(Pk)		66.00	74*	-8.00
	2483.5(Av)		38.28	54*	-15.72
	4924(Pk)		42.31	74	-31.69
	4924(Av)		32.49	54	-21.51
	7386(Pk)		46.56	74	-27.44
	7386(Av)		34.15	54	-19.85

* : Indicate restricted band of operation §15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 137 von 197

Page 137 of 197

Modulation: 802.11g

Data rate: 54Mbps

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2412	2412(Pk)	Vertical	97.62	-	-
	2412(Av)		83.97	-	-
	2390(Pk)		56.75	74*	-17.25
	2390(Av)		31.13	54*	-22.87
	4824(Pk)		42.73	74	-31.27
	4824(Av)		30.96	54	-23.04
	7236(Pk)		46.49	74	-27.51
	7236(Av)		34.33	54	-19.67
	2412(Pk)	Horizontal	103..87	-	-
	2412(Av)		90.22	-	-
	2390(Pk)		63.76	74*	-10.24
	2390(Av)		36.90	54*	-17.10
	4824(Pk)		42.83	74	-31.17
	4824(Av)		33.70	54	-20.30
	7236(Pk)		47.79	74	-26.21
	7236(Av)		34.34	54	-19.66
2437	2437(Pk)	Vertical	99.09	-	-
	2437(Av)		85.54	-	-
	4874(Pk)		43.05	74	-30.95
	4874(Av)		32.52	54	-21.48
	7311(Pk)		46.00	74	-28.00
	7311(Av)		34.40	54	-19.60
	2437(Pk)	Horizontal	105.53	-	-
	2437(Av)		92.11	-	-
	4874(Pk)		42.31	74	-31.69
	4874(Av)		33.10	54	-20.90
	7311(Pk)		46.49	74	-27.51
	7311(Av)		34.43	54	-19.57
2462	2462(Pk)	Vertical	98.22	-	-
	2462(Av)		84.74	-	-
	2483.5(Pk)		60.05	74*	-13.95
	2483.5(Av)		33.09	54*	-20.91
	4924(Pk)		43.96	74	-30.04
	4924(Av)		34.39	54	-19.61
	7386(Pk)		46.03	74	-27.97
	7386(Av)		34.11	54	-19.89
	2462(Pk)	Horizontal	104.02	-	-
	2462(Av)		90.43	-	-
	2483.5(Pk)		64.96	74*	-9.04
	2483.5(Av)		37.63	54*	-16.37
	4924(Pk)		75.03	74	1.03
	4924(Av)		35.80	54	-18.20
	7386(Pk)		45.91	74	-28.09
	7386(Av)		34.10	54	-19.90

* : Indicate restricted band of operation §15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 138 von 197
Page 138 of 197

Modulation: 802.11n HT20
Data rate: MCS0

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2412	2412(Pk)	Vertical	94.92	-	-
	2412(Av)		83.41	-	-
	2390(Pk)		56.24	74*	-17.76
	2390(Av)		32.28	54*	-21.72
	4824(Pk)		41.55	74	-32.45
	4824(Av)		30.10	54	-23.90
	7236(Pk)		46.95	74	-27.05
	7236(Av)		34.34	54	-19.66
	2412(Pk)	Horizontal	103.63	-	-
	2412(Av)		92.31	-	-
	2390(Pk)		65.20	74*	-8.80
	2390(Av)		41.23	54*	-12.77
	4824(Pk)		40.80	74	-33.20
	4824(Av)		29.44	54	-24.56
	7236(Pk)		46.10	74	-27.90
	7236(Av)		34..31	54	-19.69
2437	2437(Pk)	Vertical	100.38	-	-
	2437(Av)		89.15	-	-
	4874(Pk)		42.77	74	-31.23
	4874(Av)		34.01	54	-19.99
	7311(Pk)		46.57	74	-27.43
	7311(Av)		34.42	54	-19.58
	2437(Pk)	Horizontal	107.77	-	-
	2437(Av)		96.24	-	-
	4874(Pk)		41.68	74	-32.32
	4874(Av)		29.76	54	-24.24
	7311(Pk)		46.79	74	-27.21
	7311(Av)		34.38	54	-19.62
2462	2462(Pk)	Vertical	98.09	-	-
	2462(Av)		86.36	-	-
	2483.5(Pk)		60.63	74*	-13.37
	2483.5(Av)		35.40	54*	-18.60
	4924(Pk)		43.92	74	-30.08
	4924(Av)		36.41	54	-17.59
	7386(Pk)		45.37	74	-28.63
	7386(Av)		34.09	54	-19.91
	2462(Pk)	Horizontal	104.14	-	-
	2462(Av)		92.67	-	-
	2483.5(Pk)		64.53	74*	-9.47
	2483.5(Av)		41.20	54*	-12.80
	4924(Pk)		33.69	74	-40.31
	4924(Av)		43.16	54	-10.84
	7386(Pk)		45.83	74	-28.17
	7386(Av)		34.10	54	-19.90

* : Indicate restricted band of operation §15.205
Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 139 von 197

Page 139 of 197

Modulation: 802.11n HT20

Data rate: MCS4

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2412	2412(Pk)	Vertical	96.43	-	-
	2412(Av)		83.69	-	-
	2390(Pk)		54.03	74*	-19.97
	2390(Av)		33.43	54*	-20.57
	4824(Pk)		44.53	74	-29.47
	4824(Av)		35.81	54	-18.19
	7236(Pk)		46.35	74	-27.65
	7236(Av)		34.35	54	-19.65
	2412(Pk)	Horizontal	103.56	-	-
	2412(Av)		90.77	-	-
	2390(Pk)		62.16	74*	-11.84
	2390(Av)		40.41	54*	-13.59
	4824(Pk)		42.80	74	-31.20
	4824(Av)		32.27	54	-21.73
	7236(Pk)		46.10	74	-27.90
	7236(Av)		34.31	54	-19.69
2437	2437(Pk)	Vertical	100.58	-	-
	2437(Av)		87.40	-	-
	4874(Pk)		43.09	74	-30.91
	4874(Av)		33.91	54	-20.09
	7311(Pk)		46.94	74	-27.06
	7311(Av)		34.44	54	-19.56
	2437(Pk)	Horizontal	106.62	-	-
	2437(Av)		93.49	-	-
	4874(Pk)		42.88	74	-31.12
	4874(Av)		32.10	54	-21.90
	7311(Pk)		46.46	74	-27.54
	7311(Av)		34.43	54	-19.57
2462	2462(Pk)	Vertical	97.46	-	-
	2462(Av)		84.83	-	-
	2483.5(Pk)		57.35	74*	-16.65
	2483.5(Av)		35.16	54*	-18.84
	4924(Pk)		44.07	74	-29.93
	4924(Av)		36.18	54	-17.82
	7386(Pk)		46.54	74	-27.46
	7386(Av)		34.14	54	-19.86
	2462(Pk)	Horizontal	103.72	-	-
	2462(Av)		90.82	-	-
	2483.5(Pk)		62.67	74*	-11.33
	2483.5(Av)		40.60	54*	-13.40
	4924(Pk)		43.12	74	-30.88
	4924(Av)		33.39	54	-20.61
	7386(Pk)		46.55	74	-27.45
	7386(Av)		34.14	54	-19.86

* : Indicate restricted band of operation §15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 140 von 197
Page 140 of 197

Modulation: 802.11n HT20
Data Rate: MCS7

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2412	2412(Pk)	Vertical	97.17	-	-
	2412(Av)		82.82	-	-
	2390(Pk)		57.46	74*	-16.54
	2390(Av)		32.08	54*	-21.92
	4824(Pk)		42.43	74	-31.57
	4824(Av)		32.40	54	-21.60
	7236(Pk)		45.80	74	-28.20
	7236(Av)		34.32	54	-19.68
	2412(Pk)	Horizontal	104.01	-	-
	2412(Av)		89.65	-	-
	2390(Pk)		64.58	74*	-9.42
	2390(Av)		38.11	54*	-15.89
	4824(Pk)		42.31	74	-31.69
	4824(Av)		32.28	54	-21.72
	7236(Pk)		46.45	74	-27.55
	7236(Av)		34.33	54	-19.67
2437	2437(Pk)	Vertical	98.15	-	-
	2437(Av)		83.81	-	-
	4874(Pk)		42.94	74	-31.06
	4874(Av)		33.69	54	-20.31
	7311(Pk)		46.71	74	-27.29
	7311(Av)		34.44	54	-19.56
	2437(Pk)	Horizontal	104.04	-	-
	2437(Av)		89.67	-	-
	4874(Pk)		42.20	74	-31.80
	4874(Av)		32.06	54	-21.94
	7311(Pk)		46.00	74	-28.00
	7311(Av)		34.43	54	-19.57
2462	2462(Pk)	Vertical	98.06	-	-
	2462(Av)		83.70	-	-
	2483.5(Pk)		60.79	74*	-13.21
	2483.5(Av)		32.54	54*	-21.46
	4924(Pk)		44.70	74	-29.30
	4924(Av)		35.82	54	-18.18
	7386(Pk)		45.89	74	-28.11
	7386(Av)		34.17	54	-19.83
	2462(Pk)	Horizontal	104.25	-	-
	2462(Av)		89.90	-	-
	2483.5(Pk)		66.50	74*	-7.50
	2483.5(Av)		37.73	54*	-16.27
	4924(Pk)		43.24	74	-30.76
	4924(Av)		33.22	54	-20.78
	7386(Pk)		45.65	74	-28.35
	7386(Av)		34.14	54	-19.86

* : Indicate restricted band of operation §15.205
Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 141 von 197

Page 141 of 197

Modulation: 802.11n HT40

Data rate: MCS0

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2422	2422(Pk)	Vertical	92.40	-	-
	2422(Av)		79.87	-	-
	2390(Pk)		53.71	74*	-20.29
	2390(Av)		33.74	54*	-20.26
	4844(Pk)		44.03	74	-29.97
	4844(Av)		34.71	54	-19.29
	7266(Pk)		46.62	74	-27.38
	7266(Av)		34.52	54	-19.48
	2422(Pk)	Horizontal	99.00	-	-
	2422(Av)		86.26	-	-
	2390(Pk)		61.06	74*	-12.94
	2390(Av)		39.86	54*	-14.14
	4844(Pk)		43.64	74	-30.36
	4844(Av)		34.82	54	-19.18
	7266(Pk)		46.32	74	-27.68
	7266(Av)		34.52	54	-19.48
2452	2452(Pk)	Vertical	93.65	-	-
	2452(Av)		81.07	-	-
	2483.5(Pk)		55.83	74*	
	2483.5(Av)		32.83	54*	
	4904(Pk)		43.61	74	-30.39
	4904(Av)		35.80	54	-18.20
	7356(Pk)		47.15	74	-26.85
	7356(Av)		34.29	54	-19.71
	2452(Pk)	Horizontal	99.75	-	-
	2452(Av)		87.12	-	-
	2483.5(Pk)		61.87	74*	-12.13
	2483.5(Av)		38.11	54*	-15.89
	4904(Pk)		43.76	74	-30.24
	4904(Av)		34.80	54	-19.20
	7356(Pk)		47.13	74	-26.87
	7356(Av)		34.33	54	-19.67

*: Indicate restricted band of operation §15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 142 von 197
Page 142 of 197

Data rate: MCS4

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2422	2422(Pk)	Vertical	91.48	-	-
	2422(Av)		76.75	-	-
	2390(Pk)		51.61	74*	-22.39
	2390(Av)		32.89	54*	-21.11
	4844(Pk)		44.30	74	-29.70
	4844(Av)		34.66	54	-19.34
	7266(Pk)		46.23	74	-27.77
	7266(Av)		34.57	54	-19.43
	2422(Pk)	Horizontal	98.13	-	-
	2422(Av)		83.43	-	-
	2390(Pk)		59.75	74*	-14.25
	2390(Av)		39.17	54*	-14.83
	4844(Pk)		44.40	74	-29.60
	4844(Av)		33.58	54	-20.42
	7266(Pk)		46.91	74	-27.09
	7266(Av)		34.55	54	-19.45
2452	2452(Pk)	Vertical	92.98	-	-
	2452(Av)		78.24	-	-
	2483.5(Pk)		53.01	74*	-20.99
	2483.5(Av)		32.22	54*	-21.78
	4904(Pk)		44.40	74	-29.60
	4904(Av)		35.82	54	-18.18
	7356(Pk)		47.32	74	-26.68
	7356(Av)		34.30	54	-19.70
	2452(Pk)	Horizontal	98.60	-	-
	2452(Av)		83.93	-	-
	2483.5(Pk)		58.14	74*	-15.86
	2483.5(Av)		37.31	54*	-16.69
	4904(Pk)		44.33	74	-29.67
	4904(Av)		35.30	54	-18.70
	7356(Pk)		46.10	74	-27.90
	7356(Av)		34.35	54	-19.65

*: Indicate restricted band of operation §15.205
Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 143 von 197
Page 143 of 197

Data rate: MCS7

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2422	2422(Pk)	Vertical	91.46	-	-
	2422(Av)		75.36	-	-
	2390(Pk)		52.86	74*	-21.14
	2390(Av)		31.09	54*	-22.91
	4844(Pk)		42.95	74	-31.05
	4844(Av)		32.57	54	-21.43
	7266(Pk)		46.61	74	-27.39
	7266(Av)		34.55	54	-19.45
	2422(Pk)	Horizontal	97.89	-	-
	2422(Av)		82.05	-	-
	2390(Pk)		60.32	74*	-13.68
	2390(Av)		37.06	54*	-16.94
	4844(Pk)		44.32	74	-29.68
	4844(Av)		34.16	54	-19.84
	7266(Pk)		47.05	74	-26.95
	7266(Av)		34.55	54	-19.45
2452	2452(Pk)	Vertical	92.44	-	-
	2452(Av)		76.59	-	-
	2483.5(Pk)		54.41	74*	-19.59
	2483.5(Av)		31.16	54*	-22.84
	4904(Pk)		44.88	74	-29.12
	4904(Av)		36.34	54	-17.66
	7356(Pk)		47.06	74	-26.94
	7356(Av)		34.31	54	-19.69
	2452(Pk)	Horizontal	97.99	-	-
	2452(Av)		82.11	-	-
	2483.5(Pk)		59.49	74*	-14.51
	2483.5(Av)		35.92	54*	-18.08
	4904(Pk)		42.81	74	-31.19
	4904(Av)		33.57	54	-20.43
	7356(Pk)		46.66	74	-27.34
	7356(Av)		34.36	54	-19.64

*: Indicate restricted band of operation §15.205
Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 144 von 197


Page 144 of 197

Test Plots

Modulation: 802.11b


Data rate: 11Mbps

Channel Frequency 2437MHz

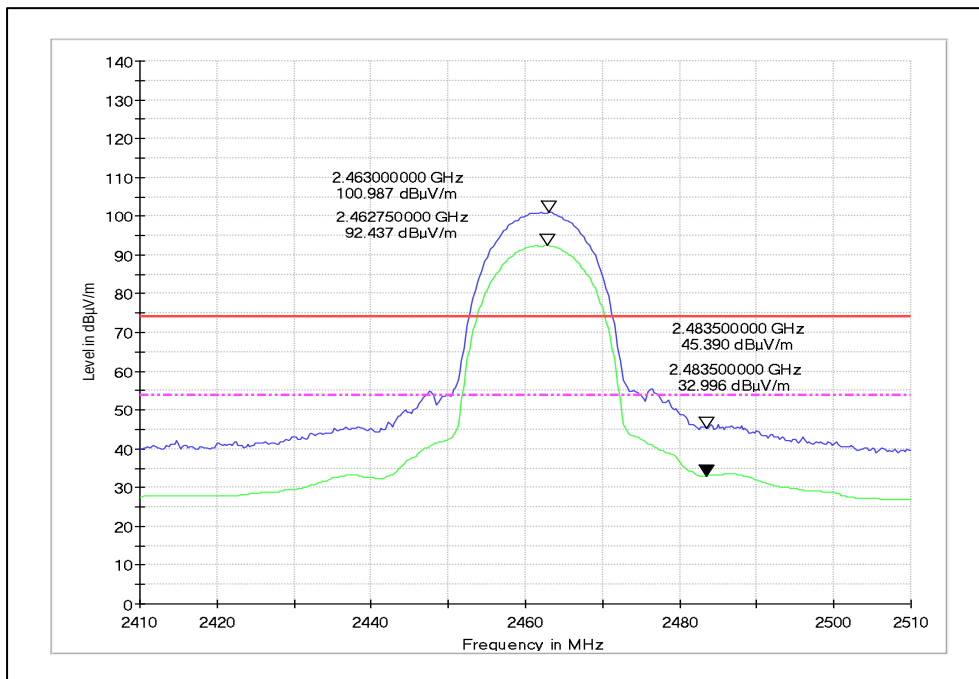

Channel Frequency: 2462MHz

Polarization: Vertical

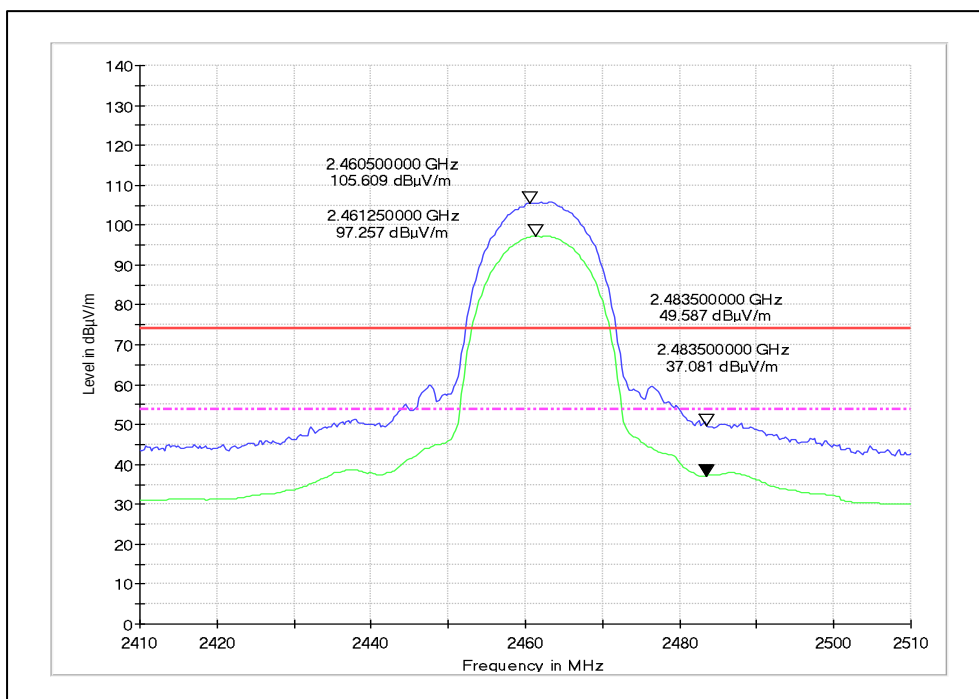


Channel Frequency: 2462MHz

Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 145 von 197
Page 145 of 197

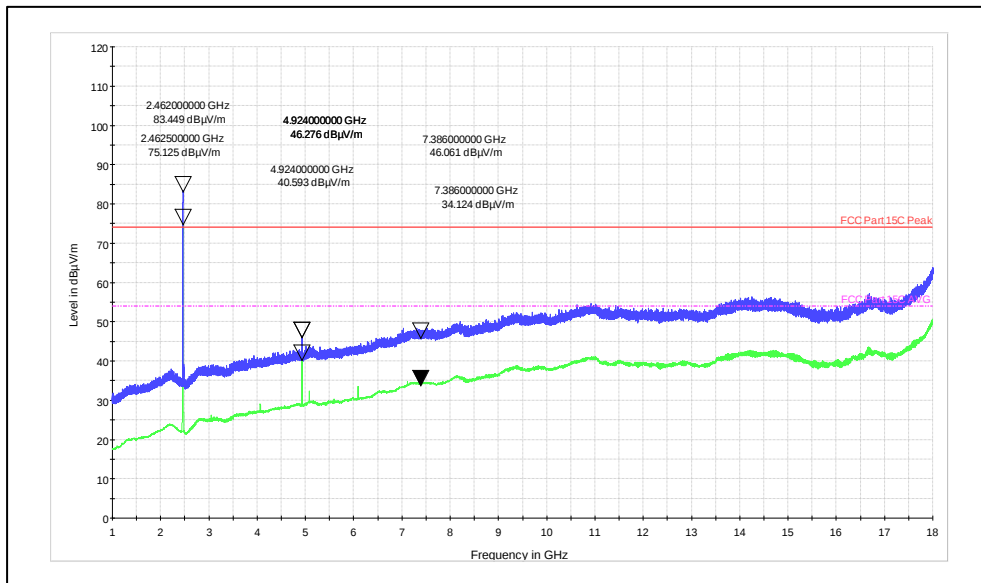

Channel Frequency: 1 – 18 GHz

Polarization: Vertical

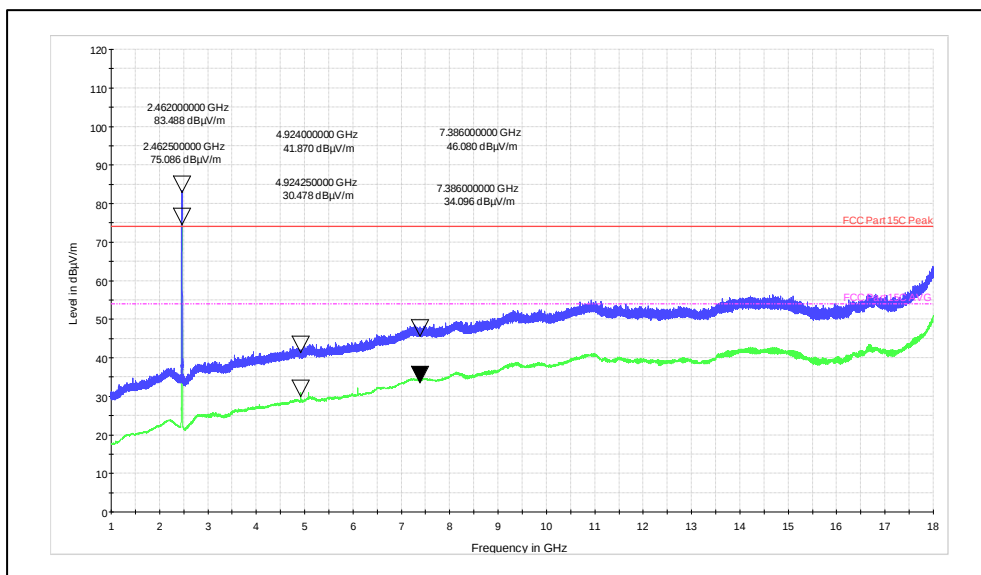

Channel Frequency: 1 – 18 GHz

Polarization: Horizontal


Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 146 von 197
Page 146 of 197


Modulation: 802.11g
Data rate: 24Mbps

Channel Frequency 2462MHz

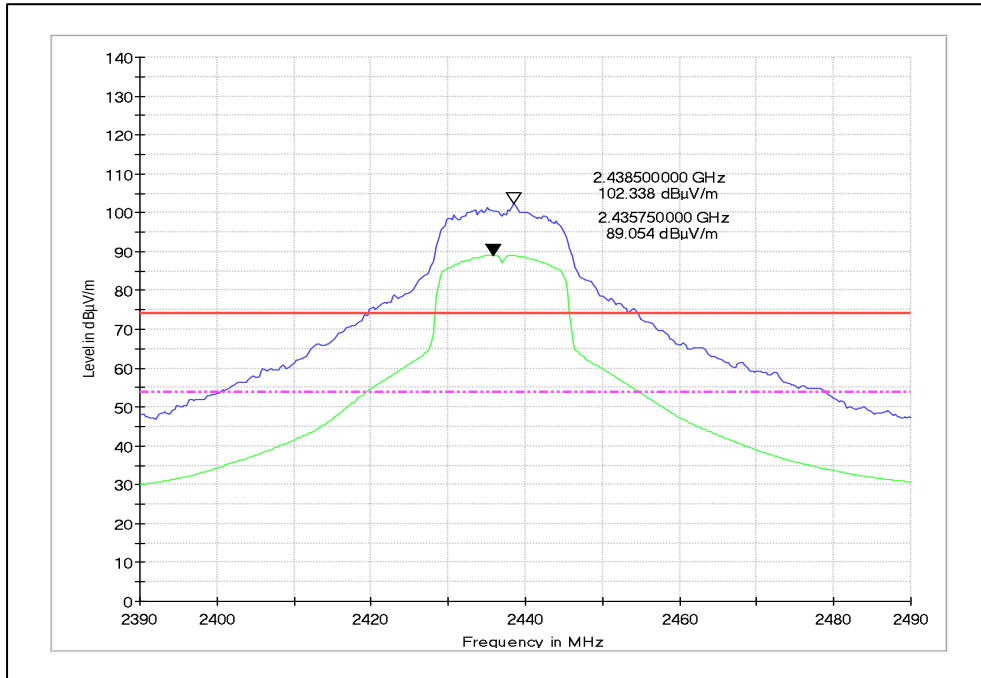

Channel Frequency: 2462MHz

Polarization: Vertical

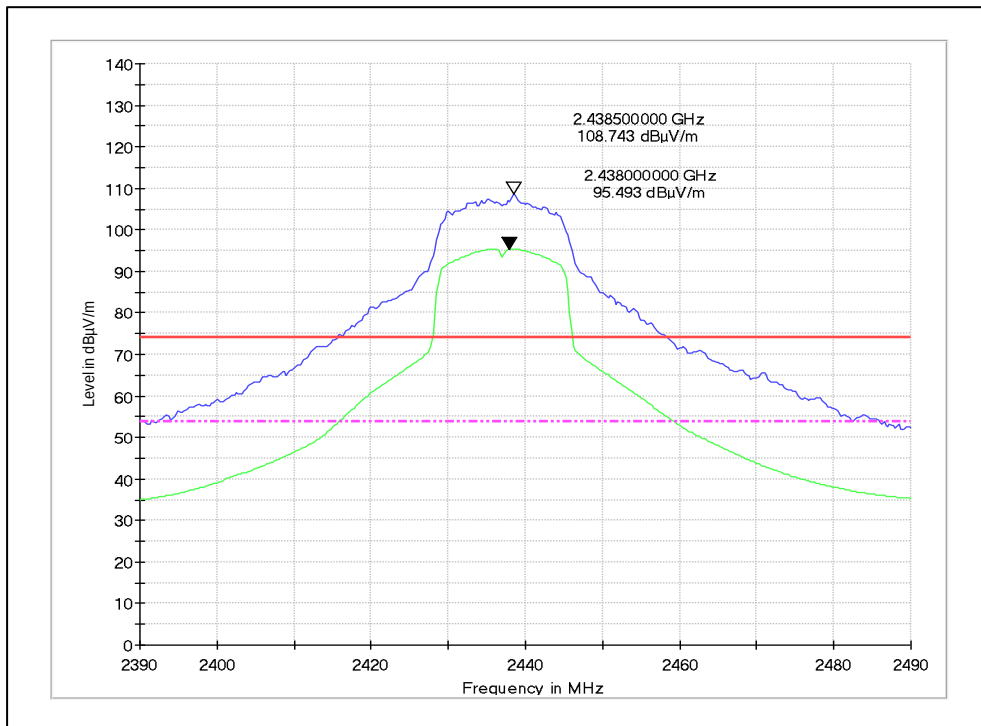


Channel Frequency: 2462MHz

Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 147 von 197
Page 147 of 197

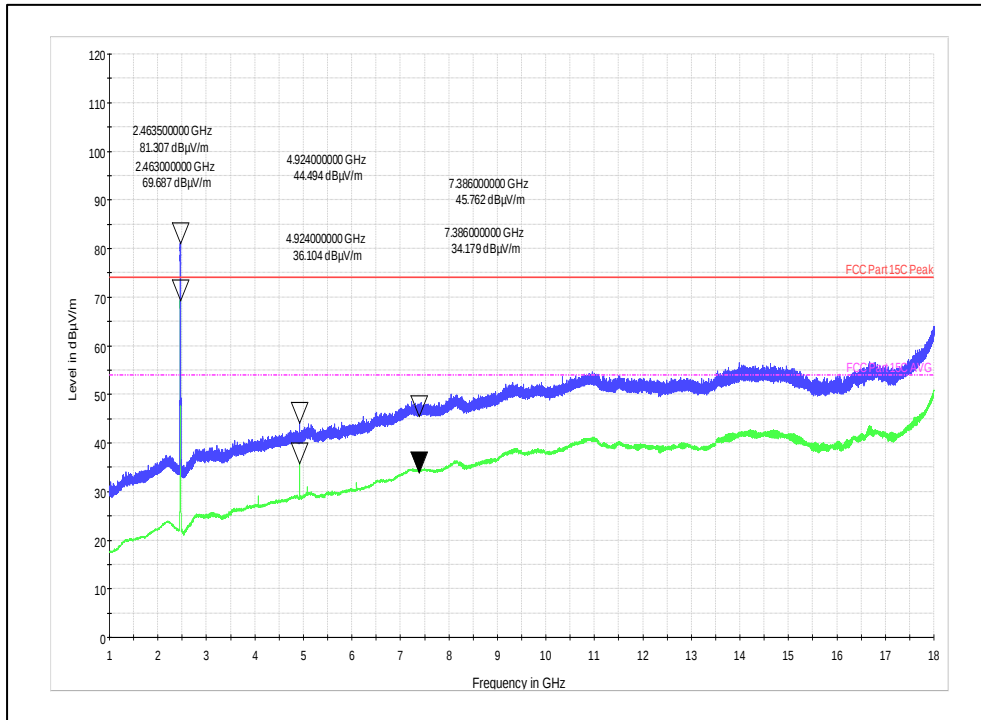

Channel Frequency: 1 – 18 GHz

Polarization: Vertical

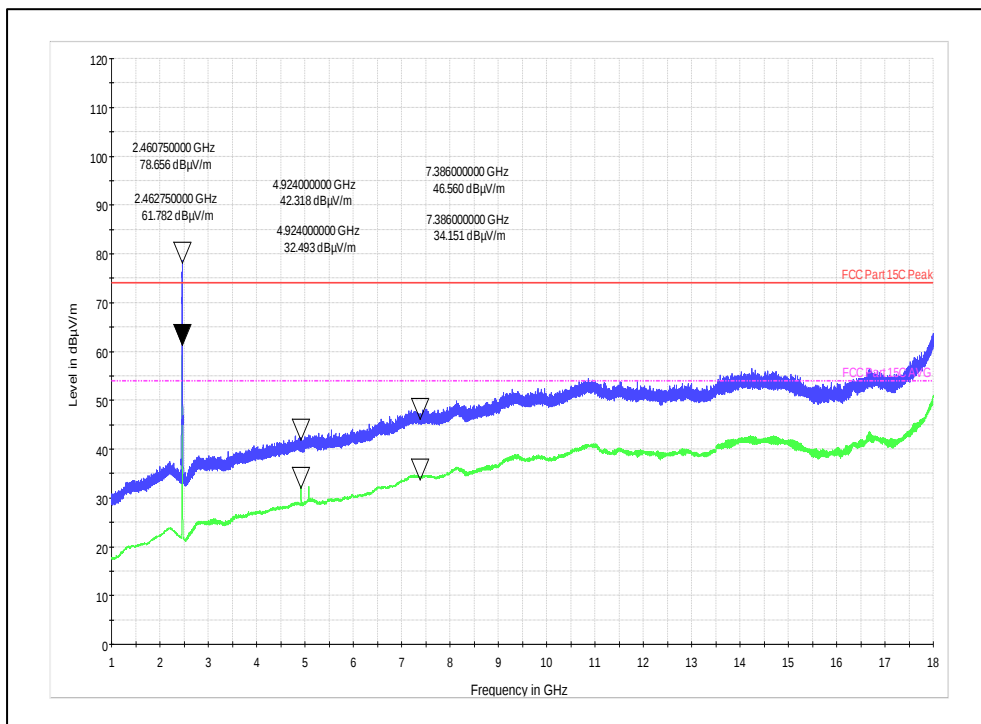

Channel Frequency: 1 – 18GHz

Polarization: Horizontal


Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 148 von 197
Page 148 of 197


Modulation: 802.11n HT20
Data rate: MCS7

Channel Frequency 2462MHz

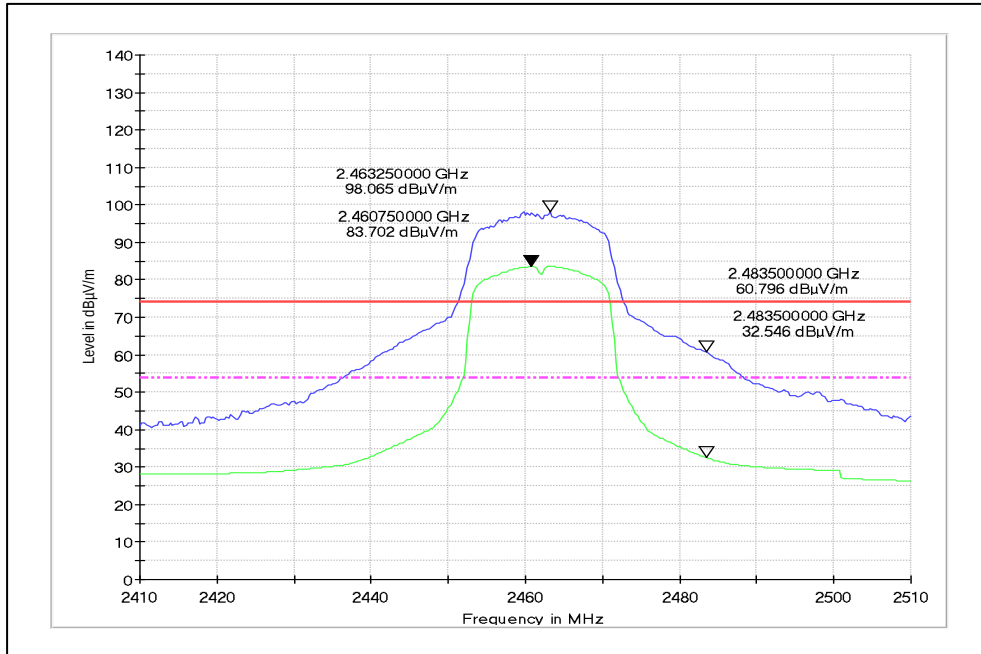

Channel Frequency: 2462MHz

Polarization: Vertical

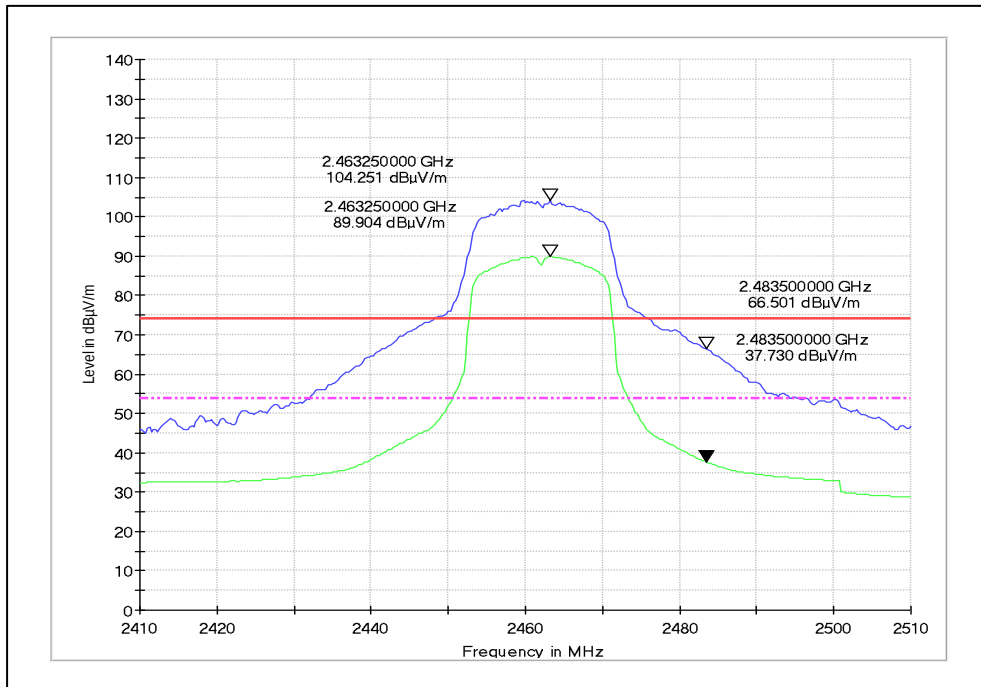


Channel Frequency: 2462MHz

Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 149 von 197
Page 149 of 197

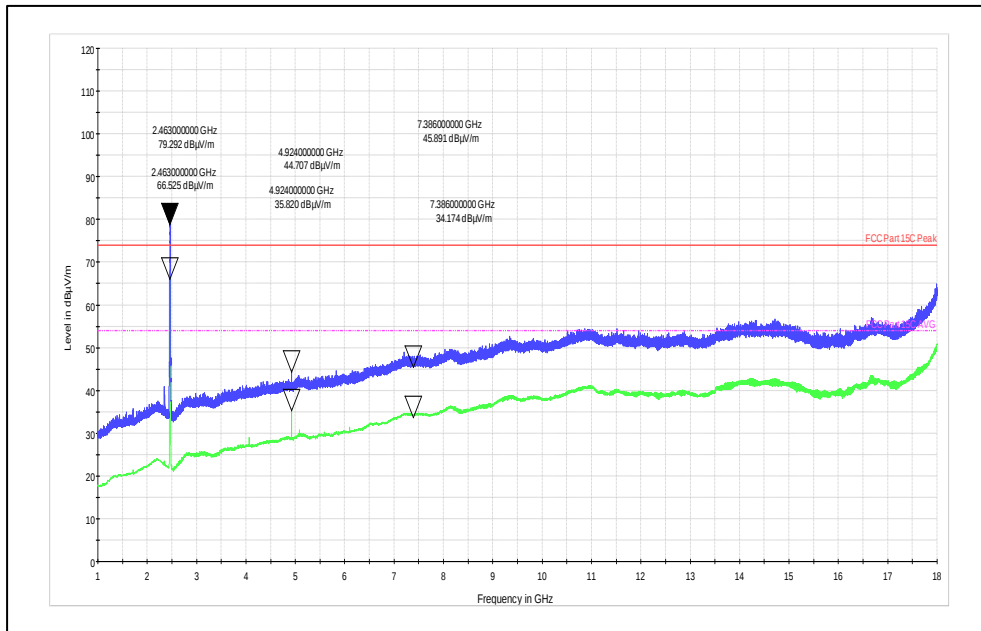

Channel Frequency: 1 – 18 GHz

Polarization: Vertical

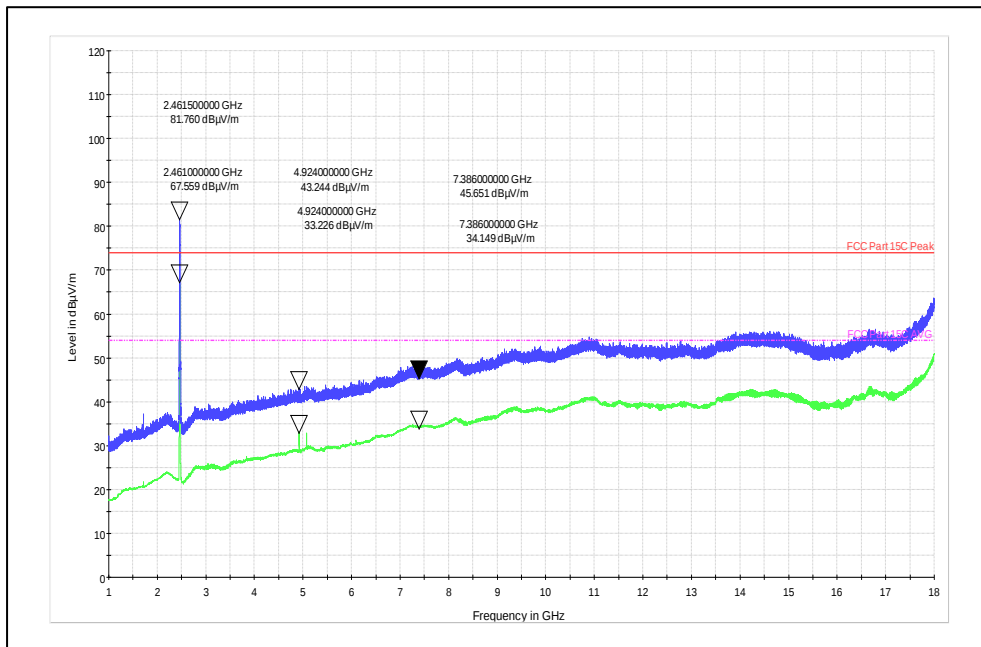

Channel Frequency: 1 – 18 GHz

Polarization: Horizontal

Prüfbericht - Nr.:

Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F


Seite 150 von 197

Page 150 of 197

Modulation: 802.11n HT40


Data rate: MCS0

Channel Frequency 2452MHz

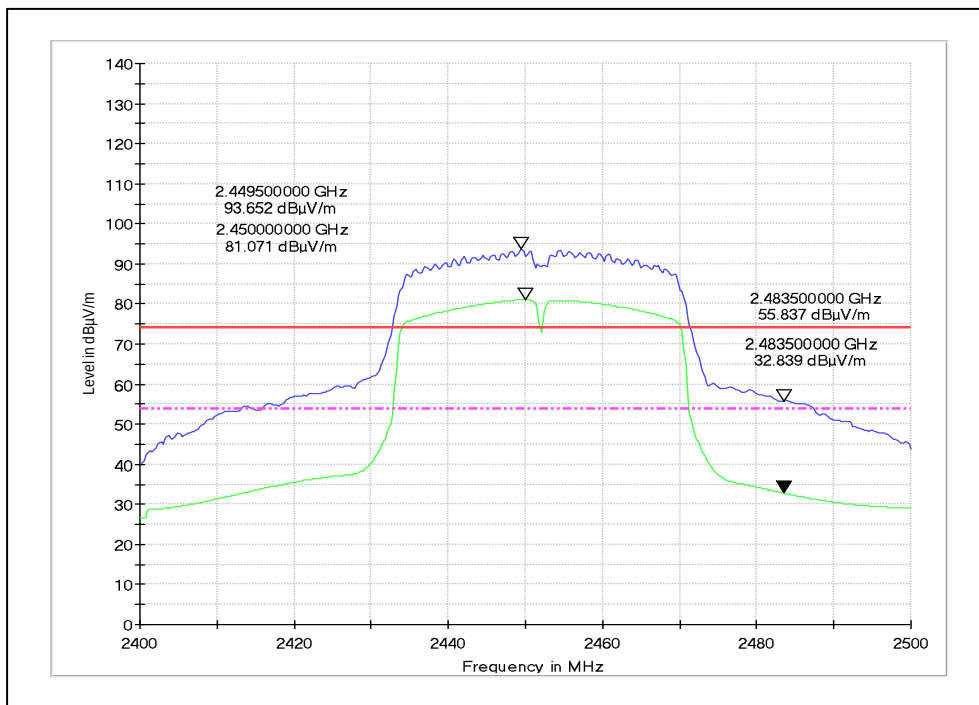

Channel Frequency: 2452MHz

Polarization: Vertical

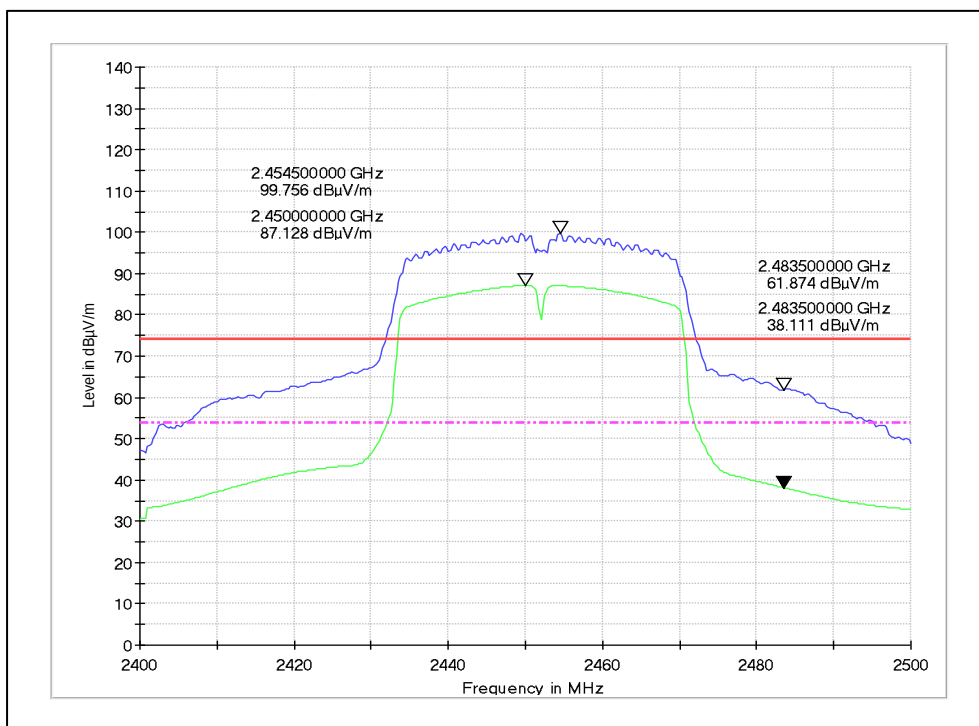


Channel Frequency: 2452MHz

Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 151 von 197
Page 151 of 197

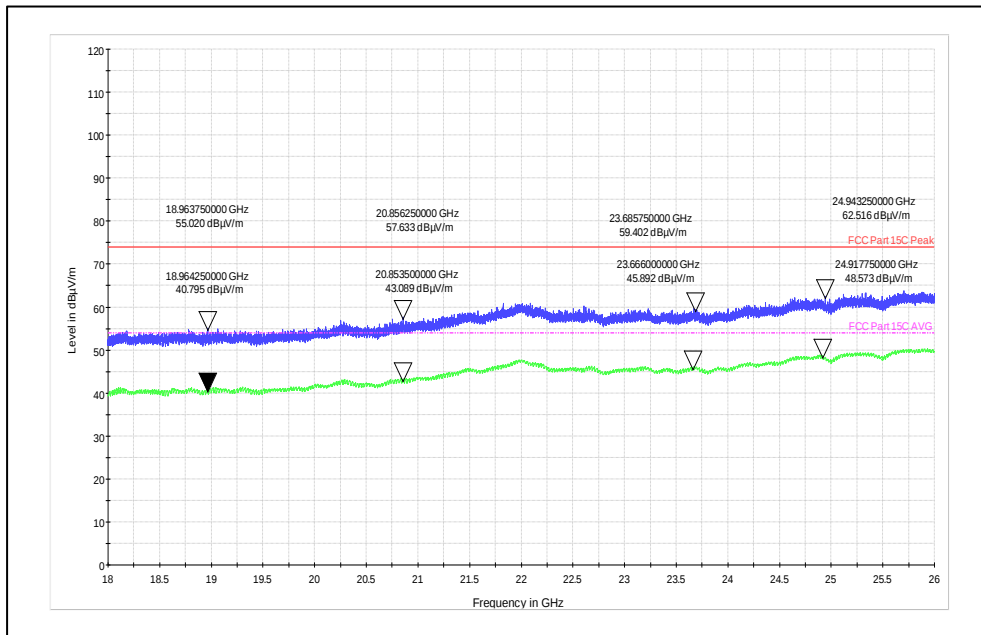

Frequency range: 18GHz to 26GHz

Polarization: Vertical

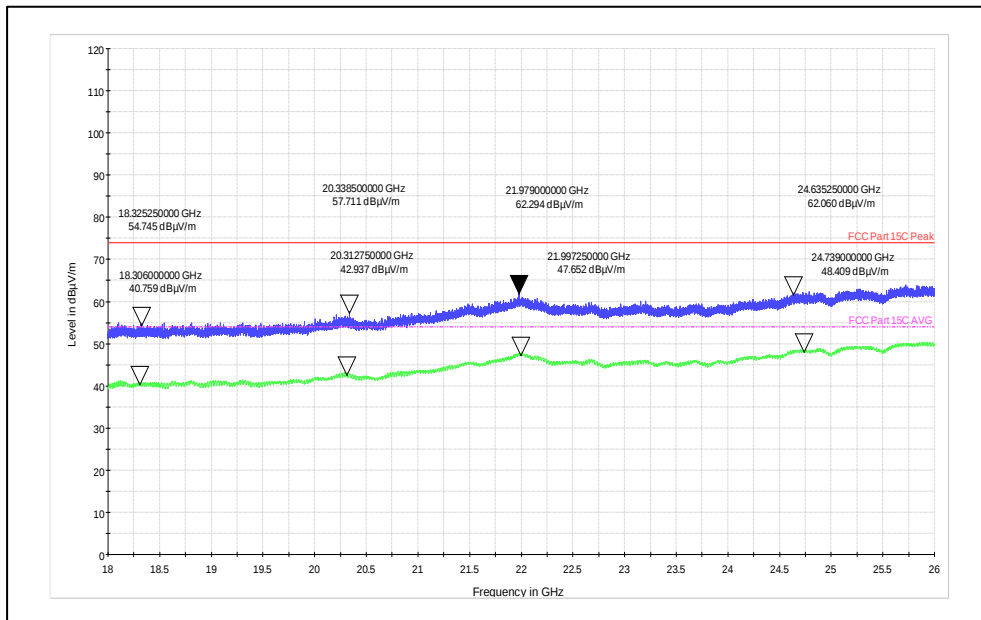

Frequency range: 18GHz to 26GHz

Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 152 von 197
Page 152 of 197


8 TEST RESULTS FOR BLUETOOTH LOW ENERGY

8.1 Maximum Peak Conducted Output Power

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (b)(3) / RSS 247 Issue 2, Section 5.4 (d)
Test Method	Subclause 11.9.1.1 of ANSI C63.10
Measurement Bandwidth	1MHz
Detector	Peak
Port of testing	Antenna port
Requirement	Power ≤ 1 W (30 dBm) & e.i.r.p ≤ 4 W (36 dBm)

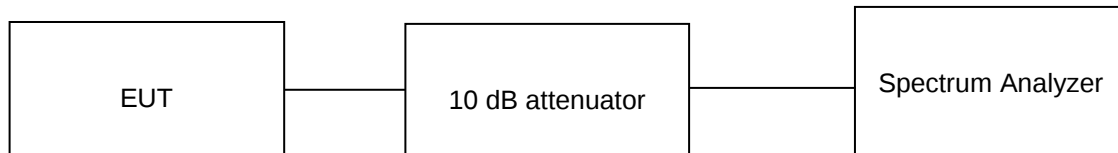

Test Condition

Normal Test Condition:

Temperature (Norm) = + 22.6 °C

Voltage = 3.6V Li-Ion battery

Relative humidity: 62%

KDB Guidelines applied:

Measurements were made as per section 8.3.1 in KDB 558074.00 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F


Seite 153 von 197
Page 153 of 197

Test results:


Note:

1. All the losses are included during measurement and final values are mentioned in the test report.
2. Total Peak Output power (dBm) = Measured Peak power (dBm) + Attenuator factor (10dB) + Cable loss (0.6dB)
3. This product do not support additional beamforming gain / directional gain, it uses signal antenna and hence directional gain of the single antenna is 2.53 dBi

Data Rate	Channel Frequency (MHz)	Measured Peak Power (dBm)	e.i.r.p (dBm)	Power Limit (dBm)	e.i.r.p Limit (dBm)
1Mbps	2402	4.42	6.95	30.00	36.00
	2440	4.85	7.38	30.00	36.00
	2480	5.63	8.16	30.00	36.00

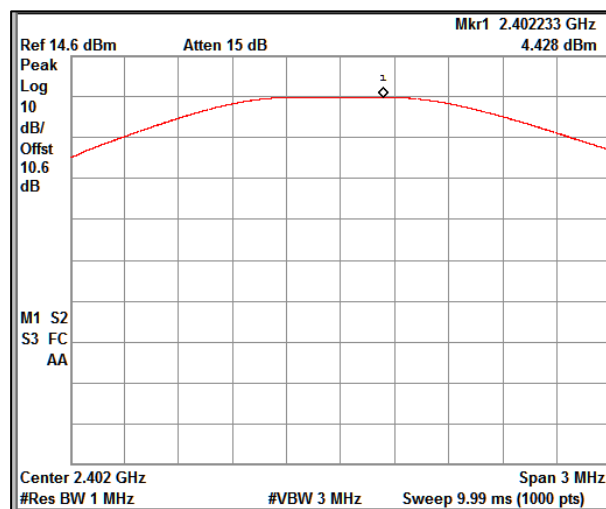

Channel Frequency: 2402MHz

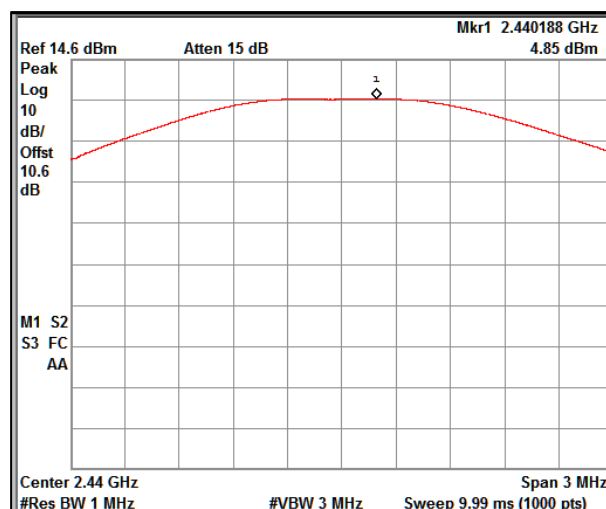


Channel Frequency: 2440MHz

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 154 von 197
Page 154 of 197

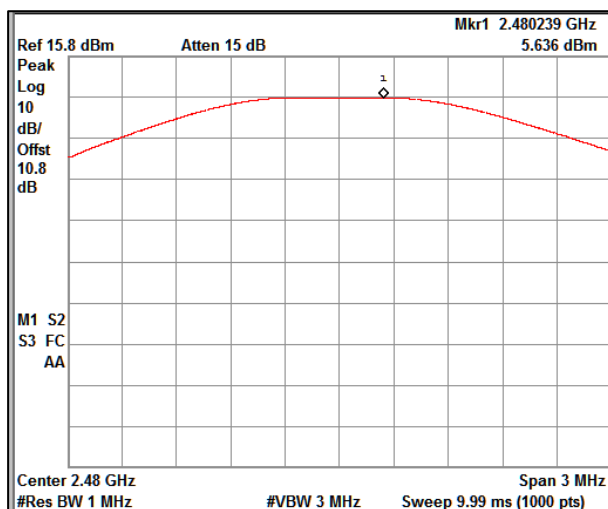

Channel Frequency: 2480MHz

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 155 von 197
Page 155 of 197


8.2 Maximum Power Spectral Density

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (e) / RSS 247 Issue 2, Section 5.2 (b)
Test Method	Subclause 11.10.2 of ANSI C63.10
Measurement Bandwidth	100 kHz
Detector	Peak detector
Port of testing	Antenna port
Requirement	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm

Test Method:

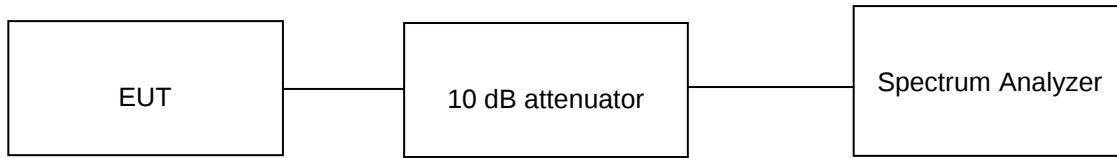

Test Condition

Normal Test Condition:

Temperature (Norm) = + 22.6°C

Voltage = 3.6V Li-Ion battery

Relative humidity: 62 %

KDB Guidelines applied:

Measurements were made as per section 8.4 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F


Seite 156 von 197
Page 156 of 197

Test results:


Note:

1. All the losses are included during measurement and final values are mentioned in the test report.
2. Total Peak PSD (dBm) = Measured Peak PSD (dBm) + Attenuator factor (10dB) + Cable loss (0.6dB)
3. This product do not support additional beamforming gain / directional gain, it uses signal antenna and hence directional gain of the single antenna is 2.53 dBi

Data rate	Channel Frequency (MHz)	Maximum Peak PSD (dBm/100kHz)	Limit (dBm/100kHz)
1Mbps	2402	3.81	8
	2440	4.24	8
	2480	4.83	8

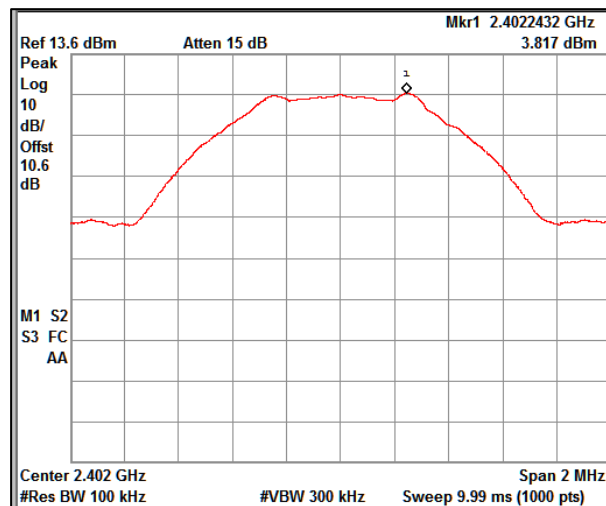

Channel Frequency: 2402MHz

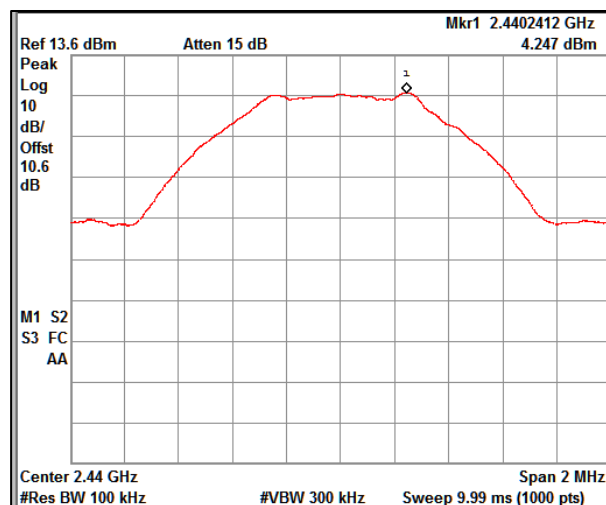

Channel Frequency: 2440MHz


Prüfbericht - Nr.:

Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 157 von 197

Page 157 of 197

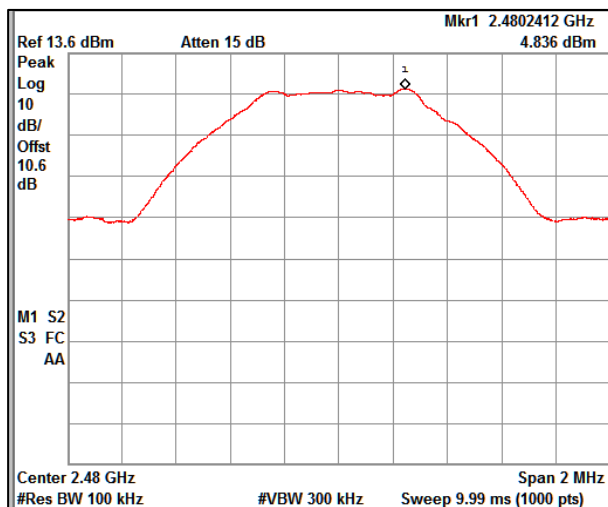

Channel Frequency: 2480MHz

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 158 von 197
Page 158 of 197


8.3 DTS Bandwidth & 99% Bandwidth

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (a) (2) / RSS 247 Issue 2, Section 5.2 (a)
Test Method	Subclause 11.8.1 of ANSI C63.10
Measurement Bandwidth	100 kHz for x dB bandwidth 1 to 5% of OCB for 99% bandwidth
Detector	Peak
Port of testing	Antenna port
Requirement	The minimum 6 dB bandwidth shall be at least 500 kHz

Test Method:

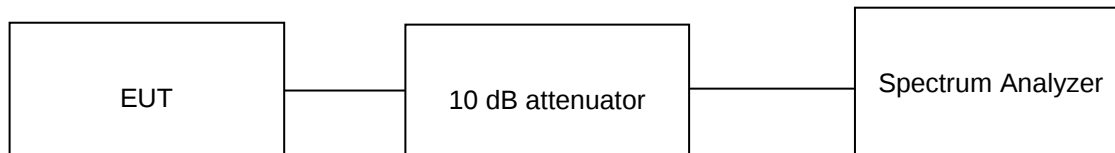

Test Condition

Normal Test Condition:

Temperature (Norm) = + 22.6 °C Voltage = 3.6V Li-Ion battery Relative humidity: 62 %

KDB Guidelines applied:

Measurements were made as per section 8.2 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F


Seite 159 von 197
Page 159 of 197

Test results:


Note:

1. All the losses are included during measurement and final values are mentioned in the test report.

Data Rate	Channel Frequency (MHz)	6 dB Bandwidth (MHz)	99% OBW (MHz)	Minimum Limit (MHz)
1Mbps	2402	731.93	1.02	0.5
	2440	730.90	1.02	0.5
	2480	730.57	1.02	0.5

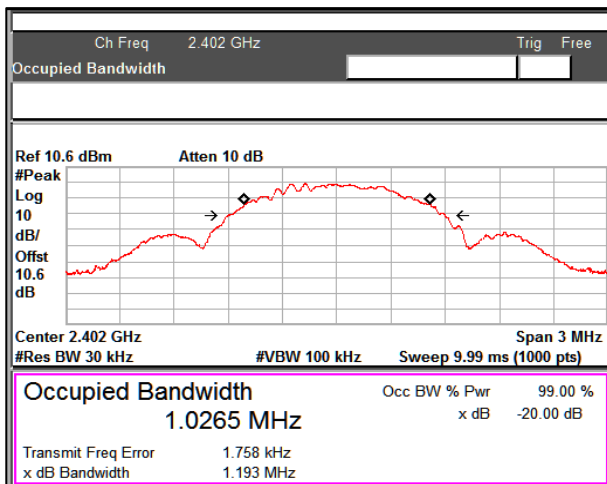


OCB 99%

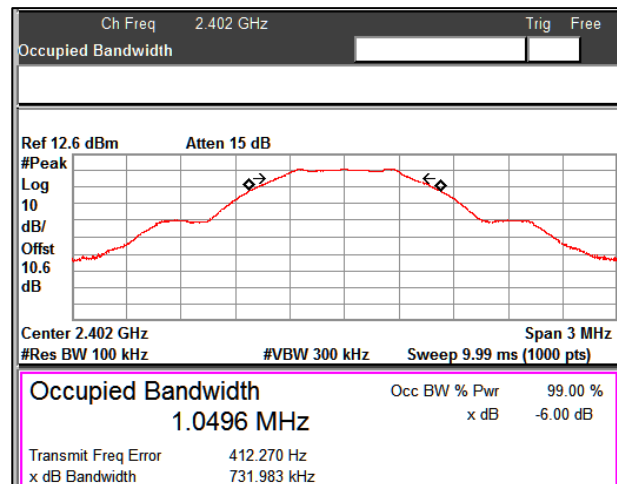


DTS Bandwidth (6dB BW)

Channel Frequency: 2402MHz

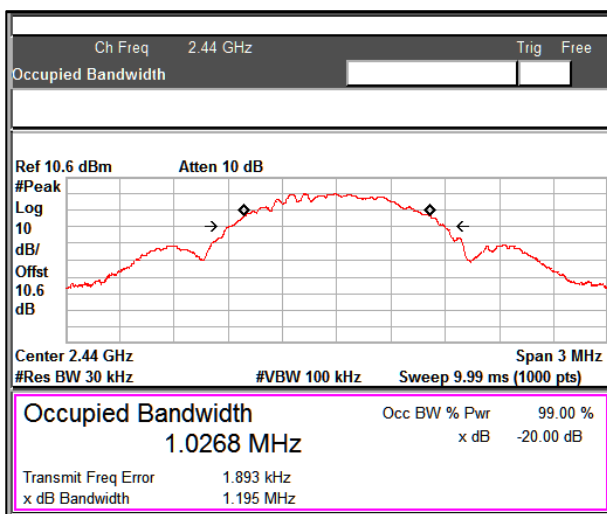

OCB 99%

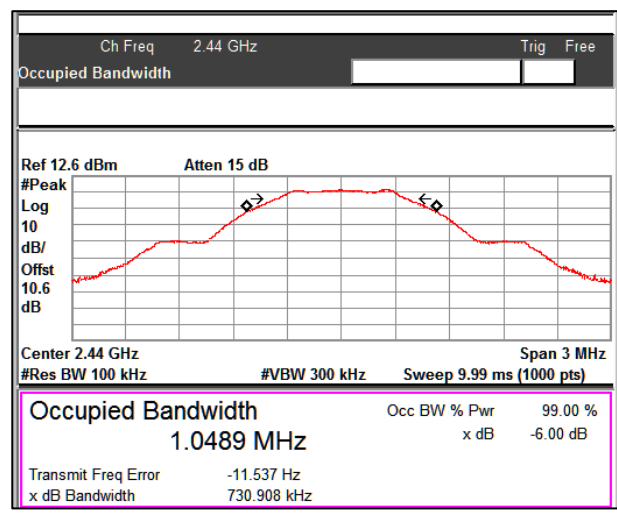



DTS Bandwidth (6dB BW)

Channel Frequency: 2440MHz

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 160 von 197
Page 160 of 197

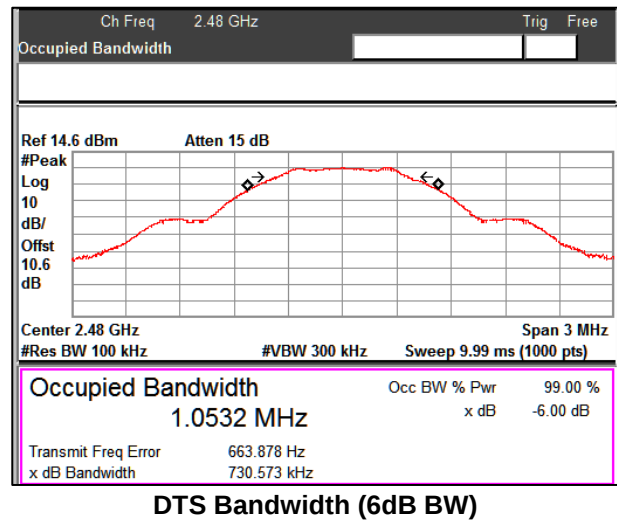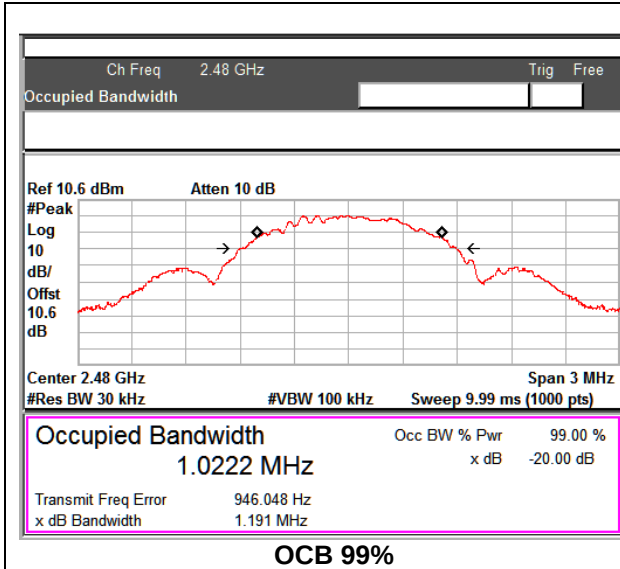

Channel Frequency: 2480MHz

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 161 von 197
Page 161 of 197


8.4 Emissions in non-restricted frequency bands and Conducted Spurious Emission

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (d) / RSS 247 Issue 2, Section 5.5
Test Method	Subclause 11.11 of ANSI C63.10
Measurement Bandwidth	100 kHz
Detector	Peak
Port of testing	Antenna port
Requirement	In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB

Test Method:

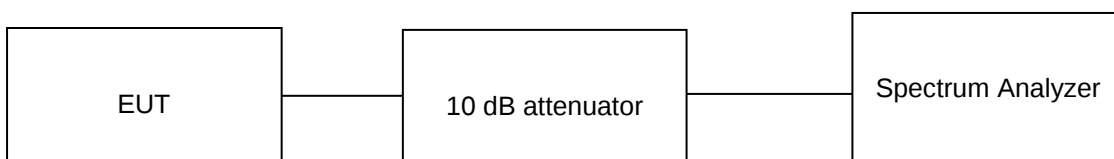

Test Condition

Normal Test Condition:

Temperature (Norm) = +22.6 °C

Voltage = 3.6V Li-Ion battery

Relative humidity: 62 %

KDB Guidelines applied:

Measurements were made as per section 8.5 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:

Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 162 von 197

Page 162 of 197


Test results:

Note:


1. All the losses are included during measurement and final values are mentioned in the test report.
2. Final Value (dBm) = Measured Value (dBm) + Attenuator factor (10dB) + Cable loss (0.6dB)
3. This product do not support additional beamforming gain / directional gain, it uses signal antenna and hence directional gain of the single antenna is 2.53 dBi

8.4.1 Band edge and reference plots

Data rate	Channel Frequency (MHz)	Reference Value (B) (dBm)	Band edge Frequency (MHz)	Value at Band edge (A) (dBm)	A-B (dBc)	Minimum Limit (dBc)
1Mbps	2402	3.81	2390	-47.54	-51.35	-20
	2480	4.81	2483.5	-52.79	-57.60	-20

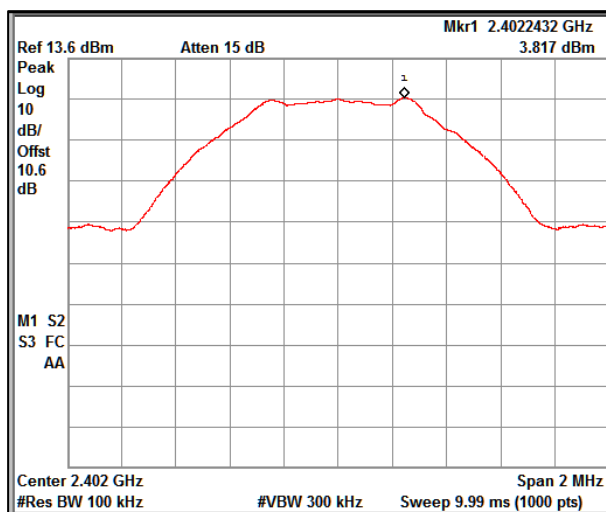

Reference Plot for Channel Frequency 2402MHz

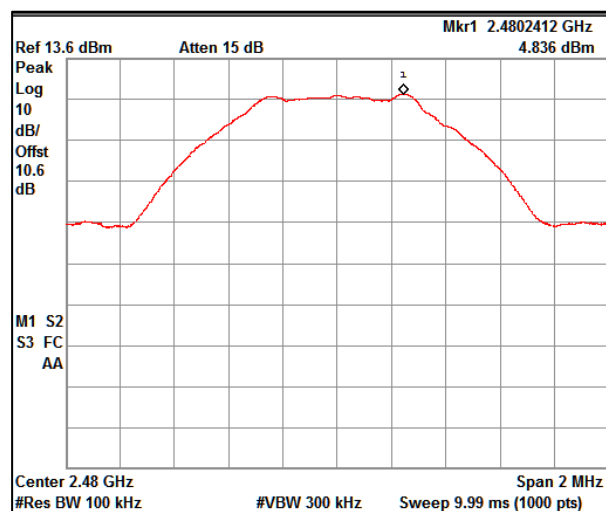


Reference Plot for Channel Frequency 2480MHz


Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 163 von 197
Page 163 of 197

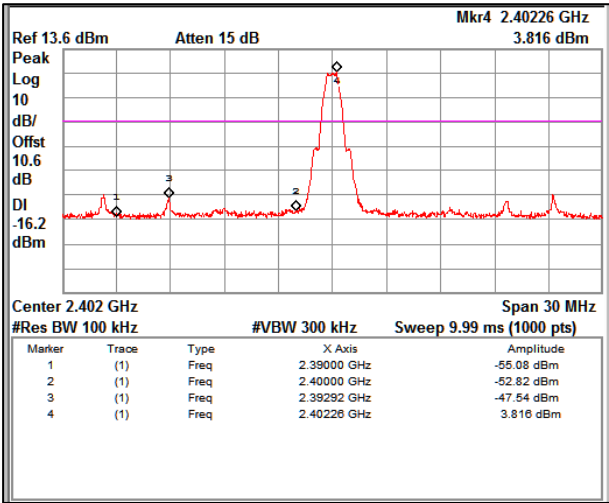

Channel Frequency: 2402MHz

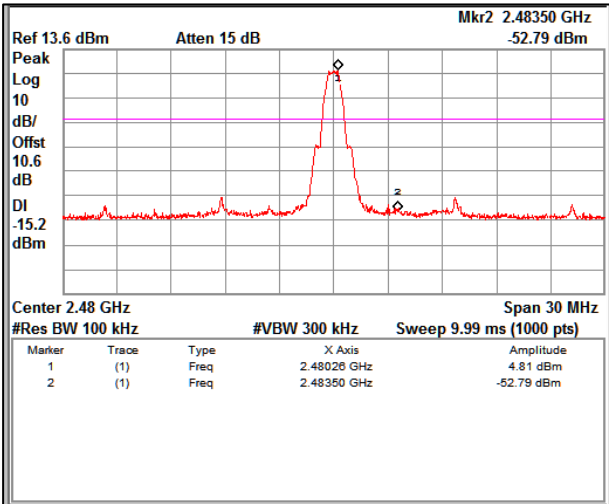

Channel Frequency: 2480MHz




Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 164 von 197
Page 164 of 197

8.4.2 Out-Of-Band Emissions

Channel Frequency 2402MHz


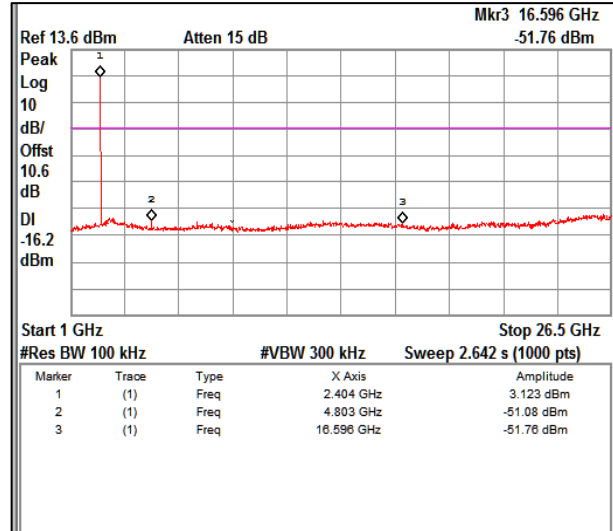
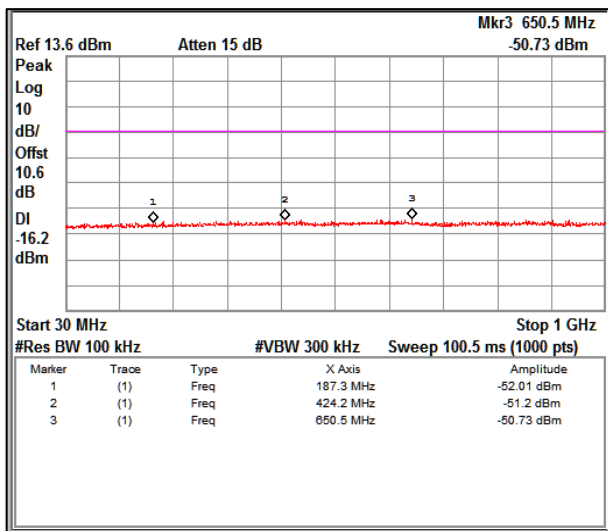
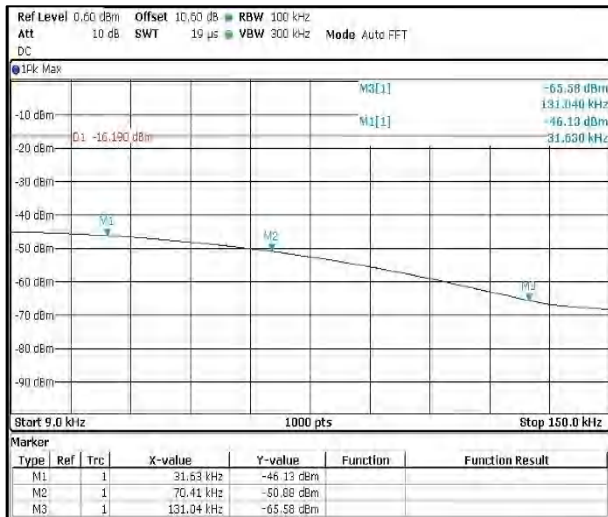


Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 165 von 197
Page 165 of 197

Channel Frequency 2440MHz

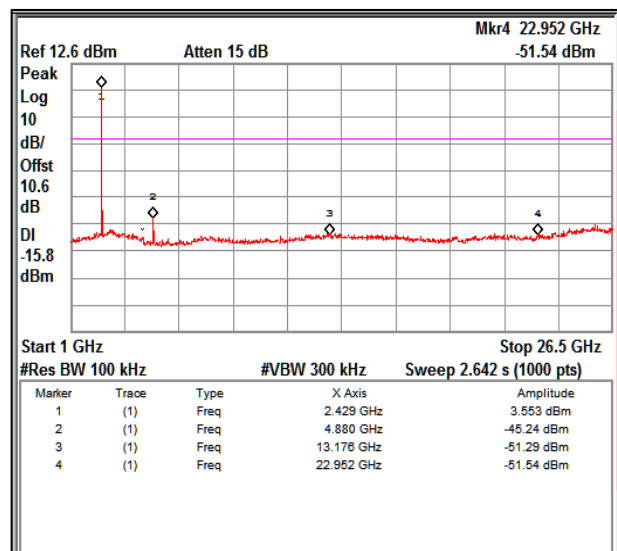
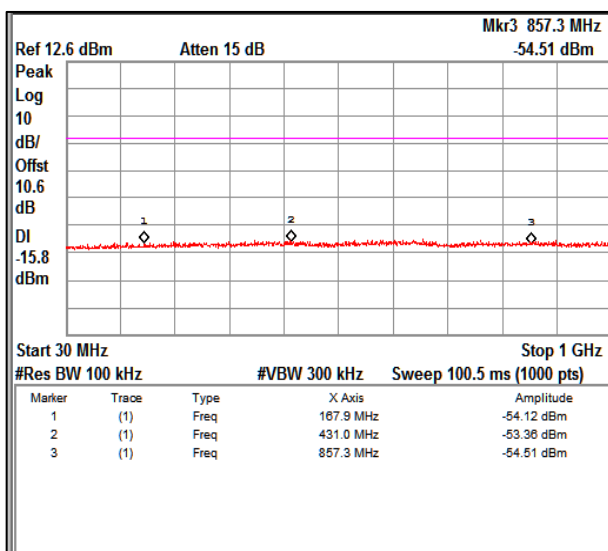
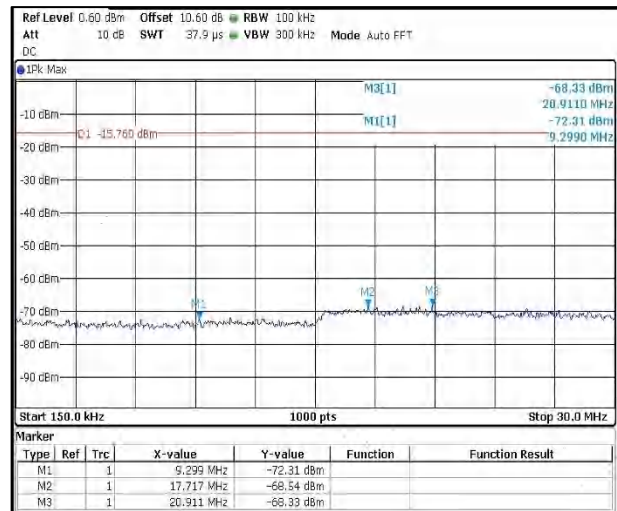
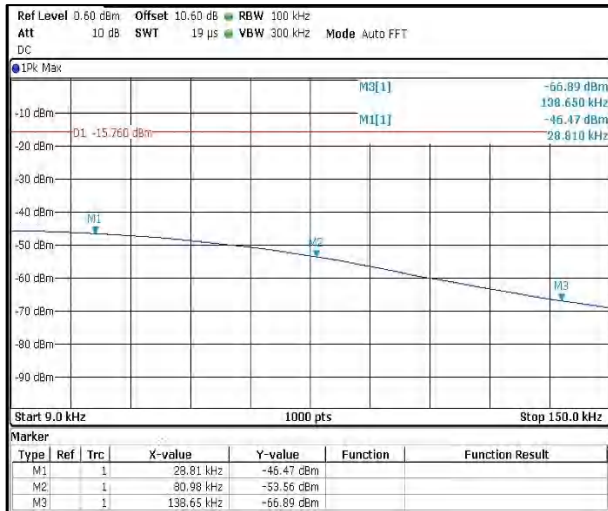


Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 166 von 197
Page 166 of 197

Channel Frequency 2480MHz

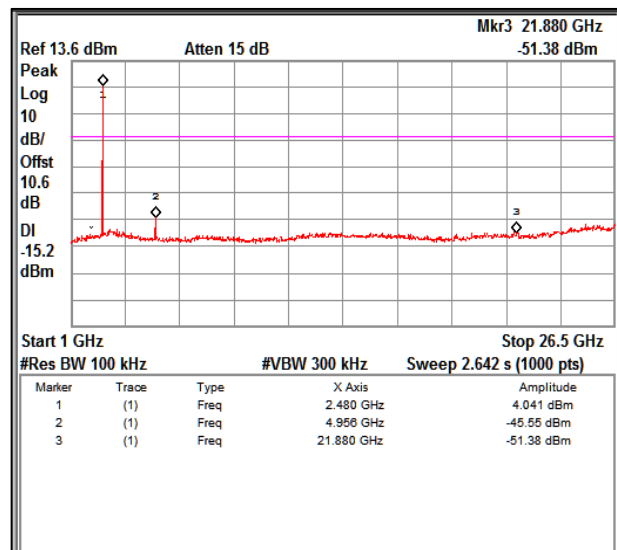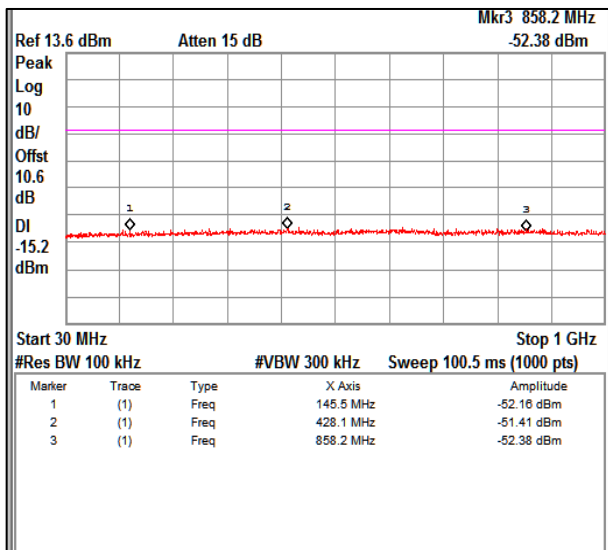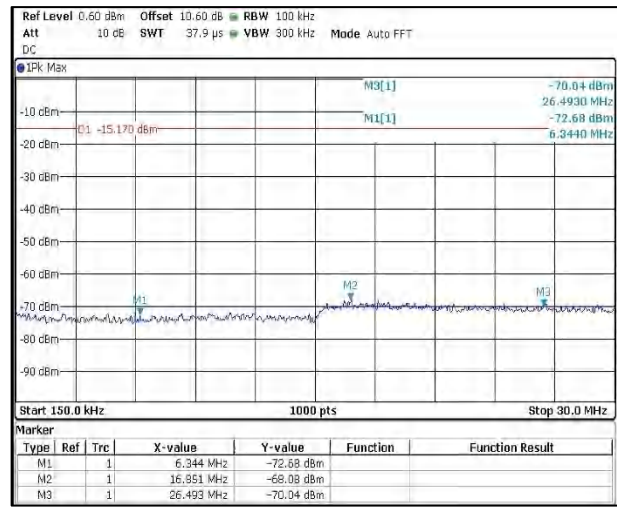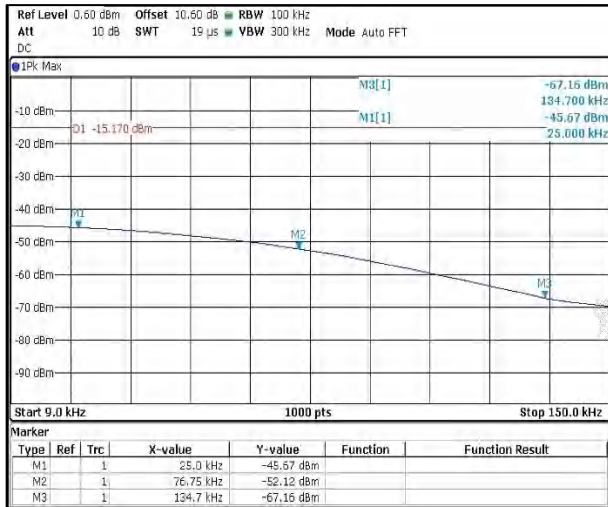

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 167 von 197
Page 167 of 197

8.5 Spurious Radiated Emissions & Restricted Bands of Operation

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (d) / (15.209 & 15.205) RSS-Gen Issue 5, Section 8.9 /8.10
Test Method	ANSI C63.10
Measurement Location	Semi Anechoic Chamber 30MHz - 1 GHz Fully Anechoic Chamber 1 GHz - 40GHz
Measurement Bandwidth	100 kHz for frequency range < 1GHz 1 MHz for Frequency range >1GHz
Detector	Refer remarks below
Measuring Distance	3 m
Requirement	As per the limits mentioned in the below table
Test setup	Refer TEST METHODOLOGY

Table 8: Transmitter limits for Radiated emission

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Distance of Measurement (m)
0.009 – 0.490	2400/F(kHz)	48.50 – 13.80	300*
0.490 – 1.705	24000/F(kHz)	33.80 – 23.00	30*
1.705 -30	30	29.54.00	30*
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.00.0	3

Remark: * The limit shows in the table above of frequency range 0.009 – 0.490, 0.490 – 1.705 MHz and 1.705-30MHz is at 300 meter, 30 meter and 30 meter range respectively, which corresponds to 128.51 – 93.80, 73.80 – 62.96 and 69.54.00 dBμV/m at 3m range by extrapolation calculation and the measurement of loop antenna.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.

Test Conditions:

Temperature (Norm) = + 22.6 °C

Voltage = 3.6V Li-Ion battery

Relative humidity = 62 %

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 168 von 197
Page 168 of 197

Test results:

Note: All the losses are included during measurement and final values are mentioned in the test report. Refer TEST METHODOLOGY for more details

Test results for frequency range 9kHz – 30MHz

No emissions found in frequency range 9 kHz to 30 MHz, and measured levels are below 20dB from the limit line, hence not reported

Test results for frequency range 30MHz – 1GHz


Vscan Air SL With Battery Mode: Cardiac

Antenna Polarization	Measured Frequency (MHz)	Measured Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Vertical	34.77	14.28	40	-25.72
	52.17	11.91	40	-28.09
	62.76	11.77	40	-28.23
	141.84	22.20	43.5	-21.30
	161.22	23.63	43.5	-19.87
	288.11	17.29	46	-28.71
	364.31	18.47	46	-27.53
	495.20	21.82	46	-24.18
	709.88	26.05	46	-19.95
Horizontal	30.63	13.39	40	-26.61
	52.98	9.54	40	-30.46
	91.77	9.69	40	-30.31
	142.05	12.30	43.5	-31.20
	299.99	17.03	46	-28.97
	418.91	19.91	46	-26.09
	549.50	23.69	46	-22.31
	713.03	24.88	46	-21.12

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 169 von 197
Page 169 of 197

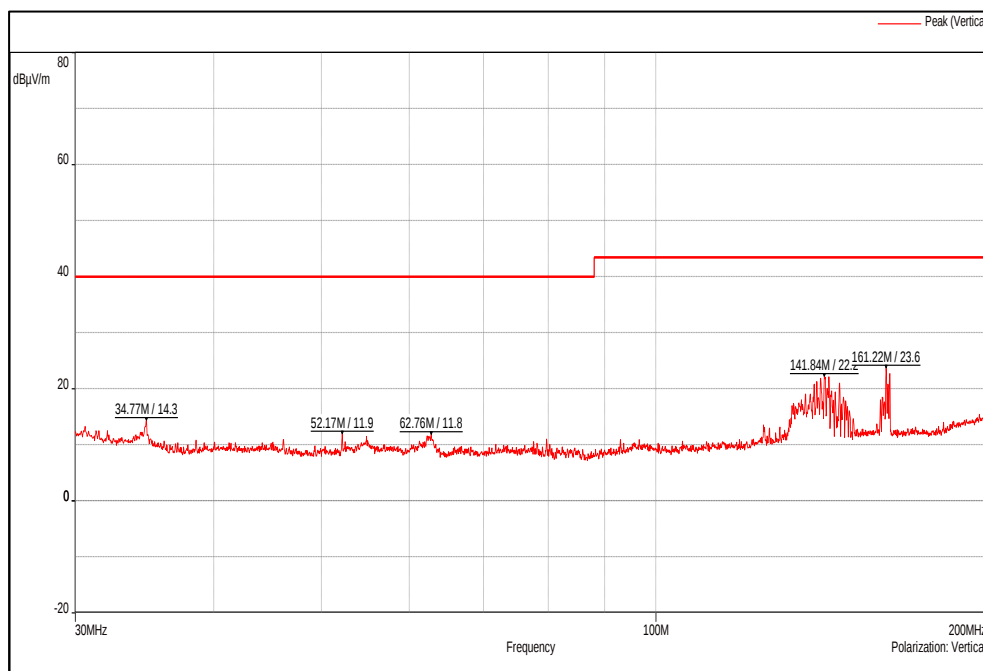

Channel Frequency 30MHz – 200MHz

Polarization Vertical

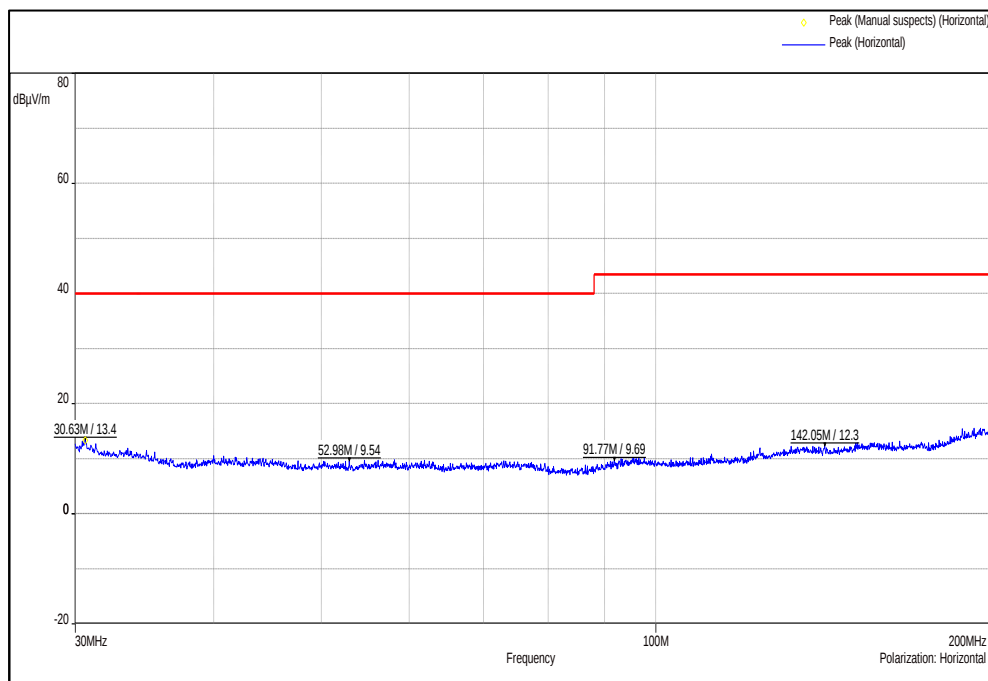


Channel Frequency 30MHz – 200MHz

Polarization Horizontal

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 170 von 197
Page 170 of 197

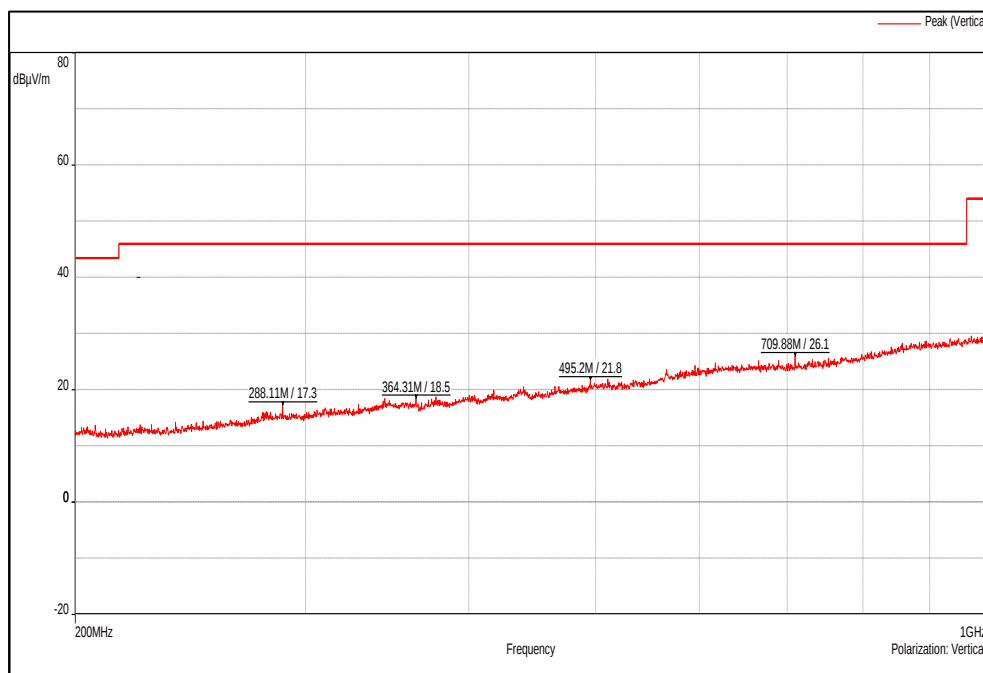

Channel Frequency 200MHz – 1GHz

Polarization Vertical

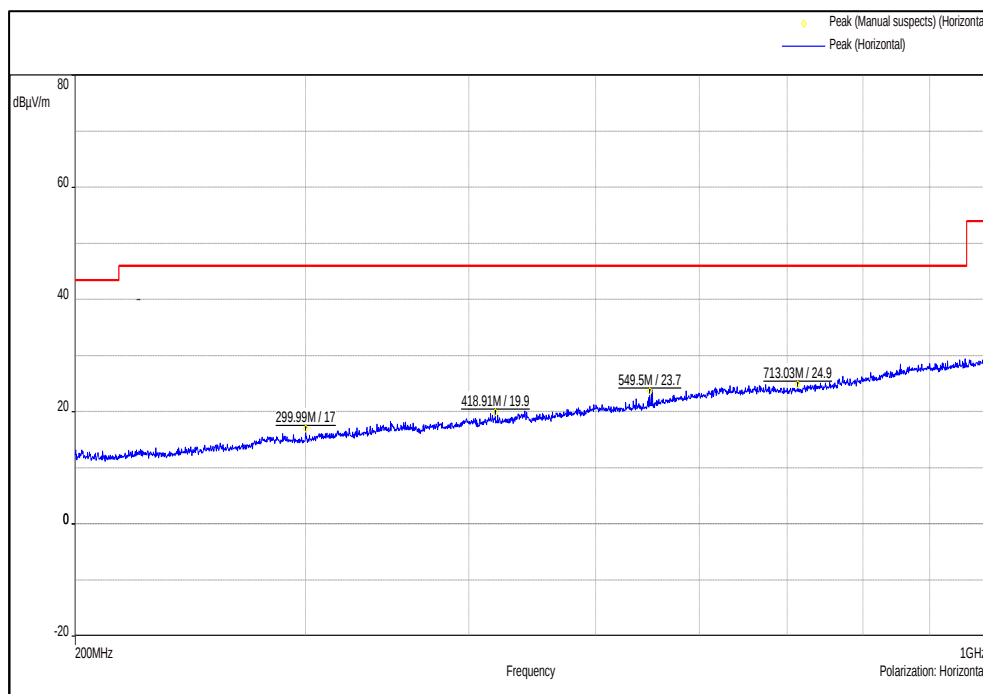

Channel Frequency 200MHz – 1GHz

Polarization Horizontal


Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 171 von 197
Page 171 of 197

Vscan Air SL With Battery Mode: Vascular

Antenna Polarization	Measured Frequency (MHz)	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	53.88	12.64	40	-27.36
	85.62	13.80	40	-26.20
	112.20	20.15	43.5	-23.35
	124.89	14.95	43.5	-28.55
	268.13	15.24	46	-30.76
	339.02	17.84	46	-28.16
	401.99	19.49	46	-26.51
	868.79	28.99	46	-17.01
Horizontal	34.32	11.91	40	-28.09
	56.49	10.19	40	-29.81
	95.49	10.47	43.5	-33.03
	194.34	15.32	43.5	-28.18
	343.13	18.11	46	-27.89
	439.97	20.26	46	-25.74
	626.81	24.81	46	-21.19
	853.55	28.34	46	-17.66

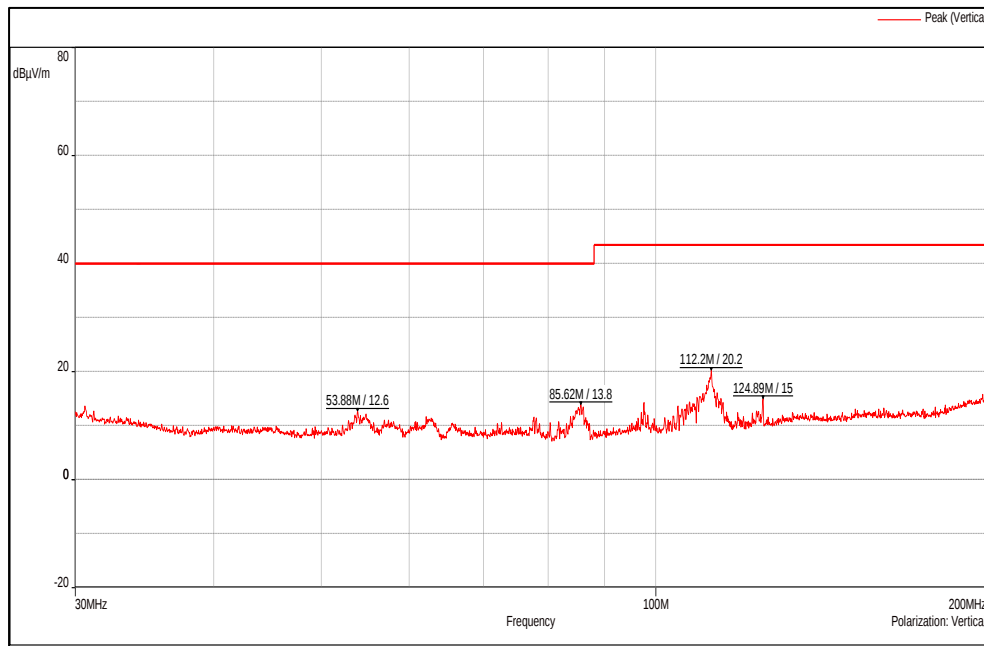



Channel Frequency 30MHz – 200MHz

Polarization Vertical

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F


Seite 172 von 197
Page 172 of 197

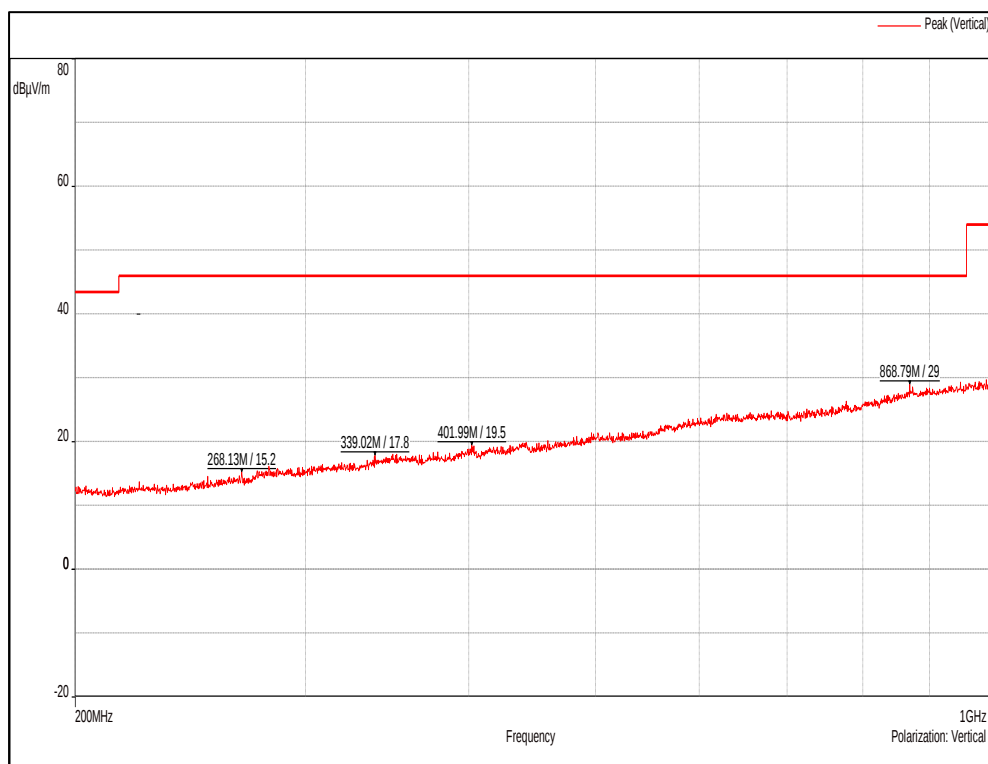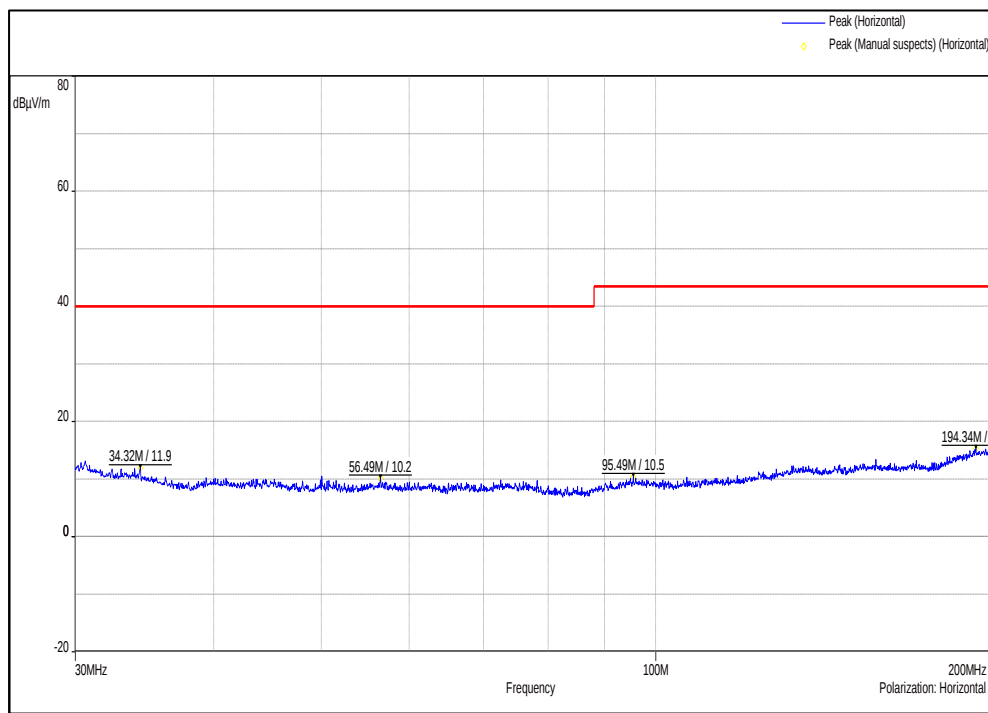

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 173 von 197
Page 173 of 197

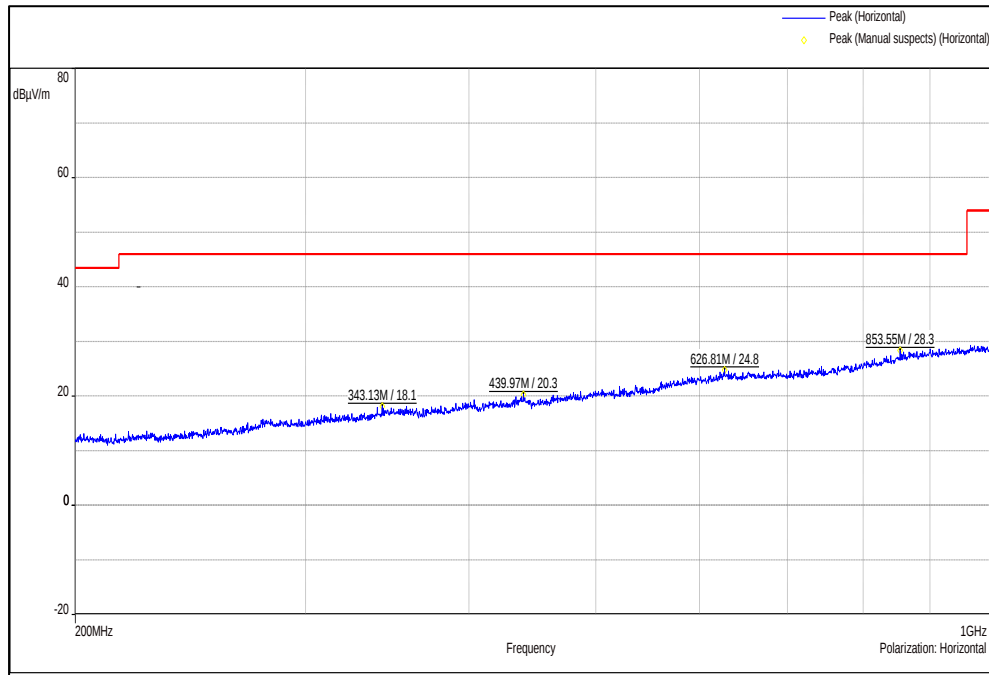

Channel Frequency 200MHz – 1GHz

Polarization Horizontal



Vscan Air SL With Charging Mode: XP Adapter + Vscan Air Charger

Antenna Polarization	Measured Frequency (MHz)	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	63.21	31.95	40	-8.05
	85.02	27.16	40	-12.84
	187.20	31.39	43.5	-12.11
	208.01	29.96	43.5	-13.54
	256.13	26.43	46	-19.57
	546.50	29.41	46	-16.59
	662.69	33.67	46	-12.33
	680.27	32.26	46	-13.74
Horizontal	63.15	22.70	40	-17.30
	191.64	34.55	43.5	-8.95
	201.92	28.78	43.5	-14.72
	258.62	27.40	46	-18.60
	400.58	25.55	46	-20.45
	687.20	28.95	46	-17.05
	930.35	31.91	46	-14.09

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F


Seite 174 von 197
Page 174 of 197

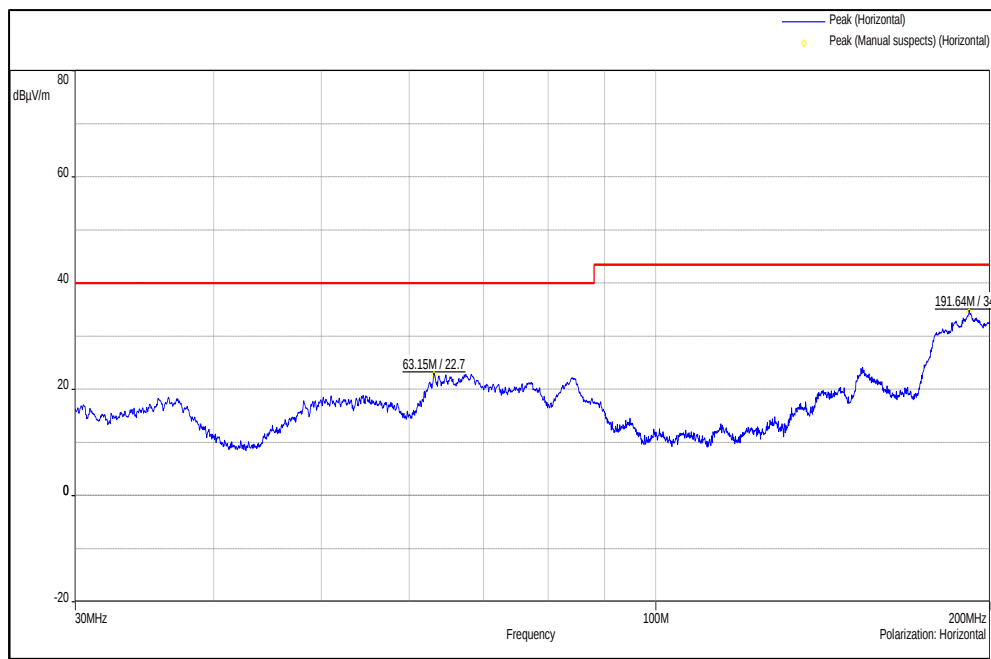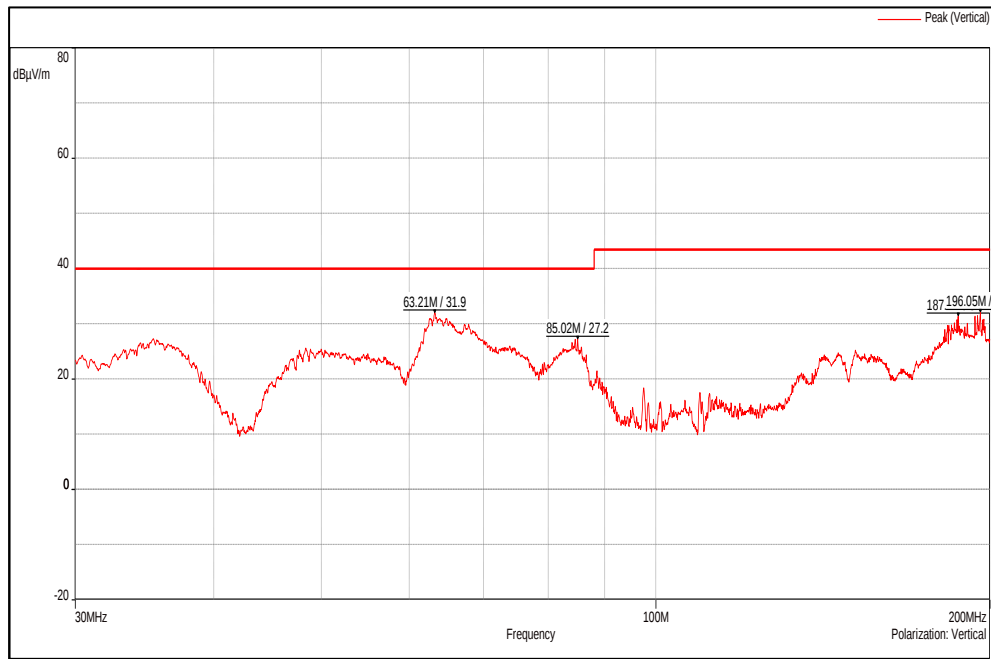

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 175 von 197
Page 175 of 197

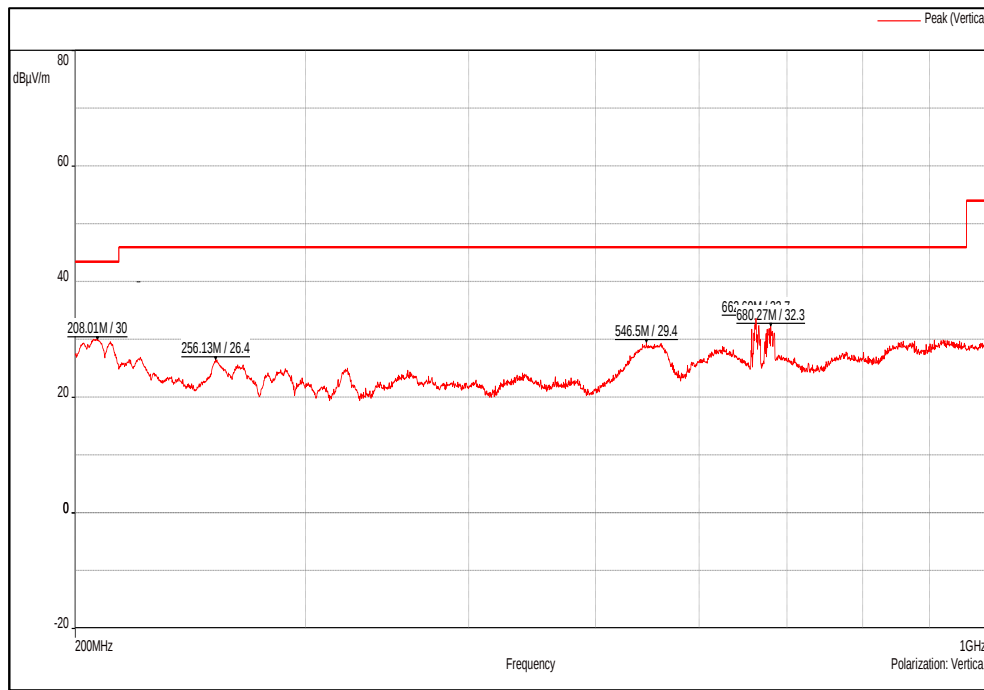

Channel Frequency 200MHz – 1GHz

Polarization Vertical

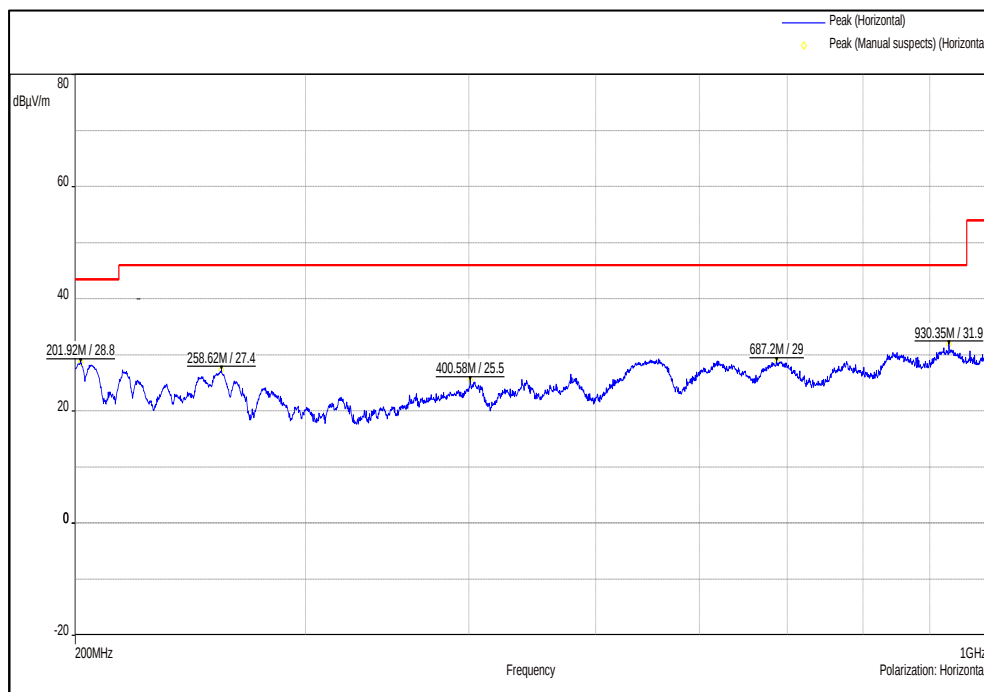

Channel Frequency 200MHz – 1GHz

Polarization Horizontal


Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 176 von 197
Page 176 of 197

Vscan Air SL With Charging Mode: GlobTek Power Adapter + Vscan Air Charger

Antenna Polarization	Measured Frequency (MHz)	Measured Emission (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Vertical	35.19	32.07	40	-7.93
	48.56	17.06	40	-22.94
	63.49	27.71	40	-12.29
	96.06	29.90	43.5	-13.60
	160.98	30.40	43.5	-13.10
	202.37	27.76	46	-18.24
	256.25	24.08	46	-21.92
	558.71	26.17	46	-19.83
	619.85	27.46	46	-18.54
	771.47	27.76	46	-18.24
Horizontal	95.64	31.70	43.5	-11.80
	196.92	34.98	43.5	-8.52
	202.49	28.53	43.5	-14.97
	253.43	30.16	46	-15.84
	548.00	25.87	46	-20.13
	630.11	28.11	46	-17.89

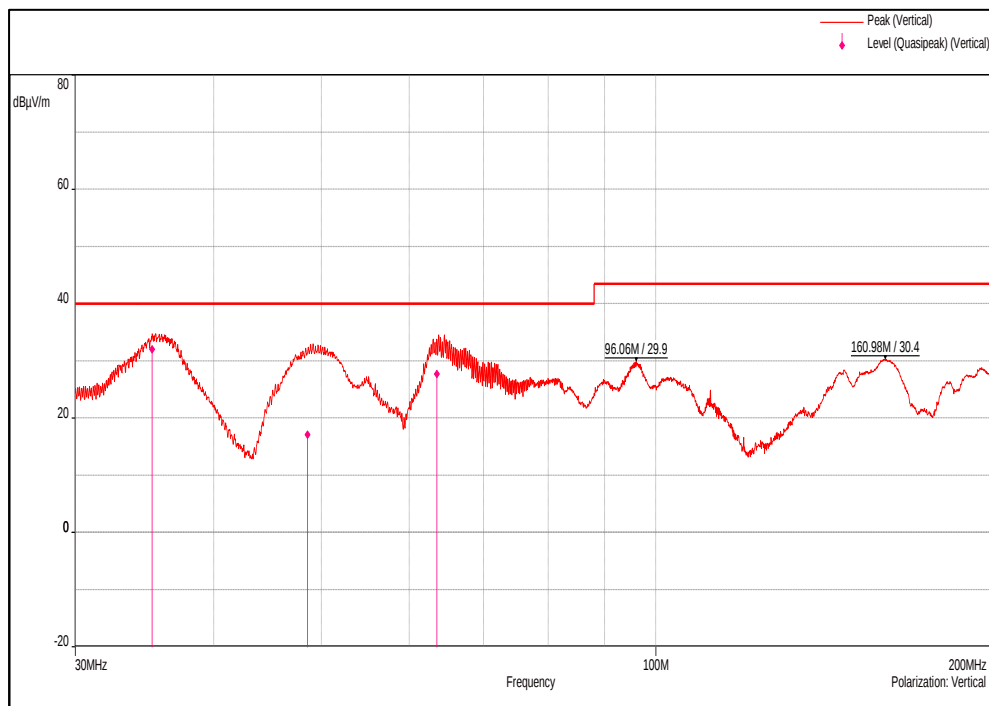


Channel Frequency 30MHz – 200MHz

Polarization Vertical

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 177 von 197
Page 177 of 197

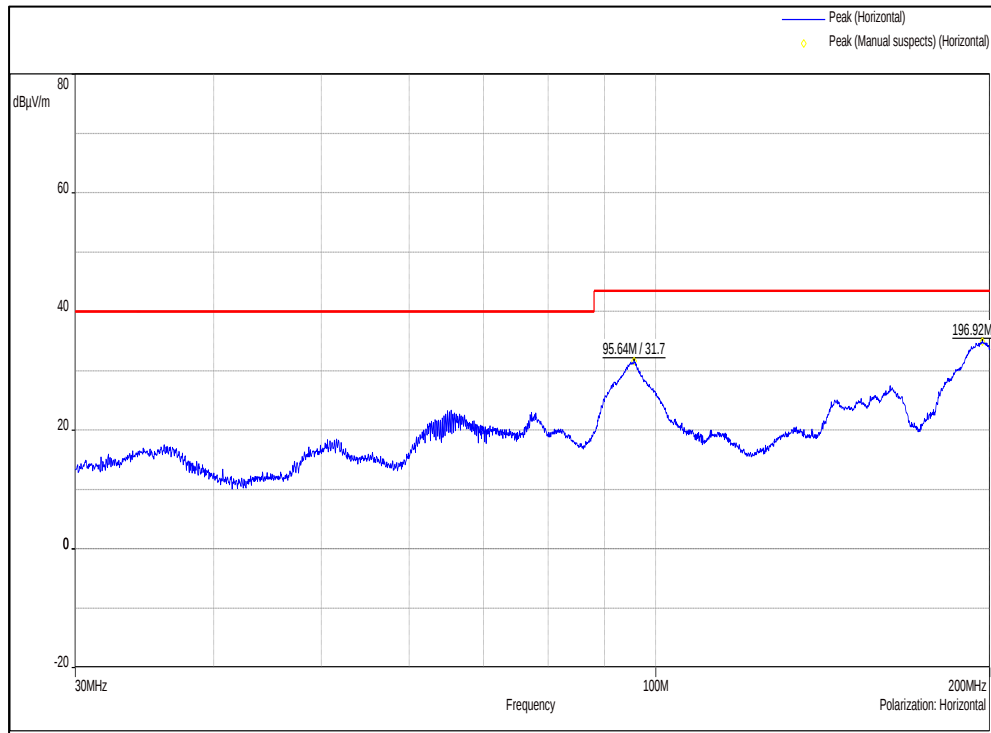

Channel Frequency 30MHz – 200MHz

Polarization Horizontal

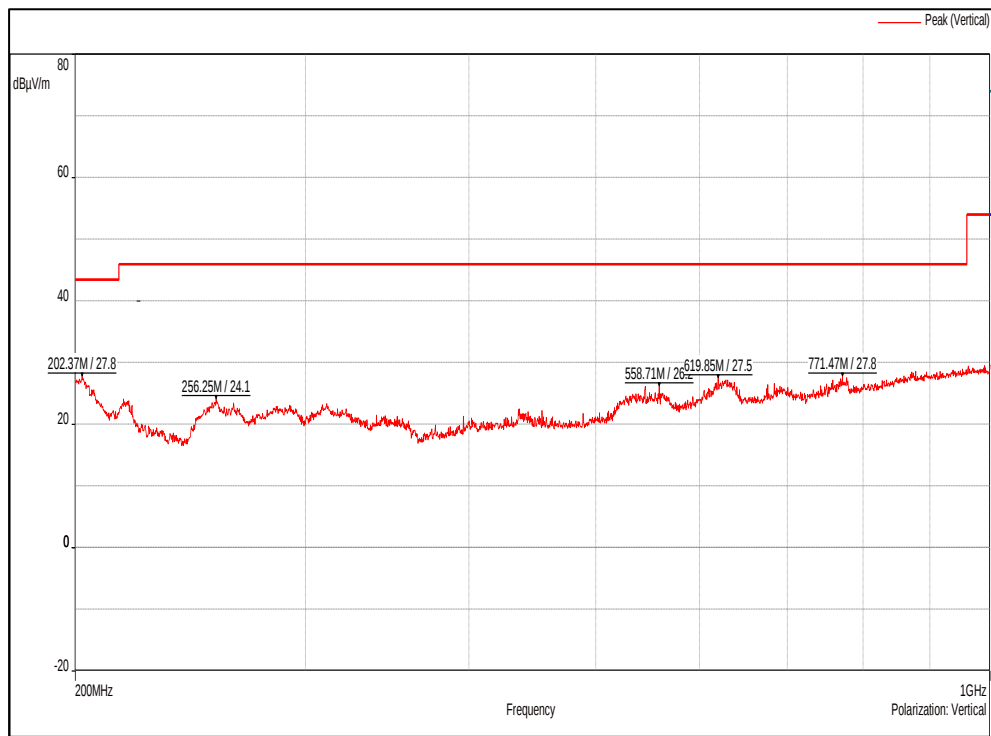


Channel Frequency 200MHz – 1GHz

Polarization Vertical

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 178 von 197
Page 178 of 197

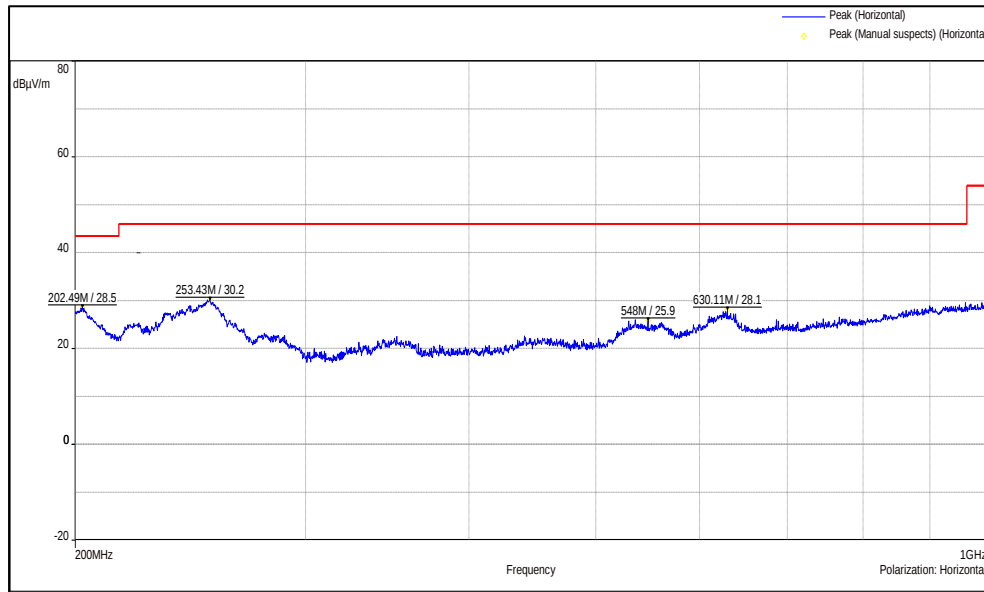

Channel Frequency 200MHz – 1GHz

Polarization Horizontal


Vscan Air SL With Charging Mode: XP Power Adapter + Anker Charger Pad

Antenna Polarization	Measured Frequency (MHz)	Measured Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Vertical	36.714(Qp)	25.12	40	-14.88
	65.016(Qp)	24.68	40	-15.32
	49.95	26.17	40	-13.83
	191.61	31.46	43.5	-12.04
	202.52	31.94	43.5	-11.56
	324.49(Qp)	15.14	46	-30.86
	359.83(Qp)	13.42	46	-32.58
Horizontal	39.42	28.86	40	-11.14
	61.60(Qp)	6.04	40	-33.96
	66.69	28.44	40	-11.56
	156.81	24.31	43.5	-19.19
	192(Qp)	32.58	43.5	-10.92
	203.81	30.89	43.5	-12.61
	290.03	26.66	46	-19.34
	463.64	26.54	46	-19.46
	611.15	26.86	46	-19.14
	808.82	28.50	46	-17.50

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 179 von 197
Page 179 of 197

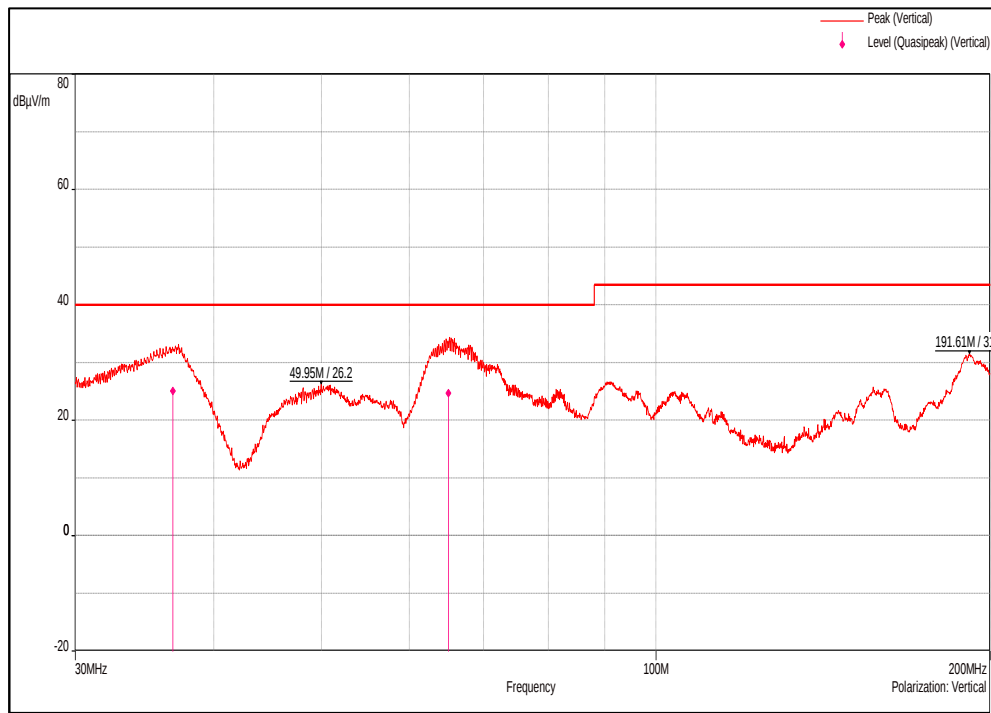

Channel Frequency 30MHz – 200MHz

Polarization Vertical

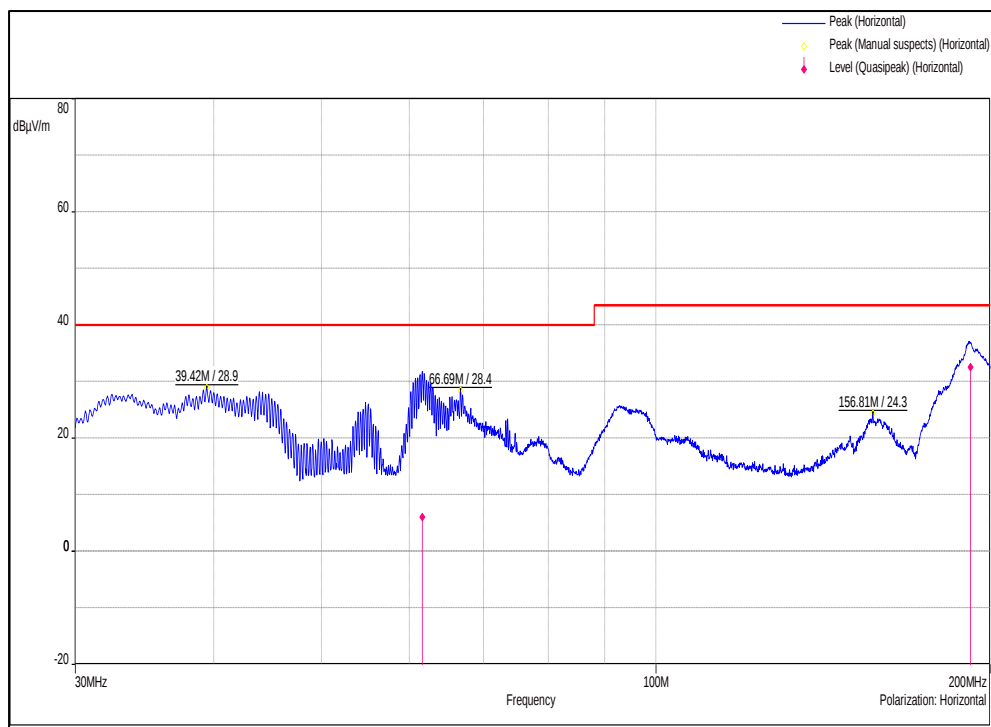


Channel Frequency 30MHz – 200MHz

Polarization Horizontal

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 180 von 197
Page 180 of 197

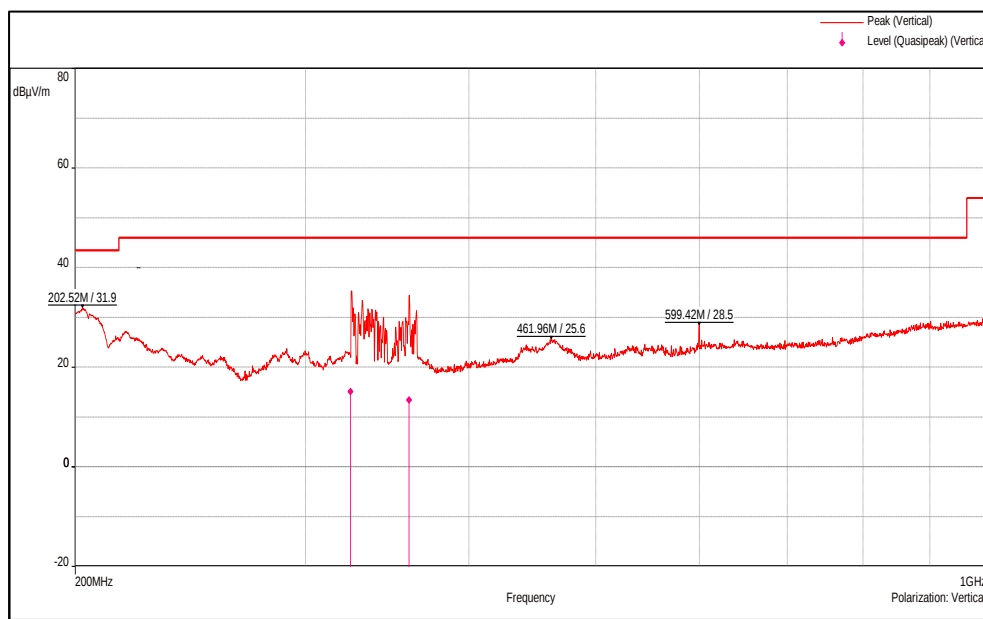

Channel Frequency 200MHz – 1GHz

Polarization Vertical

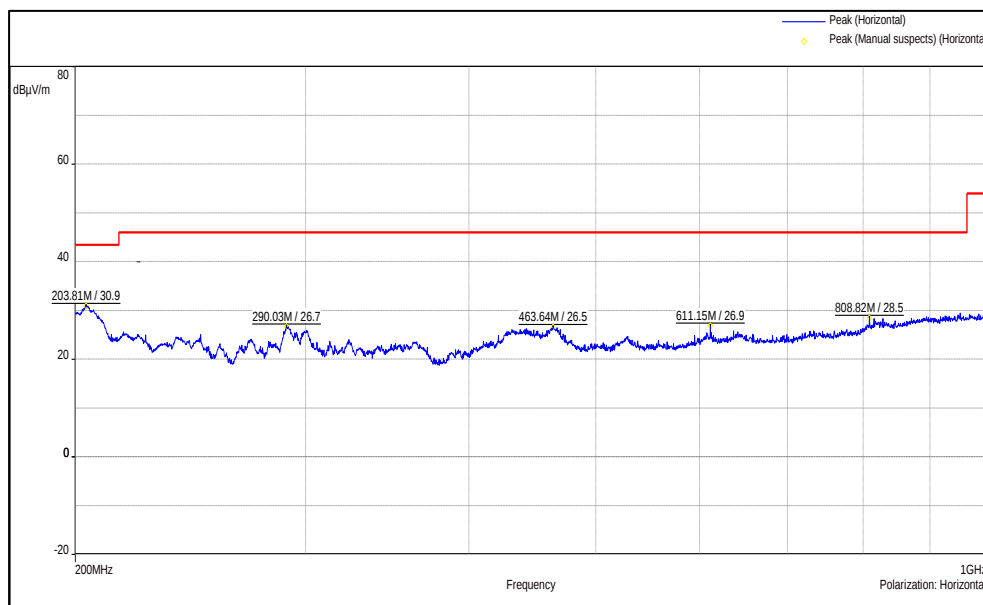

Channel Frequency 200MHz – 1GHz

Polarization Horizontal


Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 181 von 197
Page 181 of 197

Vscan Air SL With Charging Mode: GlobTek Power Adapter + Anker Charger Pad

Antenna Polarization	Measured Frequency (MHz)	Measured Emission (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Vertical	35.196(Qp)	32.07	40	-7.93
	48.564(Qp)	17.06	40	-22.94
	63.498(Qp)	27.71	40	-12.29
	96.06	29.93	43.5	-13.57
	160.98	30.38	43.5	-13.12
	210.20	31.69	43.5	-11.81
	413.30	28.32	46	-17.68
	483.26	27.11	46	-18.89
	765.65	33.27	46	-12.73
	800.39	32.00	46	-14.00
Horizontal	95.64	31.69	43.5	-11.81
	196.92	34.98	43.5	-8.52
	205.76	32.77	43.5	-10.73
	246.74	28.73	46	-17.27
	279.95	28.29	46	-17.71
	494.87	25.77	46	-20.23

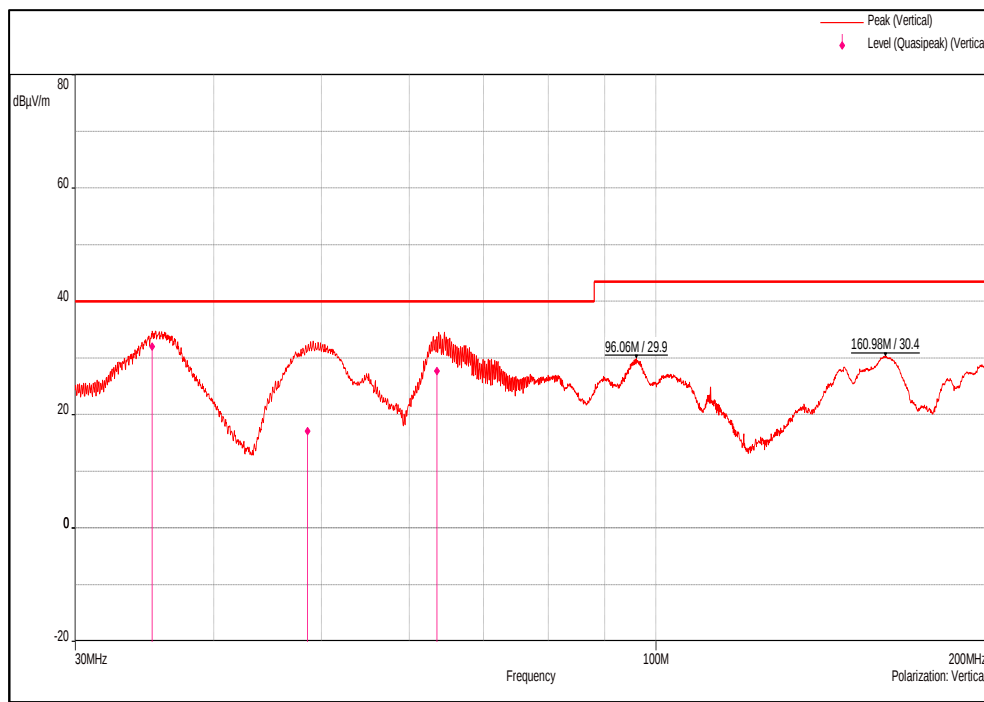


Channel Frequency 30MHz – 200MHz

Polarization Vertical

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 182 von 197
Page 182 of 197

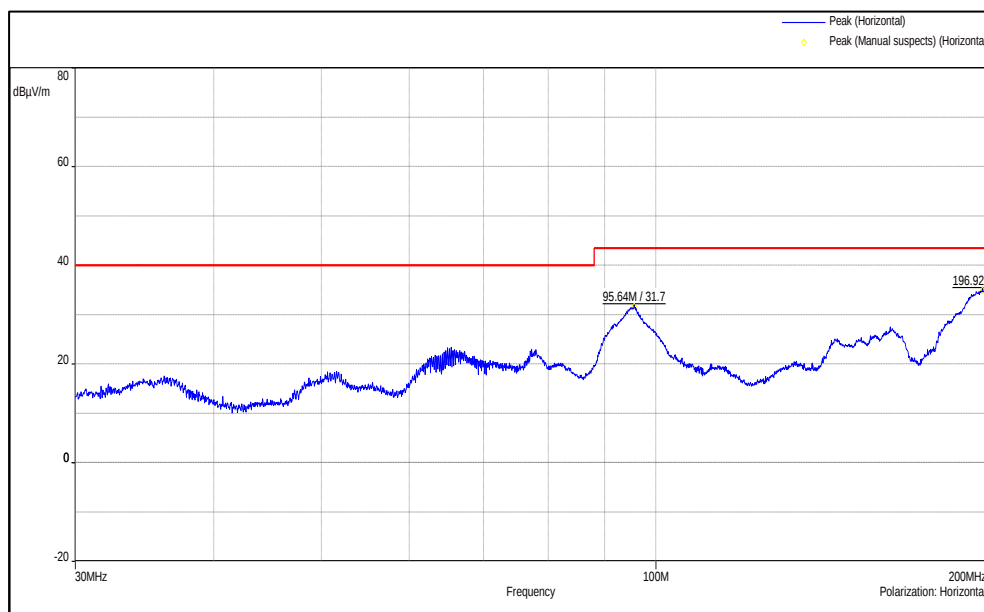

Channel Frequency 30MHz – 200MHz

Polarization Horizontal

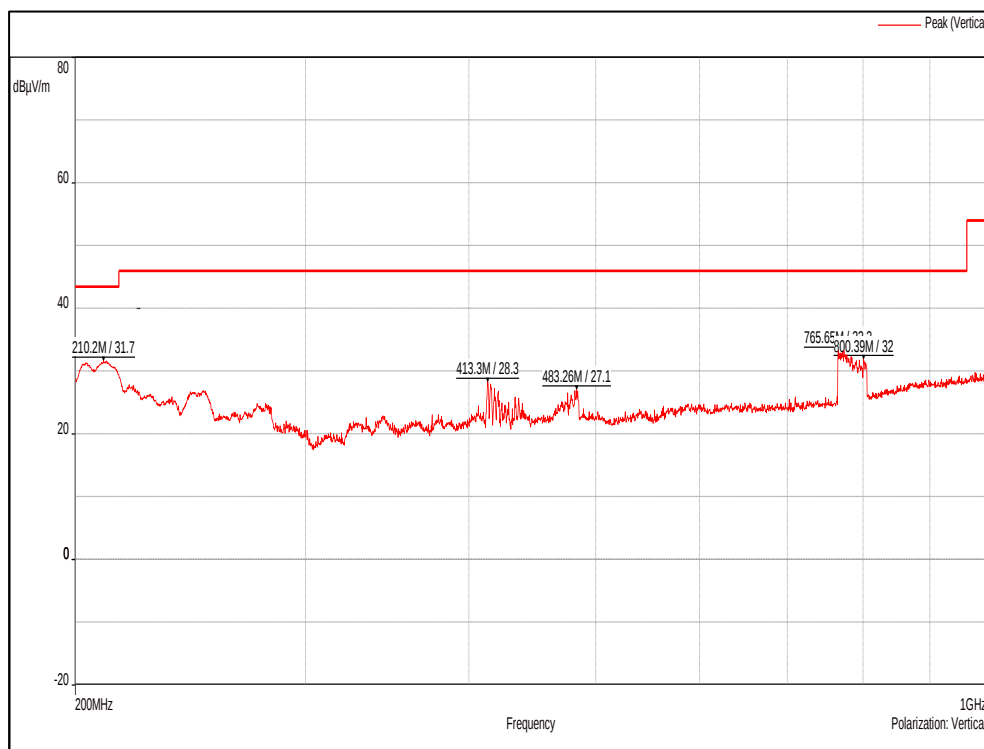

Channel Frequency 200MHz – 1GHz

Polarization Vertical


Prüfbericht - Nr.:

Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 183 von 197

Page 183 of 197

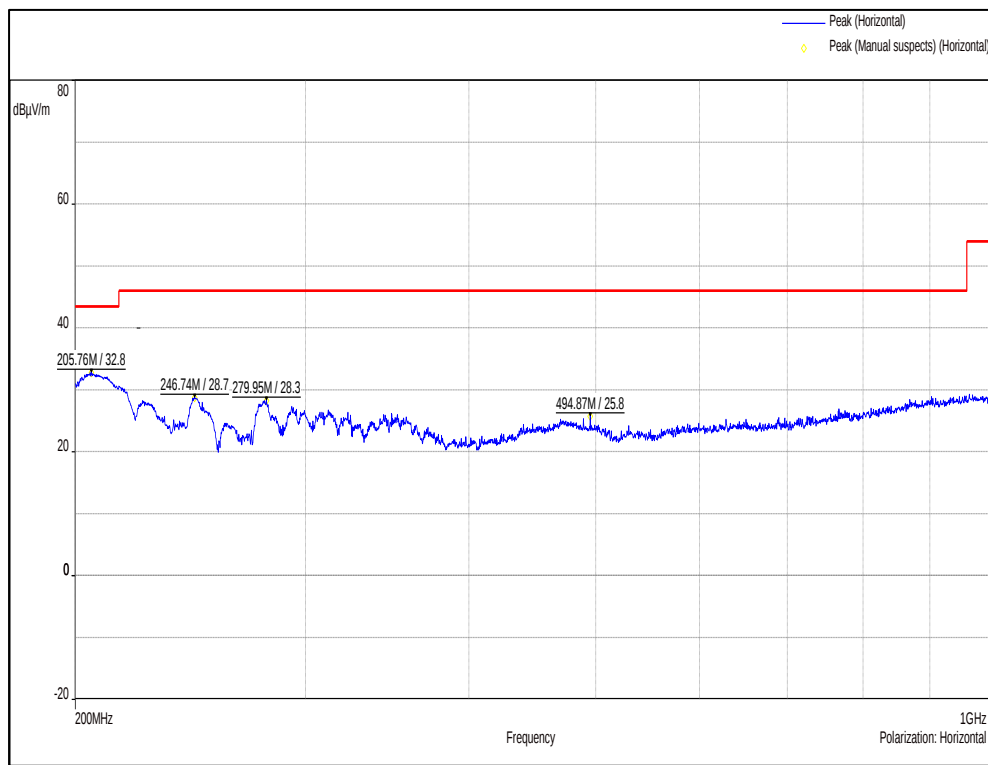

Prüfbericht - Nr.:

Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 184 von 197

Page 184 of 197

Test results for the frequencies above 1GHz

Data rate: 1Mbps


Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2402	2402(Pk)	Vertical	96.18	-	-
	2402(Av)		95.30	-	-
	2390(Pk)		42.83	74*	-31.17
	2390(Av)		30.55	54*	-23.45
	4804(Pk)		41.21	74	-32.79
	4804(Av)		29.78	54	-24.22
	7206(Pk)		45.92	74	-28.08
	7206(Av)		34.72	54	-19.28
	2402(Pk)	Horizontal	101.91	-	-
	2402(Av)		101.03	-	-
	2390(Pk)		44.14	74*	-29.86
	2390(Av)		31.80	54*	-22.20
	4804(Pk)		40.93	74	-33.07
	4804(Av)		28.94	54	-25.06
	7206(Pk)		45.95	74	-28.05
	7206(Av)		34.30	54	-19.70
2440	2440(Pk)	Vertical	94.04	-	-
	2440(Av)		93.14	-	-
	4880(Pk)		44.60	74	-29.40
	4880(Av)		33.25	54	-20.75
	7320(Pk)		46.25	74	-27.75
	7320(Av)		34.54	54	-19.46
	2440(Pk)	Horizontal	101.39	-	-
	2440(Av)		100.45	-	-
	4880(Pk)		41.89	74	-32.11
	4880(Av)		31.00	54	-23.00
	7320(Pk)		46.78	74	-27.22
	7320(Av)		34.49	54	-19.51
2480	2480(Pk)	Vertical	95.40	-	-
	2480(Av)		94.48	-	-
	2483.5(Pk)		43.01	74*	-30.99
	2483.5(Av)		31.78	54*	-22.22
	4960(Pk)		50.06	74	-23.94
	4960(Av)		44.27	54	-9.73
	7440(Pk)		46.18	74	-27.82
	7440(Av)		34.77	54	-19.23
	2480(Pk)	Horizontal	101.91	-	-
	2480(Av)		100.98	-	-
	2483.5(Pk)		47.88	74*	-26.12
	2483.5(Av)		34.12	54*	-19.88
	4960(Pk)		47.27	74	-26.73
	4960(Av)		39.81	54	-14.19
	7440(Pk)		47.51	74	-26.49
	7440(Av)		34.74	54	-19.26

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F


Seite 185 von 197
Page 185 of 197

Channel Frequency 2480MHz

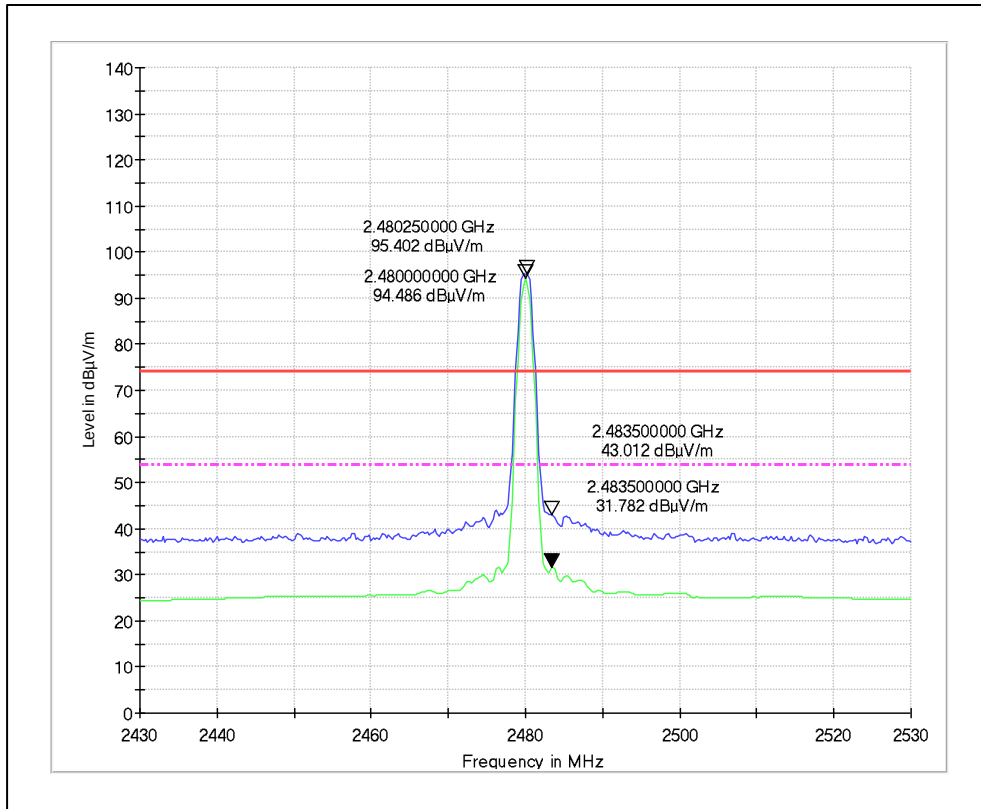

Channel Frequency: 2480MHz

Polarization: Vertical

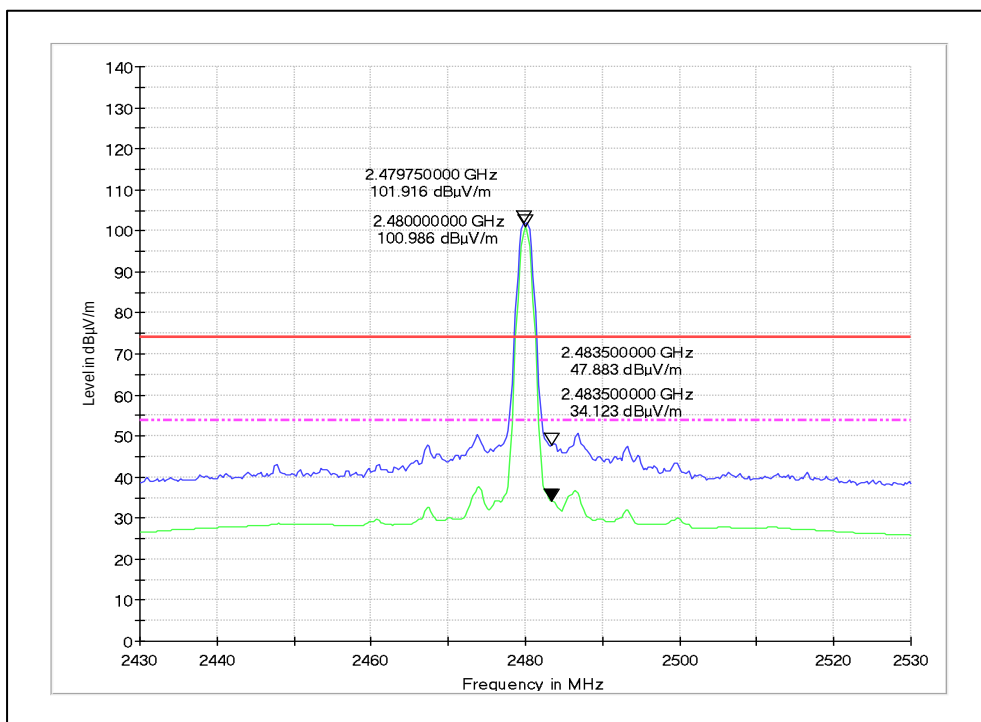


Channel Frequency: 2480MHz

Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 186 von 197
Page 186 of 197

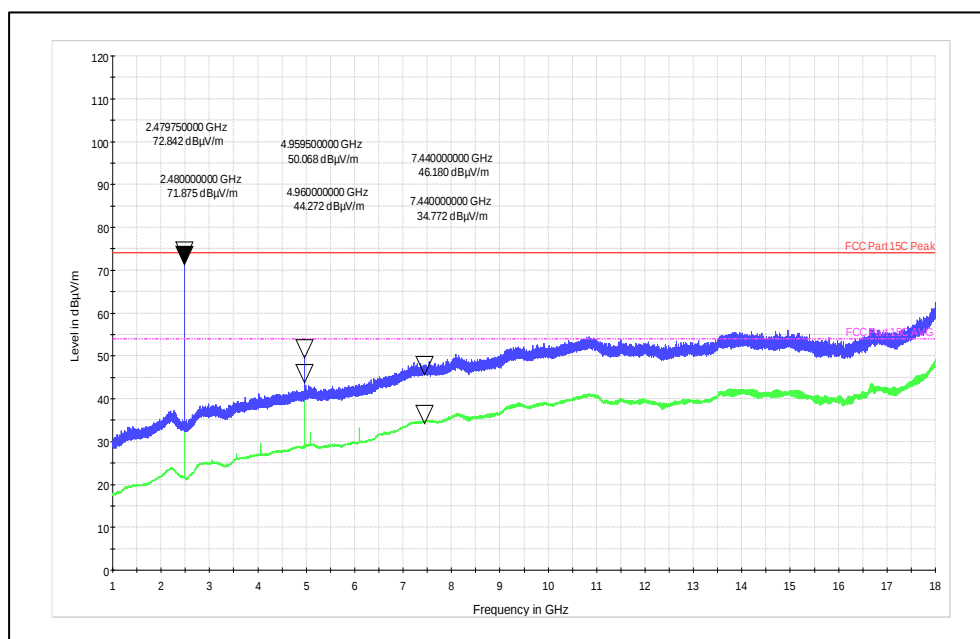

Channel Frequency: 1 - 18 GHz

Polarization: Vertical

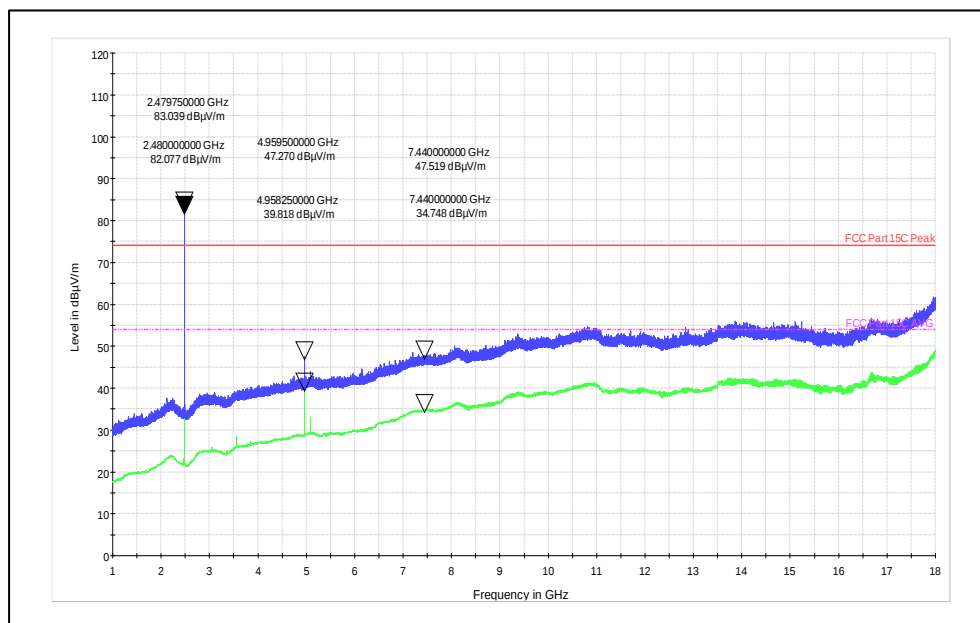


Channel Frequency: 1 - 18 GHz

Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 187 von 197
Page 187 of 197

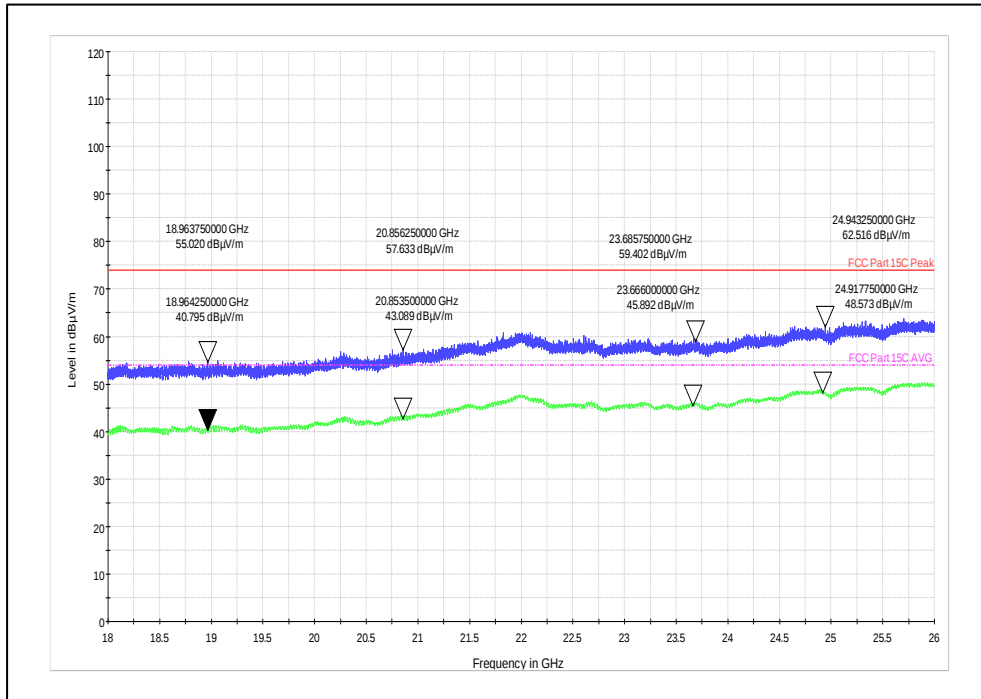

Channel Frequency: 18 - 26 GHz

Polarization: Vertical

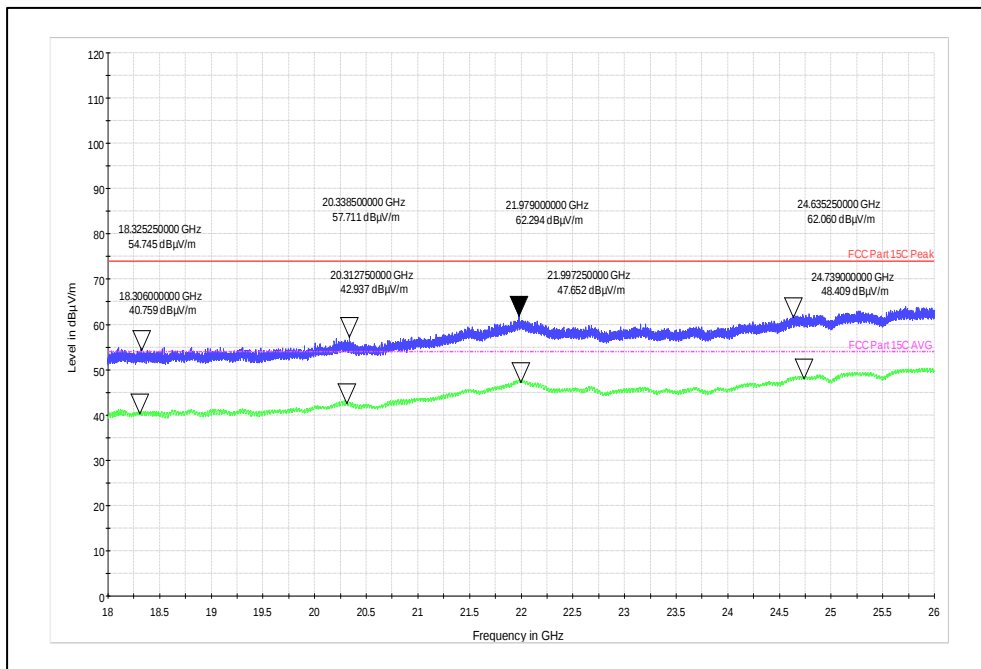

Channel Frequency: 18 - 26 GHz

Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 188 von 197
Page 188 of 197

8.6 Conducted Spurious Emission Test on AC Power Line

Result

Pass

Test Specification : FCC Part 15 Section 15.207 / RSS Gen Issue 5 Section 8.8
Test Method : ANSI C 63.10-2013
Testing Location : Screened room
Measurement Bandwidth : 9kHz
Frequency Range : 150kHz – 30MHz
Supply Voltage : 110VAC,60Hz
Test Method : Refer TEST METHODOLOGY

***Note: The product has tested with AC to DC adapter**

Limits of section 15.207

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak (dBµV)	Average (dBµV)
0.15-0.5	66-56*	56-46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

Test Conditions:

Normal Temperature = +22.6°C

Voltage (V norm) = 3.6V Li-Ion battery

Relative Humidity = 64%

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F


Seite 189 von 197
Page 189 of 197

Test result:

XP Adapter with V-Scan Pad:-

Power: 110V 60Hz_LINE

Line:-

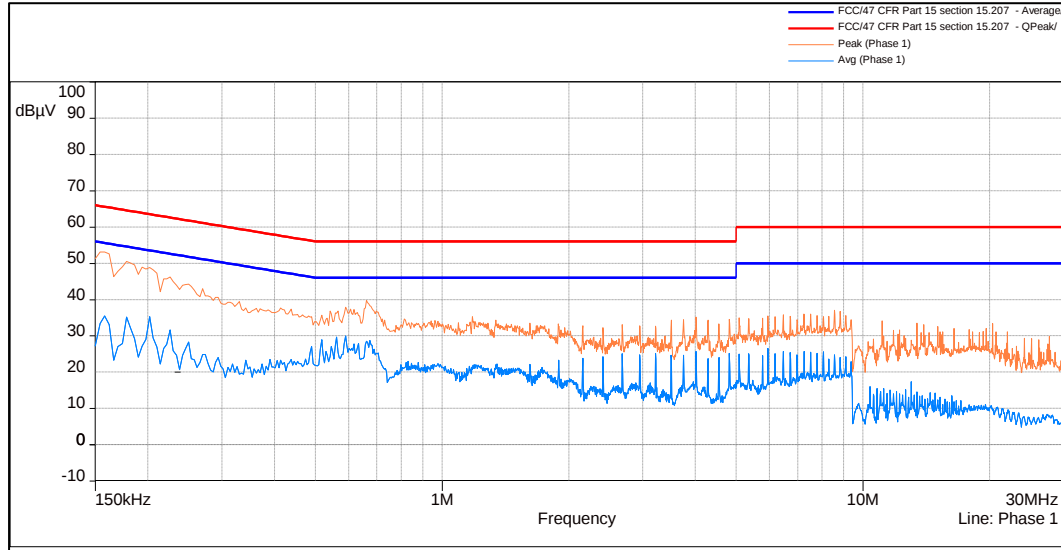

Line Graph

Quasipeak:-

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pos	RBW	Comments	Correction (dB)
0.5891	33.39	56	-22.61	Phase 1	9k	Pass	19.54
0.66155	31.73	56	-24.27	Phase 1	9k	Pass	19.55
0.15315	33.25	65.78	-32.54	Phase 1	9k	Pass	19.55
0.18895	30.14	64.04	-33.9	Phase 1	9k	Pass	19.52
0.24235	27.54	62.03	-34.49	Phase 1	9k	Pass	19.49
11.11135	21.59	60	-38.41	Phase 1	9k	Pass	19.6
8.0459	17.65	60	-42.35	Phase 1	9k	Pass	19.58
3.4867	12.84	56	-43.16	Phase 1	9k	Pass	19.57
2.1656	12.37	56	-43.63	Phase 1	9k	Pass	19.57
5.9312	16.37	60	-43.63	Phase 1	9k	Pass	19.57

Average:-

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pos	RBW	Comments	Correction (dB)
0.5891	29.9	46	-16.1	Phase 1	9k	Pass	19.54
0.66155	24.86	46	-21.14	Phase 1	9k	Pass	19.55
11.11135	10.7	50	-39.3	Phase 1	9k	Pass	19.6
3.4867	6.16	46	-39.84	Phase 1	9k	Pass	19.57
0.24235	11.4	52.03	-40.63	Phase 1	9k	Pass	19.49
2.1656	5.36	46	-40.64	Phase 1	9k	Pass	19.57
8.0459	8.65	50	-41.35	Phase 1	9k	Pass	19.58
0.18895	12.47	54.04	-41.57	Phase 1	9k	Pass	19.52
5.9312	8.08	50	-41.92	Phase 1	9k	Pass	19.57
0.15315	12.24	55.78	-43.55	Phase 1	9k	Pass	19.55


Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 190 von 197
Page 190 of 197

Power: 110V 60Hz_Neutral

Neutral:-

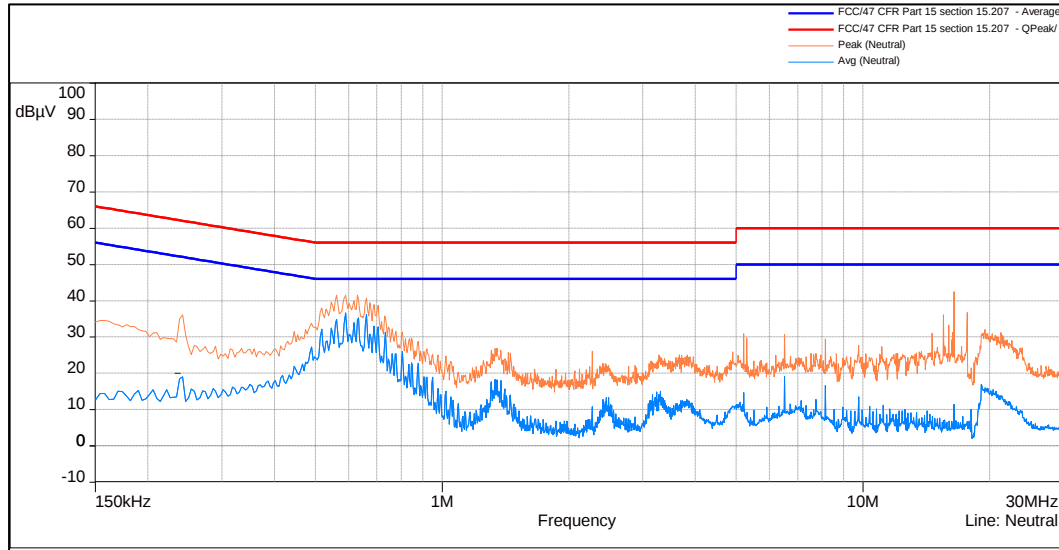

Neutral Graph

Quasipeak:-

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pos	RBW	Comments	Correction (dB)
0.5891	39.56	56	-16.44	Neutral	9k	Pass	19.55
0.73315	33.96	56	-22.04	Neutral	9k	Pass	19.56
1.3383	23.07	56	-32.93	Neutral	9k	Pass	19.59
0.24515	26.17	61.89	-35.72	Neutral	9k	Pass	19.48
2.44335	17.55	56	-38.45	Neutral	9k	Pass	19.57
5.2105	20.64	60	-39.36	Neutral	9k	Pass	19.57
8.14155	17.21	60	-42.79	Neutral	9k	Pass	19.58
11.0798	16.22	60	-43.78	Neutral	9k	Pass	19.61
16.4545	14	60	-46	Neutral	9k	Pass	19.66
19.5239	13.99	60	-46.01	Neutral	9k	Pass	19.7

Average:-

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pos	RBW	Comments	Correction (dB)
0.5891	36.69	46	-9.31	Neutral	9k	Pass	19.55
0.73315	31.41	46	-14.59	Neutral	9k	Pass	19.56
1.3383	18.05	46	-27.95	Neutral	9k	Pass	19.59
2.44335	13	46	-33	Neutral	9k	Pass	19.57
0.24515	12.78	51.89	-39.11	Neutral	9k	Pass	19.48
5.2105	10.15	50	-39.85	Neutral	9k	Pass	19.57
8.14155	7.49	50	-42.51	Neutral	9k	Pass	19.58
11.0798	6.73	50	-43.27	Neutral	9k	Pass	19.61
19.5239	5.11	50	-44.89	Neutral	9k	Pass	19.70
16.4545	3.88	50	-46.12	Neutral	9k	Pass	19.66

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 191 von 197
Page 191 of 197

Globe Tek Adapter with V-Scan Pad:-

Power: 110V 60Hz_LINE

Line:-

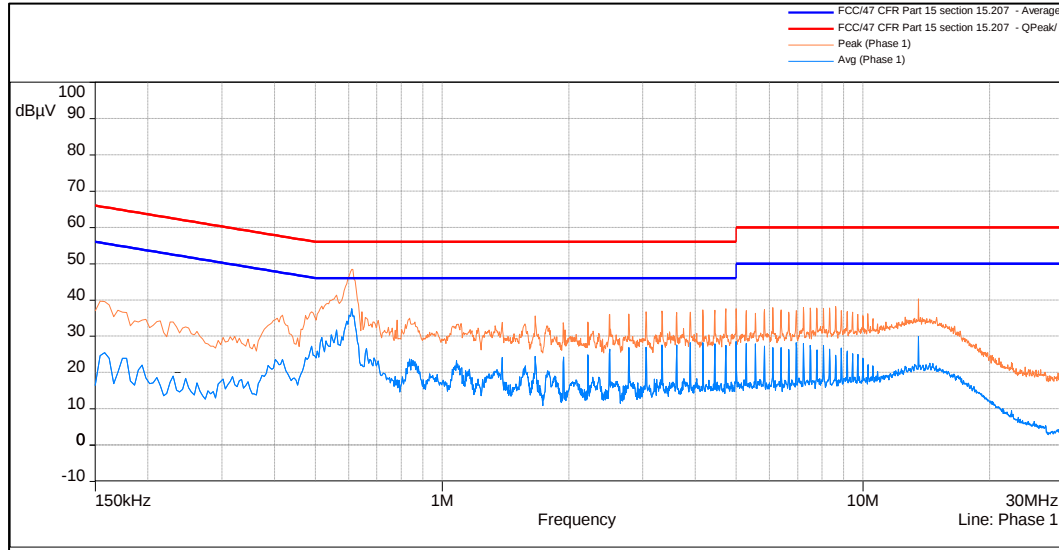

Line Graph

Quasipeak:-

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pos	RBW	Comments	Correction (dB)
0.6145	34.4	56	-21.6	Phase 1	9k	Pass	19.54
0.58045	33.47	56	-22.53	Phase 1	9k	Pass	19.54
0.8308	23.66	56	-32.34	Phase 1	9k	Pass	19.57
13.55755	27.15	60	-32.85	Phase 1	9k	Pass	19.63
1.40485	21.36	56	-34.64	Phase 1	9k	Pass	19.58
2.50785	18.27	56	-37.73	Phase 1	9k	Pass	19.57
3.352	14.74	56	-41.26	Phase 1	9k	Pass	19.57
0.1599	24.24	65.57	-41.33	Phase 1	9k	Pass	19.54
6.9568	18.58	60	-41.42	Phase 1	9k	Pass	19.58

Average:-

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pos	RBW	Comments	Correction (dB)
0.6145	24.37	46	-21.63	Phase 1	9k	Pass	19.54
0.58045	23.89	46	-22.11	Phase 1	9k	Pass	19.54
0.8308	9.74	46	-36.26	Phase 1	9k	Pass	19.57
1.40485	8.6	46	-37.4	Phase 1	9k	Pass	19.58
2.50785	5.79	46	-40.21	Phase 1	9k	Pass	19.57
3.352	5.63	46	-40.37	Phase 1	9k	Pass	19.57
13.55755	9.46	50	-40.54	Phase 1	9k	Pass	19.63
6.9568	7.83	50	-42.17	Phase 1	9k	Pass	19.58
0.1599	12.35	55.57	-43.22	Phase 1	9k	Pass	19.54


Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 192 von 197
Page 192 of 197

Power: 110V 60Hz_Neutral

Neutral:-

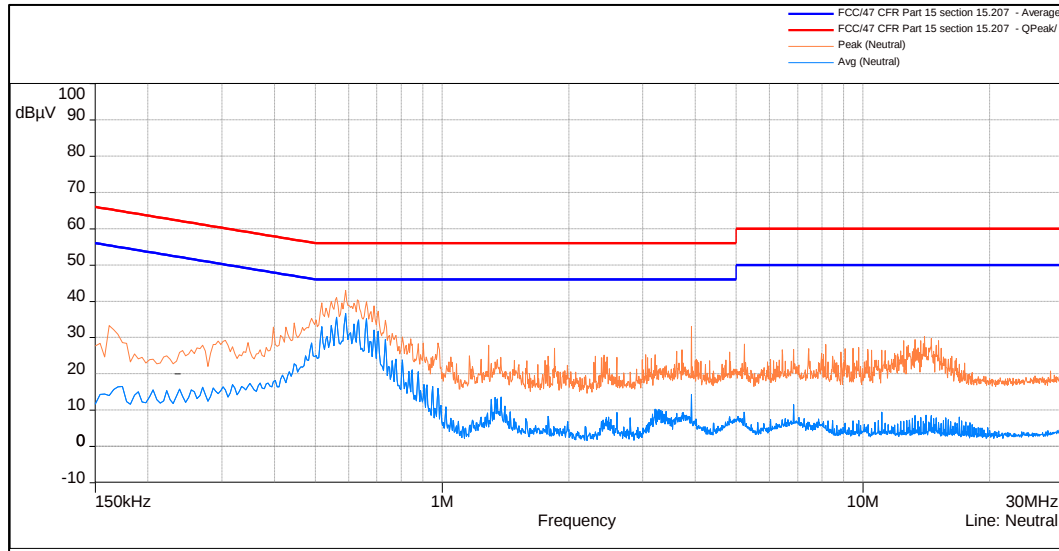

Neutral Graph

Quasipeak:-

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pos	RBW	Comments	Correction (dB)
0.61025	33.69	56	-22.31	Neutral	9k	Pass	19.55
3.90725	20.73	56	-35.27	Neutral	9k	Pass	19.58
0.2988	21.75	60.3	-38.55	Neutral	9k	Pass	19.45
0.97755	17.42	56	-38.58	Neutral	9k	Pass	19.59
6.84785	21.38	60	-38.62	Neutral	9k	Pass	19.58
0.16485	22.71	65.16	-42.45	Neutral	9k	Pass	19.52
1.29315	12.89	56	-43.11	Neutral	9k	Pass	19.59
1.8491	12.44	56	-43.56	Neutral	9k	Pass	19.57
14.0409	15.13	60	-44.87	Neutral	9k	Pass	19.64

Average:-

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pos	RBW	Comments	Correction (dB)
0.61025	28.12	46	-17.88	Neutral	9k	Pass	19.55
0.2988	15.59	50.3	-34.71	Neutral	9k	Pass	19.45
0.97755	8.99	46	-37.01	Neutral	9k	Pass	19.59
1.29315	6.9	46	-39.1	Neutral	9k	Pass	19.59
3.90725	5.96	46	-40.04	Neutral	9k	Pass	19.58
1.8491	3.82	46	-42.18	Neutral	9k	Pass	19.57
0.16485	12.49	55.16	-42.67	Neutral	9k	Pass	19.52
6.84785	5.8	50	-44.2	Neutral	9k	Pass	19.58
14.0409	2.97	50	-47.03	Neutral	9k	Pass	19.64

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 193 von 197
Page 193 of 197

Globe Tek Adapter with Anker Pad:-

Power: 110V 60Hz_LINE

Line:-

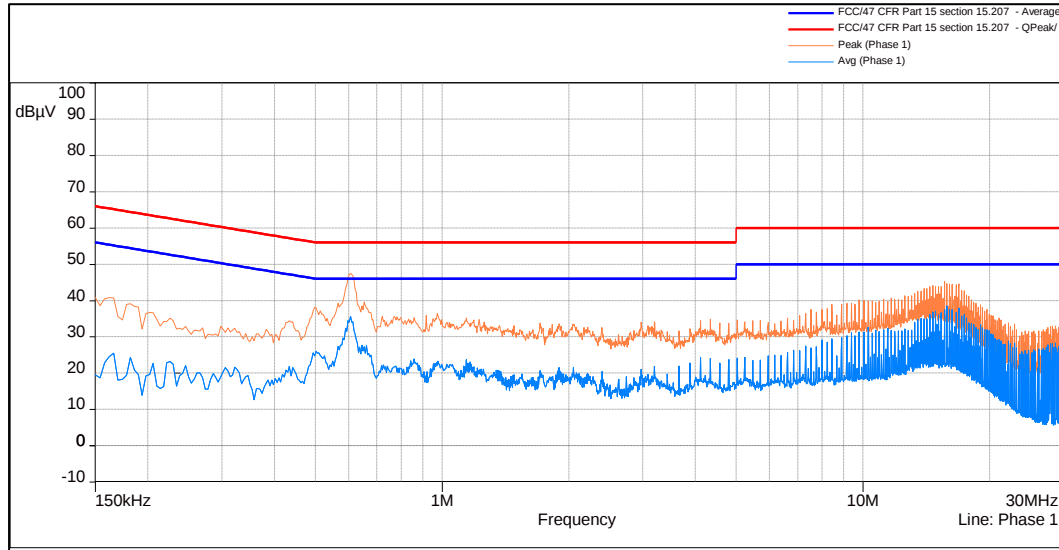

Line Graph

Quasipeak:-

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pos	RBW	Comments	Correction (dB)
0.61365	42.11	56	-13.89	Phase 1	9k	Pass	19.54
17.39165	37.5	60	-22.5	Phase 1	9k	Pass	19.66
0.98795	31.51	56	-24.49	Phase 1	9k	Pass	19.58
0.44715	27.98	56.95	-28.97	Phase 1	9k	Pass	19.51
15.64715	31	60	-29	Phase 1	9k	Pass	19.65
2.99335	25.6	56	-30.4	Phase 1	9k	Pass	19.57
0.15045	35.05	66	-30.95	Phase 1	9k	Pass	19.55
4.33705	24.52	56	-31.48	Phase 1	9k	Pass	19.57
0.23275	29.48	62.31	-32.83	Phase 1	9k	Pass	19.49
7.54845	25.95	60	-34.05	Phase 1	9k	Pass	19.58

Average:-

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pos	RBW	Comments	Correction (dB)
0.61365	32.81	46	-13.19	Phase 1	9k	Pass	19.54
0.98795	23.03	46	-22.97	Phase 1	9k	Pass	19.58
17.39165	26.95	50	-23.05	Phase 1	9k	Pass	19.66
0.44715	20.48	46.95	-26.47	Phase 1	9k	Pass	19.51
2.99335	16.42	46	-29.58	Phase 1	9k	Pass	19.57
15.64715	19.94	50	-30.06	Phase 1	9k	Pass	19.65
4.33705	15.63	46	-30.37	Phase 1	9k	Pass	19.57
0.15045	24.26	56	-31.74	Phase 1	9k	Pass	19.55
0.23275	20.24	52.31	-32.06	Phase 1	9k	Pass	19.49
7.54845	16.29	50	-33.71	Phase 1	9k	Pass	19.58


Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 194 von 197
Page 194 of 197

Power: 110V 60Hz_Neutral

Neutral:-

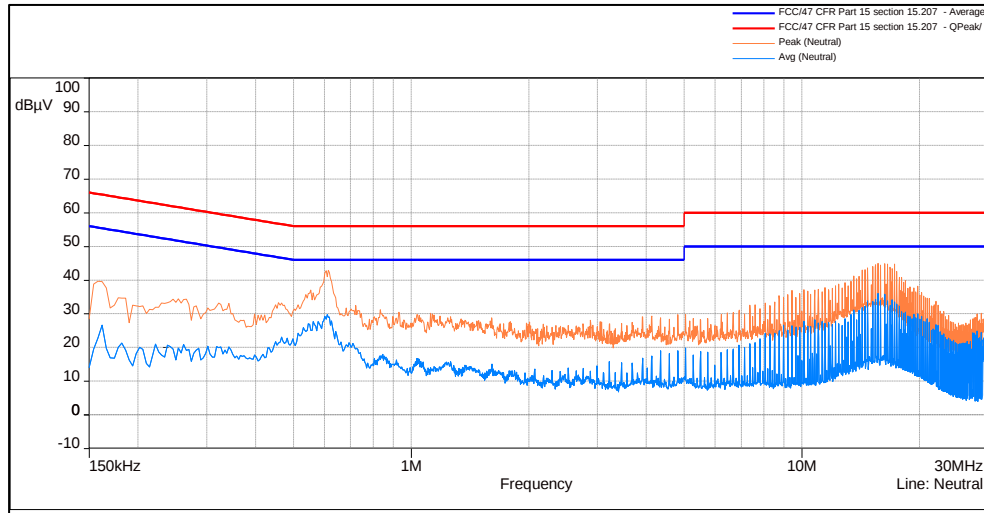

Neutral Graph

Quasipeak:-

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pos	RBW	Comments	Correction (dB)
0.59465	38.72	56	-17.28	Neutral	9k	Pass	19.55
0.15045	35.77	66	-30.23	Neutral	9k	Pass	19.53
0.476	26.07	56.37	-30.3	Neutral	9k	Pass	19.53
15.63195	27.33	60	-32.67	Neutral	9k	Pass	19.65
1.01955	22.74	56	-33.26	Neutral	9k	Pass	19.59
0.26825	27.66	61.12	-33.46	Neutral	9k	Pass	19.47
1.58665	18.7	56	-37.3	Neutral	9k	Pass	19.58
4.13045	15.45	56	-40.55	Neutral	9k	Pass	19.58
8.74285	15.89	60	-44.11	Neutral	9k	Pass	19.59
28.79285	10.67	60	-49.33	Neutral	9k	Pass	19.84

Average:-

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pos	RBW	Comments	Correction (dB)
0.59465	29.38	46	-16.62	Neutral	9k	Pass	19.55
0.476	19.97	46.37	-26.41	Neutral	9k	Pass	19.53
1.01955	14	46	-32	Neutral	9k	Pass	19.59
0.26825	18.38	51.12	-32.74	Neutral	9k	Pass	19.47
1.58665	10.44	46	-35.56	Neutral	9k	Pass	19.58
15.63195	14.14	50	-35.86	Neutral	9k	Pass	19.65
0.15045	19.47	56	-36.53	Neutral	9k	Pass	19.53
4.13045	7.66	46	-38.34	Neutral	9k	Pass	19.58
8.74285	7.85	50	-42.15	Neutral	9k	Pass	19.59
28.79285	4.25	50	-45.75	Neutral	9k	Pass	19.84

Prüfbericht - Nr.:
Test Report No.:


IN22T1OT 001
ULR-TC568822300000100F

Seite 195 von 197
Page 195 of 197

XP Adapter with Anker Pad:-

Power: 110V 60Hz_LINE

Line:-

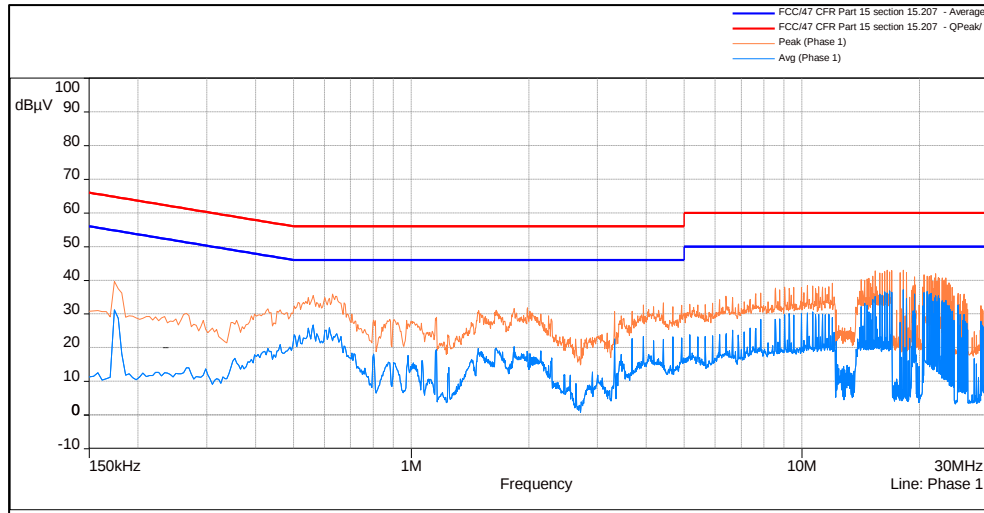

Line Graph

Quasipeak:-

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pos	RBW	Comments	Correction (dB)
0.1524	43.33	65.78	-22.45	Phase 1	9k	Pass	19.55
0.56065	32.34	56	-23.66	Phase 1	9k	Pass	19.54
1.8529	27.41	56	-28.59	Phase 1	9k	Pass	19.57
18.19005	29.28	60	-30.72	Phase 1	9k	Pass	19.67
4.404	24.14	56	-31.86	Phase 1	9k	Pass	19.57
1.13995	20.52	56	-35.48	Phase 1	9k	Pass	19.58
3.3239	16.52	56	-39.48	Phase 1	9k	Pass	19.57
9.2703	19.27	60	-40.73	Phase 1	9k	Pass	19.58
25.1155	12.29	60	-47.71	Phase 1	9k	Pass	19.77

Average:-

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pos	RBW	Comments	Correction (dB)
0.56065	27.22	46	-18.78	Phase 1	9k	Pass	19.54
1.8529	17.67	46	-28.33	Phase 1	9k	Pass	19.57
0.1524	26.9	55.78	-28.88	Phase 1	9k	Pass	19.55
1.13995	16.28	46	-29.72	Phase 1	9k	Pass	19.58
4.404	14.1	46	-31.9	Phase 1	9k	Pass	19.57
18.19005	15.21	50	-34.79	Phase 1	9k	Pass	19.67
9.2703	10.47	50	-39.53	Phase 1	9k	Pass	19.58
3.3239	5.32	46	-40.68	Phase 1	9k	Pass	19.57
25.1155	6.33	50	-43.67	Phase 1	9k	Pass	19.77


Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 196 von 197
Page 196 of 197

Power: 110V 60Hz_Neutral

Neutral:-

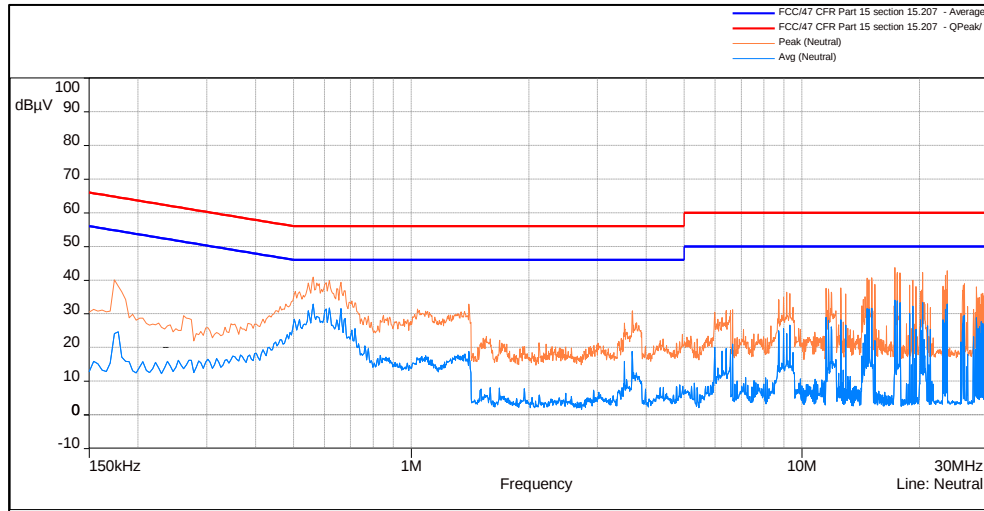

Neutral Graph

Quasipeak:-

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pos	RBW	Comments	Correction (dB)
0.56155	37.44	56	-18.56	Neutral	9k	Pass	19.55
17.2945	35.23	60	-24.77	Neutral	9k	Pass	19.67
23.5231	32.67	60	-27.33	Neutral	9k	Pass	19.76
14.68515	29.83	60	-30.17	Neutral	9k	Pass	19.65
9.31625	25.34	60	-34.66	Neutral	9k	Pass	19.59
0.1578	30.5	65.57	-35.07	Neutral	9k	Pass	19.52
6.64285	22.89	60	-37.11	Neutral	9k	Pass	19.57
1.39835	14.24	56	-41.76	Neutral	9k	Pass	19.58
3.6892	10.42	56	-45.58	Neutral	9k	Pass	19.58

Average:-

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pos	RBW	Comments	Correction (dB)
0.56155	32.11	46	-13.89	Neutral	9k	Pass	19.55
14.68515	18.63	50	-31.37	Neutral	9k	Pass	19.65
23.5231	16.09	50	-33.91	Neutral	9k	Pass	19.76
6.64285	12.82	50	-37.18	Neutral	9k	Pass	19.57
0.1578	16.01	55.57	-39.56	Neutral	9k	Pass	19.52
1.39835	6.33	46	-39.67	Neutral	9k	Pass	19.58
3.6892	4.34	46	-41.66	Neutral	9k	Pass	19.58
9.31625	4.07	50	-45.93	Neutral	9k	Pass	19.59
17.2945	2.31	50	-47.69	Neutral	9k	Pass	19.67

Prüfbericht - Nr.:
Test Report No.:

IN22T1OT 001
ULR-TC568822300000100F

Seite 197 von 197
Page 197 of 197

9 LIST OF TABLES

Table 1: List of test and measurement instruments	7
Table 2: Instrument application Software versions	8
Table 3: Ratings and System Details as declared by Client*	9
Table 4: Measurement Uncertainty	10
Table 5: List of Wi-Fi center Frequencies	12
Table 6: List of BLE Center frequencies	13
Table 7: Transmitter limits for Radiated emission	115
Table 8: Transmitter limits for Radiated emission	167

*******End of Test report*******